



Local Music Organizer

Detailed User Guide - Version 1.1.4 (Build 41)

For local Music.app libraries, standalone audio files and careful collection maintenance.

macOS 14 or later | Apple Silicon and Intel | Built-in offline audio engines

Contents

Why the application exists

Safety model and first launch

First run: build the library index

Library index types, timing and refresh rules

Navigation, playback and preview controls

Detailed guide to every main function

Repair / Convert, specialist formats and CUE albums

Vinyl De-click workflow

Troubleshooting

Privacy, open source and support

Audio Authenticity Analyzer

Version 1.1.4 Build 41: indexing and targeted refresh

Why Local Music Organizer exists

Local Music Organizer was not invented as a generic software product. It began as a personal solution written by a music collector and Music.app user with a very large offline library accumulated over many years.

The collection eventually became difficult to control: duplicate records, repeated playlist entries, missing artwork, inconsistent tags, broken file references, multiple versions of albums, rare releases and formats spread across folders and disks. Manual checking was too slow, and separate utilities showed only fragments of the problem.

The creator needed one place to answer practical questions before changing anything: Which file is better? Where is this track used? Is this a duplicate record or a second physical file? What is missing? What can be cleaned without losing the original?

Conversion created the same frustration. No single converter handled every difficult source in the collection. TAK, SACD ISO, DSD, DTS, AC3, CUE albums, tracker modules and other archival formats could require several tools and a fragile sequence of actions.

Local Music Organizer brought order back to that real collection and solved problems that had accumulated for years. Only after it worked as a personal tool did the creator decide it might be useful to other people who also maintain serious offline music libraries.

The result is intentionally cautious: understand first, review second, act only when the user explicitly chooses to act.

Safety model and first launch

1. Activate access

On the access screen, select Start Free 3-Day Trial and confirm the free App Store transaction. The complete application unlocks for three days. The trial does not renew and creates no automatic charge.

After the trial, permanent access is a separate one-time Full Version purchase. There is no subscription. Restore Purchases restores the permanent unlock for the Apple Account that completed it.

2. Complete Setup

- Select the local Music folder through the macOS folder picker.
- Select a folder for locally generated reports.
- Allow Automation access when macOS asks to communicate with Music.app.

A Music.app library is not required for standalone-file workflows. You can open individual files from Finder or add them by drag and drop.

3. Review before changing

Diagnostic scans and organizational reports are read-only. Conversion normally creates a new destination file and does not overwrite the source. Metadata editing or any operation that changes Music.app requires an explicit user action.

Privacy

Audio files, playlists, metadata and reports remain on the Mac. No Local Music Organizer account, analytics, advertising or developer-operated cloud processing is used.

What this application does not do

- It does not rebuild or repair Music.app's internal library database or a damaged **Previous Libraries** backup.
- It does not diagnose Music.app's internal **Determining gapless playback** launch queue.
- It cannot recreate a missing physical audio file unless you restore that file from your own backup.

It can still help around those problems by finding missing files, inaccessible paths, stale Music.app references, duplicates and metadata issues. Keep an independent backup of the Music.app library and the audio collection.

First run: build the library index

All library-index controls are together in Library Dashboard.

Plain-language meaning: the library index is a read-only local copy of Music.app information. It lets repeated scans use SQLite instead of asking Music.app for every record again. Building it does not edit tracks or playlists.

Recommended first run

1. Open **Library Dashboard**.
2. Leave **Include playlist usage** enabled if you want playlist relationships, duplicate protection and Used in playlists labels.
3. Click **Build / Refresh Library Index**. If saved partial progress is restored, the button becomes **Resume Library Index**.
4. Wait until Library, Full records and the required playlist count show Ready.
5. Open the tool you need and run its scan. Read-only scans do not change Music.app.

After adding or replacing a few tracks

Use **Refresh Music Changes**. For one changed playlist, use **Refresh Selected Playlist**. A full rebuild is normally unnecessary unless the status area specifically requests it.

Stopping safely

Stop Indexing finishes the current small Music.app request before saving progress. A short delay is expected and prevents an incomplete saved index.

What becomes faster

- Library Dashboard, Library Map, duplicate review and searches.
- Track Usage, Playlist Compare and playlist-membership labels.
- Audio Authenticity scans of the complete Music.app library or one selected playlist.

No index required: Audio Inspector, Live Spectrum, local playback and Repair / Convert work directly with physical files.

Library index types, resume and validation

The saved index is reusable, interruptible and checked against Music.app changes.

Full Library Records Index

Stores complete Music.app records used by library-wide dashboards, duplicate review, quality checks and searches. Completed batches are saved as work proceeds.

Playlist Usage Index

Stores playlist membership used by Playlist Compare, Playlist Duplicates, Track Usage, File Search labels and safety checks before cleanup.

Selected Playlist Index

Index Selected Playlist or **Refresh Selected Playlist** reads only the chosen playlist. This is useful for a targeted scan without rebuilding relationships for every playlist.

When the saved index is checked again

- A track was added, removed or replaced.
- Playlist names, counts or membership changed.
- The Music.app library identity or location changed.
- A previous save was incomplete or its validation data no longer matches.

The app updates only the changed portions when that is safe. If saved data is incompatible or cannot be reconciled, it refuses the stale portion and explains why instead of silently using it. Even one replaced file can require validation, but it normally does not require rebuilding everything.

Library Index is the user-facing name for the local, reusable SQLite data used by read-only library tools.

Navigation, playback and previews

Play in Music

Opens Music.app and selects or plays the matching Music.app record. In File Search, choose the bright-blue playlist button to open the requested playlist and reveal the corresponding track. A file can belong to several playlists, so each playlist button is a separate destination.

Local Preview

Plays a physical file directly when you need to inspect the file without creating another Music.app record.

Finder and Quick Look

Reveal in Finder locates the physical file. Finder Preview or Quick Look is useful for checking a candidate independently of Music.app.

Stop


Stops Music.app playback, local preview and supported active conversion/de-click playback. A long Music.app request may finish its current step before the indexing operation fully stops.

Back and Forward

Use the application navigation controls to return to the tool that opened Audio Inspector or another detail view.

Setup and permissions

Setup is the control center for playlist refresh, library-index behavior, file-search roots, logs and saved folder access.

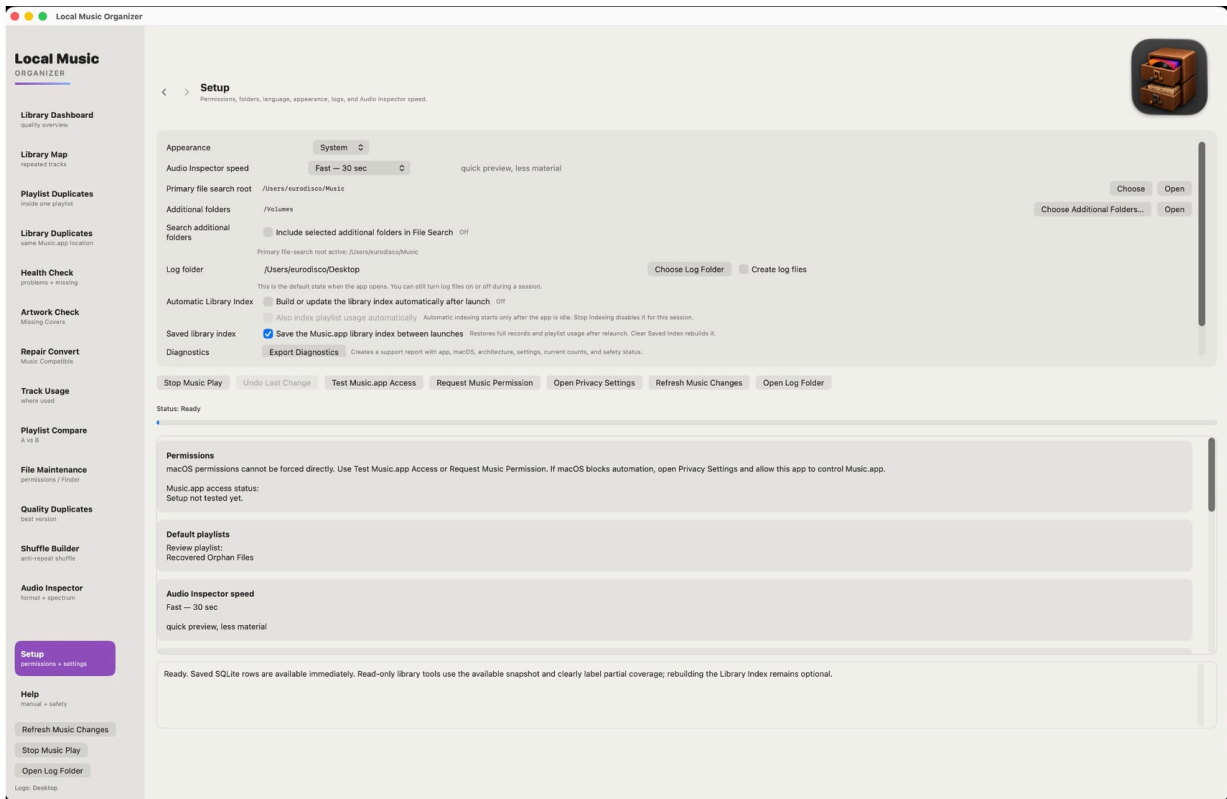


How to use this section

- Use Refresh Music Changes after a small library change; rebuild only if the status area requests it.
- Choose file-search roots and log locations with the macOS folder pickers.
- Enable saved library-index restoration for large collections.
- Leave **Include playlist usage** enabled when tools need playlist labels or usage protection.

Library Dashboard

The central place for library analysis and all Library Index controls.

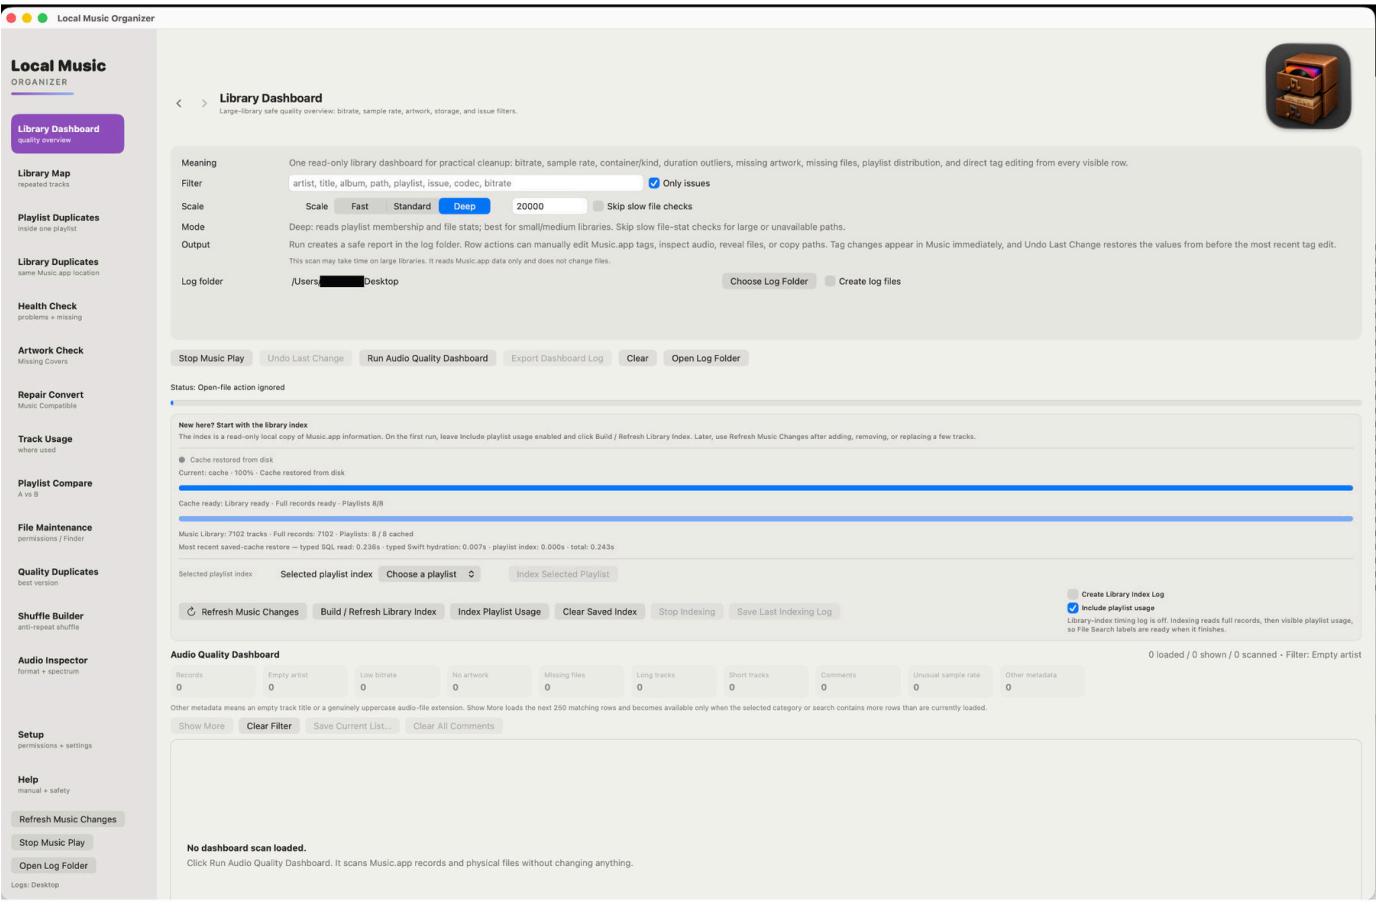


How to use this section

- Click **Build / Refresh Library Index** on the first run.
- Use **Refresh Music Changes** after adding, removing or replacing a few tracks.
- Use **Index Playlist Usage** for playlist relationships, or refresh only one selected playlist.
- Run the read-only Dashboard after the required index stages show Ready.
- Use filters and row actions without changing source audio files.

Dashboard results

Results can be filtered so a large report remains manageable.

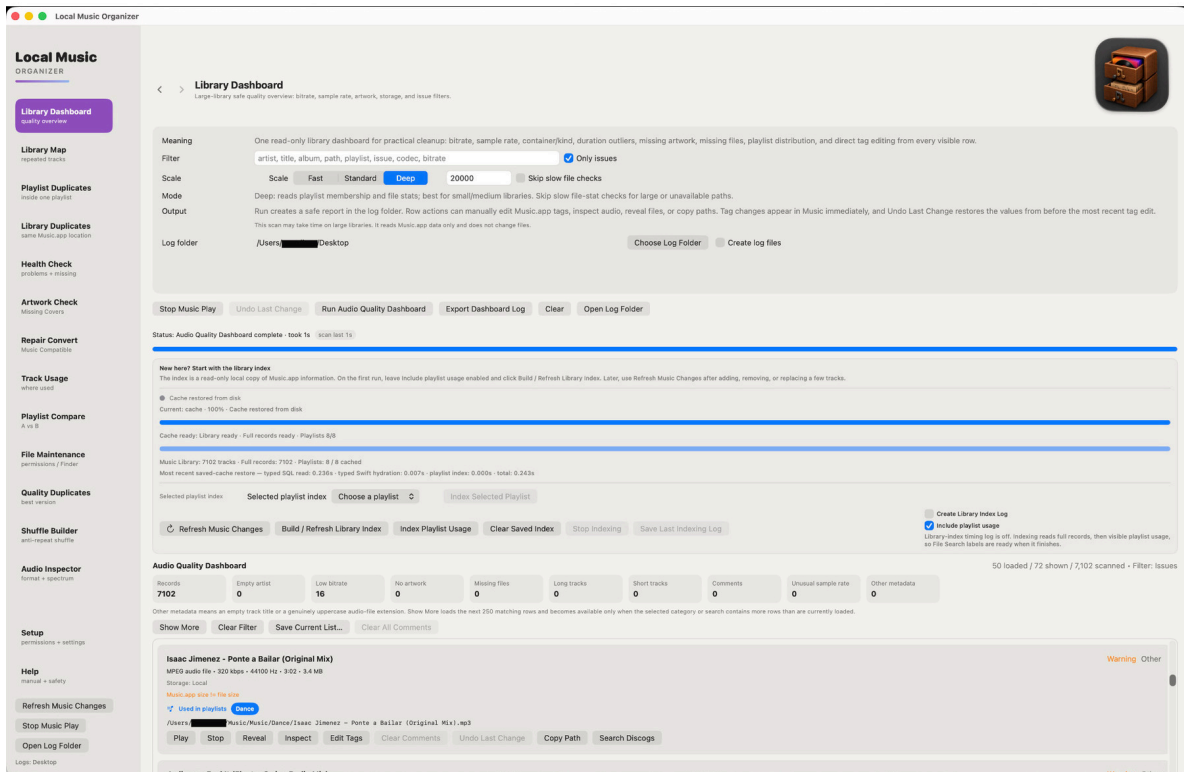

How to use this section


- Treat counters as review signals, not automatic cleanup instructions.
- Open a record in Audio Inspector when technical confirmation is needed.
- Use Reveal or Play in Music to compare Music.app information with the physical file.
- Use **Refresh Music Changes** when the displayed library state is no longer current.

Editing Music.app tags

- Choose **Edit Tags** from any result card where that button is shown. The editor is available in the Dashboard and in many scan, search, duplicate, comparison, and maintenance results.
- For a physical-file result, the application first looks for the linked Music.app record. If no linked record can be found, it does not write Music.app tags.
- Manually edit Title, Artist, Album, Album Artist, Composer, Genre, Year, Track and Disc numbers, or Comments.
- **Save to Music.app** writes the values directly to the Music.app track record. The changes appear in Music immediately.
- **Undo Last Change** restores the values from before the most recent tag edit. This is a one-step undo, so use it before making another reversible change.
- This action does not rename the physical audio file.

Library Map

Shows repeated track usage across selected playlists.

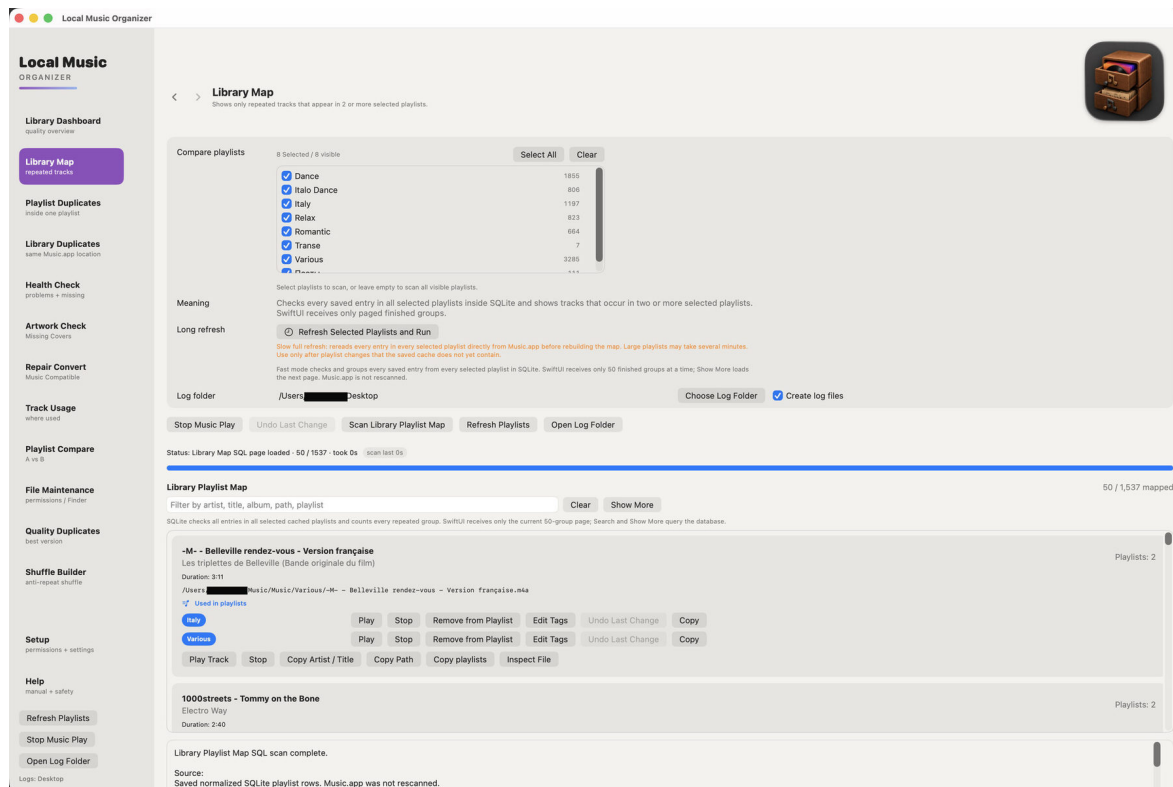


How to use this section

- **Index Playlist Usage** before running the map.
- Use it to understand relationships, not to find repeated entries inside a single playlist.
- Review every playlist location before removing an entry.
- Playlist removal does not delete the audio file.

Playlist Duplicates

Finds repeated entries inside one chosen playlist.

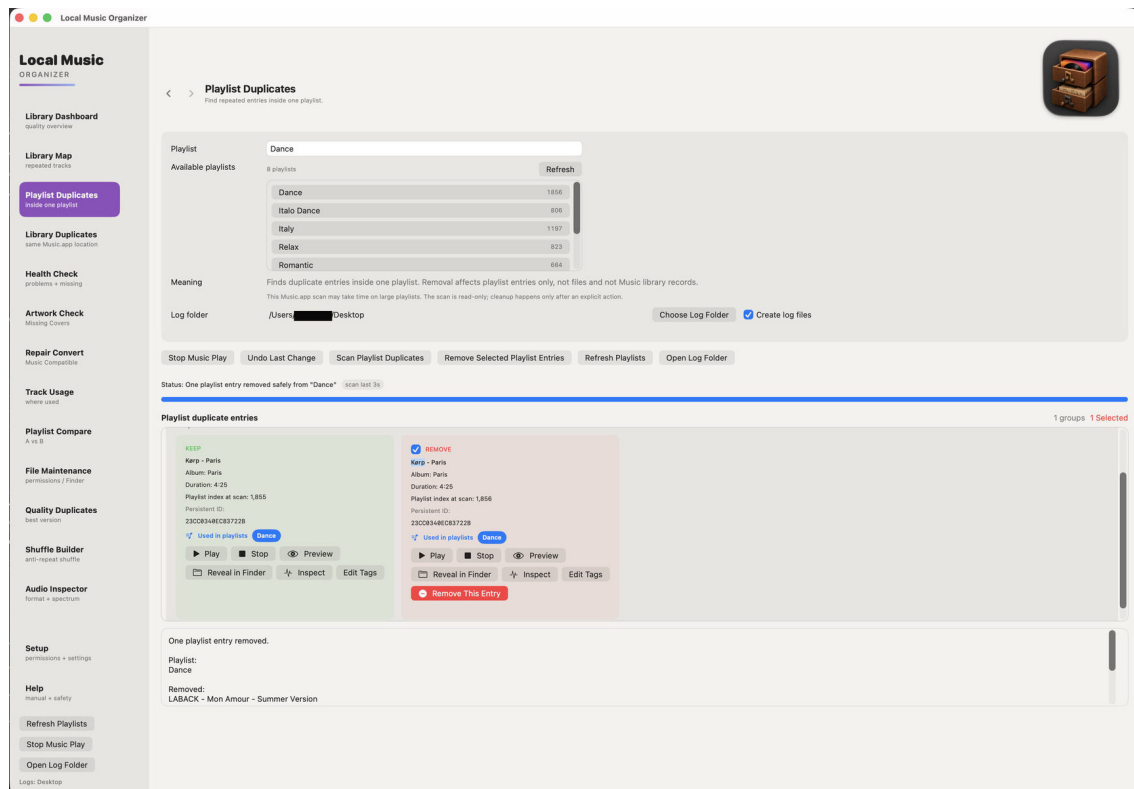


How to use this section

- The source playlist remains the scope of the scan.
- Compare title, artist, duration and file location before choosing an entry.
- Use Play in Music when two entries appear similar.
- Removal affects only the selected playlist entry.

Playlist duplicate cleanup

Actions remain explicit and reviewable.

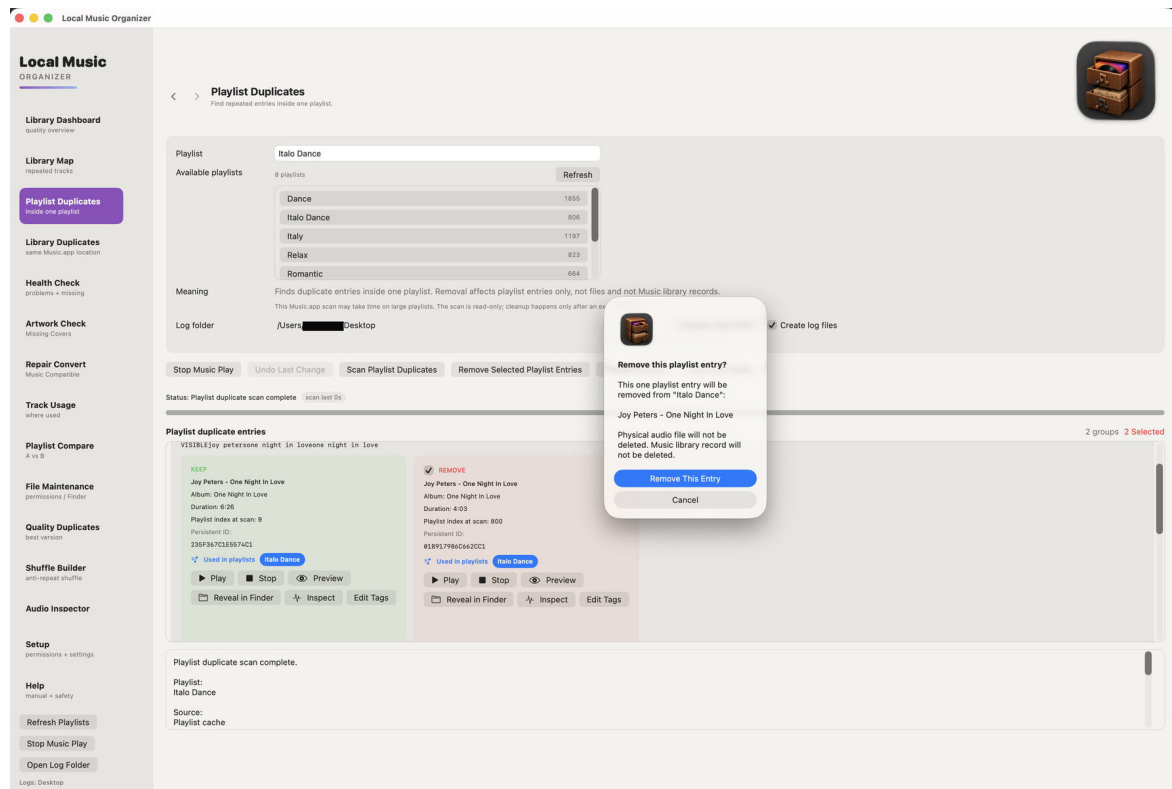


How to use this section

- Select only confirmed duplicate entries.
- Use Undo Last Change immediately after an incorrect reversible action.
- Refresh the results after cleanup.
- Keep a backup before bulk playlist maintenance.

Library Duplicates

Finds Music.app records that may refer to the same file or duplicate content.

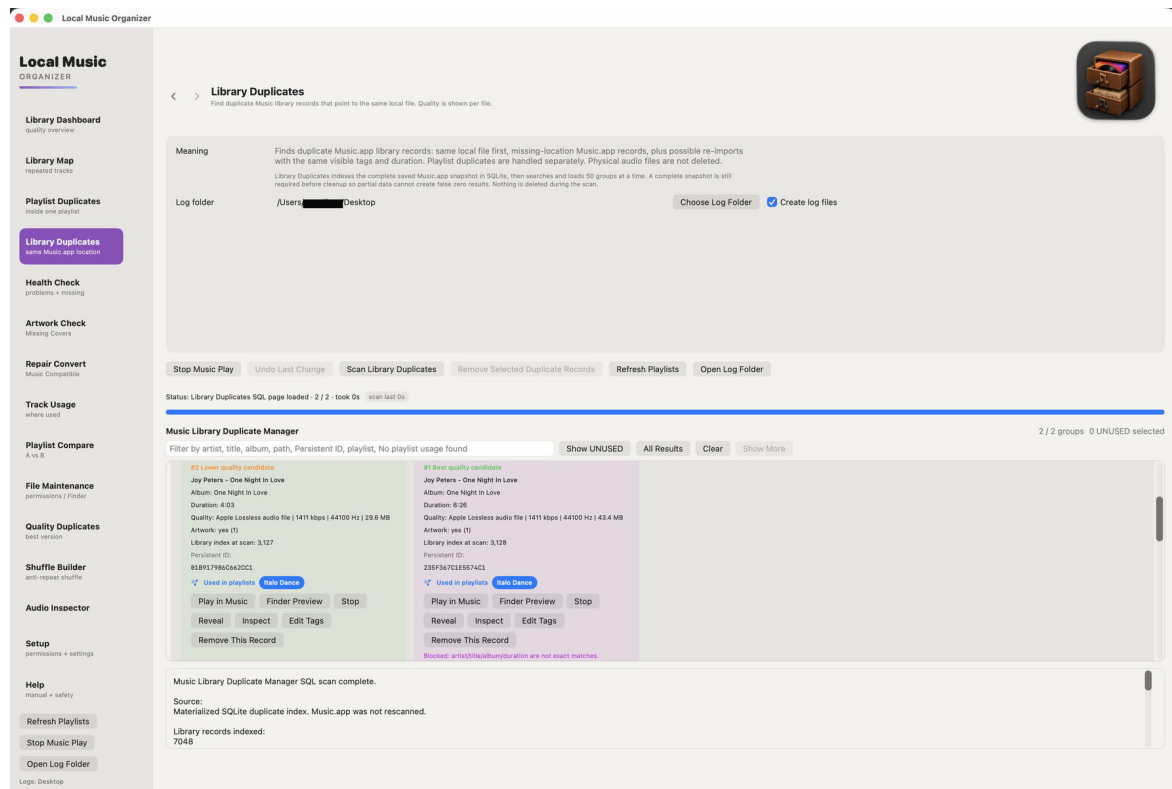


How to use this section

- Build the Library Index and **Index Playlist Usage** first.
- Distinguish a duplicate Music.app record from a second physical file.
- Protect records used by playlists.
- Preview and reveal candidates before removing any library record.

Health Check

Read-only diagnostics for records, selected playlists or a physical folder.

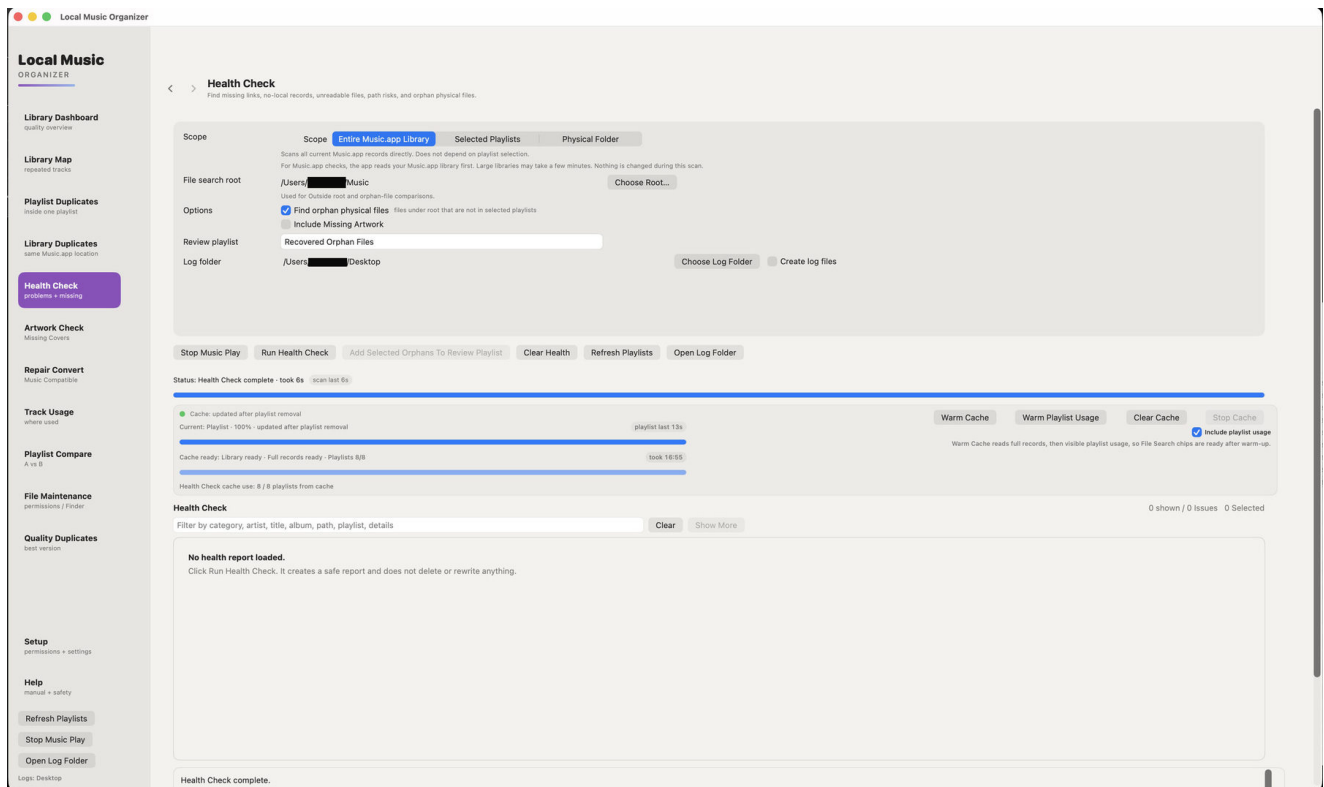


How to use this section

- Choose the scope carefully before starting.
- Review missing files, inaccessible paths and metadata problems.
- A warning is diagnostic information, not permission to delete.
- Use File Maintenance only when a physical-file action is actually needed.

Artwork Check

A separate artwork-focused scan.

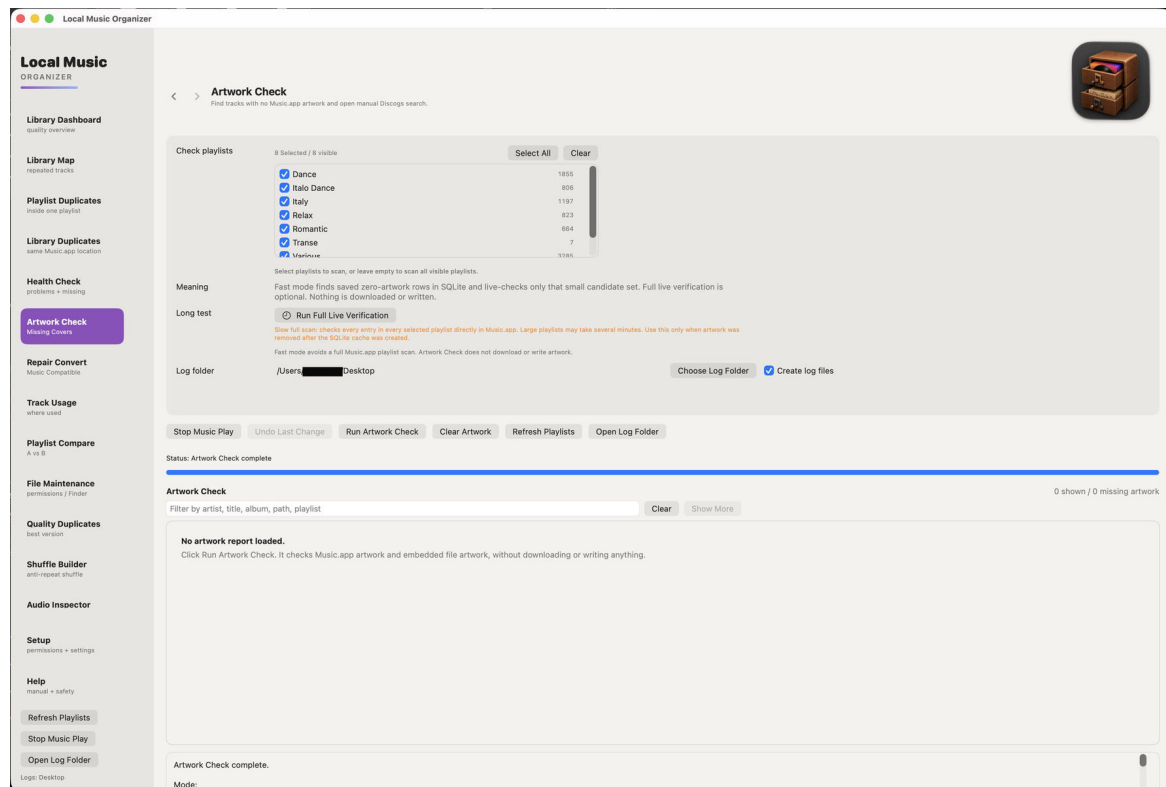


How to use this section

- Artwork access through Music.app can be slower than light metadata checks.
- The scan finds missing covers but does not modify images.
- Review album grouping before deciding that artwork is missing.
- Add or replace artwork manually only after confirmation.

Repair / Convert queue

Add audio files, playlists or CUE sheets and inspect detected sources.

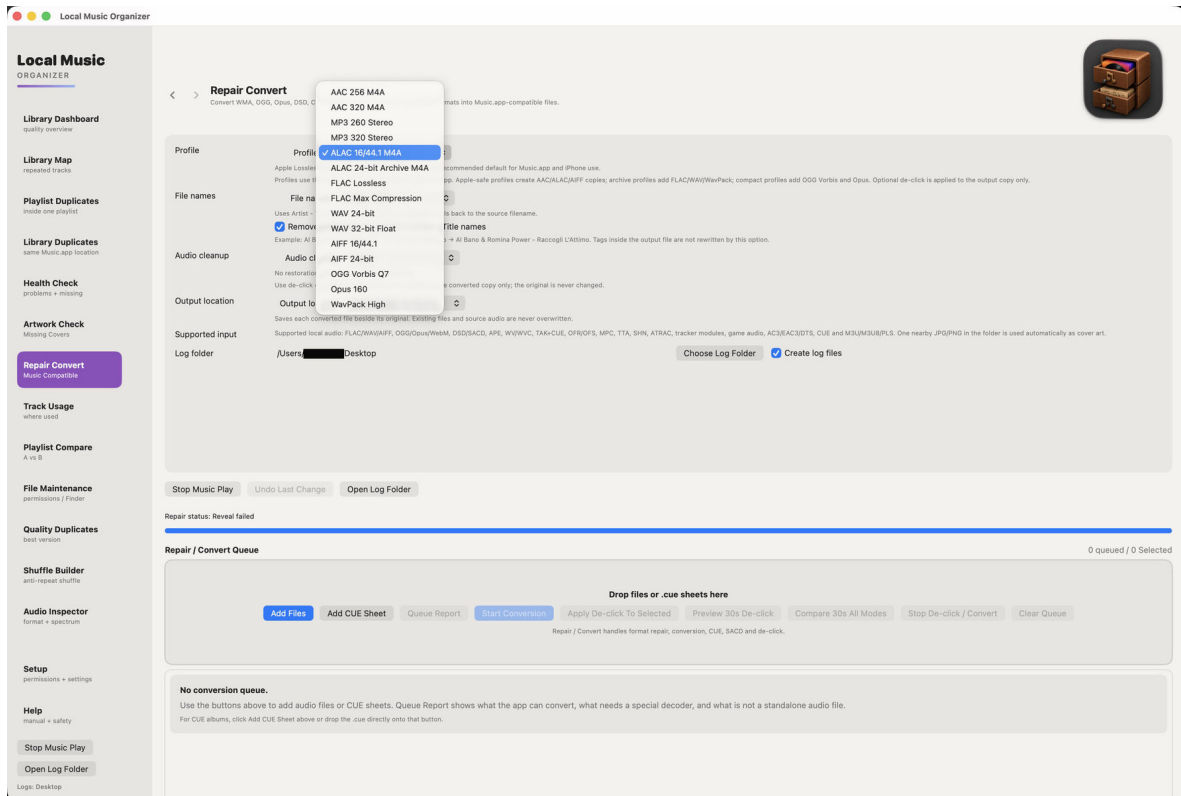


How to use this section

- Repair / Convert works directly with files and does not need the Music.app Library Index.
- Choose an output folder when macOS asks.
- Analyze the queue before conversion when source details are uncertain.
- Ordinary conversion creates new output files.

Built-in conversion engines

All required engines are included in the application.

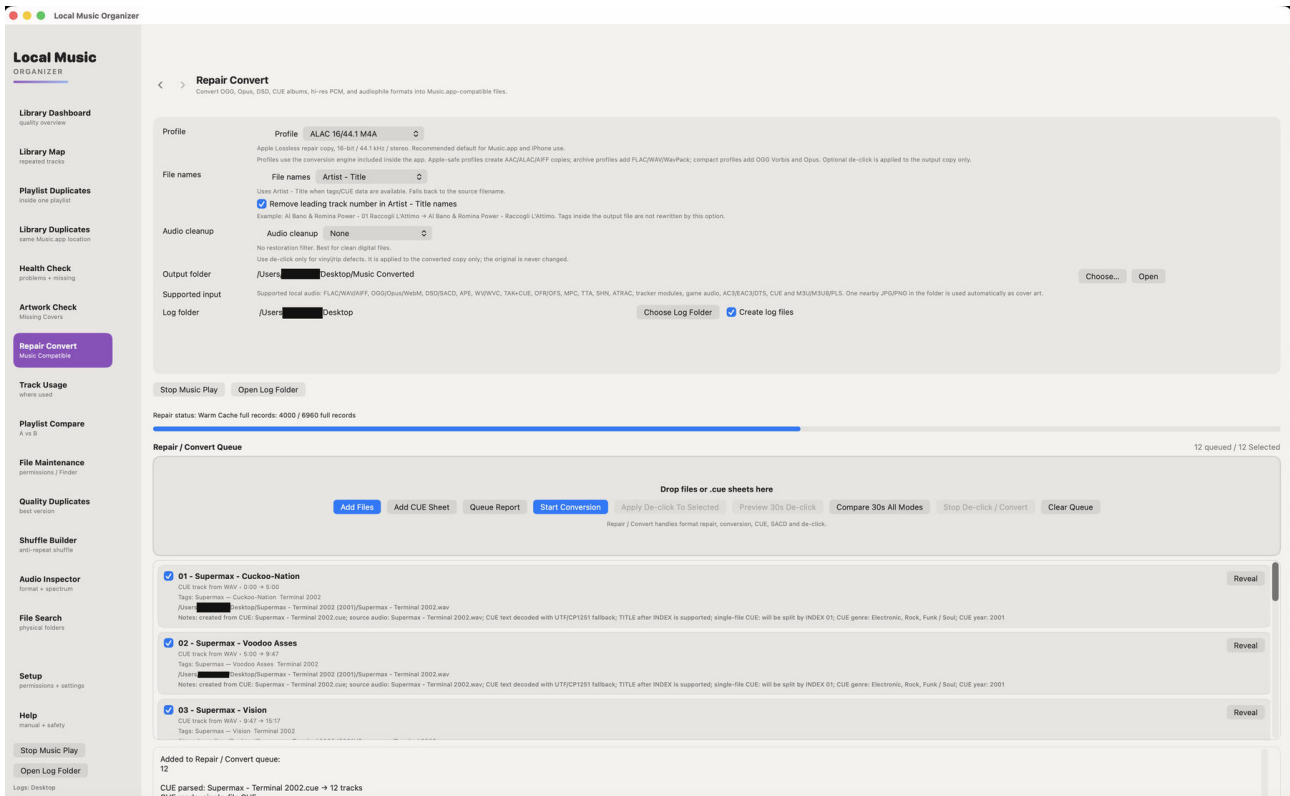


How to use this section

- Do not install separate codecs, Terminal tools or Homebrew.
- Choose a profile appropriate for Music.app or archival use.
- A listed extension can still fail if the source is damaged or non-standard.
- Read the queue report when a conversion is skipped.

Conversion profiles and progress

Progress represents the active decoding and encoding stages.

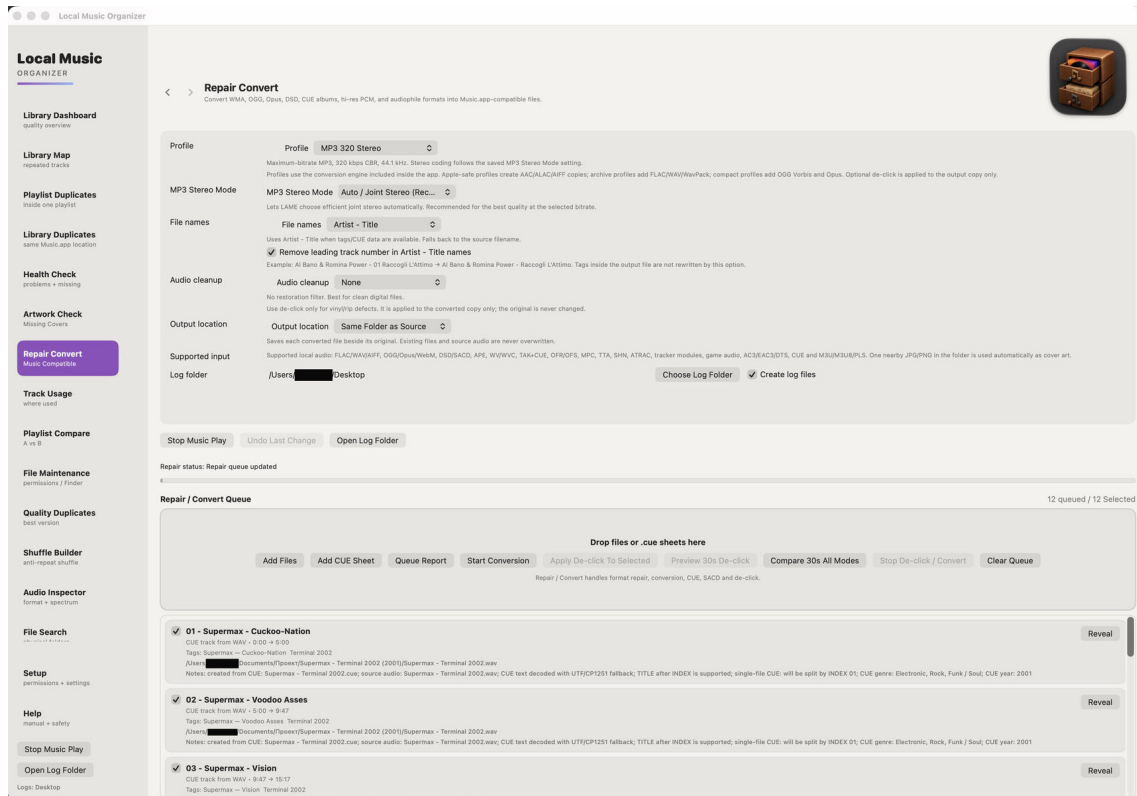


How to use this section

- Long lossless, DSD or ISO sources can take substantial time.
- Stopping should prevent an incomplete result from being presented as finished.
- Listen to the output and inspect tags before importing it into Music.app.
- Keep the original source until the result is verified.

Playlist Compare

Compares two selected playlists using several matching levels.

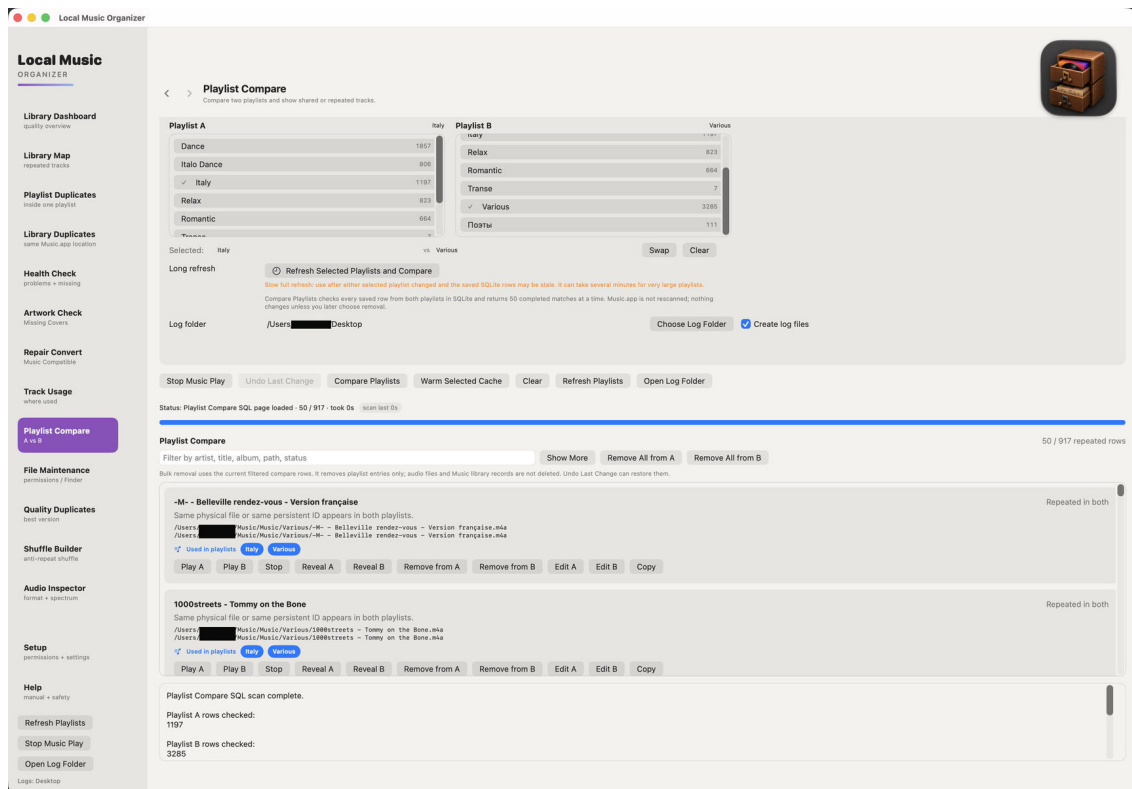


How to use this section

- **Index Playlist Usage** first.
- Persistent ID is strongest, followed by exact Music.app location and metadata/duration fallback.
- A possible match requires human review.
- Removing a row affects the chosen playlist entry, not the physical file.

File Maintenance

Physical-file tools for selected folders and explicit actions.

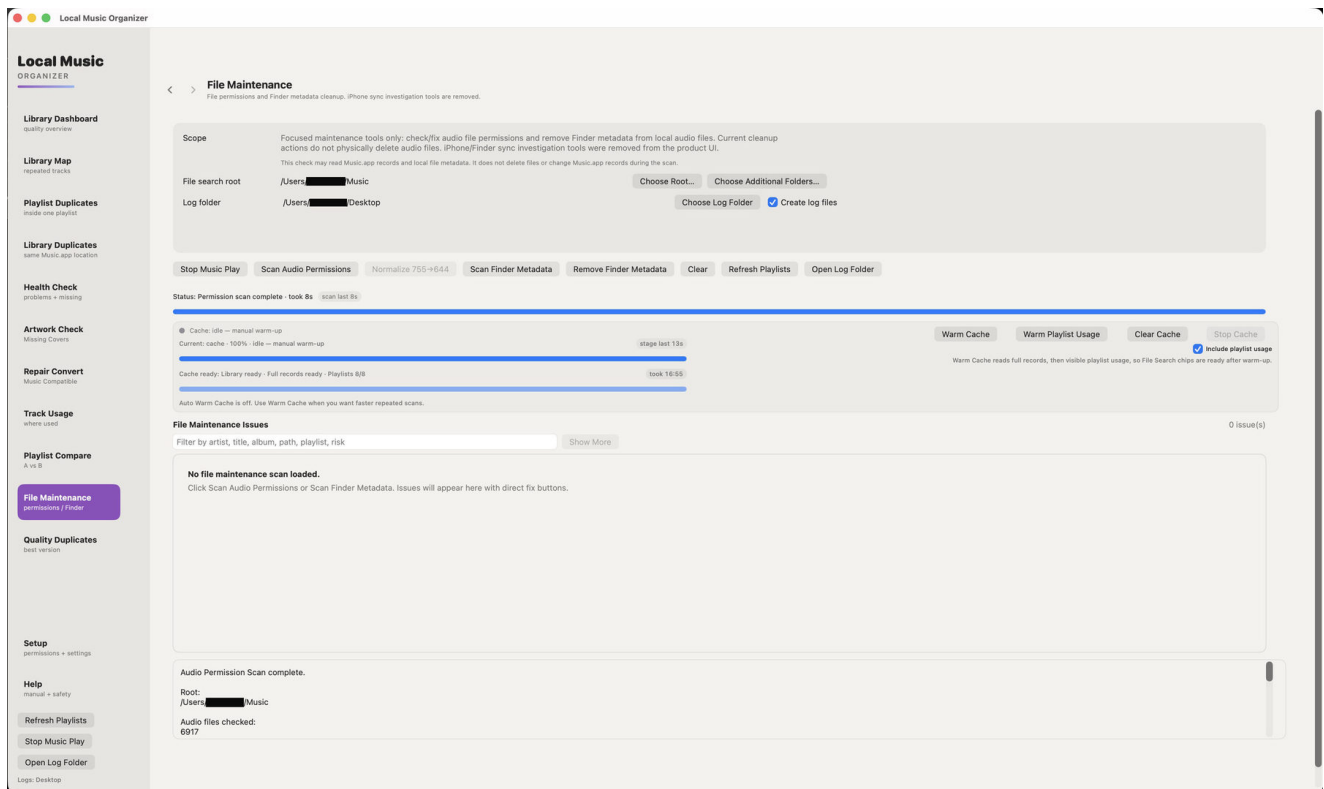


How to use this section

- Choose the folder through the macOS picker.
- Review file paths and permissions before changing them.
- Do not use this section as a substitute for Library Duplicates.
- No Full Disk Access is required.

Vinyl De-click

Preview-first click repair for noisy recordings.

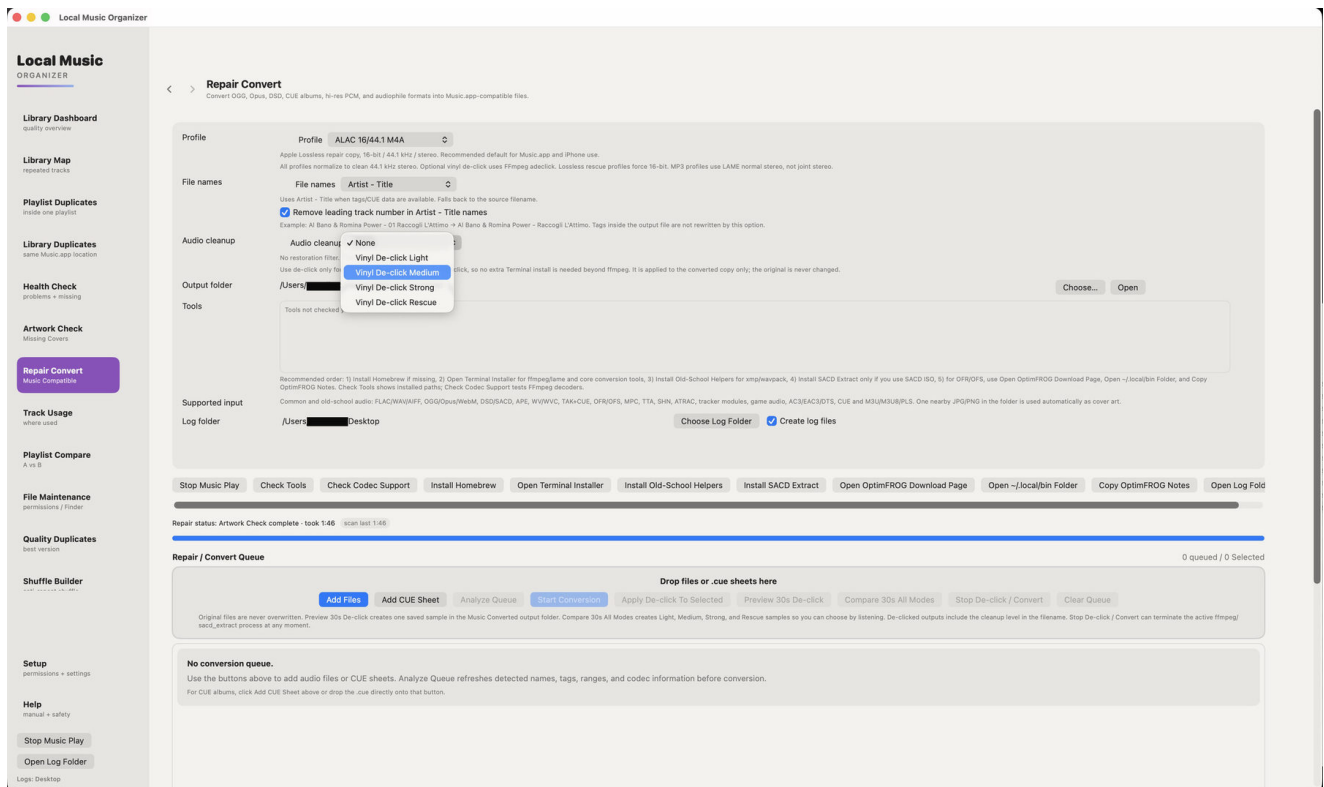


How to use this section

- Create a short comparison sample first.
- Compare Light, Medium, Strong and Rescue when available.
- Choose the weakest mode that removes the click.
- Stronger modes may soften attacks or transients.

Quality Duplicates

Compares likely versions using technical quality signals.

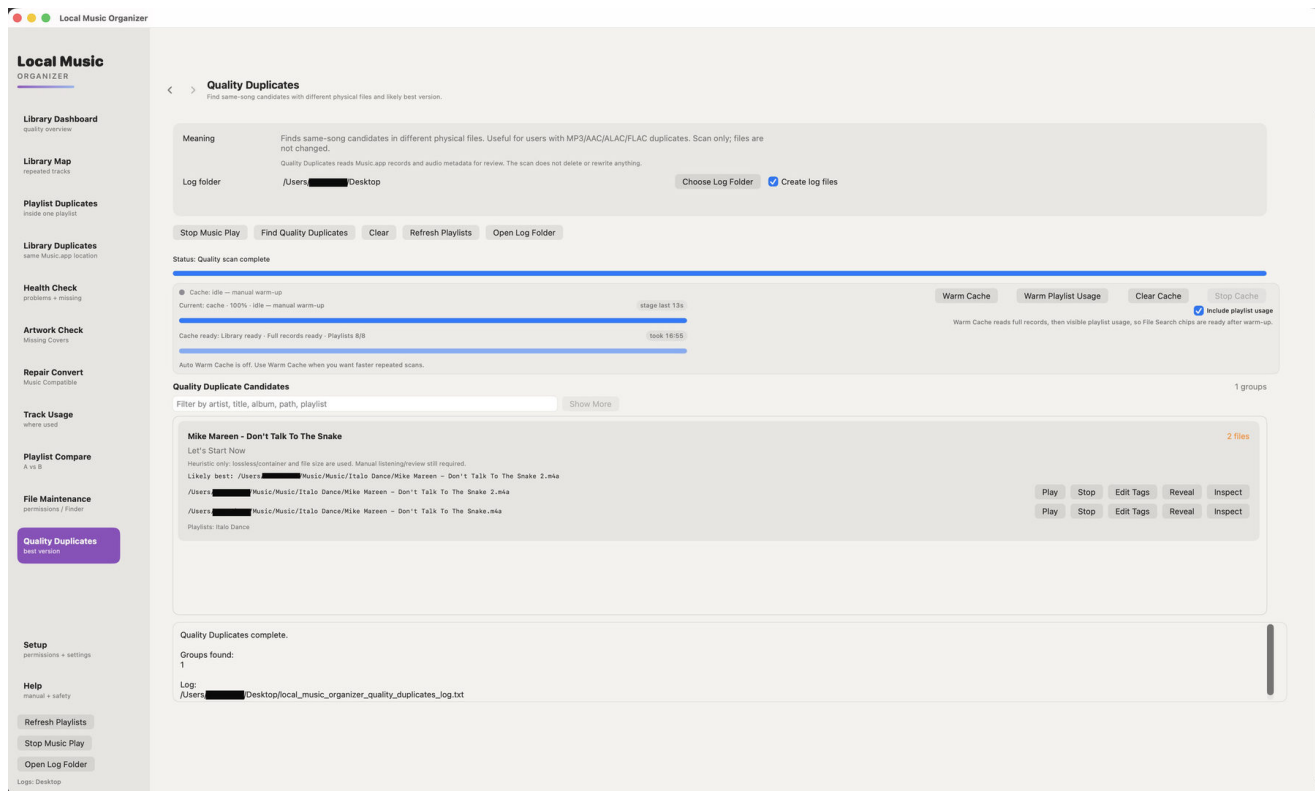


How to use this section

- Codec alone does not determine which master sounds better.
- Compare bitrate, sample rate, duration and file size together.
- Use Audio Inspector and listening before choosing a keeper.
- Preserve rare masters even when another file scores higher technically.

Shuffle Builder

Creates a new anti-repeat playlist from selected sources.

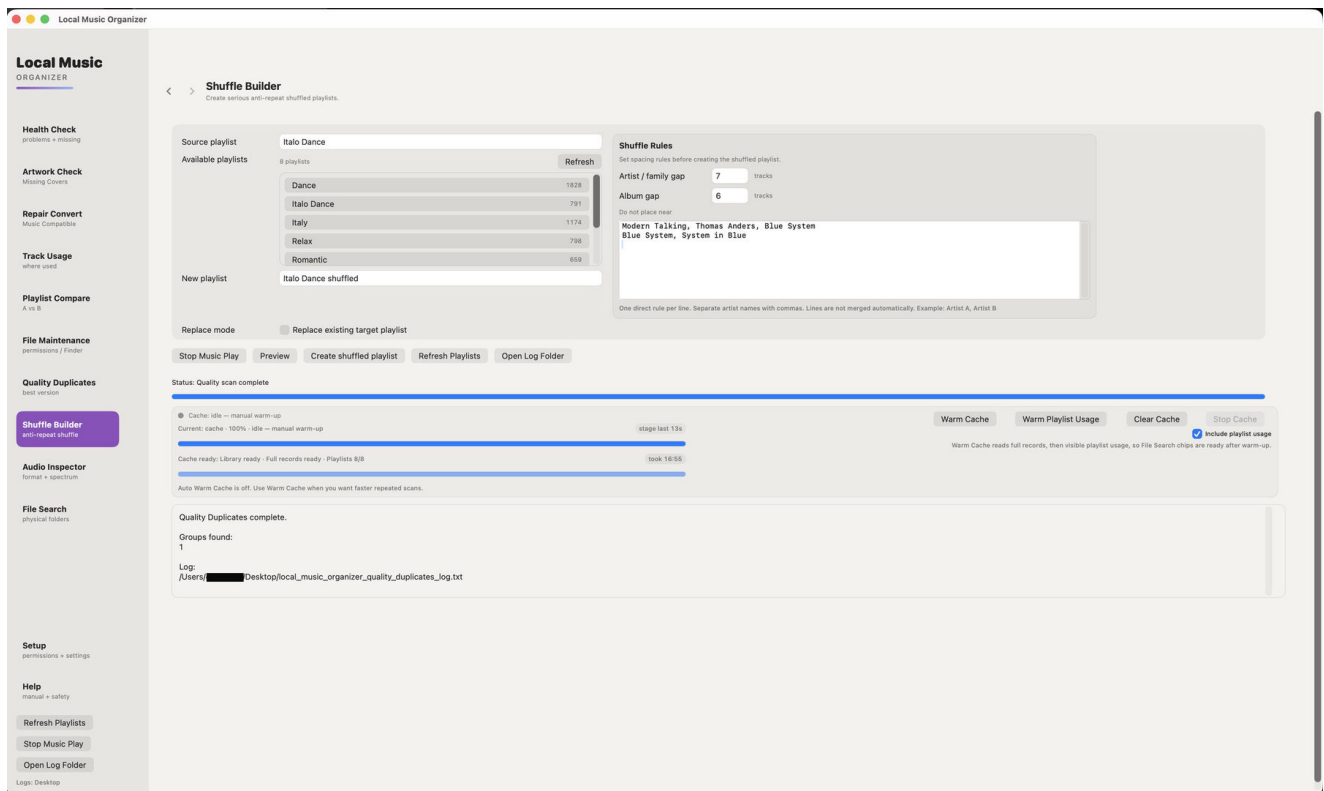

How to use this section

- The source playlists are not modified.
- Preview the source and target counts.
- Store/cloud tracks require a local file location when the workflow needs a file.
- Review the generated playlist in Music.app.

Audio Inspector - lossless

Detailed inspection of a standalone local file.

The screenshot displays the 'Audio Inspector' window within the 'Local Music Organizer' application. The interface is divided into a left sidebar and a main content area.

Left Sidebar (Local Music Organizer):

- Local Music ORGANIZER
- Health Check: problems + missing
- Artwork Check: Missing Covers
- Repair Convert: Music Compares
- Track Usage: where used
- Playlist Compare: A vs B
- File Maintenance: permissions / Finder
- Quality Duplicates: best version
- Shuffle Builder: anti-repeat shuffle
- Audio Inspector**: format + spectrum
- File Search: physical folders
- Setup: permissions + settings
- Help: manual + safety
- Buttons: Refresh Playlists, Stop Music Play, Open Log Folder
- Log: Desktop

Main Content Area (Audio Inspector):

- Header: Audio Inspector, Inspect local audio file and render a spectrum view.
- Log folder: /Users/[redacted]/Desktop. Buttons: Choose Log Folder, Create log files (checked).
- Buttons: Stop Music Play, Choose Audio File, Clear Inspector, Refresh Playlists, Open Log Folder.
- Status: Inspection complete - took 0s scan last 0s.
- Cache section: Cache: idle -- manual warm-up. Current: cache: 100% - idle -- manual warm-up. stage last 13s. Buttons: Warm Cache, Warm Playlist Usage, Clear Cache, Stop Cache. Includes playlist usage (checked). Note: Warm Cache reads full records, then visible playlist usage, so File Search chips are ready after warm-up.
- Cache ready: Library ready - Full records ready - Playlists 8/8. took 16:55.
- Note: Auto Warm Cache is off. Use Warm Cache when you want faster repeated scans.
- Drop audio file here. Supported formats: MP3, AAC, M4A, ALAC, WAV, AIFF, FLAC. Format + bit depth + 48-scale spectrum. Inspection complete: Yello - Dark Side.m4a. Button: Choose Audio File.
- File details for 'Yello - Dark Side.m4a':
 - Path: /Users/[redacted]/Music/Music/Relax/Yello - Dark Side.m4a
 - Format: Data format: 2 ch, 44100 Hz, alac (ba00000000) from 16-bit source, 4096 frames/packet. Lossless. Channels: 2. Duration: 4:15. File size: 26.7 MB.
 - Family: Lossless.
 - Bitrate: bit rate: 629925 bits per second.
 - Sample rate: 44100 Hz.
 - Bit depth: 16-bit.
 - Note: Lossless/PCM-style file. Bit depth should be meaningful when reported as 16-bit, 24-bit, or 32-bit.
- Spectrogram: A visualization of the audio's frequency spectrum over time. The y-axis is labeled 'kHz' (0 to 20) and the x-axis is labeled 'sec' (0 to 22). A color scale on the right indicates intensity in dB, ranging from -120 to -20.
- Footer: Track inspection complete.

How to use this section

- Review container, codec, channels, sample rate, bit depth, bitrate and duration.
- Inspect waveform, metadata and spectral behavior.
- Select and copy visible title, path and technical text when documenting a file.
- Run Audio Authenticity analysis for an individual dropped file.
- Return to the originating tool with Back.

Audio Inspector - lossy

Technical inspection for compressed audio.


The screenshot shows the 'Audio Inspector' window within the 'Local Music Organizer' application. The interface is divided into a left sidebar and a main content area. The sidebar contains various tool categories: Local Music Organizer, Health Check, Artwork Check, Repair Convert, Track Usage, Playlist Compare, File Maintenance, Quality Duplicates, Shuffle Builder, Audio Inspector (highlighted), File Search, Setup, Help, Refresh Playlists, Stop Music Play, and Open Log Folder. The main content area is titled 'Audio Inspector' and includes a 'Log folder' field set to '/Users/[redacted]/Desktop'. Below this are buttons for 'Stop Music Play', 'Choose Audio File', 'Clear Inspector', 'Refresh Playlists', and 'Open Log Folder'. A status bar indicates 'Inspection complete' and 'took 0s'. A progress bar shows 'Current cache - 100% full - manual warm-up' and 'stage last 13s'. A 'Warm Cache' button is present. Below the progress bar, a 'Cache ready' status is shown as 'Library ready - Full records ready - Playlists 8/8' with a 'took 16/6s' indicator. A note states 'Auto Warm Cache is off. Use Warm Cache when you want faster repeated scans.' A section titled 'Drop audio file here' lists supported formats: MP3, AAC, M4A, ALAC, WAV, AIFF, FLAC. Below this is a 'Choose Audio File' button. The main section displays metadata for the file 'Jerry Ropero Pres. Min Feat. Don Teco - Te Toca Shake Ur Body.mp3'. The metadata includes: File path, Format (Data format: 2 ch., 44100 Hz., mp3 (0x00000000) 0 bins/channel, 0 bytes/packet, 1152 frames/packet, 0 bytes/frame), Family (Lossy), Bitrate (bit rate: 320000 bits per second), Sample rate (44100 Hz), Bit depth (N/A for MP3/AAC lossy), and a Note stating 'Lossy file. Bit depth is normally not meaningful for MP3/AAC. Judge quality by bitrate and spectrum cutoff.' Below the metadata is a 'Spectrogram' visualization showing frequency (kHz) on the y-axis (0 to 22) and amplitude (dB) on the x-axis (-120 to 0). The spectrogram shows a dense pattern of green and yellow lines, indicating a complex audio signal. At the bottom, a 'Track inspection complete.' message is displayed.

How to use this section

- Review bitrate and codec together.
- Check duration and channel layout for unexpected changes.
- Use listening and provenance alongside technical values.
- Do not assume a larger file is automatically better.

File Search and Track Usage

Searches indexed physical files and connects them to Music.app usage.

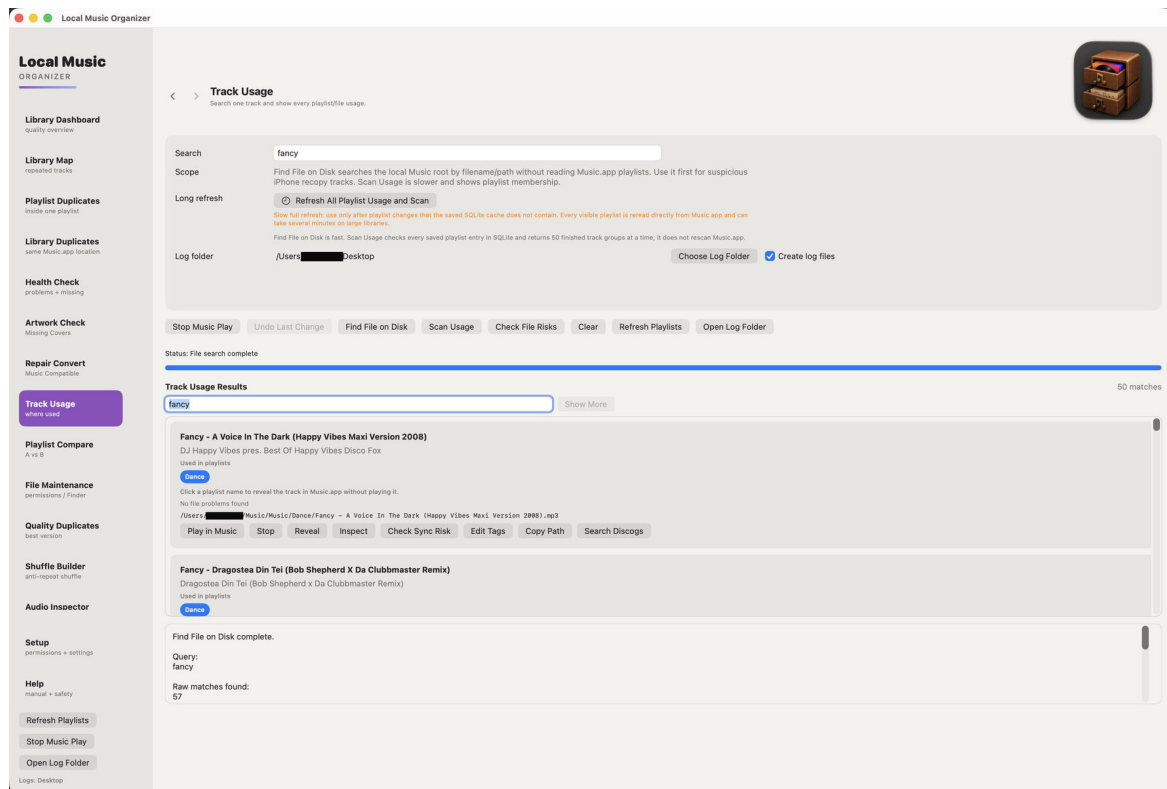

How to use this section

- Build the Library Index and **Index Playlist Usage** for the fastest complete results.
- Use **Check Usage for Results** when playlist usage has not been indexed.
- Click the bright-blue playlist name to open that playlist and reveal the exact track.
- Each playlist button is independent when the file appears in several playlists.

Specialist formats and CUE albums

Common and audiophile sources

FLAC, ALAC, WAV, AIFF, AAC/M4A, MP3, Ogg Vorbis, Opus, WavPack/WVC, APE, TAK, TTA, SHN, DSF, DFF, DSD, SACD ISO, DTS, AC3/E-AC3, CUE sheets and tracker modules.

Output profiles

AAC, ALAC, MP3, FLAC, WAV, AIFF, Ogg Vorbis, Opus and WavPack.

CUE sheets

- A single-file CUE can split one source by INDEX positions.
- A multi-file CUE can create output from several referenced sources.
- Review track titles and source paths before conversion.
- Keep the CUE and original audio together until output is verified.

SACD ISO and DSD

- The application reads the SACD table of contents and can expose stereo tracks.
- Large ISO extraction can be slow and requires enough free output space.
- Keep the original ISO until every output track is checked.

Compatibility

Corrupted, encrypted, mislabeled or unusual sources may fail even when the extension is normally supported. The queue report is the first place to look for the exact cause.

Troubleshooting

A library tool is slow

- Confirm that **Build / Refresh Library Index** completed.
- Include playlist usage when the tool depends on playlist relationships.
- The first index build can be long; later scans should reuse saved SQLite results.
- Do not clear a healthy saved index before every scan.

Results appear outdated

- Click **Refresh Music Changes**.
- Refresh only the changed playlist when that is sufficient.
- Reconnect an external disk and reselect a moved folder.
- Clear and rebuild the saved index only when the status area says validation failed or data remains stale.

A hidden-tag scan reports a very large number

- The count means fields were detected; it does not prove that every field is harmful.
- Review the exact field names and safe removal candidates.
- Nothing is removed until you select an explicit cleanup action.

Conversion stops or rolls back

- Confirm the output folder is permitted, writable and has sufficient free space.
- Read the queue report for the actual decoder or verification error.
- Try a small known-good file with the same output profile.
- Preserve the original; a failed conversion must not be treated as complete.

Music.app did not open the expected track

- Wait briefly for Music.app to finish selecting the playlist and track.
- Use the individual bright-blue playlist button, not the surrounding usage area.
- Refresh Music Changes and the relevant playlist index if the relationship is outdated.

Privacy, open source and support

Privacy

Audio, metadata, artwork, playlists, saved indexes and logs remain on the user's Mac.

Open source

Bundled components include FFmpeg/FFprobe, LAME, WavPack, DSD Nexus and libopenmpt. License notices and available source materials are included with the application and published on the website.

Support

Email: sergeyappleservice@gmail.com

Website: <https://local-music-organizer-site.pages.dev/>

Privacy: <https://local-music-organizer-site.pages.dev/privacy.html>

Open source: <https://local-music-organizer-site.pages.dev/open-source.html>

Keep this guide with the release build. Interface details may change in later updates.

Live Spectrum and local player

Real-time analysis, full-track overview and technical playback data



Screenshot 21 - Live Spectrum with the full-track waveform, playback data and technical meters.

What the Live Spectrum window shows

- Local playback and analysis run inside Local Music Organizer without creating another Music.app record.
- The logarithmic analyzer displays sub-bass, bass, low mid, mid, upper mid, presence and brilliance regions, with a dBFS scale and peak trace.
- The analyzer uses 512 FFT bands and reports the current visible-bar count, selected bar width and refresh rate.
- Technical cards show file type, resolution, channels, duration, current time, remaining time, progress, peak, RMS, headroom and clipping state.
- The full-track waveform keeps short transients visible and shows the current playback cursor across the complete file.

Player controls, seeking and window behavior

Clear transport logic and an independent macOS player window

Playback controls

- Play starts the loaded track. Pause keeps the current position, and Play continues from the same point.
- Stop is a true stop: the audio engine stops and the position returns to 0:00. The loaded track and already-built waveform remain visible, so Play starts the same track from the beginning without rebuilding the overview.
- Eject removes the loaded track and clears the player. Use Eject only when the player should become empty.
- Click anywhere in the waveform to jump to that position. Drag across the waveform for continuous seeking. The lower progress bar is also draggable.
- Seeking works during playback and while paused. During dragging, the displayed time follows the proposed position before the final seek is committed.


Independent macOS window

- The yellow window button minimizes Live Spectrum into the Dock.
- The red window button closes and hides the player window, but playback continues.
- When music is playing and the player is hidden, click the Local Music Organizer icon in the Dock to restore it.
- The player and the main organizer window are independent. Clicking the player does not intentionally bring the main organizer window to the front.
- Background conversion and gain processing do not intentionally close unrelated Finder folders or other organizer windows.

Normal macOS window meaning is preserved: yellow minimizes; red hides. Playback ends only after Pause, Stop, Eject, another playback command, or natural completion.

Spectrum appearance and playback gain

Customize the analyzer, preview gain and apply a verified change

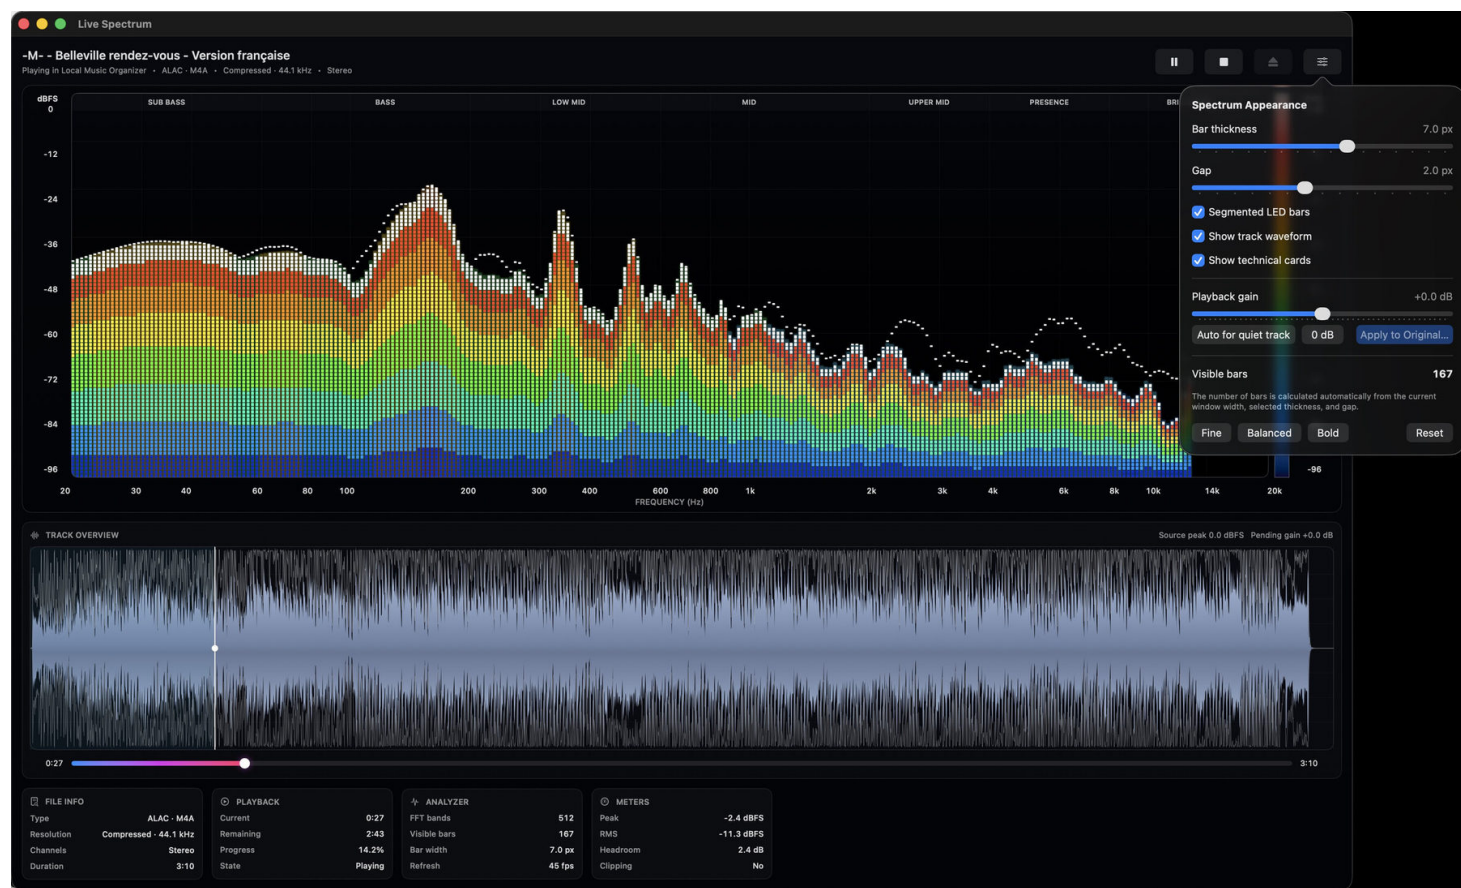

Screenshot 22 - Spectrum Appearance controls and the playback-gain workflow.

Appearance controls

- Adjust bar thickness and gap, enable or disable segmented LED bars, and show or hide the waveform and technical cards.
- Fine, Balanced and Bold presets provide quick starting points. Reset restores the standard display.
- The visible bar count is calculated automatically from the current window width, selected bar thickness and gap.

Gain preview and Apply to Original File

- Playback gain can be previewed from -12 dB to +12 dB without immediately rewriting the source file. The waveform expands or contracts around its zero line to show the selected gain visually.
- Auto for quiet track provides a conservative preview increase. 0 dB returns playback to the source level.
- Apply to Original File creates a temporary candidate and verifies it before replacement. The workflow preserves the source codec family, sample rate, channel count and bit depth where supported.
- Embedded artwork is verified separately by SHA-256. Metadata, chapters and meaningful media streams are checked before replacement. If verification fails, the original remains or is restored from the rollback copy.
- A diagnostic gain-operation log records stages, the FFmpeg command, heartbeat, progress, verification results and the exact failure reason.

Drag-and-drop conversion

Send files from Finder directly to Repair / Convert or Audio Inspector

Repair / Convert drop area

- Drag one file or several files into the large Repair / Convert drop area to add them to the conversion queue.
- Drag a .cue sheet into the drop area or directly onto Add CUE Sheet. For a CUE album, macOS may ask once for access to the folder containing both the CUE and its referenced audio file. That folder permission is saved for later CUE files inside the same authorized root.
- Use Add Files and Add CUE Sheet when a system file picker is preferable. Analyze Queue reports the detected format, the engine that can handle it, special-decoder requirements and sources that are not standalone audio files.
- Select only the queue items to process, choose the output profile, then run Convert Selected. Clear Queue removes pending entries without changing the source files.
- Ordinary Repair / Convert writes new output files and does not require the Music.app Library Index.

Drop onto the application icon

- Drag local audio files or CUE sheets from Finder onto the Local Music Organizer application icon. Multiple file-open events are grouped into one batch.
- A normal application-icon drop adds only those dropped files to the queue and starts conversion automatically using the currently selected Repair / Convert profile.
- Hold Option while dropping a file onto the application icon to open it in Audio Inspector instead of converting it. When several files are dropped with Option, the first file is opened for full inspection.
- Finder/Dock drop processing runs without intentionally bringing the main organizer window to the front and without closing the Finder folder that contains the source track.
- Direct Finder/Dock conversion retains the sandbox permission supplied with the dropped file for the complete background operation.

Before dropping files for automatic conversion, confirm the active output profile and output folder. The drop command uses the current Repair / Convert settings.

Conversion, inspection and file safety

What happens before, during and after a conversion

Conversion workflow

- Repair / Convert supports common formats and specialist sources including CUE albums, TAK, SACD ISO, DSD, DTS, AC3/E-AC3, tracker modules and other formats listed in the application.
- The bundled offline engines are used inside the sandbox. Separate Terminal tools or Homebrew are not required.
- Queue analysis is recommended when source details are uncertain. A listed extension can still fail if the source is damaged, encrypted, incomplete or non-standard.
- Progress reflects active decoding and encoding. Long lossless, DSD, ISO or multi-track CUE sources can require substantial time.
- Stop De-click / Convert requests cancellation and prevents an incomplete output from being presented as a completed result. Always listen to and inspect the output before importing it into Music.app.

Audio Inspector and local preview

- Audio Inspector reads technical properties such as format, codec, sample rate, bitrate, bit depth where available, channel layout and duration.
- Local playback can open Live Spectrum so the physical file can be heard and analyzed without creating another Music.app library record.
- The spectrum and waveform are useful for checking unusual files before conversion, comparing outputs and locating audible problems in a recording.
- Reveal in Finder locates the physical source. Finder Preview or Quick Look provides an additional independent check.

Explicit actions and original protection

- Read-only tools do not modify files. Playlist-entry removal affects the selected Music.app playlist entry, not the physical audio file.
- Ordinary conversion writes a new result. Applying gain to the original is a separate confirmed operation with a temporary candidate, verification and rollback.
- Keep a current backup before maintenance, and keep the original source until every converted output has been verified.

Library-index refresh, stop and resume rules

Keep large-library work accurate without discarding completed batches.

Continue instead of starting over

Build / Refresh Library Index saves progress after each completed batch. When a compatible partial index is restored, **Resume Library Index** continues from the last saved point.

Stopping safely

Stop Indexing can remain disabled briefly while a resumed Music.app request is being established. When available, it requests cancellation; the current small batch finishes and progress is saved.

Refresh only what you need

- **Build / Refresh Library Index** for complete Music.app records.
- **Index Playlist Usage** for relationships across visible playlists.
- **Index / Refresh Selected Playlist** for a targeted playlist workflow.
- **Refresh Music Changes** after adding, removing or replacing a small number of tracks.
- **Clear Saved Index** only when you intentionally want to discard saved progress.

Validation after library changes

At launch, the application compares saved SQLite data with current Music.app library and playlist information. If the saved state is no longer trustworthy, the status area gives the reason and requests the smallest appropriate refresh instead of returning stale results.

All library-index controls are in Library Dashboard. Audio Authenticity Analyzer keeps only its scan-scope controls: Entire Music Library or One Playlist.

Metadata and artwork protection

Narrow cleanup rules, SHA-256 verification and rollback

Hidden embedded metadata cleanup

- The cleanup targets only explicitly selected removable fields such as copyright, license/licence, publisher, label and downloader/source URL metadata.
- It preserves artwork, title, artist, album, lyrics, grouping, handler_name, language, vendor_id, iTunSMPB and technical/container metadata. Encoder metadata is preserved unless a specific remux operation regenerates it.
- When embedded artwork exists, its image bytes are hashed before cleanup. The candidate and final committed file must contain byte-identical artwork with the same SHA-256 value.
- If artwork extraction, hashing, restoration, tag verification or final replacement fails, the exact rollback copy is restored and the failure is recorded in a per-file diagnostic log.

Extended attributes

- The narrowly scoped recopy cleanup removes only com.apple.lastuseddate#PS.
- Quarantine, FinderInfo, macl, Finder tags and other extended attributes are preserved unless a separate explicit tool states otherwise.
- The application does not treat diagnostic warnings as permission to perform broad metadata removal.

Artwork Check is report-only: it finds missing covers but does not download, create or write artwork. Add or replace missing artwork manually only after confirming the correct album grouping.

For beginners: a high number of detected hidden fields is not automatically a problem. The scan is diagnostic. Review the field names and act only on candidates the application marks as safe and that you intentionally select.

Audio Authenticity Analyzer


Library-wide, selected-playlist and individual-file technical review.

The analyzer compares the declared format with measured spectral behavior. It does not alter audio and does not claim to prove a recording history.

What it measures


- Detected bandwidth or cutoff and high-frequency occupancy.
- Transition width and roll-off slope around the upper-frequency boundary.
- Brickwall Score and cutoff stability across multiple analysis windows.
- Declared codec, bitrate, sample rate and bit depth consistency.
- Estimated source class and a confidence score with plain-language reasoning.

Normal files remain in summary counts but are omitted from the actionable list and report. Only Review, Likely and failed items are shown in detail.

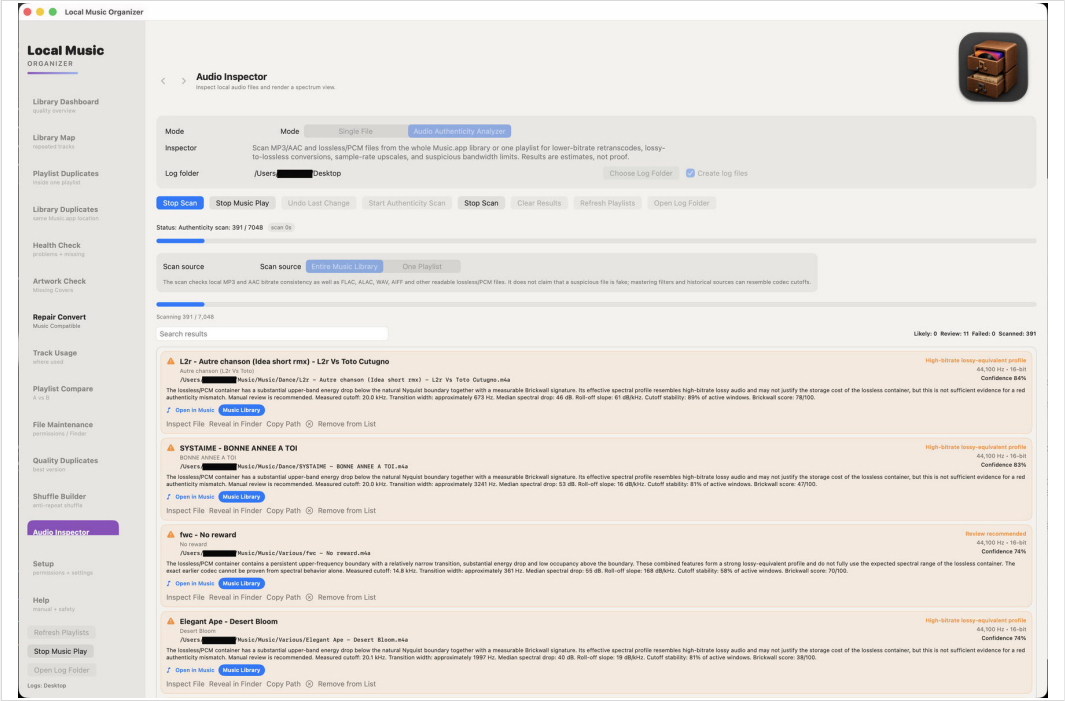

Running a library or playlist scan

Choose the scope in Audio Authenticity Analyzer; manage library-index work in Library Dashboard.

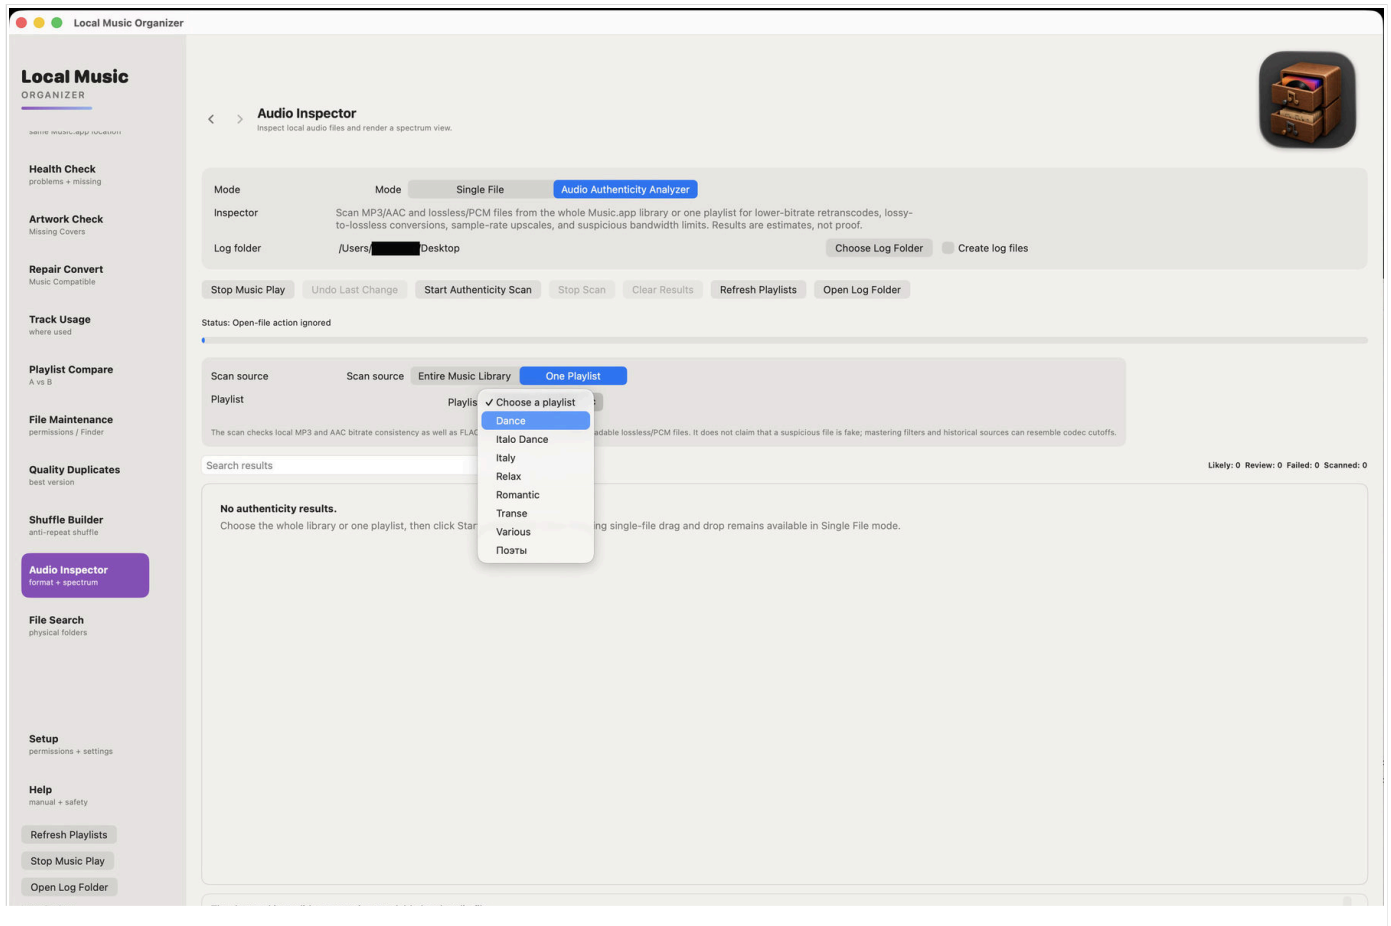

Workflow

- Choose **Entire Music Library** or **One Playlist**.
- For a playlist scan, select the playlist; **Index / Refresh Selected Playlist** is available in Library Dashboard.
- Start the scan and watch progress. **Stop Scan** preserves results already collected.
- Use Inspect File, Reveal in Finder, Copy Path or Remove from List for flagged entries.
- Drop one local file into the Analyzer for an independent single-file analysis.

Understanding the results

Only actionable or failed items remain in the detailed list.

Review recommended

One or more unusual indicators were measured, but the combined evidence is not decisive. Manual inspection is appropriate.

Likely authenticity mismatch

A stronger combination of persistent bandwidth boundary, transition shape, occupancy, stability and format mismatch was detected.

High-bitrate lossy-equivalent profile

The lossless container may not use the expected spectral range, but the evidence is not sufficient for a red mismatch classification.

Analysis failed

The file could not be decoded or measured. The path and error remain available for inspection.


Each flagged item reports

- Current codec, sample rate and bit depth.
- Detected bandwidth or cutoff, transition width and roll-off slope.
- Brickwall Score, cutoff stability and high-frequency occupancy.
- Estimated source class, confidence and a plain-language explanation.

These measurements describe the file that exists now. They are technical estimates and cannot identify an earlier codec with absolute certainty.

Detailed review and report

Manual confirmation remains important

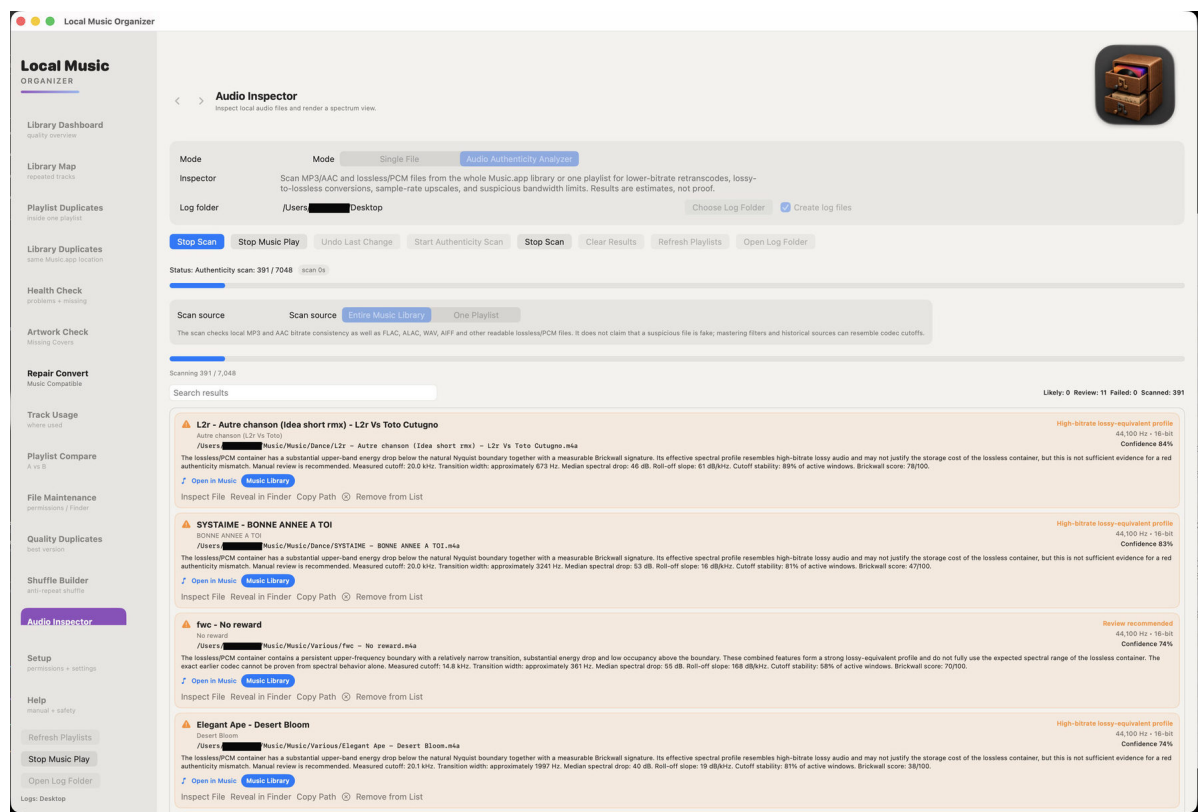

The Desktop report is named Audio Authenticity Analyzer.txt. It begins with the scan source and summary counts. The detailed section contains only Review Recommended, Likely Authenticity Mismatch and failed items; files with no obvious issue are not repeated line by line.

Important limitation

Spectral analysis cannot reconstruct a file's complete production history. A sharp cutoff may be caused by lossy encoding, but it can also come from mastering, older digital equipment, analogue bandwidth limits, vinyl processing or noise reduction. The analyzer therefore uses probability-based language and provides the evidence instead of declaring a file fake.

Recommended confirmation steps

- Open the item in Single File mode and review the spectrum across the whole track.
- Compare with a trusted CD rip or verified lossless release when available.
- Check whether every track from the same album shows the same mastering signature.
- Do not replace or delete an archival file solely because it appears in the report.

Trial, purchase and standalone files

Version 1.1.4 (Build 41)

Local Music Organizer works with a locally stored Music.app library and with standalone audio files outside Music.app. No Apple Music streaming subscription or separate application account is required.

Free 3-day trial

1. Select **Start Free 3-Day Trial**.
2. Confirm the free App Store transaction.
3. Use every feature for three days.

The trial does not renew and creates no automatic charge. Continued use is unlocked only when the user explicitly confirms the separate one-time Full Version purchase.

Testing without a Music.app library

Open a supported file from Finder or drag it into Audio Authenticity Analyzer, Live Spectrum Player or Repair / Convert. Individual-file workflows do not require the Music.app Library Index.

Privacy and restoration

Audio, playlists, metadata and reports remain on the Mac. StoreKit communicates with Apple only for trial activation, the optional one-time Full Version purchase and Restore Purchases.

Restore Purchases restores the permanent unlock for the Apple Account that completed the purchase. It does not restore audio files or rebuild a damaged Music.app library database.

SQLite scaling, clearer indexing and targeted refresh

This release keeps the safety-first workflows while making large-library preparation easier to understand and reducing repeated Music.app reads.

Large-library architecture

- Full records, individual playlist occurrences and physical-file indexes persist in SQLite and restore after relaunch.
- Large Dashboard, File Search, Library Map, Playlist Compare and duplicate results load in bounded pages.
- **Refresh Music Changes** and selected-playlist refresh avoid unnecessary full rebuilds.

Clearer first-run workflow

The Library Index is presented consistently as read-only local SQLite data.

- Build, resume, stop, selected-playlist and saved-index actions use consistent names.
- Library Dashboard explains what to run first and what to refresh after a small library change.

Tag editing and rollback

- **Edit Tags** can be opened from any result card where that action is available.
- Supported Music.app fields save directly to the linked record and appear in Music immediately.
- **Undo Last Change** restores values from before the most recent supported edit.

Safety retained

- Read-only scans remain read-only; cleanup and conversion still require explicit actions.
- Playlist cleanup removes selected playlist occurrences, not physical files.
- Conversion, gain application and metadata cleanup retain verification and rollback protections.

Recommended: build the saved library index once, then refresh only Music changes or the selected playlist when possible. Audio Inspector, Live Spectrum and Repair / Convert work directly with files and do not require the library index.