

Formal Architecture and Machinery of the Normative Formal Core and Appendices G, I, J, K, and L

Stuart Swan, Platform Architect, Siemens EDA

13 August 2026

CORE/G Shared semantics + contract	I Local replay	J Safety glue	K Liveness	L Witness selection
---	--------------------------	-------------------------	----------------------	-------------------------------

Based on: Catapult HLS User View Scheduling Rules, 13 August 2026 (aligned through Core.QSync, the cycle-level hardware interpretation, and J.TraceCertCov source-settling propagation)

The latest version of the scheduling rules document is available here:

https://github.com/Stuart-Swan/Matchlib-Examples-Kit-For-Accellera-Synthesis-WG/blob/master/matchlib_examples/doc/catapult_user_view_scheduling_rules.pdf

The scheduling rules document is the normative source: it defines the scheduling contract, formal models, assumptions, theorem statements, proofs, and evidence obligations. This formal architecture guide adds value by reorganizing that material into a coherent map of how the Core and Appendices G, I, J, K, and L depend on one another, what information crosses each proof boundary, and how design choices connect to the safety, witness-selection, and deadlock arguments. It therefore serves as a navigation and conceptual-integration aid rather than an alternate specification; when its simplified explanation and the scheduling rules differ, the scheduling rules remain authoritative.

Contents

- 1** Executive orientation
- 2** Architecture at a glance
- 3** Design choices that determine proof applicability
- 4** Core vocabulary and proof boundaries
- 5** Normative Formal Core and Appendix G - shared semantics and observable contract
- 6** Appendix I - per-process replay and preparation
- 7** Appendix J - local-to-global safety construction
- 8** Appendix K - conditional deadlock preservation
- 9** Appendix L - witness selection and snooping
- 10** How the appendices work together in a verification flow
- 11** Assumptions and evidence matrix
- 12** Common misunderstandings
- 13** Quick-reference index

1. Executive orientation

PURPOSE

Provide a single mental model for the Normative Formal Core and five appendices that otherwise appear as separate layers of formal detail.

Engineer takeaway: Treat the architecture as a proof stack: the Core fixes the shared operational semantics; G states the observable contract; I generates local evidence; J constructs the global safety witness; K proves a separate conditional internal-deadlock result; and L selects source witnesses when latency-sensitive choices matter.

The formal architecture is best understood as two related, but deliberately separate, proof pipelines built on one qualified synchronous cycle model.

- **Safety pipeline (Core $\rightarrow$ G $\rightarrow$ I $\rightarrow$ J).** Shows that a covered reachable RTL behavior has a matching behavior in the prescribed source reference model at the chosen observable boundary. On the normal compositional route, source-side Core.QSync/Core.QSync-Ref supplies the finite L2-settled snapshot required by J.RegPhaseNF/J.UnitExt; a directly validated J.GWR package may instead carry equivalent checked per-Horizon settling evidence. This remains an observable trace-compatibility claim, not cycle-by-cycle or full-state equivalence.
- **Liveness/deadlock pipeline (Core $\rightarrow$ G $\rightarrow$ I $\rightarrow$ J $\rightarrow$ K).** Starts from the safety correspondence, reconstructs the wait-relevant observation at matched Core.KCut states, and then rules out a specific class of reachable closed internal message-passing wait-cycle cutpoints under additional admissibility, fairness, progress, drain, environment, source-side, and certificate-coverage premises. In the standard qualified synchronous scope, Core.QSync-Post derives Core.KCutClosure_post from audited structural settling evidence; K.CertCov remains the separate universal package-coverage obligation.
- **Witness-selection adapter (L).** Supplies the WC witness needed by I and J when failed non-blocking polls or other latency-sensitive epsilon choices affect later observable behavior. It selects an admissible source execution aligned with the free-running RTL; it does not redefine the source model or stall the RTL.

KEY ARCHITECTURAL FACT: Safety and liveness are not one theorem

Appendix J establishes a global observable-safety correspondence from local evidence. Appendix K does not strengthen that correspondence into liveness automatically. It adds a different argument with different assumptions: wait-for-graph reconstruction, drain discipline, fairness/progress, cutpoint coverage, and the scheduler-robust source-liveness premise A5-L.

1.1 What the formal framework is trying to achieve

The user-facing goal is a verification flow in which most functional verification and debug can remain at the pre-HLS SystemC level, while the RTL is checked against a precise implementation contract. The formal appendices make that promise conditional and auditable: they identify exactly which source rules, implementation properties, witness choices, boundary abstractions, and liveness assumptions must hold.


The central idea is to compare only architecturally meaningful observations: committed message transfers, synchronization operations, and anchored signal reads/writes at selected boundaries. Internal behavior outside Σ is not all represented by the same formal object. Source evaluation and other proof-hidden micro-steps may be ϵ -steps; same-cycle settling is classified separately as δ -settling; a real clock cycle with hidden registered progress but no selected Σ event is a silent τ -cycle; and a B6 idle tick performs no ϵ work. Section 4 distinguishes these cases.

1.2 What the framework does not claim

- It does not claim identical cycle timing between pre-HLS and post-HLS models.
- It does not claim equality of all internal state, requests, or pipeline registers.
- It does not automatically prove that a particular HLS run or RTL instance satisfies E3, E4, E5/Core.SyncFence, B-faithfulness, Core.RegSeq, Core.ElabProj, the Core.QSync structural conditions, or the other implementation obligations. In the standard QSync scope, Core.KCutClosure_post is then theorem-derived rather than a separate arbitrary normalization assumption.

- It does not infer global deadlock freedom from the source-order no-reverse rule alone.
- The standard compositional QSync route, and the standard K-facing/universal G-K results, do not cover unqualified non-QSync settling semantics. Pure combinational feedback that is not broken by explicit registered or finite-capacity state, non-deterministic or order-dependent same-cycle settling, and multi-clock instances without a separately specified semantic layer are outside that standard scope. Plain finite-prefix J.1 may instead use a directly validated J.GWR package carrying the required checked per-Horizon L2-settling evidence. A non-QSync design is not thereby asserted incorrect; broader K-facing or universal use requires an explicitly defined and separately qualified theorem extension.
- It does not treat an arbitrary finite or unqualified Policy-S simulation as a complete liveness proof. The primary route requires one selected complete instrumented run plus separately established determinism, applicability, response coverage, and certificate conditions; a universal RTL conclusion additionally requires the audited QSync facts from which Core.QSync-Post derives Core.KCutClosure_post, plus K.CertCov.
- It does not make latency-sensitive polling safe merely by hiding failed polls as epsilon steps; such sites require NB-CF, isolation, direct witness construction, or Appendix L snooping.

2. Architecture at a glance

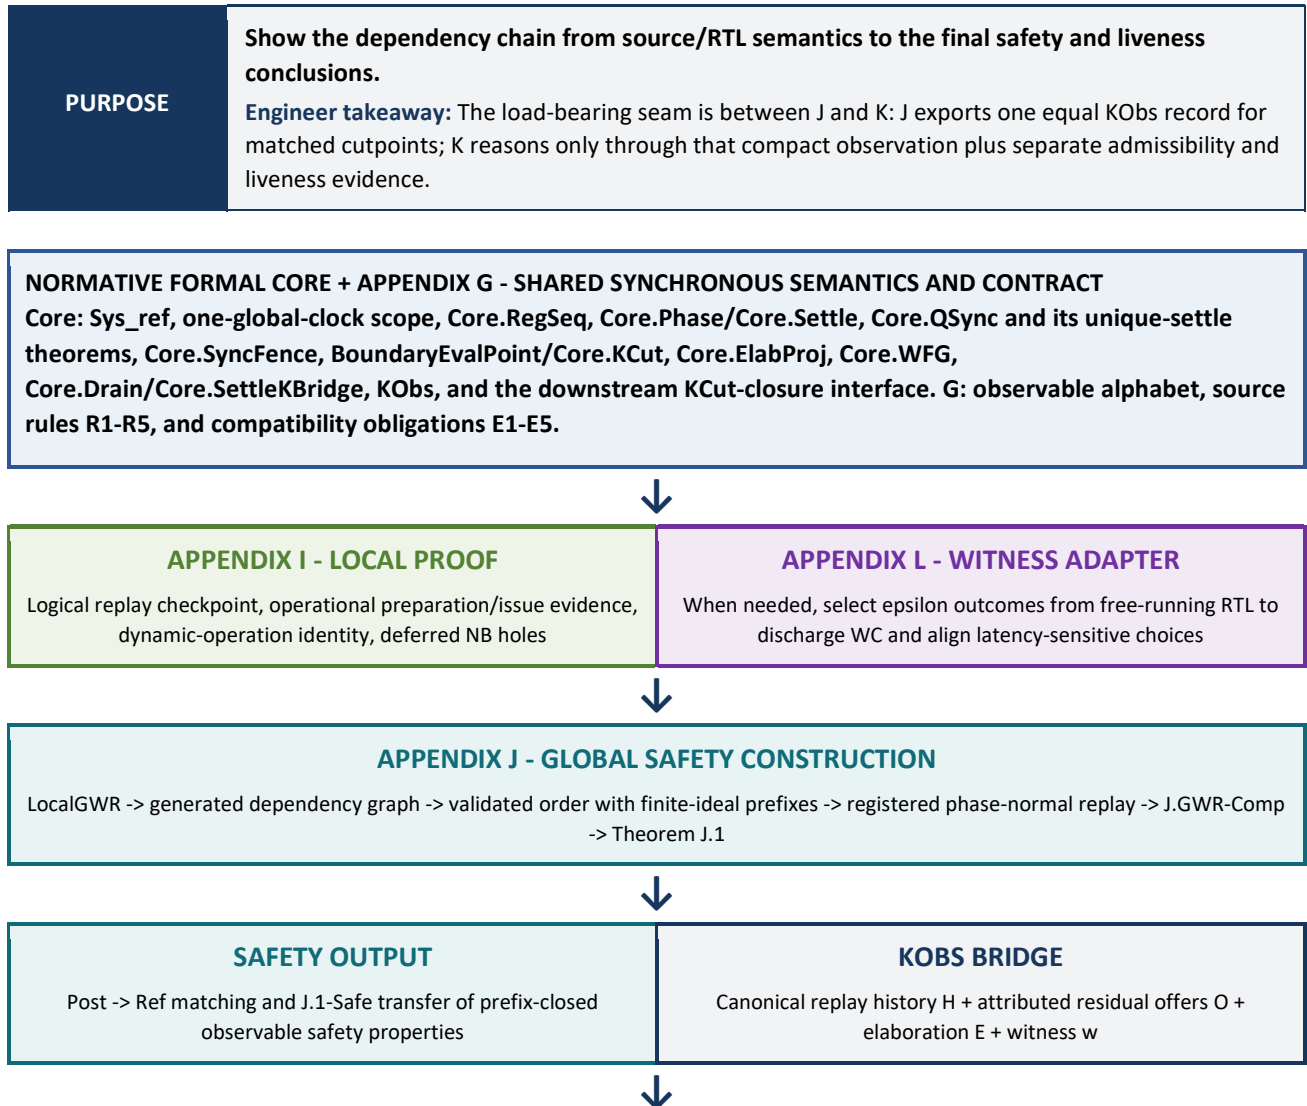

APPENDIX K - CONDITIONAL LIVENESS

Equal KObs at matched KCuts -> J-owned reconstruction -> K-owned deadlock factoring -> one certified KCut -> A5-L contradiction. Universal RTL preservation separately requires Core.KCutClosure_post plus K.CertCov; in the standard scope Core.QSync-Post derives the closure premise from audited structural QSync evidence. The one-run Policy-S workflow is practical. Appendix K-P supplies the paper serial-reduction argument; Lean mechanization, reusable certificate checking, and tool/flow qualification remain incomplete.

2.1 The main interfaces between layers

Interface	What crosses it
Core -> G/I	The Core supplies Sys_ref, dynamic operation and boundary objects, the single-clock/QSync same-cycle model, Core.RegSeq, Core.SyncFence, Core.PolicyL/Core.LLegal/Core.Phase/Core.LAdm, Core.PolicyS, Core.Settle/BoundaryEvalPoint/Core.KCut, Core.ElabProj, Core.WFG, Core.Drain/Core.SettleKBridge, KObs, and the downstream KCut-closure semantics. G constrains that shared model through R1-R5 and E1-E5; I consumes the Core semantics and G/E3/E5 discipline.
I -> J	I supplies process-local J.PCert evidence: a logical replay checkpoint plus separate operational preparation/issue facts, exact dynamic identity, typed footprints, and deferred non-blocking holes. These local facts intentionally do not claim global channel enablement or one common source execution.
L -> I/J	L supplies a witness selector proving WC when epsilon-modeled choices can affect later observable control, values, request attribution, or frontier identity.
J -> K	J supplies a reachable source witness, phase-correct reachability, exact NormRef/NormPost KCut endpoints, equal KObs at the matched cutpoints, and the J.KObs-Proc/Chan/Offers/WFG reconstruction lemmas. On the normal J construction route, source QSync-Ref supplies the finite L2 settle; the direct route may carry equivalent per-Horizon evidence. K.DrainReach separately carries Core.SettleKBridge for the exact source witness. K applies its own deadlock, waiver, environment-terminal, and extensionality factoring; it does not compare arbitrary internal states.
Policy-S -> K	The design-user activity is one selected complete instrumented Policy-S execution. The flow separately establishes SDet, route applicability including K.EnvMF and K.ResetEpoch, K.CompleteS, total finite-bound K.RespCov, K.RespClean, and certificate validity. For a universal RTL conclusion it also establishes the QSync structural evidence used by Core.QSync-Post to derive Core.KCutClosure_post, plus K.CertCov. The paper reduction is supplied; Lean mechanization and flow qualification remain outstanding.

2.2 Generic theorem machinery versus design-specific evidence

The framework deliberately separates proof algorithms that should be mechanized once from evidence that must be supplied or checked for each design, theorem instance, or RTL build.

Category	Examples
----------	----------

Category	Examples
Reusable formal machinery	Definitions of trace compatibility, local-to-global construction, dependency ranking, finite-ideal induction, phase normalization, Core.QSync-Ref/Core.QSync-Post over the qualified synchronous carrier, Core reconstruction functions, J.KObs-Proc/Chan/Offers/WFG, and K.KObs-Dead/K.KObs-Ext. Appendix K-P supplies the paper-level Policy-S serial-dominance and reduction proofs. Lean mechanization, reusable certificate validation, tool/flow qualification, and any generic universal-package construction remain reusable work to be completed.
Per-design source evidence	Source well-formedness, unique signal anchors, Core.RegSeq classification, source-side QSync structural conformance or equivalent direct per-Horizon settling evidence, WC/NB-CF/snooping coverage, shared-memory lowering, barrier well-formedness, and value-determinism conditions. Qualified Sys_B^elab templates may discharge their QSync settling facts compositionally.
Per-RTL/tool evidence	E3/E5 scheduling conformance including Core.SyncFence; E4 channel realization; exact capacities and boundaries; B-faithfulness; Core.ElabProj accounting/projection; complete request attribution; reset behavior; ClockScope; and the RTL-side QSync frame/finite-acyclic deterministic-settling/boundary-completeness evidence. In the standard scope this evidence invokes Core.QSync-Post rather than an independent arbitrary KCut-normalization proof.
Per-liveness-instance evidence	The fixed capacities, elaboration, stimulus/environment, witness, simulator semantics, Policy-S run identity, response-monitor coverage and finite bounds, run completeness, exact KCut correspondence packages, QSync theorem/evidence provenance for theorem-derived Core.KCutClosure_post, K.CertCov over the reachable KCut domain, and the selected A5-L discharge route.

3. Design choices that determine proof applicability

PURPOSE

Connect common HLS design patterns to the proof layer and evidence route they affect.

Engineer takeaway: The architect does not construct the formal certificates, but the design must expose communication, timing, reset, and state-transfer behavior clearly enough for the tool and verification flow to construct them. Appendix F of the scheduling-rules document is the architect-facing checklist; this section explains why those choices matter to the proof architecture.

This guide remains explanatory. Appendix F and the normative sections it references remain authoritative. The purpose here is to connect recognizable design patterns to Core, G, I, J, K, and L without requiring an architect to begin from certificate or theorem names.

3.1 The architect/flow responsibility boundary

ARCHITECT / FLOW BOUNDARY

The architect chooses interfaces, reset topology, memory communication, buffering, and protocol structure that admit the required correspondence. The tool and verification flow construct and check the detailed replay, channel, attribution, footprint, reset, coverage, and liveness evidence. A design may synthesize and function correctly while remaining outside a selected theorem instance when proof-relevant behavior is implicit or modeled at the wrong boundary.

The useful question is therefore not whether the architect can write a certificate. It is whether the chosen architecture exposes enough explicit structure for a qualified flow to determine what happened, assign each request or value transfer to the correct dynamic operation and reset epoch, and compare the same abstract channel and observation boundaries in source and RTL. The G-K theorem stack is a single-global-clock formalism: a selected theorem instance must stay within one synchronous clock domain unless a separate multi-clock semantic layer is supplied; CDC structures are therefore outside the ordinary instance or must be represented by separately verified boundaries.

3.2 Design choices affecting the safety and correspondence pipeline

These choices affect the Core → G → I → J pipeline and the Post → Ref safety result. They are not merely coding-style preferences: each determines whether the source and RTL provide a common observable contract and whether the local replay records can be composed into one reachable source witness.

Qualified synchronous settling discipline. (Core.RegSeq, Core.Settle, Core.QSync, Appendix Q)

- **Design implication.** Treat the selected theorem instance as ordinary synchronous hardware: one global clock; registered process/pipeline/channel state; sequential request/payload outputs determined from registered state and operands fixed for the cycle; and a complete same-cycle combinational/handshake network that is finite, deterministic, and acyclic after cutting at explicit state boundaries. Combinational logic from registers to outputs is allowed, but a newly returned cycle-t interface result cannot form a same-cycle through-path to a dependent sequential output.
- **Why the proof cares.** The L2 frame freezes registered state and selected cycle-t exogenous inputs while delta-settling computes the common boundary snapshot. Core.QSync-Ref makes source SettlePoint existence/uniqueness a theorem, including qualified Sys_B^{elab} templates; Core.QSync-Post supplies the corresponding RTL KCut and derives Core.KCutClosure_{post} in the standard scope.
- **Supported alternatives.** Pure combinational feedback and unqualified non-QSync settling semantics are outside the standard compositional QSync and K-facing/universal G-K scope. Plain finite-prefix J.1 may still use a directly validated J.GWR package carrying the required checked per-Horizon L2-settling evidence. A separately defined and qualified extension may target the downstream Core.KCutClosure interface for broader non-QSync use. Tool reports are evidence only to the extent they are trusted or independently checked; accepting an unverified settling claim enlarges the declared trusted base.

Observation boundaries and signal timing. (*Appendix F: safety items 1-3*)

- **Design implication.** Give every sequential signal read and write one unambiguous synchronization anchor. Keep direct inputs stable for the applicable reset epoch or update them through the supported synchronization handshake. Environment and testbench decisions used by the proof should depend on prior observable causal history, not on an unmodeled absolute cycle count.
- **Why the proof cares.** Appendix G defines the selected signal observations, Appendix I replays the process state at those anchors, and Appendix J composes complete observable units. An ambiguous branch-dependent anchor or a hidden latency-triggered environment decision does not identify one stable observation for the construction to match.
- **Supported alternatives.** Move the signal operation to a unique boundary, use `hls_direct_input_sync`, expose the timing decision through an explicit protocol, isolate a cycle-accurate or latency-sensitive block, or verify the timing-dependent behavior directly at RTL rather than assuming it transfers from an arbitrary source run.

Non-blocking calls and invisible polling behavior. (Appendix F: safety items 4-5)

- **Design implication.** A failed PopNB or PushNB may be hidden from the committed observable trace, but it is not harmless when its result or cadence determines arbitration, retries, timeout counters, payloads, endpoint choice, or the next visible action. An unbounded loop of failed polls is also not a stable wait in the ordinary replay fragment.
- **Why the proof cares.** Appendix I may carry a deferred non-blocking decision only past work proved independent through NoDependentUse. Appendix J later makes the shared snapshot decision. When the outcome selects later observable behavior, WC must identify a realizable source witness; Appendix L is the common implementation-alignment route.
- **Supported alternatives.** Prefer blocking communication when the architecture permits it. Otherwise prove NB-CF, use a valid Appendix L WC/L.Dir witness, directly construct the witness, or isolate and explicitly model the polling logic as a timing-sensitive protocol block.

Shared state and the actual communication boundary. (Appendix F: safety items 6-8)

- **Design implication.** Cross-process shared-memory value flow must satisfy the J.Mem lowering condition: every dependency through which one process's write can affect another process's observable behavior is made visible through covered channel or anchored-signal operations. This is a scope boundary, not merely an extra artifact to produce - a design that instead relies on the non-lowered declared-memory-semantics branch is outside Theorem J.1, Corollary J.1, and Appendix K as proved, and needs a separate memory-state proof. Fall-through FIFOs, bypasses, hidden drains or credit paths, and coupled joins or bundles must be represented in the selected source reference and elaboration model.
- **Why the proof cares.** The present J invariant does not carry an independent global shared-memory state, and E4 channel reasoning is meaningful only at a boundary whose enablement, occupancy, and transfer semantics match RTL. Treating a fall-through FIFO as an ordinary non-fall-through FIFO, or treating joined input capacities as independent slack, can produce the wrong replay and wait-state reconstruction.
- **Supported alternatives.** Use the supported memory/channel libraries and mapping layer, provide the separate memory-state extension, model a bypass as an explicit rendezvous path, or select `Sys_B^elab` with staged, bundle, join, coupler, guard, or epoch-gate boundaries and a checked Core.ElabProj package.

Reset topology and cross-epoch transaction disposition. (Appendix F: safety item 9)

- **Design implication.** Reset both endpoints and the state of a live channel consistently, or define an explicit flush, abort, cancellation, or end-of-epoch protocol. Outstanding requests and in-flight data cannot be silently retained, discarded, or reattributed across a reset boundary.
- **Why the proof cares.** Appendix J represents reset as an atomic observable unit with a named scope, fresh dynamic identities, request clearing, reset-state correspondence, and framing outside the scope. Appendix K adds a second question: whether a reset can occur during the serial comparison without invalidating the pending operation used by the reduction.
- **Supported alternatives.** Use a channel-consistent reset scope, make the cross-epoch disposition an explicit observable protocol, or supply a separately verified reset-state extension. For the Policy-S deadlock route, also satisfy K.ResetEpoch through either a reset-free comparison continuation or the independently mapped already-triggered monitor-cancellation branch.

3.3 Additional design choices affecting the deadlock pipeline

The following choices affect the additional Core $\rightarrow$ G $\rightarrow$ I $\rightarrow$ J $\rightarrow$ K liveness pipeline. They are not extra premises for every use of the Appendix J safety theorem. They matter when the claim is that the defined reachable closed internal message-passing wait-cycle cutpoint cannot occur.

Unambiguous wait ownership and persistent requests. (*Appendix F: deadlock items 1-3*)

- **Design implication.** Each analyzed logical channel should have one producer and one consumer, with shared buses and multi-client resources represented by explicit arbiters and point-to-point channels. Multi-lane or burst behavior must be explicit. A blocking request remains asserted, with stable Push payload and stable dynamic ownership, until commit or an explicit modeled reset/cancellation action.
- **Why the proof cares.** Core.WFG assigns each blocked frontier item to one complementary endpoint owner. K also reconstructs a typed residual offer for one dynamic operation. Hidden arbitration or a speculative request that can disappear does not provide the stable edge and attribution used by the wait-cycle theorem.
- **Supported alternatives.** Insert an explicit arbiter process, expose lanes or beats in the abstract interface, or provide a custom shared-resource ownership and arbitration proof instead of treating the resource as an ordinary scalar point-to-point channel.

Drain-only behavior after a blocking frontier is reached. (*Appendix F: deadlock item 4*)

- **Design implication.** Previously accepted pipeline work may finish and release finite downstream state, but later blocking work must not continue entering behind a disabled frontier or replenish the drain indefinitely. A synchronization call may advance into the next source interval only after every earlier blocking operation in `pref_S(s)` has process-facing committed; same-cycle message/sync completion is allowed under `Core.SyncFence`.
- **Why the proof cares.** Core.16 activates at the L2 SettlePoint. Lemma `Core.SettleIsKCut` makes that settled source state a KCut, but it need not yet be drain-closed. `Core.Drain` and `Core.SettleKBridge` allow only finite, non-replenishing cleanup and connect a persisting blocked frontier to the later drain-closed KCut at which `Dead_K` is evaluated. `K.DrainReach` supplies this evidence for the exact selected Policy-L witness.
- **Supported alternatives.** Use automatic-flush pipelining or an equivalent proved no-new-later-work discipline. A pipeline or custom controller that continues launching later work requires a different liveness argument and cannot rely on the ordinary drain-based reduction.

Scheduler robustness and the actual capacity configuration. (*Appendix F: deadlock items 5-6*)

- **Design implication.** Do not make deadlock freedom depend on favorable overlap, same-cycle issue, or a preferred arbitration choice when claiming scheduler-robust A5-L. Check the selected design against its actual back-annotated capacities and explicit elaborated boundaries, not an idealized unbounded network or a different rendezvous/buffered configuration.
- **Why the proof cares.** Policy-S intentionally serializes process-facing blocking issue. K.2b proves that an A5-L counterexample at a source KCut would force a finite failure on that selected conservative run under the stated premises. K.2b does not impose a narrower drain-closed cutpoint class: drain-closedness is already a clause of `Dead_K/DeadKRec^W` and is extracted from the deadlock hypothesis. A protocol that works only because later requests overlap early, or only at a larger capacity, does not satisfy that scheduler- and instance-specific claim.
- **Supported alternatives.** Rewrite or buffer the protocol, add explicit synchronization, change the selected capacity/elaboration and rebind the theorem instance, or use a scheduler-specific structural, invariant, exploration, or tool-certificate proof of A5-L.

Reset, environment, termination, and other excluded stalls. (*Appendix F: deadlock items 7-8*)

- **Design implication.** Treat dynamic reset during the serial comparison through `K.ResetEpoch`. Model EOF, done, abort, peer termination, and barrier participation explicitly. Distinguish environment-only stalls and timed or reactive multi-frontier behavior from the internal wait-cycle predicate.
- **Why the proof cares.** Appendix K excludes a specific closed internal message-passing wait structure. It does not convert every form of nonprogress into the same graph predicate. A reset can clear the exact pending operation, an external event may release the component, and an unmodeled terminated peer may create a specification error rather than the theorem's internal deadlock.

- **Supported alternatives.** Use the reset-free or mapped-cancellation `K.ResetEpoch` branch, represent terminal/environment protocols through ordinary observable actions, remain within the supported `StandardEnv/single-frontier` fragment, or discharge A5-L by a separate proof appropriate to the external timing or termination behavior.

3.4 How to use Appendix F with this guide

The parenthetical tags on the eight themes above give the complete item-level mapping to the nine safety items and eight deadlock items in Appendix F, preserving Appendix F as the checklist. Use Appendix F first as the architect-facing design-pattern screen. For each applicable item, identify the proof layer and evidence family described above, select the intended theorem scope (safety only or safety plus internal-deadlock preservation), and ensure that the tool/verification flow records the corresponding discharge in Appendix M.7a. This guide explains the dependency; it does not replace the normative constraint or the per-instance evidence record.

4. Core vocabulary and proof boundaries

PURPOSE	Define the small set of objects that repeatedly connect the Normative Formal Core and Appendices G, I, J, K, and L. Engineer takeaway: keep four distinctions visible: observable events versus generic epsilon micro-steps; delta-settling versus silent tau-cycles versus B6 idle ticks; committed history versus current residual offers; and safety correspondence versus liveness assumptions.
----------------	--

Term	Engineer-oriented meaning
Sigma (Σ)	The selected alphabet of observable events: committed Push/Pop transfers, synchronization events, and selected signal Read/Write events. The proof boundary determines which internal or DUT-boundary signals/channels are included.
Epsilon (ϵ)	The generic proof-hidden micro-step relation. It includes source evaluation, failed non-blocking choices, and other internal behavior according to the model. It is not a synonym for a silent clock cycle. Delta-settling is a specific same-cycle settling classification; B5 may charge a silent tau-cycle to epsilon work without identifying the two.
δ-settling (delta)	Cycle-local same-cycle settling. On a phase-bearing source model, δ_{ref} is exactly the <code>Core.Settle</code> relation $\rightarrow_{\epsilon,L2}$; on <code>RTL_B</code> in the standard <code>QSync</code> scope, δ_{post} is the same-cycle settling relation of <code>Core.QSync</code> . Delta steps preserve cycle index and registered state. Other epsilon steps may also preserve the cycle but are not delta-settling.
Silent τ-cycle (tau)	A real clock cycle in which no selected Σ event commits while hidden registered/internal progress may occur. Tau is explanatory cycle-level terminology, not a transition label and not an epsilon step. B5 may prove that an internally advancing silent cycle consumes bounded epsilon work.
B6 idle tick	A real clock tick after the complete system has reached the B5/global fixed point. It performs no epsilon-prefix/suffix work and leaves non-clock state unchanged; it is treated as epsilon-stutter only by the observable trace-matching convention.
Observable unit	A singleton Σ event or an explicitly atomic same-cycle group such as a rendezvous Push/Pop, paired synchronization transaction, R2C fixed-point unit, signal-anchor group, or RESET unit.
Commit	The clock cycle in which the selected boundary observer sees the operation complete; for message passing, both valid and ready are true and the payload is taken in that cycle.

Term	Engineer-oriented meaning
Issue	The cycle attributed to a dynamic source message-operation instance when its endpoint-owned request begins. Issue attribution is operational evidence; it is not generally reconstructible from committed labels alone.
ReturnedAtCycle	The cycle boundary at which a message-call result becomes process-visible. For a successful blocking or non-blocking call it is the transfer-commit cycle; for a failed PushNB/PopNB it is the cycle in which the failure status returns even though no message commits. It is an operational timestamp, not a KObs field.
Sys_ref	The prescribed source-reference transition system: Sys_B in the ordinary back-annotated case, or Sys_B ^{elab} when explicit staged, bundle, join, guard, coupler, or epoch-gate boundaries are required. Raw rendezvous Sys remains Appendix G's conceptual presentation; the G-K proof stack uses Sys_ref, with B(c)=0 recovering rendezvous semantics.
Horizon	The selected cycle/decision horizon used by J to group construction actions and enforce registered result availability and L1/L2/L3 phase ordering.
Finite ideal	A finite down-closed set of observable units: if it contains a unit, it also contains every unit required to precede it. Appendix J constructs the source witness through a chain of these legal partial-order prefixes.
KObs	The compact cutpoint record <E,w,H,O>: elaboration E, witness w, canonical replay history H, and attributed residual offers O.
Residual offer	A typed current outstanding source-level request at an explicit abstract boundary, including process, frontier item, dynamic call, direction, and reset epoch.
WFG	Core.WFG is the wait-for graph over internal processes. For each disabled message frontier item x of P, an edge P → Q points to the unique complementary endpoint owner Q. An edge alone does not make P blocked: P is blocked only when its frontier is nonempty and every frontier item is disabled, which matters for certified multi-frontier elaborations.
SettlePoint / BoundaryEvalPoint	SettlePoint is the first fixed point reached by the complete source L2 epsilon-settling relation after L1 issue closes and requests freeze; Definition Core.Settle itself is conditional on that endpoint existing. BoundaryEvalPoint is the settled explicit-boundary request/enablement interface. In the standard scope Core.QSync-Ref proves source SettlePoint existence and uniqueness.
Core.QSync	The qualified synchronous same-cycle model. QS1-QS5 require one global clock, registered/frame separation with fixed cycle inputs and stable sequential drives, deterministic local evaluation, a finite acyclic same-cycle dependency graph, and explicit-boundary completeness. QSync does not make Sys_ref globally deterministic: WC, Policy-L issue latitude, arbitration, and environment choices remain explicit.
Core.KCut	The K-facing comparison domain: a reachable state that is model-specific epsilon-quiescent and whose explicit BoundaryReq/ChannelEnabled/ChannelDisabled network is at its selected fixed point. Source SettlePoints are KCuts; RTL has its own KCut domain and no source L0-L4 phase tag.
Core.KCutClosure_po	The downstream RTL KCut-existence/non-vacuity interface. In the standard QSync scope

Term	Engineer-oriented meaning
st	Core.QSync-Post derives it from the audited structural settling facts and supplies a canonical K-facing NormPost endpoint. A non-QSync settling semantics requires an explicitly defined and separately qualified theorem extension proving the same interface. K.CertCov remains separate package totality.
Core.SyncFence	A synchronization call may commit only after every earlier blocking Push/Pop in pref_S(s) has process-facing committed, possibly in the same cycle. On RTL, same-cycle "before interval advance" accounting is proof/certificate attribution, not an observable physical sub-cycle ordering inside one clock edge.

DETERMINISM TAXONOMY - do not conflate these notions

Notion	Logical status	Engineer-oriented meaning
Same-cycle settling determinism	Model-class restriction	R2C/Core.QSync: fixed registered state, fixed cycle-t inputs, and fixed explicit request/issue drives yield one settled boundary valuation.
Conditional synchronous-step determinism	Functional cycle view after explicit choices are fixed	Once the currently legal witness, issue/scheduling, arbitration, and environment choices are fixed, the cycle can be viewed functionally. This does not remove Policy-L latitude or WC-sensitive source nondeterminism.
B1 observable RTL trace determinism	Theorem-instance assumption	Under fixed stimulus and initial state, RTL_B has one observable Sigma-projected committed history; internal epsilon behavior may still differ.
I.DR / I.DR'	Derived theorem	Replay-checkpoint equality proved from the Appendix I premises. It is not an independent assumption to enter in the M.7a discharge record.
K.CV	Appendix K premise	Relevant values/control are deterministic functions of the explicitly modeled causal history, rather than incidental scheduling timing.
SDet	Selected-instance fixing/premise	Fixes the Policy-S simulator, scheduler, arbitration, normalization, and related choices so the selected instance has no second incompatible committed history.
Normalization selection/congruence	Selected proof data plus theorem	Records which replay normalization is selected and why the replay quotient is preserved. Core.QSync canonicalizes only K-facing same-cycle settling; Appendix I/J replay normalization remains separate.

For theorem premises, Appendix M.7a supplies the evidence axis: inapplicable to the selected theorem scope, satisfied by a syntactic/design restriction, discharged by tool/RTL evidence, or discharged by a source/RTL witness construction. A required

condition may not be marked inapplicable; derived theorems such as I.DR do not become independent premises merely because their proof artifacts are recorded.

CUTPOINT BOUNDARY: KObs is not full-state equivalence

KObs is the typed KCut observation record $\langle E, w, H, O \rangle$. H carries the canonical logical replay history and replay-derived process facts; O carries the current operational residual offers. J.OfferReach proves that O is realized at a reachable source KCut selected by NormRef, and J.OfferConf audits O against the complete relevant RTL request inventory at the selected RTL KCut. Core.SyncFence ensures an outstanding blocking offer cannot silently survive into the next source interval. Core and J reconstruct explicit channel state, pending/frontier classification, BoundaryReq, channel enablement, Core.WFG, and snapshot drain closure. Appendix K separately factors environment-terminal, deadlock, waiver, and diagnostic predicates. Equal KObs is therefore a carefully designed quotient, not full-state equivalence.

4.1 Safety direction: why Post $\rightarrow$ Ref is the normal signoff argument

For ordinary safety signoff, the useful deductive direction is: every covered reachable RTL prefix has a matching reachable Sys_ref prefix with the same canonical observable history. Therefore, if all relevant Sys_ref histories satisfy a prefix-closed safety property, the RTL histories do as well. This is Corollary J.1-Safe. Its J.TraceCertCov premise carries the route-appropriate source-settling evidence: source Core.QSync-Ref on the normal compositional route, or equivalent checked per-Horizon L2 settling on a direct J.GWR route.

The reverse direction is intentionally restricted. A particular source prefix is covered only when it is already equipped with a selected RTL-consistency annotation package, or when Appendix L selects the source witness to align with the actual RTL choices. In Theorem J.1, RTLConsistentRefPrefix supplies that already-selected source/RTL pair; the theorem-wide B-faithful/E4 assumptions supply Proposition J.0's channel premises; J.0 performs the conditional composition; and the required existential post witness is simply the already-selected τ_{post}^* from the premise. The document does not claim unrestricted equality of the source and RTL behavior sets.

5. Normative Formal Core and Appendix G - shared semantics and observable contract

PURPOSE

Define the shared source-reference semantics and the observable scheduling contract that the post-HLS implementation must preserve.

Engineer takeaway: The Core is the normative semantic skeleton for G-K; Appendix G constrains that skeleton through R1-R5 and E1-E5. Neither layer by itself constructs the matching source execution - Appendices I and J do that work.

5.1 Source-side rules R1-R5

Rule	Role in the architecture
R1 - synchronization order	Synchronization calls of each process remain in dynamic source order and commit in strictly increasing cycles.
R2 - signal anchoring	For a sequential process, a signal Read is logically anchored to the closest preceding synchronization; a signal Write is anchored to the closest succeeding synchronization.

Rule	Role in the architecture
R2C - combinational fixed point	Combinational signal observations use the deterministic unique epsilon-fixed point of the explicitly modeled component. ComponentParticipatesInCycle defines the observation domain. Ordinary components emit only at canonical observation occurrences; a cycle-locked component must emit exactly one fixed-point unit in every participating cycle and none outside that domain, so omitted required units are also a conformance failure.
R3 - sync isolation	A synchronization boundary separates the message operations in the immediately preceding and succeeding source intervals, and its Core.SyncFence completion clause requires every earlier blocking Push/Pop in pref_S(s) to process-facing commit no later than the synchronization commit. Same-cycle completion is permitted.
R4 - safe issue order	Dynamic message operations preserve source issue order, with a prefix-closed reading: a later operation cannot issue unless every required earlier operation has issued.
R5 - channel capacity semantics	The source reference uses rendezvous or finite-capacity channel semantics at the selected explicit abstract boundaries; elaboration may introduce proof-internal channels but does not reorder ordinary source calls.

DEFINITION: Core.RegSeq - registered sequential-interface semantics

For a sequential process, request and Push-data outputs in cycle t depend only on registered state and operands fixed before L2 settle. If $\text{ReturnedAtCycle}(q, t)$ holds - for a success or failed non-blocking return - any dependent evaluation, control, endpoint/address, payload, or issue has a later Horizon. ReturnedAtCycle is defined normatively in Appendix C; Core.RegSeq states the dependent-use rule.

- **Why it matters.** It eliminates same-Horizon decision-to-dependent-request edges that would be inconsistent with clocked hardware.
- **Where it is used.** Appendix I local preparation, J.FoundationRank/J.DepRank, J.RegPhaseNF, and the Appendix K serial-reduction assumptions.
- **DV implication.** Checked source/tool evidence must establish the registered-cycle rule. Zero-time dependent NB cascades must be identified and then rejected, excluded, isolated, remodeled atomically, or aligned through Appendix L; silent scope exclusion is forbidden.

CLARIFICATION: Core.OrdFrontSingleton - ordinary-source frontier uniqueness

Within an ordinary non-elaborated sequential source interval, dynamic message calls remain ordered by dynamic program order, including distinct-interface calls, repeated loop iterations, and ordered unrolled instances. Therefore Front_P has at most one member. A genuine message-operation multi-frontier requires explicitly modeled incomparable $\text{Sys_B}^{\text{elab}}$ frontier items with the corresponding order, boundary, projection, and attribution evidence.

5.2 Normative Core operational semantics and the cycle-level hardware model

The Normative Formal Core treats Sys_ref as an operational transition system with explicit process state, explicit abstract channel state, dynamic operation identities, pending requests, and epsilon micro-state. It separates issue permission, step legality, cycle phase, liveness admissibility, and same-cycle settling qualification rather than collapsing them into one policy name. The standard Core.QSync scope is deliberately the familiar synchronous-hardware case: registered state and selected cycle-t inputs are fixed, sequential request/payload outputs are derived from registered state and other operands fixed before settling, and the complete same-cycle combinational/handshake network settles to one deterministic valuation before boundary actions and the next registered-state update. Combinational derivation from registers is allowed; what Core.RegSeq excludes is a same-cycle through-path from a newly returned interface result to a dependent sequential output. Pure combinational feedback is outside the standard QSync scope unless it is broken by explicit registered or finite-capacity state.

Policy	Meaning and use
Core.PolicyL / Core.LLegal	Core.PolicyL is the permissive issue policy used by the safety witness and A5-L. Core.LLegal fixes the exact Policy-L step legality and binds the fixed theorem instance; a reached outcome-independent operation may issue subject to source order, Core.RegSeq, E4/E5, Core.SyncFence, and the selected witness. QSync does not remove this issue latitude.
Core.Phase / Core.LAdm	Core.Phase defines L0-L4 and the pre-settle/settled-frontier boundary. Core.Settle names the source L2 fixed point when reached; Core.QSync-Ref supplies existence/uniqueness in the standard compositional scope, and Core.SettleIsKCut makes that source state a KCut. Core.LAdm qualifies finite Policy-L prefixes and complete executions by adding nonwithdrawal, K-epsilon, Core.Drain, and Core.SettleKBridge where a persisting blocked frontier is evaluated later. It is not a different issue policy.
Core.PolicyS	The conservative serial-blocking issue policy: a later same-interval blocking operation may issue only after every earlier blocking operation has process-facing committed in a strictly earlier cycle. It selects the instrumented deadlock-stress run used by the primary Appendix K route.

DEFINITIONS: Core.Phase, Core.Settle, Core.KCut, Core.16, Core.Drain, and Core.LAdm

Core.Phase gives each source cycle a process-owned L1 pre-settle window, L2 settling with requests and selected cycle-t inputs frozen, L3 boundary actions, and L4 registered result availability. Definition Core.Settle names the first L2 fixed point if one is reached; the L2 frame ensures delta-settling preserves the cycle index and registered process/channel state. Core.QSync-Ref proves finite existence and uniqueness of that source endpoint in the standard scope, including qualified Sys_B^elab. Core.SettleIsKCut makes it a source KCut. Core.16 activates there when the minimal frontier is fully disabled. Core.Drain permits only finite non-replenishing downstream cleanup, and Core.SettleKBridge connects a persisting L2 activation through explicit drain/normalization to the later drain-closed KCut used by Dead_K. RTL_B has no source phase tags; Core.QSync-Post provides its unique settled KCut and derives Core.KCutClosure_post in the standard scope.

ARCHITECT MENTAL MODEL - one ordinary synchronous cycle

Cycle-level view	Formal correspondence
1. Registered state and selected cycle-t exogenous inputs are fixed.	QS1/QS2; ClockScope audit; L2/QSync frame.
2. Sequential process request/payload outputs are determined from registered state and operands already fixed for the cycle.	Core.RegSeq. Ordinary combinational logic from registers is allowed; a newly returned cycle-t result cannot feed a dependent same-cycle sequential output.

3. The complete system combinational/ready-valid/guard/join/coupler network settles to one deterministic valuation.

Delta-settling; R2C; QS3/QS4; Appendix Q for Sys_B^{elab}. Pure combinational loops are outside the standard scope; feedback crosses explicit state.

4. The settled boundary snapshot is read.

BoundaryEvalPoint; source SettlePoint; Core.KCut when the K-facing proof consumes the snapshot. These are proof views of the ordinary settled cycle state, not additional hardware states.

5. Boundary decisions and commits occur.

Core.Phase L3; E4; R3/E5; Core.SyncFence.

6. The next registered state/result availability is established.

Core.Phase L4 / next cycle. RTL_B has its own registered update rather than source L0-L4 tags.

The functional cycle picture is conditional on explicit choices, not a claim that Sys_ref has only one execution. WC-sensitive outcomes, Policy-L issue/scheduling choices, arbitration, and reactive-environment choices remain part of the admissible execution set. Once those choices and the cycle inputs are fixed, QSync makes same-cycle settling canonical.

5.3 Post-HLS compatibility obligations E1-E5

Obligation	What the RTL/tool flow must establish
E1	Preserve each process's synchronization-event order.
E2	Preserve anchored signal values/visibility for sequential processes and fixed-point signal units for combinational processes.
E3	Preserve safe message Issue order and attribution, including same-interface order, distinct-interface no-reverse order, and the prefix-closed Issue condition.
E4	Realize legal rendezvous or finite-capacity FIFO behavior at each selected explicit abstract channel boundary, including payload/order/occupancy behavior.
E5	Do not move a message operation across its immediate synchronization boundary: predecessor operations issue no later than the sync; successor operations issue strictly later; and every earlier blocking Push/Pop in pref_S(s) must process-facing commit no later than the sync. Same-cycle message/sync completion is allowed. On the post side, the "accounted before interval advance" convention is certificate/trace attribution, not a physical sub-cycle RTL ordering requirement.

BOUNDARY CONDITION: B-faithfulness, Core.ElabProj, and Sys_B^{elab}

E4 only has meaning at a chosen abstract boundary. B-faithfulness must show that every transfer crosses that boundary and that occupancy/enableness match B(c). Core.ElabProj supplies four distinct roles when the implementation is elaborated: observable trace projection, occupancy projection, conservation/accounting, and proof-internal WFG visibility. Internal movement remains epsilon-opaque at the selected visible boundary, but any hidden grant, throttle, join, coupler, or epoch-gate condition that changes availability must be exposed through Sys_B^{elab} and its explicit boundaries.

5.4 Trace compatibility is observational, not temporal equivalence

The relation approximately-equal ($\approx$) matches dynamic occurrences and values at the selected alphabet while preserving the explicit constraints above. Independent observations may occur in different cycles or be grouped differently in the two executions. The relation is directed and annotation-bearing; it is not a symmetric mathematical equivalence over bare label sequences.

Appendix G also separates the explanatory causal-dependency graph from the well-founded order used by Appendix J. Causal dependency captures information flow and may contain legal same-cycle atomic cycles. Appendix J therefore constructs a narrower required-order relation and a separate generated dependency graph for the proof induction.

READING RULE: What to take from Appendix G

For architects: the Core fixes the operational model and G defines what implementation freedom remains invisible to a latency-insensitive environment. For DV: together they identify the observable checker boundary and conformance obligations. For formal implementers: the Core supplies the shared transition-system/KObs/WFG/drain vocabulary, while G supplies the R/E contract consumed by I and J.

6. Appendix I - per-process replay and preparation

PURPOSE

Show that each process can locally replay the selected RTL observable prefix and prepare for its next participation using a finite source-owned script.

Engineer takeaway: Appendix I is intentionally local. It identifies the right dynamic operation and reaches its request/decision point, but it does not assert that the complementary endpoint is present or that all process scripts can be merged globally.

6.1 Inputs and preconditions

Input	Why I needs it
Fixed initial state and stimulus	The process is replayed under the same global Sigma-causal environment behavior, not an arbitrary P-local stimulus.
WC witness	Every epsilon-modeled choice that can affect later observable control, values, identities, requests, or frontiers is fixed consistently.
I.A0 / E3/E5	The RTL message-issue discipline is supplied as an implementation assumption, including prefix-closed issue attribution and the E5/Core.SyncFence rule that no earlier blocking request survives a synchronization commit into the next interval.
Core.RegSeq	Dependent next-cycle requests cannot be created from same-cycle returned results.
B4 / finite pipeline depth	Internal micro-progress has a finite epsilon bound when the process is not externally stalled.
B2/B3 when progress is invoked	Continuously enabled actions and complementary channel discharge are eventually selected; these are environment/scheduler assumptions, not consequences of source code.
Source well-formedness	Signal anchors, dynamic operation identities, direct-input contracts, shared-memory lowering, and reset behavior are well formed.

6.2 The replay checkpoint: I.ReplayObs, I.CutpointOfferObs, I.ReplayObs-Congruence, I.DR, and I.DR'

I.ReplayObs is the logical P-local replay checkpoint determined by the committed observable-unit history, fixed stimulus, and witness. It contains the logical replay control position, replay-relevant values, witness-selected outcomes, replay-fixed dynamic attribution, completed-item status, candidate NextFront_P, anchored values, returned results, reset epoch, and normal-completion status. It is not the complete raw operational state: certified outcome-independent L1 preparation may advance the operational cursor or compute temporaries without changing the logical checkpoint.

I.CutpointOfferObs is the separate operational slice for current uncommitted blocking offers: Pending_P, Front_P, BoundaryReq, owning dynamic calls, boundary/direction/epoch facts, and stable Push payload obligations. The K-facing cutpoint therefore combines replay history H with residual offers O. Deterministic replay does not manufacture O from H; Appendix J constructs and audits O through J.OfferReach and J.OfferConf.

LEMMA: I.ReplayObs-Congruence

From equal logical replay checkpoints, the same next complete observable unit produces equal canonical immediate post-unit checkpoints. An exact selected finite normalization may then mix replay-inert preparation segments, which leave each checkpoint unchanged, with witness-fixed epsilon transitions that may update replay fields. The normalization convention must pair those replay-changing transitions so that equal checkpoints remain equal; the theorem does not assume per-path neutrality, global confluence, or uniqueness of all legal raw endpoints.

LEMMA: I.DR and I.DR' - deterministic replay

I.DR' establishes equality of the logical ReplayObs checkpoint at the canonical immediate post-unit state, before optional following L1 preparation or epsilon-normalization. I.DR establishes equality at the selected epsilon-quietest cutpoints by applying paired congruence to the exact proof-relevant normalization paths. Appendix J uses the immediate form when constructing the next Horizon and records normalized witnesses explicitly when a quietest cutpoint is required.

6.3 Deferred non-blocking decisions

A process-local proof cannot decide a non-blocking poll from process state alone because success or failure depends on the common incident-channel snapshot and possible complementary requests. Stopping the local replay at every poll would be too restrictive: a registered process may execute independent same-Horizon work that does not depend on the poll result.

DEFINITION: I.DeferredNBHole

A deferred hole records the dynamic non-blocking call, explicit boundary, snapshot key, Horizon, result destinations, reset epoch, witness-selected expected outcome, and NoDependentUse evidence. The process-local preparation script can carry the unresolved hole through independent work while forbidding any dependent use of its result.

6.4 The local preparation theorem

LEMMA: I.3 - finite process-local preparation script

Given the replay state, exact dynamic operation identity, Core.RegSeq, WC, E3/I.A0, source well-formedness, and typed footprints, I.3 constructs a finite process-owned epsilon/request path to the selected operation, its persistent issued request, or a carried deferred non-blocking decision hole. The script does not commit an unmatched observable unit and does not assume global enablement.

- **Output.** The information later packaged in J.PCert: the logical ReplayObs checkpoint, exact dynamic identity, finite per-Horizon preparation actions, separate operational issue/pending attribution, stable payload/value facts, field-sensitive footprints, and deferred-hole records.
- **Non-result.** No complementary endpoint, common channel snapshot, globally legal merge, or reachable system extension is proved here.
- **Why finite.** The source-control segment is finite and internal progress is bounded by B4/FPD when not externally stalled.

6.5 Engineer example: independent work after a poll

Suppose a process performs a PopNB, updates an independent diagnostic counter, prepares a request on another endpoint whose control and payload do not depend on the PopNB result, and only later branches on the poll status. Appendix I may carry the poll as a DeferredNBHole through the independent counter/request work. Appendix J later freezes the complete channel request snapshot at L2, decides the poll once globally, and prevents the branch from occurring until the result is available under Core.RegSeq.

ARCHITECTURAL SEAM: Why Appendix I cannot be the whole safety proof

Local scripts may each be valid when viewed against read-only summaries, yet still conflict through shared channel state, atomic rendezvous pairing, a common non-blocking snapshot, reset scope, or overlapping field accesses. Appendix J proves that the scripts coexist and derives a legal global order; it does not merely conjoin them.

7. Appendix J - local-to-global safety construction

PURPOSE

Construct one reachable Sys_ref execution from local process/channel/atomic certificates and prove observable compatibility with a selected RTL prefix.

Engineer takeaway: Appendix J is the main safety theorem. Its defining achievement is that global witness realizability is derived from local evidence rather than accepted as an unexplained system-level premise.

7.1 Theorem J.1: the top-level safety result

THEOREM: J.1 - execution-level / trace-set compositional compatibility

For every covered reachable RTL_B prefix, the normal compositional route uses Definition J.LocalGWR, QualifiedSynchronousModel_Sys_ref(I)/Core.QSync-Ref, and Theorem J.GWR-Comp to construct a reachable Sys_ref prefix and a global witness package whose annotated projections satisfy E1-E5. A directly validated J.GWR package is an alternate route and may carry equivalent checked per-Horizon L2-settling evidence instead of the global source QSync premise. Plain finite-prefix J.1 does not require post-side QSync unless a post KCut/NormPost interface is invoked. The reverse Ref -> Post clause applies only to source prefixes already equipped with an RTL-consistent annotation/witness package: that premise already selects tau_post*; theorem-wide B-faithful/E4 facts supply Proposition J.0's channel premises; J.0 performs the conditional composition; and the existential post witness is tau_post := tau_post*.

Four details are important for engineering use:

- **Finite reachability, not only fair executions.** The Post -> Ref construction applies to finite reachable RTL prefixes; fair extension is a separate premise when an infinite execution is needed.
- **Required-prefix induction.** The proof orders observable units by the constraints that must be preserved, rather than by raw RTL cycle buckets or full source order across independent endpoints.
- **Annotated carrier.** Compatibility includes dynamic identities, witness choices, Issue/Commit attribution, request facts, and channel histories. It is stronger than matching an unannotated list of labels, but weaker than full-state equivalence.
- **Source-side settling route.** On the normal J.LocalGWR -> J.GWR-Comp route, QualifiedSynchronousModel_Sys_ref(I) and Core.QSync-Ref supply the finite L2 SettlePoint needed by J.RegPhaseNF/J.UnitExt for every constructed Horizon. A directly validated J.GWR package may instead carry independently checked finite L2-settled segments for its represented Horizons. Plain finite-prefix J.1 does not thereby require post-side QSync unless a post KCut/NormPost interface is also used.

7.2 The local certificate package

Component	What it certifies
J.PCert	Per-process logical replay checkpoint plus separate finite preparation/issue evidence, exact dynamic identity, field-sensitive footprints, and deferred non-blocking holes produced from Appendix I.
J.CCert	Per-explicit-channel boundary identity, capacity, E4 history, occupancy/head, payload, request snapshot, enablement, reset, and B-faithfulness evidence.
J.ACet	Agreement for explicitly atomic units: rendezvous pairs, paired synchronization, E2/R2C groups, RESET, and other named multi-participant actions.
J.EnvCert / J.ResetCert	Environment and reset-unit identity, scope, action, and locality evidence.

Component	What it certifies
Typed footprints	Field-sensitive ReadSet/WriteSet evidence for every construction action, including component-local elaboration actions.
LocalAgree	Equality, uniqueness, ownership, coverage, and duplicate-field agreement across local records.
Generated dependencies	Locally justified Dep_J edges and enough evidence to prove that omitted pairs commute; the package does not supply a convenient global rank.

DEFINITION: J.LocalGWR

The complete local package for one RTL prefix: PCert for every process, CCert for every explicit boundary, ACert for every atomic unit, applicable environment/reset records, complete action/deferred-hole inventory, field-sensitive footprints, Core.RegSeq and source conformance, generated dependencies, LocalAgree, and coverage. It must not assume that these records already form a realizable global replay.

7.3 How J derives a global construction order

J converts the certificate package into a finite graph of primitive construction actions. The graph includes process epsilon/control actions, request/attempt assertions, settled-snapshot decisions, complete commits, and reset/environment actions. Atomic groups are contracted before ordering.

Definition / lemma	Role
J.DepJ	Generated direct dependency edges from process control/data/Issue/ReturnedAtCycle rules, request-before-snapshot rules, channel/FIFO state, atomicity, reset/environment order, and explicit component dependencies.
J.DepSound	Every generated edge is a real operational prerequisite.
J.DepComplete	If two non-atomic actions are left unordered, they either commute by field-sensitive framing or are the explicitly proved same-cycle buffered Push/Pop dual update.
J.FoundationRank	A graph-independent lexicographic semantic rank based on reset epoch, Horizon, semantic stage, local ordinal, and component tie data.
J.DepRank	Every generated edge strictly advances the foundation rank.
J.DepAcyclic	A directed cycle would strictly increase the well-founded rank back to its start, which is impossible.
J.CanonicalRank	A derived deterministic totalization of the acyclic prerequisite relation. Stable tie keys order only commuting actions.

LOAD-BEARING RESULT: J.DepComplete + J.DepRank

The flow cannot simply provide a global rank that is assumed correct. It must generate every non-commuting prerequisite from local rules, prove that unordered actions really commute, and prove each edge advances an independent semantic foundation rank. This is what makes the construction auditable and prevents a hidden global replay assumption.

7.4 Registered phase normalization

Within each Horizon, the proof must respect actual clocked interface semantics. It cannot decide a non-blocking result and then create a dependent request in the same cycle, and it cannot evaluate different polls against inconsistent partial channel snapshots.

LEMMA: J.RegPhaseNF - registered phase normal form

Every finite same-Horizon construction fragment can be permuted, without changing its canonical observable history, into: L1 process evaluation and request/attempt writes; one finite L2 settle producing the common snapshot; and L3 non-blocking decisions plus complete boundary commits. The lemma needs the local fact that the frozen L2 state admits a finite $\rightarrow_{\varepsilon, L2}$ path to a SettlePoint. On the normal compositional route Core.QSync-Ref supplies that fact uniformly; a direct J.GWR route may carry the equivalent checked per-Horizon evidence. Registered results become available only in L4/next cycle.

LEMMA: J.NBDecision

Once all L1 predecessors have executed and J.CCcert supplies the common settled snapshot, each deferred non-blocking call has exactly one legal source result. A failed poll cannot coexist with a matching enabled rendezvous request, and a successful poll cannot be invented in a full/empty state that forbids it.

7.5 From one Horizon to the complete source witness

Lemma / theorem	Function in the construction
J.Frame	A certified transition changes only its WriteSet; disjoint state and guards are preserved.
J.LocalLift	Embeds one Appendix I process-local script into a reachable global state when owned/shared locations match its certified summaries.
J.PrepareCommute	Moves independent preparation actions into the common L1 window while respecting snapshots and true dependencies.
J.UnitEnable	After L1/L2, the requests, payloads, channel state, atomic participants, and holes make each selected L3 unit genuinely enabled.
J.UnitExt	Executes one complete Horizon bucket, updates replay/channel/atomic state, resolves holes, and preserves the construction invariant.
J.GWR-Comp	Outer induction over Horizon buckets constructs the complete reachable Sys_ref witness chain and the stable J.GWR interface.

THEOREM: J.GWR-Comp - local certificates construct global witness realizability

From J.LocalGWR plus QualifiedSynchronousModel_Sys_ref(I), Core.QSync-Ref supplies a finite source L2 SettlePoint for every reachable constructed Horizon. J.GWR-Comp then validates the dependency graph and construction order, phase-normalizes each Horizon, applies Horizon-batched J.UnitExt, and produces J.GWR and J.RegPhaseReach for one reachable Sys_ref witness.

Local certificates



Generated dependency graph



J.DepRank / J.DepAcyclic

↓

Validated order with finite-ideal prefixes

↓

Core.QSync-Ref + J.RegPhaseNF + Horizon-batched J.UnitExt

↓

J.GWR + J.RegPhaseReach

Non-circularity. LocalGWR supplies no global order, no phase-normal replay, and no global extension premise.

Stable interface. J.GWR can also be supplied directly by a translation validator or symbolic replay tool; that direct route must independently validate the same reachability, ordering, ideal-prefix, and finite per-Horizon L2-settling interface.

Reset handling. RESET is an atomic observable unit; RW1-RW5 and Lemma J.RS splice a new matched reset epoch while framing unaffected components.

Finite-ideal invariant. Every flattened prefix of the validated order is down-closed: if it contains a unit, it contains all required predecessors. J.UnitExt therefore grows the witness from one legal partial-order prefix to the next. Tie ordering among independent units is bookkeeping; required predecessors are not skipped and atomic units are never split.

7.6 Proposition J.0 is deliberately separate

PROPOSITION: J.0 - pairwise composition lemma

Given an already selected compatible source/RTL trace pair, compatible per-process annotated projections, and per-channel E4 well-formedness, J.0 lifts E1-E5 to the system level. It does not construct the source or RTL trace, prove B-faithfulness, or establish J.GWR. In J.1's restricted Ref -> Post clause, RTLConsistentRefPrefix supplies the already-selected pair and J.0 is the non-circular composition step.

7.7 Safety transfer for the verification flow

DEFINITION: J.TraceCertCov + COROLLARY: J.1-Safe

J.TraceCertCov_I(D) is the named Post -> Ref safety-certificate coverage premise. For every RTL prefix in the selected domain D it records one of two route-sensitive packages: (a) the normal compositional route, with accepted J.LocalGWR/J.GWR-Comp evidence, QualifiedSynchronousModel_Sys_ref(I)/Core.QSync-Ref, and the remaining Post -> Ref premises of Theorem J.1; or (b) a directly validated J.GWR package whose checked phase-normal chain already supplies the finite L2-settled segment for every represented Horizon, plus the remaining applicable Post -> Ref premises. All evidence is bound to the same theorem instance, stimulus, observation boundary, and prefix. Corollary J.1-Safe consumes J.TraceCertCov rather than adding an unconditional QSync premise, so the direct route remains valid. Under that coverage, any prefix-closed J.HCanon-invariant safety predicate transfers from all reachable Sys_ref prefixes to every covered RTL prefix. One complete pre-HLS run is sufficient only when J.RefProjCover proves that its canonical observable prefixes cover all relevant reachable source observations. J.TraceCertCov is safety-side coverage only and does not imply K.CertCov.

7.8 The J-to-K cutpoint bridge

Trace matching alone is insufficient for deadlock reasoning. Two executions can have the same committed history while one endpoint has not reached a blocking call and the other has an attributed persistent request. J therefore augments the canonical replay history with the terminal residual-offer set.

Bridge element	Purpose
J.HCanon	Proves that the selected source and RTL prefixes have the same canonical replay history H modulo the permitted epsilon/history quotient.
J.RegPhaseReach	Records that the exact source witness was constructed with Core.RegSeq and the Core.Phase L1/L2/L3 discipline.
J.OfferReach	Shows that $\langle E, w, H, O \rangle$ is actually realized by a reachable source KCut selected by the exact NormRef witness, not merely a well-typed tuple.
J.OfferConf	At the selected RTL KCut, bidirectionally and uniquely matches every residual offer in O to a relevant asserted RTL request and every relevant RTL request back to exactly one offer. Core.SyncFence is load-bearing for identifying unqualified residual offers with the current-interval Pending_P set.
J.KObsConf	Binds one exact source/RTL package with explicit NormRef/NormPost KCut endpoints and establishes equality of the typed KObs record.
Corollary J.1	Establishes equal KObs at matched KCuts and, through J.KObs-Proc, J.KObs-Chan, J.KObs-Offers, and J.KObs-WFG, exports the J-owned reconstructed process/channel/frontier/request/enablement/WFG/snapshot-drain facts. It makes no K.Dead, K.DeadW, environment-terminal, waiver, or diagnostic conclusion; Appendix K performs that factoring.

AUDIT CRITICAL: J.OfferConf request-to-offer completeness

Every relevant asserted RTL boundary request must be attributed to exactly one source residual offer at the selected explicit boundary. Omitting a hidden asserted request, duplicating attribution, or using an unrelated source cutpoint invalidates the KObs bridge. This is the implementation abstraction boundary on which Appendix K relies.

8. Appendix K - conditional deadlock preservation

PURPOSE

Preserve absence of reachable drain-closed closed internal message-passing wait cycles from the selected source-reference instance to covered RTL KCuts. Engineer takeaway: K is not a generic progress theorem. It proves a specific KCut property and is conditional on A5-L plus fairness, drain, environment, value, lowering, and coverage obligations. Universal RTL claims additionally require Core.KCutClosure_post and K.CertCov; in the standard scope Core.QSync-Post derives the closure interface from separately audited structural QSync evidence.

8.1 The deadlock predicate

Appendix K evaluates Core.KCut states, not arbitrary epsilon-quiescent states. A KCut is reachable, epsilon-quiescent for the relevant proof model, and settled at every explicit boundary used by BoundaryReq/ChannelEnabled/ChannelDisabled. Source L2 SettlePoints are KCuts by Core.SettleIsKCut; in the standard qualified synchronous scope Core.QSync-Ref proves source SettlePoint existence/uniqueness and Core.QSync-Post proves the unique same-cycle settled RTL KCut for each reachable RTL K-origin and derives Core.KCutClosure_post. Core.KCutClosure_post remains the downstream semantic interface consumed by K so that K does not depend on the particular structural settling proof. A separately qualified non-QSync extension may reuse that interface only by proving it explicitly. The WFG contains only internal message-passing dependencies; environment-facing channels and SyncChannel barriers are handled through separate scope/assumption rules.

Object	Meaning
Front_P	The minimal pending blocking message-operation items of process P whose endpoint requests are currently asserted. Merely being the next source call is not enough; the request must have issued. Core.OrdFrontSingleton proves $ Front_P \leq 1$ in an ordinary non-elaborated source interval; multiple members require explicit Sys_B ^{elab} partial-order structure.
Blocked process	Front_P is nonempty and every frontier item is ChannelDisabled at the selected explicit boundary. A disabled edge for one item does not by itself make a multi-frontier process blocked.
WFG edge P → Q	For each disabled frontier item x of P, Core.WFG contains P → Q where Q owns x's unique complementary endpoint. Multi-frontier processes may therefore have multiple outgoing edges, while the blocked-process condition remains an all-items-disabled test.
DrainClosedNow(D)	No already-offered non-frontier request owned by D remains enabled; otherwise finite downstream drain could still change the candidate wait structure.
Definition K.Dead / K.DeadW	Dead_K is the ordinary reachable drain-closed closed internal wait-cycle predicate. Dead_K ^W is the waiver-parameterized form, excluding declared KObs-closed cutpoint classes. Optional Dead_KS remains diagnostic only.

SCOPE: Reachable closed internal wait-cycle cutpoint

The operative predicate is stronger than “the system is currently slow” and different from a global permanent-deadlock definition. It identifies a reachable internally closed wait cycle at a drain-closed snapshot. Escape through a nondefault timed/reactive environment co-frontier is a separate concern controlled by K.EnvMF and explicit waivers.

8.2 Reconstructing and factoring the wait state from J.KObs

Result	Function
J.KObs-Proc / Chan / Offers / WFG	Appendix J reconstructs process replay, explicit channel state, residual offers, frontier/request/enableness, Core.WFG, and snapshot drain facts from the common KObs record.
K.EnvTerminalAdequate / K.KObsDerived	Appendix K first supplies the environment-terminal adequacy premise and gathers the K-facing derived functions needed before deadlock factoring.
K.KObs-Dead / K.KObs-Ext	K.KObs-Dead factors K.Dead/K.DeadW and related K predicates from KObs-derived inputs; K.KObs-Ext transfers those K-owned predicates across equal KObs.
K.0 / K.1a	Reconstruct the operational minimal pending blocking frontier and characterize disabled Push/Pop frontiers for buffered and rendezvous boundaries.

Result	Function
K.2 / K.2a	Use Core.WFG and the snapshot-drain functions to prove WFG and DrainClosedNow extensionality at equal KObs cutpoints.

8.3 One certified cutpoint versus universal coverage

DEFINITION: K.CertifiedCutpoint

A K-ready package for one reachable RTL KCut ρ_{post} , together with at least one explicitly recorded reachable prefix τ_{post} and finite normalization witness ν_{post} satisfying $\text{NormPost}(\tau_{\text{post}}, \nu_{\text{post}}, \rho_{\text{post}})$. It binds the theorem instance and contains the J.1/KObs correspondence, exact source KCut witness, J.RegPhaseReach, K.DrainReach including Core.SettleKBridge, point-to-point boundary facts, waiver closure, and the remaining K-facing assumptions for that one package. It does not imply K.CertCov.

THEOREM: K.1A - certified-cutpoint preservation from A5-L

Assume one certified RTL cutpoint satisfies Dead_K^W . Equal KObs plus the J-owned reconstruction and K.KObs-Dead/K.KObs-Ext transfer the same frontier/WFG/drain/deadlock predicate to the exact reachable Sys_ref witness. J.RegPhaseReach plus K.DrainReach prove that witness is Core.LAdm-admissible. This contradicts A5-L. Therefore that certified RTL prefix/normalization/cutpoint package cannot contain the non-waived internal wait cycle.

COROLLARY: K.1A-Total - universal result under K.CertCov and KCut closure

K.1A is pointwise over an already selected certified KCut. A universal claim additionally consumes Core.KCutClosure_post and K.CertCov. In the standard QSync scope, the flow does not provide an unrelated per-instance normalization proof: audited QS1-QS5 structural evidence invokes Core.QSync-Post, which derives KCutClosure_post and a canonical same-cycle NormPost endpoint for every reachable RTL K-facing cycle origin. With K-epsilon/Core.KCutObserve, a persistent relevant blocker cannot evade that observation domain solely through pre-normalization activity. K.CertCov is then total only on KCutReach_post(l): for each reachable RTL KCut it supplies at least one recorded reachable-prefix/NormPost pair and a corresponding K.CertifiedCutpoint package. It does not require every arbitrary RTL prefix or every normalization witness to carry a package.

8.4 The central source-liveness premise A5-L

PREMISE: A5-L - scheduler-robust liberal source liveness

No finite Policy-L prefix admissible under Core.LAdm for the selected Sys_ref instance reaches a source K-facing cutpoint in KCutReach_ref(l) satisfying Dead_K^W . Drain-closedness is part of Dead_K itself, not an extra restriction on the A5-L cutpoint domain. Because Policy-S-shaped serial prefixes are included among admissible Policy-L prefixes, a design with a reachable serial wait cycle makes A5-L false; another proof technique cannot certify the unchanged instance.

A5-L is intentionally global. Internal wait cycles depend on interactions among processes, capacities, environment behavior, and the selected issue policy. Unlike the J safety construction, it cannot generally be reduced to independent per-process liveness theorems.

8.5 The primary Policy-S discharge route

The primary user-facing activity is one selected complete instrumented Policy-S execution of the pre-HLS model. The design user runs that conservative serial-issue instance and inspects its total finite-bound response monitors. The flow separately qualifies SDet, the route's structural/environment/lowering/reset applicability, run completeness, monitor coverage and bounds, and certificate validity. For a universal RTL statement, the flow establishes the QSync structural evidence from which Core.QSync-Post derives Core.KCutClosure_post (observation-domain existence/non-vacuity) and separately establishes K.CertCov (a complete K-ready package for every reachable RTL KCut). Appendix K-P supplies the paper argument that an admissible Policy-L internal deadlock forces a finite covered response failure on that selected run; Lean mechanization and tool/flow qualification remain outstanding.

Element	Role
K.Low / Sys_K	Normalize synchronization waits and witness-selected non-NB-CF dependencies into explicit blocking guard/epoch-gate channels so the serial argument operates on literal blocking frontiers.
K.EnvMF	For multi-frontier components, require StandardEnv/B1-available plus the default ready output environment; timed/reactive or otherwise nondefault environments are restricted to a certified single internal frontier.
SDet	A flow qualification that fixes every history-affecting choice - model, capacities, elaboration, reset, stimulus/environment, witness, arbitration, concrete simulator scheduling, Core.PolicyS issue semantics, and epsilon normalization - and identifies one run artifact ρ_S^{det} . SDet alone does not prove completeness or response cleanliness.
K.ResetEpoch	For each candidate liberal blocked component, either the comparison continuation contains no RESET affecting a component process or incident selected boundary, or the flow independently maps a selected liberal frontier to an already-triggered, non-waived process-facing Policy-S response monitor that the matched RESET clears under RW2. A pre-reset cutpoint satisfying neither branch needs another A5-L discharge.
K.RespCov	Default-total finite-bound coverage of every static internal process-facing blocking site and relevant dynamic class, with an unambiguous trigger/response definition and a validated monitor, static bound, or unreachability disposition.
K.RespClean	No finite prefix of the complete selected run witnesses a non-waived certified-bound expiration, maximal-finite pending frontier, cancellation/reset failure, or end-of-test pending failure.
K.CompleteS	The selected run is maximal and fair. A terminating instance reaches its declared terminal state with every monitor resolved; a nonterminating instance requires an invariant, sound model-checking/lasso proof, or equivalent completeness evidence.
A5-S / CF-S	The complete operational certificate package over the SDet-selected run: K.CompleteS + total K.RespCov + K.RespClean, bound to one normalized theorem instance and trust boundary, including the applicable K.ResetEpoch branch evidence. This is the source-side evidence used by the paper-level K.2c reduction to discharge A5-L on the supported fragment.

LEMMA: K.2b - deterministic serial-source dominance with response-failure extraction

Under the blocking/lowering, value-determinism, environment, fairness, drain, identity, reset-applicability, and total-response-coverage premises, any Core.LAdm-admissible Policy-L source KCut satisfying Dead_K^W forces the same SDet-selected Policy-S execution to produce a finite non-waived K.RespFail witness. K.2b takes A5-L's own source-KCut counterexample premise: drain-closedness is extracted from the Dead_K/DeadKRec^W hypothesis, not assumed separately. Appendix K-P supplies explicit paper proofs of the request-reachability and least-missing-transfer dominance steps, with buffered, rendezvous, finite/infinite, elaborated, multi-frontier, and reset-epoch branches. Failed non-blocking polls are handled through WC-selected return outcomes and are not claimed to have committed. The lemma does not claim equal traces, equal timing, or the same deadlock component.

COROLLARY: K.2c - the selected deterministic Policy-S execution suffices

If the complete selected Policy-S run has total response coverage and is response-clean, K.2b rules out any liberal deadlock counterexample; therefore A5-S implies A5-L on the supported fragment when SDet, K.EnvMF, K.ResetEpoch, and the remaining reduction premises hold. SDet removes quantification over alternate Policy-S schedulers, so no confluence theorem is required. This is now a paper-level corollary; Lean mechanization, reusable checker/certificate qualification, and complete package-coverage realization remain separate work.

STATUS: Paper proofs supplied; Lean mechanization and flow qualification outstanding

The instrumented Policy-S simulation and bounded-response-monitor workflow can be implemented and used now. Appendix K-P now gives explicit paper proofs of K.Low.C, K.2b.P1, K.2b.R, K.2b.P, K.2b.E, and K.2b.Q. What remains is Lean mechanization of those obligations and their supporting definitions, qualification of the concrete simulator and lowering semantics, reusable validation of the certificate interfaces and response monitors, and a checked route to the claimed cutpoint-coverage domain. Mechanization may still require local statement refinements or helper lemmas, but it is no longer being asked to discover the central serial-dominance argument.

PRACTICAL WARNING: One run must be complete and flow-qualified

For a terminating design, the selected run must reach the declared maximal terminal state and resolve every covered monitor. For a nonterminating design, a finite trace is only evidence; an invariant, sound model-checking result, recurrence/lasso proof, or equivalent argument must establish completeness and continued response cleanliness. In either case, the flow must also establish SDet, route applicability, total finite-bound response coverage, and certificate validity; a clean trace alone is not the theorem premise.

8.6 Alternate direct discharges of A5-L

Route	When it can discharge A5-L
K.Str-1 - acyclic dependency graph	If the full static process dependency graph is acyclic, no WFG cycle can occur.
K.Str-2 - ranked dependency	A well-founded rank strictly decreases along every realizable WFG edge, excluding cycles.
K.Str-3 - credit/token cycle breaking	Every static dependency cycle contains an edge proved unrealizable at reachable cutpoints, often by occupancy, initial-token, or credit invariants.
CF-3 / direct invariant	An inductive abstraction proves the prohibited Policy-L cutpoint unreachable.
CF-4 / exploration	Sound exhaustive or bounded model checking over the selected transition system.
CF-5 / tool certificate	A tool-emitted certificate using knowledge of the scheduled control graph, storage, arbitration, joins, and automatic flush.

These are alternate proofs of exactly the same A5-L property. They cannot rescue a design for which an admissible serial-shaped Policy-L prefix already reaches Dead_K.

Route-dependent barrier and termination coverage. These routes are equivalent as proofs of A5-L, but they are not equivalent as verification activities. The Policy-S route requires K.CompleteS for the selected run, so a design that hangs at a barrier, at an end-of-stream protocol, or on a terminated peer fails to produce the required complete run and is caught incidentally. The structural, invariant, exploration, direct Policy-L, and tool-certificate routes involve no such execution: because barriers contribute no Core.WFG edge, they contribute no static dependency edge either, so a barrier-only wait cycle can pass A5-L structurally with no barrier check anywhere in the flow. That is sound - Appendix K scopes barrier stalls out under A8 - but on these routes the barrier, end-of-stream, and termination obligations must be discharged by a separate argument.

8.7 Standing assumptions A1-A11 in engineer terms

Assumption	Plain-language role
A1	The source and RTL satisfy the previously defined R-rules and B-rules at the selected boundaries.
A2	Finite internal epsilon depth / finite stutter when not externally stalled.
A3	Weak fairness: a continuously enabled action is eventually selected.
A4	Channel progress: persistent complementary requests eventually discharge full/empty/rendezvous blocking.
A5	For the user-facing Policy-S route, a complete bounded-response-clean selected serial run; K.1A itself consumes A5-L directly.
A6	Point-to-point channels with unique producer and consumer at every evaluated boundary.
A7	B1 RTL determinism/witness selection plus the exact equal-KObs source/RTL correspondence and Core.LAdm qualification.
A8	Barrier participation is well formed; barrier mismatches are outside the internal message-passing deadlock theorem.
A9	At most one Push and one Pop commit per channel per cycle; multi-lane/burst resources must be modeled explicitly.
A10	Every buffered channel is logically empty after each reset boundary.
A11	K-epsilon: hidden epsilon steps do not create, remove, or redirect the WFG-relevant blocking structure.

THEOREM: K.1 - user-facing deterministic Policy-S preservation

Combine uniform K.1A premises, theorem-derived Core.KCutClosure_post, K.CertCov, SDet, K.CV, applicable NB-Align/K.Low, point-to-point boundaries, nonwithdrawal, K-epsilon, K.Drain/Core.SettleKBridge, K.EnvMF, K.ResetEpoch, K.RespCov, and A5-S. Corollary K.2c supplies A5-L; K.1A-Total then excludes the prohibited persistent K-relevant internal wait-cycle configuration over the complete reachable RTL KCut domain. In the standard scope, Core.QSync-Post derives the closure premise from audited single-clock/register-frame/finite-acyclic deterministic-settling/boundary-completeness evidence.

Status. The complete paper theorem stack is stated and argued in the scheduling-rules document. The Policy-S discharge is not yet a mechanized and flow-qualified signoff result: the K-P obligations, checker/certificate interfaces, simulator/lowering qualification, QSync structural qualification, and K.CertCov route still require implementation and validation. K.1A remains the direct theorem interface when A5-L is discharged by another valid route.

8.8 What Appendix K does not cover

- Barrier mismatches or conditional SyncChannel participation (handled by A8 and separate protocol verification).
- Waiting indefinitely for an external environment input, output readiness, termination, EOF, cancellation, or reset behavior not represented by the internal WFG predicate.
- Arbitrary starvation or throughput guarantees unrelated to the defined blocking frontier and response-monitor schema.
- Cycle-accurate RTL response bounds; K.Resp evidence is a source-side discharge of A5-L, not an RTL timing contract.
- Designs whose correctness requires favorable eager/same-cycle issue when a serial-shaped admissible prefix deadlocks.

9. Appendix L - witness selection and snooping

PURPOSE

Conditionally realize a WC-compatible source witness for latency-sensitive epsilon choices while leaving the unique free-running RTL behavior untouched.

Engineer takeaway: Snooping selects one admissible source witness only when the required WC/L.Dir witness exists. It must not feed pre-HLS readiness back into RTL, relabel payloads, drop/reorder observations, or treat an unrealizable witness as a silent stall.

9.1 Why snooping is needed

A non-blocking arbiter, interrupt controller, or retry/timeout block may make a later observable choice based on which request arrived first or how many polls failed. HLS changes internal latency, so the raw pre-HLS and post-HLS simulations can select different epsilon outcomes even though both satisfy the broad scheduling contract. When those outcomes affect later Sigma-visible behavior, Appendix I needs a specific WC-compatible witness.

If NB-CF holds - failed non-blocking outcomes do not affect later observable control, values, frontier, or request attribution - the witness is trivial and snooping is unnecessary. Cadence-sensitive polling is different: it is a localized latency-sensitive protocol and must be isolated or explicitly snoop-aligned. Appendix L is conditional: if no admissible source execution can consume the RTL event sequence in ordinal order with matching kind and payload, WC/L.Dir is not discharged for that comparison.

DEFINITION: L.1 - witness selector / snooping

At each relevant epsilon-quiescent source witness-choice cutpoint, the selector returns the outcome chosen by the matched RTL prefix using only causally available history. This is intentionally a generic quiescent witness-selection interface, not a Core.KCut requirement: KCut adds a K-facing boundary-evaluation condition that an arbitrary snooped epsilon choice need not satisfy. The selector cannot depend on future RTL events or invent a retry/timeout outcome inconsistent with the isolated protocol.

LEMMA: L.2 - conditional snooping discharge of WC

If the snooped set covers every epsilon choice that can affect later observable behavior, the wrapper changes only epsilon-choice selection, selected outcomes are causal and RTL-consistent, successful and failed non-blocking calls retain the required Sigma/epsilon interpretation, cadence-sensitive blocks are isolated, and the selected ordinal event stream is realizable, then the selected source execution satisfies WC for Appendices I and J. This is a conditional witness-construction theorem, not a guarantee that every RTL event stream has a matching source witness at the chosen boundary.

9.2 One-directional architecture

CONDITION: L.Dir - one-directional alignment / RTL-side non-interference

The RTL_B execution is free-running under the fixed stimulus. The pre-HLS snoop sequence must consume the recorded RTL snoop sequence in ordinal order, with matching kind and payload, and no pre-HLS backpressure/readiness may stall or alter RTL. Benign cycle skew is permitted. Order, kind, or payload divergence means that the required WC witness does not exist at the chosen boundary; the run has no theorem-backed guarantee and the harness must abort and triage the failure rather than silently gating or hanging.

9.3 Wrapper realization requirements W1-W5

Requirement	Engineering meaning
W1 - recorded ordinal observation	Capture each RTL snoop event by dynamic ordinal and hold it until the pre-HLS side consumes the same ordinal. Do not rely on overlapping live assertion windows.
W2 - gate only commit enable	Gate only the mirror signal that enables the pre-HLS commit: observed valid for a pre-HLS Pop or observed ready for a pre-HLS Push. Never modify the source endpoint-owned request.
W3 - registered sampling	Register the RTL observation before it enters the source-side gate to avoid delta-cycle races; the extra source latency is part of witness selection.
W4 - compare and watchdog	At each source snoop commit, compare ordinal, kind, and payload against the recorded RTL event. Never substitute the RTL payload into the source, because that would hide value divergence. Detect missing, extra, reordered, or never-consumed observations. A watchdog must convert non-existence or failure to realize the witness into a reported result; if the watchdog bound is not proved sufficient, a bound-exceeded abort is an inconclusive witness-realization failure, not by itself a proved L.Dir violation.
W5 - independent coverage proof	The wrapper mechanism is sound only for the points it records. A separate analysis must prove that all epsilon choices capable of affecting later observables are covered.

IMPLEMENTATION PITFALL: Why a live AND is unsound

ANDing the current pre-HLS and current RTL handshake levels can drop an RTL event when the RTL assertion retires before the source arrives. It can also reorder or duplicate matching under multiple outstanding events. The normative rule is an AND against a recorded per-ordinal observation retained until source consumption.

9.4 Harness soundness and shared testbenches

LEMMA: L.5 - online realization of the witness selector

A co-simulation harness realizes the abstract selector only when a matching witness exists, the harness preserves the free-running RTL trace, implements W1-W5, satisfies L.Dir, and produces the same source-side witness choices assumed by the formal comparison. The formal theorem is about the fixed RTL trace and selected source witness; harness correctness, coverage, and successful witness realization are additional implementation obligations.

A shared reactive testbench becomes problematic once one model can lag significantly, because reactions may be driven by whichever model the testbench observes. The flow should replicate the stimulus/testbench per model, or structure a shared environment around a common causal transaction stream rather than raw cycle timing.

9.5 What snooping means formally

Snooping does not use RTL to change the source specification. The source model is intentionally under-specified with respect to permitted latency and epsilon choice. When a WC/L.Dir witness exists, the RTL observation selects one admissible execution of that specification for comparison. If the event order, kind, or payload cannot be realized, the comparison is outside theorem scope and must be triaged among source-model ill-formedness, incomplete snooping coverage/harness behavior, and tool/RTL non-compliance.

9.6 Latency-robustness stress testing

Appendix L also recommends randomized stalls, varied channel latency/capacity, and adversarial weakly fair scheduling in the pre-HLS model. This is not a substitute for the formal premises, but it is a practical way to detect designs that accidentally rely on incidental ordering of causally independent events. A failure under such stress usually indicates that the source specification itself is outside the intended latency-insensitive model or that an explicit snoop/isolation boundary is missing.

10. How the appendices work together in a verification flow

PURPOSE

Translate the theorem architecture into a concrete signoff workflow.

Engineer takeaway: Safety-only use stops after the J.1/J.1-Safe package. Appendix K is added only when the claim includes the defined internal wait-cycle freedom, and it requires substantially more global evidence.

10.1 Step-by-step safety flow

Step	Deliverable
1. Fix the theorem instance	First screen the design patterns against Appendix F of the scheduling-rules document. Then select one single-global-clock theorem instance: Sys_ref = Sys_B or Sys_B^elab, explicit boundaries, capacities, Core.ElabProj package where needed, observable alphabet, reset interpretation, fixed stimulus/environment, witness provenance, and tool/RTL identities. Multi-clock designs require a separate semantic layer or per-domain verified boundaries.
2. Establish Core/G and QSync conformance	Check the Core source semantics and qualifications used by the instance - including signal anchors, Core.RegSeq, Core.SyncFence, Core.LLegal/Core.Phase/Core.Settle and its L2 frame, E4 capacities, and Core.ElabProj where applicable - together with G's R1-R5 and E1-E5 obligations, elaboration, B-faithfulness, ClockScope, and the route-appropriate Core.QSync structural evidence. On the normal J route, source QSync-Ref must provide finite L2 settling; a direct J.GWR package may instead carry equivalent per-Horizon evidence.
3. Discharge WC	Use NB-CF, an Appendix L snooping/L.2 construction with a realized WC/L.Dir witness, direct witness construction, or a complete mixed per-site coverage argument.
4. Produce local evidence	Generate J.PCert from Appendix I and per-channel/atomic/environment/reset certificates plus typed footprints and local dependencies.
5. Run J.GWR-Comp	On the normal route, invoke Core.QSync-Ref for the source L2 settle, derive the dependency order and validated construction order with finite-ideal prefixes, then the registered phase-normal construction, reachable source witness, and J.GWR interface. A direct J.GWR route must carry the equivalent checked phase-normal/settling evidence itself.
6. Apply Theorem J.1	Obtain Post -> Ref observable compatibility for the covered reachable RTL prefix. Plain finite-prefix J.1 does not require post-side QSync unless a post KCut/NormPost interface is also invoked.
7. Transfer the safety property	Use route-sensitive J.TraceCertCov and Corollary J.1-Safe over the required RTL coverage domain. J.TraceCertCov explicitly carries source QSync-Ref on the normal compositional route or equivalent checked per-Horizon settling on the direct route. Use J.RefProjCover only when claiming one selected source run covers all source observations.

10.2 Additional liveness flow

Step	Deliverable
8. Establish the KCut observation domain	For source models in the standard scope, Core.QSync-Ref proves the finite unique L2 SettlePoint and Core.SettleIsKCut makes it the source K-facing state. For RTL_B, establish the QSync structural evidence and invoke Core.QSync-Post to derive Core.KCutClosure_post: every reachable K-facing cycle-evaluation origin has a finite same-cycle normalization to a unique PostKCut before the next registered update. Core.KCutObserve preserves any persistent K-relevant blocker under K-epsilon. For an individual certified cutpoint, record the chosen reachable prefix and canonical NormPost witness ending at that KCut.
9. Build the KObs bridge	Discharge J.HCanon, J.OfferReach, J.OfferConf, and J.KObsConf for the exact same source/RTL/witness package and explicit NormRef/NormPost KCut endpoints.
10. Qualify the source witness	Use theorem-derived J.RegPhaseReach plus application evidence K.DrainReach to prove K.RLAdmReach/Core.LAdm admissibility for the exact source witness. K.DrainReach must include Core.SettleKBridge from every persisting L2 activation through intervening permitted drain to the selected later KCut.
11. Certify the cutpoint	Assemble K.CertifiedCutpoint for the selected RTL KCut and one recorded reachable-prefix/NormPost pair, including point-to-point boundaries, waiver closure, exact source KCut witness, J.RegPhaseReach, K.DrainReach/Core.SettleKBridge, QSync theorem/evidence provenance where used, and all remaining K-facing assumptions.
12. Run and qualify the A5-L discharge	For the primary route, execute one complete instrumented Core.PolicyS pre-HLS run and collect total finite-bound response evidence. The flow separately establishes SDet, K.PSF/K.EnvMF/K.ResetEpoch/K.Low/K.CV/NB-Align applicability, K.CompleteS, K.RespCov, K.RespClean, and the certificate bindings consumed by the paper-level K.2c reduction. Alternatively use a valid structural, direct Policy-L, invariant, exploration, or tool proof of A5-L.
13. Establish universal KCut closure and coverage	Apply K.1A directly to one selected certified KCut. For K.1A-Total or the universal user-facing K.1 claim, consume both Core.KCutClosure_post and K.CertCov. In the standard scope, Core.QSync-Post derives the closure interface from the accepted QSync audit evidence; K.CertCov separately ranges over every reachable RTL KCut and may choose at least one prefix/normalization/package for each. A non-QSync design requires an explicitly qualified extension proving the same closure interface.

10.3 Recommended reading order in the scheduling-rules document

- Start with the front Abstract and Formal Guarantees at a Glance, then read Appendix F for the architect-facing design constraints. Use Appendix M for the formal conclusions, scope, and division of responsibilities. Continue with the unlettered Guide to the Formal Appendices, the Normative Formal Core for the shared semantic skeleton, and Appendix G for the R/E observable contract.
- In the Normative Formal Core, focus on Sys_ref, Remark Core.Settle-a (delta/tau/idle), Remark Core.Det, Core.RegSeq, Core.PolicyL/Core.LLegal/Core.Phase/Core.LAdm, Core.PolicyS, Core.Settle and its L2 frame, Core.QSync/Core.QSync-Ref/Core.QSync-Post, Core.ElabProj, Core.WFG, Core.16/Core.Drain, and Core.18c KObs. Appendix M.7a contains the consolidated side-condition discharge record, including ClockScope and Core.QSync; Appendix R is a downstream derived companion, not a normative dependency.
- Read Appendix I to understand exactly what is local and why deferred non-blocking holes are needed.

- Read Appendix J as the central safety construction; focus first on J.LocalGWR, J.DepRank/J.DepAcyclic, the finite-ideal construction invariant, J.RegPhaseNF, J.UnitExt, J.GWR-Comp, Theorem J.1, J.TraceCertCov/J.1-Safe, and then J.KObs-Proc/Chan/Offers/WFG plus Corollary J.1.
- Read Appendix L before K when witness-selected non-blocking or latency-sensitive interfaces are present.
- Read Appendix K for Core.WFG-based deadlock reconstruction, K.EnvTerminalAdequate/K.KObsDerived, K.KObs-Dead/K.KObs-Ext, the explicit (tau_post, nu_post, rho_post) certified-cutpoint and coverage interfaces, A5-L, and the primary one-run Policy-S workflow. Appendix K-P is the deeper proof companion and records the remaining serial-reduction mechanization obligations.

11. Assumptions and evidence matrix

PURPOSE

Summarize the named assumptions that most often determine whether a theorem instance is usable.

Engineer takeaway: The important audit question is not merely “is the assumption plausible?” but “what artifact establishes it for this exact source, RTL, capacity/elaboration, stimulus, witness, reset, and environment instance?”

Architect-facing entry point. Appendix F of the scheduling-rules document is the design-pattern entry point to this matrix. Poll-dependent control triggers WC/L.Dir or isolation evidence; cross-process memory triggers J.Mem, which is a scope condition rather than an evidence item - a non-lowered shared-memory dependency places the design outside Theorem J.1, Corollary J.1, and Appendix K; asymmetric or dynamic reset triggers RW evidence and, for the serial deadlock route, K.ResetEpoch; fall-through, hidden bypass, or coupled channel structure triggers E4, B-faithfulness, Core.ElabProj, and qualified-settling evidence. The standard theorem scope additionally requires the single-clock/register-frame/finite-acyclic deterministic-settling discipline of Core.QSync. The matrix below remains the formal evidence view for the exact selected theorem instance.

Premise / evidence	Where it matters and typical discharge
B1 - RTL deterministic trace	Consumed by J/K/L selected-trace reasoning. Evidence: RTL/tool determinism proof, qualification, deterministic arbitration/environment setup, or a validated witness-selection setup. B1 is observable trace determinism, not the same thing as QSync same-cycle settling determinism.
B2 - weak fairness	Consumed by I progress embedding and K drain/progress arguments. Evidence: scheduler/arbiter fairness proof, assertions, or Appendix N pattern qualification.
B3 - channel progress	Consumed by I.2 and K. For Push at a full buffered channel, B3 guarantees a complementary Pop discharge that frees space; for Pop at empty, it guarantees a complementary Push discharge that supplies data. This is not by itself a conclusion that the original blocked operation commits. If that request remains pending and continuously enabled afterward, E4 plus B2 govern its eventual commit. Evidence may be a per-boundary progress certificate or the stated persistent two-endpoint-request premises.
B4 - finite epsilon-step depth	Consumed by Appendix I finite preparation and replay construction. D_P bounds consecutive P-owned epsilon-steps only while P remains internally advancing toward its next observable action and is not externally stalled. Stable waiting, peer delay, environmental delay, and back-pressure waiting are outside this charge. Evidence: finite source-control/pipeline/FSM progress plus the required no-infinite-epsilon-spin argument. B4 is not the QSync same-cycle settle theorem.

Premise / evidence	Where it matters and typical discharge
B5 - system quiescence cycle bound	Consumed when bounded global stabilization is required. C_{sys} is measured in real clock cycles and is stronger than Core.4 epsilon-quiescence. A derivation from B4 requires a charging lemma showing that every relevant silent tau-cycle in which a process remains internally advancing consumes bounded epsilon work. B5 is not Core.QSync, not the definition of Core.KCut, and not the same thing as the B6 idle-tick convention.
WC	Consumed by I and J; provenance may be NB-CF, L2 snooping, direct witness construction, or mixed per-site coverage.
Core.RegSeq	Consumed by I/J/K. Evidence: sequential interface structure; request/data outputs are functions of registered state and operands fixed before L2; ordinary combinational derivation from those registers is allowed, but no same-cycle newly returned interface result may feed a dependent sequential output.
Core.QSync / QSync-Ref / QSync-Post	Normal J.LocalGWR $\rightarrow$ J.GWR-Comp uses source-side QSync-Ref to obtain finite L2 settling for every constructed Horizon; a direct J.GWR package may instead carry equivalent checked per-Horizon settling evidence. Corollary J.1 cutpoint transfer and Appendix K use post-side QSync in the standard scope. Evidence follows QS1-QS5: ClockScope, registered/frame separation with fixed cycle inputs and stable sequential drives, deterministic local evaluation, finite acyclic same-cycle dependency, and explicit-boundary completeness. Qualified Sys_B ^{elab} templates may discharge the source facts compositionally.
J.LocalGWR	Consumed by the normal J.GWR-Comp route. Evidence: complete local process/channel/atomic/env/reset records, footprints, dependencies, agreement, and coverage.
B-faithfulness / Core.ElabProj	Consumed by J/K at every explicit abstract boundary. Evidence: back-annotation, structural RTL checks, interface monitors, refinement checks, or tool certificates. Elaborated instances additionally need Core.ElabProj evidence for trace projection, occupancy projection, conservation/accounting, and proof-internal WFG visibility.
J.TraceCertCov	Consumed by J.1-Safe over a selected RTL-prefix domain D. Evidence is route-sensitive: every prefix on the normal compositional route carries accepted J.LocalGWR/J.GWR-Comp evidence plus QualifiedSynchronousModel_Sys_ref(I)/Core.QSync-Ref and the remaining Post $\rightarrow$ Ref premises; a direct J.GWR package may instead carry checked finite L2-settled segments for all represented Horizons plus the remaining applicable premises. It is safety coverage and does not imply K.CertCov.
Core.Drain / K.Drain, Core.SettleKBridge, and K-epsilon	Core.Drain is consumed by Core.LAdm; K.Drain/K.DrainReach are application evidence used by K.RLAdmReach, K.1A, and serial dominance. K.DrainReach must also discharge Core.SettleKBridge from each persisting L2 SettlePoint activation to the later selected KCut, accounting for intervening epsilon normalization and explicit drain commits. Pipelines normally use Appendix B automatic flush; ordinary control needs equivalent no-new-later-work and finite non-replenishing drain evidence, plus no hidden WFG-changing epsilon behavior.

Premise / evidence	Where it matters and typical discharge
J.OfferReach / J.OfferConf / J.KObsConf	Consumed by Corollary J.1 and all K cutpoint reasoning. Evidence must bind the exact same source/RTL prefix, witness, H, O, and explicit NormRef/NormPost endpoints in the appropriate Core.KCut domains.
K.CertCov	Consumed by K.1A-Total and the universal K.1 claim, together with the downstream Core.KCutClosure_post interface. Evidence: for every reachable RTL KCut rho_post, at least one recorded reachable-prefix/NormPost pair and a corresponding K.CertifiedCutpoint package. One CF-0 validation, sampled KCuts, or a clean simulation is not enough; arbitrary transient prefixes need not carry packages.
A5-L	Consumed directly by K.1A. Evidence: Policy-S route through K.2c or a valid structural/direct/invariant/exploration/tool proof.
Selected Policy-S run / SDet / A5-S	Consumed by the paper-level K.2b/K.2c/K.1 route. The design-user artifact is one complete instrumented serial-issue run with total finite-bound response monitoring. The flow separately supplies SDet, K.EnvMF/K.ResetEpoch and other route applicability, completeness, monitor coverage/bounds, response cleanliness, exact certificate binding, and - for a universal RTL claim - QSync evidence sufficient for Core.QSync-Post plus K.CertCov. The reduction is supplied at paper level; Lean mechanization and reusable certificate/checker qualification remain incomplete.
K.EnvMF	Consumed by the serial route. Evidence: StandardEnv/B1-available for multi-frontier components, or certified single-internal-frontier structure for nondefault environments.
K.CV / NB-Align / K.Low	Consumed by the serial route when values, non-blocking choices, sync waits, or lowering affect future operations. Evidence: explicit causal/value determinism and local lowering correspondence.
K.ResetEpoch	Consumed by the Policy-S serial route when dynamic reset may affect a candidate blocked component during the comparison. Evidence: either a reset-free comparison suffix for the relevant component and incident boundaries, or an independently certified mapping from a selected liberal frontier to an already-triggered, non-waived Policy-S response monitor that the matched RESET clears under RW2. If neither branch holds, use another A5-L route.
L.Dir and W1-W5	Consumed by the online snooping harness. Evidence: free-running RTL, ordinal recording/consumption, comparison/watchdog, noninterference, and complete choice-point coverage.
ClockScope - single global clock	Applies to the G-K theorem stack and directly discharges QS1 evidence. The selected theorem instance uses one global synchronous cycle relation; CDCs are excluded from that instance or represented through separately specified/verified crossing components. Appendix O is only an informative multi-clock sketch until a separate semantic layer is supplied.
Core.SyncFence / R3/E5 completion fence	Consumed by source/RTL trace legality and by interval-scoped Pending/Front/KObs reconstruction. Evidence: every blocking q in pref_S(s) has a designated process-facing commit no later than sync s. Same-cycle q/s completion is allowed; on RTL, ordering "before interval advance" is annotation/certificate accounting rather than physical sub-cycle timing.

Premise / evidence	Where it matters and typical discharge
Core.KCutClosure_post / Core.KCutObserve	Consumed by K.1A-Total and universal K.1, separate from K.CertCov. In the standard user-facing scope, Core.KCutClosure_post is a theorem-derived interface: accepted RTL-side Core.QSync evidence invokes Core.QSync-Post, giving a finite same-cycle normalization to a unique PostKCut before the next registered update. K-epsilon plus Core.KCutObserve preserves any persistent relevant request/frontier/enablement configuration into that KCut. The former arbitrary invariant/checked-normalization routes are not independent standard-scope discharges; a non-QSync model needs a separately qualified extension.

11.1 A practical certificate boundary

A useful implementation is a versioned package with a common header that binds every artifact to one theorem instance: source and RTL build IDs, selected Sys_ref/Sys_K, boundaries/capacities/elaboration, observation projection, stimulus/environment/reset model, witness provenance, simulator/scheduler/arbitration identity, QSync structural-evidence and theorem provenance, and checker/schema versions. Separate payloads then carry J safety certificates, CF-0 cutpoint correspondence, and one declared A5-L discharge route. If a QSync property is accepted solely from an unverified producer-tool report, that dependency belongs in the declared trusted base; an independent check of the bound source/RTL artifact remains ordinary per-instance evidence instead.

SIGNOFF RULE: Do not mix witnesses or cutpoints

A J.OfferReach proof for one source state, a J.OfferConf proof for another RTL cycle, and a K.Drain proof for a different witness do not compose. The formal architecture repeatedly requires exact identity of the theorem instance, stimulus, elaboration, witness, H, O, source prefix, RTL prefix, and normalized cutpoints.

12. Common misunderstandings

Misreading	Correct interpretation
“Trace compatible” means cycle accurate.	No. It preserves selected labels, values, ordering, atomicity, channel semantics, and anchors. Independent events may move between cycles.
The source pass transfers by Ref -> Post.	For ordinary safety, the deductive path is Post -> Ref plus J.1-Safe: RTL adds no covered canonical safety behavior absent from Sys_ref. Ref -> Post is restricted to annotated RTL-consistent or witness-selected source prefixes.
Per-process replay certificates already imply a system replay.	No. Shared channel state, snapshots, atomic participants, resets, and field interference can conflict. J.GWR-Comp proves the merge.
The causal-dependency graph is the J induction order.	No. Causal dependency explains information flow and may contain legal atomic cycles. J uses generated construction dependencies plus a foundation-rank proof.
KObs is a normalized execution or full state.	No. It is a typed observation quotient $\langle E, w, H, O \rangle$ sufficient for K-facing reconstruction.

Misreading	Correct interpretation
No-reverse scheduling proves deadlock freedom.	No. It prevents one deadlock-introduction mechanism. Timing overlap, finite capacity, pipeline drain, environment behavior, and serial-shaped source deadlocks require Appendix K.
One clean Policy-S simulation is automatically a proof of A5-S.	No. The primary workflow uses one selected run, but it must be complete and instrumented, with every dynamically relevant blocking class covered by a finite-bound disposition and every monitor resolved. The flow must separately establish SDet, applicability, response coverage, and certificate validity; a nonterminating instance needs invariant/model-checking/lasso or equivalent completeness evidence.
Core.LAdm adds a new pipeline-drain requirement beyond Appendix B.	No. Core.Phase and Core.LAdm are the formal admissibility interface; Core.16/Core.Drain import the already-required Appendix B automatic-flush behavior, exact L2 activation trigger, request persistence, K-epsilon, and finite-capacity facts into the selected Policy-L witness. K.Drain is application evidence, not a redefinition.
The Policy-S reduction is already a certified theorem.	Not as a mechanized and flow-qualified theorem. The scheduling-rules document now supplies explicit paper proofs of the central K.2b/K.2c reduction, including request reachability, serial progress dominance, frozen extension, and reset handling. Lean mechanization, simulator/lowering qualification, reusable certificate validation, and complete package-coverage realization remain outstanding.
Another A5-L route can rescue a serial deadlock.	No. If an admissible Policy-S-shaped Policy-L prefix reaches Dead_K, A5-L is false for the unchanged instance.
Snooping changes the specification to match RTL.	No. It selects one behavior already admitted by the under-specified source latency/epsilon semantics.
A live AND is enough for snooping.	No. The wrapper must record per-ordinal RTL events and retain them until source consumption; otherwise events can be dropped or reordered.
Tool generation automatically discharges the proof obligations.	No. The tool or flow must emit documentation, certificates, static checks, monitors, or formal evidence for each named obligation.
A synthesizable and functionally working design is necessarily within the theorem scope.	No. Hidden timing dependence, ambiguous signal anchors, unsupported shared-memory value flow, unmatched reset disposition, fall-through/bypass behavior, or coupled boundary structure can place a correct implementation outside the selected formal model. Appendix F is the architect-facing applicability screen.
A fall-through FIFO is just an ordinary FIFO with a particular capacity.	No. Same-cycle empty-to-consume or full-to-accept behavior changes the channel transition semantics. The bypass or fall-through path must be represented explicitly in Sys_ref and covered by the boundary/elaboration evidence.
Dynamic reset is covered whenever reset is supported by the design.	No. For safety, source and RTL reset scope, state, requests, in-flight contents, and cross-epoch disposition must correspond. The Policy-S deadlock route additionally requires K.ResetEpoch for the comparison continuation or mapped cancellation branch.

Misreading	Correct interpretation
Failed non-blocking polls are invisible, so they cannot affect safety.	Their failure is not a committed Sigma event, but the outcome or cadence may select later observable control, values, requests, payloads, or endpoints. Such sites require NB-CF, a valid WC/L.Dir witness, isolation, or an explicitly modeled timing-sensitive protocol.
Input FIFO depths in a joined pipeline are independent available slack.	Not when acceptance is coupled through a join, bundle, shared stage, coupler, or epoch gate. The elaborated boundary model and its occupancy/accounting evidence determine the proof-relevant enablement.
K.Resp is an RTL latency guarantee.	No. It is source-side evidence used to discharge A5-L through serial dominance.
Any epsilon-quiescent state is a KCut.	No. Core.KCut additionally requires reachability and a settled explicit-boundary request/enablement fixed point. Source L2 SettlePoints satisfy this by Core.SettleIsKCut; Core.QSync-Ref supplies their existence/uniqueness in the standard scope, while Core.QSync-Post derives the RTL KCut-closure interface.
K.CertCov covers every RTL prefix or every normalization witness.	No. K.CertCov is total over reachable RTL KCuts. For each KCut it may exhibit at least one reachable-prefix/NormPost pair and certified package. Core.KCutClosure_post separately ensures persistent K-relevant behavior reaches that domain; in the standard scope QSync-Post derives that closure interface from structural evidence.
Delta/tau/idle are just three names for epsilon.	No. Delta is same-cycle settling (source $\rightarrow \epsilon$, L2, and the analogous QSync RTL relation); a silent tau-cycle is a real clock cycle that may contain registered progress and is not an epsilon step; a B6 idle tick performs no epsilon work and is only treated as epsilon-stutter by trace matching.
Core.QSync makes the source model deterministic.	No. QSync makes same-cycle settling canonical for fixed registered state, cycle inputs, and explicit drives/choices. WC-sensitive outcomes, Policy-L issue/scheduling latitude, arbitration, and reactive-environment choices may still admit multiple Sys_ref executions.
Core.KCutClosure_post is still an arbitrary per-instance normalization proof in the standard flow.	No. The downstream interface is unchanged, but the standard QSync scope derives it through Core.QSync-Post from audited structural facts. An alternative non-QSync settling semantics requires an explicitly defined and separately qualified theorem extension.
Same-cycle Core.SyncFence requires a physical RTL sub-cycle ordering.	No. The physical E5 requirement is cycle-granular: the predecessor process-facing commit occurs no later than the synchronization commit. The equal-cycle "accounted before interval advance" rule is the proof/certificate attribution convention used to maintain source-interval semantics.

13. Quick-reference index

PURPOSE	Provide a compact map from theorem/definition names to their role in the proof architecture. Engineer takeaway: Use this section as a navigation aid when reading the normative scheduling-rules document.
----------------	--

13.1 Normative Formal Core and Appendix G

Name	Role
Core.RegSeq	Registered next-cycle dependence rule: cycle-t sequential interface outputs derive from registered state/fixed operands; no same-cycle newly returned interface result feeds a dependent sequential output.
Core.Settle / delta-settling	Complete source L2 same-cycle settling relation and its fixed-point endpoint. The L2 frame freezes cycle index, registered state, selected cycle inputs, and stable sequential drives; Definition Core.Settle itself does not prove termination.
Core.QSync / QSync-Ref / QSync-Post	Qualified one-global-clock same-cycle model. QS1-QS5 make settling finite, deterministic, acyclic over explicit state boundaries, and boundary-complete. QSync-Ref supplies source SettlePoint/KCut existence; QSync-Post supplies the unique same-cycle settled RTL KCut for each reachable RTL K-origin and derives Core.KCutClosure_post in the standard scope.
Core.PolicyL / Core.LLegal	Permissive issue policy and exact fixed-instance step legality used by the safety witness and A5-L.
Core.Phase / Core.LAdm	L0-L4 phase boundary plus admissible finite prefixes/complete executions. Core.LAdm consumes Core.Drain and the applicable settle-to-KCut bridge.
Core.PolicyS	Conservative serial-blocking issue policy selecting the primary instrumented liveness run.
Core.ElabProj / Core.WFG / Core.16 / Core.Drain / Core.SettleKBridge	Elaboration projection/accounting, authoritative multi-frontier wait-for graph, L2-triggered freeze/drain rule, liveness continuation qualification, and the bridge from a persisting SettlePoint activation to a later selected drain-closed KCut.
Core.OrdFrontSingleton	Ordinary non-elaborated source intervals have at most one pending blocking frontier item; genuine multi-frontiers require explicit Sys_B^elab partial-order structure.
Core.18c KObs / Appendix C ReturnedAtCycle	KObs is the cutpoint quotient $\langle E, w, H, O \rangle$; ReturnedAtCycle is the process-visible result timestamp and is not a KObs field.
R1-R5 / E1-E5 / causal dependency	Appendix G source scheduling/capacity and post-HLS compatibility contract, including R2C participation and cycle-locked completeness; causal dependency is design-intent information flow, not the J induction order.
Core.KCut / Core.KCutClosure_post / Core.KCutObserve	K-facing settled/quiescent comparison domain; downstream RTL observation-domain interface; and persistent-blocker preservation into that domain. In the standard scope QSync-Post derives KCutClosure_post; K.CertCov remains separate package totality.
Core.SyncFence	Blocking operations in pref_S(s) must process-facing commit no later than synchronization s. Same-cycle completion is allowed; RTL equal-cycle interval accounting is certificate semantics, not sub-cycle timing.

13.2 Appendix I

Name	Role
I.A0	RTL E3 message-issue discipline assumption.
I.ReplayObs	Logical replay checkpoint determined by committed history, stimulus, and witness; excludes raw preparation and current request state.
I.CutpointOfferObs	Operational current-offer slice carrying Pending_P, Front_P, BoundaryReq, attribution, boundary, direction, epoch, and stable Push payload facts.
I.ReplayObs-Congruence	Immediate same-unit replay closure plus paired congruence of the exact selected normalization paths.
I.DR / I.DR'	Deterministic equality of logical replay checkpoints at selected normalized and canonical immediate post-unit cutpoints.
I.DeferredNBHole	Carried unresolved shared non-blocking decision with NoDependentUse.
I.3	Finite process-local preparation script.
I.4	Construction of the J.PCert records.

13.3 Appendix J

Name	Role
J.LocalGWR	Complete local certificate package; no global replay assumption.
J.DepJ / DepComplete / DepRank / DepAcyclic	Generate, complete, rank, and prove well-founded the construction dependencies.
Finite ideals / J.ValidatedConstructionOrder	Down-closed required-order prefixes used by the J induction; tie ordering among commuting units has no semantic significance.
J.RegPhaseNF	Normalize same-Horizon actions to registered L1/L2/L3 phases. It consumes a finite L2-settle existence fact; Core.QSync-Ref supplies it uniformly on the normal compositional route, while a direct J.GWR route may carry per-Horizon evidence.
J.NBDecision	Decide each deferred non-blocking call from the common settled snapshot.
J.UnitExt	Extend one complete Horizon bucket.
J.GWR-Comp	Construct a validated finite-ideal order, reachable J.GWR witness chain, and J.RegPhaseReach from local certificates plus source-side QualifiedSynchronousModel/Core.QSync-Ref on the normal route.
J.1	Top-level observable compatibility theorem: normal Post $\rightarrow$ Ref construction plus a restricted Ref $\rightarrow$ Post existence clause in which RTLConsistentRefPrefix already selects τ_{post}^* and Proposition J.0 performs the conditional composition.
J.0	Compose an already selected compatible pair.

Name	Role
J.TraceCertCov / J.RefProjCover	Safety-side RTL-prefix certificate coverage, and the optional one-complete-source-run observable-prefix coverage condition. J.TraceCertCov is route-sensitive: normal LocalGWR/J.GWR-Comp coverage includes source QSync-Ref; direct J.GWR coverage may instead include equivalent checked per-Horizon settling. Neither implies K.CertCov.
J.1-Safe	Transfer prefix-closed J.HCanon-invariant safety through Post -> Ref under route-sensitive J.TraceCertCov; one-run use additionally requires J.RefProjCover. The corollary does not add an unconditional QSync premise because J.TraceCertCov carries the route-appropriate settling evidence.
J.HCanon / OfferReach / OfferConf / KObsConf	Build the exact equal-KObs cutpoint bridge.
Corollary J.1	Export equal KObs plus the J.KObs-Proc/Chan/Offers/WFG reconstruction facts. It makes no K deadlock, waiver, environment-terminal, or diagnostic conclusion.

13.4 Appendix K

Name	Role
K.Dead / K.DeadW	Named ordinary and waiver-parameterized reachable drain-closed closed internal wait-cycle predicates.
K.0 / K.1a	Frontier reconstruction and channel-disabled characterization from KObs-derived inputs.
K.KObs-Dead / K.KObs-Ext	K-owned factoring and equal-KObs transfer of deadlock, waiver, environment-terminal, and diagnostic predicates; Core.WFG remains the authoritative graph definition.
K.RLAdmReach	Exact source witness is Core.LAdm-admissible: J.RegPhaseReach plus K.DrainReach, including Core.SettleKBridge, discharging Core.Drain for the same selected KCut package.
K.CertifiedCutpoint	Complete package for one reachable RTL KCut plus one recorded reachable-prefix/NormPost pair ending at that KCut.
K.CertCov	Package totality over every reachable RTL KCut: each KCut has at least one recorded prefix/normalization/certified package. It is paired with, but distinct from, Core.KCutClosure_post; in the standard scope QSync-Post derives that closure interface from audited structural evidence.
SDet	Flow qualification fixing one fully specified deterministic Core.PolicyS simulator/run; separate from run completeness and response cleanliness.
A5-L	No admissible Policy-L prefix reaches a source KCut satisfying Dead_K. Drain-closedness is part of Dead_K, not an extra A5-L cutpoint restriction.
K.ResetEpoch	Dynamic-reset applicability split for the Policy-S reduction: reset-free comparison continuation or independently mapped already-triggered monitor cancellation under RW2.
K.RespCov / RespClean / CompleteS	Total finite-bound response evidence over one complete selected instrumented run.

Name	Role
K.2b / K.2c	Paper-level serial-dominance and A5-S -> A5-L reduction. K.2b takes the same source-KCut counterexample domain as A5-L and extracts drain-closedness from Dead_K. Appendix K-P supplies explicit request-reachability, least-missing-transfer, frozen-extension, reset, and composition proofs; Lean mechanization and flow qualification remain pending.
K.1A / K.1A-Total / K.1	One-cutpoint and universal A5-L transfer. The universal result requires both Core.KCutClosure_post (observation-domain existence/persistence) and K.CertCov (certificate totality over that domain).

13.5 Appendix L

Name	Role
L.1	Causal witness selector for epsilon-modeled source choices at generic epsilon-quiescent source choice points. It is intentionally not restricted to Core.KCut, whose additional boundary-evaluation condition is K-specific.
L.2	Conditional coverage/causality/noninterference theorem under which a realizable snoop-selected witness proves WC.
L.3	NB-CF identity witness; no snooping required for irrelevant failed polls.
L.4	Cadence-sensitive polling requires isolation/snoop alignment.
L.Dir	Ordinal-preserving source consumption of a free-running RTL snoop stream; benign cycle skew is allowed, while order/kind/payload divergence means witness non-existence and no theorem-backed guarantee.
L.5	Online harness realization of an existing abstract witness selector, with W1-W5, L.Dir, coverage, and clean failure reporting as separate obligations.
W1-W5	Recorded ordinal observation, source-side commit gating, registered sampling, comparison/watchdog with proved-versus-inconclusive timeout treatment, and separate coverage proof.

13.6 One-sentence architecture summary

SUMMARY: The proof stack in one sentence

Appendix F provides the architect-facing applicability screen; the Normative Formal Core fixes `Sys_ref`, the one-global-clock qualified synchronous cycle model, `Core.RegSeq`, `Core.SyncFence`, `delta/Core.Settle/BoundaryEvalPoint/Core.KCut`, `Core.QSync-Ref/Core.QSync-Post`, explicit-choice `Policy-L/Policy-S` semantics, elaboration projection, `Core.WFG/Core.Drain/Core.SettleKBridge`, the downstream `Core.KCutClosure_post/Core.KCutObserve` interface, `Core.OrdFrontSingleton`, and `KObs`; Appendix G adds the `R1-R5/E1-E5` observable contract, including the blocking-before-sync completion fence and `R2C` participation, with Appendix C defining `ReturnedAtCycle`; Appendix I separates the logical `ReplayObs` checkpoint from operational `CutpointOfferObs/preparation` evidence and proves finite process-local replay/preparation under a fixed witness; Appendix J derives a globally reachable source witness through a validated finite-ideal construction, using source `QSync-Ref` on the normal route or equivalent direct per-Horizon settling evidence, proves `Post -> Ref` safety under route-sensitive `J.TraceCertCov`, makes the restricted `Ref -> Post/J.0` route non-circular, and exports equal `KObs` at matched `KCuts` plus J-owned reconstruction facts; Appendix L conditionally realizes the witness at generic epsilon-quiescent source choice points when latency-sensitive epsilon choices require implementation-aligned selection; and Appendix K applies K-owned deadlock factoring plus `Core.LAdm`, per-`KCut` certification, theorem-derived standard-scope `KCut` closure, `K.CertCov`, fairness/progress/environment, `K.ResetEpoch`, and `A5-L` evidence to exclude persistent K-relevant `Dead_K/Dead_K^W` structures in covered RTL. The one complete instrumented `Policy-S` run is the primary practical `A5-L` artifact; the serial reduction is supplied at paper level, while Lean mechanization and flow/certificate qualification remain incomplete.

Source note: theorem and definition names follow the latest 13 August 2026 scheduling-rules document, including Stage A terminology, the L2 frame, `Core.QSync/Core.QSync-Ref/Core.QSync-Post`, the cycle-level hardware interpretation, the intentional standard-scope settling restriction, and the route-sensitive `J.TraceCertCov` source-settling propagation. This companion intentionally simplifies prose but does not replace the normative statements, side conditions, or proof text. Appendix F of the scheduling-rules document is the architect-facing applicability checklist; this guide explains how those design choices enter the proof architecture.