Study Smart: Focus Only on What's Needed to Pass!

Exam Code | Search

Popular Exams

Microsoft | Cisco® | Amazon | CompTIA | Google

CCSP | SY0-601 | 350-401 | AZ-900 | AZ-104 | 200-301 | CISSP | PMP

Microsoft

SC-100 - Microsoft Cybersecurity Architect
MS-900 - Microsoft 365 Fundamentals
MB-220 - Microsoft Dynamics 365 for Marketing
MB-920 - Microsoft Dynamics 365 Fundamentals Finance and Operations Apps (ERP) (beta)
MB-310 - Microsoft Dynamics 365 Finance Functional Consultant
PL-200 - Microsoft Power Platform Functional Consultant
SC-900 - Microsoft Security, Compliance, and Identity Fundamentals
PL-300 - Microsoft Power BI Data Analyst
AZ-700 - Designing and Implementing Microsoft Azure Networking Solutions
DP-300 - Administering Relational Databases on Microsoft Azure
DP-203 - Data Engineering on Microsoft Azure
AZ-400 - Microsoft Azure DevOps Solutions
MB-910 - Microsoft Dynamics 365 Fundamentals Customer Engagement Apps (CRM)
AZ-305 - Designing Microsoft Azure Infrastructure Solutions
DP-100 - Designing and Implementing a Data Science Solution on Azure (beta)
DP-500 - Designing and Implementing Enterprise-Scale Analytics Solutions Using Microsoft Azure and Microsoft Power BI
AZ-104 - Microsoft Azure Administrator
AZ-500 - Microsoft Azure Security Technologies
DP-420 - Designing and Implementing Cloud-Native Applications Using Microsoft Azure Cosmos DB
AZ-204 - Developing Solutions for Microsoft Azure
MS-721 - Collaboration Communications Systems Engineer
PL-400 - Microsoft Power Platform Developer
DP-600 - Implementing Analytics Solutions Using Microsoft Fabric (beta)
MB-300 - Microsoft Dynamics 365
MB-230 - Microsoft Dynamics 365 Customer Service Functional Consultant
AZ-900 - Microsoft Azure Fundamentals
MD-102 - Endpoint Administrator (beta)
MB-210 - Microsoft Dynamics 365 for Sales
AI-102 - Designing and Implementing a Microsoft Azure AI Solution
DP-900 - Microsoft Azure Data Fundamentals
SC-400 - Microsoft Information Protection Administrator
MS-102 - Microsoft 365 Administrator (beta)
MS-700 - Managing Microsoft Teams
SC-300 - Microsoft Identity and Access Administrator
PL-900 - Microsoft Power Platform Fundamentals
AI-900 - Microsoft Azure AI Fundamentals
MB-800 - Microsoft Dynamics 365 Business Central Functional Consultant
AZ-801 - Configuring Windows Server Hybrid Advanced Services
MB-330 - Microsoft Dynamics 365 Supply Chain Management
PL-100 - Microsoft Power Platform App Maker
MB-700 - Microsoft Dynamics 365
PL-600 - Microsoft Power Platform Solution Architect
PL-500 - Microsoft Power Automate RPA Developer
AZ-800 - Administering Windows Server Hybrid Core Infrastructure
AZ-140 - Configuring and Operating Windows Virtual Desktop on

Amazon

AWS Certified Advanced Networking - Specialty ANS-C01 - AWS Certified Advanced Networking - Specialty ANS-C01
AWS Certified Cloud Practitioner - AWS Certified Cloud Practitioner (CLF-C01)
AWS Certified DevOps Engineer - Professional DOP-C02 - AWS Certified DevOps Engineer - Professional DOP-C02
AWS Certified Machine Learning - Specialty - AWS Certified Machine Learning - Specialty (MLS-C01)
AWS Certified Developer Associate - AWS Certified Developer Associate
AWS Certified Developer - Associate DVA-C02 - AWS Certified Developer - Associate DVA-C02
AWS Certified Solutions Architect - Professional SAP-C02 - AWS Certified Solutions Architect - Professional SAP-C02
AWS Certified Security - Specialty SCS-C02 - AWS Certified Security - Specialty SCS-C02
AWS Certified Solutions Architect - Associate SAA-C03 - AWS Certified Solutions Architect - Associate SAA-C03
AWS Certified SysOps Administrator - Associate - AWS Certified SysOps Administrator - Associate (SOA-C02)
AWS Certified Solutions Architect - Professional - AWS Certified Solutions Architect - Professional
AWS Certified SAP on AWS - Specialty PAS-C01 - AWS Certified SAP on AWS - Specialty PAS-C01
AWS Certified Security - Specialty - AWS Certified Security - Specialty
AWS Certified Data Engineer - Associate DEA-C01 - AWS Certified Data Engineer - Associate DEA-C01
AWS DevOps Engineer Professional - AWS DevOps Engineer - Professional (DOP-C01)
AWS Certified Cloud Practitioner CLF-C02 - AWS Certified Cloud Practitioner CLF-C02
AWS Certified Database - Specialty - AWS Certified Database - Specialty
AWS Certified Data Analytics - Specialty - AWS Certified Data Analytics - Specialty (DAS-C01)

CompTIA

SK0-005 - CompTIA Server+ Certification Exam
CS0-002 - CompTIA CySA+ Certification Exam (CS0-002)
CV0-003 - CompTIA Cloud+
CS0-003 - CompTIA Cybersecurity Analyst (CySA+)
PT0-002 - CompTIA PenTest+ Certification Exam
N10-008 - CompTIA Network+
XK0-005 - CompTIA Linux+
220-1102 - CompTIA A+ Certification Exam
220-1101 - CompTIA A+ Certification Exam
FC0-U61 - CompTIA IT Fundamentals
CAS-004 - CompTIA Advanced Security Practitioner (CASP+) CAS-004
SY0-601 - CompTIA Security+
PK0-005 - CompTIA Project+

VMware

2V0-41.23 - VMware NSX 4.x Professional
3V0-21.21 - Advanced Design VMware vSphere 7.x
2V0-33.22 - VMware Cloud Professional
5V0-22.23 - VMware vSAN Specialist v2
5V0-31.22 - VMware Cloud Foundation Specialist (v2)
2V0-21.20 - Professional VMware vSphere 7.x
2V0-21.23 - VMware vSphere 8.x Professional
1V0-21.20 - Associate VMware Data Center Virtualization

Fortinet

NSE7_EFW-7.0 - NSE 7 - Enterprise Firewall 7.0
NSE7_SDW-7.0 - Fortinet NSE 7 - SD-WAN 7.0
NSE5_FAZ-7.2 - FortiAnalyzer 7.2 Analyst
NSE5_FCT-7.0 - NSE 5 - FortiClient EMS 7.0
NSE5_FMG-7.2 - Fortinet NSE 5 - FortiManager 7.2
NSE4_FGT-7.2 - Fortinet NSE 4 - FortiOS 7.2

Oracle

1z0-082 - Oracle Database Administration I
1z0-808 - Java SE 8 Programmer
1z0-083 - Oracle Database Administration II
1z0-071 - Oracle Datbase 12c SQL
1z0-1072-23 - Oracle Cloud Infrastructure 2023 Architect Associate

Juniper

JN0-104 - Junos, Associate (JNCIA-Junos)
JN0-649 - Enterprise Routing and Switching, Professional (JNCIP-ENT)
JN0-664 - Service Provider Routing and Switching, Professional (JNCIP-SP)
JN0-351 - Enterprise Routing and Switching, Specialist (JNCIS-ENT)
JN0-231 - Security, Associate (JNCIA-SEC)

Splunk®

SPLK-1002 - Splunk Core Certified Power User
SPLK-3001 - Splunk Enterprise Security Certified Admin

Questions List

- Question #1 41
- Question #2 42
- Question #3 43
- Question #4 45
- Question #5 46
- Question #6 47
- Question #7 49
- Question #8 50
- Question #9 52
- Question #10 53
- Question #11 54
- Question #12 56
- Question #13 57
- Question #14 58
- Question #15 61
- Question #16 62
- Question #17 64
- Question #18 65
- Question #19 66
- Question #20 68
- Question #21 70
- Question #22 72
- Question #23 74
- Question #24 77
- Question #25 79
- Question #26 81
- Question #27 82
- Question #28 84

SecExams

- Question #29 85
- Question #30 86
- Question #31 88
- Question #32 90
- Question #33 91
- Question #34 92
- Question #35 93
- Question #36 94
- Question #37 95
- Question #38 97
- Question #39 98
- Question #40 100
- Question #41 102
- Question #42 104
- Question #43 106
- Question #44 108
- Question #45 113
- Question #46 116
- Question #47 118
- Question #48 120
- Question #49 122
- Question #50 123
- Question #51 124
- Question #52 125
- Question #53 126
- Question #54 129
- Question #55 131
- Question #56 132
- Question #57 134
- Question #58 135

SecExams

- Question #59 137
- Question #60 138
- Question #61 140
- Question #62 142
- Question #63 144
- Question #64 148
- Question #65 150
- Question #66 152
- Question #67 154
- Question #68 156
- Question #69 159
- Question #70 160
- Question #71 163
- Question #72 165
- Question #73 167
- Question #74 169
- Question #75 171
- Question #76 172
- Question #77 174
- Question #78 178
- Question #79 180
- Question #80 181
- Question #81 183
- Question #82 185
- Question #83 186
- Question #84 188
- Question #85 190
- Question #86 193
- Question #87 196
- Question #88 198

SecExams

- Question #89 202
- Question #90 203
- Question #91 205
- Question #92 207
- Question #93 209
- Question #94 211
- Question #95 215
- Question #96 216
- Question #97 219
- Question #98 223
- Question #99 225
- Question #100 227
- Question #101 229
- Question #102 231
- Question #103 233
- Question #104 235
- Question #105 237
- Question #106 238
- Question #107 240
- Question #108 243
- Question #109 245
- Question #110 248
- Question #111 251
- Question #112 253
- Question #113 255
- Question #114 257
- Question #115 260
- Question #116 264
- Question #117 266
- Question #118 268

SecExams

- Question #119 270
- Question #120 272
- Question #121 274
- Question #122 275
- Question #123 277
- Question #124 279
- Question #125 281
- Question #126 284
- Question #127 286
- Question #128 288
- Question #129 289
- Question #130 290
- Question #131 292
- Question #132 294
- Question #133 297
- Question #134 300
- Question #135 303
- Question #136 306
- Question #137 308
- Question #138 310
- Question #139 311
- Question #140 312
- Question #141 314
- Question #142 317
- Question #143 318
- Question #144 320
- Question #145 322
- Question #146 324
- Question #147 326
- Question #148 327

SecExams

- Question #149 329
- Question #150 331
- Question #151 332
- Question #152 334
- Question #153 335
- Question #154 336
- Question #155 338
- Question #156 341
- Question #157 343
- Question #158 346
- Question #159 350
- Question #160 352
- Question #161 354
- Question #162 357
- Question #163 358
- Question #164 360
- Question #165 362
- Question #166 363
- Question #167 365
- Question #168 366
- Question #169 367
- Question #170 369
- Question #171 371
- Question #172 373
- Question #173 375
- Question #174 378
- Question #175 382
- Question #176 383
- Question #177 385
- Question #178 388

SecExams

- Question #179 389
- Question #180 391
- Question #181 393
- Question #182 394
- Question #183 397
- Question #184 401
- Question #185 402
- Question #186 404
- Question #187 406
- Question #188 409
- Question #189 413
- Question #190 415
- Question #191 417
- Question #192 418
- Question #193 420
- Question #194 421
- Question #195 423
- Question #196 424
- Question #197 425
- Question #198 427
- Question #199 429
- Question #200 430
- Question #201 431
- Question #202 433
- Question #203 435
- Question #204 437
- Question #205 438
- Question #206 440
- Question #207 442
- Question #208 444

SecExams

- Question #209 446
- Question #210 448
- Question #211 450
- Question #212 454
- Question #213 456
- Question #214 460
- Question #215 462
- Question #216 466
- Question #217 467
- Question #218 469
- Question #219 471
- Question #220 477
- Question #221 479
- Question #222 481
- Question #223 485
- Question #224 490
- Question #225 493
- Question #226 494
- Question #227 496
- Question #228 498
- Question #229 500
- Question #230 502
- Question #231 504
- Question #232 506
- Question #233 510
- Question #234 512
- Question #235 514
- Question #236 515
- Question #237 516
- Question #238 517

SecExams

- Question #239 519
- Question #240 520
- Question #241 521
- Question #242 525
- Question #243 527
- Question #244 532
- Question #245 537
- Question #246 539
- Question #247 541
- Question #248 543
- Question #249 544
- Question #250 546
- Question #251 548
- Question #252 550
- Question #253 552
- Question #254 554
- Question #255 556
- Question #256 557
- Question #257 559
- Question #258 561
- Question #259 563
- Question #260 568
- Question #261 572
- Question #262 573
- Question #263 575
- Question #264 577
- Question #265 579
- Question #266 582
- Question #267 584
- Question #268 586

SecExams

- Question #269 591
- Question #270 592
- Question #271 594
- Question #272 596
- Question #273 597
- Question #274 598
- Question #275 600
- Question #276 604
- Question #277 606
- Question #278 607
- Question #279 612
- Question #280 618
- Question #281 621
- Question #282 623
- Question #283 627
- Question #284 629
- Question #285 633
- Question #286 634
- Question #287 635
- Question #288 636
- Question #289 636
- Question #290 637
- Question #291 638
- Question #292 639
- Question #293 640
- Question #294 641
- Question #295 642
- Question #296 643
- Question #297 644
- Question #298 645

SecExams

- Question #299 647
- Question #300 647
- Question #301 648
- Question #302 649
- Question #303 650
- Question #304 651
- Question #305 653
- Question #306 654
- Question #307 655
- Question #308 657
- Question #309 658
- Question #310 659
- Question #311 660
- Question #312 661
- Question #313 661
- Question #314 662
- Question #315 663
- Question #316 664
- Question #317 664
- Question #318 665
- Question #319 666
- Question #320 666
- Question #321 667
- Question #322 668
- Question #323 669
- Question #324 670
- Question #325 671
- Question #326 672
- Question #327 673
- Question #328 675

SecExams

- Question #329 679
- Question #330 681
- Question #331 682
- Question #332 684
- Question #333 685
- Question #334 686
- Question #335 687
- Question #336 687
- Question #337 688
- Question #338 690
- Question #339 692
- Question #340 693
- Question #341 694
- Question #342 695
- Question #343 696
- Question #344 697
- Question #345 698
- Question #346 700
- Question #347 701
- Question #348 705
- Question #349 706
- Question #350 708
- Question #351 709
- Question #352 710
- Question #353 713
- Question #354 714
- Question #355 716
- Question #356 718
- Question #357 720
- Question #358 721

SecExams

- Question #359 722
- Question #360 722
- Question #361 724
- Question #362 727
- Question #363 728
- Question #364 729
- Question #365 730
- Question #366 731
- Question #367 732
- Question #368 734
- Question #369 736
- Question #370 738
- Question #371 741
- Question #372 742
- Question #373 745
- Question #374 745
- Question #375 746
- Question #376 747
- Question #377 748
- Question #378 750
- Question #379 753
- Question #380 754
- Question #381 756
- Question #382 760
- Question #383 761
- Question #384 762
- Question #385 763
- Question #386 765
- Question #387 766
- Question #388 767

SecExams

- Question #389 769
- Question #390 770
- Question #391 772
- Question #392 773
- Question #393 775
- Question #394 778
- Question #395 780
- Question #396 782
- Question #397 784
- Question #398 786
- Question #399 788
- Question #400 791
- Question #401 793
- Question #402 794
- Question #403 796
- Question #404 798
- Question #405 799
- Question #406 800
- Question #407 802
- Question #408 804
- Question #409 805
- Question #410 808
- Question #411 809
- Question #412 810
- Question #413 811
- Question #414 812
- Question #415 813
- Question #416 815
- Question #417 817
- Question #418 819

SecExams

- Question #419 821
- Question #420 824
- Question #421 824
- Question #422 825
- Question #423 826
- Question #424 827
- Question #425 828
- Question #426 831
- Question #427 831
- Question #428 833
- Question #429 834
- Question #430 835
- Question #431 836
- Question #432 837
- Question #433 838
- Question #434 839
- Question #435 840
- Question #436 841
- Question #437 842
- Question #438 843
- Question #439 844
- Question #440 847
- Question #441 848
- Question #442 850
- Question #443 853
- Question #444 854
- Question #445 855
- Question #446 857
- Question #447 858
- Question #448 859

SecExams

- Question #449 860
- Question #450 861
- Question #451 862
- Question #452 863
- Question #453 863
- Question #454 865
- Question #455 866
- Question #456 867
- Question #457 869
- Question #458 871
- Question #459 874
- Question #460 875
- Question #461 876
- Question #462 879
- Question #463 880
- Question #464 881
- Question #465 882
- Question #466 883
- Question #467 884
- Question #468 887
- Question #469 888
- Question #470 889
- Question #471 890
- Question #472 892
- Question #473 895
- Question #474 897
- Question #475 898
- Question #476 899
- Question #477 900
- Question #478 901

SecExams

- Question #479 902
- Question #480 903
- Question #481 904
- Question #482 905
- Question #483 906
- Question #484 907
- Question #485 908
- Question #486 908
- Question #487 910
- Question #488 912
- Question #489 916
- Question #490 919
- Question #491 920
- Question #492 921
- Question #493 923
- Question #494 925
- Question #495 928
- Question #496 930
- Question #497 932
- Question #498 934
- Question #499 935
- Question #500 937
- Question #501 939
- Question #502 941
- Question #503 942
- Question #504 943
- Question #505 944
- Question #506 946
- Question #507 948
- Question #508 950

SecExams

- Question #509 951
- Question #510 953
- Question #511 957
- Question #512 961
- Question #513 962
- Question #514 963
- Question #515 963
- Question #516 965
- Question #517 966
- Question #518 968
- Question #519 969
- Question #520 970
- Question #521 972
- Question #522 973
- Question #523 974
- Question #524 976
- Question #525 978
- Question #526 979
- Question #527 981
- Question #528 983
- Question #529 985
- Question #530 986
- Question #531 988
- Question #532 989
- Question #533 991
- Question #534 992
- Question #535 995
- Question #536 997
- Question #537 1000
- Question #538 1002

SecExams

- Question #539 1003
- Question #540 1005
- Question #541 1009
- Question #542 1012
- Question #543 1014
- Question #544 1016
- Question #545 1017
- Question #546 1019
- Question #547 1021
- Question #548 1023
- Question #549 1024
- Question #550 1026
- Question #551 1028
- Question #552 1030
- Question #553 1033
- Question #554 1034
- Question #555 1036
- Question #556 1037
- Question #557 1039
- Question #558 1040
- Question #559 1041
- Question #560 1043
- Question #561 1047
- Question #562 1050
- Question #563 1051
- Question #564 1052
- Question #565 1055
- Question #566 1057
- Question #567 1060
- Question #568 1061

SecExams

- Question #569 1062
- Question #570 1064
- Question #571 1066
- Question #572 1067
- Question #573 1068
- Question #574 1070
- Question #575 1072
- Question #576 1074
- Question #577 1076
- Question #578 1078
- Question #579 1080
- Question #580 1082
- Question #581 1086
- Question #582 1089
- Question #583 1091
- Question #584 1092
- Question #585 1093
- Question #586 1094
- Question #587 1095
- Question #588 1096
- Question #589 1097
- Question #590 1099
- Question #591 1102
- Question #592 1104
- Question #593 1107
- Question #594 1109
- Question #595 1111
- Question #596 1113
- Question #597 1115
- Question #598 1116

SecExams

- Question #599 1118
- Question #600 1119
- Question #601 1124
- Question #602 1128
- Question #603 1131
- Question #604 1133
- Question #605 1137
- Question #606 1140
- Question #607 1142
- Question #608 1143
- Question #609 1145
- Question #610 1146
- Question #611 1147
- Question #612 1149
- Question #613 1150
- Question #614 1152
- Question #615 1153
- Question #616 1156
- Question #617 1161
- Question #618 1166
- Question #619 1167
- Question #620 1169
- Question #621 1170
- Question #622 1172
- Question #623 1173
- Question #624 1175
- Question #625 1177
- Question #626 1180
- Question #627 1184
- Question #628 1189

SecExams

- Question #629 1191
- Question #630 1193
- Question #631 1195
- Question #632 1196
- Question #633 1198
- Question #634 1200
- Question #635 1203
- Question #636 1205
- Question #637 1209
- Question #638 1212
- Question #639 1215
- Question #640 1217
- Question #641 1219
- Question #642 1220
- Question #643 1222
- Question #644 1223
- Question #645 1225
- Question #646 1226
- Question #647 1227
- Question #648 1229
- Question #649 1232
- Question #650 1234
- Question #651 1235
- Question #652 1237
- Question #653 1239
- Question #654 1242
- Question #655 1244
- Question #656 1246
- Question #657 1248
- Question #658 1250

SecExams

- Question #659 1252
- Question #660 1253
- Question #661 1255
- Question #662 1256
- Question #663 1257
- Question #664 1258
- Question #665 1260
- Question #666 1261
- Question #667 1262
- Question #668 1263
- Question #669 1265
- Question #670 1266
- Question #671 1268
- Question #672 1270
- Question #673 1273
- Question #674 1276
- Question #675 1276
- Question #676 1278
- Question #677 1280
- Question #678 1282
- Question #679 1283
- Question #680 1285
- Question #681 1289
- Question #682 1293
- Question #683 1296
- Question #684 1300
- Question #685 1304
- Question #686 1309
- Question #687 1310
- Question #688 1311

SecExams

- Question #689 1312
- Question #690 1314
- Question #691 1315
- Question #692 1317
- Question #693 1319
- Question #694 1321
- Question #695 1322
- Question #696 1324
- Question #697 1326
- Question #698 1328
- Question #699 1329
- Question #700 1331
- Question #701 1334
- Question #702 1338
- Question #703 1339
- Question #704 1341
- Question #705 1342
- Question #706 1344
- Question #707 1349
- Question #708 1353
- Question #709 1355
- Question #710 1356
- Question #711 1357
- Question #712 1358
- Question #713 1359
- Question #714 1360
- Question #715 1360
- Question #716 1362
- Question #717 1364
- Question #718 1366

SecExams

- Question #719 1367
- Question #720 1370
- Question #721 1372
- Question #722 1374
- Question #723 1375
- Question #724 1376
- Question #725 1377
- Question #726 1379
- Question #727 1383
- Question #728 1385
- Question #729 1387
- Question #730 1389
- Question #731 1391
- Question #732 1393
- Question #733 1396
- Question #734 1399
- Question #735 1402
- Question #736 1403
- Question #737 1404
- Question #738 1406
- Question #739 1407
- Question #740 1408
- Question #741 1409
- Question #742 1410
- Question #743 1411
- Question #744 1413
- Question #745 1414
- Question #746 1417
- Question #747 1419
- Question #748 1421

SecExams

- Question #749 1422
- Question #750 1427
- Question #751 1431
- Question #752 1434
- Question #753 1436
- Question #754 1437
- Question #755 1439
- Question #756 1444
- Question #757 1448
- Question #758 1449
- Question #759 1451
- Question #760 1453
- Question #761 1455
- Question #762 1458
- Question #763 1460
- Question #764 1462
- Question #765 1463
- Question #766 1464
- Question #767 1466
- Question #768 1470
- Question #769 1473
- Question #770 1477
- Question #771 1480
- Question #772 1482
- Question #773 1483
- Question #774 1485
- Question #775 1485
- Question #776 1487
- Question #777 1488
- Question #778 1489

SecExams

- Question #779 1490
- Question #780 1491
- Question #781 1492
- Question #782 1495
- Question #783 1497
- Question #784 1498
- Question #785 1500
- Question #786 1503
- Question #787 1505
- Question #788 1508
- Question #789 1511
- Question #790 1515
- Question #791 1518
- Question #792 1522
- Question #793 1524
- Question #794 1526
- Question #795 1527
- Question #796 1531
- Question #797 1533
- Question #798 1534
- Question #799 1535
- Question #800 1536
- Question #801 1537
- Question #802 1539
- Question #803 1539
- Question #804 1540
- Question #805 1541
- Question #806 1542
- Question #807 1543
- Question #808 1550

SecExams

- Question #809 1557
- Question #810 1562
- Question #811 1566
- Question #812 1573
- Question #813 1580
- Question #814 1585
- Question #815 1590
- Question #816 1596
- Question #817 1602
- Question #818 1608
- Question #819 1613
- Question #820 1618
- Question #821 1622
- Question #822 1626
- Question #823 1631
- Question #824 1636
- Question #825 1641
- Question #826 1647
- Question #827 1654
- Question #828 1660
- Question #829 1666
- Question #830 1671
- Question #831 1677
- Question #832 1682
- Question #833 1687
- Question #834 1691
- Question #835 1696
- Question #836 1702
- Question #837 1709
- Question #838 1715

SecExams

- Question #839 1721
- Question #840 1725
- Question #841 1730
- Question #842 1736
- Question #843 1743
- Question #844 1748
- Question #845 1754
- Question #846 1759
- Question #847 1764
- Question #848 1769
- Question #849 1773
- Question #850 1773
- Question #851 1774
- Question #852 1776
- Question #853 1778
- Question #854 1779
- Question #855 1780
- Question #856 1782
- Question #857 1786
- Question #858 1788
- Question #859 1791
- Question #860 1793
- Question #861 1796
- Question #862 1797
- Question #863 1798
- Question #864 1799
- Question #865 1807
- Question #866 1808
- Question #867 1813
- Question #868 1817

SecExams

- Question #869 1819
- Question #870 1820
- Question #871 1824
- Question #872 1826
- Question #873 1828
- Question #874 1830
- Question #875 1832
- Question #876 1837
- Question #877 1841
- Question #878 1842
- Question #879 1844
- Question #880 1845
- Question #881 1846
- Question #882 1847
- Question #883 1848
- Question #884 1849
- Question #885 1850
- Question #886 1852
- Question #887 1855
- Question #888 1858
- Question #889 1859
- Question #890 1860
- Question #891 1862
- Question #892 1864
- Question #893 1865
- Question #894 1867
- Question #895 1871
- Question #896 1875
- Question #897 1876
- Question #898 1877

SecExams

- Question #899 1878
- Question #900 1879
- Question #901 1880
- Question #902 1881
- Question #903 1883
- Question #904 1884
- Question #905 1889
- Question #906 1892
- Question #907 1894
- Question #908 1896
- Question #909 1897
- Question #910 1898
- Question #911 1898
- Question #912 1900
- Question #913 1901
- Question #914 1904
- Question #915 1906
- Question #916 1907
- Question #917 1908
- Question #918 1909
- Question #919 1912
- Question #920 1916
- Question #921 1918
- Question #922 1919
- Question #923 1920
- Question #924 1922
- Question #925 1923
- Question #926 1924
- Question #927 1925
- Question #928 1926

SecExams

- Question #929 1928
- Question #930 1929
- Question #931 1930
- Question #932 1931
- Question #933 1932
- Question #934 1933
- Question #935 1935
- Question #936 1936
- Question #937 1937
- Question #938 1938
- Question #939 1939
- Question #940 1941
- Question #941 1942
- Question #942 1943
- Question #943 1944
- Question #944 1945
- Question #945 1946
- Question #946 1950
- Question #947 1951
- Question #948 1952
- Question #949 1953
- Question #950 1954
- Question #951 1955
- Question #952 1956
- Question #953 1957
- Question #954 1958
- Question #955 1959
- Question #956 1960
- Question #957 1961
- Question #958 1962

SecExams

- Question #959 1963
- Question #960 1964
- Question #961 1964
- Question #962 1965
- Question #963 1966
- Question #964 1967
- Question #965 1970
- Question #966 1972
- Question #967 1974
- Question #968 1975
- Question #969 1976
- Question #970 1980
- Question #971 1984
- Question #972 1986
- Question #973 1988
- Question #974 1990
- Question #975 1991
- Question #976 1992
- Question #977 1993
- Question #978 1994
- Question #979 1995
- Question #980 1996
- Question #981 1997
- Question #982 1999
- Question #983 2002
- Question #984 2006
- Question #985 2008
- Question #986 2009
- Question #987 2010
- Question #988 2010

SecExams

- Question #989 2012
- Question #990 2015
- Question #991 2017
- Question #992 2018
- Question #993 2019
- Question #994 2020
- Question #995 2021
- Question #996 2022
- Question #997 2023
- Question #998 2024
- Question #999 2025
- Question #1000 2025
- Question #1001 2027
- Question #1002 2030
- Question #1003 2033
- Question #1004 2035
- Question #1005 2036
- Question #1006 2037
- Question #1007 2038
- Question #1008 2039
- Question #1009 2041
- Question #1010 2042
- Question #1011 2043
- Question #1012 2044
- Question #1013 2045
- Question #1014 2047
- Question #1015 2051
- Question #1016 2054
- Question #1017 2055
- Question #1018 2056

SecExams

- Question #1019 2057
- Question #1020 2058
- Question #1021 2059
- Question #1022 2061
- Question #1023 2066
- Question #1024 2070
- Question #1025 2071
- Question #1026 2073
- Question #1027 2077
- Question #1028 2080
- Question #1029 2084
- Question #1030 2087
- Question #1031 2091
- Question #1032 2094
- Question #1033 2095
- Question #1034 2097
- Question #1035 2101
- Question #1036 2105
- Question #1037 2107
- Question #1038 2110
- Question #1039 2114
- Question #1040 2119
- Question #1041 2122
- Question #1042 2125
- Question #1043 2126
- Question #1044 2127
- Question #1045 2129
- Question #1046 2132
- Question #1047 2136
- Question #1048 2138

SecExams

- Question #1049 2139
- Question #1050 2141
- Question #1051 2143
- Question #1052 2144
- Question #1053 2146
- Question #1054 2150
- Question #1055 2155
- Question #1056 2158
- Question #1057 2161
- Question #1058 2162
- Question #1059 2164
- Question #1060 2167
- Question #1061 2170
- Question #1062 2171
- Question #1063 2173
- Question #1064 2174
- Question #1065 2178
- Question #1066 2179
- Question #1067 2180
- Question #1068 2181
- Question #1069 2182
- Question #1070 2183
- Question #1071 2184
- Question #1072 2185
- Question #1073 2186
- Question #1074 2187
- Question #1075 2188
- Question #1076 2190
- Question #1077 2191
- Question #1078 2192

SecExams

- Question #1079 2193
- Question #1080 2194
- Question #1081 2195
- Question #1082 2196
- Question #1083 2197
- Question #1084 2201
- Question #1085 2202
- Question #1086 2203
- Question #1087 2208
- Question #1088 2210
- Question #1089 2212
- Question #1090 2213
- Question #1091 2214
- Question #1092 2215
- Question #1093 2217
- Question #1094 2222
- Question #1095 2226
- Question #1096 2227
- Question #1097 2228
- Question #1098 2229
- Question #1099 2231
- Question #1100 2235
- Question #1101 2238
- Question #1102 2243
- Question #1103 2246
- Question #1104 2248
- Question #1105 2249
- Question #1106 2250
- Question #1107 2251
- Question #1108 2254

SecExams

- Question #1109 2256
- Question #1110 2260
- Question #1111 2263
- Question #1112 2267
- Question #1113 2268
- Question #1114 2269
- Question #1115 2270
- Question #1116 2271
- Question #1117 2272
- Question #1118 2273
- Question #1119 2274
- Question #1120 2275
- Question #1121 2276
- Question #1122 2278
- Question #1123 2280
- Question #1124 2281
- Question #1125 2282
- Question #1126 2283
- Question #1127 2286
- Question #1128 2287
- Question #1129 2288
- Question #1130 2289
- Question #1131 2289
- Question #1132 2291
- Question #1133 2292
- Question #1134 2293
- Question #1135 2294
- Question #1136 2297
- Question #1137 2298
- Question #1138 2299

SecExams

- Question #1139 2300
- Question #1140 2304
- Question #1141 2305
- Question #1142 2306
- Question #1143 2307
- Question #1144 2310
- Question #1145 2311
- Question #1146 2312
- Question #1147 2313
- Question #1148 2314
- Question #1149 2315
- Question #1150 2316
- Question #1151 2317
- Question #1152 2318
- Question #1153 2319

SecExams

Microsoft - AZ-104 Practice Questions - SecExams.com

SecExams - Focus Only on What's Needed to Pass! - [secexams.com]

Question #1

Your company has serval departments. Each department has a number of virtual machines (VMs).
The company has an Azure subscription that contains a resource group named RG1.
All VMs are located in RG1.
You want to associate each VM with its respective department.
What should you do?

A) Create Azure Management Groups for each department.
B) Create a resource group for each department.
C) Assign tags to the virtual machines. (Correct Answer)
D) Modify the settings of the virtual machines.

Explanation

Correct Answer:
C
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-using-tags

Community Discussion

I took the exam on 12/22/2021 with 959 points, so I can confirm this dump is valid. 95% of the questions were from here. Your should just check the comments and not blindly accept the main soulution given below the questions.

C is correct, the tags ASSOCIATE the vms to each deparment, then for example it can be charged to each department.

He means 12 July. The whole world doesn't use MM/DD/YYYY format. That's mostly North America.

He means 12 July. The whole world doesn't use MM/DD/YYYY format. That's mostly North America.

He means 12 July. The whole world doesn't use MM/DD/YYYY format. That's mostly North America.

SecExams

Question #2

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) subscription.
You want to implement an Azure AD conditional access policy.
The policy must be configured to require members of the Global Administrators group to use Multi-Factor Authentication and an Azure AD-joined device when they connect to Azure AD from untrusted locations.
Solution: You access the multi-factor authentication page to alter the user settings.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B

Community Discussion

B is correct, 1- the best way to enforce MFA is by Conditional Access 2- the device has to be identified by azure AD as A AD joined Device. 3- the trusted ip must be configured.

Answer is correct secexams.com

Today I achieved splendid success in the Microsoft AZ-104 exam and it happened just because of pass4surexams.com The PDF format and study material assured me that I was on the right track. Thanks a bunch!!!

B is correct. You access the Azure portal to alter the grant control of the Azure AD conditional access policy.

B is correct. You access the Azure portal to alter the grant control of the Azure AD conditional access policy.

SecExams

Question #3

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) subscription.
You want to implement an Azure AD conditional access policy.
The policy must be configured to require members of the Global Administrators group to use Multi-Factor Authentication and an Azure AD-joined device when they connect to Azure AD from untrusted locations.
Solution: You access the Azure portal to alter the session control of the Azure AD conditional access policy.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B

Community Discussion

Ans: No. You alter the grant control, not session control

Answer is correct secexams.com

Under Access controls > Grant, select Grant access, Require multi-factor authentication, and select Select. https://docs.microsoft.com/en-us/azure/active-directory/conditional-access/howto-conditional-access-policy-all-users-mfa

Under Access controls > Grant, select Grant access, Require multi-factor authentication, and select Select. https://docs.microsoft.com/en-us/azure/active-directory/conditional-access/howto-conditional-access-policy-all-users-mfa

B is correct. You access the Azure portal to alter the grant control of the Azure AD conditional access policy.

SecExams

Question #4

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) subscription.
You want to implement an Azure AD conditional access policy.
The policy must be configured to require members of the Global Administrators group to use Multi-Factor Authentication and an Azure AD-joined device when they connect to Azure AD from untrusted locations.
Solution: You access the Azure portal to alter the grant control of the Azure AD conditional access policy.
Does the solution meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A

Community Discussion

Answer is A. There is another copy of this question that mentions going to the MFA page in Azure Portal as the solution = incorrect. On that page you cant make a Conditional Access Policy. I did this in lab step by step: - The Answer "A" is correct - Instead of the MFA page mentioned above, you have to go the route of Conditional Access Policy-->Grant Control mentioned here for this question. Under Grant Control you are given the option of setting MFA and requiring AD joined devices in the exact same window. Answer is correct.

https://docs.microsoft.com/en-us/azure/active-directory/conditional-access/concept-conditional-access-grant

I passed 104 last night with a 736. The open book feature was surprisingly already implemented. I got a lot of questions from here: https://shorturl.at/huEJN

A is correct.

A is correct.

Question #5

You are planning to deploy an Ubuntu Server virtual machine to your company's Azure subscription.
You are required to implement a custom deployment that includes adding a particular trusted root certification authority (CA).
Which of the following should you use to create the virtual machine?

A) The New-AzureRmVm cmdlet.
B) The New-AzVM cmdlet.
C) The Create-AzVM cmdlet. (Correct Answer)
D) The az vm create command.

Explanation

Correct Answer:
C
Once Cloud-init.txt has been created, you can deploy the VM with az vm create cmdlet, using the --custom-data parameter to provide the full path to the cloud- init.txt file.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/linux/tutorial-automate-vm-deployment

Community Discussion

It specifically mentions clout-init.txt. This link https://docs.microsoft.com/en-us/azure/virtual-machines/linux/using-cloud-init Seems to indicate that answer D is correct. Use Az VM create.

Selected Answer: D

The az vm create command. you need to create an Ubuntu Linux VM using a cloud-init script for configuration. For example, az vm create -g MyResourceGroup -n MyVm --image debian --custom-data MyCloudInitScript.yml https://docs.microsoft.com/en-us/cli/

azure/vm?view=azure-cli-latest https://cloudinit.readthedocs.io/en/latest/topics/examples.html

Answer is correct secexams.com

I passed 104 last night with a 736. The open book feature was surprisingly already implemented. I got a lot of questions from here: https://shorturl.at/huEJN

Selected Answer: D

The alternative B is definitely another viable option. It may be a bit harder but it's definitely doable with it. I guess what makes option D the correct one, according to Microsoft, would be the possibility of running the command directly from a bash shell - that is, not having to install powershell or having to use a windows machine to run the powershell cmdlets. Alternative A is wrong because AzureRM is deprecated (the command exists, at least). Alternative C represents a cmdlet that doesn't even exist.

SecExams

Question #6

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company makes use of Multi-Factor Authentication for when users are not in the office. The Per Authentication option has been configured as the usage model.
After the acquisition of a smaller business and the addition of the new staff to Azure Active Directory (Azure AD) obtains a different company and adding the new employees to Azure Active Directory (Azure AD), you are informed that these employees should also make use of Multi-Factor Authentication.
To achieve this, the Per Enabled User setting must be set for the usage model.
Solution: You reconfigure the existing usage model via the Azure portal.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:

B
Since it is not possible to change the usage model of an existing provider as it is right now, you have to create a new one and reactivate your existing server with activation credentials from the new provider.
Reference:
https://365lab.net/2015/04/11/switch-usage-model-in-azure-multi-factor-authentication-server/

Community Discussion

Is it me or the grammar / text of the whole question is very poor?

When S_Steve said answer is correct, it means the Answer is No.

When S_Steve said answer is correct, it means the Answer is No.

When S_Steve said answer is correct, it means the Answer is No.

When S_Steve said answer is correct, it means the Answer is No.

SecExams

Question #7

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company's Azure solution makes use of Multi-Factor Authentication for when users are not in the office. The Per Authentication option has been configured as the usage model.
After the acquisition of a smaller business and the addition of the new staff to Azure Active Directory (Azure AD) obtains a different company and adding the new employees to Azure Active Directory (Azure AD), you are informed that these employees should also make use of Multi-Factor Authentication.
To achieve this, the Per Enabled User setting must be set for the usage model.
Solution: You reconfigure the existing usage model via the Azure CLI.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Since it is not possible to change the usage model of an existing provider as it is right now, you have to create a new one and reactivate your existing server with activation credentials from the new provider.
Reference:
https://365lab.net/2015/04/11/switch-usage-model-in-azure-multi-factor-authentication-server/

Community Discussion

ANSWER: B - No You cannot change the usage model after creating the provider.

Selected Answer: B

Aaaaaah! Same question, same answer! :^) "You can't change the usage model (per enabled user or per authentication) after an MFA provider is created." from https://

learn.microsoft.com/en-us/azure/active-directory/authentication/concept-mfa-authprovider

Option B is correct

https://learn.microsoft.com/en-us/azure/active-directory/authentication/concept-mfa-authprovider You can't change the usage model (per enabled user or per authentication) after an MFA provider is created.

B is correct. You create a new Multi-Factor Authentication provider with a backup from the existing Multi-Factor Authentication provider data. You cannot change the usage model (per enabled user or per authentication) after an MFA provider is created.

Question #8

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company's Azure solution makes use of Multi-Factor Authentication for when users are not in the office. The Per Authentication option has been configured as the usage model.
After the acquisition of a smaller business and the addition of the new staff to Azure Active Directory (Azure AD) obtains a different company and adding the new employees to Azure Active Directory (Azure AD), you are informed that these employees should also make use of Multi-Factor Authentication.
To achieve this, the Per Enabled User setting must be set for the usage model.
Solution: You create a new Multi-Factor Authentication provider with a backup from the existing Multi-Factor Authentication provider data.
Does the solution meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Since it is not possible to change the usage model of an existing provider as it is right

now, you have to create a new one and reactivate your existing server with activation credentials from the new provider.
Reference:
https://365lab.net/2015/04/11/switch-usage-model-in-azure-multi-factor-authentication-server/

Community Discussion

For me this question is outdated and won`t show up on exam but if it showed up it would be B (No), here is why: Effective September 1st, 2018 new auth providers may no longer be created. Existing auth providers may continue to be used and updated, but migration is no longer possible. Multi-factor authentication will continue to be available as a feature in Azure AD Premium licenses. https://docs.microsoft.com/en-us/azure/active-directory/authentication/concept-mfa-authprovider

Yes Is correct as explained with the given link: https://365lab.net/2015/04/11/switch-usage-model-in-azure-multi-factor-authentication-server/

This link says "you have to create a new one and reactivate your existing server with activation credentials from the new provider". which contradicts your answer. Please remove this link.

This link says "you have to create a new one and reactivate your existing server with activation credentials from the new provider". which contradicts your answer. Please remove this link.

I just passed AZ-104 today! Dumps helped me prepare, but tough luck. For many people here I see commenting that 80-90% were from dumps but for me today, only 10-15% were common questions. Anyways, these dumps are very helpful to give you a multiple starting points to various concepts. Go through these dumps, go through the comments in questions for all questions or for the ones you are unsure about or those who have mixed voting figures. Do your own research and lab test if you want and reach to the conclusion. Fun way to learn.

SecExams

Question #9

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) tenant named weyland.com that is configured for hybrid coexistence with the on-premises Active
Directory domain.
You have a server named DirSync1 that is configured as a DirSync server.
You create a new user account in the on-premise Active Directory. You now need to replicate the user information to Azure AD immediately.
Solution: You run the Start-ADSyncSyncCycle -PolicyType Initial PowerShell cmdlet.
Does the solution meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Reference:
https://blog.kloud.com.au/2016/03/08/azure-ad-connect-manual-sync-cycle-with-powershell-start-adsyncsynccycle/

Community Discussion

Answer is B (No) Initial will perform a full sync and add the user account created but it will take time, Delta, will kick off a delta sync and bring only the last change, so it will be "immediately" and will fulfill the requirements.

Yes, this technically works, but as per the question, you want the change to be immediate. If the Initial was run against a large directory, that could take some time. Instead, run a Delta to just capture the change made and sync it immediately: Start-ADSyncSyncCycle -PolicyType Delta. Thus answer is B, NO.

Yes, this technically works, but as per the question, you want the change to be immediate. If the Initial was run against a large directory, that could take some time. Instead, run a Delta to just capture the change made and sync it immediately: Start-ADSyncSyncCycle -PolicyType Delta. Thus answer is B, NO.

Answer is A YES delta:synchronize changes since last full synchronization Start-ADSyncSyncCycle -policy initial PS C:\Users\Administrator> Start-ADSyncSyncCycle Result ------ Success https://geekdudes.wordpress.com/2018/06/05/office-365-configuring-ad-synchronization/

Immediate in this case can just mean that you don't need to wait of scheduled Sync, so to run the Initial sync should work also

Question #10

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) tenant named weyland.com that is configured for hybrid coexistence with the on-premises Active
Directory domain.
You have a server named DirSync1 that is configured as a DirSync server.
You create a new user account in the on-premise Active Directory. You now need to replicate the user information to Azure AD immediately.
Solution: You use Active Directory Sites and Services to force replication of the Global Catalog on a domain controller.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B

Community Discussion

Ans: NO On a server with Azure AD Connect installed, navigate to the Start menu and select AD Connect, then Synchronization Service. 1. Go to CONNECTORS tab. 2. Select RUN on the ACTIONS pane.

Or, you could run Start-ADSyncSyncCycle -PolicyType Delta

Or, you could run Start-ADSyncSyncCycle -PolicyType Delta

Selected Answer: B

Like described already by other people the best way is either a Synchronization being executed through the "Azure AD Connect", in the Portal or using the command "Start-ADSyncSyncCycle -PolicyType Delta".

Initial is also immediate. Only process time takes longer. The question didn't ask for fastest sync.

SecExams

Question #11

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) tenant named weyland.com that is configured for hybrid coexistence with the on-premises Active
Directory domain.
You have a server named DirSync1 that is configured as a DirSync server.
You create a new user account in the on-premise Active Directory. You now need to replicate the user information to Azure AD immediately.
Solution: You restart the NetLogon service on a domain controller.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B

Community Discussion

As described here: https://docs.microsoft.com/en-us/azure/active-directory/hybrid/how-to-connect-sync-feature-scheduler If you need to manually run a sync cycle, then from PowerShell run Start-ADSyncSyncCycle -PolicyType Delta. To initiate a full sync cycle, run Start-ADSyncSyncCycle -PolicyType Initial from a PowerShell prompt. Running a full sync cycle can be very time consuming, so if you need to replicate the user information to Azure AD immediately then run Start-ADSyncSyncCycle -PolicyType Delta. Answer is B. No

NO Please dont restart 'Netlogon' ever, in test or production... Rather reboot the whole DC, wich wont help for starting a sync i guess. If it does, its kinda a retarted way to force a sync to start.

B is correct. You run the Start-ADSyncSyncCycle -PolicyType Initial PowerShell cmdlet.

B is correct. You run the Start-ADSyncSyncCycle -PolicyType Initial PowerShell cmdlet.

very good explanation.

SecExams

Question #12

Your company has a Microsoft Azure subscription.
The company has datacenters in Los Angeles and New York.
You are configuring the two datacenters as geo-clustered sites for site resiliency.
You need to recommend an Azure storage redundancy option.
You have the following data storage requirements:
✑ Data must be stored on multiple nodes.
✑ Data must be stored on nodes in separate geographic locations.
✑ Data can be read from the secondary location as well as from the primary location.
Which of the following Azure stored redundancy options should you recommend?

A) Geo-redundant storage
B) Read-only geo-redundant storage (Correct Answer)
C) Zone-redundant storage
D) Locally redundant storage

Explanation

Correct Answer:
B
RA-GRS allows you to have higher read availability for your storage account by providing access to the data replicated to the secondary location. Once you enable €ıread only€ı this feature, the secondary location may be used to achieve higher availability in the event the data is not available in the primary region. This is an
.feature which requires the storage account be geo-replicated €ıopt-in€ı
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy

Community Discussion

B (A: "data will be available to be read-only if Microsoft initiates a failure", so its not RO if its not failed-over) Geo-redundant storage (GRS) As I explained above it helps us in replicating our data to another region which is far away hundreds of miles away from the primary region. It provides at least 99.99999999999999% (16 9's) durability of objects over

a given year. GRS replicates our data to another region, but data will be available to be read-only if Microsoft initiates a failure from primary to the secondary region. Read-access geo-redundant storage (RA-GRS) It is based on the GRS, but it also provides an option to read from the secondary region, regardless of whether Microsoft initiates a failover from the primary to the secondary region.

Answer B. Read-access geo-redundant storage (RA-GRS) It is based on the GRS, but it also provides an option to read from the secondary region, regardless of whether Microsoft initiates a failover from the primary to the secondary region.

Read-Access is correct but the option given in the answers is "Read-Only"

Read-Access is correct but the option given in the answers is "Read-Only"

B is correct.

SecExams

Question #13

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an azure subscription that includes a storage account, a resource group, a blob container and a file share.
A colleague named Jon Ross makes use of a solitary Azure Resource Manager (ARM) template to deploy a virtual machine and an additional Azure Storage account.
You want to review the ARM template that was used by Jon Ross.
Solution: You access the Virtual Machine blade.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
You should use the Resource Group blade

Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-manager-export-template

Community Discussion

Answer must be No, as questions talk about VM and storage account both which can only be reviewed at RG level.

it is so easy =B. No))

Selected Answer: B

Passed the exam on 26 July 2023. Scored 870. Similar question came.

But there are 2 different resources here. The Storage Account resource would be missing.

But there are 2 different resources here. The Storage Account resource would be missing.

SecExams

Question #14

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an azure subscription that includes a storage account, a resource group, a blob container and a file share.
A colleague named Jon Ross makes use of a solitary Azure Resource Manager (ARM) template to deploy a virtual machine and an additional Azure Storage account.
You want to review the ARM template that was used by Jon Ross.
Solution: You access the Resource Group blade.
Does the solution meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:

A

To view a template from deployment history:

1. Go to the resource group for your new resource group. Notice that the portal shows the result of the last deployment. Select this link.

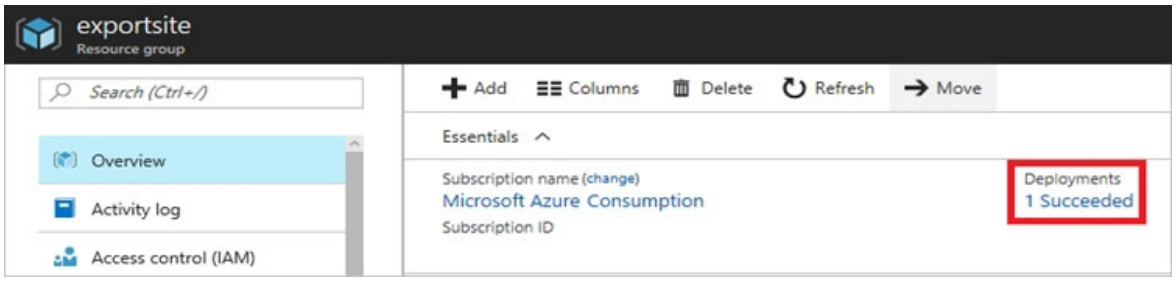

2. You see a history of deployments for the group. In your case, the portal probably lists only one deployment. Select this deployment.

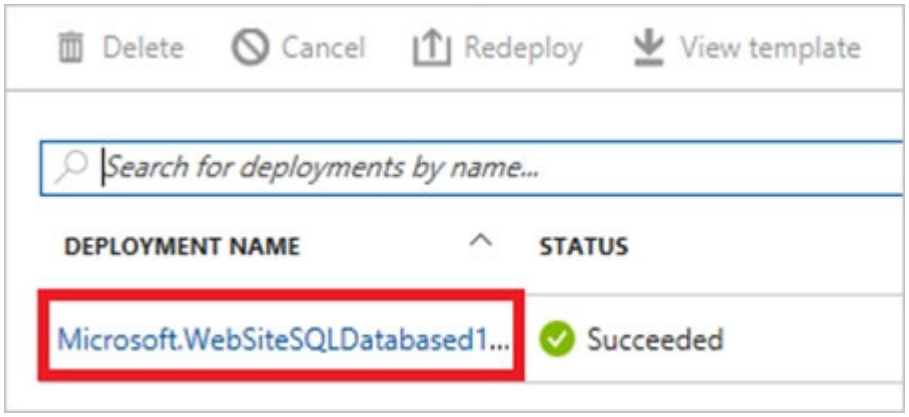

3. The portal displays a summary of the deployment. The summary includes the status of the deployment and its operations and the values that you provided for parameters. To see the template that you used for the deployment, select View template.

SecExams

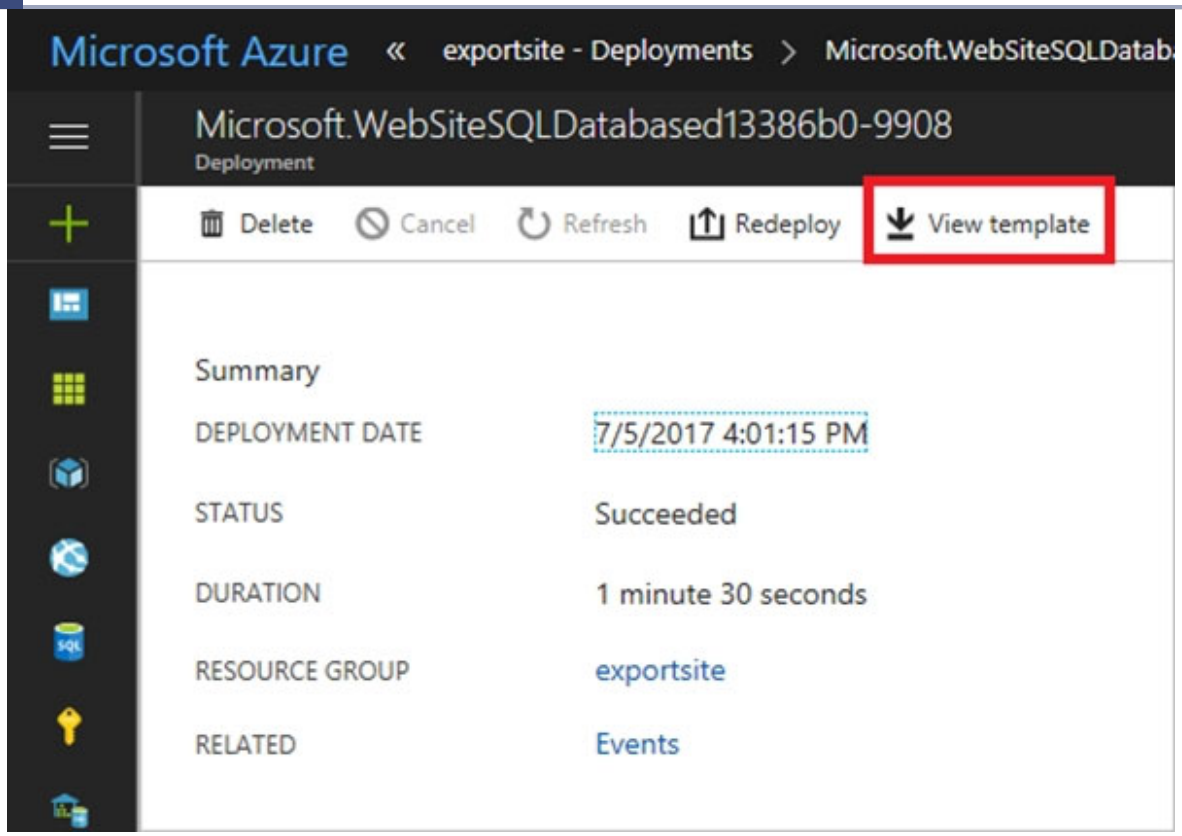

Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-manager-export-template

Community Discussion

A is correct

A is correct: from Resource Group choose ----> Deployments blade

Selected Answer: A

Passed the exam on 26 July 2023. Scored 870. Similar question came.

Yes, accessing the Resource Group blade can meet the goal of reviewing the ARM template used by Jon Ross to deploy the virtual machine and additional Azure Storage account. In the Resource Group blade, you can select the resource group where the virtual machine and additional storage account were deployed, and then click on the "Deployments" tab. This will display a list of all deployments made to the resource group, including the ARM template used for the deployment. Therefore, the solution of accessing the Resource Group blade meets the goal of reviewing the ARM template used by Jon Ross. The answer is A. Yes.

A is correct

Question #15

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an azure subscription that includes a storage account, a resource group, a blob container and a file share.
A colleague named Jon Ross makes use of a solitary Azure Resource Manager (ARM) template to deploy a virtual machine and an additional Azure Storage account.
You want to review the ARM template that was used by Jon Ross.
Solution: You access the Container blade.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
You should use the Resource Group blade
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-manager-export-template

Community Discussion

B. No, as all of us know)

No, accessing the Container blade does not provide access to the ARM template used by Jon Ross to deploy the virtual machine and an additional Azure Storage account. The Container blade displays information about the blob container within the storage account, but it does not provide access to the deployment history or ARM templates. To review the ARM template used by Jon Ross, you need to access the deployment history of the resource group where the virtual machine and additional storage account were deployed. This will show all deployments made to the resource group, including the ARM template used for the deployment.

Selected Answer: B

Passed the exam on 26 July 2023. Scored 870. Similar question came.

Selected Answer: B

You should use the Resource Group blade

B is correct. You access the Resource Group blade.

SecExams

Question #16

Your company has three virtual machines (VMs) that are included in an availability set.
You try to resize one of the VMs, which returns an allocation failure message.
It is imperative that the VM is resized.
Which of the following actions should you take?

A) You should only stop one of the VMs.
B) You should stop two of the VMs.
C) You should stop all three VMs. (Correct Answer)
D) You should remove the necessary VM from the availability set.

Explanation

Correct Answer:
C

If the VM you wish to resize is part of an availability set, then you must stop all VMs in the availability set before changing the size of any VM in the availability set.
The reason all VMs in the availability set must be stopped before performing the resize operation to a size that requires different hardware is that all running VMs in the availability set must be using the same physical hardware cluster. Therefore, if a change of physical hardware cluster is required to change the VM size then all VMs must be first stopped and then restarted one-by-one to a different physical hardware clusters.
Reference:
https://azure.microsoft.com/es-es/blog/resize-virtual-machines/

Community Discussion

C. Looks Correct Stop all the VMs in the availability set. Click Resource groups > your resource group > Resources > your availability set > Virtual Machines > your virtual machine > Stop. After all the VMs stop, resize the desired VM to a larger size. Select the resized VM and click Start, and then start each of the stopped VMs.

This question is deprecated. I tested and I was able to change the size of a VM, which is in an availability set with two other VMs, without stopping any other VM. With the three VMs up you can resize any of them.

But the question reported: "You try to resize one of the VMs, which returns an allocation failure message." so you can only stop all the 3 vms

But the question reported: "You try to resize one of the VMs, which returns an allocation failure message." so you can only stop all the 3 vms

All this means is that the change in hardware was supported by whatever the availability set was running on, not that the question is depricated. If your VM(s) are deployed using the Resource Manager (ARM) deployment model and you need to change to a size which requires different hardware then you can resize VMs by first stopping your VM, selecting a new VM size and then restarting the VM. If the VM you wish to resize is part of an availability set, then you must stop all VMs in the availability set before changing the size of any VM in the availability set. The reason all VMs in the availability set must be stopped before performing the resize operation to a size that requires different hardware is that all running VMs in the availability set must be using the same physical hardware cluster. Therefore, if a change of physical hardware cluster is required to change the VM size then all VMs must be first stopped and then restarted one-by-one to a different physical hardware clusters. https://azure.microsoft.com/en-us/blog/resize-virtual-machines/

SecExams

Question #17

You have an Azure virtual machine (VM) that has a single data disk. You have been tasked with attaching this data disk to another Azure VM.
You need to make sure that your strategy allows for the virtual machines to be offline for the least amount of time possible.
Which of the following is the action you should take FIRST?

A) Stop the VM that includes the data disk. (Correct Answer)
B) Stop the VM that the data disk must be attached to.
C) Detach the data disk.
D) Delete the VM that includes the data disk.

Explanation

Correct Answer:
A
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/detach-disk https://docs.microsoft.com/en-us/azure/lab-services/devtest-lab-attach-detach-data-disk

Community Discussion

Wrong. You can simply detach a data disk from one VM and attach it to the other VM without stopping either of the VMs.

Correct. Just tested in lab. Didn't have to stop the VM the detach and attach to the other.

Correct. Just tested in lab. Didn't have to stop the VM the detach and attach to the other.

Selected Answer: A

Stop the VM first so that disk data is not corrupted (if an service is writing data while you detach)

Wrong... disk can be hot detached with powershell or through portal. the command ensures no operation is accessing the disk when detaching it. here is the link to micrsoft article: https://learn.microsoft.com/en-us/azure/virtual-machines/windows/detach-disk

Question #18

Your company has an Azure subscription.
You need to deploy a number of Azure virtual machines (VMs) using Azure Resource Manager (ARM) templates. You have been informed that the VMs will be included in a single availability set.
You are required to make sure that the ARM template you configure allows for as many VMs as possible to remain accessible in the event of fabric failure or maintenance.
Which of the following is the value that you should configure for the platformFaultDomainCount property?

A) 10
B) 30
C) Min Value
D) Max Value (Correct Answer)

Explanation

Correct Answer:
D
The number of fault domains for managed availability sets varies by region - either two or three per region.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/manage-availability

Community Discussion

D is correct. 2 or 3 is max for a region so answer should be Max. https://stackoverflow.com/questions/49779604/how-to-find-maximum-update-domains-fault-domains-available-in-an-azure-region

As described here: https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-manage-fault-domains You can set the parameter --platform-fault-domain-count to 1, 2, or 3 (default of 3 if not specified). And as described here: https://docs.microsoft.com/en-us/azure/virtual-machines/availability-set-overview Each virtual machine in your availability set is assigned an update domain and a fault domain

by the underlying Azure platform. Each availability set can be configured with up to three fault domains and twenty update domains. So answer is D Max Value

Selected Answer: D

"Each availability set can be configured with up to 3 fault domains and 20 update domains." Ref: https://learn.microsoft.com/en-us/azure/virtual-machines/availability-set-overview#how-do-availability-sets-work Passed the exam on 26 July 2023. Scored 870. Similar question came.

Wrong. The link highlights Update Domain not fault domain.

Wrong. The link highlights Update Domain not fault domain.

Question #19

Your company has an Azure subscription.
You need to deploy a number of Azure virtual machines (VMs) using Azure Resource Manager (ARM) templates. You have been informed that the VMs will be included in a single availability set.
You are required to make sure that the ARM template you configure allows for as many VMs as possible to remain accessible in the event of fabric failure or maintenance.
Which of the following is the value that you should configure for the platformUpdateDomainCount property?

A) 10
B) 20 (Correct Answer)
C) 30
D) 40

Explanation

Correct Answer:
B
Each virtual machine in your availability set is assigned an update domain and a fault domain by the underlying Azure platform. For a given availability set, five non-user-configurable update domains are assigned by default (Resource Manager deployments can then be increased to provide up to 20 update domains) to indicate groups of virtual

machines and underlying physical hardware that can be rebooted at the same time.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/availability-set-overview

Community Discussion

Correct answer is B. 20 'Each virtual machine in your availability set is assigned an update domain and a fault domain by the underlying Azure platform. Each availability set can be configured with up to three fault domains and twenty update domains.' https://docs.microsoft.com/en-us/azure/virtual-machines/availability-set-overview

Admin of this Website ... Please Update the answer to "B" . its giving negative impact on people who think of buying Contributor Access seeing such mistakes .

this is the way the site is suppose to run because if this site give all the correct answers then MS will shut it down. that is why you need to read the discussions and analyze the answer by yourself.

this is the way the site is suppose to run because if this site give all the correct answers then MS will shut it down. that is why you need to read the discussions and analyze the answer by yourself.

About 50% of the questions have a wrong answer to it.

SecExams

Question #20

DRAG DROP -

You have downloaded an Azure Resource Manager (ARM) template to deploy numerous virtual machines (VMs). The ARM template is based on a current VM, but must be adapted to reference an administrative password.

You need to make sure that the password cannot be stored in plain text.

You are preparing to create the necessary components to achieve your goal.

Which of the following should you create to achieve your goal? Answer by dragging the correct option from the list to the answer area.

Select and Place:

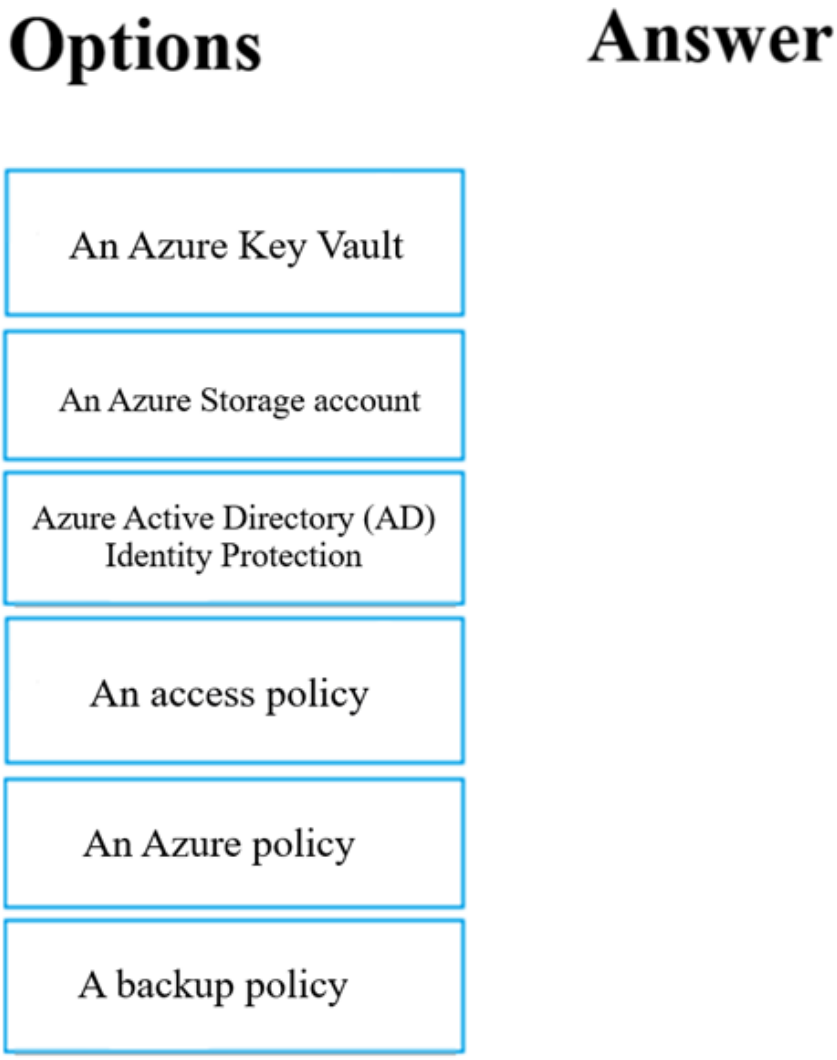

SecExams

Explanation

Correct Answer:

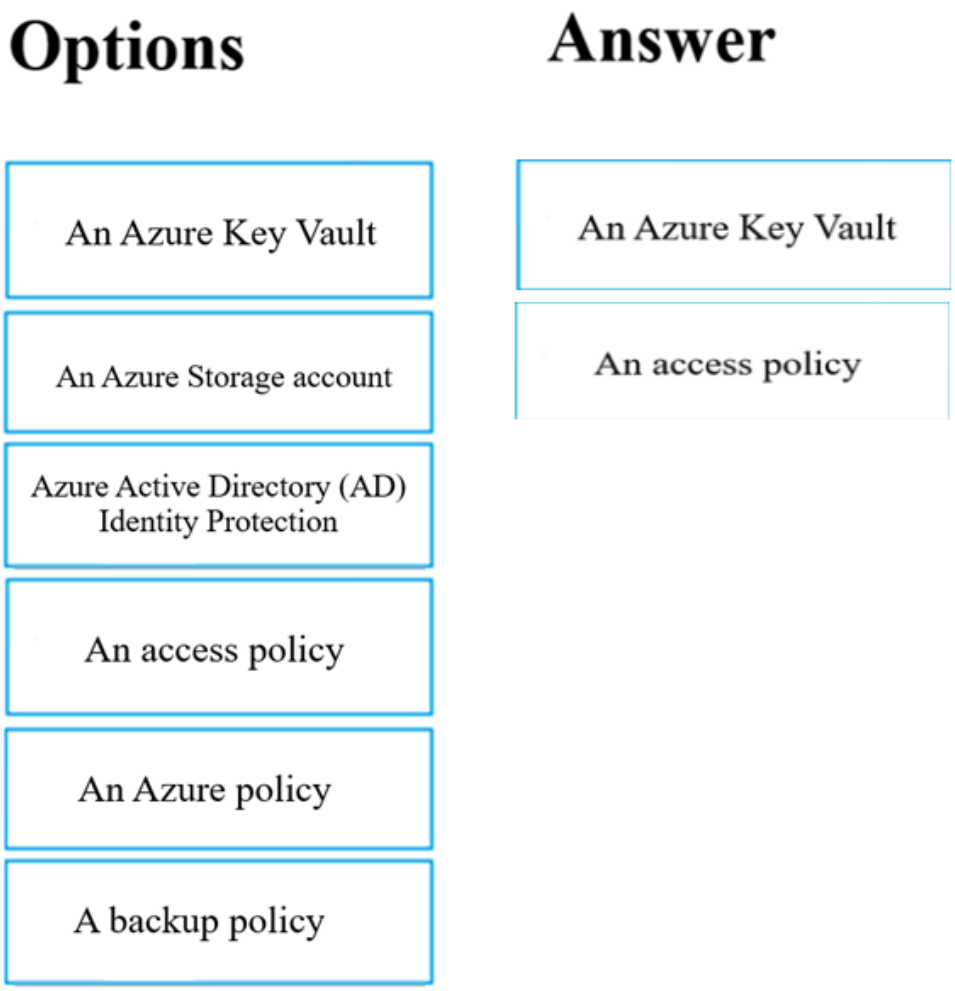

You can use a template that allows you to deploy a simple Windows VM by retrieving the password that is stored in a Key Vault. Therefore, the password is never put in plain text in the template parameter file.

Community Discussion

Key vault + access policy

This was in my exam at 10/31/2021

I agree : key vault + access policy But please note that now the access policy is considered a legacy way to provide access to the key vault. Now you can use RBAC. See :

https://learn.microsoft.com/en-us/azure/key-vault/general/rbac-access-policy https://learn.microsoft.com/en-us/azure/key-vault/general/assign-access-policy?tabs=azure-portal

I agree : key vault + access policy But please note that now the access policy is considered a legacy way to provide access to the key vault. Now you can use RBAC. See : https://learn.microsoft.com/en-us/azure/key-vault/general/rbac-access-policy https://learn.microsoft.com/en-us/azure/key-vault/general/assign-access-policy?tabs=azure-portal

Azure key vault to store the password and Access policy to make it accessible. https://learn.microsoft.com/en-us/azure/key-vault/general/basic-concepts

Question #21

Your company has an Azure Active Directory (Azure AD) tenant that is configured for hybrid coexistence with the on-premises Active Directory domain.
The on-premise virtual environment consists of virtual machines (VMs) running on Windows Server 2012 R2 Hyper-V host servers.
You have created some PowerShell scripts to automate the configuration of newly created VMs. You plan to create several new VMs.
You need a solution that ensures the scripts are run on the new VMs.
Which of the following is the best solution?

A) Configure a SetupComplete.cmd batch file in the %windir%\setup\scripts directory. (Correct Answer)

B) Configure a Group Policy Object (GPO) to run the scripts as logon scripts.
C) Configure a Group Policy Object (GPO) to run the scripts as startup scripts.
D) Place the scripts in a new virtual hard disk (VHD).

Explanation

Correct Answer:
A
After you deploy a Virtual Machine you typically need to make some changes before it's ready to use. This is something you can do manually or you could use
Remote PowerShell to automate the configuration of your VM after deployment for example.
But now there's a third alternative available allowing you customize your VM: the

CustomScriptextension.
This CustomScript extension is executed by the VM Agent and it's very straightforward: you specify which files it needs to download from your storage account and which file it needs to execute. You can even specify arguments that need to be passed to the script. The only requirement is that you execute a .ps1 file.
Reference:
https://docs.microsoft.com/en-us/windows-hardware/manufacture/desktop/add-a-custom-script-to-windows-setup https://azure.microsoft.com/en-us/blog/automating-vm-customization-tasks-using-custom-script-extension/

Community Discussion

Dude you might get a question about how you prepare omelette using VMs and LB and still you have to answer it if u want to be MS expert

Dude you might get a question about how you prepare omelette using VMs and LB and still you have to answer it if u want to be MS expert

Is this really on the AZ-104? It has nothing to do with Azure.

Ans: A After Windows is installed but before the logon screen appears, Windows Setup searches for the SetupComplete.cmd file in the %WINDIR%\Setup\Scripts\ directory
https://docs.microsoft.com/en-us/windows-hardware/manufacture/desktop/add-a-custom-script-to-windows-setup

it is obvious, use get\set\new\add\update\remove -AzRMOmlette))

SecExams

Question #22

Your company has an Azure Active Directory (Azure AD) tenant that is configured for hybrid coexistence with the on-premises Active Directory domain.
You plan to deploy several new virtual machines (VMs) in Azure. The VMs will have the same operating system and custom software requirements.
You configure a reference VM in the on-premise virtual environment. You then generalize the VM to create an image.
You need to upload the image to Azure to ensure that it is available for selection when you create the new Azure VMs.
Which PowerShell cmdlets should you use?

A) Add-AzVM
B) Add-AzVhd (Correct Answer)
C) Add-AzImage
D) Add-AzImageDataDisk

Explanation

Correct Answer:
B
The Add-AzVhd cmdlet uploads on-premises virtual hard disks, in .vhd file format, to a blob storage account as fixed virtual hard disks.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/upload-generalized-managed

Community Discussion

Selected Answer: B

"New-AzVM" is for creating new VMs, not uploading images. "Add-AzImage" does not exist. the correct command is "New-AzImage". "Add-AzImageDataDisk" Adds a data disk to an image object. "Add-AzVhd" seems to be the correct option, sing the it "Uploads a virtual hard disk from an on-premises machine to Azure (managed disk or blob)." (https://docs.microsoft.com/en-us/powershell/module/az.compute/add-azvhd?view=azps-8.3.0)

Correct answer. Example for how you do this: Add-AzVhd -ResourceGroupName $resourceGroup -Destination $urlOfUploadedImageVhd ` -LocalFilePath $localPath

It command does not exists. It only exist `New-AzImage`. That's different.

It command does not exists. It only exist `New-AzImage`. That's different.

It command does not exists. It only exist `New-AzImage`. That's different.

SecExams

Question #23

DRAG DROP -

Your company has an Azure subscription that includes a number of Azure virtual machines (VMs), which are all part of the same virtual network.

Your company also has an on-premises Hyper-V server that hosts a VM, named VM1, which must be replicated to Azure.

Which of the following objects that must be created to achieve this goal?

Answer by dragging the correct option from the list to the answer area.

Select and Place:

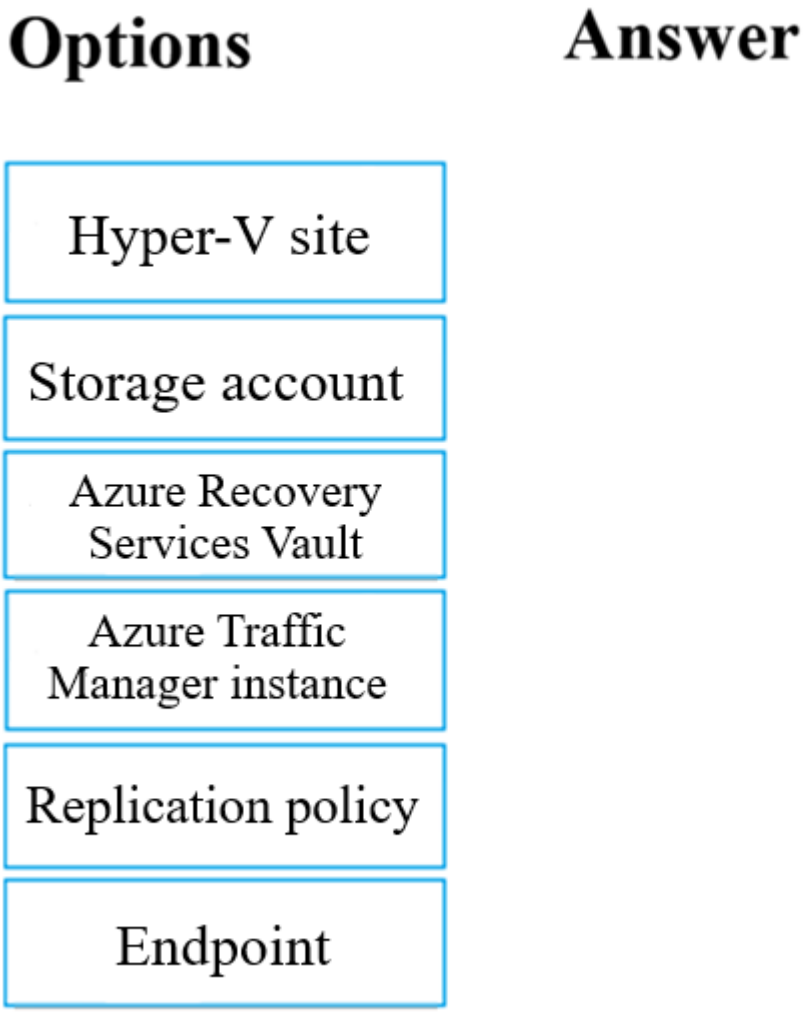

SecExams

Explanation

Correct Answer:

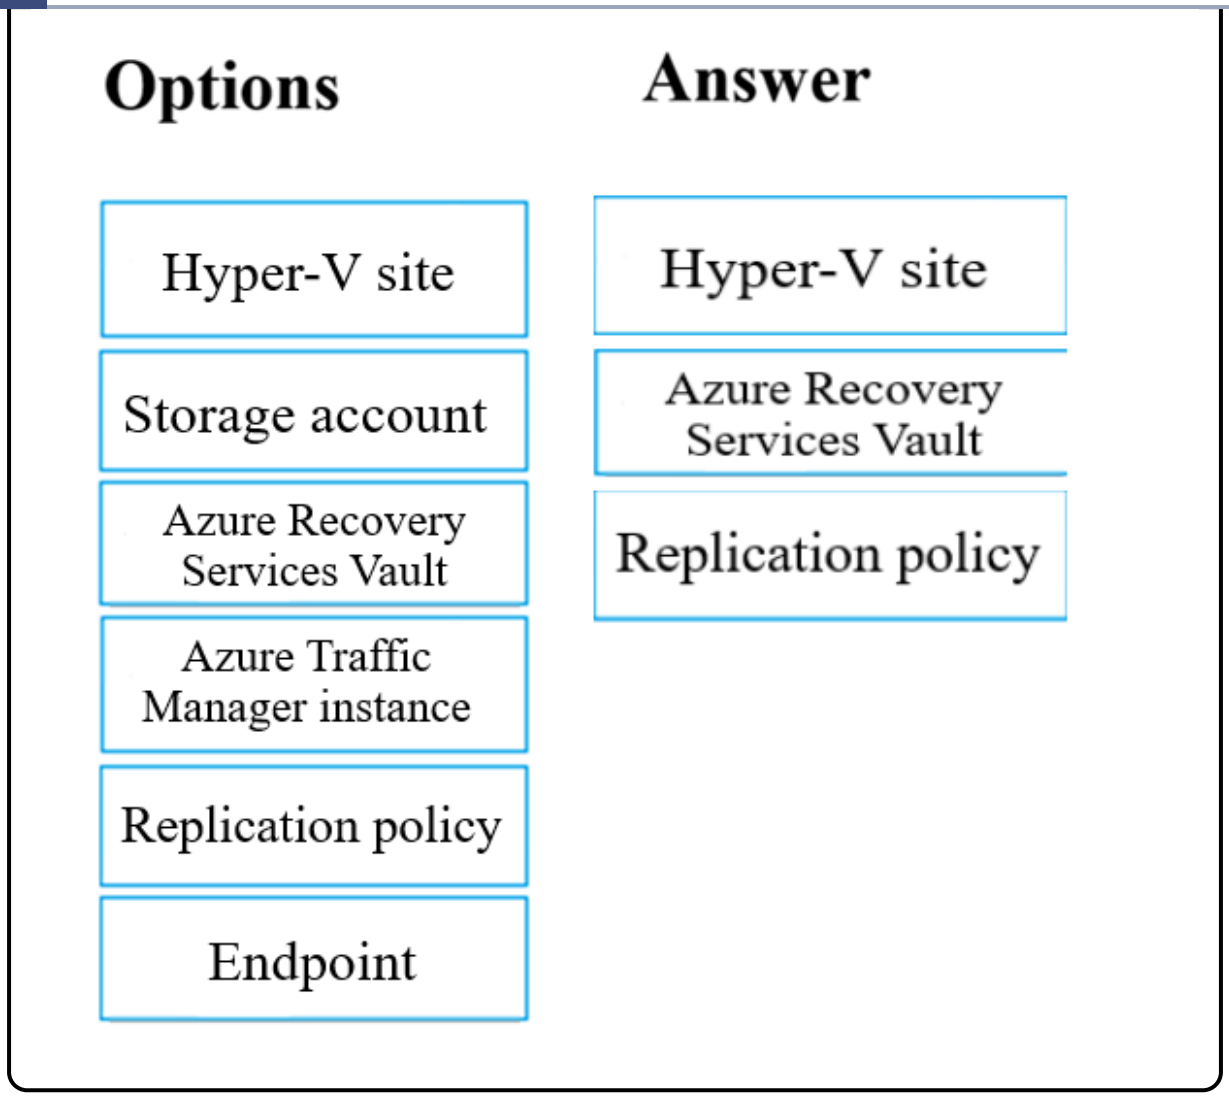

SecExams

Community Discussion

For physical servers - Storage Account - Azure Recovery Services Vault - Replication policy https://docs.microsoft.com/en-us/azure/site-recovery/physical-azure-disaster-recovery For Hyper-v server - Hyper-V site - Azure Recovery Services Vault - Replication policy https://docs.microsoft.com/en-nz/azure/site-recovery/hyper-v-prepare-on-premises-tutorial

1. Hyper-V site 2. Azure Recovery Services Vault 3. Replication policy https://docs.microsoft.com/nl-nl/azure/site-recovery/hyper-v-azure-tutorial

A Recovery Services vault is a storage entity in Azure that houses data. The data is typically copies of data, or configuration information for virtual machines (VMs), workloads, servers, or workstations. You can use Recovery Services vaults to hold backup data for various Azure services such as IaaS VMs (Linux or Windows) and Azure SQL

databases. A replication policy defines the retention history of recovery points, and the frequency of app-consistent snapshots. Site Recovery creates a default replication policy as follows: Retain recovery points for 24 hours. Take app-consistent snapshots every four hours.

A Recovery Services vault is a storage entity in Azure that houses data. The data is typically copies of data, or configuration information for virtual machines (VMs), workloads, servers, or workstations. You can use Recovery Services vaults to hold backup data for various Azure services such as IaaS VMs (Linux or Windows) and Azure SQL databases. A replication policy defines the retention history of recovery points, and the frequency of app-consistent snapshots. Site Recovery creates a default replication policy as follows: Retain recovery points for 24 hours. Take app-consistent snapshots every four hours.

So the answer is - Hyper-V site - Azure Recovery Services Vault - Replication policy

SecExams

Question #24

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company's Azure subscription includes two Azure networks named VirtualNetworkA and VirtualNetworkB.
VirtualNetworkA includes a VPN gateway that is configured to make use of static routing. Also, a site-to-site VPN connection exists between your company's on-premises network and VirtualNetworkA.
You have configured a point-to-site VPN connection to VirtualNetworkA from a workstation running Windows 10. After configuring virtual network peering between
VirtualNetworkA and VirtualNetworkB, you confirm that you are able to access VirtualNetworkB from the company's on-premises network. However, you find that you cannot establish a connection to VirtualNetworkB from the Windows 10 workstation.
You have to make sure that a connection to VirtualNetworkB can be established from the Windows 10 workstation.
Solution: You choose the Allow gateway transit setting on VirtualNetworkA.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing

Community Discussion

"After configuring virtual network peering between VirtualNetworkA and VirtualNetworkB, you confirm that you are able to access VirtualNetworkB from the company's on-

premises network." This indicates the Allow/Use gateway transit is set up working. The next step will be restart/reinstall the VPN-Client config at the windows 10 WS.

Answer B - No If you make a change to the topology of your network and have Windows VPN clients, the VPN client package for Windows clients must be downloaded and installed again in order for the changes to be applied to the client. https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing

Best answer. Please upvote.

Best answer. Please upvote.

Actually, is workstation 10 just not on any of the mentioned networks and just has the point to site connection with networkA?

SecExams

Question #25

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company's Azure subscription includes two Azure networks named VirtualNetworkA and VirtualNetworkB.
VirtualNetworkA includes a VPN gateway that is configured to make use of static routing. Also, a site-to-site VPN connection exists between your company's on-premises network and VirtualNetworkA.
You have configured a point-to-site VPN connection to VirtualNetworkA from a workstation running Windows 10. After configuring virtual network peering between
VirtualNetworkA and VirtualNetworkB, you confirm that you are able to access VirtualNetworkB from the company's on-premises network. However, you find that you cannot establish a connection to VirtualNetworkB from the Windows 10 workstation.
You have to make sure that a connection to VirtualNetworkB can be established from the Windows 10 workstation.
Solution: You choose the Allow gateway transit setting on VirtualNetworkB.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing

Community Discussion

After reconfiguring \ creating peering existing point-to-site VPN connections need to be recreated

Answer B - No If you make a change to the topology of your network and have Windows VPN clients, the VPN client package for Windows clients must be downloaded and installed again in order for the changes to be applied to the client. https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing Thanks for indicating Yes or NO!

If you **make a change to the topology** of your network and have **Windows VPN clients**, the VPN client package for Windows clients must be **downloaded and installed again**"

You're right. almost forgot about this. whenever you made some changes on the azure network, you basically need to download the P2S client again for the client devices.

You're right. almost forgot about this. whenever you made some changes on the azure network, you basically need to download the P2S client again for the client devices.

SecExams

Question #26

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company's Azure subscription includes two Azure networks named VirtualNetworkA and VirtualNetworkB.
VirtualNetworkA includes a VPN gateway that is configured to make use of static routing. Also, a site-to-site VPN connection exists between your company's on-premises network and VirtualNetworkA.
You have configured a point-to-site VPN connection to VirtualNetworkA from a workstation running Windows 10. After configuring virtual network peering between
VirtualNetworkA and VirtualNetworkB, you confirm that you are able to access VirtualNetworkB from the company's on-premises network. However, you find that you cannot establish a connection to VirtualNetworkB from the Windows 10 workstation.
You have to make sure that a connection to VirtualNetworkB can be established from the Windows 10 workstation.
Solution: You download and re-install the VPN client configuration package on the Windows 10 workstation.
Does the solution meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing

Community Discussion

Selected Answer: A

"If you make a change to the topology of your network and have Windows VPN clients, the VPN client package for Windows clients must be downloaded and installed again in order for the changes to be applied to the client." (https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing)

I have done this at work many times A is correct.

B. No, downloading and re-installing the VPN client configuration package on the Windows 10 workstation is unlikely to resolve the issue of not being able to connect to VirtualNetworkB. This is because the issue seems to be related to the virtual network peering between VirtualNetworkA and VirtualNetworkB, and not with the VPN client configuration on the Windows 10 workstation. A more appropriate solution would be to check the virtual network peering configuration, and ensure that the appropriate routes are in place to allow traffic to flow between VirtualNetworkA and VirtualNetworkB. Additionally, checking the network security groups and the Azure Firewall rules can help ensure that traffic is allowed to flow from the Windows 10 workstation to VirtualNetworkB.

A is correct

A is correct

SecExams

Question #27

Your company has virtual machines (VMs) hosted in Microsoft Azure. The VMs are located in a single Azure virtual network named VNet1.

The company has users that work remotely. The remote workers require access to the VMs on VNet1.

You need to provide access for the remote workers.

What should you do?

A) Configure a Site-to-Site (S2S) VPN.
B) Configure a VNet-toVNet VPN.
C) Configure a Point-to-Site (P2S) VPN. (Correct Answer)
D) Configure DirectAccess on a Windows Server 2012 server VM.
E) Configure a Multi-Site VPN

Explanation

Correct Answer:
C
A Point-to-Site (P2S) VPN gateway connection lets you create a secure connection to your virtual network from an individual client computer.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-vpngateways

Community Discussion

Answer C: is correct - https://docs.microsoft.com/en-us/azure/vpn-gateway/work-remotely-support

Correct, S2S would be better if you know that the remote workers work from one location, but we don't know that. They could be working from different locations(like home) that's why P2S is better.

P2S is the correct answer. Remote work can be done from anywhere at anytime. If you condition your remote workers to work from one location, that is not remote work anymore, that is an office branch.

P2S is the correct answer. Remote work can be done from anywhere at anytime. If you condition your remote workers to work from one location, that is not remote work anymore, that is an office branch.

Selected Answer: C

C. Configure a Point-to-Site (P2S) VPN. To provide access for remote workers to virtual machines (VMs) hosted in Microsoft Azure, you can use a Point-to-Site (P2S) VPN connection. This type of connection enables individual remote clients to securely connect to an Azure virtual network (VNet) over the Internet. A Site-to-Site (S2S) VPN connection is used to connect two or more on-premises networks to an Azure virtual network (VNet), while a VNet-to-VNet VPN connection is used to connect two or more Azure virtual networks (VNets) together.

SecExams

Question #28

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has a Microsoft SQL Server Always On availability group configured on their Azure virtual machines (VMs).
You need to configure an Azure internal load balancer as a listener for the availability group.
Solution: You create an HTTP health probe on port 1433.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B

Community Discussion

HTTP(!) health probe on port 1433 sounds ugly, assume NO

Took the exam today, 17 Oct. This question came out. Ans: No

Selected Answer: B

No, creating an HTTP health probe on port 1433 does not meet the goal of configuring an Azure internal load balancer as a listener for the SQL Server Always On availability group. In order to configure an Azure internal load balancer as a listener for the availability group, you need to create a TCP health probe on port 1433. SQL Server uses TCP to communicate on port 1433, so a TCP health probe is the appropriate choice to ensure the availability and health of the SQL Server instances in the availability group.

The contributor access is just 3hours of your work in UK. Buy this thing and give to people hustling from Bangladesh, Nepal etc. Dont be stingy, you could afford to pay more than 22Lakhs as tuition

The contributor access is just 3hours of your work in UK. Buy this thing and give to people hustling from Bangladesh, Nepal etc. Dont be stingy, you could afford to pay more than 22Lakhs as tuition

Question #29

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has a Microsoft SQL Server Always On availability group configured on their Azure virtual machines (VMs).
You need to configure an Azure internal load balancer as a listener for the availability group.
Solution: You set Session persistence to Client IP.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/sql/virtual-machines-windows-portal-sql-alwayson-int-listener

Community Discussion

Answer is B. "None" FYI: Session persistence ensures that a client will remain connected to the same server throughout a session or period of time. Because load balancing may, by default, send users to unique servers each time they connect, this can mean that complicated or repeated requests are slowed down.

The load balancing rules configure how the load balancer routes traffic to the SQL Server instances. For this load balancer, you enable direct server return because only one of the two SQL Server instances owns the availability group listener resource at a time. Therefore Floating IP (direct server return) is Enabled. TCP 1433 is the standard SQL port. The availability group listener health probe port has to be different from the cluster core IP address health probe port. The ports on a health probe are TCP59999 and TCP58888. https://docs.microsoft.com/en-us/azure/azure-sql/virtual-machines/windows/availability-group-load-balancer-portal-configure

that defeats the purpose of a load balancer that is allowing traffic to various different SQL servers.

that defeats the purpose of a load balancer that is allowing traffic to various different SQL servers.

Again ChatGpt

SecExams

Question #30

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has a Microsoft SQL Server Always On availability group configured on their Azure virtual machines (VMs).
You need to configure an Azure internal load balancer as a listener for the availability group.
Solution: You enable Floating IP.
Does the solution meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A

Community Discussion

The load balancing rules configure how the load balancer routes traffic to the SQL Server instances. For this load balancer, you enable direct server return because only one of the two SQL Server instances owns the availability group listener resource at a time. >> Floating IP (direct server return) Enabled

Yes, enabling Floating IP on the Azure internal load balancer as a listener for the availability group can meet the goal. By enabling Floating IP, the load balancer will use a floating IP address as the source IP address for outbound flows from the backend pool. This will ensure that the IP address used by the backend pool remains the same even if a VM is restarted or replaced, which is important for maintaining the listener for the availability group.

Yes, enabling Floating IP on the Azure internal load balancer as a listener for the availability group can meet the goal. By enabling Floating IP, the load balancer will use a floating IP address as the source IP address for outbound flows from the backend pool. This will ensure that the IP address used by the backend pool remains the same even if a VM is restarted or replaced, which is important for maintaining the listener for the availability group.

Yes floating ip is correct ? as discussed in: https://www.secexams.com/discussions/microsoft/view/12295-exam-az-300-topic-2-question-11-discussion/

I gave the AZ-104 exam and got 900/1000 on the test. This was my first attempt and all the credit goes to this platform. pass4surexams It has exam dumps and mock tests which helped me to evaluate my performance. https://www.pass4surexams.com/microsoft/az-104-dumps.html

SecExams

Question #31

Your company has two on-premises servers named SRV01 and SRV02.
Developers have created an application that runs on SRV01. The application calls a service on SRV02 by IP address.
You plan to migrate the application on Azure virtual machines (VMs). You have configured two VMs on a single subnet in an Azure virtual network.
You need to configure the two VMs with static internal IP addresses.
What should you do?

A) Run the New-AzureRMVMConfig PowerShell cmdlet.
B) Run the Set-AzureSubnet PowerShell cmdlet.
C) Modify the VM properties in the Azure Management Portal.
D) Modify the IP properties in Windows Network and Sharing Center.
E) Run the Set-AzureStaticVNetIP PowerShell cmdlet. (Correct Answer)

SecExams

Explanation

Correct Answer:
E
Specify a static internal IP for a previously created VM
If you want to set a static IP address for a VM that you previously created, you can do so by using the following cmdlets. If you already set an IP address for the
VM and you want to change it to a different IP address, you'll need to remove the existing static IP address before running these cmdlets. See the instructions below to remove a static IP.
For this procedure, you'll use the Update-AzureVM cmdlet. The Update-AzureVM cmdlet restarts the VM as part of the update process. The DIP that you specify will be assigned after the VM restarts. In this example, we set the IP address for VM2, which is located in cloud service StaticDemo.
Get-AzureVM -ServiceName StaticDemo -Name VM2 | Set-AzureStaticVNetIP -IPAddress 192.168.4.7 | Update-AzureVM

Community Discussion

Correct answer E. FYI: For the new PowerShell cmdlets you would use: Set-AzNetworkInterface

Option E is the correct answer. The Set-AzureStaticVNetIP PowerShell cmdlet is used to set a static internal IP address for an Azure virtual machine. This cmdlet allows you to set the IP address, subnet mask, and default gateway for the virtual machine's network interface. Option A, New-AzureRMVMConfig, is used to create a new virtual machine configuration object. Option B, Set-AzureSubnet, is used to modify the properties of an existing Azure subnet, not to set static IP addresses for virtual machines. Option C, modifying VM properties in the Azure Management Portal, does not provide a way to set static IP addresses for virtual machines. Option D, modifying the IP properties in Windows Network and Sharing Center, only applies to the local network interface of the VM and does not set a static internal IP address for the VM on the Azure virtual network.

Option E is the correct answer. The Set-AzureStaticVNetIP PowerShell cmdlet is used to set a static internal IP address for an Azure virtual machine. This cmdlet allows you to set the IP address, subnet mask, and default gateway for the virtual machine's network interface. Option A, New-AzureRMVMConfig, is used to create a new virtual machine configuration object. Option B, Set-AzureSubnet, is used to modify the properties of an existing Azure subnet, not to set static IP addresses for virtual machines. Option C, modifying VM properties in the Azure Management Portal, does not provide a way to set static IP addresses for virtual machines. Option D, modifying the IP properties in Windows Network and Sharing Center, only applies to the local network interface of the VM and does not set a static internal IP address for the VM on the Azure virtual network.

Correct Answer E: Run the Set-AzureStaticVNetIP PowerShell cmdlet. https://docs.microsoft.com/en-us/powershell/module/servicemanagement/azure.service/set-azurestaticvnetip?view=azuresmps-4.0.0

$Nic = Get-AzNetworkInterface -ResourceGroupName "ResourceGroup1" -Name "NetworkInterface1" $Nic.IpConfigurations[0].PrivateIpAddress = "10.0.1.20" $Nic.IpConfigurations[0].PrivateIpAllocationMethod = "Static" $Nic.Tag = @{Name = "Name"; Value = "Value"} Set-AzNetworkInterface -NetworkInterface $Nic https://docs.microsoft.com/en-us/powershell/module/az.network/set-aznetworkinterface?view=azps-6.5.0

SecExams

Question #32

Your company has an Azure Active Directory (Azure AD) subscription.
You need to deploy five virtual machines (VMs) to your company's virtual network subnet.
The VMs will each have both a public and private IP address. Inbound and outbound security rules for all of these virtual machines must be identical.
Which of the following is the least amount of network interfaces needed for this configuration?

A) 5 (Correct Answer)
B) 10
C) 20
D) 40

Explanation

Correct Answer:
A

Community Discussion

5 VM so 5 NIC Cards .we have public and private ip address set to them .however they needs same inbound and outbound rule so create NSG and attach to NIC and this req can be fulfilled 5 NIC hence 5 is right ans

5 is correct

A is correct

A is correct

Just took the exam today. This very question was there.

Question #33

Your company has an Azure Active Directory (Azure AD) subscription.
You need to deploy five virtual machines (VMs) to your company's virtual network subnet.
The VMs will each have both a public and private IP address. Inbound and outbound security rules for all of these virtual machines must be identical.
Which of the following is the least amount of security groups needed for this configuration?

A) 4
B) 3
C) 2
D) 1 (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

all identical security groups so you will only require 1 security group as all the settings are the same

correct Answer D

Selected Answer: D

Passed the exam on 26 July 2023. Scored 870. Exact question came.

D is correct

D is correct

Question #34

Your company's Azure subscription includes Azure virtual machines (VMs) that run Windows Server 2016.
One of the VMs is backed up every day using Azure Backup Instant Restore.
When the VM becomes infected with data encrypting ransomware, you decide to recover the VM's files.
Which of the following is TRUE in this scenario?

A) You can only recover the files to the infected VM. (Correct Answer)
B) You can recover the files to any VM within the company's subscription.
C) You can only recover the files to a new VM.
D) You will not be able to recover the files.

Explanation

Correct Answer:
A

Community Discussion

The question says that "Your company's Azure subscription includes Azure virtual machines (VMs) that run Windows Server 2016." it doesn't say that you have Linux machines. The answer A says that "You can ONLY recover the files to the infected VM". that is definitely WRONG as you have other VMs to recovery your files. So the answer should be B." You can recover the files to any VM within the company's subscription"

The question says that "Your company's Azure subscription includes Azure virtual machines (VMs) that run Windows Server 2016." it doesn't say that you have Linux machines. The answer A says that "You can ONLY recover the files to the infected VM". that is definitely WRONG as you have other VMs to recovery your files. So the answer should be B." You can recover the files to any VM within the company's subscription"

The question says that "Your company's Azure subscription includes Azure virtual machines (VMs) that run Windows Server 2016." it doesn't say that you have Linux machines. The answer A says that "You can ONLY recover the files to the infected VM". that is definitely WRONG as you have other VMs to recovery your files. So the answer should be B." You can recover the files to any VM within the company's subscription"

The question says that "Your company's Azure subscription includes Azure virtual machines (VMs) that run Windows Server 2016." it doesn't say that you have Linux machines. The answer A says that "You can ONLY recover the files to the infected VM". that is definitely WRONG as you have other VMs to recovery your files. So the answer should be B." You can recover the files to any VM within the company's subscription"

After reading the link provided by rawrkadia, and testing for myself, it's clear that Azure Backup Instant Restore is available for all Azure Backup VM's. Even the OS compatibility doesn't apply, like some links say. Test: - I created a Windows Server 2019 VM in Azure - Activated Backup and did Backup Now - Did File Recovery, downloaded the script and installed it in my Windows 10 On-Prem, Azure Windows Server 2016 and 2012. Everything worked, the drives were mounted in every OS, no problem. Note: The script downloaded will only work for the same OS as the original VM: Windows - Windows Linux - Linux

Question #35

Your company's Azure subscription includes Azure virtual machines (VMs) that run Windows Server 2016.
One of the VMs is backed up every day using Azure Backup Instant Restore.
When the VM becomes infected with data encrypting ransomware, you are required to restore the VM.
Which of the following actions should you take?

A) You should restore the VM after deleting the infected VM.
B) You should restore the VM to any VM within the company's subscription. (Correct Answer)
C) You should restore the VM to a new Azure VM.
D) You should restore the VM to an on-premise Windows device.

Explanation

Correct Answer:
B

Community Discussion

It should be C

I belive it is the C option A - If you delete the VM you cannot recover to that vm it must exist B - You do not know the other VMs C - Creating a New VM you can recover the VM D - You can recover from the backup https://docs.microsoft.com/en-us/azure/backup/backup-azure-arm-restore-vms

Yes, VM can be restored by replacing the existing disk or in a new VM.

Yes, VM can be restored by replacing the existing disk or in a new VM.

Answer A doesn't say to restore *to* the infected VM. It says "You should restore the VM *after deleting* the infected VM"

Question #36

You administer a solution in Azure that is currently having performance issues. You need to find the cause of the performance issues pertaining to metrics on the Azure infrastructure.
Which of the following is the tool you should use?

A) Azure Traffic Analytics
B) Azure Monitor (Correct Answer)
C) Azure Activity Log
D) Azure Advisor

Explanation

Correct Answer:
B
Metrics in Azure Monitor are stored in a time-series database which is optimized for analyzing time-stamped data. This makes metrics particularly suited for alerting and fast detection of issues.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/data-platform

Community Discussion

Yes Correct https://docs.microsoft.com/en-us/azure/architecture/framework/scalability/monitor-infrastructure

B. Azure Monitor is the tool used to collect and analyze performance metrics and logs in Azure. It provides insights into the performance of Azure resources, applications, and workloads, and helps identify and troubleshoot issues related to availability, performance, and security. Azure Traffic Analytics is used to monitor and analyze network traffic, Azure Activity Log provides insights into activities performed on Azure resources, and Azure Advisor provides recommendations for improving the performance, security, and reliability of Azure resources.

Selected Answer: B

This question came out and the answer I chose was B Exam on 21 Dec 2022 (Score 930)

B is correct

B is correct

SecExams

Question #37

Your company has an Azure subscription that includes a Recovery Services vault.
You want to use Azure Backup to schedule a backup of your company's virtual machines (VMs) to the Recovery Services vault.
Which of the following VMs can you back up? Choose all that apply.

A) VMs that run Windows 10. (Correct Answer)
B) VMs that run Windows Server 2012 or higher. (Correct Answer)
C) VMs that have NOT been shut down. (Correct Answer)
D) VMs that run Debian 8.2+. (Correct Answer)
E) VMs that have been shut down. (Correct Answer)

Explanation

Correct Answer:
ABCDE
Azure Backup supports backup of 64-bit Windows server operating system from Windows Server 2008.
Azure Backup supports backup of 64-bit Windows 10 operating system.

Azure Backup supports backup of 64-bit Debian operating system from Debian 7.9+.
Azure Backup supports backup of VM that are shutdown or offline.
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-support-matrix-iaas https://docs.microsoft.com/en-us/azure/virtual-machines/linux/endorsed-distros

Community Discussion

Passed today with 947. This question appeared, correct Answer is All

I would suggest you get to learn about Azure first and then use SecExams to plug the unavoidable holes in your knowledge.

I would suggest you get to learn about Azure first and then use SecExams to plug the unavoidable holes in your knowledge.

I would suggest you get to learn about Azure first and then use SecExams to plug the unavoidable holes in your knowledge.

I would suggest you get to learn about Azure first and then use SecExams to plug the unavoidable holes in your knowledge.

SecExams

Question #38

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Active Directory (Azure AD) tenant named contoso.com.
You have a CSV file that contains the names and email addresses of 500 external users.
You need to create a guest user account in contoso.com for each of the 500 external users.
Solution: You create a PowerShell script that runs the New-AzureADUser cmdlet for each user.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
The New-AzureADUser cmdlet creates a user in Azure Active Directory (Azure AD).
Instead use the New-AzureADMSInvitation cmdlet which is used to invite a new external user to your directory.
Reference:
https://docs.microsoft.com/en-us/powershell/module/azuread/new-azureadmsinvitation

Community Discussion

#Read external users from CSV file $GuestUsers = Import-CSV "C:\Temp\GuestUsers.csv" $i = 0; $TotalUsers = $GuestUsers.Count #Iterate users and send guest invite one by one Foreach($GuestUser in $GuestUsers) { $GuestUserName = $GuestUser.'UserName' $GuestUserEmail = $GuestUser.'EmailAddress' $i++; Write-Progress -activity "Processing $GuestUserName - $GuestUserEmail" -status "$i out of $TotalUsers completed" Try {

#Send invite $InviteResult = New-AzureADMSInvitation -InvitedUserDisplayName $GuestUserName -InvitedUserEmailAddress $GuestUserEmail -InviteRedirectURL https://myapps.microsoft.com -SendInvitationMessage $true Write-Host "Invitation sent to $GuestUserName ($GuestUserEmail)" -f Green } catch { Write-Host "Error occurred for $GuestUserName ($GuestUserEmail)" -f Yellow Write-Host $_ -f Red } }

"New-AzureADUser" is for creating new Azure AD users not inviting Guests. https://www.secexams.com/exams/microsoft/az-104/view/4/ To invite using Powershell one should use the "New-AzureADMSInvitation" cmdlet. (https://docs.microsoft.com/en-us/powershell/module/azuread/new-azureadmsinvitation?view=azureadps-2.0)

B is correct

B is correct

I just passed, Q was the exam 3 Jul 2023.

SecExams

Question #39

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Active Directory (Azure AD) tenant named contoso.com.
You have a CSV file that contains the names and email addresses of 500 external users.
You need to create a guest user account in contoso.com for each of the 500 external users.
Solution: From Azure AD in the Azure portal, you use the Bulk create user operation.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Instead use the New-AzureADMSInvitation cmdlet which is used to invite a new external user to your directory.
Reference:
https://docs.microsoft.com/en-us/powershell/module/azuread/new-azureadmsinvitation

Community Discussion

Selected Answer: B

"Bulk Create" is for new Azure AD Users. For Guests: - Use "Bulk invite users" to prepare a comma-separated value (.csv) file with the user information and invitation preferences - Upload the .csv file to Azure AD - Verify the users were added to the directory

This question was on my exam 04/11/2022!! Passed with 920!! Thanks to everyone!! Good Luck

B is correct

B is correct

This question was on my exam on 22 Sep 2023 i scored 900 ! answered NO

SecExams

Question #40

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Active Directory (Azure AD) tenant named contoso.com.
You have a CSV file that contains the names and email addresses of 500 external users.
You need to create a guest user account in contoso.com for each of the 500 external users.
Solution: You create a PowerShell script that runs the New-AzureADMSInvitation cmdlet for each external user.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Use the New-AzureADMSInvitation cmdlet which is used to invite a new external user to your directory.
Reference:
https://docs.microsoft.com/en-us/powershell/module/azuread/new-azureadmsinvitation

Community Discussion

I took Exam of Azure- 104 at 27/2/2023 I score 920 points out of 1000 points. This was on it and my answer was: B Finding answer with high vote is not enough on Examtopics site. this one is example, the command is correct but the CSV file contents you will use with New-AzureADMSInvitation is wrong! so be careful. CSV Must contain Both : - Email address to invite - the user who will receive an invitation - Redirection url - the URL to

which the invited user is forwarded after accepting the invitation. https://learn.microsoft.com/en-us/azure/active-directory/external-identities/tutorial-bulk-invite

You had it wrong. It should be A. If you had chosen A, you might have gotten more than 920 marks you probably had. Anyway, congratulations!

You had it wrong. It should be A. If you had chosen A, you might have gotten more than 920 marks you probably had. Anyway, congratulations!

i use this script almost every day, i think what this question is asking the main command to use for creating guest users. it didn't say that other commands are not necessary, depends how you read it, it could be wrong or right. but i will still choose A for this question. Below is my script. foreach ($email in $invitations) {New-AzureADMSInvitation ` -InvitedUserEmailAddress $email.InvitedUserEmailAddress ` -InvitedUserDisplayName $email.Name ` -InviteRedirectUrl https://myapps.microsoft.com ` -InvitedUserMessageInfo $messageInfo ` -SendInvitationMessage $true }

Spot on. People forget that the redirect URL can simply be passed as a param.

SecExams

Question #41

HOTSPOT -

You have an Azure subscription named Subscription1 that contains a resource group named RG1.

In RG1, you create an internal load balancer named LB1 and a public load balancer named LB2.

You need to ensure that an administrator named Admin1 can manage LB1 and LB2. The solution must follow the principle of least privilege.

Which role should you assign to Admin1 for each task? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

To add a backend pool to LB1:

- Contributor on LB1
- Network Contributor on LB1
- Network Contributor on RG1
- Owner on LB1

To add a health probe to LB2:

- Contributor on LB2
- Network Contributor on LB2
- Network Contributor on RG1
- Owner on LB2

Explanation

Correct Answer:

Answer Area

To add a backend pool to LB1:

- Contributor on LB1
- Network Contributor on LB1
- Network Contributor on RG1
- Owner on LB1

To add a health probe to LB2:

- Contributor on LB2
- Network Contributor on LB2
- Network Contributor on RG1
- Owner on LB2

The Network Contributor role lets you manage networks, but not access them.
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles

Community Discussion

There is something that we all seem to be forgetting here..and that is that Azure RBAC roles can be applied at three different scopes...management group, subscription, resource group and finally resource. So, LB1 and LB2 are resources that we want the Network Contributor role to manage, which by the way satisfies the principle of least privilege. When you apply the scope to the resource group, then it is applied to all the resources in the resource group which is not what we want. The question specifically referred to LB1 and LB2. These resources are atomic, therefore applying the scope to the two will affect just those two resources. Therefore the given answers are correct.

There is something that we all seem to be forgetting here..and that is that Azure RBAC roles can be applied at three different scopes...management group, subscription, resource group and finally resource. So, LB1 and LB2 are resources that we want the Network Contributor role to manage, which by the way satisfies the principle of least privilege. When you apply the scope to the resource group, then it is applied to all the resources in the resource group which is not what we want. The question specifically referred to LB1 and LB2. These resources are atomic, therefore applying the scope to the two will affect just those two resources. Therefore the given answers are correct.

The given answer is incorrect: Box 1. Network Contributor on RG1 Box 2. Network Contributor on RG1

Network Contributor on LB1 Network Contributor on LB2 Network Contributor role on LB1 and LB2 is the correct answer. With this role user can add create a backend address without actually adding the actual IP addresses. Network contributor can also create and modify health probe. If the user wants to add address to backend pools (eg: IPs from a VNet or entire subnet) then a Network Contributor role is required at the resource group level (or atleast on VNet)

this answer is not correct, just tested in a lab environment. Network-Contributor needs to be given on the Resource Group in question, not only the LB - for both actions, adding a Health-Probe and adding a Backend-Pool a validation on the RG-level is triggered. Not having the Network Contributor role on RG level will produce the following error mesage for adding a Health Probe: Additional details from the underlying API that might be helpful: The client 'test@<domain.ltd>' with object id '<some-object-id>' does not have authorization to perform action 'Microsoft.Resources/deployments/validate/action' over scope '/subscriptions/<subscriptionId>/resourceGroups/pb-weu-d-testexam/providers/Microsoft.Resources/deployments/HealthProbe-20221125094430' or the scope is invalid. Adding a backend pool fails to create the deployment at all. Both actions work with Network Contributor role on the Resource Group level.

SecExams

Question #42

You have an Azure subscription that contains an Azure Active Directory (Azure AD) tenant named contoso.com and an Azure Kubernetes Service (AKS) cluster named AKS1.

An administrator reports that she is unable to grant access to AKS1 to the users in contoso.com.

You need to ensure that access to AKS1 can be granted to the contoso.com users.

What should you do first?

A) From contoso.com, modify the Organization relationships settings.

B) From contoso.com, create an OAuth 2.0 authorization endpoint. (Correct Answer)

C) Recreate AKS1.

D) From AKS1, create a namespace.

Explanation

Correct Answer:
B

Reference:
https://kubernetes.io/docs/reference/access-authn-authz/authentication/

Community Discussion

Selected Answer: B

Answer is correct B Cluster administrators can configure Kubernetes role-based access control (Kubernetes RBAC) based on a user's identity or directory group membership. Azure AD authentication is provided to AKS clusters with OpenID Connect. OpenID Connect is an identity layer built on top of the OAuth 2.0 protocol https://docs.microsoft.com/en-us/azure/aks/managed-aad

This seems to be a correct answer in scope of listed answers, but please mind that AKS now supports direct integration with AAD, the method using OAuth 2.0 is considered legacy: https://docs.microsoft.com/en-us/azure/aks/azure-ad-integration-cli

This seems to be a correct answer in scope of listed answers, but please mind that AKS now supports direct integration with AAD, the method using OAuth 2.0 is considered legacy: https://docs.microsoft.com/en-us/azure/aks/azure-ad-integration-cli

In 20/08/2022 exam

You are a bot! You put the same link in all questions. Please stop promoting your channel

SecExams

Question #43

You have a Microsoft 365 tenant and an Azure Active Directory (Azure AD) tenant named contoso.com.
You plan to grant three users named User1, User2, and User3 access to a temporary Microsoft SharePoint document library named Library1.
You need to create groups for the users. The solution must ensure that the groups are deleted automatically after 180 days.
Which two groups should you create? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A) a Microsoft 365 group that uses the Assigned membership type (Correct Answer)
B) a Security group that uses the Assigned membership type
C) a Microsoft 365 group that uses the Dynamic User membership type (Correct Answer)
D) a Security group that uses the Dynamic User membership type
E) a Security group that uses the Dynamic Device membership type

Explanation

Correct Answer:
AC
You can set expiration policy only for Office 365 groups in Azure Active Directory (Azure AD).
Note: With the increase in usage of Office 365 Groups, administrators and users need a way to clean up unused groups. Expiration policies can help remove inactive groups from the system and make things cleaner.
When a group expires, all of its associated services (the mailbox, Planner, SharePoint site, etc.) are also deleted.
You can set up a rule for dynamic membership on security groups or Office 365 groups.
Incorrect Answers:
B, D, E: You can set expiration policy only for Office 365 groups in Azure Active Directory (Azure AD).
Reference:
https://docs.microsoft.com/en-us/office365/admin/create-groups/office-365-groups-expiration-policy?view=o365-worldwide

Community Discussion

Selected Answer: AC

Correct Answer: A and C Only O365 groups support automatic deletion after 180 days.

Gave exam on June 29th 2022 and passed with 870. 80 Percent of the question came from here. Thanks every one for comments.

This is a different question. The reason why A and C is correct is because the answer specifies that the group needs automatic deletion and that's only supported by Microsoft 365 groups.

This is a different question. The reason why A and C is correct is because the answer specifies that the group needs automatic deletion and that's only supported by Microsoft 365 groups.

This is a different question. The reason why A and C is correct is because the answer specifies that the group needs automatic deletion and that's only supported by Microsoft 365 groups.

SecExams

Question #44

SecExams

HOTSPOT -

You have an Azure Active Directory (Azure AD) tenant named contoso.com that contains the users shown in the following table:

Name	Type	Member of
User1	Member	Group1
User2	Guest	Group1
User3	Member	None
UserA	Member	Group2
UserB	Guest	Group2

User3 is the owner of Group1.

Group2 is a member of Group1.

You configure an access review named Review1 as shown in the following exhibit:

SecExams

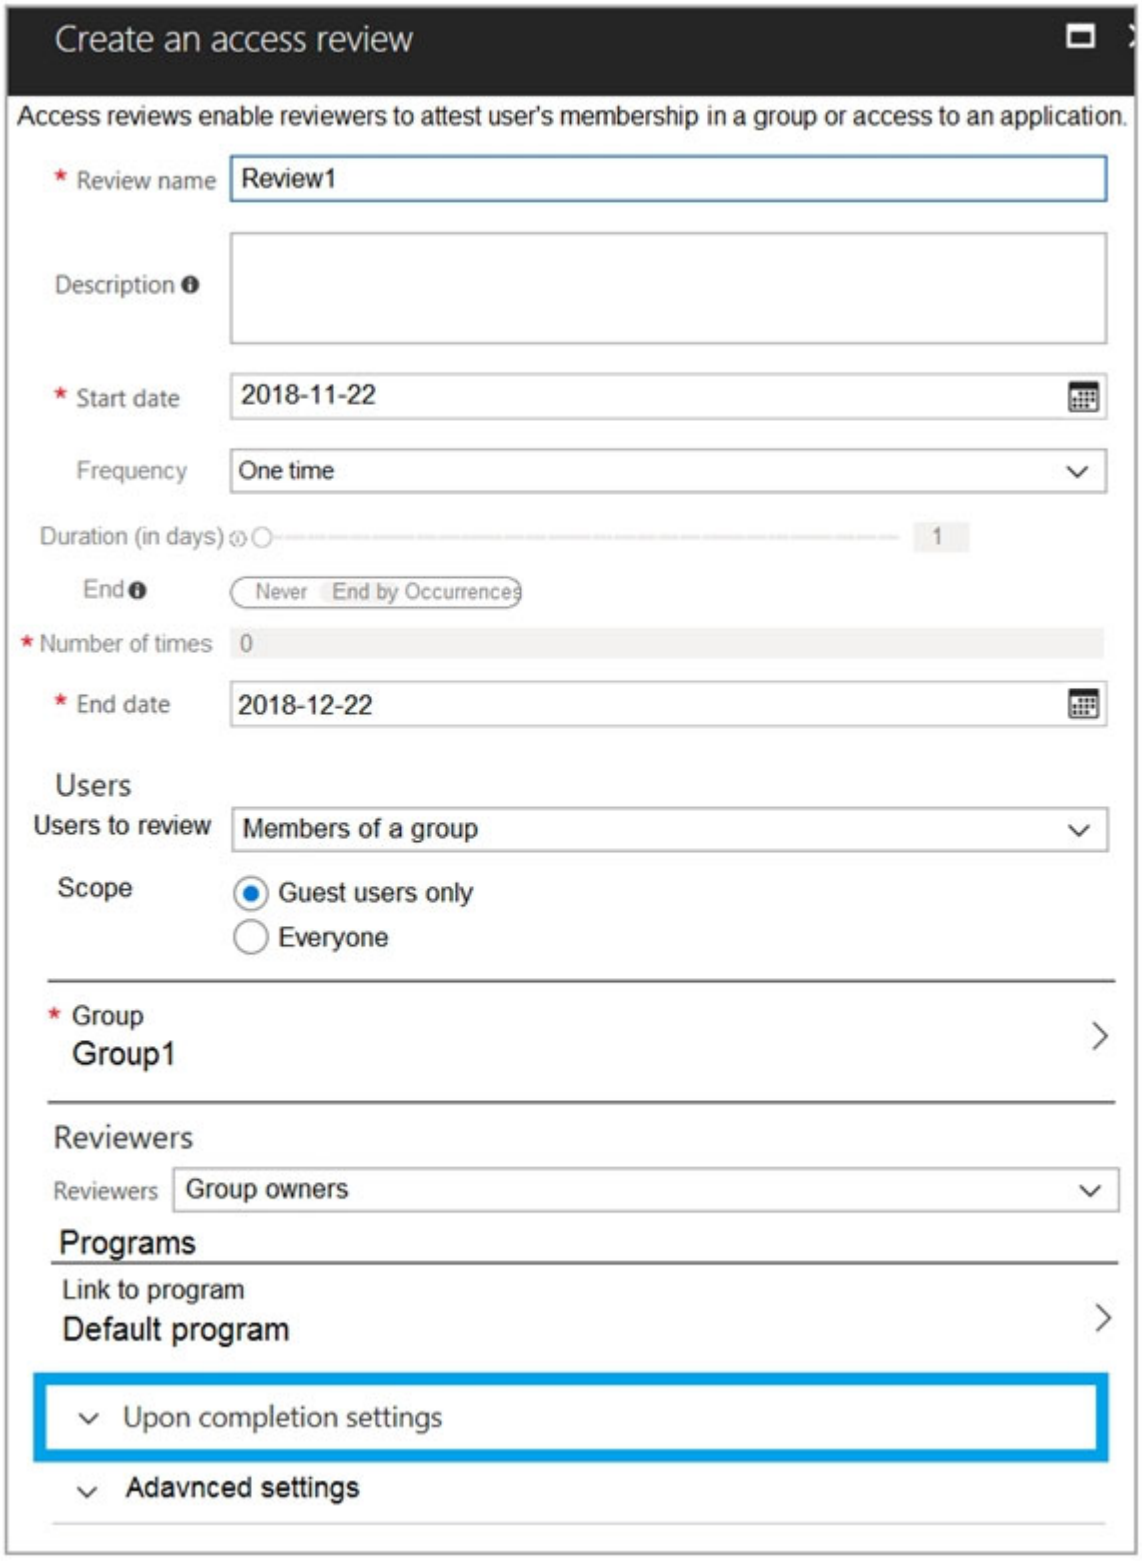

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
User3 can perform an access review of User1	○	○
User3 can perform an access review of UserA	○	○
User3 can perform an access review of UserB	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
User3 can perform an access review of User1	○	○
User3 can perform an access review of UserA	○	○
User3 can perform an access review of UserB	○	○

Reference:
https://docs.microsoft.com/en-us/azure/active-directory/governance/create-access-review

Community Discussion

Tested in lab Correct Answers: User3 can perform an access review of User1 = No User1 is a Member and not a Guest Account, Access Review specified Guests only. User3 can perform an access review of UserA = No User1 is a Member and not a Guest Account, Access Review specified Guests only. User3 can perform an access review of UserB = No Created Group 1 and Group 2, added Group 2 as a member in Group 1, Added guest Accounts to Group 1 and Group 2, In the Access Review results only the Guest Accounts in Group 1 appeared for review and "Not" the Guest accounts in Group 2.

User3 can perform an access review of User1. /No User3 can perform an access review of UserA. /No User3 can perform an access review of UserB. /No Explanation: Access to groups and applications for employees and guests changes over time. To reduce the risk associated with stale access assignments, administrators can use Azure Active Directory (Azure AD) to create access reviews for group members or application access. If you need to routinely review access, you can also create recurring access reviews. Review1 reviews access for guest users who are member of Group1. The group owner is specified as the reviewer. User3 is the owner of Group1. User2 is the only guest user in Group1. Note: Dynamic groups and nested groups are not supported with the Access review process. Reference: Create an access review of groups and applications in Azure AD access reviews : https://docs.microsoft.com/en-us/azure/active-directory/governance/create-access-review

User 3 can perform an access review of User B: YES This is why: At this time, the following scenarios are supported with nested groups: 1.One group can be added as a member of another group, and you can achieve group nesting. 2.Group membership claims. When an app is configured to receive group membership claims in the token, nested groups in which the signed-in user is a member are included. 3.Conditional access (when a conditional access policy has a group scope). 4.Restricting access to self-serve password reset. 5.Restricting which users can do Azure AD Join and device registration. https://docs.microsoft.com/en-us/azure/active-directory/enterprise-users/directory-service-limits-restrictions

User 3 can perform an access review of User B: YES This is why: At this time, the following scenarios are supported with nested groups: 1.One group can be added as a member of another group, and you can achieve group nesting. 2.Group membership claims. When an app is configured to receive group membership claims in the token, nested groups in which the signed-in user is a member are included. 3.Conditional access (when a conditional access policy has a group scope). 4.Restricting access to self-serve password reset. 5.Restricting which users can do Azure AD Join and device registration. https://docs.microsoft.com/en-us/azure/active-directory/enterprise-users/directory-service-limits-restrictions

in think it NNY, guest users are included in nested groups, its not excluded in the link you provided

SecExams

Question #45

HOTSPOT -

You have the Azure management groups shown in the following table:

Name	In management group
Tenant Root Group	*Not applicable*
ManagementGroup11	Tenant Root Group
ManagementGroup12	Tenant Root Group
ManagementGroup21	ManagementGroup11

You add Azure subscriptions to the management groups as shown in the following table:

Name	Management group
Subscription1	ManagementGroup21
Subscription2	ManagementGroup12

You create the Azure policies shown in the following table:

Name	Parameter	Scope
Not allowed resource types	virtualNetworks	Tenant Root Group
Allowed resource types	virtualNetworks	ManagementGroup12

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can create a virtual network in Subscription1.	○	○
You can create a virtual machine in Subscription2.	○	○
You can add Subscription1 to ManagementGroup11.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can create a virtual network in Subscription1.	○	○
You can create a virtual machine in Subscription2.	○	○
You can add Subscription1 to ManagementGroup11.	○	○

Box 1: No -
Virtual networks are not allowed at the root and is inherited. Deny overrides allowed.

Box 2: Yes -
Virtual Machines can be created on a Management Group provided the user has the required RBAC permissions.

Box 3: Yes -
Subscriptions can be moved between Management Groups provided the user has the required RBAC permissions.
Reference:
https://docs.microsoft.com/en-us/azure/governance/management-groups/overview
https://docs.microsoft.com/en-us/azure/governance/management-groups/manage#moving-management-groups-and-subscriptions

Community Discussion

Answer is Wrong : It should Be NO NO NO - subscription should be moved by can't be added to 2 groups.

Agree. - NO: Subscription 1: is not allowed to create a VNET. - NO: Subscription 2: Allowed to create a VNET which restricts anything else. - NO: Subscription 1: already in one Management group called 21, so cannot add into another. A Subscription can be assigned to 1 Management Group.

Agree. - NO: Subscription 1: is not allowed to create a VNET. - NO: Subscription 2: Allowed to create a VNET which restricts anything else. - NO: Subscription 1: already in one

Management group called 21, so cannot add into another. A Subscription can be assigned to 1 Management Group.

From Udemy: NYN Explanation 1. The azure policy (not allowed resource types – Virtual networks) is inherited to Subscription1. So, Virtual networks are not allowed to create in Subscription1. 2. Policy assignments get evaluated top-to-bottom. The most restrictive policy assignment will always win, i.e. a DENY on any level will take precedence over an ALLOW on any other level. So the azure policy (not allowed resource types – Virtual networks) will be applied to Subscription2. The deny policy is only for virtual networks. This allows to create a virtual machine by leveraging existing VNet's. 3. Each management group and subscription can only support one parent. Subscription1 is already part of a management group. We can't add this to another management group though we can move. https://docs.microsoft.com/en-us/azure/governance/management-groups/overview

From Udemy: NYN Explanation 1. The azure policy (not allowed resource types – Virtual networks) is inherited to Subscription1. So, Virtual networks are not allowed to create in Subscription1. 2. Policy assignments get evaluated top-to-bottom. The most restrictive policy assignment will always win, i.e. a DENY on any level will take precedence over an ALLOW on any other level. So the azure policy (not allowed resource types – Virtual networks) will be applied to Subscription2. The deny policy is only for virtual networks. This allows to create a virtual machine by leveraging existing VNet's. 3. Each management group and subscription can only support one parent. Subscription1 is already part of a management group. We can't add this to another management group though we can move. https://docs.microsoft.com/en-us/azure/governance/management-groups/overview

SecExams

Question #46

You have an Azure policy as shown in the following exhibit:

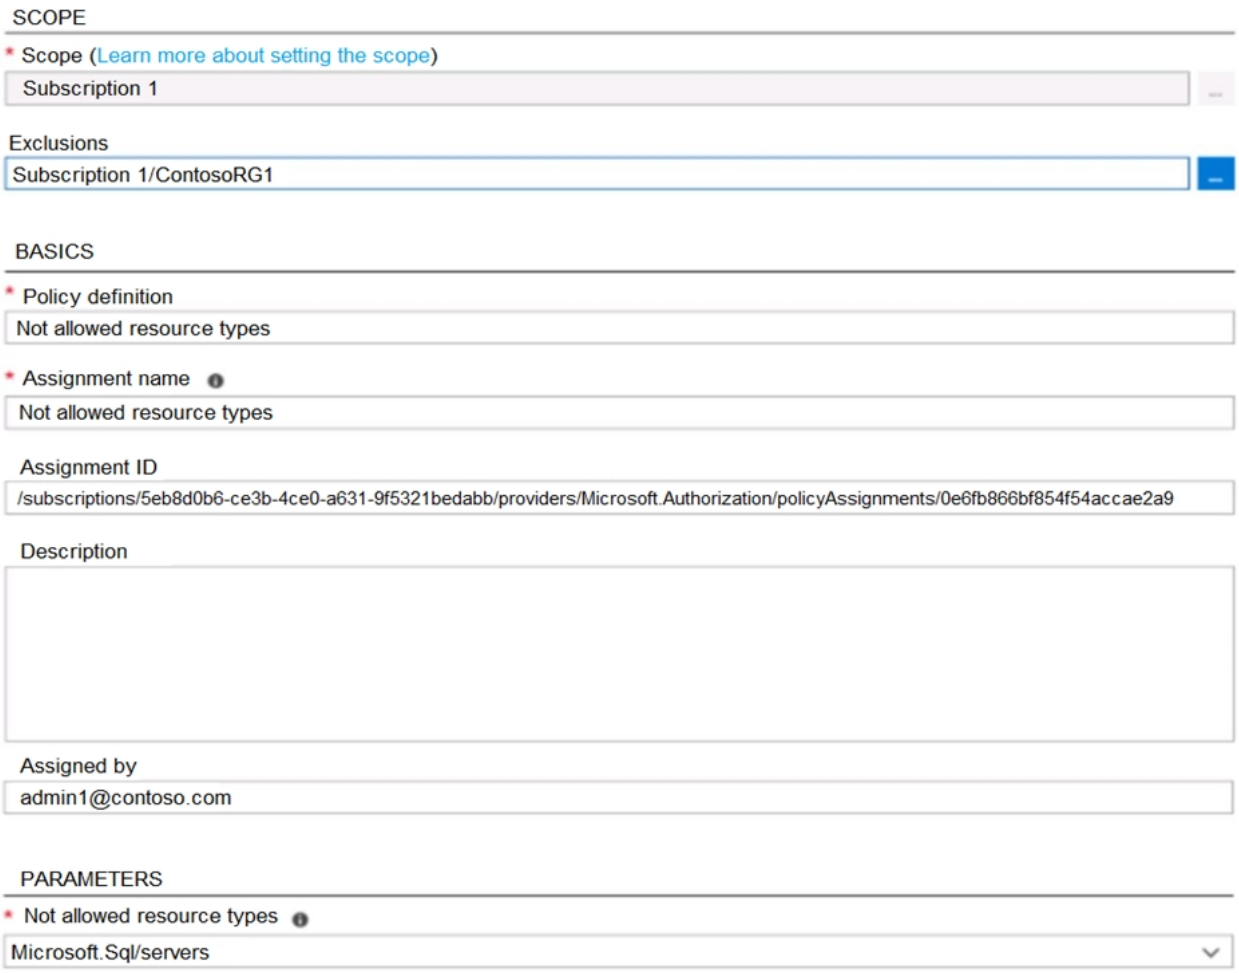

What is the effect of the policy?

A) You are prevented from creating Azure SQL servers anywhere in Subscription 1.

B) You can create Azure SQL servers in ContosoRG1 only. (Correct Answer)

C) You are prevented from creating Azure SQL Servers in ContosoRG1 only.

D) You can create Azure SQL servers in any resource group within Subscription 1.

Explanation

Correct Answer:

B

You are prevented from creating Azure SQL servers anywhere in Subscription 1 with the exception of ContosoRG1

Community Discussion

The Picked Option (B) is the correct option

Answer is Correct. B

Agree. It says: Exclusions and RG1 is there.

Agree. It says: Exclusions and RG1 is there.

This question is explained in the below video with diagram https://youtu.be/h-yIdRdsKv0

SecExams

Question #47

HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table:

Name	Type	Resource group	Tag
RG6	Resource group	*Not applicable*	*None*
VNET1	Virtual network	RG6	Department: D1

You assign a policy to RG6 as shown in the following table:

Section	Setting	Value
Scope	Scope	Subscription1/RG6
	Exclusions	*None*
Basics	Policy definition	Apply tag and its default value
	Assignment name	Apply tag and its default value
Parameters	Tag name	Label
	Tag value	Value1

To RG6, you apply the tag: RGroup: RG6.

You deploy a virtual network named VNET2 to RG6.

Which tags apply to VNET1 and VNET2? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

VNET1:

- None
- Department: D1 only
- Department: D1, and RGroup: RG6 only
- Department: D1, and Label: Value1 only
- Department: D1, RGroup: RG6, and Label: Value1

VNET2:

- None
- RGroup: RG6 only
- Label: Value1 only
- RGroup: RG6, and Label: Value1

Explanation

Correct Answer:

Answer Area

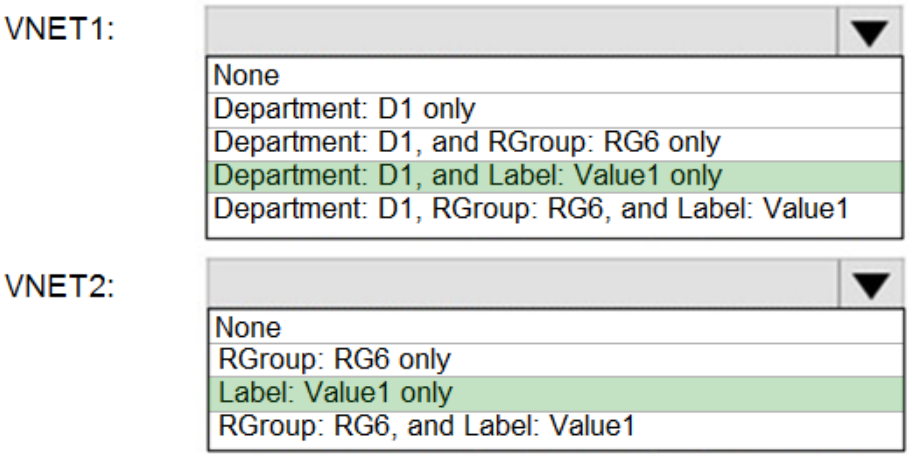

VNET1: Department: D1, and Label:Value1 only.
Tags applied to the resource group or subscription are not inherited by the resources.
Note: Azure Policy allows you to use either built-in or custom-defined policy definitions and assign them to either a specific resource group or across a whole
Azure subscription.
VNET2: Label:Value1 only.
Incorrect Answers:

RGROUP: RG6 -
Tags applied to the resource group or subscription are not inherited by the resources.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/tag-policies

Community Discussion

Correct answer is: VNET1 will only have Department: D1 tag & VNET 2 will only have Label : Value1 tag

resources created before policy creation will not inherit the policy rules. so, VNET1 will only have Department: D1 tag, VNET 2 will have Label : Value1

By default, this assignment of newly create policy will only take effect on newly created resources. Existing resources can be updated via a remediation task after the policy is assigned.

By default, this assignment of newly create policy will only take effect on newly created resources. Existing resources can be updated via a remediation task after the policy is assigned.

agree, remediation task is needed to assign new tags to already existing resources (VNET1 existed before Policy was assigned), therefore VNET1 has no tags from the policy assigned. This would be the case if a remediation task has been performed on the policy assignment, but this was not mentioned in the question.

SecExams

Question #48

You have an Azure subscription named AZPT1 that contains the resources shown in the following table:

Name	Type
storage1	Azure Storage account
VNET1	Virtual network
VM1	Azure virtual machine
VM1Managed	Managed disk for VM1
RVAULT1	Recovery Services vault for the site recovery of VM1

You create a new Azure subscription named AZPT2.
You need to identify which resources can be moved to AZPT2.
Which resources should you identify?

A) VM1, storage1, VNET1, and VM1Managed only
B) VM1 and VM1Managed only
C) VM1, storage1, VNET1, VM1Managed, and RVAULT1 (Correct Answer)
D) RVAULT1 only

Explanation

Correct Answer:
C

You can move a VM and its associated resources to a different subscription by using the Azure portal.
You can now move an Azure Recovery Service (ASR) Vault to either a new resource group within the current subscription or to a new subscription.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-resource-group-and-subscription

Community Discussion

Correct Answer: C All of them. Moving a resource only moves it to a new Resource Group or Subscription. It doesn't change the location of the resource. Reference: https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-support-resources https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-support-resources#microsoftcompute https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-support-resources#microsoftnetwork https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-support-resources#microsoftstorage https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-support-resources#microsoftrecoveryservices

Test today (12/10/2020), Passed, answered "C" for this question in exam

I'm happy for you but we can't be sure it's a correct answer based only on the fact that you passed the exam. You didn't get any correct answer confirmation.

I'm happy for you but we can't be sure it's a correct answer based only on the fact that you passed the exam. You didn't get any correct answer confirmation.

Yep. In saying that, there are some limitations on some resources eg. standard LB resource cannot be moved.

SecExams

Question #49

You recently created a new Azure subscription that contains a user named Admin1.
Admin1 attempts to deploy an Azure Marketplace resource by using an Azure Resource Manager template. Admin1 deploys the template by using Azure PowerShell and receives the following error message: `User failed validation to purchase resources. Error message: `Legal terms have not been accepted for this item on this subscription. To accept legal terms, please go to the Azure portal (http://go.microsoft.com/fwlink/?LinkId=534873) and configure programmatic deployment for the Marketplace item or create it there for the first time.`
You need to ensure that Admin1 can deploy the Marketplace resource successfully.
What should you do?

A) From Azure PowerShell, run the Set-AzApiManagementSubscription cmdlet
B) From the Azure portal, register the Microsoft.Marketplace resource provider
C) From Azure PowerShell, run the Set-AzMarketplaceTerms cmdlet (Correct Answer)
D) From the Azure portal, assign the Billing administrator role to Admin1

Explanation

Correct Answer:
C
Reference:
https://docs.microsoft.com/en-us/powershell/module/az.marketplaceordering/set-azmarketplaceterms?view=azps-4.1.0

Community Discussion

Correct Answer: C Set-AzMarketplaceTerms -Publisher <String> -Product <String> -Name <String> [-Accept] [-Terms <PSAgreementTerms>] [-DefaultProfile <IAzureContextContainer>] [-WhatIf] [-Confirm] [<CommonParameters>] Reference: https://docs.microsoft.com/en-us/powershell/module/Az.MarketplaceOrdering/Set-AzMarketplaceTerms?view=azps-4.6.0

I found mlantonis's answers are the most credible.

I found mlantonis's answers are the most credible.

For anyone wondering how we are supposed to know this while studying for 104, it's hiding here under VM docs: https://learn.microsoft.com/en-us/azure/virtual-machines/windows/cli-ps-findimage

For anyone wondering how we are supposed to know this while studying for 104, it's hiding here under VM docs: https://learn.microsoft.com/en-us/azure/virtual-machines/windows/cli-ps-findimage

Question #50

You have an Azure Active Directory (Azure AD) tenant that contains 5,000 user accounts.
You create a new user account named AdminUser1.
You need to assign the User administrator administrative role to AdminUser1.
What should you do from the user account properties?

A) From the Licenses blade, assign a new license
B) From the Directory role blade, modify the directory role (Correct Answer)
C) From the Groups blade, invite the user account to a new group

Explanation

Correct Answer:
B
Assign a role to a user -
1. Sign in to the Azure portal with an account that's a global admin or privileged role admin for the directory.
2. Select Azure Active Directory, select Users, and then select a specific user from the list.
3. For the selected user, select Directory role, select Add role, and then pick the appropriate admin roles from the Directory roles list, such as Conditional access administrator.
4. Press Select to save.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/active-directory-users-assign-role-azure-portal

Community Discussion

Correct Answer: B Active Directory -> Manage Section -> Roles and administrators-> Search for Admin and assign a user to it. Reference: https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/active-directory-users-assign-role-azure-portal

This is the correct answer(select Active directory --> Users--> select the username --> Assigned roles --> click on +add Assignments --> select User administrator role

B is correct.

B is correct.

Cleared Exam 930 was appeared in exam 18/3/2023 ANS B

SecExams

Question #51

You have an Azure Active Directory (Azure AD) tenant named contoso.onmicrosoft.com that contains 100 user accounts.
You purchase 10 Azure AD Premium P2 licenses for the tenant.
You need to ensure that 10 users can use all the Azure AD Premium features.
What should you do?

A) From the Licenses blade of Azure AD, assign a license (Correct Answer)
B) From the Groups blade of each user, invite the users to a group
C) From the Azure AD domain, add an enterprise application
D) From the Directory role blade of each user, modify the directory role

Explanation

Correct Answer:
A
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/license-users-groups

Community Discussion

Correct Answer: A Active Directory-> Manage Section > Choose Licenses -> All Products -> Select Azure Active Directory Premium P2 -> Then assign a user to it. Reference: https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/license-users-groups

that's true - licences need to be assigned

That answer made me lol

That answer made me lol

yes its true!!! apart from this we need to add location of User also

SecExams

Question #52

You have an Azure subscription named Subscription1 and an on-premises deployment of Microsoft System Center Service Manager.
Subscription1 contains a virtual machine named VM1.
You need to ensure that an alert is set in Service Manager when the amount of available memory on VM1 is below 10 percent.
What should you do first?

A) Create an automation runbook
B) Deploy a function app
C) Deploy the IT Service Management Connector (ITSM) (Correct Answer)
D) Create a notification

Explanation

Correct Answer:
C
The IT Service Management Connector (ITSMC) allows you to connect Azure and a supported IT Service Management (ITSM) product/service, such as the Microsoft System Center Service Manager.
With ITSMC, you can create work items in ITSM tool, based on your Azure alerts (metric

alerts, Activity Log alerts and Log Analytics alerts).
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/itsmc-overview

Community Discussion

Correct Answer: C IT Service Management Connector (ITSMC) allows you to connect Azure to a supported IT Service Management (ITSM) product or service. Azure services like Azure Log Analytics and Azure Monitor provide tools to detect, analyze, and troubleshoot problems with your Azure and non-Azure resources. But the work items related to an issue typically reside in an ITSM product or service. ITSMC provides a bi-directional connection between Azure and ITSM tools to help you resolve issues faster. ITSMC supports connections with the following ITSM tools: ServiceNow, System Center Service Manager, Provance, Cherwell. Reference: https://docs.microsoft.com/en-us/azure/azure-monitor/alerts/itsmc-overview

Correct, you can use the connector to bridge them together

Agreed. But interesting to reflect why the rest is wrong. A and B are technically possible too, but the question is what to do *first*. In both cases you'd need to create a trigger first (runbooks and function apps don't run by themselves) eg. with a rule and webhook. D is fairly obviously nonsense, that won't do anything to get you to Service Manager.

Agreed. But interesting to reflect why the rest is wrong. A and B are technically possible too, but the question is what to do *first*. In both cases you'd need to create a trigger first (runbooks and function apps don't run by themselves) eg. with a rule and webhook. D is fairly obviously nonsense, that won't do anything to get you to Service Manager.

Q was in exam 29th July 2023

Question #53

You sign up for Azure Active Directory (Azure AD) Premium P2.
You need to add a user named as an administrator on all the computers that will be joined to the Azure AD domain.
What should you configure in Azure AD?

A) Device settings from the Devices blade (Correct Answer)

B) Providers from the MFA Server blade
C) User settings from the Users blade
D) General settings from the Groups blade

Explanation

Correct Answer:
A
When you connect a Windows device with Azure AD using an Azure AD join, Azure AD adds the following security principles to the local administrators group on the device:
✑ The Azure AD global administrator role
✑ The Azure AD device administrator role
✑ The user performing the Azure AD join
In the Azure portal, you can manage the device administrator role on the Devices page.
To open the Devices page:
1. Sign in to your Azure portal as a global administrator or device administrator.
2. On the left navbar, click Azure Active Directory.
3. In the Manage section, click Devices.
4. On the Devices page, click Device settings.
5. To modify the device administrator role, configure Additional local administrators on Azure AD joined devices.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/devices/assign-local-admin

SecExams

Community Discussion

I studied from Microsoft learn for az-104. So far all the questions look alien to me. Dont know the answer to most of them. I wonder if its the same with others. They say that you shouldn't use dumps. But It seems like dumps is the only way to go, if they make the exams so tough

Correct Answer: A When you connect a Windows device with Azure AD using an Azure AD join, Azure AD adds the following security principles to the local administrators group on the device: ✑ The Azure AD global administrator role ✑ The Azure AD device administrator role ✑ The user performing the Azure AD join In the Azure portal, you can manage the device administrator role on the Devices page. To open the Devices page: 1. Sign in to your Azure portal as a global administrator or device administrator. 2. On the left navbar, click Azure Active Directory. 3. In the Manage section, click Devices. 4. On the Devices page, click Device settings. 5. To modify the device administrator role, configure

Additional local administrators on Azure AD joined devices. Reference: https://docs.microsoft.com/en-us/azure/active-directory/devices/assign-local-admin

you're not alone, this is what we all have to go through. I had the same shock first time I took an exam (AZ-900), but cleared it in the end. Did two more exams OK. Tip for you or anyone else studying: - go through Microsoft Learn and do the exercises. It may not help to answer the questions directly, but it's a true pain to memorize dumps without any hands on to relate to - contrary to what you read here, the exact questions are 80% different from the dumps. No point memorizing the right answer anyway. BUT, the exams are similar, and mix and match the same topics so it is hyper important to run through dumps to get used to the format. - it is *critical* to understand why one answer is correct -in other words, make sure you understand why the rest is wrong *in this particular case*. In the exam they might change the question a bit and all of a sudden another alternative is correct.

you're not alone, this is what we all have to go through. I had the same shock first time I took an exam (AZ-900), but cleared it in the end. Did two more exams OK. Tip for you or anyone else studying: - go through Microsoft Learn and do the exercises. It may not help to answer the questions directly, but it's a true pain to memorize dumps without any hands on to relate to - contrary to what you read here, the exact questions are 80% different from the dumps. No point memorizing the right answer anyway. BUT, the exams are similar, and mix and match the same topics so it is hyper important to run through dumps to get used to the format. - it is *critical* to understand why one answer is correct -in other words, make sure you understand why the rest is wrong *in this particular case*. In the exam they might change the question a bit and all of a sudden another alternative is correct.

I did the Microsoft official course, but for the exam, no way I could make it, the 32h course, didn't give me any knowledge to respond to any questions from the real exam. It's a shame, but in the AZ-104 description, it says that you need 6 months of experience, hands on with Azure to pass the exam, I wonder, how can you have 6 months of experience if you are trying to get the certificate to get the role in the company!! funny story

SecExams

Question #54

HOTSPOT -

You have Azure Active Directory tenant named Contoso.com that includes following users:

Name	Role
User1	Cloud device administrator
User2	User administrator

Contoso.com includes following Windows 10 devices:

Name	Join type
Device1	Azure AD registered
Device2	Azure AD joined

You create following security groups in Contoso.com:

Name	Membership Type	Owner
Group1	Assigned	User2
Group2	Dynamic Device	User2

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
User1 can add Device2 to Group1	○	○
User2 can add Device1 to Group1	○	○
User2 can add Device2 to Group2	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
User1 can add Device2 to Group1	○	○
User2 can add Device1 to Group1	○	○
User2 can add Device2 to Group2	○	○

Box 1: Yes -
User1 is a Cloud Device Administrator.
Device2 is Azure AD joined.
Group1 has the assigned to join type. User1 is the owner of Group1.
Note: Assigned groups - Manually add users or devices into a static group.
Azure AD joined or hybrid Azure AD joined devices utilize an organizational account in Azure AD

Box 2: No -
User2 is a User Administrator.
Device1 is Azure AD registered.
Group1 has the assigned join type, and the owner is User1.
Note: Azure AD registered devices utilize an account managed by the end user, this account is either a Microsoft account or another locally managed credential.

Box 3: Yes -
User2 is a User Administrator.
Device2 is Azure AD joined.
Group2 has the Dynamic Device join type, and the owner is User2.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/devices/overview

Community Discussion

User1 can add Device2 to Group1: No User2 can add Device1 to Group1: Yes User2 can add Device2 to Group2: No Explaination: Groups can contain both registered and joined devices as members. As a global administrator or cloud device administrator, you can manage the registered or joined devices. Intune Service administrators can update and delete devices. User administrator can manage users but not devices. User1 is a cloud device administrator. Users in this role can enable, disable, and delete devices in Azure AD and read Windows 10 BitLocker keys (if present) in the Azure portal. The role does not grant permissions to manage any other properties on the device. User2 is the owner of

Group1. He can add Device1 to Group1. Group2 is configured for dynamic membership. The properties on which the membership of a device in a group of the type dynamic device are defined cannot be changed by either an end user or an user administrator. User2 cannot add any device to Group2. Reference: https://docs.microsoft.com/en-us/azure/active-directory/devices/device-management-azure-portal

NO Cloud device admin cannot add/join devices YES: user admin can add device/user/groups NO: Dynamic groups dont require manual intervention, it uses criteria to add or remove devices/users/groups only assigned groups you can add

Take a second look. User1 does not own any of the Groups. Answer is No.

Take a second look. User1 does not own any of the Groups. Answer is No.

Take a second look. User1 does not own any of the Groups. Answer is No.

SecExams

Question #55

You have an Azure subscription that contains a resource group named RG26. RG26 is set to the West Europe location and is used to create temporary resources for a project. RG26 contains the resources shown in the following table.

Name	Type	Location
VM1	Virtual machine	North Europe
RGV1	Recovery Services vault	North Europe
SQLD01	SQL server in Azure VM	North Europe
sa001	Storage account	West Europe

SQLDB01 is backed up to RGV1.
When the project is complete, you attempt to delete RG26 from the Azure portal. The deletion fails.
You need to delete RG26.
What should you do first?

A) Delete VM1
B) Stop VM1
C) Stop the backup of SQLDB01 (Correct Answer)
D) Delete sa001

Explanation

Correct Answer:
C

Community Discussion

Took my exam a few days ago and passed with a 925. All but about 4 or 5 question are covered in these dumps. Always check the discussion for best answer.

Answer is correct, Appear On Exam July 1 2021

Q was in exam 29th July 2023

Thanks for that, I'll take the exam on 31st August, I hope the questions remain the same

Thanks for that, I'll take the exam on 31st August, I hope the questions remain the same

SecExams

Question #56

You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1.
Subscription1 has a user named User1. User1 has the following roles:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.
What should you do?

A) Remove User1 from the Security Reader and Reader roles for Subscription1.
B) Assign User1 the User Access Administrator role for VNet1. (Correct Answer)
C) Assign User1 the Network Contributor role for VNet1.
D) Assign User1 the Network Contributor role for RG1.

Explanation

Correct Answer:
B
Has full access to all resources including the right to delegate access to others.
Note:
There are several versions of this question in the exam. The question has two possible correct answers:
✑ Assign User1 the User Access Administrator role for VNet1.
✑ Assign User1 the Owner role for VNet1.
Other incorrect answer options you may see on the exam include the following:
✑ Assign User1 the Contributor role for VNet1.
✑ Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1.
✑ Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1.
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/overview

Community Discussion

This question came in the exam today 8/Mar/2022. I passed the exam, 95% questions came from here.

agree, its B

Any variations of Contributor role does not allow to grant roles to other users. Contributor can be understood as resource read/write permission. To assing roles to other users you need some variation of Owner to repurce or Administrator role. Roles do not exclude each other, so if you have Read and Contributor role, you're still a Contributor and gain nothing by removing Reader role.

Did you pay contributor access for the second half of the questions here? or just with the first half was good?

How do you practice the study case, bro?

Question #57

You have an Azure Active Directory (Azure AD) tenant named contosocloud.onmicrosoft.com.
Your company has a public DNS zone for contoso.com.
You add contoso.com as a custom domain name to Azure AD.
You need to ensure that Azure can verify the domain name.
Which type of DNS record should you create?

A) MX (Correct Answer)
B) NSEC
C) PTR
D) RRSIG

Explanation

Correct Answer:
A
To verify your custom domain name (example)
1. Sign in to the Azure portal using a Global administrator account for the directory.
2. Select Azure Active Directory, and then select Custom domain names.
3. On the Fabrikam - Custom domain names page, select the custom domain name, Contoso.
4. On the Contoso page, select Verify to make sure your custom domain is properly registered and is valid for Azure AD. Use either the TXT or the MX record type.
Note:
There are several versions of this question in the exam. The question can have two correct answers:
1. MX
2. TXT
The question can also have other incorrect answer options, including the following:
1. SRV
2. NSEC3
Reference:
https://docs.microsoft.com/en-us/azure/dns/dns-web-sites-custom-domain

Community Discussion

TXT and MX are valid answers.

So guys i will try to give an expiation to this question. When you add a custom domain in azure u are not allowed to use that unless u prove its your domain.So once u add the custom domain name azure asks u to verify and you have to provide some inputs to verify that its your these inputs can be provided in TXT or MX. So its MX in this case

Thank you - the process is covered here where you can see either TXT or MX can be chosen: https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/add-custom-domain

Thank you - the process is covered here where you can see either TXT or MX can be chosen: https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/add-custom-domain

Why would you update MX record? Its used for mail servers. The email delivery will stop working if you update MX records. TXT is always used for domain verification.

SecExams

Question #58

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers. Subscription1 contains a resource group named Dev.
You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.
Solution: On Subscription1, you assign the DevTest Labs User role to the Developers group.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
DevTest Labs User role only lets you connect, start, restart, and shutdown virtual machines in your Azure DevTest Labs.
The Logic App Contributor role lets you manage logic app, but not access to them. It provides access to view, edit, and update a logic app.
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles
https://docs.microsoft.com/en-us/azure/logic-apps/logic-apps-securing-a-logic-app

Community Discussion

Correct Answer: B The Azure DevTest Labs is a role used for Azure DevTest Labs, not for Logic Apps. DevTest Labs User role only lets you connect, start, restart, and shutdown virtual machines in your Azure DevTest Labs. The Logic App Contributor role lets you manage logic app, but not access to them. It provides access to view, edit, and update a logic app. Reference: https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles https://docs.microsoft.com/en-us/azure/logic-apps/logic-apps-securing-a-logic-app https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#devtest-labs-user

think of it as football manager (he can decide who can play but can't play himself.

think of it as football manager (he can decide who can play but can't play himself.

think of it as football manager (he can decide who can play but can't play himself.

think of it as football manager (he can decide who can play but can't play himself.

SecExams

Question #59

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers. Subscription1 contains a resource group named Dev.
You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.
Solution: On Subscription1, you assign the Logic App Operator role to the Developers group.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
You would need the Logic App Contributor role.
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles
https://docs.microsoft.com/en-us/azure/logic-apps/logic-apps-securing-a-logic-app

Community Discussion

Correct Answer: B You would need the Logic App Contributor role. Logic App Operator - Lets you read, enable, and disable logic apps, but not edit or update them. Logic App Contributor - Lets you create, manage logic apps, but not access to them. Reference: https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles https://docs.microsoft.com/en-us/azure/logic-apps/logic-apps-securing-a-logic-app https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#logic-app-operator

Logic App Operator Role - Lets you read, enable, and disable logic apps, but not edit or update them.

Was on exam 19 Aug 2022. Scored 870. Answered B

Was on exam 19 Aug 2022. Scored 870. Answered B

This question is explained in below video https://youtu.be/8tQv5aR6ugg

SecExams

Question #60

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers. Subscription1 contains a resource group named Dev.
You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.
Solution: On Dev, you assign the Contributor role to the Developers group.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
The Contributor role can manage all resources (and add resources) in a Resource Group.

Community Discussion

Correct Answer: A The Contributor role can manage all resources (and add resources) in a Resource Group. Contributor role can create logic apps. Alternatively, we can use the Logic App Contributor role, which lets you manage logic app, but not access to them. It provides access to view, edit, and update a logic app. Reference: https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#contributor https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#logic-app-contributor

Answer is Correct. YES (A) Contributor role can create logic apps

In exam 4 June 2023, Answer is A. Passed at 930

This question was on my exam on 22 Sep 2023 i scored 900 ! answered A

Selected Answer: A

Contributor or Logic App Contributor role is required. https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#contributor https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#logic-app-contributor Passed the exam on 26 July 2023. Scored 870. Exact question came.

SecExams

Question #61

DRAG DROP -

You have an Azure subscription that is used by four departments in your company. The subscription contains 10 resource groups. Each department uses resources in several resource groups.

You need to send a report to the finance department. The report must detail the costs for each department.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

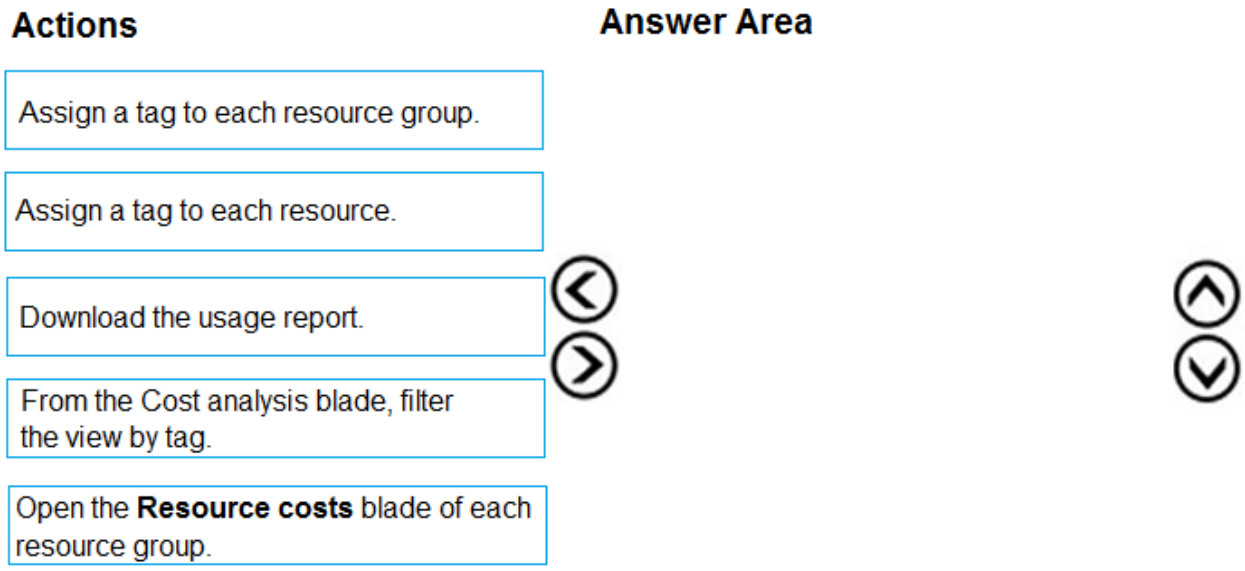

Explanation

Correct Answer:

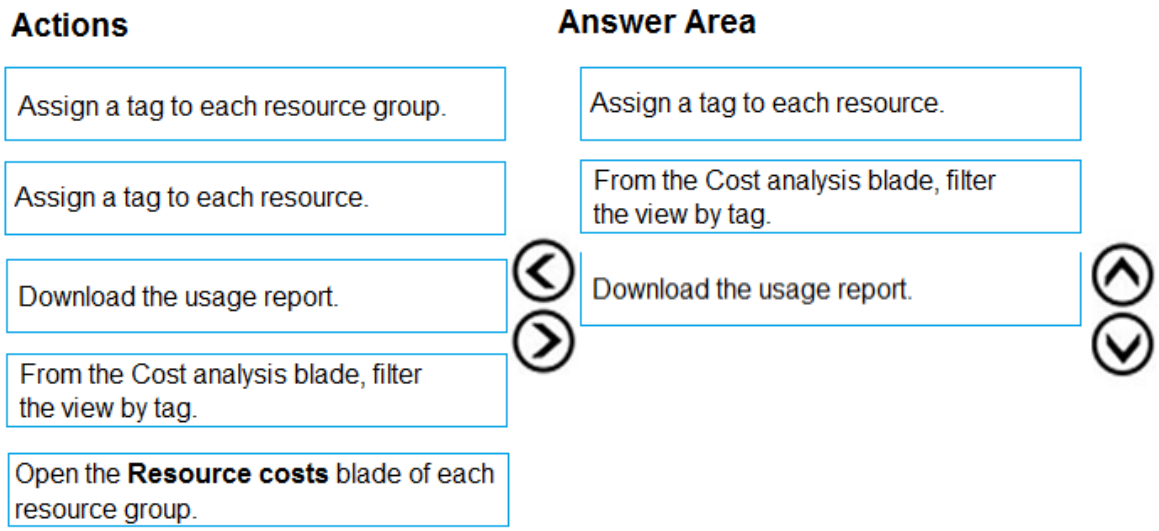

Box 1: Assign a tag to each resource.
You apply tags to your Azure resources giving metadata to logically organize them into a taxonomy. After you apply tags, you can retrieve all the resources in your subscription with that tag name and value. Each resource or resource group can have a maximum of 15 tag name/value pairs. Tags applied to the resource group are not inherited by the resources in that resource group.
Box 2: From the Cost analysis blade, filter the view by tag
After you get your services running, regularly check how much they're costing you. You can see the current spend and burn rate in Azure portal.
1. Visit the Subscriptions blade in Azure portal and select a subscription.
You should see the cost breakdown and burn rate in the popup blade.
2. Click Cost analysis in the list to the left to see the cost breakdown by resource. Wait 24 hours after you add a service for the data to populate.
3. You can filter by different properties like tags, resource group, and timespan. Click Apply to confirm the filters and Download if you want to export the view to a Comma-Separated Values (.csv) file.
Box 3: Download the usage report
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-using-tags https://docs.microsoft.com/en-us/azure/billing/billing-getting-started

Community Discussion

Correct Answer: Box 1: Assign a tag to each resource Box 2: From the Cost analysis blade, filter the view by tag Box 3: Download the usage report Reference: https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-using-tags https://docs.microsoft.com/en-us/azure/billing/billing-getting-started

Ans is correct

Yup! also tested it.

Yup! also tested it.

How do you guys test all of this? You have access to Azure in your company and they give you permissions to deploy and test? I mean this one can be tested by a free account but other things can't be tested though. I wonder how people can test so many things xD

Question #62

You have an Azure subscription named Subscription1 that contains an Azure Log Analytics workspace named Workspace1.
You need to view the error events from a table named Event.
Which query should you run in Workspace1?

A) Get-Event Event | where {$_.EventType == "error"}
B) search in (Event) "error" (Correct Answer)
C) select * from Event where EventType == "error"
D) search in (Event) * | where EventType -eq "error"

Explanation

Correct Answer:
B
To search a term in a specific table, add the table-name just after the search operator
Note:
There are several versions of this question in the exam. The question has two possible correct answers:
1. Event | search "error"
2. Event | where EventType == "error"
3. search in (Event) "error"
Other incorrect answer options you may see on the exam include the following:
1. Get-Event Event | where {$_.EventTye ز€"eq "error"}
2. Event | where EventType is "error"
3. search in (Event) * | where EventType ز€"eq "error"
4. select * from Event where EventType is "error"
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/log-query/search-queries

https://docs.microsoft.com/en-us/azure/azure-monitor/log-query/get-started-portal
https://docs.microsoft.com/en-us/azure/data-explorer/kusto/query/searchoperator?pivots=azuredataexplorer

Community Discussion

Correct B Tested in lab Home>>Monitor>>Logs All command queries return syntax error except Search in (Event) "error"

the similar question on 16/03/2022 with same question and passed with 900 percent a

Lab tests show B is the correct option. This should override whatever OpenAI answered.

Lab tests show B is the correct option. This should override whatever OpenAI answered.

D is correct. D. search in (Event) * | where EventType -eq "error" Explanation: Option A is a PowerShell command and not a Log Analytics query language (KQL) query. It won't work in Workspace1. Option B is a search query, but it is using a different syntax than KQL. The correct syntax for KQL is 'search' instead of 'search in', and the where clause should be used to filter the results. Option C is a KQL query, but it is using a wrong syntax. The correct syntax to filter data based on a condition is using 'where' instead of '==' in KQL. Option D is a valid KQL query to search the Event table in Workspace1 and filter the results based on the 'EventType' field that contains the value "error". Therefore, option D is the correct answer.

SecExams

Question #63

SecExams

HOTSPOT -

You have an Azure subscription that contains a virtual network named VNET1 in the East US 2 region. A network interface named VM1-NI is connected to VNET1.

You successfully deploy the following Azure Resource Manager template.

SecExams

```
{
    "apiVersion": "2017-03-30",
    "type": "Microsoft.Compute/virtualMachines",
    "name": "VM1",
    "zones": "1",
    "location": "EastUS2",
    "dependsOn": [
      "[resourceId('Microsoft.Network/networkInterfaces', 'VM1-NI')]"
    ],
    "properties": {
      "hardwareProfile": {
        "vmSize": "Standard_A2_v2"
      },
      "osProfile": {
        "computerName": "VM1",
        "adminUsername": "AzureAdmin",
        "adminPassword": "[parameters('adminPassword')]"
      },
      "storageProfile": {
        "imageReference": "[variables('image')]",
        "osDisk": {
          "createOption": "FromImage"
        }
      },
      "networkProfile": {
        "networkInterfaces": [
          {
            "id": "[resourceId('Microsoft.Network/networkInterfaces', 'VM1-NI')]"
          }
        ]
      }
    }
  },
  {
    "apiVersion": "2017-03-30",
    "type": "Microsoft.Compute/virtualMachines",
    "name": "VM2",
    "zones": "2",
    "location: "EastUS2",
    "dependsOn": [
      "[resourceId('Microsoft.Network/networkInterfaces', 'VM2-NI')]"
    ],
    "properties": {
      "hardwareProfile": {
        "vmSize": "Standard_A2_v2"
      },
      "osProfile": {
        "computerName": "VM2",
        "adminUsername": "AzureAdmin",
        "adminPassword": "[parameters('adminPassword')]"
      },
      "storageProfile": {
        "imageReference": "[variables('image')]",
        "osDisk": {
          "createOption": "FromImage"
        }
      },
      "networkProfile": {
        "networkInterfaces": [
          {
            "id": "[resourceId('Microsoft.Network/networkInterfaces', 'VM2-NI')]"
          }
        ]
      }
    }
  }
```

SecExams

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Statements	Yes	No
VM1 and VM2 can connect to VNET1	○	○
If an Azure datacenter becomes unavailable, VM1 or VM2 will be available.	○	○
If the East US 2 region becomes unavailable, VM1 or VM2 will be available.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM1 and VM2 can connect to VNET1	○	○
If an Azure datacenter becomes unavailable, VM1 or VM2 will be available.	○	○
If the East US 2 region becomes unavailable, VM1 or VM2 will be available.	○	○

Box 1: Yes -

Box 2: Yes -
VM1 is in Zone1, while VM2 is on Zone2.

Box 3: No -
Reference:
https://docs.microsoft.com/en-us/azure/architecture/resiliency/recovery-loss-azure-region

Community Discussion

YES YES NO

No because VM2NI is not connected to VNET1 Yes No

How do you know VM2-NI is connected to VNET1?

How do you know VM2-NI is connected to VNET1?

NIC should be in the same regiion with the VNET to work properly. As you read on the template, VM1 and VM2 are in the same region. Then, VM1-NI and VM2-IN could be connected to VNET1

SecExams

Question #64

You have an Azure subscription named Subscription1. Subscription1 contains the resource groups in the following table.

Name	Azure region	Policy
RG1	West Europe	Policy1
RG2	North Europe	Policy2
RG3	France Central	Policy3

RG1 has a web app named WebApp1. WebApp1 is located in West Europe.
You move WebApp1 to RG2.
What is the effect of the move?

A) The App Service plan for WebApp1 remains in West Europe. Policy2 applies to WebApp1. (Correct Answer)

B) The App Service plan for WebApp1 moves to North Europe. Policy2 applies to WebApp1.
C) The App Service plan for WebApp1 remains in West Europe. Policy1 applies to WebApp1.
D) The App Service plan for WebApp1 moves to North Europe. Policy1 applies to WebApp1.

Explanation

Correct Answer:
A
You can move an app to another App Service plan, as long as the source plan and the target plan are in the same resource group and geographical region.

The region in which your app runs is the region of the App Service plan it's in. However, you cannot change an App Service plan's region.
Reference:
https://docs.microsoft.com/en-us/azure/app-service/app-service-plan-manage

Community Discussion

Correct Answer: A You can only move a resource to a Resource Group or Subscription, but the location stays the same. When you move WebApp1 to RG2, the resource will be restricted based on the policy of the new Resource Group (Policy2). Reference: https://docs.microsoft.com/en-us/azure/app-service/app-service-plan-manage

A is correct

I agree with the answer (A is correct), but your comments don't seem correct. you are moving app from one region to another. Procedure is listed below: - Create a back up of the source app. - Create an app in a new App Service plan, in the target region. - Restore the back up in the target app - If you use a custom domain, bind it preemptively to the target app with 'awverify'. and enable the domain in the target app. - Configure everything else in your target app to be the same as the source app and verify your configuration. - When you're ready for the custom domain to point to the target app, remap the domain name. Here it states that you have to create new AppService plan in new region. So old plan stays where it is. Reference: https://docs.microsoft.com/en-us/azure/app-service/manage-move-across-regions

I agree with the answer (A is correct), but your comments don't seem correct. you are moving app from one region to another. Procedure is listed below: - Create a back up of the source app. - Create an app in a new App Service plan, in the target region. - Restore the back up in the target app - If you use a custom domain, bind it preemptively to the target app with 'awverify'. and enable the domain in the target app. - Configure everything else in your target app to be the same as the source app and verify your configuration. - When you're ready for the custom domain to point to the target app, remap the domain name. Here it states that you have to create new AppService plan in new region. So old plan stays where it is. Reference: https://docs.microsoft.com/en-us/azure/app-service/manage-move-across-regions

the fact moving the web app resource from one RG to other RG located in other region does not mean that the resource app change its location.

Question #65

HOTSPOT -

You have an Azure subscription named Subscription1 that has a subscription ID of c276fc76-9cd4-44c9-99a7-4fd71546436e.

You need to create a custom RBAC role named CR1 that meets the following requirements:

- ✑ Can be assigned only to the resource groups in Subscription1
- ✑ Prevents the management of the access permissions for the resource groups
- ✑ Allows the viewing, creating, modifying, and deleting of resources within the resource groups

What should you specify in the assignable scopes and the permission elements of the definition of CR1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
"assignableScopes": [
    [ ▼ ]
        "/"
        "/subscriptions/c276fc76-9cd4-44c9-99a7-4fd71546436e"
        "/subscriptions/c276fc76-9cd4-44c9-99a7-4fd71546436e/resourceGroups"
],
"permissions": [
  {
      "actions": [
      "*"
      ],
      "additionalProperties": {},
      "dataActions": [],
      "notActions": [
          [ ▼ ]
              "Microsoft.Authorization/*"
              "Microsoft.Resources/*"
              "Microsoft.Security/*"
  ],
  "notDataActions": [ ]
  }
],
```

Explanation

Correct Answer:

Answer Area

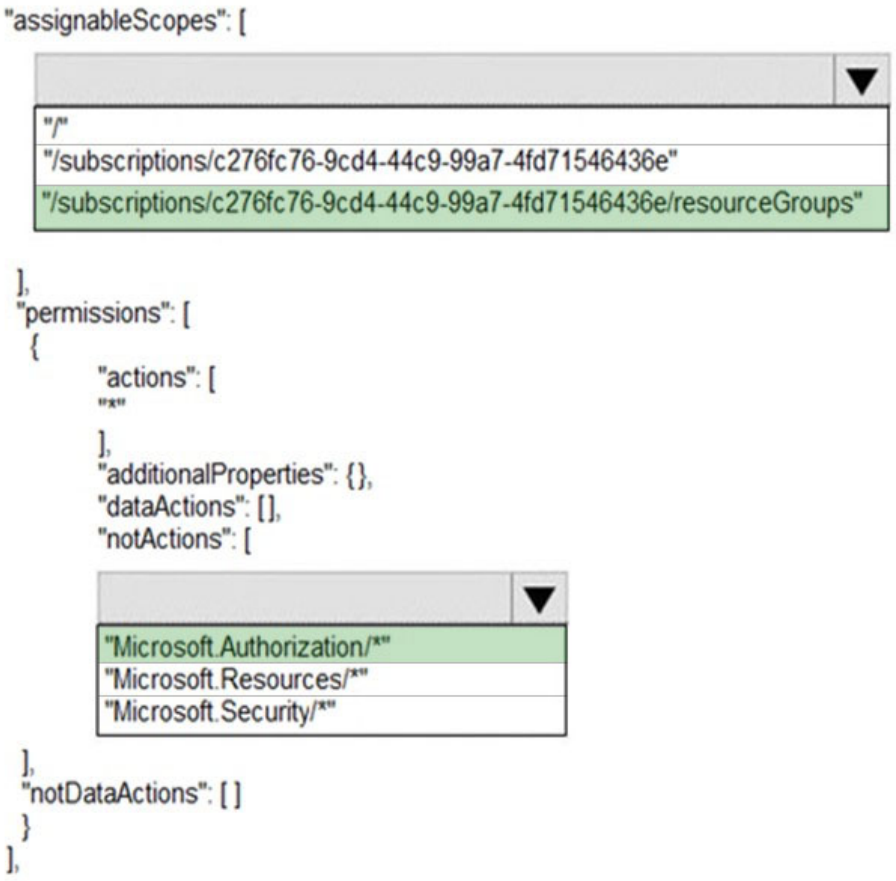

Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/custom-roles
https://docs.microsoft.com/en-us/azure/role-based-access-control/resource-provider-operations#microsoftresources

Community Discussion

Correct Answer: “/subscriptions/c276fc76-9cd4-44c9-99a7-4fd71546435e”
“Microsoft.Authorization/”

The Answer is Wrong. First part should be "/Subscription/subcription_id" only. There is nothing called "resourceGroups" only or "resourceGroups/*" . You can specify either a

subscription, specific resource group, management group or specific resource. for example it should "/subcription/subcription_id/resourceGroups/resource_group_name" Check https://github.com/MicrosoftDocs/azure-docs/blob/master/articles/role-based-access-control/role-definitions.md#role-definition-structure For second box. It is correct but missing "*". It should be "Microsoft.Authorization/*" . if you try this on az cli without "*". you will get an error

/subscriptions/subcription_id/resourceGroups/* -- This should be it. Same with the second one Microsoft.Authorization/* In both, a "*" is missing. Without this "*", the custom role won't get created. However, /subscriptions/subcription_id --> this passes the validation while creating custom role

/subscriptions/subcription_id/resourceGroups/* -- This should be it. Same with the second one Microsoft.Authorization/* In both, a "*" is missing. Without this "*", the custom role won't get created. However, /subscriptions/subcription_id --> this passes the validation while creating custom role

So often I have the feeling; This HAS to be wrong. And finding the community confirming my thoughts is nice :)

SecExams

Question #66

You have an Azure subscription.
Users access the resources in the subscription from either home or from customer sites. From home, users must establish a point-to-site VPN to access the Azure resources. The users on the customer sites access the Azure resources by using site-to-site VPNs.
You have a line-of-business-app named App1 that runs on several Azure virtual machine. The virtual machines run Windows Server 2016.
You need to ensure that the connections to App1 are spread across all the virtual machines.
What are two possible Azure services that you can use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A) an internal load balancer (Correct Answer)
B) a public load balancer
C) an Azure Content Delivery Network (CDN)
D) Traffic Manager

E) an Azure Application Gateway (Correct Answer)

Explanation

Correct Answer:
AE
Network traffic from the VPN gateway is routed to the cloud application through an internal load balancer. The load balancer is located in the front-end subnet of the application.
Reference:
https://docs.microsoft.com/en-us/azure/architecture/reference-architectures/hybrid-networking/vpn https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-overview https://docs.microsoft.com/en-us/azure/application-gateway/overview

Community Discussion

Correct Answer: A and E A: The customer sites are connected through VPNs, so an internal load balancer is enough. B: The customer sites are connected through VPNs, so there's no need for a public load balancer, an internal load balancer is enough. C: A CDN does not provide load balancing for applications, so it not relevant for this situation. D: Traffic manager is a DNS based solution to direct users' requests to the nearest (typically) instance and does not provide load balancing for this situation. E: Azure Application Gateway is a valid option, as it provides load balancing in addition to routing and security functions

i would say A and E is the correct answer.

It means that nobody is accessing the resources through public ip ..So no need of a public load balancer.

It means that nobody is accessing the resources through public ip ..So no need of a public load balancer.

It means that nobody is accessing the resources through public ip ..So no need of a public load balancer.

Question #67

You have an Azure subscription.
You have 100 Azure virtual machines.
You need to quickly identify underutilized virtual machines that can have their service tier changed to a less expensive offering.
Which blade should you use?

A) Monitor
B) Advisor (Correct Answer)
C) Metrics
D) Customer insights

Explanation

Correct Answer:
B
Advisor helps you optimize and reduce your overall Azure spend by identifying idle and underutilized resources. You can get cost recommendations from the Cost tab on the Advisor dashboard.
Reference:
https://docs.microsoft.com/en-us/azure/advisor/advisor-cost-recommendations

Community Discussion

The Advisor dashboard displays personalized recommendations for all your subscriptions. You can apply filters to display recommendations for specific subscriptions and resource types. The recommendations are divided into five categories: Reliability (formerly called High Availability): To ensure and improve the continuity of your business-critical applications. For more information, see Advisor Reliability recommendations. Security: To detect threats and vulnerabilities that might lead to security breaches. For more information, see Advisor Security recommendations. Performance: To improve the speed of your applications. For more information, see Advisor Performance recommendations. Cost: To optimize and reduce your overall Azure spending. For more information, see Advisor Cost recommendations. Operational Excellence: To help you achieve process and workflow efficiency, resource manageability and deployment best practices. . For more information, see Advisor Operational Excellence recommendations.

Correct Answer: B Advisor helps you optimize and reduce your overall Azure spend by identifying idle and underutilized resources. You can get cost recommendations from the Cost tab on the Advisor dashboard. Reference: https://docs.microsoft.com/en-us/azure/advisor/advisor-cost-recommendations

Cleared Exam today 26 Feb, This question was there in exam.

I just passed, Q was the exam 3 Jul 2023.

This question was on my exam on 22 Sep 2023 i scored 900 ! answered B

SecExams

Question #68

SecExams

HOTSPOT -

You have an Azure Active Directory (Azure AD) tenant.

You need to create a conditional access policy that requires all users to use multi-factor authentication when they access the Azure portal.

Which three settings should you configure? To answer, select the appropriate settings in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

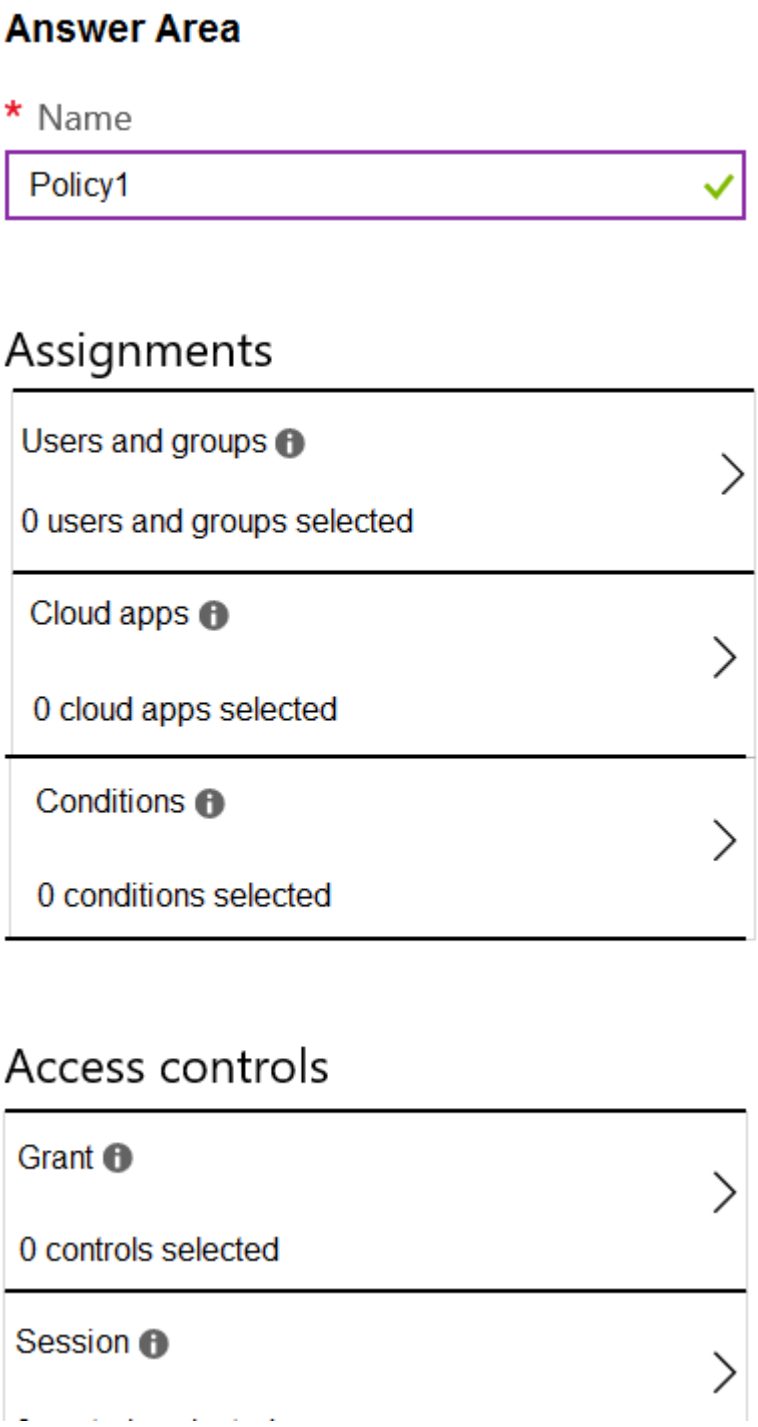

SecExams

Explanation

Correct Answer:

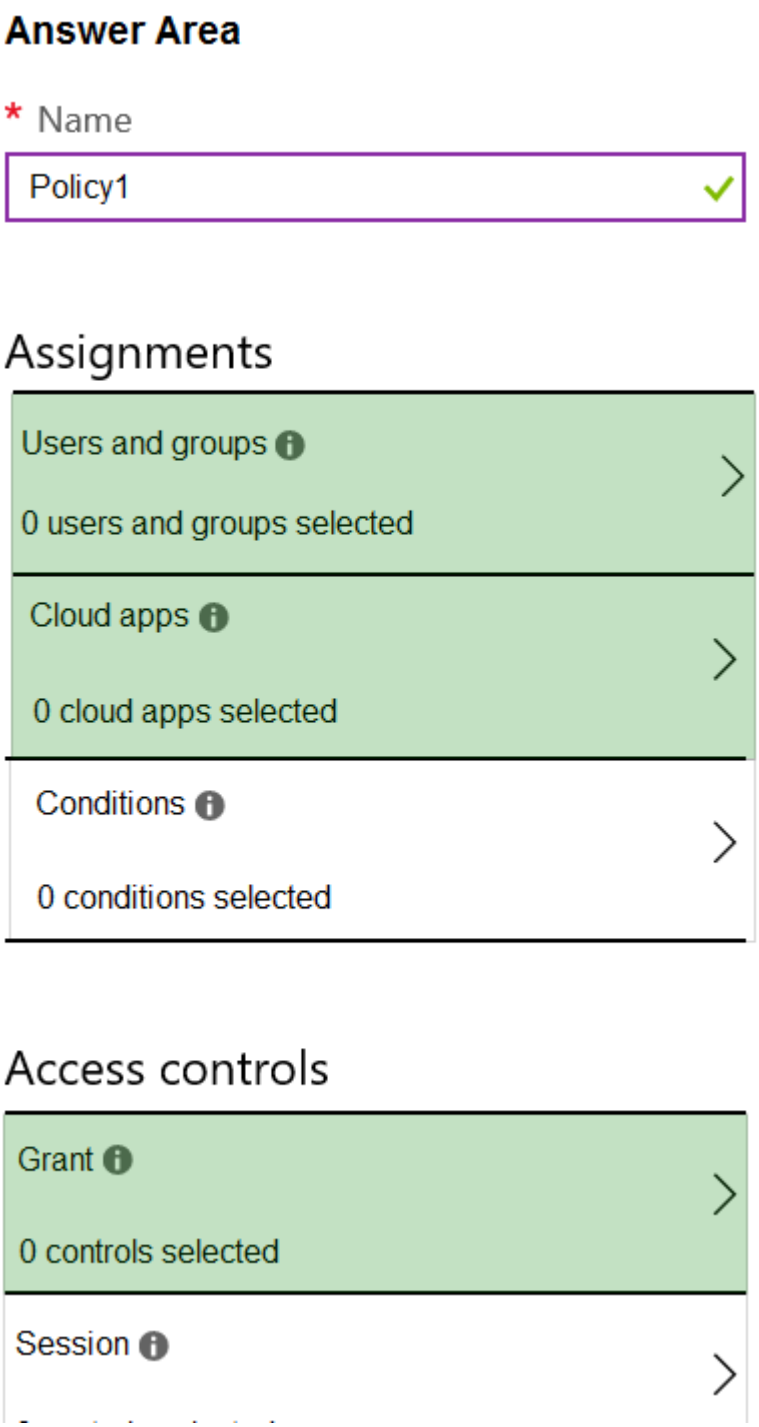

Reference:
https://docs.microsoft.com/en-us/azure/active-directory/conditional-access/app-based-mfa

Community Discussion

The Answer is correct . - Select Users & Groups : Where you have to choose all users. - Select Cloud apps or actions: to specify the Azure portal - Grant: to grant the MFA. Those are the minimum requirements to create MFA policy. No conditions are required in the question. Also check this link beside the one provided in the answer https://docs.microsoft.com/en-us/azure/active-directory/conditional-access/concept-conditional-access-policies

Correct Answer: - Select Users & Groups : Where you have to choose all users. - Select Cloud apps or actions: To specify the Azure portal - Select Grant: To grant the MFA.

Thanks for the great description. Very helpful.

Thanks for the great description. Very helpful.

https://learn.microsoft.com/en-us/azure/active-directory/conditional-access/howto-conditional-access-policy-all-users-mfa#create-a-conditional-access-policy - Select New policy. - Give your policy a name. We recommend that organizations create a meaningful standard for the names of their policies. - Under Assignments, select Users or workload identities. Under Include, select All users Under Exclude, select Users and groups and choose your organization's emergency access or break-glass accounts. - Under Cloud apps or actions > Include, select All cloud apps. Under Exclude, select any applications that don't require multifactor authentication. - Under Access controls > Grant, select Grant access, Require multifactor authentication, and select Select.

SecExams

Question #69

You have an Azure Active Directory (Azure AD) tenant named contoso.onmicrosoft.com.
The User administrator role is assigned to a user named Admin1.
An external partner has a Microsoft account that uses the sign in.
Admin1 attempts to invite the external partner to sign in to the Azure AD tenant and receives the following error message: `Unable to invite user [email protected] `" Generic authorization exception.`
You need to ensure that Admin1 can invite the external partner to sign in to the Azure AD tenant.
What should you do?

A) From the Users settings blade, modify the External collaboration settings. (Correct Answer)

B) From the Custom domain names blade, add a custom domain.
C) From the Organizational relationships blade, add an identity provider.
D) From the Roles and administrators blade, assign the Security administrator role to Admin1.

Explanation

Correct Answer:
A
Reference:
https://techcommunity.microsoft.com/t5/Azure-Active-Directory/Generic-authorization-exception-inviting-Azure-AD-gests/td-p/274742

Community Discussion

correct answer checked in portal . Go to Azure AD--users--user settings --scroll down.--External users Manage external collaboration settings

Answer is correct. You can adjust the guest user settings, their access, who can invite them from "External collaboration settings" check this link https://docs.microsoft.com/en-us/azure/active-directory/external-identities/delegate-invitations

Your excitement is awesome!

Your excitement is awesome!

Your excitement is awesome!

Question #70

You have an Azure subscription linked to an Azure Active Directory tenant. The tenant includes a user account named User1.
You need to ensure that User1 can assign a policy to the tenant root management group.
What should you do?

A) Assign the Owner role for the Azure Subscription to User1, and then modify the default conditional access policies.

B) Assign the Owner role for the Azure subscription to User1, and then instruct User1 to configure access management for Azure resources. (Correct Answer)

C) Assign the Global administrator role to User1, and then instruct User1 to configure access management for Azure resources.

D) Create a new management group and delegate User1 as the owner of the new management group.

Explanation

Correct Answer:

B

The following chart shows the list of roles and the supported actions on management groups.

Azure Role Name	Create	Rename	Move**	Delete	Assign Access	Assign Policy	Read
Owner	X	X	X	X	X	X	X
Contributor	X	X	X	X			X
MG Contributor*	X	X	X	X			X
Reader							X
MG Reader*							X
Resource Policy Contributor						X	
User Access Administrator					X	X	

Note:

Each directory is given a single top-level management group called the "Root" management group. This root management group is built into the hierarchy to have all management groups and subscriptions fold up to it. This root management group allows for global policies and Azure role assignments to be applied at the directory level. The Azure AD Global Administrator needs to elevate themselves to the User Access Administrator role of this root group initially. After elevating access, the administrator can assign any Azure role to other directory users or groups to manage the hierarchy. As administrator, you can assign your own account as owner of the root management group.

Reference:

https://docs.microsoft.com/en-us/azure/governance/management-groups/overview

Community Discussion

Correct Answer: C No one is given default access to the root management group. Azure AD Global Administrators are the only users that can elevate themselves to gain access. Once they have access to the root management group, the global administrators can

assign any Azure role to other users to manage it. Reference: https://docs.microsoft.com/en-us/azure/governance/management-groups/overview#important-facts-about-the-root-management-group https://docs.microsoft.com/en-us/azure/governance/management-groups/overview

Ans C: No one is given default access to the root management group. Azure AD Global Administrators are the only users that can elevate themselves to gain access. Once they have access to the root management group, the global administrators can assign any Azure role to other users to manage it.

No, the correctly answer is B. C is to control Azure AD (Global Administrators), not to control Management group. If you need to control Management group, use: Access control (IAM)> Add role assignment> Role> Owner or Contributor (in this case you will use Owner). Don't exist "Global Administrators" inside of Access control (IAM)> Add role assignment. The link between Azure AD and Management group will allow that you choose an user of your Azure AD, but not will inherit Azure AD role.

No, the correctly answer is B. C is to control Azure AD (Global Administrators), not to control Management group. If you need to control Management group, use: Access control (IAM)> Add role assignment> Role> Owner or Contributor (in this case you will use Owner). Don't exist "Global Administrators" inside of Access control (IAM)> Add role assignment. The link between Azure AD and Management group will allow that you choose an user of your Azure AD, but not will inherit Azure AD role.

Answer is C. Just tested in the lab.

SecExams

Question #71

HOTSPOT -

You have an Azure Active Directory (Azure AD) tenant named adatum.com.

Adatum.com contains the groups in the following table.

Name	Group type	Membership type	Membership rule
Group1	Security	Dynamic user	(user.city -startsWith "m"
Group2	Microsoft 365	Dynamic user	(user.department -notIn ["human resources"])
Group3	Microsoft 365	Assigned	*Not applicable*

You create two user accounts that are configured as shown in the following table.

Name	City	Department	Office 365 license assigned
User1	Montreal	Human resources	Yes
User2	Melbourne	Marketing	No

Of which groups are User1 and User2 members? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

User1:

- Group1 only
- Group2 only
- Group3 only
- Group1 and Group2 only
- Group1 and Group3 only
- Group2 and Group3 only
- Group1, Group2, and Group3

User2:

- Group1 only
- Group2 only
- Group3 only
- Group1 and Group2 only
- Group1 and Group3 only
- Group2 and Group3 only
- Group1, Group2, and Group3

SecExams

Explanation

Correct Answer:

Answer Area

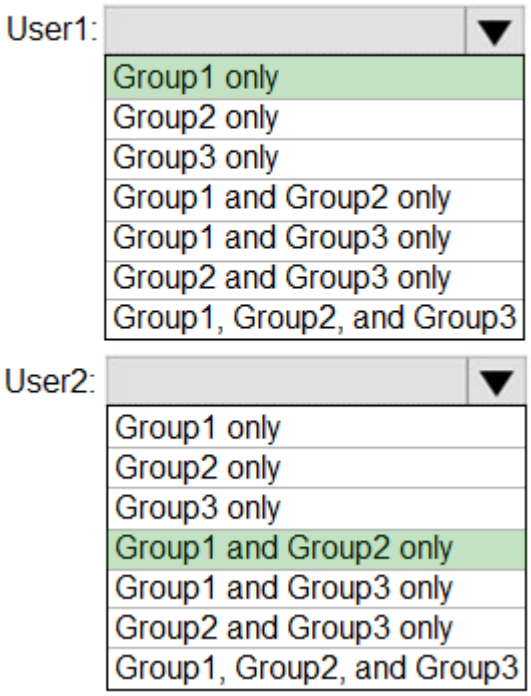

Box 1: Group 1 only -

First rule applies -

Box 2: Group1 and Group2 only -
Both membership rules apply.
Reference:
https://docs.microsoft.com/en-us/sccm/core/clients/manage/collections/create-collections

Community Discussion

Correct answer. User 1: Group 1 only User 2: Group 1 & 2

Someone has to assign users to Group3 if they have to be part of it and there is no mention of manual assignment in the question.

Someone has to assign users to Group3 if they have to be part of it and there is no mention of manual assignment in the question.

Someone has to assign users to Group3 if they have to be part of it and there is no mention of manual assignment in the question.

Someone has to assign users to Group3 if they have to be part of it and there is no mention of manual assignment in the question.

Question #72

HOTSPOT -

You have a hybrid deployment of Azure Active Directory (Azure AD) that contains the users shown in the following table.

Name	Type	Source
User1	Member	Azure AD
User2	Member	Windows Server Active Directory
User3	Guest	Microsoft account

You need to modify the JobTitle and UsageLocation attributes for the users.

For which users can you modify the attributes from Azure AD? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

JobTitle:
- User1 only
- User1 and User2 only
- User1 and User3 only
- User1, User2, and User3

UsageLocation:
- User1 only
- User1 and User2 only
- User1 and User3 only
- User1, User2, and User3

Explanation

Correct Answer:

Answer Area

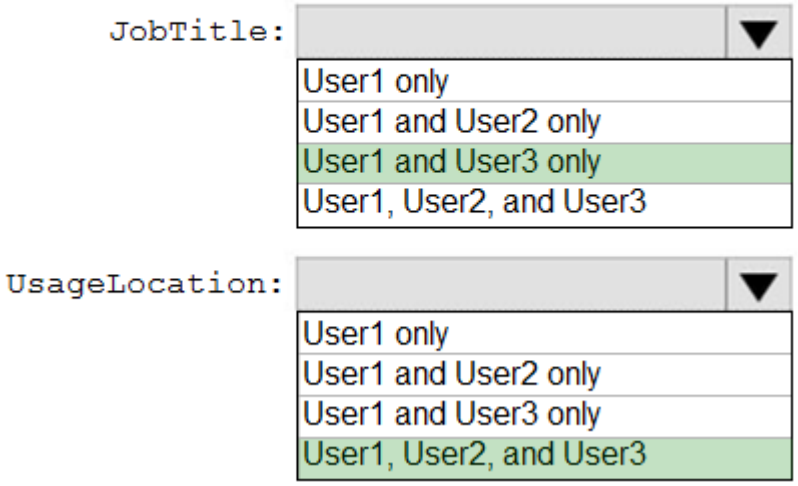

Box 1: User1 and User3 only -
You must use Windows Server Active Directory to update the identity, contact info, or job info for users whose source of authority is Windows Server Active Directory.

Box 2: User1, User2, and User3 -
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/active-directory-users-profile-azure-portal

Community Discussion

Correct Answer: Box 1:User1 and User3 only You must use Windows Server Active Directory to update the identity, contact info, or job info for users whose source of authority is Windows Server Active Directory. Box 2: User1, User2, and User3 Usage location is an Azure property that can only be modified from Azure AD (for all users including Windows Server AD users synced via Azure AD Connect). Reference: https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/active-directory-users-profile-azure-portal

Thank you for the clarification. I am shocked to see how little I know. I swear after following Microsoft's course I feel like the goal wasn't really to prepare me for the exam at all.

Thank you for the clarification. I am shocked to see how little I know. I swear after following Microsoft's course I feel like the goal wasn't really to prepare me for the exam at all.

microsoft's course is shit

microsoft's course is shit

Question #73

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You need to ensure that an Azure Active Directory (Azure AD) user named Admin1 is assigned the required role to enable Traffic Analytics for an Azure subscription.
Solution: You assign the Network Contributor role at the subscription level to Admin1.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Your account must meet one of the following to enable traffic analytics:
Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, reader, or network contributor.

Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq

Community Discussion

Correct Answer: A - Yes Your account must have any one of the following Azure roles at the subscription scope: Owner, Contributor, Reader, or Network Contributor. Network Contributor role - Lets you manage networks, but not access to them. Traffic Analytics is a cloud-based solution that provides visibility into user and application activity in cloud networks. Traffic analytics analyzes Network Watcher network security group (NSG) flow logs to provide insights into traffic flow in your Azure cloud. Reference: https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics#user-access-requirements https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles

correct answer

they are two different permissions- a NC role can manage the resources, but he/she can't grant access to those resources to anyone else. That can be done by roles with 'access' permissions such as 'owner'

they are two different permissions- a NC role can manage the resources, but he/she can't grant access to those resources to anyone else. That can be done by roles with 'access' permissions such as 'owner'

they are two different permissions- a NC role can manage the resources, but he/she can't grant access to those resources to anyone else. That can be done by roles with 'access' permissions such as 'owner'

SecExams

Question #74

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You need to ensure that an Azure Active Directory (Azure AD) user named Admin1 is assigned the required role to enable Traffic Analytics for an Azure subscription.
Solution: You assign the Owner role at the subscription level to Admin1.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Your account must meet one of the following to enable traffic analytics:
Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, reader, or network contributor.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq

Community Discussion

Correct Answer: A Your account must have any one of the following Azure roles at the subscription scope: Owner, Contributor, Reader, or Network Contributor. Network Contributor role - Lets you manage networks, but not access to them. Traffic Analytics is a cloud-based solution that provides visibility into user and application activity in cloud networks. Traffic analytics analyzes Network Watcher network security group (NSG) flow logs to provide insights into traffic flow in your Azure cloud. Reference: https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics#user-access-

requirements https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles

correct answer

Selected Answer: B

No, assigning the Network Contributor role at the subscription level to Admin1 does not meet the goal of enabling Traffic Analytics. The Network Contributor role provides the ability to manage network resources, but it does not include the necessary permissions to configure Traffic Analytics. To enable Traffic Analytics, Admin1 needs to be assigned the Network Contributor role on the resource group where the virtual network that is being monitored by Traffic Analytics is located, and also needs to have read permissions to the storage account where the Traffic Analytics data is stored.

Selected Answer: A

https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles Grants full access to manage all resources, including the ability to assign roles in Azure RBAC.

A. Yes Assigning the Owner role at the subscription level to Admin1 meets the goal of enabling Traffic Analytics for an Azure subscription. The Owner role has full access to all resources within the subscription, including the ability to enable Traffic Analytics. By assigning the Owner role to Admin1 at the subscription level, Admin1 will have the necessary permissions and control to enable and configure Traffic Analytics for the Azure subscription. Therefore, the provided solution meets the goal.

SecExams

Question #75

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You need to ensure that an Azure Active Directory (Azure AD) user named Admin1 is assigned the required role to enable Traffic Analytics for an Azure subscription.
Solution: You assign the Reader role at the subscription level to Admin1.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Your account must meet one of the following to enable traffic analytics:
Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, reader, or network contributor.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq

Community Discussion

Traffic Analytics requires the following prerequisites: A Network Watcher enabled subscription. Network Security Group (NSG) flow logs enabled for the NSGs you want to monitor. An Azure Storage account, to store raw flow logs. An Azure Log Analytics workspace, with read and write access. Your account must meet one of the following to enable traffic analytics: Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, reader, or network contributor.

Correct Answer: A - Yes Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, reader, or network contributor. Reader role -

View all resources, but does not allow you to make any changes. Traffic Analytics is a cloud-based solution that provides visibility into user and application activity in cloud networks. Traffic analytics analyzes Network Watcher network security group (NSG) flow logs to provide insights into traffic flow in your Azure cloud. Reference: https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics#user-access-requirements https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles

Answer is NO. Refer the following link: https://learn.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq Your account must meet one of the following to enable traffic analytics: Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, or network contributor.

Answer is NO. Refer the following link: https://learn.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq Your account must meet one of the following to enable traffic analytics: Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, or network contributor.

Answer is NO. Your account must meet one of the following to enable traffic analytics: Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, or network contributor.

SecExams

Question #76

You have an Azure subscription that contains a user named User1.
You need to ensure that User1 can deploy virtual machines and manage virtual networks. The solution must use the principle of least privilege.
Which role-based access control (RBAC) role should you assign to User1?

A) Owner
B) Virtual Machine Contributor
C) Contributor (Correct Answer)
D) Virtual Machine Administrator Login

Explanation

Correct Answer:
C

Contributor: Grants full access to manage all resources, but does not allow you to assign roles in Azure RBAC
Incorrect Answers:
A: Owner: Grants full access to manage all resources, including the ability to assign roles in Azure RBAC.
B: Virtual Machine Contributor: Lets you manage virtual machines, but not access to them, and not the virtual network or storage account they're connected to.
D: Virtual Machine Administrator Login: View Virtual Machines in the portal and login as administrator.
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles

Community Discussion

Should the answer be C. Contributor? Answer B, only allows the managing of the VM's and not the Virtual Networks as stated in the question.

Correct Answer: C Only Owner and Contributor can perform the actions, but we need to follow the least privilege principal, so Contributor. A: Owner- Grants full access to manage all resources, including the ability to assign roles in Azure RBAC. B: Virtual Machine Contributor - Create and manage virtual machines, manage disks and disk snapshots, install and run software, reset password of the root user of the virtual machine using VM extensions, and manage local user accounts using VM extensions. This role does not grant you management access to the virtual network or storage account the virtual machines are connected to. This role does not allow you to assign roles in Azure RBAC. C: Contributor - Grants full access to manage all resources, but does not allow you to assign roles in Azure RBAC, manage assignments in Azure Blueprints, or share image galleries. D: Virtual Machine Administrator Login - View Virtual Machines in the portal and login as administrator. Reference: https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles

Was on exam 19 Aug 2022. Scored 870. Answered C

Was on exam 19 Aug 2022. Scored 870. Answered C

yes but, with B you can only achieve to manage VMs not Vnets which is also mentioned.

Question #77

SecExams

HOTSPOT -

You have an Azure Active Directory (Azure AD) tenant that contains three global administrators named Admin1, Admin2, and Admin3.

The tenant is associated to an Azure subscription. Access control for the subscription is configured as shown in the Access control exhibit. (Click the Access

Control tab.)

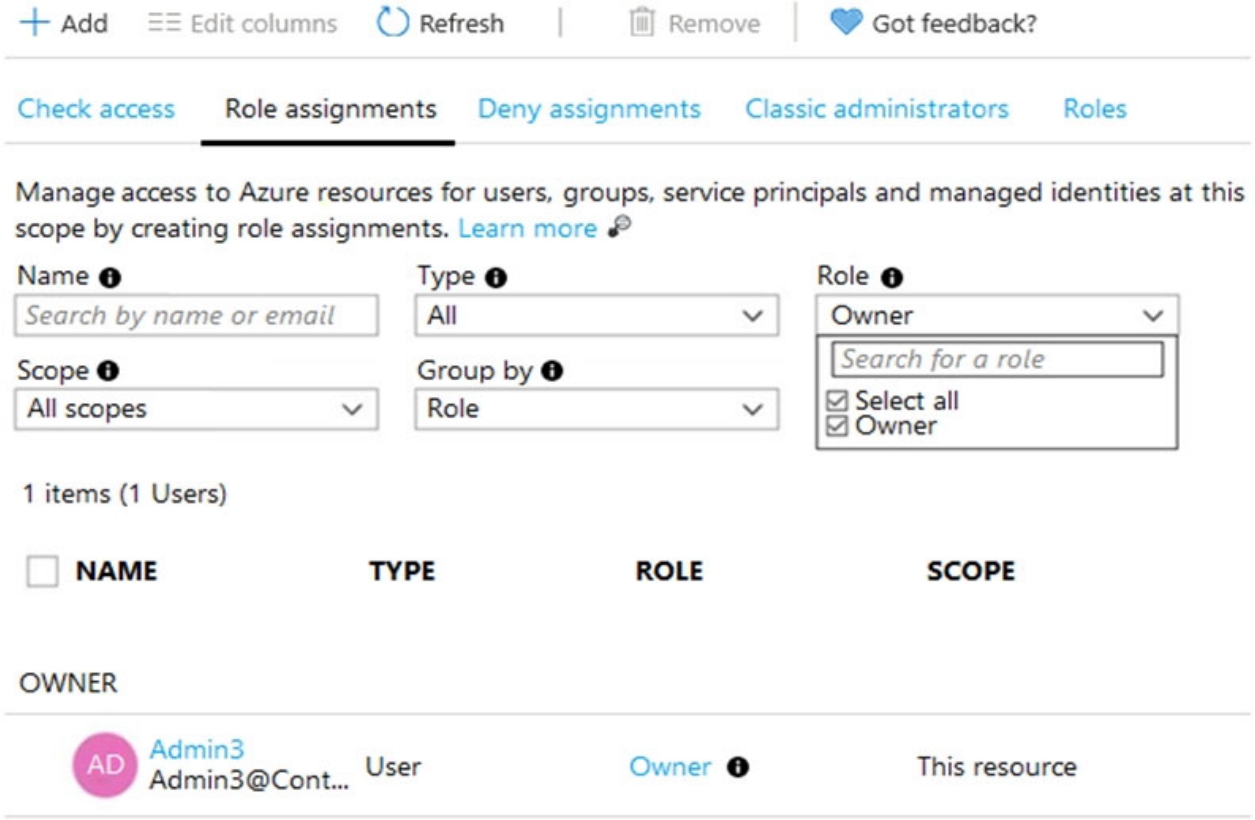

You sign in to the Azure portal as Admin1 and configure the tenant as shown in the Tenant exhibit. (Click the Tenant tab.)

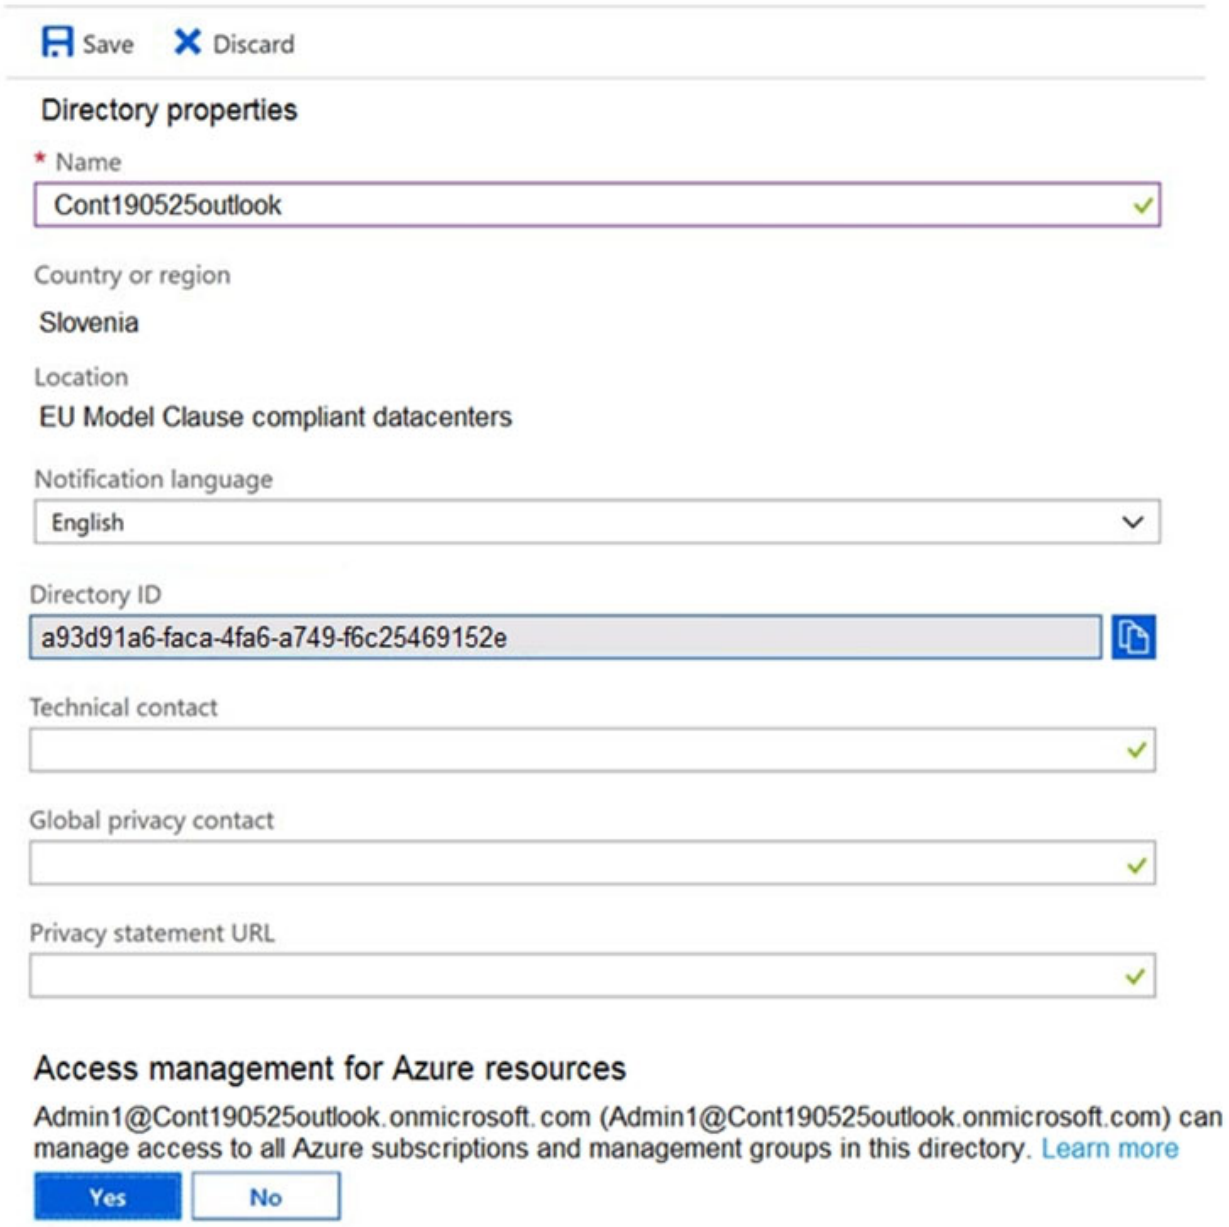

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
Admin1 can add Admin 2 as an owner of the subscription.	○	○
Admin3 can add Admin 2 as an owner of the subscription.	○	○
Admin2 can create a resource group in the subscription.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
Admin1 can add Admin 2 as an owner of the subscription.	○	○
Admin3 can add Admin 2 as an owner of the subscription.	○	○
Admin2 can create a resource group in the subscription.	○	○

Box 1: No -
Only Admin3, the owner, can assign ownership.

Box 2: Yes -

Box 3: No -
Reference:
https://docs.microsoft.com/en-us/azure/cost-management-billing/manage/add-change-subscription-administrator

SecExams

Community Discussion

Correct Answer: Azure (RBAC) and Azure AD roles are independent. AD roles do not grant access to resources and Azure roles do not grant access to Azure AD. However, a Global Administrator in AD can elevate access to all subscriptions and will be User Access Administrator in Azure root scope. All 3 users are GA (AD) and Admin3 is owner of the subscription (RBAC). Admin1 has elevated access, so he is also User Access Admin (RBAC). To assign a user the owner role at the Subscription scope, you require permissions, such as User Access Admin or Owner. Box 1: Yes Admin1 has elevated access, so he is User Access Admin. This is valid. Box 2: Yes Admi3 is Owner of the Subscription. This is valid. Box 3: No Admin2 is just a GA in Azure AD scope. He doesn't have permission in the Subscription. Reference: https://docs.microsoft.com/en-us/azure/role-based-access-control/elevate-access-global-admin https://docs.microsoft.com/en-us/azure/role-based-access-control/role-assignments-portal-subscription-admin

Kindly ignore my previous comment, below is the correct one 1. Yes : Admin1 is a Global Administrator at Tenant which does not give it permission on subscription but as per exibit it has taken control to manage access to all Azure subscriptions therefore it now has access to manage subscription therefore can assign role to other users. 2. Yes : Admin 3 is Global Administrator + Owner of Subscription therefore can assign Owner role to other user. 3. NO : Admin2 is Global Administrator for Tenant and do not have any rights on Subscription therefore cannot create resources in it.

Kindly ignore my previous comment, below is the correct one 1. Yes : Admin1 is a Global Administrator at Tenant which does not give it permission on subscription but as per exibit it has taken control to manage access to all Azure subscriptions therefore it now has access to manage subscription therefore can assign role to other users. 2. Yes : Admin 3 is Global Administrator + Owner of Subscription therefore can assign Owner role to other user. 3. NO : Admin2 is Global Administrator for Tenant and do not have any rights on Subscription therefore cannot create resources in it.

Answer is correct, tested in Lab 1. No : Admin1 is a Global Administrator at Tenant which does not give it permission on subscription therefore cannot assign Owner Roles 2. Yes : Admin 3 is Global Administrator + Owner of Subscription therefore can assign Owner role to other user. 3. NO : Admin2 is Global Administrator for Tenant and do not have any rights on Subscription thereofore cannot create resources in it.

Correct answer: Yes, Yes, No Tested in lab after lots if time spent switching back and forward. Initially I thought Yes/No/Yes but I was wrong

SecExams

Question #78

You have an Azure subscription named Subscription1 that contains an Azure virtual machine named VM1. VM1 is in a resource group named RG1.
VM1 runs services that will be used to deploy resources to RG1.
You need to ensure that a service running on VM1 can manage the resources in RG1 by using the identity of VM1.
What should you do first?

A) From the Azure portal, modify the Managed Identity settings of VM1 (Correct Answer)
B) From the Azure portal, modify the Access control (IAM) settings of RG1
C) From the Azure portal, modify the Access control (IAM) settings of VM1
D) From the Azure portal, modify the Policies settings of RG1

Explanation

Correct Answer:
A
Managed identities for Azure resources provides Azure services with an automatically managed identity in Azure Active Directory. You can use this identity to authenticate to any service that supports Azure AD authentication, without having credentials in your code.
You can enable and disable the system-assigned managed identity for VM using the Azure portal.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/managed-identities-azure-resources/qs-configure-portal-windows-vm

Community Discussion

SecExams

Correct Answer: A Managed identities for Azure resources provides Azure services with an automatically managed identity in Azure Active Directory. You can use this identity to authenticate to any service that supports Azure AD authentication, without having credentials in your code. You can enable and disable the system-assigned managed identity for VM using the Azure portal. RBAC manages who has access to Azure resources, what areas they have access to and what they can do with those resources. Examples of Role Based Access Control (RBAC) include: Allowing an app to access all resources in a resource group Policies on the other hand focus on resource properties during deployment and for already existing resources. As an example, a policy can be issued to ensure users can only deploy DS series VMs within a specified resource Reference: https://docs.microsoft.com/en-us/azure/active-directory/managed-identities-azure-resources/qs-configure-portal-windows-vm

Answer is correct "A" Modify Managed Identities.

Trust in Superman(mlantonis)!!!

Trust in Superman(mlantonis)!!!

Your answers are quiet correct.

Question #79

You have an Azure subscription that contains a resource group named TestRG.
You use TestRG to validate an Azure deployment.
TestRG contains the following resources:

Name	Type	Description
VM1	Virtual Machine	VM1 is running and configured to back up to Vault1 daily
Vault1	Recovery Services Vault	Vault1 includes all backups of VM1
VNET1	Virtual Network	VNET1 has a resource lock of type Delete

You need to delete TestRG.
What should you do first?

A) Modify the backup configurations of VM1 and modify the resource lock type of VNET1
B) Remove the resource lock from VNET1 and delete all data in Vault1
C) Turn off VM1 and remove the resource lock from VNET1 (Correct Answer)
D) Turn off VM1 and delete all data in Vault1

Explanation

Correct Answer:
C
When you delete a resource group, all of its resources are also deleted. Deleting a resource group deletes all of its template deployments and currently stored operations.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/delete-resource-group?tabs=azure-powershell

Community Discussion

Correct Answer: B When you delete a resource group, all of its resources are also deleted. Deleting a resource group deletes all of its template deployments and currently stored operations. As an administrator, you can lock a subscription, resource group, or resource to prevent other users in your organization from accidentally deleting or modifying critical resources. The lock overrides any permissions the user might have. You can't delete a vault that contains backup data. Once backup data is deleted, it will go into the soft deleted state. So you have to remove the lock on order to delete the VNET and delete the backups in order to delete the vault. Reference: https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/delete-resource-group?tabs=azure-

powershell https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/lock-resources https://docs.microsoft.com/en-us/azure/backup/backup-azure-delete-vault#before-you-start

Answer should be B. A recovery service vault can not deleted unless all its backups are deleted permanently. And along with that definitely resource lock has to be removed on vnet

The thing is that A mentions "and modify the resource lock type". You can set a lock to either CanNotDelete or ReadOnly - both block the resource from being deleted, which is why you have to remove the lock, not modify it.

The thing is that A mentions "and modify the resource lock type". You can set a lock to either CanNotDelete or ReadOnly - both block the resource from being deleted, which is why you have to remove the lock, not modify it.

The thing is that A mentions "and modify the resource lock type". You can set a lock to either CanNotDelete or ReadOnly - both block the resource from being deleted, which is why you have to remove the lock, not modify it.

SecExams

Question #80

You have an Azure DNS zone named adatum.com.
You need to delegate a subdomain named research.adatum.com to a different DNS server in Azure.
What should you do?

A) Create an NS record named research in the adatum.com zone. (Correct Answer)
B) Create a PTR record named research in the adatum.com zone.
C) Modify the SOA record of adatum.com.
D) Create an A record named *.research in the adatum.com zone.

Explanation

Correct Answer:
A
You need to create a name server (NS) record for the zone.
Reference:
https://docs.microsoft.com/en-us/azure/dns/delegate-subdomain

Community Discussion

Correct Answer: A An NS record or (name server record) tells recursive name servers which name servers are authoritative for a zone. You can have as many NS records as you would like in your zone file. The benefit of having multiple NS records is the redundancy of your DNS service. You need to create a name server (NS) record for the zone. Reference: https://docs.microsoft.com/en-us/azure/dns/delegate-subdomain

All the best for your Exam guys:))

Thank you i guess

Thank you i guess

Answer A correct. It should be "Create or edit an NS record .." Because this record is already created after DNS zone creation.

SecExams

Question #81

DRAG DROP -

You have an Azure Active Directory (Azure AD) tenant that has the contoso.onmicrosoft.com domain name.

You have a domain name of contoso.com registered at a third-party registrar.

You need to ensure that you can create Azure AD users that have names containing a suffix of @contoso.com.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

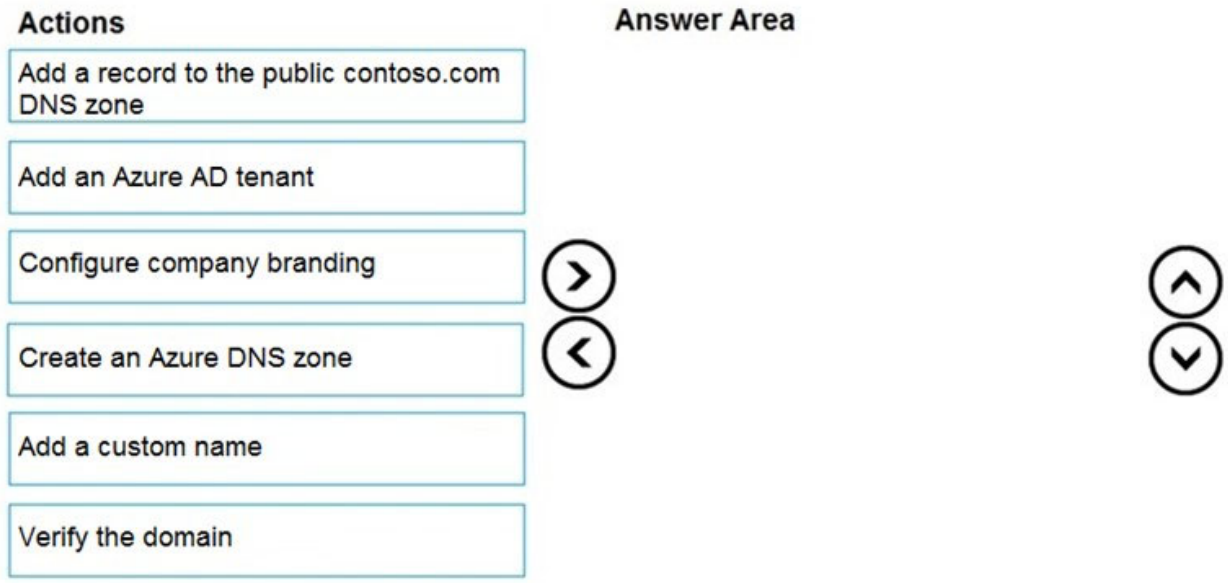

Explanation

Correct Answer:

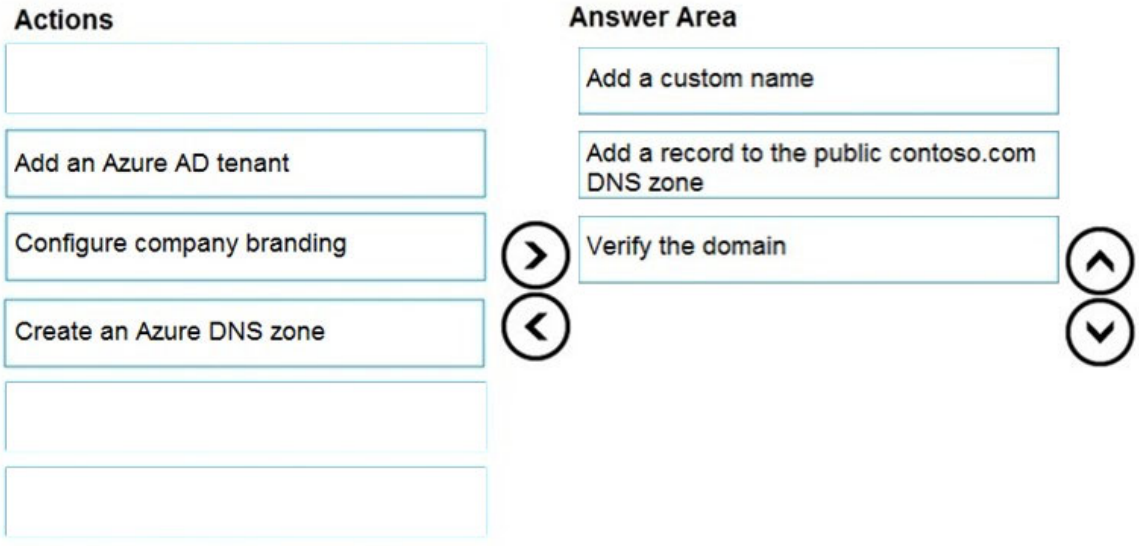

1. Add the custom domain name to your directory
2. Add a DNS entry for the domain name at the domain name registrar
3. Verify the custom domain name in Azure AD

Reference:
https://docs.microsoft.com/en-us/azure/dns/dns-web-sites-custom-domain

Community Discussion

I bought a domain just to test this. The answer is correct. Please like me.

As I'm a smart guy I can confirm this to be the proper answer

Source: Dude trust me

Source: Dude trust me

Seems legit

SecExams

Question #82

You have an Azure subscription named Subscription1 that contains an Azure Log Analytics workspace named Workspace1.
You need to view the error events from a table named Event.
Which query should you run in Workspace1?

A) Get-Event Event | where {$_.EventType == "error"}
B) Event | search "error" (Correct Answer)
C) select * from Event where EventType == "error"
D) search in (Event) * | where EventType ג€"eq ג€errorג€

Explanation

Correct Answer:
B
The search operator provides a multi-table/multi-column search experience.
The syntax is:
Table_name | search "search term"
Note:
There are several versions of this question in the exam. The question has three possible correct answers:
1. search in (Event) "error"
2. Event | search "error"
3. Event | where EventType == "error"
Other incorrect answer options you may see on the exam include the following:
1. Get-Event Event | where {$_.EventTye ג€"eq "error"}
2. Event | where EventType is "error"
3. select * from Event where EventType is "error"
4. search in (Event) * | where EventType ג€"eq "error"
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/log-query/search-queries
https://docs.microsoft.com/en-us/azure/azure-monitor/log-query/get-started-portal
https://docs.microsoft.com/en-us/azure/data-explorer/kusto/query/searchoperator?pivots=azuredataexplorer

Community Discussion

Selected Answer: B

B) 'Event | search "error"' Reference: https://docs.microsoft.com/en-us/azure/azure-monitor/logs/log-analytics-tutorial

select * from Event where EventType == "error" is an example of SQL (Structured Query Language) whereas Log Analytics uses KQL (Kusto Query Language). The correct answer is B

select * from Event where EventType == "error" is an example of SQL (Structured Query Language) whereas Log Analytics uses KQL (Kusto Query Language). The correct answer is B

Selected Answer: C

The correct query to view error events from a table named "Event" in Azure Log Analytics workspace is: C. select * from Event where EventType == "error" This query will retrieve all the records from the "Event" table where the EventType is equal to "error," allowing you to view only the error events.

B - Tested in lab (Event | search "error")

Question #83

You have a registered DNS domain named contoso.com.
You create a public Azure DNS zone named contoso.com.
You need to ensure that records created in the contoso.com zone are resolvable from the internet.
What should you do?

A) Create NS records in contoso.com.
B) Modify the SOA record in the DNS domain registrar.
C) Create the SOA record in contoso.com.
D) Modify the NS records in the DNS domain registrar. (Correct Answer)

Explanation

Correct Answer:
D
Reference:
https://docs.microsoft.com/en-us/azure/dns/dns-delegate-domain-azure-dns

Community Discussion

Correct answer - D. Registrar “owns” the tld and will have their NS registered against the domain by default. By changing the registrar NS records to point to your Azure DNS NS records you take ownership into your Azure DNS.

D. Modify the NS records in the DNS domain registrar.

Selected Answer: D

watch this video to understand really what an NS record is !? https://www.youtube.com/watch?v=WyDQhlRDad8&t=2s

Selected Answer: D

I took Exam of Azure- 104 at 27/2/2023 I score 920 points out of 1000 points. This was on it and my answer was: D

Selected Answer: D

D. Modify the NS records in the DNS domain registrar. To ensure that records created in the Azure DNS zone named contoso.com are resolvable from the internet, you need to delegate the domain to the Azure DNS name servers. To do this, you need to modify the NS (Name Server) records at the DNS domain registrar for contoso.com to point to the Azure DNS name servers. This will allow the authoritative DNS server for contoso.com to be hosted in Azure and answer queries for the contoso.com zone. Option A is not the correct answer, because creating NS records in the contoso.com zone will not delegate the domain to the Azure DNS name servers. Option B is also not the correct answer, because modifying the SOA (Start of Authority) record in the DNS domain registrar will not delegate the domain to the Azure DNS name servers either. Option C is also not necessary, because Azure DNS automatically creates an SOA record for each zone, and it cannot be modified.

SecExams

Question #84

HOTSPOT -

You have an Azure subscription that contains a storage account named storage1.

The subscription is linked to an Azure Active Directory (Azure AD) tenant named contoso.com that syncs to an on-premises Active Directory domain.

The domain contains the security principals shown in the following table.

Name	Type
User1	User
Computer1	Computer

In Azure AD, you create a user named User2.

The storage1 account contains a file share named share1 and has the following configurations.

```
"kind": "StorageV2",
"properties": {
                "azureFilesIdentityBasedAuthentication": {
                    "directoryServiceOptions": "AD",
                    "activeDirectoryProperties": {
                        "domainName": "Contoso.com",
                        "netBiosDomainName": "Contoso.com",
                        "forestName": "Contoso.com",
-
                    }
            }
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can assign the Storage File Data SMB Share Contributor role to User1 for share1.	○	○
You can assign the Storage File Data SMB Share Reader role to Computer1 for share1.	○	○
You can assign the Storage File Data SMB Share Elevated Contributor role to User2 for share1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can assign the Storage File Data SMB Share Contributor role to User1 for share1.	○	○
You can assign the Storage File Data SMB Share Reader role to Computer1 for share1.	○	○
You can assign the Storage File Data SMB Share Elevated Contributor role to User2 for share1.	○	○

Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-files-identity-ad-ds-assign-permissions?tabs=azure-portal

Community Discussion

Was on exam today 19.11.2021. Passed with 920 Correct answer: Y-N-Y

emotional damage

emotional damage

emotional damage

emotional damage

SecExams

Question #85

HOTSPOT -

You have an Azure subscription named Subscription1 that contains a virtual network VNet1.

You add the users in the following table.

User	Role
User1	Owner
User2	Security Admin
User3	Network Contributor

Which user can perform each configuration? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Add a subnet to VNet1:

- User1 only
- User3 only
- User1 and User3 only
- User2 and User3 only
- User1, User2, and User3

Assign a user the Reader role to VNet1:

- User1 only
- User2 only
- User3 only
- User1 and User2 only
- User2 and User3 only
- User1, User2, and User3

Explanation

Correct Answer:

Answer Area

Add a subnet to VNet1:

- User1 only
- User3 only
- **User1 and User3 only**
- User2 and User3 only
- User1, User2, and User3

Assign a user the Reader role to VNet1:

- **User1 only**
- User2 only
- User3 only
- User1 and User2 only
- User2 and User3 only
- User1, User2, and User3

Box 1: User1 and User3 only.
User1: The Owner Role lets you manage everything, including access to resources.
User3: The Network Contributor role lets you manage networks, including creating subnets.
Box 2: User1 only.
The Security Admin role: In Security Center only: Can view security policies, view security states, edit security policies, view alerts and recommendations, dismiss alerts and recommendations.
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles
https://docs.microsoft.com/en-us/azure/role-based-access-control/resource-provider-operations#microsoftnetwork

SecExams

Community Discussion

Correct. Security admin can't add subnets. Only owner can assign roles.

1) Add a subnet to VNET1 = "User1 and User3 only" 2) Assign a user the Reader role to VNEt1 = "User1 only" Explanation: User1 - The Owner Role lets you manage everything, including access to resources. User3 - The Network Contributor role lets you manage networks, including creating subnets. User2 - The Security Admin role can view security policies, view security states, edit security policies, view alerts and recommendations, dismiss alerts and recommendations.

On exam 24/02/2023

Was in my exam today 07 Dec 2022

Hey you are replying in many questions with the same statment. Is it true or faek

SecExams

Question #86

SecExams

HOTSPOT -

You have the Azure resources shown on the following exhibit.

You plan to track resource usage and prevent the deletion of resources.

To which resources can you apply locks and tags? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Locks:

RG1 and VM1 only
Sub1 and RG1 only
Sub1, RG1, and VM1 only
MG1, Sub1, RG1, and VM1 only
Tenant Root Group, MG1, Sub1, RG1, and VM1

Tags:

RG1 and VM1 only
Sub1 and RG1 only
Sub1, RG1, and VM1 only
MG1, Sub1, RG1, and VM1 only
Tenant Root Group, MG1, Sub1, RG1, and VM1

SecExams

Explanation

Correct Answer:

Answer Area

Locks:

RG1 and VM1 only
Sub1 and RG1 only
Sub1, RG1, and VM1 only
MG1, Sub1, RG1, and VM1 only
Tenant Root Group, MG1, Sub1, RG1, and VM1

Tags:

RG1 and VM1 only
Sub1 and RG1 only
Sub1, RG1, and VM1 only
MG1, Sub1, RG1, and VM1 only
Tenant Root Group, MG1, Sub1, RG1, and VM1

Box 1: Sub1, RG1, and VM1 only -
You can lock a subscription, resource group, or resource to prevent other users in your organization from accidentally deleting or modifying critical resources.

Box 2: Sub1, RG1, and VM1 only -
You apply tags to your Azure resources, resource groups, and subscriptions.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/lock-resources?tabs=json https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/tag-resources?tabs=json

Community Discussion

Correct answer. Only can assign locks and tags to subscriptions, resource groups and resources. Tested in lab

Answer is correct, both Tags and Locks are available to Subscriptions, Resource Groups, and Resources.. See FIRST Paragraph in both Refs Ref Locks: https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/lock-resources?tabs=json Ref Tags: https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/tag-resources?tabs=json

Got this exact question - Passed the exam today, 1/May/23 - scored 930. I am still digesting the fact that 95% of the questions are from here, though it is tough to believe before you take the exam.

This question was on my exam on 22 Sep 2023. scored 900

This came in the exam early this week.

SecExams

Question #87

You have an Azure Active Directory (Azure AD) tenant.
You plan to delete multiple users by using Bulk delete in the Azure Active Directory admin center.
You need to create and upload a file for the bulk delete.
Which user attributes should you include in the file?

A) The user principal name and usage location of each user only
B) The user principal name of each user only (Correct Answer)
C) The display name of each user only
D) The display name and usage location of each user only
E) The display name and user principal name of each user only

Explanation

Correct Answer:
B
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/enterprise-users/users-bulk-delete

Community Discussion

This is the dumbest fucking question. Why would anyone ever need to memorize this in real life?

It is a flag for Microsoft that you have used dumbs to pass the exam. Because only so you could get the answer right.

It is a flag for Microsoft that you have used dumbs to pass the exam. Because only so you could get the answer right.

Selected Answer: B

To perform a bulk delete of users in Azure Active Directory, you need to create and upload a CSV file that contains the list of users to be deleted. The file should include the user principal name (UPN) of each user only. Therefore, the answer is B. The user principal name of each user only. When you use the bulk delete feature in the Azure Active Directory admin center, you need to specify the UPN for each user that you want to delete. The UPN is a unique identifier for each user in Azure AD and is the primary way that Azure AD identifies and manages user accounts. Including additional attributes like the display name or usage location is not required for the bulk delete operation, as the UPN is the only mandatory attribute for the user account. However, you may include additional attributes in the CSV file if you want to keep track of the metadata associated with each user account.

If you use pure logic you can immediately take away answer C, D, E out from the question as "display name" is not an unique identificator of the user. "Principal name" in other hand is. So the question really is between A and B.

SecExams

Question #88

SecExams

HOTSPOT -

You have an Azure subscription named Sub1 that contains the Azure resources shown in the following table.

Name	Type
RG1	Resource group
storage1	Storage account
VNET1	Virtual network

You assign an Azure policy that has the following settings:

- Scope: Sub1
- Exclusions: Sub1/RG1/VNET1
- Policy definition: Append a tag and its value to resources
- Policy enforcement: Enabled
- Tag name: Tag4
- Tag value: value4

You assign tags to the resources as shown in the following table.

Resource	Tag
Sub1	`Tag1:subscription`
RG1	`Tag2:IT`
storage1	`Tag3:value1`
VNET1	`Tag3:value2`

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
RG1 has the `Tag2:IT` tag assigned only	○	○
Storage1 has the `Tag1:subscription`, `Tag2:IT`, `Tag3:value1`, and `Tag4:value4` tags assigned.	○	○
VNET1 has the `Tag2:IT` and `Tag3:value2` tags assigned only	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
RG1 has the `Tag2:IT` tag assigned only	○	○
Storage1 has the `Tag1:subscription`, `Tag2:IT`, `Tag3:value1`, and `Tag4:value4` tags assigned.	○	○
VNET1 has the `Tag2:IT` and `Tag3:value2` tags assigned only	○	○

Box 1: No -
The Azure Policy will add Tag4 to RG1.

Box 2: No -
Tags applied to the resource group or subscription aren't inherited by the resources although you can enable inheritance with Azure Policy. Storage1 has Tag3:
Value1 and the Azure Policy will add Tag4.

Box 3: No -
Tags applied to the resource group or subscription aren't inherited by the resources so VNET1 does not have Tag2.
VNET1 has Tag3:value2. VNET1 is excluded from the Azure Policy so Tag4 will not be added to VNET1.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/tag-resources?tabs=json

Community Discussion

N, N, N 1st No: Azure policy was created before the RG1 was assigned tag, which means when RG1 was manually assigned tag Tag2:IT, the policy will take action to append Tag4:vaule4 to RG1. Note that policy action is to "append", that means whatever else tag RG1 is given won't be taken away. As such RG1 will have two tags, Tag2:IT and Tag4:value4 2nd No: Remember tags are not inheritable, whatever tag assigned to RG1 won't be applied to any resources under it. As such the Storage1 should be Tag3:value1 and Tag4:vaule4. 3rd No: vNet1 is excluded from the Azure policy, hence the policy won't do

anything to it. As such vNet1 should only have the tag manually assigned: Tag3:value2. PS, I take that "Exclusions: Sub1/RG1/VNET1" does not mean both RG1 & vNet1 are excluded, only vNet1 is excluded, the Sub1/RG1/VNET1 is merely a path to the object that is excluded.

Wouldn't it be Y-N-N? Y - RG1 is excluded thus retain as it is N - Storage1 will have Tag3:value1 and Tag4:value4 N - VNET1 is excluded as well so only have Tag3:value2

RG1 is NOT excluded. Only VNET1 is excluded. if you think RG1 is excluded by "Sub1/RG1/VNET1", then you should think Sub1 is also excluded.

RG1 is NOT excluded. Only VNET1 is excluded. if you think RG1 is excluded by "Sub1/RG1/VNET1", then you should think Sub1 is also excluded.

Correct Answer is Y-N-N For statement #1, As per policy definition, "Append a tag and its value to resources" policy appends the specified tag and value when any resource which is missing this tag is created or updated. Does not modify the tags of resources created before this policy was applied until those resources are changed. DOES NOT APPLY TO RESOURCE GROUPS. New 'modify' effect policies are available that support remediation of tags on existing resources (see https://aka.ms/modifydoc). https://learn.microsoft.com/en-us/azure/azure-resource-manager/management/tag-policies Hence, the tag would remain Tag2:IT only Statement#2 and #3 are 'N' because Tags applied to the resource group or subscription aren't inherited by the resources.

SecExams

Question #89

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You need to ensure that an Azure Active Directory (Azure AD) user named Admin1 is assigned the required role to enable Traffic Analytics for an Azure subscription.
Solution: You assign the Traffic Manager Contributor role at the subscription level to Admin1.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq

Community Discussion

Q.36 Assign Network Contributor role at subscription level to Admin1 ✉ Yes Q.37 Assign Owner role at subscription level to Admin1 ✉ Yes Q.38 Assign Reader role at subscription level to Admin1 ✉ Yes Q.52 Assign Traffic Manager Contributor role at subscription level to Admin1 ✉ No

Reader role is not applicable anymore. Only correct answers are 'owner, contributor, or network contributor'.

Reader role is not applicable anymore. Only correct answers are 'owner, contributor, or network contributor'.

Reader role is not applicable anymore. Only correct answers are 'owner, contributor, or network contributor'.

Reader role is not applicable anymore. Only correct answers are 'owner, contributor, or network contributor'.

Question #90

You have three offices and an Azure subscription that contains an Azure Active Directory (Azure AD) tenant.
You need to grant user management permissions to a local administrator in each office.
What should you use?

A) Azure AD roles
B) administrative units (Correct Answer)
C) access packages in Azure AD entitlement management
D) Azure roles

Explanation

Correct Answer:
B
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/roles/administrative-units

Community Discussion

The answer is correct Administrative units restrict permissions in a role to any portion of your organization that you define. You could, for example, use administrative units to delegate the Helpdesk Administrator role to regional support specialists, so they can manage users only in the region that they support.

Although I agree with your explanation the question is not really stating that administrative units are required as there is no statement about the local office administrators and weather they need to administer all users or should only administer the users of their respective office.

Although I agree with your explanation the question is not really stating that administrative units are required as there is no statement about the local office administrators and weather they need to administer all users or should only administer the users of their respective office.

Selected Answer: B

B) "administrative units" "It can be useful to restrict administrative scope by using administrative units in organizations that are made up of independent divisions of any kind."- https://docs.microsoft.com/en-us/azure/active-directory/roles/administrative-units#deployment-scenario

Selected Answer: B

To grant user management permissions to a local administrator in each office, you should use Azure AD administrative units. Administrative units are a feature in Azure AD that allow you to delegate administrative permissions to specific groups of users or administrators. You can create an administrative unit for each office and then assign a local administrator to manage the users and groups within that unit. Azure AD roles, Azure roles, and access packages in Azure AD entitlement management are also used to grant permissions to users and groups, but they are not designed specifically for delegating administrative permissions to specific groups of users or administrators based on their location or organizational structure. Therefore, they are not the best option for granting user management permissions to local administrators in each office. So, the correct answer is B. administrative units.

SecExams

Question #91

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers. Subscription1 contains a resource group named Dev.
You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.
Solution: On Dev, you assign the Logic App Contributor role to the Developers group.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles

Community Discussion

I'm putting this at the very beginning so newcomers here are encouraged to continue. I just passed my exam (910/1000). 99.99% of questions are from here, including the cases. Microsoft are too lazy to change them (which is a good thing for us, i guess?). Be sure to use the comment section (especially comments from Mlantonis). Good luck guys!!

Answer "Yes" is correct. Logic App Contributor role will allow you to create Logic Apps. See here: https://docs.microsoft.com/en-us/azure/logic-apps/logic-apps-securing-a-logic-app?tabs=azure-portal "Your Azure subscription requires Contributor permissions

for the resource group that contains that logic app resource. If you create a logic app resource, you automatically have Contributor access."

Answer is [A]. If you look at logic app contributor details , you will see under Type Microsoft.Resources (Microsoft.Resources/deployments/write) there is a permission to Create deployment . this permission creates or updates a deployment. however as every contributor role you cannot assign RBAC so you will see that under the type Microsoft.Authorization all permissions there are read permissions

Answer is [A]. If you look at logic app contributor details , you will see under Type Microsoft.Resources (Microsoft.Resources/deployments/write) there is a permission to Create deployment . this permission creates or updates a deployment. however as every contributor role you cannot assign RBAC so you will see that under the type Microsoft.Authorization all permissions there are read permissions

Answer is [A]. If you look at logic app contributor details , you will see under Type Microsoft.Resources (Microsoft.Resources/deployments/write) there is a permission to Create deployment . this permission creates or updates a deployment. however as every contributor role you cannot assign RBAC so you will see that under the type Microsoft.Authorization all permissions there are read permissions

SecExams

Question #92

HOTSPOT -

You have an Azure Load Balancer named LB1.

You assign a user named User1 the roles shown in the following exhibit.

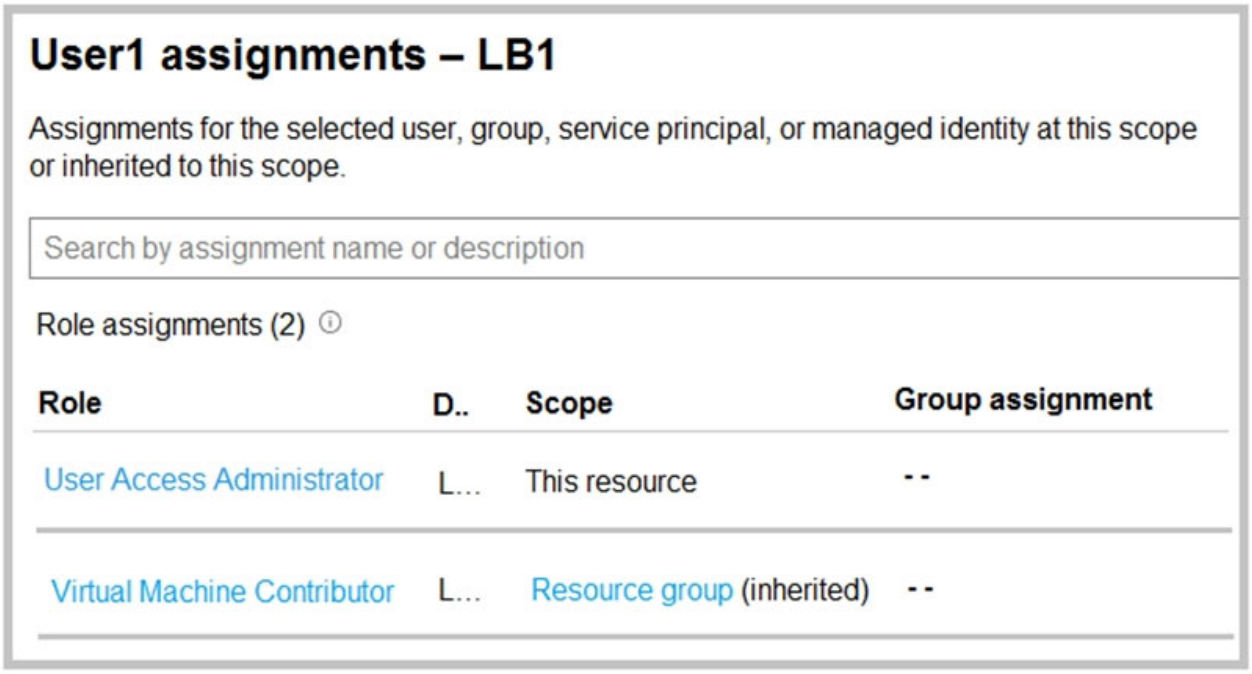

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

User1 can **[answer choice]** LB1.

- delete
- create a NAT rule for
- assign access to other users for

User1 can **[answer choice]** the resource group.

- delete a virtual machine from
- modify the load balancing rules in
- deploy an Azure Kubernetes Service (AKS) cluster to

Explanation

Correct Answer:

Answer Area

User1 can **[answer choice]** LB1.

- delete
- create a NAT rule for
- assign access to other users for

User1 can **[answer choice]** the resource group.

- delete a virtual machine from
- modify the load balancing rules in
- deploy an Azure Kubernetes Service (AKS) cluster to

Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#virtual-machine-contributor https://docs.microsoft.com/en-us/azure/role-based-access-control/rbac-and-directory-admin-roles

Community Discussion

1) User1 can "assign access to other users for" LB1. 2) User1 can "delete a virtual machine from" the resource group. The Role assignments say it all.

Cleared Exam today 26 Feb, This question was there in exam.

Was in test yesterday

1. assign access to other users 2. delete a VM https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#user-access-administrator Lets you manage user access to Azure resources. https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#virtual-machine-contributor Create and manage virtual machines, manage disks, install and run software, reset password of the root user of the virtual machine using VM extensions, and manage local user accounts using VM extensions. This role does not grant you management access to the virtual network or storage account the virtual machines are connected to. This role does not allow you to assign roles in Azure RBAC.

i wish all questions were as simple as this

SecExams

Question #93

You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1.
Subscription1 has a user named User1. User1 has the following roles:
✑ Reader
✑ Security Admin
✑ Security Reader
You need to ensure that User1 can assign the Reader role for VNet1 to other users.
What should you do?

A) Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1.
B) Assign User1 the Owner role for VNet1. (Correct Answer)
C) Assign User1 the Contributor role for VNet1.
D) Assign User1 the Network Contributor role for VNet1.

Explanation

Correct Answer:
B
Has full access to all resources including the right to delegate access to others.
Note:
There are several versions of this question in the exam. The question has two possible correct answers:
✑ Assign User1 the User Access Administrator role for VNet1.
✑ Assign User1 the Owner role for VNet1.
Other incorrect answer options you may see on the exam include the following:
✑ Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1.
✑ Remove User1 from the Security Reader and Reader roles for Subscription1.
✑ Assign User1 the Network Contributor role for RG1.
References:
https://docs.microsoft.com/en-us/azure/role-based-access-control/rbac-and-directory-admin-roles https://docs.microsoft.com/en-us/azure/role-based-access-control/overview

Community Discussion

B. Owner correct Owner = Grants full access to manage all resources, including the ability to assign roles in Azure RBAC. Contributor = Grants full access to manage all resources, but does NOT allow you to assign roles in Azure RBAC. (you cannot add users or changes their rights) User Access Administrator = Lets you manage user access to Azure resources. Reader = View all resources, but does not allow you to make any changes. Security Admin = View and update permissions for Security Center. Same permissions as the Security Reader role and can also update the security policy and dismiss alerts and recommendations. Network Contributor = Lets you manage networks, but not access to them. (so you can add VNET, subnet, etc)

it was in exam on 11/23

Selected Answer: B

B) "Assign User1 the Owner role for VNet1." From the provided options, only the Owner role scoped at the resource level gives the ability to assign other roles to other users.

Selected Answer: B

This question comes up so often and is easy to answer: Only owners or User Access Administrators can assign roles to other users

On the 2n test I took

SecExams

Question #94

SecExams

HOTSPOT -

You configure the custom role shown in the following exhibit.

```
{
    "properties": {
        "roleName": "role1",
        "description": "",
        "roletype": "true",
        "assignableScopes": [
            "/subscriptions/3d6209d5-c714-4440-9556e-d6342086c2d7/"
        ],
        "permissions": [
            {
                "actions": [
                    "Microsoft.Authorization/*/read",
                    "Microsoft.Compute/availabilitySets/*",
                    "Microsoft.Compute/locations/*",
                    "Microsoft.Compute/virtualMachines/*",
                    "Microsoft.Compute/virtualMachineScaleSets/*",
                    "Microsoft.Compute/disks/write",
                    "Microsoft.Compute/disks/read",
                    "Microsoft.Compute/disks/delete",
                    "Microsoft.Network/locations/*",
                    "Microsoft.Network/networkInterfaces/*",
                    "Microsoft.Network/networkSecurityGroups/join/action",
                    "Microsoft.Network/networkSecurityGroups/read",
                    "Microsoft.Network/publicIPAddresses/join/action",
                    "Microsoft.Network/publicIPAddresses/read",
                    "Microsoft.Network/virtualNetworks/read",
                    "Microsoft.Network/virtualNetworks/subnets/join/action",
                    "Microsoft.Resources/deployments/*",
                    "Microsoft.Resources/subscriptions/resourceGroups/read",
                    "Microsoft.Support/*"
                ],
                "notActions": [],
                "dataActions": [],
                "notDataActions": []
            }
        ]
    }
}
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

To ensure that users can sign in to virtual machines that are assigned role1, modify the **[answer choice]** section

- actions
- roletype
- notActions
- dataActions
- notDataActions
- assignableScopes

To ensure that role1 can be assigned only to a resource group named RG1, modify the **[answer choice]** section

- actions
- roletype
- notActions
- dataActions
- notDataActions
- assignableScopes

Explanation

Correct Answer:

Answer Area

To ensure that users can sign in to virtual machines that are assigned role1, modify the **[answer choice]** section

- actions
- roletype
- notActions
- dataActions
- notDataActions
- assignableScopes

To ensure that role1 can be assigned only to a resource group named RG1, modify the **[answer choice]** section

- actions
- roletype
- notActions
- dataActions
- notDataActions
- assignableScopes

Box 1: roletype -

You need to configure Azure RBAC policy to determine who can log in to the VM. Two Azure roles are used to authorize VM login:

Virtual Machine Administrator Login: Users with this role assigned can log in to an Azure virtual machine with administrator privileges.
Virtual Machine User Login: Users with this role assigned can log in to an Azure virtual machine with regular user privileges.
Note, example roletype:
"roleName": "Virtual Machine Administrator Login",
"roleType": "BuiltInRole",
"type": "Microsoft.Authorization/roleDefinitions"

Box 2: assignableScopes -
Azure role-based access control (Azure RBAC) is the authorization system you use to manage access to Azure resources. To grant access, you assign roles to users, groups, service principals, or managed identities at a particular scope.
When you assign roles, you must specify a scope. Scope is the set of resources the access applies to. In Azure, you can specify a scope at four levels from broad to narrow: management group, subscription, resource group, and resource.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/devices/howto-vm-sign-in-azure-ad-windows https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles https://docs.microsoft.com/en-us/azure/role-based-access-control/role-assignments-portal

SecExams

Community Discussion

the answer is wrong. you are not defining a policy but a custom role. You need to provide either of the following in DataActions: Microsoft.Compute/virtualMachines/login/action Microsoft.Compute/virtualMachines/loginAsAdmin/action https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles?source=recommendations#virtual-machine-administrator-login correct answer is dataActions and assignableScopes

was on today's exam passed with 820 score

tested Data Actions and assignableScopes is the correct answe

DataActions https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles?source=recommendations#virtual-machine-user-login

https://www.youtube.com/watch?v=vorVUbAfw9c Answer: DataActions and AssignableScopes

Question #95

You have an Azure subscription that contains a storage account named storage1.
The storage1 account contains a file share named share1.
The subscription is linked to a hybrid Azure Active Directory (Azure AD) tenant that contains a security group named Group1.
You need to grant Group1 the Storage File Data SMB Share Elevated Contributor role for share1.
What should you do first?

A) Enable Active Directory Domain Service (AD DS) authentication for storage1. (Correct Answer)
B) Grant share-level permissions by using File Explorer.
C) Mount share1 by using File Explorer.
D) Create a private endpoint.

Explanation

Correct Answer:
A
Before you enable Azure AD over SMB for Azure file shares, make sure you have completed the following prerequisites:
1. Select or create an Azure AD tenant.
2. To support authentication with Azure AD credentials, you must enable Azure AD Domain Services for your Azure AD tenant.
Etc.
Note: The Storage File Data SMB Share Elevated Contributor allows read, write, delete and modify NTFS permissions in Azure Storage file shares over SMB.
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-files-identity-auth-active-directory-domain-service-enable

Community Discussion

Selected Answer: A

A) " Enable Active Directory Domain Service (AD DS) authentication for storage1. "
Reference: https://docs.microsoft.com/en-us/azure/storage/files/storage-files-identity-

auth-active-directory-domain-service-enable?tabs=azure-portal#overview-of-the-workflow

A. Enable Active Directory Domain Service (AD DS) authentication for storage1. To grant the Group1 the Storage File Data SMB Share Elevated Contributor role for share1, you need to enable Active Directory Domain Service (AD DS) authentication for the storage account. By enabling AD DS authentication, you allow Azure AD security groups to be used for granting access control to file shares in the storage account. This enables you to assign roles, such as the Storage File Data SMB Share Elevated Contributor role, to the security group Group1 for the specific file share share1. Once AD DS authentication is enabled and the security group is assigned the appropriate role, Group1 will have the necessary permissions to access and manage the file share. Therefore, enabling Active Directory Domain Service (AD DS) authentication for storage1 is the first step you should take to grant Group1 the Storage File Data SMB Share Elevated Contributor role for share1.

No, because it is now called "Microsoft Entra Domain Services".

No, because it is now called "Microsoft Entra Domain Services".

No, because it is now called "Microsoft Entra Domain Services".

SecExams

Question #96

You have 15 Azure subscriptions.
You have an Azure Active Directory (Azure AD) tenant that contains a security group named Group1.
You plan to purchase additional Azure subscription.
You need to ensure that Group1 can manage role assignments for the existing subscriptions and the planned subscriptions. The solution must meet the following requirements:
✑ Use the principle of least privilege.
✑ Minimize administrative effort.
What should you do?

A) Assign Group1 the Owner role for the root management group.
B) Assign Group1 the User Access Administrator role for the root management group. (Correct Answer)
C) Create a new management group and assign Group1 the User Access Administrator role for the group.

D) Create a new management group and assign Group1 the Owner role for the group.

Explanation

Correct Answer:
B
The User Access Administrator role enables the user to grant other users access to Azure resources. This switch can be helpful to regain access to a subscription.
Management groups give you enterprise-grade management at scale no matter what type of subscriptions you might have.
Each directory is given a single top-level management group called the "Root" management group. This root management group is built into the hierarchy to have all management groups and subscriptions fold up to it. This root management group allows for global policies and Azure role assignments to be applied at the directory level.
Incorrect:
Not C: A few directories that started using management groups early in the preview before June 25 2018 could see an issue where not all the subscriptions were within the hierarchy. The process to have all subscriptions in the hierarchy was put in place after a role or policy assignment was done on the root management group in the directory.
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/rbac-and-directory-admin-roles https://docs.microsoft.com/en-us/azure/governance/management-groups/overview

Community Discussion

Selected Answer: B

B) " Assign Group1 the User Access Administrator role for the root management group." To be able to assign licenses to all current and future subscriptions, while minimizing the administrative effort, one should apply the role to the Root Management Group. And because we should use the principle of least privilege we should chose the User Access Administrator role instead of the Owner one.

B or C depending on which requirement you're prioritizing. - B if you're minimizing the administrative effort - C if you're following principle of least privilege

Elevation is needed first, but in general this is the right answer and the most effective following the principle of least-privileged-access and will also be valid on newly added Subscriptions. https://learn.microsoft.com/en-us/azure/role-based-access-control/elevate-access-global-admin

Elevation is needed first, but in general this is the right answer and the most effective following the principle of least-privileged-access and will also be valid on newly added Subscriptions. https://learn.microsoft.com/en-us/azure/role-based-access-control/elevate-access-global-admin

I think the key here is " existing subscriptions and the planned [all future] subscriptions" OpenAI says: "Option C is not the best choice because it requires creating a new management group which is not necessary for the given scenario. " If we were to go the route of C we would need to do considerations for all further added subsciptions (more administrative thought) which we don't need with B and the group is said that it should have the role of all further subscriptions to there's no point to it.

SecExams

Question #97

SecExams

HOTSPOT -

You have an Azure subscription that contains the hierarchy shown in the following exhibit.

You create an Azure Policy definition named Policy1.

To which Azure resources can you assign Policy1 and which Azure resources can you specify as exclusions from Policy1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

You can assign Policy1 to:

- Subscription1 and RG1 only
- ManagementGroup1 and Subscription1 only
- Tenant Root Group, ManagementGroup1, and Subscription1 only
- Tenant Root Group, ManagementGroup1, Subscription1, and RG1 only
- Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1

You can exclude Policy1 from:

- VM1 only
- RG1 and VM1 only
- Subscription1, RG1, and VM1 only
- ManagementGroup1, Subscription1, RG1, and VM1 only
- Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1

Explanation

Correct Answer:

Answer Area

You can assign Policy1 to:

- Subscription1 and RG1 only
- ManagementGroup1 and Subscription1 only
- Tenant Root Group, ManagementGroup1, and Subscription1 only
- Tenant Root Group, ManagementGroup1, Subscription1, and RG1 only
- **Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1**

You can exclude Policy1 from:

- VM1 only
- RG1 and VM1 only
- Subscription1, RG1, and VM1 only
- **ManagementGroup1, Subscription1, RG1, and VM1 only**
- Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1

Box 1: Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1

Once your business rules have been formed, the policy definition or initiative is assigned to any scope of resources that Azure supports, such as management groups, subscriptions, resource groups, or individual resources.

Note: Azure provides four levels of scope: management groups, subscriptions, resource groups, and resources. The following image shows an example of these layers.

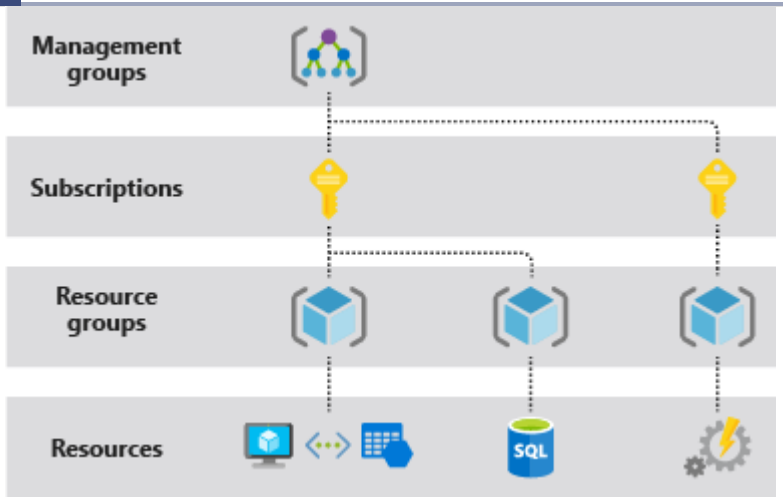

Box 2: ManagementGroup1, Subscription1, RG1, and VM1
You can exclude a subscope from the assignment.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/overview

Community Discussion

Since the discussion added a lot of confusion cause a lot of people in here just drop random facts without any proof,misleading people, i tested it at an Azure lab. In the scope field at the "Basics" tab i was able to select "Tenant Root Group" or "Management Group1" with the optional entries of Subscription and Resource group So ""you can assign policy to Tenant Root Group,ManagementGroup1,Subscription1 and RG1"" As for the second answer about the exclusions, i was able to select all the items in the scope EXCEPT the Tenant Root Group Therefore the correct answer would be ""ManagementGroup1,Subscription1,RG11 and VM1"" I hope that helps

Wrong! You can assign a policy to the Root, Management Group, Subscription and Ressource Group BUT NOT A RESSOUCE ITSELF! Test it in Portal! 2nd part of answer seems to be correct. You can not Exclude the highest scope that you can assign to. I tried it in portal as well and it wont save the exclusion Tenant Root Group

So I checked again and the portal doesnt let you do it! Thats what I based my assumption! But via Azure CLI it says that a ressource is a vaild scope for assignment: https://docs.microsoft.com/en-us/cli/azure/policy/assignment?view=azure-cli-latest#az-policy-assignment-create So yeah I think that you are right and my comment is wrong but I can not delete it. But looks like this is just a portal restriction. Sorry for the confusion!

So I checked again and the portal doesnt let you do it! Thats what I based my assumption! But via Azure CLI it says that a ressource is a vaild scope for assignment: https://docs.microsoft.com/en-us/cli/azure/policy/assignment?view=azure-cli-latest#az-policy-assignment-create So yeah I think that you are right and my comment is wrong but I can not delete it. But looks like this is just a portal restriction. Sorry for the confusion!

So I checked again and the portal doesnt let you do it! Thats what I based my assumption! But via Azure CLI it says that a ressource is a vaild scope for assignment: https://docs.microsoft.com/en-us/cli/azure/policy/assignment?view=azure-cli-latest#az-policy-assignment-create So yeah I think that you are right and my comment is wrong but I can not delete it. But looks like this is just a portal restriction. Sorry for the confusion!

Question #98

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the following users in an Azure Active Directory tenant named contoso.onmicrosoft.com:

Name	Role	Scope
User1	Global administrator	Azure Active Directory
User2	Global administrator	Azure Active Directory
User3	User administrator	Azure Active Directory
User4	Owner	Azure Subscription

User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com.
You need to create new user accounts in external.contoso.onmicrosoft.com.
Solution: You instruct User2 to create the user accounts.
Does that meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Only a global administrator can add users to this tenant.
Reference:
https://docs.microsoft.com/en-us/azure/devops/organizations/accounts/add-users-to-azure-ad

Community Discussion

Correct, but the explanation is not. User1 is global admin of contoso.onmicrosoft.com. As he created the new tenant called external.contoso.onmicrosoft.com, he will be the OWNER. Check the scope not just the role, tho.

Correct Answer: A - Yes Only User1 has access to the new Tenant, because User1 created the Tenant and became automatically Global Admin.

Putting this here, hope it helps someone. Question was reworded at some point, changing the answer to B: No. https://learn.microsoft.com/en-us/answers/questions/1163804/need-clear-understanding-on-the-permissions-global

Putting this here, hope it helps someone. Question was reworded at some point, changing the answer to B: No. https://learn.microsoft.com/en-us/answers/questions/1163804/need-clear-understanding-on-the-permissions-global

Then if User2 want to create new user on external.contoso.onmicrosoft.com , he can't right ? because User2 is not the one who create tenant external.contoso.onmicrosoft.com that mean User 2 don't be OWNER

SecExams

Question #99

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the following users in an Azure Active Directory tenant named contoso.onmicrosoft.com:

Name	Role	Scope
User1	Global administrator	Azure Active Directory
User2	Global administrator	Azure Active Directory
User3	User administrator	Azure Active Directory
User4	Owner	Azure Subscription

User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com.
You need to create new user accounts in external.contoso.onmicrosoft.com.
Solution: You instruct User4 to create the user accounts.
Does that meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Only a global administrator can add users to this tenant.
Reference:
https://docs.microsoft.com/en-us/azure/devops/organizations/accounts/add-users-to-azure-ad

Community Discussion

Selected Answer: B

B:No, when you create a new tenant, the creator is the only global admin and owner, he must first give access to others to allow anything. https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/active-directory-access-create-new-tenant#your-user-account-in-the-new-tenant

Tested. Ans is B. No Even if User4 is owner of subscription, he was not able to find new tenant created by user1 in Azure Active Directory > Manage Tenant.

There are several version of this question. The following are the valid and invalid solutions that may be presented. Valid Solution: Meets the Goal Solution: Solution: You instruct User1 to create the user accounts. Invalid Solutions: Does not Meet the Goal - Solution: You instruct User2 to create the user accounts. -Solution: You instruct User3 to create the user accounts. -Solution: You instruct User4 to create the user accounts.

It was in exam on 11/23

This proves that answer to question 58 is No

SecExams

Question #100

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the following users in an Azure Active Directory tenant named contoso.onmicrosoft.com:

Name	Role	Scope
User1	Global administrator	Azure Active Directory
User2	Global administrator	Azure Active Directory
User3	User administrator	Azure Active Directory
User4	Owner	Azure Subscription

User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com.
You need to create new user accounts in external.contoso.onmicrosoft.com.
Solution: You instruct User3 to create the user accounts.
Does that meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Only a global administrator can add users to this tenant.
Reference:
https://docs.microsoft.com/en-us/azure/devops/organizations/accounts/add-users-to-azure-ad

Community Discussion

The answer is No! I tested this. 1. I created a new Tenant contosogmpp. 2. Added 2 users, User1 and User 2 in this tenant and gave them global privileges 3. I logged through User1 and created a new tenant called externalcontossgmpp 4. Now when I logged in through User2 and try to switch tenants, the new tenant externalcontossgmpp is not available at all for User2. Hence User1 needs to invite User2 first

Selected Answer: B

it is another tentant

Answer is NO, the one who just created the tenant is the only one who can add Users. But when he assign "user 3" the User Administrator or Global Administrator role then he/she can. And yes NOT only the Global Adminsitrator can add AD Users. Source: ""Add new users or delete existing users from your Azure Active Directory (Azure AD) tenant. To add or delete users, you must be a User Administrator or Global Administrator." https://learn.microsoft.com/en-us/azure/active-directory/fundamentals/add-users-azure-active-directory

There are several version of this question. The following are the valid and invalid solutions that may be presented. Valid Solution: Meets the Goal Solution: Solution: You instruct User1 to create the user accounts. Invalid Solutions: Does not Meet the Goal - Solution: You instruct User2 to create the user accounts. -Solution: You instruct User3 to create the user accounts. -Solution: You instruct User4 to create the user accounts.

NO After User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com, User-1 becomes owner and Global Administrator of external.contoso.onmicrosoft.com. BUT User-3 doesn't have any authorization in new tenant. User-3's User Administrator Role applies to contoso.onmicrosoft.com NOT for external.contoso.onmicrosoft.com. SO User-1 CAN NOT instruct User3 to create the user accounts. MAYBE that can be done after User-1 assigns Global Administrator or User Access Administrator Role to User-3.

SecExams

Question #101

You have two Azure subscriptions named Sub1 and Sub2.
An administrator creates a custom role that has an assignable scope to a resource group named RG1 in Sub1.
You need to ensure that you can apply the custom role to any resource group in Sub1 and Sub2. The solution must minimize administrative effort.
What should you do?

A) Select the custom role and add Sub1 and Sub2 to the assignable scopes. Remove RG1 from the assignable scopes. (Correct Answer)

B) Create a new custom role for Sub1. Create a new custom role for Sub2. Remove the role from RG1.

C) Create a new custom role for Sub1 and add Sub2 to the assignable scopes. Remove the role from RG1.

D) Select the custom role and add Sub1 to the assignable scopes. Remove RG1 from the assignable scopes. Create a new custom role for Sub2.

Explanation

Correct Answer:
A
Can be used as:
"AssignableScopes": [
"/subscriptions/{Sub1}",
"/subscriptions/{Sub2}",
Note: Custom role example:
The following shows what a custom role looks like as displayed using Azure PowerShell in JSON format. This custom role can be used for monitoring and restarting virtual machines.
{
"Name": "Virtual Machine Operator",
"Id": "88888888-8888-8888-8888-888888888888",
"IsCustom": true,
"Description": "Can monitor and restart virtual machines.",
"Actions": [
"Microsoft.Storage/*/read",
"Microsoft.Network/*/read",
"Microsoft.Compute/*/read",
"Microsoft.Compute/virtualMachines/start/action",
"Microsoft.Compute/virtualMachines/restart/action",

"Microsoft.Authorization/*/read",
"Microsoft.ResourceHealth/availabilityStatuses/read",
"Microsoft.Resources/subscriptions/resourceGroups/read",
"Microsoft.Insights/alertRules/*",
"Microsoft.Insights/diagnosticSettings/*",
"Microsoft.Support/*"
],
"NotActions": [],
"DataActions": [],
"NotDataActions": [],
"AssignableScopes": [
"/subscriptions/{subscriptionId1}",
"/subscriptions/{subscriptionId2}",
"/providers/Microsoft.Management/managementGroups/{groupId1}"
]
}
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/custom-roles

Community Discussion

Selected Answer: A

A) " Select the custom role and add Sub1 and Sub2 to the assignable scopes. Remove RG1 from the assignable scopes. " To assure the solution minimizes the administrative effort, we just need to change the assignable scope list of the custom role. Reference: https://docs.microsoft.com/en-us/azure/role-based-access-control/custom-roles#custom-role-properties

Selected Answer: A

To ensure that you can apply the custom role to any resource group in Sub1 and Sub2 while minimizing administrative effort, you should select the custom role and add both Sub1 and Sub2 to the assignable scopes. In the Azure portal, navigate to the custom role that has been created and click on it. By adding both Sub1 and Sub2 to the assignable scopes of the custom role, you can ensure that the role can be applied to any resource group in both subscriptions. This minimizes administrative effort by eliminating the need to create separate custom roles for each subscription. Option B is not recommended as it would require creating a separate custom role for each subscription, which would increase administrative effort. Option C is not recommended as it would only allow the custom role to be applied to resource groups in Sub1 and not Sub2. Option D is not

recommended as it would require creating a separate custom role for Sub2, which would increase administrative effort.

WOULD YOU STOP POSTING THIS??? Really? EVERY SINGLE QUESTION? GTFO

WOULD YOU STOP POSTING THIS??? Really? EVERY SINGLE QUESTION? GTFO

Selected Answer: A

A is the answer. https://learn.microsoft.com/en-us/azure/role-based-access-control/custom-roles If the Azure built-in roles don't meet the specific needs of your organization, you can create your own custom roles. Just like built-in roles, you can assign custom roles to users, groups, and service principals at management group (in preview only), subscription, and resource group scopes. Custom roles can be shared between subscriptions that trust the same Azure AD tenant.

SecExams

Question #102

You have an Azure Subscription that contains a storage account named storageacct1234 and two users named User1 and User2.
You assign User1 the roles shown in the following exhibit.

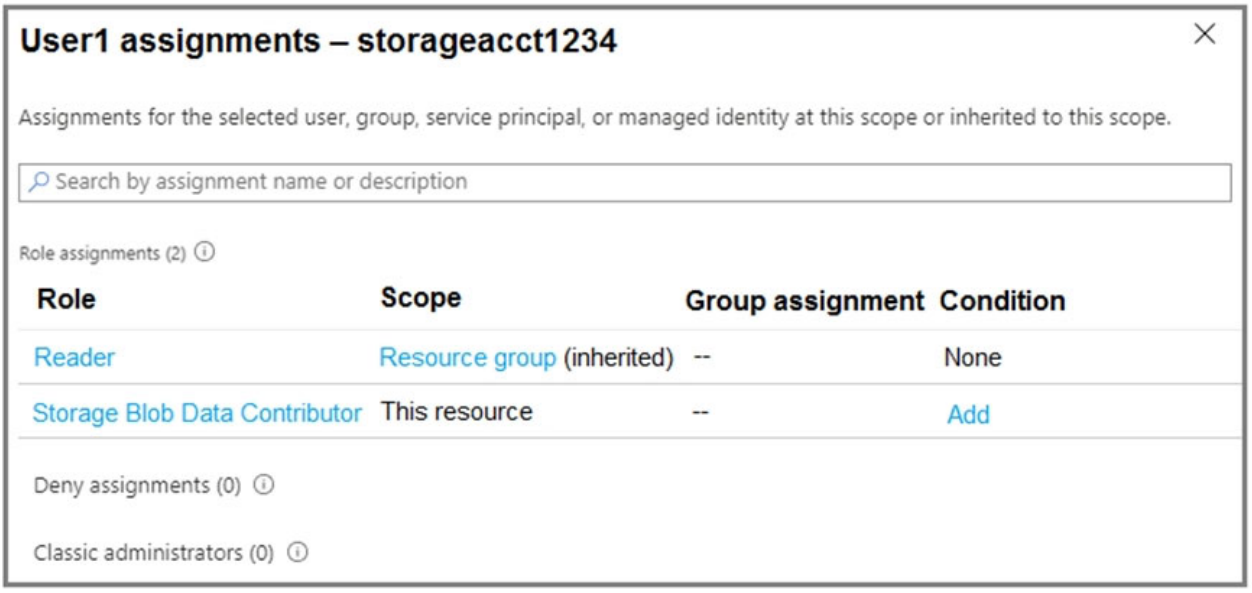

Which two actions can User1 perform? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A) Assign roles to User2 for storageacct1234. (Correct Answer)
B) Upload blob data to storageacct1234.

C) Modify the firewall of storageacct1234.

D) View blob data in storageacct1234.

E) View file shares in storageacct1234. (Correct Answer)

Explanation

Correct Answer:
AE

Community Discussion

Selected Answer: BD

Correct Answer is:BD

Selected Answer: BD

correct answers: BD

For example, if you assign the Storage Blob Data Contributor role to user Mary at the level of a container named sample-container, then Mary is granted read, write, and delete access to all of the blobs in that container. However, if Mary wants to view a blob in the Azure portal, then the Storage Blob Data Contributor role by itself will not provide sufficient permissions to navigate through the portal to the blob in order to view it. The additional permissions are required to navigate through the portal and view the other resources that are visible there.

For example, if you assign the Storage Blob Data Contributor role to user Mary at the level of a container named sample-container, then Mary is granted read, write, and delete access to all of the blobs in that container. However, if Mary wants to view a blob in the Azure portal, then the Storage Blob Data Contributor role by itself will not provide sufficient permissions to navigate through the portal to the blob in order to view it. The additional permissions are required to navigate through the portal and view the other resources that are visible there.

E is not the answer. The Reader role only grants User1 the permission to view the properties and metadata of the storage account, not the data inside it.

Question #103

You have an Azure subscription named Subscription1 that contains the storage accounts shown in the following table:

Name	Account kind	Azure service that contains data
storage1	Storage	File
storage2	StorageV2 (general purpose v2)	File, Table
storage3	StorageV2 (general purpose v2)	Queue
storage4	BlobStorage	Blob

You plan to use the Azure Import/Export service to export data from Subscription1.
You need to identify which storage account can be used to export the data.
What should you identify?

A) storage1
B) storage2
C) storage3
D) storage4 (Correct Answer)

Explanation

Correct Answer:
D
Azure Import/Export service supports the following of storage accounts:
✑ Standard General Purpose v2 storage accounts (recommended for most scenarios)
✑ Blob Storage accounts
✑ General Purpose v1 storage accounts (both Classic or Azure Resource Manager deployments),
Azure Import/Export service supports the following storage types:
✑ Import supports Azure Blob storage and Azure File storage
✑ Export supports Azure Blob storage
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-requirements

Community Discussion

Correct Answer: D Azure Import/Export service supports the following of storage accounts: ✑ Standard General Purpose v2 storage accounts (recommended for most scenarios) ✑ Blob Storage accounts ✑ General Purpose v1 storage accounts (both Classic or Azure Resource Manager deployments), Azure Import/Export service supports the following storage types: ✑ Import supports Azure Blob storage and Azure File storage ✑ Export supports Azure Blob storage. Azure Files not supported. Only storage4 can be exported. Reference: https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-requirements

From the provided link. I assume since they table in the question notes "Storage" its being disregarded as an invalid option. Thus the answer blob appears to be correct. Standard General Purpose v2 storage accounts (recommended for most scenarios) Blob Storage accounts

Came in exams 27/7/2023. I selected D

I used free version access for this site and it helped me pass the exam. Some questions that I had on the exams, I took the exam more than once, are not available under the free tier access, but 80% of the questions came from here. I do recommend investing a bit of money and getting full access to this site. I didn't memorise answers but analysed them and studied as Microsoft does tweak them a bit. This Q was on the exam.

was on the exam on June 17 2023

SecExams

Question #104

HOTSPOT -

You have Azure Storage accounts as shown in the following exhibit.

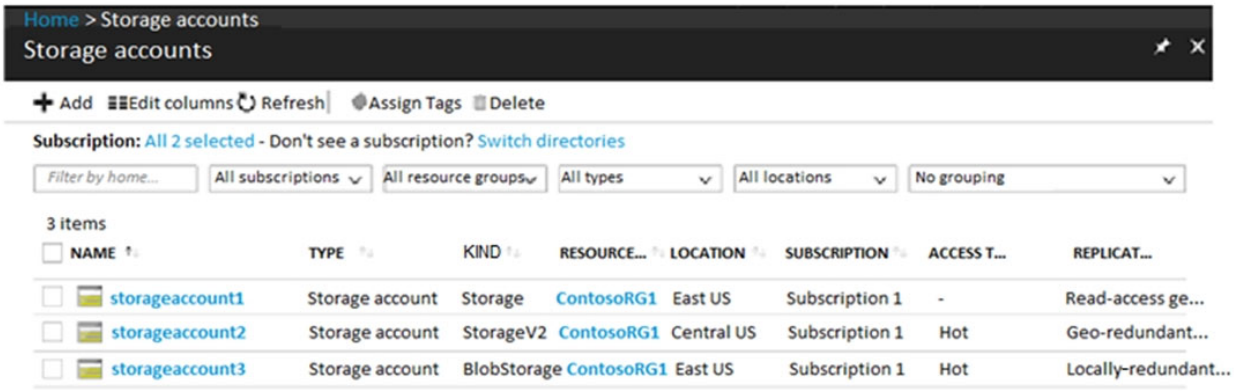

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

You can use **[answer choice]** for Azure Table Storage.

- storageaccount1 only
- storageaccount2 only
- storageaccount3 only
- storageaccount1 and storageaccount2 only
- storageaccount2 and storageaccount3 only

You can use **[answer choice]** for Azure Blob storage.

- storageaccount3 only
- storageaccount2 and storageaccount3 only
- storageaccount1 and storageaccount3 only
- all the storage accounts

Explanation

Correct Answer:

Answer Area

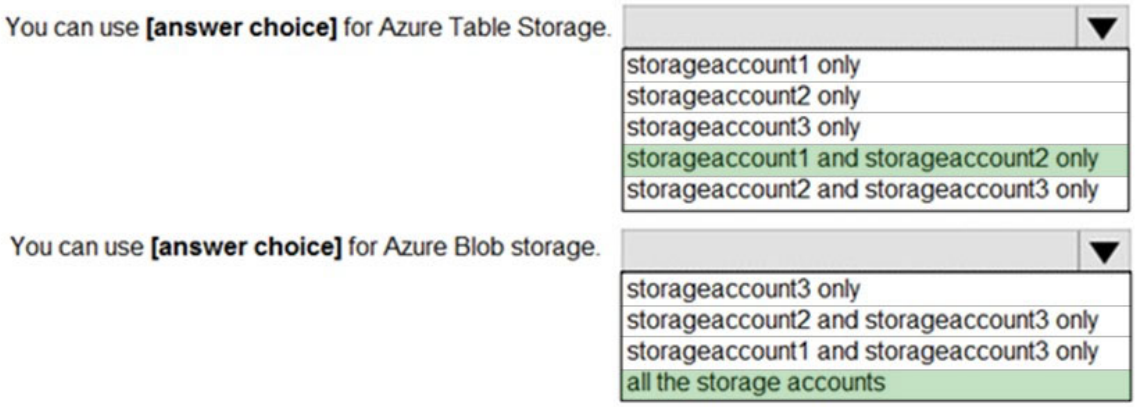

Box 1: storageaccount1 and storageaccount2 only

Box 2: All the storage accounts -
Note: The three different storage account options are: General-purpose v2 (GPv2) accounts, General-purpose v1 (GPv1) accounts, and Blob storage accounts.
✑ General-purpose v2 (GPv2) accounts are storage accounts that support all of the latest features for blobs, files, queues, and tables.
✑ Blob storage accounts support all the same block blob features as GPv2, but are limited to supporting only block blobs.
✑ General-purpose v1 (GPv1) accounts provide access to all Azure Storage services, but may not have the latest features or the lowest per gigabyte pricing.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-account-options

Community Discussion

Answer is correct. - Storage account 1 & 2 - All storage accounts.

Correct Answer: Box 1: storageaccount1 and storageaccount2 only Box 2: All the storage accounts

because he is the chosen one.

because he is the chosen one.

because he is the chosen one.

SecExams

Question #105

You have Azure subscription that includes data in following locations:

Name	Type
container1	Blob container
share1	Azure files share
DB1	SQL database
Table1	Azure Table

You plan to export data by using Azure import/export job named Export1.
You need to identify the data that can be exported by using Export1.
Which data should you identify?

A) DB1
B) container1 (Correct Answer)
C) share1
D) Table1

Explanation

Correct Answer:
B

Community Discussion

Blobs are only type of storage which can be exported.

Answer is correct. B - Blob Container. For Azure file share, it is tricky as it is mentioned Azure Files can be used for export and import. But I tested especially with file share and it doesn't work. Maybe work for storage account with type file or something. but not Azure file shares.

Was on exam 19 Aug 2022. Scored 870. Answered B

Was on exam 19 Aug 2022. Scored 870. Answered B

1. Import and export support for blob storage. 2. Only import support for File storage but export not support. check the table of Supported storage types https://learn.microsoft.com/en-us/azure/import-export/storage-import-export-requirements#supported-storage-types

Question #106

HOTSPOT -

You have an Azure Storage account named storage1.

You have an Azure App Service app named App1 and an app named App2 that runs in an Azure container instance. Each app uses a managed identity.

You need to ensure that App1 and App2 can read blobs from storage1. The solution must meet the following requirements:

✑ Minimize the number of secrets used.

✑ Ensure that App2 can only read from storage1 for the next 30 days.

What should you configure in storage1 for each app? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

App1:

- Access keys
- Advanced security
- Access control (IAM)
- Shared access signatures (SAS)

App2:

- Access keys
- Advanced security
- Access control (IAM)
- Shared access signatures (SAS)

Explanation

Correct Answer:

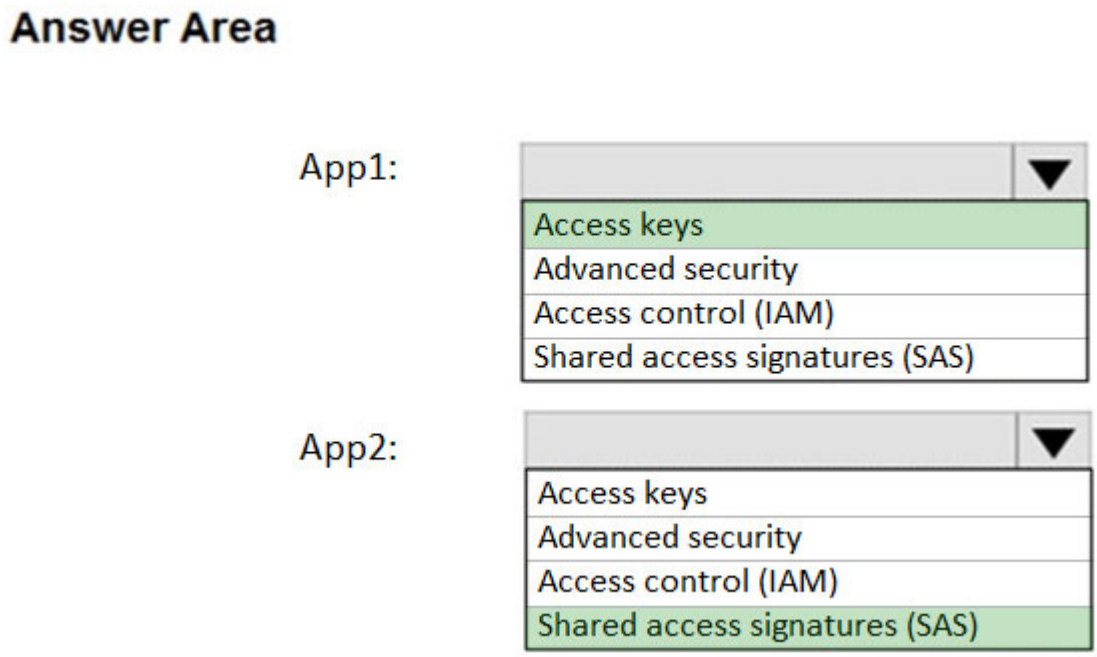

App1: Access keys -
App2: Shared access signature (SAS)
A shared access signature (SAS) provides secure delegated access to resources in your storage account without compromising the security of your data. With a SAS, you have granular control over how a client can access your data. You can control what resources the client may access, what permissions they have on those resources, and how long the SAS is valid, among other parameters.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-sas-overview

Community Discussion

Correct Answer: Box 1: Access Control (IAM) Since the App1 uses Managed Identity, App1 can access the Storage Account via IAM. As per requirement, we need to minimize the number of secrets used, so Access keys is not ideal. Box 2: Shared access signatures (SAS) We need temp access for App2, so we need to use SAS. Reference: https://docs.microsoft.com/en-us/azure/storage/common/storage-auth

I think App1 should access storage1 over IAM with managed identity. The requirement is minimize the number of secrets used...

In reference to the first part of this question (App1): I found this page under "Identity and access management" to be spot on: https://docs.microsoft.com/en-us/azure/storage/blobs/security-recommendations#identity-and-access-management App1 answer: IAM App2 answer: SAS (only way you can implement a time limit)

In reference to the first part of this question (App1): I found this page under "Identity and access management" to be spot on: https://docs.microsoft.com/en-us/azure/storage/blobs/security-recommendations#identity-and-access-management App1 answer: IAM App2 answer: SAS (only way you can implement a time limit)

Yes, and especially since they say "apps can read blobs from storage1"... So, IAM is supported in that case and requires no secrets to keep. App1 = IAM / RBAC and App2 = SAS https://docs.microsoft.com/en-us/azure/storage/common/storage-auth

Question #107

HOTSPOT -

You need to create an Azure Storage account that meets the following requirements:

✑ Minimizes costs

✑ Supports hot, cool, and archive blob tiers

✑ Provides fault tolerance if a disaster affects the Azure region where the account resides

How should you complete the command? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
az storage account create -g RG1 -n storageaccount1
--kind [ ▼ ]  --sku [ ▼ ]
```

--kind: FileStorage, Storage, StorageV2

--sku: Standard_GRS, Standard_LRS, Standard_RAGRS, Premium_LRS

Explanation

Correct Answer:

Answer Area

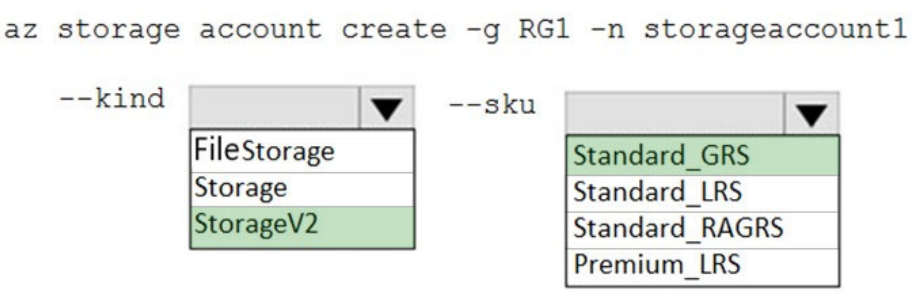

Box 1: StorageV2 -
You may only tier your object storage data to hot, cool, or archive in Blob storage and General Purpose v2 (GPv2) accounts. General Purpose v1 (GPv1) accounts do not support tiering.
General-purpose v2 accounts deliver the lowest per-gigabyte capacity prices for Azure Storage, as well as industry-competitive transaction prices.

Box 2: Standard_GRS -
Geo-redundant storage (GRS): Cross-regional replication to protect against region-wide unavailability.
Incorrect Answers:
Locally-redundant storage (LRS): A simple, low-cost replication strategy. Data is replicated within a single storage scale unit.
Read-access geo-redundant storage (RA-GRS): Cross-regional replication with read access to the replica. RA-GRS provides read-only access to the data in the secondary location, in addition to geo-replication across two regions, but is more expensive compared to GRS.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy-grs
https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers

Community Discussion

Correct Answer: Box 1: StorageV2 Box 2: Standard_GRS Reference: https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy-grs https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers

Keep in mind the question is mentioning the minimize cost, even though Storage v2 and blob both can support the hot, cool, and archive but Storage V2 is lowest cost. so answer is correct.

Pass the exam on 11 August 2023 with 909, Below are some of the notes that may help for Blob and file storage: A. Blob Storage: 1-Archive is supported in Blob Storage and General Purpose v2 (GPv2) accounts. Only storage accounts that are configured for LRS, GRS, or RA-GRS support moving blobs to the archive tier. 2-Import supports Azure Blob storage and Azure File storage 3 -Export supports Azure Blob storage 4-support Lifecycle management policies. Lifecycle management policies are supported for block blobs and append blobs in general-purpose v2, premium block blob, and Blob Storage accounts. 5-Object Replication supports General Purpose V2 and Premium Blob accounts. 6-Support both Azure (AD) and SAS (Shared Access Signature) token.

Pass the exam on 11 August 2023 with 909, Below are some of the notes that may help for Blob and file storage: A. Blob Storage: 1-Archive is supported in Blob Storage and General Purpose v2 (GPv2) accounts. Only storage accounts that are configured for LRS, GRS, or RA-GRS support moving blobs to the archive tier. 2-Import supports Azure Blob storage and Azure File storage 3 -Export supports Azure Blob storage 4-support Lifecycle management policies. Lifecycle management policies are supported for block blobs and append blobs in general-purpose v2, premium block blob, and Blob Storage accounts. 5-Object Replication supports General Purpose V2 and Premium Blob accounts. 6-Support both Azure (AD) and SAS (Shared Access Signature) token.

Answer Valid! This question was on the exam 22/02/2023. Scored 920. Thanks guys!

SecExams

Question #108

You have an Azure subscription that contains the resources in the following table.

Name	Type
RG1	Resource group
store1	Azure Storage account
Sync1	Azure File Sync

Store1 contains a file share named data. Data contains 5,000 files.
You need to synchronize the files in the file share named data to an on-premises server named Server1.
Which three actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Create a container instance
B) Register Server1 (Correct Answer)
C) Install the Azure File Sync agent on Server1 (Correct Answer)
D) Download an automation script
E) Create a sync group (Correct Answer)

Explanation

Correct Answer:
BCE
Step 1 (C): Install the Azure File Sync agent on Server1
The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share
Step 2 (B): Register Server1.
Register Windows Server with Storage Sync Service
Registering your Windows Server with a Storage Sync Service establishes a trust relationship between your server (or cluster) and the Storage Sync Service.
Step 3 (E): Create a sync group and a cloud endpoint.
A sync group defines the sync topology for a set of files. Endpoints within a sync group are kept in sync with each other. A sync group must contain one cloud endpoint, which represents an Azure file share and one or more server endpoints. A server endpoint represents a path on registered server.
Reference:

https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide

Community Discussion

Correct Answer: B, C and E Step 1: Install the Azure File Sync agent on Server1. The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share. Step 2: Register Server1. Register Windows Server with Storage Sync Service. Registering your Windows Server with a Storage Sync Service establishes a trust relationship between your server and the Storage Sync Service. Step 3: Create a sync group and a cloud endpoint. A sync group defines the sync topology for a set of files. Endpoints within a sync group are kept in sync with each other. A sync group must contain one cloud, which represents an Azure file share and one or more server endpoints. A server endpoint represents a path on registered server. Reference: https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide

that's correct!

Correct Answer. Thanks Mlantonis.

Correct Answer. Thanks Mlantonis.

Selected Answer: BCE

Step 1: Install the Azure File Sync agent on Server1. The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share. Step 2: Register Server1. Register Windows Server with Storage Sync Service. Registering your Windows Server with a Storage Sync Service establishes a trust relationship between your server and the Storage Sync Service. Step 3: Create a sync group and a cloud endpoint. A sync group defines the sync topology for a set of files. Endpoints within a sync group are kept in sync with each other. A sync group must contain one cloud, which represents an Azure file share and one or more server endpoints. A server endpoint represents a path on registered server. Reference: https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide

SecExams

Question #109

SecExams

HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group
VNET1	Virtual network	RG1
VNET2	Virtual network	RG2
VM1	Virtual machine	RG2

The status of VM1 is Running.

You assign an Azure policy as shown in the exhibit. (Click the Exhibit tab.)

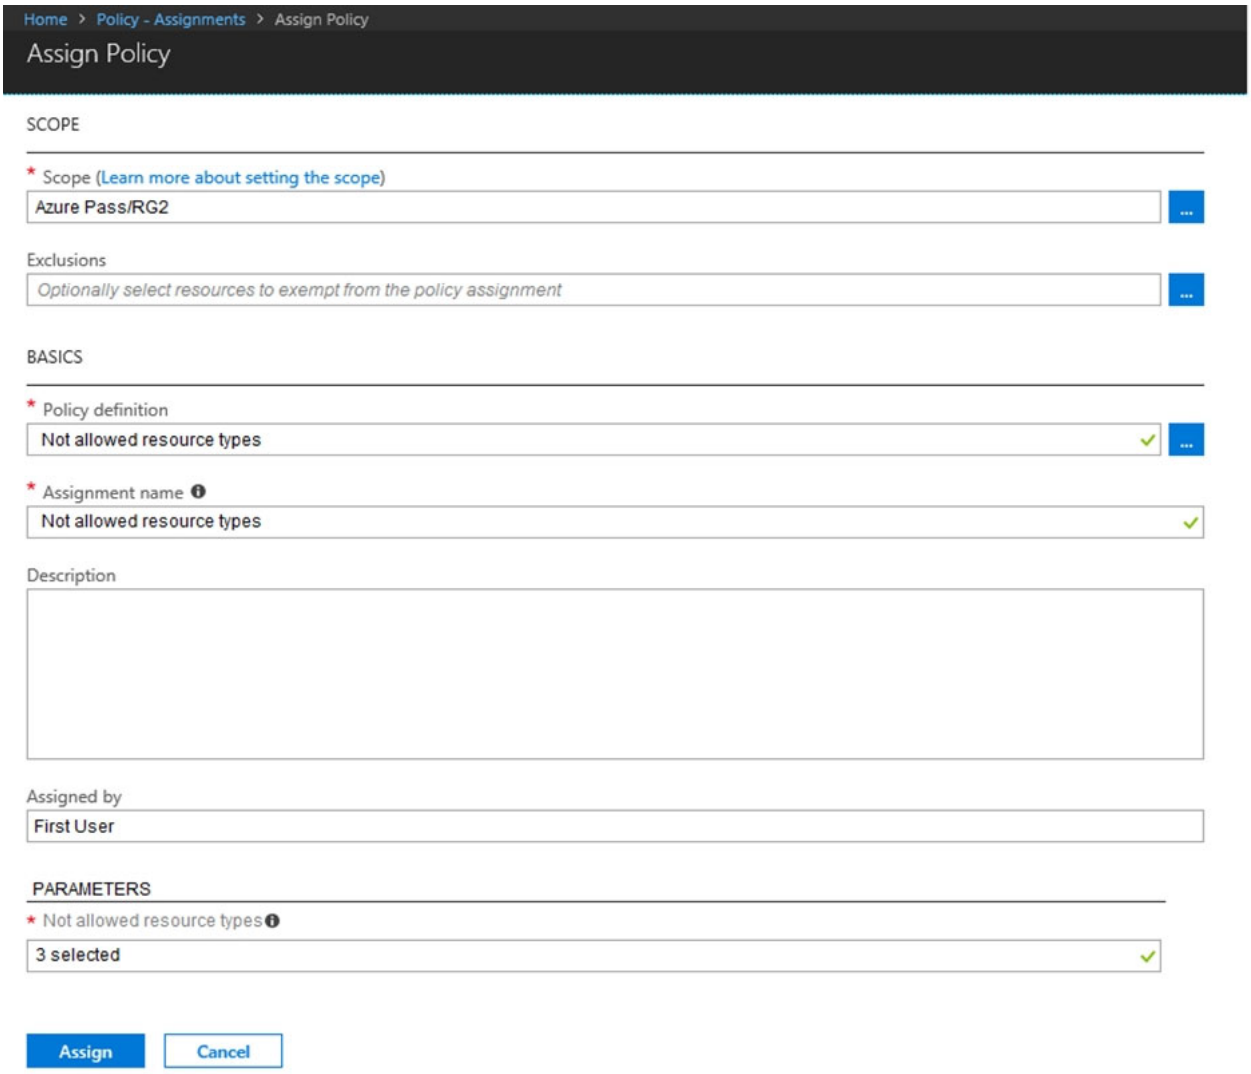

You assign the policy by using the following parameters:

Microsoft.ClassicNetwork/virtualNetworks

Microsoft.Network/virtualNetworks

Microsoft.Compute/virtualMachines

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
An administrator can move VNET1 to RG2	○	○
The state of VM1 changed to deallocated	○	○
An administrator can modify the address space of VNET2	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
An administrator can move VNET1 to RG2	○	○
The state of VM1 changed to deallocated	○	○
An administrator can modify the address space of VNET2	○	○

Community Discussion

Y-N-N tested today in a LAB.

N-N-N Policy will identify the VM as not compliant but will not put VM in deallocate

Definetly N-N-N - tested in lab

Definetly N-N-N - tested in lab

How did you get a yes if you tested this? I just did and it's a hard "No". Resource 'VNET1' was dissallowed by policy. (Code: RequestDisallowedByPolicy).

Question #110

DRAG DROP -

You have an Azure subscription that contains a storage account.

You have an on-premises server named Server1 that runs Windows Server 2016. Server1 has 2 TB of data.

You need to transfer the data to the storage account by using the Azure Import/ Export service.

In which order should you perform the actions? To answer, move all actions from the list of actions to the answer area and arrange them in the correct order.

NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.

Select and Place:

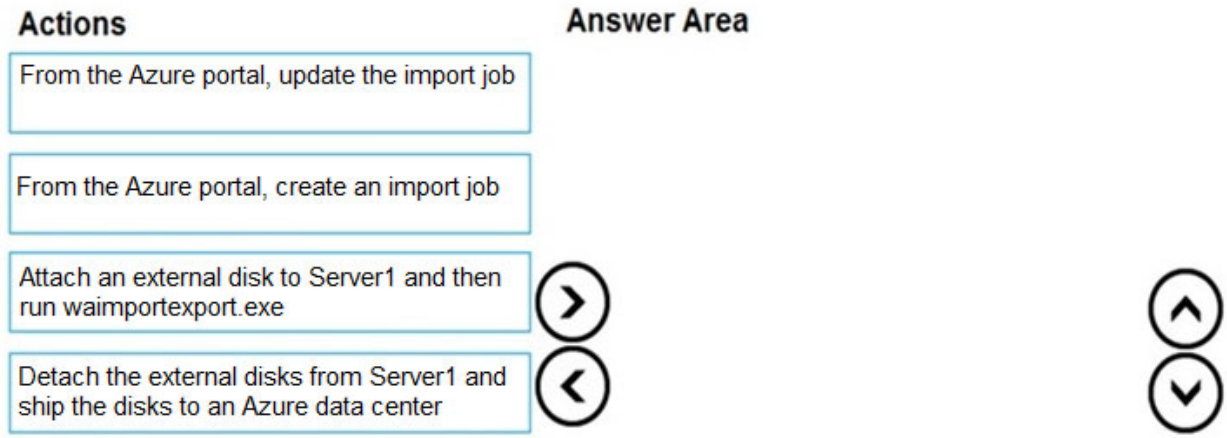

Explanation

Correct Answer:

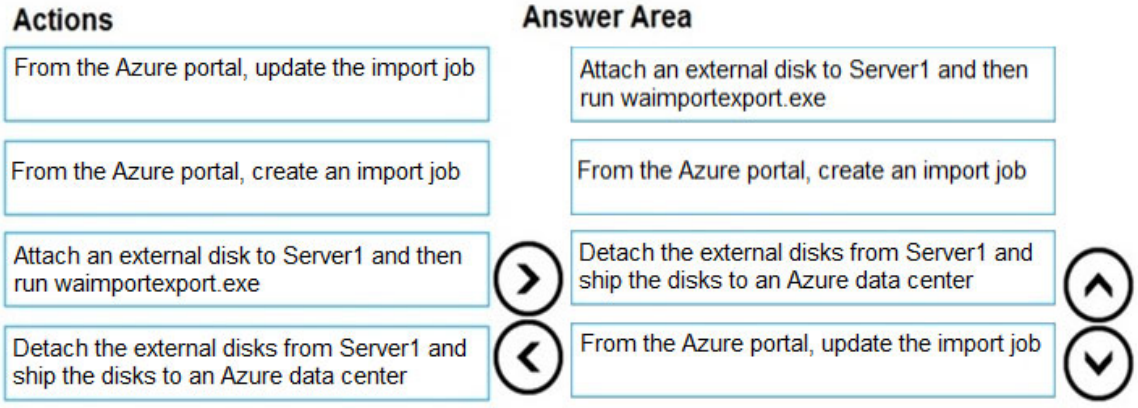

At a high level, an import job involves the following steps:
Step 1: Attach an external disk to Server1 and then run waimportexport.exe
Determine data to be imported, number of drives you need, destination blob location for your data in Azure storage.
Use the WAImportExport tool to copy data to disk drives. Encrypt the disk drives with BitLocker.
Step 2: From the Azure portal, create an import job.
Create an import job in your target storage account in Azure portal. Upload the drive journal files.
Step 3: Detach the external disks from Server1 and ship the disks to an Azure data center.
Provide the return address and carrier account number for shipping the drives back to you.
Ship the disk drives to the shipping address provided during job creation.
Step 4: From the Azure portal, update the import job
Update the delivery tracking number in the import job details and submit the import job.
The drives are received and processed at the Azure data center.
The drives are shipped using your carrier account to the return address provided in the import job.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-service

Community Discussion

Correct Answer: Step 1: Prepare the drives (Attach an external disk to Server1 and then run waimportexport.exe) Step 2: Create an import job (From the Azure portal, create an import job) Step 3: Ship the drives to the Azure datacenter (Detach the external disks from Server1 and ship the disks to an Azure data center) Step 4: Update the job with tracking information (From the Azure portal, update the import job) Reference: https://docs.microsoft.com/en-us/azure/import-export/storage-import-export-data-to-files?tabs=azure-portal https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-service

i just realised i don't know shit!

That's why we are here, to memorize answer without understanding what's under the hood. :(

That's why we are here, to memorize answer without understanding what's under the hood. :(

I somewhat disagree. I am for one certainly not here to memorize answers. What is the point of getting the certificate without knowing the matter?! Whenever I end up on a question where I feel that my knowledge is shaky or downright lacking I can do some research and actually learn / understand what I couldn't have if I had only limited myself to Microsoft's "official" way of preparing for the exam. It is kind of messed up but yeah if one believes that he can pass the exam solely on what's being taught by Microsoft you will be in for a rude wakening.

SecExams

Question #111

HOTSPOT -

You have Azure subscription that includes following Azure file shares:

Name	In storage account	Location
share1	storage1	West US
share2	storage1	West US

You have the following on-premises servers:

Name	Folders
Server1	D:\Folder1, E:\Folder2
Server2	D:\Data

You create a Storage Sync Service named Sync1 and an Azure File Sync group named Group1. Group1 uses share1 as a cloud endpoint.

You register Server1 and Server2 in Sync1. You add D:\Folder1 on Server1 as a server endpoint of Group1.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
share2 can be added as a cloud endpoint for Group1	○	○
E:\Folder2 on Server1 can be added as a server endpoint for Group1	○	○
D:\Data on Server2 can be added as a server endpoint for Group1	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
share2 can be added as a cloud endpoint for Group1	○	○
E:\Folder2 on Server1 can be added as a server endpoint for Group1	○	○
D:\Data on Server2 can be added as a server endpoint for Group1	○	○

Box 1: No -
Group1 already has a cloud endpoint named Share1.
A sync group must contain one cloud endpoint, which represents an Azure file share and one or more server endpoints.

Box 2: Yes -
Yes, one or more server endpoints can be added to the sync group.

Box 3: Yes -
Yes, one or more server endpoints can be added to the sync group.
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide

SecExams

Community Discussion

Correct Answer: Box 1: No A sync group contains one cloud endpoint, or Azure file share, and at least one server endpoint. Box 2: No Azure File Sync does not support more than one server endpoint from the same server in the same Sync Group. Box 3: Yes Multiple server endpoints can exist on the same volume if their namespaces are not overlapping (for example, F:\sync1 and F:\sync2) and each endpoint is syncing to a unique sync group. Reference: https://docs.microsoft.com/en-us/answers/questions/110822/azure-file-sync-multiple-sync-directories-for-same.html https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide

NO NO YES

Lab tested ... NO NO YES is correct confirmation of second que: https://docs.microsoft.com/en-us/answers/questions/110822/azure-file-sync-multiple-sync-directories-for-same.html "Azure File Sync does not support more than one server endpoint from the same server in the same sync group."

Lab tested ... NO NO YES is correct confirmation of second que: https://docs.microsoft.com/en-us/answers/questions/110822/azure-file-sync-multiple-sync-directories-for-same.html "Azure File Sync does not support more than one server endpoint from the same server in the same sync group."

That's correct (NO NO YES), because to add another server endpoint from the same server you need to have another sync group... "Multiple server endpoints can exist on the same volume if their namespaces are not overlapping (for example, F:\sync1 and F:\sync2) and each endpoint is syncing to a unique sync group."

Question #112

DRAG DROP -

You have an Azure subscription named Subscription1.

You create an Azure Storage account named contosostorage, and then you create a file share named data.

Which UNC path should you include in a script that references files from the data file share? To answer, drag the appropriate values to the correct targets. Each value may be used once, more than once or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Select and Place:

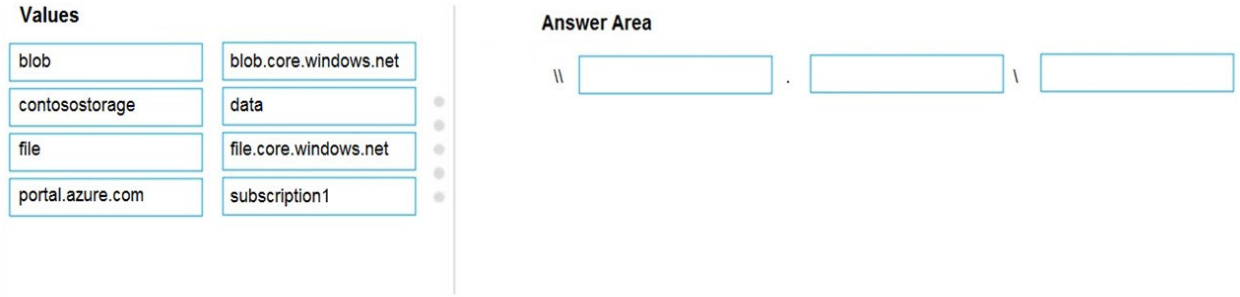

Explanation

Correct Answer:

Box 1: contosostorage -

The name of account -

Box 2: file.core.windows.net -

Box 3: data -
The name of the file share is data.
Example:

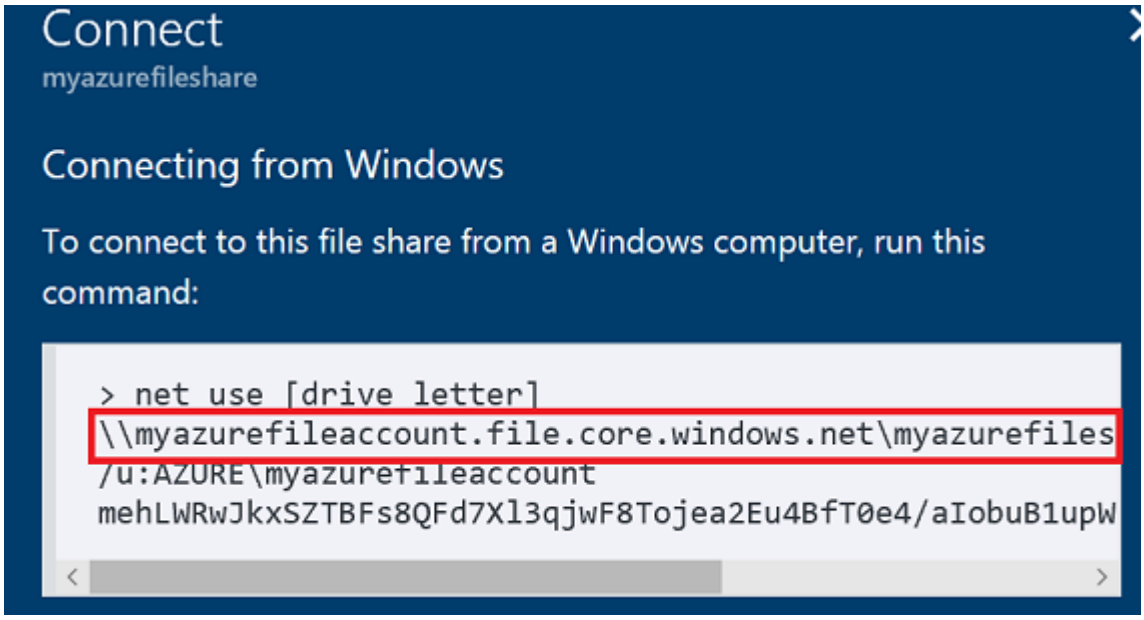

Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-use-files-windows

Community Discussion

Correct Answer: [storageaccountname].file.core.windows.net/[FileShareName] contosostorage.file.core.windows.net\data Reference: https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-use-files-windows

Correct Answer - contosostorage.file.core.windows.net\data.

Just in case you wanted to know exactly where to look. "\\<storageAccountName>.file.core.windows.net\<fileShareName>" Mount the Azure file share with File Explorer > Step 3 https://learn.microsoft.com/en-us/azure/storage/files/storage-how-to-use-files-windows#mount-the-azure-file-share-with-file-explorer

Just in case you wanted to know exactly where to look. "\\<storageAccountName>.file.core.windows.net\<fileShareName>" Mount the Azure file share with File Explorer > Step 3 https://learn.microsoft.com/en-us/azure/storage/files/storage-how-to-use-files-windows#mount-the-azure-file-share-with-file-explorer

Found this Q in the exam, 3/7/23

Question #113

HOTSPOT -

You have an Azure subscription that contains an Azure Storage account.

You plan to copy an on-premises virtual machine image to a container named vmimages.

You need to create the container for the planned image.

Which command should you run? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

azcopy [▼]
- make
- sync
- copy

'https://mystorageaccount. [▼] .core.windows.net/vmimages'
- blob
- dfs
- queue
- table
- images
- file

Explanation

Correct Answer:

Answer Area

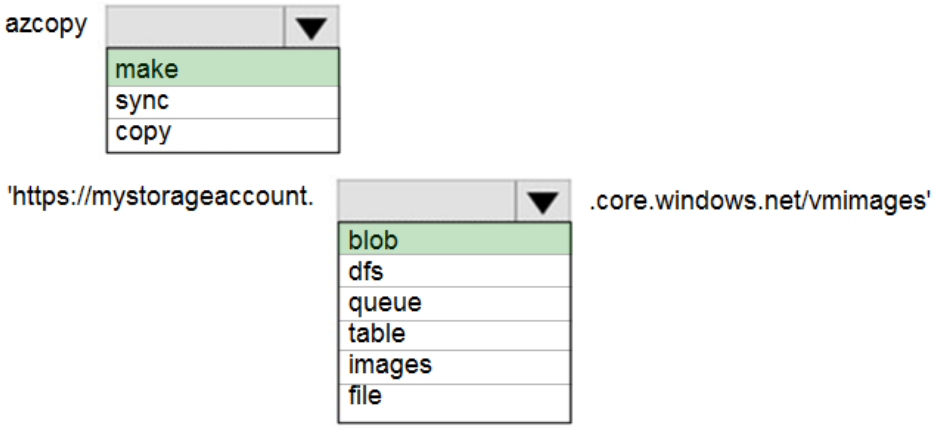

Community Discussion

Correct Answer: azcopy make 'https://mystorageaccount.blob.core.windows.net/vmimages' Similar to OS Images, a VM Image is a collection of metadata and pointers to a set of VHDs (one VHD per disk) stored as page blobs in Azure Storage. Reference: https://docs.microsoft.com/en-us/azure/storage/common/storage-ref-azcopy-make

Correct Answer. Similar to OS Images, a VM Image is a collection of metadata and pointers to a set of VHDs (one VHD per disk) stored as page blobs in Azure Storage

Agree correct answer - make, blob

Agree correct answer - make, blob

In case yall wanted to know where they got the quote from. You could've just googled it. "Similar to OS Images, a VM Image is a collection of metadata and pointers to a set of VHDs (one VHD per disk) stored as page blobs in Azure Storage." https://azure.microsoft.com/en-us/blog/vm-image-blog-post/

Question #114

HOTSPOT -

You have an Azure File sync group that has the endpoints shown in the following table.

Name	Type
Endpoint1	Cloud endpoint
Endpoint2	Server endpoint
Endpoint3	Server endpoint

Cloud tiering is enabled for Endpoint3.

You add a file named File1 to Endpoint1 and a file named File2 to Endpoint2.

On which endpoints will File1 and File2 be available within 24 hours of adding the files? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

File1:

- Endpoint1 only
- Endpoint3 only
- Endpoint2 and Endpoint3 only
- Endpoint1, Endpoint2, and Endpoint3

File2:

- Endpoint2 only
- Endpoint3 only
- Endpoint2 and Endpoint3 only
- Endpoint1, Endpoint2, and Endpoint3

Explanation

Correct Answer:

Answer Area

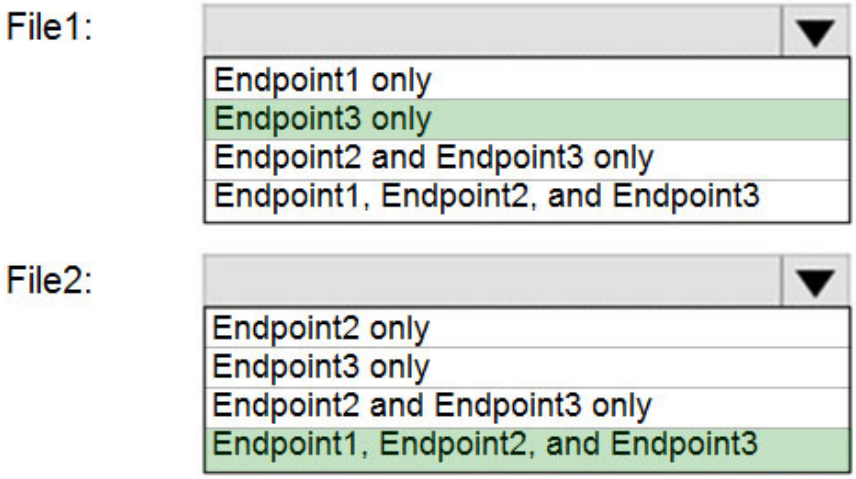

File1: Endpoint3 only -
Cloud Tiering: A switch to enable or disable cloud tiering. When enabled, cloud tiering will tier files to your Azure file shares. This converts on-premises file shares into a cache, rather than a complete copy of the dataset, to help you manage space efficiency on your server. With cloud tiering, infrequently used or accessed files can be tiered to Azure Files.
File2: Endpoint1, Endpoint2, and Endpoint3
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-cloud-tiering

SecExams

Community Discussion

Correct Answer: File1: Endpoint1 only It is a cloud endpoint, and it is scanned by the detection job every 24 hours. File2: Endpoint1, Endpoint2 and Endpoint3 With the on-premises servers the file is scanned and synced automatically after it's being added. Note: They changed the question in Exam from "within 24 hours" to "after 24 hours". So, the answer is: File1: Endpoint1, Endpoint2 and Endpoint3 File2: Endpoint1, Endpoint2 and Endpoint3 Reference: https://docs.microsoft.com/en-us/learn/modules/extend-share-capacity-with-azure-file-sync/2-what-azure-file-sync

Should be File 1: Endpoint 1 only File 2: Endpoint 1, Endpoint 2 and Endpoint 3

Their ref link section: "how does it work?" 1. "That means that if you change a file in the Azure file share, you might not see the change on the on-premises file share for up to 24 hours." 2. "Azure File Sync uses Windows USN journaling on the Windows Server computer to automatically start a sync session when files change on the server endpoint. Changes

made to the on-premises file share are immediately detected and replicated to the Azure file share." Just in case yall wanted the quote without having to look for it in their ref link.

Their ref link section: "how does it work?" 1. "That means that if you change a file in the Azure file share, you might not see the change on the on-premises file share for up to 24 hours." 2. "Azure File Sync uses Windows USN journaling on the Windows Server computer to automatically start a sync session when files change on the server endpoint. Changes made to the on-premises file share are immediately detected and replicated to the Azure file share." Just in case yall wanted the quote without having to look for it in their ref link.

you waited 24 hour for the job to be sync? I think the answer is all endpoints because the syc job run every 24 hour so even if your created the file a second after the sync jobs started it will be sync within 24 hours

SecExams

Question #115

SecExams

HOTSPOT -

You have several Azure virtual machines on a virtual network named VNet1.

You configure an Azure Storage account as shown in the following exhibit.

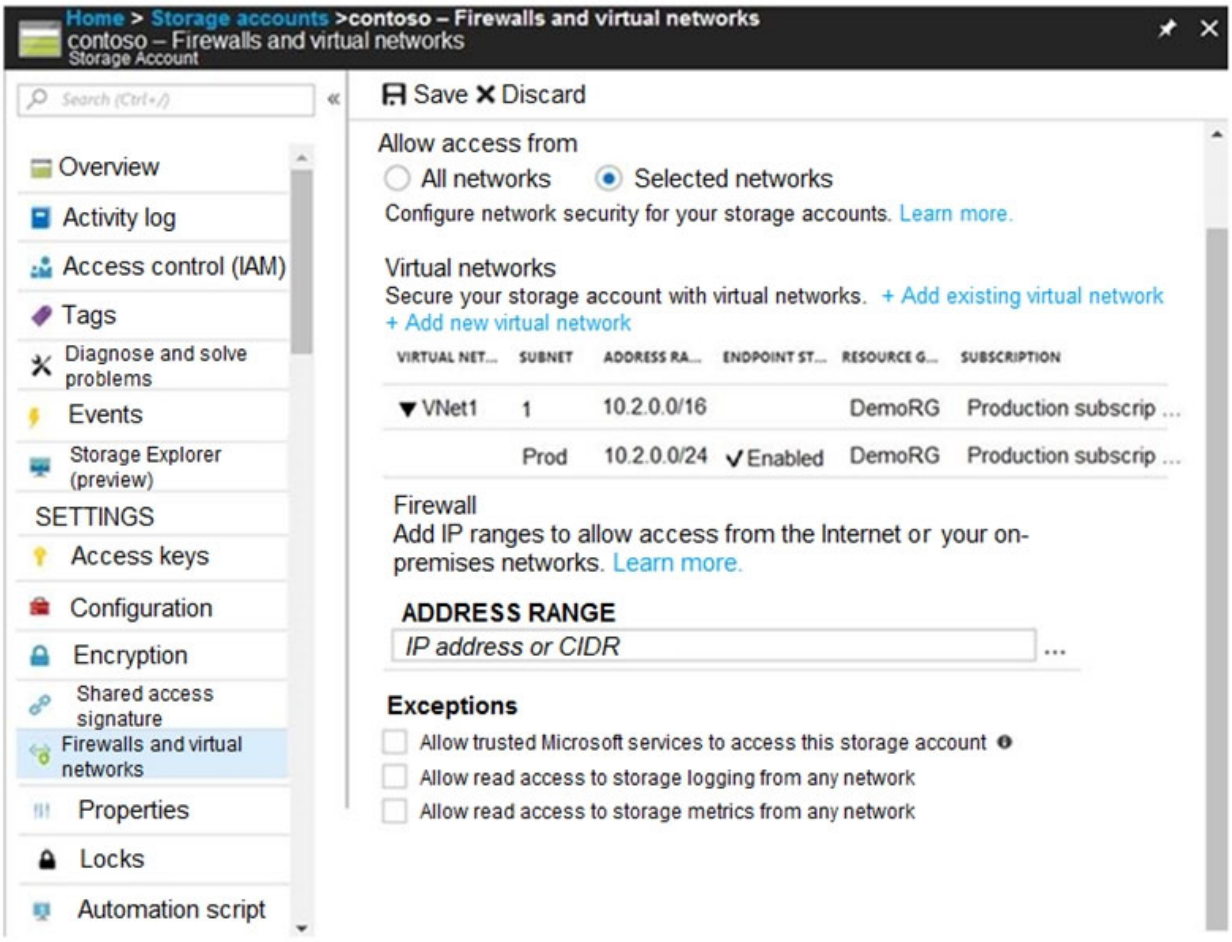

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

The virtual machines on the 10.2.9.0/24 subnet will have network connectivity to the file shares in the storage account **[answer choice]**.

- always
- during a backup
- never

Azure Backup will be able to back up the unmanaged hard disks of the virtual machines in the storage account **[answer choice]**.

- always
- during a backup
- never

Explanation

Correct Answer:

Answer Area

The virtual machines on the 10.2.9.0/24 subnet will have network connectivity to the file shares in the storage account **[answer choice]**.

- always
- during a backup
- never

Azure Backup will be able to back up the unmanaged hard disks of the virtual machines in the storage account **[answer choice]**.

- always
- during a backup
- never

Box 1: never -
The 10.2.9.0/24 subnet is not whitelisted.

Box 2: never -
After you configure firewall and virtual network settings for your storage account, select Allow trusted Microsoft services to access this storage account as an exception to enable Azure Backup service to access the network restricted storage account.

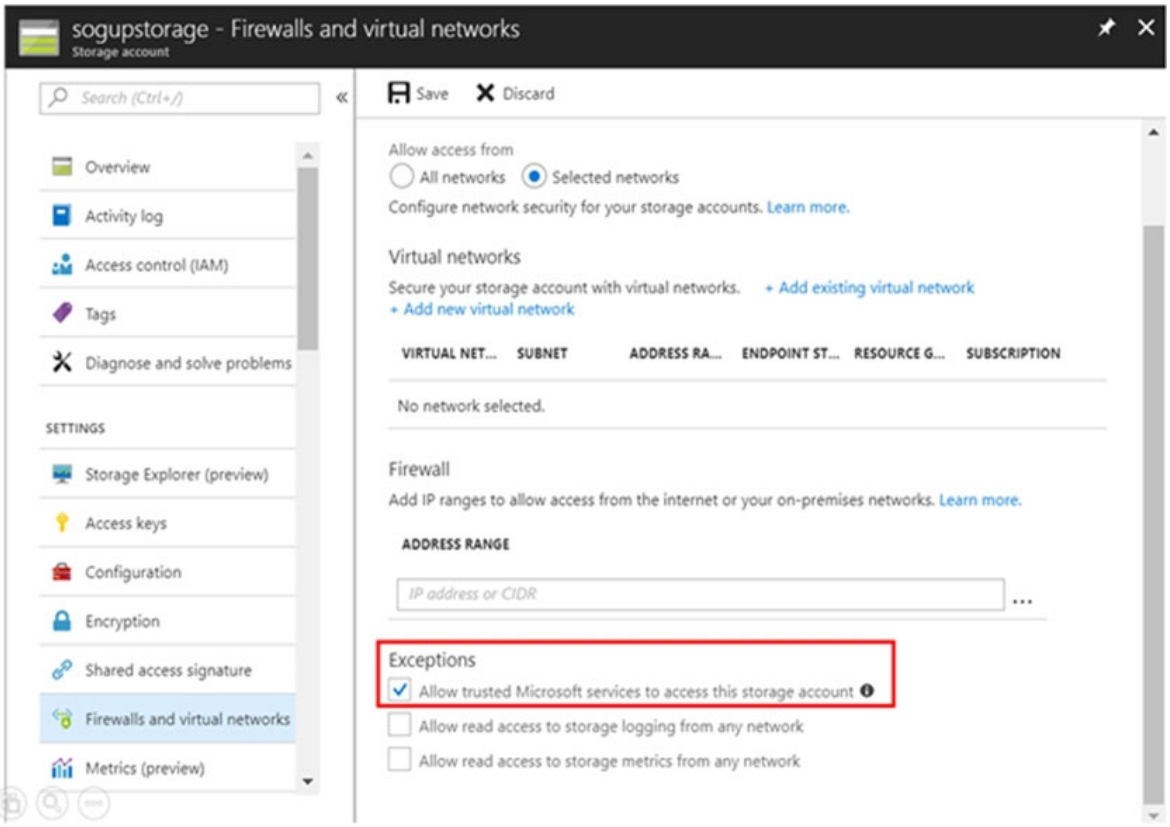

Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-use-files-windows

https://azure.microsoft.com/en-us/blog/azure-backup-now-supports-storage-accounts-secured-with-azure-storage-firewalls-and-virtual-networks/

Community Discussion

Correct Answer: VNet1's address space is 10.2.0.0/16. The VNet1 has only 1 Subnet associated: 10.2.0.0/24. The address space of a VNet is irrelevant if there isn't a corresponding Subnet from, which VMs can be assigned IP addresses. Box1: Never VMs from 10.2.9.0/24 (10.2.9.0 - 10.2.9.255) are out of Subnet. Subnet IP range 10.2.0.0 - 10.2.0.255. Box2: Never Since the checkbox to allow trusted Microsoft services is not checked. After you configure firewall and virtual network settings for your storage account, select Allow trusted Microsoft services to access this storage account as an exception to enable Azure Backup service to access the network restricted storage account.

VMs from the 10.2.9.0/24 should NEVER access the storage!!!!! Since wich the selection of the network is segmented by subnets, and not by virtual networks.

Technically 10.2.9.0/24 subnet is part of 10.2.0.0/16 subnet which is in the allowed subnet. but should still be Never because it's Endpoint status is not enabled

Technically 10.2.9.0/24 subnet is part of 10.2.0.0/16 subnet which is in the allowed subnet. but should still be Never because it's Endpoint status is not enabled

Allowed access is at the subnet level which is 10.2.0.0/24 which includes Ip range 10.2.0.0-10.2.0.255, this means the VM on 10.2.9.0/24 will not have access to storage account.

SecExams

Question #116

HOTSPOT -

You have a sync group named Sync1 that has a cloud endpoint. The cloud endpoint includes a file named File1.txt.

Your on-premises network contains servers that run Windows Server 2016. The servers are configured as shown in the following table.

Name	Share	Share contents
Server1	Share1	File1.txt, File2.txt
Server2	Share2	File2.txt, File3.txt

You add Share1 as an endpoint for Sync1. One hour later, you add Share2 as an endpoint for Sync1.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
On the cloud endpoint, File1.txt is overwritten by File1.txt from Share1.	○	○
On Server1, File1.txt is overwritten by File1.txt from the cloud endpoint.	○	○
File1.txt from Share1 replicates to Share2.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
On the cloud endpoint, File1.txt is overwritten by File1.txt from Share1.	○	○
On Server1, File1.txt is overwritten by File1.txt from the cloud endpoint.	○	○
File1.txt from Share1 replicates to Share2.	○	○

Box 1: Yes -
If you add an Azure file share that has an existing set of files as a cloud endpoint to a sync group, the existing files are merged with any other files that are already on other endpoints in the sync group.

Box 2: No -

Box 3: Yes -
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-planning

Community Discussion

NO NO YES

Agree, files are never overwritten. If the file exists, it will get a new name on the endpoint (file1(1).txt)

came in exam today 3/24/21, passed 850+ score always check discussion for correct answers. answered n,n,y

came in exam today 3/24/21, passed 850+ score always check discussion for correct answers. answered n,n,y

I just tested in the lab and files are not overwritten. File that is older will get name of the hosting server added. for example: srv01 creates a new version of "file1" so older version (hosted on srv02) gets renamed to "file1-srv02"

Question #117

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Kind	Performance	Replication	Access tier
storage1	Storage (general purpose v1)	Premium	Geo-redundant storage (GRS)	*None*
storage2	StorageV2 (general purpose v2)	Standard	Locally-redundant storage (LRS)	Cool
storage3	StorageV2 (general purpose v2)	Premium	Read-access geo-redundant storage (RA-GRS)	Hot
storage4	BlobStorage	Standard	Locally-redundant storage (LRS)	Hot

You need to identify which storage account can be converted to zone-redundant storage (ZRS) replication by requesting a live migration from Azure support.
What should you identify?

A) storage1
B) storage2 (Correct Answer)
C) storage3
D) storage4

Explanation

Correct Answer:
B
ZRS currently supports standard general-purpose v2, FileStorage and BlockBlobStorage storage account types.
Incorrect Answers:
A, not C: Live migration is supported only for storage accounts that use LRS replication. If your account uses GRS or RA-GRS, then you need to first change your account's replication type to LRS before proceeding. This intermediary step removes the secondary endpoint provided by GRS/RA-GRS.
Also, only standard storage account types support live migration. Premium storage accounts must be migrated manually.
D: ZRS currently supports standard general-purpose v2, FileStorage and BlockBlobStorage storage account types.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy-zrs

Community Discussion

This is one of those ridiculous questions that would imply we should memorize the 50 different combinations of storage type, replication type, versus live migration support. Useless info to keep in your head, why would they test for this. The support rules around live migration support are horrendous. Bleh.

Answer is correct. It is storage2. The key to the answer in this question is "Live migration" - You can do Live migration to ZRS from LRS or GRS only. - Also this only applies on General Purpose v2 storage.

This is why I use brain dumps. Memorizing every available feature in different sku's for all resources is completely pointless. In a real life scenario anyone would just google this information or refer to Microsoft documentation. Microsoft puts too much emphasis on this. Instead they should focus more on users understanding the core concepts and how they apply to live scenarios.

This is why I use brain dumps. Memorizing every available feature in different sku's for all resources is completely pointless. In a real life scenario anyone would just google this information or refer to Microsoft documentation. Microsoft puts too much emphasis on this. Instead they should focus more on users understanding the core concepts and how they apply to live scenarios.

Exactly. It's like a memory exercise. Totally pointless. Because you easily google it in a work environment. Even the expert will have to google this stuff.

SecExams

Question #118

You have an Azure subscription that contains a storage account named account1.

You plan to upload the disk files of a virtual machine to account1 from your on-premises network. The on-premises network uses a public IP address space of 131.107.1.0/24.

You plan to use the disk files to provision an Azure virtual machine named VM1. VM1 will be attached to a virtual network named VNet1. VNet1 uses an IP address space of 192.168.0.0/24.

You need to configure account1 to meet the following requirements:

✑ Ensure that you can upload the disk files to account1.

✑ Ensure that you can attach the disks to VM1.

✑ Prevent all other access to account1.

Which two actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

A) From the Networking blade of account1, select Selected networks. (Correct Answer)

B) From the Networking blade of account1, select Allow trusted Microsoft services to access this storage account.

C) From the Networking blade of account1, add the 131.107.1.0/24 IP address range.

D) From the Networking blade of account1, add VNet1.

E) From the Service endpoints blade of VNet1, add a service endpoint. (Correct Answer)

Explanation

Correct Answer:
AE
A: By default, storage accounts accept connections from clients on any network. To limit access to selected networks, you must first change the default action.

Azure portal -
1. Navigate to the storage account you want to secure.
2. Click on the settings menu called Firewalls and virtual networks.
3. To deny access by default, choose to allow access from 'Selected networks'. To allow traffic from all networks, choose to allow access from 'All networks'.
4. Click Save to apply your changes.
E: Grant access from a Virtual Network
Storage accounts can be configured to allow access only from specific Azure Virtual

Networks.
By enabling a Service Endpoint for Azure Storage within the Virtual Network, traffic is ensured an optimal route to the Azure Storage service. The identities of the virtual network and the subnet are also transmitted with each request.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-network-security

Community Discussion

A,C IS THE CORRECT ANSWER

From someone who did a "lot of research" you clearly have no idea what you're talking about. B is not selected by default with A. You clearly don't understand what "Allow trusted Microsoft services to access this storage account", as this has nothing to do with the question. The question CLEARLY says that you plan do upload from the on-premises network with PUBLIC ip address 131.107.1.0/24. A, C are the only possible combination to answer this question. For other options: - B, theres no need to involve Microsoft trusted services here. - D, that only works if there is a site-to-site VPN, and that is NOT stated in the problem. - E, theres nothing to do with the problem.

From someone who did a "lot of research" you clearly have no idea what you're talking about. B is not selected by default with A. You clearly don't understand what "Allow trusted Microsoft services to access this storage account", as this has nothing to do with the question. The question CLEARLY says that you plan do upload from the on-premises network with PUBLIC ip address 131.107.1.0/24. A, C are the only possible combination to answer this question. For other options: - B, theres no need to involve Microsoft trusted services here. - D, that only works if there is a site-to-site VPN, and that is NOT stated in the problem. - E, theres nothing to do with the problem.

Too many mixed answers here. Decided to spend hours reading MS Docs! K, let's settle this one once and for all. Technically all answers are correct, however you can only choose 2. So here we go: B, C, D depends on A. And B is selected by default btw (once you do A). E has to be done for the disk to be used by VM1. So the correct answer is A and E. A which will cover B C D. And E as explained above. Hope this helps!

I can confirm that. I tested it myself on the portal. I tried to attach a vhd with my public IP. Only when I am whitelisting my ip i can attach a dsik. I believe the main point here is "Ensure that you can attach the disks to VM1.": In this case "you", means our public IP must be allowed, ergo the onprem net.

Question #119

DRAG DROP -

You have an on-premises file server named Server1 that runs Windows Server 2016.

You have an Azure subscription that contains an Azure file share.

You deploy an Azure File Sync Storage Sync Service, and you create a sync group.

You need to synchronize files from Server1 to Azure.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

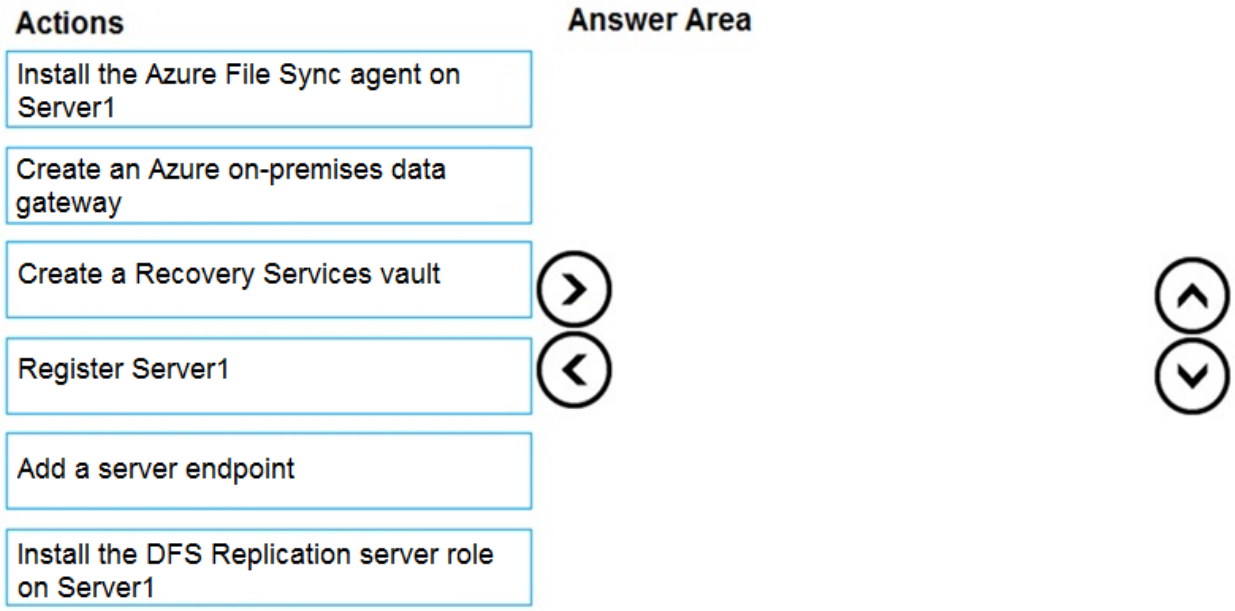

Explanation

Correct Answer:

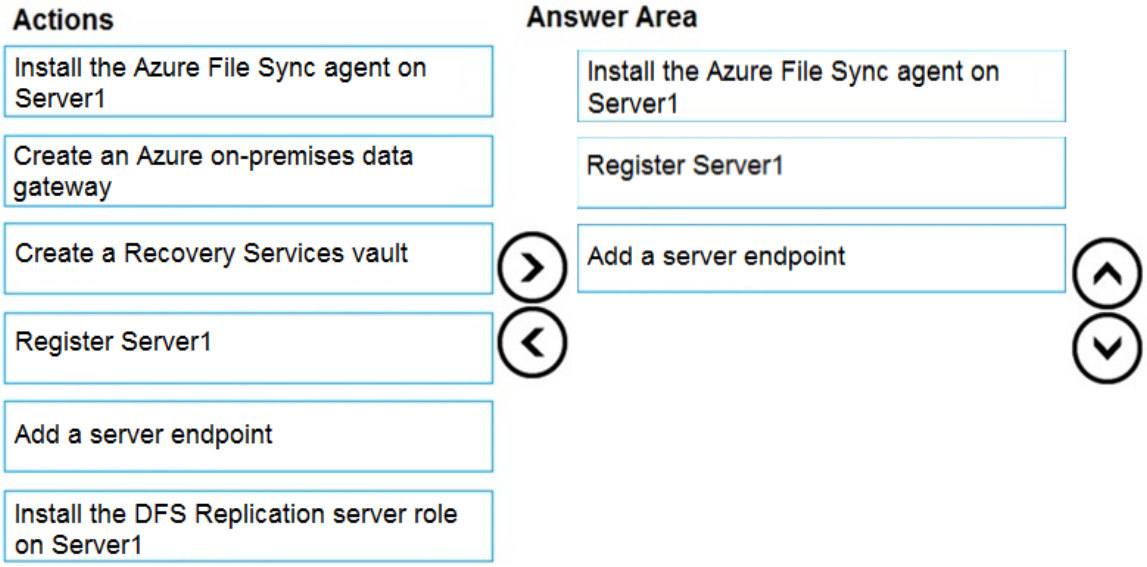

Step 1: Install the Azure File Sync agent on Server1
The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share
Step 2: Register Server1.
Register Windows Server with Storage Sync Service
Registering your Windows Server with a Storage Sync Service establishes a trust relationship between your server (or cluster) and the Storage Sync Service.

Step 3: Add a server endpoint -
Create a sync group and a cloud endpoint.
A sync group defines the sync topology for a set of files. Endpoints within a sync group are kept in sync with each other. A sync group must contain one cloud endpoint, which represents an Azure file share and one or more server endpoints. A server endpoint represents a path on registered server.
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide

Community Discussion

Correct Answer: Step 1: Install the Azure File Sync agent on Server1 The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share Step 2: Register Server1 Register Windows Server with Storage Sync Service Registering your Windows Server with a Storage Sync Service establishes a trust relationship between your server (or cluster) and the Storage Sync Service. Step 3: Add a server endpoint Create a sync group and a cloud endpoint. A sync group defines the sync topology for a set of files. Endpoints within a sync group are kept in sync with each other. A sync group must contain one cloud endpoint, which represents an Azure file share and

one or more server endpoints. A server endpoint represents a path on registered server. Reference: https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide

Answer is correct

1) "Install the Azure File Sync agent on Server1" 2) "Register Server1" 3) "Add a server endpoint" Reference: https://docs.microsoft.com/en-us/azure/storage/file-sync/file-sync-deployment-guide?tabs=azure-portal%2Cproactive-portal

Came on exam today (24/05-2022)

on exam 13/3/2022

SecExams

Question #120

HOTSPOT -

You plan to create an Azure Storage account in the Azure region of East US 2.

You need to create a storage account that meets the following requirements:

✑ Replicates synchronously.

✑ Remains available if a single data center in the region fails.

How should you configure the storage account? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Replication:

- Geo-redundant storage (GRS)
- Locally-redundant storage (LRS)
- Read-access geo-redundant storage (RA GRS)
- Zone-redundant storage (ZRS)

Account type:

- Blob storage
- Storage (general purpose v1)
- StorageV2 (general purpose v2)

Explanation

Correct Answer:

Answer Area

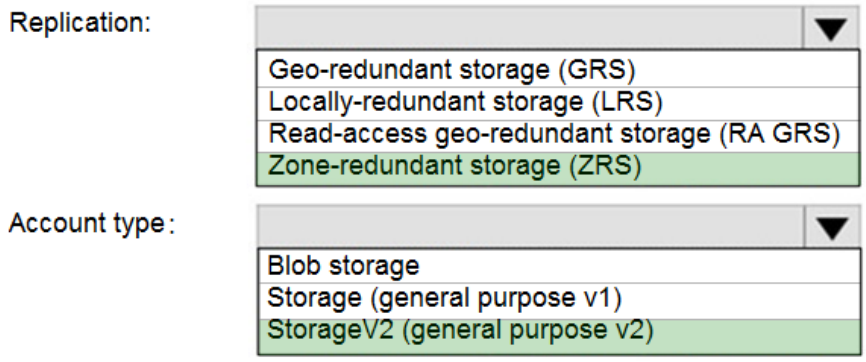

Box 1: Zone-redundant storage (ZRS)
Zone-redundant storage (ZRS) replicates your data synchronously across three storage clusters in a single region.
LRS would not remain available if a data center in the region fails
GRS and RA GRS use asynchronous replication.
Box 2: StorageV2 (general purpose V2)
ZRS only support GPv2.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy-zrs

Community Discussion

Correct Answer: Box 1: Zone-redundant storage (ZRS) Zone-redundant storage (ZRS) replicates your data synchronously across three storage clusters in a single Region. GRS protects against Zone failure, while ZRS protects against data center failure. LRS would not remain available if a data center in the region fails. GRS and RA GRS use asynchronous replication. Box 2: StorageV2 (general purpose V2) ZRS only support GPv2. Reference: https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy-zrs

Answer describes ZRS being correct but marks GRS. From reading the description is seems like ZRS is the correct answer.

Was on exam 19 Aug 2022. Scored 870. Answered: Box1: Zone-redundant storage (ZRS) Box 2: StorageV2 (general purpose V2)

Was on exam 19 Aug 2022. Scored 870. Answered: Box1: Zone-redundant storage (ZRS) Box 2: StorageV2 (general purpose V2)

True. ZRS is correct.

Question #121

You plan to use the Azure Import/Export service to copy files to a storage account.
Which two files should you create before you prepare the drives for the import job? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) an XML manifest file
B) a dataset CSV file (Correct Answer)
C) a JSON configuration file
D) a PowerShell PS1 file
E) a driveset CSV file (Correct Answer)

Explanation

Correct Answer:
BE
B: Modify the dataset.csv file in the root folder where the tool resides. Depending on whether you want to import a file or folder or both, add entries in the dataset.csv file
E: Modify the driveset.csv file in the root folder where the tool resides.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-data-to-files

Community Discussion

Correct Answer: B and E Modify the dataset.csv file in the root folder where the tool resides. Depending on whether you want to import a file or folder or both, add entries in

the dataset.csv file Modify the driveset.csv file in the root folder where the tool is. Reference: https://docs.microsoft.com/en-us/azure/import-export/storage-import-export-service https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-data-to-files

It should be B and E. Explanation is right though

I find mlantonis's answers are correct and most reliable

I find mlantonis's answers are correct and most reliable

Answer valid! This question was on the exam 22/02/2023. Scored 920. Thanks guys!

Question #122

You have a Recovery Service vault that you use to test backups. The test backups contain two protected virtual machines.
You need to delete the Recovery Services vault.
What should you do first?

A) From the Recovery Service vault, delete the backup data.
B) Modify the disaster recovery properties of each virtual machine.
C) Modify the locks of each virtual machine.
D) From the Recovery Service vault, stop the backup of each backup item. (Correct Answer)

Explanation

Correct Answer:
D
You can't delete a Recovery Services vault if it is registered to a server and holds backup data. If you try to delete a vault, but can't, the vault is still configured to receive backup data.
Remove vault dependencies and delete vault
In the vault dashboard menu, scroll down to the Protected Items section, and click Backup Items. In this menu, you can stop and delete Azure File Servers, SQL Servers in Azure VM, and Azure virtual machines.

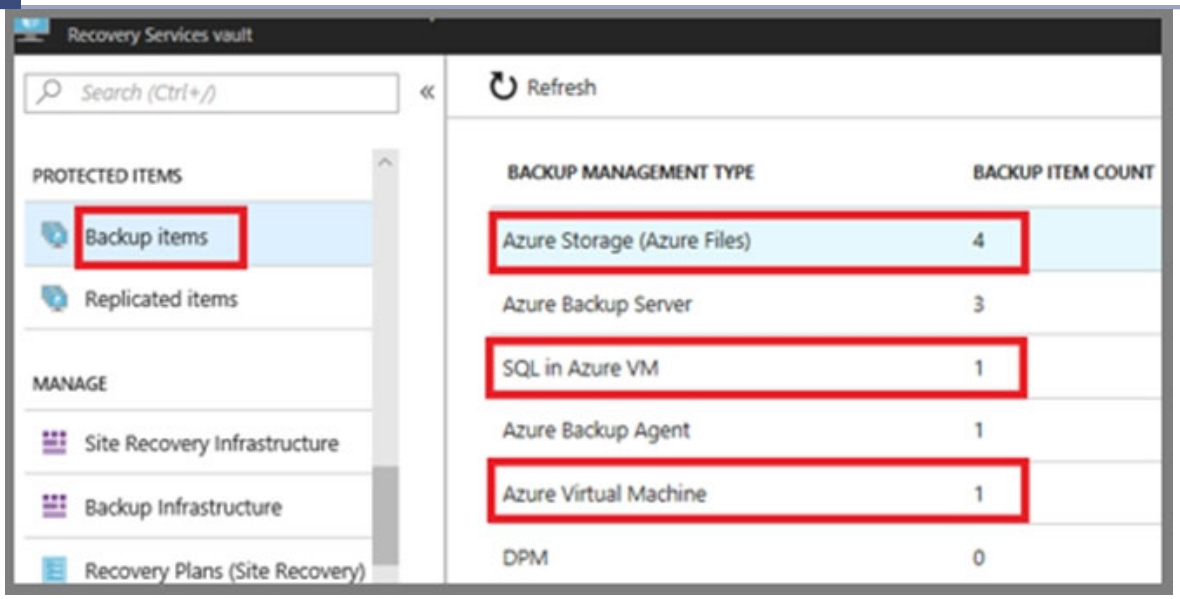

Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-azure-delete-vault

Community Discussion

Correct Answer: D Reference: https://docs.microsoft.com/en-us/azure/backup/backup-azure-delete-vault#delete-protected-items-in-the-cloud

correct

Funy is that in similar question eartlier in the subset it was to delete backups not to stop them

Was on exam 22 Aug 2022. Scored 870. Answered D

Was on exam 22 Aug 2022. Scored 870. Answered D

Question #123

HOTSPOT -

You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Location	Resource group
RG1	Resource group	West US	*Not applicable*
RG2	Resource group	West US	*Not applicable*
Vault1	Recovery Services vault	Central US	RG1
Vault2	Recovery Services vault	West US	RG2
VM1	Virtual machine	Central US	RG2
storage1	Storage account	West US	RG1
SQL1	Azure SQL database	East US	RG2

In storage1, you create a blob container named blob1 and a file share named share1.

Which resources can be backed up to Vault1 and Vault2? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Can use Vault1 for backups:

- VM1 only
- VM1 and share1 only
- VM1 and SQL1 only
- VM1, storage1, and SQL1 only
- VM1, blob1, share1, and SQL1

Can use Vault2 for backups:

- storage1 only
- share1 only
- VM1 and share1 only
- blob1 and share1 only
- storage1 and SQL1 only

SecExams

Explanation

Correct Answer:

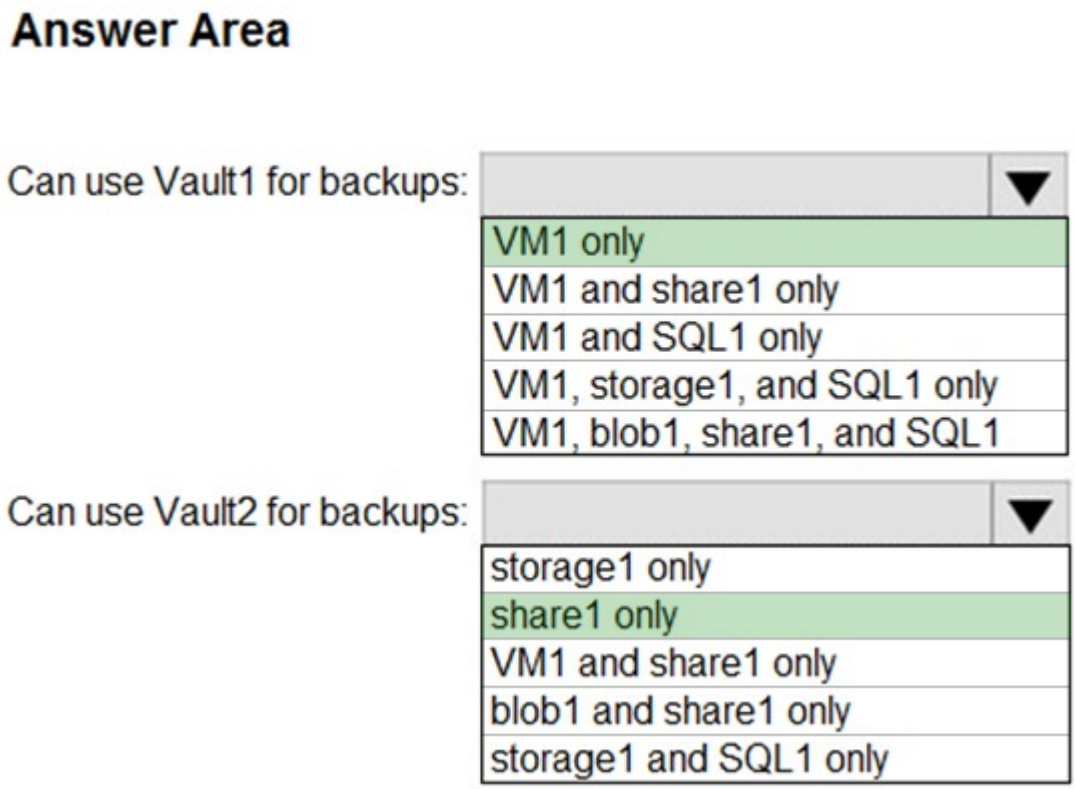

Box 1: VM1 only -
VM1 is in the same region as Vault1.
File1 is not in the same region as Vautl1.
SQL is not in the same region as Vault1.
Blobs cannot be backup up to service vaults.
Note: To create a vault to protect virtual machines, the vault must be in the same region as the virtual machines.
Box 2: Share1 only.
Storage1 is in the same region (West USA) as Vault2. Share1 is in Storage1.
Note: After you select Backup, the Backup pane opens and prompts you to select a storage account from a list of discovered supported storage accounts. They're either associated with this vault or present in the same region as the vault, but not yet associated to any Recovery Services vault.
Reference:
https://docs.microsoft.com/bs-cyrl-ba/azure/backup/backup-create-rs-vault https://docs.microsoft.com/en-us/azure/backup/backup-afs

Community Discussion

Correct Answer: Box 1: VM1 only VM1 is in the same region as Vault1. File1 is not in the same region as Vautl1. SQL is not in the same region as Vault1. Blobs cannot be backup up to service vaults. Note: To create a Vault to protect VMs, the Vault must be in the same Region as the VMs. Box 2: Share1 only Storage1 is in the same region as Vault2. Share1 is in Storage1. Note: Only VM and Fileshare is allowed to Backup. Reference: https://docs.microsoft.com/bs-cyrl-ba/azure/backup/backup-create-rs-vault https://docs.microsoft.com/en-us/azure/backup/backup-afs https://feedback.azure.com/forums/217298-storage/suggestions/37096837-possibility-to-backup-blob-data-in-the-recovery-se

Answer looks correct it is only share1 within storage1 that can be backed up as you can't back up blobs See: https://feedback.azure.com/forums/217298-storage/suggestions/37096837-possibility-to-backup-blob-data-in-the-recovery-se

Answer is correct. Storage1 is not valid because it contains a Blob inside, so only Share1 can be backup.

Answer is correct. Storage1 is not valid because it contains a Blob inside, so only Share1 can be backup.

good talk

SecExams

Question #124

You have an Azure subscription named Subscription1.
You have 5 TB of data that you need to transfer to Subscription1.
You plan to use an Azure Import/Export job.
What can you use as the destination of the imported data?

A) a virtual machine
B) an Azure Cosmos DB database
C) Azure File Storage (Correct Answer)
D) the Azure File Sync Storage Sync Service

Explanation

Correct Answer:
C
Azure Import/Export service is used to securely import large amounts of data to Azure

Blob storage and Azure Files by shipping disk drives to an Azure datacenter.
The maximum size of an Azure Files Resource of a file share is 5 TB.
Note:
There are several versions of this question in the exam. The question has two correct answers:
1. Azure File Storage
2. Azure Blob Storage
The question can have other incorrect answer options, including the following:
✑ Azure Data Lake Store
✑ Azure SQL Database
✑ Azure Data Factory
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-service

Community Discussion

SecExams

Correct Answer: C Azure Import/Export service is used to securely import large amounts of data to Azure Blob storage and Azure Files by shipping disk drives to an Azure datacenter. This service can also be used to transfer data from Azure Blob storage to disk drives and ship to your on-premises sites. Data from one or more disk drives can be imported either to Azure Blob storage or Azure Files. The maximum size of an Azure Files Resource of a file share is 5 TB. Note: There are several versions of this question in the exam. The question has two correct answers: 1. Azure File Storage or 2. Azure Blob Storage The question can have other incorrect answer options, including the following: ✑ Azure Data Lake Store ✑ Azure SQL Database ✑ Azure Data Factory Reference: https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-service

Correct

Yes, very likely you would - Passed the exam today, 1/May/23 - scored 930. I am still digesting the fact that 95% of the questions are from here, though it is tough to believe before you take the exam.

Yes, very likely you would - Passed the exam today, 1/May/23 - scored 930. I am still digesting the fact that 95% of the questions are from here, though it is tough to believe before you take the exam.

Yes, very likely you would - Passed the exam today, 1/May/23 - scored 930. I am still digesting the fact that 95% of the questions are from here, though it is tough to believe before you take the exam.

Question #125

SecExams

HOTSPOT -

You have an Azure subscription.

You create the Azure Storage account shown in the following exhibit.

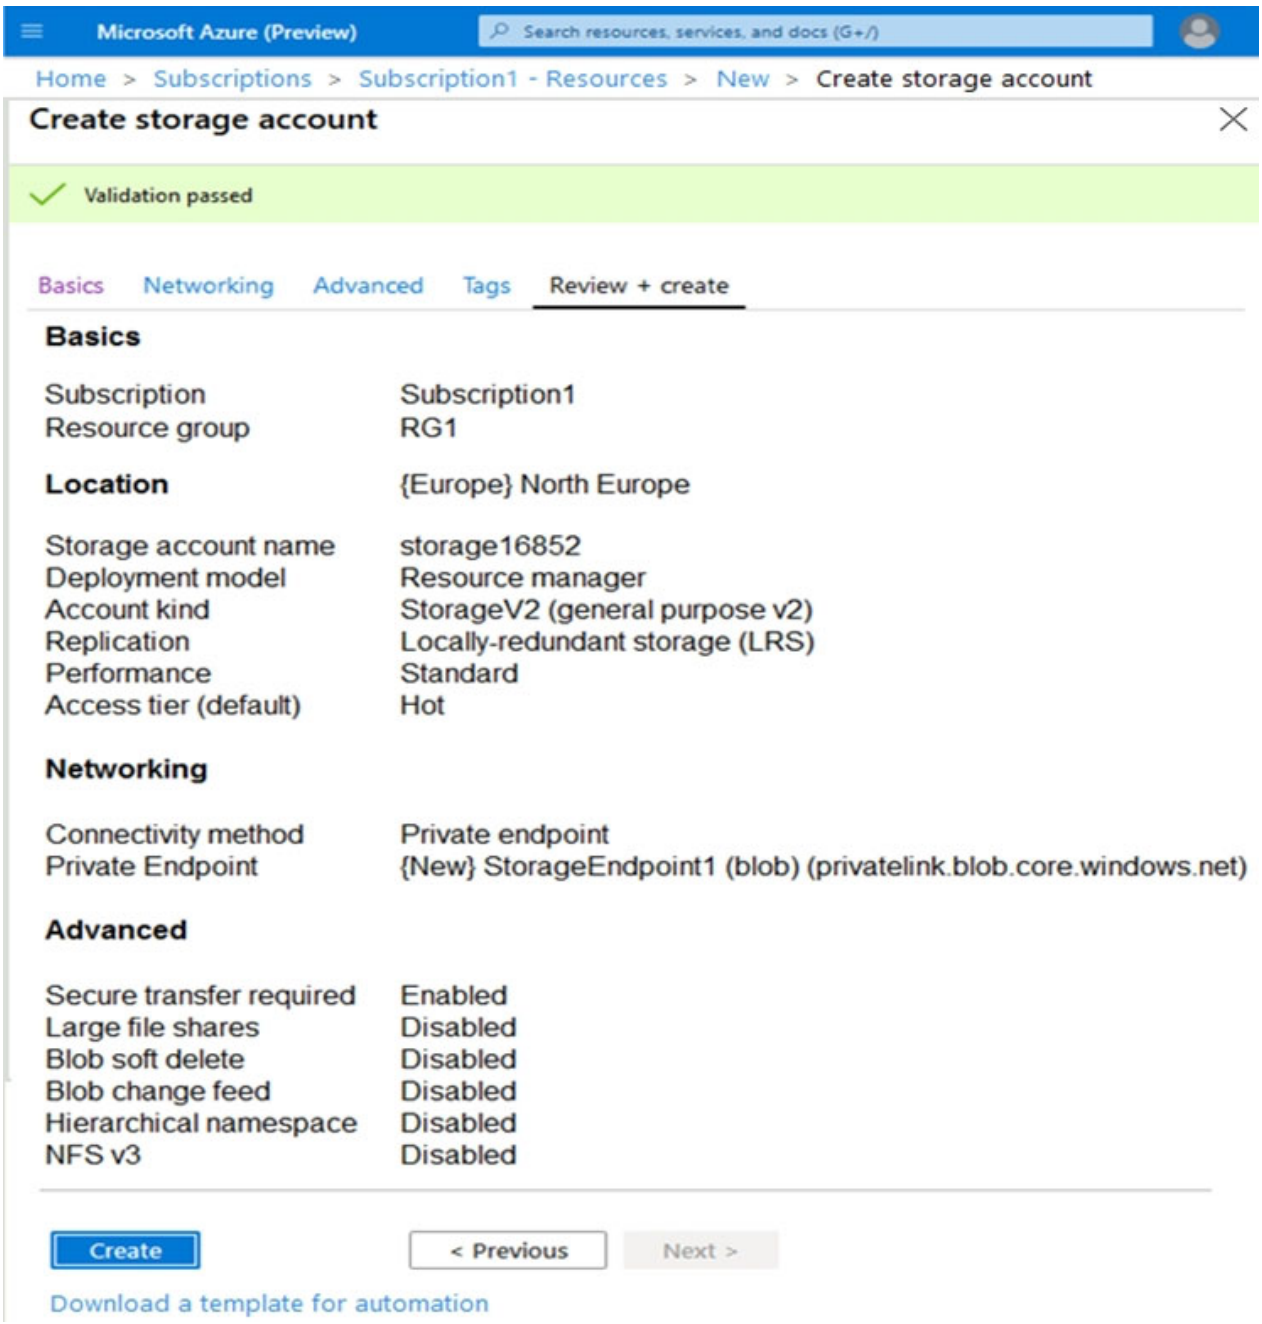

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

The minimum number of copies of the storage account will be **[answer choice]**

- 1
- 2
- 3
- 4

To reduce the cost of infrequently accessed data in the storage account, you must modify the **[answer choice]** setting

- Access tier (default)
- Performance
- Account kind
- Replication

Explanation

Correct Answer:

Answer Area

The minimum number of copies of the storage account will be **[answer choice]**

- 1
- 2
- 3
- 4

To reduce the cost of infrequently accessed data in the storage account, you must modify the **[answer choice]** setting

- Access tier (default)
- Performance
- Account kind
- Replication

Box 1: 3 -
Locally Redundant Storage (LRS) provides highly durable and available storage within a single location (sub region). We maintain an equivalent of 3 copies (replicas) of your data within the primary location as described in our SOSP paper; this ensures that we can recover from common failures (disk, node, rack) without impacting your storage account's availability and durability.

Box 2: Access tier -
Change the access tier from Hot to Cool.
Note: Azure storage offers different access tiers, which allow you to store blob object data in the most cost-effective manner. The available access tiers include:
Hot - Optimized for storing data that is accessed frequently.

Cool - Optimized for storing data that is infrequently accessed and stored for at least 30 days.
Archive - Optimized for storing data that is rarely accessed and stored for at least 180 days with flexible latency requirements (on the order of hours).
Reference:
https://azure.microsoft.com/en-us/blog/data-series-introducing-locally-redundant-storage-for-windows-azure-storage/ https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers

Community Discussion

Both of them are correct. - LRS has 3 copies of data - Access tier has the "cool" option to store infrequently accessed data.

Answer is Correct: in LRS: "Three" Copies in "Three" Racks in a "Single" Datacenter in ZRS: "Three" Copies in "Three" Datacenters in a "Single" Region Ref: ttps://docs.microsoft.com/en-us/learn/modules/configure-blob-storage/4-create-blob-access-tiers?ns-enrollment-type=LearningPath&ns-enrollment-id=learn.az-104-manage-storage

Answer valid! This question was on the exam 22/02/2023. Scored 920. Thanks guys!

Answer valid! This question was on the exam 22/02/2023. Scored 920. Thanks guys!

On exam 09/01/2023.

Question #126

You have an Azure Storage account named storage1.
You plan to use AzCopy to copy data to storage1.
You need to identify the storage services in storage1 to which you can copy the data.
Which storage services should you identify?

A) blob, file, table, and queue
B) blob and file only (Correct Answer)
C) file and table only
D) file only

E) blob, table, and queue only

Explanation

Correct Answer:
B
AzCopy is a command-line utility that you can use to copy blobs or files to or from a storage account.
Incorrect Answers:
A, C, E: AzCopy does not support table and queue storage services.
D: AzCopy supports file storage services, as well as blob storage services.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10

Community Discussion

Correct Answer B - blob and file only Azure Import job supports: Azure Blob Storage, and Azure Files storage Azure Export job supports: Azure Blob Storage https://docs.microsoft.com/en-us/azure/import-export/storage-import-export-requirements

Wrong. New version is v10. Only Blobs and Files are supported. Provided answer "B" is correct.

Wrong. New version is v10. Only Blobs and Files are supported. Provided answer "B" is correct.

**** The new version 7.3 version of AZCOPY, now copy Azure Table... So this question maybe was updated in exam Az-104 . Reference --> https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10#download-azcopy

Why do you refer to Import/Export here? I would refer to documentation about azcopy copy command instead - https://docs.microsoft.com/en-us/azure/storage/common/storage-ref-azcopy-copy

Question #127

HOTSPOT -

You have an Azure Storage account named storage1 that uses Azure Blob storage and Azure File storage.

You need to use AzCopy to copy data to the blob storage and file storage in storage1.

Which authentication method should you use for each type of storage? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Blob storage:

- Azure Active Directory (Azure AD) only
- Shared access signatures (SAS) only
- Access keys and shared access signatures (SAS) only
- Azure Active Directory (Azure AD) and shared access signatures (SAS) only
- Azure Active Directory (Azure AD), access keys, and shared access signatures (SAS)

File storage:

- Azure Active Directory (Azure AD) only
- Shared access signatures (SAS) only
- Access keys and shared access signatures (SAS) only
- Azure Active Directory (Azure AD) and shared access signatures (SAS) only
- Azure Active Directory (Azure AD), access keys, and shared access signatures (SAS)

Explanation

Correct Answer:

Answer Area

Blob storage:

- Azure Active Directory (Azure AD) only
- Shared access signatures (SAS) only
- Access keys and shared access signatures (SAS) only
- **Azure Active Directory (Azure AD) and shared access signatures (SAS) only**
- Azure Active Directory (Azure AD), access keys, and shared access signatures (SAS)

File storage:

- Azure Active Directory (Azure AD) only
- **Shared access signatures (SAS) only**
- Access keys and shared access signatures (SAS) only
- Azure Active Directory (Azure AD) and shared access signatures (SAS) only
- Azure Active Directory (Azure AD), access keys, and shared access signatures (SAS)

You can provide authorization credentials by using Azure Active Directory (AD), or by using a Shared Access Signature (SAS) token.

Box 1:

Both Azure Active Directory (AD) and Shared Access Signature (SAS) token are supported for Blob storage.
Box 2:
Only Shared Access Signature (SAS) token is supported for File storage.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10

Community Discussion

Correct Answer: You can provide authorization credentials by using Azure Active Directory (AD), or by using a Shared Access Signature (SAS) token. Box 1: Both Azure Active Directory (AD) and Shared Access Signature (SAS) token are supported for Blob storage. Box 2: Only Shared Access Signature (SAS) token is supported for File storage. Reference: https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10

Authorize AzCopy You can provide authorization credentials by using Azure Active Directory (AD), or by using a Shared Access Signature (SAS) token. Use this table as a guide: AUTHORIZE AZCOPY Storage type Currently supported method of authorization Blob storage Azure AD & SAS Blob storage (hierarchical namespace) Azure AD & SAS File storage SAS only

Authorize AzCopy You can provide authorization credentials by using Azure Active Directory (AD), or by using a Shared Access Signature (SAS) token. Use this table as a guide: AUTHORIZE AZCOPY Storage type Currently supported method of authorization Blob storage Azure AD & SAS Blob storage (hierarchical namespace) Azure AD & SAS File storage SAS only

Authorize AzCopy You can provide authorization credentials by using Azure Active Directory (AD), or by using a Shared Access Signature (SAS) token. Use this table as a guide: AUTHORIZE AZCOPY Storage type Currently supported method of authorization Blob storage Azure AD & SAS Blob storage (hierarchical namespace) Azure AD & SAS File storage SAS only

Because AzCopy only supports Azure AD & SAS. AzCopy >> Blob supports both Azure AD & SAS AZCopy >> File supports SAS only

SecExams

Question #128

You have an Azure subscription that contains an Azure Storage account.
You plan to create an Azure container instance named container1 that will use a Docker image named Image1. Image1 contains a Microsoft SQL Server instance that requires persistent storage.
You need to configure a storage service for Container1.
What should you use?

A) Azure Files (Correct Answer)
B) Azure Blob storage
C) Azure Queue storage
D) Azure Table storage

Explanation

Correct Answer:
A
Reference:
https://azure.microsoft.com/en-us/blog/persistent-docker-volumes-with-azure-file-storage/ https://docs.microsoft.com/en-us/azure/aks/concepts-storage

Community Discussion

Correct answer should be Azure Files

Answer is not Correct. It should be A "Azure Files" Azure files are used as persistent disks for docker images. It doesn't matter the type of the image or its functionality.

Correct, here is the proof: https://azure.microsoft.com/en-us/blog/persistent-docker-volumes-with-azure-file-storage/

Correct, here is the proof: https://azure.microsoft.com/en-us/blog/persistent-docker-volumes-with-azure-file-storage/

I would also consider the answer to be A: Files Reason being the word persistent in the question....

Question #129

You have an app named App1 that runs on two Azure virtual machines named VM1 and VM2.
You plan to implement an Azure Availability Set for App1. The solution must ensure that App1 is available during planned maintenance of the hardware hosting
VM1 and VM2.
What should you include in the Availability Set?

A) one update domain
B) two fault domains
C) one fault domain
D) two update domains (Correct Answer)

Explanation

Correct Answer:
D
Microsoft updates, which Microsoft refers to as planned maintenance events, sometimes require that VMs be rebooted to complete the update. To reduce the impact on VMs, the Azure fabric is divided into update domains to ensure that not all VMs are rebooted at the same time.
Incorrect Answers:
A: An update domain is a group of VMs and underlying physical hardware that can be rebooted at the same time.
B, C: A fault domain shares common storage as well as a common power source and network switch. It is used to protect against unplanned system failure.
References:
https://petri.com/understanding-azure-availability-sets
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/tutorial-availability-sets

Community Discussion

Correct Answer: D When you create an Availability Set, the hardware in a location is divided into multiple update domains and fault domains. An update domain is a group of VMs and underlying physical hardware that can be rebooted at the same time. VMs in the same fault domain share common storage as well as a common power source and

network switch. During scheduled maintenance, only one update domain is updated at any given time. Update domains aren't necessarily updated sequentially. So, we need two update domains. Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/windows/tutorial-availability-sets https://docs.microsoft.com/en-us/azure/virtual-machines/manage-availability https://docs.microsoft.com/en-us/azure/virtual-machines/maintenance-and-updates

Hi the answer is D: the Q talk about the hardware hosting VM1 and VM2. the hardware, meaning the Server containing the VMs (Called Update domain). During a Planed maintenance the update domains are shootdown one at a time. so D is ther right answer

Hi the answer is D: the Q talk about the hardware hosting VM1 and VM2. the hardware, meaning the Server containing the VMs (Called Update domain). During a Planed maintenance the update domains are shootdown one at a time. so D is ther right answer

If it is maintinance - Update domain If it is hardware failed - Fault Domain Correct Ans is D

If it is maintinance - Update domain If it is hardware failed - Fault Domain Correct Ans is D

SecExams

Question #130

You have an Azure subscription named Subscription1.
You have 5 TB of data that you need to transfer to Subscription1.
You plan to use an Azure Import/Export job.
What can you use as the destination of the imported data?

A) an Azure Cosmos DB database
B) Azure Blob storage (Correct Answer)
C) Azure Data Lake Store
D) the Azure File Sync Storage Sync Service

Explanation

Correct Answer:
B
Azure Import/Export service is used to securely import large amounts of data to Azure Blob storage and Azure Files by shipping disk drives to an Azure datacenter.

Note:
There are several versions of this question in the exam. The question has two correct answers:
1. Azure File Storage
2. Azure Blob Storage
The question can have other incorrect answer options, including the following:
✑ a virtual machine
✑ Azure SQL Database
✑ Azure Data Factory
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-service

Community Discussion

Azure blob storage and Azure files are the one's for azure import/export service to securely transfer data to Azure by shipping the data from disk drives,

Selected Answer: B

I Luv Honey because it is B here is summary There are two versions of WAImportExport: *Version 1 for import/export into Azure Blob Storage *Version 2 for import into Azure Files *It is WAImportExport.exe ONLY compatible with 64-bit Windows *Modify the driveset.csv file in the root folder where the tool resides. *Modify the dataset.csv file in the root folder where the tool resides. Depending on whether *you want to import a file or folder or both, add entries in the dataset.csv file *The maximum size of an Azure Files Resource of a file share is 5 TB

Was on exam 19 Aug 2022. Scored 870. Answered B

Was on exam 19 Aug 2022. Scored 870. Answered B

It was in exam on 11/23

Question #131

DRAG DROP -

You have an Azure subscription that contains an Azure file share.

You have an on-premises server named Server1 that runs Windows Server 2016.

You plan to set up Azure File Sync between Server1 and the Azure file share.

You need to prepare the subscription for the planned Azure File Sync.

Which two actions should you perform in the Azure subscription? To answer, drag the appropriate actions to the correct targets. Each action may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Select and Place:

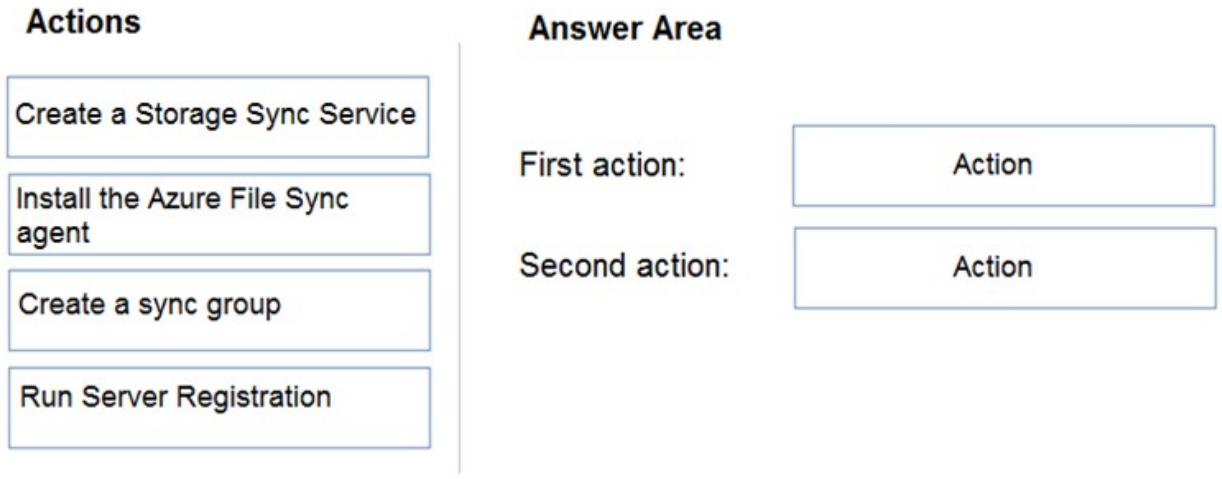

Explanation

Correct Answer:

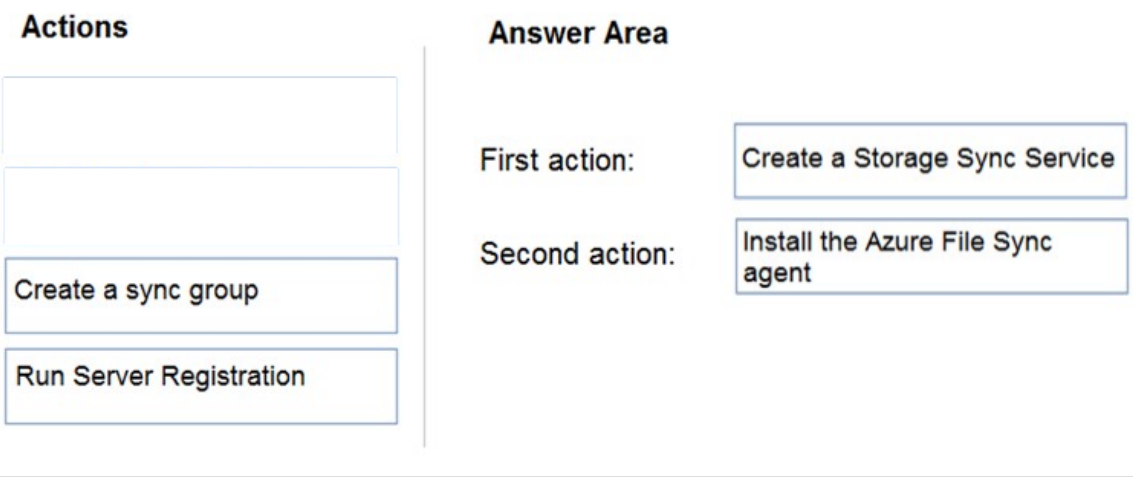

First action: Create a Storage Sync Service
The deployment of Azure File Sync starts with placing a Storage Sync Service resource into a resource group of your selected subscription.
Second action: Install the Azure File Sync agent
The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share.
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide

Community Discussion

I think answer should be Create Storage Sync Service, Create a Sync Group as they are asking for "Which two actions should you perform in the Azure subscription?"

Correct Answer: First action: Create a Storage Sync Service The deployment of Azure File Sync starts with placing a Storage Sync Service resource into a resource group of your selected subscription. Second action: Install the Azure File Sync agent The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share. 1. Prepare Windows Server to use with Azure File Sync 2. Deploy the Storage Sync Service 3. Install the Azure File Sync agent 4. Register Windows Server with Storage Sync Service 5. Create a sync group and a cloud endpoint 6. Create a server endpoint 7. Configure firewall and virtual network settings Reference: https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide https://docs.microsoft.com/en-us/azure/storage/file-sync/file-sync-deployment-guide?tabs=azure-portal%2Cproactive-portal#deploy-the-storage-sync-service

and the link provided in answer has teh following: 1. Deploy a Storage Sync Service. 2. Create a sync group. 3. Install Azure File Sync agent on the server with the full data set. Agent is installed on the server not in azure so can't be the right answer

and the link provided in answer has teh following: 1. Deploy a Storage Sync Service. 2. Create a sync group. 3. Install Azure File Sync agent on the server with the full data set. Agent is installed on the server not in azure so can't be the right answer

Yes, the question is very specific as to which actions to be performed in AZURE SUBSCRIPTION. The answer should be CREATE STORAGE SYNC SERVICE and CREATE SYNC GROUP. The installation of the agent will be on-premise server. So, this action is not taking place in Azure Subscription.

SecExams

Question #132

HOTSPOT -

You have an Azure subscription that contains the file shares shown in the following table.

Name	Location
share1	West US
share2	West US
share3	East US

You have the on-premises file shares shown in the following table.

Name	Server	Path
data1	Server1	D:\Folder1
data2	Server2	E:\Folder2
data3	Server3	E:\Folder2

You create an Azure file sync group named Sync1 and perform the following actions:

- ✑ Add share1 as the cloud endpoint for Sync1.
- ✑ Add data1 as a server endpoint for Sync1.
- ✑ Register Server1 and Server2 to Sync1.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can add share3 as an additional cloud endpoint for Sync1.	○	○
You can add data2 as an additional server endpoint for Sync1.	○	○
You can add data3 as an additional server endpoint for Sync1.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can add share3 as an additional cloud endpoint for Sync1.	○	○
You can add data2 as an additional server endpoint for Sync1.	○	○
You can add data3 as an additional server endpoint for Sync1.	○	○

Box 1: No -
A sync group must contain one cloud endpoint, which represents an Azure file share and one or more server endpoints.

Box 2: Yes -
Data2 is located on Server2 which is registered to Sync1.

Box 3: No -
Data3 is located on Server3 which is not registered to Sync1.
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide?tabs=azure-portal%2Cproactive-portal#create-a-sync-group-and-a- cloud-endpoint

SecExams

Community Discussion

NO - only one cloud endpoint can be added to sync1 YES - Server2 has been registered to Sync1 but data2 is not added to server endpoint. So we can add data2 as additional server endpoint for Sync1 NO - We have to register Server3 first

Correct Answer: Box 1: No A sync group must contain one cloud endpoint, which represents an Azure file share and one or more server endpoints. Box 2: Yes Data2 is located on Server2 which is registered to Sync1. Box 3: No Data3 is located on Server3 which is not registered to Sync1. Reference: https://docs.microsoft.com/en-us/azure/storage/file-sync/file-sync-deployment-guide?tabs=azure-portal%2Cproactive-portal#create-a-sync-group-and-a-%20cloud-endpoint

I agree with you NO-Yes-NO However for the third one, it no cause the server is not registered yet and the overlapping namespaces.

I agree with you NO-Yes-NO However for the third one, it no cause the server is not registered yet and the overlapping namespaces.

Exactly. We cannot add an endpoint to an unregistered server: https://docs.microsoft.com/en-us/azure/storage/file-sync/file-sync-server-endpoint

SecExams

Question #133

HOTSPOT -

You have an Azure subscription named Subscription1 that contains the resources shown in the following table:

Name	Type	Location	Resource group
RG1	Resource group	East US	*Not applicable*
RG2	Resource group	West US	*Not applicable*
Vault1	Recovery Services vault	West Europe	RG1
storage1	Storage account	East US	RG2
storage2	Storage account	West US	RG1
storage3	Storage account	West Europe	RG2
Analytics1	Log Analytics workspace	East US	RG1
Analytics2	Log Analytics workspace	West US	RG2
Analytics3	Log Analytics workspace	West Europe	RG1

You plan to configure Azure Backup reports for Vault1.

You are configuring the Diagnostics settings for the AzureBackupReports log.

Which storage accounts and which Log Analytics workspaces can you use for the Azure Backup reports of Vault1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Storage accounts:

- storage1 only
- storage2 only
- storage3 only
- storage1, storage2, and storage3

Log Analytics workspaces:

- Analytics1 only
- Analytics2 only
- Analytics3 only
- Analytics1, Analytics2, and Analytics3

Explanation

Correct Answer:

Answer Area

Storage accounts:

- storage1 only
- storage2 only
- storage3 only
- storage1, storage2, and storage3

Log Analytics workspaces:

- Analytics1 only
- Analytics2 only
- Analytics3 only
- Analytics1, Analytics2, and Analytics3

Box 1: storage1, storage2, and storage3
The location and subscription where this Log Analytics workspace can be created is independent of the location and subscription where your vaults exist.

Box 2: Analytics3 -
Vault1 and Analytics3 are both in West Europe.
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-azure-configure-reports

Community Discussion

storage 3 analytics 1,2 & 3 this is correct as analytics are independent of locations!

Correct Answer: Storage accounts: Storage 3 only Storage Account must be in the same Region as the Recovery Services Vault. Log Analytics workspaces: Analytics1, Analytics2, and Analytics3 Set up one or more Log Analytics workspaces to store your Backup reporting data. The location and subscription where this Log Analytics workspace can be created is independent of the location and subscription where your Vaults exist.
Reference: https://docs.microsoft.com/en-us/azure/backup/configure-reports#1-create-a-log-analytics-workspace-or-use-an-existing-one

Confirmed. Here is a snippet from the link: "Set up one or more Log Analytics workspaces to store your Backup reporting data. The location and subscription where this Log Analytics workspace can be created ***is independent of the location and subscription where your vaults exist***."

Confirmed. Here is a snippet from the link: "Set up one or more Log Analytics workspaces to store your Backup reporting data. The location and subscription where this Log

Analytics workspace can be created ***is independent of the location and subscription where your vaults exist***."

Confirmed. Here is a snippet from the link: "Set up one or more Log Analytics workspaces to store your Backup reporting data. The location and subscription where this Log Analytics workspace can be created ***is independent of the location and subscription where your vaults exist***."

SecExams

Question #134

HOTSPOT -

You have an Azure subscription that contains the storage accounts shown in the following exhibit.

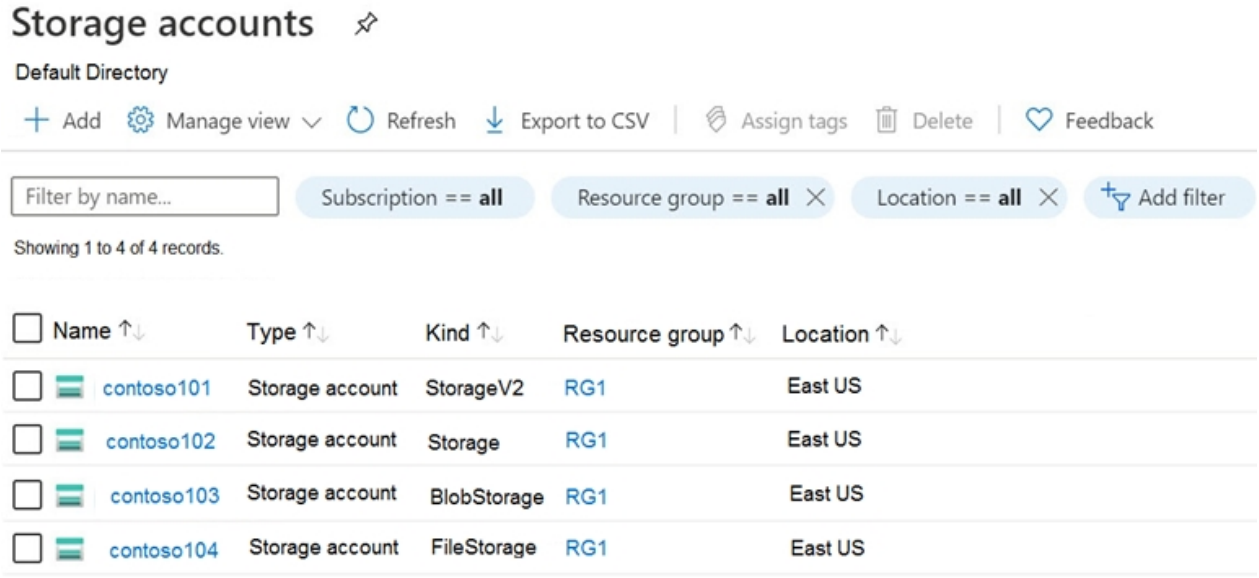

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

You can create a premium file share in

- contoso101only
- contoso104 only
- contoso101 or contoso104 only
- contoso101, contoso102, or contoso104 only
- contoso101, contoso102, contoso103, or contoso104

You can use the Archive access tier in

- contoso101only
- contoso101 or contoso103 only
- contoso101, contoso102, and contoso103 only
- contoso101, contoso102, and contoso104 only
- contoso101, contoso102, contoso103, and contoso104

Explanation

Correct Answer:

Answer Area

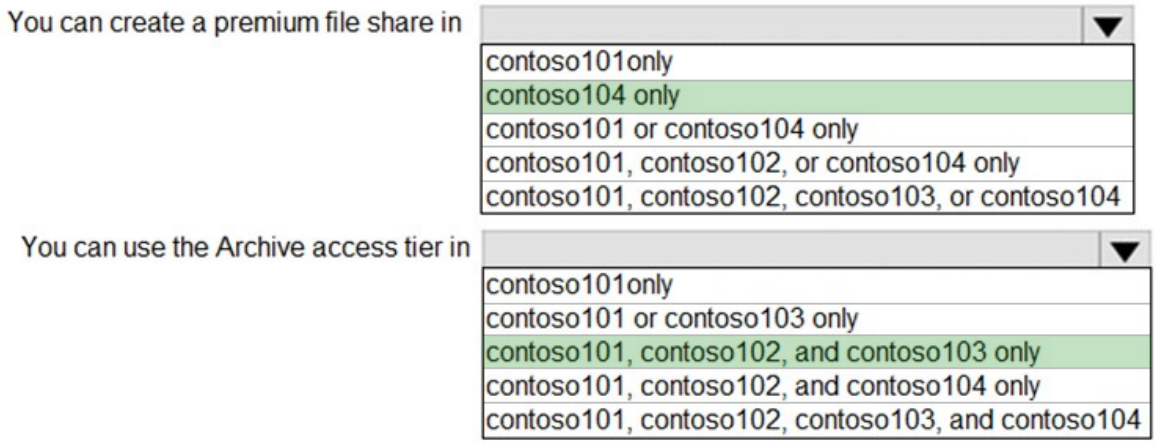

Box 1: contoso104 only -
Premium file shares are hosted in a special purpose storage account kind, called a FileStorage account.
Box 2: contoso101, contoso102, and contos103 only
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-create-premium-fileshare?tabs=azure-portal https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers

Community Discussion

Correct Answer: Box 1: contoso104 only Premium file shares are hosted in a special purpose storage account kind, called a FileStorage account. Box 2: contoso101 and contos103 only Object storage data tiering between hot, cool, and archive is supported in Blob Storage and General Purpose v2 (GPv2) accounts. General Purpose v1 (GPv1) accounts don't support tiering. The archive tier supports only LRS, GRS, and RA-GRS. Reference: https://docs.microsoft.com/en-us/azure/storage/common/storage-account-overview https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-create-premium-fileshare?tabs=azure-portal https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers

Box1 - 104 only. Box2 - 101 and 103 only (Storage V2 and BLOB storage) https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers -Object storage data tiering between hot, cool, and archive is supported in Blob Storage and General Purpose v2 (GPv2) accounts. General Purpose v1 (GPv1) accounts don't support tiering.

This question was in the exam 08June 2023

Your link actually states the following: "Access tier refers to the data usage pattern you've specified for your general-purpose v2 or Blob Storage account." So, 101 or 103 only

Your link actually states the following: "Access tier refers to the data usage pattern you've specified for your general-purpose v2 or Blob Storage account." So, 101 or 103 only

SecExams

Question #135

SecExams

HOTSPOT -

You have an Azure subscription named Subscription1.

In Subscription1, you create an Azure file share named share1.

You create a shared access signature (SAS) named SAS1 as shown in the following exhibit:

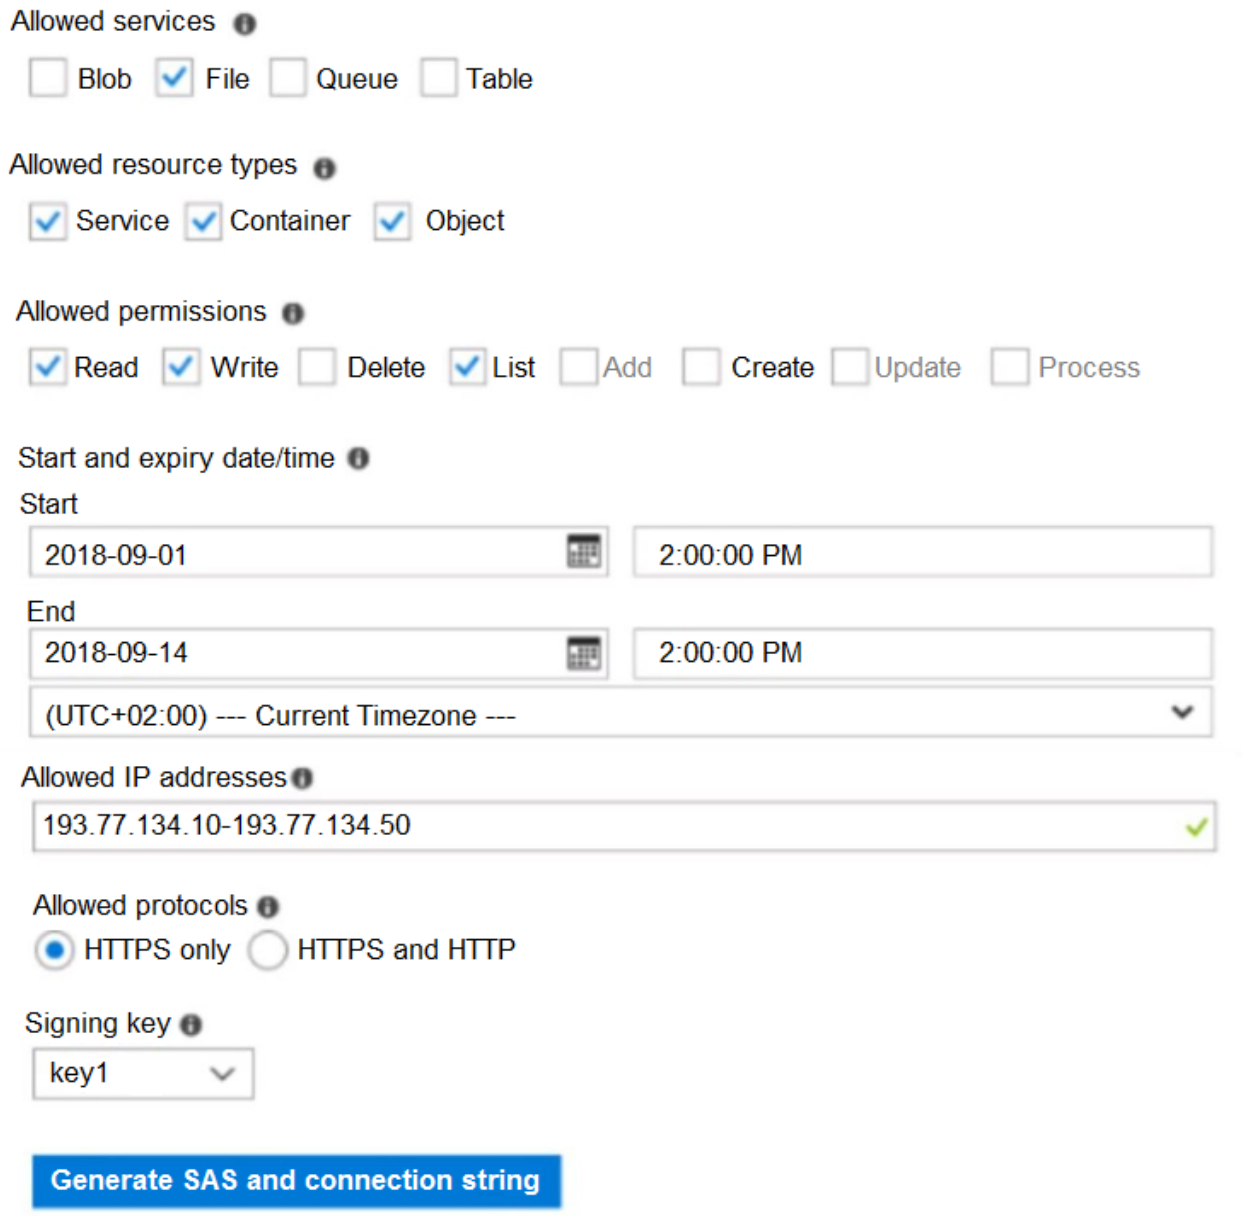

To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

If on September 2, 2018, you run Microsoft Azure Storage Explorer on a computer that has an IP address of 193.77.134.1, and you use SAS1 to connec to the storage account, you **[answer choice].**

- will be prompted for credentials
- will have no access
- will have read, write, and list access
- will have read-only access

If on September 10, 2018, you run the net use command on a computer that has an IP address of 193.77.134.50, and you use SAS1 as the password to connect to share1, you **[answer choice].**

- will be prompted for credentials
- will have no access
- will have read, write, and list access
- will have read-only access

Explanation

Correct Answer:

Answer Area

If on September 2, 2018, you run Microsoft Azure Storage Explorer on a computer that has an IP address of 193.77.134.1, and you use SAS1 to connec to the storage account, you **[answer choice].**

- will be prompted for credentials
- **will have no access**
- will have read, write, and list access
- will have read-only access

If on September 10, 2018, you run the net use command on a computer that has an IP address of 193.77.134.50, and you use SAS1 as the password to connect to share1, you **[answer choice].**

- will be prompted for credentials
- will have no access
- **will have read, write, and list access**
- will have read-only access

Box 1: Will have no access -
The IP 193.77.134.1 does not have access on the SAS.
Box 2: Will have read, write, and list access
The net use command is used to connect to file shares.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-dotnet-shared-access-signature-part-1 https://docs.microsoft.com/en-us/azure/vs-azure-tools-storage-manage-with-storage-explorer?tabs=windows

Community Discussion

The Answer is not correct. It should be no access for both cases. - for first case, cause the IP is not matching the SAS requirements - for second case, since it is using "net use" where it uses SMB. The SMB (Server Message Broker) protocol does not support SAS. it still asks for username/password. Accordingly, it will give error wrong username/pass and will not provide access.

Correct Answer: Box 1: will have no access The IP 193.77.134.1 does not have access on the SAS, because it is not matching the SAS requirements. IP is out of range. Box 2: will have no access The SAS token is not supported in mounting Azure File share currently, it just supports the Azure storage account key. Since it is using "net use" where it uses SMB, the SMB (Server Message Broker) protocol does not support SAS. it still asks for username/password. Accordingly, it will give error wrong username/pass and will not provide access. Reference: https://docs.microsoft.com/en-us/azure/storage/common/storage-dotnet-shared-access-signature-part-1 https://docs.microsoft.com/en-us/azure/vs-azure-tools-storage-manage-with-storage-explorer?tabs=windows https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-use-files-windows https://docs.microsoft.com/en-us/answers/questions/40741/sas-key-for-unc-path.html

Was on exam 19 Aug 2022. Scored 870. Answered: Box1: have no access Box2: have no access

Was on exam 19 Aug 2022. Scored 870. Answered: Box1: have no access Box2: have no access

It's amazing that wrong answers can be on the site for 2.5 years when this is a paid service.

SecExams

Question #136

You have two Azure virtual machines named VM1 and VM2. You have two Recovery Services vaults named RSV1 and RSV2.
VM2 is backed up to RSV1.
You need to back up VM2 to RSV2.
What should you do first?

A) From the RSV1 blade, click Backup items and stop the VM2 backup (Correct Answer)
B) From the RSV2 blade, click Backup. From the Backup blade, select the backup for the virtual machine, and then click Backup
C) From the VM2 blade, click Disaster recovery, click Replication settings, and then select RSV2 as the Recovery Services vault

D) From the RSV1 blade, click Backup Jobs and export the VM2 job

Explanation

Correct Answer:
A
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-azure-vms-first-look-arm

Community Discussion

This is wrong answer, first step should be stopping the backup If you want to change the recovery service vault you need to disassociate the previous RSV and delete the backup data. To delete backup data, you need to stop the backup first. So: 1. Stop the backup in RSV1 (D) 2. Remove the backup data. 3. Disassociate the VM in RSV1. 4. Associate the VM in RSV2.

Selected Answer: A

The correct answer is: A. From the RSV1 blade, click Backup items and stop the VM2 backup

Selected Answer: A

When you back up a virtual machine to a Recovery Services vault, the backup is stored in that vault. You cannot have the same virtual machine backed up to two different vaults. In order to back up VM2 to RSV2, you first need to stop the backup of VM2 from RSV1. Once the backup is stopped, you can then create a new backup job for VM2 in RSV2. Here are the steps on how to back up VM2 to RSV2: ①In the Azure portal, go to the Recovery Services vaults blade. ②Select the RSV1 vault. ③On the Backup items blade, select the VM2 backup. ④Click Stop. ⑤Once the VM2 backup is stopped, go to the RSV2 vault. ⑥On the Backup blade, click + Backup job. ⑦In the Backup job blade, select the VM2 virtual machine. ⑧Click Create. ⑨The VM2 backup job will be created and started in RSV2.

Jesus christ, this site has a lot of wrong answers. Its just ridiculous at this point. But then again, without these questions, a lot of us will probably fail the exam anyways lol.

My thoughts exactly. What's holding this site up is the dialogue in the discussions.

SecExams

Question #137

You have a general-purpose v1 Azure Storage account named storage1 that uses locally-redundant storage (LRS).
You need to ensure that the data in the storage account is protected if a zone fails. The solution must minimize costs and administrative effort.
What should you do first?

A) Create a new storage account.
B) Configure object replication rules.
C) Upgrade the account to general-purpose v2. (Correct Answer)
D) Modify the Replication setting of storage1.

Explanation

Correct Answer:
C
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy

Community Discussion

Correct. v1 supports GRS/RA-GRS but question was about least cost. Least cost is ZRS which is only supported for v2 and premium file/block storage. Source: https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy#supported-storage-account-types

Answer is correct, and this is why : General-purpose v2 storage accounts support the latest Azure Storage features and incorporate all of the functionality of general-purpose v1 and Blob storage accounts. General-purpose v2 accounts are recommended for most storage scenarios. General-purpose v2 accounts deliver the lowest per-gigabyte capacity prices for Azure Storage, as well as industry-competitive transaction prices. General-purpose v2 accounts support default account access tiers of hot or cool and blob level tiering between hot, cool, or archive. Upgrading to a general-purpose v2 storage account from your general-purpose v1 or Blob storage accounts is straightforward. You can upgrade using the Azure portal, PowerShell, or Azure CLI. There is no downtime or risk of data loss associated with upgrading to a general-purpose v2 storage account. The account upgrade happens via a simple Azure Resource Manager operation that changes the account type. Hope this helps

ZRS replicates data into multiple "Zones". So if your primary zone fails then the other two or more zones are available and will takeover the failed zone for you and your server will stay alive. So ZRS is great for zone failure. GRS replicated your data into different geography. For example, if you are in USA you will most likley be using NA geography. And if you use GRS, your data will be replicated to a secondary gregraphy such as EU, Asia, etc. So with GRS, even if the entire NA Azure servers failes and lose all your data, you will still have backed up data in a different geography.

ZRS replicates data into multiple "Zones". So if your primary zone fails then the other two or more zones are available and will takeover the failed zone for you and your server will stay alive. So ZRS is great for zone failure. GRS replicated your data into different geography. For example, if you are in USA you will most likley be using NA geography. And if you use GRS, your data will be replicated to a secondary gregraphy such as EU, Asia, etc. So with GRS, even if the entire NA Azure servers failes and lose all your data, you will still have backed up data in a different geography.

ZRS replicates data into multiple "Zones". So if your primary zone fails then the other two or more zones are available and will takeover the failed zone for you and your server will stay alive. So ZRS is great for zone failure. GRS replicated your data into different geography. For example, if you are in USA you will most likley be using NA geography. And if you use GRS, your data will be replicated to a secondary gregraphy such as EU, Asia, etc. So with GRS, even if the entire NA Azure servers failes and lose all your data, you will still have backed up data in a different geography.

SecExams

Question #138

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Type	Performance
storage1	StorageV2	Standard
storage2	BlobStorage	Standard
storage3	BlockBlobStorage	Premium
storage4	FileStorage	Premium

You plan to manage the data stored in the accounts by using lifecycle management rules.
To which storage accounts can you apply lifecycle management rules?

A) storage1 only
B) storage1 and storage2 only
C) storage3 and storage4 only
D) storage1, storage2, and storage3 only (Correct Answer)
E) storage1, storage2, storage3, and storage4

Explanation

Correct Answer:
D
Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/storage-lifecycle-management-concepts?tabs=azure-portal

Community Discussion

Answer is correct . The lifecycle management feature is available in all Azure regions for general purpose v2 (GPv2) accounts, blob storage accounts, premium block blobs storage accounts, and Azure Data Lake Storage Gen2 accounts.

This question came in the exam today 8/Mar/2022. I passed the exam, 95% questions came from here.

A bad question; storage account type and kind are mixed here. Also at this point, this is all legacy. Storage account types offered now without switching to legacy are simply standard (gpv2) and premium. Even in legacy, there isn't any such storage account type as "filestorage", so storage4 as listed is not valid, period.

A bad question; storage account type and kind are mixed here. Also at this point, this is all legacy. Storage account types offered now without switching to legacy are simply standard (gpv2) and premium. Even in legacy, there isn't any such storage account type as "filestorage", so storage4 as listed is not valid, period.

Have you purchase Contributor Access ?

Question #139

You create an Azure Storage account named contosostorage.
You plan to create a file share named data.
Users need to map a drive to the data file share from home computers that run Windows 10.
Which outbound port should you open between the home computers and the data file share?

A) 80
B) 443
C) 445 (Correct Answer)
D) 3389

Explanation

Correct Answer:
C
Server Message Block (SMB) is used to connect to an Azure file share over the internet.
The SMB protocol requires TCP port 445 to be open.
Incorrect Answers:
A: Port 80 is required for HTTP to a web server
B: Port 443 is required for HTTPS to a web server
D: Port 3389443 is required for Remote desktop protocol (RDP) connections
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-use-files-windows

Community Discussion

Correct answer is port 445, as this is port for SMB protocol to share files Incorrect: Port 80: HTTP, this is for web Port 443: HTTPS, for web too Port 3389: Remote desktop protocol (RDP)

Took the exam today on 17 Oct. Similar question came out. Know the usage for all your ports! Ans:445

I took Exam of Azure- 104 at 27/2/2023 I score 920 points out of 1000 points. This was on it and my answer was: C think about it like this: Port 80: HTTP/ web Port 443: HTTPS/web Port 3389: Remote desktop protocol (RDP) then that leave you with what? :) 445 which is for SMB/ share files

Selected Answer: C

To map a drive to the Azure file share from home computers that run Windows 10, you need to open outbound port 445. So the correct answer is: C. 445 This port is used for SMB (Server Message Block) protocol, which is what Windows uses for file sharing. Note that some ISPs block this port, so if you experience issues, a VPN or Azure ExpressRoute connection may be necessary to allow the traffic. Always ensure you are following security best practices when opening ports, especially when dealing with potentially sensitive data.

Selected Answer: C

445. https://learn.microsoft.com/en-us/azure/storage/files/storage-how-to-use-files-windows#prerequisites Passed the exam on 26 July 2023. Scored 870. Exact question came.

Question #140

You have an Azure subscription named Subscription1.
You have 5 TB of data that you need to transfer to Subscription1.
You plan to use an Azure Import/Export job.
What can you use as the destination of the imported data?

A) Azure File Storage (Correct Answer)
B) an Azure Cosmos DB database

C) Azure Data Factory
D) Azure SQL Database

Explanation

Correct Answer:
A
Reference:
https://docs.microsoft.com/en-us/azure/import-export/storage-import-export-service

Community Discussion

In exam today 11-DEC-2021 ans: A

same as Q22 & Q28 (BLOB & FILE STORAGE)

this question was there on 16/03/2022 with same question and passed with 900 percent

Selected Answer: A

A is the correct answer

Selected Answer: A

yes, correct answer is A

SecExams

Question #141

SecExams

HOTSPOT -

You have an Azure subscription that contains an Azure Storage account named storageaccount1.

You export storageaccount1 as an Azure Resource Manager template. The template contains the following sections.

```
{
        "type": "Microsoft.Storage/storageAccount",
        "apiVersion": "2019-06-01",
        "name": "storageaccount1",
        "location": "eastus",
        "sku": {
            "name": "Standard_LRS",
            "tier": "Standard"
        },
        "kind": "StorageV2",
        "properties": {
            "networkAcls": {
                "bypass": "AzureServices",
                "virtualNetworkRules": [],
                "ipRules": [],
                "defaultAction": "Allow",
            },
            "supportsHttpsTrafficOnly": true,
            "encryption": {
                "services": {
                    "file": {
                        "keyType": "Account",
                        "enabled": true
                    }
                    "blob": {
                        "keyType": "Account",
                        "enabled": true
                    }
                },
                "keySource": "Microsoft.Storage"
            },
            "accessTier": "Hot"
        }
    },
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point

Hot Area:

Answer Area

Statements	Yes	No
A server that has a public IP address of 131.107.103.10 can access storageaccount1	○	○
Individual blobs in storageaccount1 can be set to use the archive tier	○	○
Global administrations in Azure Active Directory (Azure AD) can access a file share hosted in storageaccount1 by using their Azure AD credentials	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
A server that has a public IP address of 131.107.103.10 can access storageaccount1	○	○
Individual blobs in storageaccount1 can be set to use the archive tier	○	○
Global administrations in Azure Active Directory (Azure AD) can access a file share hosted in storageaccount1 by using their Azure AD credentials	○	○

Reference:
https://docs.microsoft.com/en-us/azure/templates/microsoft.storage/storageaccounts?tabs=json

Community Discussion

Box 1- Yes. VirtualNetworkRules & IpRules are blank, with the default action Allow. Box 2- Yes. Individual blobs can be set to the archive tier - ref.https://docs.microsoft.com/en-us/azure/storage/blobs/access-tiers-overview Bob 3. No. To access blob data in the Azure portal with Azure AD credentials, a user must have the following role assignments: A data access role, such as Storage Blob Data Contributor The Azure Resource Manager

Reader role Ref.https://docs.microsoft.com/en-us/azure/storage/blobs/assign-azure-role-data-access?tabs=portal

1: Yes. Defaultaction is allow. IP is allowed. 2: Yes. Storagev2 allows tiering. 3: No. File share access requires SAS.

Box 2 is YES (moderator please delete my initial response to prevent further confusion. Thanks).

Box 2 is YES (moderator please delete my initial response to prevent further confusion. Thanks).

Box 2 is YES (moderator please delete my initial response to prevent further confusion. Thanks).

SecExams

Question #142

You have an Azure subscription that contains a storage account named storage1.
You have the devices shown in the following table.

Name	Platform
Device1	Windows 10
Device2	Linux
Device3	macOS

From which devices can you use AzCopy to copy data to storage1?

A) Device 1 only
B) Device1, Device2 and Device3 (Correct Answer)
C) Device1 and Device2 only
D) Device1 and Device3 only

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

B) "Device1, Device2 and Device3" AzCopy is supported in all these three operating systems: https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10#download-azcopy

Selected Answer: B

Source: https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10

B) "Device1, Device2 and Device3" AzCopy is supported in all three operating systems. First, download the AzCopy V10 executable file to any directory on your computer. AzCopy V10 is just an executable file, so there's nothing to install. Windows 64-bit (zip) Windows 32-bit (zip) Linux x86-64 (tar) Linux ARM64 Preview (tar) macOS (zip) Note: If you want to copy data to and from your Azure Table storage service, then install AzCopy version 7.3. https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10

Selected Answer: B

Correct Answer : B https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10

Selected Answer: B

AzCopy is a CLI cmdlet and will work on All operating systems

Question #143

You have an Azure Storage account named storage1 that contains a blob container named container1.
You need to prevent new content added to container1 from being modified for one year.
What should you configure?

A) the access tier
B) an access policy (Correct Answer)

C) the Access control (IAM) settings
D) the access level

Explanation

Correct Answer:
B
Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/immutable-storage-overview?tabs=azure-portal

Community Discussion

Answer B Time-based retention policies: With a time-based retention policy, users can set policies to store data for a specified interval. When a time-based retention policy is set, objects can be created and read, but not modified or deleted. After the retention period has expired, objects can be deleted but not overwritten.

B is correct. Because Access policy can set retention policy.

Selected Answer: B

B) "an access policy" Using SAS in conjunction with a stored Access Policy the desired outcome can be achieved: "You can use a stored access policy to change the start time, expiry time, or permissions for a signature. You can also use a stored access policy to revoke a signature after it has been issued." - https://docs.microsoft.com/en-us/rest/api/storageservices/define-stored-access-policy

More specific: https://docs.microsoft.com/en-us/azure/storage/blobs/immutable-time-based-retention-policy-overview

More specific: https://docs.microsoft.com/en-us/azure/storage/blobs/immutable-time-based-retention-policy-overview

SecExams

Question #144

HOTSPOT -

You have an Azure Storage account named storage1 that contains a blob container. The blob container has a default access tier of Hot. Storage1 contains a container named conainer1.

You create lifecycle management rules in storage1 as shown in the following table.

Name	Rule scope	Blob type	Blob subtype	Rule block	Prefix match
Rule1	Limit blobs by using filters.	Block blobs	Base blobs	If base blobs were not modified for two days, move to archive storage. If base blobs were not modified for nine days, delete the blob.	container1/Dep1
Rule2	Apply to all blobs in storage1.	Block blobs	Base blobs	If base blobs were not modified for three days, move to cool storage. If base blobs were not modified for nine days, move to archive storage.	**Not applicable**

You perform the actions shown in the following table.

Date	Action
October 1	Upload three files named Dep1File1.docx, File2.docx, and File3.docx to container 1.
October 2	Edit Dep1File1.docx and File3.docx.
October 5	Edit File2.docx.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
On October 10, you can read Dep1File1.docx.	○	○
On October 10, you can read File2.docx.	○	○
On October 10, you can read File3.docx.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
On October 10, you can read Dep1File1.docx.	○	○
On October 10, you can read File2.docx.	○	○
On October 10, you can read File3.docx.	○	○

Community Discussion

I don't think this is correct Rule1 archives blobs(aka files) after 2 days of inactivity and deletes after 9 Rule2 moves to cool tier after 3 days and archive tier after 9 Of the three files, Rule1 only applies to Dep1File1.docx, while the other files have Rule2 applied. The question asks if you can read the files on the 10th, not if they still exist. Files in the archive tier CANNOT be read as documented by Microsoft: "While a blob is in archive storage, the blob data is offline and can't be read or modified. To read or download a blob in archive, you must first rehydrate it to an online tier." https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers Dep1File1.docx was last updated 8 days ago, and would be in archive tier File2.docx was last updated 5 days ago, and would be in cool tier File3.docx was last updated 8 days ago and would be in cool tier Dep1File1 > No cannot be read File2 > Yes cannot be read File3 > Yes can be read

Correct Answer N Y Y Dep1File1 is hit by rule 1 which will archive the file by the 10th rendering it unreadable File 2 and file3 are missed by the first rule and gets hit by the 2nd rule, which will make them still readable by the 10th https://docs.microsoft.com/en-us/azure/storage/blobs/archive-rehydrate-overview#:~:text=While%20a%20blob%20is%20in,the%20hot%20or%20cool%20tier.

Hi guys, I guess should be Y-Y-Y Explanation: All the files are uploaded to container 1 include Dep1File1 (not under container/Dep), then the only rule that affect to all the files will be Rule 2. Dep1File1 > Yes can be read, will be on cool tier. File2 > Yes can be read, will be on cool tier. File3 > Yes can be read, will be on cool tier.

Hi guys, I guess should be Y-Y-Y Explanation: All the files are uploaded to container 1 include Dep1File1 (not under container/Dep), then the only rule that affect to all the files will be Rule 2. Dep1File1 > Yes can be read, will be on cool tier. File2 > Yes can be read, will be on cool tier. File3 > Yes can be read, will be on cool tier.

Not sure I agree with "Dep1File1 > No cannot be read". If only Rule1 applies and this is archive, agree. However, you have not considered that Rule2 also applies to Dep1File1.docx. This would then mean: Oct1 - Dep1File1.docx uploaded Oct2 -

Dep1File1.docx modified Oct5 - Dep1File1.docx moved to archive (Rule 1 kicks in - not modified for 2 days) Oct6 - Dep1File1.docx moved to cool (Rule 2 kicks in - not modified for 3 days) Oct10 – RESULT. Dep1File1.docx can be accessed while as this is actually in cool storage.

Question #145

You are configuring Azure Active Directory (Azure AD) authentication for an Azure Storage account named storage1.
You need to ensure that the members of a group named Group1 can upload files by using the Azure portal. The solution must use the principle of least privilege.
Which two roles should you configure for storage1? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Storage Account Contributor
B) Storage Blob Data Contributor (Correct Answer)
C) Reader (Correct Answer)
D) Contributor
E) Storage Blob Data Reader

Explanation

Correct Answer:
BC
To access blob data in the Azure portal with Azure AD credentials, a user must have the following role assignments:
* A data access role, such as Storage Blob Data Reader or Storage Blob Data Contributor
* The Azure Resource Manager Reader role, at a minimum
The Reader role is an Azure Resource Manager role that permits users to view storage account resources, but not modify them. It does not provide read permissions to data in Azure Storage, but only to account management resources. The Reader role is necessary so that users can navigate to blob containers in the Azure portal.
Note: in order from least to greatest permissions:

The Reader and Data Access role -
The Storage Account Contributor role
The Azure Resource Manager Contributor role
The Azure Resource Manager Owner role

Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/assign-azure-role-data-access

Community Discussion

Selected Answer: BC

B) "Storage Blob Data Contributor" & C) "Reader" The following line says it all: "The Reader role is an Azure Resource Manager role that permits users to view storage account resources, but not modify them. It does not provide read permissions to data in Azure Storage, but only to account management resources. The Reader role is necessary so that users can navigate to blob containers in the Azure portal. For example, if you assign the Storage Blob Data Contributor role to user Mary at the level of a container named sample-container, then Mary is granted read, write, and delete access to all of the blobs in that container. However, if Mary wants to view a blob in the Azure portal, then the Storage Blob Data Contributor role by itself will not provide sufficient permissions to navigate through the portal to the blob in order to view it. The additional permissions are required to navigate through the portal and view the other resources that are visible there." - https://docs.microsoft.com/en-us/azure/storage/blobs/assign-azure-role-data-access?tabs=portal

The "Storage Blob Data Reader" doesn't let you see the storage account in the portal.

The "Storage Blob Data Reader" doesn't let you see the storage account in the portal.

The "Storage Blob Data Reader" doesn't let you see the storage account in the portal.

The "Storage Blob Data Reader" doesn't let you see the storage account in the portal.

SecExams

Question #146

HOTSPOT -

You have an Azure Storage account named storage1 that stores images.

You need to create a new storage account and replicate the images in storage1 to the new account by using object replication.

How should you configure the new account? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

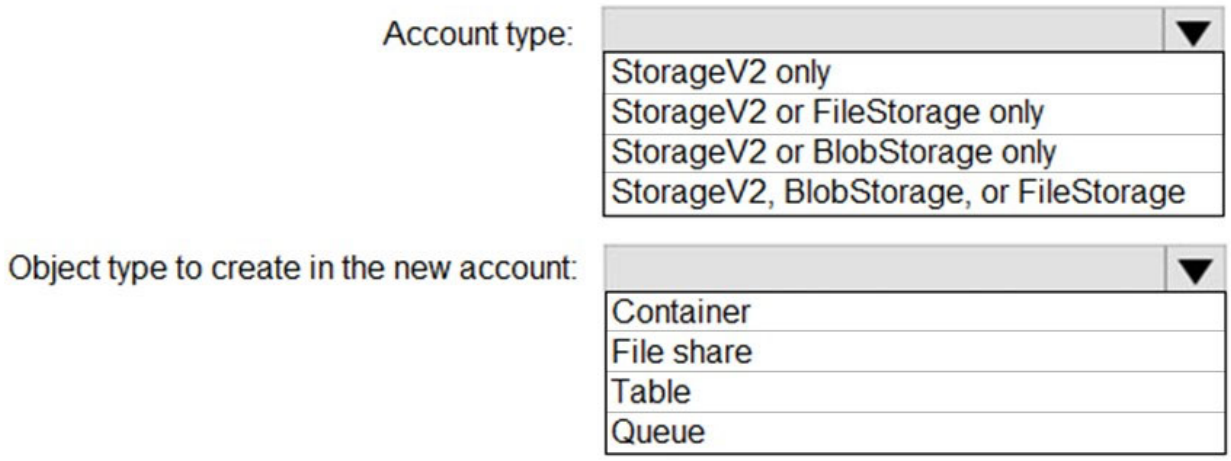

Explanation

Correct Answer:

Answer Area

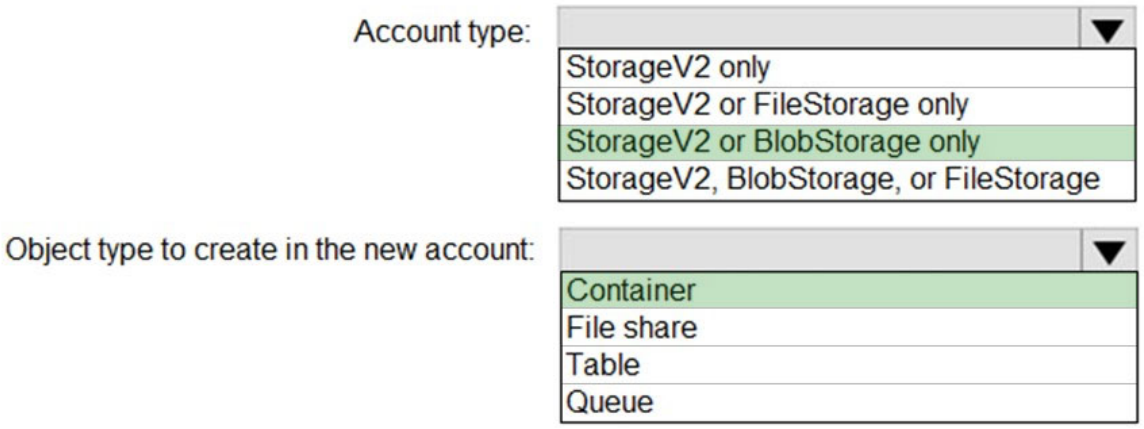

Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/object-replication-overview

Community Discussion

Account type: StorageV2 or BlobStorage only Object type to create in the new account: Container Object Replication supports General Purpose V2 and Premium Blob accounts. Blob versioning should be enabled on both the source and destination storage account. Change feed is enabled on the source storage account.

today in exam 1) Account type: "StorageV2 or Blobstorage only" 2) Object type to create in the new account: "Container"

Object replication is supported by Storage V2 and Premium Block Blob storage. Legacy Block blob storage does not support object replication. BlobStorage specifically refers to Legacy Block Blob storage while Premium Block Blob storage is always referenced as BlockBlobStorage. In short we can only use StorageV2 in this case.

Object replication is supported by Storage V2 and Premium Block Blob storage. Legacy Block blob storage does not support object replication. BlobStorage specifically refers to Legacy Block Blob storage while Premium Block Blob storage is always referenced as BlockBlobStorage. In short we can only use StorageV2 in this case.

The answer for (1) is incorrect. It should be "Storage V2 only". https://docs.microsoft.com/en-us/azure/storage/blobs/lifecycle-management-overview#rule-actions Object replication is supported for general-purpose v2 storage accounts and premium block blob accounts. Blob Storage is standard blob account, not premium.

Question #147

You have an on-premises server that contains a folder named D:\Folder1.
You need to copy the contents of D:\Folder1 to the public container in an Azure Storage account named contosodata.
Which command should you run?

A) https://contosodata.blob.core.windows.net/public
B) azcopy sync D:\folder1 https://contosodata.blob.core.windows.net/public --snapshot
C) azcopy copy D:\folder1 https://contosodata.blob.core.windows.net/public --recursive (Correct Answer)
D) az storage blob copy start-batch D:\Folder1 https://contosodata.blob.core.windows.net/public

Explanation

Correct Answer:
C
The azcopy copy command copies a directory (and all of the files in that directory) to a blob container. The result is a directory in the container by the same name.
Incorrect Answers:
B: The azcopy sync command replicates the source location to the destination location. However, the file is skipped if the last modified time in the destination is more recent.
D: The az storage blob copy start-batch command copies multiple blobs to a blob container.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-blobs
https://docs.microsoft.com/en-us/azure/storage/common/storage-ref-azcopy-copy

Community Discussion

Correct Answer: C A: URL of the Storage Account. B: The azcopy sync command replicates the source location to the destination location. However, the file is skipped if the last modified time in the destination is more recent. C: The azcopy copy command copies a

directory (and all the files in that directory) to a blob container. The result is a directory in the container by the same name. D: The az storage blob copy start-batch command copies multiple blobs to a blob container. Reference: https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-blobs https://docs.microsoft.com/en-us/azure/storage/common/storage-ref-azcopy-copy

copies a directory (and all of the files in that directory) to a blob container:- azcopy copy 'C:\myDirectory' 'https://mystorageaccount.blob.core.windows.net/mycontainer' --recursive To copy to a directory within the container :- azcopy copy 'C:\myDirectory' 'https://mystorageaccount.blob.core.windows.net/mycontainer/myBlobDirectory' --recursive

Basically given answer is correct.

Basically given answer is correct.

Selected Answer: C

C) " azcopy copy D:\folder1 https://contosodata.blob.core.windows.net/public --recursive" Reference: https://docs.microsoft.com/en-us/azure/storage/common/storage-ref-azcopy-copy

SecExams

Question #148

You have an Azure subscription.

In the Azure portal, you plan to create a storage account named storage1 that will have the following settings:

- ✑ Performance: Standard
- ✑ Replication: Zone-redundant storage (ZRS)
- ✑ Access tier (default): Cool
- ✑ Hierarchical namespace: Disabled

You need to ensure that you can set Account kind for storage1 to BlockBlobStorage.

Which setting should you modify first?

A) Performance (Correct Answer)

B) Replication

C) Access tier (default)

D) Hierarchical namespace

Explanation

Correct Answer:
A
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-account-overview
https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-performance-tiers

Community Discussion

Answer is correct https://docs.microsoft.com/en-us/azure/storage/common/storage-account-create?tabs=azure-portal Select Standard performance for general-purpose v2 storage accounts (default). This type of account is recommended by Microsoft for most scenarios. For more information, see Types of storage accounts. Select Premium for scenarios requiring low latency. After selecting Premium, select the type of premium storage account to create. The following types of premium storage accounts are available: Block blobs File shares Page blobs

Answer is A. Performance. Reference: https://docs.microsoft.com/en-us/azure/storage/common/storage-account-create?tabs=azure-cli These are the supported values for the kind parameter: StorageV2 = Standard general-purpose v2 BlockBlobStorage = Premium block blobs FileStorage = Premium file shares StorageV2 = Premium page blobs Storage = legacy Standard general-purpose v1 BlobStorage = legacy blob storage As you can see above BlockBlobStorage in only available for Premium_LRS or Premium_ZRS. So we must change the Performance from Standard to Premium.

Selected Answer: A

The "BlockBlobStorage" account kind is specialized for storing block blobs and append blobs. It is optimized for high transaction rates. To set the account kind to "BlockBlobStorage", the storage account must have: - Performance: Premium - Replication: Locally-redundant storage (LRS) or Zone-redundant storage (ZRS) Given the provided settings, the "Performance" setting is set to "Standard", which is not compatible with the "BlockBlobStorage" account kind. Therefore, you should modify: A. Performance You would need to set it to "Premium" to be able to select "BlockBlobStorage" as the account kind.

I agree it needs to be Premium... but what does the tiering option do when you try and move it to premium since premium doesn't support tiering?

A) Performance : Because Blockblob storage supported in premium not in Standard.

Question #149

DRAG DROP -

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Azure Active Directory (Azure AD) authentication	Contents
storage1	Enabled	A blob container named container1 that has a public access level of No public access
storage2	Enabled	A file share named share1

You plan to use AzCopy to copy a blob from container1 directly to share1.

You need to identify which authentication method to use when you use AzCopy.

What should you identify for each account? To answer, drag the appropriate authentication methods to the correct accounts. Each method may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Select and Place:

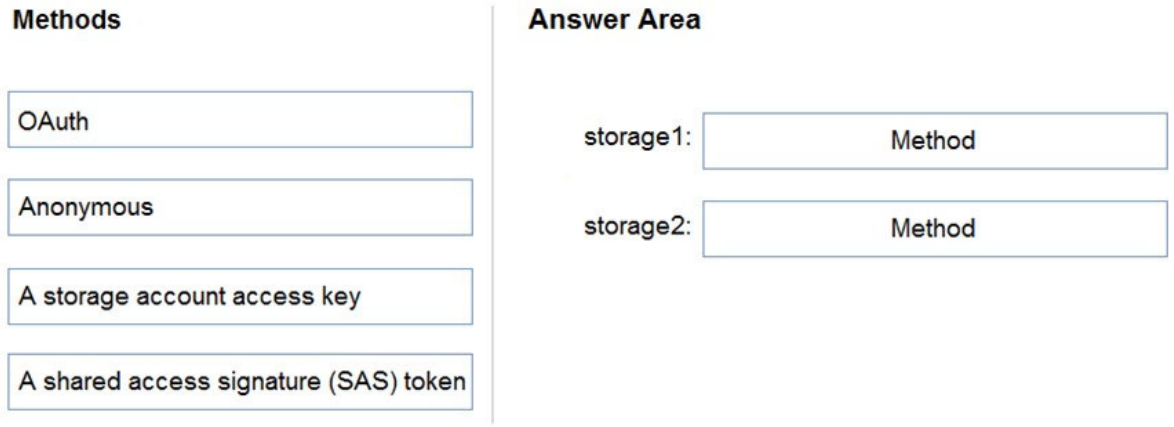

Explanation

Correct Answer:

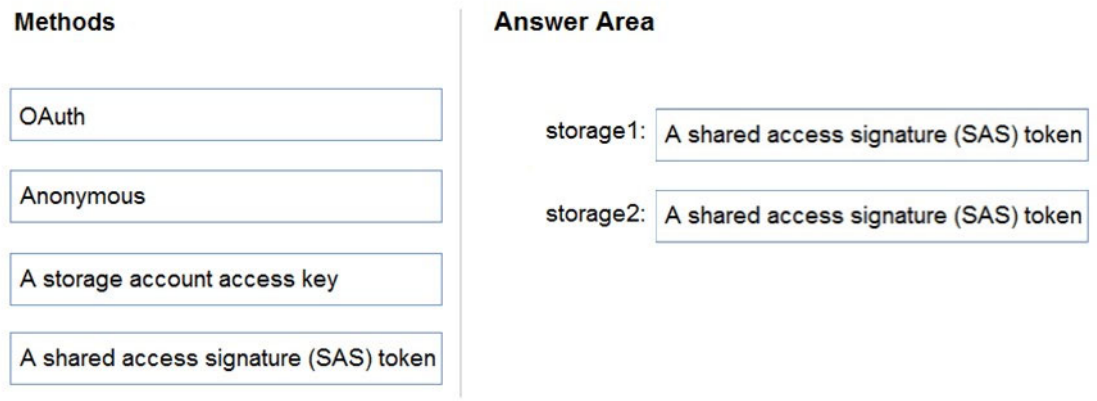

Box 1: A shared access signature (SAS) token.
You can provide authorization credentials by using Azure Active Directory (AD), or by using a Shared Access Signature (SAS) token.
For Blob storage you can use Azure AD & SAS.
Note: In the current release, if you plan to copy blobs between storage accounts, you'll have to append a SAS token to each source URL. You can omit the SAS token only from the destination URL.
Box 2: A shared access signature (SAS) token.
For File storage you can only use SAS.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10

Community Discussion

1) A shared access signature (SAS) token 2) A shared access signature (SAS) token Blob Storage: Support both Azure Active Directory (AD) and Shared Access Signature (SAS) token. File Storage: Only Shared Access Signature (SAS) token is supported. Reference: https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10?toc=%2Fazure%2Fstorage%2Fblobs%2Ftoc.json#authorize-azcopy

On the Exam 3/29/23.

To storage1, you could authenticate with Access Key, SAS and AAD, but Storage1 has disabled public access, so you can't access it with AzCopy even authenticated. However in SAS toiken you can specify authorized IP range from which you can use your access. Access Key and AAD don;t have that option, hence the only possible authorization method for storage1 is SAS.

I hope you passed

I hope you passed

Question #150

You create an Azure Storage account.
You plan to add 10 blob containers to the storage account.
For one of the containers, you need to use a different key to encrypt data at rest.
What should you do before you create the container?

A) Generate a shared access signature (SAS).
B) Modify the minimum TLS version.
C) Rotate the access keys.
D) Create an encryption scope. (Correct Answer)

Explanation

Correct Answer:
D
Encryption scopes enable you to manage encryption with a key that is scoped to a container or an individual blob. You can use encryption scopes to create secure boundaries between data that resides in the same storage account but belongs to different customers.
Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/encryption-scope-overview

Community Discussion

Selected Answer: D

D) Create an encryption scope Why? In Azure Storage, encryption of data at rest is done using Azure Storage Service Encryption (SSE). Azure Storage SSE uses Microsoft-managed encryption keys to encrypt the data in the storage account. In the scenario described, you need to use a different key to encrypt data at rest for one of the containers. To do this, you need to create an encryption scope, which is a named configuration that defines the default encryption settings for a container. By creating an encryption scope, you can use a customer-managed key, stored in Azure Key Vault, to encrypt the data in that specific container. Therefore, option D (Create an encryption scope) is the correct

answer as it allows you to use a different key for data encryption for the specific container.

Selected Answer: D

D) "Create an encryption scope." Reference: https://docs.microsoft.com/en-us/azure/storage/blobs/encryption-scope-overview#how-encryption-scopes-work

Similar question on exam May-11-2023: Which types of services storage encryption scope is enable. 1) Only Containers (correct) 2) Only Azure Files 3) Azure Files and Containers 4) Containers and Tables 5) Containers and Queue When you define an encryption scope, you specify a key that may be scoped to a **container*** or an ***individual blob***. https://learn.microsoft.com/en-us/azure/storage/blobs/encryption-scope-overview#how-encryption-scopes-work

Selected Answer: D

Encryption scopes enable you to manage encryption with a key that is scoped to a container or an individual blob. You can use encryption scopes to create secure boundaries between data that resides in the same storage account but belongs to different customers.

Selected Answer: B

Correct Answer: D

SecExams

Question #151

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You deploy an Azure Kubernetes Service (AKS) cluster named AKS1.
You need to deploy a YAML file to AKS1.
Solution: From Azure CLI, you run az aks.
Does this meet the goal?

A) Yes

B) No (Correct Answer)

Explanation

Correct Answer:
B
Reference:
https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough

Community Discussion

Correct Answer B - No To deploy the YAML file you need to runs kubectl apply -f file_name.yaml https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough

Passed 11 Oct 2021 with 947. This question appeared, correct Answer

Selected Answer: B

To deploy a YAML file to AKS1, you would typically use the `kubectl` command. The `az aks` command in Azure CLI is primarily used to manage AKS clusters, not to deploy resources into them. For example, to deploy a YAML file, you would use: ``` kubectl apply -f <filename>.yaml ``` Simply running `az aks` would not deploy a YAML file to AKS1. So, the answer is: B. No

Selected Answer: B

I took Exam of Azure- 104 at 27/2/2023 I score 920 points out of 1000 points. This was on it and my answer was: B There are many version of this Q on the exam btw only using the kubectl is the correct answer.

Use the contributor access

Question #152

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You deploy an Azure Kubernetes Service (AKS) cluster named AKS1.
You need to deploy a YAML file to AKS1.
Solution: From Azure CLI, you run the kubectl client.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Reference:
https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough

Community Discussion

Answer is Yes. To manage a Kubernetes cluster, use the Kubernetes command-line client, kubectl then run "kubectl apply -f azure-vote.yaml" https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough

Passed 11 Oct 2021 with 947. This question appeared, correct Answer

On the Exam 3/29/23.

Today 11/01/2022 in exam go with highly voted

On exam today

Question #153

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You deploy an Azure Kubernetes Service (AKS) cluster named AKS1.
You need to deploy a YAML file to AKS1.
Solution: From Azure CLI, you run azcopy.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Reference:
https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough

Community Discussion

Answer: NO To deploy a YAML file, the command is: kubectl apply -f example.yaml Src: https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough

In exam October 16, 2021

Took the exam today on 17 Oct. This question came out. Ans: kubectl

Passed 11 Oct 2021 with 947. This question appeared, correct Answer

Selected Answer: B

Answer: NO To deploy a YAML file, the command is: kubectl apply -f example.yaml

Question #154

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1 that runs Windows Server 2016.
You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.
Solution: You create an Azure storage account and configure shared access signatures (SASs). You install the Microsoft Monitoring Agent on VM1. You create an alert in Azure Monitor and specify the storage account as the source.
Does that meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Instead: You create an Azure Log Analytics workspace and configure the data settings. You install the Microsoft Monitoring Agent on VM1. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview

Community Discussion

Exam tomorrow. Really hope I pass. Pray for me y'all!

Answer is "No". You want to create an Alert which means you need Log analytics and Azure monitor. 1. You create an Azure Log Analytics workspace and configure the data settings. 2. You install the Microsoft Monitoring Agent on VM1. 3. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source.

on exam 4/29/23

Selected Answer: B

The solution provided doesn't meet the goal for several reasons: 1. Creating an Azure storage account and configuring shared access signatures (SASs) is not necessary for monitoring events on a virtual machine. Azure Monitor can directly collect events from the VM's System event log using the Microsoft Monitoring Agent. 2. The Microsoft Monitoring Agent can indeed collect logs and send them to Azure Monitor, but specifying a storage account as the source would not be the typical approach for monitoring System event logs. You would usually send the logs directly to a Log Analytics workspace. 3. To monitor the System event log for specific events, you would set up a Log Analytics workspace, configure the Microsoft Monitoring Agent to send logs to that workspace, and then set up an alert based on a query that examines those logs. So, the answer is: B. No

mine is tomorrow 25th sep 2023, im sooo not confident in this, i hope i pass like most of you guys did

SecExams

Question #155

SecExams

HOTSPOT -

You have an Azure subscription named Subscription1. Subscription1 contains the resources in the following table.

Name	Type
RG1	Resource group
RG2	Resource group
VNet1	Virtual network
VNet2	Virtual network

VNet1 is in RG1. VNet2 is in RG2. There is no connectivity between VNet1 and VNet2.

An administrator named Admin1 creates an Azure virtual machine named VM1 in RG1. VM1 uses a disk named Disk1 and connects to VNet1. Admin1 then installs a custom application in VM1.

You need to move the custom application to VNet2. The solution must minimize administrative effort.

Which two actions should you perform? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

First action:

- Create a network interface in RG2.
- Detach a network interface.
- Delete VM1.
- Move a network interface to RG2.

Second action:

- Attach a network interface.
- Create a network interface in RG2.
- Create a new virtual machine.
- Move VM1 to RG2.

Explanation

Correct Answer:

Answer Area

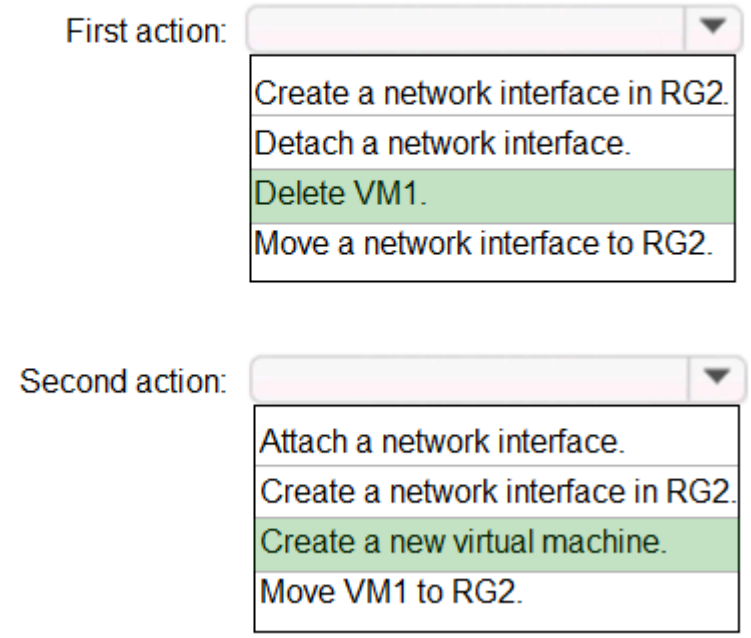

We cannot just move a virtual machine between networks. What we need to do is identify the disk used by the VM, delete the VM itself while retaining the disk, and recreate the VM in the target virtual network and then attach the original disk to it.
Reference:
https://blogs.technet.microsoft.com/canitpro/2014/06/16/step-by-step-move-a-vm-to-a-different-vnet-on-azure/ https://4sysops.com/archives/move-an-azure-vm-to-another-virtual-network-vnet/#migrate-an-azure-vm-between-vnets

Community Discussion

Correct Answer: We cannot just move a virtual machine between networks. What we need to do is identify the disk used by the VM, delete the VM itself while retaining the disk, and recreate the VM in the target virtual network and then attach the original disk to it. Note: You can change the Subnet a VM is connected to after it's created, but you cannot change the VNet. Reference: https://blogs.technet.microsoft.com/canitpro/2014/06/16/step-by-step-move-a-vm-to-a-different-vnet-on-azure/ https://4sysops.com/archives/move-an-azure-vm-to-another-virtual-network-vnet/#migrate-an-azure-vm-between-vnets https://docs.microsoft.com/en-us/azure/virtual-machines/network-overview

Correct , not possible to migrate from vnet to another vnet. Must delete VM while keeping the disk. then create a new vm using the saved virtual hard disk

True. "You can change the subnet a VM is connected to after it's created, but you cannot change the VNet." (https://docs.microsoft.com/en-us/azure/virtual-machines/network-overview)

True. "You can change the subnet a VM is connected to after it's created, but you cannot change the VNet." (https://docs.microsoft.com/en-us/azure/virtual-machines/network-overview)

Thank you @mlantonis for your explanations, I have passed the exam with 830,90% questions from here, I did udemy training on Microsoft learn and practice tests, and without ET would have never cleared exam in first attempt thank you all for the contribution.

SecExams

Question #156

You download an Azure Resource Manager template based on an existing virtual machine. The template will be used to deploy 100 virtual machines.
You need to modify the template to reference an administrative password. You must prevent the password from being stored in plain text.
What should you create to store the password?

A) an Azure Key Vault and an access policy (Correct Answer)
B) an Azure Storage account and an access policy
C) a Recovery Services vault and a backup policy
D) Azure Active Directory (AD) Identity Protection and an Azure policy

Explanation

Correct Answer:
A
You can use a template that allows you to deploy a simple Windows VM by retrieving the password that is stored in a Key Vault. Therefore, the password is never put in plain text in the template parameter file.
Reference:
https://azure.microsoft.com/en-us/resources/templates/101-vm-secure-password/

Community Discussion

Correct. Answer is A using Azure Vault

"adminPassword": { "reference": { "keyVault": { "id": "GEN-KEYVAULT-RESOURCE-ID" }, "secretName": "GEN-KEYVAULT-PASSWORD-SECRET-NAME" } }

Selected Answer: A

A is correct Azure Key Vault to store password and an access policy to control access to the vault

This came in June 25 2022 exam. Didn't pass :(

answer is right. This question also appears on MS free assessment exam.

SecExams

Question #157

HOTSPOT -

You have the App Service plans shown in the following table.

Name	Operating system	Location
ASP1	Windows	West US
ASP2	Windows	Central US
ASP3	Linux	West US

You plan to create the Azure web apps shown in the following table.

Name	Runtime stack	Location
WebApp1	.NET Core 3.0	West US
WebApp2	ASP.NET 4.7	West US

You need to identify which App Service plans can be used for the web apps.
What should you identify? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

WebApp1:

- ASP1 only
- ASP3 only
- ASP1 and ASP2 only
- ASP1 and ASP3 only
- ASP1, ASP2, and ASP3

WebApp2:

- ASP1 only
- ASP3 only
- ASP1 and ASP2 only
- ASP1 and ASP3 only
- ASP1, ASP2, and ASP3

Explanation

Correct Answer:

Answer Area

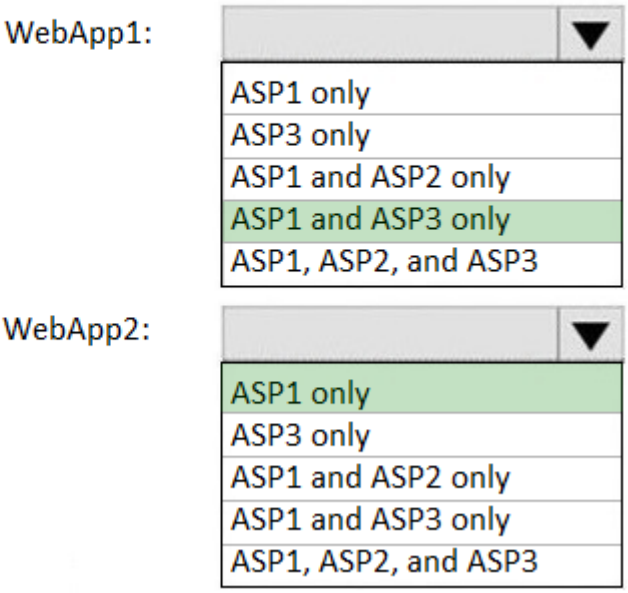

Box 1: ASP1 ASP3 -
Asp1, ASP3: ASP.NET Core apps can be hosted both on Windows or Linux.
Not ASP2: The region in which your app runs is the region of the App Service plan it's in.

Box 2: ASP1 -
ASP.NET apps can be hosted on Windows only.
Reference:
https://docs.microsoft.com/en-us/azure/app-service/quickstart-dotnetcore?pivots=platform-linux https://docs.microsoft.com/en-us/azure/app-service/app-service-plan-manage#

Community Discussion

Correct Answer: Box 1: ASP1 and ASP3 only ASP.NET Core apps can be hosted both on Windows or Linux. The region in which your app runs is the region of the App Service Plan is in. ASP2 is in Central US, not the same as WebApp1. Different locations. Box 2: ASP1 only ASP.NET apps can be hosted on Windows only. Only ASP1 is in the same Location as the WebApp2 (West US). Reference: https://docs.microsoft.com/en-us/azure/app-service/quickstart-dotnetcore?pivots=platform-linux https://docs.microsoft.com/en-us/azure/app-service/app-service-plan-manage

Answer Correct. Web App can only created and identified in App Service plan in same region and resource group. For ASP.NET, it only can be created with Windows App Service Plan

ASP.NET CORE (Windows or Linux) ASP.NET(Windows) PHP(Windows or Linux) Ruby(Linux) Node.js(Windows or Linux) Java(Windows or linux) Python (Linux) HTML (Windows or Linux)

ASP.NET CORE (Windows or Linux) ASP.NET(Windows) PHP(Windows or Linux) Ruby(Linux) Node.js(Windows or Linux) Java(Windows or linux) Python (Linux) HTML (Windows or Linux)

ASP.NET CORE (Windows or Linux) ASP.NET(Windows) PHP(Windows or Linux) Ruby(Linux) Node.js(Windows or Linux) Java(Windows or linux) Python (Linux) HTML (Windows or Linux)

SecExams

Question #158

SecExams

HOTSPOT -

You create a virtual machine scale set named Scale1. Scale1 is configured as shown in the following exhibit.

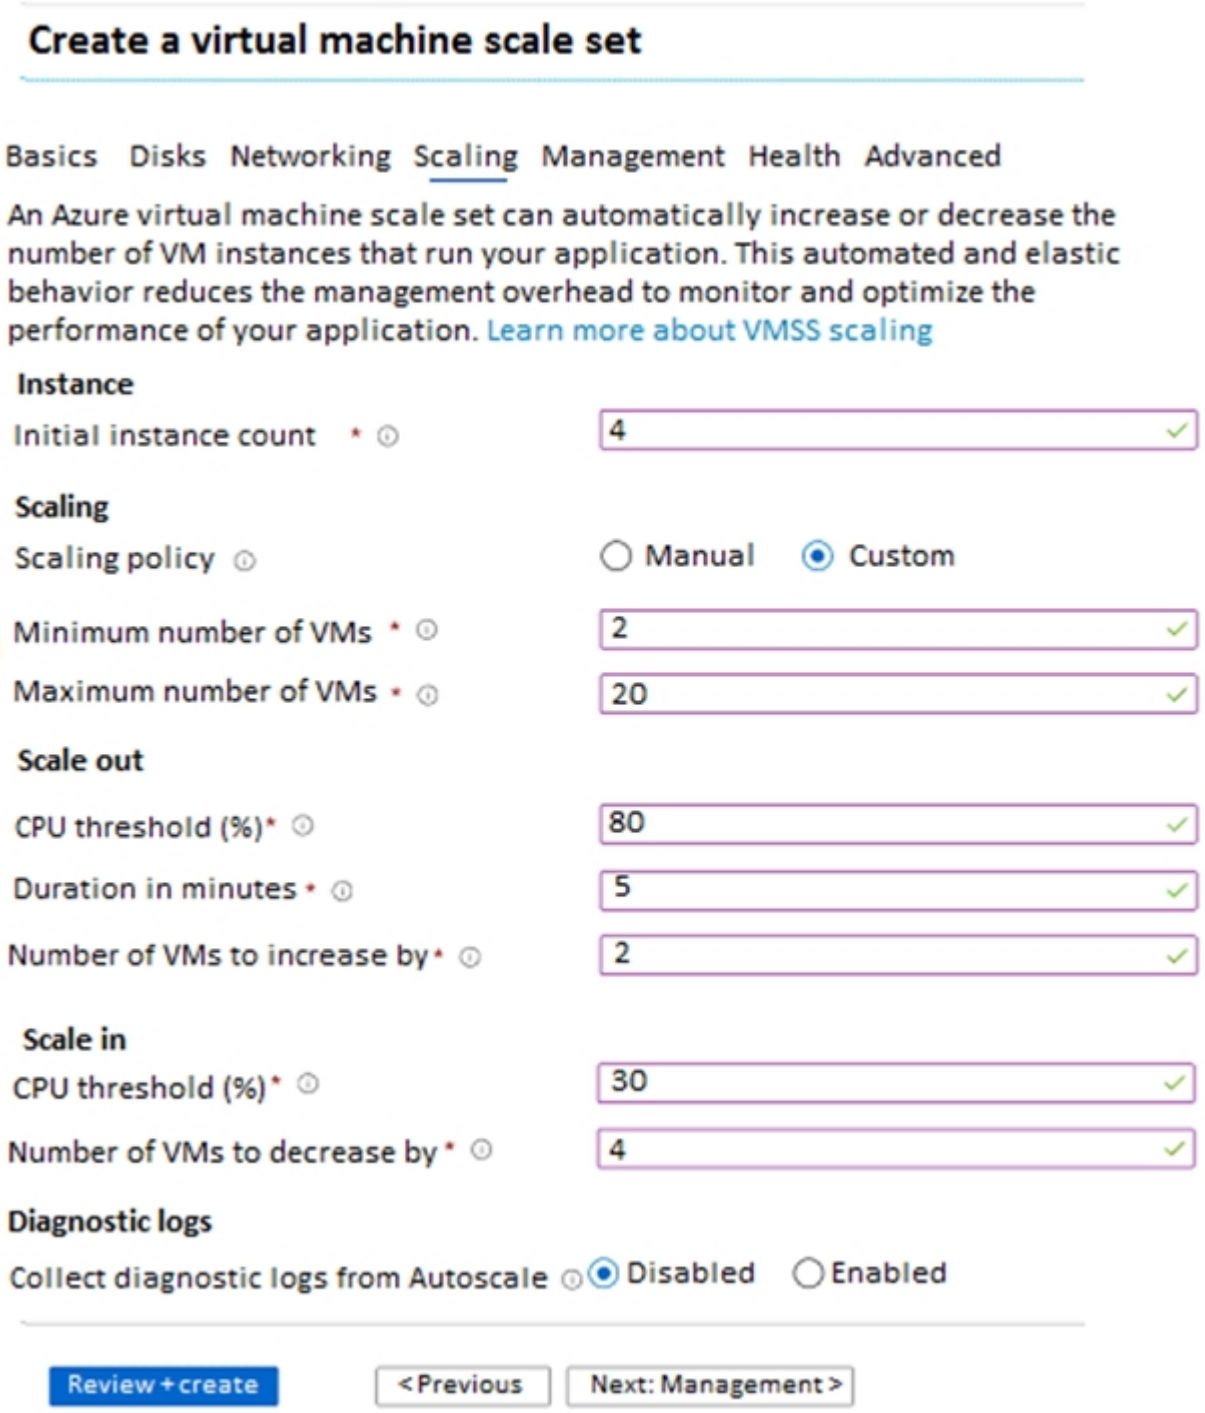

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

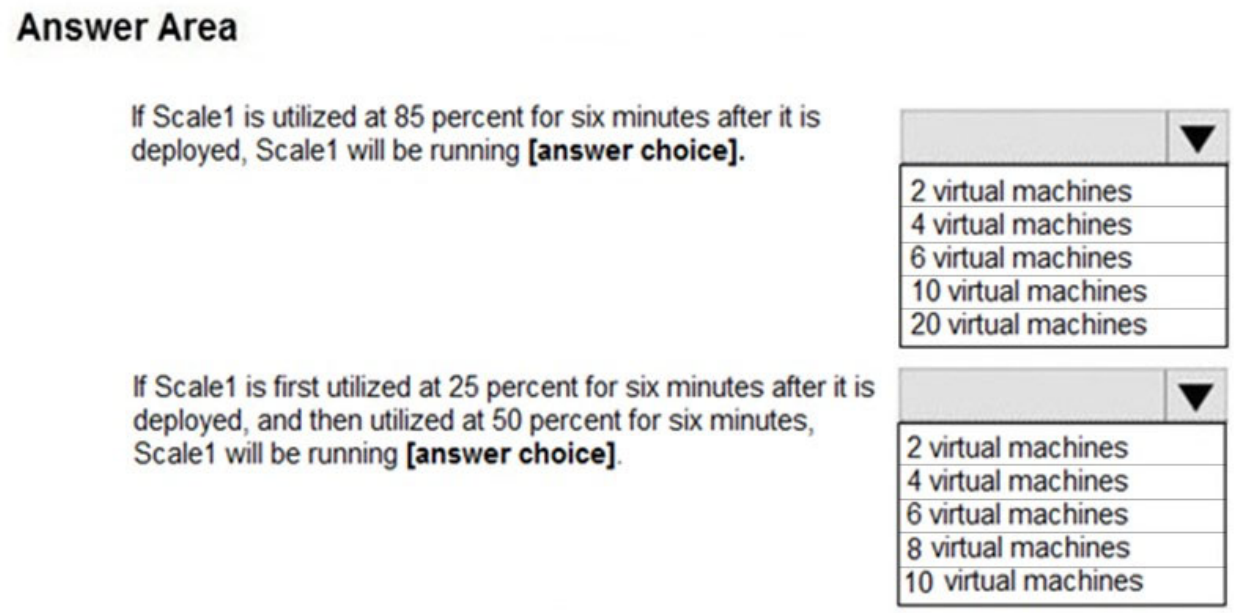

Explanation

Correct Answer:

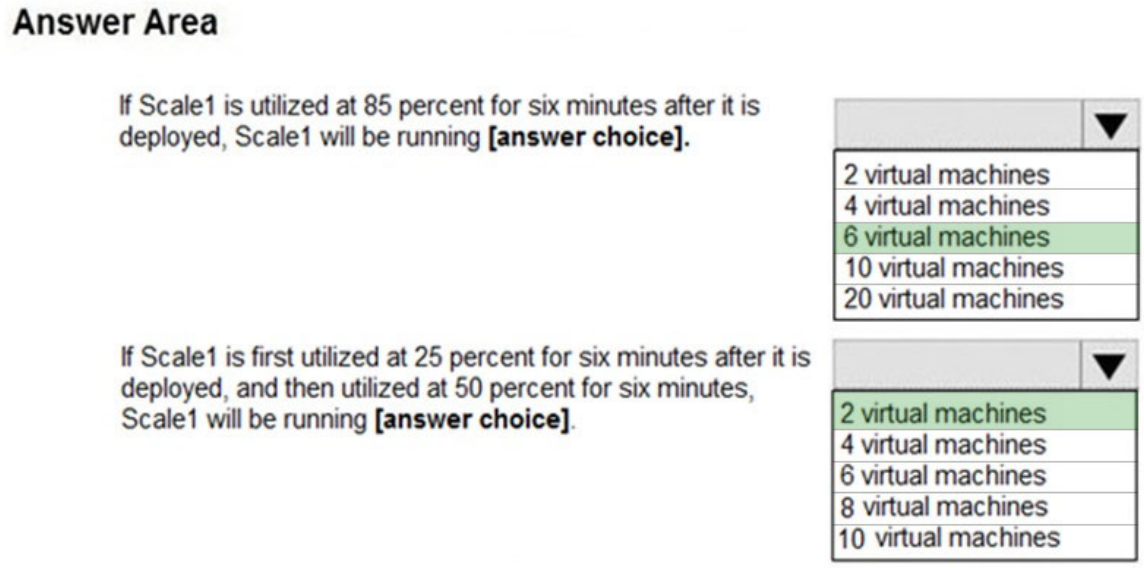

Box 1: 6 virtual machines -
The Autoscale scale out rule increases the number of VMs by 2 if the CPU threshold is 80% or higher. The initial instance count is 4 and rises to 6 when the 2 extra instances of VMs are added.

Box 2: 2 virtual machnes -
The Autoscale scale in rule decreases the number of VMs by 4 if the CPU threshold is 30% or lower. The initial instance count is 4 and thus cannot be reduced to

0 as the minimum instances is set to 2. Instances are only added when the CPU threshold reaches 80%.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/autoscale-overview
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/autoscale-best-practices https://docs.microsoft.com/en-us/azure/azure-monitor/platform/autoscale-common-scale-patterns

Community Discussion

Correct Answer: Box 1: 6 virtual machines The Autoscale scale out rule increases the number of VMs by 2 if the CPU threshold is 80% or higher. The initial instance count is 4 and rises to 6 when the 2 extra instances of VMs are added. Box 2: 2 virtual machnes The Autoscale scale in rule decreases the number of VMs by 4 if the CPU threshold is 30% or lower. The initial instance count is 4 and thus cannot be reduced to 0 as the minimum instances is set to 2. Instances are only added when the CPU threshold reaches 80%. Reference: https://docs.microsoft.com/en-us/azure/azure-monitor/platform/autoscale-overview https://docs.microsoft.com/en-us/azure/azure-monitor/platform/autoscale-best-practices https://docs.microsoft.com/en-us/azure/azure-monitor/platform/autoscale-common-scale-patterns

Scale-out to 6 is correct. Scale-in to 2 is also correct: Starting with 4VMs. Usage (25%) is below threshold, so scale-in happens to the min. of 2 machines. (Calculate: If 4 VMs have 25%, then 2 VMs will have 50%; this does not trigger the Scale-out, so scale in will be done!) Then for the next time it stays at 50%, so no changes are made an the set still consists 2 VMs

Answer valid! This question was on the exam 22/02/2023. Scored 920. Thanks guys!

Answer valid! This question was on the exam 22/02/2023. Scored 920. Thanks guys!

correct answer and justification.

SecExams

Question #159

You plan to automate the deployment of a virtual machine scale set that uses the Windows Server 2016 Datacenter image.
You need to ensure that when the scale set virtual machines are provisioned, they have web server components installed.
Which two actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Upload a configuration script
B) Create an automation account
C) Create an Azure policy
D) Modify the extensionProfile section of the Azure Resource Manager template (Correct Answer)
E) Create a new virtual machine scale set in the Azure portal (Correct Answer)

Explanation

Correct Answer:
DE
Virtual Machine Scale Sets can be used with the Azure Desired State Configuration (DSC) extension handler. Virtual machine scale sets provide a way to deploy and manage large numbers of virtual machines, and can elastically scale in and out in response to load. DSC is used to configure the VMs as they come online so they are running the production software.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-dsc

Community Discussion

Correct Answer: A and D The Custom Script Extension downloads and executes scripts on Azure VMs. This extension is useful for post deployment configuration, software installation, or any other configuration / management task. Scripts can be downloaded from Azure storage or GitHub, or provided to the Azure portal at extension run-time. The Custom Script extension integrates with Azure Resource Manager templates, and can also be used with the Azure CLI, Azure PowerShell, Azure portal, or the REST API The following Custom Script Extension definition downloads a sample script from GitHub, installs the

required packages, then writes the VM instance hostname to a basic HTML page.
Reference: https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/tutorial-install-apps-template

A and D?

Yes, because of the word "automate" you can't use the portal. So A and D should be the right answer.

Yes, because of the word "automate" you can't use the portal. So A and D should be the right answer.

For the first time, I disagree with @mlantonis answer, but not the explanation. The reference link is spot on, and it has you 1. Create Custom Script Extension definition, which is editing the extensionProfile section So, D. Then 2. you create the Scale Set. That is E. So answer is D and E.

SecExams

Question #160

HOTSPOT -

You have an Azure Kubernetes Service (AKS) cluster named AKS1 and a computer named Computer1 that runs Windows 10. Computer1 that has the Azure CLI installed.

You need to install the kubectl client on Computer1.

Which command should you run? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

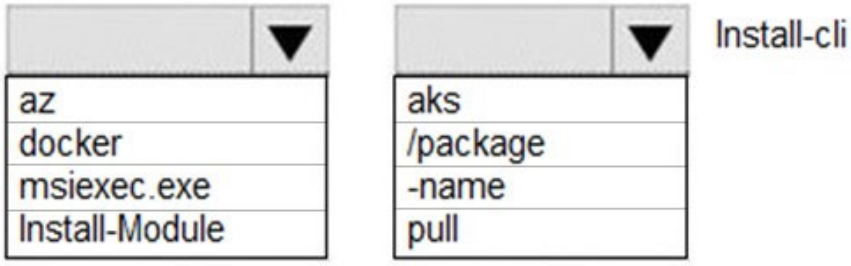

Explanation

Correct Answer:

Answer Area

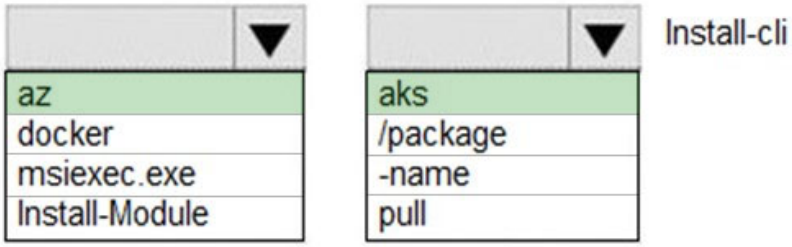

To install kubectl locally, use the az aks install-cli command: az aks install-cli

Reference:

https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough

Community Discussion

Correct Answer: To install kubectl locally, use the az aks install-cli command. Note: Azure cli commands start with az. We use Install-Module to install a Powershell module.
Reference: https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough
https://docs.microsoft.com/en-us/cli/azure/reference-index?view=azure-cli-latest

Answer correct

Was on exam 19 Aug 2022. Scored 870. Answered: az aks install-cli

Was on exam 19 Aug 2022. Scored 870. Answered: az aks install-cli

Passed today. this is part of the exam. 4/23/22

SecExams

Question #161

DRAG DROP -

You onboard 10 Azure virtual machines to Azure Automation State Configuration.

You need to use Azure Automation State Configuration to manage the ongoing consistency of the virtual machine configurations.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.

Select and Place:

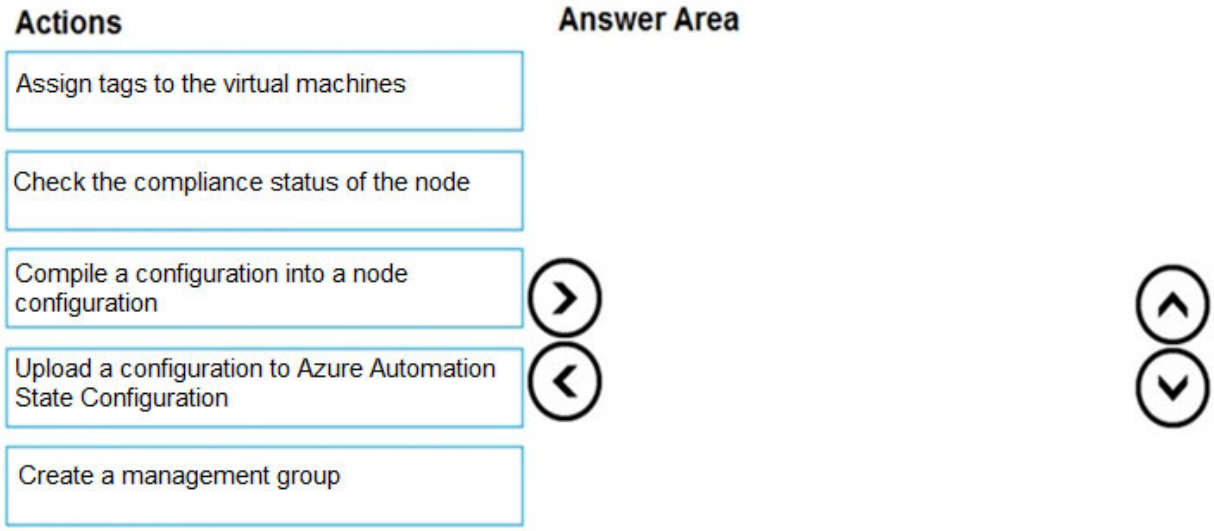

SecExams

Explanation

Correct Answer:

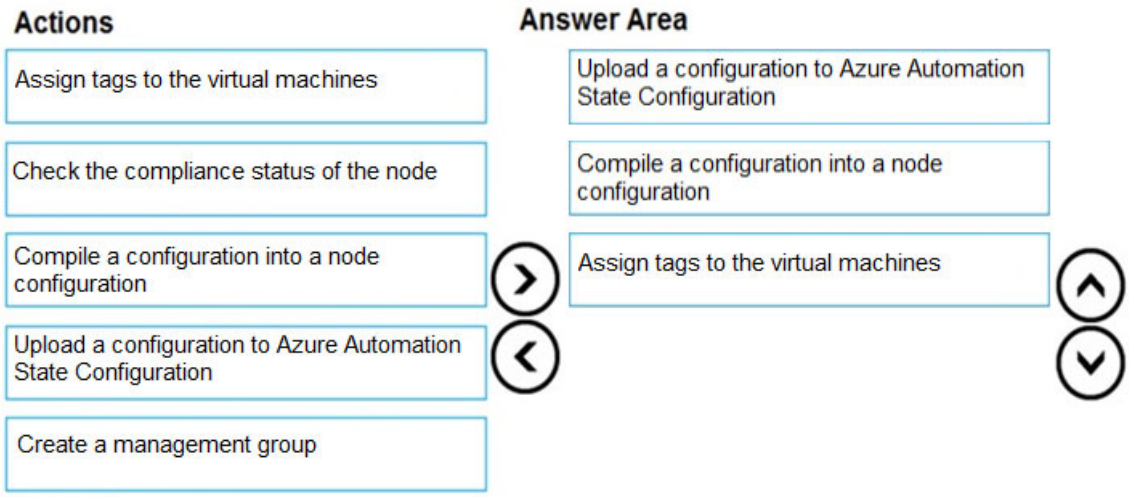

Step 1: Upload a configuration to Azure Automation State Configuration.
Import the configuration into the Automation account.
Step 2: Compile a configuration into a node configuration.
A DSC configuration defining that state must be compiled into one or more node configurations (MOF document), and placed on the Automation DSC Pull Server.
Step 3: Assign the node configuration
Then: Check the compliance status of the node
Each time Azure Automation State Configuration performs a consistency check on a managed node, the node sends a status report back to the pull server. You can view these reports on the page for that node.
On the blade for an individual report, you can see the following status information for the corresponding consistency check:
The report status ג€" whether the node is "Compliant", the configuration "Failed", or the node is "Not Compliant"
Reference:
https://docs.microsoft.com/en-us/azure/automation/automation-dsc-getting-started

Community Discussion

Not correct. The right order is: 1. Upload a configuration to Azure Automation State Configuration 2. Compile a configuration into a node configuration 3. Check the compliance status of the node.

Correct Answer: 1: Upload a configuration to Azure Automation State Configuration 2: Compile a configuration into a node configuration 3: Check the compliance status of the node. Step 1: Create and upload a configuration to Azure Automation Step 2: Compile a configuration into a node configuration Step 3: Register a VM to be managed by State Configuration Step 4: Specify configuration mode settings Step 5: Assign a node configuration to a managed node Step 6: Check the compliance status of a managed

node Reference: https://docs.microsoft.com/en-us/azure/automation/automation-dsc-getting-started https://docs.microsoft.com/en-us/azure/automation/tutorial-configure-servers-desired-state

this is a demo tu better understand https://www.youtube.com/watch?v=8plqKnxzDHA

this is a demo tu better understand https://www.youtube.com/watch?v=8plqKnxzDHA

To manage the ongoing consistency of virtual machine configurations using Azure Automation State Configuration, you should follow these steps in sequence: 1. **Upload a configuration to Azure Automation State Configuration**: Before you can apply a desired state to a machine, you need a configuration. This configuration defines the desired state. 2. **Compile a configuration into a node configuration**: After uploading the configuration, you need to compile it. This process turns the human-readable configuration into a format that can be read and applied by the target machines (nodes). 3. **Check the compliance status of the node**: After the node configuration is applied to machines, you can regularly check the compliance status to ensure that the machines adhere to the defined desired state. If they drift from the desired state, Azure Automation State Configuration can correct them, depending on how you've set it up.

SecExams

Question #162

You have an Azure Resource Manager template named Template1 that is used to deploy an Azure virtual machine.

Template1 contains the following text:

```
"location": {
    "type": "String",
    "defaultValue": "eastus",
    "allowedValues": [
        "canadacentral",
        "eastus",
        "westeurope",
        "westus" ]
}
```

The variables section in Template1 contains the following text:

"location": "westeurope"

The resources section in Template1 contains the following text:

```
"type": "Microsoft.Compute/virtualMachines",
"apiVersion": "2018-10-01",
"name": "[variables('vmName')]",
"location": "westeurope",
```

You need to deploy the virtual machine to the West US location by using Template1.

What should you do?

A) Modify the location in the resources section to westus (Correct Answer)

B) Select West US during the deployment

C) Modify the location in the variables section to westus

Explanation

Correct Answer:
A

Community Discussion

Correct Answer: A You can change the location in resources. Parameters used to define the value of some variables to be able to use in different places in the template resources. Resources are used only for complicated expressions. In any case, RM will only deploy from resources. In case the value is not mentioned directly, then it will check parameters if it is specified in the resources. Based on this question, the value of location is defined directly in resources. so you change the resources location value. Use location parameter. To allow flexibility when deploying your template, use a parameter to specify the location for resources. Set the default value of the parameter to resourceGroup().location. Reference: https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/resource-location?tabs=azure-powershell https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/template-syntax#resources

Correct Answer A: You can change the location in resources. Parameters used to define the value of some variables to be able to use in different places in the template resources. Resources are used only for complicated expressions. In any case, RM will only deploy from resources. In case the value is not mentioned directly, then it will check parameters if it is specified in the resources. Based on this question, the value of location is defined directly in resources. so you change the resources location value

Came in my exam today 17/05/23

Correct Answer A, came out in my exam today 08 April 2023.

Part of Exam Question

SecExams

Question #163

You create an App Service plan named Plan1 and an Azure web app named webapp1.

You discover that the option to create a staging slot is unavailable.

You need to create a staging slot for Plan1.

What should you do first?

A) From Plan1, scale up the App Service plan (Correct Answer)

B) From webapp1, modify the Application settings

C) From webapp1, add a custom domain

D) From Plan1, scale out the App Service plan

Explanation

Correct Answer:
A
The app must be running in the Standard, Premium, or Isolated tier in order for you to enable multiple deployment slots.
If the app isn't already in the Standard, Premium, or Isolated tier, you receive a message that indicates the supported tiers for enabling staged publishing. At this point, you have the option to select Upgrade and go to the Scale tab of your app before continuing.
Scale up: Get more CPU, memory, disk space, and extra features like dedicated virtual machines (VMs), custom domains and certificates, staging slots, autoscaling, and more.
Incorrect:
Scale out: Increase the number of VM instances that run your app. You can scale out to as many as 30 instances
Reference:
https://docs.microsoft.com/en-us/azure/app-service/deploy-staging-slots https://docs.microsoft.com/en-us/azure/app-service/manage-scale-up

Community Discussion

Correct Answer: A The app must be running in the Standard, Premium, or Isolated tier in order for you to enable multiple deployment slots. If the app isn't already in the Standard, Premium, or Isolated tier, you receive a message that indicates the supported tiers for enabling staged publishing. At this point, you have the option to select Upgrade and go to the Scale tab of your app before continuing. Scale up: Get more CPU, memory, disk space, and extra features like dedicated virtual machines (VMs), custom domains and certificates, staging slots, autoscaling, and more. Scale out: Increase the number of VM instances that run your app. You can scale out to as many as 30 instances Reference: https://docs.microsoft.com/en-us/azure/app-service/deploy-staging-slots https://docs.microsoft.com/en-us/azure/app-service/manage-scale-up

correct . For more read https://docs.microsoft.com/en-us/azure/app-service/manage-scale-up

Yes A, and this is a better link: https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/azure-subscription-service-limits#app-service-limits

Yes A, and this is a better link: https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/azure-subscription-service-limits#app-service-limits

Selected Answer: A

A) "From Plan1, scale up the App Service Plan" "When you deploy your web app, web app on Linux, mobile back end, or API app to Azure App Service, you can use a separate deployment slot instead of the default production slot when you're running in the Standard, Premium, or Isolated App Service plan tier. " - https://docs.microsoft.com/en-us/azure/app-service/deploy-staging-slots

Question #164

You plan to move a distributed on-premises app named App1 to an Azure subscription.
After the planned move, App1 will be hosted on several Azure virtual machines.
You need to ensure that App1 always runs on at least eight virtual machines during planned Azure maintenance.
What should you create?

A) one virtual machine scale set that has 10 virtual machines instances
B) one Availability Set that has three fault domains and one update domain
C) one Availability Set that has 10 update domains and one fault domain (Correct Answer)
D) one virtual machine scale set that has 12 virtual machines instances

Explanation

Correct Answer:
C
An update domain is a logical group of underlying hardware that can undergo maintenance or be rebooted at the same time. As you create VMs within an availability set, the Azure platform automatically distributes your VMs across these update domains. This approach ensures that at least one instance of your application always remains running as the Azure platform undergoes periodic maintenance.
Reference:
http://www.thatlazyadmin.com/azure-fault-update-domains/

Community Discussion

Correct Answer: A VM Scale Set consists of a set of identically configured VMs. Availability Set consists of a set of discrete VMs. No more than 20% of the Scale Set upgrading at any

time, then 2 machines out of 10 will have maintenance, the 8 remaining VMs will be up. Virtual machine scale sets are created with five fault domains by default in Azure regions with no zones. For the regions that support zonal deployment of virtual machine scale sets and this option is selected, the default value of the fault domain count is 1 for each of the zones. FD=1 in this case implies that the VM instances belonging to the scale set will be spread across many racks on a best effort basis. Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/manage-availability https://docs.microsoft.com/en-us/learn/modules/build-app-with-scale-sets/2-features-benefits-virtual-machine-scale-sets https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-automatic-upgrade

Answer is wrong. The correct Answer is A. First: in case you created on fault domain, you are limited with one update domain. You can test this. Second: By default, Azure uses 5 update domains and up to 3 fault domains. So, In case you created 10 vm in scale set. then you will have 2 vm in each update domain. So once one update domain is not available, then you get 4 domains with 8 vms as required.

Question says "during planned Azure maintenance" this has nothing to do with Scale set definition so i think C is correct we need Availability set nor Scale set

Question says "during planned Azure maintenance" this has nothing to do with Scale set definition so i think C is correct we need Availability set nor Scale set

Answer: C is correct. By Default 5 update domain but can have up to 20 update domain. "Within an availability set, individual VMs are spread across up to 20 update domains. During scheduled maintenance, only one update domain is updated at any given time. Update domains aren't necessarily updated sequentially." https://docs.microsoft.com/en-us/azure/virtual-machines/maintenance-and-updates?bc=https%3A%2F%2Fdocs.microsoft.com%2Fen-us%2Fazure%2Fbread%2Ftoc.json&toc=https%3A%2F%2Fdocs.microsoft.com%2Fen-us%2Fazure%2Fvirtual-machine-scale-sets%2Ftoc.json

SecExams

Question #165

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1 that runs Windows Server 2016.
You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.
Solution: You create an event subscription on VM1. You create an alert in Azure Monitor and specify VM1 as the source
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Instead: You create an Azure Log Analytics workspace and configure the data settings. You install the Microsoft Monitoring Agent on VM1. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview

Community Discussion

Correct Answer: B - No You need to specify Log Analytics as the source for this alert, and not the VM as source for the alert. 1. You create an Azure Log Analytics workspace and configure the data settings. 2. You install the Microsoft Monitoring Agent on VM1. 3. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source. Reference: https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview

I can confirm, answer is correct.

this question was there on 16/03/2022 with same question and passed with 900 percent

Selected Answer: B

B) "No" You need to create a Log Analytics Workspace. Reference: https://docs.microsoft.com/en-us/azure/azure-monitor/agents/agents-overview#install-the-agent-and-configure-data-collection

Took the exam today on 17 Oct. This question came out. Ans: No

Question #166

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1. VM1 was deployed by using a custom Azure Resource Manager template named ARM1.json.
You receive a notification that VM1 will be affected by maintenance.
You need to move VM1 to a different host immediately.
Solution: From the Overview blade, you move the virtual machine to a different subscription.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
You would need to redeploy the VM.
Reference:

https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node

Community Discussion

Correct Answer: B - No Changing Subscription won't affect the downtime, it will just you change the billing. You would need to redeploy the VM. After you redeploy a VM, the temporary disk is lost, and dynamic IP addresses associated with virtual network interface are updated. From Overview there is no option to move the VM to another hardware to skip the maintenance. Ideally you need an Availability Set and defining the Update Domains. Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node

Answer is correct . NO (B) Changing Subscription won't change any change for the downtime, Just you change the billing

I took Exam of Azure- 104 at 27/2/2023 I score 920 points out of 1000 points. This was on it and my answer was: B there are many version of this showing on the exam. the only right answer is Redeploy.

I hope MS can automatically move it to another hardware/ do maintenance once the VM is deallocated.

I hope MS can automatically move it to another hardware/ do maintenance once the VM is deallocated.

SecExams

Question #167

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1. VM1 was deployed by using a custom Azure Resource Manager template named ARM1.json.
You receive a notification that VM1 will be affected by maintenance.
You need to move VM1 to a different host immediately.
Solution: From the Redeploy blade, you click Redeploy.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
When you redeploy a VM, it moves the VM to a new node within the Azure infrastructure and then powers it back on, retaining all your configuration options and associated resources.
References:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node

Community Discussion

Correct Answer: A - Yes When you redeploy a VM, it moves the VM to a new node within the Azure infrastructure and then powers it back on, retaining all your configuration options and associated resources. Use the Azure portal. Select the VM you wish to redeploy, then select the Redeploy button in the Settings blade. You may need to scroll down to see the Support and Troubleshooting section that contains the 'Redeploy' button. Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node

Answer Correct. YES (A) The best solution , it will redeploy in a different location within Azure infrastructure in the same region

I used free version access for this site and it helped me pass the exam. Some questions that I had on the exams, I took the exam more than once, are not available under the free tier access, but 80% of the questions came from here. I do recommend investing a bit of money and getting full access to this site. I didn't memorise answers but analysed them and studied as Microsoft does tweak them a bit. This Q was on the exam.

I took Exam of Azure- 104 at 27/2/2023 I score 920 points out of 1000 points. This was on it and my answer was: A

This question is came up today on 3/20/2022

SecExams

Question #168

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1. VM1 was deployed by using a custom Azure Resource Manager template named ARM1.json.
You receive a notification that VM1 will be affected by maintenance.
You need to move VM1 to a different host immediately.
Solution: From the Update management blade, you click Enable.
Does this meet the goal?

A) Yes

B) No (Correct Answer)

Explanation

Correct Answer:
B
You would need to redeploy the VM.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node

Community Discussion

Correct Answer: B - No You would need to redeploy the VM. Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node

Answer is Correct. NO (B)

Simular question set was on todays exam. (7th April 2023)

Redeploying on the portal is very easy but you're using Powershell: Set-AzVM -ResourceGroup MyResourcesGroup -Name MyVM -redeploy

Selected Answer: B

You would need to redeploy the VM.

Question #169

You have an Azure subscription that contains a web app named webapp1.
You need to add a custom domain named www.contoso.com to webapp1.
What should you do first?

A) Create a DNS record (Correct Answer)
B) Add a connection string
C) Upload a certificate.
D) Stop webapp1.

Explanation

Correct Answer:
A
You can use either a CNAME record or an A record to map a custom DNS name to App Service.
Reference:
https://docs.microsoft.com/en-us/Azure/app-service/app-service-web-tutorial-custom-domain

Community Discussion

Correct Answer: A You can use either a CNAME record or an A record to map a custom DNS name to App Service. You should use CNAME records for all custom DNS names except root domains (for example, contoso.com). For root domains, use A records.
Reference: https://docs.microsoft.com/en-us/Azure/app-service/app-service-web-tutorial-custom-domain

Answer is correct. A.

Selected Answer: A

A is correct U can use either a CNAME record or an A record to map a custom DNS name to App Service and as per traditional AD DS, always best use CNAMEs for custom records except the root record Also as NOTE: dont confuse this app service custom domain with Azure custom domains where the later requires either MX or TXT record

On exam 04/12/2022. A answer correct

This question came in the exam today 8/Mar/2022. I passed the exam, 95% questions came from here.

SecExams

Question #170

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Region
RG1	Resource group	West US
RG2	Resource group	East Asia
storage1	Storage account	West US
storage2	Storage account	East Asia
VM1	Virtual machine	West US
VNET1	Virtual network	West US
VNET2	Virtual network	East Asia

VM1 connects to VNET1.
You need to connect VM1 to VNET2.
Solution: You move VM1 to RG2, and then you add a new network interface to VM1.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Instead you should delete VM1. You recreate VM1, and then you add the network interface for VM1.
Note: When you create an Azure virtual machine (VM), you must create a virtual network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot change the VNet.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview

Community Discussion

Correct Answer: B - No Instead, you should delete VM1. Then recreate VM1 and add the network interface for VM1. To migrate a VM from a VNET to another VNET. The only option is to delete the VM and redeploy it using a new NIC and NIC connected to VNET2. Note: When you create an Azure Virtual Machine (VM), you must create a Virtual Network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot change the VNet. You can also change the size of a VM. Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview

If you create a VM and later want to migrate it into a VNet, it is not a simple configuration change. You must redeploy the VM into the VNet. The easiest way to redeploy is to delete the VM, but not any disks attached to it, and then re-create the VM using the original disks in the VNet.

Selected Answer: B

i Luv Honey because it is B Remember this: Network interface ****(VM <--> VNET <---> NIC. All the three resources MUST be in the same location)***, so Before creating a network interface, you must have an existing virtual network in the same location and subscription you create a network interface in.

Selected Answer: B

B) "No" The only way to change the VNET from a VM is by re-creating the VM in the desired VNET. Reference: https://docs.microsoft.com/en-us/answers/questions/130410/how-to-change-the-vnet-of-a-vm.html

Question appeared in exam today, April 7 2022

SecExams

Question #171

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Region
RG1	Resource group	West US
RG2	Resource group	East Asia
storage1	Storage account	West US
storage2	Storage account	East Asia
VM1	Virtual machine	West US
VNET1	Virtual network	West US
VNET2	Virtual network	East Asia

VM1 connects to VNET1.
You need to connect VM1 to VNET2.
Solution: You delete VM1. You recreate VM1, and then you create a new network interface for VM1 and connect it to VNET2.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
You should delete VM1. You recreate VM1, and then you add the network interface for VM1.
Note: When you create an Azure virtual machine (VM), you must create a virtual network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot change the VNet.

Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview

Community Discussion

Correct Answer: A - Yes You should delete VM1. Then recreate VM1 and add the network interface for VM1. To migrate a VM from a VNET to another VNET. The only option is to delete the VM and redeploy it using a new NIC and NIC connected to VNET2. Note: When you create an Azure Virtual Machine (VM), you must create a Virtual Network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot change the VNet. You can also change the size of a VM. Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview

Answer is correct. YES (A). To migrate a VM from a VNET to another VNET. The only option is to delete the VM and redeploy it using a new NIC and NIC connected to VNET2

We should move the OSdisk to destination region and then creating new VM will work.

We should move the OSdisk to destination region and then creating new VM will work.

We should move the OSdisk to destination region and then creating new VM will work.

SecExams

Question #172

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Region
RG1	Resource group	West US
RG2	Resource group	East Asia
storage1	Storage account	West US
storage2	Storage account	East Asia
VM1	Virtual machine	West US
VNET1	Virtual network	West US
VNET2	Virtual network	East Asia

VM1 connects to VNET1.
You need to connect VM1 to VNET2.
Solution: You turn off VM1, and then you add a new network interface to VM1.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Instead you should delete VM1. You recreate VM1, and then you add the network interface for VM1.
Note: When you create an Azure virtual machine (VM), you must create a virtual network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot change the VNet.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview

Community Discussion

Correct Answer: B - No Instead, you should delete VM1. Then recreate VM1 and add the network interface for VM1. To migrate a VM from a VNET to another VNET. The only option is to delete the VM and redeploy it using a new NIC and NIC connected to VNET2. Note: When you create an Azure Virtual Machine (VM), you must create a Virtual Network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot change the VNet. You can also change the size of a VM. Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview

The answer is correct . NO (B). Even if you added a new network interface, this interface will be connected to the same VNET1.

Correct specified in the constraints page at the bottom of this link: https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface-vm "You can connect network interfaces in the same VM to different subnets within a virtual network. However, the network interfaces must all be connected to the same virtual network."

Correct specified in the constraints page at the bottom of this link: https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface-vm "You can connect network interfaces in the same VM to different subnets within a virtual network. However, the network interfaces must all be connected to the same virtual network."

No is correct

SecExams

Question #173

HOTSPOT -

You have an Azure subscription named Subscription1 that contains the quotas shown in the following table.

Quota	Location	Usage
Standard BS Family vCPUs	West US	0 of 20
Standard D Family vCPUs	West US	0 of 20
Total Regional vCPUs	West US	0 of 20

You deploy virtual machines to Subscription1 as shown in the following table.

Name	Size	vCPUs	Location	Status
VM1	Standard_B2ms	2	West US	Running
VM2	Standard_B16ms	16	West US	Stopped (Deallocated)

You plan to deploy the virtual machines shown in the following table.

Name	Size	vCPUs
VM3	Standard_B2ms	1
VM4	Standard_D4s_v3	4
VM5	Standard_B16ms	16

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can deploy VM3 to West US.	○	○
You can deploy VM4 to West US.	○	○
You can deploy VM5 to West US.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can deploy VM3 to West US.	○	○
You can deploy VM4 to West US.	○	○
You can deploy VM5 to West US.	○	○

The total regional vCPUs is 20 so that means a maximum total of 20 vCPUs across all the different VM sizes. The deallocated VM with 16 vCPUs counts towards the total. VM20 and VM1 are using 18 of the maximum 20 vCPUs leaving only two vCPUs available.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/quotas

Community Discussion

Correct Answer: Total regional vCPUs = 20 2 vCPUs (VM1) + 16 vCPUs (VM20) = 18 vCPUs, which means that only 2 vCPUs left to exceed usage limit. Box 1: Yes We can add 1 vCPU. 2 vCPUs (VM1) + 16 vCPUs (VM20) + 1 vCPU (VM3) = 19 vCPUs Box 2: No We cannot add 4 vCPUs. 2 vCPUs (VM1) + 16 vCPUs (VM20) + 4 vCPU (VM4) = 22 vCPUs Box 3: No We cannot add 16 vCPU. 2 vCPUs (VM1) + 16 vCPUs (VM20) + 16 vCPU (VM5) = 34 vCPUs Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/windows/quota

Correct YES NO NO The deallocated VM are still using and reserving the used 16 vCPU + 2 vCPU ,so in total we only have 2 vCPU available in the region

it makes sense.. Thanks

it makes sense.. Thanks

Correct - Y,N,N. I tested here in the lab enviroment! On thing to be clear here is that people can be confused about VM's Family Bs and Ds vCPUs. They're different for sure, but Microsoft says: "The vCPU quotas for virtual machines and scale sets are arranged in two tiers for each subscription, in each region. The first tier is the Total Regional vCPUs,

and the second tier is the various VM size family cores such as the D-series vCPUs. Anytime a new VM is deployed the vCPUs for the VM must not exceed the vCPU quota for the VM size family or the total regional vCPU quota. If you exceed either of those quotas, the VM deployment won't be allowed. " "Quota is calculated based on the total number of cores in use both allocated and deallocated. If you need additional cores, request a quota increase or delete VMs that are no longer needed." https://learn.microsoft.com/en-us/azure/virtual-machines/quotas

SecExams

Question #174

SecExams

HOTSPOT -

You have an Azure subscription that contains an Azure Availability Set named WEBPROD-AS-USE2 as shown in the following exhibit.

```
PS Azure:\> az vm availability-set list –g RG1
[
  {
    "id": "/subscriptions/8372f433-2dcd-4361-b5ef-5b188fed87d0/resourceGroups/
RG1/providers/Microsoft.Compute/availabilitySets/WEBPROD-AS-USE2",
    "location": "eastus2",
    "name": "WEBPROD-AS-USE2",
    "platformFaultDomainCount": 2,
    "platformUpdateDomainCount": 10,
    "proximityPlacementGroup": null,
    "resourceGroup": "RG1",
    "sku": {
      "capacity": null,
      "name": "Aligned",
      "tier": null
    },
    "statuses": null,
    "tags": {},
    "type": "Microsoft.Compute/availabilitySets",
    "virtualMachines": [ ]
  }
]
Azure:/
```

You add 14 virtual machines to WEBPROD-AS-USE2.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

When Microsoft performs planned maintenance in East US 2, the maximum number of unavailable virtual machines will be **[answer choice]**.

- 2
- 7
- 10
- 14

If the server rack in the Azure datacenter that hosts WEBPROD-AS-USE2 experiences a power failure, the maximum number of unavailable virtual machines will be **[answer choice]**.

- 2
- 7
- 10
- 14

Explanation

Correct Answer:

Answer Area

When Microsoft performs planned maintenance in East US 2, the maximum number of unavailable virtual machines will be **[answer choice]**.

- 2
- 7
- 10
- 14

If the server rack in the Azure datacenter that hosts WEBPROD-AS-USE2 experiences a power failure, the maximum number of unavailable virtual machines will be **[answer choice]**.

- 2
- 7
- 10
- 14

Box 1: 2 -
There are 10 update domains. The 14 VMs are shared across the 10 update domains so four update domains will have two VMs and six update domains will have one VM. Only one update domain is rebooted at a time. Therefore, a maximum of two VMs will be offline.

Box 2: 7 -
There are 2 fault domains. The 14 VMs are shared across the 2 fault domains, so 7 VMs in each fault domain. A rack failure will affect one fault domain so 7 VMs will be offline.

Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/manage-availability

Community Discussion

Correct Answer: Box 1: 2 There are 10 update domains. The 14 VMs are shared across the 10 update domains, so 4 update domains will have 2 VMs and 6 update domains will have 1 VM. Only one update domain is rebooted at a time. D1 D2 D3 D4 D5 D6 D7 D8 D9 D10 vm1 vm2 vm3 vm4 vm5 vm6 vm7 vm8 vm9 vm10 vm11 vm12 vm13 vm14 Maximum Down = 2 Minimum Down = 1 Box 2: 7 There are 2 fault domains. The 14 VMs are shared across the 2 fault domains, so 7 VMs in each fault domain. A rack failure will affect one fault domain so 7 VMs will be offline. 14 VM in 2 Fault Domain Rack 1 Rack 2 vm1 vm8 vm2 vm9 vm3 vm10 vm4 vm11 vm5 vm12 vm6 vm13 vm7 vm14 Maximum Down = 7 Minimum Down = 7

Box 1: 2 - There are 10 update domains. The 14 VMs are shared across the 10 update domains so four update domains will have two VMs and six update domains will have one VM. Only one update domain is rebooted at a time. Therefore, a maximum of two VMs will be offline. Box 2: 7 - There are 2 fault domains. The 14 VMs are shared across the 2 fault domains, so 7 VMs in each fault domain. A rack failure will affect one fault domain so 7 VMs will be offline.

You are a legend brother. I read their god damn documentation over and over and could not get it through my thick head. Thank you so very much for your well explained, throughout and concise answers all over this course.

You are a legend brother. I read their god damn documentation over and over and could not get it through my thick head. Thank you so very much for your well explained, throughout and concise answers all over this course.

Why Microsoft doesn't hire people like Mlantonis to restructure the Microsoft Learn.....

SecExams

Question #175

You deploy an Azure Kubernetes Service (AKS) cluster named Cluster1 that uses the IP addresses shown in the following table.

IP address	Assigned to
131.107.2.1	Load balancer front end
192.168.10.2	Kubernetes DNS service
172.17.7.1	Docket bridge address
10.0.10.11	Kubernetes cluster node

You need to provide internet users with access to the applications that run in Cluster1.
Which IP address should you include in the DNS record for Cluster1?

A) 131.107.2.1 (Correct Answer)
B) 10.0.10.11
C) 172.17.7.1
D) 192.168.10.2

Explanation

Correct Answer:
A

Community Discussion

Correct Answer. (A). To be able to access applications on kubernetes , you need a application Load Balancer created by Azure which have public ip.

Correct Answer: A To be able to access applications on Kubernetes, you need an application Load Balancer created by Azure which have public IP. Note: 10.X.X.X range is private. Reference: https://docs.microsoft.com/en-us/azure/aks/load-balancer-standard

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. Answered A

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. Answered A

Appreciate! Help a lots.

Question #176

You have a deployment template named Template1 that is used to deploy 10 Azure web apps.
You need to identify what to deploy before you deploy Template1. The solution must minimize Azure costs.
What should you identify?

A) five Azure Application Gateways
B) one App Service plan (Correct Answer)
C) 10 App Service plans
D) one Azure Traffic Manager
E) one Azure Application Gateway

Explanation

Correct Answer:
B
You create Azure web apps in an App Service plan.
Reference:
https://docs.microsoft.com/en-us/azure/app-service/overview-hosting-plans

Community Discussion

Correct Answer: B Creating one App Service Plan, you can support up to 10 Web Apps. Adding any of the other resources are pointless and not noted as a requirement.
Reference: https://docs.microsoft.com/en-us/azure/app-service/overview-hosting-plans

Correct: you only need a single App service plan, as your web apps will share the service plans resource availability. Adding any of the other resources are pointless and not noted as a requirement.

Looks like the number changed: It now ranges from 8 to 64: https://docs.microsoft.com/en-us/azure/app-service/overview-hosting-plans#should-i-put-an-app-in-a-new-plan-or-an-existing-plan

Looks like the number changed: It now ranges from 8 to 64: https://docs.microsoft.com/en-us/azure/app-service/overview-hosting-plans#should-i-put-an-app-in-a-new-plan-or-an-existing-plan

Selected Answer: B

B) "one App Service Plan" One App Service Plan can a lot of Web Apps based on the SKU chosen: https://docs.microsoft.com/en-us/azure/app-service/overview-hosting-plans#should-i-put-an-app-in-a-new-plan-or-an-existing-plan

SecExams

Question #177

SecExams

HOTSPOT -

You plan to deploy an Azure container instance by using the following Azure Resource Manager template.

```
{
    "type": "Microsoft.ContainerInstance/containerGroups",
    "apiVersion": "2018-10-01",
    "name": "webprod",
    "location": "westus",
    "properties": {
        "containers": [
            {
                "name": "webprod",
                "properties": {
                    "image": "microsoft/iis:nanoserver",
                    "ports": [
                        {
                            "protocol": "TCP",
                            "port": 80
                        }
                    ],
                    "environmentVariables": [ ],
                    "resources": {
                        "requests": {
                            "memoryInGB": 1.5,
                            "cpu": 1
                        }
                    }
                }
            }
        ],
        "restartPolicy": "OnFailure",
        "ipAddress": {
            "ports": [
                {
                    "protocol": "TCP",
                    "port": 80
                }
            ],
            "ip": "[parameters('IPAddress')]",
            "type": "Public"
        },
        "osType": "Windows"
    }
}
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the template.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Internet users **[answer choice].**

- can connect to the container from any device
- cannot connect to the container
- can only connect to the container from devices that run Windows

If Internet Information Services (IIS) in the container fail, **[answer choice].**

- the container will restart automatically
- the container will only restart manually
- the container must be redeployed

Explanation

Correct Answer:

Answer Area

Internet users **[answer choice].**

- can connect to the container from any device
- cannot connect to the container
- can only connect to the container from devices that run Windows

If Internet Information Services (IIS) in the container fail, **[answer choice].**

- the container will restart automatically
- the container will only restart manually
- the container must be redeployed

Community Discussion

Correct. Can connect from any dev. Will restart autom.

1) Internet users "can connect to the container from any device" 2) If Internet Information Services (IIS) in the container fails, "the container will restart automatically". Explanation: No Access restrictions are specified. The "restartPolicy" is set as "OnFailure".

because the os type is windows, if you create Linux container then the os type will be Linux

because the os type is windows, if you create Linux container then the os type will be Linux

because the os type is windows, if you create Linux container then the os type will be Linux

Question #178

You have an Azure subscription that contains a virtual machine named VM1. VM1 hosts a line-of-business application that is available 24 hours a day. VM1 has one network interface and one managed disk. VM1 uses the D4s v3 size.
You plan to make the following changes to VM1:
✑ Change the size to D8s v3.
✑ Add a 500-GB managed disk.
✑ Add the Puppet Agent extension.
✑ Enable Desired State Configuration Management.
Which change will cause downtime for VM1?

A) Enable Desired State Configuration Management
B) Add a 500-GB managed disk
C) Change the size to D8s v3 (Correct Answer)
D) Add the Puppet Agent extension

Explanation

Correct Answer:
C
While resizing the VM it must be in a stopped state.
Reference:
https://azure.microsoft.com/en-us/blog/resize-virtual-machines/

Community Discussion

Correct Answer: C While resizing, the VM must be in a stopped state, therefore there will be a downtime. Reference: https://azure.microsoft.com/en-us/blog/resize-virtual-machines

Correct answer. Resizing VM will cause downtime.

Got this question on today's exam. Yes, I passed. Thanks to you guys!

Nowadays you don't need to stop the vm prior to resizing, even if the vm is running, you may resize, but it will restart the vm causing downtime anyway. Also another advantage of stopping vm prior to resizing is that it gives more choices to choose from in the vm list.

Nowadays you don't need to stop the vm prior to resizing, even if the vm is running, you may resize, but it will restart the vm causing downtime anyway. Also another advantage of stopping vm prior to resizing is that it gives more choices to choose from in the vm list.

Question #179

You have an app named App1 that runs on an Azure web app named webapp1.
The developers at your company upload an update of App1 to a Git repository named Git1.
Webapp1 has the deployment slots shown in the following table.

Name	Function
webapp1-prod	Production
webapp1-test	Staging

You need to ensure that the App1 update is tested before the update is made available to users.
Which two actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Swap the slots (Correct Answer)
B) Deploy the App1 update to webapp1-prod, and then test the update
C) Stop webapp1-prod
D) Deploy the App1 update to webapp1-test, and then test the update (Correct Answer)
E) Stop webapp1-test

Explanation

Correct Answer:
AD

Community Discussion

Answer is correct. 1.Deploy the App to “webapp1-test” which is staging environment and test it there. 2.Once the test is success swap the slots, so the new changes will be available under production.

The answer is correct. - Deploying an app to a slot first(Test is this case) and swapping it into production makes sure that all instances of the slot are warmed up before being swapped into production. - After a swap, the slot with previously staged app now has the previous production app. If the changes swapped into the production slot aren't as you expect, you can perform the same swap immediately to get your "last known good site" back.

this guy put this note in every question in site

this guy put this note in every question in site

On the Exam 3/29/23.

SecExams

Question #180

You have an Azure subscription named Subscription1 that has the following providers registered:

- Authorization
- Automation
- Resources
- Compute
- KeyVault
- Network
- Storage
- Billing
- Web

Subscription1 contains an Azure virtual machine named VM1 that has the following configurations:

- Private IP address: 10.0.0.4 (dynamic)
- Network security group (NSG): NSG1
- Public IP address: None
- Availability set: AVSet
- Subnet: 10.0.0.0/24
- Managed disks: No
- Location: East US

You need to record all the successful and failed connection attempts to VM1.
Which three actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Enable Azure Network Watcher in the East US Azure region. (Correct Answer)
B) Add an Azure Network Watcher connection monitor.
C) Register the MicrosoftLogAnalytics provider.
D) Create an Azure Storage account.
E) Register the Microsoft.Insights resource provider. (Correct Answer)
F) Enable Azure Network Watcher flow logs. (Correct Answer)

Explanation

Correct Answer:
AEF

You can log network traffic that flows through an NSG with Network Watcher's NSG flow log capability.
✑ In the Azure portal, enable Network Watcher
✑ Register Insights provider. NSG flow logging requires the Microsoft.Insights provider.
✑ Enable NSG flow log. NSG flow log data is written to an Azure Storage account, Subscription1 has storage.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-nsg-flow-logging-portal

Community Discussion

Selected Answer: DEF

https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview When you create or update a virtual network in your subscription, Network Watcher will be enabled automatically in your Virtual Network's region. There is no impact to your resources or associated charge for automatically enabling Network Watcher. For more information, see Network Watcher create. https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-nsg-flow-logging-portal Create a VM with a network security group Enable Network Watcher (done by default with the vnet/subnet creation) -- and register the Microsoft.Insights provider ---------todo Enable a traffic flow log for an NSG, using Network Watcher's NSG flow log capability --todo BUT ! NSG flow log data is written to an Azure Storage account. Complete the following steps to create a storage account for the log data. So you need to create a storage account before enable the NSG flow Download logged data View logged data

Answer is correct so AEF. 1.Create a VM with a network security group 2.Enable Network Watcher and register the Microsoft.Insights provider 3.Enable a traffic flow log for an NSG, using Network Watcher's NSG flow log capability 4.Download logged data 5.View logged data https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-nsg-flow-logging-portal

It is mentioned that a VM is already created. You cannot create a VM when there is nog VNET. So my conclusion is that the VNET is there, and so Network Watcher already enabled. leaves DEF for answer.

It is mentioned that a VM is already created. You cannot create a VM when there is nog VNET. So my conclusion is that the VNET is there, and so Network Watcher already enabled. leaves DEF for answer.

It is mentioned that a VM is already created. You cannot create a VM when there is nog VNET. So my conclusion is that the VNET is there, and so Network Watcher already enabled. leaves DEF for answer.

Question #181

You need to deploy an Azure virtual machine scale set that contains five instances as quickly as possible.
What should you do?

A) Deploy five virtual machines. Modify the Availability Zones settings for each virtual machine.
B) Deploy five virtual machines. Modify the Size setting for each virtual machine.
C) Deploy one virtual machine scale set that is set to VM (virtual machines) orchestration mode.
D) Deploy one virtual machine scale set that is set to ScaleSetVM orchestration mode. (Correct Answer)

Explanation

Correct Answer:
D
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/orchestration-modes

Community Discussion

Answer is correct (D). the main idea is to create 5 VMs asap. To do this you should let Azure do it for you with the least steps. either by using ARM template which is not mentioned here or VM scale set. That leaves us with 2 options C or D. C is like unmanaged Scale set where you add the VMs manually to the scale set as a unmanaged group. while D is managed scale set by Azure where it is based on configuration set during the setup of the VM Scale set

Correct Answer: D ScaleSetVM orchestration mode: Virtual machine instances added to the scale set are based on the scale set configuration model. The virtual machine instance lifecycle - creation, update, deletion - is managed by the scale set. It the current default VMSS behavior. (Scale set VMs are created in a single shot). VM (virtual machines)

orchestration mode: Virtual machines created outside of the scale set can be explicitly added to the scale set. The orchestration mode VM will only create an empty VMSS without any instances, and you will have to manually add new VMs into it by specifying the VMSS ID during the creation of the VM. (Separately VMs are created and added to scale set later) Reference: https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/orchestration-modes

The oschestration mode have different names at the present: In flexible orchestration mode, you manually create and add a virtual machine of any configuration to the scale set. In uniform orchestration mode, you define a virtual machine model and Azure will generate identical instances based on that model. https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-orchestration-modes

The oschestration mode have different names at the present: In flexible orchestration mode, you manually create and add a virtual machine of any configuration to the scale set. In uniform orchestration mode, you define a virtual machine model and Azure will generate identical instances based on that model. https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-orchestration-modes

NAME HAS BEEN CHNAGED NEW NAME IS SOMTHING LIKE THIS FLEXIBLE ORCHESTRATION == VM ORCHASTRATION MODE UNIFORM ORCHESTRATION == SCALESETVM ORCHASTRATION MODE Answer according to this will be Uniform Orchastration Mode

SecExams

Question #182

You plan to create the Azure web apps shown in the following table.

Name	Runtime stack
WebApp1	.NET Core 3.1(LTS)
WebApp2	ASP.NET V4.8
WebApp3	PHP 7.3
WebApp4	Ruby 2.6

What is the minimum number of App Service plans you should create for the web apps?

A) 1 (Correct Answer)

B) 2

C) 3

D) 4

Explanation

Correct Answer:
A

Community Discussion

Correct Answer: B .NET Core 3.0: Windows and Linux ASP .NET V4.7: Windows only PHP 7.3: Windows and Linux Ruby 2.6: Linux only Also, you can't use Windows and Linux Apps in the same App Service Plan, because when you create a new App Service plan you have to choose the OS type. You can't mix Windows and Linux apps in the same App Service plan. So, you need 2 ASPs. Reference: https://docs.microsoft.com/en-us/azure/app-service/overview

Maybe it can but it's not listed as webapp runtime for windows: $ az webapp list-runtimes --os windows ["dotnet:7", "dotnet:6", "DOTNETCORE:3.1", "ASPNET:V4.8", "ASPNET:V3.5", "NODE:18LTS", "NODE:16LTS", "NODE:14LTS", "PHP:7.4", "java:1.8:Java SE:8", "java:11:Java SE:11", "java:17:Java SE:17", "java:1.8:TOMCAT:10.0", "java:11:TOMCAT:10.0", "java:17:TOMCAT:10.0", "java:1.8:TOMCAT:9.0", "java:11:TOMCAT:9.0", "java:17:TOMCAT:9.0", "java:1.8:TOMCAT:8.5", "java:11:TOMCAT:8.5", "java:17:TOMCAT:8.5"]

Maybe it can but it's not listed as webapp runtime for windows: $ az webapp list-runtimes --os windows ["dotnet:7", "dotnet:6", "DOTNETCORE:3.1", "ASPNET:V4.8", "ASPNET:V3.5", "NODE:18LTS", "NODE:16LTS", "NODE:14LTS", "PHP:7.4", "java:1.8:Java SE:8", "java:11:Java SE:11", "java:17:Java SE:17", "java:1.8:TOMCAT:10.0", "java:11:TOMCAT:10.0", "java:17:TOMCAT:10.0", "java:1.8:TOMCAT:9.0", "java:11:TOMCAT:9.0", "java:17:TOMCAT:9.0", "java:1.8:TOMCAT:8.5", "java:11:TOMCAT:8.5", "java:17:TOMCAT:8.5"]

Maybe it can but it's not listed as webapp runtime for windows: $ az webapp list-runtimes --os windows ["dotnet:7", "dotnet:6", "DOTNETCORE:3.1", "ASPNET:V4.8", "ASPNET:V3.5", "NODE:18LTS", "NODE:16LTS", "NODE:14LTS", "PHP:7.4", "java:1.8:Java SE:8", "java:11:Java SE:11", "java:17:Java SE:17", "java:1.8:TOMCAT:10.0", "java:11:TOMCAT:10.0", "java:17:TOMCAT:10.0", "java:1.8:TOMCAT:9.0", "java:11:TOMCAT:9.0", "java:17:TOMCAT:9.0", "java:1.8:TOMCAT:8.5", "java:11:TOMCAT:8.5", "java:17:TOMCAT:8.5"]

Maybe it can but it's not listed as webapp runtime for windows: $ az webapp list-runtimes --os windows ["dotnet:7", "dotnet:6", "DOTNETCORE:3.1", "ASPNET:V4.8",

"ASPNET:V3.5", "NODE:18LTS", "NODE:16LTS", "NODE:14LTS", "PHP:7.4", "java:1.8:Java SE:8", "java:11:Java SE:11", "java:17:Java SE:17", "java:1.8:TOMCAT:10.0", "java:11:TOMCAT:10.0", "java:17:TOMCAT:10.0", "java:1.8:TOMCAT:9.0", "java:11:TOMCAT:9.0", "java:17:TOMCAT:9.0", "java:1.8:TOMCAT:8.5", "java:11:TOMCAT:8.5", "java:17:TOMCAT:8.5"]

SecExams

Question #183

SecExams

HOTSPOT -

You have a pay-as-you-go Azure subscription that contains the virtual machines shown in the following table.

Name	Resource group	Daily cost
VM1	RG1	20 euros
VM2	RG2	30 euros

You create the budget shown in the following exhibit.

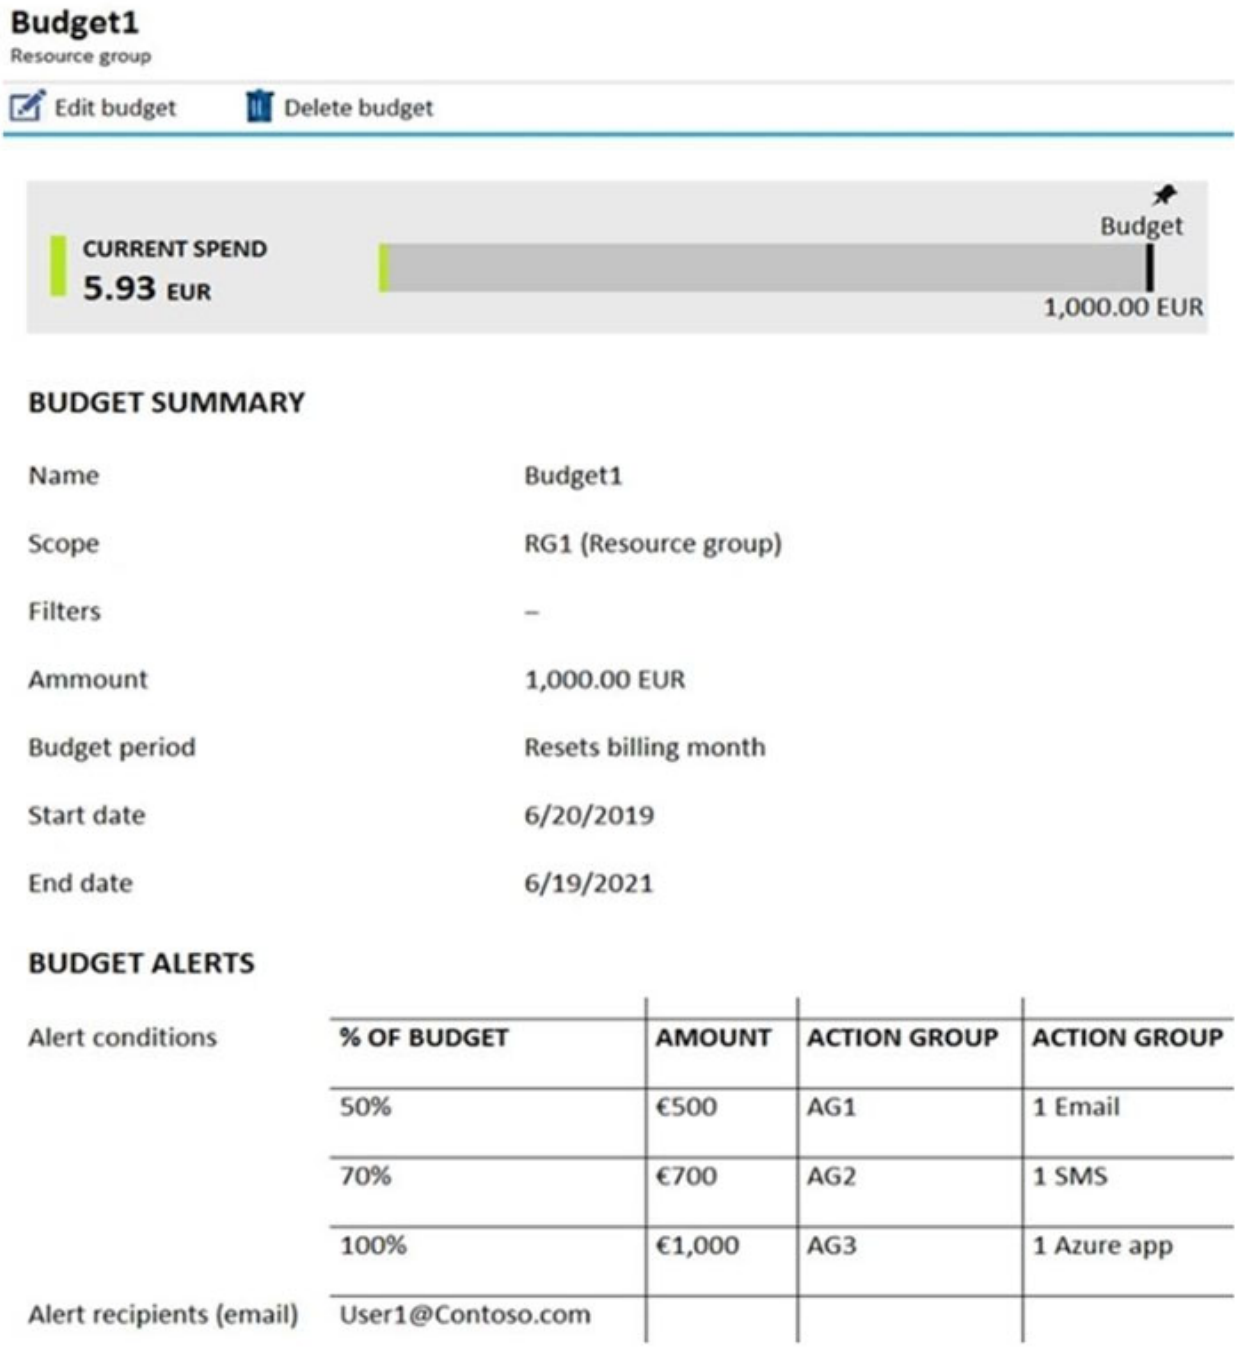

The AG1 action group contains a user named only.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

Hot Area:

Answer Area

When the maximum amount in Budget1 is reached, **[answer choice]**.

- VM1 and VM2 are turned off
- VM1 and VM2 continue to run
- VM1 is turned off, and VM2 continues to run

Based on the current usage costs of the virtual machines, **[answer choice]**.

- no email notifications will be sent each month
- one email notification will be sent each month
- two email notifications will be sent each month
- three email notifications will be sent each month

Explanation

Correct Answer:

Answer Area

When the maximum amount in Budget1 is reached, **[answer choice]**.

- VM1 and VM2 are turned off
- VM1 and VM2 continue to run
- VM1 is turned off, and VM2 continues to run

Based on the current usage costs of the virtual machines, **[answer choice]**.

- no email notifications will be sent each month
- one email notification will be sent each month
- two email notifications will be sent each month
- three email notifications will be sent each month

Box 1: VM1 and VM2 continue to run

The budget alerts are for Resource Group RG1, which include VM1, but not VM2. However, when the budget thresholds you've created are exceeded, only notifications are triggered. None of your resources are affected and your consumption isn't stopped.

Box 2: one email notification will be sent each month.

Budget alerts for Resource Group RG1, which include VM1, but not VM2.VM1 consumes 20 Euro/day. The 50%, 500 Euro limit, will be reached in 25 days, and an email will be sent. The 70% and 100% alert conditions will not be reached within a month, and they don't trigger email actions anyway.

Credit alerts: Credit alerts are generated automatically at 90% and at 100% of your Azure credit balance. Whenever an alert is generated, it's reflected in cost alerts and in the email sent to the account owners. 90% and 100% will not be reached though.

Reference:

https://docs.microsoft.com/en-us/azure/cost-management-billing/costs/cost-mgt-

alerts-monitor-usage-spending https://docs.microsoft.com/en-gb/azure/cost-management-billing/costs/tutorial-acm-create-budgets

Community Discussion

Correct Answer: Box 1: VM1 and VM2 continue to run The Budget's scope is RG1, so only VM1 will be handled. When the budget thresholds you've created are exceeded, only notifications are triggered. To stop resources, you need to setup additional things, none of which are mentioned in the question. Box 2: one email notification will be sent each month. Budget alerts have scope in Resource Group RG1, which includes VM1, but not VM2. VM1 consumes 20 Euro/day, so 20 euros * 30 days = 600 euros. The 50%, 500 Euro limit, will be reached in 25 days (25*20 = 500), so an email will be sent. The 70% and 100% alert conditions will not be reached within a month, and they don't trigger email actions anyway, because AG1 action group contains a user. Credit alerts: Credit alerts are generated automatically at 90% and at 100% of your Azure credit balance. Whenever an alert is generated, it's reflected in cost alerts and in the email sent to the account owners. 90% and 100% will not be reached though.

Answer is Wrong. Correct is - VM1 and VM2 continues to run. First the Alerts is managed only for VM1 in the scope of RG1. Second, when alert hits 100%, the action group is a Azure app, which I assume a Azure logic App. It is not clear what this app does. accordingly, we can assume no action to stop the VM as a spending limit. It is just an alert. - The second answer is wrong. the alert will send an two email notification , one based on Action group AG1 and another based on the alert recipients (the admin)

- VM1 and VM2 continue to run. When the budget thresholds you've created are exceeded, only notifications are triggered. None of your resources are affected and your consumption isn't stopped. https://docs.microsoft.com/en-us/azure/cost-management-billing/costs/tutorial-acm-create-budgets - Only one email will be sent each month. Only if you don't specify a particular action group, an email is sent to the alert recipients. https://www.codit.eu/blog/control-your-azure-costs-through-budget-alerts

- VM1 and VM2 continue to run. When the budget thresholds you've created are exceeded, only notifications are triggered. None of your resources are affected and your consumption isn't stopped. https://docs.microsoft.com/en-us/azure/cost-management-billing/costs/tutorial-acm-create-budgets - Only one email will be sent each month. Only if you don't specify a particular action group, an email is sent to the alert recipients. https://www.codit.eu/blog/control-your-azure-costs-through-budget-alerts

I selected one email based on the math, AG1 is reached but AG2 is not reached because 30 days of 20 dollars a day is only $600. Also even if AG2 was triggered it still wouldnt send out a 2nd email.

Question #184

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.
You need to view the date and time when the resources were created in RG1.
Solution: From the Subscriptions blade, you select the subscription, and then click Programmatic deployment.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
From the RG1 blade, click Deployments. You see a history of deployment for the resource group.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/template-tutorial-create-first-template?tabs=azure-powershell

Community Discussion

Correct Answer: B - No From the RG1 blade, click Deployments. You see a history of deployment for the resource group. Reference: https://docs.microsoft.com/en-us/azure/

azure-resource-manager/templates/template-tutorial-create-first-template?tabs=azure-powershell

No is the correct

Passed today. this is part of the exam. 4/23/22

came in today's exam 25/6/2022

Here's something I could only learn here. I often went to the Activity Log for the resource or in the Azure monitor. No wonder why it never found a good answer. :)

Question #185

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Region
RG1	Resource group	West US
RG2	Resource group	East Asia
storage1	Storage account	West US
storage2	Storage account	East Asia
VM1	Virtual machine	West US
VNET1	Virtual network	West US
VNET2	Virtual network	East Asia

VM1 connects to VNET1.
You need to connect VM1 to VNET2.
Solution: You create a new network interface, and then you add the network interface to VM1.
Does this meet the goal?

A) Yes

B) No (Correct Answer)

Explanation

Correct Answer:
B
You should delete VM1. You recreate VM1, and then you add the network interface for VM1.
Note: When you create an Azure virtual machine (VM), you must create a virtual network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot change the VNet.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview

Community Discussion

Correct Answer: B - No Instead, you should delete VM1. Then recreate VM1 and add the network interface for VM1. To migrate a VM from a VNET to another VNET. The only option is to delete the VM and redeploy it using a new NIC and NIC connected to VNET2. Note: When you create an Azure Virtual Machine (VM), you must create a Virtual Network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot change the VNet. You can also change the size of a VM.
Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview

Answer is correct. NO (B)

Was on exam 15/11/2021

this question was there on 16/03/2022 with same question and passed with 900 percent

q27, q28, q29 & q42 are in pack. [remember: Delete&Recreate!]

Question #186

You have an Azure Active Directory (Azure AD) tenant named adatum.com that contains the users shown in the following table.

Name	Role
User1	*None*
User2	Global administrator
User3	Cloud device administrator
User4	Intune administrator

Adatum.com has the following configurations:

✑ Users may join devices to Azure AD is set to User1.

✑ Additional local administrators on Azure AD joined devices is set to None.

You deploy Windows 10 to a computer named Computer1. User1 joins Computer1 to adatum.com.

You need to identify the local Administrator group membership on Computer1.

Which users are members of the local Administrators group?

A) User1 only
B) User2 only
C) User1 and User2 only (Correct Answer)
D) User1, User2, and User3 only
E) User1, User2, User3, and User4

Explanation

Correct Answer:
C
Users may join devices to Azure AD - This setting enables you to select the users who can register their devices as Azure AD joined devices. The default is All.
Additional local administrators on Azure AD joined devices - You can select the users that are granted local administrator rights on a device. Users added here are added to the Device Administrators role in Azure AD. Global administrators, here User2, in Azure AD and device owners are granted local administrator rights by default.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/devices/device-management-azure-portal

Community Discussion

Answer is correct . User 1 and User 2 only. First the only user who can join Azure AD devices is User 1 . since User1 is admin on machine. So, the machine can be added. Second, the ones that can be local admins on Windows 10 are managed under "Additional local administrators" , since this is not mentioned, so we can assume default. By default, the ones are global administrator and device owners (device administrators). This lead us to User1 and User2 only

ans : D, https://docs.microsoft.com/en-us/azure/active-directory/devices/assign-local-admin When you connect a Windows device with Azure AD using an Azure AD join, Azure AD adds the following security principals to the local administrators group on the device: The Azure AD global administrator role The Azure AD device administrator role The user performing the Azure AD join

It's the 'Azure AD joined device local administrator role' not the 'Cloud Device Administrator'. So C is correct. When you connect a Windows device with Azure AD using an Azure AD join, Azure AD adds the following security principals to the local administrators group on the device: The Azure AD global administrator role The Azure AD joined device local administrator role The user performing the Azure AD join

It's the 'Azure AD joined device local administrator role' not the 'Cloud Device Administrator'. So C is correct. When you connect a Windows device with Azure AD using an Azure AD join, Azure AD adds the following security principals to the local administrators group on the device: The Azure AD global administrator role The Azure AD joined device local administrator role The user performing the Azure AD join

correct answer

SecExams

Question #187

HOTSPOT -

You have Azure subscriptions named Subscription1 and Subscription2.

Subscription1 has following resource groups:

Name	Region	Lock type
RG1	West Europe	None
RG2	West Europe	Read Only

RG1 includes a web app named App1 in the West Europe location.

Subscription2 contains the following resource groups:

Name	Region	Lock type
RG3	East Europe	Delete
RG4	Central US	none

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
App1 can be moved to RG2	○	○
App1 can be moved to RG3	○	○
App1 can be moved to RG4	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
App1 can be moved to RG2	○	○
App1 can be moved to RG3	○	○
App1 can be moved to RG4	○	○

Box 1: No -
RG2 is read only. ReadOnly means authorized users can read a resource, but they cannot delete or update the resource.

Box 2: Yes -

Box 3: Yes -
Note:
App Service resources are region-specific and cannot be moved directly across regions. You can move the App Service resource by creating a copy of your existing App Service resource in the target region, then move your content over to the new app. You can then delete the source app and App Service plan.
To make copying your app easier, you can clone an individual App Service app into an App Service plan in another region.
Reference:
https://docs.microsoft.com/en-us/azure/app-service/manage-move-across-regions
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-limitations/app-service-move-limitations

Community Discussion

N,Y,Y. The first question was tested on Azure. Created RG1, RG2. both are in West Europe. RG2 has assigned READ-ONLY lock. Created web-App name App11223344 (same location as RG1,RG2) in RG1. Removing App11223344 to RG2 failed. ---------- {"code":"ResourceMovePolicyValidationFailed","message":"Resource move policy validation failed. Please see details. Diagnostic information: request correlation id 'fd5981c2-705b-4966-b438-cd760bd1a13f'.","details": [{"code":"ResourceMovePolicyValidationFailed","target":"Microsoft.Web/Microsoft.Web/sites/App11223344","message":"{\"error\":{\"code\":\"ScopeLocked\",\"message\":\"The scope '/subscriptions/2df00a78-a9c5-4c98-92ef-aa1fbbb50e6f/resourcegroups/RG2/

providers/Microsoft.Web/sites/App11223344' cannot perform write operation because following scope(s) are locked: '/subscriptions/2df00a78-a9c5-4c98-92ef-aa1fbbb50e6f/resourceGroups/RG2'. Please remove the lock and try again.\"}}"}]}

N,Y,Y. The first question was tested on Azure. Created RG1, RG2. both are in West Europe. RG2 has assigned READ-ONLY lock. Created web-App name App11223344 (same location as RG1,RG2) in RG1. Removing App11223344 to RG2 failed. ---------- {"code":"ResourceMovePolicyValidationFailed","message":"Resource move policy validation failed. Please see details. Diagnostic information: request correlation id 'fd5981c2-705b-4966-b438-cd760bd1a13f'.","details":[{"code":"ResourceMovePolicyValidationFailed","target":"Microsoft.Web/Microsoft.Web/sites/App11223344","message":"{\"error\":{\"code\":\"ScopeLocked\",\"message\":\"The scope '/subscriptions/2df00a78-a9c5-4c98-92ef-aa1fbbb50e6f/resourcegroups/RG2/providers/Microsoft.Web/sites/App11223344' cannot perform write operation because following scope(s) are locked: '/subscriptions/2df00a78-a9c5-4c98-92ef-aa1fbbb50e6f/resourceGroups/RG2'. Please remove the lock and try again.\"}}"}]}

Answer is Correct. Yes Yes Yes - the lock is only effecting the resources itself with edit/delete. Which means If the resource is in a resource group with no lock types then it is free to move to any other group even if the other group has lock type read only or delete. However if the resource is a RG with read-only lock , it can NOT be moved. In case of no delete lock , it can be moved.

Correct Answer: Locks are designed for any update or removal. In this case we want to move only, we are not deleting, and we are not changing anything in the resource. For this reason, all of them are 'Y'. Box 1: Yes Box 2: Yes Box 3: Yes

Same here, can't move - N, Y, Y. {"code":"ResourceMovePolicyValidationFailed","message":"Resource move policy validation failed. Please see details. Diagnostic information: subscription id '082877ab-8970-41b0-8ba8-5246ccda0cbe', request correlation id 'eec62f30-ecd6-49b1-995c-e8efc3072e0a'.","details":[{"code":"ResourceMovePolicyValidationFailed","target":"Microsoft.Network/Microsoft.Network/virtualNetworks/test1","message":"{\"error\":{\"code\":\"ScopeLocked\",\"message\":\"The scope '/subscriptions/082877ab-8970-41b0-8ba8-5246ccda0cbe/resourcegroups/pk_test_2/providers/Microsoft.Network/virtualNetworks/test1' cannot perform write operation because following scope(s) are locked: '/subscriptions/082877ab-8970-41b0-8ba8-5246ccda0cbe/resourceGroups/pk_test_2'. Please remove the lock and try again.\"}}"}]}

Question #188

SecExams

HOTSPOT -
You have an Azure subscription named Subscription1 that contains the following resource group:
✑ Name: RG1
✑ Region: West US
✑ Tag: `tag1`: `value1`
You assign an Azure policy named Policy1 to Subscription1 by using the following configurations:
✑ Exclusions: None
✑ Policy definition: Append a tag and its value to resources
✑ Assignment name: Policy1
✑ Parameters:
✑ Tag name: tag2

Tag value: value2 -
▪
After Policy1 is assigned, you create a storage account that has the following configuration:
✑ Name: storage1
✑ Location: West US
✑ Resource group: RG1
✑ Tags: `tag3`: `value3`
You need to identify which tags are assigned to each resource.
What should you identify? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

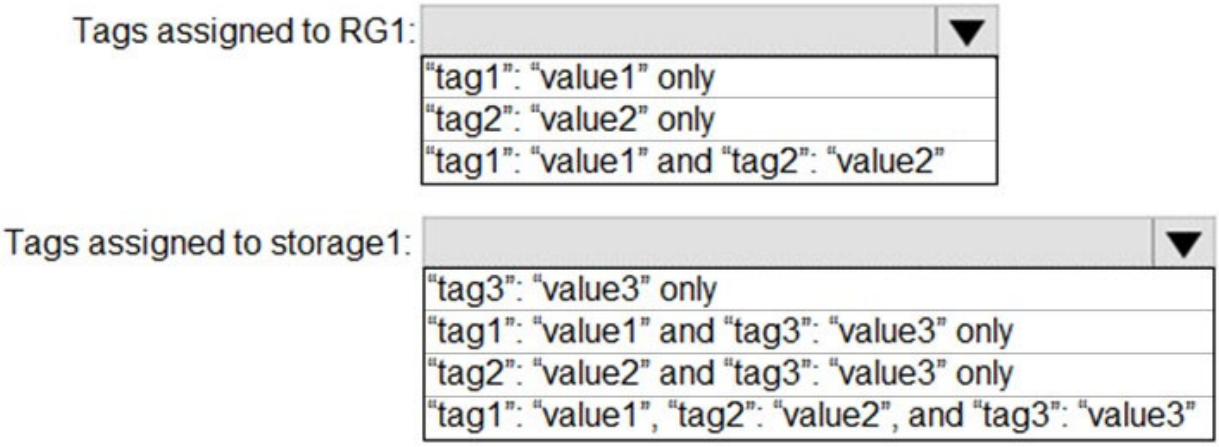

Explanation

Correct Answer:

Answer Area

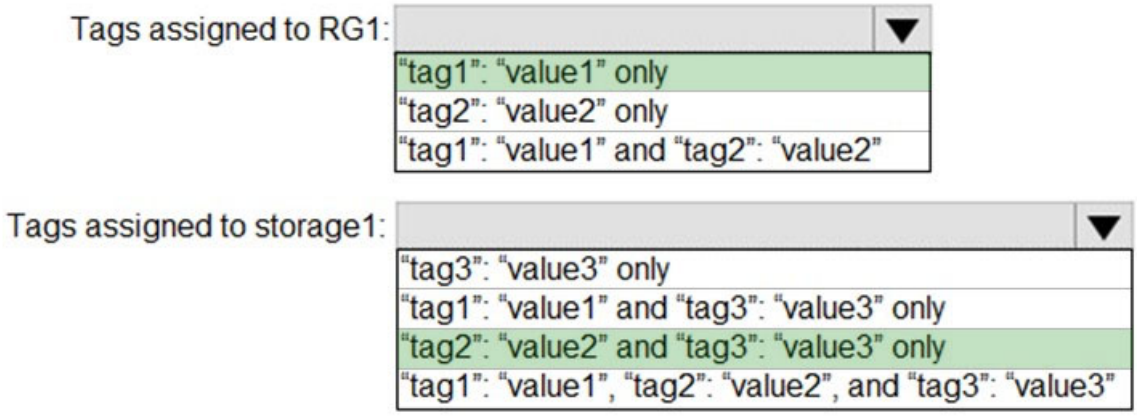

Box 1: "tag1": "value1" only -

Box 2: "tag2": "value2" and "tag3": "value3" only

Tags applied to the resource group are not inherited by the resources in that resource group.

Reference:

https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-using-tags

Community Discussion

Tag assigned to RG1 - tag1: value1 Tag assigned to storage1: tag2: value2 and tag3: value3 RG1 already exists so does not receive tag2. According to the documentation: "Add a tag to resources" Adds the specified tag and value when any resource missing this tag is created or updated. Existing resources can be remediated by triggering a remediation task. If the tag exists with a different value it will not be changed. Does not modify tags on resource groups.

I was not sure til i read the following, i think part important to pay attention to it the "Append a tag and its value to resources" and as per below Append a tag and its value to resources Appends the specified tag and value when any resource which is missing this tag is created or updated. Does not modify the tags of resources created before this policy was applied until those resources are changed. Does not apply to resource groups. New 'modify' effect policies are available that support remediation of tags on existing resources (see https://aka.ms/modifydoc). Ans is Tag assigned to RG1 - tag1: value1 Tag assigned to storage1: tag2: value2 and tag3: value3 https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/tag-policies

that's actually 100% wrong, no documentation states that resources inherit the resource group tag. as a matter of fact, it's the opposite: resource DO NOT inherit the tag of the resource group they belong to.

that's actually 100% wrong, no documentation states that resources inherit the resource group tag. as a matter of fact, it's the opposite: resource DO NOT inherit the tag of the resource group they belong to.

The resources does not inherit tags from the resource groups, so please do not use words like "100% correct", not true.

SecExams

Question #189

HOTSPOT -

You have an Azure subscription named Subscription1.

In Subscription1, you create an alert rule named Alert1.

The Alert1 action group is configured as shown in the following exhibit.

```
ResourceGroupName   : default-activitylogalerts
GroupShortName      : AG1
Enabled             : True
EmailReceivers      : {Action1_ "EmailAction"}
SmsReceivers        : {Action1_ "SMSAction"}
WebhookReceivers    : {}
Id                  : /subscriptions/a4fde29b-d56a-4f6c-8298-
6c53cd0b720c/resourceGroups/
default-activitylogalerts/providers/microsoft.insights/actionGroups/ActionGroup1
Name                : ActionGroup1
Type                : Microsoft.Insights/ActionGroups
Location            : Global
Tags                : {}
```

Alert1 alert criteria triggered every minute.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

The number of email messages that Alert1 will send in an hour is

- 0
- 4
- 6
- 12
- 60

The number of SMS messages that Alert2 will send in an hour is

- 0
- 4
- 6
- 12
- 60

Explanation

Correct Answer:

Answer Area

The number of email messages that Alert1 will send in an hour is

- 0
- 4
- 6
- 12
- 60

The number of SMS messages that Alert2 will send in an hour is

- 0
- 4
- 6
- 12
- 60

Box 1: 60 -
One alert per minute will trigger one email per minute.

Box 2: 12 -
No more than 1 SMS every 5 minutes can be send, which equals 12 per hour.
Note: Rate limiting is a suspension of notifications that occurs when too many are sent to a particular phone number, email address or device. Rate limiting ensures that alerts are manageable and actionable.
The rate limit thresholds are:
✑ SMS: No more than 1 SMS every 5 minutes.
✑ Voice: No more than 1 Voice call every 5 minutes.
✑ Email: No more than 100 emails in an hour.
✑ Other actions are not rate limited.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/alerts-rate-limiting

Community Discussion

Correct Answer: Box 1: 60 One alert per minute will trigger one email per minute. Box 2: 12 or 0 -If it's a typo and it means Alert1, then Answer = 12 (60/5 = 12) -If it is actually Alert2 then Answer = 0 No more than 1 SMS every 5 minutes can be send, which equals 12 per hour (60/5 = 12). Note: Rate limiting is a suspension of notifications that occurs when too many are sent to a particular phone number, email address or device. Rate limiting ensures that alerts are manageable and actionable. The rate limit thresholds are: ✑ SMS: No more than 1 SMS every 5 minutes. ✑ Voice: No more than 1 Voice call every 5 minutes. ✑ Email: No more than 100 emails in an hour. ✑ Other actions are not rate limited. Reference: https://docs.microsoft.com/en-us/azure/azure-monitor/platform/alerts-rate-limiting

** Take another look * BOX 1: 60 BOX 2: Not sure if its a typo.. but it says "Alert2" .. they do not mention Alert2 only Alert1. -If they meant Alert1 then Answer = 12 -If they meant Alert2 then Answer = 0

This is so much work you've done for us all. They probably meant alert1 in that next question

This is so much work you've done for us all. They probably meant alert1 in that next question

Had this question in exam - box 2 mentions ALERT1, so the correct answer is 60/12

Question #190

You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Region	Resource group
RG1	Resource group	West Europe	*Not applicable*
RG2	Resource group	North Europe	*Not applicable*
Vault1	Recovery Services vault	West Europe	RG1

You create virtual machines in Subscription1 as shown in the following table.

Name	Resource group	Region	Operating system
VM1	RG1	West Europe	Windows Server 2016
VM2	RG1	North Europe	Windows Server 2016
VM3	RG2	West Europe	Windows Server 2016
VMA	RG1	West Europe	Ubuntu Server 18.04
VMB	RG1	North Europe	Ubuntu Server 18.04
VMC	RG2	West Europe	Ubuntu Server 18.04

You plan to use Vault1 for the backup of as many virtual machines as possible. Which virtual machines can be backed up to Vault1?

A) VM1 only
B) VM3 and VMC only
C) VM1, VM2, VM3, VMA, VMB, and VMC
D) VM1, VM3, VMA, and VMC only (Correct Answer)
E) VM1 and VM3 only

Explanation

Correct Answer:
D
To create a vault to protect virtual machines, the vault must be in the same region as the virtual machines. If you have virtual machines in several regions, create a Recovery Services vault in each region.
Reference:
https://docs.microsoft.com/bs-cyrl-ba/azure/backup/backup-create-rs-vault

Community Discussion

Answer is correct. D The following criteria is important for vault backup, the data source (VM) must be in the same region and subscription. It works with any resource group or any Operating system. Accordingly the answer is correct. https://docs.microsoft.com/en-us/azure/backup/backup-azure-arm-vms-prepare

Correct Answer: D To create a Recovery Services Vault to protect Virtual Machines, the vault must be in the same Region as the Virtual Machines. If you have Virtual Machines in several Regions, create a Recovery Services Vault in each Region. It works with any resource group or any Operating System. Reference: https://docs.microsoft.com/bs-cyrl-ba/azure/backup/backup-create-rs-vault https://docs.microsoft.com/en-us/azure/backup/backup-azure-arm-vms-prepare

Selected Answer: D

Came up in exam today, Answer: D 920/1000

I payed 1 year contributor access haha Nothing bad happened! I hope to pass the exam this month:)

I payed 1 year contributor access haha Nothing bad happened! I hope to pass the exam this month:)

SecExams

Question #191

You have an Azure Kubernetes Service (AKS) cluster named AKS1.
You need to configure cluster autoscaler for AKS1.
Which two tools should you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A) the kubectl command (Correct Answer)
B) the az aks command (Correct Answer)
C) the Set-AzVm cmdlet
D) the Azure portal
E) the Set-AzAks cmdlet

Explanation

Correct Answer:
AB
A: The following example uses the kubectl autoscale command to autoscale the number of pods in the azure-vote-front deployment. If average CPU utilization across all pods exceeds 50% of their requested usage, the autoscaler increases the pods up to a maximum of 10 instances. A minimum of 3 instances is then defined for the deployment:
kubectl autoscale deployment azure-vote-front --cpu-percent=50 --min=3 --max=10
B: Use the az aks update command to enable and configure the cluster autoscaler on the node pool for the existing cluster.
Reference:
https://docs.microsoft.com/en-us/azure/aks/tutorial-kubernetes-scale https://docs.microsoft.com/en-us/azure/aks/cluster-autoscaler

Community Discussion

Correct Answer: B and D We need to configure autoscaler for the AKS cluster. We do not want to scale Kubernetes pods, so kubectl command is not needed. A: kubectl command is used for configuring Kubernetes and not AKS cluster. B: The az aks command is used for the AKS cluster configuration. C: Set-AzVm cmdlet is used for VMs. D: Azure portal, under node pools, press scale, then choose auto scale. E: Set-AzAks, creates or updates an AKS cluster, the correct cmdlet is Set-AzAksCluster. AKS clusters can scale in one of two ways: - The cluster autoscaler watches for pods that can't be scheduled on nodes because of resource constraints. The cluster then automatically increases the number of

nodes. - The horizontal pod autoscaler uses the Metrics Server in a Kubernetes cluster to monitor the resource demand of pods. If an application needs more resources, the number of pods is automatically increased to meet the demand. Reference: https://docs.microsoft.com/en-us/azure/aks/cluster-autoscaler

The Answer is not correct. The right is B & D. B is for az aks command , check https://docs.microsoft.com/en-us/azure/aks/cluster-autoscaler D is for Azure portal. Under node pools, press scale, then choose auto scale. The Answer A is not correct as it is confusing with Horizontal pod autoscale which is not asked here. The pod autoscale use kubectl.

There are 2 things to understand: a) Are we talking about pods? b) Are we talking about nodes? The question is regarding how to autoscale the AKS, so it means that we are talking about the nodes. As we are talking how to scale the nodes: a) az aks is neccesary b) Then you scale the nodes in the portal. The correct answers are B & D. If we want to scale the pods, the options would be kubelet, but it is not the case. We are not talking about the containers, we are talking about the infrastructure behind this.

There are 2 things to understand: a) Are we talking about pods? b) Are we talking about nodes? The question is regarding how to autoscale the AKS, so it means that we are talking about the nodes. As we are talking how to scale the nodes: a) az aks is neccesary b) Then you scale the nodes in the portal. The correct answers are B & D. If we want to scale the pods, the options would be kubelet, but it is not the case. We are not talking about the containers, we are talking about the infrastructure behind this.

The article does a good job explaining the difference of "cluster autoscaler" and "horizontal pod autoscaler"... https://docs.microsoft.com/en-us/azure/aks/cluster-autoscaler FYI also - the PowerShell command that can do this same task is "Set-AzAksCluster" (not Set-AzAks). B and D it is!

Question #192

You create the following resources in an Azure subscription:

✑ An Azure Container Registry instance named Registry1

✑ An Azure Kubernetes Service (AKS) cluster named Cluster1

You create a container image named App1 on your administrative workstation.

You need to deploy App1 to Cluster1.

What should you do first?

A) Run the docker push command.

B) Create an App Service plan.

C) Run the az acr build command. (Correct Answer)

D) Run the az aks create command.

Explanation

Correct Answer:
C
You should sign in and push a container image to Container Registry.
Run the az acr build command to build and push the container image. az acr build \
--image contoso-website \
--registry $ACR_NAME \
--file Dockerfile .
Reference:
https://docs.microsoft.com/en-us/learn/modules/aks-deploy-container-app/5-exercise-deploy-app

Community Discussion

I have this same question in the exam (passed) and does not have the option C. So I choose the Docker push.

Answer is Correct . C. The question has a lot of missing steps. If we go with Answer A. then we need the following: - Make sure that ACR is integrated to AKS. - docker tag has been run with the right ACR. - docker push - create kubectl apply with the right deployment and right ACR. In case we go with Answer C. - No need for docker push or tag. - still need to make sure that ACR is integrated to AKS. - then run kubectl apply

Building vs. Pushing: The az acr build command is used for the initial step of building a container image, which involves compiling source code, creating a Docker image from it, and then pushing it to an Azure Container Registry. In the scenario described, the container image (App1) is already built on your administrative workstation. Therefore, you do not need to build it again using az acr build.

Building vs. Pushing: The az acr build command is used for the initial step of building a container image, which involves compiling source code, creating a Docker image from it, and then pushing it to an Azure Container Registry. In the scenario described, the container image (App1) is already built on your administrative workstation. Therefore, you do not need to build it again using az acr build.

SecExams

C. Run the az acr build command. ACR tasks automatically push successfully built images to your registry by default, allowing you to deploy them from your registry immediately. Microsoft exam - Microsoft documentation ... If you are in doubt go to: https://learn.microsoft.com/en-us/azure/container-registry/container-registry-tutorial-quick-task#deploy-to-azure-container-instances

Question #193

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group	Location
RG1	Resource group	*Not applicable*	Central US
RG2	Resource group	*Not applicable*	West US
VMSS1	Virtual machine scale set	RG2	West US
Proximity1	Proximity placement group	RG1	Central US
Proximity2	Proximity placement group	RG2	West US
Proximity3	Proximity placement group	RG1	Central US

You need to configure a proximity placement group for VMSS1.
Which proximity placement groups should you use?

A) Proximity2 only (Correct Answer)
B) Proximity1, Proximity2, and Proximity3
C) Proximity1 only
D) Proximity1 and Proximity3 only

Explanation

Correct Answer:
A
Resource Group location of VMSS1 is the RG2 location, which is West US.
Only Proximity2, which also in RG2, is location in West US
Reference:
https://azure.microsoft.com/en-us/blog/introducing-proximity-placement-groups/

Community Discussion

Correct Answer: A Placement Groups is a capability to achieve co-location of your Azure Infrastructure as a Service (IaaS) resources and low network latency among them, for

improved application performance. Azure proximity placement groups represent a new logical grouping capability for your Azure Virtual Machines, which in turn is used as a deployment constraint when selecting where to place your virtual machines. In fact, when you assign your virtual machines to a proximity placement group, the virtual machines are placed in the same data center, resulting in lower and deterministic latency for your applications. The VMSS should share the same region, even it should be the same zone as proximity groups are located in the same data center. Accordingly, it should be proximity 2 only. Reference: https://azure.microsoft.com/en-us/blog/introducing-proximity-placement-groups

This should be proximity 1 only, proximity 2 is not in the same region as the VMSS

They have changed the question and the table since the comment has been made. Basically the proximity group and the VMSS1 should be in the same region.

They have changed the question and the table since the comment has been made. Basically the proximity group and the VMSS1 should be in the same region.

They have changed the question and the table since the comment has been made. Basically the proximity group and the VMSS1 should be in the same region.

SecExams

Question #194

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.
You need to view the date and time when the resources were created in RG1.
Solution: From the Subscriptions blade, you select the subscription, and then click Resource providers.
Does this meet the goal?

A) Yes

B) No (Correct Answer)

Explanation

Correct Answer:
B

Community Discussion

Correct Answer: B - No From the RG1 blade, click Deployments. You see a history of deployment for the resource group. Reference: https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/template-tutorial-create-first-template?tabs=azure-powershell

I agree, you should look at the Deployments under the Resource Group

Q41, 51, 52 & 53 [remember: RG1 blade-->deployment]

RG1->Deployments

Selected Answer: B

Correct Answer: B

SecExams

Question #195

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.
You need to view the date and time when the resources were created in RG1.
Solution: From the RG1 blade, you click Automation script.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
From the RG1 blade, click Deployments. You see a history of deployment for the resource group.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/template-tutorial-create-first-template?tabs=azure-powershell

Community Discussion

Correct Answer: B - No From the RG1 blade, click Deployments. You see a history of deployment for the resource group. Reference: https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/template-tutorial-create-first-template?tabs=azure-powershell

correct. Programmatic deployment are used for API/CLI

Selected Answer: B

It's "Deployments" on RG blade

came in today's exam 25/6/2022

B. No - Bcoz it's under RG1 blade Settings ->Deployment

Question #196

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.
You need to view the date and time when the resources were created in RG1.
Solution: From the RG1 blade, you click Deployments.
Does this meet the goal?

A) Yes (Correct Answer)

B) No

Explanation

Correct Answer:
A
From the RG1 blade, click Deployments. You see a history of deployment for the resource group.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/template-tutorial-create-first-template?tabs=azure-powershell

Community Discussion

Correct Answer: A - Yes From the RG1 blade, click Deployments. You see a history of deployment for the resource group. Reference: https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/template-tutorial-create-first-template?tabs=azure-powershell

correct

This question came in the exam, all three versions of this..!! Best of luck

I love these "clustered" questions, like these FOUR: 41, 51, 52 & 53 (remember the only positive ans: RG1 blade - Deployments) Thanx mlantonis and fedztedz

successfully achieved with 950 marks. Thanks mlantonis and fedztedz...Aprciate your continous support

SecExams

Question #197

You have an Azure subscription named Subscription1.
You deploy a Linux virtual machine named VM1 to Subscription1.
You need to monitor the metrics and the logs of VM1.
What should you use?

A) Azure HDInsight
B) Linux Diagnostic Extension (LAD) 3.0 (Correct Answer)
C) the AzurePerformanceDiagnostics extension
D) Azure Analysis Services

Explanation

Correct Answer:
B
The Linux Diagnostic Extension should be used which downloads the Diagnostic Extension (LAD) agent on Linux server.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/diagnostics-linux

Community Discussion

Correct Answer: B The Linux diagnostic extension helps a user monitor the health of a Linux VM running on Microsoft Azure. It has the following collection and capabilities: - Metrics - Syslog - Files A: Azure HDInsight is a managed, full-spectrum, open-source analytics service in the cloud for enterprises. You can use open-source frameworks such as Hadoop, Apache Spark, Apache Hive, LLAP, Apache Kafka, Apache Storm, R, and more. C: Azure Performance Diagnostics VM Extension is used for Windows VM only. D: Azure Analysis Services is a fully managed platform as a service (PaaS) that provides enterprise-grade data models in the cloud.

Not correct. Answer is B. it is linux server accordingly Linux Diagnostic Extension should be used which download the Diagnostic Extension (LAD) agent on Linux server.

https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/diagnostics-linux?tabs=azcli

https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/diagnostics-linux?tabs=azcli

no. It's actually in the link you provided, "Important For information about version 3.x, see Use the Linux diagnostic extension 3.0 to monitor metrics and logs. For information about version 2.3 and earlier, see Monitor the performance and diagnostic data of a Linux VM." so LAD version doesn't matter. B is the right answer!

SecExams

Question #198

HOTSPOT -

You have an Azure subscription named Subscription1. Subscription1 contains a virtual machine named VM1.

You install and configure a web server and a DNS server on VM1.

VM1 has the effective network security rules shown in the following exhibit:

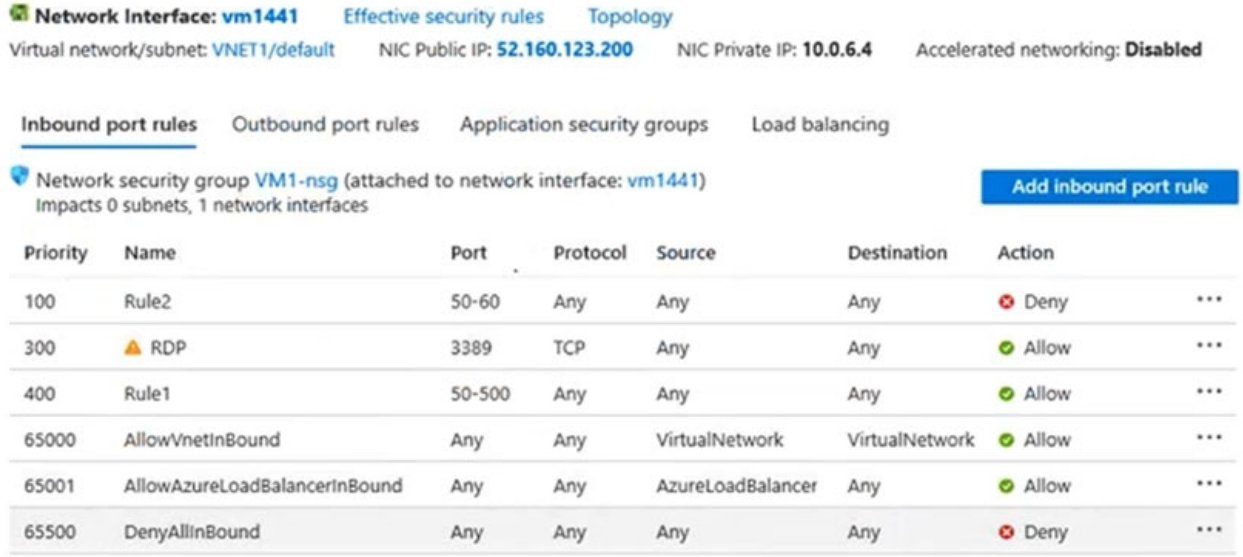

Network Interface: vm1441 Effective security rules Topology

Virtual network/subnet: VNET1/default NIC Public IP: 52.160.123.200 NIC Private IP: 10.0.6.4 Accelerated networking: Disabled

Inbound port rules | Outbound port rules | Application security groups | Load balancing

Network security group VM1-nsg (attached to network interface: vm1441)
Impacts 0 subnets, 1 network interfaces

Add inbound port rule

Priority	Name	Port	Protocol	Source	Destination	Action
100	Rule2	50-60	Any	Any	Any	Deny
300	RDP	3389	TCP	Any	Any	Allow
400	Rule1	50-500	Any	Any	Any	Allow
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Internet users **[answer choice]**.

- can connect to only the DNS server on VM1
- can connect to only the web server on VM1
- can connect to the web server and the DNS server on VM1
- cannot connect to the web server and the DNS server on VM1

If you delete Rule2, Internet users **[answer choice]**.

- can connect to only the DNS server on VM1
- can connect to only the web server on VM1
- can connect to the web server and the DNS server on VM1
- cannot connect to the web server and the DNS server on VM1

Explanation

Correct Answer:

Answer Area

Internet users **[answer choice].**

- can connect to only the DNS server on VM1
- can connect to only the web server on VM1
- can connect to the web server and the DNS server on VM1
- cannot connect to the web server and the DNS server on VM1

If you delete Rule2, Internet users **[answer choice].**

- can connect to only the DNS server on VM1
- can connect to only the web server on VM1
- can connect to the web server and the DNS server on VM1
- cannot connect to the web server and the DNS server on VM1

Box 1:
Rule2 blocks ports 50-60, which includes port 53, the DNS port. Internet users can reach to the Web server, since it uses port 80.
Box 2:
If Rule2 is removed internet users can reach the DNS server as well.
Note: Rules are processed in priority order, with lower numbers processed before higher numbers, because lower numbers have higher priority. Once traffic matches a rule, processing stops. As a result, any rules that exist with lower priorities (higher numbers) that have the same attributes as rules with higher priorities are not processed.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/security-overview

Community Discussion

It looks like all 300 questions appeared in your exam :D . I see your comments everywhere.

It looks like all 300 questions appeared in your exam :D . I see your comments everywhere.

Passed today with 947. This question appeared, correct Answer

Correct. Usually : DNS = Port 53 WEB = Port 80 (http) or 443 (https). Rule are processed by priority order A number between 100 and 4096. Rules are processed in priority order, with lower numbers processed before higher numbers, because lower numbers have higher priority. Once traffic matches a rule, processing stops. As a result, any rules that exist with lower priorities (higher numbers) that have the same attributes as rules with higher priorities are not processed. https://docs.microsoft.com/en-us/azure/virtual-network/network-security-groups-overview Rule 2 Blocked DNS (Range 50-60) First match > DNS

SecExams

Blocked Rule 1 Allow http (Range 50-500) First Match > http Allow. If we delete Rule 2, Rule 1 Allows http and DNS. First match > It works.

Box 1: Rule2 blocks ports 50-60, which includes port 53, the DNS port. Internet users can reach to the Web server, since it uses port 80. Box 2: If Rule2 is removed internet users can reach the DNS server as well. Note: Rules are processed in priority order, with lower numbers processed before higher numbers, because lower numbers have higher priority. Once traffic matches a rule, processing stops. As a result, any rules that exist with lower priorities (higher numbers) that have the same attributes as rules with higher priorities are not processed.

Question #199

You plan to deploy three Azure virtual machines named VM1, VM2, and VM3. The virtual machines will host a web app named App1.
You need to ensure that at least two virtual machines are available if a single Azure datacenter becomes unavailable.
What should you deploy?

A) all three virtual machines in a single Availability Zone
B) all virtual machines in a single Availability Set
C) each virtual machine in a separate Availability Zone (Correct Answer)
D) each virtual machine in a separate Availability Set

Explanation

Correct Answer:
C
Use availability zones to protect from datacenter level failures.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/manage-availability
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/tutorial-availability-sets

Community Discussion

i always get nervous when the discussion count hits 30-50+ . You know something isn't right :D , if its just below 20, then i just skip and continue

C is the correct answer - if you want Datacenter level high availability - vms should be deployed in different zones.

Availability set - Within data centre - configure update domains and fault domains
Availability zone - Within region (usually three data centres per region)

Availability set - Within data centre - configure update domains and fault domains
Availability zone - Within region (usually three data centres per region)

your explanation was simple and precise unlike other sprouting nonsense here.

SecExams

Question #200

You have an Azure virtual machine named VM1 that runs Windows Server 2019.
You save VM1 as a template named Template1 to the Azure Resource Manager library.
You plan to deploy a virtual machine named VM2 from Template1.
What can you configure during the deployment of VM2?

A) operating system
B) administrator username
C) virtual machine size
D) resource group (Correct Answer)

Explanation

Correct Answer:
D
When deploying a virtual machine from a template, you must specify:
✑ the Resource Group name and location for the VM
✑ the administrator username and password
✑ an unique DNS name for the public IP
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/ps-template

Community Discussion

not correct. Answer is Resource Group. I tried the only ones that need to be updated manually are resource group and password.

"what can you configure"... you can't configure a resource group, but you can choose one. A resource group should be already configured. An administrator username is not preconfigured, so you have to make a new one. I will go with B

Confirming RG. Manual steps: log in, deploy VM1. Accept all defaults. Go to resource > template > save to library. View library > deploy template, It pre-populates the subscription but you have to set an RG. VM Name can be customized, admin user/pass are pulled from template. Costs about $.15 to verify and less than 5 minutes, if you're in doubt sign up for azure pass and do it yourself.

Confirming RG. Manual steps: log in, deploy VM1. Accept all defaults. Go to resource > template > save to library. View library > deploy template, It pre-populates the subscription but you have to set an RG. VM Name can be customized, admin user/pass are pulled from template. Costs about $.15 to verify and less than 5 minutes, if you're in doubt sign up for azure pass and do it yourself.

yes D. Resource Group is the correct answer: Admin user, password, vm size and os are the part of ARM templates. But resource group is not hence needs to be mentioned while deployment! Refer below sample ARM template for reference in which all above attributes passed in parameter. https://github.com/Azure/azure-quickstart-templates/blob/master/101-vm-simple-windows/azuredeploy.json

SecExams

Question #201

You have an Azure subscription that contains an Azure virtual machine named VM1. VM1 runs a financial reporting app named App1 that does not support multiple active instances.

At the end of each month, CPU usage for VM1 peaks when App1 runs.

You need to create a scheduled runbook to increase the processor performance of VM1 at the end of each month.

What task should you include in the runbook?

A) Add the Azure Performance Diagnostics agent to VM1.

B) Modify the VM size property of VM1.

C) Add VM1 to a scale set.

D) Increase the vCPU quota for the subscription.

E) Add a Desired State Configuration (DSC) extension to VM1. (Correct Answer)

Explanation

Correct Answer:
E
Reference:
https://docs.microsoft.com/en-us/azure/automation/automation-quickstart-dsc-configuration

Community Discussion

Correct Answer: B Here we need to modify the size of the VM to increase the number of vCPU's assigned to the VM. This can be included as a task in the runbook. The VM size property can be modified by a runbook that is triggered by metrics, but you can schedule it monthly. C: Scheduled vertical scaling could be a solution, but then you don't need a scheduled runbook and it states that it does not support multiple active instances. Scale Set is not a n option. E: DSC is only useful to keep the resources on a VM (OS, File shares, etc.) in a consistent state, not to change VM properties. Reference: https://www.apress.com/us/blog/all-blog-posts/scale-up-azure-vms/15823864#:~:text=If%20you%20select%20the%20option,to%20the%20next%20larger%20size

not correct. Answer is B. Scale up the VM using Automation virtual scale set runbooks which trigger a webhook

this the reason why we can't use scale set - "App1 that does not support multiple active instances"

this the reason why we can't use scale set - "App1 that does not support multiple active instances"

this the reason why we can't use scale set - "App1 that does not support multiple active instances"

SecExams

Question #202

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.
You need to ensure that NGINX is available on all the virtual machines after they are deployed.
What should you use?

A) Deployment Center in Azure App Service
B) A Desired State Configuration (DSC) extension (Correct Answer)
C) the New-AzConfigurationAssignment cmdlet
D) a Microsoft Intune device configuration profile

Explanation

Correct Answer:
B
Azure virtual machine extensions are small packages that run post-deployment configuration and automation on Azure virtual machines.
In the following example, the Azure CLI is used to deploy a custom script extension to an existing virtual machine, which installs a Nginx webserver. az vm extension set \
--resource-group myResourceGroup \
--vm-name myVM --name customScript \
--publisher Microsoft.Azure.Extensions \
--settings '{"commandToExecute": "apt-get install -y nginx"}
Note:
There are several versions of this question in the exam. The question has two correct answers:
1. a Desired State Configuration (DSC) extension
2. Azure Custom Script Extension
The question can have other incorrect answer options, including the following:
✑ the Publish-AzVMDscConfiguration cmdlet
✑ Azure Application Insights
Reference:
https://docs.microsoft.com/en-us/azure/architecture/framework/devops/automation-configuration

Community Discussion

Correct Answer: B Note: There are several versions of this question in the exam. The question has two correct answers: 1. a Desired State Configuration (DSC) extension 2. Azure Custom Script Extension The question can have other incorrect answer options, including the following: ✑ the Publish-AzVMDscConfiguration cmdlet ✑ Azure Application Insights

Answer is correct "B" with ARM templates, DSC is used.

During my training with MS, i had this question but solution B was not given there so in that case this is the solution below: You are going to deploy multiple Virtual machines having Windows Server Operating System by using Azure Resource Manager Template. While completing the Virtual machines deployment you need to make sure that NGINX should be available on all the Virtual machines. What should you do? Answer: Azure Custom Script Extension Explanation A Custom Script Extension(CSE) can be used to automatically launch and execute virtual machine customization tasks post configuration. Your script extension may perform simple tasks such as stopping the virtual machine or installing a software component. However, the script could be more complex and perform a series of tasks. Reference link https://learn.microsoft.com/en-us/training/modules/configure-virtual-machine-extensions/3-implement-custom-script-extensions

Selected Answer: B

B is the answer. https://learn.microsoft.com/en-us/azure/virtual-machines/extensions/dsc-template

Selected Answer: B

The Azure DSC extension uses the Azure VM Agent framework to deliver, enact, and report on DSC configurations running on Azure VMs. https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/dsc-overview

SecExams

Question #203

HOTSPOT -

You deploy an Azure Kubernetes Service (AKS) cluster that has the network profile shown in the following exhibit.

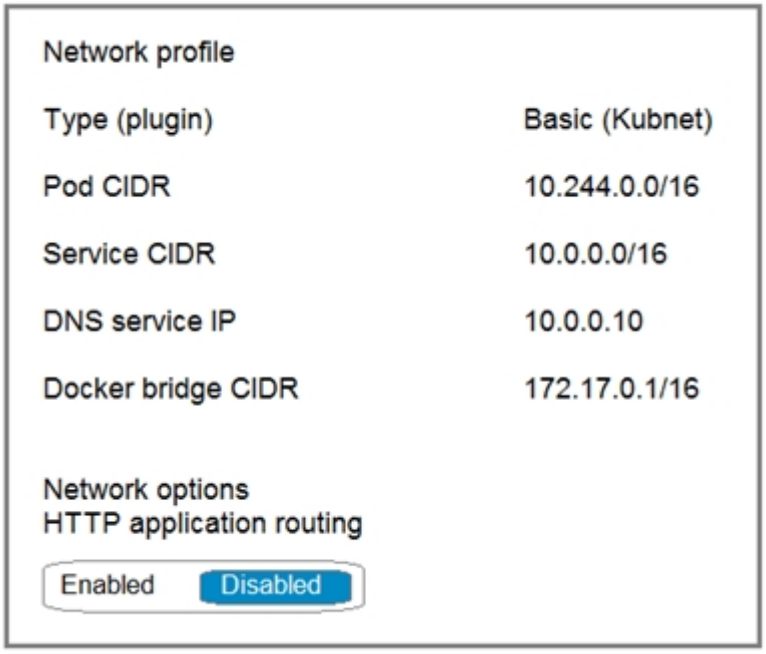

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Containers will be assigned an IP address in the **[answer choice]** subnet.

- 10.244.0.0/16
- 10.0.0.0/16
- 172.17.0.1/16

Services in the AKS cluster will be assigned an IP address in the **[answer choice]** subnet.

- 10.244.0.0/16
- 10.0.0.0/16
- 172.17.0.1/16

Explanation

Correct Answer:

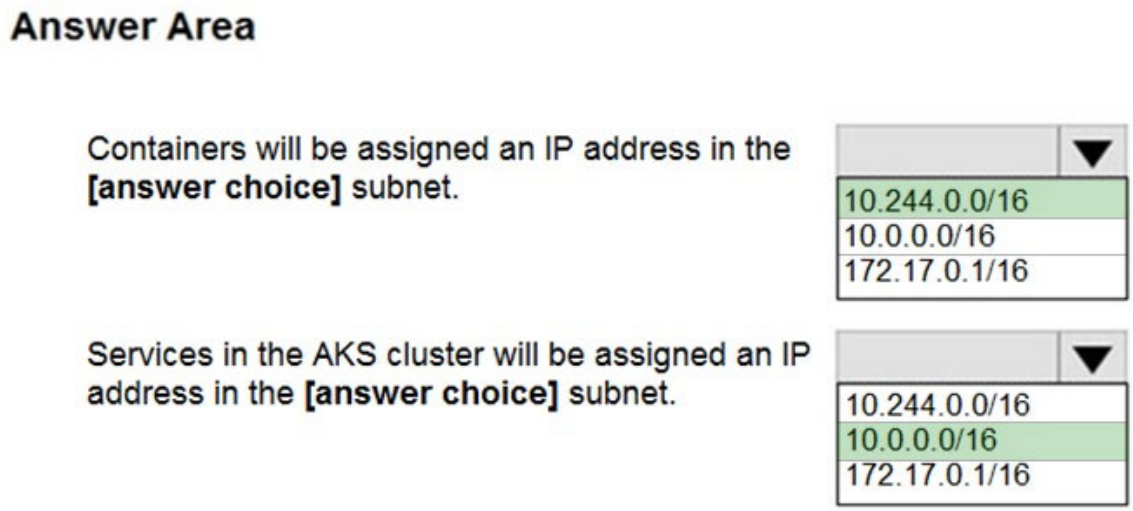

Box 1: 10.244.0.0/16 -
The Pod CIDR.
Note: The --pod-cidr should be a large address space that isn't in use elsewhere in your network environment. This range includes any on-premises network ranges if you connect, or plan to connect, your Azure virtual networks using Express Route or a Site-to-Site VPN connection.
This address range must be large enough to accommodate the number of nodes that you expect to scale up to. You can't change this address range once the cluster is deployed if you need more addresses for additional nodes.

Box 2: 10.0.0.0/16 -
The --service-cidr is used to assign internal services in the AKS cluster an IP address.
Reference:
https://docs.microsoft.com/en-us/azure/aks/configure-kubenet

Community Discussion

Correct Answer: Box 1: 10.244.0.0/16 The Pod CIDR, because containers live inside Pods. Note: You can't change this address range once the cluster is deployed, if you need more addresses for additional nodes. Box 2: 10.0.0.0/16 The Service CIDR is used to assign internal services in the AKS cluster an IP address. Reference: https://docs.microsoft.com/en-us/azure/aks/configure-kubenet https://docs.microsoft.com/en-us/azure/aks/configure-azure-cni#plan-ip-addressing-for-your-cluster

I'm writing the exam in 3 hours .. I'll go with the given selections - wish me luck!

Im guessing you passed as you havent been back...lol

Im guessing you passed as you havent been back...lol

what was the result?

Question #204

You have an Azure subscription named Subscription1 that contains an Azure Log Analytics workspace named Workspace1.

You need to view the error events from a table named Event.

Which query should you run in Workspace1?

A) select * from Event where EventType == "error"
B) Event | search "error" (Correct Answer)
C) Event | where EventType is "error"
D) Get-Event Event | where {$_.EventType == "error"}

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

Correct answer is B other correct answer option can come in the following form: Search in (Event) "Error" Event | where eventType = "Error"

Will be doing exam next week. If this question isn't in my exam i sue Examtopics :P

Selected Answer: B

Both B & C are OK, other possibilities are: 1) Event | search "Error" 2) Event | where eventType = "Error" 3) Search in (Event) "Error"

Event | search "error"

BTW, I just saw that "C" is NOT OK, My mistake

Question #205

You have an Azure App Services web app named App1.

You plan to deploy App1 by using Web Deploy.

You need to ensure that the developers of App1 can use their Azure AD credentials to deploy content to App1. The solution must use the principle of least privilege.

What should you do?

A) Assign the Owner role to the developers
B) Configure app-level credentials for FTPS
C) Assign the Website Contributor role to the developers (Correct Answer)
D) Configure user-level credentials for FTPS

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: C

C. Assign the Website Contributor role to the developers. To allow the developers of App1 to use their Azure AD credentials to deploy content to App1 using Web Deploy, you should assign the Website Contributor role to the developers. This role provides the

necessary permissions for developers to deploy content to the web app, but does not grant them excessive permissions that could be used to make unwanted changes. Option A is not recommended as it would grant excessive permissions to the developers, which could be used to make unwanted changes. Option B and D are not relevant to the scenario as the question is specifically asking for how to use Azure AD credentials for Web Deploy, not FTPS. Option C is a potential solution, but the Website Contributor role provides a more targeted and appropriate level of permissions for the scenario.

Selected Answer: C

B is wrong because: "To secure app deployment from a local computer, Azure App Service supports two types of credentials for local Git deployment and FTP/S deployment. These credentials are not the same as your Azure subscription credentials." https://learn.microsoft.com/en-us/azure/app-service/deploy-configure-credentials?tabs=cli Correct is C. https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#website-contributor Microsoft.Resources/deployments/* - Create and manage a deployment

This question was on my exam today on 11/14/2023.

I got this question today in my exam.

Passed AZ-104 today 03/07/24 879%. 99% of Examtopics questions in my test with exact same wording. This question was on the test, I answered C. Very Thanks to Examtopics.

SecExams

Question #206

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Active Directory (Azure AD) tenant named contoso.com.

You have a CSV file that contains the names and email addresses of 500 external users.

You need to create a guest user account in contoso.com for each of the 500 external users.

Solution: From Azure AD in the Azure portal, you use the Bulk invite users operation.

Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

The Answer supplied is correct, it is No. Reason: The question states "You have a CSV file that contains the names and email addresses of 500 external users." This implies that

the required fields (Email and Redirection URL)are missing from the .csv file. Here are the csv field pre-requisites that are needed for bulk upload of external users: https://learn.microsoft.com/en-us/azure/active-directory/external-identities/tutorial-bulk-invite#prerequisites

He is not talking about the idea of using the Bulk, its the CSV file that not containing the right requirements for this task! you need the Email + Redirection URL so you can use it with Bulk invite.....not the Email + names !! This Question mentioned on many versions. pay attention to the words.

He is not talking about the idea of using the Bulk, its the CSV file that not containing the right requirements for this task! you need the Email + Redirection URL so you can use it with Bulk invite.....not the Email + names !! This Question mentioned on many versions. pay attention to the words.

He is not talking about the idea of using the Bulk, its the CSV file that not containing the right requirements for this task! you need the Email + Redirection URL so you can use it with Bulk invite.....not the Email + names !! This Question mentioned on many versions. pay attention to the words.

He is not talking about the idea of using the Bulk, its the CSV file that not containing the right requirements for this task! you need the Email + Redirection URL so you can use it with Bulk invite.....not the Email + names !! This Question mentioned on many versions. pay attention to the words.

SecExams

Question #207

HOTSPOT

-

You have an Azure subscription that is linked to an Azure AD tenant. The tenant contains the custom role-based access control (RBAC) roles shown in the following table.

Name	Description
Role1	Azure subscription role
Role2	Azure AD role

From the Azure portal, you need to create two custom roles named Role3 and Role4. Role3 will be an Azure subscription role. Role4 will be an Azure AD role.

Which roles can you clone to create the new roles? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Role3:

- Role1 only
- Built-in Azure subscription roles only
- Role1 and built-in Azure subscription roles only
- Built-in Azure subscription roles and built-in Azure AD roles only
- Role1, Role2, built-in Azure subscription roles, and built-in Azure AD roles

Role4:

- Role2 only
- Built-in Azure AD roles only
- Role2 and built-in Azure AD roles only
- Built-in Azure AD roles and built-in Azure subscription roles only
- Role1, Role2, built-in Azure AD, and built-in Azure subscription roles

Explanation

Correct Answer:

Answer Area

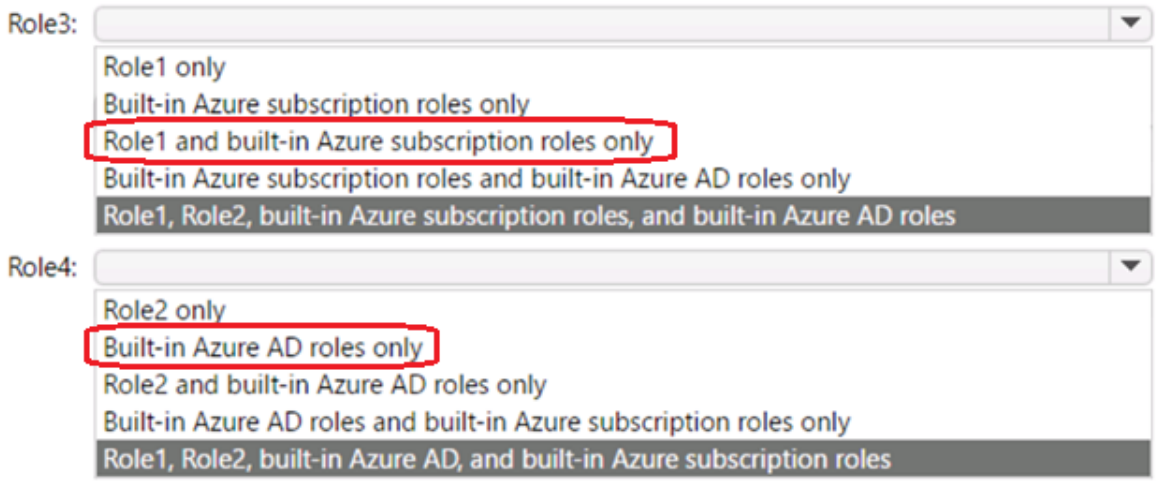

Community Discussion

Thanks. Answer should be Role3: Role1 and built-in Azure subscription roles only Role4: Role2 only Explanation: You cannot clone built-in Azure AD role

Thanks. Answer should be Role3: Role1 and built-in Azure subscription roles only Role4: Role2 only Explanation: You cannot clone built-in Azure AD role

https://www.secexams.com/discussions/microsoft/view/57784-exam-az-500-topic-2-question-58-discussion/ i found similar questions in other page

Answer is correcrt Valid! This question was on the exam 22/02/2023. Scored 920. Thanks guys!

Answer is correcrt Valid! This question was on the exam 22/02/2023. Scored 920. Thanks guys!

Question #208

DRAG DROP

-

You have an Azure subscription named Sub1 that contains two users named User1 and User2.

You need to assign role-based access control (RBAC) roles to User1 and User2. The users must be able to perform the following tasks in Sub1:

• User1 must view the data in any storage account.
• User2 must assign users the Contributor role for storage accounts.

The solution must use the principle of least privilege.

Which RBAC role should you assign to each user? To answer, drag the appropriate roles to the correct users. Each role may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

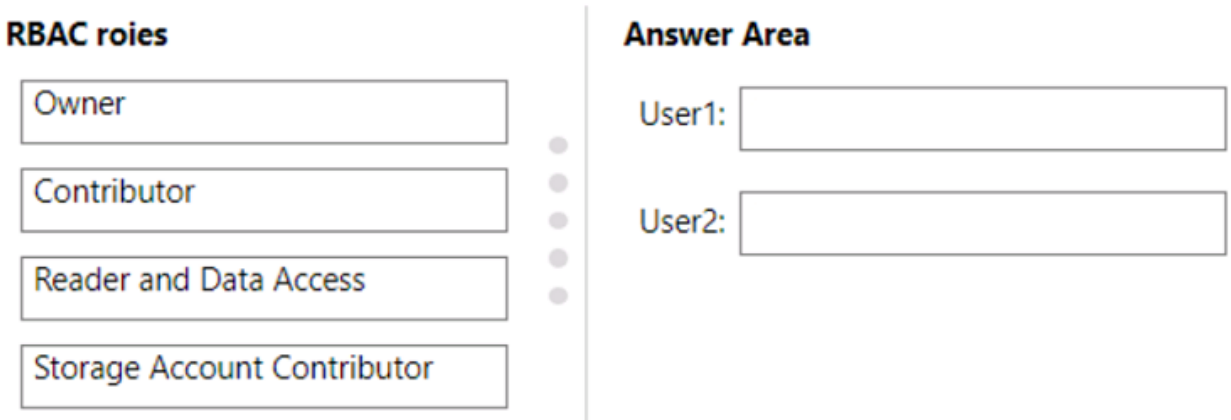

Explanation

Correct Answer:

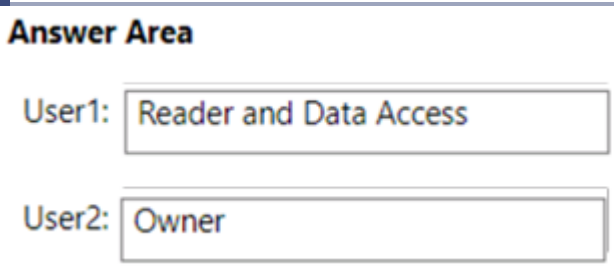

Community Discussion

Answer is correct. "Reader and Data Access": "Lets you view everything but will not let you delete or create a storage account or contained resource. It will also allow read/write access to all data contained in a storage account via access to storage account keys." "Owner" is needed to manage permissions, as "User Access Administrator" is not offered as an option.

Cleared Exam 930 was appeared in exam 18/3/2023 ANS most upvoted

Answer is wrong. there is a 5th option User Access Administrator, which is cut out here. You see the 5 dots? -Reader and Data Access -User Access Administrator ;)

Also User Access Administrator: User Access Administrator: can assign roles but can't do anything with the actual resources, so manages access but not the resources. Contributor: can do everything with the actual resources but can't assign roles, so manages the resources but not the access to them. Owner: can do everything, most powerful role in Azure.

Also User Access Administrator: User Access Administrator: can assign roles but can't do anything with the actual resources, so manages access but not the resources. Contributor: can do everything with the actual resources but can't assign roles, so manages the resources but not the access to them. Owner: can do everything, most powerful role in Azure.

SecExams

Question #209

You have an Azure subscription that contains 10 virtual machines, a key vault named Vault1, and a network security group (NSG) named NSG1. All the resources are deployed to the East US Azure region.

The virtual machines are protected by using NSG1. NSG1 is configured to block all outbound traffic to the internet.

You need to ensure that the virtual machines can access Vault1. The solution must use the principle of least privilege and minimize administrative effort

What should you configure as the destination of the outbound security rule for NSG1?

A) an application security group
B) a service tag (Correct Answer)
C) an IP address range

Explanation

Correct Answer:
B

Community Discussion

The correct answer is B. a service tag. In order to ensure that the virtual machines can access Vault1 while also using the principle of least privilege and minimizing administrative effort, you should configure a service tag as the destination of the outbound security rule for NSG1. Service tags represent a group of IP addresses associated with Azure PaaS and SaaS services. By specifying a service tag as the destination of the outbound security rule, you can allow the virtual machines to access Vault1 without having to manually specify the IP addresses of Vault1. This reduces administrative effort and ensures that the virtual machines are only able to access Vault1, rather than any other internet destination.

Selected Answer: B

B - Service Tag is correct. https://learn.microsoft.com/en-us/azure/virtual-network/service-tags-overview#available-service-tags "AzureKeyVault" tag can be used in outbound NSGs.

This question was on my exam on 22 Sep 2023. scored 900 i answered B

Selected Answer: B

Una etiqueta de servicio representa un grupo de prefijos de direcciones IP de un servicio de Azure determinado. Microsoft administra los prefijos de direcciones que la etiqueta de servicio incluye y actualiza automáticamente dicha etiqueta a medida que las direcciones cambian, lo que minimiza la complejidad de las actualizaciones frecuentes en las reglas de seguridad de red. Puede usar etiquetas de servicio para definir controles de acceso a la red en grupos de seguridad de red, Azure Firewall y rutas definidas por el usuario. Use etiquetas de servicio en lugar de direcciones IP específicas cuando cree reglas de seguridad y rutas.

You should configure a service tag as the destination of the outbound security rule for NSG1. This will allow the virtual machines to access Vault1 while still adhering to the principle of least privilege and minimizing administrative effort. A service tag represents a group of Azure resources that are identified by a common tag, in this case, the key vault. By configuring the outbound rule to allow traffic to the key vault service tag, you are ensuring that only traffic to the key vault is allowed, and not to any other internet destinations. This is more secure and efficient than specifying an IP address range or configuring an application security group.

SecExams

Question #210

You have an Azure AD tenant named adatum.com that contains the groups shown in the following table.

Name	Member of
Group1	*None*
Group2	Group1
Group3	Group2

Adatum.com contains the users shown in the following table.

Name	Member of
User1	Group1
User2	Group2
User3	Group3
User4	*None*

You assign the Azure Active Directory Premium Plan 2 license to Group1 and User4.

Which users are assigned the Azure Active Directory Premium Plan 2 license?

A) User4 only
B) User1 and User4 only (Correct Answer)
C) User1, User2, and User4 only
D) User1, User2, User3, and User4

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

Nevermind, the answer is B https://learn.microsoft.com/en-us/azure/active-directory/enterprise-users/licensing-group-advanced Under Limitations and known issues: "Group-based licensing currently does not support groups that contain other groups (nested groups). If you apply a license to a nested group, only the immediate first-level user members of the group have the licenses applied."

Selected Answer: B

A. User4 only (INCORRECT = Also Group1 has directly assigned licenses) B. User1 and User4 only (CORRECT = Both have directly assigned license) C. User1, User2, and User4 only (INCORRECT = User2 is member of Group2 that is NESTED to Group1. NESTED Group are NOT Supported as per MS KB: Group-based licensing currently does not support groups that contain other groups (nested groups). If you apply a license to a nested group, only the immediate first-level user members of the group have the licenses applied. REF: https://learn.microsoft.com/en-us/azure/active-directory/enterprise-users/licensing-group-advanced) D. User1, User2, User3, and User4 (INCORRECT= Same reason answer C)

"You assign the Azure Active Directory Premium Plan 2 license to Group1 and User4." User 4 is assigned the license directly

"You assign the Azure Active Directory Premium Plan 2 license to Group1 and User4." User 4 is assigned the license directly

"You assign the Azure Active Directory Premium Plan 2 license to Group1 and User4." User 4 is assigned the license directly

SecExams

Question #211

SecExams

HOTSPOT
-

You have an Azure AD tenant named contoso.com.

You have two external partner organizations named fabrikam.com and litwareinc.com. Fabrikam.com is configured as a connected organization.

You create an access package as shown in the Access package exhibit. (Click the Access package tab.)

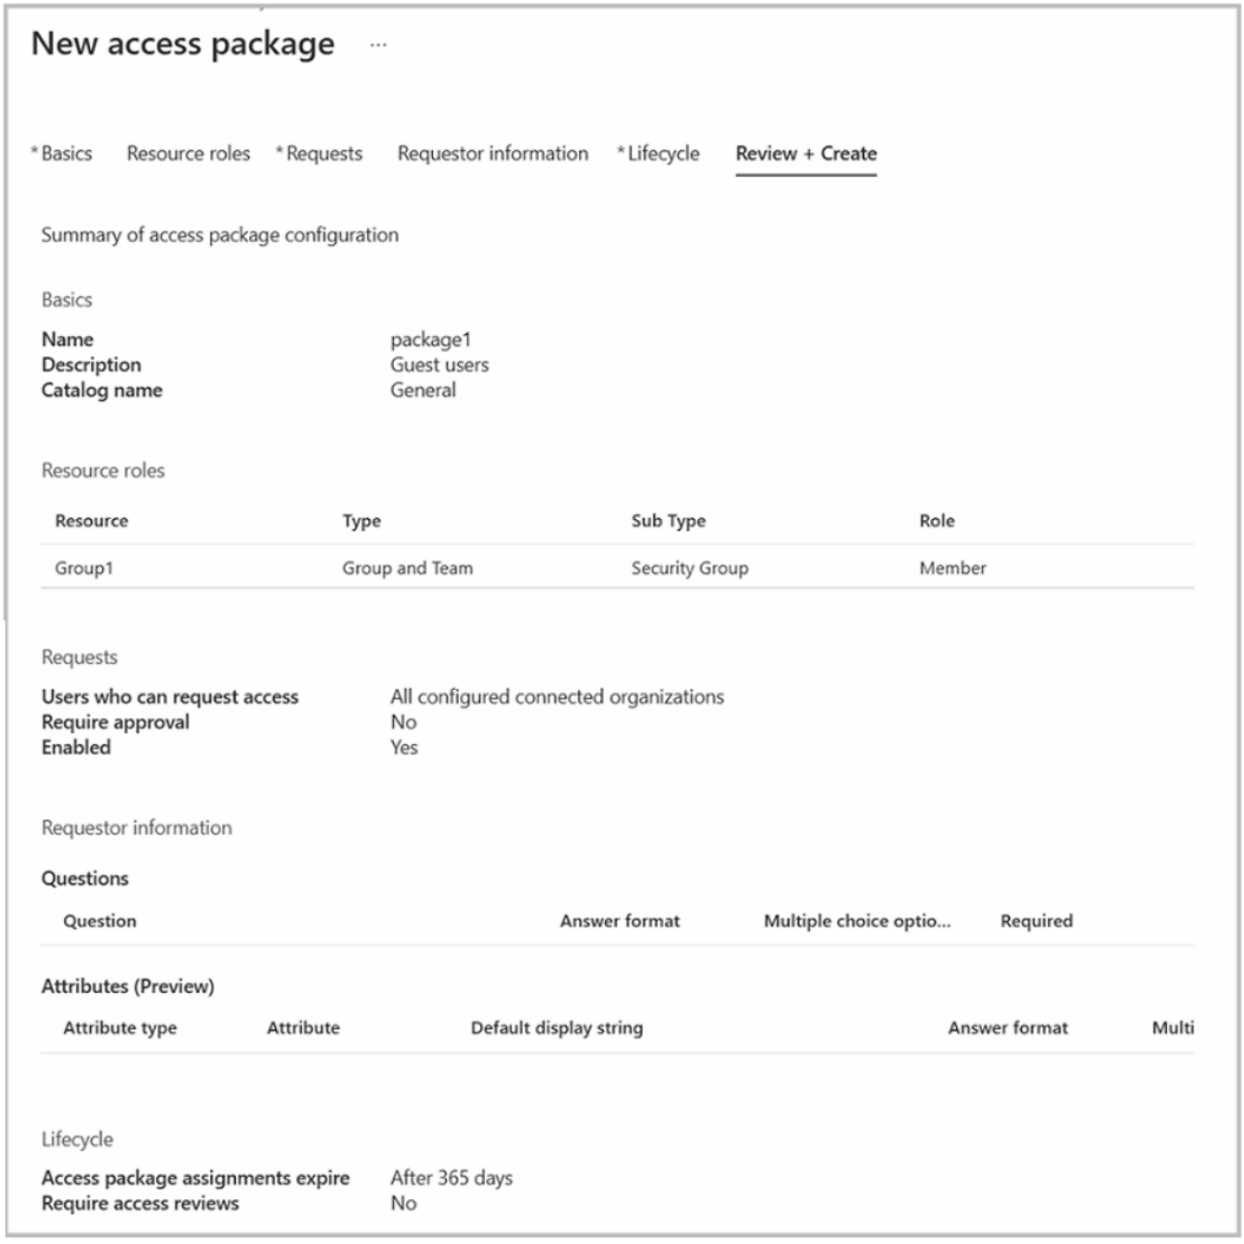

New access package ...

*Basics | Resource roles | *Requests | Requestor information | *Lifecycle | Review + Create

Summary of access package configuration

Basics

Name	package1
Description	Guest users
Catalog name	General

Resource roles

Resource	Type	Sub Type	Role
Group1	Group and Team	Security Group	Member

Requests

Users who can request access	All configured connected organizations
Require approval	No
Enabled	Yes

Requestor information

Questions

Question	Answer format	Multiple choice optio...	Required

Attributes (Preview)

Attribute type	Attribute	Default display string	Answer format	Multi

Lifecycle

Access package assignments expire	After 365 days
Require access reviews	No

You configure the external user lifecycle settings as shown in the Lifecycle

exhibit. (Click the Lifecycle tab.)

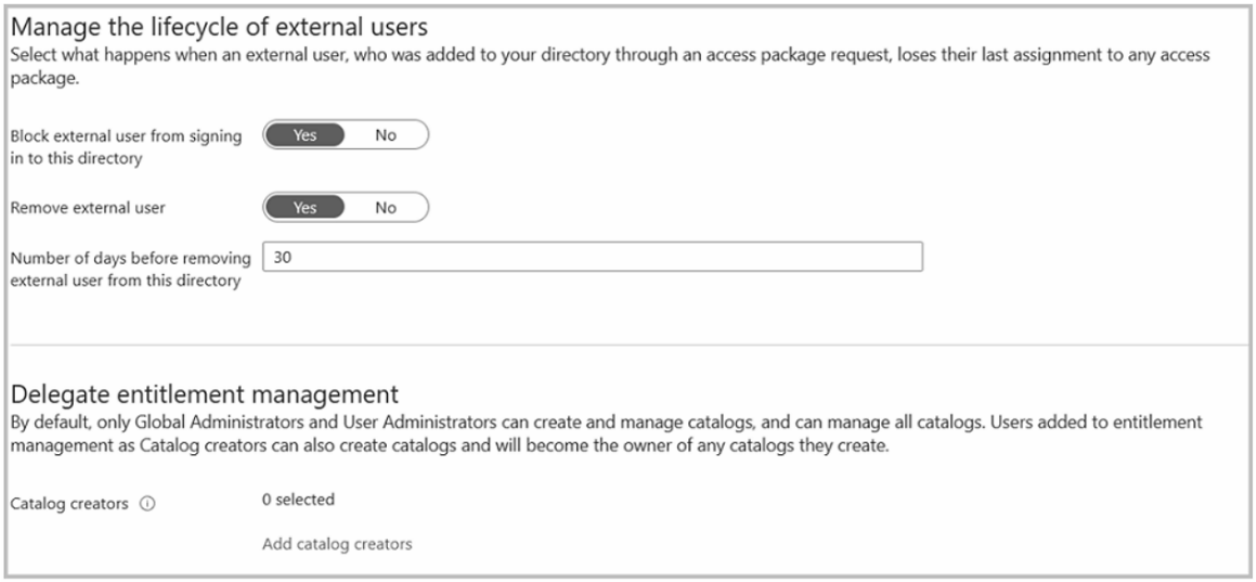

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Statements	Yes	No
Litwareinc.com users can be assigned to package1.	○	○
After 365 days, fabrikam.com users will be removed from Group1.	○	○
After 395 days, fabrikam.com users will be removed from the contoso.com tenant.	○	○

Explanation

Correct Answer:

Statements	Yes	No
Litwareinc.com users can be assigned to package1.	○	○
After 365 days, fabrikam.com users will be removed from Group1.	○	○
After 395 days, fabrikam.com users will be removed from the contoso.com tenant.	○	○

Community Discussion

N - Because not Connected Y - Because when it expires it is removed from the group. Proof to follow Y - Because..math https://learn.microsoft.com/en-us/azure/active-directory/governance/entitlement-management-access-package-resources When a user's access package assignment expires, they are removed from the group or team, unless they currently have an assignment to another access package that includes that same group or team.

N not a connected organisation N expired not remove Y 365 + 30 = 395 removed

After reading this article, i would say NYY is correct. Thank you

After reading this article, i would say NYY is correct. Thank you

The answer https://www.youtube.com/watch?v=J136cq9r0u8&list=PLlKA5U_Yqgof3H0YWhzvarFixW9QLTr4S&index=53

SecExams

Question #212

HOTSPOT

-

You have an Azure subscription. The subscription contains a storage account named storage1 that has the lifecycle management rules shown in the following table.

Name	Blob prefix	If base were last modified more than (days ago)	Then
Rule1	container1/	3 days	Move to archive storage
Rule2	*Not applicable*	5 days	Move to cool storage
Rule3	container2/	10 days	Delete the blob
Rule4	container2/	15 days	Move to archive storage

On June 1, you store two blobs in storage1 as shown in the following table.

Name	Location	Access tier
File1	container1	Hot
File2	container2	Hot

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
On June 6, File1 will be stored in the Cool access tier.	◯	◯
On June 1, File2 will be stored in the Cool access tier.	◯	◯
On June 16, File2 will be stored in the Archive access tier.	◯	◯

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
On June 6, File1 will be stored in the Cool access tier.	○	○
On June 1, File2 will be stored in the Cool access tier.	○	○
On June 16, File2 will be stored in the Archive access tier.	○	○

Community Discussion

N-N-N On June 6, File1 will be in archive because File1 is in container 1, and rule 1 applies 3 days after june 1. On June 1, File2 will still be in Hot tier because File2 is in container2, Rule3 and Rule4 havent hit yet. On June 16, File2 will be deleted because Rule3 applies 10 days after June 1.

Incorrect because lifecycle management policies cant move objects from archive to cool, so file 1 will remain in archive.

Incorrect because lifecycle management policies cant move objects from archive to cool, so file 1 will remain in archive.

Incorrect because lifecycle management policies cant move objects from archive to cool, so file 1 will remain in archive.

Incorrect because lifecycle management policies cant move objects from archive to cool, so file 1 will remain in archive.

SecExams

Question #213

SecExams

HOTSPOT

-

You have an Azure subscription.

You plan to deploy a storage account named storage1 by using the following Azure Resource Manager (ARM) template.

SecExams

```
{
    "$schema": "http://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",
    "contentVersion": "1.0.0.0",
    "resources": [
        {
            "name": "storage1",
            "type": "Microsoft.Storage/storageAccounts",
            "apiVersion": "2021-08-01",
            "location": "East US",
            "properties": {
                "allowBlobPublicAccess": true,
                "defaultToOAuthAuthentication": false,
                "networkAcls": {
                    "bypass": "AzureServices",
                    "defaultAction": "Allow",
                    "ipRules": []
                }
            },
            "sku": {
                "name": "Standard_LRS"
            },
            "kind": "StorageV2"
        },
        {
            "name": "storage1/default",
            "type": "Microsoft.Storage/storageAccounts/blobServices",
            "apiVersion": "2021-08-01",
            "properties": {
                "restorePolicy": {
                    "enabled": true,
                    "days": 6
                },
                "deleteRetentionPolicy": {
                    "enabled": true,
                    "days": 7
                },
                "containerDeleteRetentionPolicy": {
                    "enabled": true,
                    "days": 7
                },
                "changeFeed": {
                    "enabled": true
                },
                "isVersioningEnabled": true
            },
            "dependsOn": [
                "[concat('Microsoft.Storage/storageAccounts/', 'storage1')]"
            ]
        }
    ]
}
```

For each of the following statements, select Yes if the statement is hue. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Statements	Yes	No
Changes made to the data in storage1 can be rolled back after seven days.	○	○
Only users located in the East US Azure region can connect to storage1.	○	○
Three copies of storage1 will be maintained in the East US Azure region.	○	○

Explanation

Correct Answer:

Statements	Yes	No
Changes made to the data in storage1 can be rolled back after seven days.	○	○
Only users located in the East US Azure region can connect to storage1.	○	○
Three copies of storage1 will be maintained in the East US Azure region.	○	○

Community Discussion

N-N-Y deleteRetentionPolicy is 7 days, so can not be restored after 7 days. Means, backup is deleted after 7 days. allowBlobPublicAccess is true, so anyone can access the blob, not just on Azure. kind is Standard_LRS, so 3 local copies are stored.

This was came in exam on 01/04/23

I chose selected answer only and cleared exam with 870+

I chose selected answer only and cleared exam with 870+

On the Exam 3/29/23.

Question #214

You have an on-premises server that contains a folder named D:\Folder1.

You need to copy the contents of D:\Folder1 to the public container in an Azure Storage account named contosodata.

Which command should you run?

A) az storage blob copy start D:\Folder1 https://contosodata.blob.core.windows.net/public
B) azcopy sync D:\folder1 https://contosodata.blob.core.windows.net/public --snapshot
C) azcopy copy D:\folder1 https://contosodata.blob.core.windows.net/public --recursive (Correct Answer)
D) az storage blob copy start-batch D:\Folder1 https://contosodata.blob.core.windows.net/public

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: C

Correct Answer: C A: URL of the Storage Account. B: The azcopy sync command replicates the source location to the destination location. However, the file is skipped if the last modified time in the destination is more recent. C: The azcopy copy command copies a directory (and all the files in that directory) to a blob container. The result is a directory in the container by the same name. D: The az storage blob copy start-batch command copies multiple blobs to a blob container. Reference: https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-blobs https://docs.microsoft.com/en-us/azure/storage/common/storage-ref-azcopy-copy

Selected Answer: C

C: The azcopy copy command copies a directory (and all the files in that directory) to a blob container. The result is a directory in the container by the same name.

Selected Answer: C

correct

C. azcopy copy D:\folder1 https://contosodata.blob.core.windows.net/public --recursive

azcopy copy [source File] [destination file] --recursive

SecExams

Question #215

SecExams

HOTSPOT
-

You have an Azure subscription that contains a storage account named storage1. The storage1 account contains a container named container1.

You need to create a lifecycle management rule for storage1 that will automatically move the blobs in container1 to the lowest-cost tier after 90 days.

How should you complete the rule? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Explanation

Correct Answer:

Community Discussion

tierToArchive and prefixMatch - tierToArchive because it's the lowest cost tier, and doesnt say anyhting about needing to read data after 90 days. However, rehydration costs will occur if they did need to read it. - prefixMatch because we only want the blob in the container1.

{ "type": "Microsoft.Storage/storageAccounts/blobServices/lifecyclePolicies", "name": "storageAccount/default/lifecyclePolicies", "apiVersion": "2019-06-01", "properties": { "policy": { "rules": [{ "name": "rule1", "enabled": true, "type": "Lifecycle", "definition": { "actions": { "baseBlob": { "tierToArchive": "90" }, "snapshot": { "deleteSnapshots": "true" } }, "filters": { "blobTypes": ["blockBlob"], "prefixMatch": ["container1/"] } } }] } } }

I took Exam of Azure- 104 at 27/2/2023 I score 920 points out of 1000 points. This was on it and my answer was: tierToArchive and prefixMatch - tierToArchive because it's the lowest cost tier - prefixMatch because we only want the blob in the container1

Exact same Q came in my exam on 30 April2023. tiertoarchive n prefix match

1st: tierToArchive --> Lowest cost tier 2nd: prefixMatch --> An array of strings for prefixes to be matched. Each rule can define up to 10 case-sensitive prefixes. A prefix string must start with a container name. For example, if you want to match all blobs under https://myaccount.blob.core.windows.net/sample-container/blob1/... for a rule, the prefixMatch is sample-container/blob1.

SecExams

Question #216

DRAG DROP

-

You have an Azure subscription that contains a virtual machine named VM1.

You need to back up VM1. The solution must ensure that backups are stored across three availability zones in the primary region.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

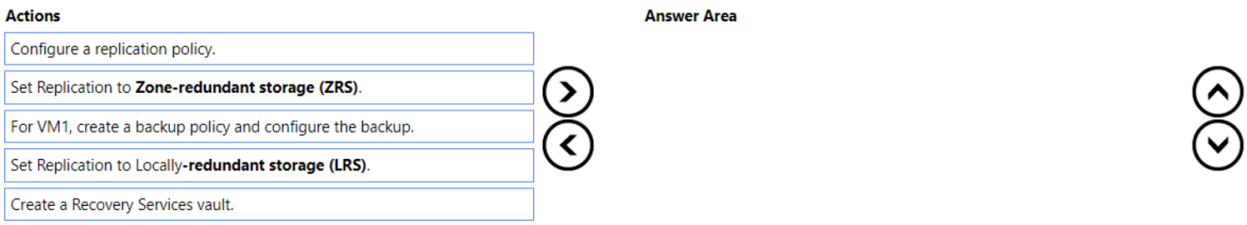

Explanation

Correct Answer:

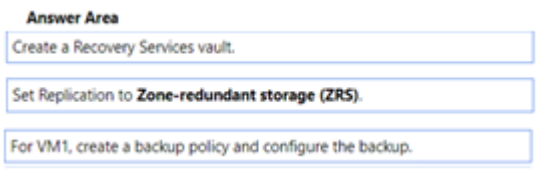

Community Discussion

1. Create Recovery Services Vault, 2. Set Replication Policy to ZRS (because of the requirement for having in three separate zones) 3. For VM1, create a backup policy

This was on the exam today!

This question was in my exam on 31/08/2023.

1. Create a Recovery Services vault. 2. Set Replication to ZRS 3. For VM1, create a backup policy and configure the backup. https://learn.microsoft.com/en-us/azure/backup/backup-create-recovery-services-vault

The answer is correct

Question #217

You have an Azure subscription named Subscription1.

You have 5 TB of data that you need to transfer to Subscription1.

You plan to use an Azure Import/Export job.

What can you use as the destination of the imported data?

A) an Azure Cosmos DB database
B) Azure File Storage (Correct Answer)
C) Azure SQL Database
D) a virtual machine

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

B is the answer. https://learn.microsoft.com/en-us/azure/import-export/storage-import-export-service Azure Import/Export service is used to securely import large amounts of data to Azure Blob storage and Azure Files by shipping disk drives to an Azure datacenter. This service can also be used to transfer data from Azure Blob storage to disk drives and ship to your on-premises sites. Data from one or more disk drives can be imported either to Azure Blob storage or Azure Files.

Answr is B. I see this question for the 3rd time already

Import service (upload) - Azure Blob storage and Azure Files Export service (download) - Azure Blob storage

Se está repetindo tanto é sinal que vai cair na prova.

Selected Answer: B

B. Azure File Storage

SecExams

Question #218

You have an Azure subscription that contains the resources shown in the following table.

Name	Type
storage1	Storage account
container1	Blob container
table1	Storage table

You need to perform the tasks shown in the following table.

Name	Type
Task1	Create a new storage account.
Task2	Upload an append blob to container1.
Task3	Create a file share in storage1.
Task4	Add data to table1.

Which tasks can you perform by using Azure Storage Explorer?

A) Task1 and Task3 only
B) Task1, Task2, and Task3 only
C) Task1, Task3, and Task4 only
D) Task2, Task3, and Task4 only (Correct Answer)
E) Task1, Task2, Task3, and Task4

Explanation

Correct Answer:
D

Community Discussion

Azure Storage Explorer does not have the ability to create a new storage account directly. Instead, you can use Azure Storage Explorer to connect to and manage existing storage accounts in Azure.

Selected Answer: D

Azure Storage Explorer does what is states, it explores Storage, not create it.

If it could create, guess it would be called Azure Storage Creator :)

If it could create, guess it would be called Azure Storage Creator :)

If only they were all this easy

SecExams

Question #219

SecExams

HOTSPOT
-

You have an Azure AD user named User1 and a read-access geo-redundant storage (RA-GRS) account named contoso2023.

You need to meet the following requirements:

• User1 must be able to write blob data to contoso2023.
• The contoso2023 account must fail over to its secondary endpoint.

Which two settings should you configure? To answer, select the appropriate settings in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

SecExams

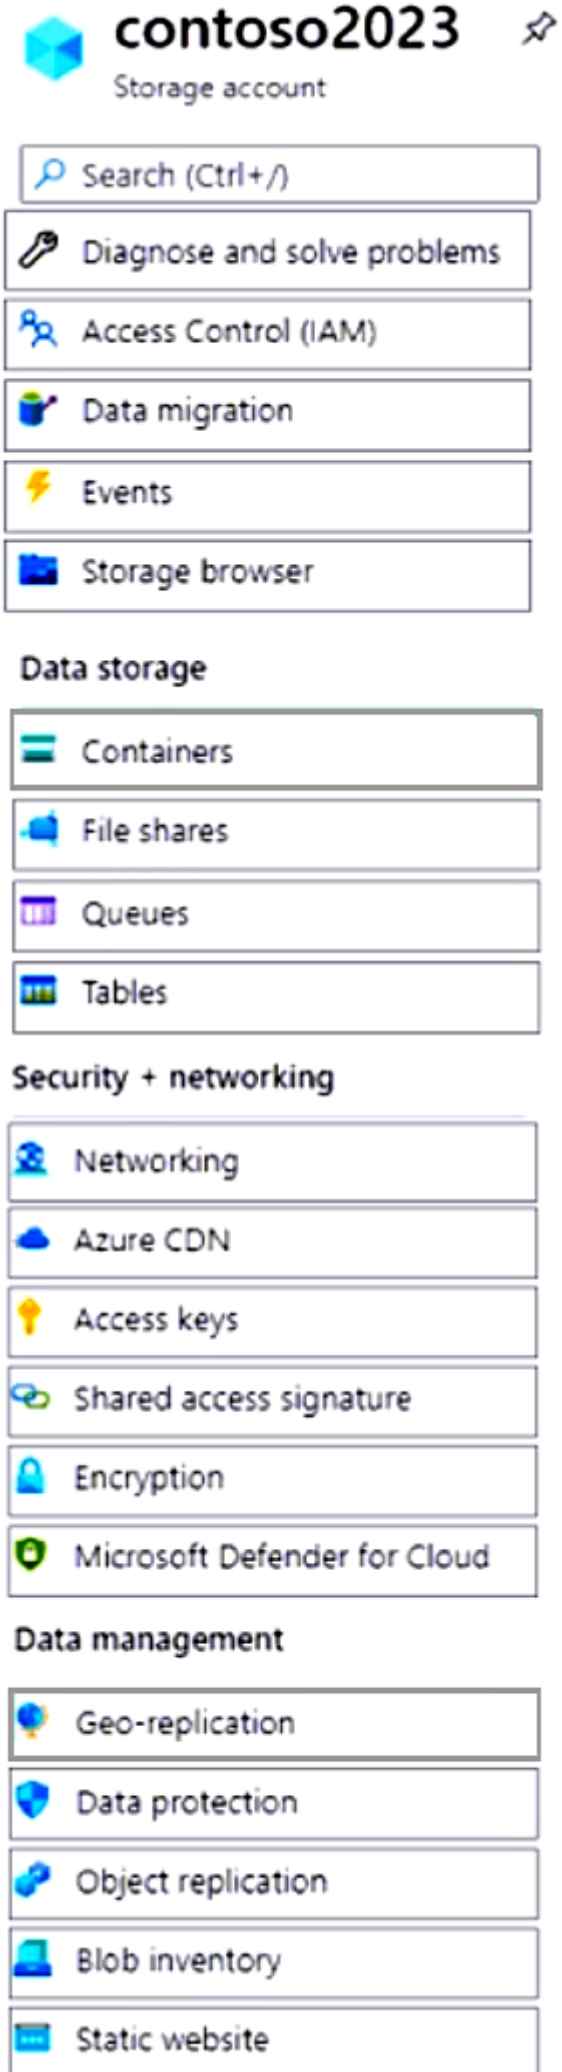
contoso2023
Storage account
Search (Ctrl+/)
Diagnose and solve problems
Access Control (IAM)
Data migration
Events
Storage browser
Data storage
Containers
File shares
Queues
Tables
Security + networking
Networking
Azure CDN
Access keys
Shared access signature
Encryption
Microsoft Defender for Cloud
Data management
Geo-replication
Data protection
Object replication
Blob inventory
Static website

SecExams

Explanation

Correct Answer:

SecExams

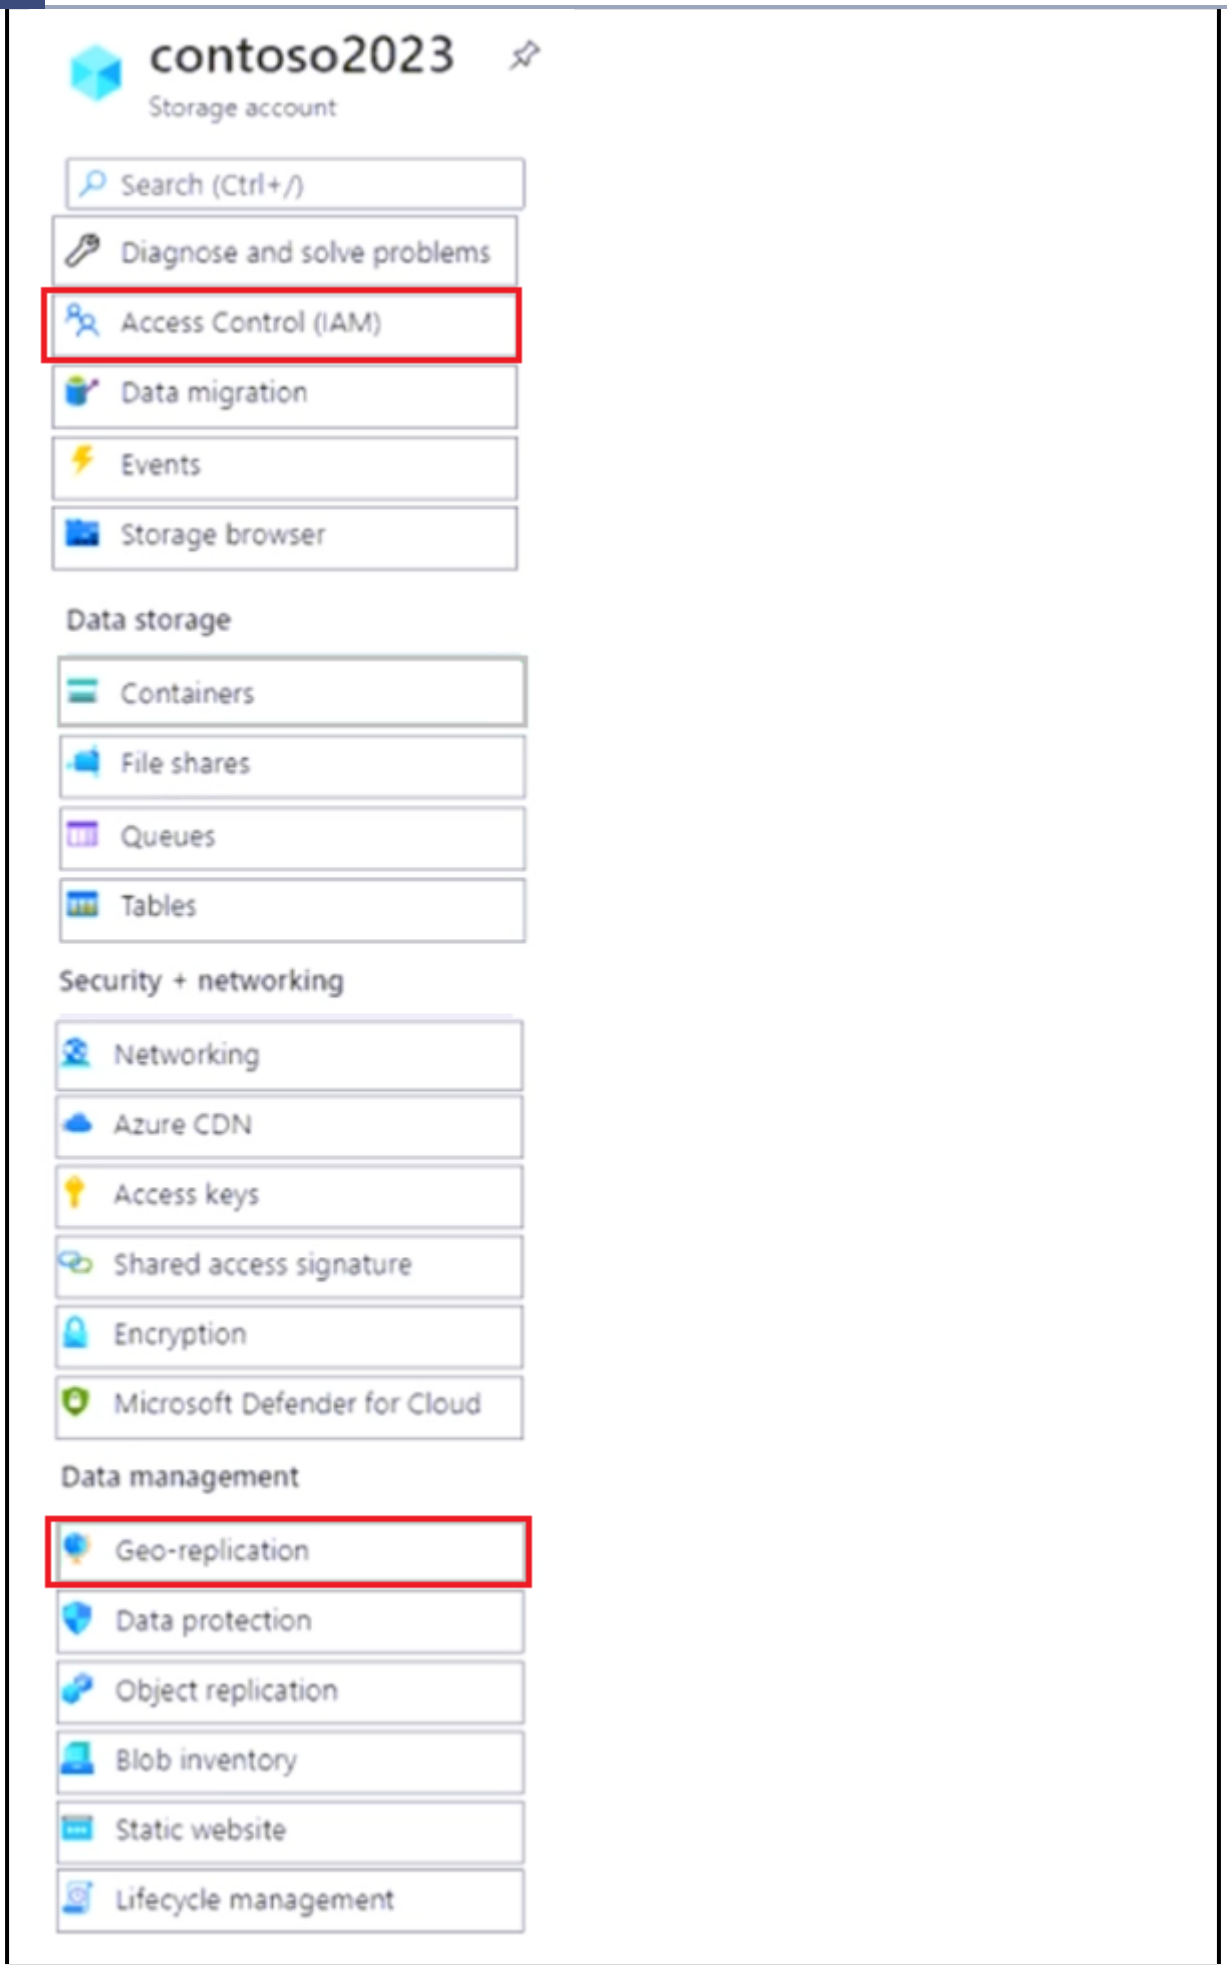
contoso2023
Storage account
Search (Ctrl+/)
Diagnose and solve problems
Access Control (IAM)
Data migration
Events
Storage browser
Data storage
Containers
File shares
Queues
Tables
Security + networking
Networking
Azure CDN
Access keys
Shared access signature
Encryption
Microsoft Defender for Cloud
Data management
Geo-replication
Data protection
Object replication
Blob inventory
Static website
Lifecycle management

SecExams

Community Discussion

this appeard in my exam today rip

New name is Redundancy.

Important note: "Geo-replication" is now changed to "Redundancy" by name. They are the same settings, just a new name.

New name is Redundancy.

IT'S NOW IAM AND REDUDANCY (REPLICATION CHANGED TO THIS NAME)

SecExams

Question #220

You have an Azure subscription that contains a storage account named storage1.

You plan to create a blob container named container1.

You need to use customer-managed key encryption for container1.

Which key should you use?

A) an EC key that uses the P-384 curve only
B) an EC key that uses the P-521 curve only
C) an EC key that uses the P-384 curve or P-521 curve only
D) an RSA key with a key size of 4096 only
E) an RSA key type with a key size of 2048, 3072, or 4096 only (Correct Answer)

Explanation

Correct Answer:
E

Community Discussion

what kinda $hit question IS THIS

Selected Answer: E

Provided answer E is correct. "Azure storage encryption supports RSA and RSA-HSM keys of sizes 2048, 3072 and 4096" https://learn.microsoft.com/en-us/azure/storage/common/customer-managed-keys-overview#enable-customer-managed-keys-for-a-storage-account

hmm... chatGPT (if you want to believe AI) says... "E" To use customer-managed key encryption for a blob container in Azure, you can use either an RSA key or an Elliptic Curve (EC) key. The minimum key size for an RSA key is 2048 bits, and the key size can be 2048, 3072, or 4096 bits. The recommended key size for an EC key is at least 256 bits. Therefore, the correct answer is E. an RSA key type with a key size of 2048, 3072, or 4096 only.

Selected Answer: E

Azure storage encryption supports RSA and RSA-HSM keys of sizes 2048, 3072 and 4096. For more information about keys, see About keys.

Answer E is correct. Azure Container Registry supports only RSA or RSA-HSM keys. Elliptic-curve keys aren't currently supported.

SecExams

Question #221

You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1.

Subscription1 has a user named User1. User1 has the following roles:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.

What should you do?

A) Assign User1 the Network Contributor role for VNet1.
B) Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1.
C) Assign User1 the Owner role for VNet1. (Correct Answer)
D) Assign User1 the Network Contributor role for RG1.

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: C

There is only two choices for that puspose; - Assign User1 the Owner role for VNet1. - Assign User1 the User Access Administrator role for VNet1.

I did see this on the exam

Same as Question 53. https://www.secexams.com/discussions/microsoft/view/74021-exam-az-104-topic-2-question-53-discussion

C is correct. It is the only role in the give options have capability to assign permissions.

Selected Answer: C

C. seems correct

SecExams

Question #222

SecExams

HOTSPOT

-

You have an Azure subscription that contains the users shown in the following table.

Name	Member of
User1	Group1
User2	Group2
User3	Group3

The groups are configured as shown in the following table.

Name	Type	Azure AD roles can be assigned to the group
Group1	Security	Yes
Group2	Security	Yes
Group3	Microsoft 365	Yes

You have a resource group named RG1 as shown in the following exhibit.

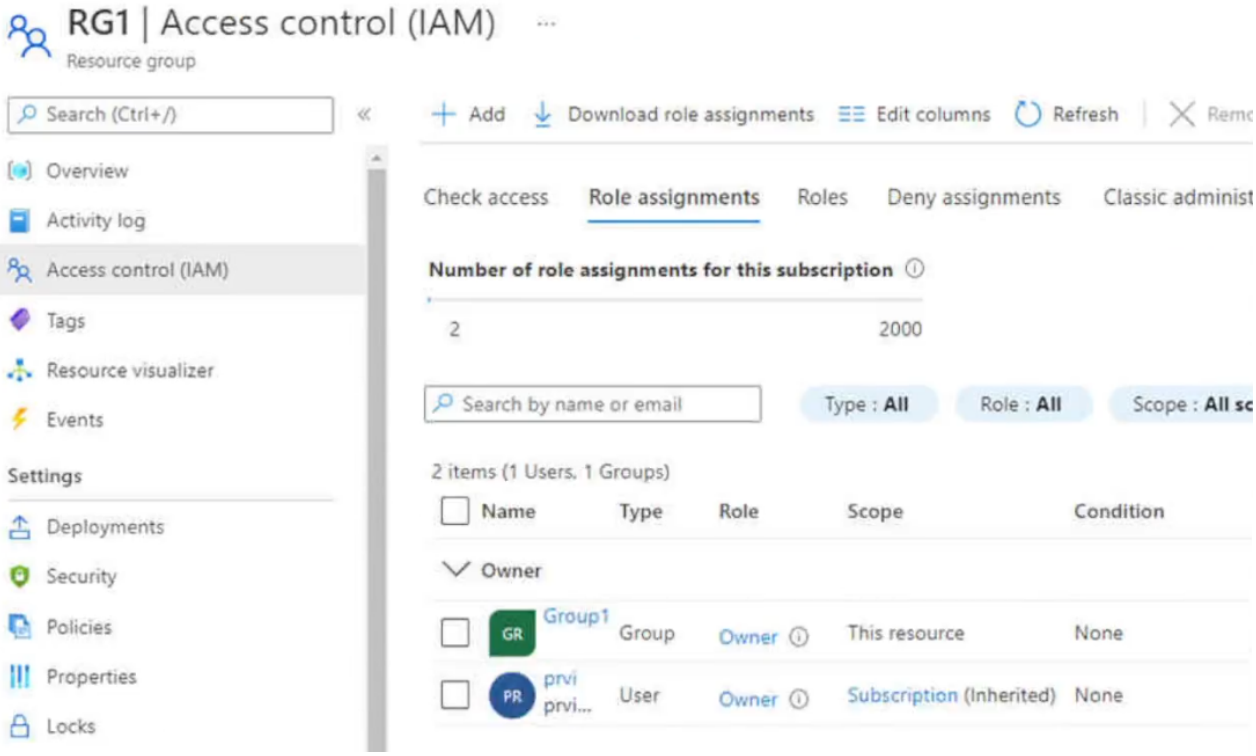

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

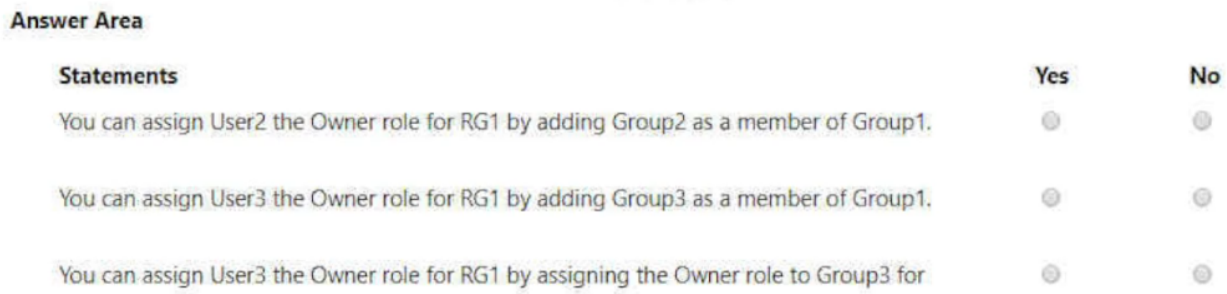

Explanation

Correct Answer:

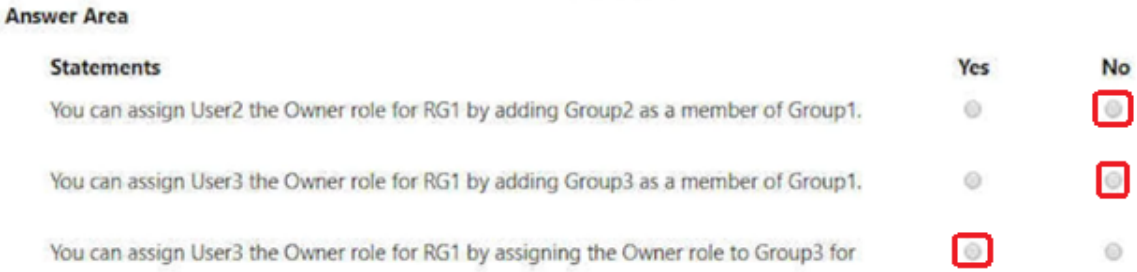

Community Discussion

Just tested in my Azure test environment. Answer is: 1. No 2. No 3. Yes Don't know where rpalanivel83 got his answers from

All 3 statements tested: Yes It is possible to add Group2 to Group1, after checking the effective access the user in Group2 is owner. No M365 groups cant be added to membership of another group Yes the statement is not complete but if it states to assign the role to Group3 directly it is possible

Nesting is currently not supported for groups that can be assigned to a role. and the screen grab shows that the groups are assigned a role as YES. Answers are correct

Nesting is currently not supported for groups that can be assigned to a role. and the screen grab shows that the groups are assigned a role as YES. Answers are correct

I agree, here some official documentation references. For the first question: https://learn.microsoft.com/en-us/azure/active-directory/roles/groups-concept#how-are-role-assignable-groups-protected "Group nesting isn't supported. A group can't be added as a member of a role-assignable group." For the second question: https://learn.microsoft.com/en-us/azure/active-directory/fundamentals/how-to-manage-groups#add-or-remove-a-group-from-another-group "We currently don't support: ... Adding Microsoft 365 groups to Security groups or other Microsoft 365 groups. " For the third question, although it appears truncated in the screenshot (ending with "for...") there is a reference about Microsoft 365 groups support for roles assignment here: https://learn.microsoft.com/en-us/azure/active-directory/roles/groups-concept#how-role-assignments-to-groups-work "To assign a role to a group, you must create a new security or Microsoft 365 group with the isAssignableToRole property set to true. "

SecExams

Question #223

SecExams

HOTSPOT
-

You have an Azure subscription that contains a user named User1 and a storage account named storage1. The storage1 account contains the resources shown in the following table.

Name	Type
container1	Container
folder1	File share
Table1	Table

User1 is assigned the following roles for storage1:

• Storage Blob Data Reader
• Storage Table Data Contributor
• Storage File Data SMB Share Contributor

For storage1, you create a shared access signature (SAS) named SAS1 that has the settings shown in the following exhibit. (Click the Exhibit tab.)

SecExams

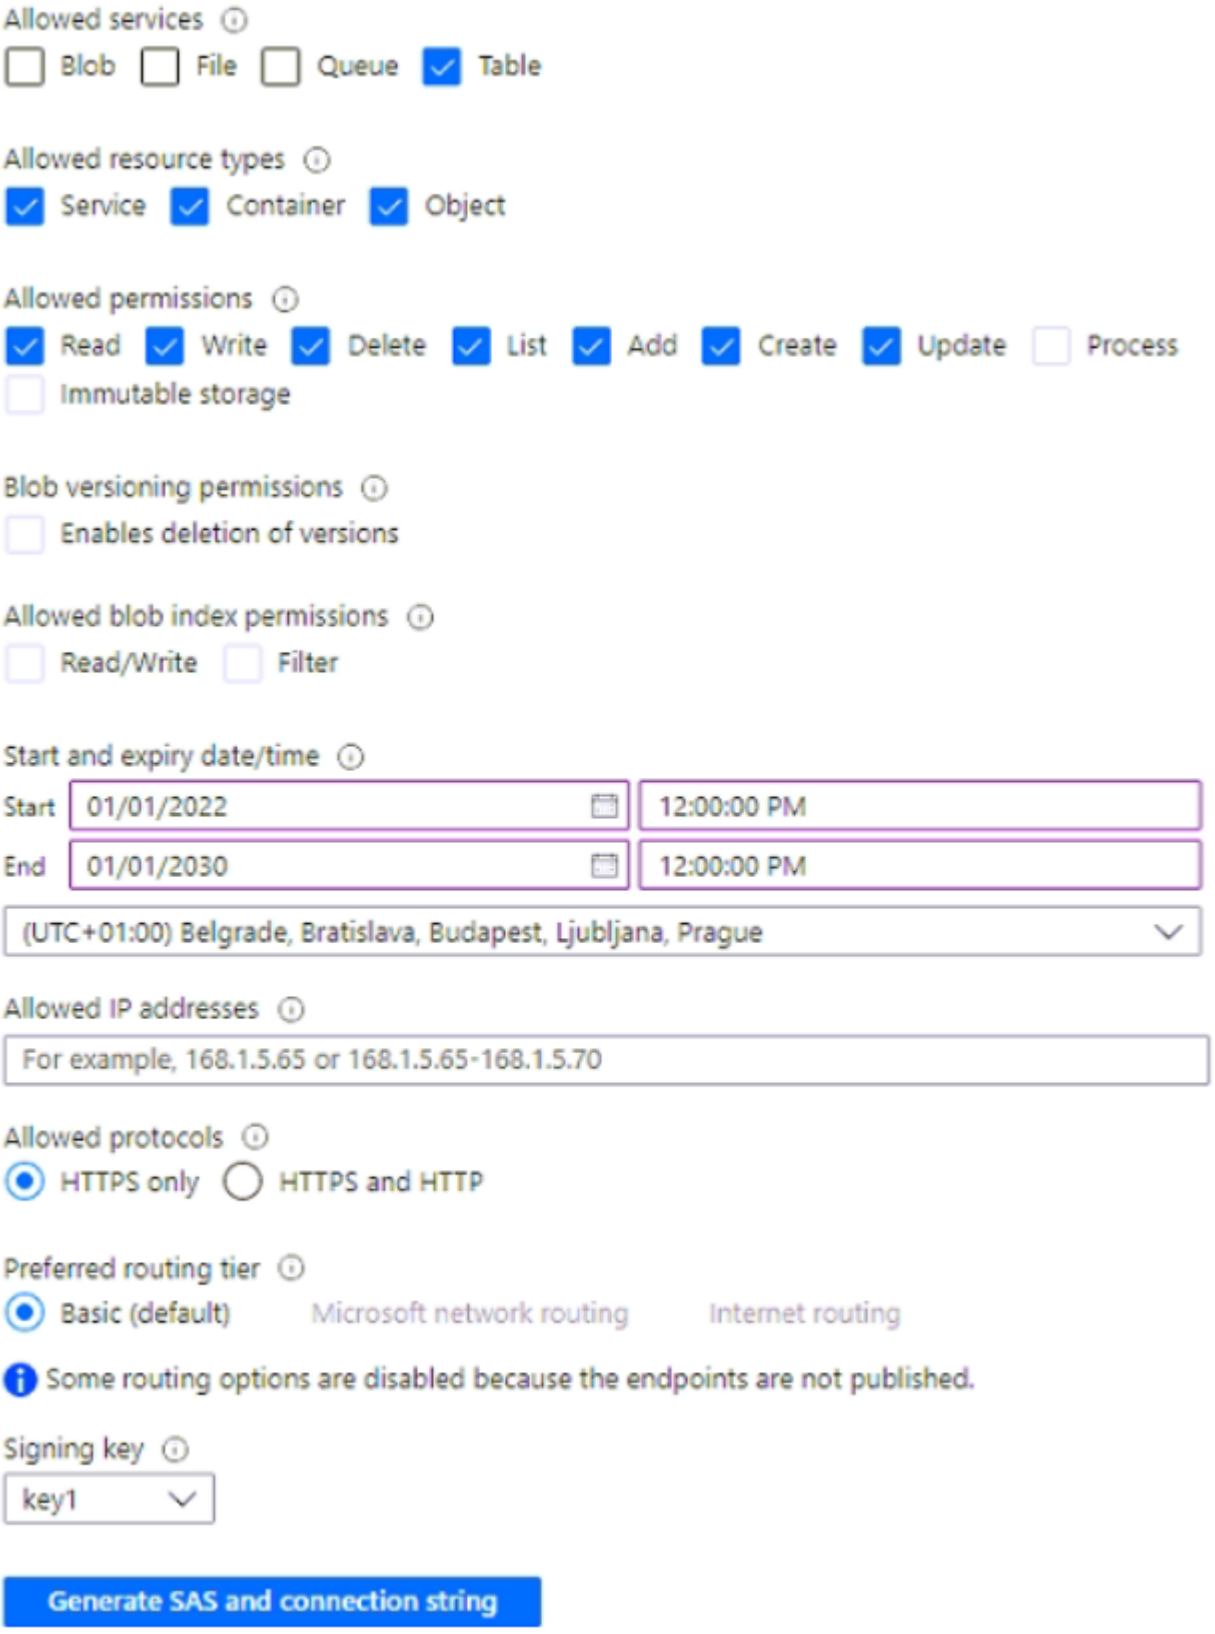

To which resources can User1 write by using SAS1 and key1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

key1:
- Table1 only
- Table1 and container1 only
- folder1 and Table1 only
- folder1 and container1 only
- Table1, folder1, and container1

SAS1:
- Table1 only
- Table1 and container1 only
- folder1 and Table1 only
- folder1 and container1 only
- Table1, folder1, and container1

Explanation

Correct Answer:

Answer Area

key1:
- Table1 only
- Table1 and container1 only
- folder1 and Table1 only
- folder1 and container1 only
- Table1, folder1, and container1

SAS1:
- Table1 only
- Table1 and container1 only
- folder1 and Table1 only
- folder1 and container1 only
- Table1, folder1, and container1

Community Discussion

key1: folder1, container1, table1 SAS1: table1 I think that key 1 is the key of storage account which is created when creating storage account. Thus, it should be able to access all in storage account. SAS1 allows table only which is shown in the exhibit.

The correct answer is definitely (ExamTopic's provided answer is unfortunately wrong): Using key1: Table1, folder1, and container1 Using SAS1: Table1 only Reasoning: 1. The question clearly states: "To which resources can User1 write by using SAS1 and key1?" This means that the RBAC for User1 will not apply. Hence, when using the SAS1 this means that only Table services (i.e. "Table1") will be allowed, regardless of the RBAC. 2. The signing key "key1", which is one of the two storage account access keys, are to be seen as the "root password" for the storage account. Exhibit: "Your storage account access keys are similar to a root password for your storage account." https://learn.microsoft.com/en-us/azure/storage/common/storage-configure-connection-string Go to your Storage Account and select the Access keys blade. There you will find the two keys and connection strings using each of them. These connection strings give "root access" to everything. Hence, when using key1 all services are granted.

I'm not agree with you. Question was about write access. User 1 don't have write access to blob because of Storage blob data reader access. So answers should be: key1: folder1, table1 SAS1: table1 only

I'm not agree with you. Question was about write access. User 1 don't have write access to blob because of Storage blob data reader access. So answers should be: key1: folder1, table1 SAS1: table1 only

Wrong, kamlau's answer is correct "key1: folder1, container1, table1". Storage account access keys provide full access to the configuration of a storage account, as well as the data. Always be careful to protect your access keys. ref: https://learn.microsoft.com/en-us/azure/storage/common/storage-account-keys-manage?tabs=azure-portal#regenerate-access-keys

SecExams

Question #224

SecExams

HOTSPOT

-

You have an Azure subscription that contains the storage account shown in the following exhibit.

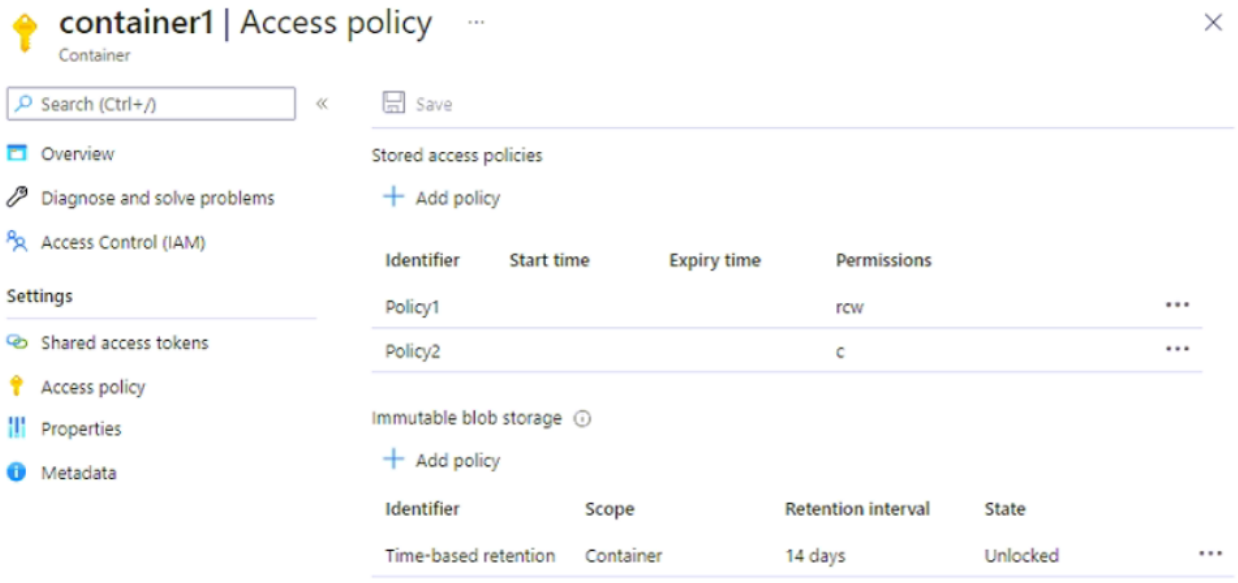

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic

NOTE: Each correct selection is worth one point.

Answer Area

The maximum number of additional stored access policies that you can create for container1 is **[answer choice]**.

0
1
3
5
6

The maximum number of additional immutable blob storage policies that you can create for container1 is **[answer choice]**.

0
1
2
4
5

Explanation

Correct Answer:

Answer Area

The maximum number of additional stored access policies that you can create for container1 is **[answer choice]**.

0
1
3
5
6

The maximum number of additional immutable blob storage policies that you can create for container1 is **[answer choice]**.

0
1
2
4
5

Community Discussion

Tested on Azure. My conclusion is: Max stored access policies: 3, because max total of stored access policy is 5 and we already have 2, so additional 3 available. Max immutable blob storage: 1, because max total of immutable blob storage policy is 2 - one Legal hold policy and one Time-based retention policy. We already have one, so additional 1 available.

why should we remember some random parameters? :(

tested in lab Maximum number of Stored access policies is 5 Maximum number of Immutable blob storage is 2 Answer 3 1

This is just for Microsoft to show you that you don't know anything

This is just for Microsoft to show you that you don't know anything

SecExams

Question #225

You have an Azure subscription named Subscription1.

You have 5 TB of data that you need to transfer to Subscription1.

You plan to use an Azure Import/Export job.

What can you use as the destination of the imported data?

A) Azure Blob Storage (Correct Answer)
B) Azure Data Lake Store
C) Azure SQL Database
D) a virtual machine

Explanation

Correct Answer:
A

Community Discussion

Correct answer is A Azure Import/Export service is used to securely import large amounts of data to Azure Blob storage and Azure Files by shipping disk drives to an Azure datacenter. This service can also be used to transfer data from Azure Blob storage to disk drives and ship to your on-premises sites. Data from one or more disk drives can be imported either to Azure Blob storage or Azure Files. The maximum size of an Azure Files Resource of a file share is 5 TB. Note: There are several versions of this question in the exam. The question has two correct answers: 1. Azure File Storage or 2. Azure Blob Storage

Selected Answer: A

A. Also, this question has come up in the dump before

Selected Answer: A

A: Blob Storage

Selected Answer: A

- A. Azure Blob Storage Azure Import/Export service supports the following storage types:
☞ Import supports Azure Blob storage and Azure File storage

Selected Answer: A

A is the answer. https://learn.microsoft.com/en-us/azure/import-export/storage-import-export-service Azure Import/Export service is used to securely import large amounts of data to Azure Blob storage and Azure Files by shipping disk drives to an Azure datacenter. This service can also be used to transfer data from Azure Blob storage to disk drives and ship to your on-premises sites. Data from one or more disk drives can be imported either to Azure Blob storage or Azure Files.

Question #226

You have an Azure subscription. The subscription contains a storage account named storage1 that has the lifecycle management rules shown in the following table.

Name	If base blobs were last modified more than (days)	Then
Rule1	5 days	Move to cool storage
Rule2	5 days	Delete the blob
Rule3	5 days	Move to archive storage

On June 1, you store a blob named File1 in the Hot access tier of storage1.

What is the state of File1 on June 7?

A) stored in the Cool access tier
B) stored in the Archive access tier
C) stored in the Hot access tier
D) deleted (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Sorry, the corect answer is D If you define more than one action on the same blob, lifecycle management applies the least expensive action to the blob. For example, action delete is cheaper than action tierToArchive. Action tierToArchive is cheaper than action tierToCool. https://learn.microsoft.com/en-us/azure/storage/blobs/lifecycle-management-overview

Who in their right mind will set up rules like this? Answer is D.

No one...except ms examiner :)

No one...except ms examiner :)

Selected Answer: D

D is the answer. https://learn.microsoft.com/en-us/azure/storage/blobs/lifecycle-management-overview#rule-actions If you define more than one action on the same blob, lifecycle management applies the least expensive action to the blob. For example, action delete is cheaper than action tierToArchive. Action tierToArchive is cheaper than action tierToCool.

SecExams

Question #227

HOTSPOT

-

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Kind	Redundancy
storage1	StorageV2	Geo-zone-redundant storage (GZRS)
storage2	BlobStorage	Read-access geo-redundant storage (RA-GRS)
storage3	BlockBlobStorage	Zone-redundant storage (ZRS)

You need to identify which storage accounts support lifecycle management, and which storage accounts support moving data to the Archive access tier.

Which storage accounts should you use? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Lifecycle management:

- storage1 only
- storage2 only
- storage1 and storage3 only
- storage2 and storage3 only
- storage1, storage2, and storage3

The Archive access tier:

- storage1 only
- storage2 only
- storage1 and storage3 only
- storage2 and storage3 only
- storage1, storage2, and storage3

SecExams

Explanation

Correct Answer:

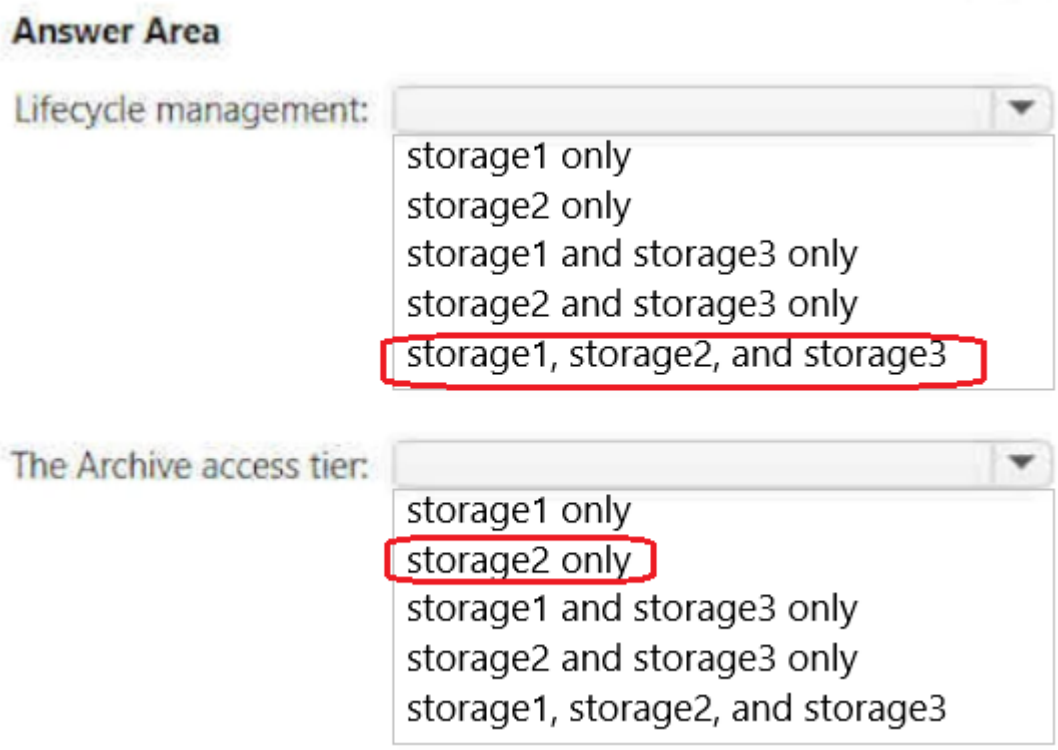

Community Discussion

Correct 1 - storage1, storage2, storage3 Lifecycle management policies are supported for block blobs and append blobs in general-purpose v2, premium block blob, and Blob Storage accounts. 2 - storage2 Only storage accounts that are configured for LRS, GRS, or RA-GRS support moving blobs to the archive tier. The archive tier isn't supported for ZRS, GZRS, or RA-GZRS accounts. https://learn.microsoft.com/en-us/azure/storage/blobs/lifecycle-management-overview https://learn.microsoft.com/en-us/azure/storage/blobs/access-tiers-overview

Passed today on 29Jan23 with a score of 970. This question was in the exam. Correct Answer: 1 - storage1, storage2, storage3 2 - storage2

Excellent answer, and thanks for the references. I'd like to share something I've just realised, in case someone gets confused by the fact that Premium BlockBlobStorage does support lifecycle management BUT does not support tiers (mentioned in the same

reference under Rule actions): lifecycle management != tiering! So it would seem LM is supported by premium block blob accounts, but limited to just deletion rules...

Excellent answer, and thanks for the references. I'd like to share something I've just realised, in case someone gets confused by the fact that Premium BlockBlobStorage does support lifecycle management BUT does not support tiers (mentioned in the same reference under Rule actions): lifecycle management != tiering! So it would seem LM is supported by premium block blob accounts, but limited to just deletion rules...

This was the last question I saw before entering my exam venue, guess what ? It was my first question, I didn't even bother to read the question. Lol

Question #228

You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1.

Subscription1 has a user named User1. User1 has the following roles:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.

What should you do?

A) Remove User1 from the Security Reader role for Subscript on 1. Assign User1 the Contributor role for RG1.
B) Assign User1 the Owner role for VNet1. (Correct Answer)
C) Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription 1.
D) Assign User1 the Contributor role for VNet1.

Explanation

Correct Answer:

B

Community Discussion

if they were all that easy, everyone would be certified :-)

Selected Answer: B

B seems fine

Same as question 71. https://www.secexams.com/discussions/microsoft/view/95675-exam-az-104-topic-2-question-71-discussion

Same with topic 2 question 53

Selected Answer: B

B is the answer.

SecExams

Question #229

Your on-premises network contains a VPN gateway.

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vgw1	Virtual network gateway	Gateway for Site-to-Site VPN to the on-premises network
storage1	Storage account	Standard performance tier
Vnet1	Virtual network	Enabled forced tunneling
VM1	Virtual machine	Connected to Vnet1

You need to ensure that all the traffic from VM1 to storage1 travels across the Microsoft backbone network.

What should you configure?

A) Azure Application Gateway
B) private endpoints (Correct Answer)
C) a network security group (NSG)
D) Azure Virtual WAN

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

Per the MS documentation, private endpoint seems to be the proper choice: "You can use private endpoints for your Azure Storage accounts to allow clients on a virtual network (VNet) to securely access data over a Private Link. The private endpoint uses a separate IP address from the VNet address space for each storage account service. Network traffic between the clients on the VNet and the storage account traverses over the VNet and a private link on the Microsoft backbone network, eliminating exposure from the public

internet." Link: https://learn.microsoft.com/en-us/azure/storage/common/storage-private-endpoints

Selected Answer: B

I took Exam of Azure- 104 at 27/2/2023 I score 920 points out of 1000 points. This was on it and my answer was: B

I don't believe you. You are spamming every question with this reply

I don't believe you. You are spamming every question with this reply

Selected Answer: B

A private endpoint is a network interface that uses a private IP address from your virtual network. This network interface connects you privately and securely to a service that's powered by Azure Private Link. By enabling a private endpoint, you're bringing the service into your virtual network. The service could be an Azure service such as: Azure Storage Azure Cosmos DB Azure SQL Database Your own service, using Private Link service. https://learn.microsoft.com/en-us/azure/private-link/private-endpoint-overview

SecExams

Question #230

HOTSPOT

-

You have an Azure subscription that contains a user named User1 and the resources shown in the following table.

Name	Type
RG1	Resource group
networkinterface1	Virtual network interface
NSG1	Network security group (NSG)

NSG1 is associated to networkinterface1.

User1 has role assignments for NSG1 as shown in the following table.

Role	Scope
Contributor	This resource
Reader	Subscription (Inherited)
Storage Account Contributor	Resource group (Inherited)

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
User1 can create a storage account in RG1.	○	○
User1 can modify the DNS settings of networkinterface1.	○	○
User1 can create an inbound security rule to filter inbound traffic to networkinterface1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
User1 can create a storage account in RG1.	○	○
User1 can modify the DNS settings of networkinterface1.	○	○
User1 can create an inbound security rule to filter inbound traffic to networkinterface1.	○	○

Community Discussion

Correct Answers. YES, No, Yes (YES)User1 can create a storage account in RG1, since User1 has Storage Account Contribute Role inherited from Resource Group. (NO) User1 can modify the DNS settings of networkinterface1, since it requires Network Contribute role referring to the following link. https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface?tabs=network-interface-portal#permissions (YES) User1 can create an inbound security rule to filter inbound traffic to networkinterface1, since User1 has Contributor role for NSG1

YNY is the answer. https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#storage-account-contributor - Microsoft.Storage/storageAccounts/* Create and manage storage accounts https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#reader View all resources, but does not allow you to make any changes. https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#contributor Grants full access to manage all resources, but does not allow you to assign roles in Azure RBAC, manage assignments in Azure Blueprints, or share image galleries.

Wrong. Answer is N-N-Y. You cannot create new storage accounts with a "Storage Account Contributor" role, only manage existing. Don't confuse people.

Wrong. Answer is N-N-Y. You cannot create new storage accounts with a "Storage Account Contributor" role, only manage existing. Don't confuse people.

SecExams

Ok I have tested this as its controversial as fk. You can indeed create new storage accounts with the SA Contribute role. Confusion came after the identical experiment with the Logic App Contributor role. As for that one you cannot create logic apps due to lack of a write permission. Despite the docs saying Microsoft.Logic/*

Question #231

You have an Azure subscription named Subscription1.

You have 5 TB of data that you need to transfer to Subscription1.

You plan to use an Azure Import/Export job.

What can you use as the destination of the imported data?

A) an Azure Cosmos DB database
B) Azure Data Lake Store
C) Azure Blob storage (Correct Answer)
D) Azure Data Factory

Explanation

Correct Answer:
C

Community Discussion

I love seeing dupes, means less questions to actually get through when studying

Very Tough question.. appearing again and again. :)

Selected Answer: C

This question better be on the exam.

Selected Answer: C

C - Blob Storage (it's been repeated atleast 3 times, what's going on?)

Selected Answer: C

C is the answer. https://learn.microsoft.com/en-us/azure/import-export/storage-import-export-service Azure Import/Export service is used to securely import large amounts of data to Azure Blob storage and Azure Files by shipping disk drives to an Azure datacenter. This service can also be used to transfer data from Azure Blob storage to disk drives and ship to your on-premises sites. Data from one or more disk drives can be imported either to Azure Blob storage or Azure Files.

SecExams

Question #232

SecExams

HOTSPOT
-

You have an Azure subscription that contains a storage account named storage1. The storage1 account contains a container named container1.

You create a blob lifecycle rule named rule1.

You need to configure rule1 to automatically move blobs that were NOT updated for 45 days from contained to the Cool access tier.

How should you complete the rule? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

SecExams

Explanation

Correct Answer:

Community Discussion

1. daysAfterModificationGreaterThan 2. Blockblob https://learn.microsoft.com/en-us/azure/storage/blobs/lifecycle-management-overview#rule-actions daysAfterModificationGreaterThan - The condition for actions on a current version of a blob Tiering is not yet supported in a premium block blob storage account. For all other accounts, tiering is allowed only on block blobs and not for append and page blobs. tierToCool - Supported for blockBlob

Cleared Exam today 26 Feb, This question was there in exam.

Was on the exam on June 17

is it new question?

Answer is correct: The current release supports blockBlob and appendBlob. Only delete is supported for appendBlob, set tier isn't supported. https://learn.microsoft.com/en-us/azure/storage/blobs/lifecycle-management-overview#rule-filters

Question #233

You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1.

Subscription1 has a user named User1. User1 has the following roles:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.

What should you do?

A) Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1.
B) Assign User1 the Access Administrator role for VNet1. (Correct Answer)
C) Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1.
D) Assign User1 the Network Contributor role for RG1.

Explanation

Correct Answer:
B

Community Discussion

B is correct, You need to have the Owner Role or Access Administrator role to assign roles but Access Administrator role is preferred as it is least privilege. https://learn.microsoft.com/en-us/azure/role-based-access-control/rbac-and-directory-admin-roles

Shouldn't this be "User" Access Administrator?

Selected Answer: B

B. Assign User1 the Access Administrator role for VNet1.

Selected Answer: B

Selected Answer: B

Selected Answer: B

You need User Administrator Role for assigning the Reader role to User1 for VNet1

SecExams

Question #234

HOTSPOT

-

You have three Azure subscriptions named Sub1, Sub2, and Sub3 that are linked to an Azure AD tenant.

The tenant contains a user named User1, a security group named Group1, and a management group named MG1. User is a member of Group1.

Sub1 and Sub2 are members of MG1. Sub1 contains a resource group named RG1. RG1 contains five Azure functions.

You create the following role assignments for MG1:

- Group1: Reader
- User1: User Access Administrator

You assign User the Virtual Machine Contributor role for Sub1 and Sub2.

Answer Area

Statements	Yes	No
The Group1 members can view the configurations of the Azure functions.	○	○
User1 can assign the Owner role for RG1.	○	○
User1 can create a new resource group and deploy a virtual machine to the new group.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
The Group1 members can view the configurations of the Azure functions.	○	○
User1 can assign the Owner role for RG1.	○	○
User1 can create a new resource group and deploy a virtual machine to the new group.	○	○

Community Discussion

Personally I think its YYN. 1) GROUP1 Reader access, provides access to view all items, except secrets https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#reader 2) To Assign OWNER role, you need to either Owner role or User Administrator Access Role https://learn.microsoft.com/en-us/azure/role-based-access-control/role-assignments-portal-subscription-admin#prerequisites 3) Neither User Access Admin Role nor the Reader Role allows to create new resources. https://learn.microsoft.com/en-us/azure/role-based-access-control/role-assignments-steps

So a User Access Administrator can't create new resource groups but they can assign a user with the Owner role, and the user with the Owner role *can* create new resource groups? I feel like Im missing something.

It clearly states Group1 is assigned Reader role at the MG1 Scope

It clearly states Group1 is assigned Reader role at the MG1 Scope

It clearly states Group1 is assigned Reader role at the MG1 Scope

SecExams

Question #235

You have an Azure subscription that contains the resources shown in the following table.

Name	Description
share1	File share in storage1
storage1	Storage account
User1	Azure AD user

You need to assign User1 the Storage File Data SMB Share Contributor role for share1.

What should you do first?

A) Enable identity-based data access for the file shares in storage1.
B) Modify the security profile for the file shares in storage1.
C) Select Default to Azure Active Directory authorization in the Azure portal for storage1.
D) Configure Access control (IAM) for share1. (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

It should be A, I just created a storage account, then created a file share, went to IAM, and it says : To give individual accounts access to the file share (Kerberos), enable identity-based authentication for the storage account.

Selected Answer: A

After arguing with ChatGPT here is the answer: The correct steps to assign User1 the Storage File Data SMB Share Contributor role for share1 are: 1. Enable identity-based data access for the file shares in storage1. 2. Configure Access control (IAM) for share1 and add User1 as a role assignment with the Storage File Data SMB Share Contributor role. So the correct answer is A.

lol you cant trust ChatGPT to be truthful.

lol you cant trust ChatGPT to be truthful.

That is so weird, as I just labbed it. For me answer D As I did just lab it, and I can assign the mentioned role straight out of the box

SecExams

Question #236

You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1.

Subscription1 has a user named User1. User1 has the following roles:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.

What should you do?

A) Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1.
B) Assign User1 the User Access Administrator role for VNet1. (Correct Answer)
C) Remove User1 from the Security Reader and Reader roles for Subscription1.
D) Assign User1 the Contributor role for VNet1.

Explanation

Correct Answer:
B

Community Discussion

many time repeated question

Selected Answer: B

B is indeed correct. Only User Access Administrator role and Owner role can assign permissions.

I hope that the AZ-104 is just different variations of this question 60 times.

I used to be a question, but now I am the answer

This question has appeared too many times. It better be on the exam now lol

SecExams

Question #237

You have an Azure subscription named Subscription1.

You have 5 TB of data that you need to transfer to Subscription1.

You plan to use an Azure Import/Export job.

What can you use as the destination of the imported data?

A) an Azure Cosmos DB database
B) Azure Blob Storage (Correct Answer)
C) Azure SQL Database
D) the Azure File Sync Storage Sync Service

Explanation

Correct Answer:
B

Community Discussion

If i come across this question one more time lol

I am beginning to love this question

after all these duplicates, if this question doesn't come up on the exam day, I'll be very pissed off :-)

Selected Answer: B

https://learn.microsoft.com/en-us/azure/import-export/storage-import-export-service
Azure Import/Export service is used to securely import large amounts of data to Azure Blob storage and Azure Files by shipping disk drives to an Azure datacenter. This service can also be used to transfer data from Azure Blob storage to disk drives and ship to your on-premises sites. Data from one or more disk drives can be imported either to Azure Blob storage or Azure Files.

When I see this question again as I'm going through these dumps for the first time I'm thinking: "Finally, I know one of them!"

Question #238

You plan to create an Azure Storage account named storage1 that will contain a file share named share1.

You need to ensure that share1 can support SMB Multichannel. The solution must minimize costs.

How should you configure storage?

A) Premium performance with locally-redundant storage (LRS) (Correct Answer)

B) Standard performance with zone-redundant storage (ZRS)
C) Premium performance with geo-redundant storage (GRS)
D) Standard performance with locally-redundant storage (LRS)

Explanation

Correct Answer:
A

Community Discussion

Selected Answer: A

Provided answer is correct. According to documentation only Premium file shares (FileStorage), LRS/ZRS are supported for SMB. https://learn.microsoft.com/en-us/azure/storage/files/storage-files-smb-multichannel-performance

Correct https://learn.microsoft.com/en-us/azure/storage/files/storage-files-smb-multichannel-performance

We need to remember Premium not standard. LRS is supported for Server Message block and cost effective. Correct is A

The question says: "The solution must minimize costs.".

The question says: "The solution must minimize costs.".

SecExams

Question #239

You have an Azure subscription named Subscription1.

You have 5 TB of data that you need to transfer to Subscription1.

You plan to use an Azure Import/Export job.

What can you use as the destination of the imported data?

A) Azure Data Lake Store
B) Azure File Storage (Correct Answer)
C) Azure SQL Database
D) the Azure File Sync Storage Sync Service

Explanation

Correct Answer:
B

Community Discussion

If you miss this question at this point you should probably move to AWS ?

This question is repeated 1000 times.

You are right, but no cause for alarm

You are right, but no cause for alarm

surely you won't get it wrong..

Question #240

You have an Azure subscription that contains a storage account named storage1.

You plan to use conditions when assigning role-based access control (RBAC) roles to storage1.

Which storage1 services support conditions when assigning roles?

A) containers only (Correct Answer)
B) file shares only
C) tables only
D) queues only
E) containers and queues only
F) files shares and tables only

Explanation

Correct Answer:
A

Community Discussion

Anybody else just slogging through this dumps set? AZ 104 has got to be one of the most exhausting examinations to understand just because of the wide scope of things it covers as well as the specific questions on very specific products and scenarios. Good luck to everyone taking this exam.

Selected Answer: E

The answer is container and queue

This question was in exam 15/01/24

why ET admins doesn't revisit and provide right answer in Reveal solution column ?

This question was on my exam today on 11/14/2023.

Question #241

SecExams

HOTSPOT

-

You have an Azure subscription that contains the resource groups shown in the following table.

Name	Region
RG1	West US
RG2	West US
RG3	East US

The subscription contains the virtual networks shown in the following table.

Name	Resource group	Region	Subnet	Subnet IP address space
VNet1	RG1	West US	Subnet1	10.1.0.0/16
VNet2	RG2	Central US	Subnet2	10.2.0.0/24
VNet3	RG3	East US	Subnet3	10.3.0.0/24

You plan to deploy the Azure Kubernetes Service (AKS) clusters shown in the following table.

Name	Resource group	Region	Number of nodes	Network configuration
AKS1	RG1	West US	30	Azure Container Network Interface (CNI)
AKS2	RG2	West US	100	Azure Container Network Interface (CNI)
AKS3	RG3	East US	50	Kubenet

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

SecExams

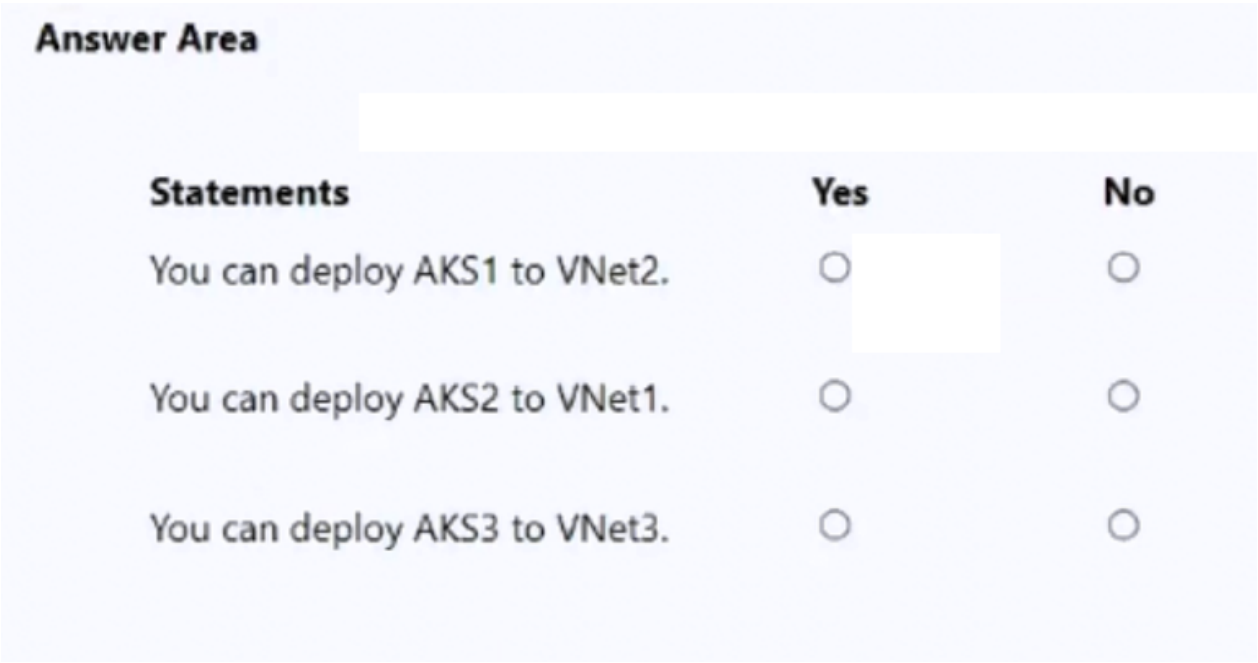

Explanation

Correct Answer:

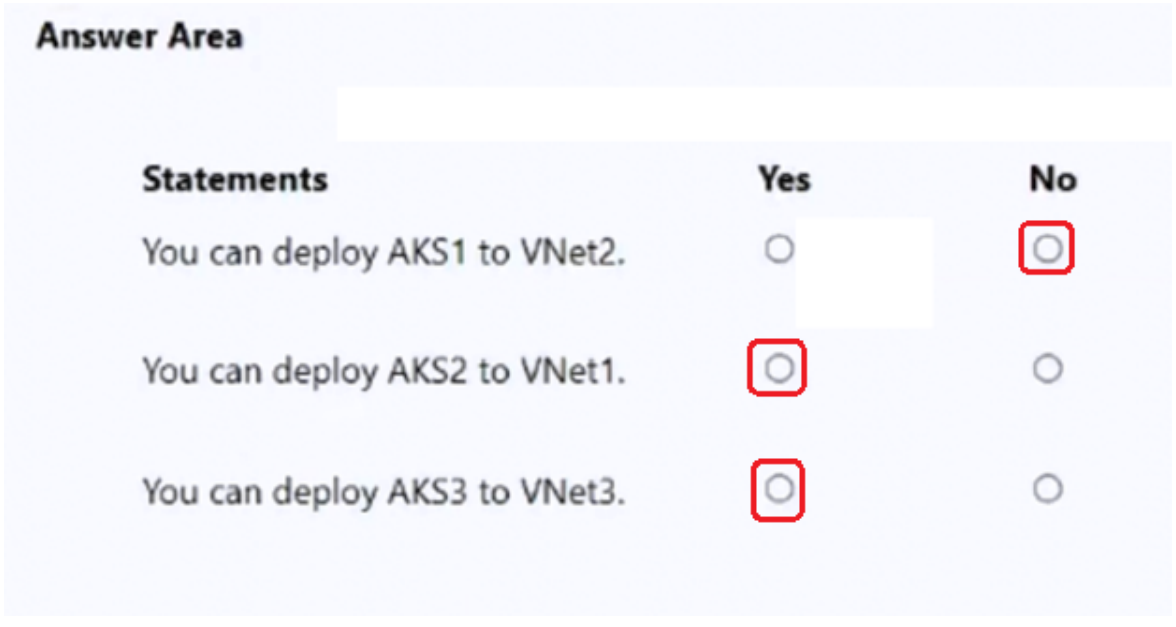

Community Discussion

Agree with the answer NYY. explaination as follows 1. N subnet is not in the same location as cluster "If you want to select an existing virtual network, make sure it's in the

same location and Azure subscription as your Kubernetes cluster." https://learn.microsoft.com/en-us/azure/aks/configure-azure-cni 2. Y azure cni network in same loacation as cluster and within the total pod no. limit 3. Y "Bring your own subnet and route table with kubenet .With kubenet, a route table must exist on your cluster subnet(s). AKS supports bringing your own existing subnet and route table." https://learn.microsoft.com/en-us/azure/aks/configure-kubenet#prerequisites

Agree with the answer NYY. explaination as follows 1. N subnet is not in the same location as cluster "If you want to select an existing virtual network, make sure it's in the same location and Azure subscription as your Kubernetes cluster." https://learn.microsoft.com/en-us/azure/aks/configure-azure-cni 2. Y azure cni network in same loacation as cluster and within the total pod no. limit 3. Y "Bring your own subnet and route table with kubenet .With kubenet, a route table must exist on your cluster subnet(s). AKS supports bringing your own existing subnet and route table." https://learn.microsoft.com/en-us/azure/aks/configure-kubenet#prerequisites

NYY VNET is created by default but we can connect to an existing VNET "you can create an AKS cluster that uses kubenet and connect to an existing virtual network subnet" "With kubenet, a route table must exist on your cluster subnet(s). AKS supports bringing your own existing subnet and route table." https://learn.microsoft.com/en-us/azure/aks/configure-kubenet

3 is yes: "As a compromise, you can create an AKS cluster that uses kubenet and connect to an existing virtual network subnet. This approach lets the nodes receive defined IP addresses, without the need to reserve a large number of IP addresses up front for all of the potential pods that could run in the cluster."

3 is yes: "As a compromise, you can create an AKS cluster that uses kubenet and connect to an existing virtual network subnet. This approach lets the nodes receive defined IP addresses, without the need to reserve a large number of IP addresses up front for all of the potential pods that could run in the cluster."

SecExams

Question #242

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.

You need to ensure that NGINX is available on all the virtual machines after they are deployed.

What should you use?

A) the Publish-AzVMDscConfiguration cmdlet
B) Azure Application Insights
C) a Desired State Configuration (DSC) extension (Correct Answer)
D) Azure AD Application Proxy

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: C

Answer is C) a Desired State Configuration (DSC) extension To ensure that NGINX is available on all the virtual machines in a virtual machine scale set, you can use the Desired State Configuration (DSC) extension. Option A (the Publish-AzVMDscConfiguration cmdlet) is used to generate a configuration file for DSC. Option B (Azure Application Insights) is a monitoring service that provides application performance and availability telemetry. Option D (Azure AD Application Proxy) is a service that enables remote access to on-premises applications. Therefore, the correct option for this scenario is C: a Desired State Configuration (DSC) extension. The DSC extension can be used to configure and manage the state of the virtual machines in the virtual machine scale set, including the installation of NGINX.

Selected Answer: C

C. a Desired State Configuration (DSC) extension

Selected Answer: C

This same question exists with with other answer. The only possible solutions are: 1. a Desired State Configuration (DSC) extension 2. Azure Custom Script Extension Remember this, because this question will repeat a lot later.

This question was in my exam on 31/08/2023.

Got this on 4/22/2023

SecExams

Question #243

SecExams

HOTSPOT
-

You have an Azure AD tenant named adatum.com that contains the groups shown in the following table.

Name	Type	Member of
Group1	Security	*None*
Group2	Security	Group1

Adatum.com contains the users shown in the following table.

Name	Member of
User1	Group1
User2	Group2

You assign an Azure Active Directory Premium P2 license to Group1 as shown in the following exhibit.

SecExams

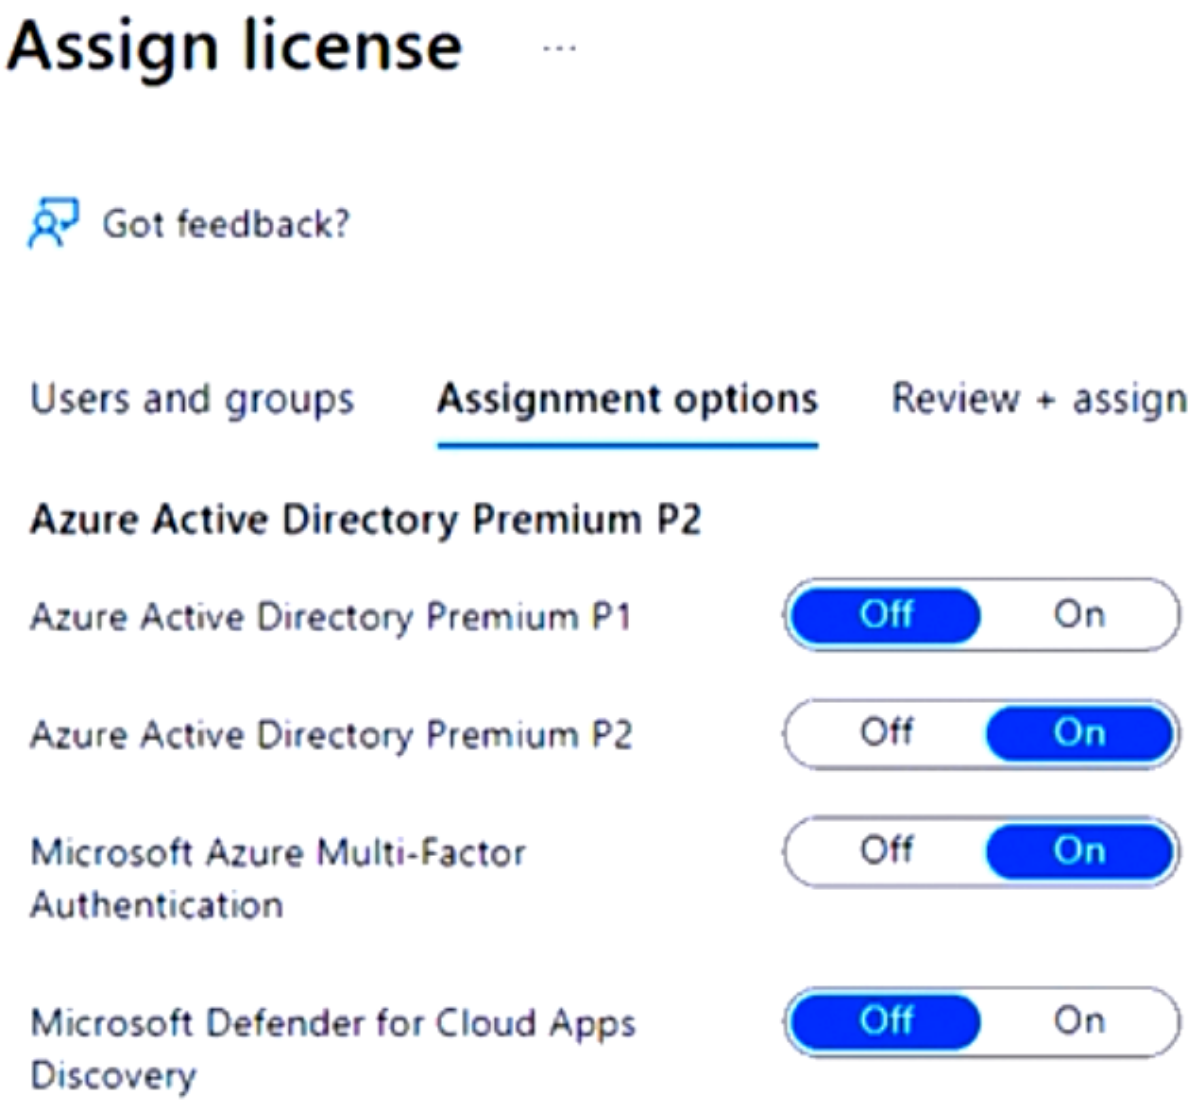

SecExams

Group2 is NOT directly assigned a license.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
You can assign User1 the Microsoft Defender for Cloud Apps Discovery license.	○	○
You can remove the Azure Active Directory Premium P2 license from User1.	○	○
User2 is assigned the Azure Active Directory Premium P2.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can assign User1 the Microsoft Defender for Cloud Apps Discovery license.	○	●
You can remove the Azure Active Directory Premium P2 license from User1.	●	○
User2 is assigned the Azure Active Directory Premium P2.	●	○

Community Discussion

YNN 1) Y, You can assign users MS Defender for Cloud Apps on a per user basis. 2) N, You cannot remove the P2 license as User1 is in Group1. 3) N, nested group assignments don't work

OpenAI "No: User1 is a member of Group1, which has been assigned the Azure Active Directory Premium P2 license, but not the Microsoft Defender for Cloud Apps Discovery license. Since Group1 does not have the Microsoft Defender for Cloud Apps Discovery license assigned, User1 cannot be assigned that license either. No: User1 is a member of Group1, which has been directly assigned the Azure Active Directory Premium P2 license. Since User1 inherits the license from Group1, the Azure Active Directory Premium P2 license cannot be removed from User1 individually. It can only be removed by removing the license assignment from Group1. No: User2 is a member of Group2, which is not directly assigned any licenses. Therefore, User2 does not inherit the Azure Active Directory Premium P2 license or any other license assigned to Group2. To assign the

Azure Active Directory Premium P2 license to User2, it would need to be directly assigned to User2 or to a group that User2 is a member of."

I agree with that! 1) Yes: The "Microsoft Defender for Cloud Apps Discovery" license is not automatically assigned through Group1 (but it's also not prohibited). 2) NO: The "Azure Active Directory Premium P2 License" is automatically assigned to the user. If I could remove the license from the user afterwards, it would contradict the "Assignment option" of Group1. 3) NO: User2 is in Group2, which is a member of Group1. However, license assignments are not inherited through subgroups (I don't have a Microsoft source for this statement). https://learn.microsoft.com/en-us/azure/active-directory/enterprise-users/licensing-group-advanced

I agree with that! 1) Yes: The "Microsoft Defender for Cloud Apps Discovery" license is not automatically assigned through Group1 (but it's also not prohibited). 2) NO: The "Azure Active Directory Premium P2 License" is automatically assigned to the user. If I could remove the license from the user afterwards, it would contradict the "Assignment option" of Group1. 3) NO: User2 is in Group2, which is a member of Group1. However, license assignments are not inherited through subgroups (I don't have a Microsoft source for this statement). https://learn.microsoft.com/en-us/azure/active-directory/enterprise-users/licensing-group-advanced

How can this have 41 upvotes?! Answers of generative AI, such as Chat GPT, are not reliable! It's called AI hallucination. Ask it a question to a difficult technical problem and the answer will most likely contain errors.

SecExams

Question #244

SecExams

HOTSPOT

-

You have an Azure subscription that has offices in the East US and West US Azure regions.

You plan to create the storage account shown in the following exhibit.

SecExams

Create a storage account ...

Basics Advanced Networking Data protection Encryption Tags **Review**

Basics

Subscription	Azure subscription 1
Resource Group	RG1
Location	eastus
Storage account name	adatum22
Deployment model	Resource manager
Performance	Premium
Premium account type	File shares
Replication	Zone-redundant storage (ZRS)

Advanced

Secure transfer	Enabled
Allow storage account key access	Enabled
Allow cross-tenant replication	Disabled
Default to Azure Active Directory authorization in the Azure portal	Disabled
Blob public access	Enabled
Minimum TLS version	Version 1.2
Permitted scope for copy operations (preview)	From any storage account
Enable hierarchical namespace	Disabled
Enable network file system v3	Disabled
Enable SFTP	Disabled
Large file shares	Disabled

Networking

Network connectivity	Public endpoint (all networks)
Default routing tier	Microsoft network routing
Endpoint type	Standard

Data protection

Point-in-time restore	Disabled
Blob soft delete	Disabled

SecExams

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

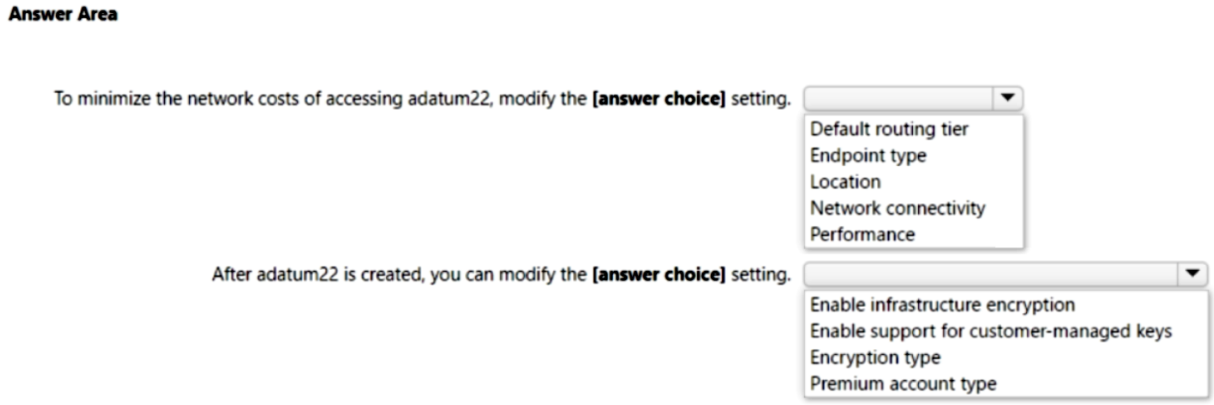

Explanation

Correct Answer:

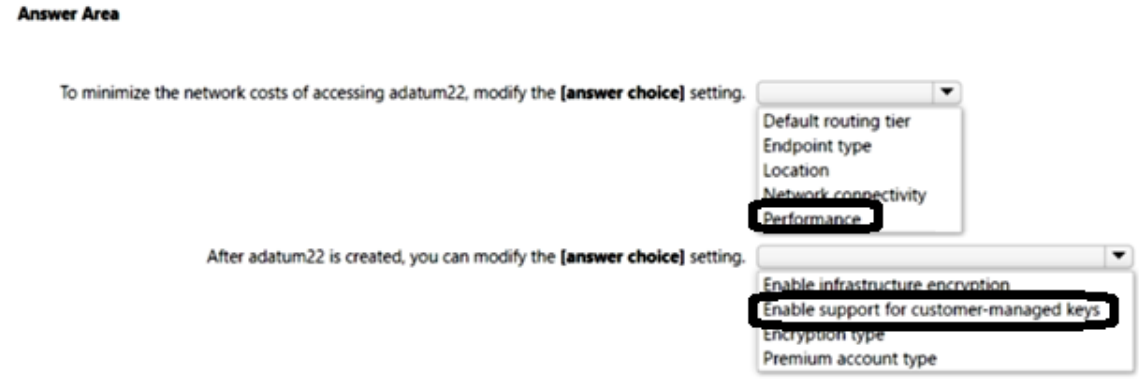

Community Discussion

Correct answers: Minimize network cost - Default routing tier to Internet Routing After creation you can modify - Encryption type

to minimize network cost - default routing tier https://learn.microsoft.com/en-us/azure/storage/common/network-routing-preference what can be changed after creation -

cutomer-managed key "You can switch between customer-managed keys and Microsoft-managed keys at any time" https://learn.microsoft.com/en-us/azure/storage/common/customer-managed-keys-overview

Confirmed in Azure Lab as of 17/08/2023: 1. Default Routing Tier can be changed to lower networking costs. Choose Internet Routing for low cost. 2. After an storage account is created, Only Encryption Type can be changed. "Enabled support for customer-managed keys" and "Infrastructure Encryption" both cannot be changed.

Encryption type is the correct answer for the second one, your reasoning is correct, but you ,is read the question.

Encryption type is the correct answer for the second one, your reasoning is correct, but you ,is read the question.

SecExams

Question #245

HOTSPOT

-

You have an Azure subscription.

You plan to deploy a new storage account.

You need to configure encryption for the account. The solution must meet the following requirements:

• Use a customer-managed key stored in a key vault.
• Use the maximum supported bit length.

Which type of key and which bit length should you use? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

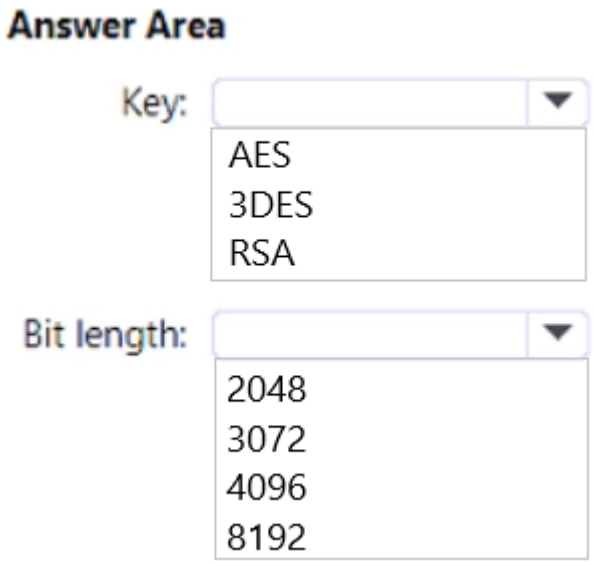

Explanation

Correct Answer:

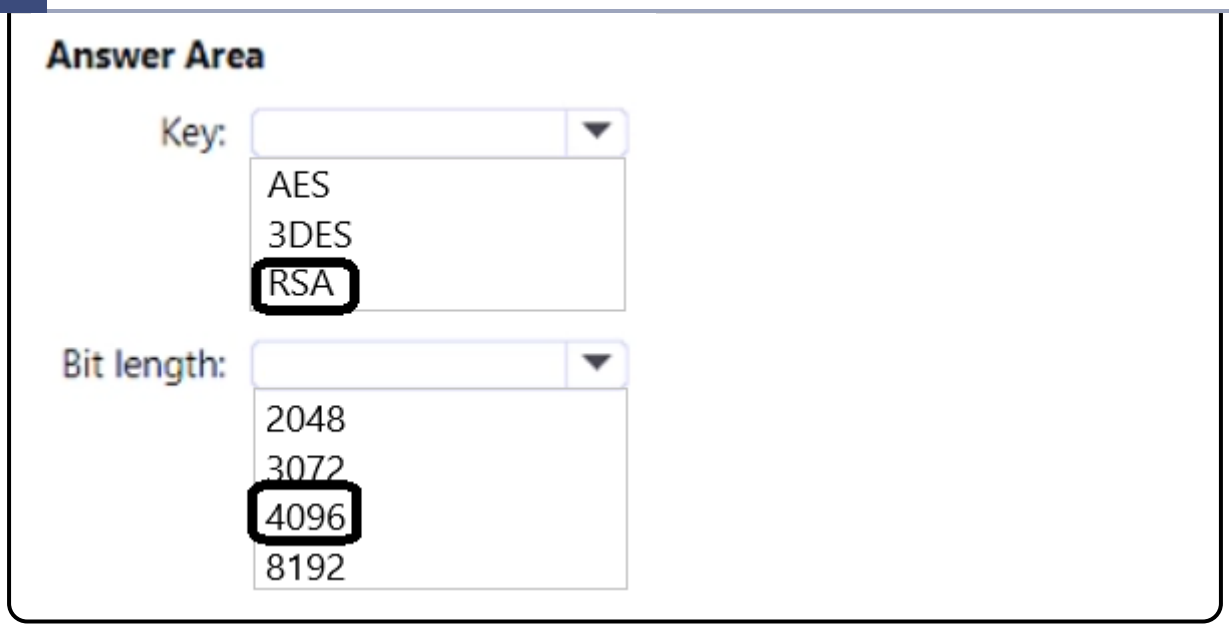

Community Discussion

*RSA 4096 typo

Answer is correct: Key: RSA length: 4096 https://learn.microsoft.com/en-us/azure/storage/common/customer-managed-keys-overview#key-vault-requirements

Is this in the syllabus I don't think so

key: RSA bit length: 4098 https://learn.microsoft.com/en-us/azure/storage/common/customer-managed-keys-overview?toc=%2Fazure%2Fstorage%2Fblobs%2Ftoc.json&bc=%2Fazure%2Fstorage%2Fblobs%2Fbreadcrumb%2Ftoc.js

RSA: "Software-protected" RSA key Supported (2048-bit, 3072-bit, 4096-bit) https://learn.microsoft.com/en-us/azure/key-vault/keys/about-keys#hsm-protected-keys

SecExams

Question #246

HOTSPOT

-

You have a hybrid deployment of Azure Active Directory (Azure AD) that contains the users shown in the following table.

Name	User type	On-premises sync enabled
User1	Member	No
User2	Member	Yes
User3	Guest	No

You need to modify the JobTitle and UsageLocation attributes for the users.

For which users can you modify the attributes from Azure AD? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

JobTitle:
- User1 only
- User1 and User2 only
- User1 and User3 only
- User1, User2, and User3

UsageLocation:
- User1 only
- User1 and User2 only
- User1 and User3 only
- User1, User2, and User3

SecExams

Explanation

Correct Answer:

Answer Area

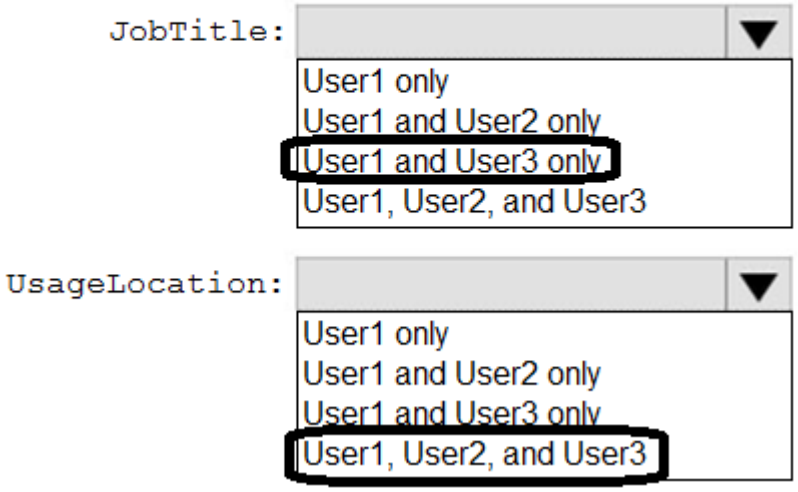

Community Discussion

Users syncing from an On Prem AD to AAD cannot have the job title altered in AAD. it would need to be done in local AD , as AADC by default synchronizes the jobTitle property. Usage location is set only on the cloud side for all users, and Guest users can have their job titles set as well as cloud native (AAD) users. Source - I've been the AD and AAD admin for years at several organizations.

so the correct answer is: 1 and 3 and 1,2, and 3 is that correct?

so the correct answer is: 1 and 3 and 1,2, and 3 is that correct?

https://www.secexams.com/discussions/microsoft/view/38424-exam-az-104-topic-2-question-32-discussion/

If You read the question carefully the key word will be <On-Premises Sync Enable>, when Status is "YES" that means the user is in the On-prem AD . it also means you cant change in On Azure AD , When the status is "NO" that means the Users is at AZURE AD . so the answer will be User 1 and User3 only for Jobtitle

Question #247

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Active Directory (Azure AD) tenant named contoso.com.

You have a CSV file that contains the names and email addresses of 500 external users.

You need to create a guest user account in contoso.com for each of the 500 external users.

Solution: You create a PowerShell script that runs the New-MgUser cmdlet for each external user.

Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

The `New-MgUser` cmdlet is part of the Microsoft Graph PowerShell module, and it's used for creating new users in Azure AD. However, when creating guest users (or B2B users),

you typically would invite them rather than create them like regular members. The cmdlet you'd want to use for inviting external guest users is `New-AzureADMSInvitation` if you're using the AzureAD module or a related command in the Microsoft Graph module. Given the provided solution, the answer is: B. No

This question was on my exam on 22 Sep 2023. scored 900 i answered B

Found this Q in the exam, 3/7/23

Selected Answer: B

New-AzureADMSInvitation or New-MgInvitation can be used to invite users, Not New-MgUser https://learn.microsoft.com/en-us/powershell/microsoftgraph/azuread-msoline-cmdlet-map?view=graph-powershell-1.0#users

Are you saying the correct answer is Option B?

SecExams

Question #248

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Active Directory (Azure AD) tenant named contoso.com.

You have a CSV file that contains the names and email addresses of 500 external users.

You need to create a guest user account in contoso.com for each of the 500 external users.

Solution: You create a PowerShell script that runs the New-MgInvitation cmdlet for each external user.

Does this meet the goal?

A) Yes (Correct Answer)

B) No

Explanation

Correct Answer:
A

Community Discussion

Selected Answer: A

The New-MgInvitation cmdlet is part of the Microsoft Graph PowerShell module. It's used to create an invitation to an external user. When the invited user redeems their

invitation, a guest user is created in the directory. If you use a PowerShell script that loops through each external user in the CSV file and runs the New-MgInvitation cmdlet for each of them, it will send out invitation emails to each of those external users. Once an external user accepts the invitation, they'll be added to the Azure AD tenant as a guest user. So, using the New-MgInvitation cmdlet in a PowerShell script for each external user does meet the goal of creating a guest user account in contoso.com for each of the 500 external users. The answer is: A. Yes

The cmdlet New-MgInvitation requires the Redirection URL. "The URL the user should be redirected to once the invitation is redeemed. Required." Reference: https://learn.microsoft.com/en-us/powershell/module/microsoft.graph.identity.signins/new-mginvitation?view=graph-powershell-1.0 So the answer is: B. No

The cmdlet New-MgInvitation requires the Redirection URL. "The URL the user should be redirected to once the invitation is redeemed. Required." Reference: https://learn.microsoft.com/en-us/powershell/module/microsoft.graph.identity.signins/new-mginvitation?view=graph-powershell-1.0 So the answer is: B. No

Correct. I believe "New-AzureADMSInvitation" is used to bulk invite guests from CSV file. Source: https://learn.microsoft.com/en-us/azure/active-directory/external-identities/bulk-invite-powershell

As you run the command from a script, you can hardcode a redirection URL into it. A is correct, I would say!

SecExams

Question #249

You have an Azure Storage account that contains 5,000 blobs accessed by multiple users.

You need to ensure that the users can view only specific blobs based on blob index tags.

What should you include in the solution?

A) a role assignment condition
B) a stored access policy
C) just-in-time (JIT) VM access
D) a shared access signature (SAS) (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Anser is A: An Azure role assignment condition is an optional check that you can add to your role assignment to provide more fine-grained access control. For example, you can add a condition that requires an object to have a specific tag to read the object. https://learn.microsoft.com/en-us/azure/role-based-access-control/conditions-role-assignments-portal

Answer: A Role assignment Condition https://learn.microsoft.com/en-us/azure/role-based-access-control/conditions-custom-security-attributes

Here is the whole procedure to do it via role assignment condition. Answer is A. This is a fairly new feature called ABAC (Attribute-based access control). https://learningbydoing.cloud/blog/control-access-to-azure-storage-blobs-with-abac/

This question was in exam 15/01/24

The answer is D. A. role assignment condition: This would control access at the container level, not individual blobs. You need more granular control for specific blobs based on tags. B. stored access policy: This can be used to define access levels for a container or blob, but it wouldn't allow you to filter based on tags dynamically. C. just-in-time (JIT) VM access: This is used for managing access to virtual machines, not blob storage. D. shared access signature (SAS): This provides temporary access to blobs with granular control over permissions. You can generate SAS tokens with conditions based on blob index tags, allowing users to access only the relevant blobs.

SecExams

Question #250

You have an Azure Storage account named storage1.

For storage1, you create an encryption scope named Scope1.

Which storage types can you encrypt by using Scope?

A) file shares only
B) containers only (Correct Answer)
C) file shares and containers only
D) containers and tables only
E) file shares, containers, and tables only
F) file shares, containers, tables, and queues

Explanation

Correct Answer:
B

Community Discussion

Answer is B: Encryption scopes enable you to manage encryption with a key that is scoped to a container or an individual blob. There is no blob in the answer choices. https://learn.microsoft.com/en-us/azure/storage/blobs/encryption-scope-overview#how-encryption-scopes-work

Containers is correct. Reference: https://learn.microsoft.com/en-us/azure/storage/blobs/encryption-scope-manage

Another new question

Containers

Selected Answer: B

Encryption scopes in Azure Blob Storage allow you to define a default customer-managed key for blobs within a container. As of my last update in September 2021, encryption scopes are primarily used for blob data in containers. Thus, among the given

options: B. containers only is the correct answer, as encryption scopes target blob containers specifically.

SecExams

Question #251

You have an Azure subscription named Subscription1 that contains virtual network named VNet1. VNet1 is in a resource group named RG1.

A user named User1 has the following roles for Subscription1:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.

What should you do?

A) Assign User1 the Contributor role for VNet1.
B) Assign User1 the Network Contributor role for VNet1.
C) Assign User1 the User Access Administrator role for VNet1. (Correct Answer)
D) Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1.

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: C

Three of the answers involve assigning a Contributor role. Contributor does not include the ability to assign rights, permissions, or roles. Therefore the correct answer has to be C, assign the User Access Admin role.

Selected Answer: C

This question has already appeared multiple times

Selected Answer: C

Network Contributor - Lets you manage networks, but not access to them. https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#network-contributor User Access Administrator - Lets you manage user access to Azure resources. https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#user-access-administrator Contributor - Grants full access to manage all resources, but does not allow you to assign roles in Azure RBAC, manage assignments in Azure Blueprints, or share image galleries. T2Q71 - similar question with another possible solution - Assign User1 the Owner role for VNet1.

Selected Answer: C

To allow User1 to assign the Reader role for VNet1 to other users, User1 needs to have permissions related to Azure RBAC (Role-Based Access Control). Among the listed options: A. Assign User1 the Contributor role for VNet1. - The Contributor role allows a user to manage everything except access. B. Assign User1 the Network Contributor role for VNet1. - This role provides permissions to manage networking resources, not role assignments. C. Assign User1 the User Access Administrator role for VNet1. - This role provides permissions to manage user access to Azure resources, which means User1 can assign roles to other users for VNet1. D. Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1. - This does not directly provide User1 with permissions to manage user access. The correct action is: C. Assign User1 the User Access Administrator role for VNet1.

Selected Answer: C

correcta

SecExams

Question #252

You have an Azure subscription named Subscription1 that contains virtual network named VNet1. VNet1 is in a resource group named RG1.

User named User1 has the following roles for Subscription1:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.
What should you do?

A) Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1.
B) Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1.
C) Assign User1 the Network Contributor role for VNet1.
D) Assign User1 the User Access Administrator role for VNet1. (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: D

Three of the answers involve assigning a Contributor role. Contributor does not include the ability to assign rights, permissions, or roles. Therefore the correct answer has to be D, assign the User Access Admin role.

Selected Answer: D

Owner and User Access Administrator can assign roles

Selected Answer: D

To allow User1 to assign the Reader role for VNet1 to other users, User1 needs to have permissions related to Azure RBAC (Role-Based Access Control). Among the listed options: A. Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1. - The Contributor role allows a user to manage everything except access. B. Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1. - Again, the Contributor role doesn't grant User1 the ability to assign roles to others. C. Assign User1 the Network Contributor role for VNet1. - This role provides permissions to manage networking resources, not role assignments. D. Assign User1 the User Access Administrator role for VNet1. - This role provides permissions to manage user access to Azure resources, which means User1 can assign roles to other users for VNet1. The correct action to meet the requirement is: D. Assign User1 the User Access Administrator role for VNet1.

Selected Answer: D

Network Contributor - Lets you manage networks, but not access to them. https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#network-contributor User Access Administrator - Lets you manage user access to Azure resources. https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#user-access-administrator Only User Access Administrator or Owner could assign roles to other users.

SecExams

Question #253

HOTSPOT

-

You have an Azure Storage account named storage1 that uses Azure Blob storage and Azure File storage.

You need to use AzCopy to copy data to the blob storage and file storage in storage1.

Which authentication method should you use for each type of storage? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Blob storage:

- Azure AD only
- Shared access signatures (SAS) only
- Azure AD and shared access signatures (SAS)

File storage:

- Azure AD only
- Shared access signatures (SAS) only
- Azure AD and shared access signatures (SAS)

Explanation

Correct Answer:

Answer Area

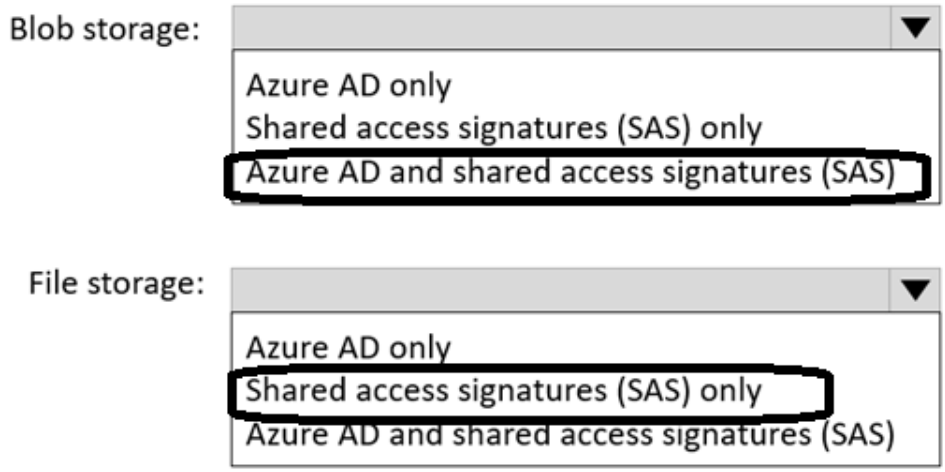

Community Discussion

First: Azure AD & SAS Second: SAS Source: https://learn.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10#authorize-azcopy

The link you provided states: "You can provide authorization credentials by using Microsoft Entra ID, or by using a Shared Access Signature (SAS) token". So it should be Azure AD & SAS for both Questions. Am I getting it wrong?

The link you provided states: "You can provide authorization credentials by using Microsoft Entra ID, or by using a Shared Access Signature (SAS) token". So it should be Azure AD & SAS for both Questions. Am I getting it wrong?

Currently supported method of authorization Blob storage: Microsoft Entra ID & SAS Blob storage (hierarchical namespace): Microsoft Entra ID & SAS File storage: SAS only

Funny how even Microsoft is confused by their naming. It is called "Azure Files" or specifically "File Shares" and not "File storage".

Question #254

HOTSPOT

-

You have an Azure AD tenant that contains a user named External User.

External User authenticates to the tenant by using .

You need to ensure that External User authenticates to the tenant by using .

Which two settings should you configure from the Overview blade? To answer, select the appropriate settings in the answer area.

NOTE: Each correct answer is worth one point.

Answer Area

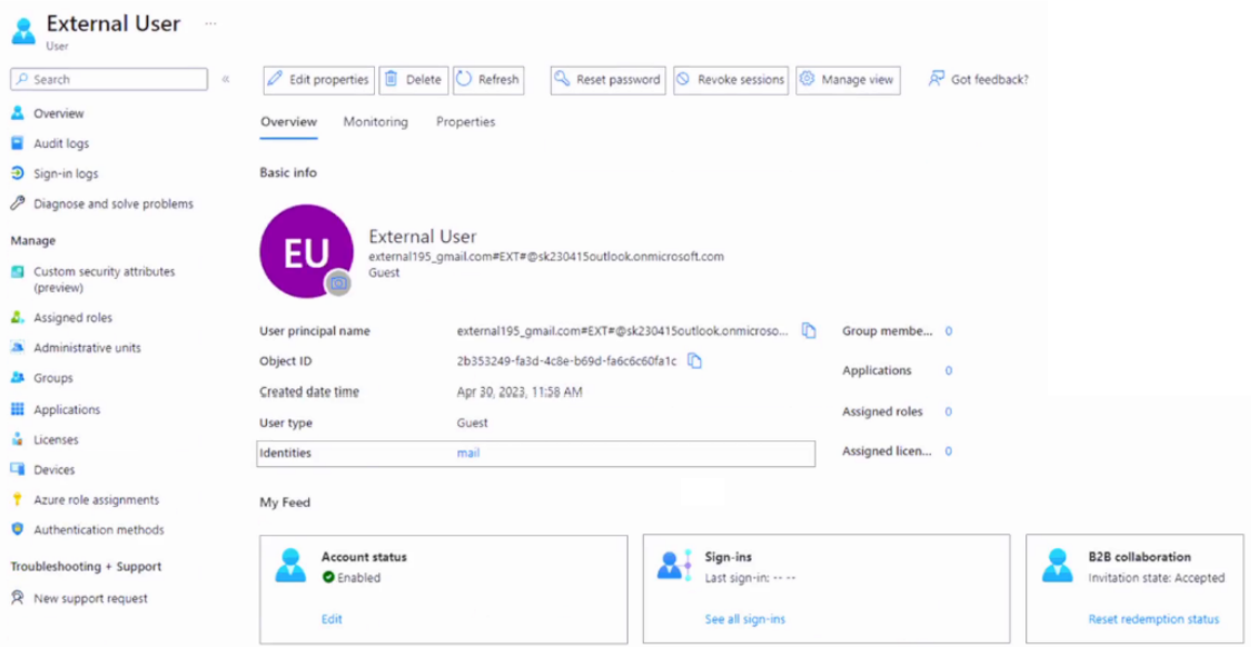

Explanation

Correct Answer:

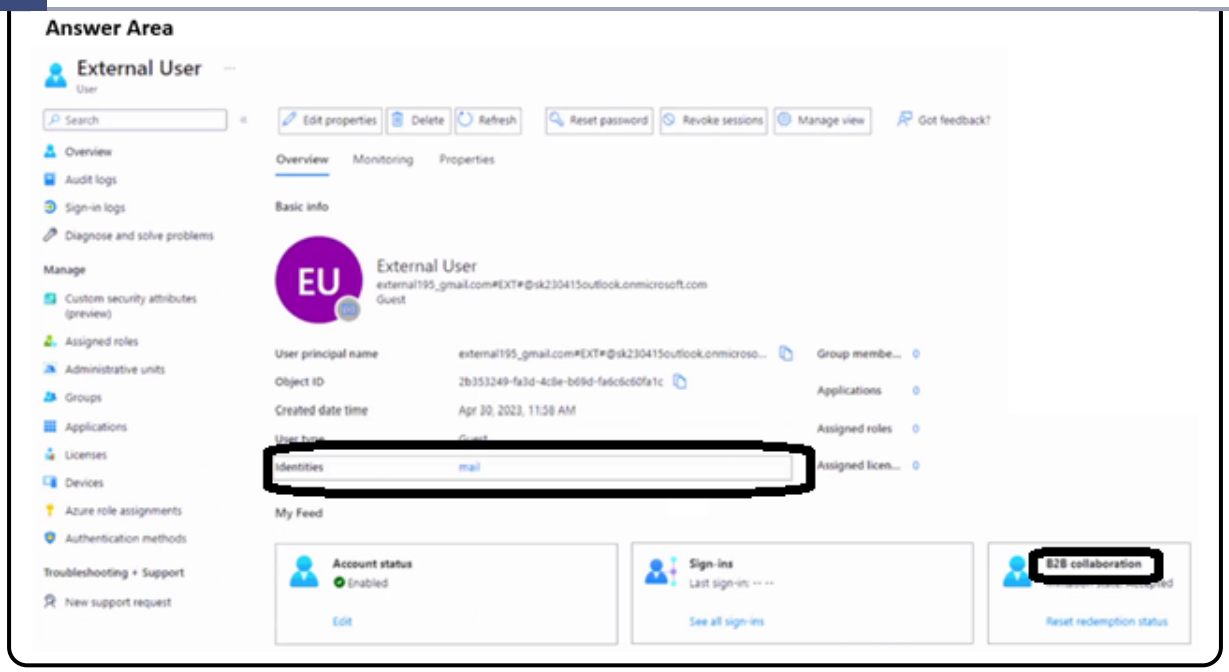

Community Discussion

If the user wants to sign in using a different email: - Select the Edit properties icon. - Scroll to Email and type the new email. - Next to Other emails, select Add email. Select Add, type the new email, and select Save. - Select the Save button at the bottom of the page to save all changes On the Overview tab, under My Feed, select the "Reset redemption" status link in the B2B collaboration tile. https://learn.microsoft.com/en-us/azure/active-directory/external-identities/reset-redemption-status#use-the-microsoft-entra-admin-center-to-reset-redemption-status

So this source shows that the first step is to do this: Browse to Identity > Users > All users. Which can be done from the Overview tab by simply clicking on Identities as noted by the given answer. Then it states: "On the Overview tab, under My Feed, select the Reset redemption status link in the B2B collaboration tile." So the given answer of "Identities" and "B2B Tile" are correct

This question was in exam 15/01/24

'Revoke sessions' to stop External User's to previous authenticated session using external195@gmail.com. 'Edit Properties' to ensure that External User authenticates to the tenant by using contractor@gmail.com.

Yes it should be 'Edit Properties' option. In the answer image, it is shown as 'identities' attribute, which is not correct.

Question #255

You have an Azure subscription that contains the resources shown in the following table.

Name	Description
RG1	Resource group
RG2	Resource group
storage1	Storage account in RG1
Workspace1	Azure Synapse Analytics workspace in RG2

You need to assign Workspace1 a role to allow read, write, and delete operations for the data stored in the containers of storage1.

Which role should you assign?

A) Storage Account Contributor
B) Contributor
C) Storage Blob Data Contributor (Correct Answer)
D) Reader and Data Access

Explanation

Correct Answer:
C

Community Discussion

ChatGPT and AI in general cannot be trusted to be truthful. Use them if you want but you need to personally verify everything they say. Just mentioning that you used ChatGPT or any AI does not add any validity to your statements and in fact it calls into question the very info provided

ChatGPT and AI in general cannot be trusted to be truthful. Use them if you want but you need to personally verify everything they say. Just mentioning that you used ChatGPT or

any AI does not add any validity to your statements and in fact it calls into question the very info provided

Selected Answer: A

hello am under the water please help me

Selected Answer: C

Storage Blob Data Contributor Read, write, and delete Azure Storage containers and blobs. https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#storage-blob-data-contributor

Selected Answer: C

A : No has permissons to delete and is a general role ( ) B : Too general C : Apply requirement , Read , write and delete (https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#storage-blob-data-contributor) D : Impossible to delete

SecExams

Question #256

You have an Azure subscription named Subscription1 that contains virtual network named VNet1. VNet1 is in a resource group named RG1.

A user named User1 has the following roles for Subscription1:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.

What should you do?

A) Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1.
B) Assign User1 the Contributor role for VNet1.
C) Assign User1 the Owner role for VNet1. (Correct Answer)

D) Assign User1 the Network Contributor role for RG1.

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: C

user access admin is beyond the scope for A, B, and D - so the answer must be C by logical deduction. open to hearing your thoughts though!

Option C This question is repeated many times

Selected Answer: C

i feel like i answered this question about 10 times today already. no wonder there are near 600 questions in this dump.... considering how much ET raised their prices over the past years one would expect some quality control

c Owner or user access administrator to assign role to other users

there would be a whole lot less questions in this cumbersome exam dump if we removed the many repetitions of this same question.

SecExams

Question #257

You have an Azure AD tenant that contains the groups shown in the following table.

Name	Type	Security
Group1	Security	Enabled
Group2	Mail-enabled security	Enabled
Group3	Microsoft 365	Enabled
Group4	Microsoft 365	Disabled

You purchase Azure Active Directory Premium P2 licenses.

To which groups can you assign a license?

A) Group1 only
B) Group1 and Group3 only (Correct Answer)
C) Group3 and Group4 only
D) Group1, Group2, and Group3 only
E) Group1, Group2, Group3, and Group4

Explanation

Correct Answer:
B

Community Discussion

Answer is B: "The feature can only be used with security groups, and Microsoft 365 groups that have securityEnabled=TRUE." https://learn.microsoft.com/en-us/azure/active-directory/enterprise-users/licensing-group-advanced#limitations-and-known-issues I could not find much information on the possibility of adding it to 'mail enabled' group.

Selected Answer: B

Azure AD licenses can be assigned to user accounts. When you want to assign licenses to a group, the intention is to assign those licenses to the members of the group. You can assign licenses to Microsoft 365 groups and security groups, but not to mail-enabled security groups. Furthermore, the group should be security-enabled to get the licenses assigned. From the given list: Group1: Security group (Security Enabled) - You can assign licenses. Group2: Mail-enabled security group (Security Enabled) - You cannot assign licenses to mail-enabled security groups. Group3: Microsoft 365 group (Security Enabled) - You can assign licenses. Group4: Microsoft 365 group (Security Disabled) - You cannot assign licenses to security-disabled groups. The correct answer is: B. Group1 and Group3 only.

Selected Answer: D

securityEnabled=TRUE so Group1, 2 ad 3 are good, is mail enbaled security group is the same a security group with some additionnal functions.

Selected Answer: D

Tested in lab and was able to assign license to mail enabled security group

Selected Answer: D

Answer is D: "The feature can only be used with security groups, and Microsoft 365 groups that have securityEnabled=TRUE." https://learn.microsoft.com/en-us/azure/active-directory/enterprise-users/licensing-group-advanced#limitations-and-known-issues Mail-enabled security groups function the same as regular security groups, except that they cannot be dynamically managed through Microsoft Entra ID and cannot contain devices. https://learn.microsoft.com/en-us/microsoft-365/admin/create-groups/compare-groups?view=o365-worldwide#mail-enabled-security-groups

SecExams

Question #258

HOTSPOT

-

You have an Azure AD tenant.

You need to create a Microsoft 365 group that contains only members of a marketing department in France.

How should you complete the dynamic membership rule? To answer, select the appropriate options in the answer area.

NOTE: Each correct answer is worth one point.

SecExams

Answer Area

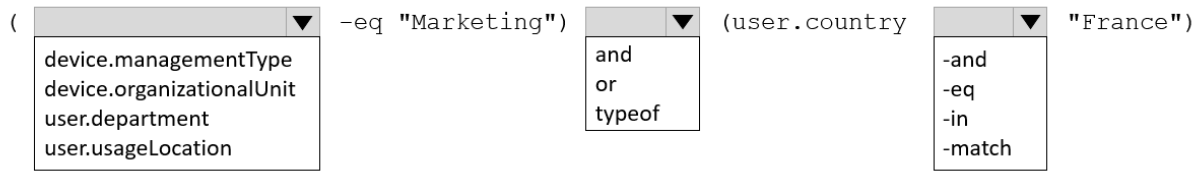

Explanation

Correct Answer:

Answer Area

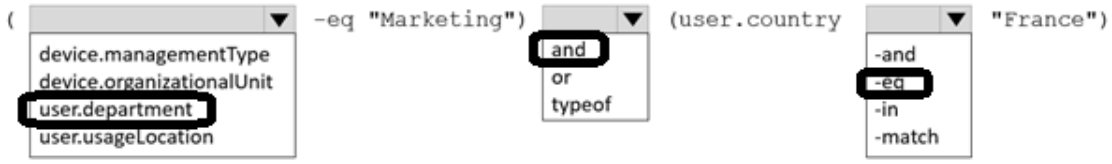

Community Discussion

(user.department –eq "Marketing") –and (user.country –eq "France") parentheses could be used to determine order https://learn.microsoft.com/en-us/azure/active-directory/enterprise-users/groups-dynamic-membership#operator-precedence

(user.department -eq "Marketing") -and (user.country -eq "France")

The given answer is correct.

(user.department -eq "Marketing") and (user.country -eq "France") - user.department -eq "Marketing": This part checks if the user's department attribute in Azure AD is equal to "Marketing". - and: This operator combines the two conditions. - user.country -eq "France": This part checks if the user's country attribute in Azure AD is equal to "France". Therefore, the rule will only add users to the group who meet both conditions: they must be in the "Marketing" department and have their country set to "France".

The given answer is correct.

SecExams

Question #259

SecExams

HOTSPOT
-

You have an Azure AD tenant.

You need to modify the Default user role permissions settings for the tenant. The solution must meet the following requirements:

• Standard users must be prevented from creating new service principals.
• Standard users must only be able to use PowerShell or Microsoft Graph to manage their own Azure resources.

Which two settings should you modify? To answer, select the appropriate settings in the answer area.

NOTE: Each correct answer is worth one point.

SecExams

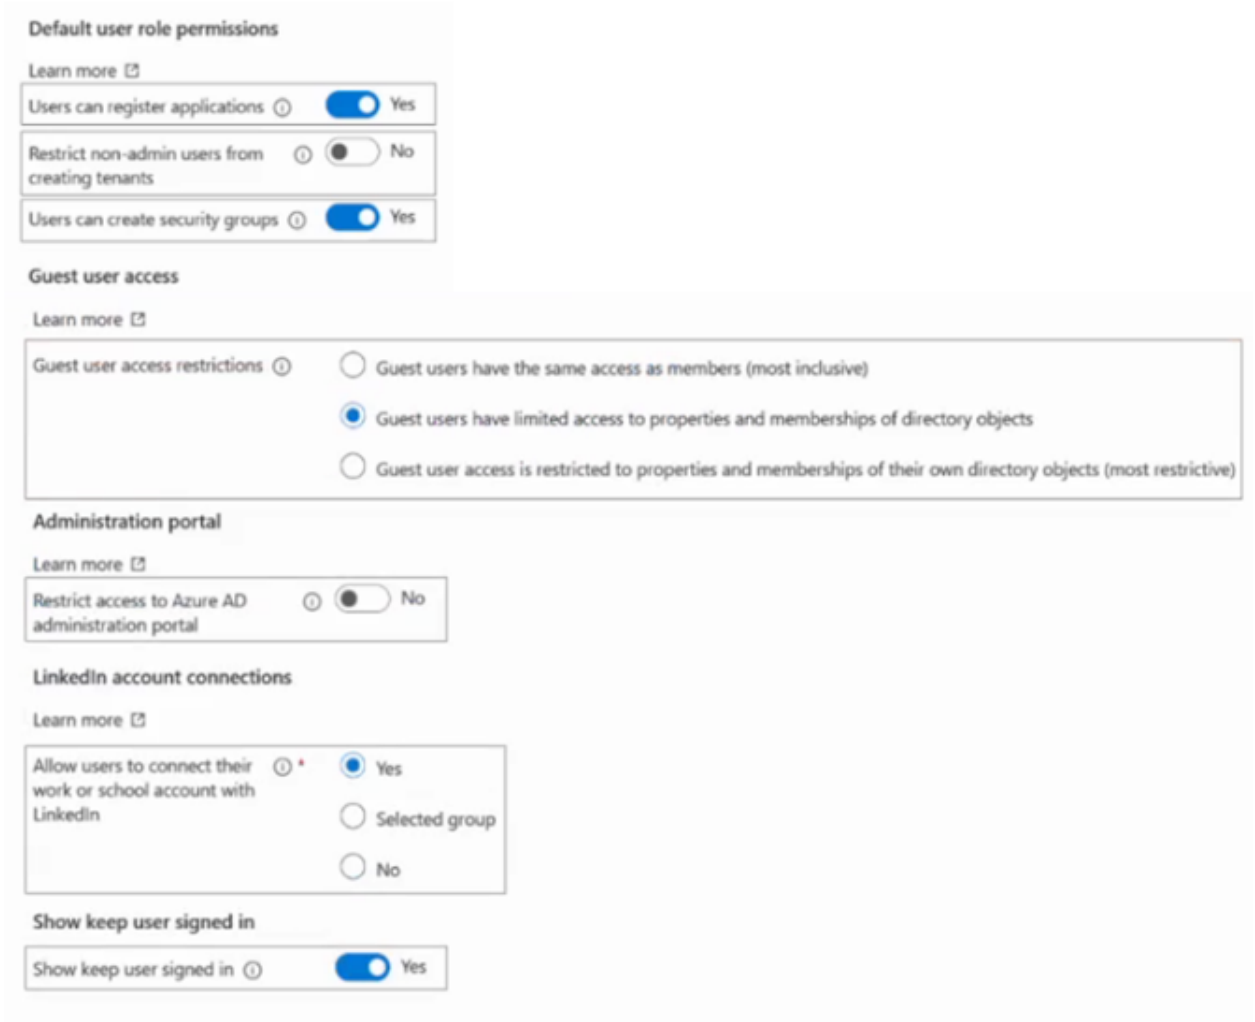

Explanation

Correct Answer:

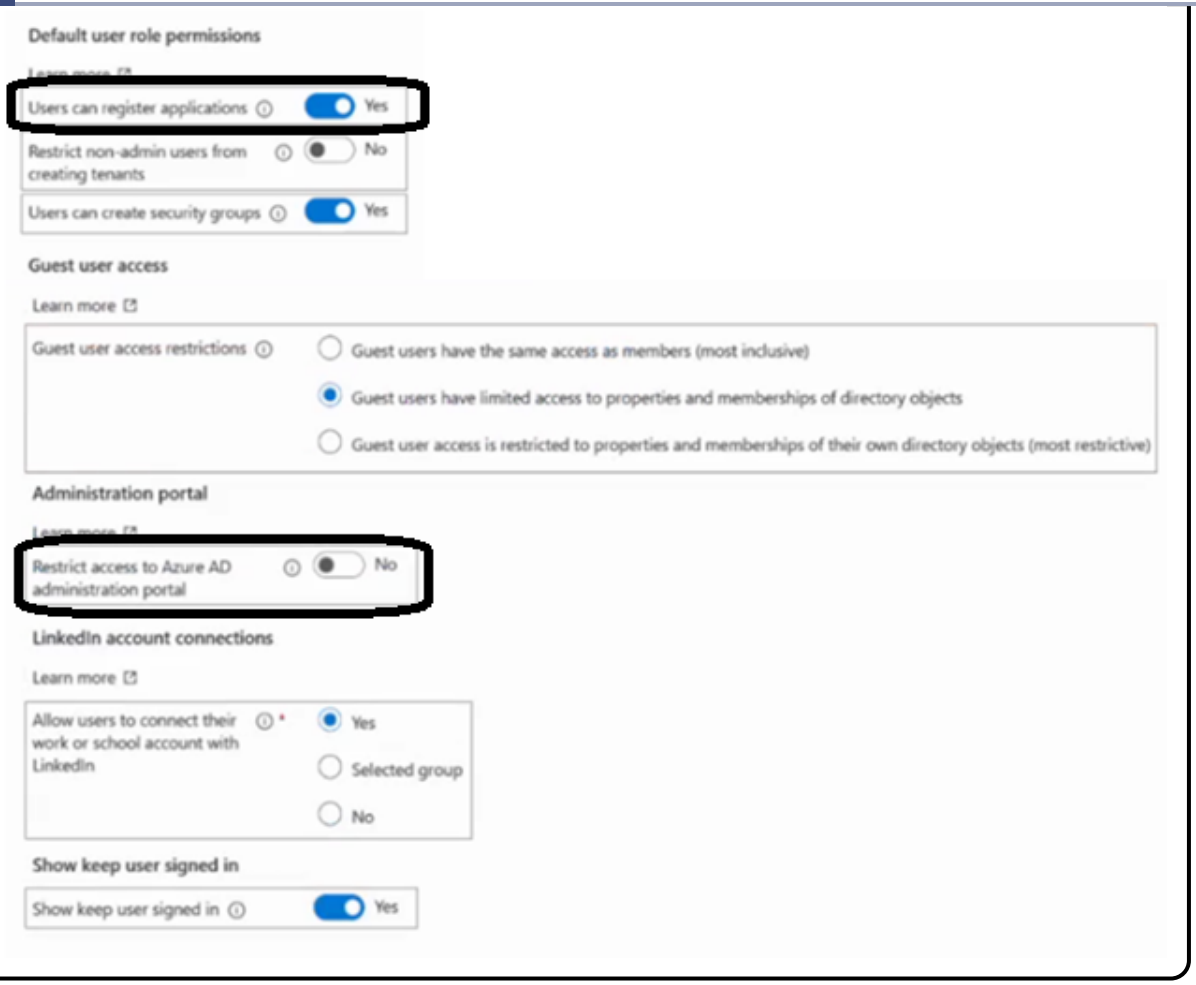

Community Discussion

Register applications: Setting this option to No prevents users from creating application registrations. Restrict access to Azure AD administration portal: What does this switch do? No: lets non-administrators browse the Azure AD administration portal. Yes: Restricts non-administrators from browsing the Azure AD administration portal. Non-administrators who are owners of groups or applications are unable to use the Azure portal to manage their owned resources. What does it not do? It doesn't restrict access to Azure AD data using PowerShell, Microsoft GraphAPI, or other clients such as Visual Studio. It doesn't restrict access as long as a user is assigned a custom role (or any role). https://learn.microsoft.com/en-us/azure/active-directory/fundamentals/users-default-permissions

The given answer is correct.

why isnt it to restrict user to their own directory objects?

Although I agree with your answer, the setting is already "Yes" in "Restrict access to Azure administration portal," meaning that there is no need to change that setting. It looks like that the question has it backwards.

No, the "Restrict Access to Azure AD" is set to "No".

SecExams

Question #260

SecExams

HOTSPOT

-

You have an Azure subscription named Sub1 that contains the blob containers shown in the following table.

Name	In storage account	Contains blob
cont1	storage1	blob1
cont2	storage2	blob2
cont3	storage3	blob3

Sub1 contains two users named User1 and User2. Both users are assigned the Reader role at the Sub1 scope.

You have a condition named Condition1 as shown in the following exhibit.

```
(
 (
  !(ActionMatches{'Microsoft.Storage/storageAccounts/blobServices/containers/blobs/read'})
 )
 OR
 (
 @Resource[Microsoft.Storage/storageAccounts/blobServices/containers:name] StringEquals 'cont1'
 )
)
```

You have a condition named Condition2 as shown in the following exhibit.

```
(
 (
  !(ActionMatches{'Microsoft.Storage/storageAccounts/blobServices/containers/blobs/write'})
 )
 OR
 (
 @Resource[Microsoft.Storage/storageAccounts/blobServices/blobs:path] StringLike '*2*'
 )
)
```

You assign roles to User1 and User2 as shown in the following table.

User	Role	Scope	Role assignment condition
User1	Storage Blob Data Reader	sub1	Condition1
User2	Storage Blob Data Owner	storage1	Condition2

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
User1 can read blob2.	○	○
User1 can read blob3.	○	○
User2 can read blob1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
User1 can read blob2.	◉	○
User1 can read blob3.	◉	○
User2 can read blob1.	○	◉

Community Discussion

Answer is NNY The conditions are difficult to read, but they mean (according to reference 1): a. If the user performs a reading operation, then he may only read from “cont1” b. If the user performs a writing operation, then he may only write to blobs like “*2*” Given that, then: 1- User 1 can read Blob2 - No, because he is reading, then the condition a. applies, and he is not reading cont1 2- User 1 can read Blob3 - No, because he is reading, then the condition a. applies, and he is not reading cont1 3- User 2 can read blob 1 - Yes. He is not writing, so the condition b. does not apply. He has permissions granted by the role on the scope he is reading - Storage Blob Data Owner on storage1, which contains blob1 References: 1. https://learn.microsoft.com/en-us/azure/role-based-access-control/conditions-format 2. https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles

Based on the documentation is NNY

ANSWER IS NNY condition1 - read action cannot perform since it encloses a parenthesis and exclamation point which indicate not. It also include OR which if the resource name string is equal to "cont1" then it cannot read it, again because it all enclose to a ! (condition). so, USER1 CAN READ BLOB2? No. because it falls to a condition that it cannot not read. USER1 CAN READ BLOB2? No. Again because it falls to a condition that it cannot not read. USER2 CAN READ BLOB1? Yes. condition2 says that it cannot write or if it contains string like "2" (wild card search with * asterisk). it all surpasses all the condition into false. note: user1 has a reader role but it also has a condition1 which prevent it to read. user2 is the owner so it has read and write permission, but it also has a condition2 which prevent it to write. but it can read.

ANSWER IS NNY condition1 - read action cannot perform since it encloses a parenthesis and exclamation point which indicate not. It also include OR which if the resource name string is equal to "cont1" then it cannot read it, again because it all enclose to a ! (condition). so, USER1 CAN READ BLOB2? No. because it falls to a condition that it cannot not read. USER1 CAN READ BLOB2? No. Again because it falls to a condition that it cannot not read. USER2 CAN READ BLOB1? Yes. condition2 says that it cannot write or if it contains string like "2" (wild card search with * asterisk). it all surpasses all the condition into false. note: user1 has a reader role but it also has a condition1 which prevent it to read. user2 is the owner so it has read and write permission, but it also has a condition2 which prevent it to write. but it can read.

Totally agree with this answer. Explanation: In a nutshell the two conditions can be read as such: - condition 1: user 1 can read only blobs from container cont1 - condition 2: user 2 can write only to blobs with path matching the pattern *2*. user 1 has azure blob data reader but restricted to read only blobs in container . user 2 has azure blob data owner and doesn't have any read restrictions (the condition is targeting write action). That

SecExams

means He can read all blobs from all containers in storage account. Documetation: https://learn.microsoft.com/en-us/azure/role-based-access-control/conditions-format

Question #261

HOTSPOT

-

You have an Azure subscription.

You plan to create a role definition to meet the following requirements:

- Users must be able to view the configuration data of a storage account.
- Users must be able to perform all actions on a virtual network.
- The solution must use the principle of least privilege.

What should you include in the role definition for each requirement? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

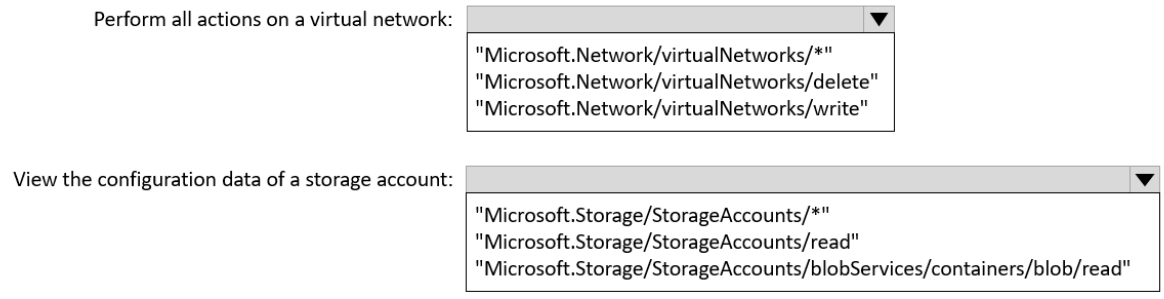

Explanation

Correct Answer:

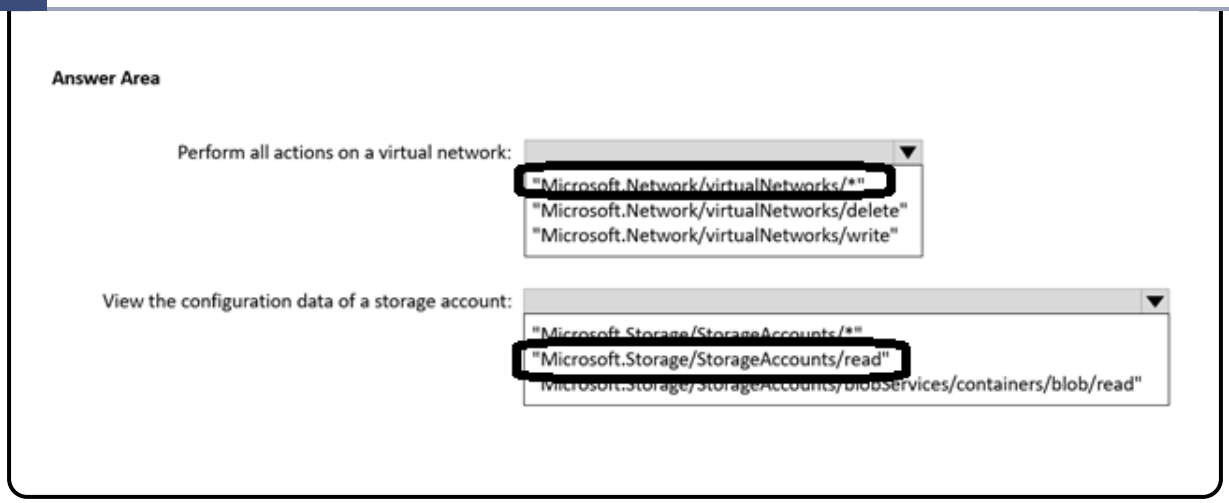

Community Discussion

Answer is correct

Finished the exam today with 837 points and this question was asked. About 70% of the questions were from here brothers - keep studying and you will make it!

Ans is correct. Passes the exam on 15 OCT. This question was there. Thanks ET Team

Did you purchase ET contribution subscription ?

Did you purchase ET contribution subscription ?

Question #262

You have an Azure subscription named Subscription1.

You have 5 TB of data that you need to transfer to Subscription1.

You plan to use an Azure Import/Export job.

What can you use as the destination of the imported data?

A) Azure Data Factory
B) the Azure File Sync Storage Sync Service

C) Azure File Storage (Correct Answer)

D) Azure SQL Database

Explanation

Correct Answer:
C

Community Discussion

If this doesn't come on exam, Imma sue SecExams

If they removed all the duplicates of this question, I feel we would get another page of questions for us poor people.

LOL what can be the answer to this one, first time I read it.

When I see this question, I always think , yes at least I know this one :)

Why would one come to the comments section for this question?

SecExams

Question #263

HOTSPOT

-

You have an Azure subscription that contains a virtual machine named VM1.

To VM1, you plan to add a 1-TB data disk that meets the following requirements:

- Provides data resiliency in the event of a datacenter outage.
- Provides the lowest latency and the highest performance.
- Ensures that no data loss occurs if a host fails.

You need to recommend which type of storage and host caching to configure for the new data disk.

Answer Area

Storage type:

- Premium SSD that uses locally-redundant storage (LRS)
- Premium SSD that uses zone-redundant storage (ZRS)
- Standard SSD that uses locally-redundant storage (LRS)
- Standard SSD that uses zone-redundant storage (ZRS)

Host caching:

- None
- Read-only
- Read/Write

Explanation

Correct Answer:

Answer Area

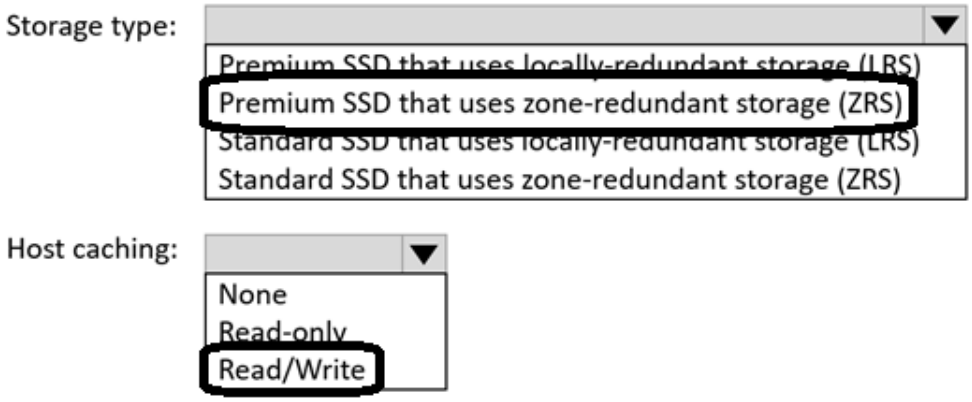

Community Discussion

Answer: Storage type: Premium SDD that uses zone-redundant storage (ZRS) Host-caching: Read-only Rationale ZRS replicates to different locations Host caching: Write cache stores information in memory, no host, no memory, no data Redundancy options for Azure managed disks - Azure Virtual Machines | Microsoft Learn Enable and configure Azure VM disk cache with the Azure portal - Training | Microsoft Learn

Let's evaluate the requirements: 1. **Provides data resiliency in the event of a datacenter outage.** - Zone-redundant storage (ZRS) provides this capability by replicating data across multiple availability zones, ensuring that if one datacenter fails, the data is still available in other zones. 2. **Provides the lowest latency and the highest performance.** - Premium SSDs offer better performance and lower latency compared to Standard SSDs. 3. **Ensures that no data loss occurs if a host fails.** - Write caching can pose a risk of data loss in the event of a host failure. Thus, we need to be careful when enabling write caching. Given the options: Storage: - Premium SSD that uses zone-redundant storage (ZRS) is the right choice as it provides high performance and ensures data resiliency across datacenter outages. Host caching: To avoid data loss during a host failure, we should avoid using write caching. - Read-Only would be the appropriate choice to enhance performance without risking data loss due to host failure.

SecExams

I succeeded the exam today with 837 point and I can say that these dumps really helped me! About 70% from the questions were from here and even after 2 years most of the comments of Mlantonis are on point - You deserve a special thank you brother. To the rest; make sure you thoroughly check the discussions because the solutions given by ET aren't always correct. By going through the discussions and occasionally reading MSDOCS you wil learn all that is necessary. Good luck! And yes I advise to pay for the full questions – those 30 days access were well spend!!

For the cache question.. There is no guarantee to the data stored in Cache. Hence Read Only is advised. Only application that can bear minor data loss can go for Read/Write Cache. https://learn.microsoft.com/en-us/answers/questions/1350516/host-caching

For the cache question.. There is no guarantee to the data stored in Cache. Hence Read Only is advised. Only application that can bear minor data loss can go for Read/Write Cache. https://learn.microsoft.com/en-us/answers/questions/1350516/host-caching

SecExams

Question #264

You have an Azure virtual machine named VM1 and an Azure key vault named Vault1.

On VM1, you plan to configure Azure Disk Encryption to use a key encryption key (KEK).

You need to prepare Vault1 for Azure Disk Encryption.

Which two actions should you perform on Vault1? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

A) Select Azure Virtual machines for deployment.
B) Create a new key. (Correct Answer)
C) Create a new secret.
D) Configure a key rotation policy.
E) Select Azure Disk Encryption for volume encryption. (Correct Answer)

Explanation

Correct Answer:
BE

Community Discussion

Selected Answer: BE

To prepare Vault1 for Azure Disk Encryption with a key encryption key (KEK): 1. **You need to have a key in the Key Vault.** This will be the KEK. Azure Disk Encryption uses BitLocker for Windows VMs, which requires a key for encrypting the data disk. If you're using a KEK, the BEK (BitLocker Encryption Key) will be wrapped by this KEK. So, you should: B. Create a new key. 2. **The key vault itself should be configured for Azure Disk Encryption.** This ensures the vault is set up to work with Azure VMs and their disks. Therefore: E. Select Azure Disk Encryption for volume encryption. So, the correct actions are B and E.

A little bit vague, but B and D seems correct, depending on how you look at it: Relevant links: https://learn.microsoft.com/en-us/azure/virtual-machines/windows/disk-encryption-key-vault?tabs=azure-portal https://learn.microsoft.com/en-us/azure/virtual-machines/windows/disk-encryption-windows

Selected Answer: BD

To prepare Azure Key Vault (Vault1) for Azure Disk Encryption using a key encryption key (KEK) on VM1, you should perform the following actions: B. Create a new key: You need to create a key in the key vault to be used as the KEK for Azure Disk Encryption. D. Configure a key rotation policy: Azure Disk Encryption typically requires key rotation. Configuring a key rotation policy is a best practice for managing encryption keys securely. The correct options are B and D. Option E, "Select Azure Disk Encryption for volume encryption," is not the correct choice in this scenario because this action should be performed on the virtual machine (VM1) and not on the Azure Key Vault (Vault1).

SecExams

ChatGPT "To prepare Azure Key Vault (Vault1) for Azure Disk Encryption using a key encryption key (KEK) on VM1, you need to perform the following actions: B. Create a new key: You should create a new key in Vault1. This key will serve as the KEK for encrypting the VM's disks. D. Configure a key rotation policy: It's a best practice to configure key rotation for your KEK to enhance security. This helps ensure that your encryption keys are periodically rotated, reducing the risk associated with long-lived keys. The other options (A, C, and E) are not directly related to preparing Vault1 for Azure Disk Encryption using a KEK, so they are not necessary for this specific scenario."

Selected Answer: AE

https://learn.microsoft.com/en-us/azure/virtual-machines/windows/disk-encryption-key-vault?tabs=azure-portal Vault is already created you now need to configure it for Azure Disk Encryption. The steps to do this are in the doc. Azure portal Select your key vault and go to Access Policies. (E) Under "Enable Access to", select the box labeled Azure Disk Encryption for volume encryption. (A) Select Azure Virtual Machines for deployment and/or Azure Resource Manager for template deployment, if needed. Click Save.

SecExams

Question #265

You have an Azure subscription that contains a virtual machine named VM1 and an Azure key vault named KV1.

You need to configure encryption for VM1. The solution must meet the following requirements:

- Store and use the encryption key in KV1.
- Maintain encryption if VM1 is downloaded from Azure.
- Encrypt both the operating system disk and the data disks.

Which encryption method should you use?

A) customer-managed keys
B) Confidential disk encryption
C) Azure Disk Encryption (Correct Answer)
D) encryption at host

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: C

"You can protect your managed disks by using Azure Disk Encryption for Linux VMs, which uses DM-Crypt, or Azure Disk Encryption for Windows VMs, which uses Windows BitLocker, to protect both operating system disks and data disks with full volume encryption. Encryption keys and secrets are safeguarded in your Azure Key Vault subscription. By using the Azure Backup service, you can back up and restore encrypted virtual machines (VMs) that use Key Encryption Key (KEK) configuration." https://learn.microsoft.com/en-us/azure/security/fundamentals/encryption-overview

Selected Answer: C

Given the requirements, the best fit would be: C. Azure Disk Encryption This solution encrypts both the OS and data disks, allows for the keys to be stored in Azure Key Vault, and maintains encryption if the VM is downloaded from Azure.

You should use C. Azure Disk Encryption. Azure Disk Encryption (ADE) encrypts the OS and data disks of Azure virtual machines (VMs) inside your VMs by using the DM-Crypt feature of Linux or the BitLocker feature of Windows. ADE is integrated with Azure Key Vault to help you control and manage the disk encryption keys and secrets, with the option to encrypt with a key encryption key (KEK). This means it can store and use the encryption key in KV1, as per your requirement. Moreover, Azure Disk Encryption maintains encryption if the VM is downloaded from Azure. This is because the encryption keys are stored in Azure Key Vault and not on the local machine. Therefore, even if the VM is downloaded, the data remains encrypted. Finally, Azure Disk Encryption can encrypt both the operating system disk and the data disks, which is another one of your requirements. So, Azure Disk Encryption meets all your specified requirements. https://learn.microsoft.com/en-us/azure/virtual-machines/windows/disk-encryption-overview. https://learn.microsoft.com/en-us/azure/virtual-machines/disk-encryption-overview.

Selected Answer: C

ChatGPT: Let's evaluate each of the provided options in the context of the given requirements: A. Customer-managed keys: Customer-managed keys are used for Azure Disk Encryption, which is a suitable choice for this scenario. This option allows you to

store and manage the encryption keys in Azure Key Vault, which aligns with the requirement to use the encryption key from KV1. B. Confidential disk encryption: Confidential disk encryption is not a standard Azure feature or encryption method. It doesn't directly apply to encrypting Azure virtual machines and their disks. Therefore, this option is not appropriate for the scenario. C. Azure Disk Encryption: Azure Disk Encryption is the correct encryption method in this scenario. It enables you to encrypt both the operating system disk and data disks of a virtual machine using either Microsoft-managed or customer-managed keys from Azure Key Vault. D. Encryption at host: Encryption at host refers to Azure Confidential Computing, a different feature focused on securing data in use, not data at rest as required in this scenario. This option is not suitable for encrypting virtual machines and their disks as specified.

Has anyone done the test to confirm this new question?

SecExams

Question #266

HOTSPOT

-

You have an Azure subscription that contains a storage account named storage1.

You need to configure a shared access signature (SAS) to ensure that users can only download blobs securely by name.

Which two settings should you configure? To answer, select the appropriate settings in the answer area.

NOTE: Each correct answer is worth one point.

Answer Area

Explanation

Correct Answer:

Answer Area

Community Discussion

Configure the SAS token settings: Allowed services: Blob (since you want to access blobs). Allowed resource types: Service (if you want users to access all blobs within a container) or Object (if you want users to access a specific blob by name). Allowed permissions: Set to "Read" to allow downloading. Specify the start and expiry date for the token. If you're using a shared access policy, you can select it here. Otherwise, configure the SAS token directly.

This question was in my exam on 31/08/2023.

asking the same. i'll perform 2nd chance on wednesday 6th of sept.

asking the same. i'll perform 2nd chance on wednesday 6th of sept.

asking the same. i'll perform 2nd chance on wednesday 6th of sept.

SecExams

Question #267

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Active Directory (Azure AD) tenant named contoso.com.

You have a CSV file that contains the names and email addresses of 500 external users.

You need to create a guest user account in contoso.com for each of the 500 external users.

Solution: You create a PowerShell script that runs the New-MgUser cmdlet for each user.

Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

Instead use the New-AzureADMSInvitation cmdlet which is used to invite a new external user to your directory. Reference: https://docs.microsoft.com/en-us/powershell/module/

azuread/new-azureadmsinvitation New-MgUser —> https://learn.microsoft.com/en-us/powershell/module/microsoft.graph.users/new-mguser?view=graph-powershell-1.0

This question is repeated multiple times, can admin remove duplicates

Selected Answer: B

should do the invite cmdlet rather than the create one

Selected Answer: B

'New-MgInvitation' is the command to add external users to the organization. https://learn.microsoft.com/en-us/powershell/module/microsoft.graph.identity.signins/new-mginvitation?view=graph-powershell-1.0

SecExams

Question #268

SecExams

HOTSPOT

-

You purchase a new Azure subscription.

You create an Azure Resource Manager (ARM) template named deploy.json as shown in the following exhibit.

SecExams

```
{
  "$schema":
"https://schema.management.azure.com/schemas/2019-04-
01/deploymentTemplate.json#",
  "contentVersion": "1.0.0.0",
  "paramters": {
      "obj1": {
        "type": "object",
        "defaultValue": {
          "propA": "one",
          "propB": "two",
          "propC": "three",
          "propD": {
             "propD-1": "sub",
             "propD-2": "sub"
          }
      }
  },
  "par1": {
    "type": "string",
    "allowedValues": [
    "centralus",
   "eastus",
  "westus" ],
  "defaultValue": "eastus"
     }
  },
  "variables": {
  "var1": [
     "westus",
     "centraus"
     "eastus"
  ]
},
  "resources": [
      {
        "type": "Microsoft.Resources/resrouceGroups",
        "apiVersion": "2018-05-01",
        "location": "eastus",
        "name": [concat('RGS', copyIndex())]"
        "copy": {
        "name": "copy",
        "count": 2
        }
  },
  {
        "type": "Microsoft.Resources/resourceGroups",
        "apiVersion": "2018-05-01",
        "location": [last(variables('var1'))]",
        "name": "[concat('ResGrp', '8')]"
       },
     {
        "type": "Microsoft.Resources/resourceGroups",
        "apiVersion": "2018-05-01",
        "location": "[parameters('part1')]",
        "name": "[concat('RGroup', length(parameters('obj1')))]"
  }
  ],
  "outputs": {}
}
```

SecExams

You connect to the subscription and run the following command.

New-AzDeployment –Location westus –TemplateFile “deploy.json”

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
Three resource groups are created when you run the script.	○	○
A resource group named RGroup5 is created.	○	○
All the resource groups are created in the East US Azure region.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
Three resource groups are created when you run the script.	◉	○
A resource group named RGroup5 is created.	○	◉
All the resource groups are created in the East US Azure region.	◉	○

Community Discussion

NNY - I run the ARM template in a lab environment. Before go to the explanation, it's valid to say that there are some errors in the script format and I have to fix it to run successfully. 1- It's N, because it creates 4 Resource Groups and not 3 Resource Groups (RGS0, RGS1, RGroup4 and ResGrp8); 1.1: The Resource Group named with "[concat('RGS', copyIndex())]", creates RGS0 and RGS1; 1.2: The Resource Group named with "[concat('ResGrp', '8')]", creates ResGrp8; 1.3: The Resource Group named with "[concat('RGroup', length(parameters('obj1')))]", creates RGroup4 (As we can see, obj1 parameter has a length of 4 'propA', 'propB', 'propC' and 'propD'); 2 - It's N, because it doesn't create a resourcer group named RGroup5; 3 - It's Y, because all resource groups were created in the East US Azure Region.

NNY, 1: No, to my count there will be 4 resources deployed 2: No, the length(parameters('obj1')) count will result in 4, as there are top-level properties. 3: Yes, the -location parameter given only effects what region the deployment would happen in, the resourcses location are defined by the template, and in this case the first two get an explicit eastus, the second refers to the last item in the list which is eastus and the third gets the default value of it which is again eastus

Why The Resource Group named with "[concat('RGS', copyIndex())]", creates RGS0 and RGS1?

No. It's is different! When you specify the location with a template, the location tells Azure Resource Manager where to store the deployment data. "For subscription level deployments, you must provide a location for the deployment. The location of the deployment is separate from the location of the resources you deploy. The deployment location specifies where to store deployment data. Management group and tenant deployments also require a location. For resource group deployments, the location of the resource group is used to store the deployment data." References: https://learn.microsoft.com/en-us/powershell/module/az.resources/new-azdeployment?view=azps-10.4.1#description https://learn.microsoft.com/en-us/azure/azure-resource-manager/templates/deploy-to-subscription?tabs=azure-cli#deployment-location-and-name

No. It's is different! When you specify the location with a template, the location tells Azure Resource Manager where to store the deployment data. "For subscription level deployments, you must provide a location for the deployment. The location of the deployment is separate from the location of the resources you deploy. The deployment location specifies where to store deployment data. Management group and tenant deployments also require a location. For resource group deployments, the location of the resource group is used to store the deployment data." References: https://learn.microsoft.com/en-us/powershell/module/az.resources/new-azdeployment?view=azps-10.4.1#description https://learn.microsoft.com/en-us/azure/azure-resource-

manager/templates/deploy-to-subscription?tabs=azure-cli#deployment-location-and-name

Question #269

You have an Azure subscription that contains a storage account named storage1. The storage1 account contains a container named container1.

You need to configure access to container1. The solution must meet the following requirements:
• Only allow read access.
• Allow both HTTP and HTTPS protocols.
• Apply access permissions to all the content in the container.

What should you use?

A) an access policy
B) a shared access signature (SAS) (Correct Answer)
C) Azure Content Delivery Network (CDN)
D) access keys

Explanation

Correct Answer:
B

Community Discussion

To configure read access to a container in an Azure Storage account while allowing both HTTP and HTTPS protocols and applying access permissions to all the content in the container, you should use a Shared Access Signature (SAS). Therefore, the correct option is: B. a shared access signature (SAS) Shared Access Signatures (SAS) are used to grant limited access to specific resources in your storage account while maintaining fine-grained control over the allowed operations, including read access. You can create a SAS token with the necessary permissions and then provide this token to the users or applications that need access to the container.

Selected Answer: B

Shared Access Signature (SAS): SAS can be used to provide delegated access to resources in your storage account, allowing you to specify the types of permissions granted, the protocols allowed (HTTP and/or HTTPS), and the duration of the access. By generating a SAS token, you can grant read-only access to container1, and allow both HTTP and HTTPS protocols for accessing the content in the container1. https://learn.microsoft.com/en-us/azure/cdn/cdn-storage-custom-domain-https

B. a shared access signature (SAS)

Who can send me this PDF version, please? oluwafemmyade@hotmail.com.... TIA

Ctrl + P, save as PDF

SecExams

Question #270

You need to create an Azure Storage account named storage1. The solution must meet the following requirements:

- Support Azure Data Lake Storage.
- Minimize costs for infrequently accessed data.
- Automatically replicate data to a secondary Azure region.

Which three options should you configure for storage1? Each correct answer presents part of the solution.

NOTE: Each correct answer is worth one point.

A) zone-redundant storage (ZRS)
B) the Cool access tire (Correct Answer)
C) geo-redundant storage (GRS) (Correct Answer)
D) the Hot access tier
E) hierarchical namespace (Correct Answer)

Explanation

Correct Answer:
BCE

Community Discussion

B. The Cool access tier: The Cool access tier is suitable for infrequently accessed data and offers lower storage costs compared to the Hot access tier. C. Geo-redundant storage (GRS): Geo-redundant storage replicates data to a secondary Azure region, providing data redundancy and disaster recovery capabilities. E. Hierarchical namespace: The hierarchical namespace is required for Azure Data Lake Storage, as it enables the storage account to support the data lake's file system structure. So, the correct options are B, C, and E.

Answers B, C, E

Answer; B,C, E

Selected Answer: BCE

Correct answer : B C E

Selected Answer: BCE

To meet the given requirements for the Azure Storage account named storage1, you should configure the following options: B. The Cool access tier: The Cool access tier is suitable for infrequently accessed data, as it offers lower storage costs compared to the Hot access tier. This option helps minimize costs for infrequently accessed data. C. Geo-redundant storage (GRS): GRS provides data replication to a secondary Azure region, ensuring data durability and availability in case of a regional outage. This option automatically replicates data to a secondary Azure region. E. Hierarchical namespace: Azure Data Lake Storage requires a hierarchical namespace to support its features. By enabling the hierarchical namespace, you can use Azure Data Lake Storage capabilities with the storage account. So, the correct options to configure for storage1 are B. the Cool access tier, C. geo-redundant storage (GRS), and E. hierarchical namespace.

SecExams

Question #271

Your on-premises network contains a VPN gateway.

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vgw1	Virtual network gateway	Gateway for Site-to-Site VPN to the on-premises network
storage1	Storage account	Standard performance tier
Vnet1	Virtual network	Enabled forced tunneling
VM1	Virtual machine	Connected to Vnet1

You need to ensure that all the traffic from VM1 to storage1 travels across the Microsoft backbone network.

What should you configure?

A) Azure AD Application Proxy
B) private endpoints (Correct Answer)
C) a network security group (NSG)
D) Azure Peering Service

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

Correct, that's what private endpoints are for. "A private endpoint is a network interface that uses a private IP address from your virtual network. This network interface connects you privately and securely to a service that's powered by Azure Private Link. By enabling a private endpoint, you're bringing the service into your virtual network." https://learn.microsoft.com/en-us/azure/private-link/private-endpoint-overview

Ok, the following question seems to complicate things a bit - same scenario, different solution... Here is what MS says about the difference about private endpoints and service endpoints: "What is the difference between Service Endpoints and Private Endpoints? - Private Endpoints grant network access to specific resources behind a given service providing granular segmentation. Traffic can reach the service resource from on premises without using public endpoints. - A Service Endpoint remains a publicly routable IP address. A Private Endpoint is a private IP in the address space of the virtual network where the private endpoint is configured." https://learn.microsoft.com/en-us/azure/private-link/private-link-faq#what-is-the-difference-between-service-endpoints-and-private-endpoints- From what I read here, both service endpoints and private endpoints seem a viable solution to the requirements stated.

Ok, the following question seems to complicate things a bit - same scenario, different solution... Here is what MS says about the difference about private endpoints and service endpoints: "What is the difference between Service Endpoints and Private Endpoints? - Private Endpoints grant network access to specific resources behind a given service providing granular segmentation. Traffic can reach the service resource from on premises without using public endpoints. - A Service Endpoint remains a publicly routable IP address. A Private Endpoint is a private IP in the address space of the virtual network where the private endpoint is configured." https://learn.microsoft.com/en-us/azure/private-link/private-link-faq#what-is-the-difference-between-service-endpoints-and-private-endpoints- From what I read here, both service endpoints and private endpoints seem a viable solution to the requirements stated.

B is perfect

SecExams

Question #272

Your on-premises network contains a VPN gateway.

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vgw1	Virtual network gateway	Gateway for Site-to-Site VPN to the on-premises network
storage1	Storage account	Standard performance tier
Vnet1	Virtual network	Enabled forced tunneling
VM1	Virtual machine	Connected to Vnet1

You need to ensure that all the traffic from VM1 to storage1 travels across the Microsoft backbone network.

What should you configure?

A) Azure AD Application Proxy
B) service endpoints (Correct Answer)
C) a network security group (NSG)
D) Azure Firewall

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

Correct. "Virtual Network (VNet) service endpoint provides secure and direct connectivity to Azure services over an optimized route over the Azure backbone network." https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoints-overview

500 and 400 repeated

Selected Answer: B

A. Azure AD Application Proxy B. service endpoints C. a network security group (NSG) D. Azure Firewall

No doubts here

Question #273

Your on-premises network contains a VPN gateway.

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vgw1	Virtual network gateway	Gateway for Site-to-Site VPN to the on-premises network
storage1	Storage account	Standard performance tier
Vnet1	Virtual network	Enabled forced tunneling
VM1	Virtual machine	Connected to Vnet1

You need to ensure that all the traffic from VM1 to storage1 travels across the Microsoft backbone network.

What should you configure?

A) Azure Application Gateway
B) service endpoints (Correct Answer)
C) a network security group (NSG)
D) Azure Peering Service

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

B. service endpoints - assures traffic goes over MS bon(er)

This question was on my exam today on 11/14/2023.

And wat was your answer

And wat was your answer

Question #274

You have an Azure subscription named Sub1 that contains the resources shown in the following table.

Name	Type
MG1	Management group
RG1	Resource group
VM1	Virtual machine

You create a user named Admin1.

To what can you add Admin1 as a co-administrator?

A) RG1
B) MG1
C) Sub1 (Correct Answer)
D) VM1

Explanation

Correct Answer:
C

Community Discussion

The correct answer is: C. Sub1 You can add Admin1 as a co-administrator to the Sub1 subscription. You cannot add Admin1 as a co-administrator to the RG1 resource group, MG1 management group, or VM1 virtual machine. Co-administrators have full access to all resources in a subscription, including the ability to create, read, update, and delete resources. To add Admin1 as a co-administrator to Sub1: In the Azure portal, navigate to Sub1. Click Access control (IAM). Click Assign role. Select the Co-Administrator role. Select Admin1 in the Select drop-down list. Click Assign. Once the role has been assigned, Admin1 will have full access to all resources in Sub1. Note: Co-administrators can only be assigned at the subscription scope. You cannot assign co-administrators to resource groups, management groups, or virtual machines.

Selected Answer: C

Answer is correct. A new question about a legacy topic. Co-Administrators where a thing before Azure RBAC was introduced - and will be deprecated from Aug 31, 2024... Co-administrators have full access to all resources in a subscription, including the ability to create, read, update, and delete resources.

The correct answer is C: Sub1, however this is a leagacy question, Co-Administrator and Service Administrator roles are used with classic ressources: Classic resources and classic administrators will be retired on August 31, 2024. Remove unnecessary Co-Administrators and use Azure RBAC for fine-grained access control. ref: https://learn.microsoft.com/en-us/azure/role-based-access-control/classic-administrators

from 15 February 2024 you will not be able to add new Co-Administrator

C is correct

SecExams

Question #275

SecExams

HOTSPOT

-

You have an Azure Storage account named storage1 that contains two containers named container1 and container2. Blob versioning is enabled for both containers.

You periodically take blob snapshots of critical blobs.

You create the following lifecycle management policy.

SecExams

```
{
  "rules": [
    {
      "enabled": true,
      "name": "rule1",
      "type": "Lifecycle",
      "definition": {
        "actions": {
          "version": {
            "tierToCool": {
              "daysAfterCreationGreaterThan": 15
              },
              "tierToArchive": {
                "daysAfterLastTierChangeGreaterThan": 7,
                "daysAfterCreationGreaterThan": 30
              }
            }
          },
          "filters": {
            "blobTypes": [
              "blockBlob"
            ],
            "prefixMatch": [
              "container1/"
            ]
          }
        }
      }
    ]
  }
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
A blob snapshot automatically moves to the Cool access tier after 15 days.	○	○
A blob version in container2 automatically moves to the Archive access tier after 30 days.	○	○
A rehydrated version automatically moves to the Archive access tier after 30 days.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
A blob snapshot automatically moves to the Cool access tier after 15 days.	○	○
A blob version in container2 automatically moves to the Archive access tier after 30 days.	○	○
A rehydrated version automatically moves to the Archive access tier after 30 days.	○	○

Community Discussion

Correct, YNN. Y - See section tierToCool N - rule1 only applies to container1, not container2, see section prefixMatch N - This one is a bit complicated. Rehydrated files (that were in the archive tier first and then returned to hot or cool) wouldn't necessarily be archived after 30 days - as there's a condition that the last tier change must be at least 7 days ago. (I'll leave it open how these files became archived in the first place, before 30 days after creation...)

NNN There is no snapshot section. Only a version section. So there is no policy defgined for any snapshot not matter which containter its in. The is no policy for container 2 since this one is filtered for only container 1. Hard No. Rehydrated version keep their original creation date and the current rules still apply so if anything it will be less than 30 days.

I think it should be NNN.... the first is N for the same reason that the second is N

I think it should be NNN.... the first is N for the same reason that the second is N

I think its NNN. 1. The Lifecycle management only applies to container 1. It says nothing about container. Thus, when this says "A blob snapshot" its talking about 1 and 2. So no, because container 2 doesn't have a lifecycle policy. 2. No, because container 2 doesn't have a lifecycle policy. 3. No, same as #1. I checked and there is no automatic blob movement w/o a lifecycle management policy.

Question #276

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Kind	Performance	Replication	Access tier
storage1	Storage (general purpose v1)	Premium	Locally-redundant storage (LRS)	*Not applicable*
storage2	StorageV2 (general purpose v2)	Standard	Locally-redundant storage (LRS)	Cool
storage3	StorageV2 (general purpose v2)	Standard	Read-access geo-redundant storage (RA-GRS)	Hot
storage4	BlobStorage	Premium	Locally-redundant storage (LRS)	Hot

Which storage account can be converted to zone-redundant storage (ZRS) replication?

A) storage1
B) storage2 (Correct Answer)
C) storage3
D) storage4

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

B. storage2 to convert to ZRS must the Kind be: Standard general-purpose v2 (StorageV2), Premium block blobs (BlockBlobStorage) or Premium file shares (FileStorage) and the Replication is from LRS possible (...from GRS/RA-GRS convert to LRS first) https://learn.microsoft.com/en-us/azure/storage/common/storage-redundancy#supported-storage-account-types https://learn.microsoft.com/en-us/azure/storage/common/redundancy-migration?tabs=portal#replication-change-table

it should be storage2 and 4 ?

https://learn.microsoft.com/en-us/azure/storage/common/redundancy-migration

Storage2 - similar questions found earlier

Selected Answer: B

ZRS is supported for all Azure Storage services through standard general-purpose v2 storage accounts, including: Azure Blob storage (hot and cool block blobs and append blobs, non-disk page blobs) Azure Files (all standard tiers: transaction optimized, hot, and cool) Azure Table storage Azure Queue storage https://learn.microsoft.com/en-us/azure/storage/common/storage-redundancy?toc=%2Fazure%2Fstorage%2Fblobs%2Ftoc.json&bc=%2Fazure%2Fstorage%2Fblobs%2Fbreadcrumb%2Ftoc.js

SecExams

Question #277

You have an Azure subscription that contains the devices shown in the following table.

Name	Platform
Device1	Windows
Device2	Ubuntu Linux
Device3	macOS
Device4	Android

On which devices can you install Azure Storage Explorer?

A) Device1 only
B) Device1 and Device2 only
C) Device1 and Device3 only
D) Device1, Device2, and Device3 only (Correct Answer)
E) Device1, Device3, and Device4 only

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: D

https://learn.microsoft.com/en-us/azure/vs-azure-tools-storage-manage-with-storage-explorer?tabs=windows#overview

Selected Answer: D

https://learn.microsoft.com/en-us/azure/vs-azure-tools-storage-manage-with-storage-explorer?tabs=windows

D is correct

Question #278

SecExams

HOTSPOT

-

You have an Azure subscription.

You plan to create the Azure Storage account as shown in the following exhibit.

SecExams

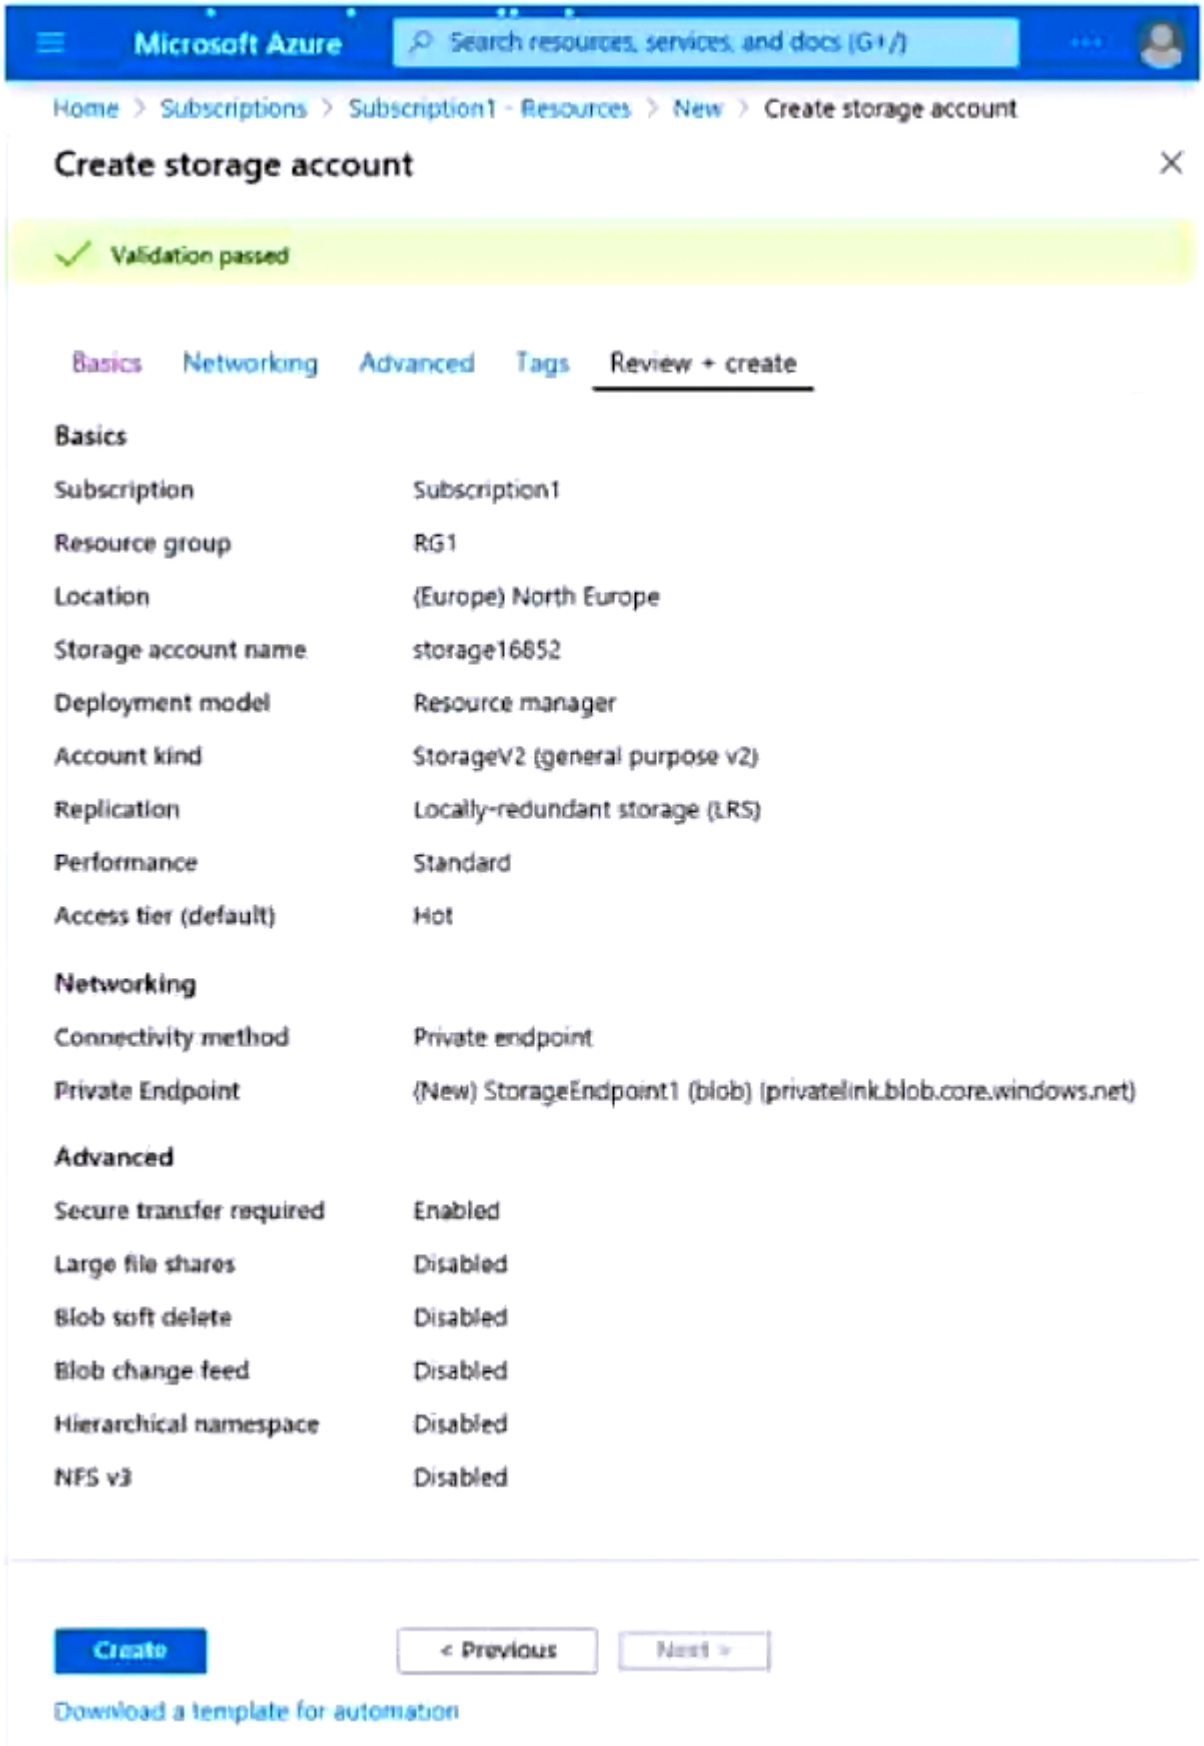

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Answer Area

The minimum number of copies of the storage account will be **[answer choice]**.

1
2
3
4

To reduce the cost of infrequently accessed data in the storage account, you must modify the **[answer choice]** setting.

Access tier (default)
Performance
Account kind
Replication

Explanation

Correct Answer:

Answer Area

The minimum number of copies of the storage account will be **[answer choice]**.

1
2
3
4

To reduce the cost of infrequently accessed data in the storage account, you must modify the **[answer choice]** setting.

Access tier (default)
Performance
Account kind
Replication

Community Discussion

Answer is correct. Any data is stored in three different copies, either within a data center or across different availability zones or regions. Infrequently used data can be stored most cost-effiiently on the cold access tier.

3 https://www.azurespeed.com/Information/AzureAvailabilityZones Access Tier (move to cold)

Given answer is correct.

Correct : 3 ans accesTier

SecExams

Question #279

SecExams

HOTSPOT
-

You have an Azure Storage account named storage1 that contains a container named container1. The container1 container stores thousands of image files.

You plan to use an Azure Resource Manager (ARM) template to create a blob inventory rule named rule1.

You need to ensure that only blobs whose names start with the word finance are stored daily as a CSV file in container1.

How should you complete rule1? To answer, select the options in the answer area.

NOTE: Each correct answer is worth one point.

SecExams

Answer Area

```
. . .
   {
        "definition": {
          "filters": {
            "blobTypes":  [                ▼ ]
                          appendBlob
                          blockBlob
                          pageBlob
            "includeBlobVersions": true,
            "includeSnapshots": true,
            "prefixMatch":  [              ▼ ]
                          container1/*
                          container1/finance
                          finance
          },
          "format": "string",
          "objectType": "blob",
          "schedule": "daily",
          "schemaFields": ["Name"]
        },
        "destination": "CSV",
        "enabled": true,
        "name": "rule1"
      }
. . .
```

SecExams

Explanation

Correct Answer:

SecExams

Answer Area

```
. . .
   {
          "definition": {
            "filters": {
              "blobTypes":  [ appendBlob | blockBlob | pageBlob ]
              "includeBlobVersions": true,
              "includeSnapshots": true,
              "prefixMatch":  [ container1/* | container1/finance | finance ]
            },
            "format": "string",
            "objectType": "blob",
            "schedule": "daily",
            "schemaFields": ["Name"]
          },
          "destination": "CSV",
          "enabled": true,
          "name": "rule1"
        }
. . .
```

Community Discussion

BlockBlob makes most sense for CSV files: https://learn.microsoft.com/en-us/rest/api/storageservices/understanding-block-blobs--append-blobs--and-page-blobs For prefixmatch consult: https://learn.microsoft.com/en-us/azure/storage/blobs/storage-blob-faq A prefix match string of container1/sub1/ applies to all blobs in the container named container1 that begin with the string sub1/. For example, the prefix will match blobs named container1/sub1/test.txt or container1/sub1/sub2/test.txt.

blockBlob and container1/finance If the data is truly append-only and you never need to modify or delete portions of the data, you might consider using Append Blobs. However, since is mentioned a requirement to store daily CSV files, and assuming that you may need to update or replace the data for a specific day, Block Blobs are likely a more suitable choice. https://www.smikar.com/differences-between-blob-types/#:~:text=Block%20blobs%20are%20ideal%20for%20uploading%20large%20files,as%20log%20files%2C%20ar

Append blobs are not designed to store images, specially thousands of it. "They are optimized for scenarios where you are continuously adding data, such as log files, telemetry data, or other sequential data streams."

Append blobs are not designed to store images, specially thousands of it. "They are optimized for scenarios where you are continuously adding data, such as log files, telemetry data, or other sequential data streams."

Correct!

SecExams

Question #280

HOTSPOT

-

You have an Azure subscription that contains a storage account named storage1. The storage1 account contains blobs in a container named container1.

You plan to share access to storage1.

You need to generate a shared access signature (SAS). The solution must meet the following requirements:

• Ensure that the SAS can only be used to enumerate and download blobs stored in container1.
• Use the principle of least privilege.

Which three settings should you enable? To answer, select the appropriate settings in the answer area.

Explanation

Correct Answer:

Community Discussion

The correct answer should be: Allowed resource types: Container Allowed permissions: List and Read. Explanation: Container: "Grants access to the content and metadata of any blob in the container, and to the list of blobs in the container." Source: https://learn.microsoft.com/en-us/rest/api/storageservices/create-user-delegation-sas#specify-the-signed-resource-field Specifying "Object" additionally would be redundant because it is a subset of "Container". List: "List blobs non-recursively." Source: https://learn.microsoft.com/en-us/rest/api/storageservices/create-user-delegation-sas#specify-permissions Satisfies the requirement of enumeration. Read: "Read the content, blocklist, properties, and metadata of any blob in the container or directory. Use a blob as the source of a copy operation." Source: https://learn.microsoft.com/en-us/rest/api/storageservices/create-user-delegation-sas#specify-permissions Satisfies the requirement of download.

From the Internet: As far as I know, the resource type, you could regard as below: Service (s): Access to service-level APIs (e.g., Get/Set Service Properties, Get Service Stats, List Containers/Queues/Tables/Shares) Container (c): Access to container-level APIs (e.g., Create/Delete Container, Create/Delete Queue, Create/Delete Table, Create/Delete Share, List Blobs/Files and Directories) Object (o): Access to object-level APIs for blobs, queue messages, table entities, and files(e.g. Put Blob, Query Entity, Get Messages, Create File, etc.) therefore is the answer: Container, Object, Read correct

I would go with "container, read, list" container: it's the resource type we want to generate SAS for read: this will allow download List: this will allow enumeration or count/listing object: is for when you want to target a specific blob. So it's not necessary for this scenario however it was required in the previous question.

I would say container and object. You need container to list and you need the object to download. You need the list option because that's the actions you want to perform on the container and you need read to download the object. https://learn.microsoft.com/en-us/answers/questions/67751/azure-sas-terms

still 4, buddy...

SecExams

Question #281

HOTSPOT

-

You have an Azure subscription. The subscription contains a storage account named storage1 that has the lifecycle management rules shown in the following table.

Name	Blob prefix	If base were last modified more than (days ago)	Then
Rule1	container1/	3 days	Move to archive storage
Rule2	*Not applicable*	5 days	Move to cool storage
Rule3	container2/	10 days	Delete the blob
Rule4	container2/	15 days	Move to archive storage

On June 1, you store two blobs in storage1 as shown in the following table.

Name	Location	Access tier
File1	container1	Hot
File2	container2	Hot

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
On June 6, File1 will be stored in the Cool access tier.	◯	◯
On June 7, File2 will be stored in the Cool access tier.	◯	◯
On June 16, File2 will be stored in the Archive access tier.	◯	◯

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
On June 6, File1 will be stored in the Cool access tier.	○	◉
On June 7, File2 will be stored in the Cool access tier.	◉	○
On June 16, File2 will be stored in the Archive access tier.	○	◉

Community Discussion

Correct answers! On June 6, File 1 will be stored in the Cool access tier: NO - Rule 1 applies and File 1 will be in archive storage. On June 7, File 2 will be stored in the Cool access tier: YES - Rule 5 applies to all files due to the lack of a prefix, and File 2 will be in cool storage. On June 16, File 2 will be stored in the Archive access tier: NO - Rule 3 applies and File 2 will be deleted.

Plot twist, on June 7, File 2 already is in the Cool access tier because it was moved to there on June 6th.

Plot twist, on June 7, File 2 already is in the Cool access tier because it was moved to there on June 6th.

correct nearly as Topic 3 Question 49 (https://www.secexams.com/discussions/microsoft/view/93938-exam-az-104-topic-3-question-49-discussion/)

Where is the Rule5 ?

Question #282

SecExams

HOTSPOT

-

You have a Microsoft Entra tenant that contains the groups shown in the following table.

Name	Type	Has an assigned license
Group1	Security	Yes
Group2	Security	No
Group3	Microsoft 365	Yes
Group4	Microsoft 365	No

The tenant contains the users shown in the following table.

Name	Member of	Has a direct assigned license
User1	*None*	Yes
User2	Group1	No
User3	Group4	Yes
User4	*None*	No

Which users and groups can you delete? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

Users:

- User4 only
- User1 and User4 only
- User2 and User4 only
- User1, User2, User3, and User4

Groups:

- Group2 only
- Group2 and Group3 only
- Group2 and Group4 only
- Group1, Group2, Group3, and Group4

SecExams

Explanation

Correct Answer:

Answer Area

Users:

- User4 only
- User1 and User4 only
- User2 and User4 only
- User1, User2, User3, and User4

Groups:

- Group2 only
- Group2 and Group3 only
- Group2 and Group4 only
- Group1, Group2, Group3, and Group4

SecExams

Community Discussion

Tested and verified answers are Users = User1, User2, User3, User4 (can delete all users whether a license is assigned directly or via inheritance from a group membership) Groups = Group 2 and Group 4 (Groups with active license assignments cannot be deleted. You get an error)

User : User 1, User2 , User 3 and User 4 (Explain : You can deleted all users with licence then what happend ? Only free the licence and storage en some part) Group : Group 2 and Group 4 (Groups with active license assignments cannot be deleted. You get an error) https://techcommunity.microsoft.com/t5/microsoft-365-admin-center/reclaiming-licenses-from-deleted-users/m-p/116488

First comment

Correct. Tested in Lab too.

Correct. Tested in Lab too.

Question #283

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Location
VM1	Virtual machine	East US
storage1	Storage account	West US

You need to ensure that data transfers between storage1 and VM1 do NOT traverse the internet

What should you configure for storage1?

A) data protection
B) a private endpoint (Correct Answer)
C) Public network access in the Firewalls and virtual networks settings
D) a shared access signature (SAS)

Explanation

Correct Answer:
B

Community Discussion

Correct Answer: B To ensure that all the traffic from VM1 to storage1 travels across the Microsoft backbone network without going out to the public internet, you should use a private endpoint. A private endpoint uses a private IP address from your VNet, effectively bringing the service into your VNet. Any traffic between your virtual machine and the storage account will traverse over the VNet and stay on the Microsoft backbone network, without ever leaving it. Link: https://learn.microsoft.com/en-us/azure/storage/common/storage-private-endpoints

Selected Answer: B

Correct Answer: B To ensure that all the traffic from VM1 to storage1 travels across the Microsoft backbone network without going out to the public internet, you should use a

private endpoint. A private endpoint uses a private IP address from your VNet, effectively bringing the service into your VNet. Any traffic between your virtual machine and the storage account will traverse over the VNet and stay on the Microsoft backbone network, without ever leaving it. Link: https://learn.microsoft.com/en-us/azure/storage/common/storage-private-endpoints

correct Amswer :B

B it's ok

SecExams

Question #284

SecExams

HOTSPOT

-

You have an Azure Storage account named contoso2024 that contains the resources shown in the following table.

Name	Type	Contents
container1	Blob container	File1
share1	Azure Files share	File2

You have users that have permissions for contoso2024 as shown in the following table.

Name	Permission
User1	Reader role
User2	Storage Account Contributor role
User3	Has an access key for contoso2024

The contoso2024 account is configured as shown in the following exhibit.

SecExams

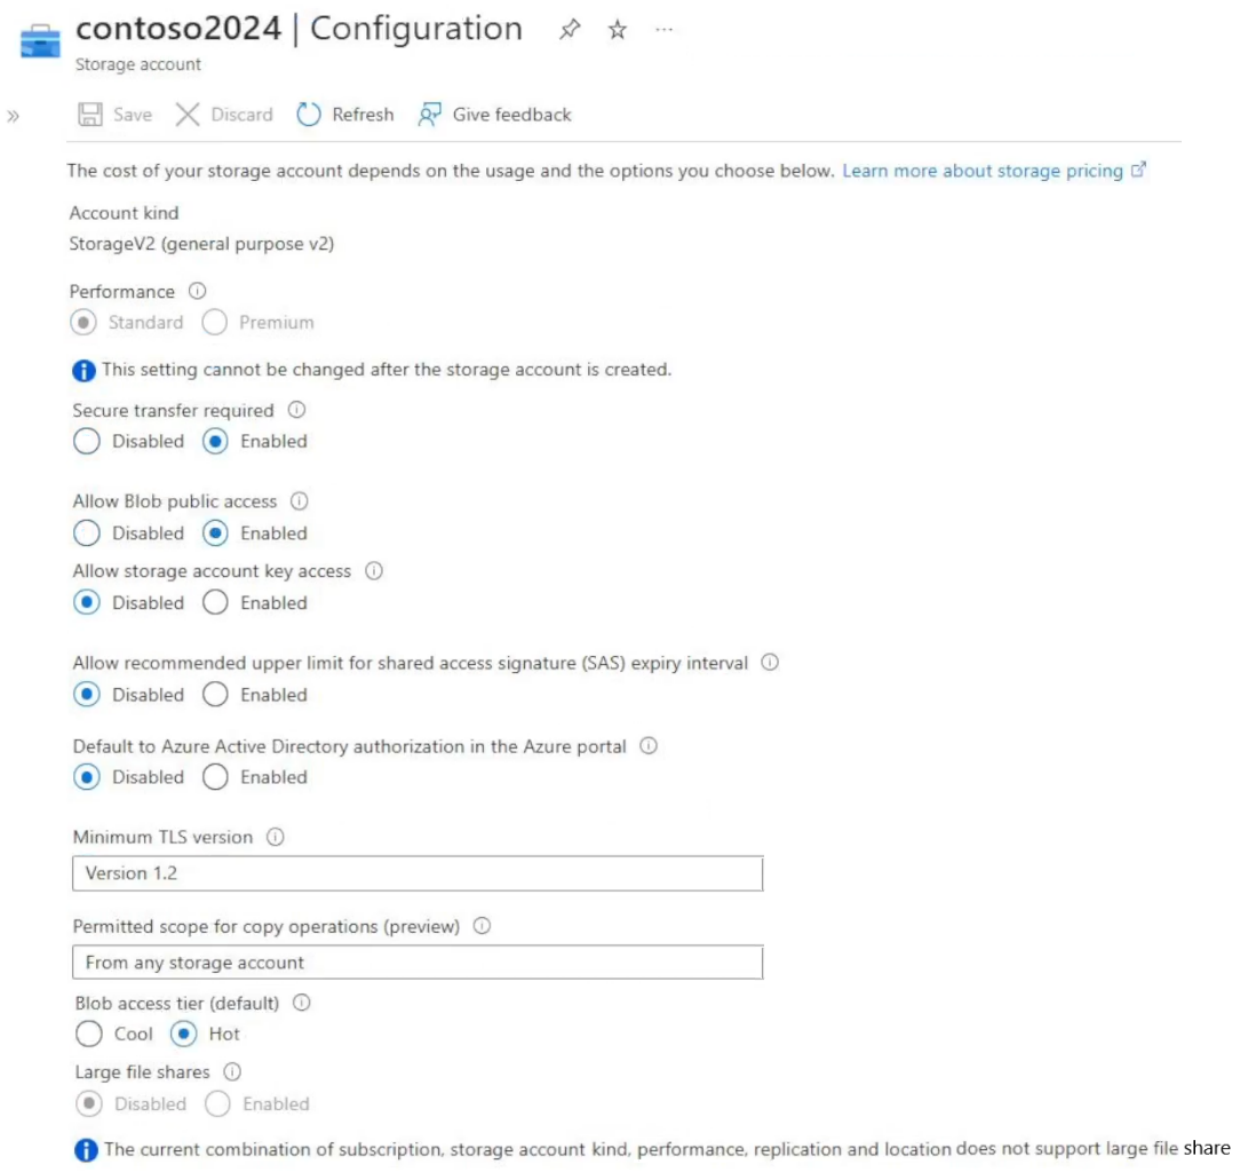

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
User1 can read File1.	○	○
User2 can read File2.	○	○
User3 can read File1 and File2.	○	○

Explanation

Correct Answer:

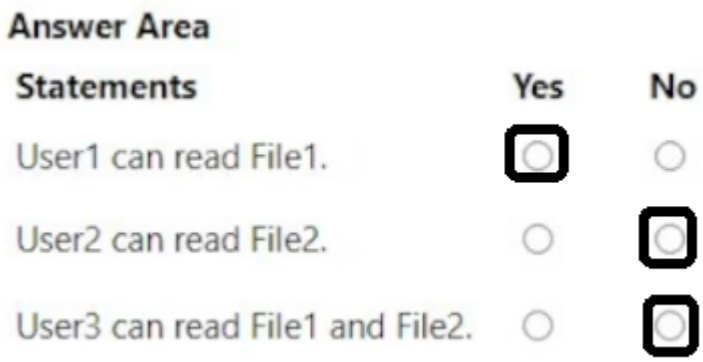

Community Discussion

Correct Answer: 1-Yes: Public Access is enabled for blob 2- No: Azure Storage Account Contributor role can't access the file share 3- No: Access Key is disabled on the storage account

N-N-N User 1 does not have Storage Blob Data Reader or Storage Blob Data Contributor role to read File1. https://learn.microsoft.com/en-us/azure/storage/blobs/assign-azure-role-data-access?tabs=portal

ANSWERS = N-N-N Storage Account Contributor: DataActions => none Reader: DataActions => none Storage account access keys: disabled "These keys can be used to authorize access to data in your storage account via Shared Key authorization, or via SAS tokens that are signed with the shared key." Reference: https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles https://learn.microsoft.com/en-us/azure/storage/common/storage-account-keys-manage?tabs=azure-portal

ANSWERS = N-N-N Storage Account Contributor: DataActions => none Reader: DataActions => none Storage account access keys: disabled "These keys can be used to authorize access to data in your storage account via Shared Key authorization, or via SAS tokens that are signed with the shared key." Reference: https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles https://learn.microsoft.com/en-us/azure/storage/common/storage-account-keys-manage?tabs=azure-portal

SecExams

Answer should be No-No-No 1. No, Reader does not allow to read contents . It only allows to read the metadata and other settings. 2. No, Storage account contributor also does not allow to read data. Only access to read/change settings. 3. No, since access keys are disabled

Question #285

Your company has serval departments. Each department has a number of virtual machines (VMs).
The company has an Azure subscription that contains a resource group named RG1.
All VMs are located in RG1.
You want to associate each VM with its respective department.
What should you do?

A) Create Azure Management Groups for each department.
B) Create a resource group for each department.
C) Assign tags to the virtual machines. (Correct Answer)
D) Modify the settings of the virtual machines.

Explanation

Correct Answer: C ?
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-using-tags

Community Discussion

Question #286

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) subscription.
You want to implement an Azure AD conditional access policy.
The policy must be configured to require members of the Global Administrators group to use Multi-Factor Authentication and an Azure AD-joined device when they connect to Azure AD from untrusted locations.
Solution: You access the multi-factor authentication page to alter the user settings.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #287

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) subscription.
You want to implement an Azure AD conditional access policy.
The policy must be configured to require members of the Global Administrators group to use Multi-Factor Authentication and an Azure AD-joined device when they connect to Azure AD from untrusted locations.
Solution: You access the Azure portal to alter the session control of the Azure AD conditional access policy.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #288

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) subscription.
You want to implement an Azure AD conditional access policy.
The policy must be configured to require members of the Global Administrators group to use Multi-Factor Authentication and an Azure AD-joined device when they connect to Azure AD from untrusted locations.
Solution: You access the Azure portal to alter the grant control of the Azure AD conditional access policy.
Does the solution meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?

Community Discussion

Question #289

You are planning to deploy an Ubuntu Server virtual machine to your company's Azure subscription.
You are required to implement a custom deployment that includes adding a particular trusted root certification authority (CA).
Which of the following should you use to create the virtual machine?

A) The New-AzureRmVm cmdlet.
B) The New-AzVM cmdlet.
C) The Create-AzVM cmdlet. (Correct Answer)
D) The az vm create command.

Explanation

Correct Answer: C ?
Once Cloud-init.txt has been created, you can deploy the VM with az vm create cmdlet, using the --custom-data parameter to provide the full path to the cloud- init.txt file.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/linux/tutorial-automate-vm-deployment

Community Discussion

Question #290

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company makes use of Multi-Factor Authentication for when users are not in the office. The Per Authentication option has been configured as the usage model.
After the acquisition of a smaller business and the addition of the new staff to Azure Active Directory (Azure AD) obtains a different company and adding the new employees to Azure Active Directory (Azure AD), you are informed that these employees should also make use of Multi-Factor Authentication.
To achieve this, the Per Enabled User setting must be set for the usage model.
Solution: You reconfigure the existing usage model via the Azure portal.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Since it is not possible to change the usage model of an existing provider as it is right now, you have to create a new one and reactivate your existing server with activation credentials from the new provider.
Reference:

https://365lab.net/2015/04/11/switch-usage-model-in-azure-multi-factor-authentication-server/

Community Discussion

Question #291

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company's Azure solution makes use of Multi-Factor Authentication for when users are not in the office. The Per Authentication option has been configured as the usage model.
After the acquisition of a smaller business and the addition of the new staff to Azure Active Directory (Azure AD) obtains a different company and adding the new employees to Azure Active Directory (Azure AD), you are informed that these employees should also make use of Multi-Factor Authentication.
To achieve this, the Per Enabled User setting must be set for the usage model.
Solution: You reconfigure the existing usage model via the Azure CLI.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Since it is not possible to change the usage model of an existing provider as it is right now, you have to create a new one and reactivate your existing server with activation credentials from the new provider.
Reference:
https://365lab.net/2015/04/11/switch-usage-model-in-azure-multi-factor-authentication-server/

Community Discussion

Question #292

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.

Your company's Azure solution makes use of Multi-Factor Authentication for when users are not in the office. The Per Authentication option has been configured as the usage model.

After the acquisition of a smaller business and the addition of the new staff to Azure Active Directory (Azure AD) obtains a different company and adding the new employees to Azure Active Directory (Azure AD), you are informed that these employees should also make use of Multi-Factor Authentication.

To achieve this, the Per Enabled User setting must be set for the usage model.

Solution: You create a new Multi-Factor Authentication provider with a backup from the existing Multi-Factor Authentication provider data.

Does the solution meet the goal?

A) Yes (Correct Answer)

B) No

Explanation

Correct Answer: A ?

Since it is not possible to change the usage model of an existing provider as it is right now, you have to create a new one and reactivate your existing server with activation credentials from the new provider.

Reference:

https://365lab.net/2015/04/11/switch-usage-model-in-azure-multi-factor-authentication-server/

Community Discussion

Selected Answer: A

Finally explained...

Question #293

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) tenant named weyland.com that is configured for hybrid coexistence with the on-premises Active
Directory domain.
You have a server named DirSync1 that is configured as a DirSync server.
You create a new user account in the on-premise Active Directory. You now need to replicate the user information to Azure AD immediately.
Solution: You run the Start-ADSyncSyncCycle -PolicyType Initial PowerShell cmdlet.
Does the solution meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
Reference:
https://blog.kloud.com.au/2016/03/08/azure-ad-connect-manual-sync-cycle-with-powershell-start-adsyncsynccycle/

Community Discussion

Question #294

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) tenant named weyland.com that is configured for hybrid coexistence with the on-premises Active
Directory domain.
You have a server named DirSync1 that is configured as a DirSync server.
You create a new user account in the on-premise Active Directory. You now need to replicate the user information to Azure AD immediately.
Solution: You use Active Directory Sites and Services to force replication of the Global Catalog on a domain controller.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #295

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) tenant named weyland.com that is configured for hybrid coexistence with the on-premises Active
Directory domain.
You have a server named DirSync1 that is configured as a DirSync server.
You create a new user account in the on-premise Active Directory. You now need to replicate the user information to Azure AD immediately.
Solution: You restart the NetLogon service on a domain controller.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #296

Your company has a Microsoft Azure subscription.
The company has datacenters in Los Angeles and New York.
You are configuring the two datacenters as geo-clustered sites for site resiliency.
You need to recommend an Azure storage redundancy option.
You have the following data storage requirements:
✑ Data must be stored on multiple nodes.
✑ Data must be stored on nodes in separate geographic locations.
✑ Data can be read from the secondary location as well as from the primary location.
Which of the following Azure stored redundancy options should you recommend?

A) Geo-redundant storage
B) Read-only geo-redundant storage (Correct Answer)
C) Zone-redundant storage
D) Locally redundant storage

Explanation

Correct Answer: B ?
RA-GRS allows you to have higher read availability for your storage account by providing access to the data replicated to the secondary location. Once you enable €ıread only€ı this feature, the secondary location may be used to achieve higher availability in the event the data is not available in the primary region. This is an .feature which requires the storage account be geo-replicated €ıopt-in€ı
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy

Community Discussion

Question #297

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an azure subscription that includes a storage account, a resource group, a blob container and a file share.
A colleague named Jon Ross makes use of a solitary Azure Resource Manager (ARM) template to deploy a virtual machine and an additional Azure Storage account.
You want to review the ARM template that was used by Jon Ross.
Solution: You access the Virtual Machine blade.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
You should use the Resource Group blade
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-manager-export-template

Community Discussion

Question #298

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an azure subscription that includes a storage account, a resource group, a blob container and a file share.
A colleague named Jon Ross makes use of a solitary Azure Resource Manager (ARM) template to deploy a virtual machine and an additional Azure Storage account.
You want to review the ARM template that was used by Jon Ross.
Solution: You access the Resource Group blade.
Does the solution meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
To view a template from deployment history:
1. Go to the resource group for your new resource group. Notice that the portal shows the result of the last deployment. Select this link.

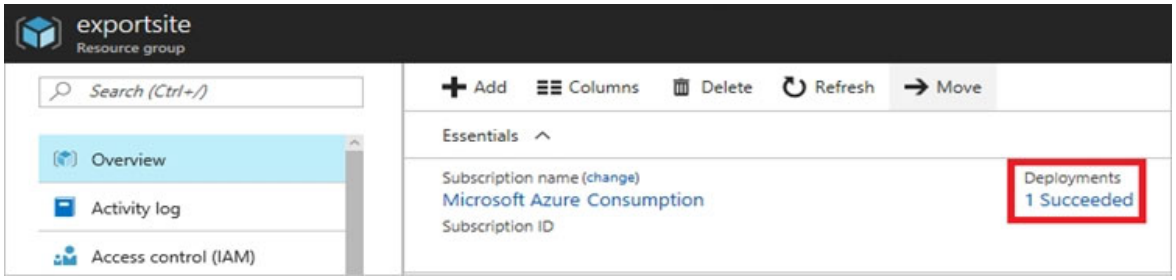

2. You see a history of deployments for the group. In your case, the portal probably lists only one deployment. Select this deployment.

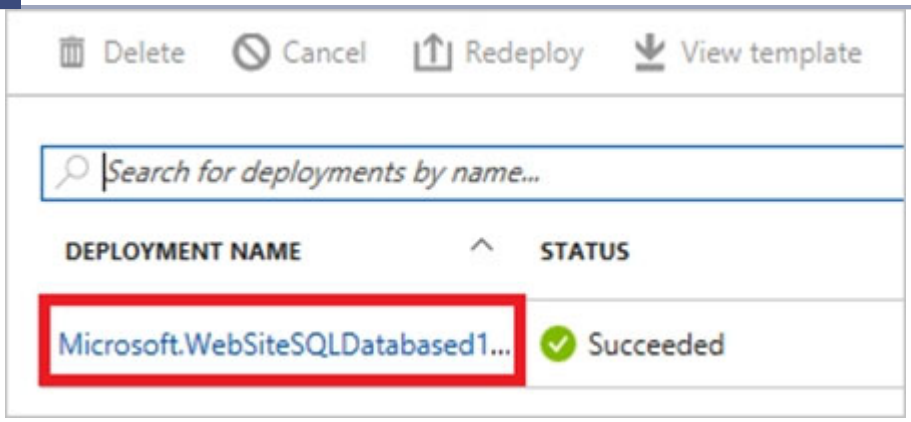

3. The portal displays a summary of the deployment. The summary includes the status of the deployment and its operations and the values that you provided for parameters. To see the template that you used for the deployment, select View template.

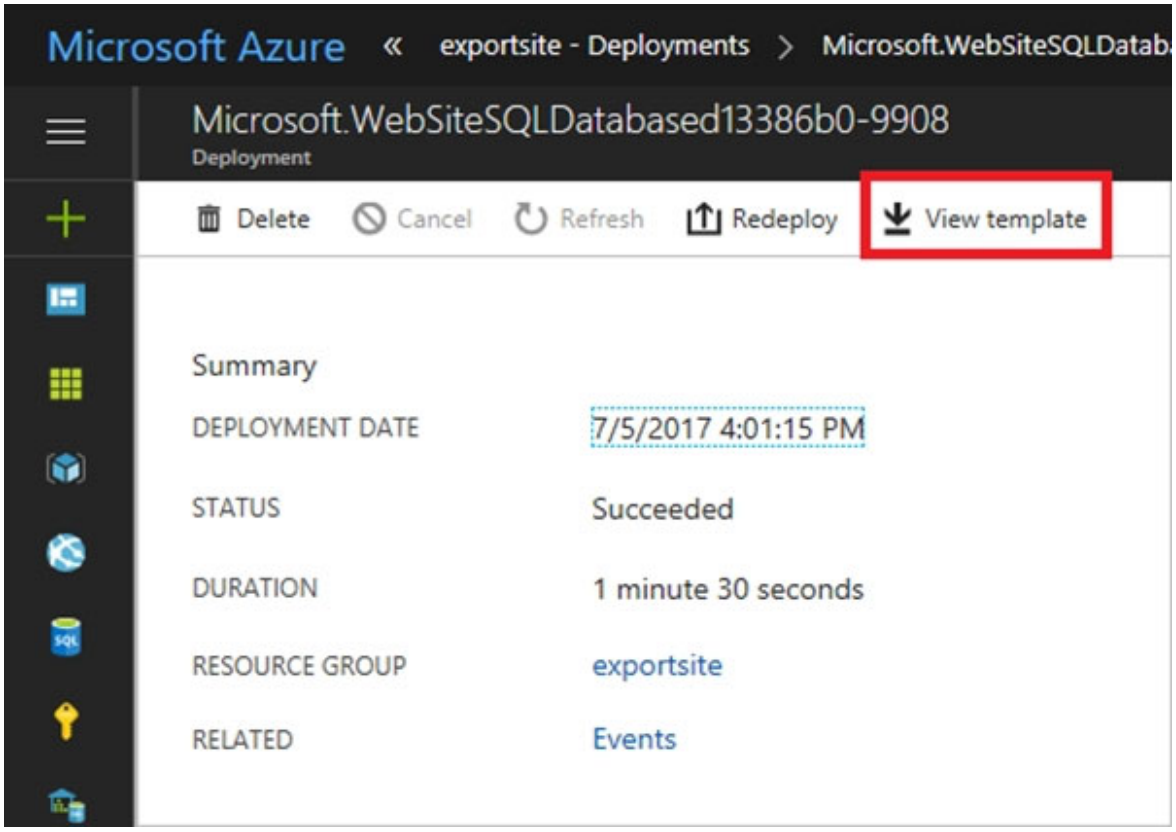

Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-manager-export-template

Community Discussion

Question #299

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an azure subscription that includes a storage account, a resource group, a blob container and a file share.
A colleague named Jon Ross makes use of a solitary Azure Resource Manager (ARM) template to deploy a virtual machine and an additional Azure Storage account.
You want to review the ARM template that was used by Jon Ross.
Solution: You access the Container blade.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
You should use the Resource Group blade
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-manager-export-template

Community Discussion

Question #300

Your company has three virtual machines (VMs) that are included in an availability set.
You try to resize one of the VMs, which returns an allocation failure message.
It is imperative that the VM is resized.
Which of the following actions should you take?

A) You should only stop one of the VMs.

B) You should stop two of the VMs.

C) You should stop all three VMs. (Correct Answer)

D) You should remove the necessary VM from the availability set.

Explanation

Correct Answer: C ?

If the VM you wish to resize is part of an availability set, then you must stop all VMs in the availability set before changing the size of any VM in the availability set.

The reason all VMs in the availability set must be stopped before performing the resize operation to a size that requires different hardware is that all running VMs in the availability set must be using the same physical hardware cluster. Therefore, if a change of physical hardware cluster is required to change the VM size then all VMs must be first stopped and then restarted one-by-one to a different physical hardware clusters.

Reference:

https://azure.microsoft.com/es-es/blog/resize-virtual-machines/

SecExams

Community Discussion

Question #301

You have an Azure virtual machine (VM) that has a single data disk. You have been tasked with attaching this data disk to another Azure VM.

You need to make sure that your strategy allows for the virtual machines to be offline for the least amount of time possible.

Which of the following is the action you should take FIRST?

A) Stop the VM that includes the data disk. (Correct Answer)

B) Stop the VM that the data disk must be attached to.

C) Detach the data disk.

D) Delete the VM that includes the data disk.

Explanation

Correct Answer: A ?

Reference:

https://docs.microsoft.com/en-us/azure/virtual-machines/windows/detach-disk https://docs.microsoft.com/en-us/azure/lab-services/devtest-lab-attach-detach-data-disk

Community Discussion

Question #302

Your company has an Azure subscription.
You need to deploy a number of Azure virtual machines (VMs) using Azure Resource Manager (ARM) templates. You have been informed that the VMs will be included in a single availability set.
You are required to make sure that the ARM template you configure allows for as many VMs as possible to remain accessible in the event of fabric failure or maintenance.
Which of the following is the value that you should configure for the platformFaultDomainCount property?

A) 10
B) 30
C) Min Value
D) Max Value (Correct Answer)

Explanation

Correct Answer: D ?
The number of fault domains for managed availability sets varies by region - either two or three per region.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/manage-availability

Community Discussion

Question #303

Your company has an Azure subscription.
You need to deploy a number of Azure virtual machines (VMs) using Azure Resource Manager (ARM) templates. You have been informed that the VMs will be included in a single availability set.
You are required to make sure that the ARM template you configure allows for as many VMs as possible to remain accessible in the event of fabric failure or maintenance.
Which of the following is the value that you should configure for the platformUpdateDomainCount property?

A) 10
B) 20 (Correct Answer)
C) 30
D) 40

Explanation

Correct Answer: B ?
Each virtual machine in your availability set is assigned an update domain and a fault domain by the underlying Azure platform. For a given availability set, five non-user-configurable update domains are assigned by default (Resource Manager deployments can then be increased to provide up to 20 update domains) to indicate groups of virtual machines and underlying physical hardware that can be rebooted at the same time.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/availability-set-overview

Community Discussion

Question #304

DRAG DROP -

You have downloaded an Azure Resource Manager (ARM) template to deploy numerous virtual machines (VMs). The ARM template is based on a current VM, but must be adapted to reference an administrative password.

You need to make sure that the password cannot be stored in plain text.

You are preparing to create the necessary components to achieve your goal.

Which of the following should you create to achieve your goal? Answer by dragging the correct option from the list to the answer area.

Select and Place:

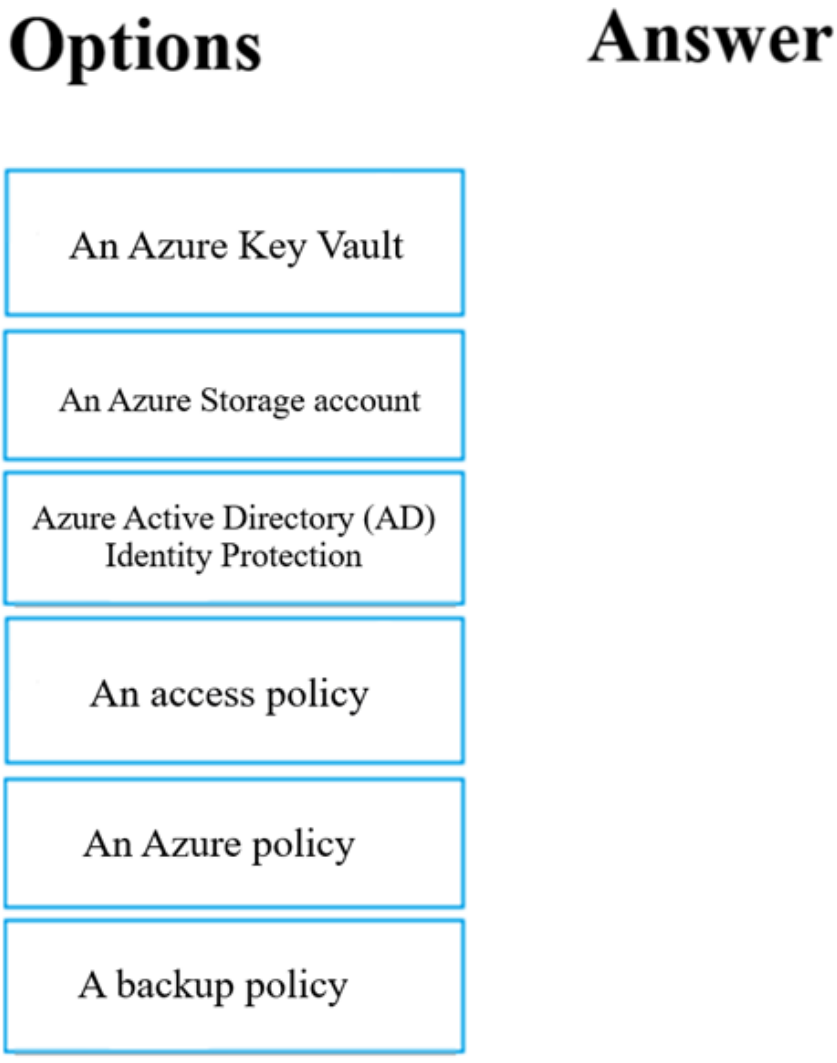

SecExams

Explanation

Correct Answer:

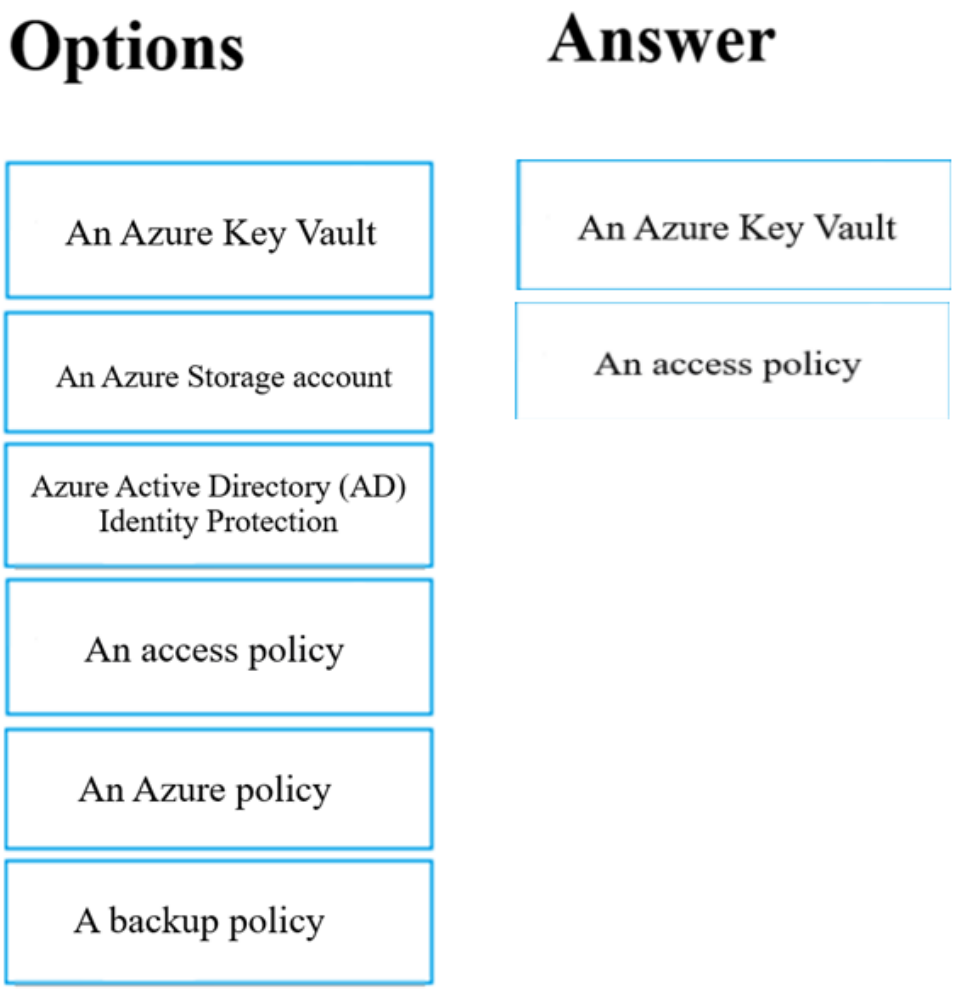

You can use a template that allows you to deploy a simple Windows VM by retrieving the password that is stored in a Key Vault. Therefore, the password is never put in plain text in the template parameter file.

Community Discussion

SecExams

Question #305

Your company has an Azure Active Directory (Azure AD) tenant that is configured for hybrid coexistence with the on-premises Active Directory domain.
The on-premise virtual environment consists of virtual machines (VMs) running on Windows Server 2012 R2 Hyper-V host servers.
You have created some PowerShell scripts to automate the configuration of newly created VMs. You plan to create several new VMs.
You need a solution that ensures the scripts are run on the new VMs.
Which of the following is the best solution?

A) Configure a SetupComplete.cmd batch file in the %windir%\setup\scripts directory. (Correct Answer)
B) Configure a Group Policy Object (GPO) to run the scripts as logon scripts.
C) Configure a Group Policy Object (GPO) to run the scripts as startup scripts.
D) Place the scripts in a new virtual hard disk (VHD).

Explanation

Correct Answer: A ?
After you deploy a Virtual Machine you typically need to make some changes before it's ready to use. This is something you can do manually or you could use
Remote PowerShell to automate the configuration of your VM after deployment for example.
But now there's a third alternative available allowing you customize your VM: the CustomScriptextension.
This CustomScript extension is executed by the VM Agent and it's very straightforward: you specify which files it needs to download from your storage account and which file it needs to execute. You can even specify arguments that need to be passed to the script. The only requirement is that you execute a .ps1 file.
Reference:
https://docs.microsoft.com/en-us/windows-hardware/manufacture/desktop/add-a-custom-script-to-windows-setup https://azure.microsoft.com/en-us/blog/automating-vm-customization-tasks-using-custom-script-extension/

Community Discussion

Question #306

Your company has an Azure Active Directory (Azure AD) tenant that is configured for hybrid coexistence with the on-premises Active Directory domain.
You plan to deploy several new virtual machines (VMs) in Azure. The VMs will have the same operating system and custom software requirements.
You configure a reference VM in the on-premise virtual environment. You then generalize the VM to create an image.
You need to upload the image to Azure to ensure that it is available for selection when you create the new Azure VMs.
Which PowerShell cmdlets should you use?

A) Add-AzVM
B) Add-AzVhd (Correct Answer)
C) Add-AzImage
D) Add-AzImageDataDisk

Explanation

Correct Answer: B ?
The Add-AzVhd cmdlet uploads on-premises virtual hard disks, in .vhd file format, to a blob storage account as fixed virtual hard disks.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/upload-generalized-managed

Community Discussion

Question #307

DRAG DROP -

Your company has an Azure subscription that includes a number of Azure virtual machines (VMs), which are all part of the same virtual network.

Your company also has an on-premises Hyper-V server that hosts a VM, named VM1, which must be replicated to Azure.

Which of the following objects that must be created to achieve this goal?

Answer by dragging the correct option from the list to the answer area.

Select and Place:

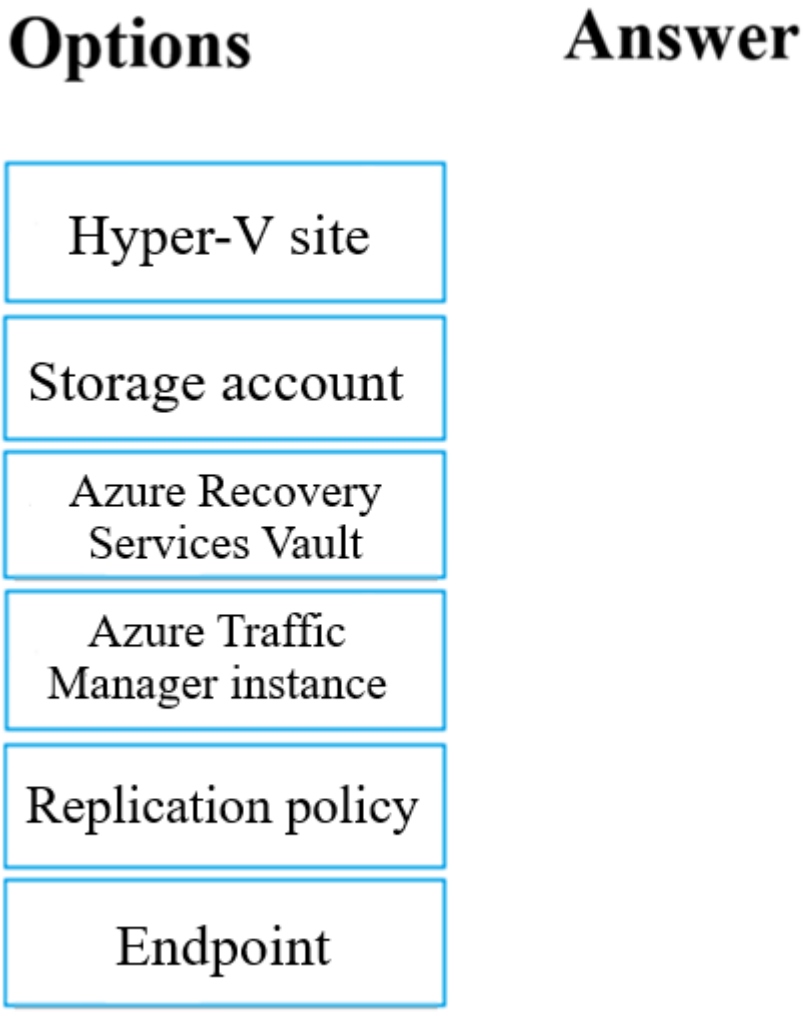

SecExams

Explanation

Correct Answer:

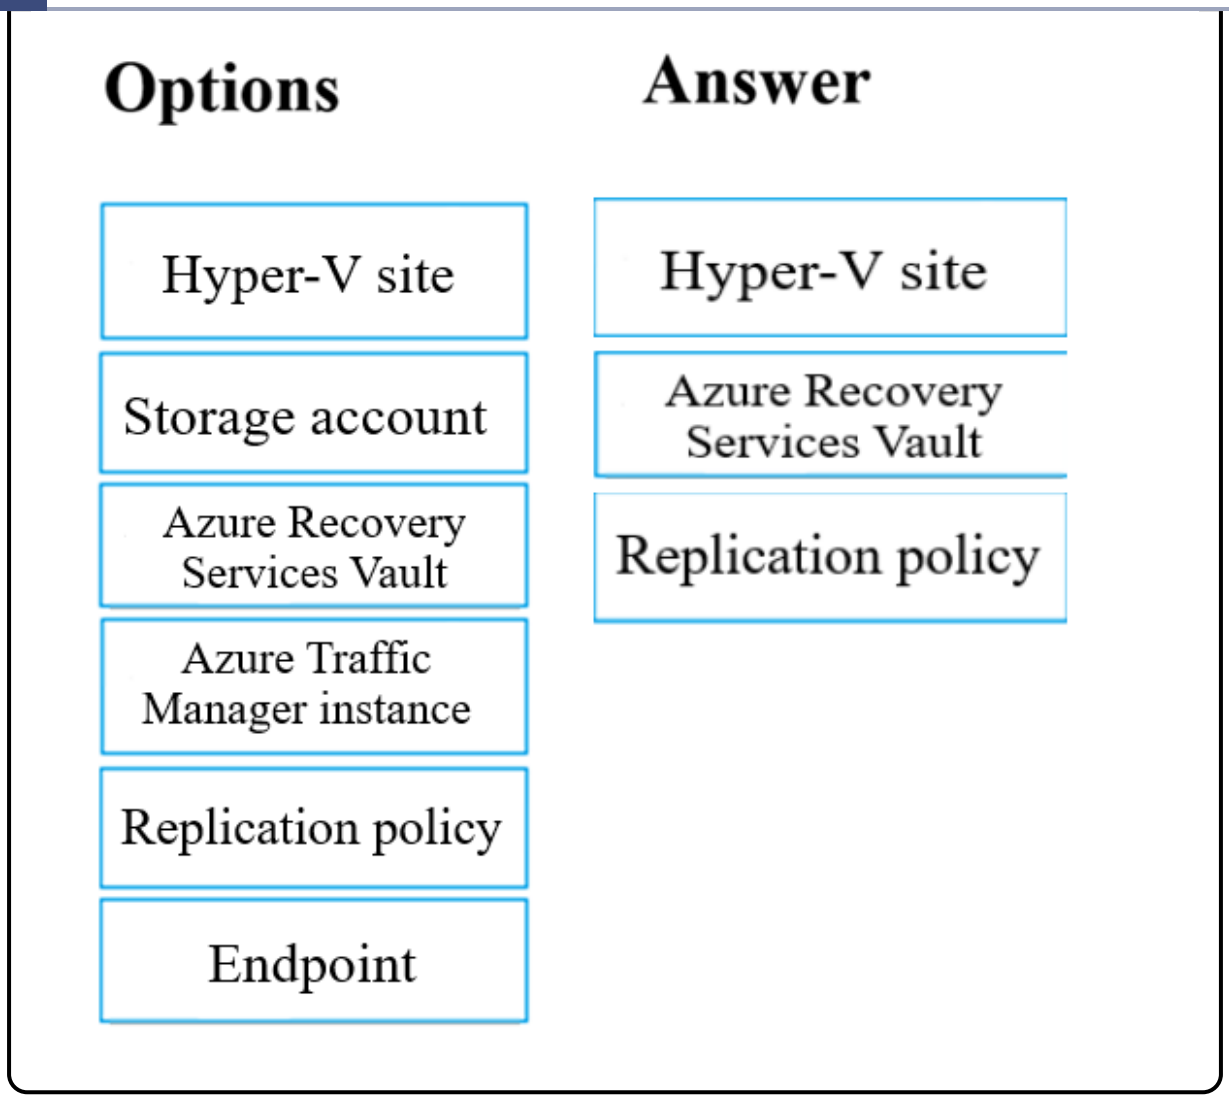

SecExams

Community Discussion

Question #308

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.

Your company's Azure subscription includes two Azure networks named VirtualNetworkA and VirtualNetworkB.

VirtualNetworkA includes a VPN gateway that is configured to make use of static routing. Also, a site-to-site VPN connection exists between your company's on-premises network and VirtualNetworkA.

You have configured a point-to-site VPN connection to VirtualNetworkA from a workstation running Windows 10. After configuring virtual network peering between

VirtualNetworkA and VirtualNetworkB, you confirm that you are able to access VirtualNetworkB from the company's on-premises network. However, you find that you cannot establish a connection to VirtualNetworkB from the Windows 10 workstation.

You have to make sure that a connection to VirtualNetworkB can be established from the Windows 10 workstation.

Solution: You choose the Allow gateway transit setting on VirtualNetworkA.

Does the solution meet the goal?

A) Yes

B) No (Correct Answer)

Explanation

Correct Answer: B ?

Reference:

https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing

Community Discussion

Question #309

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.

Your company's Azure subscription includes two Azure networks named VirtualNetworkA and VirtualNetworkB.

VirtualNetworkA includes a VPN gateway that is configured to make use of static routing. Also, a site-to-site VPN connection exists between your company's on-premises network and VirtualNetworkA.

You have configured a point-to-site VPN connection to VirtualNetworkA from a workstation running Windows 10. After configuring virtual network peering between

VirtualNetworkA and VirtualNetworkB, you confirm that you are able to access VirtualNetworkB from the company's on-premises network. However, you find that you cannot establish a connection to VirtualNetworkB from the Windows 10 workstation.

You have to make sure that a connection to VirtualNetworkB can be established from the Windows 10 workstation.

Solution: You choose the Allow gateway transit setting on VirtualNetworkB.

Does the solution meet the goal?

A) Yes

B) No (Correct Answer)

Explanation

Correct Answer: B ?

Reference:

https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing

Community Discussion

Question #310

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.

Your company's Azure subscription includes two Azure networks named VirtualNetworkA and VirtualNetworkB.

VirtualNetworkA includes a VPN gateway that is configured to make use of static routing. Also, a site-to-site VPN connection exists between your company's on-premises network and VirtualNetworkA.

You have configured a point-to-site VPN connection to VirtualNetworkA from a workstation running Windows 10. After configuring virtual network peering between

VirtualNetworkA and VirtualNetworkB, you confirm that you are able to access VirtualNetworkB from the company's on-premises network. However, you find that you cannot establish a connection to VirtualNetworkB from the Windows 10 workstation.

You have to make sure that a connection to VirtualNetworkB can be established from the Windows 10 workstation.

Solution: You download and re-install the VPN client configuration package on the Windows 10 workstation.

Does the solution meet the goal?

A) Yes (Correct Answer)

B) No

Explanation

Correct Answer: A ?

Reference:

https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing

Community Discussion

Question #311

Your company has virtual machines (VMs) hosted in Microsoft Azure. The VMs are located in a single Azure virtual network named VNet1.
The company has users that work remotely. The remote workers require access to the VMs on VNet1.
You need to provide access for the remote workers.
What should you do?

A) Configure a Site-to-Site (S2S) VPN.
B) Configure a VNet-toVNet VPN.
C) Configure a Point-to-Site (P2S) VPN. (Correct Answer)
D) Configure DirectAccess on a Windows Server 2012 server VM.
E) Configure a Multi-Site VPN

Explanation

Correct Answer: C ?
A Point-to-Site (P2S) VPN gateway connection lets you create a secure connection to your virtual network from an individual client computer.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-vpngateways

Community Discussion

Question #312

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has a Microsoft SQL Server Always On availability group configured on their Azure virtual machines (VMs).
You need to configure an Azure internal load balancer as a listener for the availability group.
Solution: You create an HTTP health probe on port 1433.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #313

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has a Microsoft SQL Server Always On availability group configured on their Azure virtual machines (VMs).
You need to configure an Azure internal load balancer as a listener for the availability group.
Solution: You set Session persistence to Client IP.
Does the solution meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/sql/virtual-machines-windows-portal-sql-alwayson-int-listener

Community Discussion

Question #314

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has a Microsoft SQL Server Always On availability group configured on their Azure virtual machines (VMs).
You need to configure an Azure internal load balancer as a listener for the availability group.
Solution: You enable Floating IP.
Does the solution meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?

Community Discussion

Question #315

Your company has two on-premises servers named SRV01 and SRV02.
Developers have created an application that runs on SRV01. The application calls a service on SRV02 by IP address.
You plan to migrate the application on Azure virtual machines (VMs). You have configured two VMs on a single subnet in an Azure virtual network.
You need to configure the two VMs with static internal IP addresses.
What should you do?

A) Run the New-AzureRMVMConfig PowerShell cmdlet.
B) Run the Set-AzureSubnet PowerShell cmdlet.
C) Modify the VM properties in the Azure Management Portal.
D) Modify the IP properties in Windows Network and Sharing Center.
E) Run the Set-AzureStaticVNetIP PowerShell cmdlet. (Correct Answer)

SecExams

Explanation

Correct Answer: E ?
Specify a static internal IP for a previously created VM
If you want to set a static IP address for a VM that you previously created, you can do so by using the following cmdlets. If you already set an IP address for the
VM and you want to change it to a different IP address, you'll need to remove the existing static IP address before running these cmdlets. See the instructions below to remove a static IP.
For this procedure, you'll use the Update-AzureVM cmdlet. The Update-AzureVM cmdlet restarts the VM as part of the update process. The DIP that you specify will be assigned after the VM restarts. In this example, we set the IP address for VM2, which is located in cloud service StaticDemo.
Get-AzureVM -ServiceName StaticDemo -Name VM2 | Set-AzureStaticVNetIP -IPAddress 192.168.4.7 | Update-AzureVM

Community Discussion

Question #316

Your company has an Azure Active Directory (Azure AD) subscription.
You need to deploy five virtual machines (VMs) to your company's virtual network subnet.
The VMs will each have both a public and private IP address. Inbound and outbound security rules for all of these virtual machines must be identical.
Which of the following is the least amount of network interfaces needed for this configuration?

A) 5 (Correct Answer)
B) 10
C) 20
D) 40

Explanation

Correct Answer: A ?

Community Discussion

Question #317

Your company has an Azure Active Directory (Azure AD) subscription.
You need to deploy five virtual machines (VMs) to your company's virtual network subnet.
The VMs will each have both a public and private IP address. Inbound and outbound security rules for all of these virtual machines must be identical.
Which of the following is the least amount of security groups needed for this configuration?

A) 4
B) 3
C) 2
D) 1 (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #318

Your company's Azure subscription includes Azure virtual machines (VMs) that run Windows Server 2016.
One of the VMs is backed up every day using Azure Backup Instant Restore.
When the VM becomes infected with data encrypting ransomware, you decide to recover the VM's files.
Which of the following is TRUE in this scenario?

A) You can only recover the files to the infected VM. (Correct Answer)
B) You can recover the files to any VM within the company's subscription.
C) You can only recover the files to a new VM.
D) You will not be able to recover the files.

Explanation

Correct Answer: A ?

Community Discussion

Wrong. Correct answer is B. Azure Backup Instant Restore allows you to restore files directly from backups without needing to provision a new VM. You can recover files to any existing VM within your subscription or to a new VM. This flexibility is beneficial in scenarios like ransomware attacks, where you may want to recover files to a different VM to avoid reintroducing the infection.

Question #319

Your company's Azure subscription includes Azure virtual machines (VMs) that run Windows Server 2016.
One of the VMs is backed up every day using Azure Backup Instant Restore.
When the VM becomes infected with data encrypting ransomware, you are required to restore the VM.
Which of the following actions should you take?

A) You should restore the VM after deleting the infected VM.
B) You should restore the VM to any VM within the company's subscription. (Correct Answer)
C) You should restore the VM to a new Azure VM.
D) You should restore the VM to an on-premise Windows device.

Explanation

Correct Answer: B ?

Community Discussion

Question #320

You administer a solution in Azure that is currently having performance issues.
You need to find the cause of the performance issues pertaining to metrics on the Azure infrastructure.
Which of the following is the tool you should use?

A) Azure Traffic Analytics
B) Azure Monitor (Correct Answer)
C) Azure Activity Log
D) Azure Advisor

Explanation

Correct Answer: B ?
Metrics in Azure Monitor are stored in a time-series database which is optimized for analyzing time-stamped data. This makes metrics particularly suited for alerting and fast

detection of issues.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/data-platform

Community Discussion

Selected Answer: B

Currently Azure Monitor is a good tool to use.

Question #321

Your company has an Azure subscription that includes a Recovery Services vault.
You want to use Azure Backup to schedule a backup of your company's virtual machines (VMs) to the Recovery Services vault.
Which of the following VMs can you back up? Choose all that apply.

A) VMs that run Windows 10. (Correct Answer)
B) VMs that run Windows Server 2012 or higher. (Correct Answer)
C) VMs that have NOT been shut down. (Correct Answer)
D) VMs that run Debian 8.2+. (Correct Answer)
E) VMs that have been shut down. (Correct Answer)

Explanation

Correct Answer: ABCDE ?
Azure Backup supports backup of 64-bit Windows server operating system from Windows Server 2008.
Azure Backup supports backup of 64-bit Windows 10 operating system.
Azure Backup supports backup of 64-bit Debian operating system from Debian 7.9+.
Azure Backup supports backup of VM that are shutdown or offline.
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-support-matrix-iaas https://docs.microsoft.com/en-us/azure/virtual-machines/linux/endorsed-distros

Community Discussion

Selected Answer: ABCDE

Answer: All It'd be stranger if you couldn't backup something in whatever state it's in or setup it has.

Question #322

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Active Directory (Azure AD) tenant named contoso.com.
You have a CSV file that contains the names and email addresses of 500 external users.
You need to create a guest user account in contoso.com for each of the 500 external users.
Solution: You create a PowerShell script that runs the New-AzureADUser cmdlet for each user.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
The New-AzureADUser cmdlet creates a user in Azure Active Directory (Azure AD).
Instead use the New-AzureADMSInvitation cmdlet which is used to invite a new external user to your directory.
Reference:
https://docs.microsoft.com/en-us/powershell/module/azuread/new-azureadmsinvitation

Community Discussion

Question #323

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Active Directory (Azure AD) tenant named contoso.com.
You have a CSV file that contains the names and email addresses of 500 external users.
You need to create a guest user account in contoso.com for each of the 500 external users.
Solution: From Azure AD in the Azure portal, you use the Bulk create user operation.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Instead use the New-AzureADMSInvitation cmdlet which is used to invite a new external user to your directory.
Reference:
https://docs.microsoft.com/en-us/powershell/module/azuread/new-azureadmsinvitation

Community Discussion

Question #324

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Active Directory (Azure AD) tenant named contoso.com.
You have a CSV file that contains the names and email addresses of 500 external users.
You need to create a guest user account in contoso.com for each of the 500 external users.
Solution: You create a PowerShell script that runs the New-AzureADMSInvitation cmdlet for each external user.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
Use the New-AzureADMSInvitation cmdlet which is used to invite a new external user to your directory.
Reference:
https://docs.microsoft.com/en-us/powershell/module/azuread/new-azureadmsinvitation

Community Discussion

Question #325

HOTSPOT -

You have an Azure subscription named Subscription1 that contains a resource group named RG1.

In RG1, you create an internal load balancer named LB1 and a public load balancer named LB2.

You need to ensure that an administrator named Admin1 can manage LB1 and LB2. The solution must follow the principle of least privilege.

Which role should you assign to Admin1 for each task? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

To add a backend pool to LB1:

- Contributor on LB1
- Network Contributor on LB1
- Network Contributor on RG1
- Owner on LB1

To add a health probe to LB2:

- Contributor on LB2
- Network Contributor on LB2
- Network Contributor on RG1
- Owner on LB2

Explanation

Correct Answer:

Answer Area

To add a backend pool to LB1:

- Contributor on LB1
- **Network Contributor on LB1**
- Network Contributor on RG1
- Owner on LB1

To add a health probe to LB2:

- Contributor on LB2
- **Network Contributor on LB2**
- Network Contributor on RG1
- Owner on LB2

The Network Contributor role lets you manage networks, but not access them.
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles

Community Discussion

Question #326

You have an Azure subscription that contains an Azure Active Directory (Azure AD) tenant named contoso.com and an Azure Kubernetes Service (AKS) cluster named AKS1.
An administrator reports that she is unable to grant access to AKS1 to the users in contoso.com.
You need to ensure that access to AKS1 can be granted to the contoso.com users.
What should you do first?

A) From contoso.com, modify the Organization relationships settings.
B) From contoso.com, create an OAuth 2.0 authorization endpoint. (Correct Answer)
C) Recreate AKS1.
D) From AKS1, create a namespace.

Explanation

Correct Answer: B ?

Reference:
https://kubernetes.io/docs/reference/access-authn-authz/authentication/

Community Discussion

Question #327

You have a Microsoft 365 tenant and an Azure Active Directory (Azure AD) tenant named contoso.com.
You plan to grant three users named User1, User2, and User3 access to a temporary Microsoft SharePoint document library named Library1.
You need to create groups for the users. The solution must ensure that the groups are deleted automatically after 180 days.
Which two groups should you create? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A) a Microsoft 365 group that uses the Assigned membership type (Correct Answer)
B) a Security group that uses the Assigned membership type
C) a Microsoft 365 group that uses the Dynamic User membership type (Correct Answer)
D) a Security group that uses the Dynamic User membership type
E) a Security group that uses the Dynamic Device membership type

Explanation

Correct Answer: AC ?
You can set expiration policy only for Office 365 groups in Azure Active Directory (Azure AD).
Note: With the increase in usage of Office 365 Groups, administrators and users need a way to clean up unused groups. Expiration policies can help remove inactive groups from the system and make things cleaner.
When a group expires, all of its associated services (the mailbox, Planner, SharePoint site, etc.) are also deleted.
You can set up a rule for dynamic membership on security groups or Office 365 groups.
Incorrect Answers:
B, D, E: You can set expiration policy only for Office 365 groups in Azure Active Directory (Azure AD).
Reference:

https://docs.microsoft.com/en-us/office365/admin/create-groups/office-365-groups-expiration-policy?view=o365-worldwide

Community Discussion

SecExams

Question #328

SecExams

HOTSPOT -

You have an Azure Active Directory (Azure AD) tenant named contoso.com that contains the users shown in the following table:

Name	Type	Member of
User1	Member	Group1
User2	Guest	Group1
User3	Member	None
UserA	Member	Group2
UserB	Guest	Group2

User3 is the owner of Group1.

Group2 is a member of Group1.

You configure an access review named Review1 as shown in the following exhibit:

SecExams

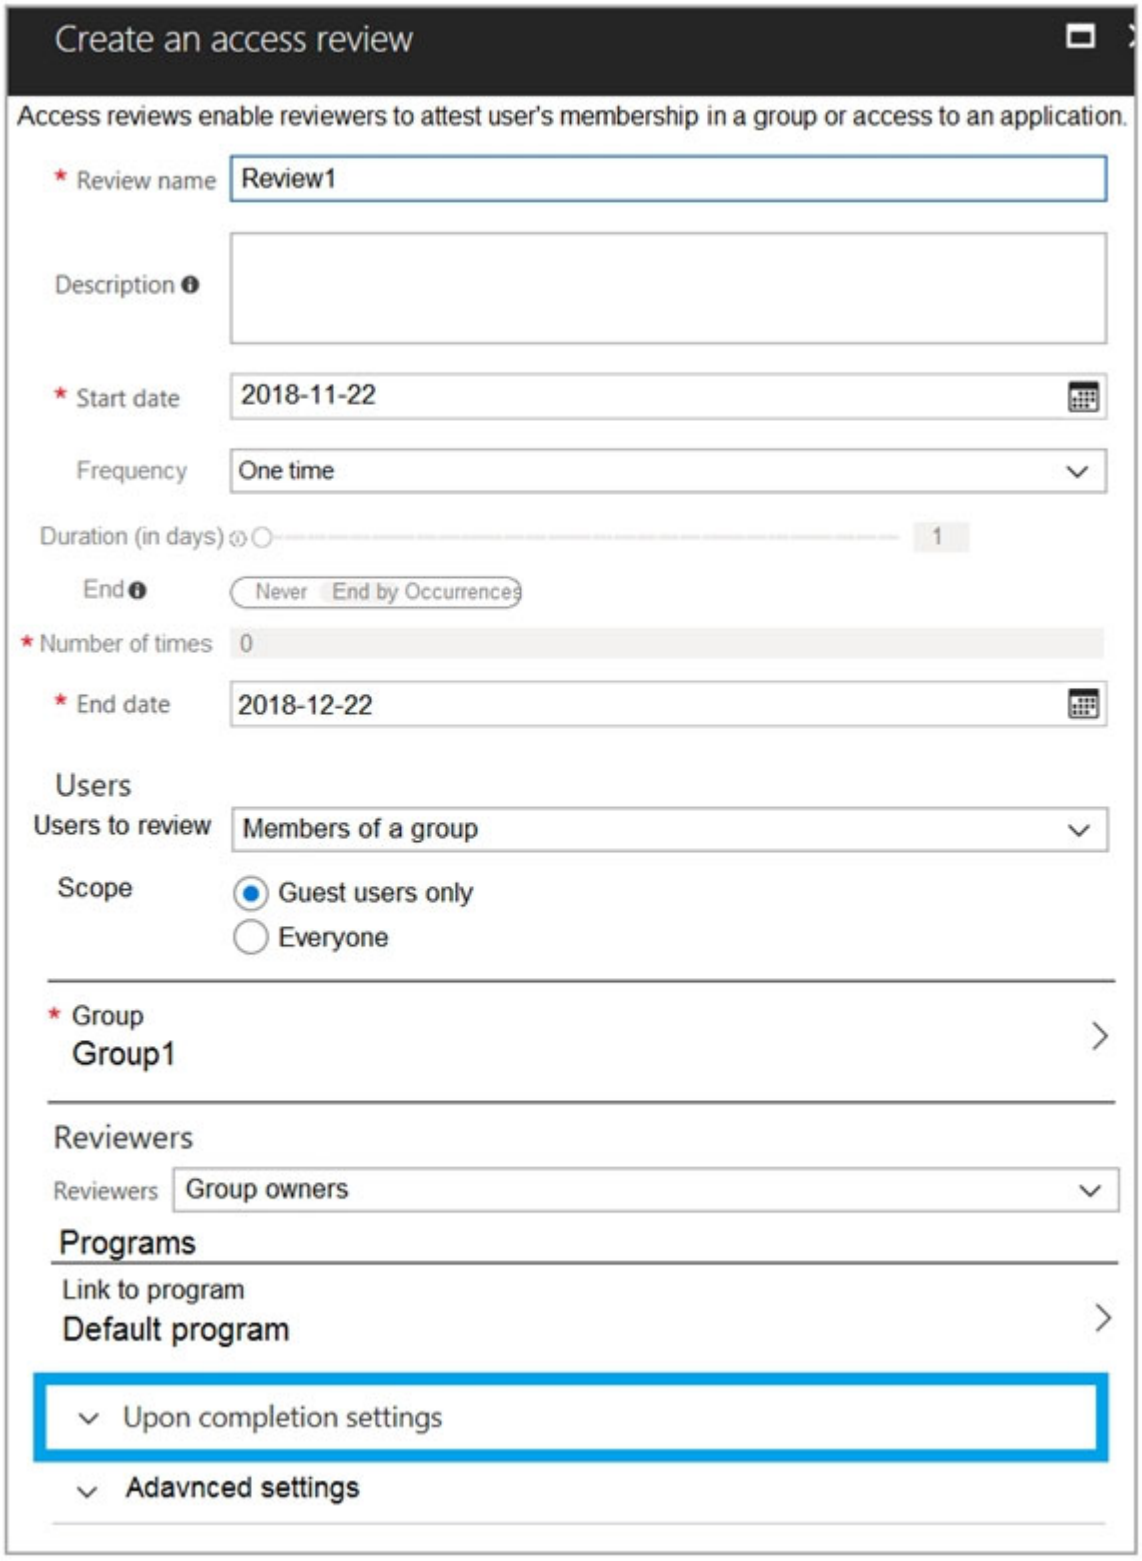

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
User3 can perform an access review of User1	○	○
User3 can perform an access review of UserA	○	○
User3 can perform an access review of UserB	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
User3 can perform an access review of User1	○	○
User3 can perform an access review of UserA	○	○
User3 can perform an access review of UserB	○	○

Reference:
https://docs.microsoft.com/en-us/azure/active-directory/governance/create-access-review

Community Discussion

Answer must be YYN. User3 owns Group1 and is reviewing Group1.

Question #329

HOTSPOT -

You have the Azure management groups shown in the following table:

Name	In management group
Tenant Root Group	*Not applicable*
ManagementGroup11	Tenant Root Group
ManagementGroup12	Tenant Root Group
ManagementGroup21	ManagementGroup11

You add Azure subscriptions to the management groups as shown in the following table:

Name	Management group
Subscription1	ManagementGroup21
Subscription2	ManagementGroup12

You create the Azure policies shown in the following table:

Name	Parameter	Scope
Not allowed resource types	virtualNetworks	Tenant Root Group
Allowed resource types	virtualNetworks	ManagementGroup12

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can create a virtual network in Subscription1.	○	○
You can create a virtual machine in Subscription2.	○	○
You can add Subscription1 to ManagementGroup11.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can create a virtual network in Subscription1.	○	○
You can create a virtual machine in Subscription2.	○	○
You can add Subscription1 to ManagementGroup11.	○	○

Box 1: No -
Virtual networks are not allowed at the root and is inherited. Deny overrides allowed.

Box 2: Yes -
Virtual Machines can be created on a Management Group provided the user has the required RBAC permissions.

Box 3: Yes -
Subscriptions can be moved between Management Groups provided the user has the required RBAC permissions.
Reference:
https://docs.microsoft.com/en-us/azure/governance/management-groups/overview
https://docs.microsoft.com/en-us/azure/governance/management-groups/manage#moving-management-groups-and-subscriptions

Community Discussion

Question #330

You have an Azure policy as shown in the following exhibit:

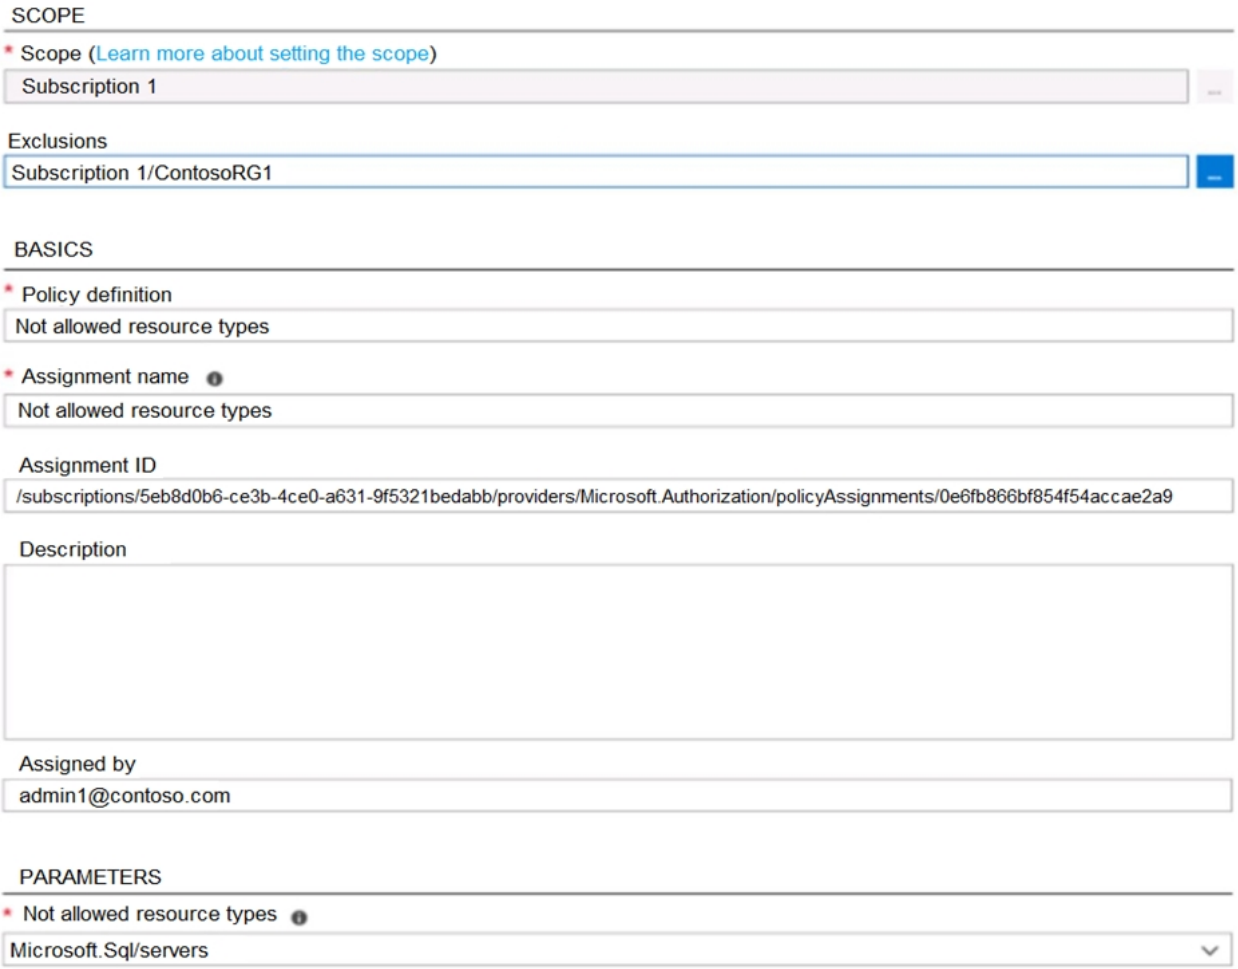

What is the effect of the policy?

A) You are prevented from creating Azure SQL servers anywhere in Subscription 1.

B) You can create Azure SQL servers in ContosoRG1 only. (Correct Answer)

C) You are prevented from creating Azure SQL Servers in ContosoRG1 only.

D) You can create Azure SQL servers in any resource group within Subscription 1.

Explanation

Correct Answer: B ?

You are prevented from creating Azure SQL servers anywhere in Subscription 1 with the exception of ContosoRG1

Community Discussion

Question #331

HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table:

Name	Type	Resource group	Tag
RG6	Resource group	*Not applicable*	*None*
VNET1	Virtual network	RG6	Department: D1

You assign a policy to RG6 as shown in the following table:

Section	Setting	Value
Scope	Scope	Subscription1/RG6
	Exclusions	*None*
Basics	Policy definition	Apply tag and its default value
	Assignment name	Apply tag and its default value
Parameters	Tag name	Label
	Tag value	Value1

To RG6, you apply the tag: RGroup: RG6.

You deploy a virtual network named VNET2 to RG6.

Which tags apply to VNET1 and VNET2? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

VNET1:

- None
- Department: D1 only
- Department: D1, and RGroup: RG6 only
- Department: D1, and Label: Value1 only
- Department: D1, RGroup: RG6, and Label: Value1

VNET2:

- None
- RGroup: RG6 only
- Label: Value1 only
- RGroup: RG6, and Label: Value1

Explanation

Correct Answer:

Answer Area

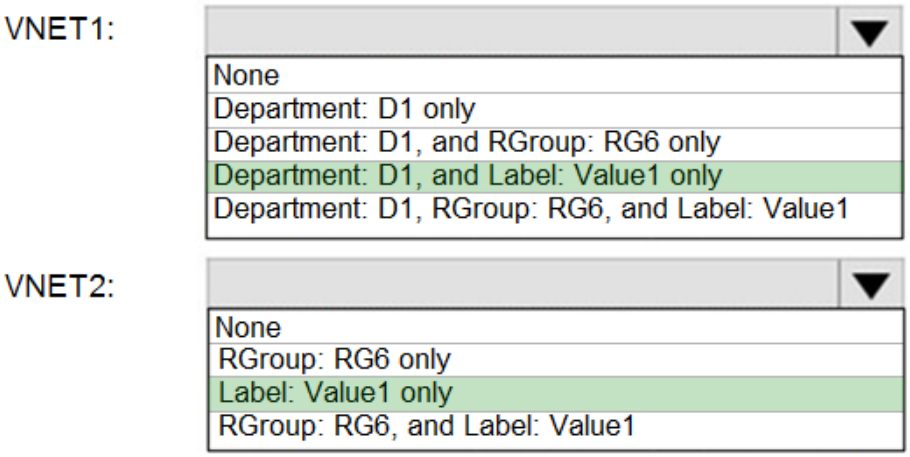

VNET1: Department: D1, and Label:Value1 only.
Tags applied to the resource group or subscription are not inherited by the resources.
Note: Azure Policy allows you to use either built-in or custom-defined policy definitions and assign them to either a specific resource group or across a whole
Azure subscription.
VNET2: Label:Value1 only.
Incorrect Answers:

RGROUP: RG6 -
Tags applied to the resource group or subscription are not inherited by the resources.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/tag-policies

Community Discussion

Question #332

You have an Azure subscription named AZPT1 that contains the resources shown in the following table:

Name	Type
storage1	Azure Storage account
VNET1	Virtual network
VM1	Azure virtual machine
VM1Managed	Managed disk for VM1
RVAULT1	Recovery Services vault for the site recovery of VM1

You create a new Azure subscription named AZPT2.
You need to identify which resources can be moved to AZPT2.
Which resources should you identify?

A) VM1, storage1, VNET1, and VM1Managed only
B) VM1 and VM1Managed only
C) VM1, storage1, VNET1, VM1Managed, and RVAULT1 (Correct Answer)
D) RVAULT1 only

Explanation

Correct Answer: C ?
You can move a VM and its associated resources to a different subscription by using the Azure portal.
You can now move an Azure Recovery Service (ASR) Vault to either a new resource group within the current subscription or to a new subscription.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-resource-group-and-subscription

Community Discussion

Given this context, if RVAULT1 has an active Site Recovery setup for VM1, then VM1 and RVAULT1 cannot be moved together. Therefore, you would need to identify the resources that can indeed be moved without these constraints. Thus, the previous assessment may need to be refined based on the ASR status. If the ASR is active, then the correct answer would be: B. VM1 and VM1Managed only (if only those are free from ASR dependencies).

Question #333

You recently created a new Azure subscription that contains a user named Admin1.
Admin1 attempts to deploy an Azure Marketplace resource by using an Azure Resource Manager template. Admin1 deploys the template by using Azure PowerShell and receives the following error message: `User failed validation to purchase resources. Error message: `Legal terms have not been accepted for this item on this subscription. To accept legal terms, please go to the Azure portal (http://go.microsoft.com/fwlink/?LinkId=534873) and configure programmatic deployment for the Marketplace item or create it there for the first time.`
You need to ensure that Admin1 can deploy the Marketplace resource successfully.
What should you do?

A) From Azure PowerShell, run the Set-AzApiManagementSubscription cmdlet
B) From the Azure portal, register the Microsoft.Marketplace resource provider
C) From Azure PowerShell, run the Set-AzMarketplaceTerms cmdlet (Correct Answer)
D) From the Azure portal, assign the Billing administrator role to Admin1

Explanation

Correct Answer: C ?
Reference:
https://docs.microsoft.com/en-us/powershell/module/az.marketplaceordering/set-azmarketplaceterms?view=azps-4.1.0

Community Discussion

Question #334

You have an Azure Active Directory (Azure AD) tenant that contains 5,000 user accounts.
You create a new user account named AdminUser1.
You need to assign the User administrator administrative role to AdminUser1.
What should you do from the user account properties?

A) From the Licenses blade, assign a new license
B) From the Directory role blade, modify the directory role (Correct Answer)
C) From the Groups blade, invite the user account to a new group

Explanation

Correct Answer: B ?
Assign a role to a user -
1. Sign in to the Azure portal with an account that's a global admin or privileged role admin for the directory.
2. Select Azure Active Directory, select Users, and then select a specific user from the list.
3. For the selected user, select Directory role, select Add role, and then pick the appropriate admin roles from the Directory roles list, such as Conditional access administrator.
4. Press Select to save.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/active-directory-users-assign-role-azure-portal

Community Discussion

Question #335

You have an Azure Active Directory (Azure AD) tenant named contoso.onmicrosoft.com that contains 100 user accounts.
You purchase 10 Azure AD Premium P2 licenses for the tenant.
You need to ensure that 10 users can use all the Azure AD Premium features.
What should you do?

A) From the Licenses blade of Azure AD, assign a license (Correct Answer)
B) From the Groups blade of each user, invite the users to a group
C) From the Azure AD domain, add an enterprise application
D) From the Directory role blade of each user, modify the directory role

Explanation

Correct Answer: A ?
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/license-users-groups

Community Discussion

Question #336

You have an Azure subscription named Subscription1 and an on-premises deployment of Microsoft System Center Service Manager.
Subscription1 contains a virtual machine named VM1.
You need to ensure that an alert is set in Service Manager when the amount of available memory on VM1 is below 10 percent.
What should you do first?

A) Create an automation runbook
B) Deploy a function app
C) Deploy the IT Service Management Connector (ITSM) (Correct Answer)
D) Create a notification

Explanation

Correct Answer: C ?
The IT Service Management Connector (ITSMC) allows you to connect Azure and a supported IT Service Management (ITSM) product/service, such as the Microsoft System Center Service Manager.
With ITSMC, you can create work items in ITSM tool, based on your Azure alerts (metric alerts, Activity Log alerts and Log Analytics alerts).
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/itsmc-overview

Community Discussion

SecExams

Question #337

You sign up for Azure Active Directory (Azure AD) Premium P2.
You need to add a user named as an administrator on all the computers that will be joined to the Azure AD domain.
What should you configure in Azure AD?

A) Device settings from the Devices blade (Correct Answer)
B) Providers from the MFA Server blade
C) User settings from the Users blade
D) General settings from the Groups blade

Explanation

Correct Answer: A ?
When you connect a Windows device with Azure AD using an Azure AD join, Azure AD adds the following security principles to the local administrators group on the device:
- The Azure AD global administrator role
- The Azure AD device administrator role
- The user performing the Azure AD join

In the Azure portal, you can manage the device administrator role on the Devices page.
To open the Devices page:
1. Sign in to your Azure portal as a global administrator or device administrator.
2. On the left navbar, click Azure Active Directory.
3. In the Manage section, click Devices.

4. On the Devices page, click Device settings.
5. To modify the device administrator role, configure Additional local administrators on Azure AD joined devices.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/devices/assign-local-admin

Community Discussion

SecExams

Question #338

HOTSPOT -

You have Azure Active Directory tenant named Contoso.com that includes following users:

Name	Role
User1	Cloud device administrator
User2	User administrator

Contoso.com includes following Windows 10 devices:

Name	Join type
Device1	Azure AD registered
Device2	Azure AD joined

You create following security groups in Contoso.com:

Name	Membership Type	Owner
Group1	Assigned	User2
Group2	Dynamic Device	User2

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
User1 can add Device2 to Group1	○	○
User2 can add Device1 to Group1	○	○
User2 can add Device2 to Group2	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
User1 can add Device2 to Group1	○	○
User2 can add Device1 to Group1	○	○
User2 can add Device2 to Group2	○	○

Box 1: Yes -
User1 is a Cloud Device Administrator.
Device2 is Azure AD joined.
Group1 has the assigned to join type. User1 is the owner of Group1.
Note: Assigned groups - Manually add users or devices into a static group.
Azure AD joined or hybrid Azure AD joined devices utilize an organizational account in Azure AD

Box 2: No -
User2 is a User Administrator.
Device1 is Azure AD registered.
Group1 has the assigned join type, and the owner is User1.
Note: Azure AD registered devices utilize an account managed by the end user, this account is either a Microsoft account or another locally managed credential.

Box 3: Yes -
User2 is a User Administrator.
Device2 is Azure AD joined.
Group2 has the Dynamic Device join type, and the owner is User2.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/devices/overview

Community Discussion

Question #339

You have an Azure subscription that contains a resource group named RG26. RG26 is set to the West Europe location and is used to create temporary resources for a project. RG26 contains the resources shown in the following table.

Name	Type	Location
VM1	Virtual machine	North Europe
RGV1	Recovery Services vault	North Europe
SQLD01	SQL server in Azure VM	North Europe
sa001	Storage account	West Europe

SQLDB01 is backed up to RGV1.
When the project is complete, you attempt to delete RG26 from the Azure portal. The deletion fails.
You need to delete RG26.
What should you do first?

A) Delete VM1
B) Stop VM1
C) Stop the backup of SQLDB01 (Correct Answer)
D) Delete sa001

Explanation

Correct Answer: C ?

Community Discussion

Question #340

You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1.
Subscription1 has a user named User1. User1 has the following roles:
✑ Reader
✑ Security Admin
✑ Security Reader
You need to ensure that User1 can assign the Reader role for VNet1 to other users.
What should you do?

A) Remove User1 from the Security Reader and Reader roles for Subscription1.
B) Assign User1 the User Access Administrator role for VNet1. (Correct Answer)
C) Assign User1 the Network Contributor role for VNet1.
D) Assign User1 the Network Contributor role for RG1.

Explanation

Correct Answer: B ?
Has full access to all resources including the right to delegate access to others.
Note:
There are several versions of this question in the exam. The question has two possible correct answers:
✑ Assign User1 the User Access Administrator role for VNet1.
✑ Assign User1 the Owner role for VNet1.
Other incorrect answer options you may see on the exam include the following:
✑ Assign User1 the Contributor role for VNet1.
✑ Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1.
✑ Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1.
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/overview

Community Discussion

Question #341

You have an Azure Active Directory (Azure AD) tenant named contosocloud.onmicrosoft.com.
Your company has a public DNS zone for contoso.com.
You add contoso.com as a custom domain name to Azure AD.
You need to ensure that Azure can verify the domain name.
Which type of DNS record should you create?

A) MX (Correct Answer)
B) NSEC
C) PTR
D) RRSIG

Explanation

Correct Answer: A ?
To verify your custom domain name (example)
1. Sign in to the Azure portal using a Global administrator account for the directory.
2. Select Azure Active Directory, and then select Custom domain names.
3. On the Fabrikam - Custom domain names page, select the custom domain name, Contoso.
4. On the Contoso page, select Verify to make sure your custom domain is properly registered and is valid for Azure AD. Use either the TXT or the MX record type.
Note:
There are several versions of this question in the exam. The question can have two correct answers:
1. MX
2. TXT
The question can also have other incorrect answer options, including the following:
1. SRV
2. NSEC3
Reference:
https://docs.microsoft.com/en-us/azure/dns/dns-web-sites-custom-domain

Community Discussion

Question #342

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers. Subscription1 contains a resource group named Dev.
You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.
Solution: On Subscription1, you assign the DevTest Labs User role to the Developers group.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
DevTest Labs User role only lets you connect, start, restart, and shutdown virtual machines in your Azure DevTest Labs.
The Logic App Contributor role lets you manage logic app, but not access to them. It provides access to view, edit, and update a logic app.
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles
https://docs.microsoft.com/en-us/azure/logic-apps/logic-apps-securing-a-logic-app

Community Discussion

Question #343

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers. Subscription1 contains a resource group named Dev.
You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.
Solution: On Subscription1, you assign the Logic App Operator role to the Developers group.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
You would need the Logic App Contributor role.
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles
https://docs.microsoft.com/en-us/azure/logic-apps/logic-apps-securing-a-logic-app

Community Discussion

Question #344

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers. Subscription1 contains a resource group named Dev.
You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.
Solution: On Dev, you assign the Contributor role to the Developers group.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
The Contributor role can manage all resources (and add resources) in a Resource Group.

Community Discussion

Question #345

DRAG DROP -

You have an Azure subscription that is used by four departments in your company. The subscription contains 10 resource groups. Each department uses resources in several resource groups.

You need to send a report to the finance department. The report must detail the costs for each department.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

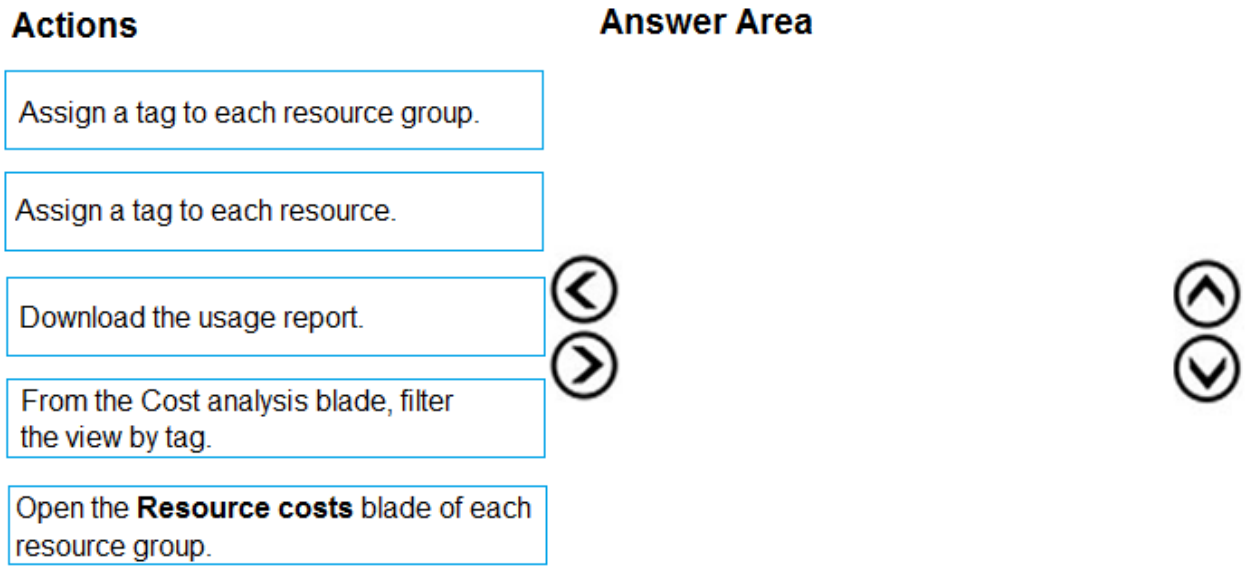

Explanation

Correct Answer:

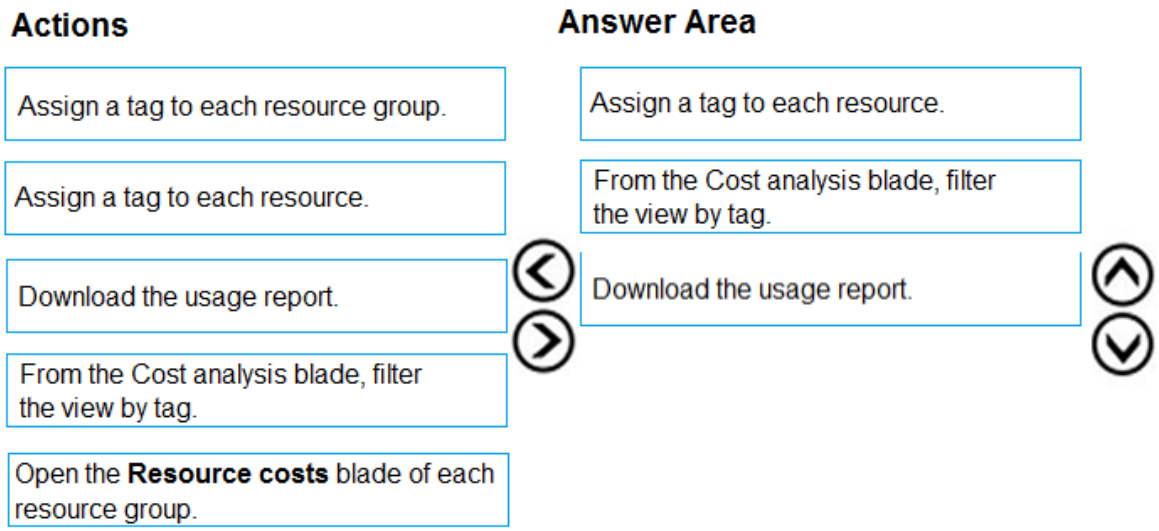

Box 1: Assign a tag to each resource.
You apply tags to your Azure resources giving metadata to logically organize them into a taxonomy. After you apply tags, you can retrieve all the resources in your subscription with that tag name and value. Each resource or resource group can have a maximum of 15 tag name/value pairs. Tags applied to the resource group are not inherited by the resources in that resource group.
Box 2: From the Cost analysis blade, filter the view by tag
After you get your services running, regularly check how much they're costing you. You can see the current spend and burn rate in Azure portal.
1. Visit the Subscriptions blade in Azure portal and select a subscription.
You should see the cost breakdown and burn rate in the popup blade.
2. Click Cost analysis in the list to the left to see the cost breakdown by resource. Wait 24 hours after you add a service for the data to populate.
3. You can filter by different properties like tags, resource group, and timespan. Click Apply to confirm the filters and Download if you want to export the view to a Comma-Separated Values (.csv) file.
Box 3: Download the usage report
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-using-tags https://docs.microsoft.com/en-us/azure/billing/billing-getting-started

Community Discussion

Question #346

You have an Azure subscription named Subscription1 that contains an Azure Log Analytics workspace named Workspace1.

You need to view the error events from a table named Event.

Which query should you run in Workspace1?

A) Get-Event Event | where {$_.EventType == "error"}

B) search in (Event) "error" (Correct Answer)

C) select * from Event where EventType == "error"

D) search in (Event) * | where EventType -eq "error"

Explanation

Correct Answer: B ?

To search a term in a specific table, add the table-name just after the search operator

Note:

There are several versions of this question in the exam. The question has two possible correct answers:

1. Event | search "error"
2. Event | where EventType == "error"
3. search in (Event) "error"

Other incorrect answer options you may see on the exam include the following:

1. Get-Event Event | where {$_.EventTye ג€"eq "error"}
2. Event | where EventType is "error"
3. search in (Event) * | where EventType ג€"eq "error"
4. select * from Event where EventType is "error"

Reference:

https://docs.microsoft.com/en-us/azure/azure-monitor/log-query/search-queries

https://docs.microsoft.com/en-us/azure/azure-monitor/log-query/get-started-portal

https://docs.microsoft.com/en-us/azure/data-explorer/kusto/query/searchoperator?pivots=azuredataexplorer

Community Discussion

Question #347

SecExams

HOTSPOT -

You have an Azure subscription that contains a virtual network named VNET1 in the East US 2 region. A network interface named VM1-NI is connected to VNET1.

You successfully deploy the following Azure Resource Manager template.

SecExams

```
{
    "apiVersion": "2017-03-30",
    "type": "Microsoft.Compute/virtualMachines",
    "name": "VM1",
    "zones": "1",
    "location": "EastUS2",
    "dependsOn": [
      "[resourceId('Microsoft.Network/networkInterfaces', 'VM1-NI')]"
    ],
    "properties": {
      "hardwareProfile": {
        "vmSize": "Standard_A2_v2"
      },
      "osProfile": {
        "computerName": "VM1",
        "adminUsername": "AzureAdmin",
        "adminPassword": "[parameters('adminPassword')]"
      },
      "storageProfile": {
        "imageReference": "[variables('image')]",
        "osDisk": {
          "createOption": "FromImage"
        }
      },
      "networkProfile": {
        "networkInterfaces": [
          {
            "id": "[resourceId('Microsoft.Network/networkInterfaces', 'VM1-NI')]"
          }
        ]
      }
    }
  },
  {
    "apiVersion": "2017-03-30",
    "type": "Microsoft.Compute/virtualMachines",
    "name": "VM2",
    "zones": "2",
    "location: "EastUS2",
    "dependsOn": [
      "[resourceId('Microsoft.Network/networkInterfaces', 'VM2-NI')]"
    ],
    "properties": {
      "hardwareProfile": {
        "vmSize": "Standard_A2_v2"
      },
      "osProfile": {
        "computerName": "VM2",
        "adminUsername": "AzureAdmin",
        "adminPassword": "[parameters('adminPassword')]"
      },
      "storageProfile": {
        "imageReference": "[variables('image')]",
        "osDisk": {
          "createOption": "FromImage"
        }
      },
      "networkProfile": {
        "networkInterfaces": [
          {
            "id": "[resourceId('Microsoft.Network/networkInterfaces', 'VM2-NI')]"
          }
        ]
      }
    }
  }
```

SecExams

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Statements	Yes	No
VM1 and VM2 can connect to VNET1	○	○
If an Azure datacenter becomes unavailable, VM1 or VM2 will be available.	○	○
If the East US 2 region becomes unavailable, VM1 or VM2 will be available.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM1 and VM2 can connect to VNET1	○	○
If an Azure datacenter becomes unavailable, VM1 or VM2 will be available.	○	○
If the East US 2 region becomes unavailable, VM1 or VM2 will be available.	○	○

Box 1: Yes -

Box 2: Yes -
VM1 is in Zone1, while VM2 is on Zone2.

Box 3: No -
Reference:
https://docs.microsoft.com/en-us/azure/architecture/resiliency/recovery-loss-azure-region

Community Discussion

Question #348

You have an Azure subscription named Subscription1. Subscription1 contains the resource groups in the following table.

Name	Azure region	Policy
RG1	West Europe	Policy1
RG2	North Europe	Policy2
RG3	France Central	Policy3

RG1 has a web app named WebApp1. WebApp1 is located in West Europe.
You move WebApp1 to RG2.
What is the effect of the move?

A) The App Service plan for WebApp1 remains in West Europe. Policy2 applies to WebApp1. (Correct Answer)

B) The App Service plan for WebApp1 moves to North Europe. Policy2 applies to WebApp1.
C) The App Service plan for WebApp1 remains in West Europe. Policy1 applies to WebApp1.
D) The App Service plan for WebApp1 moves to North Europe. Policy1 applies to WebApp1.

Explanation

Correct Answer: A ?
You can move an app to another App Service plan, as long as the source plan and the target plan are in the same resource group and geographical region.
The region in which your app runs is the region of the App Service plan it's in. However, you cannot change an App Service plan's region.
Reference:
https://docs.microsoft.com/en-us/azure/app-service/app-service-plan-manage

Community Discussion

Question #349

HOTSPOT -

You have an Azure subscription named Subscription1 that has a subscription ID of c276fc76-9cd4-44c9-99a7-4fd71546436e.

You need to create a custom RBAC role named CR1 that meets the following requirements:

- ✑ Can be assigned only to the resource groups in Subscription1
- ✑ Prevents the management of the access permissions for the resource groups
- ✑ Allows the viewing, creating, modifying, and deleting of resources within the resource groups

What should you specify in the assignable scopes and the permission elements of the definition of CR1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
"assignableScopes": [
    [ ▼ ]
        "/"
        "/subscriptions/c276fc76-9cd4-44c9-99a7-4fd71546436e"
        "/subscriptions/c276fc76-9cd4-44c9-99a7-4fd71546436e/resourceGroups"
],
"permissions": [
  {
      "actions": [
      "*"
      ],
      "additionalProperties": {},
      "dataActions": [],
      "notActions": [
          [ ▼ ]
              "Microsoft.Authorization/*"
              "Microsoft.Resources/*"
              "Microsoft.Security/*"
  ],
  "notDataActions": [ ]
  }
],
```

Explanation

Correct Answer:

Answer Area

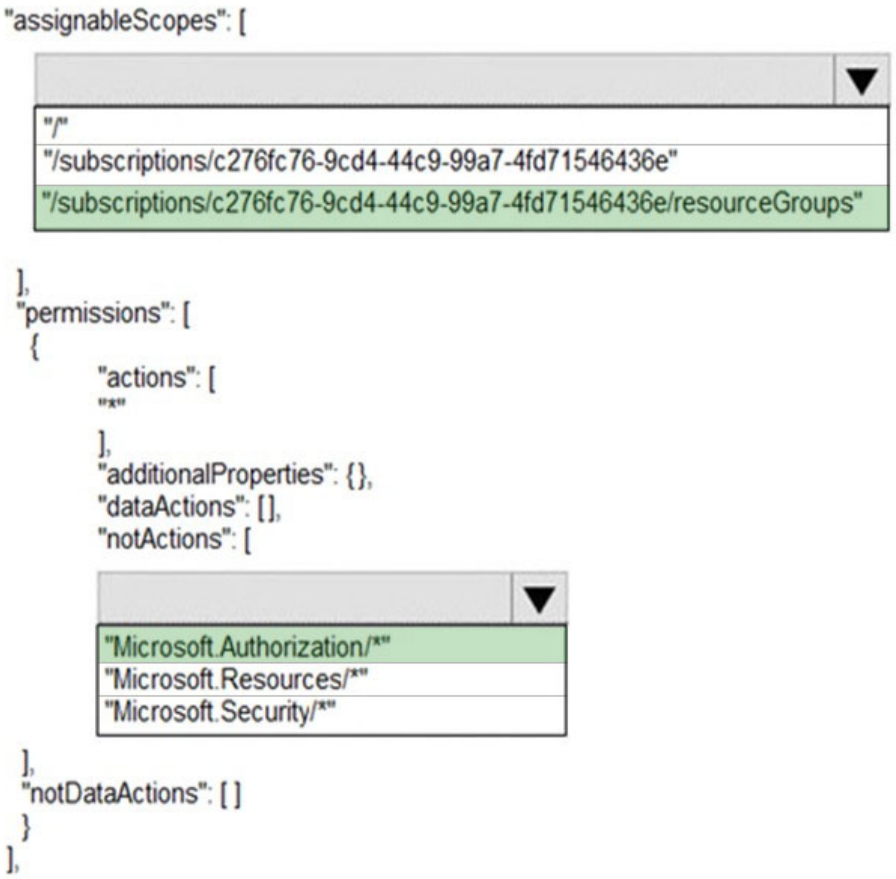

Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/custom-roles
https://docs.microsoft.com/en-us/azure/role-based-access-control/resource-provider-operations#microsoftresources

Community Discussion

Question #350

You have an Azure subscription.
Users access the resources in the subscription from either home or from customer sites. From home, users must establish a point-to-site VPN to access the Azure resources. The users on the customer sites access the Azure resources by using site-to-site VPNs.
You have a line-of-business-app named App1 that runs on several Azure virtual machine. The virtual machines run Windows Server 2016.
You need to ensure that the connections to App1 are spread across all the virtual machines.
What are two possible Azure services that you can use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A) an internal load balancer (Correct Answer)
B) a public load balancer
C) an Azure Content Delivery Network (CDN)
D) Traffic Manager
E) an Azure Application Gateway (Correct Answer)

Explanation

Correct Answer: AE ?
Network traffic from the VPN gateway is routed to the cloud application through an internal load balancer. The load balancer is located in the front-end subnet of the application.
Reference:
https://docs.microsoft.com/en-us/azure/architecture/reference-architectures/hybrid-networking/vpn https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-overview https://docs.microsoft.com/en-us/azure/application-gateway/overview

Community Discussion

Question #351

You have an Azure subscription.
You have 100 Azure virtual machines.
You need to quickly identify underutilized virtual machines that can have their service tier changed to a less expensive offering.
Which blade should you use?

A) Monitor
B) Advisor (Correct Answer)
C) Metrics
D) Customer insights

Explanation

Correct Answer: B ?
Advisor helps you optimize and reduce your overall Azure spend by identifying idle and underutilized resources. You can get cost recommendations from the Cost tab on the Advisor dashboard.
Reference:
https://docs.microsoft.com/en-us/azure/advisor/advisor-cost-recommendations

Community Discussion

Question #352

SecExams

HOTSPOT -

You have an Azure Active Directory (Azure AD) tenant.

You need to create a conditional access policy that requires all users to use multi-factor authentication when they access the Azure portal.

Which three settings should you configure? To answer, select the appropriate settings in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

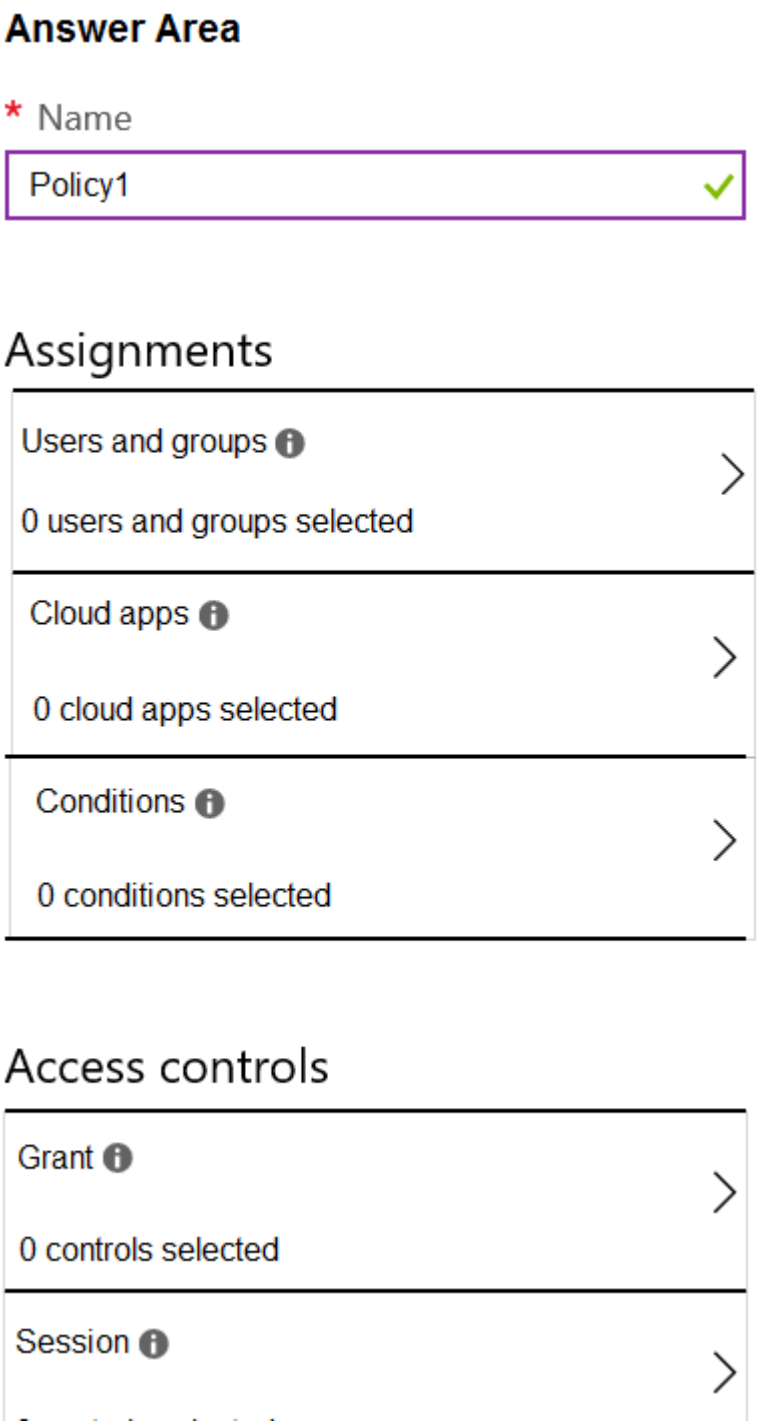

SecExams

Explanation

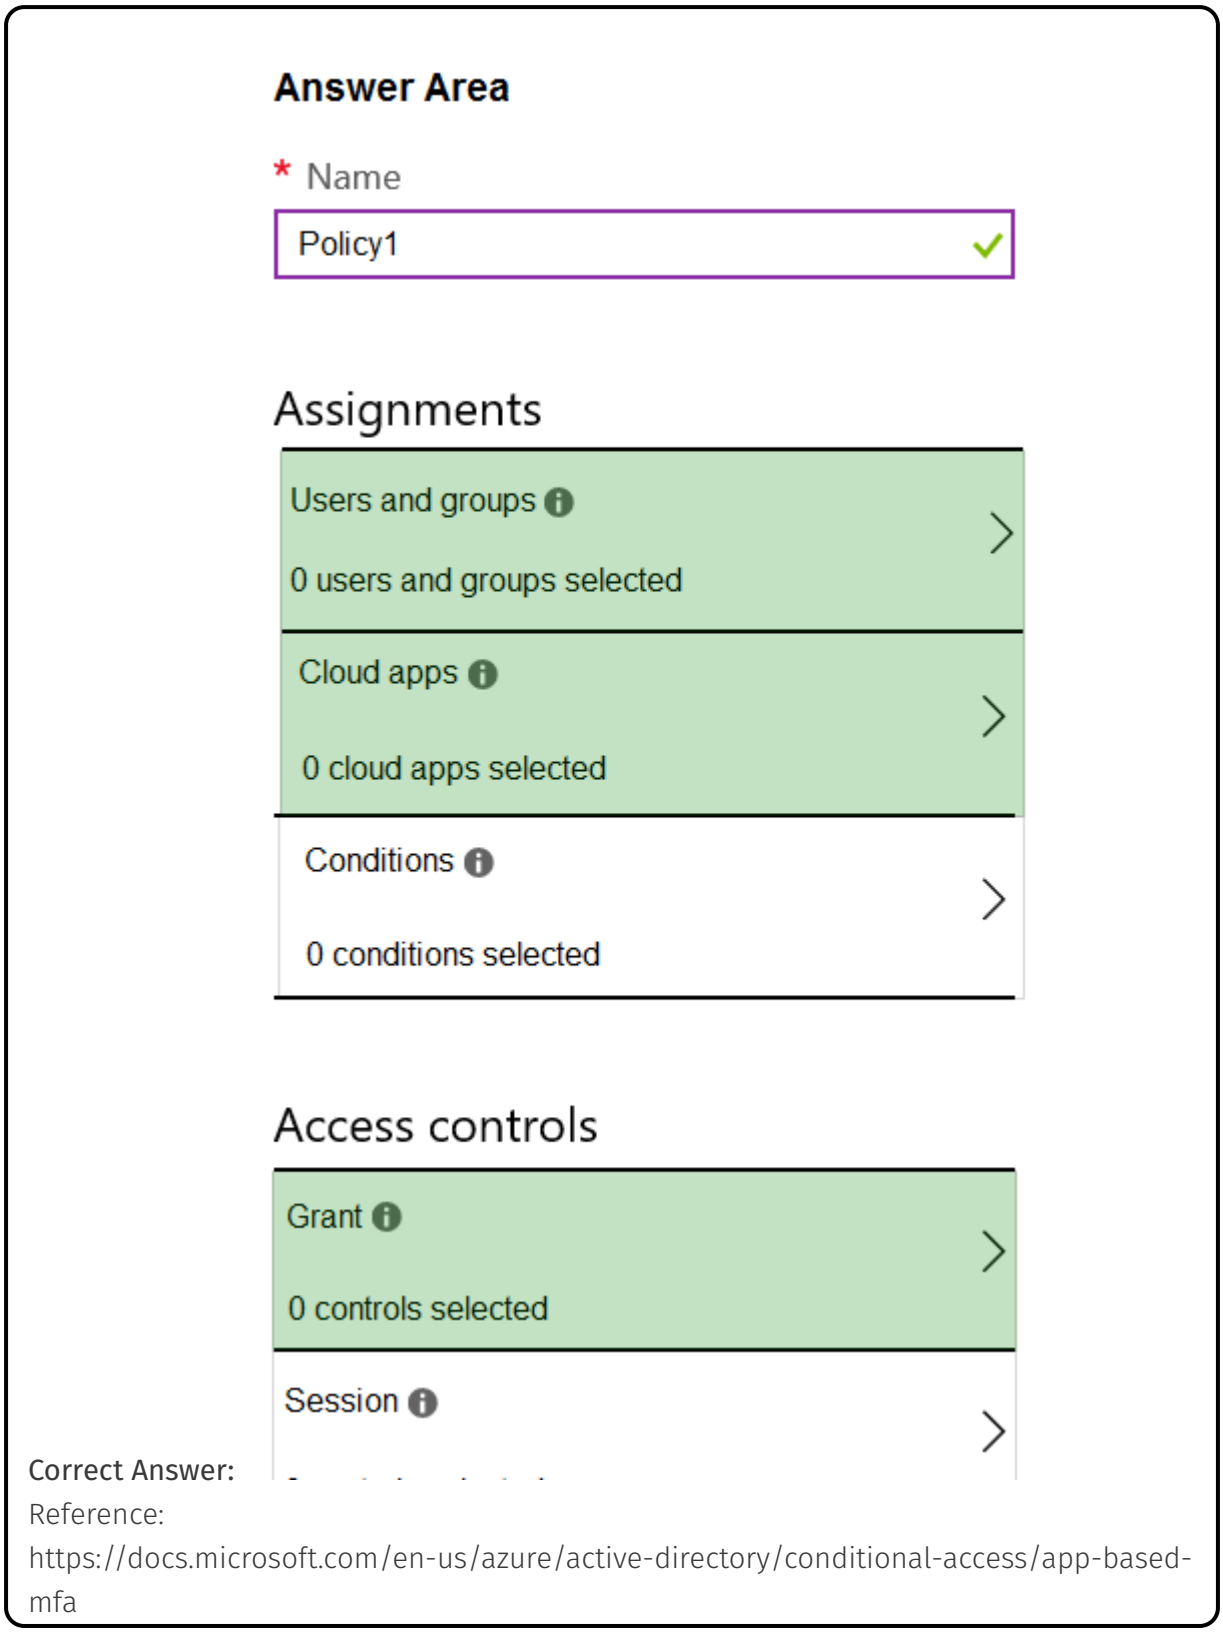

Correct Answer:

Reference:
https://docs.microsoft.com/en-us/azure/active-directory/conditional-access/app-based-mfa

Community Discussion

Question #353

You have an Azure Active Directory (Azure AD) tenant named contoso.onmicrosoft.com.
The User administrator role is assigned to a user named Admin1.
An external partner has a Microsoft account that uses the sign in.
Admin1 attempts to invite the external partner to sign in to the Azure AD tenant and receives the following error message: `Unable to invite user [email protected] `" Generic authorization exception.`
You need to ensure that Admin1 can invite the external partner to sign in to the Azure AD tenant.
What should you do?

A) From the Users settings blade, modify the External collaboration settings. (Correct Answer)
B) From the Custom domain names blade, add a custom domain.
C) From the Organizational relationships blade, add an identity provider.
D) From the Roles and administrators blade, assign the Security administrator role to Admin1.

Explanation

Correct Answer: A ?
Reference:
https://techcommunity.microsoft.com/t5/Azure-Active-Directory/Generic-authorization-exception-inviting-Azure-AD-gests/td-p/274742

Community Discussion

Question #354

You have an Azure subscription linked to an Azure Active Directory tenant. The tenant includes a user account named User1.
You need to ensure that User1 can assign a policy to the tenant root management group.
What should you do?

A) Assign the Owner role for the Azure Subscription to User1, and then modify the default conditional access policies.
B) Assign the Owner role for the Azure subscription to User1, and then instruct User1 to configure access management for Azure resources. (Correct Answer)
C) Assign the Global administrator role to User1, and then instruct User1 to configure access management for Azure resources.
D) Create a new management group and delegate User1 as the owner of the new management group.

Explanation

Correct Answer: B ?
The following chart shows the list of roles and the supported actions on management groups.

Azure Role Name	Create	Rename	Move**	Delete	Assign Access	Assign Policy	Read
Owner	X	X	X	X	X	X	X
Contributor	X	X	X	X			X
MG Contributor*	X	X	X	X			X
Reader							X
MG Reader*							X
Resource Policy Contributor						X	
User Access Administrator					X	X	

Note:
Each directory is given a single top-level management group called the "Root" management group. This root management group is built into the hierarchy to have all management groups and subscriptions fold up to it. This root management group allows for global policies and Azure role assignments to be applied at the directory level. The Azure AD Global Administrator needs to elevate themselves to the User Access Administrator role of this root group initially. After elevating access, the administrator can assign any Azure role to other directory users or groups to manage the hierarchy. As administrator, you can assign your own account as owner of the root management group.

Reference:
https://docs.microsoft.com/en-us/azure/governance/management-groups/overview

Community Discussion

SecExams

Question #355

HOTSPOT -

You have an Azure Active Directory (Azure AD) tenant named adatum.com.

Adatum.com contains the groups in the following table.

Name	Group type	Membership type	Membership rule
Group1	Security	Dynamic user	(user.city -startsWith "m"
Group2	Microsoft 365	Dynamic user	(user.department -notIn ["human resources"])
Group3	Microsoft 365	Assigned	*Not applicable*

You create two user accounts that are configured as shown in the following table.

Name	City	Department	Office 365 license assigned
User1	Montreal	Human resources	Yes
User2	Melbourne	Marketing	No

Of which groups are User1 and User2 members? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

User1:
- Group1 only
- Group2 only
- Group3 only
- Group1 and Group2 only
- Group1 and Group3 only
- Group2 and Group3 only
- Group1, Group2, and Group3

User2:
- Group1 only
- Group2 only
- Group3 only
- Group1 and Group2 only
- Group1 and Group3 only
- Group2 and Group3 only
- Group1, Group2, and Group3

SecExams

Explanation

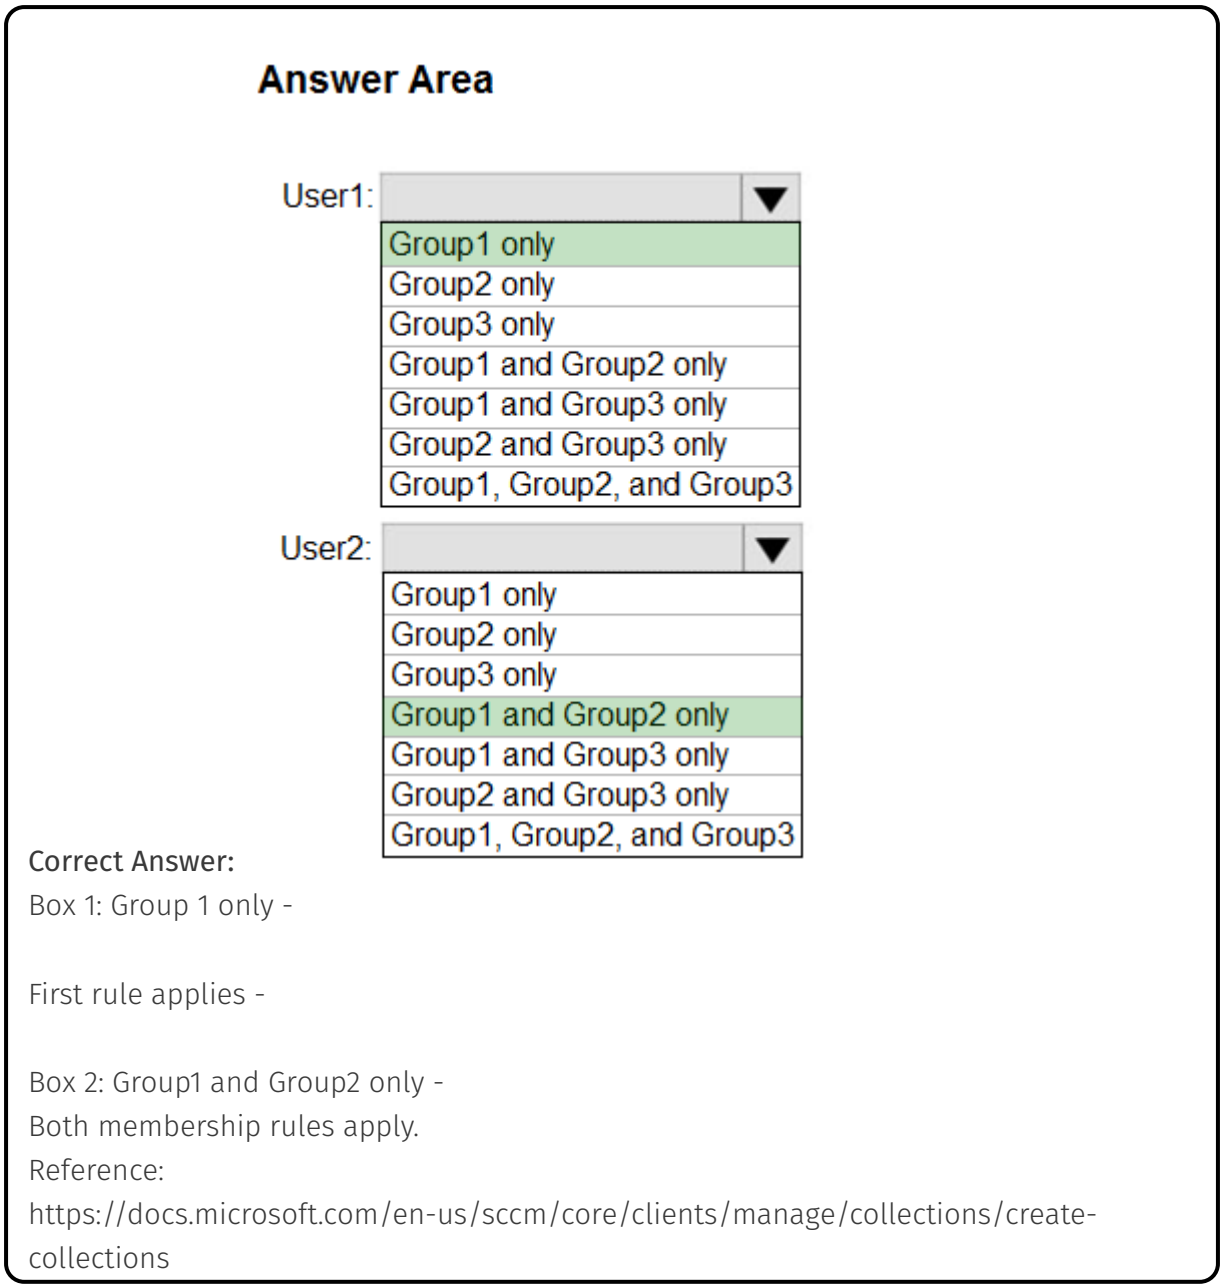

Correct Answer:
Box 1: Group 1 only -

First rule applies -

Box 2: Group1 and Group2 only -
Both membership rules apply.
Reference:
https://docs.microsoft.com/en-us/sccm/core/clients/manage/collections/create-collections

Community Discussion

Question #356

HOTSPOT -

You have a hybrid deployment of Azure Active Directory (Azure AD) that contains the users shown in the following table.

Name	Type	Source
User1	Member	Azure AD
User2	Member	Windows Server Active Directory
User3	Guest	Microsoft account

You need to modify the JobTitle and UsageLocation attributes for the users.

For which users can you modify the attributes from Azure AD? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

JobTitle:

- User1 only
- User1 and User2 only
- User1 and User3 only
- User1, User2, and User3

UsageLocation:

- User1 only
- User1 and User2 only
- User1 and User3 only
- User1, User2, and User3

SecExams

Explanation

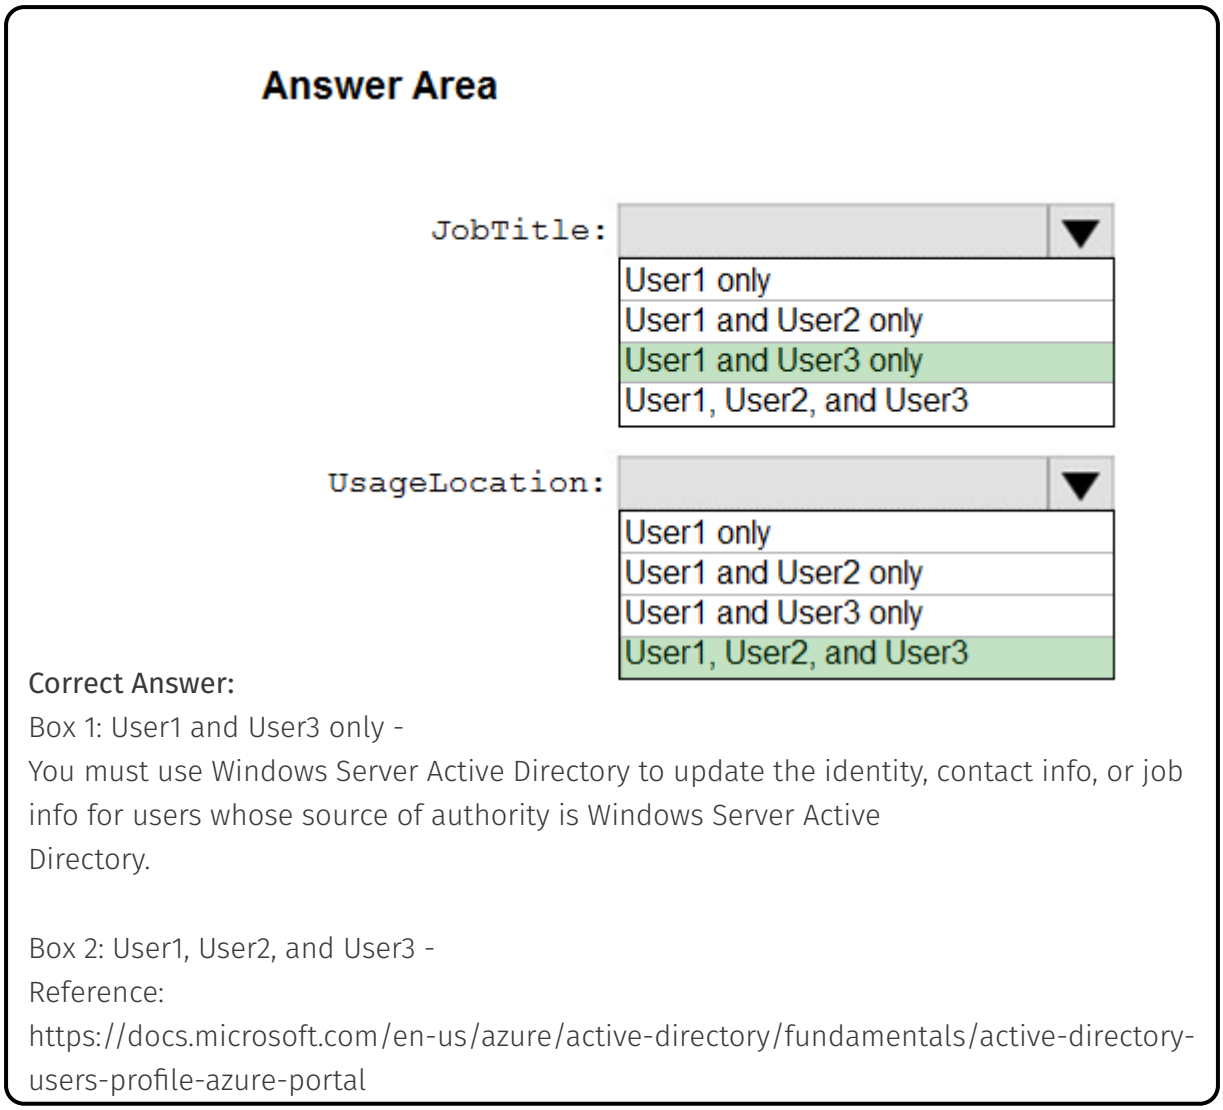

Correct Answer:

Box 1: User1 and User3 only -

You must use Windows Server Active Directory to update the identity, contact info, or job info for users whose source of authority is Windows Server Active Directory.

Box 2: User1, User2, and User3 -

Reference:

https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/active-directory-users-profile-azure-portal

Community Discussion

Question #357

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You need to ensure that an Azure Active Directory (Azure AD) user named Admin1 is assigned the required role to enable Traffic Analytics for an Azure subscription.
Solution: You assign the Network Contributor role at the subscription level to Admin1.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
Your account must meet one of the following to enable traffic analytics:
Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, reader, or network contributor.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq

Community Discussion

Question #358

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You need to ensure that an Azure Active Directory (Azure AD) user named Admin1 is assigned the required role to enable Traffic Analytics for an Azure subscription.
Solution: You assign the Owner role at the subscription level to Admin1.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
Your account must meet one of the following to enable traffic analytics:
Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, reader, or network contributor.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq

Community Discussion

Question #359

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You need to ensure that an Azure Active Directory (Azure AD) user named Admin1 is assigned the required role to enable Traffic Analytics for an Azure subscription.
Solution: You assign the Reader role at the subscription level to Admin1.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
Your account must meet one of the following to enable traffic analytics:
Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, reader, or network contributor.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq

Community Discussion

Question #360

You have an Azure subscription that contains a user named User1.
You need to ensure that User1 can deploy virtual machines and manage virtual networks. The solution must use the principle of least privilege.
Which role-based access control (RBAC) role should you assign to User1?

A) Owner

B) Virtual Machine Contributor

C) Contributor (Correct Answer)

D) Virtual Machine Administrator Login

Explanation

Correct Answer: C ?

Contributor: Grants full access to manage all resources, but does not allow you to assign roles in Azure RBAC

Incorrect Answers:

A: Owner: Grants full access to manage all resources, including the ability to assign roles in Azure RBAC.

B: Virtual Machine Contributor: Lets you manage virtual machines, but not access to them, and not the virtual network or storage account they're connected to.

D: Virtual Machine Administrator Login: View Virtual Machines in the portal and login as administrator.

Reference:

https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles

Community Discussion

SecExams

Question #361

SecExams

HOTSPOT -

You have an Azure Active Directory (Azure AD) tenant that contains three global administrators named Admin1, Admin2, and Admin3.

The tenant is associated to an Azure subscription. Access control for the subscription is configured as shown in the Access control exhibit. (Click the Access

Control tab.)

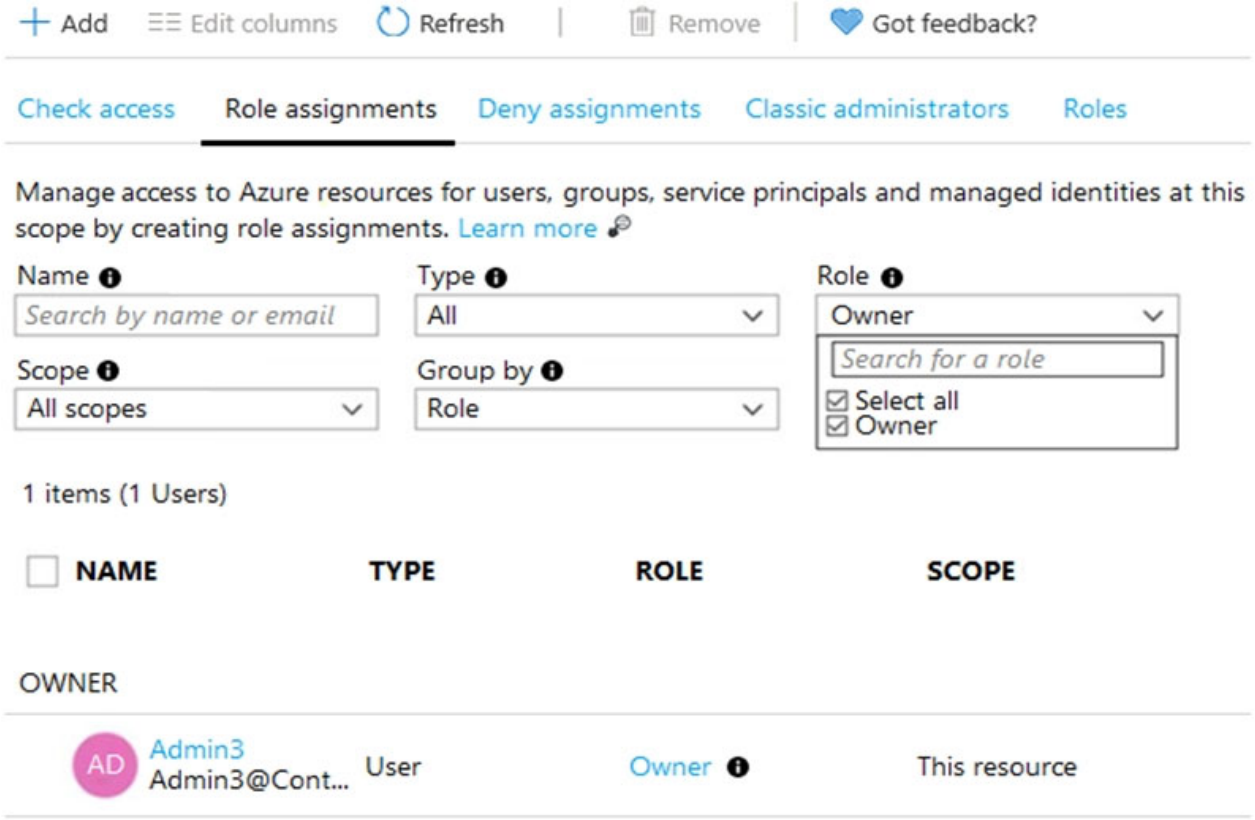

You sign in to the Azure portal as Admin1 and configure the tenant as shown in the Tenant exhibit. (Click the Tenant tab.)

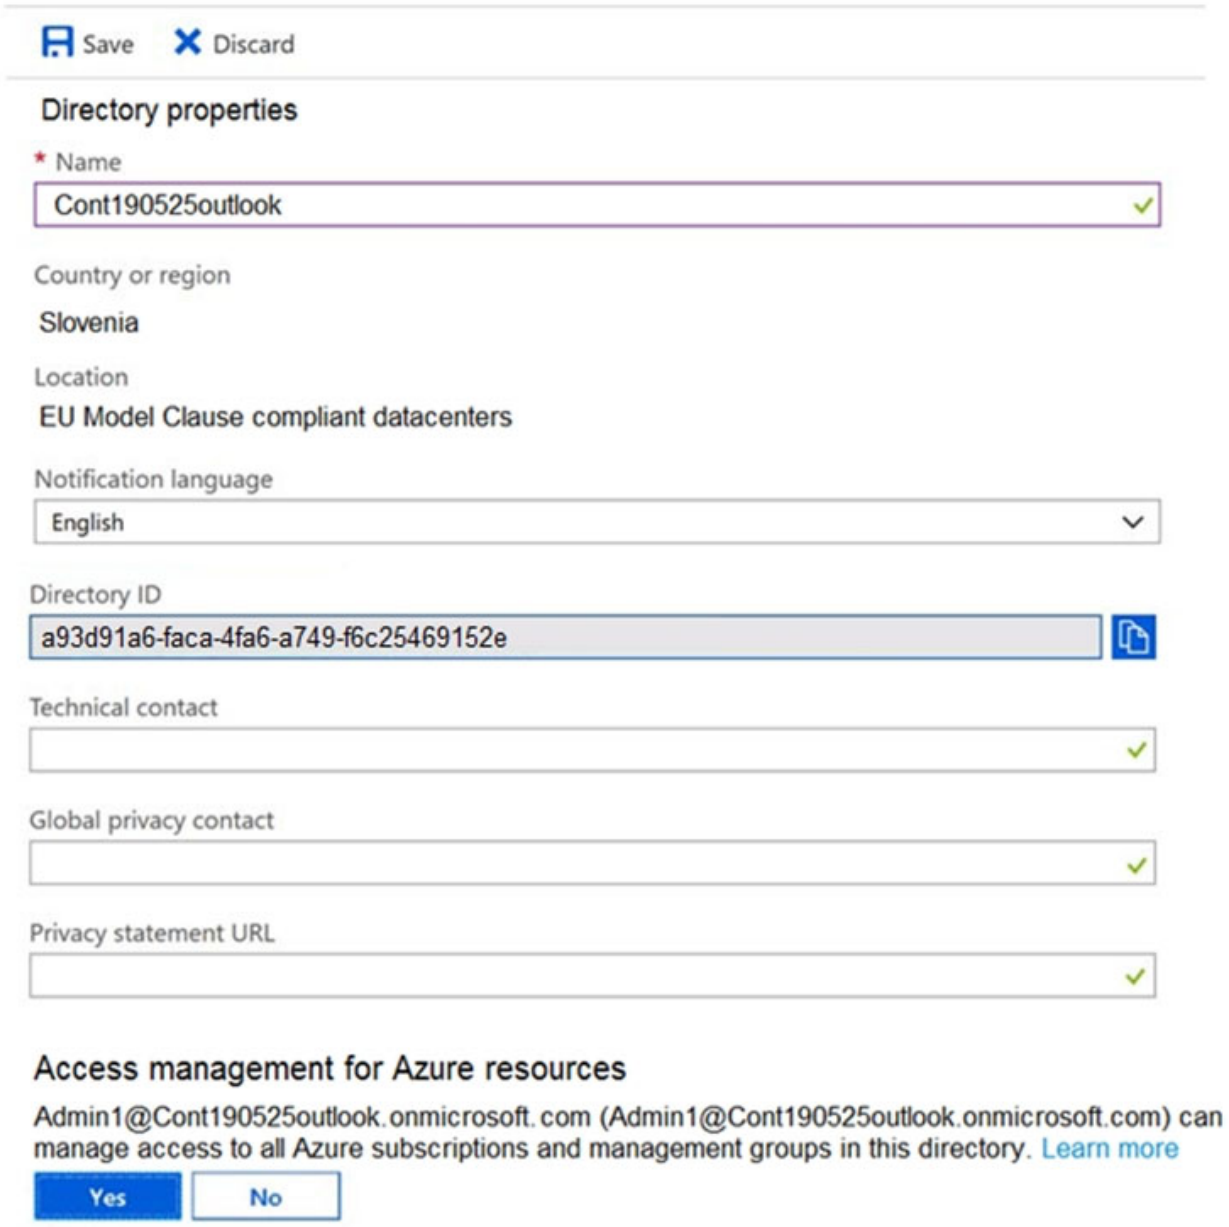

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
Admin1 can add Admin 2 as an owner of the subscription.	○	○
Admin3 can add Admin 2 as an owner of the subscription.	○	○
Admin2 can create a resource group in the subscription.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
Admin1 can add Admin 2 as an owner of the subscription.	○	○
Admin3 can add Admin 2 as an owner of the subscription.	○	○
Admin2 can create a resource group in the subscription.	○	○

Box 1: No -
Only Admin3, the owner, can assign ownership.

Box 2: Yes -

Box 3: No -
Reference:
https://docs.microsoft.com/en-us/azure/cost-management-billing/manage/add-change-subscription-administrator

SecExams

Community Discussion

Question #362

You have an Azure subscription named Subscription1 that contains an Azure virtual machine named VM1. VM1 is in a resource group named RG1.
VM1 runs services that will be used to deploy resources to RG1.
You need to ensure that a service running on VM1 can manage the resources in RG1 by using the identity of VM1.
What should you do first?

A) From the Azure portal, modify the Managed Identity settings of VM1 (Correct Answer)
B) From the Azure portal, modify the Access control (IAM) settings of RG1
C) From the Azure portal, modify the Access control (IAM) settings of VM1

D) From the Azure portal, modify the Policies settings of RG1

Explanation

Correct Answer: A ?
Managed identities for Azure resources provides Azure services with an automatically managed identity in Azure Active Directory. You can use this identity to authenticate to any service that supports Azure AD authentication, without having credentials in your code.
You can enable and disable the system-assigned managed identity for VM using the Azure portal.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/managed-identities-azure-resources/qs-configure-portal-windows-vm

Community Discussion

Question #363

You have an Azure subscription that contains a resource group named TestRG.
You use TestRG to validate an Azure deployment.
TestRG contains the following resources:

Name	Type	Description
VM1	Virtual Machine	VM1 is running and configured to back up to Vault1 daily
Vault1	Recovery Services Vault	Vault1 includes all backups of VM1
VNET1	Virtual Network	VNET1 has a resource lock of type Delete

You need to delete TestRG.
What should you do first?

A) Modify the backup configurations of VM1 and modify the resource lock type of VNET1
B) Remove the resource lock from VNET1 and delete all data in Vault1
C) Turn off VM1 and remove the resource lock from VNET1 (Correct Answer)
D) Turn off VM1 and delete all data in Vault1

Explanation

Correct Answer: C ?

When you delete a resource group, all of its resources are also deleted. Deleting a resource group deletes all of its template deployments and currently stored operations.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/delete-resource-group?tabs=azure-powershell

Community Discussion

Question #364

You have an Azure DNS zone named adatum.com.
You need to delegate a subdomain named research.adatum.com to a different DNS server in Azure.
What should you do?

A) Create an NS record named research in the adatum.com zone. (Correct Answer)
B) Create a PTR record named research in the adatum.com zone.
C) Modify the SOA record of adatum.com.
D) Create an A record named *.research in the adatum.com zone.

Explanation

Correct Answer: A ?
You need to create a name server (NS) record for the zone.
Reference:
https://docs.microsoft.com/en-us/azure/dns/delegate-subdomain

Community Discussion

SecExams

Question #365

DRAG DROP -

You have an Azure Active Directory (Azure AD) tenant that has the contoso.onmicrosoft.com domain name.

You have a domain name of contoso.com registered at a third-party registrar.

You need to ensure that you can create Azure AD users that have names containing a suffix of @contoso.com.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

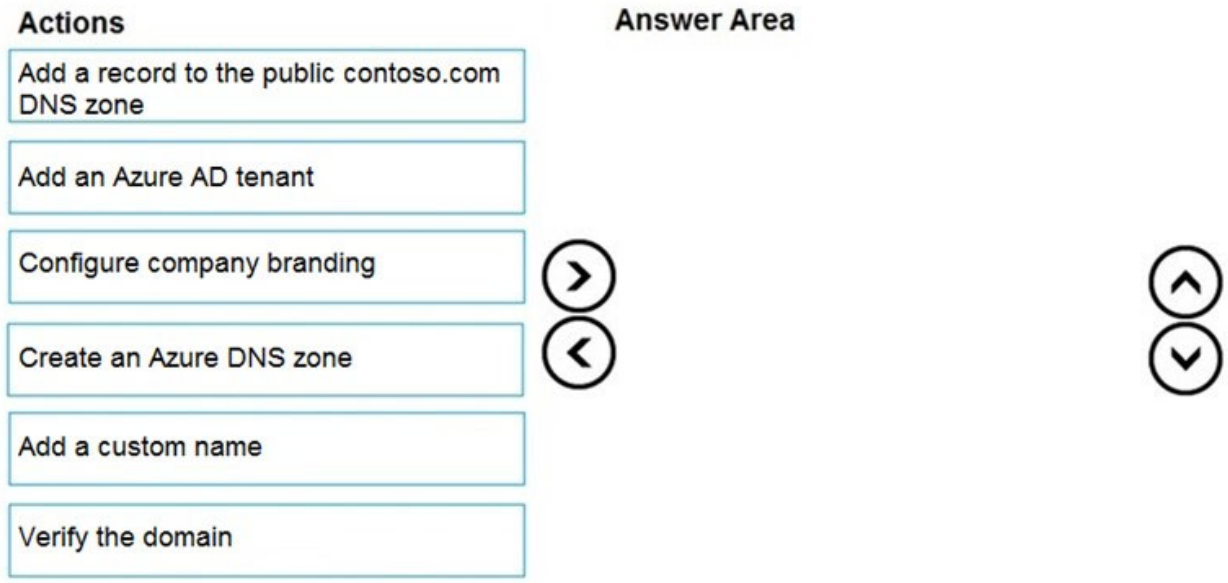

SecExams

Explanation

Correct Answer:

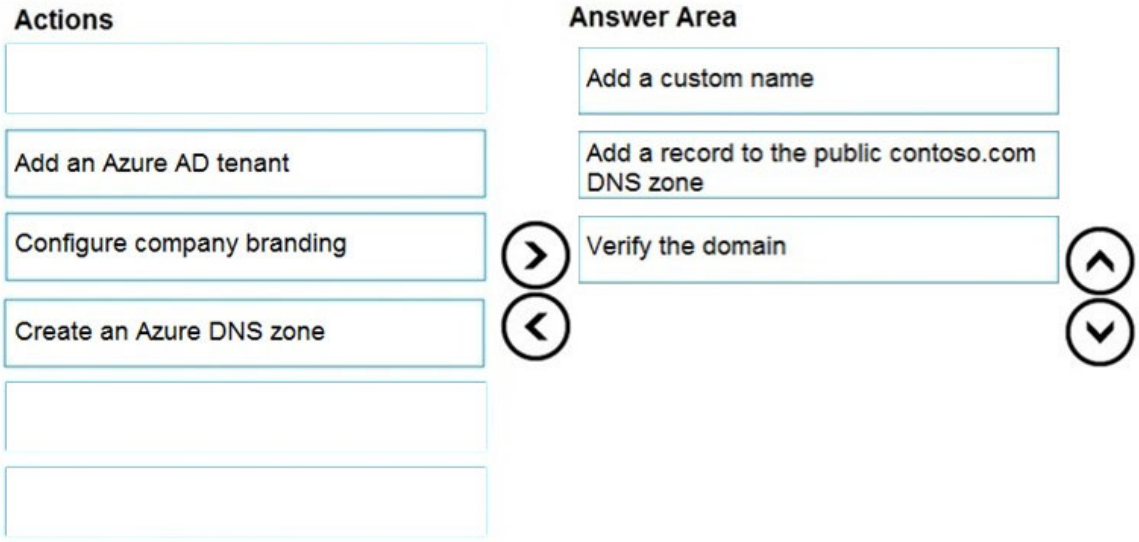

1. Add the custom domain name to your directory
2. Add a DNS entry for the domain name at the domain name registrar
3. Verify the custom domain name in Azure AD

Reference:
https://docs.microsoft.com/en-us/azure/dns/dns-web-sites-custom-domain

Community Discussion

Question #366

You have an Azure subscription named Subscription1 that contains an Azure Log Analytics workspace named Workspace1.

You need to view the error events from a table named Event.

Which query should you run in Workspace1?

A) Get-Event Event | where {$_.EventType == "error"}

B) Event | search "error" (Correct Answer)

C) select * from Event where EventType == "error"

D) search in (Event) * | where EventType ג€"eq ג€errorג€

Explanation

Correct Answer: B ?

The search operator provides a multi-table/multi-column search experience.

The syntax is:

Table_name | search "search term"

Note:
There are several versions of this question in the exam. The question has three possible correct answers:
1. search in (Event) "error"
2. Event | search "error"
3. Event | where EventType == "error"
Other incorrect answer options you may see on the exam include the following:
1. Get-Event Event | where {$_.EventTye ƛ€"eq "error"}
2. Event | where EventType is "error"
3. select * from Event where EventType is "error"
4. search in (Event) * | where EventType ƛ€"eq "error"
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/log-query/search-queries
https://docs.microsoft.com/en-us/azure/azure-monitor/log-query/get-started-portal
https://docs.microsoft.com/en-us/azure/data-explorer/kusto/query/searchoperator?pivots=azuredataexplorer

SecExams

Community Discussion

Question #367

You have a registered DNS domain named contoso.com.
You create a public Azure DNS zone named contoso.com.
You need to ensure that records created in the contoso.com zone are resolvable from the internet.
What should you do?

A) Create NS records in contoso.com.
B) Modify the SOA record in the DNS domain registrar.
C) Create the SOA record in contoso.com.
D) Modify the NS records in the DNS domain registrar. (Correct Answer)

Explanation

Correct Answer: D ?
Reference:
https://docs.microsoft.com/en-us/azure/dns/dns-delegate-domain-azure-dns

Community Discussion

SecExams

Question #368

HOTSPOT -

You have an Azure subscription that contains a storage account named storage1.

The subscription is linked to an Azure Active Directory (Azure AD) tenant named contoso.com that syncs to an on-premises Active Directory domain.

The domain contains the security principals shown in the following table.

Name	Type
User1	User
Computer1	Computer

In Azure AD, you create a user named User2.

The storage1 account contains a file share named share1 and has the following configurations.

```
"kind": "StorageV2",
"properties": {
                "azureFilesIdentityBasedAuthentication": {
                    "directoryServiceOptions": "AD",
                    "activeDirectoryProperties": {
                        "domainName": "Contoso.com",
                        "netBiosDomainName": "Contoso.com",
                        "forestName": "Contoso.com",
-
                    }
            }
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can assign the Storage File Data SMB Share Contributor role to User1 for share1.	○	○
You can assign the Storage File Data SMB Share Reader role to Computer1 for share1.	○	○
You can assign the Storage File Data SMB Share Elevated Contributor role to User2 for share1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can assign the Storage File Data SMB Share Contributor role to User1 for share1.	○	○
You can assign the Storage File Data SMB Share Reader role to Computer1 for share1.	○	○
You can assign the Storage File Data SMB Share Elevated Contributor role to User2 for share1.	○	○

Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-files-identity-ad-ds-assign-permissions?tabs=azure-portal

Community Discussion

SecExams

Question #369

HOTSPOT -

You have an Azure subscription named Subscription1 that contains a virtual network VNet1.

You add the users in the following table.

User	Role
User1	Owner
User2	Security Admin
User3	Network Contributor

Which user can perform each configuration? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Add a subnet to VNet1:

- User1 only
- User3 only
- User1 and User3 only
- User2 and User3 only
- User1, User2, and User3

Assign a user the Reader role to VNet1:

- User1 only
- User2 only
- User3 only
- User1 and User2 only
- User2 and User3 only
- User1, User2, and User3

Explanation

Correct Answer:

Answer Area

Add a subnet to VNet1:

- User1 only
- User3 only
- **User1 and User3 only**
- User2 and User3 only
- User1, User2, and User3

Assign a user the Reader role to VNet1:

- **User1 only**
- User2 only
- User3 only
- User1 and User2 only
- User2 and User3 only
- User1, User2, and User3

Box 1: User1 and User3 only.
User1: The Owner Role lets you manage everything, including access to resources.
User3: The Network Contributor role lets you manage networks, including creating subnets.
Box 2: User1 only.
The Security Admin role: In Security Center only: Can view security policies, view security states, edit security policies, view alerts and recommendations, dismiss alerts and recommendations.
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles
https://docs.microsoft.com/en-us/azure/role-based-access-control/resource-provider-operations#microsoftnetwork

SecExams

Community Discussion

Question #370

SecExams

HOTSPOT -

You have the Azure resources shown on the following exhibit.

You plan to track resource usage and prevent the deletion of resources.

To which resources can you apply locks and tags? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Locks:

RG1 and VM1 only
Sub1 and RG1 only
Sub1, RG1, and VM1 only
MG1, Sub1, RG1, and VM1 only
Tenant Root Group, MG1, Sub1, RG1, and VM1

Tags:

RG1 and VM1 only
Sub1 and RG1 only
Sub1, RG1, and VM1 only
MG1, Sub1, RG1, and VM1 only
Tenant Root Group, MG1, Sub1, RG1, and VM1

SecExams

Explanation

Correct Answer:

Answer Area

Locks:

RG1 and VM1 only
Sub1 and RG1 only
Sub1, RG1, and VM1 only
MG1, Sub1, RG1, and VM1 only
Tenant Root Group, MG1, Sub1, RG1, and VM1

Tags:

RG1 and VM1 only
Sub1 and RG1 only
Sub1, RG1, and VM1 only
MG1, Sub1, RG1, and VM1 only
Tenant Root Group, MG1, Sub1, RG1, and VM1

Box 1: Sub1, RG1, and VM1 only -
You can lock a subscription, resource group, or resource to prevent other users in your organization from accidentally deleting or modifying critical resources.

Box 2: Sub1, RG1, and VM1 only -
You apply tags to your Azure resources, resource groups, and subscriptions.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/lock-resources?tabs=json https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/tag-resources?tabs=json

Community Discussion

Question #371

You have an Azure Active Directory (Azure AD) tenant.
You plan to delete multiple users by using Bulk delete in the Azure Active Directory admin center.
You need to create and upload a file for the bulk delete.
Which user attributes should you include in the file?

A) The user principal name and usage location of each user only
B) The user principal name of each user only (Correct Answer)
C) The display name of each user only
D) The display name and usage location of each user only
E) The display name and user principal name of each user only

Explanation

Correct Answer: B ?
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/enterprise-users/users-bulk-delete

Community Discussion

Question #372

SecExams

HOTSPOT -

You have an Azure subscription named Sub1 that contains the Azure resources shown in the following table.

Name	Type
RG1	Resource group
storage1	Storage account
VNET1	Virtual network

You assign an Azure policy that has the following settings:

- Scope: Sub1
- Exclusions: Sub1/RG1/VNET1
- Policy definition: Append a tag and its value to resources
- Policy enforcement: Enabled
- Tag name: Tag4
- Tag value: value4

You assign tags to the resources as shown in the following table.

Resource	Tag
Sub1	`Tag1:subscription`
RG1	`Tag2:IT`
storage1	`Tag3:value1`
VNET1	`Tag3:value2`

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
RG1 has the `Tag2:IT` tag assigned only	◯	◯
Storage1 has the `Tag1:subscription`, `Tag2:IT`, `Tag3:value1`, and `Tag4:value4` tags assigned.	◯	◯
VNET1 has the `Tag2:IT` and `Tag3:value2` tags assigned only	◯	◯

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
RG1 has the `Tag2:IT` tag assigned only	○	○
Storage1 has the `Tag1:subscription`, `Tag2:IT`, `Tag3:value1`, and `Tag4:value4` tags assigned.	○	○
VNET1 has the `Tag2:IT` and `Tag3:value2` tags assigned only	○	○

Box 1: No -
The Azure Policy will add Tag4 to RG1.

Box 2: No -
Tags applied to the resource group or subscription aren't inherited by the resources although you can enable inheritance with Azure Policy. Storage1 has Tag3:
Value1 and the Azure Policy will add Tag4.

Box 3: No -
Tags applied to the resource group or subscription aren't inherited by the resources so VNET1 does not have Tag2.
VNET1 has Tag3:value2. VNET1 is excluded from the Azure Policy so Tag4 will not be added to VNET1.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/tag-resources?tabs=json

Community Discussion

If RG1 is excluded, would it not have anything further tagged to it?

Question #373

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You need to ensure that an Azure Active Directory (Azure AD) user named Admin1 is assigned the required role to enable Traffic Analytics for an Azure subscription.
Solution: You assign the Traffic Manager Contributor role at the subscription level to Admin1.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq

Community Discussion

Question #374

You have three offices and an Azure subscription that contains an Azure Active Directory (Azure AD) tenant.
You need to grant user management permissions to a local administrator in each office.
What should you use?

A) Azure AD roles
B) administrative units (Correct Answer)

C) access packages in Azure AD entitlement management
D) Azure roles

Explanation

Correct Answer: B ?
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/roles/administrative-units

Community Discussion

Question #375

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers. Subscription1 contains a resource group named Dev.
You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.
Solution: On Dev, you assign the Logic App Contributor role to the Developers group.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles

Community Discussion

Question #376

HOTSPOT -

You have an Azure Load Balancer named LB1.

You assign a user named User1 the roles shown in the following exhibit.

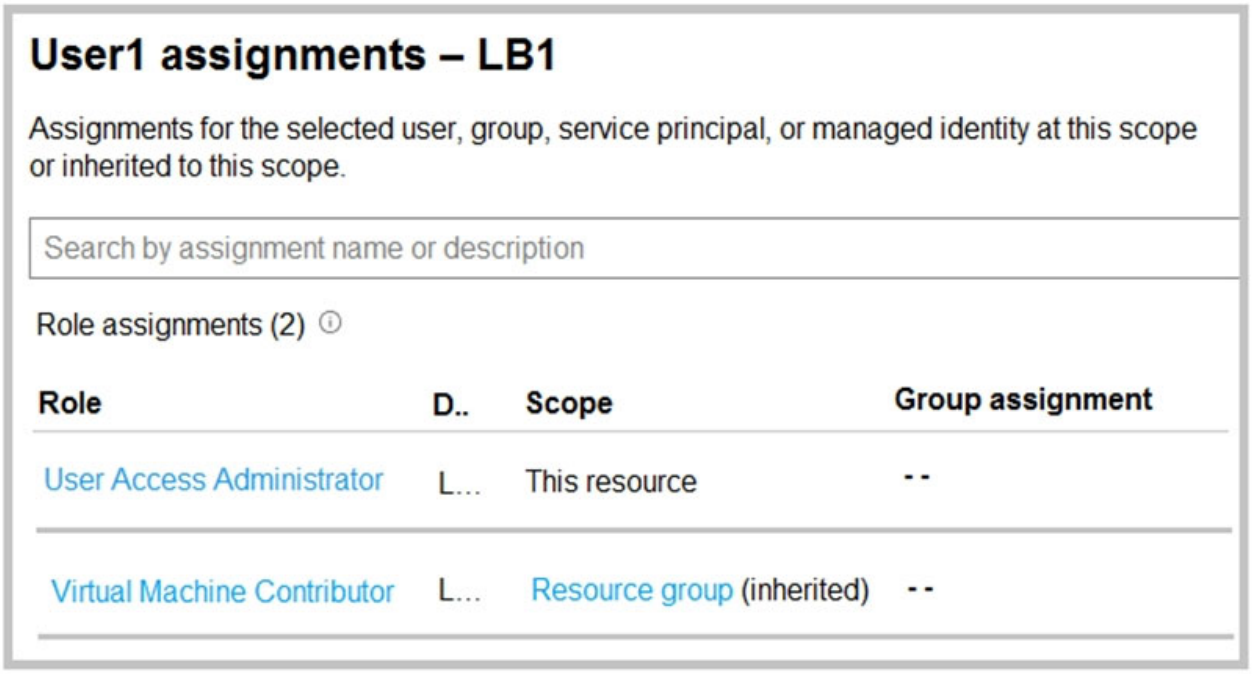

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

User1 can **[answer choice]** LB1.

- delete
- create a NAT rule for
- assign access to other users for

User1 can **[answer choice]** the resource group.

- delete a virtual machine from
- modify the load balancing rules in
- deploy an Azure Kubernetes Service (AKS) cluster to

Explanation

Correct Answer:

Answer Area

User1 can **[answer choice]** LB1.

- delete
- create a NAT rule for
- assign access to other users for

User1 can **[answer choice]** the resource group.

- delete a virtual machine from
- modify the load balancing rules in
- deploy an Azure Kubernetes Service (AKS) cluster to

Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#virtual-machine-contributor https://docs.microsoft.com/en-us/azure/role-based-access-control/rbac-and-directory-admin-roles

Community Discussion

Question #377

You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1.
Subscription1 has a user named User1. User1 has the following roles:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.
What should you do?

A) Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1.
B) Assign User1 the Owner role for VNet1. (Correct Answer)
C) Assign User1 the Contributor role for VNet1.
D) Assign User1 the Network Contributor role for VNet1.

Explanation

Correct Answer: B ?
Has full access to all resources including the right to delegate access to others.
Note:
There are several versions of this question in the exam. The question has two possible correct answers:
✑ Assign User1 the User Access Administrator role for VNet1.
✑ Assign User1 the Owner role for VNet1.
Other incorrect answer options you may see on the exam include the following:
✑ Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1.
✑ Remove User1 from the Security Reader and Reader roles for Subscription1.
✑ Assign User1 the Network Contributor role for RG1.
References:
https://docs.microsoft.com/en-us/azure/role-based-access-control/rbac-and-directory-admin-roles https://docs.microsoft.com/en-us/azure/role-based-access-control/overview

Community Discussion

SecExams

Question #378

SecExams

HOTSPOT -

You configure the custom role shown in the following exhibit.

```
{
    "properties": {
        "roleName": "role1",
        "description": "",
        "roletype": "true",
        "assignableScopes": [
            "/subscriptions/3d6209d5-c714-4440-9556e-d6342086c2d7/"
        ],
        "permissions": [
            {
                "actions": [
                    "Microsoft.Authorization/*/read",
                    "Microsoft.Compute/availabilitySets/*",
                    "Microsoft.Compute/locations/*",
                    "Microsoft.Compute/virtualMachines/*",
                    "Microsoft.Compute/virtualMachineScaleSets/*",
                    "Microsoft.Compute/disks/write",
                    "Microsoft.Compute/disks/read",
                    "Microsoft.Compute/disks/delete",
                    "Microsoft.Network/locations/*",
                    "Microsoft.Network/networkInterfaces/*",
                    "Microsoft.Network/networkSecurityGroups/join/action",
                    "Microsoft.Network/networkSecurityGroups/read",
                    "Microsoft.Network/publicIPAddresses/join/action",
                    "Microsoft.Network/publicIPAddresses/read",
                    "Microsoft.Network/virtualNetworks/read",
                    "Microsoft.Network/virtualNetworks/subnets/join/action",
                    "Microsoft.Resources/deployments/*",
                    "Microsoft.Resources/subscriptions/resourceGroups/read",
                    "Microsoft.Support/*"
                ],
                "notActions": [],
                "dataActions": [],
                "notDataActions": []
            }
        ]
    }
}
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

To ensure that users can sign in to virtual machines that are assigned role1, modify the **[answer choice]** section

- actions
- roletype
- notActions
- dataActions
- notDataActions
- assignableScopes

To ensure that role1 can be assigned only to a resource group named RG1, modify the **[answer choice]** section

- actions
- roletype
- notActions
- dataActions
- notDataActions
- assignableScopes

Explanation

Correct Answer:

Answer Area

To ensure that users can sign in to virtual machines that are assigned role1, modify the **[answer choice]** section

- actions
- roletype
- notActions
- dataActions
- notDataActions
- assignableScopes

To ensure that role1 can be assigned only to a resource group named RG1, modify the **[answer choice]** section

- actions
- roletype
- notActions
- dataActions
- notDataActions
- assignableScopes

Box 1: roletype -

You need to configure Azure RBAC policy to determine who can log in to the VM. Two Azure roles are used to authorize VM login:

Virtual Machine Administrator Login: Users with this role assigned can log in to an Azure virtual machine with administrator privileges.
Virtual Machine User Login: Users with this role assigned can log in to an Azure virtual machine with regular user privileges.
Note, example roletype:
"roleName": "Virtual Machine Administrator Login",
"roleType": "BuiltInRole",
"type": "Microsoft.Authorization/roleDefinitions"

Box 2: assignableScopes -
Azure role-based access control (Azure RBAC) is the authorization system you use to manage access to Azure resources. To grant access, you assign roles to users, groups, service principals, or managed identities at a particular scope.
When you assign roles, you must specify a scope. Scope is the set of resources the access applies to. In Azure, you can specify a scope at four levels from broad to narrow: management group, subscription, resource group, and resource.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/devices/howto-vm-sign-in-azure-ad-windows https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles https://docs.microsoft.com/en-us/azure/role-based-access-control/role-assignments-portal

SecExams

Community Discussion

Question #379

You have an Azure subscription that contains a storage account named storage1.
The storage1 account contains a file share named share1.
The subscription is linked to a hybrid Azure Active Directory (Azure AD) tenant that contains a security group named Group1.
You need to grant Group1 the Storage File Data SMB Share Elevated Contributor role for share1.
What should you do first?

A) Enable Active Directory Domain Service (AD DS) authentication for storage1. (Correct Answer)
B) Grant share-level permissions by using File Explorer.
C) Mount share1 by using File Explorer.

D) Create a private endpoint.

Explanation

Correct Answer: A ?
Before you enable Azure AD over SMB for Azure file shares, make sure you have completed the following prerequisites:
1. Select or create an Azure AD tenant.
2. To support authentication with Azure AD credentials, you must enable Azure AD Domain Services for your Azure AD tenant.
Etc.
Note: The Storage File Data SMB Share Elevated Contributor allows read, write, delete and modify NTFS permissions in Azure Storage file shares over SMB.
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-files-identity-auth-active-directory-domain-service-enable

SecExams

Community Discussion

Question #380

You have 15 Azure subscriptions.
You have an Azure Active Directory (Azure AD) tenant that contains a security group named Group1.
You plan to purchase additional Azure subscription.
You need to ensure that Group1 can manage role assignments for the existing subscriptions and the planned subscriptions. The solution must meet the following requirements:
✑ Use the principle of least privilege.
✑ Minimize administrative effort.
What should you do?

A) Assign Group1 the Owner role for the root management group.
B) Assign Group1 the User Access Administrator role for the root management group. (Correct Answer)
C) Create a new management group and assign Group1 the User Access Administrator role for the group.

D) Create a new management group and assign Group1 the Owner role for the group.

Explanation

Correct Answer: B ?

The User Access Administrator role enables the user to grant other users access to Azure resources. This switch can be helpful to regain access to a subscription.

Management groups give you enterprise-grade management at scale no matter what type of subscriptions you might have.

Each directory is given a single top-level management group called the "Root" management group. This root management group is built into the hierarchy to have all management groups and subscriptions fold up to it. This root management group allows for global policies and Azure role assignments to be applied at the directory level.

Incorrect:

Not C: A few directories that started using management groups early in the preview before June 25 2018 could see an issue where not all the subscriptions were within the hierarchy. The process to have all subscriptions in the hierarchy was put in place after a role or policy assignment was done on the root management group in the directory.

Reference:

https://docs.microsoft.com/en-us/azure/role-based-access-control/rbac-and-directory-admin-roles https://docs.microsoft.com/en-us/azure/governance/management-groups/overview

Community Discussion

SecExams

Question #381

SecExams

HOTSPOT -

You have an Azure subscription that contains the hierarchy shown in the following exhibit.

You create an Azure Policy definition named Policy1.

To which Azure resources can you assign Policy1 and which Azure resources can you specify as exclusions from Policy1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

You can assign Policy1 to:

- Subscription1 and RG1 only
- ManagementGroup1 and Subscription1 only
- Tenant Root Group, ManagementGroup1, and Subscription1 only
- Tenant Root Group, ManagementGroup1, Subscription1, and RG1 only
- Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1

You can exclude Policy1 from:

- VM1 only
- RG1 and VM1 only
- Subscription1, RG1, and VM1 only
- ManagementGroup1, Subscription1, RG1, and VM1 only
- Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1

Explanation

Correct Answer:

Answer Area

You can assign Policy1 to:

- Subscription1 and RG1 only
- ManagementGroup1 and Subscription1 only
- Tenant Root Group, ManagementGroup1, and Subscription1 only
- Tenant Root Group, ManagementGroup1, Subscription1, and RG1 only
- **Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1**

You can exclude Policy1 from:

- VM1 only
- RG1 and VM1 only
- Subscription1, RG1, and VM1 only
- **ManagementGroup1, Subscription1, RG1, and VM1 only**
- Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1

Box 1: Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1

Once your business rules have been formed, the policy definition or initiative is assigned to any scope of resources that Azure supports, such as management groups, subscriptions, resource groups, or individual resources.

Note: Azure provides four levels of scope: management groups, subscriptions, resource groups, and resources. The following image shows an example of these layers.

SecExams

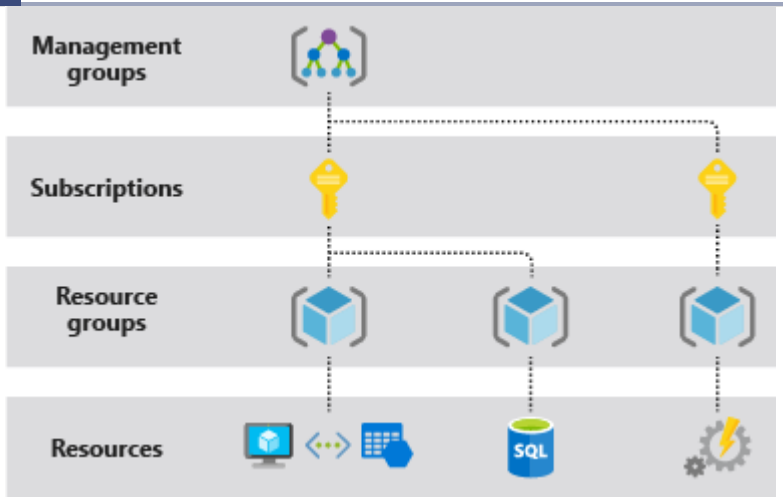

Box 2: ManagementGroup1, Subscription1, RG1, and VM1
You can exclude a subscope from the assignment.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/overview

Community Discussion

Question #382

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the following users in an Azure Active Directory tenant named contoso.onmicrosoft.com:

Name	Role	Scope
User1	Global administrator	Azure Active Directory
User2	Global administrator	Azure Active Directory
User3	User administrator	Azure Active Directory
User4	Owner	Azure Subscription

User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com.
You need to create new user accounts in external.contoso.onmicrosoft.com.
Solution: You instruct User2 to create the user accounts.
Does that meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
Only a global administrator can add users to this tenant.
Reference:
https://docs.microsoft.com/en-us/azure/devops/organizations/accounts/add-users-to-azure-ad

Community Discussion

Question #383

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the following users in an Azure Active Directory tenant named contoso.onmicrosoft.com:

Name	Role	Scope
User1	Global administrator	Azure Active Directory
User2	Global administrator	Azure Active Directory
User3	User administrator	Azure Active Directory
User4	Owner	Azure Subscription

User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com.
You need to create new user accounts in external.contoso.onmicrosoft.com.
Solution: You instruct User4 to create the user accounts.
Does that meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Only a global administrator can add users to this tenant.
Reference:
https://docs.microsoft.com/en-us/azure/devops/organizations/accounts/add-users-to-azure-ad

Community Discussion

Question #384

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the following users in an Azure Active Directory tenant named contoso.onmicrosoft.com:

Name	Role	Scope
User1	Global administrator	Azure Active Directory
User2	Global administrator	Azure Active Directory
User3	User administrator	Azure Active Directory
User4	Owner	Azure Subscription

User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com.
You need to create new user accounts in external.contoso.onmicrosoft.com.
Solution: You instruct User3 to create the user accounts.
Does that meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Only a global administrator can add users to this tenant.
Reference:
https://docs.microsoft.com/en-us/azure/devops/organizations/accounts/add-users-to-azure-ad

Community Discussion

Selected Answer: A

user administrator can add users : answer is A

Question #385

You have two Azure subscriptions named Sub1 and Sub2.
An administrator creates a custom role that has an assignable scope to a resource group named RG1 in Sub1.
You need to ensure that you can apply the custom role to any resource group in Sub1 and Sub2. The solution must minimize administrative effort.
What should you do?

A) Select the custom role and add Sub1 and Sub2 to the assignable scopes. Remove RG1 from the assignable scopes. (Correct Answer)

B) Create a new custom role for Sub1. Create a new custom role for Sub2. Remove the role from RG1.

C) Create a new custom role for Sub1 and add Sub2 to the assignable scopes. Remove the role from RG1.

D) Select the custom role and add Sub1 to the assignable scopes. Remove RG1 from the assignable scopes. Create a new custom role for Sub2.

Explanation

Correct Answer: A ?
Can be used as:
"AssignableScopes": [
"/subscriptions/{Sub1}",
"/subscriptions/{Sub2}",
Note: Custom role example:
The following shows what a custom role looks like as displayed using Azure PowerShell in JSON format. This custom role can be used for monitoring and restarting virtual machines.
{
"Name": "Virtual Machine Operator",
"Id": "88888888-8888-8888-8888-888888888888",
"IsCustom": true,
"Description": "Can monitor and restart virtual machines.",
"Actions": [
"Microsoft.Storage/*/read",
"Microsoft.Network/*/read",

```
"Microsoft.Compute/*/read",
"Microsoft.Compute/virtualMachines/start/action",
"Microsoft.Compute/virtualMachines/restart/action",
"Microsoft.Authorization/*/read",
"Microsoft.ResourceHealth/availabilityStatuses/read",
"Microsoft.Resources/subscriptions/resourceGroups/read",
"Microsoft.Insights/alertRules/*",
"Microsoft.Insights/diagnosticSettings/*",
"Microsoft.Support/*"
],
"NotActions": [],
"DataActions": [],
"NotDataActions": [],
"AssignableScopes": [
"/subscriptions/{subscriptionId1}",
"/subscriptions/{subscriptionId2}",
"/providers/Microsoft.Management/managementGroups/{groupId1}"
]
}
```

Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/custom-roles

Community Discussion

Question #386

You have an Azure Subscription that contains a storage account named storageacct1234 and two users named User1 and User2.
You assign User1 the roles shown in the following exhibit.

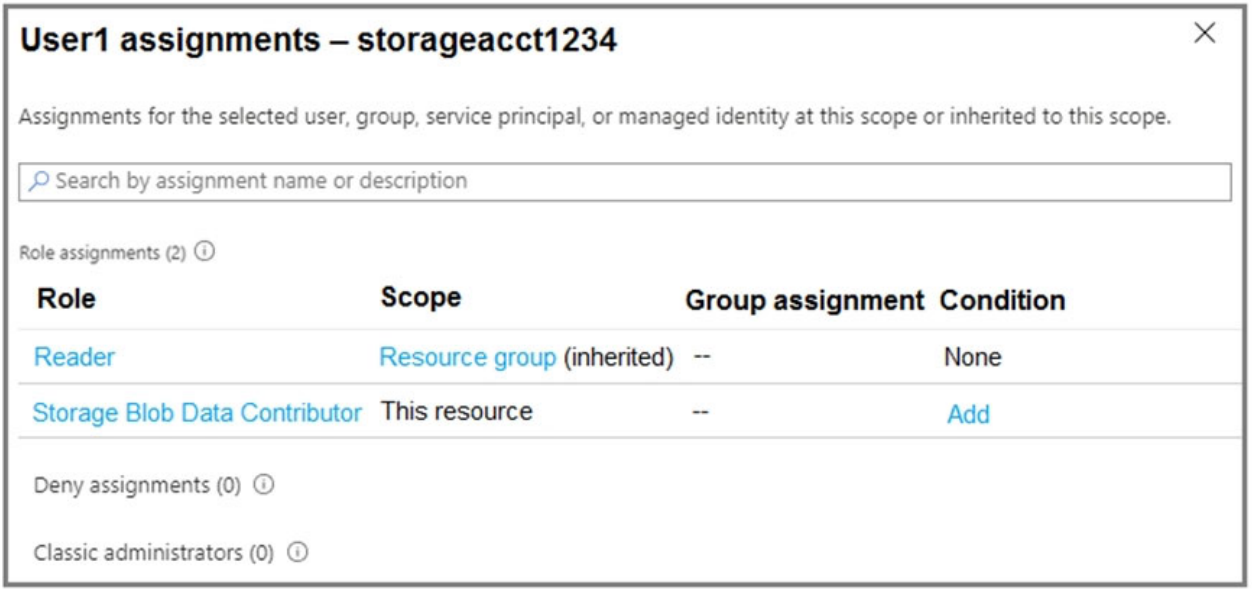

Which two actions can User1 perform? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A) Assign roles to User2 for storageacct1234. (Correct Answer)
B) Upload blob data to storageacct1234.
C) Modify the firewall of storageacct1234.
D) View blob data in storageacct1234.
E) View file shares in storageacct1234. (Correct Answer)

Explanation

Correct Answer: AE ?

Community Discussion

Selected Answer: BD

AE have to be completely incorrect.

Question #387

You have an Azure subscription named Subscription1 that contains the storage accounts shown in the following table:

Name	Account kind	Azure service that contains data
storage1	Storage	File
storage2	StorageV2 (general purpose v2)	File, Table
storage3	StorageV2 (general purpose v2)	Queue
storage4	BlobStorage	Blob

You plan to use the Azure Import/Export service to export data from Subscription1.
You need to identify which storage account can be used to export the data.
What should you identify?

A) storage1
B) storage2
C) storage3
D) storage4 (Correct Answer)

Explanation

Correct Answer: D ?
Azure Import/Export service supports the following of storage accounts:
✑ Standard General Purpose v2 storage accounts (recommended for most scenarios)
✑ Blob Storage accounts
✑ General Purpose v1 storage accounts (both Classic or Azure Resource Manager deployments),
Azure Import/Export service supports the following storage types:
✑ Import supports Azure Blob storage and Azure File storage
✑ Export supports Azure Blob storage
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-requirements

Community Discussion

Question #388

HOTSPOT -

You have Azure Storage accounts as shown in the following exhibit.

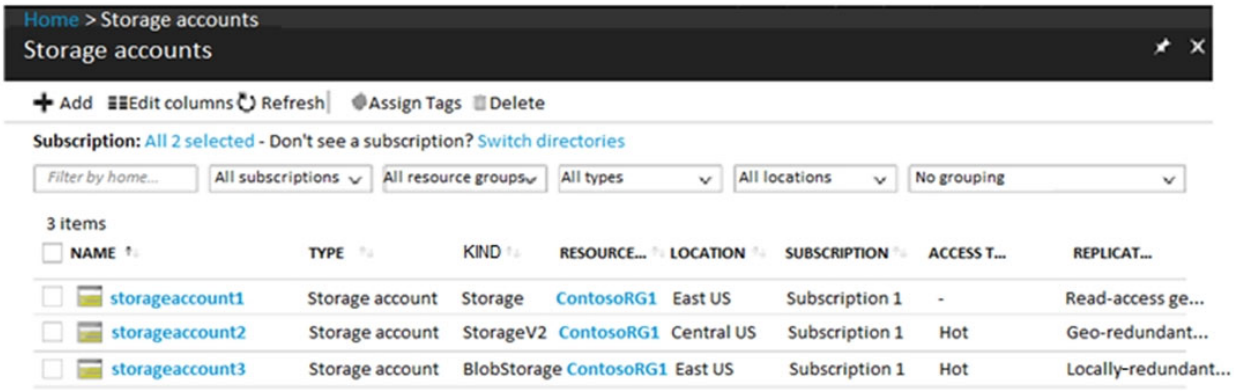

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

You can use **[answer choice]** for Azure Table Storage.

- storageaccount1 only
- storageaccount2 only
- storageaccount3 only
- storageaccount1 and storageaccount2 only
- storageaccount2 and storageaccount3 only

You can use **[answer choice]** for Azure Blob storage.

- storageaccount3 only
- storageaccount2 and storageaccount3 only
- storageaccount1 and storageaccount3 only
- all the storage accounts

Explanation

Correct Answer:

Answer Area

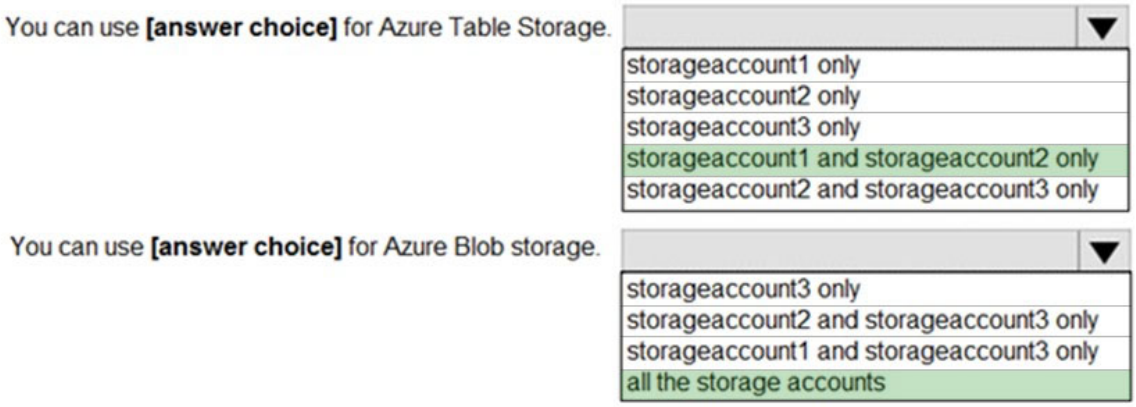

Box 1: storageaccount1 and storageaccount2 only

Box 2: All the storage accounts -
Note: The three different storage account options are: General-purpose v2 (GPv2) accounts, General-purpose v1 (GPv1) accounts, and Blob storage accounts.
✑ General-purpose v2 (GPv2) accounts are storage accounts that support all of the latest features for blobs, files, queues, and tables.
✑ Blob storage accounts support all the same block blob features as GPv2, but are limited to supporting only block blobs.
✑ General-purpose v1 (GPv1) accounts provide access to all Azure Storage services, but may not have the latest features or the lowest per gigabyte pricing.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-account-options

Community Discussion

Question #389

You have Azure subscription that includes data in following locations:

Name	Type
container1	Blob container
share1	Azure files share
DB1	SQL database
Table1	Azure Table

You plan to export data by using Azure import/export job named Export1.
You need to identify the data that can be exported by using Export1.
Which data should you identify?

A) DB1
B) container1 (Correct Answer)
C) share1
D) Table1

Explanation

Correct Answer: B ?

Community Discussion

SecExams

Question #390

HOTSPOT -

You have an Azure Storage account named storage1.

You have an Azure App Service app named App1 and an app named App2 that runs in an Azure container instance. Each app uses a managed identity.

You need to ensure that App1 and App2 can read blobs from storage1. The solution must meet the following requirements:

✑ Minimize the number of secrets used.

✑ Ensure that App2 can only read from storage1 for the next 30 days.

What should you configure in storage1 for each app? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

App1:

- Access keys
- Advanced security
- Access control (IAM)
- Shared access signatures (SAS)

App2:

- Access keys
- Advanced security
- Access control (IAM)
- Shared access signatures (SAS)

Explanation

Correct Answer:

Answer Area

App1:

- Access keys
- Advanced security
- Access control (IAM)
- Shared access signatures (SAS)

App2:

- Access keys
- Advanced security
- Access control (IAM)
- Shared access signatures (SAS)

App1: Access keys -
App2: Shared access signature (SAS)
A shared access signature (SAS) provides secure delegated access to resources in your storage account without compromising the security of your data. With a
SAS, you have granular control over how a client can access your data. You can control what resources the client may access, what permissions they have on those resources, and how long the SAS is valid, among other parameters.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-sas-overview

SecExams

Community Discussion

Question #391

HOTSPOT -

You need to create an Azure Storage account that meets the following requirements:

✑ Minimizes costs

✑ Supports hot, cool, and archive blob tiers

✑ Provides fault tolerance if a disaster affects the Azure region where the account resides

How should you complete the command? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
az storage account create -g RG1 -n storageaccount1
    --kind [ ▼ ]                    --sku [ ▼ ]
```

--kind: FileStorage | Storage | StorageV2

--sku: Standard_GRS | Standard_LRS | Standard_RAGRS | Premium_LRS

SecExams

Explanation

Correct Answer:

Answer Area

```
az storage account create -g RG1 -n storageaccount1
    --kind [ StorageV2 ▼ ]          --sku [ Standard_GRS ▼ ]
```

--kind: FileStorage | Storage | StorageV2

--sku: Standard_GRS | Standard_LRS | Standard_RAGRS | Premium_LRS

Box 1: StorageV2 -

You may only tier your object storage data to hot, cool, or archive in Blob storage and

General Purpose v2 (GPv2) accounts. General Purpose v1 (GPv1) accounts do not support tiering.
General-purpose v2 accounts deliver the lowest per-gigabyte capacity prices for Azure Storage, as well as industry-competitive transaction prices.

Box 2: Standard_GRS -
Geo-redundant storage (GRS): Cross-regional replication to protect against region-wide unavailability.
Incorrect Answers:
Locally-redundant storage (LRS): A simple, low-cost replication strategy. Data is replicated within a single storage scale unit.
Read-access geo-redundant storage (RA-GRS): Cross-regional replication with read access to the replica. RA-GRS provides read-only access to the data in the secondary location, in addition to geo-replication across two regions, but is more expensive compared to GRS.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy-grs
https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers

SecExams

Community Discussion

Question #392

You have an Azure subscription that contains the resources in the following table.

Name	Type
RG1	Resource group
store1	Azure Storage account
Sync1	Azure File Sync

Store1 contains a file share named data. Data contains 5,000 files.
You need to synchronize the files in the file share named data to an on-premises server named Server1.
Which three actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Create a container instance
B) Register Server1 (Correct Answer)

C) Install the Azure File Sync agent on Server1 (Correct Answer)

D) Download an automation script

E) Create a sync group (Correct Answer)

Explanation

Correct Answer: BCE ?

Step 1 (C): Install the Azure File Sync agent on Server1

The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share

Step 2 (B): Register Server1.

Register Windows Server with Storage Sync Service

Registering your Windows Server with a Storage Sync Service establishes a trust relationship between your server (or cluster) and the Storage Sync Service.

Step 3 (E): Create a sync group and a cloud endpoint.

A sync group defines the sync topology for a set of files. Endpoints within a sync group are kept in sync with each other. A sync group must contain one cloud endpoint, which represents an Azure file share and one or more server endpoints. A server endpoint represents a path on registered server.

Reference:

https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide

SecExams

Community Discussion

Question #393

SecExams

HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group
VNET1	Virtual network	RG1
VNET2	Virtual network	RG2
VM1	Virtual machine	RG2

The status of VM1 is Running.

You assign an Azure policy as shown in the exhibit. (Click the Exhibit tab.)

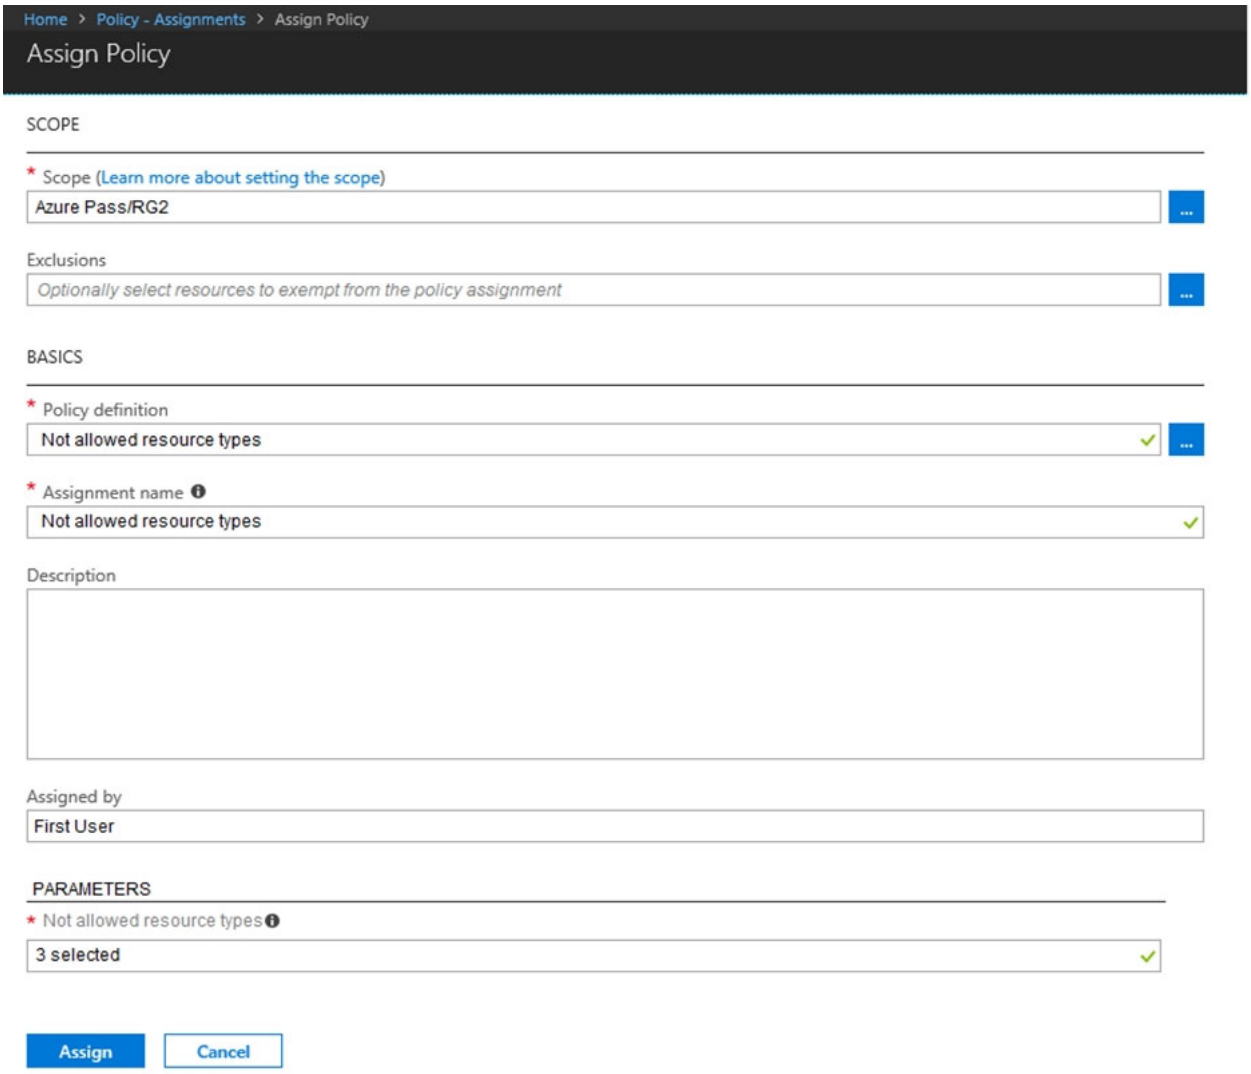

You assign the policy by using the following parameters:

Microsoft.ClassicNetwork/virtualNetworks

Microsoft.Network/virtualNetworks

Microsoft.Compute/virtualMachines

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
An administrator can move VNET1 to RG2	○	○
The state of VM1 changed to deallocated	○	○
An administrator can modify the address space of VNET2	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
An administrator can move VNET1 to RG2	○	○
The state of VM1 changed to deallocated	○	○
An administrator can modify the address space of VNET2	○	○

Community Discussion

SecExams

Question #394

DRAG DROP -

You have an Azure subscription that contains a storage account.

You have an on-premises server named Server1 that runs Windows Server 2016. Server1 has 2 TB of data.

You need to transfer the data to the storage account by using the Azure Import/ Export service.

In which order should you perform the actions? To answer, move all actions from the list of actions to the answer area and arrange them in the correct order.

NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.

Select and Place:

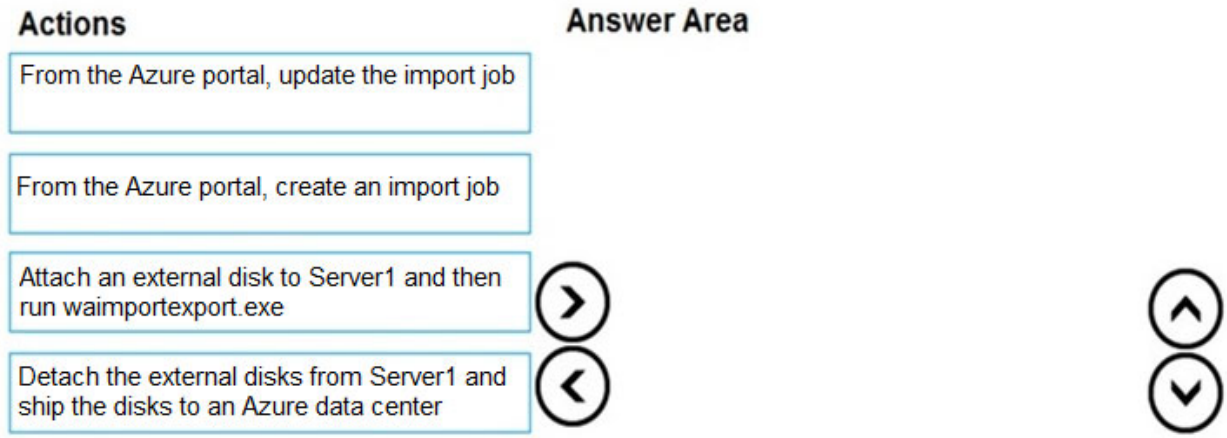

Explanation

Correct Answer:

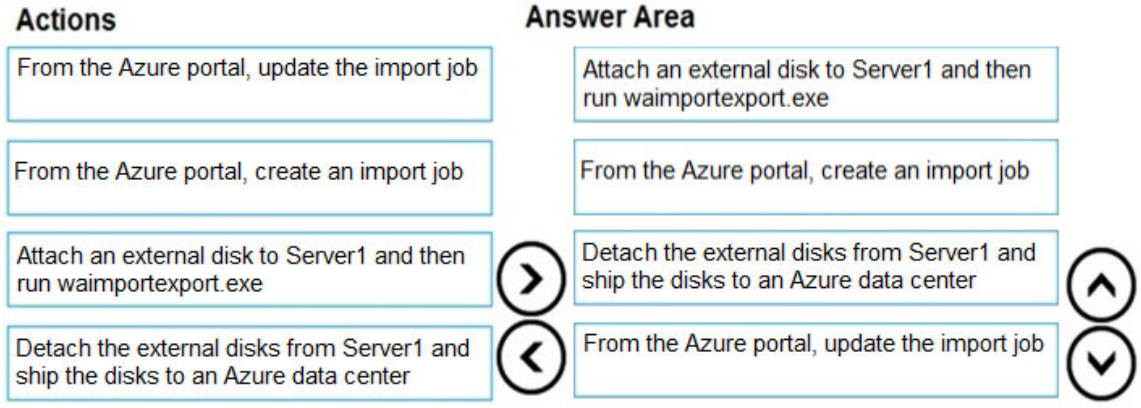

At a high level, an import job involves the following steps:
Step 1: Attach an external disk to Server1 and then run waimportexport.exe
Determine data to be imported, number of drives you need, destination blob location for your data in Azure storage.
Use the WAImportExport tool to copy data to disk drives. Encrypt the disk drives with BitLocker.
Step 2: From the Azure portal, create an import job.
Create an import job in your target storage account in Azure portal. Upload the drive journal files.
Step 3: Detach the external disks from Server1 and ship the disks to an Azure data center.
Provide the return address and carrier account number for shipping the drives back to you.
Ship the disk drives to the shipping address provided during job creation.
Step 4: From the Azure portal, update the import job
Update the delivery tracking number in the import job details and submit the import job.
The drives are received and processed at the Azure data center.
The drives are shipped using your carrier account to the return address provided in the import job.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-service

Community Discussion

SecExams

Question #395

HOTSPOT -

You have Azure subscription that includes following Azure file shares:

Name	In storage account	Location
share1	storage1	West US
share2	storage1	West US

You have the following on-premises servers:

Name	Folders
Server1	D:\Folder1, E:\Folder2
Server2	D:\Data

You create a Storage Sync Service named Sync1 and an Azure File Sync group named Group1. Group1 uses share1 as a cloud endpoint.

You register Server1 and Server2 in Sync1. You add D:\Folder1 on Server1 as a server endpoint of Group1.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
share2 can be added as a cloud endpoint for Group1	○	○
E:\Folder2 on Server1 can be added as a server endpoint for Group1	○	○
D:\Data on Server2 can be added as a server endpoint for Group1	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
share2 can be added as a cloud endpoint for Group1	○	○
E:\Folder2 on Server1 can be added as a server endpoint for Group1	○	○
D:\Data on Server2 can be added as a server endpoint for Group1	○	○

Box 1: No -
Group1 already has a cloud endpoint named Share1.
A sync group must contain one cloud endpoint, which represents an Azure file share and one or more server endpoints.

Box 2: Yes -
Yes, one or more server endpoints can be added to the sync group.

Box 3: Yes -
Yes, one or more server endpoints can be added to the sync group.
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide

SecExams

Community Discussion

Question #396

DRAG DROP -

You have an Azure subscription named Subscription1.

You create an Azure Storage account named contosostorage, and then you create a file share named data.

Which UNC path should you include in a script that references files from the data file share? To answer, drag the appropriate values to the correct targets. Each value may be used once, more than once or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Select and Place:

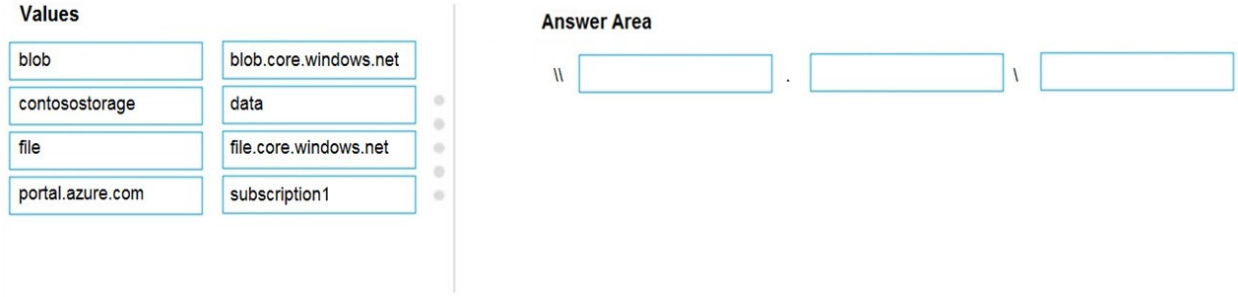

Explanation

Correct Answer:

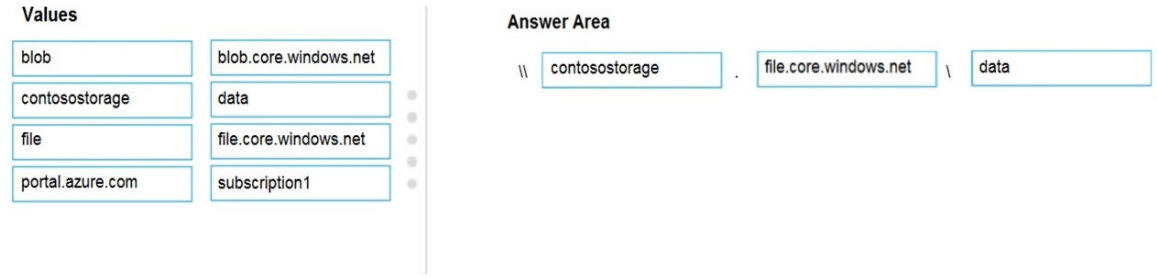

Box 1: contosostorage -

The name of account -

Box 2: file.core.windows.net -

Box 3: data -

The name of the file share is data.

Example:

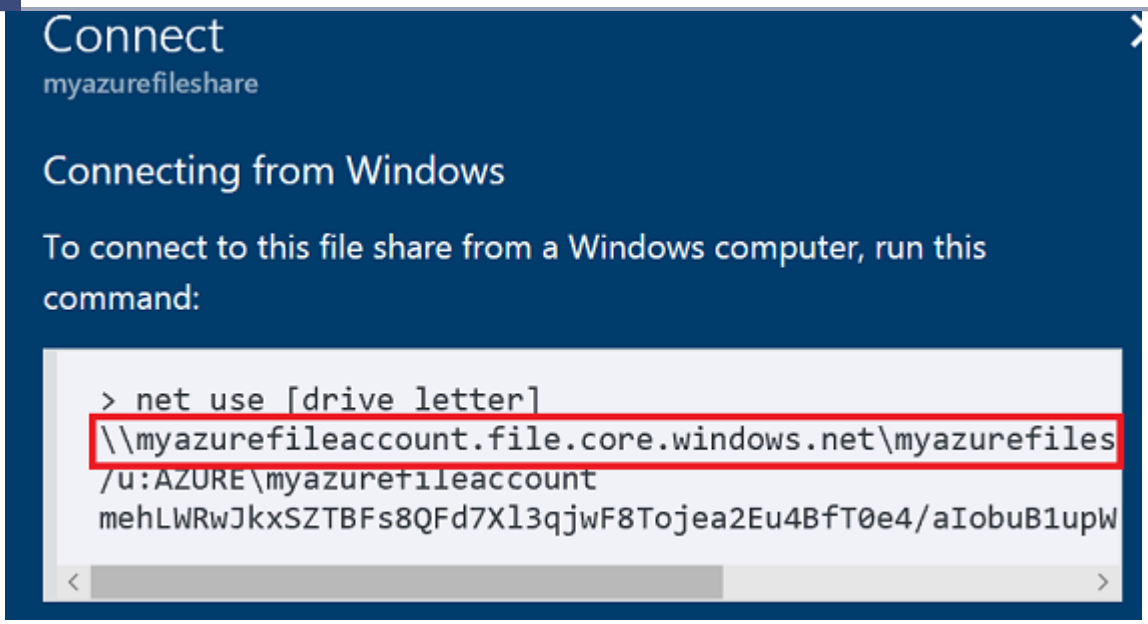

Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-use-files-windows

Community Discussion

Question #397

HOTSPOT -

You have an Azure subscription that contains an Azure Storage account.

You plan to copy an on-premises virtual machine image to a container named vmimages.

You need to create the container for the planned image.

Which command should you run? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

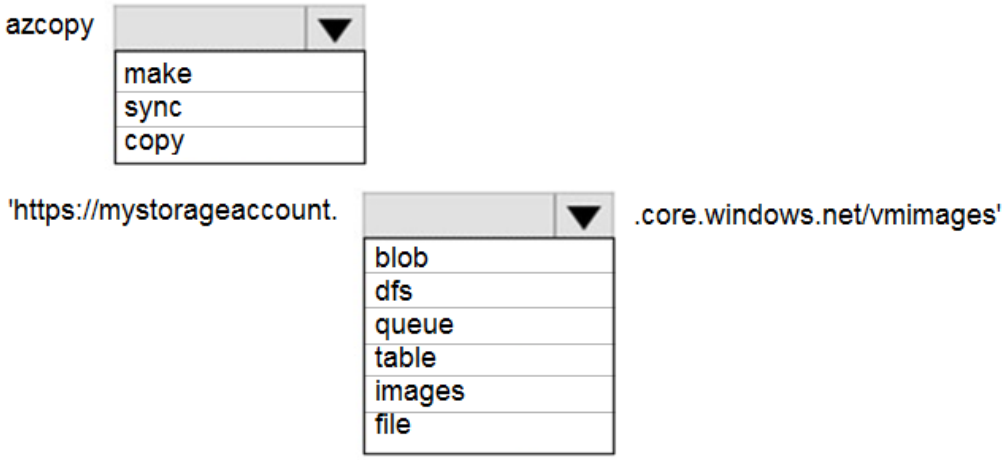

Explanation

Correct Answer:

Answer Area

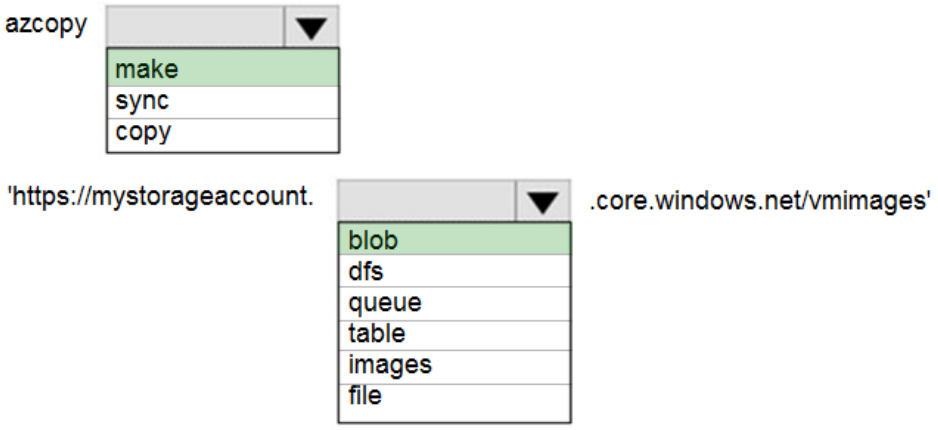

Community Discussion

SecExams

Question #398

HOTSPOT -

You have an Azure File sync group that has the endpoints shown in the following table.

Name	Type
Endpoint1	Cloud endpoint
Endpoint2	Server endpoint
Endpoint3	Server endpoint

Cloud tiering is enabled for Endpoint3.

You add a file named File1 to Endpoint1 and a file named File2 to Endpoint2.

On which endpoints will File1 and File2 be available within 24 hours of adding the files? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

File1:

- Endpoint1 only
- Endpoint3 only
- Endpoint2 and Endpoint3 only
- Endpoint1, Endpoint2, and Endpoint3

File2:

- Endpoint2 only
- Endpoint3 only
- Endpoint2 and Endpoint3 only
- Endpoint1, Endpoint2, and Endpoint3

Explanation

Correct Answer:

Answer Area

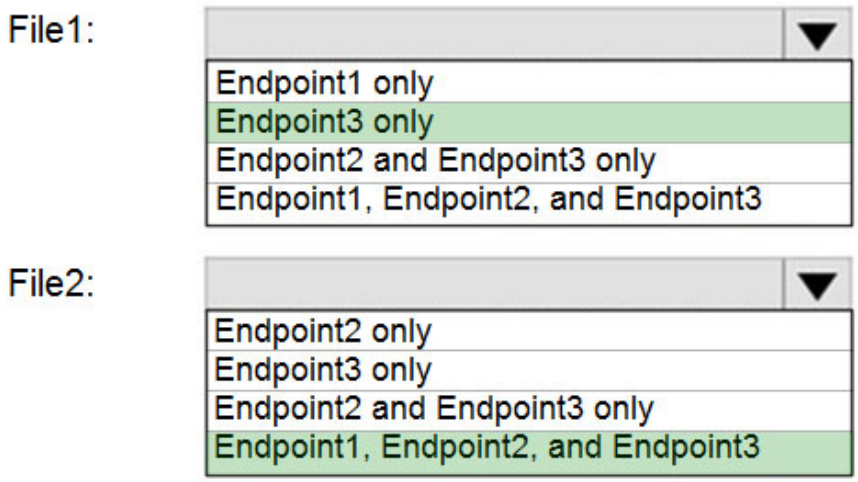

File1: Endpoint3 only -
Cloud Tiering: A switch to enable or disable cloud tiering. When enabled, cloud tiering will tier files to your Azure file shares. This converts on-premises file shares into a cache, rather than a complete copy of the dataset, to help you manage space efficiency on your server. With cloud tiering, infrequently used or accessed files can be tiered to Azure Files.
File2: Endpoint1, Endpoint2, and Endpoint3
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-cloud-tiering

SecExams

Community Discussion

Question #399

SecExams

HOTSPOT -

You have several Azure virtual machines on a virtual network named VNet1.

You configure an Azure Storage account as shown in the following exhibit.

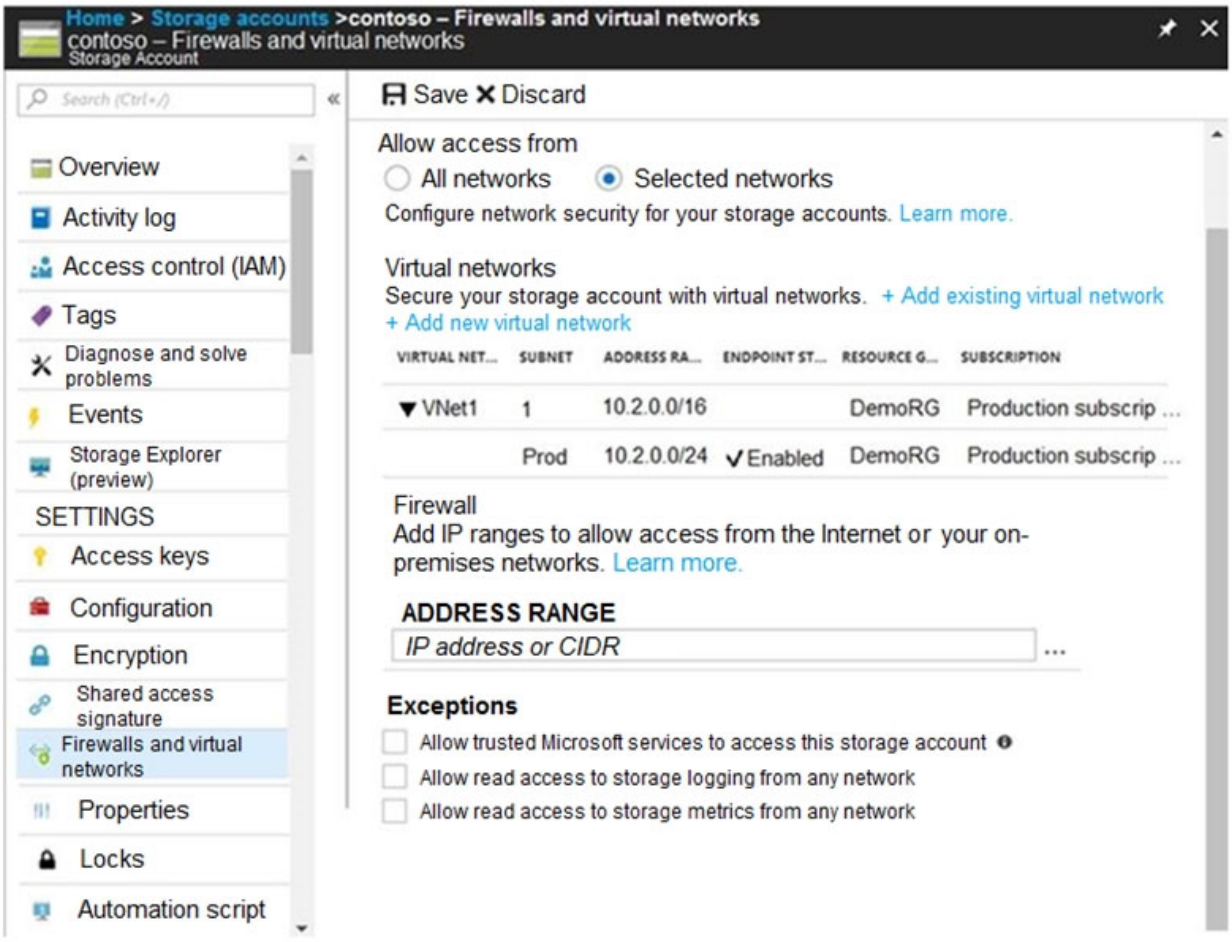

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

The virtual machines on the 10.2.9.0/24 subnet will have network connectivity to the file shares in the storage account **[answer choice]**.

- always
- during a backup
- never

Azure Backup will be able to back up the unmanaged hard disks of the virtual machines in the storage account **[answer choice]**.

- always
- during a backup
- never

Explanation

Correct Answer:

Answer Area

The virtual machines on the 10.2.9.0/24 subnet will have network connectivity to the file shares in the storage account **[answer choice]**.

- always
- during a backup
- never

Azure Backup will be able to back up the unmanaged hard disks of the virtual machines in the storage account **[answer choice]**.

- always
- during a backup
- never

Box 1: never -
The 10.2.9.0/24 subnet is not whitelisted.

Box 2: never -
After you configure firewall and virtual network settings for your storage account, select Allow trusted Microsoft services to access this storage account as an exception to enable Azure Backup service to access the network restricted storage account.

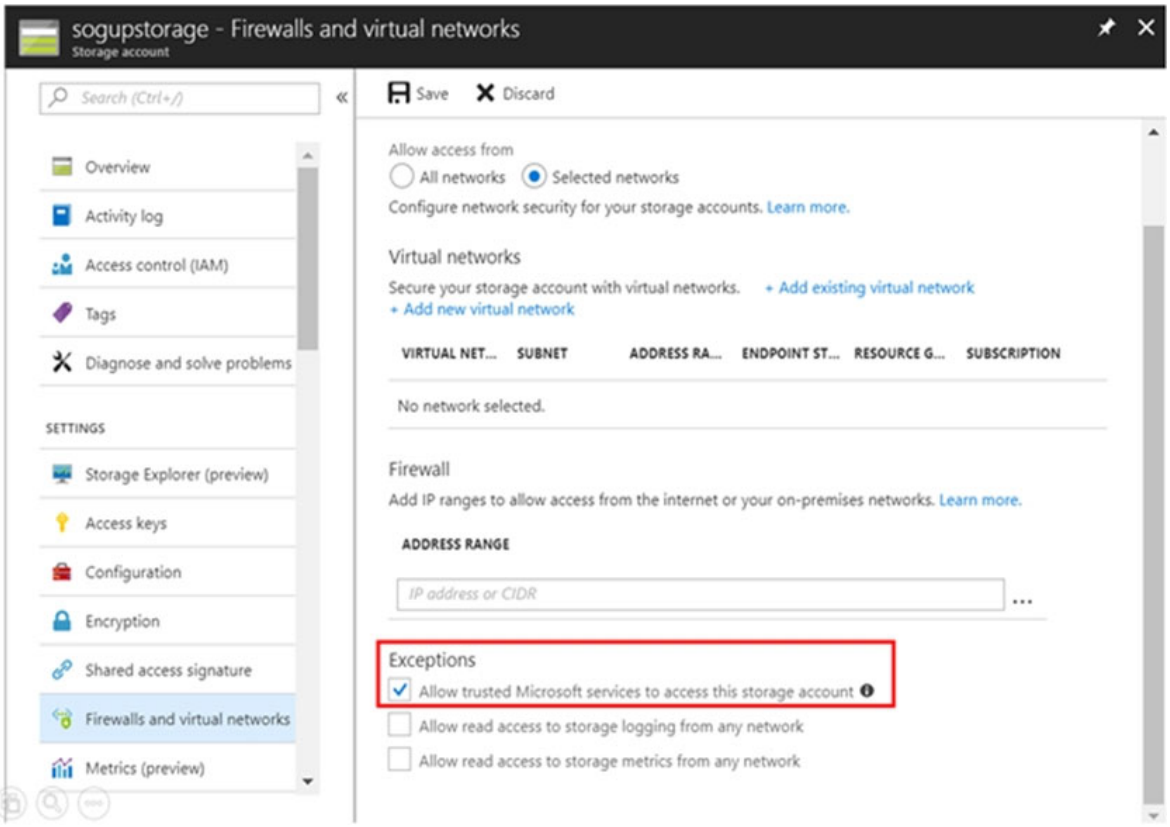

Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-use-files-windows

https://azure.microsoft.com/en-us/blog/azure-backup-now-supports-storage-accounts-secured-with-azure-storage-firewalls-and-virtual-networks/

Community Discussion

Question #400

HOTSPOT -

You have a sync group named Sync1 that has a cloud endpoint. The cloud endpoint includes a file named File1.txt.

Your on-premises network contains servers that run Windows Server 2016. The servers are configured as shown in the following table.

Name	Share	Share contents
Server1	Share1	File1.txt, File2.txt
Server2	Share2	File2.txt, File3.txt

You add Share1 as an endpoint for Sync1. One hour later, you add Share2 as an endpoint for Sync1.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
On the cloud endpoint, File1.txt is overwritten by File1.txt from Share1.	○	○
On Server1, File1.txt is overwritten by File1.txt from the cloud endpoint.	○	○
File1.txt from Share1 replicates to Share2.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
On the cloud endpoint, File1.txt is overwritten by File1.txt from Share1.	○	○
On Server1, File1.txt is overwritten by File1.txt from the cloud endpoint.	○	○
File1.txt from Share1 replicates to Share2.	○	○

Box 1: Yes -
If you add an Azure file share that has an existing set of files as a cloud endpoint to a sync group, the existing files are merged with any other files that are already on other endpoints in the sync group.

Box 2: No -

Box 3: Yes -
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-planning

Community Discussion

files are never over written. So it will N N Y.

Question #401

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Kind	Performance	Replication	Access tier
storage1	Storage (general purpose v1)	Premium	Geo-redundant storage (GRS)	*None*
storage2	StorageV2 (general purpose v2)	Standard	Locally-redundant storage (LRS)	Cool
storage3	StorageV2 (general purpose v2)	Premium	Read-access geo-redundant storage (RA-GRS)	Hot
storage4	BlobStorage	Standard	Locally-redundant storage (LRS)	Hot

You need to identify which storage account can be converted to zone-redundant storage (ZRS) replication by requesting a live migration from Azure support.
What should you identify?

A) storage1
B) storage2 (Correct Answer)
C) storage3
D) storage4

Explanation

Correct Answer: B ?
ZRS currently supports standard general-purpose v2, FileStorage and BlockBlobStorage storage account types.
Incorrect Answers:
A, not C: Live migration is supported only for storage accounts that use LRS replication. If your account uses GRS or RA-GRS, then you need to first change your account's replication type to LRS before proceeding. This intermediary step removes the secondary endpoint provided by GRS/RA-GRS.
Also, only standard storage account types support live migration. Premium storage accounts must be migrated manually.
D: ZRS currently supports standard general-purpose v2, FileStorage and BlockBlobStorage storage account types.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy-zrs

Community Discussion

Question #402

You have an Azure subscription that contains a storage account named account1.

You plan to upload the disk files of a virtual machine to account1 from your on-premises network. The on-premises network uses a public IP address space of 131.107.1.0/24.

You plan to use the disk files to provision an Azure virtual machine named VM1. VM1 will be attached to a virtual network named VNet1. VNet1 uses an IP address space of 192.168.0.0/24.

You need to configure account1 to meet the following requirements:

✑ Ensure that you can upload the disk files to account1.

✑ Ensure that you can attach the disks to VM1.

✑ Prevent all other access to account1.

Which two actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

A) From the Networking blade of account1, select Selected networks. (Correct Answer)

B) From the Networking blade of account1, select Allow trusted Microsoft services to access this storage account.

C) From the Networking blade of account1, add the 131.107.1.0/24 IP address range.

D) From the Networking blade of account1, add VNet1.

E) From the Service endpoints blade of VNet1, add a service endpoint. (Correct Answer)

Explanation

Correct Answer: AE ?

A: By default, storage accounts accept connections from clients on any network. To limit access to selected networks, you must first change the default action.

Azure portal -

1. Navigate to the storage account you want to secure.
2. Click on the settings menu called Firewalls and virtual networks.
3. To deny access by default, choose to allow access from 'Selected networks'. To allow traffic from all networks, choose to allow access from 'All networks'.
4. Click Save to apply your changes.

E: Grant access from a Virtual Network
Storage accounts can be configured to allow access only from specific Azure Virtual Networks.
By enabling a Service Endpoint for Azure Storage within the Virtual Network, traffic is ensured an optimal route to the Azure Storage service. The identities of the virtual network and the subnet are also transmitted with each request.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-network-security

Community Discussion

SecExams

Question #403

DRAG DROP -

You have an on-premises file server named Server1 that runs Windows Server 2016.

You have an Azure subscription that contains an Azure file share.

You deploy an Azure File Sync Storage Sync Service, and you create a sync group.

You need to synchronize files from Server1 to Azure.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

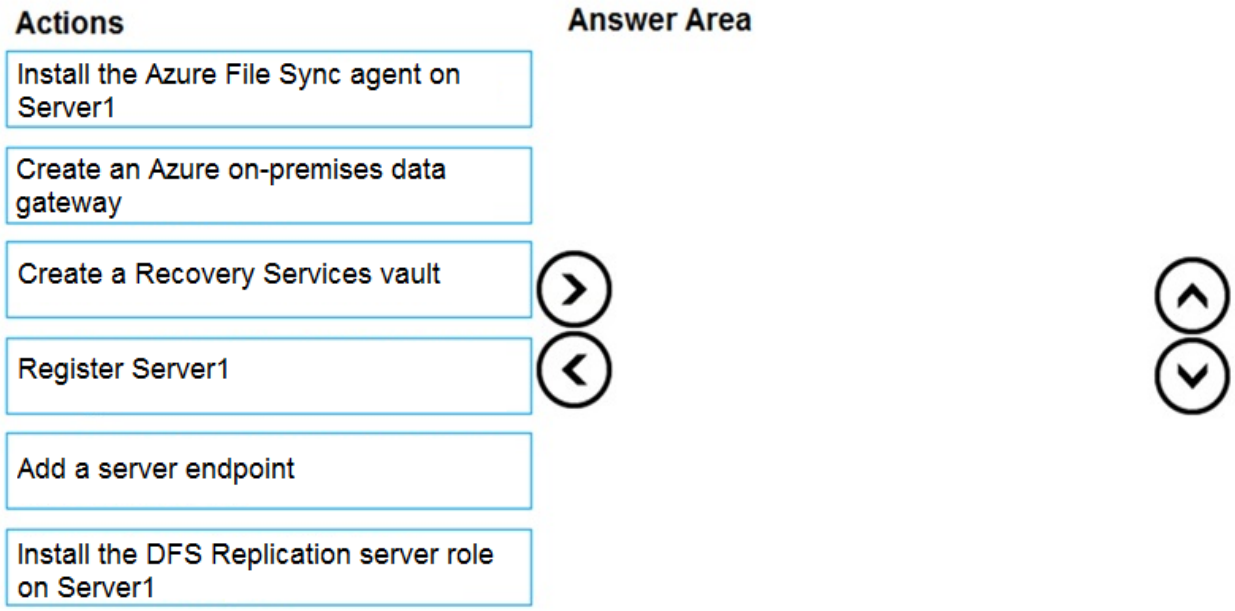

SecExams

Explanation

Correct Answer:

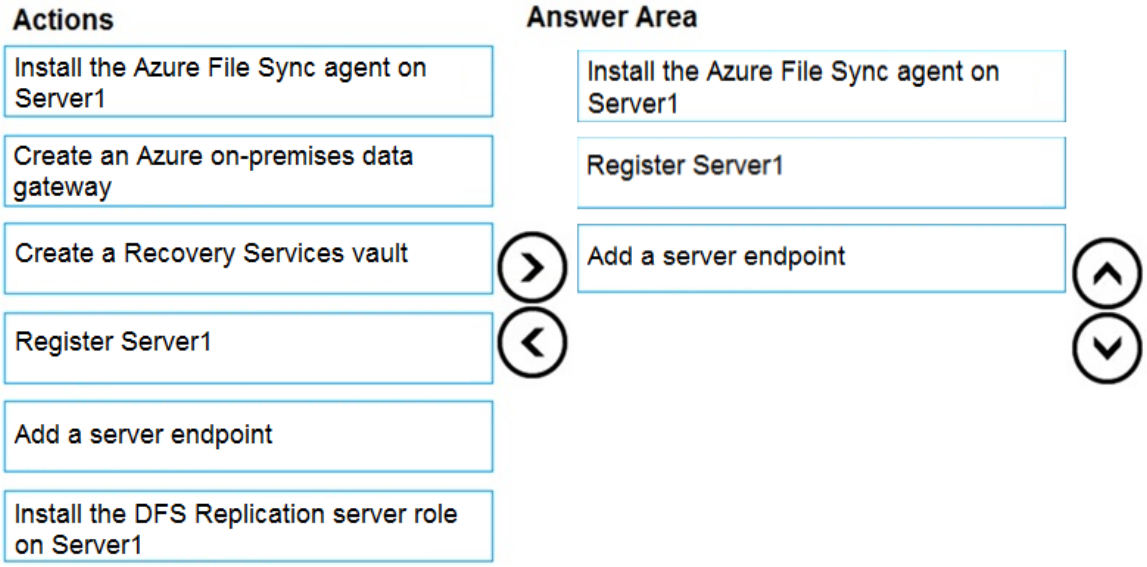

Step 1: Install the Azure File Sync agent on Server1
The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share
Step 2: Register Server1.
Register Windows Server with Storage Sync Service
Registering your Windows Server with a Storage Sync Service establishes a trust relationship between your server (or cluster) and the Storage Sync Service.

Step 3: Add a server endpoint -
Create a sync group and a cloud endpoint.
A sync group defines the sync topology for a set of files. Endpoints within a sync group are kept in sync with each other. A sync group must contain one cloud endpoint, which represents an Azure file share and one or more server endpoints. A server endpoint represents a path on registered server.
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide

Community Discussion

Question #404

HOTSPOT -

You plan to create an Azure Storage account in the Azure region of East US 2.

You need to create a storage account that meets the following requirements:

✑ Replicates synchronously.

✑ Remains available if a single data center in the region fails.

How should you configure the storage account? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

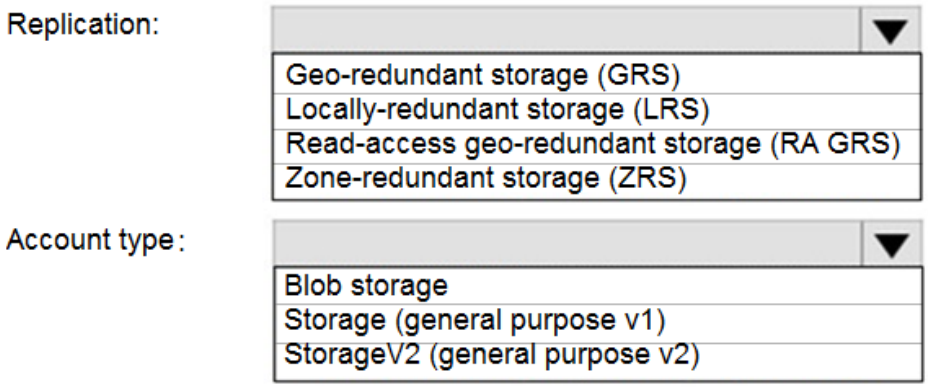

Explanation

Correct Answer:

Answer Area

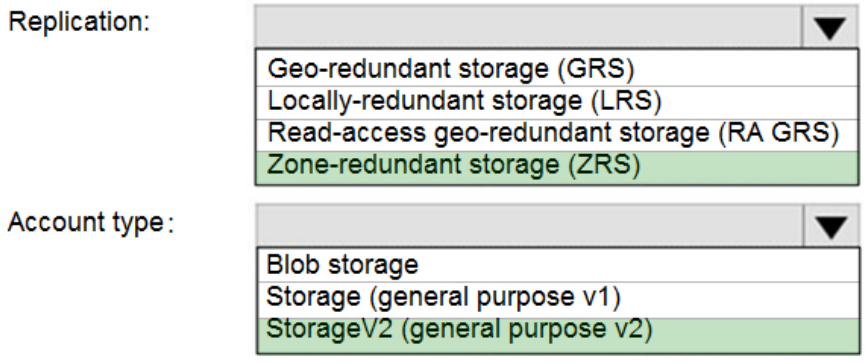

Box 1: Zone-redundant storage (ZRS)

Zone-redundant storage (ZRS) replicates your data synchronously across three storage clusters in a single region.
LRS would not remain available if a data center in the region fails
GRS and RA GRS use asynchronous replication.
Box 2: StorageV2 (general purpose V2)
ZRS only support GPv2.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy-zrs

Community Discussion

Question #405

You plan to use the Azure Import/Export service to copy files to a storage account.
Which two files should you create before you prepare the drives for the import job? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) an XML manifest file
B) a dataset CSV file (Correct Answer)
C) a JSON configuration file
D) a PowerShell PS1 file
E) a driveset CSV file (Correct Answer)

Explanation

Correct Answer: BE ?
B: Modify the dataset.csv file in the root folder where the tool resides. Depending on whether you want to import a file or folder or both, add entries in the dataset.csv file
E: Modify the driveset.csv file in the root folder where the tool resides.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-data-to-files

Community Discussion

Question #406

You have a Recovery Service vault that you use to test backups. The test backups contain two protected virtual machines.
You need to delete the Recovery Services vault.
What should you do first?

A) From the Recovery Service vault, delete the backup data.
B) Modify the disaster recovery properties of each virtual machine.
C) Modify the locks of each virtual machine.
D) From the Recovery Service vault, stop the backup of each backup item. (Correct Answer)

Explanation

Correct Answer: D ?
You can't delete a Recovery Services vault if it is registered to a server and holds backup data. If you try to delete a vault, but can't, the vault is still configured to receive backup data.
Remove vault dependencies and delete vault
In the vault dashboard menu, scroll down to the Protected Items section, and click Backup Items. In this menu, you can stop and delete Azure File Servers, SQL Servers in Azure VM, and Azure virtual machines.

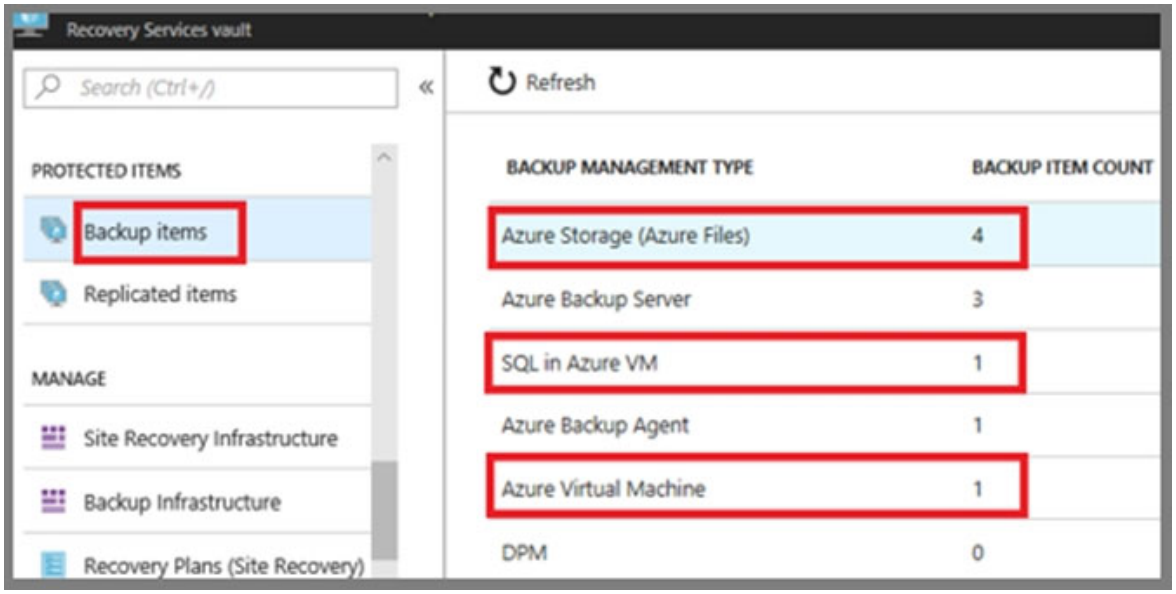

Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-azure-delete-vault

Community Discussion

SecExams

Question #407

HOTSPOT -

You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Location	Resource group
RG1	Resource group	West US	*Not applicable*
RG2	Resource group	West US	*Not applicable*
Vault1	Recovery Services vault	Central US	RG1
Vault2	Recovery Services vault	West US	RG2
VM1	Virtual machine	Central US	RG2
storage1	Storage account	West US	RG1
SQL1	Azure SQL database	East US	RG2

In storage1, you create a blob container named blob1 and a file share named share1.

Which resources can be backed up to Vault1 and Vault2? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Can use Vault1 for backups:

- VM1 only
- VM1 and share1 only
- VM1 and SQL1 only
- VM1, storage1, and SQL1 only
- VM1, blob1, share1, and SQL1

Can use Vault2 for backups:

- storage1 only
- share1 only
- VM1 and share1 only
- blob1 and share1 only
- storage1 and SQL1 only

SecExams

Explanation

Correct Answer:

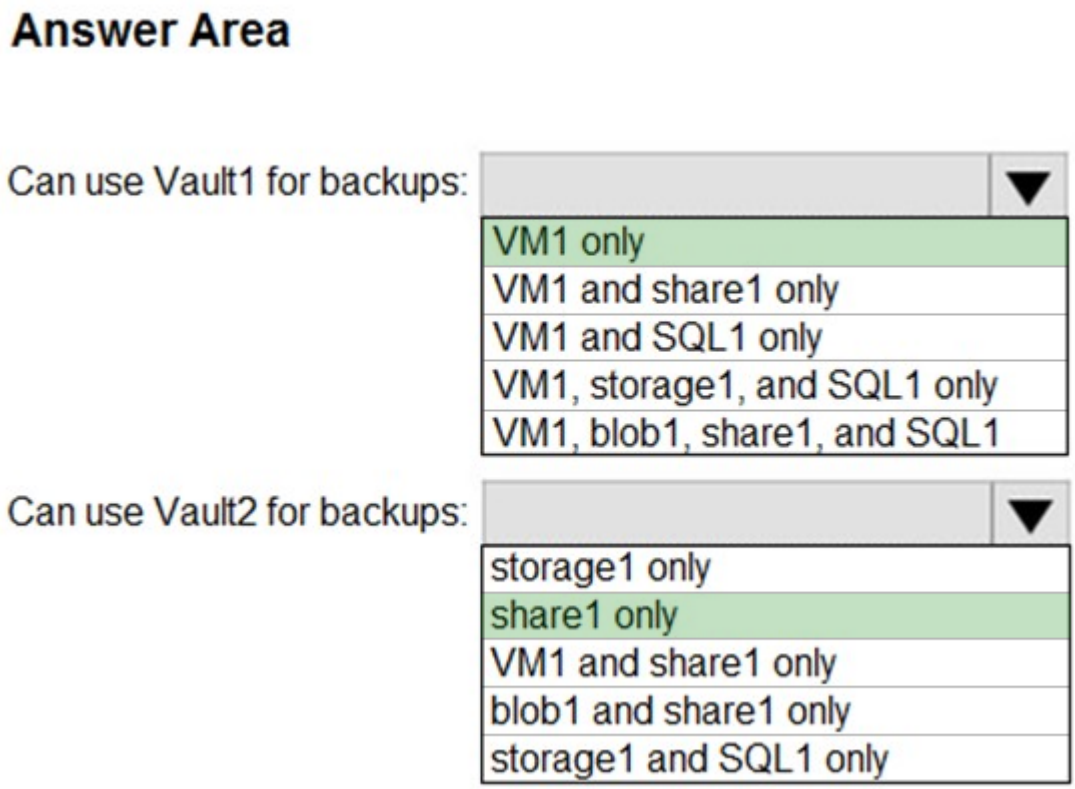

Box 1: VM1 only -
VM1 is in the same region as Vault1.
File1 is not in the same region as Vautl1.
SQL is not in the same region as Vault1.
Blobs cannot be backup up to service vaults.
Note: To create a vault to protect virtual machines, the vault must be in the same region as the virtual machines.
Box 2: Share1 only.
Storage1 is in the same region (West USA) as Vault2. Share1 is in Storage1.
Note: After you select Backup, the Backup pane opens and prompts you to select a storage account from a list of discovered supported storage accounts. They're either associated with this vault or present in the same region as the vault, but not yet associated to any Recovery Services vault.
Reference:
https://docs.microsoft.com/bs-cyrl-ba/azure/backup/backup-create-rs-vault https://docs.microsoft.com/en-us/azure/backup/backup-afs

Community Discussion

Question #408

You have an Azure subscription named Subscription1.
You have 5 TB of data that you need to transfer to Subscription1.
You plan to use an Azure Import/Export job.
What can you use as the destination of the imported data?

A) a virtual machine
B) an Azure Cosmos DB database
C) Azure File Storage (Correct Answer)
D) the Azure File Sync Storage Sync Service

Explanation

Correct Answer: C ?
Azure Import/Export service is used to securely import large amounts of data to Azure Blob storage and Azure Files by shipping disk drives to an Azure datacenter.
The maximum size of an Azure Files Resource of a file share is 5 TB.
Note:
There are several versions of this question in the exam. The question has two correct answers:
1. Azure File Storage
2. Azure Blob Storage
The question can have other incorrect answer options, including the following:
✑ Azure Data Lake Store
✑ Azure SQL Database
✑ Azure Data Factory
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-service

Community Discussion

Question #409

SecExams

HOTSPOT -

You have an Azure subscription.

You create the Azure Storage account shown in the following exhibit.

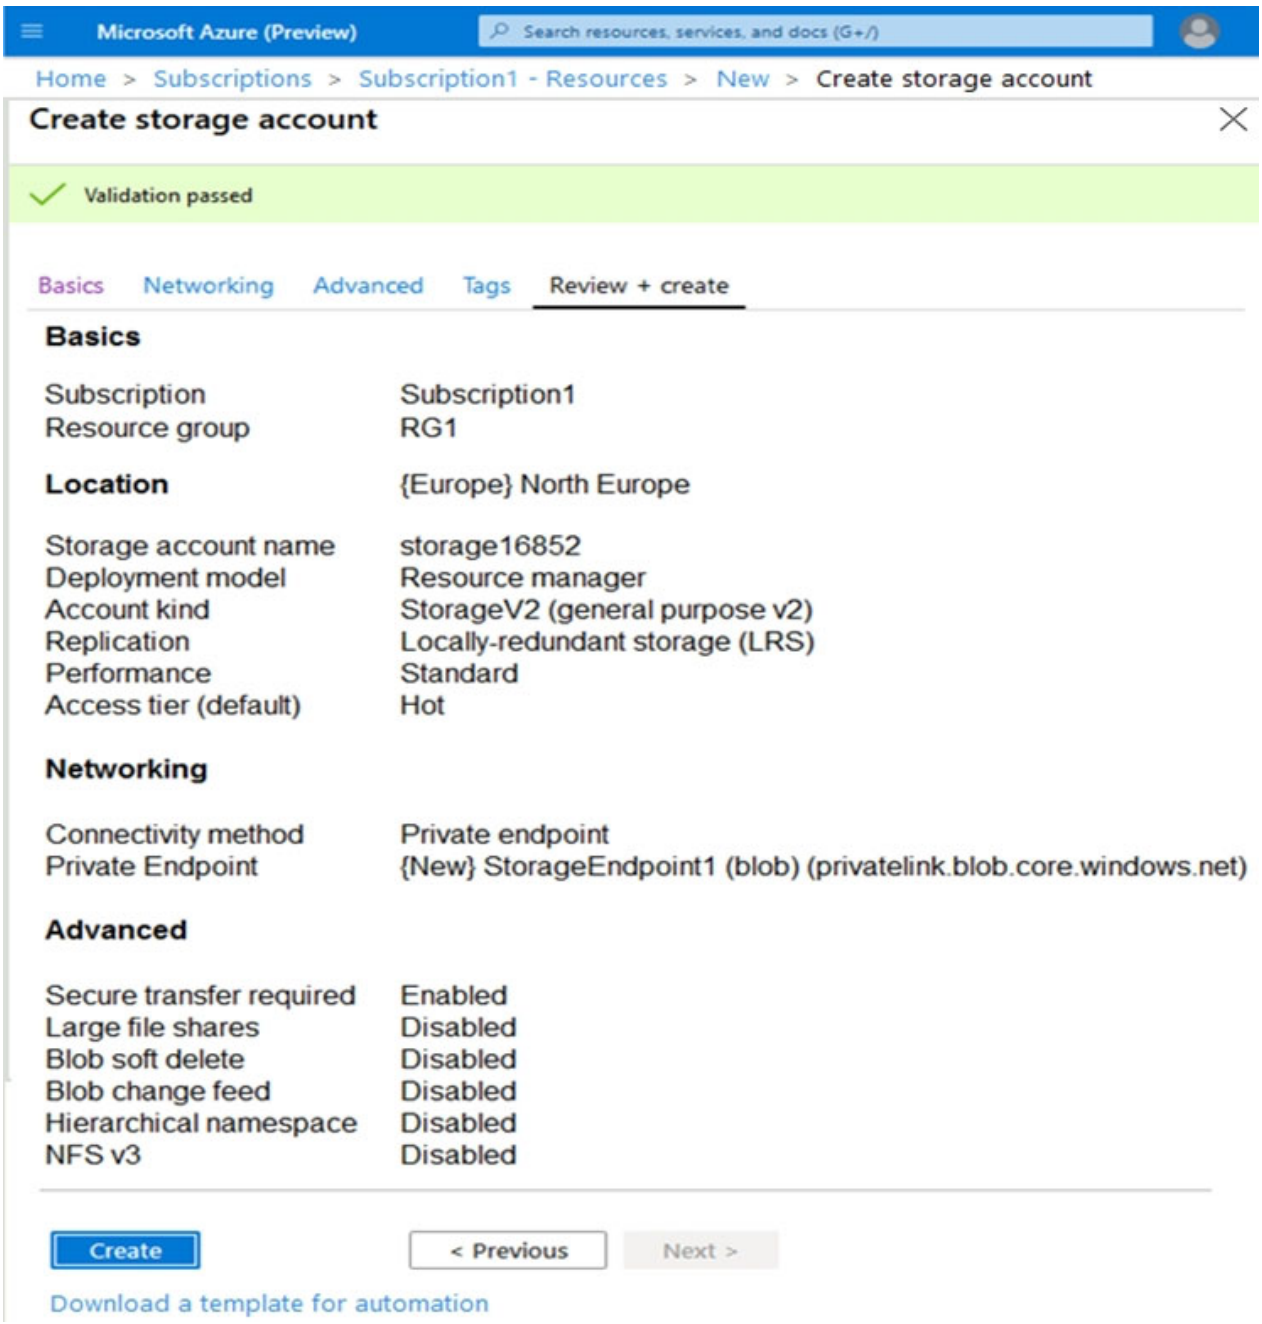

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

The minimum number of copies of the storage account will be **[answer choice]**

- 1
- 2
- 3
- 4

To reduce the cost of infrequently accessed data in the storage account, you must modify the **[answer choice]** setting

- Access tier (default)
- Performance
- Account kind
- Replication

Explanation

Correct Answer:

Answer Area

The minimum number of copies of the storage account will be **[answer choice]**

- 1
- 2
- 3
- 4

To reduce the cost of infrequently accessed data in the storage account, you must modify the **[answer choice]** setting

- Access tier (default)
- Performance
- Account kind
- Replication

Box 1: 3 -
Locally Redundant Storage (LRS) provides highly durable and available storage within a single location (sub region). We maintain an equivalent of 3 copies (replicas) of your data within the primary location as described in our SOSP paper; this ensures that we can recover from common failures (disk, node, rack) without impacting your storage account's availability and durability.

Box 2: Access tier -
Change the access tier from Hot to Cool.
Note: Azure storage offers different access tiers, which allow you to store blob object data in the most cost-effective manner. The available access tiers include:
Hot - Optimized for storing data that is accessed frequently.

Cool - Optimized for storing data that is infrequently accessed and stored for at least 30 days.
Archive - Optimized for storing data that is rarely accessed and stored for at least 180 days with flexible latency requirements (on the order of hours).
Reference:
https://azure.microsoft.com/en-us/blog/data-series-introducing-locally-redundant-storage-for-windows-azure-storage/ https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers

Community Discussion

Question #410

You have an Azure Storage account named storage1.
You plan to use AzCopy to copy data to storage1.
You need to identify the storage services in storage1 to which you can copy the data.
Which storage services should you identify?

A) blob, file, table, and queue
B) blob and file only (Correct Answer)
C) file and table only
D) file only
E) blob, table, and queue only

Explanation

Correct Answer: B ?
AzCopy is a command-line utility that you can use to copy blobs or files to or from a storage account.
Incorrect Answers:
A, C, E: AzCopy does not support table and queue storage services.
D: AzCopy supports file storage services, as well as blob storage services.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10

Community Discussion

Question #411

HOTSPOT -

You have an Azure Storage account named storage1 that uses Azure Blob storage and Azure File storage.

You need to use AzCopy to copy data to the blob storage and file storage in storage1.

Which authentication method should you use for each type of storage? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Blob storage:

- Azure Active Directory (Azure AD) only
- Shared access signatures (SAS) only
- Access keys and shared access signatures (SAS) only
- Azure Active Directory (Azure AD) and shared access signatures (SAS) only
- Azure Active Directory (Azure AD), access keys, and shared access signatures (SAS)

File storage:

- Azure Active Directory (Azure AD) only
- Shared access signatures (SAS) only
- Access keys and shared access signatures (SAS) only
- Azure Active Directory (Azure AD) and shared access signatures (SAS) only
- Azure Active Directory (Azure AD), access keys, and shared access signatures (SAS)

Explanation

Correct Answer:

Answer Area

Blob storage:

- Azure Active Directory (Azure AD) only
- Shared access signatures (SAS) only
- Access keys and shared access signatures (SAS) only
- Azure Active Directory (Azure AD) and shared access signatures (SAS) only
- Azure Active Directory (Azure AD), access keys, and shared access signatures (SAS)

File storage:

- Azure Active Directory (Azure AD) only
- Shared access signatures (SAS) only
- Access keys and shared access signatures (SAS) only
- Azure Active Directory (Azure AD) and shared access signatures (SAS) only
- Azure Active Directory (Azure AD), access keys, and shared access signatures (SAS)

You can provide authorization credentials by using Azure Active Directory (AD), or by using a Shared Access Signature (SAS) token.
Box 1:
Both Azure Active Directory (AD) and Shared Access Signature (SAS) token are supported for Blob storage.
Box 2:
Only Shared Access Signature (SAS) token is supported for File storage.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10

Community Discussion

Question #412

You have an Azure subscription that contains an Azure Storage account.
You plan to create an Azure container instance named container1 that will use a Docker image named Image1. Image1 contains a Microsoft SQL Server instance that requires persistent storage.
You need to configure a storage service for Container1.
What should you use?

A) Azure Files (Correct Answer)
B) Azure Blob storage
C) Azure Queue storage
D) Azure Table storage

Explanation

Correct Answer: A ?
Reference:
https://azure.microsoft.com/en-us/blog/persistent-docker-volumes-with-azure-file-storage/ https://docs.microsoft.com/en-us/azure/aks/concepts-storage

Community Discussion

Question #413

You have an app named App1 that runs on two Azure virtual machines named VM1 and VM2.
You plan to implement an Azure Availability Set for App1. The solution must ensure that App1 is available during planned maintenance of the hardware hosting
VM1 and VM2.
What should you include in the Availability Set?

A) one update domain
B) two fault domains
C) one fault domain
D) two update domains (Correct Answer)

Explanation

Correct Answer: D ?
Microsoft updates, which Microsoft refers to as planned maintenance events, sometimes require that VMs be rebooted to complete the update. To reduce the impact on VMs, the Azure fabric is divided into update domains to ensure that not all VMs are rebooted at the same time.
Incorrect Answers:
A: An update domain is a group of VMs and underlying physical hardware that can be rebooted at the same time.
B, C: A fault domain shares common storage as well as a common power source and network switch. It is used to protect against unplanned system failure.
References:
https://petri.com/understanding-azure-availability-sets
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/tutorial-availability-sets

Community Discussion

Question #414

You have an Azure subscription named Subscription1.
You have 5 TB of data that you need to transfer to Subscription1.
You plan to use an Azure Import/Export job.
What can you use as the destination of the imported data?

A) an Azure Cosmos DB database
B) Azure Blob storage (Correct Answer)
C) Azure Data Lake Store
D) the Azure File Sync Storage Sync Service

Explanation

Correct Answer: B ?
Azure Import/Export service is used to securely import large amounts of data to Azure Blob storage and Azure Files by shipping disk drives to an Azure datacenter.
Note:
There are several versions of this question in the exam. The question has two correct answers:
1. Azure File Storage
2. Azure Blob Storage
The question can have other incorrect answer options, including the following:
✑ a virtual machine
✑ Azure SQL Database
✑ Azure Data Factory
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-service

Community Discussion

Question #415

DRAG DROP -

You have an Azure subscription that contains an Azure file share.

You have an on-premises server named Server1 that runs Windows Server 2016.

You plan to set up Azure File Sync between Server1 and the Azure file share.

You need to prepare the subscription for the planned Azure File Sync.

Which two actions should you perform in the Azure subscription? To answer, drag the appropriate actions to the correct targets. Each action may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Select and Place:

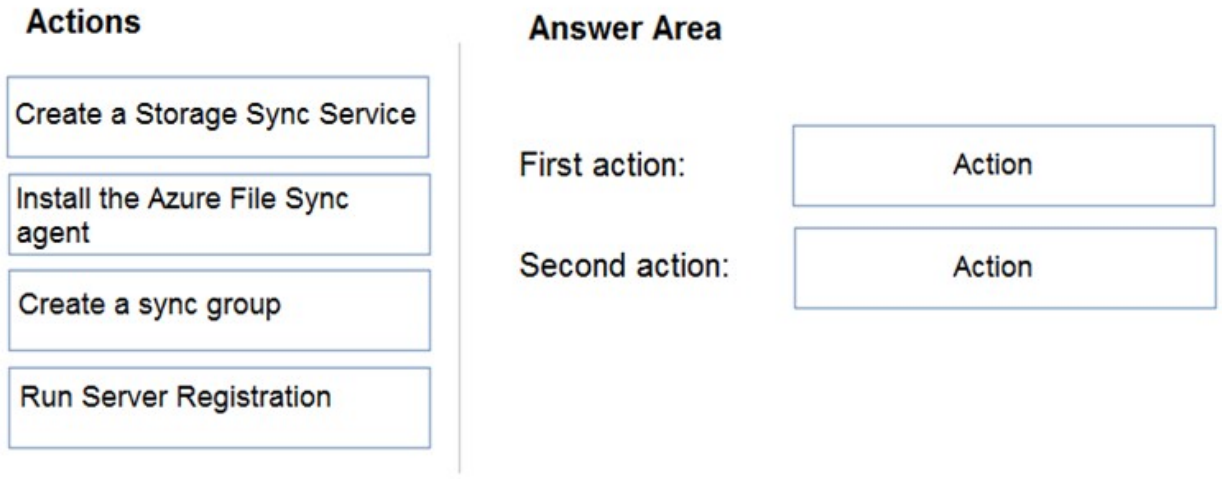

Explanation

Correct Answer:

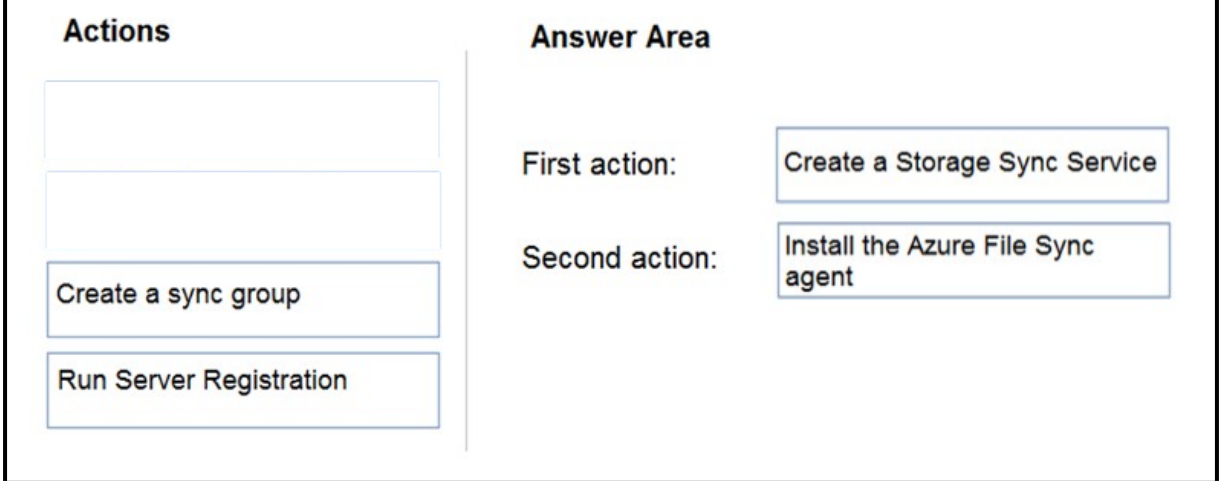

First action: Create a Storage Sync Service
The deployment of Azure File Sync starts with placing a Storage Sync Service resource into a resource group of your selected subscription.
Second action: Install the Azure File Sync agent
The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share.
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide

Community Discussion

SecExams

Question #416

HOTSPOT -

You have an Azure subscription that contains the file shares shown in the following table.

Name	Location
share1	West US
share2	West US
share3	East US

You have the on-premises file shares shown in the following table.

Name	Server	Path
data1	Server1	D:\Folder1
data2	Server2	E:\Folder2
data3	Server3	E:\Folder2

You create an Azure file sync group named Sync1 and perform the following actions:

- ✑ Add share1 as the cloud endpoint for Sync1.
- ✑ Add data1 as a server endpoint for Sync1.
- ✑ Register Server1 and Server2 to Sync1.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can add share3 as an additional cloud endpoint for Sync1.	○	○
You can add data2 as an additional server endpoint for Sync1.	○	○
You can add data3 as an additional server endpoint for Sync1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can add share3 as an additional cloud endpoint for Sync1.	○	●
You can add data2 as an additional server endpoint for Sync1.	●	○
You can add data3 as an additional server endpoint for Sync1.	○	●

Box 1: No -
A sync group must contain one cloud endpoint, which represents an Azure file share and one or more server endpoints.

Box 2: Yes -
Data2 is located on Server2 which is registered to Sync1.

Box 3: No -
Data3 is located on Server3 which is not registered to Sync1.
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide?tabs=azure-portal%2Cproactive-portal#create-a-sync-group-and-a- cloud-endpoint

Community Discussion

Question #417

HOTSPOT -

You have an Azure subscription named Subscription1 that contains the resources shown in the following table:

Name	Type	Location	Resource group
RG1	Resource group	East US	*Not applicable*
RG2	Resource group	West US	*Not applicable*
Vault1	Recovery Services vault	West Europe	RG1
storage1	Storage account	East US	RG2
storage2	Storage account	West US	RG1
storage3	Storage account	West Europe	RG2
Analytics1	Log Analytics workspace	East US	RG1
Analytics2	Log Analytics workspace	West US	RG2
Analytics3	Log Analytics workspace	West Europe	RG1

You plan to configure Azure Backup reports for Vault1.

You are configuring the Diagnostics settings for the AzureBackupReports log.

Which storage accounts and which Log Analytics workspaces can you use for the Azure Backup reports of Vault1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Storage accounts:

- storage1 only
- storage2 only
- storage3 only
- storage1, storage2, and storage3

Log Analytics workspaces:

- Analytics1 only
- Analytics2 only
- Analytics3 only
- Analytics1, Analytics2, and Analytics3

Explanation

Correct Answer:

Answer Area

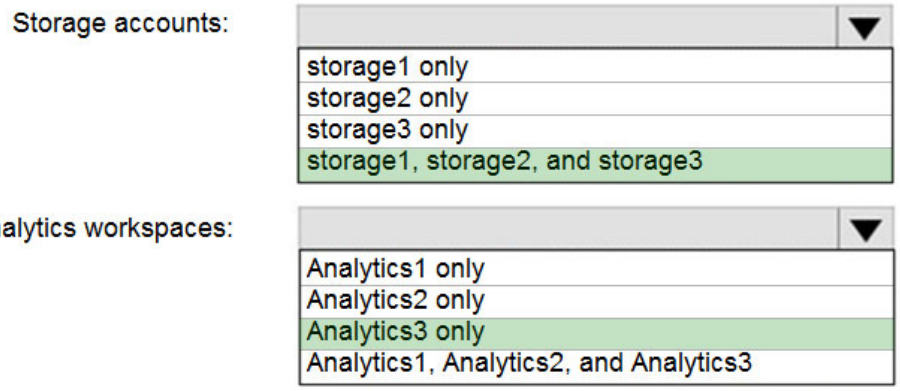

Box 1: storage1, storage2, and storage3
The location and subscription where this Log Analytics workspace can be created is independent of the location and subscription where your vaults exist.

Box 2: Analytics3 -
Vault1 and Analytics3 are both in West Europe.
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-azure-configure-reports

Community Discussion

SecExams

Question #418

HOTSPOT -

You have an Azure subscription that contains the storage accounts shown in the following exhibit.

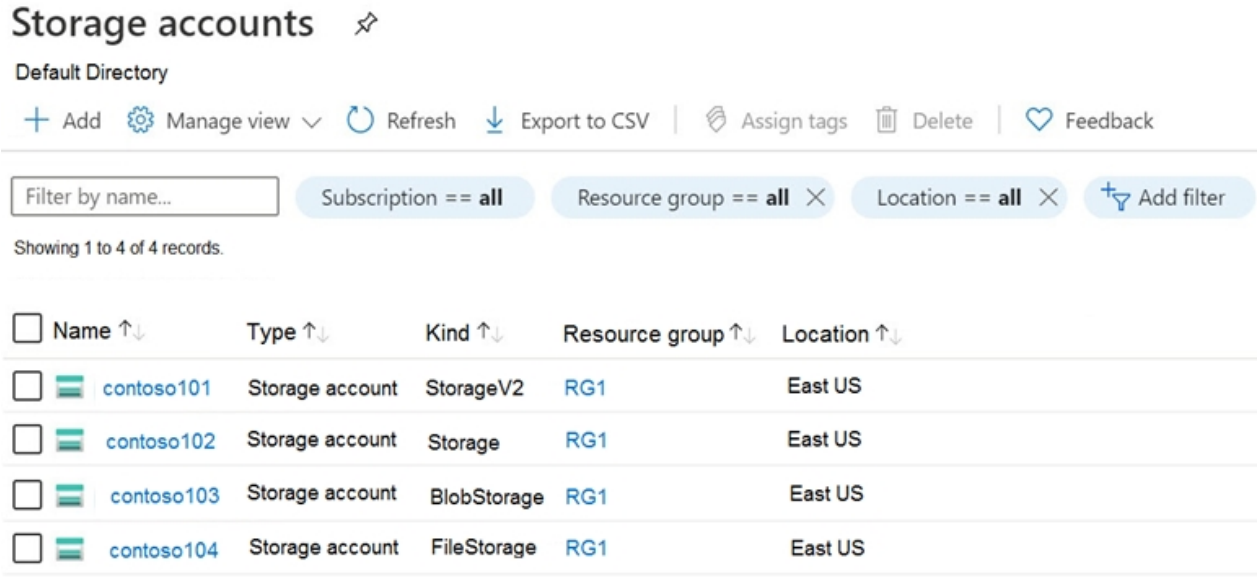

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

You can create a premium file share in

- contoso101only
- contoso104 only
- contoso101 or contoso104 only
- contoso101, contoso102, or contoso104 only
- contoso101, contoso102, contoso103, or contoso104

You can use the Archive access tier in

- contoso101only
- contoso101 or contoso103 only
- contoso101, contoso102, and contoso103 only
- contoso101, contoso102, and contoso104 only
- contoso101, contoso102, contoso103, and contoso104

Explanation

Correct Answer:

Answer Area

You can create a premium file share in

- contoso101only
- contoso104 only
- contoso101 or contoso104 only
- contoso101, contoso102, or contoso104 only
- contoso101, contoso102, contoso103, or contoso104

You can use the Archive access tier in

- contoso101only
- contoso101 or contoso103 only
- contoso101, contoso102, and contoso103 only
- contoso101, contoso102, and contoso104 only
- contoso101, contoso102, contoso103, and contoso104

Box 1: contoso104 only -
Premium file shares are hosted in a special purpose storage account kind, called a FileStorage account.
Box 2: contoso101, contoso102, and contos103 only
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-create-premium-fileshare?tabs=azure-portal https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers

Community Discussion

SecExams

Question #419

SecExams

HOTSPOT -

You have an Azure subscription named Subscription1.

In Subscription1, you create an Azure file share named share1.

You create a shared access signature (SAS) named SAS1 as shown in the following exhibit:

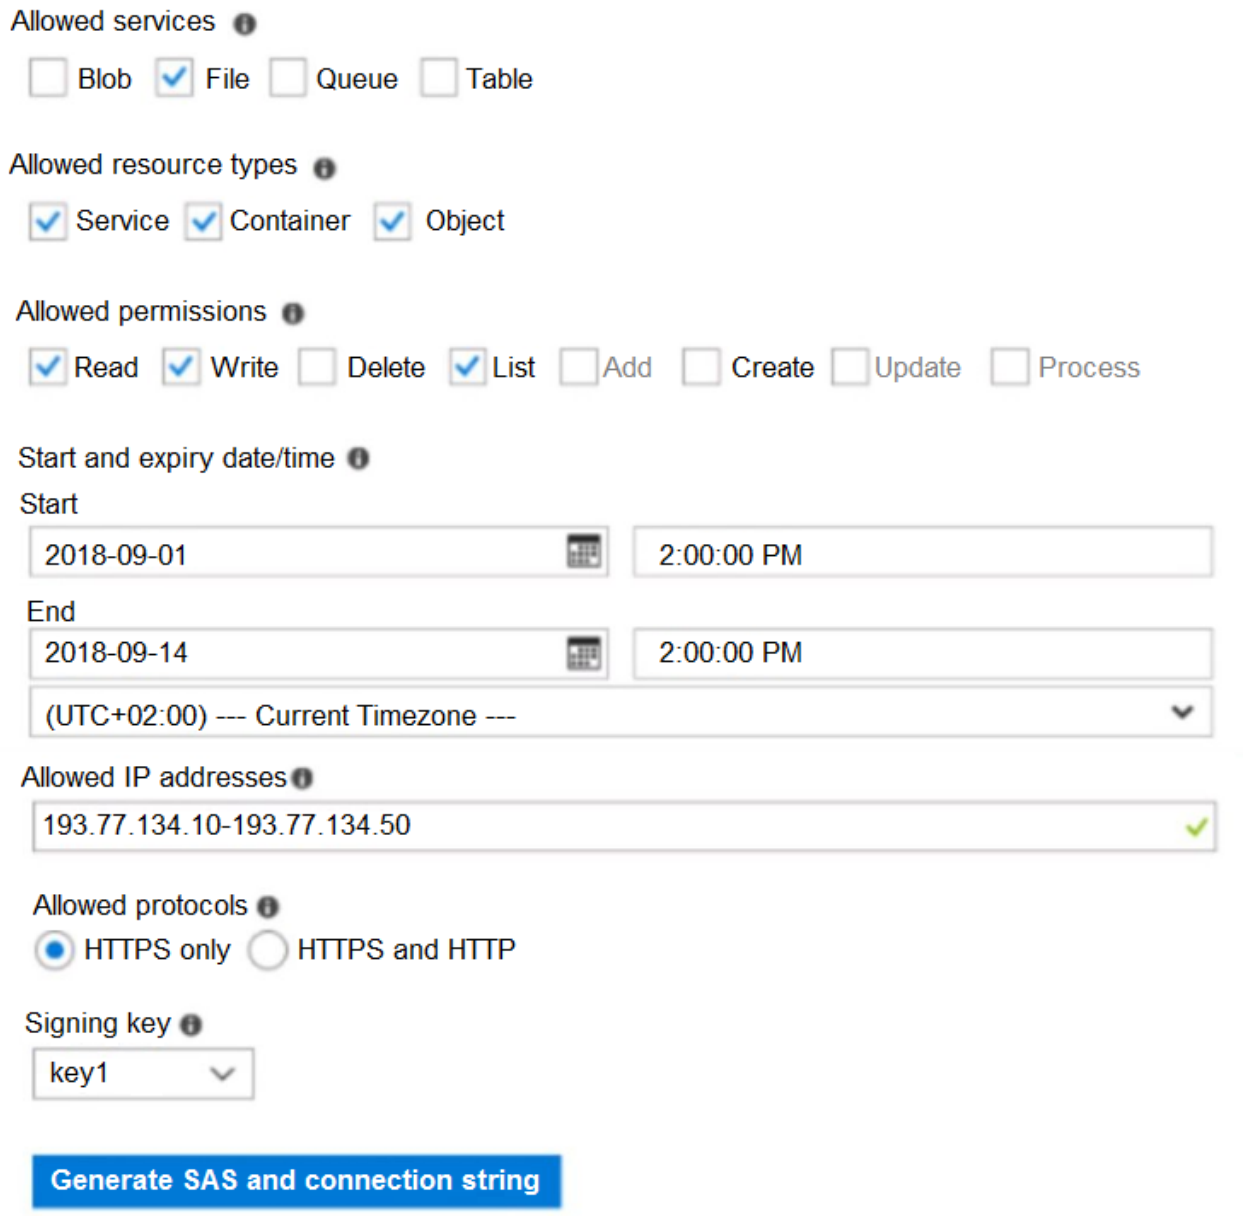

To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

If on September 2, 2018, you run Microsoft Azure Storage Explorer on a computer that has an IP address of 193.77.134.1, and you use SAS1 to connec to the storage account, you **[answer choice].**

- will be prompted for credentials
- will have no access
- will have read, write, and list access
- will have read-only access

If on September 10, 2018, you run the net use command on a computer that has an IP address of 193.77.134.50, and you use SAS1 as the password to connect to share1, you **[answer choice].**

- will be prompted for credentials
- will have no access
- will have read, write, and list access
- will have read-only access

Explanation

Correct Answer:

Answer Area

If on September 2, 2018, you run Microsoft Azure Storage Explorer on a computer that has an IP address of 193.77.134.1, and you use SAS1 to connec to the storage account, you **[answer choice].**

- will be prompted for credentials
- **will have no access**
- will have read, write, and list access
- will have read-only access

If on September 10, 2018, you run the net use command on a computer that has an IP address of 193.77.134.50, and you use SAS1 as the password to connect to share1, you **[answer choice].**

- will be prompted for credentials
- will have no access
- **will have read, write, and list access**
- will have read-only access

Box 1: Will have no access -
The IP 193.77.134.1 does not have access on the SAS.
Box 2: Will have read, write, and list access
The net use command is used to connect to file shares.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-dotnet-shared-access-signature-part-1 https://docs.microsoft.com/en-us/azure/vs-azure-tools-storage-manage-with-storage-explorer?tabs=windows

Community Discussion

Question #420

You have two Azure virtual machines named VM1 and VM2. You have two Recovery Services vaults named RSV1 and RSV2.
VM2 is backed up to RSV1.
You need to back up VM2 to RSV2.
What should you do first?

A) From the RSV1 blade, click Backup items and stop the VM2 backup
B) From the RSV2 blade, click Backup. From the Backup blade, select the backup for the virtual machine, and then click Backup
C) From the VM2 blade, click Disaster recovery, click Replication settings, and then select RSV2 as the Recovery Services vault (Correct Answer)
D) From the RSV1 blade, click Backup Jobs and export the VM2 job

Explanation

Correct Answer: C ?
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-azure-vms-first-look-arm

Community Discussion

Question #421

You have a general-purpose v1 Azure Storage account named storage1 that uses locally-redundant storage (LRS).
You need to ensure that the data in the storage account is protected if a zone fails. The solution must minimize costs and administrative effort.
What should you do first?

A) Create a new storage account.
B) Configure object replication rules.
C) Upgrade the account to general-purpose v2. (Correct Answer)
D) Modify the Replication setting of storage1.

Explanation

Correct Answer: C ?
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy

Community Discussion

Question #422

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Type	Performance
storage1	StorageV2	Standard
storage2	BlobStorage	Standard
storage3	BlockBlobStorage	Premium
storage4	FileStorage	Premium

You plan to manage the data stored in the accounts by using lifecycle management rules.
To which storage accounts can you apply lifecycle management rules?

A) storage1 only
B) storage1 and storage2 only
C) storage3 and storage4 only
D) storage1, storage2, and storage3 only (Correct Answer)
E) storage1, storage2, storage3, and storage4

Explanation

Correct Answer: D ?
Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/storage-lifecycle-management-concepts?tabs=azure-portal

Community Discussion

Question #423

You create an Azure Storage account named contosostorage.
You plan to create a file share named data.
Users need to map a drive to the data file share from home computers that run Windows 10.
Which outbound port should you open between the home computers and the data file share?

A) 80
B) 443
C) 445 (Correct Answer)
D) 3389

Explanation

Correct Answer: C ?
Server Message Block (SMB) is used to connect to an Azure file share over the internet.
The SMB protocol requires TCP port 445 to be open.
Incorrect Answers:
A: Port 80 is required for HTTP to a web server
B: Port 443 is required for HTTPS to a web server
D: Port 3389443 is required for Remote desktop protocol (RDP) connections
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-use-files-windows

Community Discussion

Question #424

You have an Azure subscription named Subscription1.
You have 5 TB of data that you need to transfer to Subscription1.
You plan to use an Azure Import/Export job.
What can you use as the destination of the imported data?

A) Azure File Storage (Correct Answer)
B) an Azure Cosmos DB database
C) Azure Data Factory
D) Azure SQL Database

Explanation

Correct Answer: A ?
Reference:
https://docs.microsoft.com/en-us/azure/import-export/storage-import-export-service

Community Discussion

SecExams

Question #425

SecExams

HOTSPOT -

You have an Azure subscription that contains an Azure Storage account named storageaccount1.

You export storageaccount1 as an Azure Resource Manager template. The template contains the following sections.

```
{
        "type": "Microsoft.Storage/storageAccount",
        "apiVersion": "2019-06-01",
        "name": "storageaccount1",
        "location": "eastus",
        "sku": {
            "name": "Standard_LRS",
            "tier": "Standard"
        },
        "kind": "StorageV2",
        "properties": {
            "networkAcls": {
                "bypass": "AzureServices",
                "virtualNetworkRules": [],
                "ipRules": [],
                "defaultAction": "Allow",
            },
            "supportsHttpsTrafficOnly": true,
            "encryption": {
                "services": {
                    "file": {
                        "keyType": "Account",
                        "enabled": true
                    }
                    "blob": {
                        "keyType": "Account",
                        "enabled": true
                    }
                },
                "keySource": "Microsoft.Storage"
            },
            "accessTier": "Hot"
        }
    },
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point

Hot Area:

Answer Area

Statements	Yes	No
A server that has a public IP address of 131.107.103.10 can access storageaccount1	○	○
Individual blobs in storageaccount1 can be set to use the archive tier	○	○
Global administrations in Azure Active Directory (Azure AD) can access a file share hosted in storageaccount1 by using their Azure AD credentials	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
A server that has a public IP address of 131.107.103.10 can access storageaccount1	○	○
Individual blobs in storageaccount1 can be set to use the archive tier	○	○
Global administrations in Azure Active Directory (Azure AD) can access a file share hosted in storageaccount1 by using their Azure AD credentials	○	○

Reference:
https://docs.microsoft.com/en-us/azure/templates/microsoft.storage/storageaccounts?tabs=json

Community Discussion

Question #426

You have an Azure subscription that contains a storage account named storage1.
You have the devices shown in the following table.

Name	Platform
Device1	Windows 10
Device2	Linux
Device3	macOS

From which devices can you use AzCopy to copy data to storage1?

A) Device 1 only
B) Device1, Device2 and Device3 (Correct Answer)
C) Device1 and Device2 only
D) Device1 and Device3 only

Explanation

Correct Answer: B ?

Community Discussion

Question #427

You have an Azure Storage account named storage1 that contains a blob container named container1.
You need to prevent new content added to container1 from being modified for one year.
What should you configure?

A) the access tier
B) an access policy (Correct Answer)
C) the Access control (IAM) settings

D) the access level

Explanation

Correct Answer: B ?
Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/immutable-storage-overview?tabs=azure-portal

Community Discussion

SecExams

Question #428

HOTSPOT -

You have an Azure Storage account named storage1 that contains a blob container. The blob container has a default access tier of Hot. Storage1 contains a container named conainer1.

You create lifecycle management rules in storage1 as shown in the following table.

Name	Rule scope	Blob type	Blob subtype	Rule block	Prefix match
Rule1	Limit blobs by using filters.	Block blobs	Base blobs	If base blobs were not modified for two days, move to archive storage. If base blobs were not modified for nine days, delete the blob.	container1/Dep1
Rule2	Apply to all blobs in storage1.	Block blobs	Base blobs	If base blobs were not modified for three days, move to cool storage. If base blobs were not modified for nine days, move to archive storage.	**Not applicable**

You perform the actions shown in the following table.

Date	Action
October 1	Upload three files named Dep1File1.docx, File2.docx, and File3.docx to container 1.
October 2	Edit Dep1File1.docx and File3.docx.
October 5	Edit File2.docx.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
On October 10, you can read Dep1File1.docx.	○	○
On October 10, you can read File2.docx.	○	○
On October 10, you can read File3.docx.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
On October 10, you can read Dep1File1.docx.	○	○
On October 10, you can read File2.docx.	○	○
On October 10, you can read File3.docx.	○	○

Community Discussion

Question #429

You are configuring Azure Active Directory (Azure AD) authentication for an Azure Storage account named storage1.
You need to ensure that the members of a group named Group1 can upload files by using the Azure portal. The solution must use the principle of least privilege.
Which two roles should you configure for storage1? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Storage Account Contributor
B) Storage Blob Data Contributor (Correct Answer)
C) Reader (Correct Answer)
D) Contributor
E) Storage Blob Data Reader

Explanation

Correct Answer: BC ?
To access blob data in the Azure portal with Azure AD credentials, a user must have the following role assignments:
* A data access role, such as Storage Blob Data Reader or Storage Blob Data Contributor
* The Azure Resource Manager Reader role, at a minimum
The Reader role is an Azure Resource Manager role that permits users to view storage account resources, but not modify them. It does not provide read permissions to data in Azure Storage, but only to account management resources. The Reader role is necessary so that users can navigate to blob containers in the Azure portal.
Note: in order from least to greatest permissions:

The Reader and Data Access role -
The Storage Account Contributor role
The Azure Resource Manager Contributor role
The Azure Resource Manager Owner role
Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/assign-azure-role-data-access

Community Discussion

Question #430

HOTSPOT -
You have an Azure Storage account named storage1 that stores images.
You need to create a new storage account and replicate the images in storage1 to the new account by using object replication.
How should you configure the new account? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

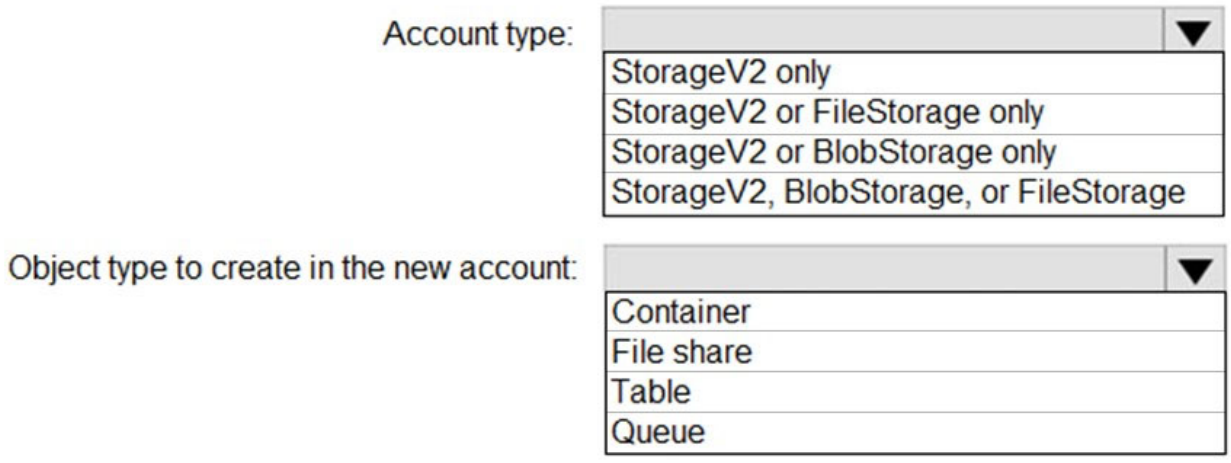

Explanation

Correct Answer:

Answer Area

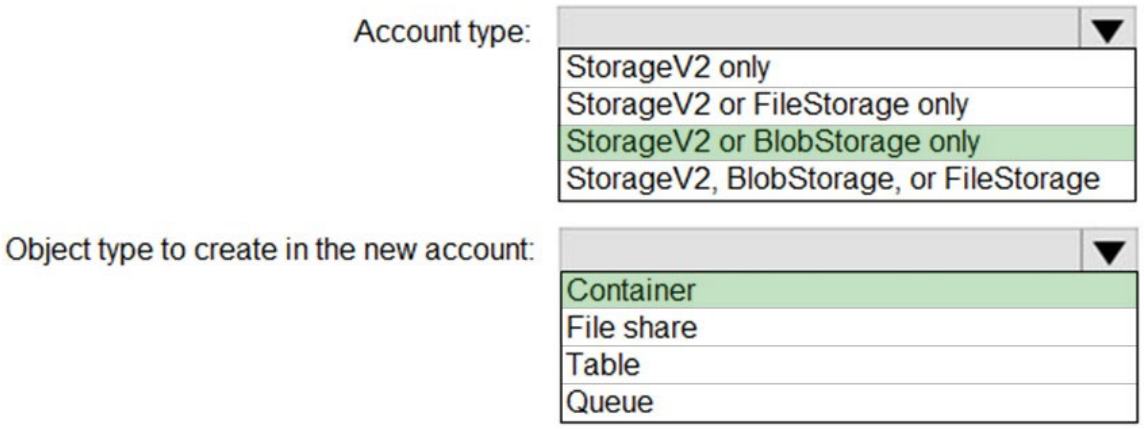

Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/object-replication-overview

Community Discussion

Question #431

You have an on-premises server that contains a folder named D:\Folder1.
You need to copy the contents of D:\Folder1 to the public container in an Azure Storage account named contosodata.
Which command should you run?

A) https://contosodata.blob.core.windows.net/public
B) azcopy sync D:\folder1 https://contosodata.blob.core.windows.net/public --snapshot
C) azcopy copy D:\folder1 https://contosodata.blob.core.windows.net/public --recursive (Correct Answer)
D) az storage blob copy start-batch D:\Folder1 https://contosodata.blob.core.windows.net/public

Explanation

Correct Answer: C ?
The azcopy copy command copies a directory (and all of the files in that directory) to a blob container. The result is a directory in the container by the same name.
Incorrect Answers:
B: The azcopy sync command replicates the source location to the destination location.

However, the file is skipped if the last modified time in the destination is more recent.
D: The az storage blob copy start-batch command copies multiple blobs to a blob container.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-blobs
https://docs.microsoft.com/en-us/azure/storage/common/storage-ref-azcopy-copy

Community Discussion

Question #432

You have an Azure subscription.
In the Azure portal, you plan to create a storage account named storage1 that will have the following settings:

- ✑ Performance: Standard
- ✑ Replication: Zone-redundant storage (ZRS)
- ✑ Access tier (default): Cool
- ✑ Hierarchical namespace: Disabled

You need to ensure that you can set Account kind for storage1 to BlockBlobStorage.
Which setting should you modify first?

A) Performance (Correct Answer)
B) Replication
C) Access tier (default)
D) Hierarchical namespace

Explanation

Correct Answer: A ?
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-account-overview
https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-performance-tiers

Community Discussion

Question #433

DRAG DROP -

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Azure Active Directory (Azure AD) authentication	Contents
storage1	Enabled	A blob container named container1 that has a public access level of No public access
storage2	Enabled	A file share named share1

You plan to use AzCopy to copy a blob from container1 directly to share1.

You need to identify which authentication method to use when you use AzCopy.

What should you identify for each account? To answer, drag the appropriate authentication methods to the correct accounts. Each method may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Select and Place:

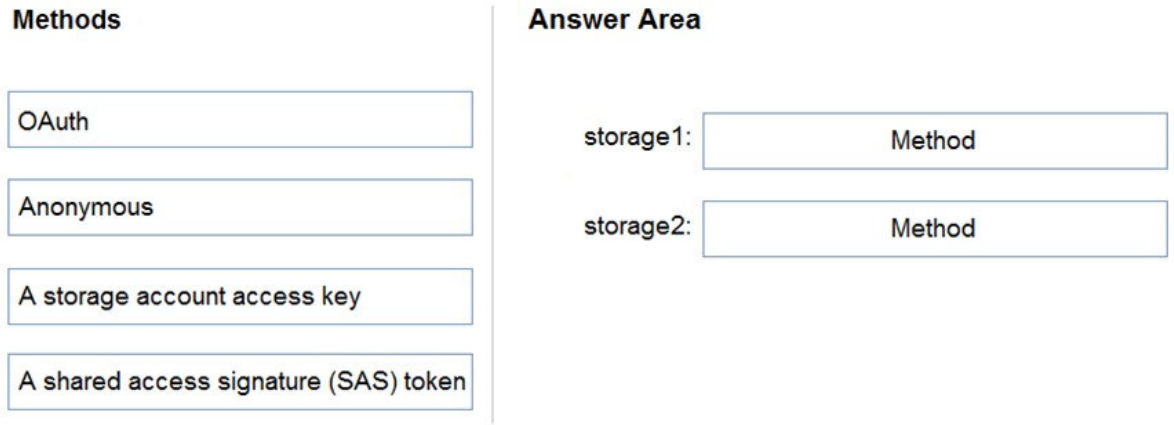

Explanation

Correct Answer:

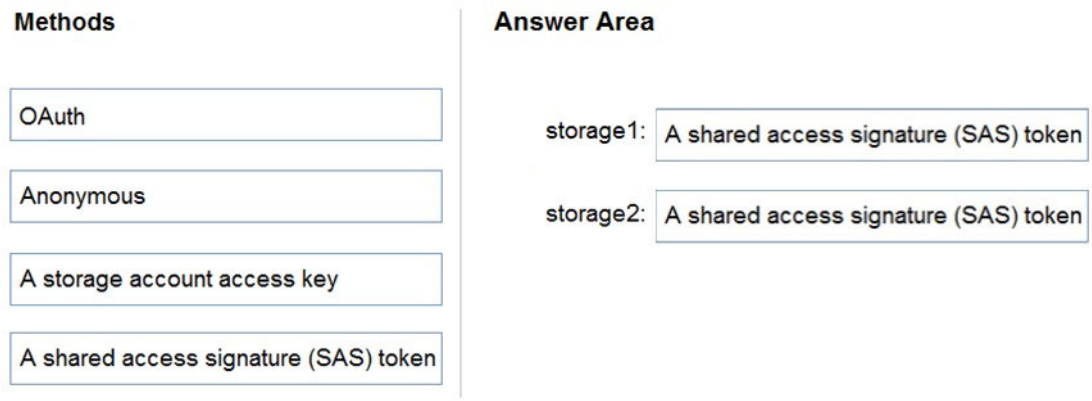

Box 1: A shared access signature (SAS) token.
You can provide authorization credentials by using Azure Active Directory (AD), or by using a Shared Access Signature (SAS) token.
For Blob storage you can use Azure AD & SAS.
Note: In the current release, if you plan to copy blobs between storage accounts, you'll have to append a SAS token to each source URL. You can omit the SAS token only from the destination URL.
Box 2: A shared access signature (SAS) token.
For File storage you can only use SAS.
Reference:
https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10

Community Discussion

Question #434

You create an Azure Storage account.
You plan to add 10 blob containers to the storage account.
For one of the containers, you need to use a different key to encrypt data at rest.
What should you do before you create the container?

A) Generate a shared access signature (SAS).
B) Modify the minimum TLS version.
C) Rotate the access keys.
D) Create an encryption scope. (Correct Answer)

Explanation

Correct Answer: D ?
Encryption scopes enable you to manage encryption with a key that is scoped to a container or an individual blob. You can use encryption scopes to create secure boundaries between data that resides in the same storage account but belongs to different customers.
Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/encryption-scope-overview

Community Discussion

Question #435

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You deploy an Azure Kubernetes Service (AKS) cluster named AKS1.
You need to deploy a YAML file to AKS1.
Solution: From Azure CLI, you run az aks.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Reference:
https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough

Community Discussion

Question #436

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You deploy an Azure Kubernetes Service (AKS) cluster named AKS1.
You need to deploy a YAML file to AKS1.
Solution: From Azure CLI, you run the kubectl client.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
Reference:
https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough

Community Discussion

Question #437

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You deploy an Azure Kubernetes Service (AKS) cluster named AKS1.
You need to deploy a YAML file to AKS1.
Solution: From Azure CLI, you run azcopy.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Reference:
https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough

Community Discussion

Question #438

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1 that runs Windows Server 2016.
You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.
Solution: You create an Azure storage account and configure shared access signatures (SASs). You install the Microsoft Monitoring Agent on VM1. You create an alert in Azure Monitor and specify the storage account as the source.
Does that meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Instead: You create an Azure Log Analytics workspace and configure the data settings. You install the Microsoft Monitoring Agent on VM1. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview

Community Discussion

Question #439

SecExams

HOTSPOT -

You have an Azure subscription named Subscription1. Subscription1 contains the resources in the following table.

Name	Type
RG1	Resource group
RG2	Resource group
VNet1	Virtual network
VNet2	Virtual network

VNet1 is in RG1. VNet2 is in RG2. There is no connectivity between VNet1 and VNet2.

An administrator named Admin1 creates an Azure virtual machine named VM1 in RG1. VM1 uses a disk named Disk1 and connects to VNet1. Admin1 then installs a custom application in VM1.

You need to move the custom application to VNet2. The solution must minimize administrative effort.

Which two actions should you perform? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

First action:

- Create a network interface in RG2.
- Detach a network interface.
- Delete VM1.
- Move a network interface to RG2.

Second action:

- Attach a network interface.
- Create a network interface in RG2.
- Create a new virtual machine.
- Move VM1 to RG2.

Explanation

Correct Answer:

Answer Area

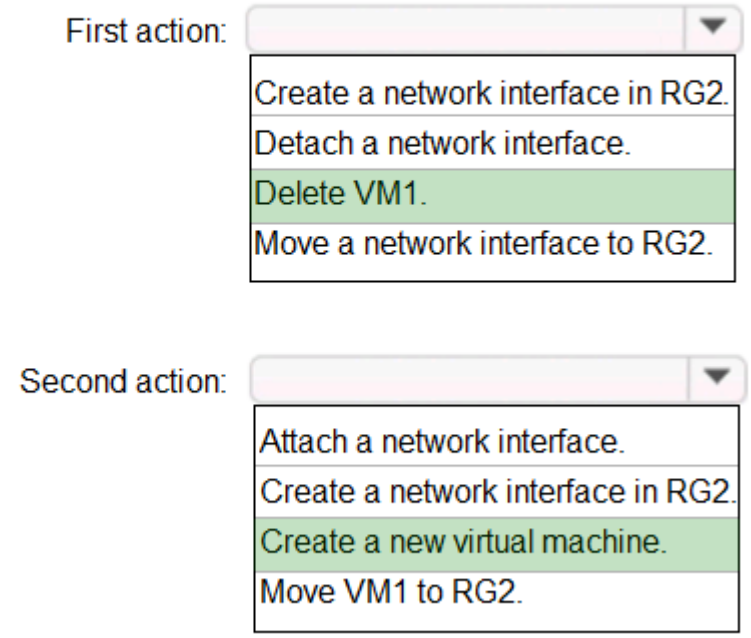

We cannot just move a virtual machine between networks. What we need to do is identify the disk used by the VM, delete the VM itself while retaining the disk, and recreate the VM in the target virtual network and then attach the original disk to it.
Reference:
https://blogs.technet.microsoft.com/canitpro/2014/06/16/step-by-step-move-a-vm-to-a-different-vnet-on-azure/ https://4sysops.com/archives/move-an-azure-vm-to-another-virtual-network-vnet/#migrate-an-azure-vm-between-vnets

Community Discussion

SecExams

Question #440

You download an Azure Resource Manager template based on an existing virtual machine. The template will be used to deploy 100 virtual machines.
You need to modify the template to reference an administrative password. You must prevent the password from being stored in plain text.
What should you create to store the password?

A) an Azure Key Vault and an access policy (Correct Answer)
B) an Azure Storage account and an access policy
C) a Recovery Services vault and a backup policy
D) Azure Active Directory (AD) Identity Protection and an Azure policy

Explanation

Correct Answer: A ?
You can use a template that allows you to deploy a simple Windows VM by retrieving the password that is stored in a Key Vault. Therefore, the password is never put in plain text in the template parameter file.
Reference:
https://azure.microsoft.com/en-us/resources/templates/101-vm-secure-password/

Community Discussion

Question #441

HOTSPOT -

You have the App Service plans shown in the following table.

Name	Operating system	Location
ASP1	Windows	West US
ASP2	Windows	Central US
ASP3	Linux	West US

You plan to create the Azure web apps shown in the following table.

Name	Runtime stack	Location
WebApp1	.NET Core 3.0	West US
WebApp2	ASP.NET 4.7	West US

You need to identify which App Service plans can be used for the web apps.
What should you identify? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

WebApp1:

- ASP1 only
- ASP3 only
- ASP1 and ASP2 only
- ASP1 and ASP3 only
- ASP1, ASP2, and ASP3

WebApp2:

- ASP1 only
- ASP3 only
- ASP1 and ASP2 only
- ASP1 and ASP3 only
- ASP1, ASP2, and ASP3

Explanation

Correct Answer:

Answer Area

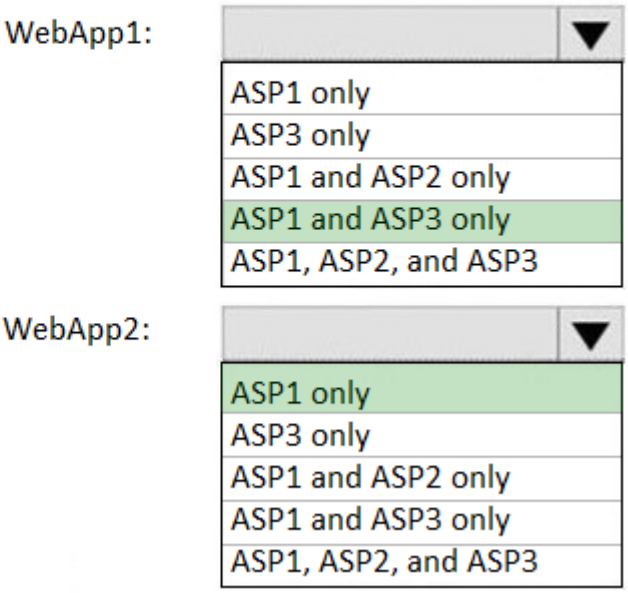

Box 1: ASP1 ASP3 -
Asp1, ASP3: ASP.NET Core apps can be hosted both on Windows or Linux.
Not ASP2: The region in which your app runs is the region of the App Service plan it's in.

Box 2: ASP1 -
ASP.NET apps can be hosted on Windows only.
Reference:
https://docs.microsoft.com/en-us/azure/app-service/quickstart-dotnetcore?pivots=platform-linux https://docs.microsoft.com/en-us/azure/app-service/app-service-plan-manage#

Community Discussion

Question #442

SecExams

HOTSPOT -

You create a virtual machine scale set named Scale1. Scale1 is configured as shown in the following exhibit.

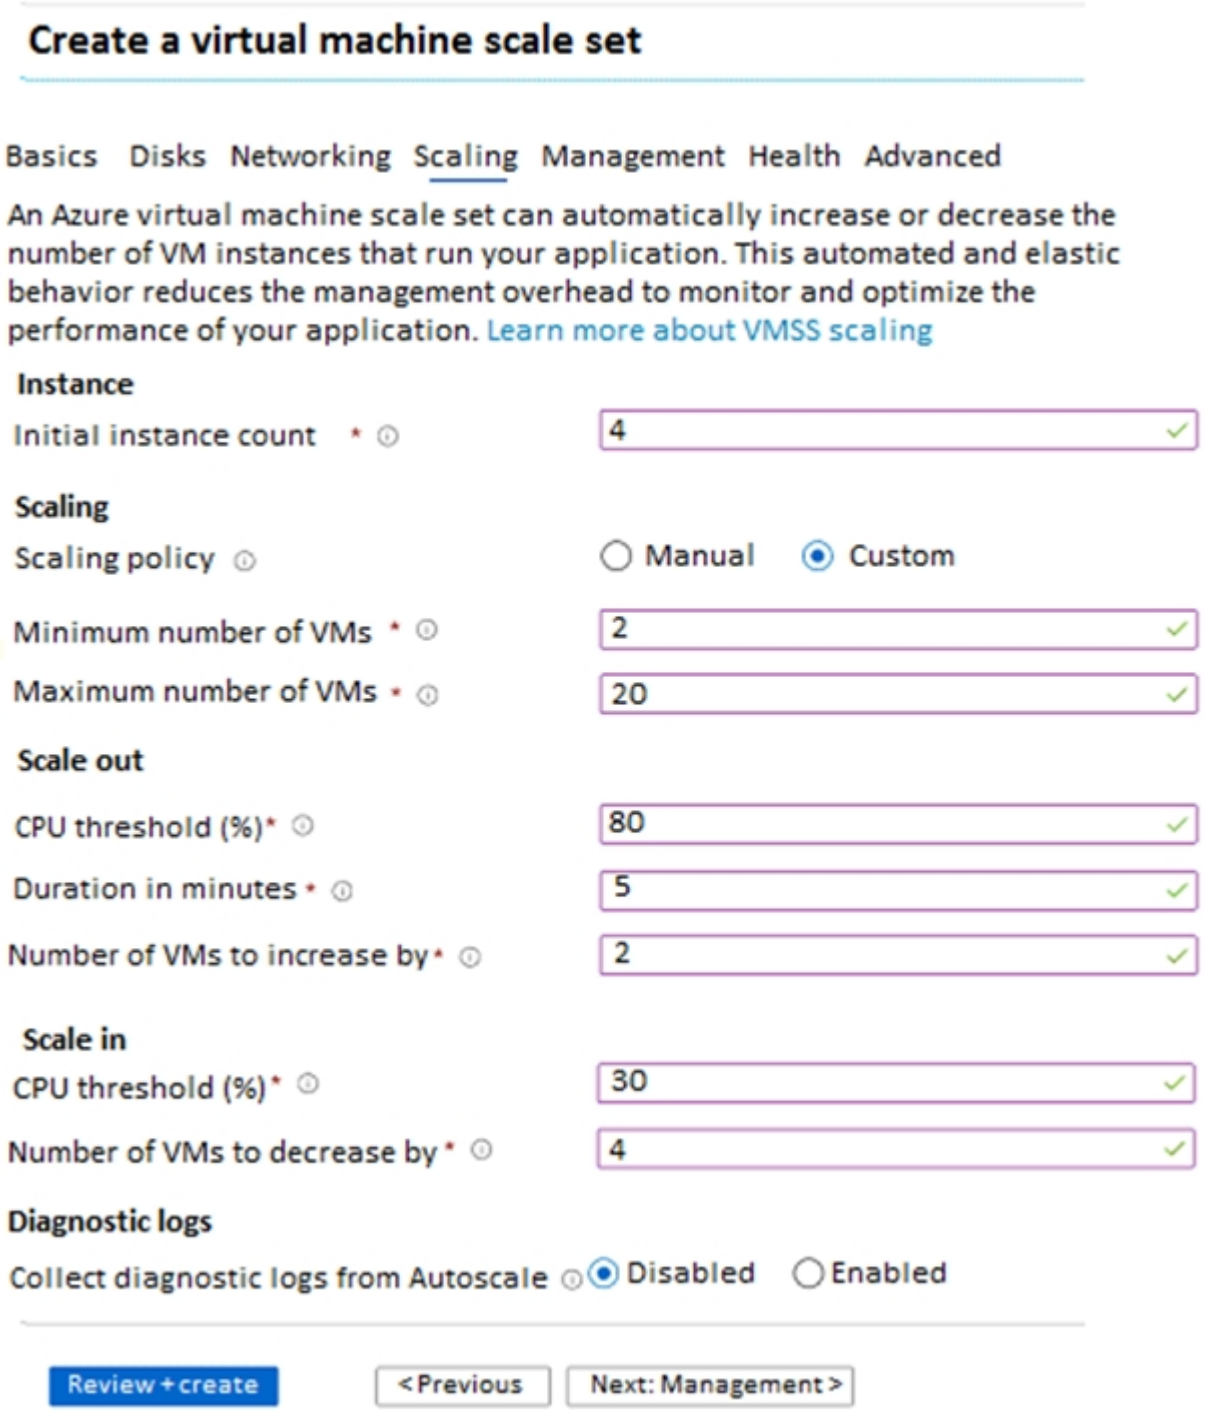

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

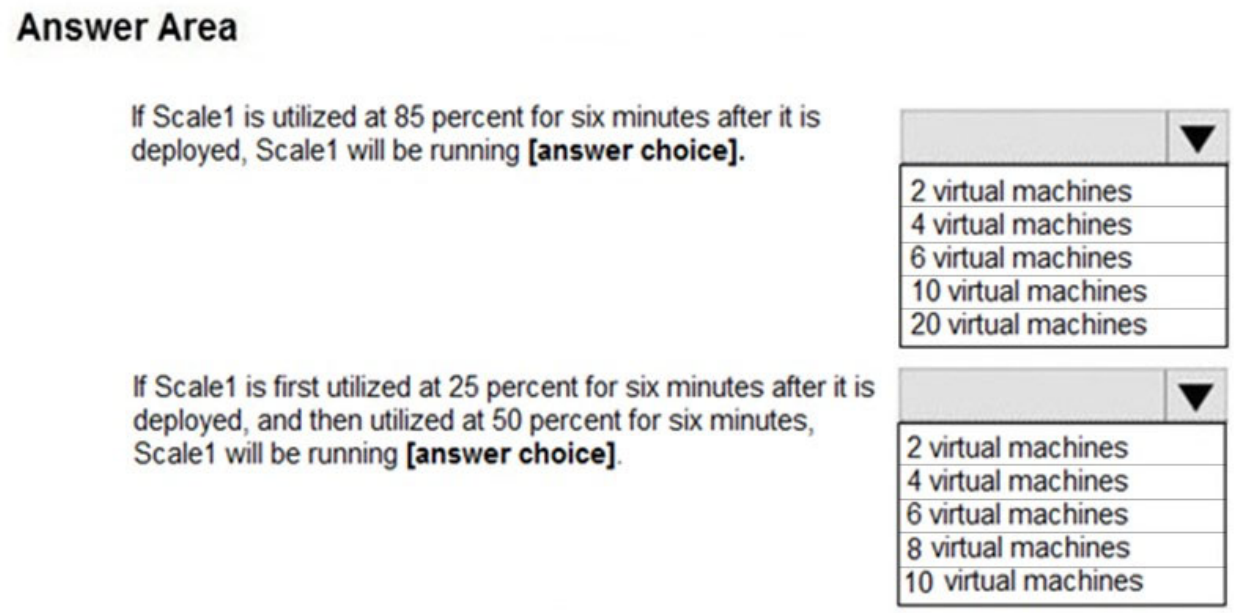

SecExams

Explanation

Correct Answer:

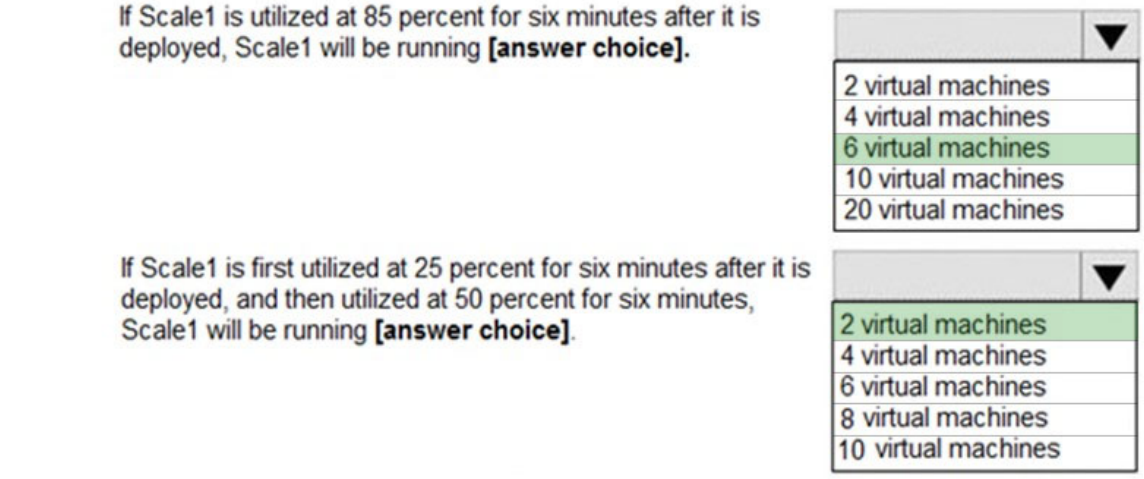

Box 1: 6 virtual machines -
The Autoscale scale out rule increases the number of VMs by 2 if the CPU threshold is 80% or higher. The initial instance count is 4 and rises to 6 when the 2 extra instances of VMs are added.

Box 2: 2 virtual machnes -
The Autoscale scale in rule decreases the number of VMs by 4 if the CPU threshold is 30% or lower. The initial instance count is 4 and thus cannot be reduced to

0 as the minimum instances is set to 2. Instances are only added when the CPU threshold reaches 80%.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/autoscale-overview
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/autoscale-best-practices https://docs.microsoft.com/en-us/azure/azure-monitor/platform/autoscale-common-scale-patterns

Community Discussion

Question #443

You plan to automate the deployment of a virtual machine scale set that uses the Windows Server 2016 Datacenter image.
You need to ensure that when the scale set virtual machines are provisioned, they have web server components installed.
Which two actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Upload a configuration script
B) Create an automation account
C) Create an Azure policy
D) Modify the extensionProfile section of the Azure Resource Manager template (Correct Answer)
E) Create a new virtual machine scale set in the Azure portal (Correct Answer)

Explanation

Correct Answer: DE ?
Virtual Machine Scale Sets can be used with the Azure Desired State Configuration (DSC) extension handler. Virtual machine scale sets provide a way to deploy and manage large numbers of virtual machines, and can elastically scale in and out in response to load. DSC is used to configure the VMs as they come online so they are running the production software.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-dsc

Community Discussion

Question #444

HOTSPOT -

You have an Azure Kubernetes Service (AKS) cluster named AKS1 and a computer named Computer1 that runs Windows 10. Computer1 that has the Azure CLI installed.

You need to install the kubectl client on Computer1.

Which command should you run? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

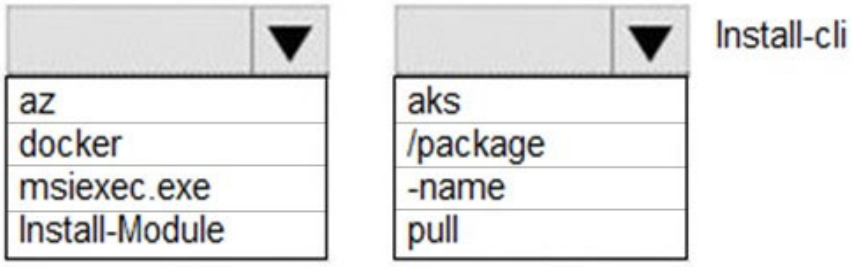

Explanation

Correct Answer:

Answer Area

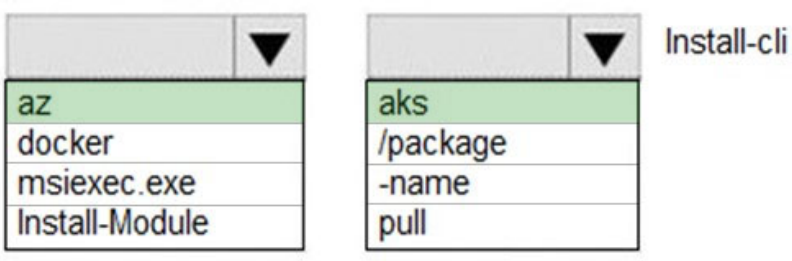

To install kubectl locally, use the az aks install-cli command: az aks install-cli
Reference:
https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough

Community Discussion

Question #445

DRAG DROP -

You onboard 10 Azure virtual machines to Azure Automation State Configuration. You need to use Azure Automation State Configuration to manage the ongoing consistency of the virtual machine configurations.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.

Select and Place:

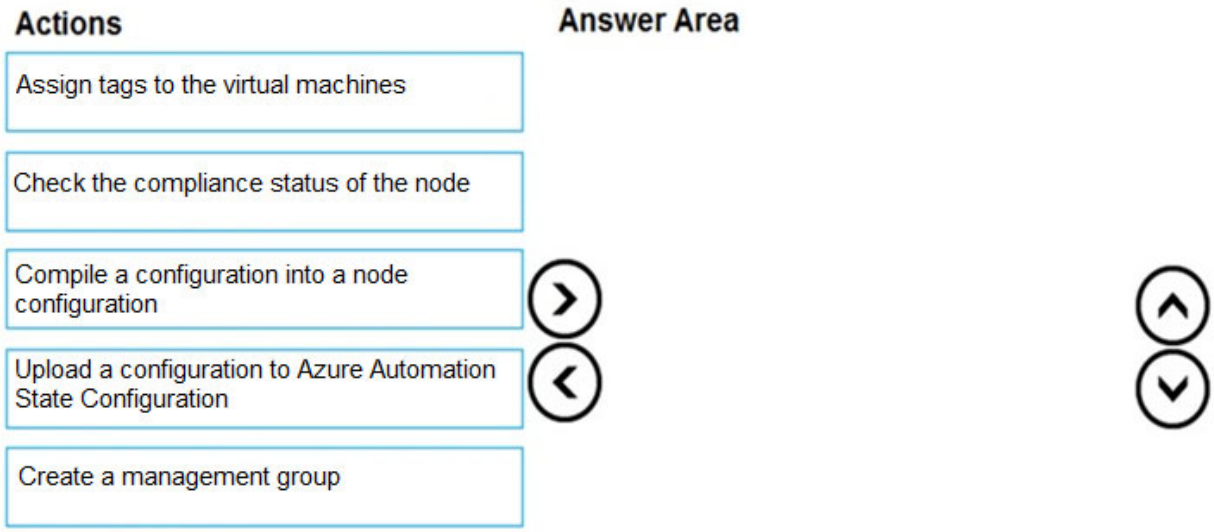

Explanation

Correct Answer:

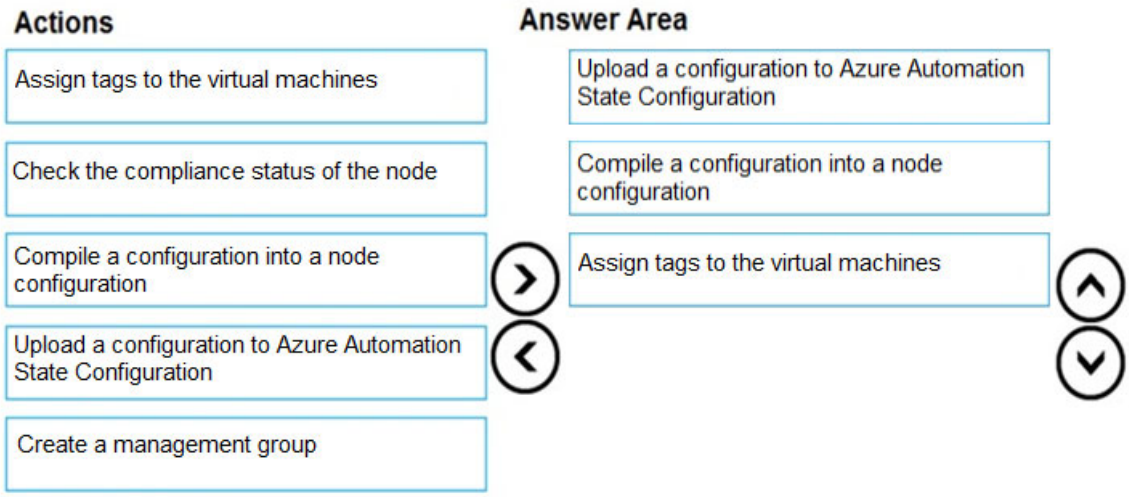

Step 1: Upload a configuration to Azure Automation State Configuration.
Import the configuration into the Automation account.
Step 2: Compile a configuration into a node configuration.
A DSC configuration defining that state must be compiled into one or more node configurations (MOF document), and placed on the Automation DSC Pull Server.
Step 3: Assign the node configuration
Then: Check the compliance status of the node
Each time Azure Automation State Configuration performs a consistency check on a managed node, the node sends a status report back to the pull server. You can view these reports on the page for that node.
On the blade for an individual report, you can see the following status information for the corresponding consistency check:
The report status ג€" whether the node is "Compliant", the configuration "Failed", or the node is "Not Compliant"
Reference:
https://docs.microsoft.com/en-us/azure/automation/automation-dsc-getting-started

Community Discussion

Question #446

You have an Azure Resource Manager template named Template1 that is used to deploy an Azure virtual machine.
Template1 contains the following text:

```
"location": {
    "type": "String",
    "defaultValue": "eastus",
    "allowedValues": [
        "canadacentral",
        "eastus",
        "westeurope",
        "westus" ]
}
```

The variables section in Template1 contains the following text:
"location": "westeurope"
The resources section in Template1 contains the following text:

```
"type": "Microsoft.Compute/virtualMachines",
"apiVersion": "2018-10-01",
"name": "[variables('vmName')]",
"location": "westeurope",
```

You need to deploy the virtual machine to the West US location by using Template1.
What should you do?

A) Modify the location in the resources section to westus (Correct Answer)
B) Select West US during the deployment
C) Modify the location in the variables section to westus

Explanation

Correct Answer: A ?

Community Discussion

Question #447

You create an App Service plan named Plan1 and an Azure web app named webapp1.
You discover that the option to create a staging slot is unavailable.
You need to create a staging slot for Plan1.
What should you do first?

A) From Plan1, scale up the App Service plan (Correct Answer)
B) From webapp1, modify the Application settings
C) From webapp1, add a custom domain
D) From Plan1, scale out the App Service plan

Explanation

Correct Answer: A ?
The app must be running in the Standard, Premium, or Isolated tier in order for you to enable multiple deployment slots.
If the app isn't already in the Standard, Premium, or Isolated tier, you receive a message that indicates the supported tiers for enabling staged publishing. At this point, you have the option to select Upgrade and go to the Scale tab of your app before continuing.
Scale up: Get more CPU, memory, disk space, and extra features like dedicated virtual machines (VMs), custom domains and certificates, staging slots, autoscaling, and more.
Incorrect:
Scale out: Increase the number of VM instances that run your app. You can scale out to as many as 30 instances
Reference:
https://docs.microsoft.com/en-us/azure/app-service/deploy-staging-slots https://docs.microsoft.com/en-us/azure/app-service/manage-scale-up

Community Discussion

Question #448

You plan to move a distributed on-premises app named App1 to an Azure subscription.
After the planned move, App1 will be hosted on several Azure virtual machines.
You need to ensure that App1 always runs on at least eight virtual machines during planned Azure maintenance.
What should you create?

A) one virtual machine scale set that has 10 virtual machines instances
B) one Availability Set that has three fault domains and one update domain
C) one Availability Set that has 10 update domains and one fault domain (Correct Answer)
D) one virtual machine scale set that has 12 virtual machines instances

Explanation

Correct Answer: C ?
An update domain is a logical group of underlying hardware that can undergo maintenance or be rebooted at the same time. As you create VMs within an availability set, the Azure platform automatically distributes your VMs across these update domains. This approach ensures that at least one instance of your application always remains running as the Azure platform undergoes periodic maintenance.
Reference:
http://www.thatlazyadmin.com/azure-fault-update-domains/

Community Discussion

Question #449

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1 that runs Windows Server 2016.
You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.
Solution: You create an event subscription on VM1. You create an alert in Azure Monitor and specify VM1 as the source
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Instead: You create an Azure Log Analytics workspace and configure the data settings. You install the Microsoft Monitoring Agent on VM1. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview

Community Discussion

Question #450

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1. VM1 was deployed by using a custom Azure Resource Manager template named ARM1.json.
You receive a notification that VM1 will be affected by maintenance.
You need to move VM1 to a different host immediately.
Solution: From the Overview blade, you move the virtual machine to a different subscription.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
You would need to redeploy the VM.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node

Community Discussion

Question #451

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1. VM1 was deployed by using a custom Azure Resource Manager template named ARM1.json.
You receive a notification that VM1 will be affected by maintenance.
You need to move VM1 to a different host immediately.
Solution: From the Redeploy blade, you click Redeploy.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
When you redeploy a VM, it moves the VM to a new node within the Azure infrastructure and then powers it back on, retaining all your configuration options and associated resources.
References:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node

Community Discussion

Question #452

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1. VM1 was deployed by using a custom Azure Resource Manager template named ARM1.json.
You receive a notification that VM1 will be affected by maintenance.
You need to move VM1 to a different host immediately.
Solution: From the Update management blade, you click Enable.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
You would need to redeploy the VM.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node

Community Discussion

Question #453

You have an Azure subscription that contains a web app named webapp1.
You need to add a custom domain named www.contoso.com to webapp1.
What should you do first?

A) Create a DNS record (Correct Answer)
B) Add a connection string

C) Upload a certificate.
D) Stop webapp1.

Explanation

Correct Answer: A ?
You can use either a CNAME record or an A record to map a custom DNS name to App Service.
Reference:
https://docs.microsoft.com/en-us/Azure/app-service/app-service-web-tutorial-custom-domain

Community Discussion

SecExams

Question #454

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Region
RG1	Resource group	West US
RG2	Resource group	East Asia
storage1	Storage account	West US
storage2	Storage account	East Asia
VM1	Virtual machine	West US
VNET1	Virtual network	West US
VNET2	Virtual network	East Asia

VM1 connects to VNET1.
You need to connect VM1 to VNET2.
Solution: You move VM1 to RG2, and then you add a new network interface to VM1.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Instead you should delete VM1. You recreate VM1, and then you add the network interface for VM1.
Note: When you create an Azure virtual machine (VM), you must create a virtual network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot change the VNet.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview

Community Discussion

Question #455

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Region
RG1	Resource group	West US
RG2	Resource group	East Asia
storage1	Storage account	West US
storage2	Storage account	East Asia
VM1	Virtual machine	West US
VNET1	Virtual network	West US
VNET2	Virtual network	East Asia

VM1 connects to VNET1.
You need to connect VM1 to VNET2.
Solution: You delete VM1. You recreate VM1, and then you create a new network interface for VM1 and connect it to VNET2.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
You should delete VM1. You recreate VM1, and then you add the network interface for VM1.
Note: When you create an Azure virtual machine (VM), you must create a virtual network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's

created, but you cannot change the VNet.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview

Community Discussion

Question #456

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Region
RG1	Resource group	West US
RG2	Resource group	East Asia
storage1	Storage account	West US
storage2	Storage account	East Asia
VM1	Virtual machine	West US
VNET1	Virtual network	West US
VNET2	Virtual network	East Asia

VM1 connects to VNET1.
You need to connect VM1 to VNET2.
Solution: You turn off VM1, and then you add a new network interface to VM1.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Instead you should delete VM1. You recreate VM1, and then you add the network interface for VM1.
Note: When you create an Azure virtual machine (VM), you must create a virtual network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot change the VNet.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview

Community Discussion

SecExams

Question #457

HOTSPOT -

You have an Azure subscription named Subscription1 that contains the quotas shown in the following table.

Quota	Location	Usage
Standard BS Family vCPUs	West US	0 of 20
Standard D Family vCPUs	West US	0 of 20
Total Regional vCPUs	West US	0 of 20

You deploy virtual machines to Subscription1 as shown in the following table.

Name	Size	vCPUs	Location	Status
VM1	Standard_B2ms	2	West US	Running
VM2	Standard_B16ms	16	West US	Stopped (Deallocated)

You plan to deploy the virtual machines shown in the following table.

Name	Size	vCPUs
VM3	Standard_B2ms	1
VM4	Standard_D4s_v3	4
VM5	Standard_B16ms	16

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can deploy VM3 to West US.	○	○
You can deploy VM4 to West US.	○	○
You can deploy VM5 to West US.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can deploy VM3 to West US.	○	○
You can deploy VM4 to West US.	○	○
You can deploy VM5 to West US.	○	○

The total regional vCPUs is 20 so that means a maximum total of 20 vCPUs across all the different VM sizes. The deallocated VM with 16 vCPUs counts towards the total. VM20 and VM1 are using 18 of the maximum 20 vCPUs leaving only two vCPUs available.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/quotas

Community Discussion

SecExams

Question #458

SecExams

HOTSPOT -

You have an Azure subscription that contains an Azure Availability Set named WEBPROD-AS-USE2 as shown in the following exhibit.

```
PS Azure:\> az vm availability-set list –g RG1
[
  {
    "id": "/subscriptions/8372f433-2dcd-4361-b5ef-5b188fed87d0/resourceGroups/
RG1/providers/Microsoft.Compute/availabilitySets/WEBPROD-AS-USE2",
    "location": "eastus2",
    "name": "WEBPROD-AS-USE2",
    "platformFaultDomainCount": 2,
    "platformUpdateDomainCount": 10,
    "proximityPlacementGroup": null,
    "resourceGroup": "RG1",
    "sku": {
      "capacity": null,
      "name": "Aligned",
      "tier": null
    },
    "statuses": null,
    "tags": {},
    "type": "Microsoft.Compute/availabilitySets",
    "virtualMachines": [ ]
  }
]
Azure:/
```

You add 14 virtual machines to WEBPROD-AS-USE2.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

When Microsoft performs planned maintenance in East US 2, the maximum number of unavailable virtual machines will be **[answer choice]**.

- 2
- 7
- 10
- 14

If the server rack in the Azure datacenter that hosts WEBPROD-AS-USE2 experiences a power failure, the maximum number of unavailable virtual machines will be **[answer choice]**.

- 2
- 7
- 10
- 14

Explanation

Correct Answer:

Answer Area

When Microsoft performs planned maintenance in East US 2, the maximum number of unavailable virtual machines will be **[answer choice]**.

- 2
- 7
- 10
- 14

If the server rack in the Azure datacenter that hosts WEBPROD-AS-USE2 experiences a power failure, the maximum number of unavailable virtual machines will be **[answer choice]**.

- 2
- 7
- 10
- 14

Box 1: 2 -
There are 10 update domains. The 14 VMs are shared across the 10 update domains so four update domains will have two VMs and six update domains will have one VM. Only one update domain is rebooted at a time. Therefore, a maximum of two VMs will be offline.

Box 2: 7 -
There are 2 fault domains. The 14 VMs are shared across the 2 fault domains, so 7 VMs in each fault domain. A rack failure will affect one fault domain so 7 VMs will be offline.

Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/manage-availability

Community Discussion

Question #459

You deploy an Azure Kubernetes Service (AKS) cluster named Cluster1 that uses the IP addresses shown in the following table.

IP address	Assigned to
131.107.2.1	Load balancer front end
192.168.10.2	Kubernetes DNS service
172.17.7.1	Docket bridge address
10.0.10.11	Kubernetes cluster node

You need to provide internet users with access to the applications that run in Cluster1.
Which IP address should you include in the DNS record for Cluster1?

A) 131.107.2.1 (Correct Answer)
B) 10.0.10.11
C) 172.17.7.1
D) 192.168.10.2

Explanation

Correct Answer: A ?

Community Discussion

Question #460

You have a deployment template named Template1 that is used to deploy 10 Azure web apps.
You need to identify what to deploy before you deploy Template1. The solution must minimize Azure costs.
What should you identify?

A) five Azure Application Gateways
B) one App Service plan (Correct Answer)
C) 10 App Service plans
D) one Azure Traffic Manager
E) one Azure Application Gateway

Explanation

Correct Answer: B ?
You create Azure web apps in an App Service plan.
Reference:
https://docs.microsoft.com/en-us/azure/app-service/overview-hosting-plans

Community Discussion

SecExams

Question #461

SecExams

HOTSPOT -

You plan to deploy an Azure container instance by using the following Azure Resource Manager template.

```
{
    "type": "Microsoft.ContainerInstance/containerGroups",
    "apiVersion": "2018-10-01",
    "name": "webprod",
    "location": "westus",
    "properties": {
        "containers": [
            {
                "name": "webprod",
                "properties": {
                    "image": "microsoft/iis:nanoserver",
                    "ports": [
                        {
                            "protocol": "TCP",
                            "port": 80
                        }
                    ],
                    "environmentVariables": [ ],
                    "resources": {
                        "requests": {
                            "memoryInGB": 1.5,
                            "cpu": 1
                        }
                    }
                }
            }
        ],
        "restartPolicy": "OnFailure",
        "ipAddress": {
            "ports": [
                {
                    "protocol": "TCP",
                    "port": 80
                }
            ],
            "ip": "[parameters('IPAddress')]",
            "type": "Public"
        },
        "osType": "Windows"
    }
}
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the template.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Internet users **[answer choice]**.

- can connect to the container from any device
- cannot connect to the container
- can only connect to the container from devices that run Windows

If Internet Information Services (IIS) in the container fail, **[answer choice]**.

- the container will restart automatically
- the container will only restart manually
- the container must be redeployed

Explanation

Correct Answer:

Answer Area

Internet users **[answer choice]**.

- can connect to the container from any device
- cannot connect to the container
- can only connect to the container from devices that run Windows

If Internet Information Services (IIS) in the container fail, **[answer choice]**.

- the container will restart automatically
- the container will only restart manually
- the container must be redeployed

Community Discussion

SecExams

Question #462

You have an Azure subscription that contains a virtual machine named VM1. VM1 hosts a line-of-business application that is available 24 hours a day. VM1 has one network interface and one managed disk. VM1 uses the D4s v3 size.
You plan to make the following changes to VM1:
✑ Change the size to D8s v3.
✑ Add a 500-GB managed disk.
✑ Add the Puppet Agent extension.
✑ Enable Desired State Configuration Management.
Which change will cause downtime for VM1?

A) Enable Desired State Configuration Management
B) Add a 500-GB managed disk
C) Change the size to D8s v3 (Correct Answer)
D) Add the Puppet Agent extension

Explanation

Correct Answer: C ?
While resizing the VM it must be in a stopped state.
Reference:
https://azure.microsoft.com/en-us/blog/resize-virtual-machines/

Community Discussion

Question #463

You have an app named App1 that runs on an Azure web app named webapp1.
The developers at your company upload an update of App1 to a Git repository named Git1.
Webapp1 has the deployment slots shown in the following table.

Name	Function
webapp1-prod	Production
webapp1-test	Staging

You need to ensure that the App1 update is tested before the update is made available to users.
Which two actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Swap the slots (Correct Answer)
B) Deploy the App1 update to webapp1-prod, and then test the update
C) Stop webapp1-prod
D) Deploy the App1 update to webapp1-test, and then test the update (Correct Answer)
E) Stop webapp1-test

Explanation

Correct Answer: AD ?

Community Discussion

Question #464

You have an Azure subscription named Subscription1 that has the following providers registered:

- Authorization
- Automation
- Resources
- Compute
- KeyVault
- Network
- Storage
- Billing
- Web

Subscription1 contains an Azure virtual machine named VM1 that has the following configurations:

- Private IP address: 10.0.0.4 (dynamic)
- Network security group (NSG): NSG1
- Public IP address: None
- Availability set: AVSet
- Subnet: 10.0.0.0/24
- Managed disks: No
- Location: East US

You need to record all the successful and failed connection attempts to VM1.
Which three actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Enable Azure Network Watcher in the East US Azure region. (Correct Answer)
B) Add an Azure Network Watcher connection monitor.
C) Register the MicrosoftLogAnalytics provider.
D) Create an Azure Storage account.
E) Register the Microsoft.Insights resource provider. (Correct Answer)
F) Enable Azure Network Watcher flow logs. (Correct Answer)

Explanation

Correct Answer: AEF ?
You can log network traffic that flows through an NSG with Network Watcher's NSG flow

log capability.
✑ In the Azure portal, enable Network Watcher
✑ Register Insights provider. NSG flow logging requires the Microsoft.Insights provider.
✑ Enable NSG flow log. NSG flow log data is written to an Azure Storage account, Subscription1 has storage.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-nsg-flow-logging-portal

Community Discussion

Question #465

You need to deploy an Azure virtual machine scale set that contains five instances as quickly as possible.
What should you do?

A) Deploy five virtual machines. Modify the Availability Zones settings for each virtual machine.
B) Deploy five virtual machines. Modify the Size setting for each virtual machine.
C) Deploy one virtual machine scale set that is set to VM (virtual machines) orchestration mode.
D) Deploy one virtual machine scale set that is set to ScaleSetVM orchestration mode. (Correct Answer)

Explanation

Correct Answer: D ?
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/orchestration-modes

Community Discussion

Question #466

You plan to create the Azure web apps shown in the following table.

Name	Runtime stack
WebApp1	.NET Core 3.1(LTS)
WebApp2	ASP.NET V4.8
WebApp3	PHP 7.3
WebApp4	Ruby 2.6

What is the minimum number of App Service plans you should create for the web apps?

A) 1 (Correct Answer)

B) 2

C) 3

D) 4

Explanation

Correct Answer: A ?

Community Discussion

Question #467

SecExams

HOTSPOT -

You have a pay-as-you-go Azure subscription that contains the virtual machines shown in the following table.

Name	Resource group	Daily cost
VM1	RG1	20 euros
VM2	RG2	30 euros

You create the budget shown in the following exhibit.

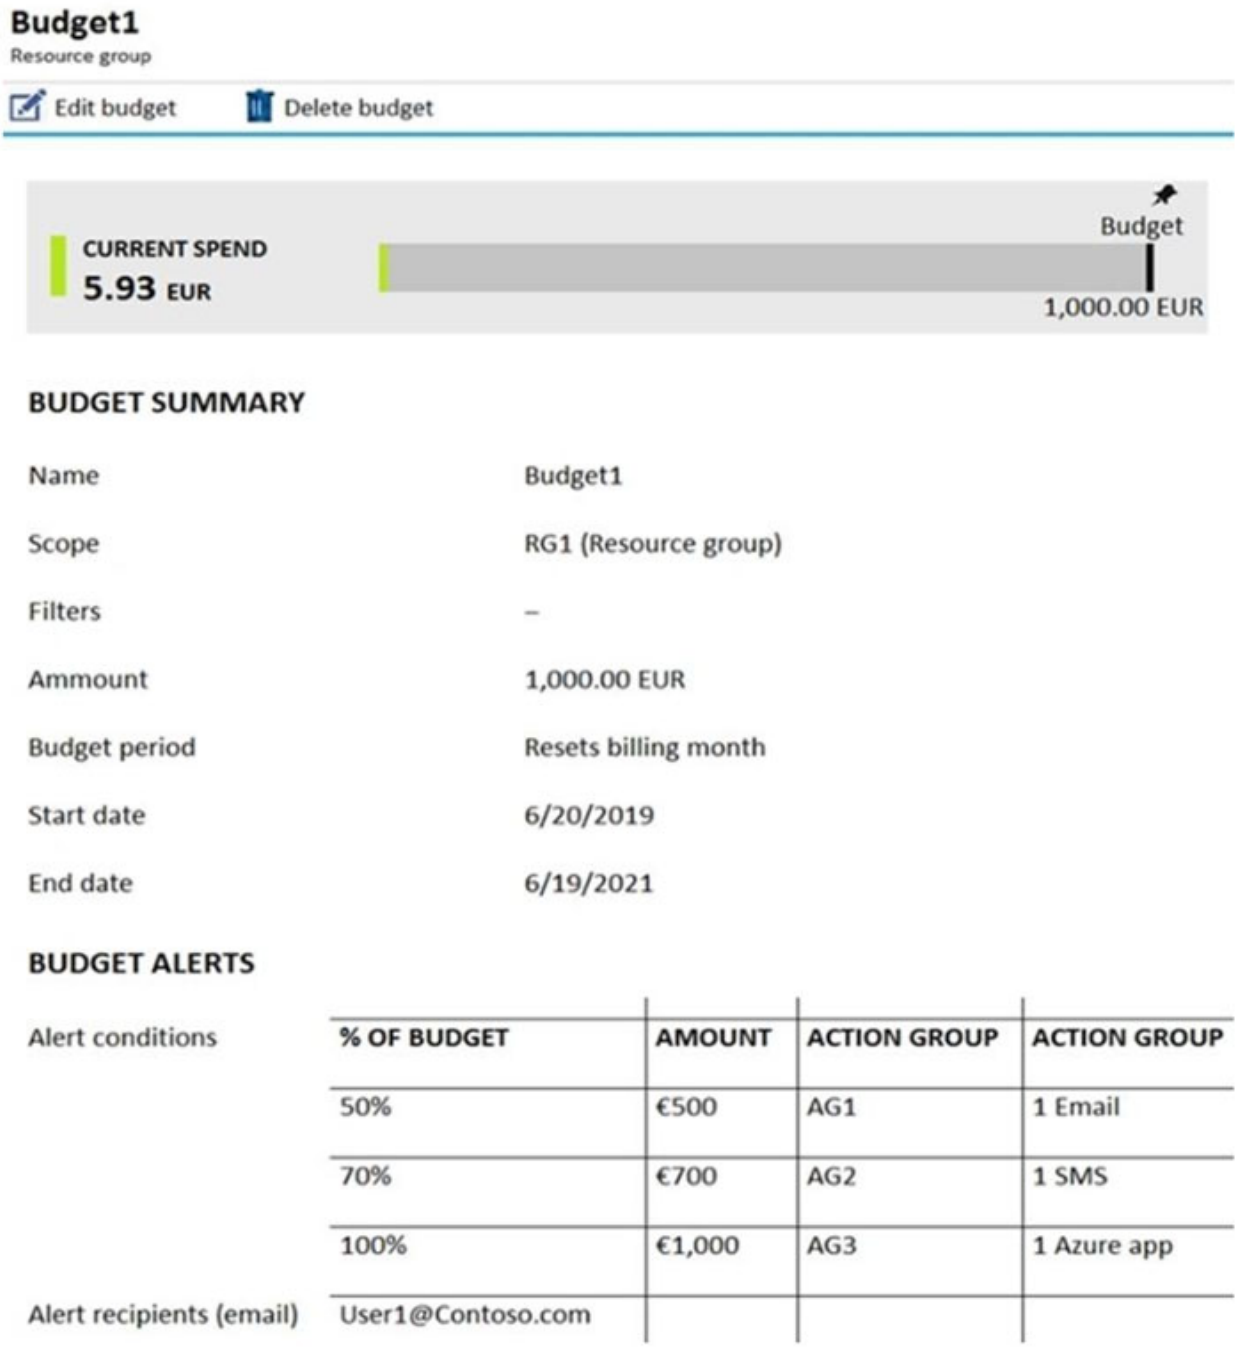

The AG1 action group contains a user named only.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

Hot Area:

Answer Area

When the maximum amount in Budget1 is reached, **[answer choice]**.

- VM1 and VM2 are turned off
- VM1 and VM2 continue to run
- VM1 is turned off, and VM2 continues to run

Based on the current usage costs of the virtual machines, **[answer choice]**.

- no email notifications will be sent each month
- one email notification will be sent each month
- two email notifications will be sent each month
- three email notifications will be sent each month

Explanation

Correct Answer:

Answer Area

When the maximum amount in Budget1 is reached, **[answer choice]**.

- VM1 and VM2 are turned off
- VM1 and VM2 continue to run
- VM1 is turned off, and VM2 continues to run

Based on the current usage costs of the virtual machines, **[answer choice]**.

- no email notifications will be sent each month
- one email notification will be sent each month
- two email notifications will be sent each month
- three email notifications will be sent each month

Box 1: VM1 and VM2 continue to run

The budget alerts are for Resource Group RG1, which include VM1, but not VM2. However, when the budget thresholds you've created are exceeded, only notifications are triggered. None of your resources are affected and your consumption isn't stopped.

Box 2: one email notification will be sent each month.

Budget alerts for Resource Group RG1, which include VM1, but not VM2.VM1 consumes 20 Euro/day. The 50%, 500 Euro limit, will be reached in 25 days, and an email will be sent. The 70% and 100% alert conditions will not be reached within a month, and they don't trigger email actions anyway.

Credit alerts: Credit alerts are generated automatically at 90% and at 100% of your Azure credit balance. Whenever an alert is generated, it's reflected in cost alerts and in the email sent to the account owners. 90% and 100% will not be reached though.

Reference:

https://docs.microsoft.com/en-us/azure/cost-management-billing/costs/cost-mgt-

alerts-monitor-usage-spending https://docs.microsoft.com/en-gb/azure/cost-management-billing/costs/tutorial-acm-create-budgets

Community Discussion

Question #468

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.
You need to view the date and time when the resources were created in RG1.
Solution: From the Subscriptions blade, you select the subscription, and then click Programmatic deployment.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
From the RG1 blade, click Deployments. You see a history of deployment for the resource group.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/template-tutorial-create-first-template?tabs=azure-powershell

Community Discussion

Question #469

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Region
RG1	Resource group	West US
RG2	Resource group	East Asia
storage1	Storage account	West US
storage2	Storage account	East Asia
VM1	Virtual machine	West US
VNET1	Virtual network	West US
VNET2	Virtual network	East Asia

VM1 connects to VNET1.
You need to connect VM1 to VNET2.
Solution: You create a new network interface, and then you add the network interface to VM1.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
You should delete VM1. You recreate VM1, and then you add the network interface for VM1.
Note: When you create an Azure virtual machine (VM), you must create a virtual network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot change the VNet.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview

Community Discussion

Question #470

You have an Azure Active Directory (Azure AD) tenant named adatum.com that contains the users shown in the following table.

Name	Role
User1	*None*
User2	Global administrator
User3	Cloud device administrator
User4	Intune administrator

Adatum.com has the following configurations:

✑ Users may join devices to Azure AD is set to User1.

✑ Additional local administrators on Azure AD joined devices is set to None.

You deploy Windows 10 to a computer named Computer1. User1 joins Computer1 to adatum.com.

You need to identify the local Administrator group membership on Computer1.

Which users are members of the local Administrators group?

A) User1 only

B) User2 only

C) User1 and User2 only (Correct Answer)

D) User1, User2, and User3 only

E) User1, User2, User3, and User4

Explanation

Correct Answer: C ?

Users may join devices to Azure AD - This setting enables you to select the users who can register their devices as Azure AD joined devices. The default is All.

Additional local administrators on Azure AD joined devices - You can select the users that are granted local administrator rights on a device. Users added here are added to the Device Administrators role in Azure AD. Global administrators, here User2, in Azure AD and device owners are granted local administrator rights by default.

Reference:

https://docs.microsoft.com/en-us/azure/active-directory/devices/device-management-azure-portal

Community Discussion

Question #471

HOTSPOT -

You have Azure subscriptions named Subscription1 and Subscription2.

Subscription1 has following resource groups:

Name	Region	Lock type
RG1	West Europe	None
RG2	West Europe	Read Only

RG1 includes a web app named App1 in the West Europe location.

Subscription2 contains the following resource groups:

Name	Region	Lock type
RG3	East Europe	Delete
RG4	Central US	none

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
App1 can be moved to RG2	○	○
App1 can be moved to RG3	○	○
App1 can be moved to RG4	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
App1 can be moved to RG2	○	○
App1 can be moved to RG3	○	○
App1 can be moved to RG4	○	○

Box 1: No -
RG2 is read only. ReadOnly means authorized users can read a resource, but they cannot delete or update the resource.

Box 2: Yes -

Box 3: Yes -
Note:
App Service resources are region-specific and cannot be moved directly across regions. You can move the App Service resource by creating a copy of your existing App Service resource in the target region, then move your content over to the new app. You can then delete the source app and App Service plan.
To make copying your app easier, you can clone an individual App Service app into an App Service plan in another region.
Reference:
https://docs.microsoft.com/en-us/azure/app-service/manage-move-across-regions
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-limitations/app-service-move-limitations

Community Discussion

Question #472

SecExams

HOTSPOT -
You have an Azure subscription named Subscription1 that contains the following resource group:
✑ Name: RG1
✑ Region: West US
✑ Tag: `tag1`: `value1`
You assign an Azure policy named Policy1 to Subscription1 by using the following configurations:
✑ Exclusions: None
✑ Policy definition: Append a tag and its value to resources
✑ Assignment name: Policy1
✑ Parameters:
✑ Tag name: tag2

Tag value: value2 -
▪
After Policy1 is assigned, you create a storage account that has the following configuration:
✑ Name: storage1
✑ Location: West US
✑ Resource group: RG1
✑ Tags: `tag3`: `value3`
You need to identify which tags are assigned to each resource.
What should you identify? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

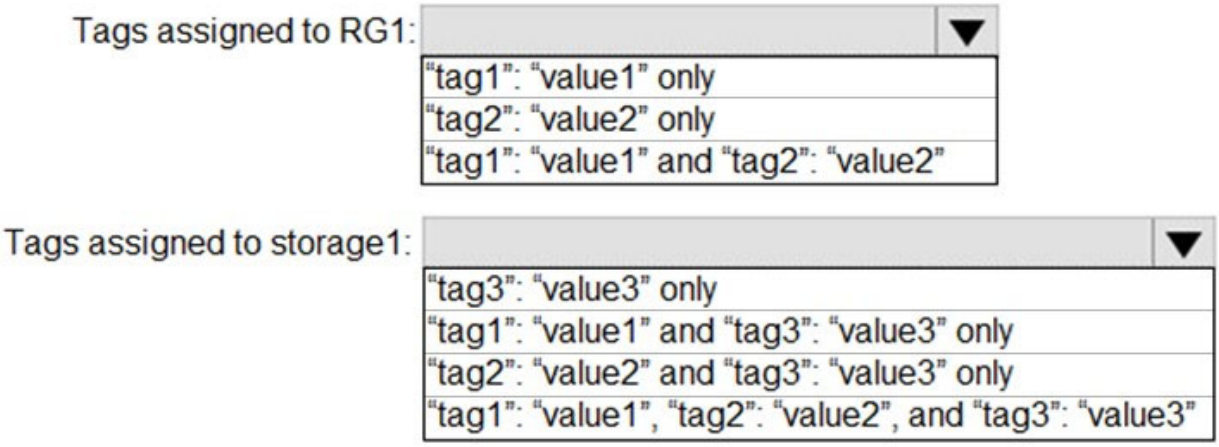

Explanation

Correct Answer:

Answer Area

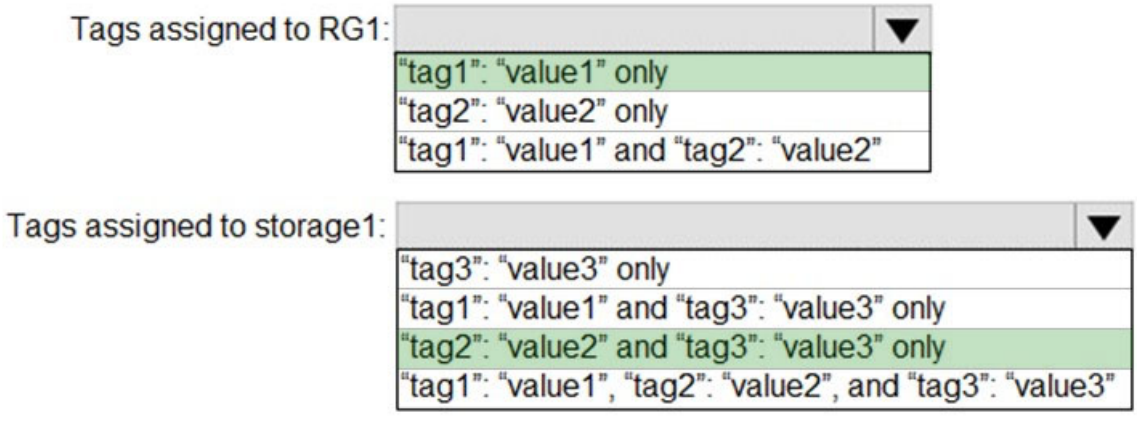

Box 1: "tag1": "value1" only -

Box 2: "tag2": "value2" and "tag3": "value3" only

Tags applied to the resource group are not inherited by the resources in that resource group.

Reference:

https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-using-tags

Community Discussion

Question #473

HOTSPOT -

You have an Azure subscription named Subscription1.

In Subscription1, you create an alert rule named Alert1.

The Alert1 action group is configured as shown in the following exhibit.

```
ResourceGroupName   : default-activitylogalerts
GroupShortName      : AG1
Enabled             : True
EmailReceivers      : {Action1_ "EmailAction"}
SmsReceivers        : {Action1_ "SMSAction"}
WebhookReceivers    : {}
Id                  : /subscriptions/a4fde29b-d56a-4f6c-8298-
6c53cd0b720c/resourceGroups/
default-activitylogalerts/providers/microsoft.insights/actionGroups/ActionGroup1
Name                : ActionGroup1
Type                : Microsoft.Insights/ActionGroups
Location            : Global
Tags                : {}
```

Alert1 alert criteria triggered every minute.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

The number of email messages that Alert1 will send in an hour is

- 0
- 4
- 6
- 12
- 60

The number of SMS messages that Alert2 will send in an hour is

- 0
- 4
- 6
- 12
- 60

Explanation

Correct Answer:

Answer Area

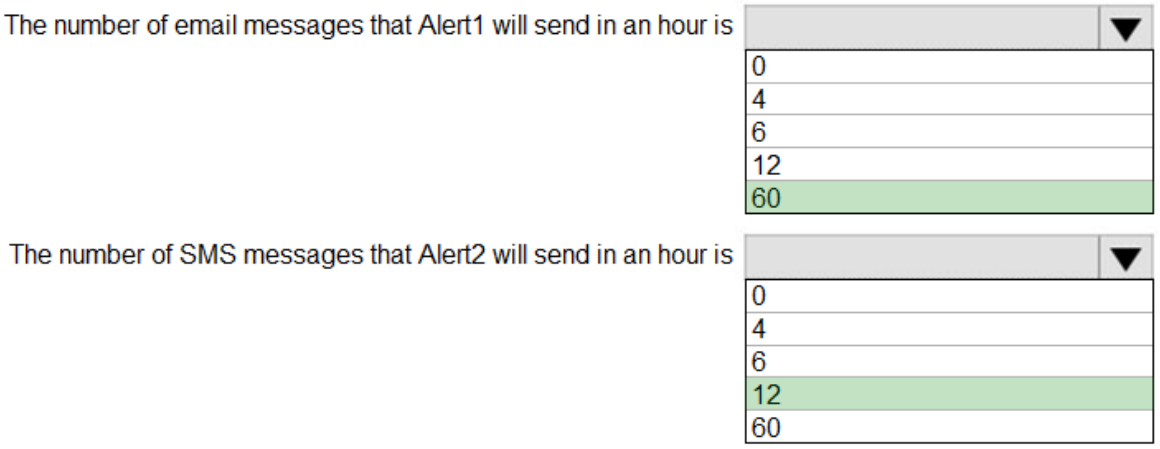

Box 1: 60 -
One alert per minute will trigger one email per minute.

Box 2: 12 -
No more than 1 SMS every 5 minutes can be send, which equals 12 per hour.
Note: Rate limiting is a suspension of notifications that occurs when too many are sent to a particular phone number, email address or device. Rate limiting ensures that alerts are manageable and actionable.
The rate limit thresholds are:
✑ SMS: No more than 1 SMS every 5 minutes.
✑ Voice: No more than 1 Voice call every 5 minutes.
✑ Email: No more than 100 emails in an hour.
✑ Other actions are not rate limited.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/alerts-rate-limiting

Community Discussion

Question #474

You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Region	Resource group
RG1	Resource group	West Europe	*Not applicable*
RG2	Resource group	North Europe	*Not applicable*
Vault1	Recovery Services vault	West Europe	RG1

You create virtual machines in Subscription1 as shown in the following table.

Name	Resource group	Region	Operating system
VM1	RG1	West Europe	Windows Server 2016
VM2	RG1	North Europe	Windows Server 2016
VM3	RG2	West Europe	Windows Server 2016
VMA	RG1	West Europe	Ubuntu Server 18.04
VMB	RG1	North Europe	Ubuntu Server 18.04
VMC	RG2	West Europe	Ubuntu Server 18.04

You plan to use Vault1 for the backup of as many virtual machines as possible.
Which virtual machines can be backed up to Vault1?

A) VM1 only
B) VM3 and VMC only
C) VM1, VM2, VM3, VMA, VMB, and VMC
D) VM1, VM3, VMA, and VMC only (Correct Answer)
E) VM1 and VM3 only

Explanation

Correct Answer: D ?
To create a vault to protect virtual machines, the vault must be in the same region as the virtual machines. If you have virtual machines in several regions, create a Recovery Services vault in each region.
Reference:
https://docs.microsoft.com/bs-cyrl-ba/azure/backup/backup-create-rs-vault

Community Discussion

Question #475

You have an Azure Kubernetes Service (AKS) cluster named AKS1.
You need to configure cluster autoscaler for AKS1.
Which two tools should you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

A) the kubectl command (Correct Answer)
B) the az aks command (Correct Answer)
C) the Set-AzVm cmdlet
D) the Azure portal
E) the Set-AzAks cmdlet

Explanation

Correct Answer: AB ?
A: The following example uses the kubectl autoscale command to autoscale the number of pods in the azure-vote-front deployment. If average CPU utilization across all pods exceeds 50% of their requested usage, the autoscaler increases the pods up to a maximum of 10 instances. A minimum of 3 instances is then defined for the deployment:
kubectl autoscale deployment azure-vote-front --cpu-percent=50 --min=3 --max=10
B: Use the az aks update command to enable and configure the cluster autoscaler on the node pool for the existing cluster.
Reference:
https://docs.microsoft.com/en-us/azure/aks/tutorial-kubernetes-scale https://docs.microsoft.com/en-us/azure/aks/cluster-autoscaler

Community Discussion

Question #476

You create the following resources in an Azure subscription:

☞ An Azure Container Registry instance named Registry1

☞ An Azure Kubernetes Service (AKS) cluster named Cluster1

You create a container image named App1 on your administrative workstation.

You need to deploy App1 to Cluster1.

What should you do first?

A) Run the docker push command.

B) Create an App Service plan.

C) Run the az acr build command. (Correct Answer)

D) Run the az aks create command.

Explanation

SecExams

Correct Answer: C ?

You should sign in and push a container image to Container Registry.

Run the az acr build command to build and push the container image. az acr build \

--image contoso-website \

--registry $ACR_NAME \

--file Dockerfile .

Reference:

https://docs.microsoft.com/en-us/learn/modules/aks-deploy-container-app/5-exercise-deploy-app

Community Discussion

Question #477

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group	Location
RG1	Resource group	*Not applicable*	Central US
RG2	Resource group	*Not applicable*	West US
VMSS1	Virtual machine scale set	RG2	West US
Proximity1	Proximity placement group	RG1	Central US
Proximity2	Proximity placement group	RG2	West US
Proximity3	Proximity placement group	RG1	Central US

You need to configure a proximity placement group for VMSS1.
Which proximity placement groups should you use?

A) Proximity2 only (Correct Answer)
B) Proximity1, Proximity2, and Proximity3
C) Proximity1 only
D) Proximity1 and Proximity3 only

Explanation

Correct Answer: A ?
Resource Group location of VMSS1 is the RG2 location, which is West US.
Only Proximity2, which also in RG2, is location in West US
Reference:
https://azure.microsoft.com/en-us/blog/introducing-proximity-placement-groups/

Community Discussion

Question #478

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.
You need to view the date and time when the resources were created in RG1.
Solution: From the Subscriptions blade, you select the subscription, and then click Resource providers.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #479

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.
You need to view the date and time when the resources were created in RG1.
Solution: From the RG1 blade, you click Automation script.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
From the RG1 blade, click Deployments. You see a history of deployment for the resource group.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/template-tutorial-create-first-template?tabs=azure-powershell

Community Discussion

Question #480

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.
You need to view the date and time when the resources were created in RG1.
Solution: From the RG1 blade, you click Deployments.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
From the RG1 blade, click Deployments. You see a history of deployment for the resource group.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/template-tutorial-create-first-template?tabs=azure-powershell

Community Discussion

Question #481

You have an Azure subscription named Subscription1.
You deploy a Linux virtual machine named VM1 to Subscription1.
You need to monitor the metrics and the logs of VM1.
What should you use?

A) Azure HDInsight
B) Linux Diagnostic Extension (LAD) 3.0 (Correct Answer)
C) the AzurePerformanceDiagnostics extension
D) Azure Analysis Services

Explanation

Correct Answer: B ?
The Linux Diagnostic Extension should be used which downloads the Diagnostic Extension (LAD) agent on Linux server.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/diagnostics-linux

Community Discussion

SecExams

Question #482

HOTSPOT -

You have an Azure subscription named Subscription1. Subscription1 contains a virtual machine named VM1.

You install and configure a web server and a DNS server on VM1.

VM1 has the effective network security rules shown in the following exhibit:

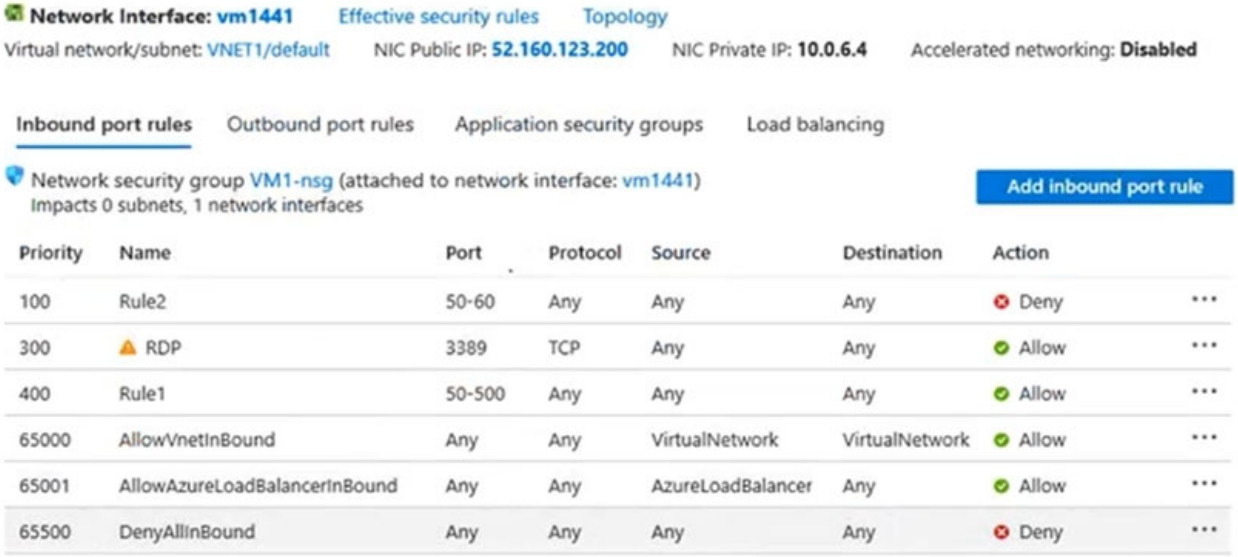

Network Interface: vm1441 Effective security rules Topology

Virtual network/subnet: VNET1/default NIC Public IP: 52.160.123.200 NIC Private IP: 10.0.6.4 Accelerated networking: Disabled

Inbound port rules | Outbound port rules | Application security groups | Load balancing

Network security group VM1-nsg (attached to network interface: vm1441)
Impacts 0 subnets, 1 network interfaces

Add inbound port rule

Priority	Name	Port	Protocol	Source	Destination	Action
100	Rule2	50-60	Any	Any	Any	Deny
300	RDP	3389	TCP	Any	Any	Allow
400	Rule1	50-500	Any	Any	Any	Allow
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Internet users **[answer choice]**.

- can connect to only the DNS server on VM1
- can connect to only the web server on VM1
- can connect to the web server and the DNS server on VM1
- cannot connect to the web server and the DNS server on VM1

If you delete Rule2, Internet users **[answer choice]**.

- can connect to only the DNS server on VM1
- can connect to only the web server on VM1
- can connect to the web server and the DNS server on VM1
- cannot connect to the web server and the DNS server on VM1

Explanation

Correct Answer:

Answer Area

Internet users **[answer choice].**

- can connect to only the DNS server on VM1
- can connect to only the web server on VM1
- can connect to the web server and the DNS server on VM1
- cannot connect to the web server and the DNS server on VM1

If you delete Rule2, Internet users **[answer choice].**

- can connect to only the DNS server on VM1
- can connect to only the web server on VM1
- can connect to the web server and the DNS server on VM1
- cannot connect to the web server and the DNS server on VM1

Box 1:
Rule2 blocks ports 50-60, which includes port 53, the DNS port. Internet users can reach to the Web server, since it uses port 80.
Box 2:
If Rule2 is removed internet users can reach the DNS server as well.
Note: Rules are processed in priority order, with lower numbers processed before higher numbers, because lower numbers have higher priority. Once traffic matches a rule, processing stops. As a result, any rules that exist with lower priorities (higher numbers) that have the same attributes as rules with higher priorities are not processed.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/security-overview

Community Discussion

Question #483

You plan to deploy three Azure virtual machines named VM1, VM2, and VM3. The virtual machines will host a web app named App1.
You need to ensure that at least two virtual machines are available if a single Azure datacenter becomes unavailable.
What should you deploy?

A) all three virtual machines in a single Availability Zone
B) all virtual machines in a single Availability Set
C) each virtual machine in a separate Availability Zone (Correct Answer)
D) each virtual machine in a separate Availability Set

Explanation

Correct Answer: C ?
Use availability zones to protect from datacenter level failures.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/manage-availability
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/tutorial-availability-sets

Community Discussion

Question #484

You have an Azure virtual machine named VM1 that runs Windows Server 2019.
You save VM1 as a template named Template1 to the Azure Resource Manager library.
You plan to deploy a virtual machine named VM2 from Template1.
What can you configure during the deployment of VM2?

A) operating system
B) administrator username (Correct Answer)
C) virtual machine size
D) resource group

Explanation

Correct Answer: B ?
When deploying a virtual machine from a template, you must specify:
✑ the Resource Group name and location for the VM
✑ the administrator username and password
✑ an unique DNS name for the public IP
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/ps-template

Community Discussion

Question #485

You have an Azure subscription that contains an Azure virtual machine named VM1. VM1 runs a financial reporting app named App1 that does not support multiple active instances.
At the end of each month, CPU usage for VM1 peaks when App1 runs.
You need to create a scheduled runbook to increase the processor performance of VM1 at the end of each month.
What task should you include in the runbook?

A) Add the Azure Performance Diagnostics agent to VM1.
B) Modify the VM size property of VM1.
C) Add VM1 to a scale set.
D) Increase the vCPU quota for the subscription.
E) Add a Desired State Configuration (DSC) extension to VM1. (Correct Answer)

SecExams

Explanation

Correct Answer: E ?
Reference:
https://docs.microsoft.com/en-us/azure/automation/automation-quickstart-dsc-configuration

Community Discussion

Question #486

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.
You need to ensure that NGINX is available on all the virtual machines after they are deployed.
What should you use?

A) Deployment Center in Azure App Service
B) A Desired State Configuration (DSC) extension (Correct Answer)
C) the New-AzConfigurationAssignment cmdlet

D) a Microsoft Intune device configuration profile

Explanation

Correct Answer: B ?
Azure virtual machine extensions are small packages that run post-deployment configuration and automation on Azure virtual machines.
In the following example, the Azure CLI is used to deploy a custom script extension to an existing virtual machine, which installs a Nginx webserver. az vm extension set \
--resource-group myResourceGroup \
--vm-name myVM --name customScript \
--publisher Microsoft.Azure.Extensions \
--settings '{"commandToExecute": "apt-get install -y nginx"}
Note:
There are several versions of this question in the exam. The question has two correct answers:
1. a Desired State Configuration (DSC) extension
2. Azure Custom Script Extension
The question can have other incorrect answer options, including the following:
✑ the Publish-AzVMDscConfiguration cmdlet
✑ Azure Application Insights
Reference:
https://docs.microsoft.com/en-us/azure/architecture/framework/devops/automation-configuration

SecExams

Community Discussion

Question #487

HOTSPOT -

You deploy an Azure Kubernetes Service (AKS) cluster that has the network profile shown in the following exhibit.

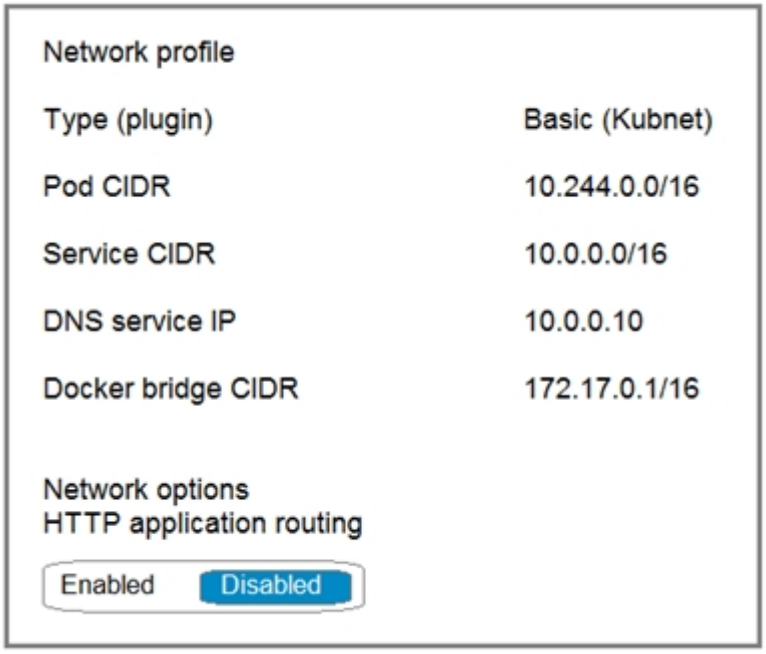

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Containers will be assigned an IP address in the **[answer choice]** subnet.

- 10.244.0.0/16
- 10.0.0.0/16
- 172.17.0.1/16

Services in the AKS cluster will be assigned an IP address in the **[answer choice]** subnet.

- 10.244.0.0/16
- 10.0.0.0/16
- 172.17.0.1/16

Explanation

Correct Answer:

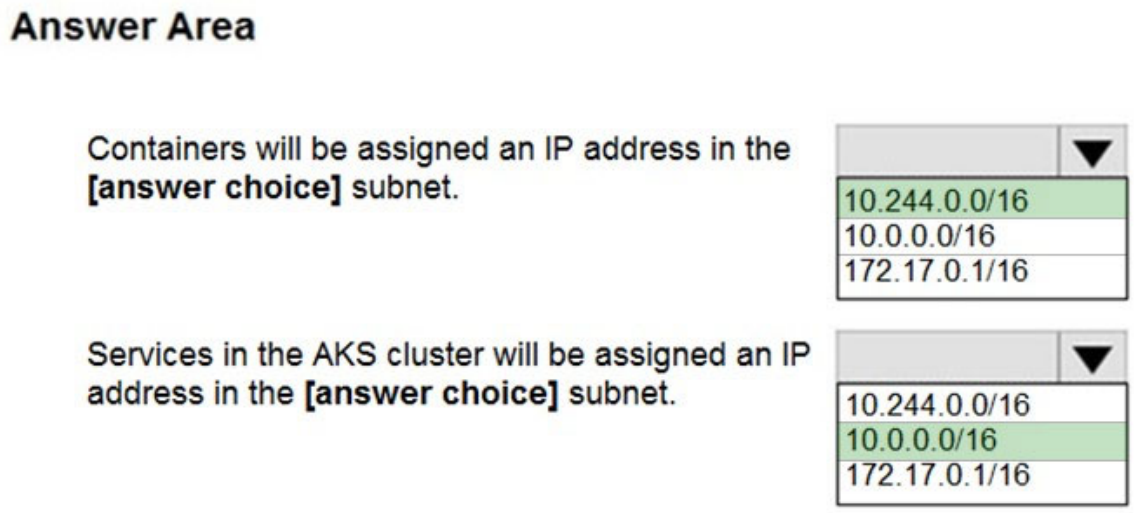

Box 1: 10.244.0.0/16 -
The Pod CIDR.
Note: The --pod-cidr should be a large address space that isn't in use elsewhere in your network environment. This range includes any on-premises network ranges if you connect, or plan to connect, your Azure virtual networks using Express Route or a Site-to-Site VPN connection.
This address range must be large enough to accommodate the number of nodes that you expect to scale up to. You can't change this address range once the cluster is deployed if you need more addresses for additional nodes.

Box 2: 10.0.0.0/16 -
The --service-cidr is used to assign internal services in the AKS cluster an IP address.
Reference:
https://docs.microsoft.com/en-us/azure/aks/configure-kubenet

Community Discussion

SecExams

Question #488

SecExams

HOTSPOT -

You have the App Service plan shown in the following exhibit.

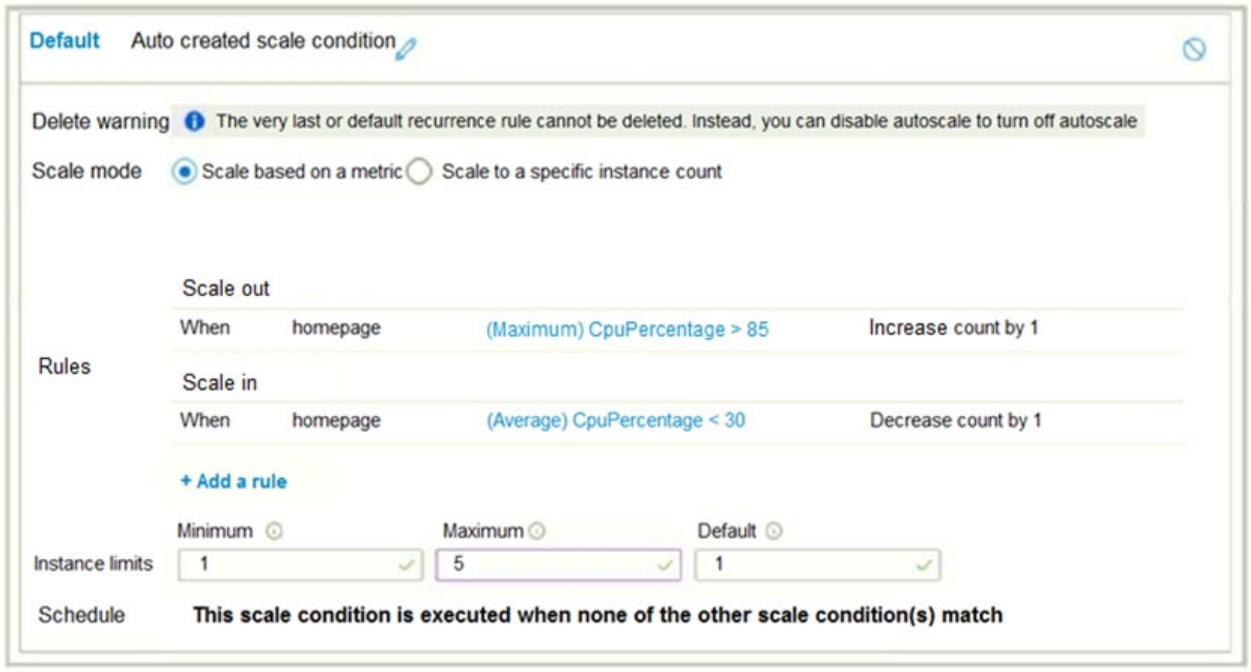

The scale-in settings for the App Service plan are configured as shown in the following exhibit.

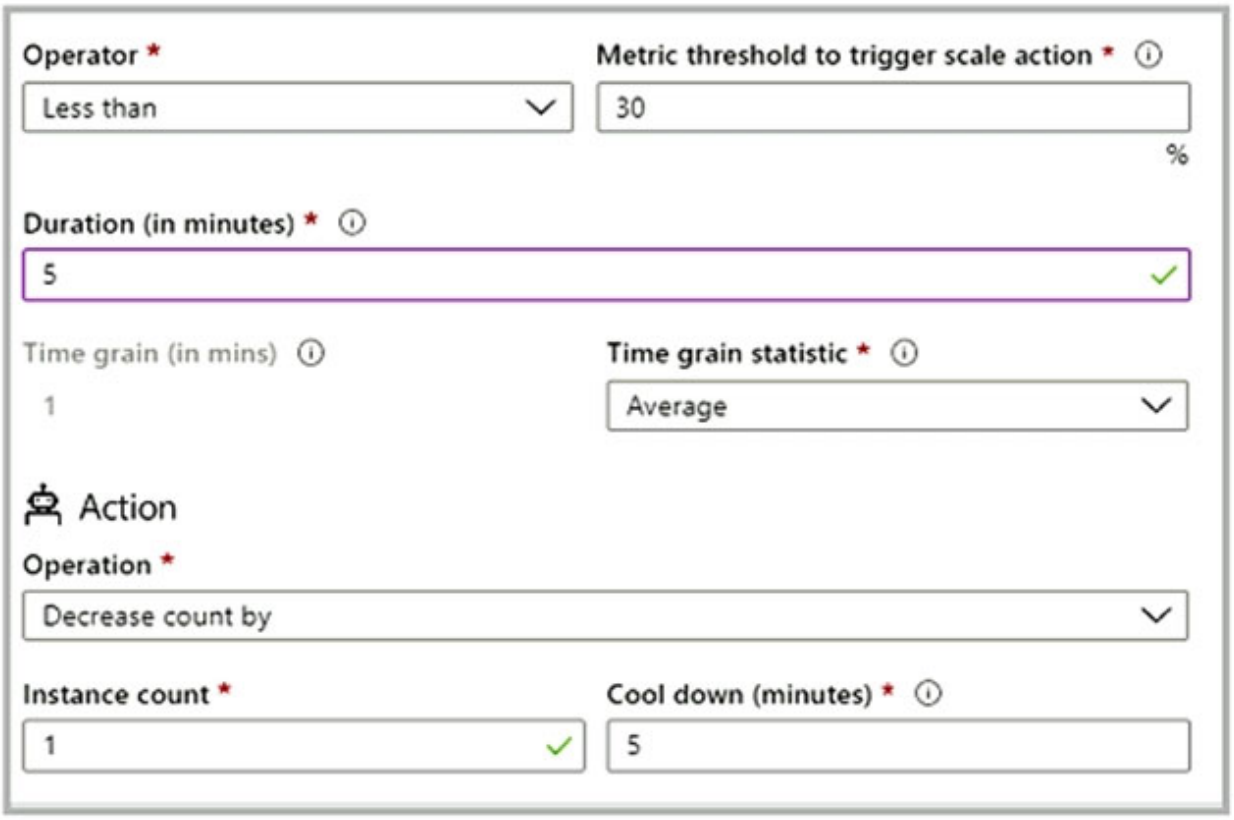

The scale out rule is configured with the same duration and cool down tile as the scale in rule.

Use the drop-down menus to select the answer choice that completes each

statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

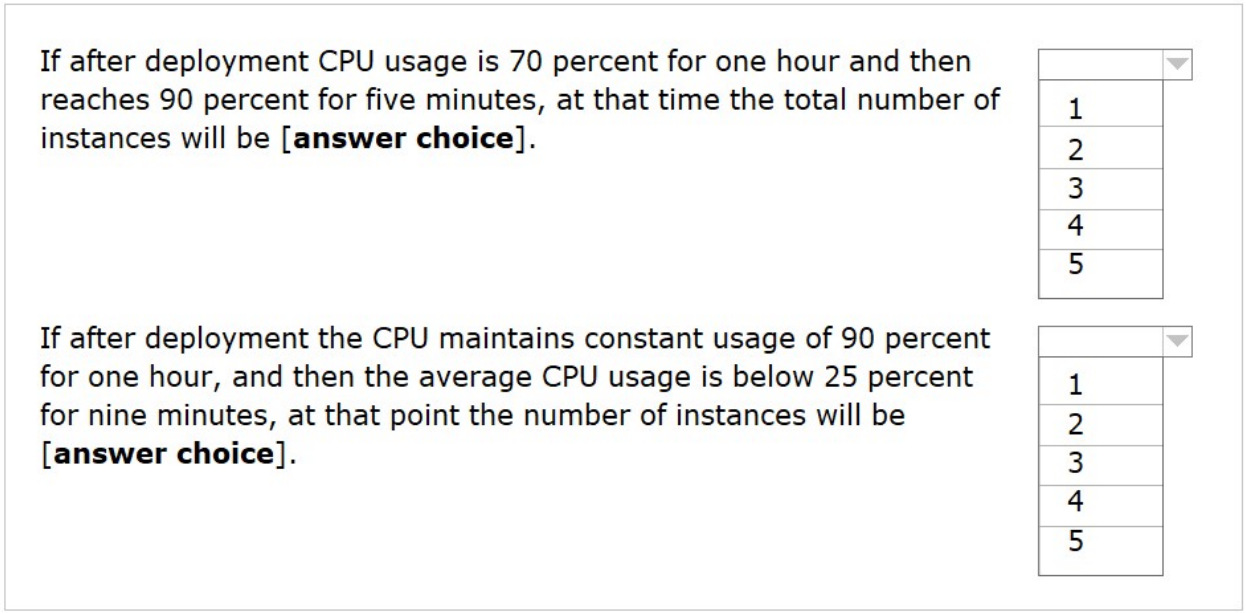

Explanation

Correct Answer:

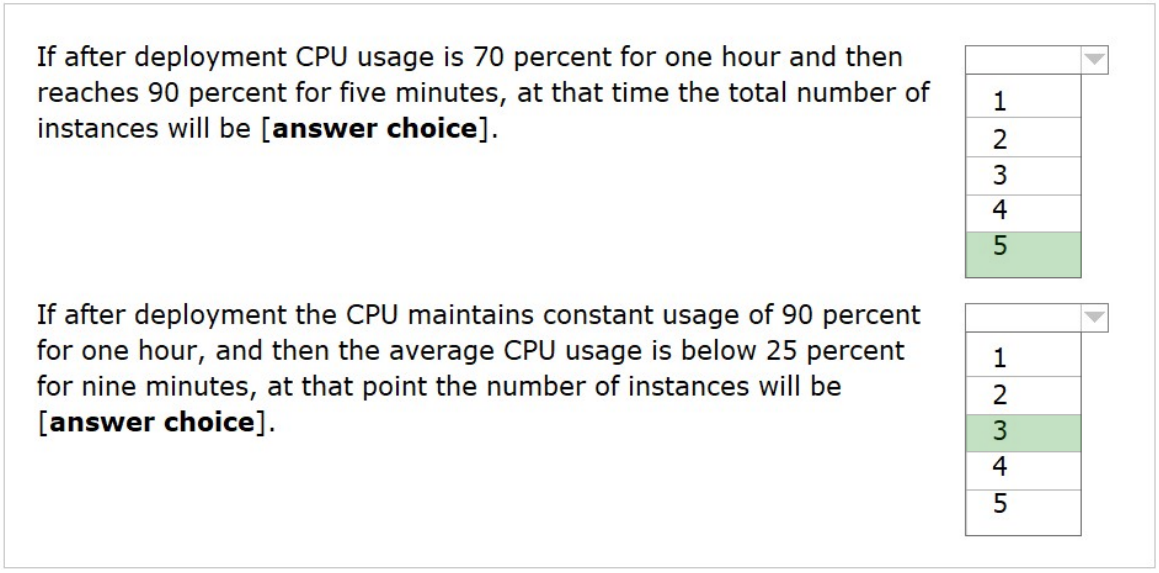

Box 1: 5 -

The maximum 5 will kept as the CPU Usage >= 30.

Box 2: 3 -

As soon as the average CPU usage drops below 30%, the count will decrease by 1. After the 5 minute cool-down it will decrease by another 1, reaching 3.

Reference:

https://docs.microsoft.com/en-us/azure/azure-monitor/learn/tutorial-autoscale-performance-schedule

Community Discussion

Correct Answer: Box 1: 2 70% for 1h, and then 90% for 5 minutes. So, from the default of 1 it will scale out out 1 more. So, 2 in total. Box 2: 4 90% for 1h and then 25% for 9minutes. So, from the default of 1 it will it scale in to the max 5 (60/5 = 12, which means 6 times scale out, because we have 5 minutes period of cool down). Then when it drops to 25% for 9 minutes and it will scale in once after 5 mins (since the average of the last 5 minutes is under 30%), so it will decrease by 1, so 4 in total. Then it will have a cooldown of 5 minutes before scaling in again, but since only 4 minutes left from 9 minutes (9-5 = 4), it won't scale in again. So, 4 in total. Reference: https://docs.microsoft.com/en-us/azure/azure-monitor/learn/tutorial-autoscale-performance-schedule https://docs.microsoft.com/en-us/azure/azure-monitor/autoscale/autoscale-understanding-settings

I think: 2 4

I respect your answer mlantonis, but you explaination on box 2 confused me. Can't we just say that while it was on 90% we all know that it stays at 5 instances. When the threshold dropped down to 25% for 9 minutes, the count decreased by 1 only since it didn't reach 10 minutes. Nonetheless, Mlantonis is correct and explanation is also correct.

I respect your answer mlantonis, but you explaination on box 2 confused me. Can't we just say that while it was on 90% we all know that it stays at 5 instances. When the threshold dropped down to 25% for 9 minutes, the count decreased by 1 only since it didn't reach 10 minutes. Nonetheless, Mlantonis is correct and explanation is also correct.

it starts at 1. Scale out if CPU > 85% over 5 min and pause during 5 min (Cool Down). Assuming instant scaling...and CPU still at 90% at all time (very simplified view). If CPU is at 90% for one hour we have 0 min : 1 (default) 5 min : 2 5-10 min : Still 2 (Cooldown time) 10 min : 3 (average last 5 is still CPU>90%) 10 min-15 min : Still 3 15 min : 4 and so on until we reach 5 (maximum capacity). The calculation provided by Fed seems not correct as it is assumed that after the cool down time, the system wait another 5 min to collect metrics which seems not the case.

SecExams

Question #489

SecExams

HOTSPOT -

You have the App Service plan shown in the following exhibit.

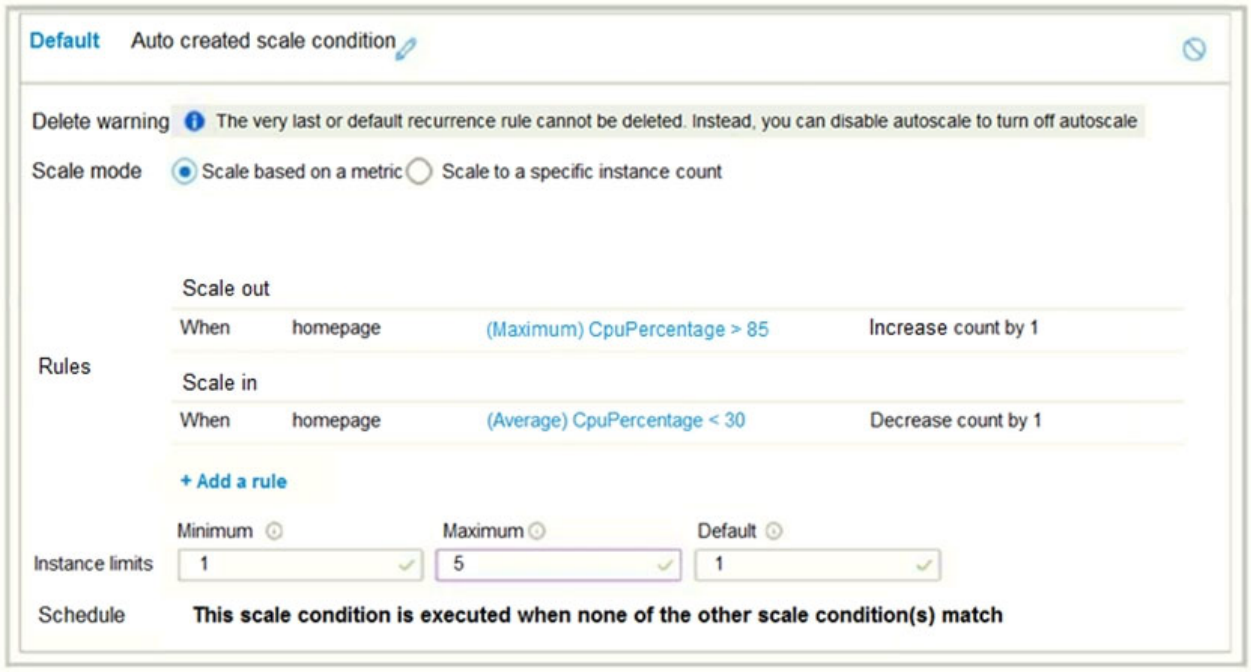

The scale-in settings for the App Service plan are configured as shown in the following exhibit.

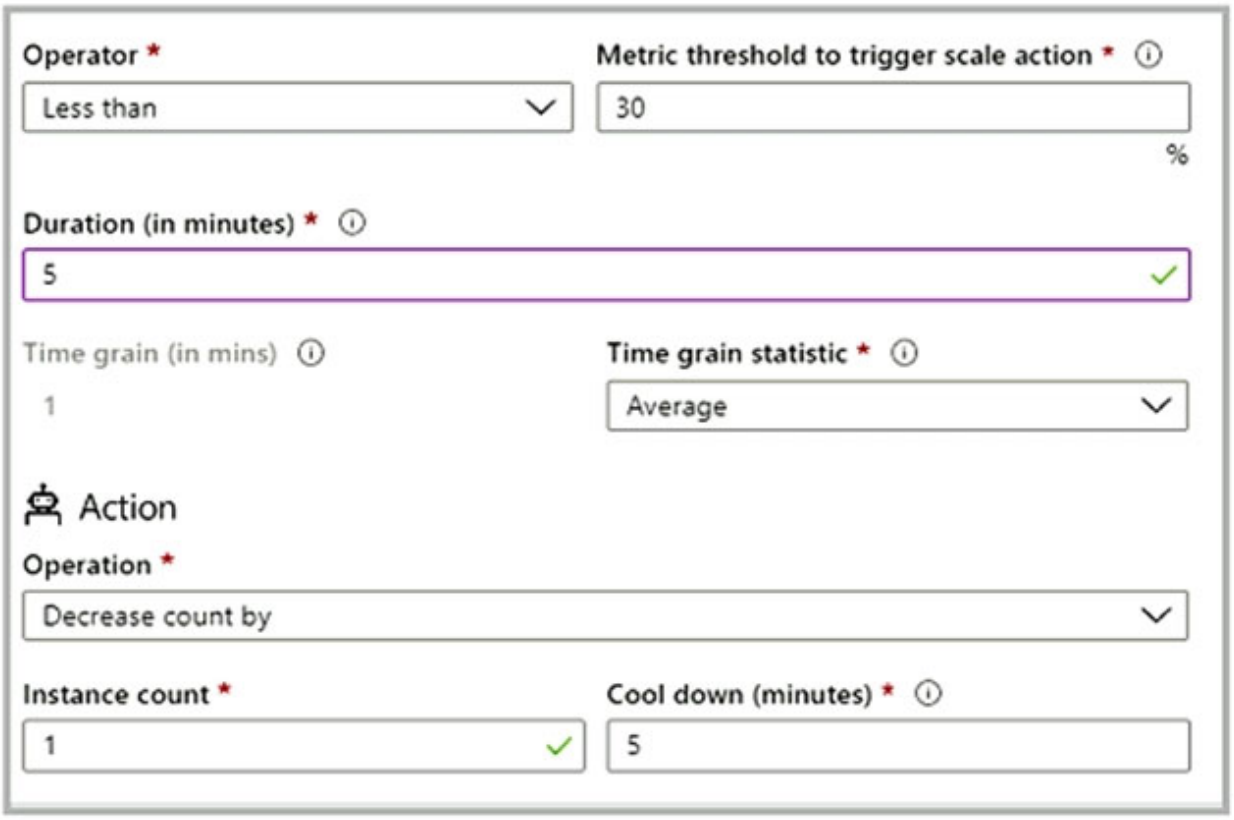

The scale out rule is configured with the same duration and cool down tile as the scale in rule.

Use the drop-down menus to select the answer choice that completes each

statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

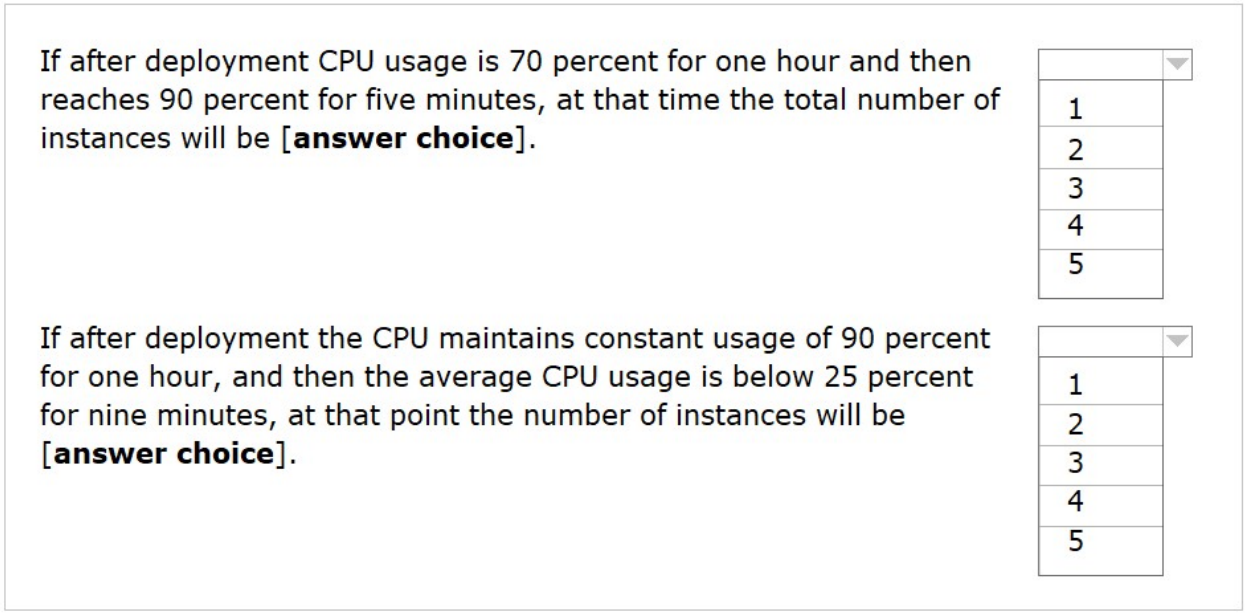

Explanation

Correct Answer:

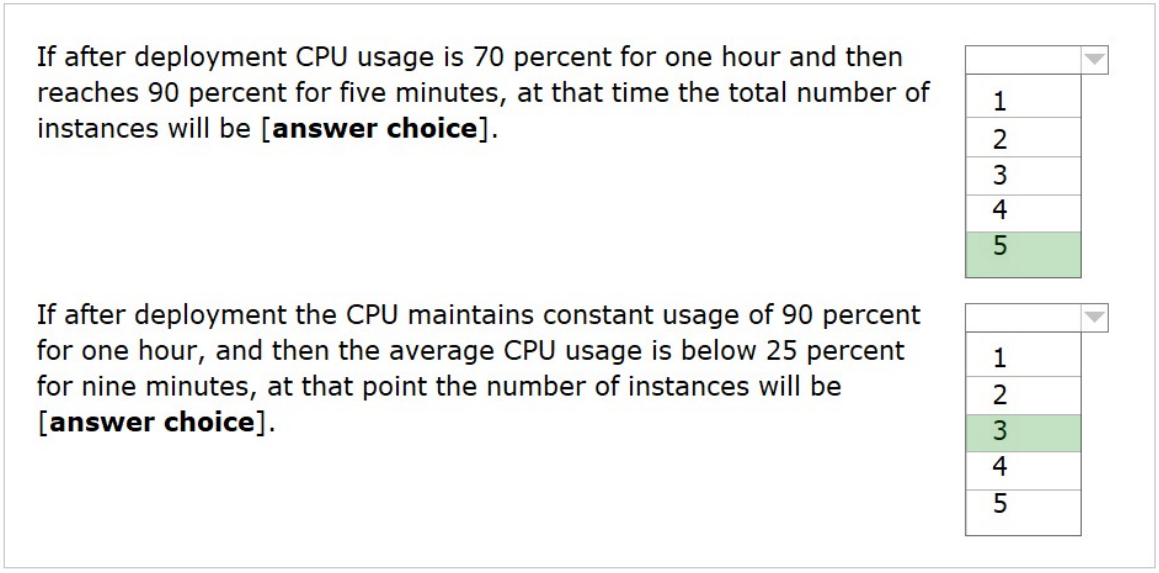

Box 1: 5 -

The maximum 5 will kept as the CPU Usage >= 30.

Box 2: 3 -

As soon as the average CPU usage drops below 30%, the count will decrease by 1. After the 5 minute cool-down it will decrease by another 1, reaching 3.

Reference:

https://docs.microsoft.com/en-us/azure/azure-monitor/learn/tutorial-autoscale-performance-schedule

Community Discussion

Question #490

You have an Azure virtual machine named VM1 that runs Windows Server 2019.
The VM was deployed using default drive settings.
You sign in to VM1 as a user named User1 and perform the following actions:

- ✑ Create files on drive C.
- ✑ Create files on drive D.
- ✑ Modify the screen saver timeout.
- ✑ Change the desktop background.

You plan to redeploy VM1.
Which changes will be lost after you redeploy VM1?

A) the modified screen saver timeout
B) the new desktop background
C) the new files on drive D (Correct Answer)
D) the new files on drive C

Explanation

Correct Answer:
C

Community Discussion

Correct Answer: C For Windows Server, the temporary disk is mounted as “D:\”. For Linux based VM’s the temporary disk is mounted as “/dev/sdb1”. Reference: https://www.cloudelicious.net/azure-vms-and-their-temporary-storage

In the exam on Feb 26, 2022, I passed today's exam 784. happy weekend!!

That's what I'm thinking. It's also weird to see people pass and then come all the way back here

That's what I'm thinking. It's also weird to see people pass and then come all the way back here

That's what I'm thinking. It's also weird to see people pass and then come all the way back here

Question #491

You have an Azure virtual machine named VM1 that runs Windows Server 2019.
The VM was deployed using default drive settings.
You sign in to VM1 as a user named User1 and perform the following actions:

- ✑ Create files on drive C.
- ✑ Create files on drive D.
- ✑ Modify the screen saver timeout.
- ✑ Change the desktop background.

You plan to redeploy VM1.
Which changes will be lost after you redeploy VM1?

A) the modified screen saver timeout
B) the new desktop background
C) the new files on drive D (Correct Answer)
D) the new files on drive C

Explanation

Correct Answer: C ?

Community Discussion

sadf

Question #492

You have an Azure subscription.

You have an on-premises virtual machine named VM1. The settings for VM1 are shown in the exhibit. (Click the Exhibit tab.)

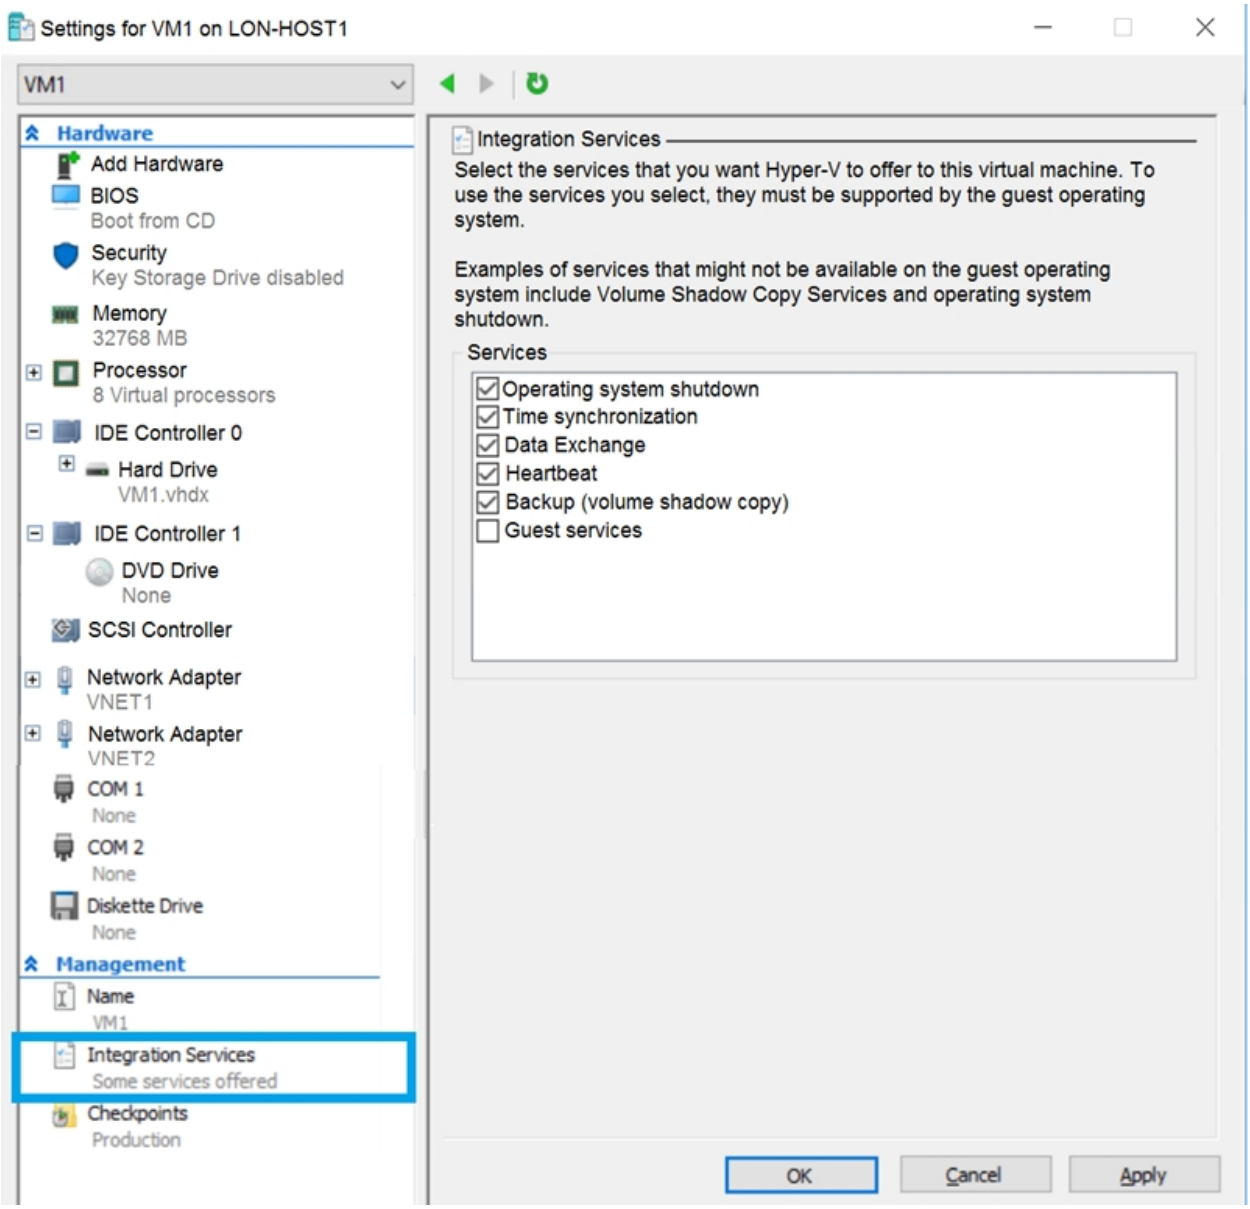

You need to ensure that you can use the disks attached to VM1 as a template for Azure virtual machines.

What should you modify on VM1?

A) the memory

B) the network adapters

C) the hard drive (Correct Answer)

D) the processor

E) Integration Services

Explanation

Correct Answer:
C
From the exhibit we see that the disk is in the VHDX format.
Before you upload a Windows virtual machine (VM) from on-premises to Microsoft Azure, you must prepare the virtual hard disk (VHD or VHDX). Azure supports only generation 1 VMs that are in the VHD file format and have a fixed sized disk. The maximum size allowed for the VHD is 1,023 GB. You can convert a generation 1 VM from the VHDX file system to VHD and from a dynamically expanding disk to fixed-sized.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/prepare-for-upload-vhd-image

SecExams

Community Discussion

Correct Answer: C The Virtual hard disk is VHDx, it should be formated to VHD before migration from on-premises to Azure. Azure supports only generation 1 VMs that are in the VHD file format and have a fixed sized disk. The maximum size allowed for the VHD is 1,023 GB. You can convert a generation 1 VM from the VHDX file system to VHD and from a dynamically expanding disk to fixed-sized. Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/windows/prepare-for-upload-vhd-image

Correct. the VIrtual hard disk is VHDx, it should be format to VHD before migration from on-premis to Azure

Correct

Correct

Passed today. this is part of the exam. 4/23/22

Question #493

You have an Azure subscription.

You have an on-premises virtual machine named VM1. The settings for VM1 are shown in the exhibit. (Click the Exhibit tab.)

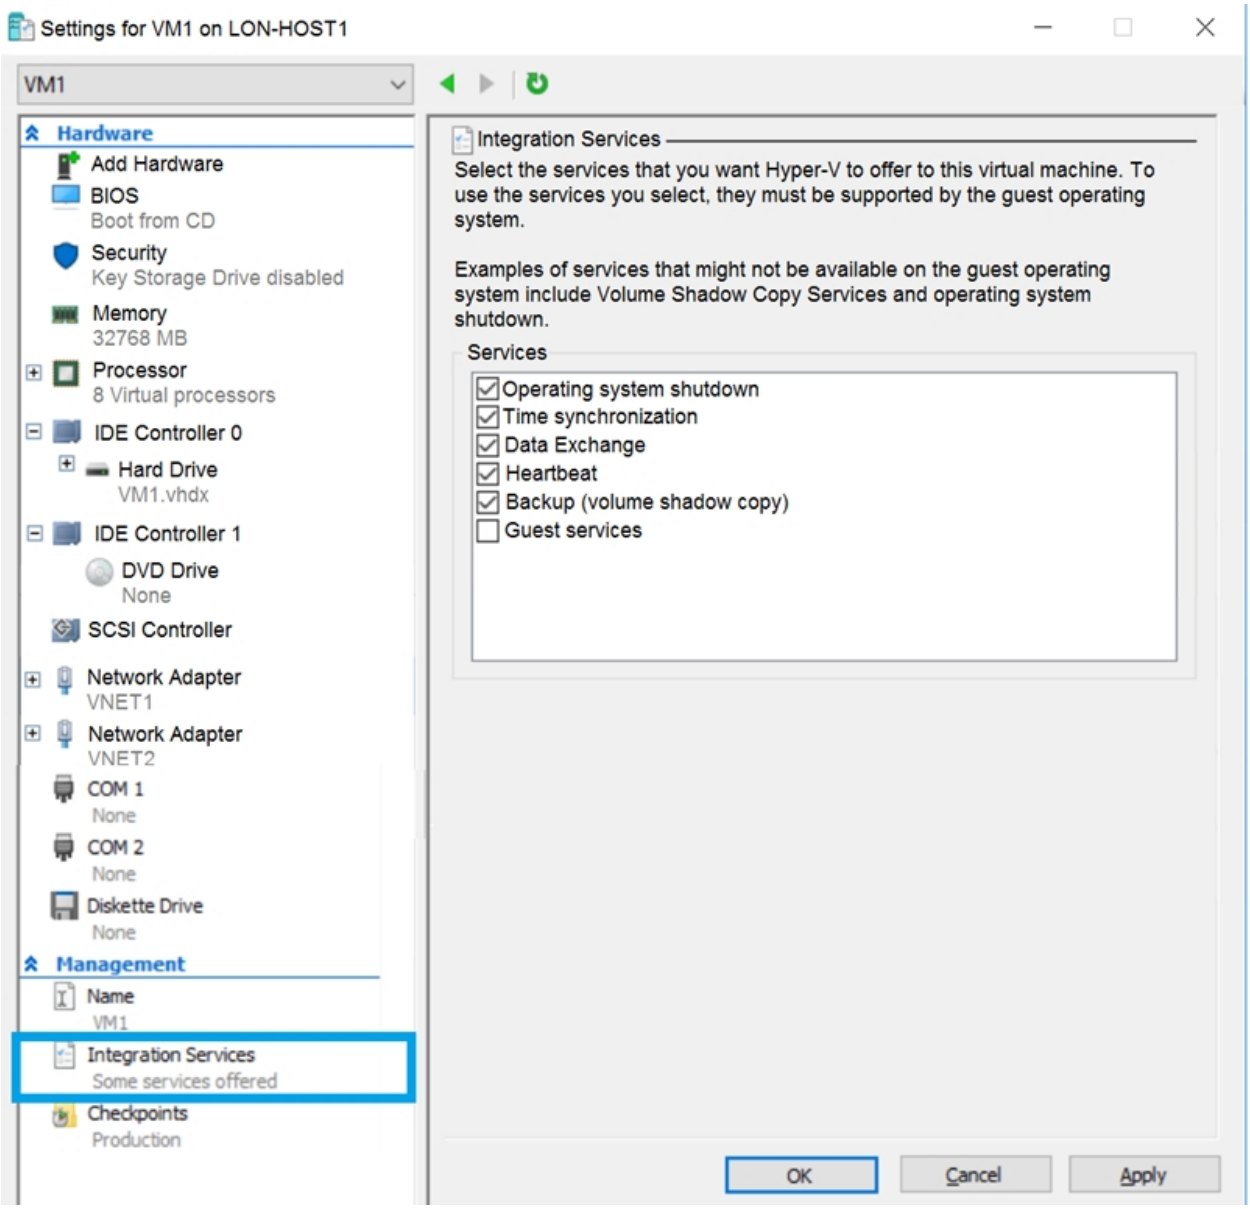

You need to ensure that you can use the disks attached to VM1 as a template for Azure virtual machines.

What should you modify on VM1?

A) the memory

B) the network adapters

C) the hard drive (Correct Answer)

D) the processor

E) Integration Services

Explanation

Correct Answer: C ?
From the exhibit we see that the disk is in the VHDX format.
Before you upload a Windows virtual machine (VM) from on-premises to Microsoft Azure, you must prepare the virtual hard disk (VHD or VHDX). Azure supports only generation 1 VMs that are in the VHD file format and have a fixed sized disk. The maximum size allowed for the VHD is 1,023 GB. You can convert a generation 1 VM from the VHDX file system to VHD and from a dynamically expanding disk to fixed-sized.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/prepare-for-upload-vhd-image

Community Discussion

SecExams

Question #494

HOTSPOT -

You have an Azure subscription that contains a virtual machine scale set. The scale set contains four instances that have the following configurations:

- Operating system: Windows Server 2016
- Size: Standard_D1_v2

You run the get-azvmss cmdlet as shown in the following exhibit:

```
PS Azure:\> (Get-AzVmss -Name WebProd -ResourceGroupName RG1).VirtualMachineProfile.OsProfile.WindowsConfiguration

ProvisionVMAgent          : True
EnableAutomaticUpdates    : False
TimeZone                  :
AdditionalUnattendContent :
WinRM                     :

Azure:/
PS Azure:\> Get-AzVmss -Name WebProd -ResourceGroupName RG1 | Select -ExpandProperty UpgradePolicy

        Mode RollingUpgradePolicy  AutomaticOSUpgradePolicy
        ---- ---------------------  ---------------------------------
Automatic                          Microsoft.Azure.Management.Compute.Models.AutomaticOSUpgradePolicy

Azure:/
PS Azure:\> []
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

When an administrator changes the virtual machine size, the size will be changed on up to **[answer choice]** virtual machines simultaneously.

- 0
- 1
- 2
- 4

When a new build of the Windows Server 2016 image is released, the new build will be deployed to up to **[answer choice]** virtual machines simultaneously.

- 0
- 1
- 2
- 4

Explanation

Correct Answer:

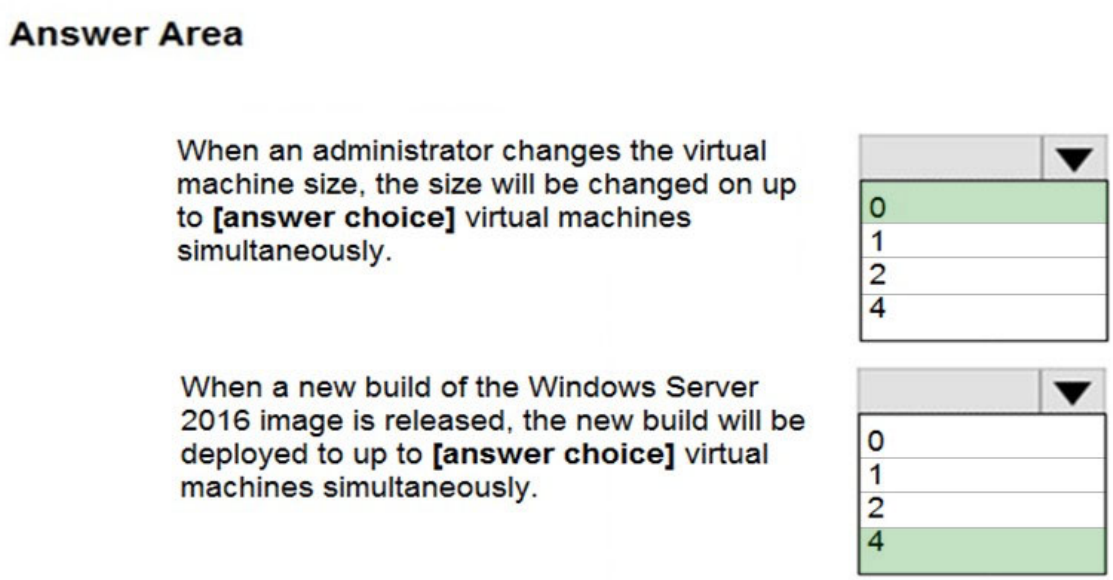

The Get-AzVmssVM cmdlet gets the model view and instance view of a Virtual Machine Scale Set (VMSS) virtual machine.

Box 1: 0 -
The enableAutomaticUpdates parameter is set to false. To update existing VMs, you must do a manual upgrade of each existing VM.

Box 2: 4 -
Enabling automatic OS image upgrades on your scale set helps ease update management by safely and automatically upgrading the OS disk for all instances in the scale set.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-upgrade-scale-set https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-automatic-upgrade

Community Discussion

Correct Answer: Box 1: 4 If you resize the Scale Set all the VMs get resized at once, thus 4 is the correct answer. Box 2: 1 Automatic OS updates update 20% of the VMs at once, with a minimum of 1 VM instance at a time. Also 20% of 4 = 0.8. Reference: https://docs.microsoft.com/en-us/learn/modules/build-app-with-scale-sets/2-features-benefits-virtual-machine-scale-sets https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-automatic-upgrade https://

docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-upgrade-scale-set

The question asks "if the administrator changes the size", not if it gets scaled up vertically. I tested this, and if you resize the scale set all the virtual machines get resized at once, thus 4 is the correct answer. For the second part, automatic OS updates update 20% of the VMs at once, with a minimum of 1 VM instance at a time.

That is patches where as this is os upgrades

That is patches where as this is os upgrades

That is patches where as this is os upgrades

SecExams

Question #495

HOTSPOT -

You have an Azure subscription that contains a virtual machine scale set. The scale set contains four instances that have the following configurations:

- Operating system: Windows Server 2016
- Size: Standard_D1_v2

You run the get-azvmss cmdlet as shown in the following exhibit:

```
PS Azure:\> (Get-AzVmss -Name WebProd -ResourceGroupName RG1).VirtualMachineProfile.OsProfile.WindowsConfiguration

ProvisionVMAgent          : True
EnableAutomaticUpdates    : False
TimeZone                  :
AdditionalUnattendContent :
WinRM                     :

Azure:/
PS Azure:\> Get-AzVmss -Name WebProd -ResourceGroupName RG1 | Select -ExpandProperty UpgradePolicy

        Mode RollingUpgradePolicy  AutomaticOSUpgradePolicy
        ---- ---------------------  ---------------------------------
Automatic                          Microsoft.Azure.Management.Compute.Models.AutomaticOSUpgradePolicy

Azure:/
PS Azure:\> []
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

When an administrator changes the virtual machine size, the size will be changed on up to **[answer choice]** virtual machines simultaneously.

- 0
- 1
- 2
- 4

When a new build of the Windows Server 2016 image is released, the new build will be deployed to up to **[answer choice]** virtual machines simultaneously.

- 0
- 1
- 2
- 4

Explanation

Correct Answer:

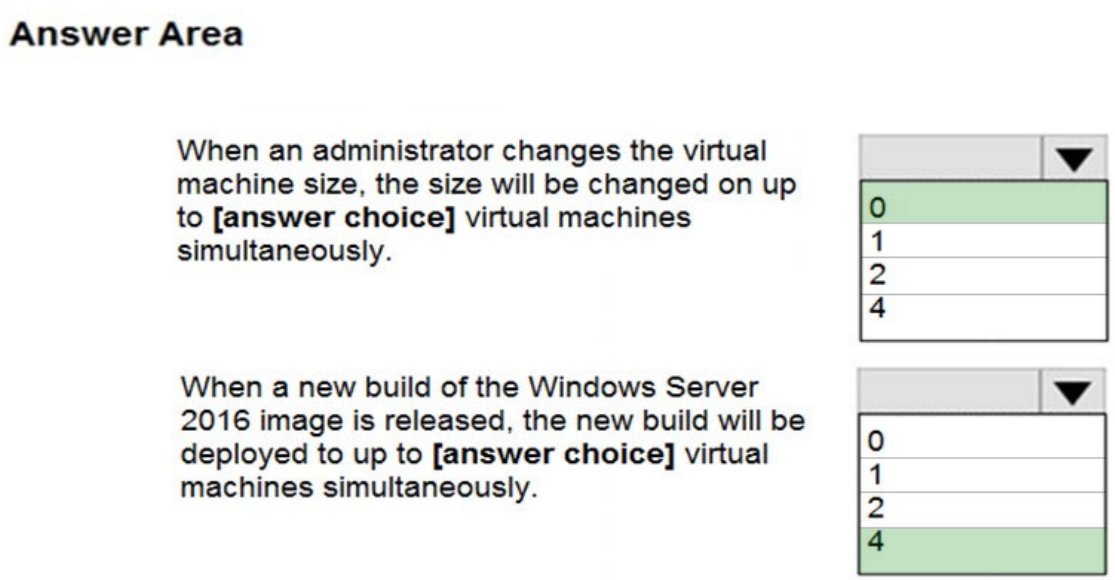

The Get-AzVmssVM cmdlet gets the model view and instance view of a Virtual Machine Scale Set (VMSS) virtual machine.

Box 1: 0 -
The enableAutomaticUpdates parameter is set to false. To update existing VMs, you must do a manual upgrade of each existing VM.

Box 2: 4 -
Enabling automatic OS image upgrades on your scale set helps ease update management by safely and automatically upgrading the OS disk for all instances in the scale set.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-upgrade-scale-set https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-automatic-upgrade

Community Discussion

Question #496

You have an Azure subscription named Subscription1 that is used by several departments at your company. Subscription1 contains the resources in the following table:

Name	Type
storage1	Storage account
RG1	Resource group
container1	Blob container
share1	File share

Another administrator deploys a virtual machine named VM1 and an Azure Storage account named storage2 by using a single Azure Resource Manager template.

You need to view the template used for the deployment.

From which blade can you view the template that was used for the deployment?

A) VM1

B) RG1 (Correct Answer)

C) storage2

D) container1

Explanation

Correct Answer:

B

View template from deployment history

1. Go to the resource group for your new resource group. Notice that the portal shows the result of the last deployment. Select this link.

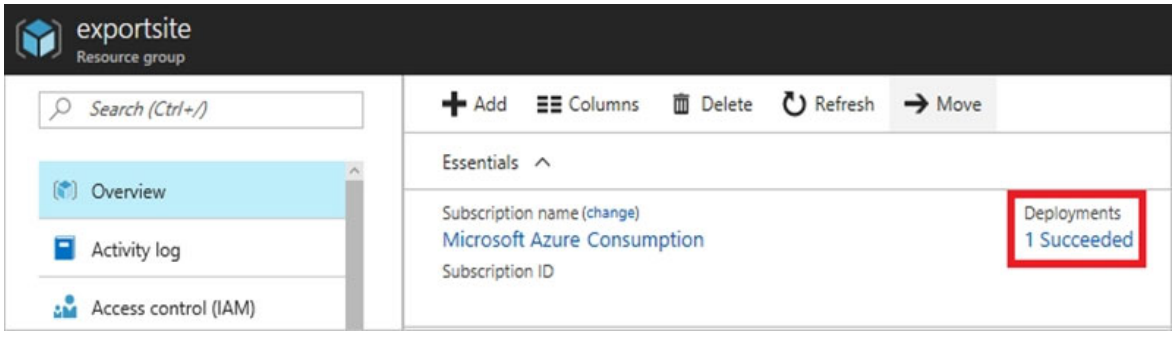

2. You see a history of deployments for the group. In your case, the portal probably lists only one deployment. Select this deployment.

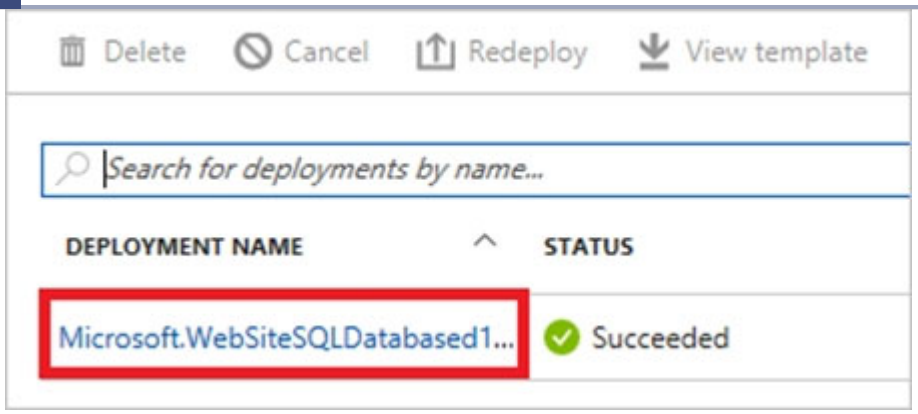

3. The portal displays a summary of the deployment. The summary includes the status of the deployment and its operations and the values that you provided for parameters. To see the template that you used for the deployment, select View template.

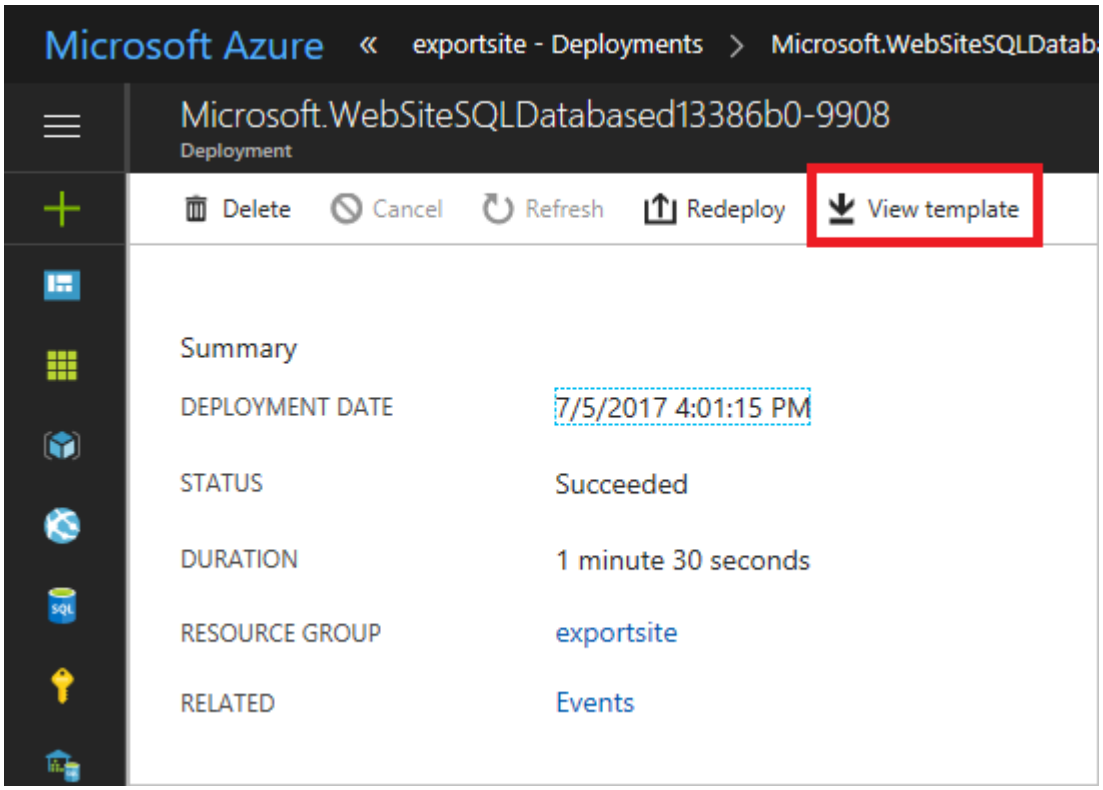

Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-manager-export-template

Community Discussion

Correct answer B RG1. the only way to see both together storage and VM

Correct Answer: B

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. Answered B

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. Answered B

Selected Answer: B

Correct Answer B Came up in exam today 920/1000

Question #497

You have an Azure subscription named Subscription1 that is used by several departments at your company. Subscription1 contains the resources in the following table:

Name	Type
storage1	Storage account
RG1	Resource group
container1	Blob container
share1	File share

Another administrator deploys a virtual machine named VM1 and an Azure Storage account named storage2 by using a single Azure Resource Manager template.

You need to view the template used for the deployment.

From which blade can you view the template that was used for the deployment?

A) VM1

B) RG1 (Correct Answer)

C) storage2

D) container1

Explanation

Correct Answer: B ?

View template from deployment history

1. Go to the resource group for your new resource group. Notice that the portal shows the result of the last deployment. Select this link.

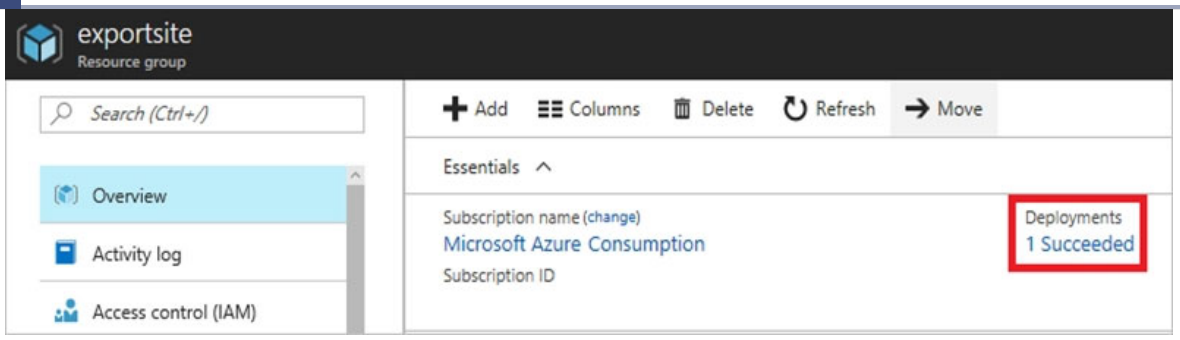

2. You see a history of deployments for the group. In your case, the portal probably lists only one deployment. Select this deployment.

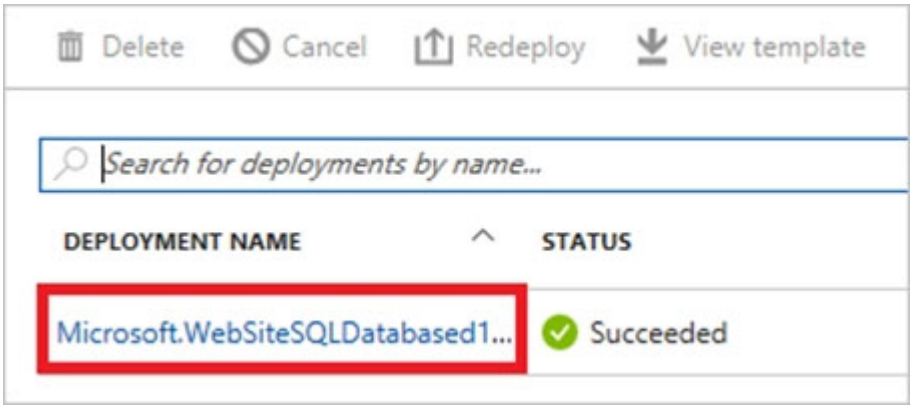

3. The portal displays a summary of the deployment. The summary includes the status of the deployment and its operations and the values that you provided for parameters. To see the template that you used for the deployment, select View template.

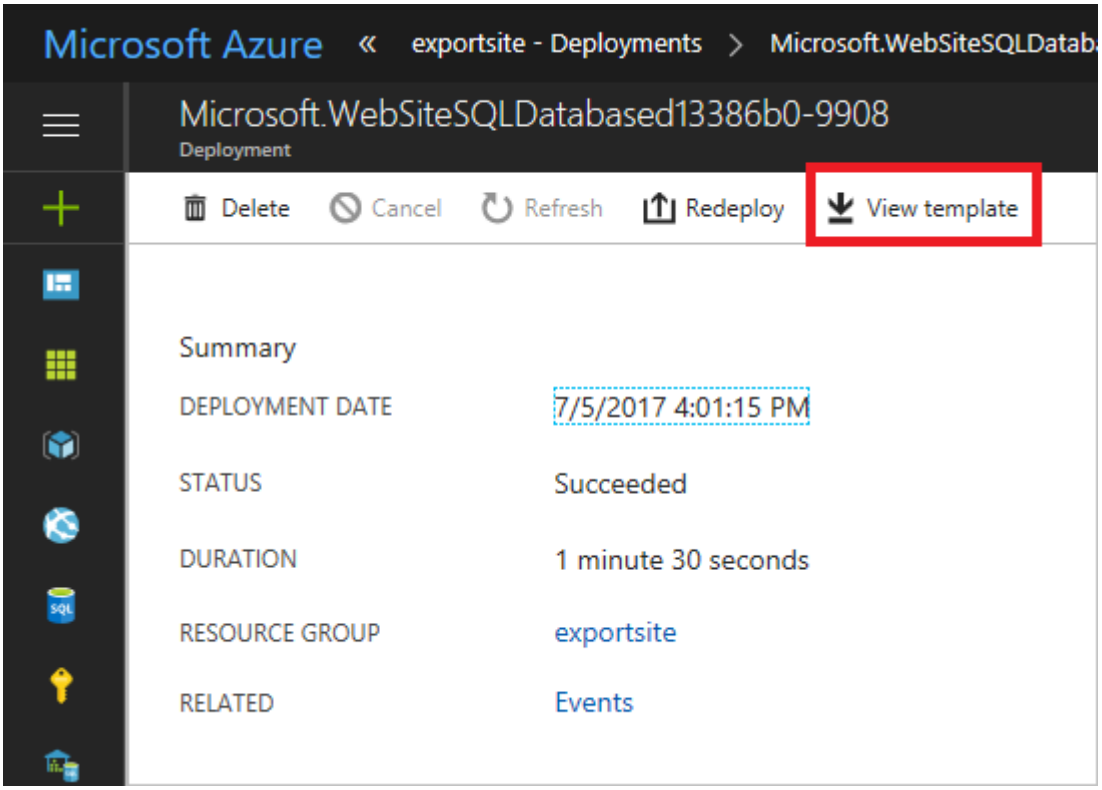

Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-manager-export-template

Community Discussion

Question #498

You have an Azure web app named App1. App1 has the deployment slots shown in the following table:

Name	Function
webapp1-prod	Production
webapp1-test	Staging

In webapp1-test, you test several changes to App1.
You back up App1.
You swap webapp1-test for webapp1-prod and discover that App1 is experiencing performance issues.
You need to revert to the previous version of App1 as quickly as possible.
What should you do?

A) Redeploy App1
B) Swap the slots (Correct Answer)
C) Clone App1
D) Restore the backup of App1

Explanation

Correct Answer:
B
When you swap deployment slots, Azure swaps the Virtual IP addresses of the source and destination slots, thereby swapping the URLs of the slots. We can easily revert the deployment by swapping back.
Reference:
https://docs.microsoft.com/en-us/azure/app-service/deploy-staging-slots

Community Discussion

Correct Swap slots. this is advantage of using slots. where each slot has its own host name while the app content and configuration elements are the one who are swapped. this is done seamlessly for traffic direction and no requests are dropped or downtime happens.

Correct Answer: B When you swap deployment slots, Azure swaps the Virtual IP addresses of the source and destination slots, thereby swapping the URLs of the slots. We can easily revert the deployment by swapping back. Deployment slots are live apps with their own host names. App content and configurations elements can be swapped between two deployment slots, including the production slot. Deploying your application to a non-production slot has the following benefits: 1. You can validate app changes in a staging deployment slot before swapping it with the production slot. 2. Deploying an app to a slot first and swapping it into production makes sure that all instances of the slot are warmed up before being swapped into production. Reference: https://docs.microsoft.com/en-us/azure/app-service/deploy-staging-slots

Correct

Correct

On the Exam 3/29/23.

SecExams

Question #499

You have an Azure web app named App1. App1 has the deployment slots shown in the following table:

Name	Function
webapp1-prod	Production
webapp1-test	Staging

In webapp1-test, you test several changes to App1.
You back up App1.
You swap webapp1-test for webapp1-prod and discover that App1 is experiencing performance issues.
You need to revert to the previous version of App1 as quickly as possible.
What should you do?

A) Redeploy App1
B) Swap the slots (Correct Answer)

C) Clone App1
D) Restore the backup of App1

Explanation

Correct Answer: B ?
When you swap deployment slots, Azure swaps the Virtual IP addresses of the source and destination slots, thereby swapping the URLs of the slots. We can easily revert the deployment by swapping back.
Reference:
https://docs.microsoft.com/en-us/azure/app-service/deploy-staging-slots

Community Discussion

SecExams

Question #500

HOTSPOT -

You have an Azure subscription named Subscription1. Subscription1 contains two Azure virtual machines VM1 and VM2. VM1 and VM2 run Windows Server 2016.

VM1 is backed up daily by Azure Backup without using the Azure Backup agent.

VM1 is affected by ransomware that encrypts data.

You need to restore the latest backup of VM1.

To which location can you restore the backup? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

You can perform a file recovery of VM1 to:

- VM1 only
- VM1 or a new Azure virtual machine only
- VM1 and VM2 only
- A new Azure virtual machine only
- Any Windows computer that has Internet connectivity

You can restore VM1 to:

- VM1 only
- VM1 or a new Azure virtual machine only
- VM1 and VM2 only
- Any Windows computer that has Internet connectivity

Explanation

Correct Answer:

Answer Area

You can perform a file recovery of VM1 to:

- VM1 only
- VM1 or a new Azure virtual machine only
- VM1 and VM2 only
- A new Azure virtual machine only
- Any Windows computer that has Internet connectivity

You can restore VM1 to:

- VM1 only
- VM1 or a new Azure virtual machine only
- VM1 and VM2 only
- Any Windows computer that has Internet connectivity

Note: The new VM must be in the same region.

Reference:

https://docs.microsoft.com/en-us/azure/backup/backup-azure-arm-restore-vms

SecExams

Community Discussion

Question #501

HOTSPOT -

You have an Azure subscription named Subscription1. Subscription1 contains two Azure virtual machines VM1 and VM2. VM1 and VM2 run Windows Server 2016.

VM1 is backed up daily by Azure Backup without using the Azure Backup agent.

VM1 is affected by ransomware that encrypts data.

You need to restore the latest backup of VM1.

To which location can you restore the backup? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

You can perform a file recovery of VM1 to:

- VM1 only
- VM1 or a new Azure virtual machine only
- VM1 and VM2 only
- A new Azure virtual machine only
- Any Windows computer that has Internet connectivity

You can restore VM1 to:

- VM1 only
- VM1 or a new Azure virtual machine only
- VM1 and VM2 only
- Any Windows computer that has Internet connectivity

Explanation

Correct Answer:

Answer Area

You can perform a file recovery of VM1 to:

- VM1 only
- VM1 or a new Azure virtual machine only
- VM1 and VM2 only
- A new Azure virtual machine only
- Any Windows computer that has Internet connectivity

You can restore VM1 to:

- VM1 only
- VM1 or a new Azure virtual machine only
- VM1 and VM2 only
- Any Windows computer that has Internet connectivity

Note: The new VM must be in the same region.
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-azure-arm-restore-vms

SecExams

Community Discussion

Correct Answer: Box 1: Any Windows computer that has Internet connectivity For files recovery, you download and run a windows executable to map a network drive. It can only run when the OS meets the requirements. Any computer running Windows Server 2016 or Windows 10 is suitable. File recovery can be done from any machine on the Internet. Note: There might be compatibility issues with any Windows computer, so consider VM1 and VM2 only as an answer. Box 2: VM1 or a new Azure virtual machine only For restoring a VM, you can choose 'Create new' or 'Replace existing'. Reference: https://docs.microsoft.com/en-us/azure/backup/backup-azure-restore-files-from-vm https://github.com/MicrosoftDocs/azure-docs/blob/master/articles/backup/backup-azure-restore-files-from-vm.md#for-windows-os

File recovery can be done from any machine on internet. for restoring the VM, you can restore the backed up disk and either restore the disk before the malware (VM) or create a any virtual machine

Box 1 should be VM1 and VM2 only: "Restoring files and folders is available only for Azure VMs deployed using the Resource Manager model and protected to a Recovery Services vault." https://docs.microsoft.com/en-us/azure/backup/backup-azure-restore-files-from-vm Box 2: VM1 or New AZure VM only: When restoring a VM, you can't use the replace existing VM option for ADE encrypted VMs. This option is only supported for unencrypted managed disks. https://docs.microsoft.com/en-us/azure/backup/restore-azure-encrypted-virtual-machines

Box 1 should be VM1 and VM2 only: "Restoring files and folders is available only for Azure VMs deployed using the Resource Manager model and protected to a Recovery Services vault." https://docs.microsoft.com/en-us/azure/backup/backup-azure-restore-files-from-vm Box 2: VM1 or New AZure VM only: When restoring a VM, you can't use the replace existing VM option for ADE encrypted VMs. This option is only supported for unencrypted managed disks. https://docs.microsoft.com/en-us/azure/backup/restore-azure-encrypted-virtual-machines

For file recovery, I wouldn't suggest going for the option "any computer with the internet connection" because of the OS compatibility problem. When recovering files, you can't restore files to a previous or future operating system version. In this case, we need either Windows Server 2016 machine or windows 10 client machines, not windows 8.1, or windows 8. Here is the link: https://docs.microsoft.com/en-us/azure/backup/backup-azure-restore-files-from-vm#for-windows-os Therefore, I suggest the option "VM1 and VM2 only" as we definitely know that their O.S. is compatible.

SecExams

Question #502

You plan to back up an Azure virtual machine named VM1.
You discover that the Backup Pre-Check status displays a status of Warning.
What is a possible cause of the Warning status?

A) VM1 is stopped.
B) VM1 does not have the latest version of the Azure VM Agent (WaAppAgent.exe) installed. (Correct Answer)
C) VM1 has an unmanaged disk.
D) A Recovery Services vault is unavailable.

Explanation

Correct Answer: B ?
The Warning state indicates one or more issues in VM's configuration that might lead to

backup failures and provides recommended steps to ensure successful backups. Not having the latest VM Agent installed, for example, can cause backups to fail intermittently and falls in this class of issues.
Reference:
https://azure.microsoft.com/en-us/blog/azure-vm-backup-pre-checks/

Community Discussion

Question #503

You plan to back up an Azure virtual machine named VM1.
You discover that the Backup Pre-Check status displays a status of Warning.
What is a possible cause of the Warning status?

A) VM1 is stopped.
B) VM1 does not have the latest version of the Azure VM Agent (WaAppAgent.exe) installed. (Correct Answer)
C) VM1 has an unmanaged disk.
D) A Recovery Services vault is unavailable.

Explanation

Correct Answer:
B
The Warning state indicates one or more issues in VM's configuration that might lead to backup failures and provides recommended steps to ensure successful backups. Not having the latest VM Agent installed, for example, can cause backups to fail intermittently and falls in this class of issues.
Reference:
https://azure.microsoft.com/en-us/blog/azure-vm-backup-pre-checks/

Community Discussion

Answer is Correct, Check the REF they provided, and this REF by Microsoft also, proves that: https://github.com/MicrosoftDocs/azure-docs/blob/master/articles/backup/backup-azure-manage-windows-server.md

Cleared Exam today 26 Feb, This question was there in exam.

You can backup a stopped VM.

You can backup a stopped VM.

This came out in my exam

Question #504

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1. VM1 was deployed by using a custom Azure Resource Manager template named ARM1.json.
You receive a notification that VM1 will be affected by maintenance.
You need to move VM1 to a different host immediately.
Solution: From the Overview blade, you move the virtual machine to a different resource group.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
You would need to redeploy the VM.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node

Community Discussion

Question #505

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1. VM1 was deployed by using a custom Azure Resource Manager template named ARM1.json.
You receive a notification that VM1 will be affected by maintenance.
You need to move VM1 to a different host immediately.
Solution: From the Overview blade, you move the virtual machine to a different resource group.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
You would need to redeploy the VM.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node

Community Discussion

There are several versions of this question. The following are the correct and incorrect answers that will be presented. Correct Answer: Meets the goal. -Solution: From the Redeploy blade, you click Redeploy. Incorrect Answers: Does not meet the goal. -Solution: From the Overview blade, you move the virtual machine to a different subscription. -

Solution: From the Update management blade, you click Enable. -Solution: From the Overview blade, you move the virtual machine to a different resource group.

Redeploy the machine, Reply If i was wrong

As the other questions of this type have stated. Redeploy the machine.

As the other questions of this type have stated. Redeploy the machine.

redeploy mean it moves the VM to a different host.

SecExams

Question #506

HOTSPOT -

You have an Azure subscription.

You plan to use Azure Resource Manager templates to deploy 50 Azure virtual machines that will be part of the same availability set.

You need to ensure that as many virtual machines as possible are available if the fabric fails or during servicing.

How should you configure the template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
{
  "$schema": "https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",
  "contentVersion": "1.0.0.0",
  "parameters": {},
  "resources": [
    {
      "type": "Microsoft.Compute/availabilitySets",
      "name": "ha",
      "apiVersion": "2017-12-01",
      "location": "eastus",
      "properties": {
        "platformFaultDomainCount": [ ▾ ] ,
        "platformUpdateDomainCount": [ ▾ ]
      }
    }
  ]
}
```

"platformFaultDomainCount" options: 0, 1, 2, 3, 4

"platformUpdateDomainCount" options: 10, 20, 25, 30, 40, 50

Explanation

Correct Answer:

Answer Area

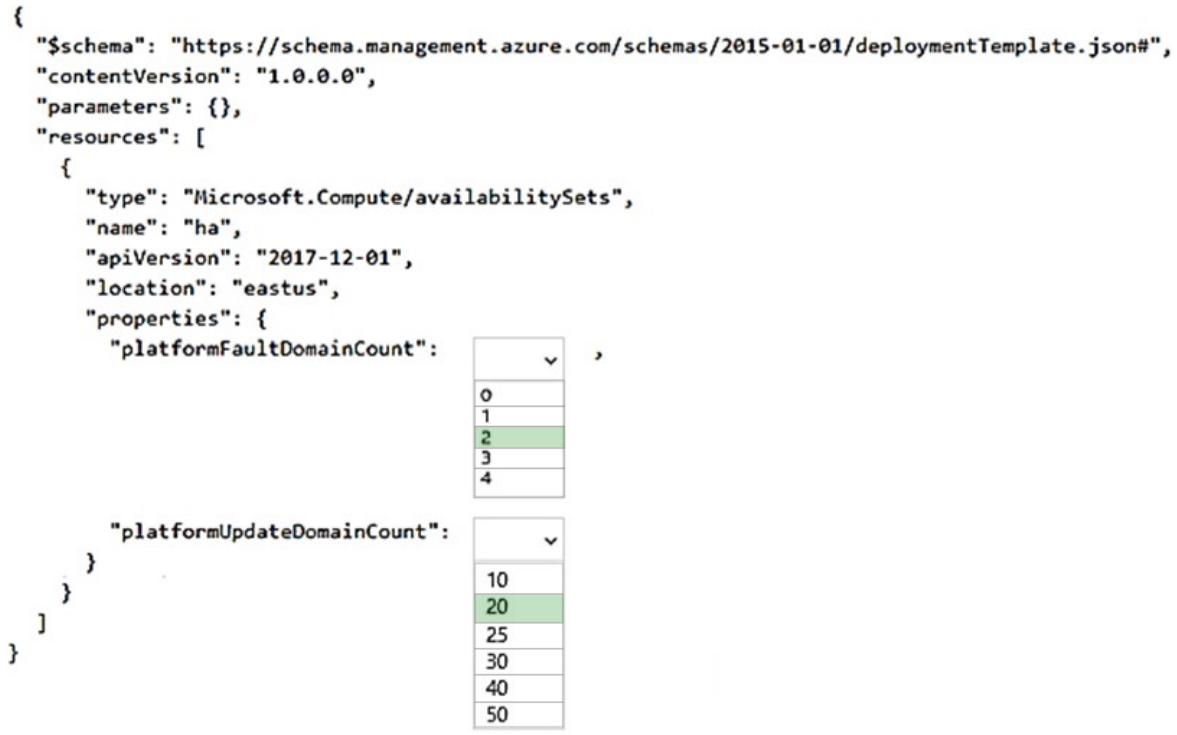

Box 1: 2 -
Use two fault domains.
2 or 3 is max, depending on which region you are in.

Box 2: 20 -
Use 20 for platformUpdateDomainCount
Increasing the update domain (platformUpdateDomainCount) helps with capacity and availability planning when the platform reboots nodes. A higher number for the pool (20 is max) means that fewer of their nodes in any given availability set would be rebooted at once.
Reference:
https://www.itprotoday.com/microsoft-azure/check-if-azure-region-supports-2-or-3-fault-domains-managed-disks https://github.com/Azure/acs-engine/issues/1030

Community Discussion

Question #507

HOTSPOT -

You have an Azure subscription.

You plan to use Azure Resource Manager templates to deploy 50 Azure virtual machines that will be part of the same availability set.

You need to ensure that as many virtual machines as possible are available if the fabric fails or during servicing.

How should you configure the template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
{
  "$schema": "https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",
  "contentVersion": "1.0.0.0",
  "parameters": {},
  "resources": [
    {
      "type": "Microsoft.Compute/availabilitySets",
      "name": "ha",
      "apiVersion": "2017-12-01",
      "location": "eastus",
      "properties": {
        "platformFaultDomainCount": [ ▾ ] ,
        "platformUpdateDomainCount": [ ▾ ]
      }
    }
  ]
}
```

"platformFaultDomainCount" options: 0, 1, 2, 3, 4

"platformUpdateDomainCount" options: 10, 20, 25, 30, 40, 50

Explanation

Correct Answer:

Answer Area

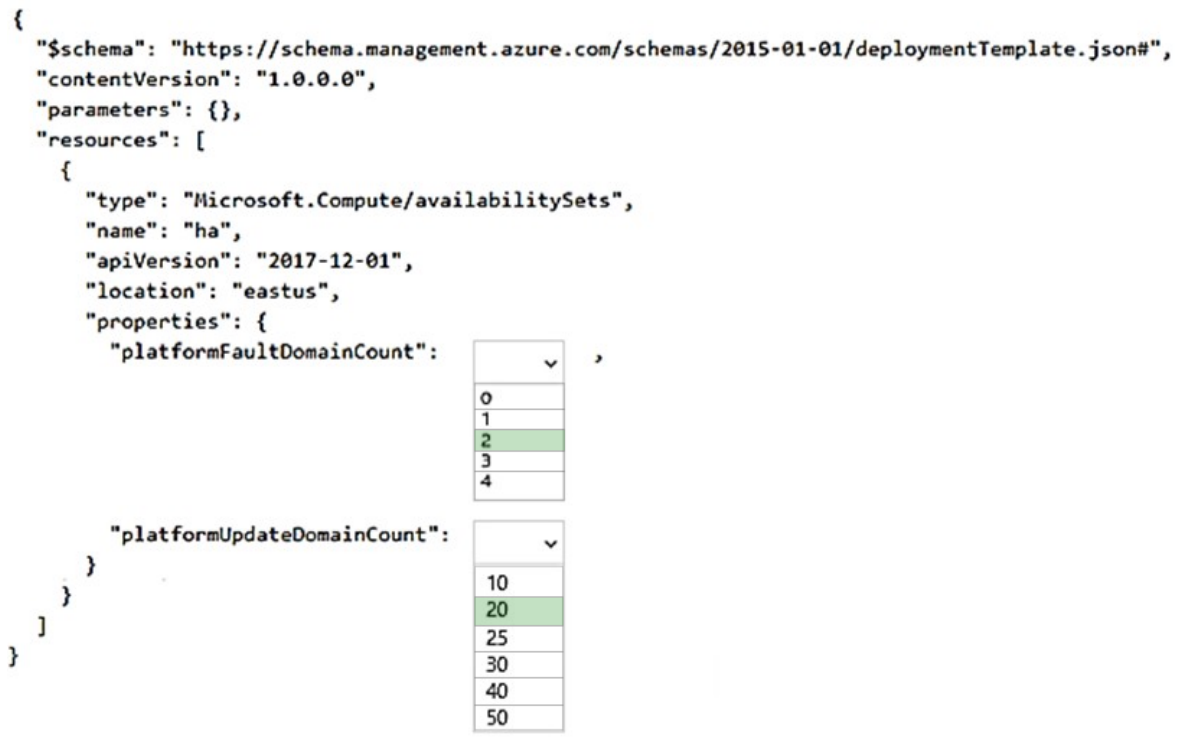

Box 1: 2 -
Use two fault domains.
2 or 3 is max, depending on which region you are in.

Box 2: 20 -
Use 20 for platformUpdateDomainCount
Increasing the update domain (platformUpdateDomainCount) helps with capacity and availability planning when the platform reboots nodes. A higher number for the pool (20 is max) means that fewer of their nodes in any given availability set would be rebooted at once.
Reference:
https://www.itprotoday.com/microsoft-azure/check-if-azure-region-supports-2-or-3-fault-domains-managed-disks https://github.com/Azure/acs-engine/issues/1030

Community Discussion

first box: platformFaultDomainCount should be 3 (since its in East US) ref: https://stackoverflow.com/questions/49779604/how-to-find-maximum-update-domains-fault-domains-available-in-an-azure-region second box: platformUpdateDomainCount = 20

And MS expects us to memorize this garbage ? Gimme a break

And MS expects us to memorize this garbage ? Gimme a break

if you can have 2 or 3 and it asks for the max of VM, why would you choose 2 fault domains ? if you have to and 50 VM, if you domain fails you will lose 25, in the case of 3 fault domains you would loose only 18 or 18 or 14, because the 50 are split in the 3 domains...

if you can have 2 or 3 and it asks for the max of VM, why would you choose 2 fault domains ? if you have to and 50 VM, if you domain fails you will lose 25, in the case of 3 fault domains you would loose only 18 or 18 or 14, because the 50 are split in the 3 domains...

Question #508

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1 that runs Windows Server 2016.
You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.
Solution: You create an Azure Log Analytics workspace and configure the Agent configuration settings. You install the Microsoft Monitoring Agent on VM1. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
Alerts in Azure Monitor can identify important information in your Log Analytics repository. They are created by alert rules that automatically run log searches at regular intervals, and if results of the log search match particular criteria, then an alert record is

created and it can be configured to perform an automated response.
The Log Analytics agent collects monitoring data from the guest operating system and workloads of virtual machines in Azure, other cloud providers, and on- premises. It collects data into a Log Analytics workspace.
References:
https://docs.microsoft.com/en-us/azure/azure-monitor/learn/tutorial-response https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview

Community Discussion

Question #509

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1 that runs Windows Server 2016.
You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.
Solution: You create an Azure Log Analytics workspace and configure the Agent configuration settings. You install the Microsoft Monitoring Agent on VM1. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Alerts in Azure Monitor can identify important information in your Log Analytics repository. They are created by alert rules that automatically run log searches at regular intervals, and if results of the log search match particular criteria, then an alert record is

created and it can be configured to perform an automated response.
The Log Analytics agent collects monitoring data from the guest operating system and workloads of virtual machines in Azure, other cloud providers, and on- premises. It collects data into a Log Analytics workspace.
References:
https://docs.microsoft.com/en-us/azure/azure-monitor/learn/tutorial-response https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview

Community Discussion

The answer is correct. 1. Log analytics agent - Install in VM. 2. Log analytics workspace - collect the log files from Log Analytics Agent. 3. Azure Monitor - Create alert based on logs read from Log Analytics Workspace.

This question was asked on exam taken on Sept 30, 2021

Exam Question 08OCT2022

I see this question coming back 3 times with the following differences : - configure the Agent configuration settings. You install the Microsoft Monitoring Agent on VM1 (question 64) - configure the data settings. You add the Microsoft Monitoring Agent VM extension to VM1. (question 70) - configure the data settings. You install the Microsoft Monitoring Agent on VM1 (question 71) Everyone agrees that the second one (extension) is wrong. But everyone also seems to agree that the two others are correct ?

900 is a score not a percentage, but congrats on you passing mate :)

SecExams

Question #510

SecExams

HOTSPOT -

You have an Azure subscription.

You deploy a virtual machine scale set that is configured as shown in the following exhibit.

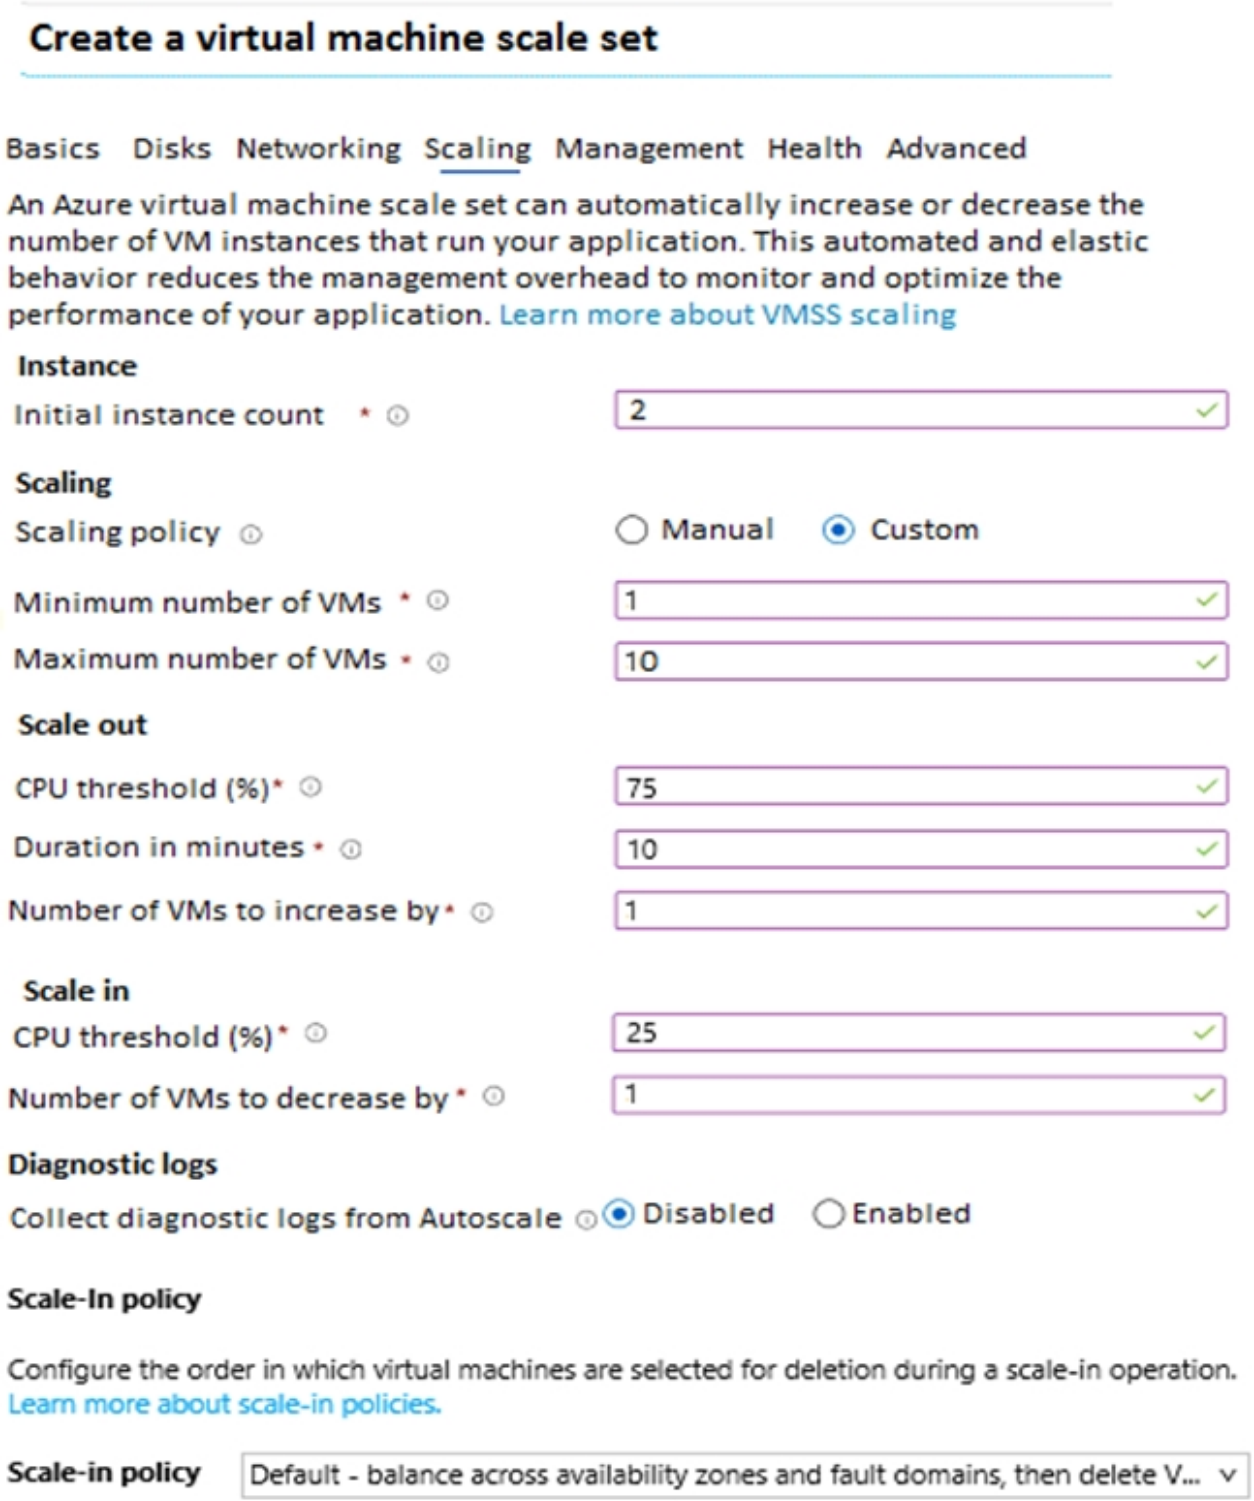

Use the drop-down menus to select the answer choice that answers each question based on the information presented in the graphic

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

At 9:00 AM, the scale set starts and CPU utilization is 90 percent for 15 minutes. How many virtual machine instances will be running at 9:15 AM?

- 2
- 3
- 4
- 5

At 10:00 AM, the scale set has five virtual machine instances running and CPU utilization falls to less than 15 percent for 60 minutes. How many virtual machine instances will be running at 11:00 AM?

- 1
- 2
- 3
- 4

Explanation

Correct Answer:

Answer Area

At 9:00 AM, the scale set starts and CPU utilization is 90 percent for 15 minutes. How many virtual machine instances will be running at 9:15 AM?

- 2
- **3**
- 4
- 5

At 10:00 AM, the scale set has five virtual machine instances running and CPU utilization falls to less than 15 percent for 60 minutes. How many virtual machine instances will be running at 11:00 AM?

- **1**
- 2
- 3
- 4

Reference:

https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-autoscale-portal

Community Discussion

SecExams

Question #511

SecExams

HOTSPOT -

You have an Azure subscription.

You deploy a virtual machine scale set that is configured as shown in the following exhibit.

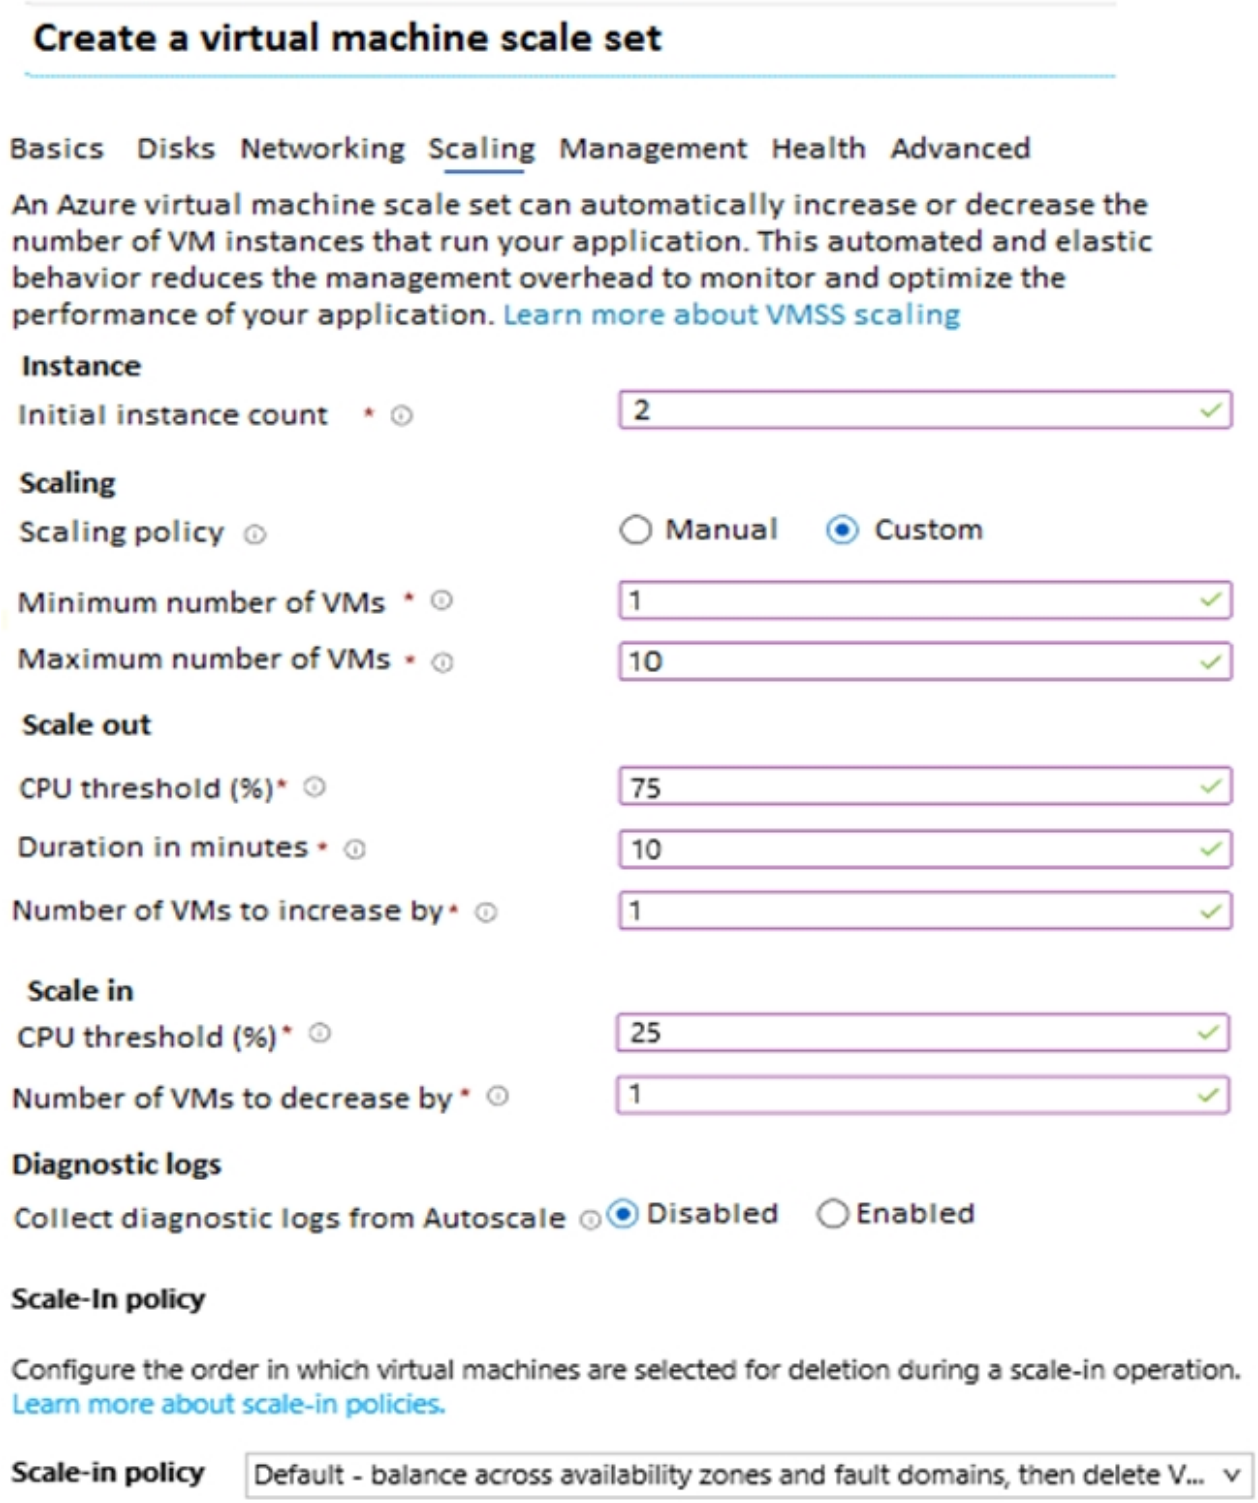

Use the drop-down menus to select the answer choice that answers each question based on the information presented in the graphic

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

At 9:00 AM, the scale set starts and CPU utilization is 90 percent for 15 minutes. How many virtual machine instances will be running at 9:15 AM?

- 2
- 3
- 4
- 5

At 10:00 AM, the scale set has five virtual machine instances running and CPU utilization falls to less than 15 percent for 60 minutes. How many virtual machine instances will be running at 11:00 AM?

- 1
- 2
- 3
- 4

Explanation

Correct Answer:

Answer Area

At 9:00 AM, the scale set starts and CPU utilization is 90 percent for 15 minutes. How many virtual machine instances will be running at 9:15 AM?

- 2
- **3**
- 4
- 5

At 10:00 AM, the scale set has five virtual machine instances running and CPU utilization falls to less than 15 percent for 60 minutes. How many virtual machine instances will be running at 11:00 AM?

- **1**
- 2
- 3
- 4

Reference:

https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-autoscale-portal

Community Discussion

box-1 : 3 box-2: 1

Box-1 : 3 Initial starts 2 VM's 15 minutes have passed. at 10 minutes 1 VM was added we now have 3 VM's. Cool down is 5 Minutes before another 10 minute wait cycle starts so the answer is 3. Box-2: 1 Initial 5 VM's 60 minutes Pass. 1 VM removed every 15 minute cycle. 10 minutes wait timer plus 5 minute cool down equals 15 minutes cycle. Four 15 minute cycles pass equaling 60 minutes removing 4 VM's. We have 1 VM left. Default Scale in and Out Default Durations are 10 minutes with 5 minute cool down. The default scale set settings in Azure are: -Minimum number of instances 1 -Maximum number of instances 10 -Scale out CPU threshold (%) 75 -Duration in minutes10 -Number of instances to increase by 1 -Scale in CPU threshold (%) 25 -Number of instances to decrease by -1 https://learn.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-autoscale-portal#create-a-rule-to-automatically-scale-in

why is it 1 on the second question, it decreases by 1 when CPU utilization goes below 25%, but there is no rule for when to count down again and so on ? it only exist for the scale out rule.

I agree with you because it did not say when the duration for countdown starts..and by the way, the question states there are 5 instances to start with. We must not assume what these questions are asking of us. go with the strict and stated meaning of the question. i say 3 for box1 and 4 for box2. please somebody correct if a am wrong.

I agree with you because it did not say when the duration for countdown starts..and by the way, the question states there are 5 instances to start with. We must not assume what these questions are asking of us. go with the strict and stated meaning of the question. i say 3 for box1 and 4 for box2. please somebody correct if a am wrong.

SecExams

Question #512

You have web apps in the West US, Central US and East US Azure regions.
You have the App Service plans shown in the following table.

Name	Operating system	Location	SKU and size
ASP1	Windows	West US	Standard S1
ASP2	Linux	Central US	Premium V2 P1v2
ASP3	Linux	East US	Premium V2 P1v2
ASP4	Linux	East US	Premium V2 P1v2

You plan to create an additional App Service plan named ASP5 that will use the Linux operating system.
You need to identify in which of the currently used locations you can deploy ASP5.
What should you recommend?

A) West US, Central US, or East US (Correct Answer)
B) Central US only
C) East US only
D) West US only

Explanation

Correct Answer: A ?
Reference:
https://docs.microsoft.com/en-us/azure/app-service/app-service-plan-manage

Community Discussion

Question #513

You have web apps in the West US, Central US and East US Azure regions.
You have the App Service plans shown in the following table.

Name	Operating system	Location	SKU and size
ASP1	Windows	West US	Standard S1
ASP2	Linux	Central US	Premium V2 P1v2
ASP3	Linux	East US	Premium V2 P1v2
ASP4	Linux	East US	Premium V2 P1v2

You plan to create an additional App Service plan named ASP5 that will use the Linux operating system.
You need to identify in which of the currently used locations you can deploy ASP5.
What should you recommend?

A) West US, Central US, or East US (Correct Answer)
B) Central US only
C) East US only
D) West US only

Explanation

Correct Answer:
A
Reference:
https://docs.microsoft.com/en-us/azure/app-service/app-service-plan-manage

Community Discussion

He took the exam, that's how he knows that question was in his exam

He took the exam, that's how he knows that question was in his exam

He took the exam, that's how he knows that question was in his exam

He took the exam, that's how he knows that question was in his exam

Hi guys: What does this question want to test? I couldn't get the point.

Question #514

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.
You need to ensure that NGINX is available on all the virtual machines after they are deployed.
What should you use?

A) the New-AzConfigurationAssignment cmdlet
B) a Desired State Configuration (DSC) extension (Correct Answer)
C) Azure Active Directory (Azure AD) Application Proxy
D) Azure Application Insights

Explanation

Correct Answer: B ?
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/dsc-overview

Community Discussion

Question #515

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.
You need to ensure that NGINX is available on all the virtual machines after they are deployed.
What should you use?

A) the New-AzConfigurationAssignment cmdlet

B) a Desired State Configuration (DSC) extension (Correct Answer)

C) Azure Active Directory (Azure AD) Application Proxy

D) Azure Application Insights

Explanation

Correct Answer:
B
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/dsc-overview

Community Discussion

Correct Answer: B Note: There are several versions of this question in the exam. The question has two correct answers: 1. a Desired State Configuration (DSC) extension 2. Azure Custom Script Extension The question can have other incorrect answer options, including the following: ✑ the Publish-AzVMDscConfiguration cmdlet ✑ Azure Application Insights

B. a Desired State Configuration (DSC) extension

Question 59 was the same, is repeated. Desired State Configuration (DSC) extension by the way

This question came in the exam today 8/Mar/2022. I passed the exam, 95% questions came from here.

Cleared Exam today 26 Feb, This question was there in exam.

SecExams

Question #516

HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table.

Name	Type
ManagementGroup1	Management group
RG1	Resource group
9c8bc1cd-7655-4c66-b3ea-a8ee101d8f75	Subscription ID
Tag1	Tag

In Azure Cloud Shell, you need to create a virtual machine by using an Azure Resource Manager (ARM) template.

How should you complete the command? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

```
$adminPassword = Read-Host -Prompt "Enter the administrator password" -AsSecureString
```

New-AzVm	-Tag Tag1 '
New-AzResource	-ResourceGroupName RG1 '
New-AzTemplateSpec	-GroupName ManagementGroup1 '
New-AzResourceGroupDeployment	-Subscription 9c8bc1cd-7655-4c66-b3ea-a8ee101d8f75

```
- TemplateUri "https://raw.githubusercontent.com/Azure/azure-quickstart-templates/master/101-vm-simple-windows/azuredeploy.json" '
- adminUsername LocalAdministrator -adminPassword $adminPassword -dnsLabelPrefix ContosoVM1
```

Explanation

Correct Answer:

```
$adminPassword = Read-Host -Prompt "Enter the administrator password" -AsSecureString
```

New-AzVm	-Tag Tag1 '
New-AzResource	-ResourceGroupName RG1 '
New-AzTemplateSpec	-GroupName ManagementGroup1 '
New-AzResourceGroupDeployment	-Subscription 9c8bc1cd-7655-4c66-b3ea-a8ee101d8f75

```
- TemplateUri "https://raw.githubusercontent.com/Azure/azure-quickstart-templates/master/101-vm-simple-windows/azuredeploy.json" '
- adminUsername LocalAdministrator -adminPassword $adminPassword -dnsLabelPrefix ContosoVM1
```

Reference:
https://docs.microsoft.com/en-us/powershell/module/az.resources/new-azresourcegroupdeployment?view=azps-6.6.0

Community Discussion

Question #517

HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table.

Name	Type
ManagementGroup1	Management group
RG1	Resource group
9c8bc1cd-7655-4c66-b3ea-a8ee101d8f75	Subscription ID
Tag1	Tag

In Azure Cloud Shell, you need to create a virtual machine by using an Azure Resource Manager (ARM) template.

How should you complete the command? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

```
$adminPassword = Read-Host -Prompt "Enter the administrator password" -AsSecureString
```

New-AzVm	-Tag Tag1 '
New-AzResource	-ResourceGroupName RG1 '
New-AzTemplateSpec	-GroupName ManagementGroup1 '
New-AzResourceGroupDeployment	-Subscription 9c8bc1cd-7655-4c66-b3ea-a8ee101d8f75

```
- TemplateUri "https://raw.githubusercontent.com/Azure/azure-quickstart-templates/master/101-vm-simple-windows/azuredeploy.json" '
- adminUsername LocalAdministrator -adminPassword $adminPassword -dnsLabelPrefix ContosoVM1
```

Explanation

Correct Answer:

```
$adminPassword = Read-Host -Prompt "Enter the administrator password" -AsSecureString
```

New-AzVm	-Tag Tag1 '
New-AzResource	-ResourceGroupName RG1 '
New-AzTemplateSpec	-GroupName ManagementGroup1 '
New-AzResourceGroupDeployment	-Subscription 9c8bc1cd-7655-4c66-b3ea-a8ee101d8f75

```
- TemplateUri "https://raw.githubusercontent.com/Azure/azure-quickstart-templates/master/101-vm-simple-windows/azuredeploy.json" '
- adminUsername LocalAdministrator -adminPassword $adminPassword -dnsLabelPrefix ContosoVM1
```

Reference:
https://docs.microsoft.com/en-us/powershell/module/az.resources/new-azresourcegroupdeployment?view=azps-6.6.0

Community Discussion

Box 1: New-AzResourceGroupDeployment. This cmdlet allows you to use a custom ARM template file to deploy resources to a resource group. For example: New-AzResourceGroup -Name $resourceGroupName -Location "$location" New-AzResourceGroupDeployment ` -ResourceGroupName $resourceGroupName ` -TemplateUri "https://raw.githubusercontent.com/Azure/azure-quickstart-templates/master/quickstarts/microsoft.compute/vm-simple-windows/azuredeploy.json" ` -adminUsername $adminUsername ` -adminPassword $adminPassword ` -dnsLabelPrefix $dnsLabelPrefix Box 2: -ResourceGroupName RG1. It's one of parameters of New-AzResourceGroupDeployment to specify to which resource group you want to deploy resources. You could use New-AzVm to create a VM, but it doesn't use a template. You would need to provide all parameters in the command line. Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/windows/ps-template https://docs.microsoft.com/en-us/powershell/module/az.compute/new-azvm?view=azps-7.0.0

On the exam today, 4.March.2022

1. New-AzResourceGroupDeployment 2. -ResourceGroupName RG1 https://learn.microsoft.com/en-us/powershell/module/az.resources/new-azresourcegroupdeployment

I think the answer is correct. $resourceGroupName = Read-Host -Prompt "Enter the Resource Group name" $location = Read-Host -Prompt "Enter the location (i.e. centralus)" $adminUsername = Read-Host -Prompt "Enter the administrator username" $adminPassword = Read-Host -Prompt "Enter the administrator password" -AsSecureString $dnsLabelPrefix = Read-Host -Prompt "Enter an unique DNS name for the public IP" New-AzResourceGroup -Name $resourceGroupName -Location "$location" _____ New-AzResourceGroupDeployment ` -ResourceGroupName $resourceGroupName ` -TemplateUri "https://raw.githubusercontent.com/Azure/azure-quickstart-templates/master/quickstarts/microsoft.compute/vm-simple-windows/azuredeploy.json" ` -adminUsername $adminUsername ` -adminPassword $adminPassword ` -dnsLabelPrefix $dnsLabelPrefix ---------- (Get-AzVm -ResourceGroupName $resourceGroupName).name

Lab thing guys before posting! You are wrong. New-AzVm does NOT accept argument TemplateUri

Question #518

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some questions sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You deploy an Azure Kubernetes Service (AKS) cluster named AKS1.
You need to deploy a YAML file to AKS1.
Solution: From Azure Cloud Shell, you run az aks.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
To deploy a YAML file, the command is:
kubectl apply -f <file_name>.yaml
Reference:
https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough

Community Discussion

Question #519

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some questions sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You deploy an Azure Kubernetes Service (AKS) cluster named AKS1.
You need to deploy a YAML file to AKS1.
Solution: From Azure Cloud Shell, you run az aks.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
To deploy a YAML file, the command is:
kubectl apply -f <file_name>.yaml
Reference:
https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough

Community Discussion

Answer: NO To deploy a YAML file, the command is: kubectl apply -f example.yaml Src: https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough

Answer is correct, Appear On Exam July 1 2021

az aks? even if you didn't know the answer you gotta know this is wrong :)

Besides the comments w/ answers here is a short summary I found useful from chatgpt: az aks is a command-line interface (CLI) tool provided by Microsoft Azure to manage and deploy Kubernetes clusters on Azure, while kubectl is the command-line tool for

interacting with a Kubernetes cluster. The main difference between the two is the scope of their functionality: - az aks is focused on provisioning and managing AKS clusters, including creating and scaling the cluster, managing authentication and network configurations, and upgrading the cluster. - kubectl is focused on interacting with and managing the components running within a Kubernetes cluster, such as deploying and managing applications, inspecting cluster state, and troubleshooting issues. Both tools can be used together to effectively manage an AKS cluster, with az aks being used for cluster-level tasks and kubectl for workload-level tasks.

There are several versions of this question. The following are the correct and incorrect answers that can be presented. Correct Answer: Meets the goal. -Solution: From Azure Cloud Shell, you run the kubectl client. Incorrect Answers: Does not meet the goal. -Solution: From Azure Cloud Shell, you run az aks. -Solution: From Azure CLI, you run azcopy

SecExams

Question #520

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1 that runs Windows Server 2016.
You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.
Solution: You create an Azure Log Analytics workspace and configure the data settings. You add the Microsoft Monitoring Agent VM extension to VM1. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:

B
You must install the Microsoft Monitoring Agent on VM1, and not the Microsoft Monitoring Agent VM extension.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview

Community Discussion

Correct Answer: You add the Microsoft Monitoring Agent VM extension to VM1 > This is WRONG You Install the Microsoft Monitoring Agent VM agent to VM1 > This is Correct 1. Log analytics agent - Install in VM. 2. Log analytics workspace - collect the log files from Log Analytics Agent. 3. Azure Monitor - Create alert based on logs read from Log Analytics Workspace. Reference: https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview

I think the Answer should be - Yes. You need to click the Add button on Portal-> Settings-> Extensions to Install the Extension on VM. Azure Monitor currently has multiple agents because of recent consolidation of Azure Monitor and Log Analytics. The Azure Monitor Agent is implemented as an Azure VM extension. Windows/Linux name: Microsoft.Azure.Monitor Windows type: AzureMonitorWindowsAgent Linix type: AzureMonitorLinuxAgent https://docs.microsoft.com/en-us/azure/azure-monitor/platform/azure-monitor-agent-install?tabs=ARMAgentPowerShell%2CPowerShellWindows%2CPowerShellWindowsArc%2CCLIWindows%2CCLIWind

In 2023 you can add Microsoft Monitoring Agent VM extension to VM1 See: https://learn.microsoft.com/en-us/azure/azure-monitor/agents/azure-monitor-agent-manage?tabs=azure-portal

In 2023 you can add Microsoft Monitoring Agent VM extension to VM1 See: https://learn.microsoft.com/en-us/azure/azure-monitor/agents/azure-monitor-agent-manage?tabs=azure-portal

Another trick question by MS to try and trip you up. I swear more than half of this test just comes down to your comprehensive reading skills.

SecExams

Question #521

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1 that runs Windows Server 2016.
You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.
Solution: You create an Azure Log Analytics workspace and configure the data settings. You add the Microsoft Monitoring Agent VM extension to VM1. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
You must install the Microsoft Monitoring Agent on VM1, and not the Microsoft Monitoring Agent VM extension.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview

Community Discussion

Question #522

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1 that runs Windows Server 2016.
You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.
Solution: You create an Azure Log Analytics workspace and configure the data settings. You install the Microsoft Monitoring Agent on VM1. You create an alert in
Azure Monitor and specify the Log Analytics workspace as the source.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Alerts in Azure Monitor can identify important information in your Log Analytics repository. They are created by alert rules that automatically run log searches at regular intervals, and if results of the log search match particular criteria, then an alert record is created and it can be configured to perform an automated response.
The Log Analytics agent collects monitoring data from the guest operating system and workloads of virtual machines in Azure, other cloud providers, and on- premises. It collects data into a Log Analytics workspace.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/learn/tutorial-response https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview

Community Discussion

Correct Answer: A - Yes You add the Microsoft Monitoring Agent VM extension to VM1 > This is WRONG You Install the Microsoft Monitoring Agent VM agent to VM1 > This is Correct 1. Log analytics agent - Install in VM. 2. Log analytics workspace - collect the log files from Log Analytics Agent. 3. Azure Monitor - Create alert based on logs read from Log Analytics Workspace. Reference: https://docs.microsoft.com/en-us/azure/azure-monitor/learn/tutorial-response https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview

I mean what's the difference with the above? The words "add" versus "install"? That would be ridiculous...

I saw the difference in the extension name. Anyway, it's correct.

I saw the difference in the extension name. Anyway, it's correct.

it's still ridiculous

SecExams

Question #523

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1 that runs Windows Server 2016.
You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.
Solution: You create an Azure Log Analytics workspace and configure the data settings. You install the Microsoft Monitoring Agent on VM1. You create an alert in
Azure Monitor and specify the Log Analytics workspace as the source.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
Alerts in Azure Monitor can identify important information in your Log Analytics repository. They are created by alert rules that automatically run log searches at regular intervals, and if results of the log search match particular criteria, then an alert record is created and it can be configured to perform an automated response.
The Log Analytics agent collects monitoring data from the guest operating system and workloads of virtual machines in Azure, other cloud providers, and on- premises. It collects data into a Log Analytics workspace.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/learn/tutorial-response https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview

Community Discussion

SecExams

Question #524

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group	Location
Vault1	Recovery services vault	RG1	East US
VM1	Virtual machine	RG1	East US
VM2	Virtual machine	RG1	West US

All virtual machines run Windows Server 2016.

On VM1, you back up a folder named Folder1 as shown in the following exhibit.

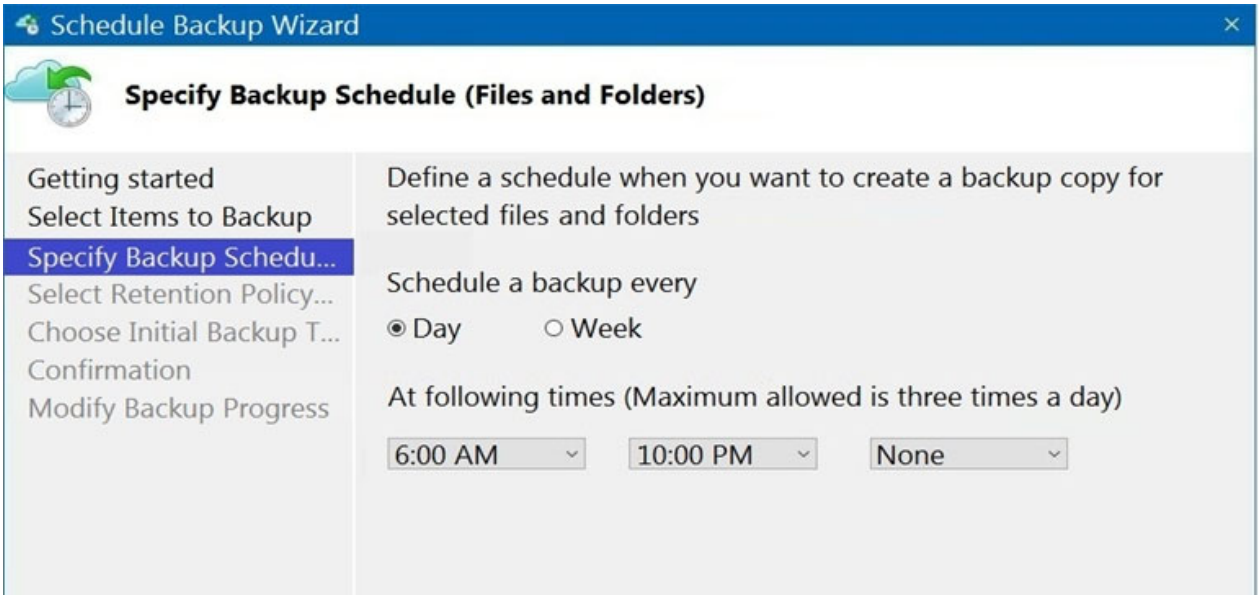

You plan to restore the backup to a different virtual machine.

You need to restore the backup to VM2.

What should you do first?

A) From VM1, install the Windows Server Backup feature.

B) From VM2, install the Microsoft Azure Recovery Services Agent. (Correct Answer)

C) From VM1, install the Microsoft Azure Recovery Services Agent.

D) From VM2, install the Windows Server Backup feature.

Explanation

Correct Answer:
B
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-azure-restore-windows-server

Community Discussion

B Microsoft Azure Recovery Services Agent also known as MARS or Azure Backup Agent can be used to restore data for entire volume or just individual folders and files. reference: https://learn.microsoft.com/en-us/azure/backup/restore-all-files-volume-mars

A bit confused on this question. From my understanding, I thought RSV could only backup from resources located in the same region? VM2 is in a different region here.

MARS Agent can recover data without region restriction and that is why it exists on top of the normal RSV. correct me if i am wrong :)

MARS Agent can recover data without region restriction and that is why it exists on top of the normal RSV. correct me if i am wrong :)

Selected Answer: B

Came on 21st Dec 2022 (score 930) Answer B

SecExams

Question #525

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group	Location
Vault1	Recovery services vault	RG1	East US
VM1	Virtual machine	RG1	East US
VM2	Virtual machine	RG1	West US

All virtual machines run Windows Server 2016.

On VM1, you back up a folder named Folder1 as shown in the following exhibit.

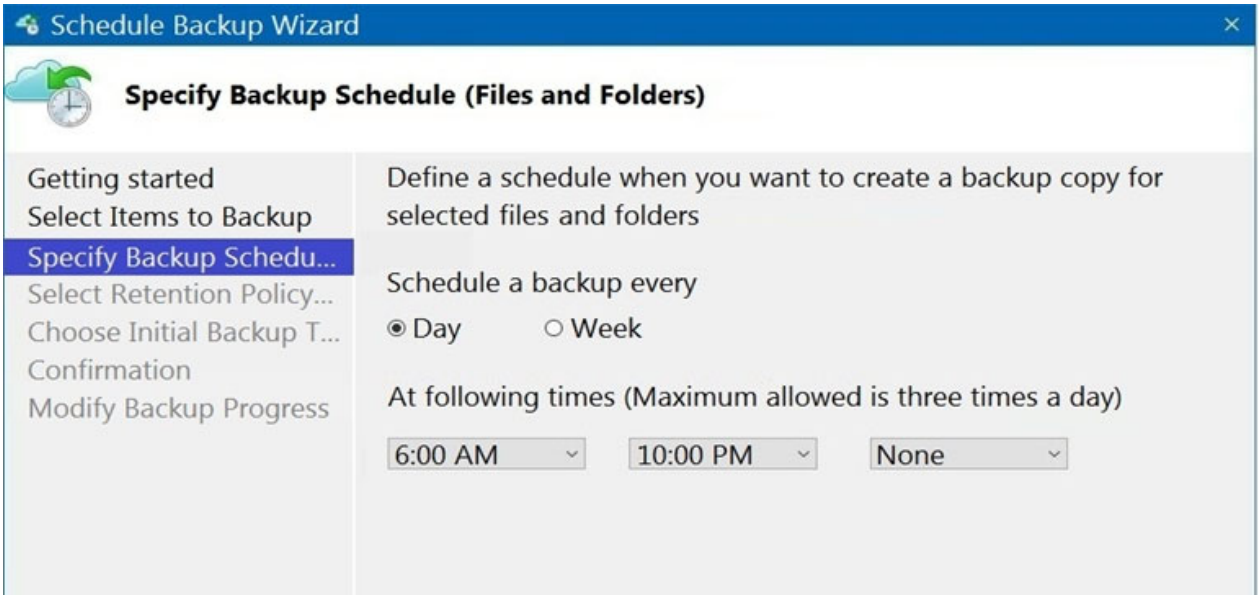

You plan to restore the backup to a different virtual machine.

You need to restore the backup to VM2.

What should you do first?

A) From VM1, install the Windows Server Backup feature.

B) From VM2, install the Microsoft Azure Recovery Services Agent. (Correct Answer)

C) From VM1, install the Microsoft Azure Recovery Services Agent.

D) From VM2, install the Windows Server Backup feature.

Explanation

Correct Answer: B ?

Reference:

https://docs.microsoft.com/en-us/azure/backup/backup-azure-restore-windows-server

Community Discussion

Question #526

HOTSPOT -

You have an Azure subscription.

You need to use an Azure Resource Manager (ARM) template to create a virtual machine that will have multiple data disks.

How should you complete the template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
{
"$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",
  "parameters": {
    "numberOfDataDisks": {
      "type": "int",
      "metadata": {
        "description": "The number of dataDisks to create."
      }
    },
    ...
  },
  "resources": [
    {
      "type": "Microsoft.Compute/virtualMachines",
      "apiVersion": "2017-03-30",
      ...
      "properties": {
        "storageProfile": {
        ...
          [ "copy":[ | "copyIndex":[ | "dependsOn":[ ]
          { "name": "dataDisks",
            "count": "[parameters('numberOfDataDisks')]",
            "input": {
              "diskSizeGB": 1023,
              "lun": [ "[copy | "[copyIndex | "[dependsOn ] ('dataDisks')]",

              "createOption": "Empty"
...
}
```

Explanation

Correct Answer:

Answer Area

```
{
"$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",
  "parameters": {
    "numberOfDataDisks": {
      "type": "int",
      "metadata": {
        "description": "The number of dataDisks to create."
      }
    },
    ...
  },
  "resources": [
    {
      "type": "Microsoft.Compute/virtualMachines",
      "apiVersion": "2017-03-30",
      ...
      "properties": {
        "storageProfile": {
        ...
          [ "copy":[ | "copyIndex":[ | "dependsOn":[ ]
          { "name": "dataDisks",
            "count": "[parameters('numberOfDataDisks')]",
            "input": {
              "diskSizeGB": 1023,
              "lun": [ "[copy | "[copyIndex | "[dependsOn ] ('dataDisks')]",
              "createOption": "Empty"
...
}
```

Community Discussion

Is correct: https://docs.microsoft.com/nl-nl/azure/azure-resource-manager/templates/copy-properties

Answer is correct, Appear On Exam July 1 2021

Got this question on 09/09/23

https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/copy-properties

https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/copy-properties

Question #527

HOTSPOT -

You have an Azure subscription.

You need to use an Azure Resource Manager (ARM) template to create a virtual machine that will have multiple data disks.

How should you complete the template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
{
"$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",
  "parameters": {
    "numberOfDataDisks": {
      "type": "int",
      "metadata": {
        "description": "The number of dataDisks to create."
      }
    },
    ...
  },
  "resources": [
    {
      "type": "Microsoft.Compute/virtualMachines",
      "apiVersion": "2017-03-30",
      ...
      "properties": {
        "storageProfile": {
        ...
        [ "copy":[ | "copyIndex":[ | "dependsOn":[ ]
          { "name": "dataDisks",
            "count": "[parameters('numberOfDataDisks')]",
            "input": {
              "diskSizeGB": 1023,
              "lun": [ "[copy | "[copyIndex | "[dependsOn ] ('dataDisks')]",

              "createOption": "Empty"
...
}
```

Explanation

Correct Answer:

Answer Area

```
{
"$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",
  "parameters": {
    "numberOfDataDisks": {
      "type": "int",
      "metadata": {
        "description": "The number of dataDisks to create."
      }
    },
    ...
  },
  "resources": [
    {
      "type": "Microsoft.Compute/virtualMachines",
      "apiVersion": "2017-03-30",
      ...
      "properties": {
        "storageProfile": {
        ...
          [ "copy":[ | "copyIndex":[ | "dependsOn":[ ]
          { "name": "dataDisks",
            "count": "[parameters('numberOfDataDisks')]",
            "input": {
              "diskSizeGB": 1023,
              "lun": [ "[copy | "[copyIndex | "[dependsOn ] ('dataDisks')]",
              "createOption": "Empty"
...
}
```

Community Discussion

Question #528

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Location	Resource group
RG1	Resource group	East US	*Not applicable*
RG2	Resource group	West Europe	*Not applicable*
RG3	Resource group	North Europe	*Not applicable*
VNET1	Virtual network	Central US	RG1
VM1	Virtual machine	West US	RG2

Subscription1 also includes a virtual network named VNET2. VM1 connects to a virtual network named VNET2 by using a network interface named NIC1.
You need to create a new network interface named NIC2 for VM1.
Solution: You create NIC2 in RG1 and West US.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
The virtual machine you attach a network interface to and the virtual network you connect it to must exist in the same location, here West US, also referred to as a region.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface

Community Discussion

A Multiple NICs allow a VM to connect to different subnets. VM must have at least one NIC. A virtual machine can have more than one NIC, depending on the size of the VM you create. Each NIC attached to a VM must exist in the same location and subscription as the VM. Each NIC must be connected to a VNet that exists in the same Azure location and subscription as the NIC. Reference: https://learn.microsoft.com/en-us/azure/virtual-network/network-overview

Yes. Remember you goal! "You need to create a new network interface named NIC2 for VM1." You can pretty much ignore everything expect for the location of VM1. The question only asked if you can create a new NIC for VM1 in westus not if you can connect it to any subnets or vNets. "Each NIC attached to a VM must exist in the same location and subscription as the VM. Each NIC must be connected to a VNet that exists in the same Azure location and subscription as the NIC. You can change the subnet a VM is connected to after it's created. You can't change the virtual network. Each NIC attached to a VM is assigned a MAC address that doesn't change until the VM is deleted." https://learn.microsoft.com/en-us/azure/virtual-network/network-overview#network-interfaces

Yes. Remember you goal! "You need to create a new network interface named NIC2 for VM1." You can pretty much ignore everything expect for the location of VM1. The question only asked if you can create a new NIC for VM1 in westus not if you can connect it to any subnets or vNets. "Each NIC attached to a VM must exist in the same location and subscription as the VM. Each NIC must be connected to a VNet that exists in the same Azure location and subscription as the NIC. You can change the subnet a VM is connected to after it's created. You can't change the virtual network. Each NIC attached to a VM is assigned a MAC address that doesn't change until the VM is deleted." https://learn.microsoft.com/en-us/azure/virtual-network/network-overview#network-interfaces

a resource group region does not affect the region of its resources

a resource group region does not affect the region of its resources

SecExams

Question #529

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Location	Resource group
RG1	Resource group	East US	*Not applicable*
RG2	Resource group	West Europe	*Not applicable*
RG3	Resource group	North Europe	*Not applicable*
VNET1	Virtual network	Central US	RG1
VM1	Virtual machine	West US	RG2

Subscription1 also includes a virtual network named VNET2. VM1 connects to a virtual network named VNET2 by using a network interface named NIC1.
You need to create a new network interface named NIC2 for VM1.
Solution: You create NIC2 in RG1 and West US.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
The virtual machine you attach a network interface to and the virtual network you connect it to must exist in the same location, here West US, also referred to as a region.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface

Community Discussion

Question #530

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Location	Resource group
RG1	Resource group	East US	*Not applicable*
RG2	Resource group	West Europe	*Not applicable*
RG3	Resource group	North Europe	*Not applicable*
VNET1	Virtual network	Central US	RG1
VM1	Virtual machine	West US	RG2

Subscription1 also includes a virtual network named VNET2. VM1 connects to a virtual network named VNET2 by using a network interface named NIC1.
You need to create a new network interface named NIC2 for VM1.
Solution: You create NIC2 in RG2 and Central US.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
The virtual machine you attach a network interface to and the virtual network you connect it to must exist in the same location, here West US, also referred to as a region.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface

Community Discussion

Selected Answer: B

B is the answer. https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface?tabs=network-interface-portal#create-a-network-interface - A network interface can exist in the same, or different resource group, than the virtual machine you attach it to, or the virtual network you connect it to. - The virtual machine you add the network interface to must also exist in the same location and subscription as the network interface.

B Multiple NICs allow a VM to connect to different subnets. VM must have at least one NIC. A virtual machine can have more than one NIC, depending on the size of the VM you create. Each NIC attached to a VM must exist in the same location and subscription as the VM. Each NIC must be connected to a VNet that exists in the same Azure location and subscription as the NIC. Reference: https://learn.microsoft.com/en-us/azure/virtual-network/network-overview

Selected Answer: B

B - No. NIC2 must be in the same location as VM1

Selected Answer: B

Hello guys, in this kind of questions I guess the clue is the following: VM1 connected to VNET2 with NIC1 on location West US. Then VNET2 location is West US and only the NICs on West US locations will be ok for the answers.

Selected Answer: B

B is the answer. A is the answer. https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface?tabs=network-interface-portal#create-a-network-interface - A network interface can exist in the same, or different resource group, than the virtual machine you attach it to, or the virtual network you connect it to. - The virtual machine you add the network interface to must also exist in the same location and subscription as the network interface.

SecExams

Question #531

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Location	Resource group
RG1	Resource group	East US	*Not applicable*
RG2	Resource group	West Europe	*Not applicable*
RG3	Resource group	North Europe	*Not applicable*
VNET1	Virtual network	Central US	RG1
VM1	Virtual machine	West US	RG2

Subscription1 also includes a virtual network named VNET2. VM1 connects to a virtual network named VNET2 by using a network interface named NIC1.
You need to create a new network interface named NIC2 for VM1.
Solution: You create NIC2 in RG2 and Central US.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
The virtual machine you attach a network interface to and the virtual network you connect it to must exist in the same location, here West US, also referred to as a region.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface

Community Discussion

Question #532

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Location	Resource group
RG1	Resource group	East US	*Not applicable*
RG2	Resource group	West Europe	*Not applicable*
RG3	Resource group	North Europe	*Not applicable*
VNET1	Virtual network	Central US	RG1
VM1	Virtual machine	West US	RG2

Subscription1 also includes a virtual network named VNET2. VM1 connects to a virtual network named VNET2 by using a network interface named NIC1.
You need to create a new network interface named NIC2 for VM1.
Solution: You create NIC2 in RG2 and West US.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
The virtual machine you attach a network interface to and the virtual network you connect it to must exist in the same location, here West US, also referred to as a region.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface

Community Discussion

Selected Answer: A

Correct Answer: A Resource Group doesn't matter in this question, as long as the NIC is in the same location as the VNET & VM

compare with Q74, have not idea which one is correct.

Selected Answer: A

A is the answer. https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface?tabs=network-interface-portal#create-a-network-interface - A network interface can exist in the same, or different resource group, than the virtual machine you attach it to, or the virtual network you connect it to. - The virtual machine you add the network interface to must also exist in the same location and subscription as the network interface.

A Multiple NICs allow a VM to connect to different subnets. VM must have at least one NIC. A virtual machine can have more than one NIC, depending on the size of the VM you create. Each NIC attached to a VM must exist in the same location and subscription as the VM. Each NIC must be connected to a VNet that exists in the same Azure location and subscription as the NIC. Reference: https://learn.microsoft.com/en-us/azure/virtual-network/network-overview

location

SecExams

Question #533

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Location	Resource group
RG1	Resource group	East US	*Not applicable*
RG2	Resource group	West Europe	*Not applicable*
RG3	Resource group	North Europe	*Not applicable*
VNET1	Virtual network	Central US	RG1
VM1	Virtual machine	West US	RG2

Subscription1 also includes a virtual network named VNET2. VM1 connects to a virtual network named VNET2 by using a network interface named NIC1.
You need to create a new network interface named NIC2 for VM1.
Solution: You create NIC2 in RG2 and West US.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
The virtual machine you attach a network interface to and the virtual network you connect it to must exist in the same location, here West US, also referred to as a region.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface

Community Discussion

Question #534

You develop the following Azure Resource Manager (ARM) template to create a resource group and deploy an Azure Storage account to the resource group.

```
{
    "$schema": https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#,
    "contentVersion": "1.0.0.0",
    "resources": [
        {
            "type": "Microsoft.Resources/resourceGroups",
            "apiVersion": "2018-05-01",
            "location": "eastus",
            "name": "RG1"
        },
        {
            "type": "Microsoft.Resources/deployments",
            "apiVersion": "2017-05-10",
            "name": "storageDeployment",
            "resourceGroup": "RG1",
            "dependsOn": [
                "[resourceId('Microsoft.Resources/resourceGroups/', 'RG1')]"
            ],
            "properties": {
                "mode": "Incremental",
                "template": {
                    "$schema": https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#,
                    "contentVersion": "1.0.0.0",
                    "resources": [
                        {
                            "type": "Microsoft.Storage/storageAccounts",
                            "apiVersion": "2017-10-01",
                            "name": "storage1",
                            "location": "eastus",
                            "kind": "StorageV2",
                            "sku": {
                                "name": "Standard_LRS"
                            }
                        }
                    ]
                }
            }
        }
    ]
}
```

Which cmdlet should you run to deploy the template?

A) New-AzResource

B) New-AzResourceGroupDeployment (Correct Answer)

C) New-AzTenantDeployment

D) New-AzDeployment

SecExams

Explanation

Correct Answer:
B
Deployment scope.
You can target your deployment to a resource group, subscription, management group, or tenant. Depending on the scope of the deployment, you use different commands.
To deploy to a resource group, use New-AzResourceGroupDeployment.
Incorrect:
Not C: To deploy to a tenant, use New-AzTenantDeployment.
Not D: To deploy to a subscription, use New-AzSubscriptionDeployment which is an alias of the New-AzDeployment cmdlet.
To deploy to a management group, use New-AzManagementGroupDeployment.
Not A: The New-AzResource cmdlet creates an Azure resource, such as a website, Azure SQL Database server, or Azure SQL Database, in a resource group.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/deploy-powershell

Community Discussion

Selected Answer: D

D is correct here. We are creating RG and storage acc. in this RG. By using New-AzResourceGroupDeployment command -> "Adds an Azure deployment to a resource group."

Selected Answer: D

D New-AzResource - creates an Azure resource, such as a website, Azure SQL Database server, or Azure SQL Database, in a resource group. Reference: https://learn.microsoft.com/en-us/powershell/module/az.resources/new-azresource New-AzResourceGroupDeployment - adds a deployment to an existing resource group. Reference: https://learn.microsoft.com/en-us/powershell/module/az.resources/new-azresourcegroupdeployment New-AzDeployment - The New-AzDeployment cmdlet adds a deployment at the current subscription scope. This includes the resources that the deployment requires. Reference: https://learn.microsoft.com/en-us/powershell/module/az.resources/new-azdeployment Ner-AzTenanDeployment just exceeded the scope.

Agree Answer should be D 1. The New-AzDeployment cmdlet adds a deployment at the current subscription scope. This includes the resources that the deployment requires.

https://learn.microsoft.com/en-us/powershell/module/az.resources/new-azdeployment?view=azps-8.3.0

Agree Answer should be D 1. The New-AzDeployment cmdlet adds a deployment at the current subscription scope. This includes the resources that the deployment requires. https://learn.microsoft.com/en-us/powershell/module/az.resources/new-azdeployment?view=azps-8.3.0

agreed..... To add resources to a resource group, use the New-AzResourceGroupDeployment which creates a deployment at a resource group. The New-AzDeployment cmdlet creates a deployment at the current subscription scope, which deploys subscription level resources.

SecExams

Question #535

You develop the following Azure Resource Manager (ARM) template to create a resource group and deploy an Azure Storage account to the resource group.

```
{
    "$schema": https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#,
    "contentVersion": "1.0.0.0",
    "resources": [
        {
            "type": "Microsoft.Resources/resourceGroups",
            "apiVersion": "2018-05-01",
            "location": "eastus",
            "name": "RG1"
        },
        {
            "type": "Microsoft.Resources/deployments",
            "apiVersion": "2017-05-10",
            "name": "storageDeployment",
            "resourceGroup": "RG1",
            "dependsOn": [
                "[resourceId('Microsoft.Resources/resourceGroups/', 'RG1')]"
            ],
            "properties": {
                "mode": "Incremental",
                "template": {
                    "$schema": https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#,
                    "contentVersion": "1.0.0.0",
                    "resources": [
                        {
                            "type": "Microsoft.Storage/storageAccounts",
                            "apiVersion": "2017-10-01",
                            "name": "storage1",
                            "location": "eastus",
                            "kind": "StorageV2",
                            "sku": {
                                "name": "Standard_LRS"
                            }
                        }
                    ]
                }
            }
        }
    ]
}
```

Which cmdlet should you run to deploy the template?

A) New-AzResource

B) New-AzResourceGroupDeployment (Correct Answer)

C) New-AzTenantDeployment

D) New-AzDeployment

Explanation

Correct Answer: B ?

Deployment scope.

You can target your deployment to a resource group, subscription, management group, or tenant. Depending on the scope of the deployment, you use different commands.

To deploy to a resource group, use New-AzResourceGroupDeployment.

Incorrect:

Not C: To deploy to a tenant, use New-AzTenantDeployment.

Not D: To deploy to a subscription, use New-AzSubscriptionDeployment which is an alias of the New-AzDeployment cmdlet.

To deploy to a management group, use New-AzManagementGroupDeployment.

Not A: The New-AzResource cmdlet creates an Azure resource, such as a website, Azure SQL Database server, or Azure SQL Database, in a resource group.

Reference:

https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/deploy-powershell

Community Discussion

SecExams

Question #536

HOTSPOT -

You have an Azure App Service app named WebApp1 that contains two folders named Folder1 and Folder2.

You need to configure a daily backup of WebApp1. The solution must ensure that Folder2 is excluded from the backup.

What should you create first, and what should you use to exclude Folder2? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

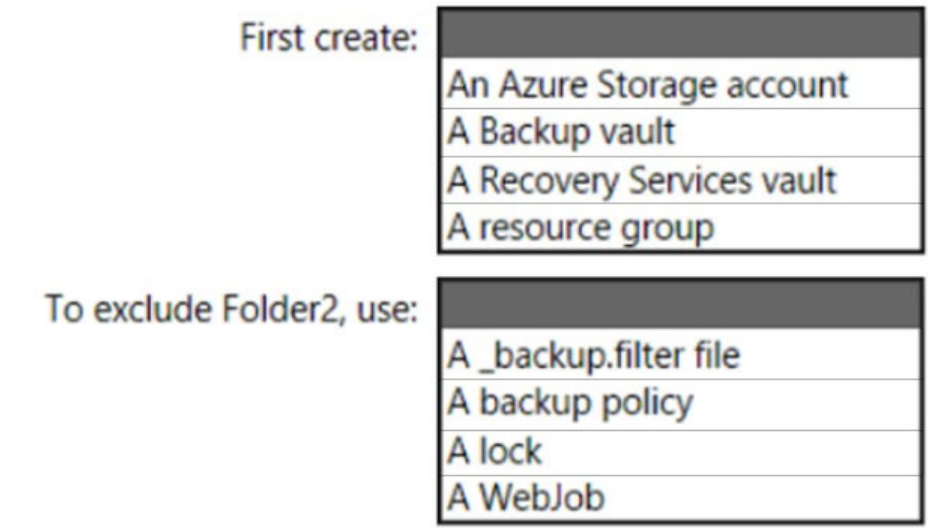

Explanation

Correct Answer:

Answer Area

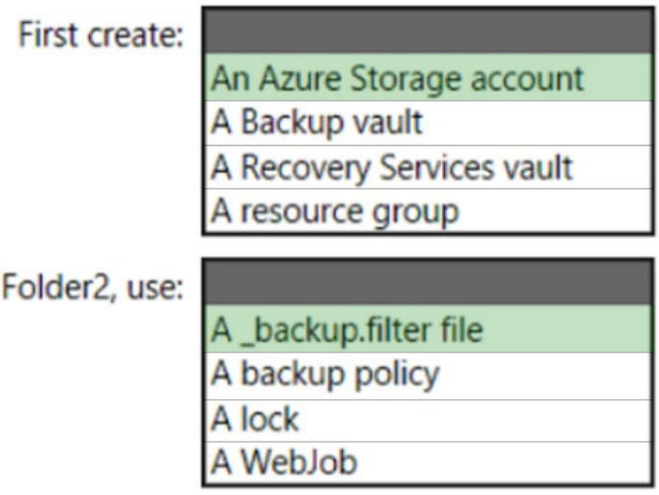

Box 1: An Azure Storage account -
App Service can back up the following information to an Azure storage account and container that you have configured your app to use.

App configuration -

File content -

Database connected to your app -
Note: Choose your backup destination by selecting a Storage Account and Container. The storage account must belong to the same subscription as the app you want to back up. If you wish, you can create a new storage account or a new container in the respective pages.

Box 2: A _backup.filter file -
Exclude files from your backup.
Suppose you have an app that contains log files and static images that have been backup once and are not going to change. In such cases, you can exclude those folders and files from being stored in your future backups. To exclude files and folders from your backups, create a _backup.filter file in the D:\home\site \wwwroot folder of your app. Specify the list of files and folders you want to exclude in this file.
Reference:
https://docs.microsoft.com/en-us/azure/app-service/manage-backup

Community Discussion

Yes, the given answer is correct. As I was quite confused, let me add some more details: You need a Recovery service vault if you want to backup VMs, File Shares, SAP HANA in a VM or SQL Server in a VM. You need a Backup vault if you want to backup Azure Disks, Azure Blobs or Azure Database for PostgreSQL Server. The question asks about an App Service, this one backs up to a storage account.

Given answer correct. This question was in the exam today. layout slightly different. 70-75% of the questions are from ET I passed today 800

I got into this trap as well. You need a Recovery service vault if you want to backup VMs, File Shares, SAP HANA in a VM or SQL Server in a VM. The question asks about an App Service, this one backs up to a storage account.

I got into this trap as well. You need a Recovery service vault if you want to backup VMs, File Shares, SAP HANA in a VM or SQL Server in a VM. The question asks about an App Service, this one backs up to a storage account.

I got into this trap as well. You need a Recovery service vault if you want to backup VMs, File Shares, SAP HANA in a VM or SQL Server in a VM. The question asks about an App Service, this one backs up to a storage account.

SecExams

Question #537

HOTSPOT -

You have an Azure App Service app named WebApp1 that contains two folders named Folder1 and Folder2.

You need to configure a daily backup of WebApp1. The solution must ensure that Folder2 is excluded from the backup.

What should you create first, and what should you use to exclude Folder2? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

First create:	An Azure Storage account A Backup vault A Recovery Services vault A resource group
To exclude Folder2, use:	A _backup.filter file A backup policy A lock A WebJob

Explanation

Correct Answer:

Answer Area

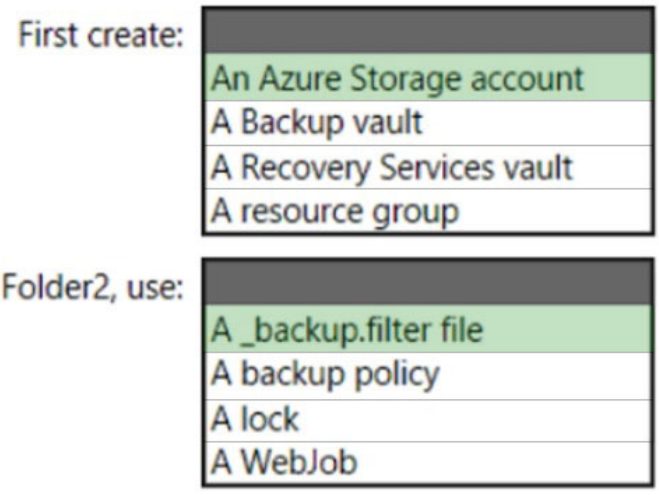

Box 1: An Azure Storage account -
App Service can back up the following information to an Azure storage account and container that you have configured your app to use.

App configuration -

File content -

Database connected to your app -
Note: Choose your backup destination by selecting a Storage Account and Container. The storage account must belong to the same subscription as the app you want to back up. If you wish, you can create a new storage account or a new container in the respective pages.

Box 2: A _backup.filter file -
Exclude files from your backup.
Suppose you have an app that contains log files and static images that have been backup once and are not going to change. In such cases, you can exclude those folders and files from being stored in your future backups. To exclude files and folders from your backups, create a _backup.filter file in the D:\home\site \wwwroot folder of your app. Specify the list of files and folders you want to exclude in this file.
Reference:
https://docs.microsoft.com/en-us/azure/app-service/manage-backup

Community Discussion

Question #538

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.
You need to ensure that NGINX is available on all the virtual machines after they are deployed.
What should you use?

A) the Publish-AzVMDscConfiguration cmdlet
B) Azure Application Insights
C) Azure Custom Script Extension (Correct Answer)
D) a Microsoft Endpoint Manager device configuration profile

Explanation

Correct Answer:
C
Use Azure Resource Manager templates to install applications into virtual machine scale sets with the Custom Script Extension.
Note: The Custom Script Extension downloads and executes scripts on Azure VMs. This extension is useful for post deployment configuration, software installation, or any other configuration / management task.
To see the Custom Script Extension in action, create a scale set that installs the NGINX web server and outputs the hostname of the scale set VM instance.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/tutorial-install-apps-template

Community Discussion

There are several versions of this question in the exam. The question has two correct answers: 1. A Desired State Configuration (DSC) extension 2. Azure Custom Script Extension

Selected Answer: C

C The Custom Script Extension downloads and runs scripts on Azure virtual machines (VMs). This extension is useful for post-deployment configuration, software installation,

or any other configuration or management task. You can download scripts from Azure Storage or GitHub Reference: https://learn.microsoft.com/en-us/azure/virtual-machines/extensions/custom-script-windows For DSC extension, as im not a server expert, it might be able to use for Microsoft IIS which is a native role and feature but not for the NGNIX. Hope other can give an proper conclusion..

Same as Question 89. https://www.secexams.com/discussions/microsoft/view/95713-exam-az-104-topic-4-question-89-discussion

Selected Answer: C

C is the answer. https://learn.microsoft.com/en-us/azure/virtual-machines/extensions/custom-script-windows The Custom Script Extension downloads and runs scripts on Azure virtual machines (VMs). This extension is useful for post-deployment configuration, software installation, or any other configuration or management task. You can download scripts from Azure Storage or GitHub, or provide them to the Azure portal at extension runtime.

Selected Answer: C

There are several versions of this question in the exam. The question has two correct answers: 1. A Desired State Configuration (DSC) extension 2. Azure Custom Script Extension

SecExams

Question #539

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.

You need to ensure that NGINX is available on all the virtual machines after they are deployed.

What should you use?

A) the Publish-AzVMDscConfiguration cmdlet
B) Azure Application Insights
C) Azure Custom Script Extension (Correct Answer)
D) a Microsoft Endpoint Manager device configuration profile

Explanation

Correct Answer: C ?

Use Azure Resource Manager templates to install applications into virtual machine scale sets with the Custom Script Extension.

Note: The Custom Script Extension downloads and executes scripts on Azure VMs. This extension is useful for post deployment configuration, software installation, or any other configuration / management task.

To see the Custom Script Extension in action, create a scale set that installs the NGINX web server and outputs the hostname of the scale set VM instance.

Reference:

https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/tutorial-install-apps-template

Community Discussion

SecExams

Question #540

HOTSPOT -

You have an Azure subscription. The subscription contains a virtual machine that runs Windows 10.

You need to join the virtual machine to an Active Directory domain.

How should you complete the Azure Resource Manager (ARM) template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
{
    "apiVersion": "2017-03-30",
    "type": [ "Extensions" | "Microsoft.Compute/VirtualMachines" | "Microsoft.Compute/virtualMachines/extensions" ],
    "name": "[concat(parameters('VName'), '/joindomain')]",
    "location": "[parameter('location')]",
    "properties": {
      "publisher": "Microsoft.Compute",
      "type": "JsonADDomainExtension",
      "typeHandlerVersion": "1.3",
      "autoUpgradeMinorVersion": true,
      "settings": {
        "Name": "[parameters('domainName')]",
        "User": "[parameters('domainusername')]",
        "Restart": "true",
        "Options": "3"
      },
      [ "ProtectedSettings":{ | "Settings":{ | "Statuses":{ ]
        "Password": "[parameters('domainPassword')]"
      }
}
```

SecExams

Explanation

Correct Answer:

Answer Area

```
{
    "apiVersion": "2017-03-30",
    "type": [ "Extensions" | "Microsoft.Compute/VirtualMachines" | "Microsoft.Compute/virtualMachines/extensions" ],
    "name": "[concat(parameters('VName'), '/joindomain')]",
    "location": "[parameter('location')]",
    "properties": {
      "publisher": "Microsoft.Compute",
      "type": "JsonADDomainExtension",
      "typeHandlerVersion": "1.3",
      "autoUpgradeMinorVersion": true,
      "settings": {
        "Name": "[parameters('domainName')]",
        "User": "[parameters('domainusername')]",
        "Restart": "true",
        "Options": "3"
      },
      [ "ProtectedSettings":{ | "Settings":{ | "Statuses":{ ]
        "Password": "[parameters('domainPassword')]"
      }
}
```

Box 1: "Microsoft.Compute/VirtualMachines/extensions",
The following JSON example uses the Microsoft.Compute/virtualMachines/extensions resource type to install the Active Directory domain join extension.
Parameters are used that you specify at deployment time. When the extension is deployed, the VM is joined to the specified managed domain.
Box 2: "ProtectedSettings":{
Example:
{
"apiVersion": "2015-06-15",

"type": "Microsoft.Compute/virtualMachines/extensions",
"name": "[concat(parameters('dnsLabelPrefix'),'/joindomain')]",
"location": "[parameters('location')]",
"dependsOn": [
"[concat('Microsoft.Compute/virtualMachines/', parameters('dnsLabelPrefix'))]"
],
"properties": {
"publisher": "Microsoft.Compute",
"type": "JsonADDomainExtension",
"typeHandlerVersion": "1.3",
"autoUpgradeMinorVersion": true,
"settings": {
"Name": "[parameters('domainToJoin')]",
"OUPath": "[parameters('ouPath')]",
"User": "[concat(parameters('domainToJoin'), '\\', parameters('domainUsername'))]",
"Restart": "true",
"Options": "[parameters('domainJoinOptions')]"
},
"protectedSettings": {
"Password": "[parameters('domainPassword')]"
}
}
}
Reference:
https://docs.microsoft.com/en-us/azure/active-directory-domain-services/join-windows-vm-template

SecExams

Community Discussion

Answer is correct. https://docs.microsoft.com/en-us/azure/active-directory-domain-services/join-windows-vm-template

Correct Answer: box1: Microsoft.Compute/virtualMachines/extensions box2: protectedSettings https://docs.microsoft.com/en-us/azure/active-directory-domain-services/join-windows-vm-template#azure-resource-manager-template-overview

Came on 21st Dec 2022 Exam Answer is correct

This question was in exam 15/01/24

came on exam 16th November 2023, answer is correct

SecExams

Question #541

HOTSPOT -

You have an Azure subscription. The subscription contains a virtual machine that runs Windows 10.

You need to join the virtual machine to an Active Directory domain.

How should you complete the Azure Resource Manager (ARM) template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
{
    "apiVersion": "2017-03-30",
    "type": [ "Extensions" | "Microsoft.Compute/VirtualMachines" | "Microsoft.Compute/virtualMachines/extensions" ],
    "name": "[concat(parameters('VName'), '/joindomain')]",
    "location": "[parameter('location')]",
    "properties": {
      "publisher": "Microsoft.Compute",
      "type": "JsonADDomainExtension",
      "typeHandlerVersion": "1.3",
      "autoUpgradeMinorVersion": true,
      "settings": {
        "Name": "[parameters('domainName')]",
        "User": "[parameters('domainusername')]",
        "Restart": "true",
        "Options": "3"
      },
      [ "ProtectedSettings":{ | "Settings":{ | "Statuses":{ ]
        "Password": "[parameters('domainPassword')]"
      }
}
```

SecExams

Explanation

Correct Answer:

Answer Area

```
{
    "apiVersion": "2017-03-30",
    "type": [ "Extensions", "Microsoft.Compute/VirtualMachines", "Microsoft.Compute/virtualMachines/extensions" ],
    "name": "[concat(parameters('VName'), '/joindomain')]",
    "location": "[parameter('location')]",
    "properties": {
      "publisher": "Microsoft.Compute",
      "type": "JsonADDomainExtension",
      "typeHandlerVersion": "1.3",
      "autoUpgradeMinorVersion": true,
      "settings": {
        "Name": "[parameters('domainName')]",
        "User": "[parameters('domainusername')]",
        "Restart": "true",
        "Options": "3"
      },
      [ "ProtectedSettings":{ , "Settings":{ , "Statuses":{ ]
        "Password": "[parameters('domainPassword')]"
      }
  }
```

Box 1: "Microsoft.Compute/VirtualMachines/extensions",
The following JSON example uses the Microsoft.Compute/virtualMachines/extensions resource type to install the Active Directory domain join extension.
Parameters are used that you specify at deployment time. When the extension is deployed, the VM is joined to the specified managed domain.
Box 2: "ProtectedSettings":{
Example:
{
"apiVersion": "2015-06-15",

```
"type": "Microsoft.Compute/virtualMachines/extensions",
"name": "[concat(parameters('dnsLabelPrefix'),'/joindomain')]",
"location": "[parameters('location')]",
"dependsOn": [
"[concat('Microsoft.Compute/virtualMachines/', parameters('dnsLabelPrefix'))]"
],
"properties": {
"publisher": "Microsoft.Compute",
"type": "JsonADDomainExtension",
"typeHandlerVersion": "1.3",
"autoUpgradeMinorVersion": true,
"settings": {
"Name": "[parameters('domainToJoin')]",
"OUPath": "[parameters('ouPath')]",
"User": "[concat(parameters('domainToJoin'), '\\', parameters('domainUsername'))]",
"Restart": "true",
"Options": "[parameters('domainJoinOptions')]"
},
"protectedSettings": {
"Password": "[parameters('domainPassword')]"
}
}
}
```

Reference:
https://docs.microsoft.com/en-us/azure/active-directory-domain-services/join-windows-vm-template

SecExams

Community Discussion

Question #542

HOTSPOT -

You have an Azure subscription named Sub1.

You plan to deploy a multi-tiered application that will contain the tiers shown in the following table.

Tier	Accessible from the Internet	Number of virtual machines
Front-end web server	Yes	10
Business logic	No	100
Microsoft SQL Server database	No	5

You need to recommend a networking solution to meet the following requirements:

✑ Ensure that communication between the web servers and the business logic tier spreads equally across the virtual machines.

✑ Protect the web servers from SQL injection attacks.

Which Azure resource should you recommend for each requirement? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Ensure that communication between the web servers and the business logic tier spreads equally across the virtual machines:

- an application gateway that uses the Standard tier
- an application gateway that uses the WAF tier
- an internal load balancer
- a network security group (NSG)
- a public load balancer

Protect the web servers from SQL injection attacks:

- an application gateway that uses the Standard tier
- an application gateway that uses the WAF tier
- an internal load balancer
- a network security group (NSG)
- a public load balancer

Explanation

Correct Answer:

Answer Area

Ensure that communication between the web servers and the business logic tier spreads equally across the virtual machines:

- an application gateway that uses the Standard tier
- an application gateway that uses the WAF tier
- an internal load balancer
- a network security group (NSG)
- a public load balancer

Protect the web servers from SQL injection attacks:

- an application gateway that uses the Standard tier
- an application gateway that uses the WAF tier
- an internal load balancer
- a network security group (NSG)
- a public load balancer

Box 1: an internal load balancer
Azure Internal Load Balancer (ILB) provides network load balancing between virtual machines that reside inside a cloud service or a virtual network with a regional scope.
Box 2: an application gateway that uses the WAF tier
Azure Web Application Firewall (WAF) on Azure Application Gateway provides centralized protection of your web applications from common exploits and vulnerabilities. Web applications are increasingly targeted by malicious attacks that exploit commonly known vulnerabilities.
Reference:
https://docs.microsoft.com/en-us/azure/web-application-firewall/ag/ag-overview

SecExams

Community Discussion

Question #543

HOTSPOT -

You have an Azure subscription named Sub1.

You plan to deploy a multi-tiered application that will contain the tiers shown in the following table.

Tier	Accessible from the Internet	Number of virtual machines
Front-end web server	Yes	10
Business logic	No	100
Microsoft SQL Server database	No	5

You need to recommend a networking solution to meet the following requirements:

✑ Ensure that communication between the web servers and the business logic tier spreads equally across the virtual machines.

✑ Protect the web servers from SQL injection attacks.

Which Azure resource should you recommend for each requirement? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Ensure that communication between the web servers and the business logic tier spreads equally across the virtual machines:

- an application gateway that uses the Standard tier
- an application gateway that uses the WAF tier
- an internal load balancer
- a network security group (NSG)
- a public load balancer

Protect the web servers from SQL injection attacks:

- an application gateway that uses the Standard tier
- an application gateway that uses the WAF tier
- an internal load balancer
- a network security group (NSG)
- a public load balancer

Explanation

Correct Answer:

Answer Area

Ensure that communication between the web servers and the business logic tier spreads equally across the virtual machines:	an application gateway that uses the Standard tier an application gateway that uses the WAF tier **an internal load balancer** a network security group (NSG) a public load balancer
Protect the web servers from SQL injection attacks:	an application gateway that uses the Standard tier **an application gateway that uses the WAF tier** an internal load balancer a network security group (NSG) a public load balancer

Box 1: an internal load balancer
Azure Internal Load Balancer (ILB) provides network load balancing between virtual machines that reside inside a cloud service or a virtual network with a regional scope.
Box 2: an application gateway that uses the WAF tier
Azure Web Application Firewall (WAF) on Azure Application Gateway provides centralized protection of your web applications from common exploits and vulnerabilities. Web applications are increasingly targeted by malicious attacks that exploit commonly known vulnerabilities.
Reference:
https://docs.microsoft.com/en-us/azure/web-application-firewall/ag/ag-overview

Community Discussion

Correct Answer: Box 1: an internal load balancer Azure Internal Load Balancer (ILB) provides network load balancing between virtual machines that reside inside a cloud service or a virtual network with a regional scope. Box 2: an application gateway that uses the WAF tier Azure Web Application Firewall (WAF) on Azure Application Gateway provides centralized protection of your web applications from common exploits and vulnerabilities. Web applications are increasingly targeted by malicious attacks that exploit commonly known vulnerabilities. Application gateway which uses WAF tier.

Answer is correct. - Internal Load Balancer. check the example in https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-overview - Application gateway which uses WAF tier.

Was on exam today 19.11.2021. Passed with 920. Correct answer: - Internal Load Balancer - Application gateway which uses WAF tier

Passed today on 29Jan23 with a score of 970. This question was in the exam. Correct Answer: Box 1: an internal load balancer Box 2: an application gateway that uses the WAF tier

Azure Web Application Firewall (WAF) on Azure Application Gateway provides centralized protection of your web applications from common exploits and vulnerabilities. Web applications are increasingly targeted by malicious attacks that exploit commonly known vulnerabilities. SQL injection and cross-site scripting are among the most common attacks

Question #544

Your company has three offices. The offices are located in Miami, Los Angeles, and New York. Each office contains datacenter.

You have an Azure subscription that contains resources in the East US and West US Azure regions. Each region contains a virtual network. The virtual networks are peered.

You need to connect the datacenters to the subscription. The solution must minimize network latency between the datacenters.

What should you create?

A) three Azure Application Gateways and one On-premises data gateway
B) three virtual hubs and one virtual WAN
C) three virtual WANs and one virtual hub (Correct Answer)
D) three On-premises data gateways and one Azure Application Gateway

Explanation

Correct Answer: C ?
Reference:
https://docs.microsoft.com/en-us/azure/virtual-wan/virtual-wan-about

Community Discussion

Question #545

Your company has three offices. The offices are located in Miami, Los Angeles, and New York. Each office contains datacenter.
You have an Azure subscription that contains resources in the East US and West US Azure regions. Each region contains a virtual network. The virtual networks are peered.
You need to connect the datacenters to the subscription. The solution must minimize network latency between the datacenters.
What should you create?

A) three Azure Application Gateways and one On-premises data gateway
B) three virtual hubs and one virtual WAN
C) three virtual WANs and one virtual hub (Correct Answer)
D) three On-premises data gateways and one Azure Application Gateway

Explanation

Correct Answer:
C
Reference:
https://docs.microsoft.com/en-us/azure/virtual-wan/virtual-wan-about

Community Discussion

Correct Answer: C There can only be one hub per Azure region. It should be 2 Virtual Hubs and 1 WAN. Since we have just two region, it may be impossible to have 3 hubs. Reference: https://docs.microsoft.com/en-us/azure/virtual-wan/virtual-wan-about

They're all wrong because the question says there are 2 Azure regions, and the below documentation says each region only has a single hub... Should be 2 hubs and one WAN. https://docs.microsoft.com/en-us/azure/virtual-wan/virtual-wan-about "Hub: A virtual hub is a Microsoft-managed virtual network. The hub contains various service endpoints to enable connectivity. From your on-premises network (vpnsite), you can connect to a VPN Gateway inside the virtual hub, connect ExpressRoute circuits to a virtual hub, or even connect mobile users to a Point-to-site gateway in the virtual hub. The hub is the core of your network in a region. There can only be one hub per Azure region."

Agree. In the link below there is a very good architecture that shows almost the same example as in the question, and we can see 1 virtual WAN and 2 hubs: https://docs.microsoft.com/en-us/azure/virtual-wan/migrate-from-hub-spoke-topology#architecture The closest answer would be 'B', 3 hubs and 1 WAN. Even if we don´t have 3 regions being used, we can still create 3 hubs in 3 different regions.

Agree. In the link below there is a very good architecture that shows almost the same example as in the question, and we can see 1 virtual WAN and 2 hubs: https://docs.microsoft.com/en-us/azure/virtual-wan/migrate-from-hub-spoke-topology#architecture The closest answer would be 'B', 3 hubs and 1 WAN. Even if we don´t have 3 regions being used, we can still create 3 hubs in 3 different regions.

Microsoft has removed the limitation of having only 1 hub per region. "A virtual hub is a Microsoft-managed virtual network. The hub contains various service endpoints to enable connectivity. From your on-premises network (vpnsite), you can connect to a VPN gateway inside the virtual hub, connect ExpressRoute circuits to a virtual hub, or even connect mobile users to a point-to-site gateway in the virtual hub. The hub is the core of your network in a region. Multiple virtual hubs can be created in the same region." Reference - https://learn.microsoft.com/en-us/azure/virtual-wan/virtual-wan-about

SecExams

Question #546

HOTSPOT -

You plan to deploy five virtual machines to a virtual network subnet.

Each virtual machine will have a public IP address and a private IP address.

Each virtual machine requires the same inbound and outbound security rules.

What is the minimum number of network interfaces and network security groups that you require? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Minimum number of network interfaces:

- 5
- 10
- 15
- 20

Minimum number of network security groups:

- 1
- 2
- 5
- 10

Explanation

Correct Answer:

Answer Area

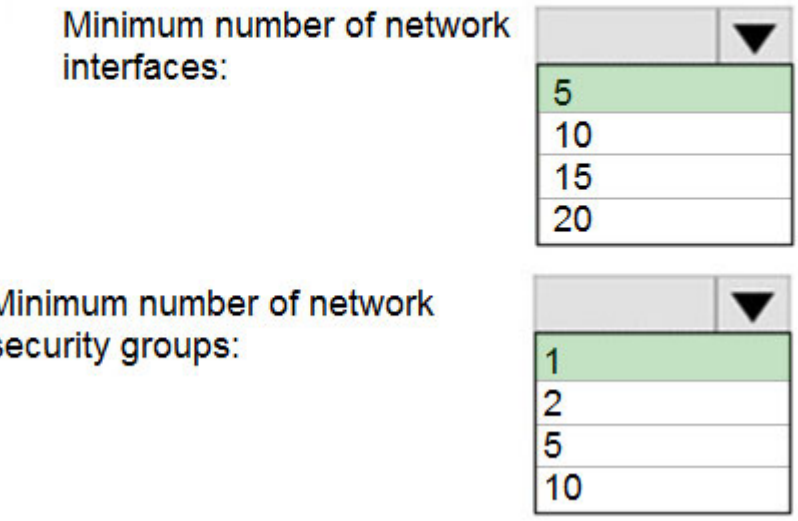

Box 1: 5 -
A public and a private IP address can be assigned to a single network interface.

Box 2: 1 -
You can associate zero, or one, network security group to each virtual network subnet and network interface in a virtual machine. The same network security group can be associated to as many subnets and network interfaces as you choose.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface-addresses

Community Discussion

Question #547

HOTSPOT -

You plan to deploy five virtual machines to a virtual network subnet.

Each virtual machine will have a public IP address and a private IP address.

Each virtual machine requires the same inbound and outbound security rules.

What is the minimum number of network interfaces and network security groups that you require? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Minimum number of network interfaces:

- 5
- 10
- 15
- 20

Minimum number of network security groups:

- 1
- 2
- 5
- 10

Explanation

Correct Answer:

Answer Area

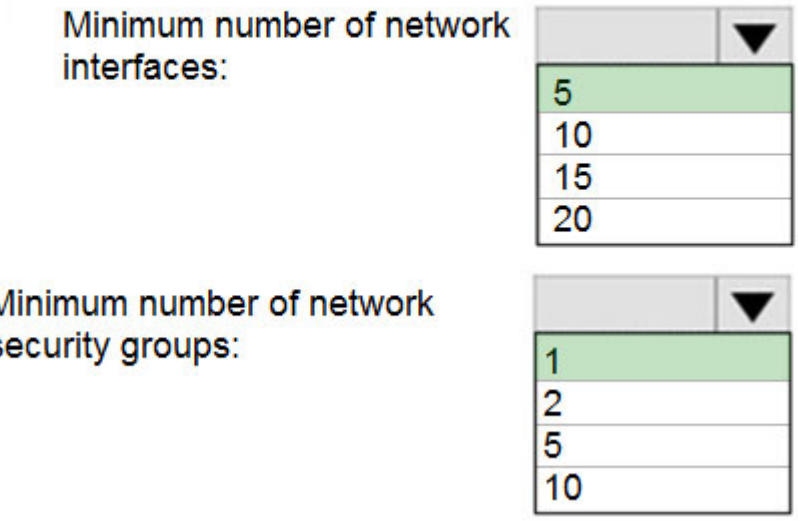

Box 1: 5 -
A public and a private IP address can be assigned to a single network interface.

Box 2: 1 -
You can associate zero, or one, network security group to each virtual network subnet and network interface in a virtual machine. The same network security group can be associated to as many subnets and network interfaces as you choose.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface-addresses

Community Discussion

Answer should be : 5 Network interfaces and 1 Network security group

Box 1: 5 A public and a private IP address can be assigned to a single network interface. By default a NIC is associated to one IP address. Anyway nothing prevents a NIC to have MORE THAN ONE IP address. So to the VM's NIC, you can associate the public and the private IP at the same time. You are not forced to have one NIC for the public IP and one NIC for the private IP. Box 2: 1 You can associate zero, or one, network security group to each virtual network subnet and network interface in a virtual machine. The same network security group can be associated to as many subnets and network interfaces as you choose. Reference: https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface-addresses

I took Exam of Azure- 104 at 27/2/2023 I score 920 points out of 1000 points. This was on it and my answer was: Box 1: 5 Box 2: 1

I know Mlantonis is giving best answer with detail explanation but this guy fedztedz is also good and giving correct answers in most of the question. You both are amazing :)

nic 5 nsg 1 correct answer

Question #548

You have an Azure subscription that contains the resources shown in the following table.

Name	Type
LB1	Load balancer
VM1	Virtual machine
VM2	Virtual machine

LB1 is configured as shown in the following table.

Name	Type	Value
bepool1	Backend pool	VM1, VM2
LoadBalancerFrontEnd	Frontend IP configuration	Public IP address
hprobe1	Health probe	Protocol: TCP Port: 80 Interval: 5 seconds Unhealthy threshold: 2
rule1	Load balancing rule	IP version: IPv4 Frontend IP address: LoadBalancerFrontEnd Port: 80 Backend Port: 80 Backend pool: bepool1 Health probe: hprobe1

You plan to create new inbound NAT rules that meet the following requirements:

☞ Provide Remote Desktop access to VM1 from the internet by using port 3389.

☞ Provide Remote Desktop access to VM2 from the internet by using port 3389.

What should you create on LB1 before you can create the new inbound NAT rules?

A) a frontend IP address (Correct Answer)

B) a load balancing rule

C) a health probe

D) a backend pool

Explanation

Correct Answer: A ?

Community Discussion

Question #549

You have an Azure subscription that contains the resources shown in the following table.

Name	Type
LB1	Load balancer
VM1	Virtual machine
VM2	Virtual machine

LB1 is configured as shown in the following table.

Name	Type	Value
bepool1	Backend pool	VM1, VM2
LoadBalancerFrontEnd	Frontend IP configuration	Public IP address
hprobe1	Health probe	Protocol: TCP Port: 80 Interval: 5 seconds Unhealthy threshold: 2
rule1	Load balancing rule	IP version: IPv4 Frontend IP address: LoadBalancerFrontEnd Port: 80 Backend Port: 80 Backend pool: bepool1 Health probe: hprobe1

You plan to create new inbound NAT rules that meet the following requirements:

✑ Provide Remote Desktop access to VM1 from the internet by using port 3389.

✑ Provide Remote Desktop access to VM2 from the internet by using port 3389.

What should you create on LB1 before you can create the new inbound NAT rules?

A) a frontend IP address (Correct Answer)

B) a load balancing rule
C) a health probe
D) a backend pool

Explanation

Correct Answer:
A

Community Discussion

I think the answer is correct. Key is port 3389 from the internet for both VMs. If we want to connect to two different machines on the same port we need to have two different frontend IPs for the port forwarding.

This does not make sense. On existing LB, you can create NAT rule right away. The frontend IP address is already there. Imho maybe B is right, you need to set the load balancing rule for port 3389.

impossible IP1:3389 -> vm1:3389 IP1:3389 -> vm2:3389 ??? possible IP1:3389 -> vm1:3389 IP2:3389 -> vm2:3389 or IP1:3389 -> vm1:3389 IP1:3388 -> vm2:3389

impossible IP1:3389 -> vm1:3389 IP1:3389 -> vm2:3389 ??? possible IP1:3389 -> vm1:3389 IP2:3389 -> vm2:3389 or IP1:3389 -> vm1:3389 IP1:3388 -> vm2:3389

That's right, you need to know the specific IP address of the VM, otherwise, you will randomly access any VM in the LB. It is A

SecExams

Question #550

HOTSPOT -

You have Azure virtual machines that run Windows Server 2019 and are configured as shown in the following table.

Name	Private IP address	Public IP address	Virtual network name	DNS suffix configured in Windows Server
VM1	10.1.0.4	52.186.85.63	VNET1	Adatum.com
VM2	10.1.0.5	13.92.168.13	VNET1	Contoso.com

You create a private Azure DNS zone named adatum.com. You configure the adatum.com zone to allow auto registration from VNET1.

Which A records will be added to the adatum.com zone for each virtual machine? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

A records for VM1:

- None
- Private IP address only
- Public IP address only
- Private IP address and public IP address

A records for VM2:

- None
- Private IP address only
- Public IP address only
- Private IP address and public IP address

Explanation

Correct Answer:

Answer Area

A records for VM1:

- None
- Private IP address only
- Public IP address only
- Private IP address and public IP address

A records for VM2:

- None
- Private IP address only
- Public IP address only
- Private IP address and public IP address

The virtual machines are registered (added) to the private zone as A records pointing to their private IP addresses.
Reference:
https://docs.microsoft.com/en-us/azure/dns/private-dns-overview https://docs.microsoft.com/en-us/azure/dns/private-dns-scenarios

Community Discussion

Correct Answer: The virtual machines are registered (added) to the private zone as A records pointing to their private IP addresses. Since both VM1 & VM2 are in same Vnet1 and the Vnet1 is liked under adatum.com domain (Private DNS Zone->Setting->virtual network links). Reference: https://docs.microsoft.com/en-us/azure/dns/private-dns-overview https://docs.microsoft.com/en-us/azure/dns/private-dns-scenarios

Answer is correct. Private/Private check https://docs.microsoft.com/en-us/azure/dns/private-dns-scenarios#scenario-split-horizon-functionality

Box 1: Private Box 2: Private

Box 1: Private Box 2: Private

Checked in lab; the DNS records in the private zone are created using the " Virtual network links" to the VNet. The DNS name in the VM itself has no impact on this. So yes, Both "Private" is correct.

Question #551

HOTSPOT -

You have Azure virtual machines that run Windows Server 2019 and are configured as shown in the following table.

Name	Private IP address	Public IP address	Virtual network name	DNS suffix configured in Windows Server
VM1	10.1.0.4	52.186.85.63	VNET1	Adatum.com
VM2	10.1.0.5	13.92.168.13	VNET1	Contoso.com

You create a private Azure DNS zone named adatum.com. You configure the adatum.com zone to allow auto registration from VNET1.

Which A records will be added to the adatum.com zone for each virtual machine? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

A records for VM1:

- None
- Private IP address only
- Public IP address only
- Private IP address and public IP address

A records for VM2:

- None
- Private IP address only
- Public IP address only
- Private IP address and public IP address

Explanation

Correct Answer:

Answer Area

A records for VM1:

- None
- Private IP address only
- Public IP address only
- Private IP address and public IP address

A records for VM2:

- None
- Private IP address only
- Public IP address only
- Private IP address and public IP address

The virtual machines are registered (added) to the private zone as A records pointing to their private IP addresses.
Reference:
https://docs.microsoft.com/en-us/azure/dns/private-dns-overview https://docs.microsoft.com/en-us/azure/dns/private-dns-scenarios

Community Discussion

SecExams

Question #552

HOTSPOT -

You have an Azure virtual network named VNet1 that connects to your on-premises network by using a site-to-site VPN. VNet1 contains one subnet named Sunet1.

Subnet1 is associated to a network security group (NSG) named NSG1. Subnet1 contains a basic internal load balancer named ILB1. ILB1 has three Azure virtual machines in the backend pool.

You need to collect data about the IP addresses that connects to ILB1. You must be able to run interactive queries from the Azure portal against the collected data.

What should you do? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Resource to create:

- An Azure Event Grid
- An Azure Log Analytics workspace
- An Azure Storage account

Resource on which to enable diagnostics:

- ILB1
- NSG1
- The Azure virtual machines

Explanation

Correct Answer:

Answer Area

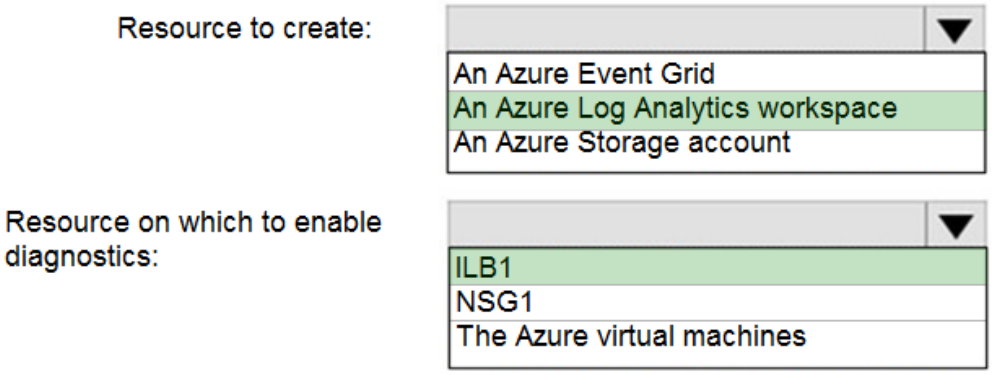

Box 1: An Azure Log Analytics workspace
In the Azure portal you can set up a Log Analytics workspace, which is a unique Log Analytics environment with its own data repository, data sources, and solutions

Box 2: ILB1 -
Reference:
https://docs.microsoft.com/en-us/azure/log-analytics/log-analytics-quick-create-workspace https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-standard-diagnostics

Community Discussion

Correct Answer: Box 1: An Azure Log Analytics workspace In the Azure portal you can set up a Log Analytics workspace, which is a unique Log Analytics environment with its own data repository, data sources, and solutions. Box 2: NSG1 NSG flow logs allow viewing information about ingress and egress IP traffic through a Network security group. Through this, the IP addresses that connect to the ILB can be monitored when the diagnostics are enabled on a Network Security Group. We cannot enable diagnostics on an internal load balancer to check for the IP addresses. As for Internal LB, it is basic one. Basic can only connect to storage account. Also, Basic LB has only activity logs, which doesn't include the connectivity workflow. So, we need to use NSG to meet the mentioned requirements.

Answer is not correct. The correct answer is - Create a Log Analytics Workspace - NSG As for Internal LB, it is basic one. Basic can only connect to storage account. Also Basic LB has only activity logs which doesn't include the connectivity workflow. So, we need to use NSG to meet the mentioned requirements.

Reference: https://docs.microsoft.com/en-us/azure/log-analytics/log-analytics-quick-create-workspace https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-standard-diagnostics

Reference: https://docs.microsoft.com/en-us/azure/log-analytics/log-analytics-quick-create-workspace https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-standard-diagnostics

very good catch! Because yes you are right after looking at the link : https://learn.microsoft.com/en-gb/azure/load-balancer/skus#skus you cannot do diagnostics for the load balancer you know, which is crazy i would of picked that over the NSG. Box 2: NSG1

SecExams

Question #553

HOTSPOT -

You have an Azure virtual network named VNet1 that connects to your on-premises network by using a site-to-site VPN. VNet1 contains one subnet named Sunet1.

Subnet1 is associated to a network security group (NSG) named NSG1. Subnet1 contains a basic internal load balancer named ILB1. ILB1 has three Azure virtual machines in the backend pool.

You need to collect data about the IP addresses that connects to ILB1. You must be able to run interactive queries from the Azure portal against the collected data.

What should you do? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Resource to create:

- An Azure Event Grid
- An Azure Log Analytics workspace
- An Azure Storage account

Resource on which to enable diagnostics:

- ILB1
- NSG1
- The Azure virtual machines

Explanation

Correct Answer:

Answer Area

Resource to create:

- An Azure Event Grid
- An Azure Log Analytics workspace
- An Azure Storage account

Resource on which to enable diagnostics:

- ILB1
- NSG1
- The Azure virtual machines

Box 1: An Azure Log Analytics workspace
In the Azure portal you can set up a Log Analytics workspace, which is a unique Log Analytics environment with its own data repository, data sources, and solutions

Box 2: ILB1 -
Reference:
https://docs.microsoft.com/en-us/azure/log-analytics/log-analytics-quick-create-workspace https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-standard-diagnostics

Community Discussion

Question #554

You have the Azure virtual networks shown in the following table.

Name	Address space	Subnet	Resource group Azure region
VNet1	10.11.0.0/16	10.11.0.0/17	West US
VNet2	10.11.0.0/17	10.11.0.0/25	West US
VNet3	10.10.0.0/22	10.10.1.0/24	East US
VNet4	192.168.16.0/22	192.168.16.0/24	North Europe

To which virtual networks can you establish a peering connection from VNet1?

A) VNet2 andVNet3 only
B) VNet2 only
C) VNet3 and VNet4 only (Correct Answer)
D) VNet2, VNet3, and VNet4

Explanation

Correct Answer:
C
Address spaces must not overlap to enable VNet Peering.
Incorrect Answers:
A, B, D: The address space for VNet2 overlaps with VNet1. We therefore cannot establish a peering between VNet2 and VNet1.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/tutorial-connect-virtual-networks-portal https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-faq#vnet-peering

Community Discussion

Correct Answer: C VNet1 10.11.0.0/16 = 10.11.0.1 - 10.11.255.255 (overlap VNet2) VNet2 10.11.0.0/17 = 10.11.0.1 - 10.11.127.254 (overlap VNet1) VNet3 10.10.0.0/22 = 10.10.0.1 - 10.10.3.254 (no overlap) VNet4 192.168.16.0/22 = 192.168.16.1 - 192.168.19.254 (no overlap) Possible peerings are: VNet1 -> Vnet3 VNet1 -> Vnet4 If a virtual network has address ranges that overlap with another virtual network or on-premises network, the two networks can't be connected.

Tested, in this context answer is correct. Vnet 2 and Vnet 1 can not be peered and also Vnet 2 and vnet3 or vnet 4 can not be peered. But tested more and discovered that Vnet1 can make a peering with Vnet 3 and Vnet4. Pay attention if there will be a modification in the answer. The strange way of Microshit qestions.

Selected Answer: C

Virtual Peering Requirements: • Virtual Peering comes in two forms: Virtual Peering for within a Region and Global Virtual Peering for across regions. The question does not limit the peering to one region. So peering permitted to VNET3 and VNET4 • Virtual Peering cannot have overlapping address spaces so no peering can be had with VNET2 until there is an address space change (requires recreation of the VNET). Therefore only logical answer is C: VNET3 & VNET4: Read Here: (https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-peering-overview)

Selected Answer: C

Given answer is correct... Peering should NOT have overlapping Address Space/subnets

Selected Answer: C

Possible peerings are: VNet1 -> Vnet3 VNet1 -> Vnet4

Question #555

You have the Azure virtual networks shown in the following table.

Name	Address space	Subnet	Resource group Azure region
VNet1	10.11.0.0/16	10.11.0.0/17	West US
VNet2	10.11.0.0/17	10.11.0.0/25	West US
VNet3	10.10.0.0/22	10.10.1.0/24	East US
VNet4	192.168.16.0/22	192.168.16.0/24	North Europe

To which virtual networks can you establish a peering connection from VNet1?

A) VNet2 andVNet3 only
B) VNet2 only
C) VNet3 and VNet4 only (Correct Answer)
D) VNet2, VNet3, and VNet4

Explanation

Correct Answer: C ?
Address spaces must not overlap to enable VNet Peering.
Incorrect Answers:
A, B, D: The address space for VNet2 overlaps with VNet1. We therefore cannot establish a peering between VNet2 and VNet1.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/tutorial-connect-virtual-networks-portal https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-faq#vnet-peering

Community Discussion

Question #556

You have an Azure subscription that contains a virtual network named VNet1. VNet1 contains four subnets named Gateway, Perimeter, NVA, and Production. The NVA subnet contains two network virtual appliances (NVAs) that will perform network traffic inspection between the Perimeter subnet and the Production subnet.

You need to implement an Azure load balancer for the NVAs. The solution must meet the following requirements:

✑ The NVAs must run in an active-active configuration that uses automatic failover.

✑ The load balancer must load balance traffic to two services on the Production subnet. The services have different IP addresses.

Which three actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

A) Deploy a basic load balancer

B) Deploy a standard load balancer (Correct Answer)

C) Add two load balancing rules that have HA Ports and Floating IP enabled (Correct Answer)

D) Add two load balancing rules that have HA Ports enabled and Floating IP disabled

E) Add a frontend IP configuration, a backend pool, and a health probe

F) Add a frontend IP configuration, two backend pools, and a health probe (Correct Answer)

Explanation

Correct Answer:
BCF
A standard load balancer is required for the HA ports.
Two backend pools are needed as there are two services with different IP addresses.
Floating IP rule is used where backend ports are reused.
Incorrect Answers:
E: HA Ports are not available for the basic load balancer.
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-standard-overview https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-multivip-overview

Community Discussion

The given answer is correct: B - HA ports need are not supported by a basic loadbalancer C - You need a floating ip for the active-active configuration to switch over quickly F - You need 2 backend pools for the 2 different services

The Answer is not correct. It should be BDE. Why? - Basically we are just want to load balance the NVM , that's all. So, we will need HA ports for HA and failover. But since we don't want to balance the services themselves , so we go with disabled IP floating and one backend service for NVM. check https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-ha-ports-overview#a-single-non-floating-ip-non-direct-server-return-ha-ports-configuration-on-an-internal-standard-load-balancer However, if we need to also Load Balance the production two services using the same LB, then we would need Floating IP and also another backend pool for those 2 services. then the answer would be BCF. But the question here, can LB send balance traffic to those production services. I think it can by using the health probe and some monitoring to balance the requests sent to IPs.

F: 1 service are the NVAs. the other service is for backend servers

F: 1 service are the NVAs. the other service is for backend servers

The question is clear about that LBs need to be able to failover, so we need to make sure 2 services can still working while only 1 LB is available which means in the same LB, so BCF?

SecExams

Question #557

You have an Azure subscription that contains a virtual network named VNet1. VNet1 contains four subnets named Gateway, Perimeter, NVA, and Production. The NVA subnet contains two network virtual appliances (NVAs) that will perform network traffic inspection between the Perimeter subnet and the Production subnet.

You need to implement an Azure load balancer for the NVAs. The solution must meet the following requirements:

✑ The NVAs must run in an active-active configuration that uses automatic failover.

✑ The load balancer must load balance traffic to two services on the Production subnet. The services have different IP addresses.

Which three actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

A) Deploy a basic load balancer

B) Deploy a standard load balancer (Correct Answer)

C) Add two load balancing rules that have HA Ports and Floating IP enabled (Correct Answer)

D) Add two load balancing rules that have HA Ports enabled and Floating IP disabled

E) Add a frontend IP configuration, a backend pool, and a health probe

F) Add a frontend IP configuration, two backend pools, and a health probe (Correct Answer)

Explanation

Correct Answer: BCF ?

A standard load balancer is required for the HA ports.

Two backend pools are needed as there are two services with different IP addresses.

Floating IP rule is used where backend ports are reused.

Incorrect Answers:

E: HA Ports are not available for the basic load balancer.

Reference:

https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-standard-overview https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-multivip-overview

Community Discussion

Question #558

You have an Azure subscription named Subscription1 that contains two Azure virtual networks named VNet1 and VNet2. VNet1 contains a VPN gateway named VPNGW1 that uses static routing. There is a site-to-site VPN connection between your on-premises network and VNet1.

On a computer named Client1 that runs Windows 10, you configure a point-to-site VPN connection to VNet1.

You configure virtual network peering between VNet1 and VNet2. You verify that you can connect to VNet2 from the on-premises network. Client1 is unable to connect to VNet2.

You need to ensure that you can connect Client1 to VNet2.

What should you do?

A) Download and re-install the VPN client configuration package on Client1. (Correct Answer)

B) Select Allow gateway transit on VNet1.

C) Select Allow gateway transit on VNet2.

D) Enable BGP on VPNGW1

Explanation

Correct Answer:
A
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing

Community Discussion

"If you make a change to the topology of your network and have Windows VPN clients, the VPN client package for Windows clients must be downloaded and installed again" I would go with `A` is the correct option as the S2S config has been changed AFTER the P2S client installation was performed. Installation of the client software package needs installing again post S2S config changes.

Correct Answer: A If you make a change to the topology of your network and have Windows VPN clients, the VPN client package for Windows clients must be downloaded and installed again. Reference: https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing

I agree, This is the exact verbiage from Microsoft: If you make a change to the topology of your network and have Windows VPN clients, the VPN client package for Windows clients must be downloaded and installed again in order for the changes to be applied to the client.

I agree, This is the exact verbiage from Microsoft: If you make a change to the topology of your network and have Windows VPN clients, the VPN client package for Windows clients must be downloaded and installed again in order for the changes to be applied to the client.

100% correct. https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing

SecExams

Question #559

You have an Azure subscription named Subscription1 that contains two Azure virtual networks named VNet1 and VNet2. VNet1 contains a VPN gateway named VPNGW1 that uses static routing. There is a site-to-site VPN connection between your on-premises network and VNet1.

On a computer named Client1 that runs Windows 10, you configure a point-to-site VPN connection to VNet1.

You configure virtual network peering between VNet1 and VNet2. You verify that you can connect to VNet2 from the on-premises network. Client1 is unable to connect to VNet2.

You need to ensure that you can connect Client1 to VNet2.

What should you do?

A) Download and re-install the VPN client configuration package on Client1. (Correct Answer)

B) Select Allow gateway transit on VNet1.

C) Select Allow gateway transit on VNet2.

D) Enable BGP on VPNGW1

Explanation

Correct Answer: A ?
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing

Community Discussion

SecExams

Question #560

SecExams

HOTSPOT -

You have an Azure subscription. The subscription contains virtual machines that run Windows Server 2016 and are configured as shown in the following table.

Name	Virtual network	DNS suffix configured in Windows Server
VM1	VNET2	Contoso.com
VM2	VNET2	None
VM3	VNET2	Adatum.com

You create a public Azure DNS zone named adatum.com and a private Azure DNS zone named contoso.com.

You create a virtual network link for contoso.com as shown in the following exhibit.

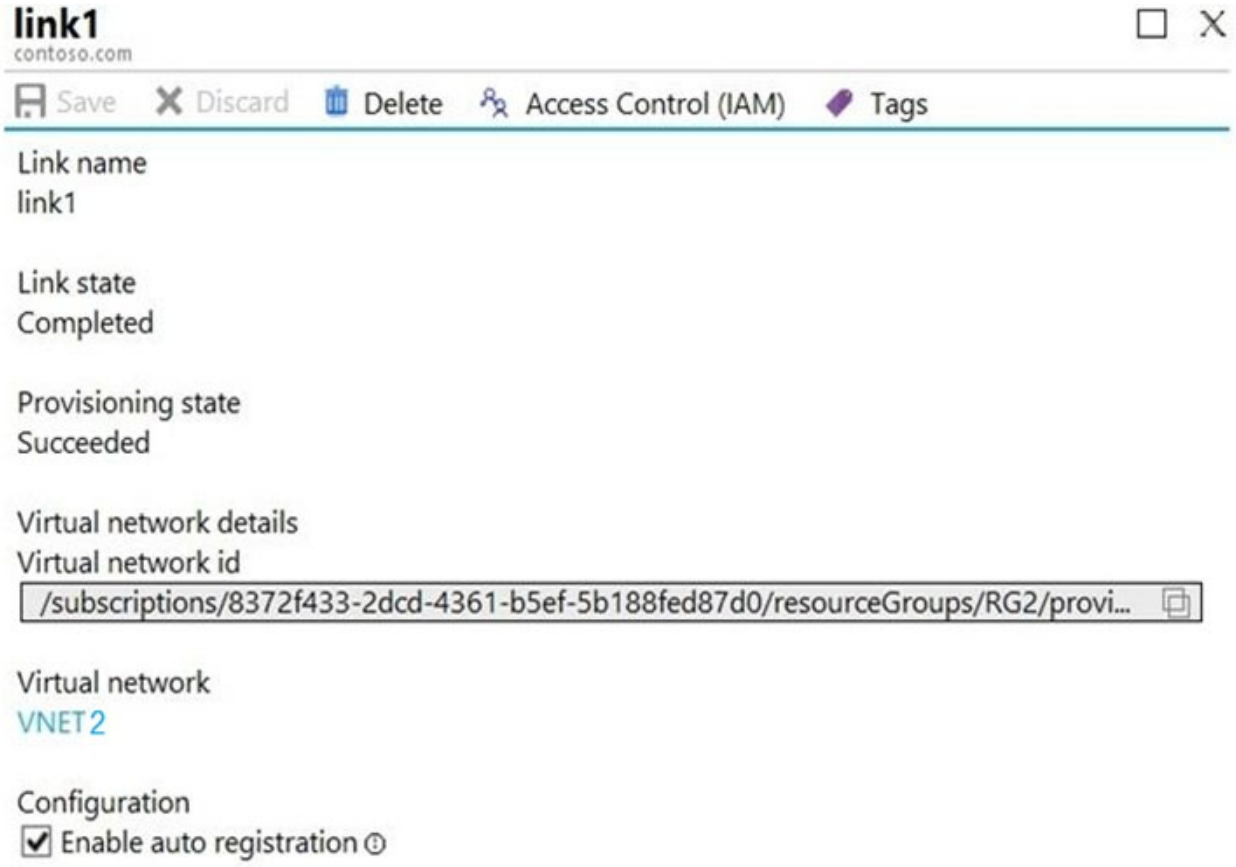

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
When VM1 starts, a record for VM1 is added to the contoso.com DNS zone.	○	○
When VM2 starts, a record for VM2 is added to the contoso.com DNS zone.	○	○
When VM3 starts, a record for VM3 is added to the adatum.com DNS zone.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
When VM1 starts, a record for VM1 is added to the contoso.com DNS zone.	○	○
When VM2 starts, a record for VM2 is added to the contoso.com DNS zone.	○	○
When VM3 starts, a record for VM3 is added to the adatum.com DNS zone.	○	○

Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-name-resolution-for-vms-and-role-instances https://docs.microsoft.com/en-us/azure/dns/private-dns-autoregistration

Community Discussion

Correct Answer: All three VMs are in VNET2. Auto registration is enabled for private Azure DNS zone named contoso.com, which is linked to VNET2. So, VM1, VM2 and VM3 will auto-register their host records to contoso.com. None of the VM will auto-register to the public Azure DNS zone named adatum.com. You cannot register private IPs on the internet (adatum.com) Box 1: Yes Auto registration is enabled for private Azure DNS zone named contoso.com. Box 2: Yes Auto registration is enabled for private Azure DNS zone named contoso.com. Box 3: No None of the VM will auto-register to the public Azure DNS zone named adatum.com Reference: https://docs.microsoft.com/en-us/azure/virtual-network/

virtual-networks-name-resolution-for-vms-and-role-instances https://docs.microsoft.com/en-us/azure/dns/private-dns-autoregistration https://docs.microsoft.com/en-us/azure/dns/private-dns-virtual-network-links

1. The PRIVATE zone contoso.com is linked to VNET1 2. All three VMs are in VNET1 3. All of the VMs will auto-register their host records to contoso.com 4. None of the VMs will auto-register to a public DNS zone. You cannot register private IPs on the internet (adatum) The answer given is correct Yes, Yes, No

You mean VNET 2 nor VNET 1

You mean VNET 2 nor VNET 1

Valid came out in my exam today 08 April 2023.

SecExams

Question #561

SecExams

HOTSPOT -

You have an Azure subscription. The subscription contains virtual machines that run Windows Server 2016 and are configured as shown in the following table.

Name	Virtual network	DNS suffix configured in Windows Server
VM1	VNET2	Contoso.com
VM2	VNET2	None
VM3	VNET2	Adatum.com

You create a public Azure DNS zone named adatum.com and a private Azure DNS zone named contoso.com.

You create a virtual network link for contoso.com as shown in the following exhibit.

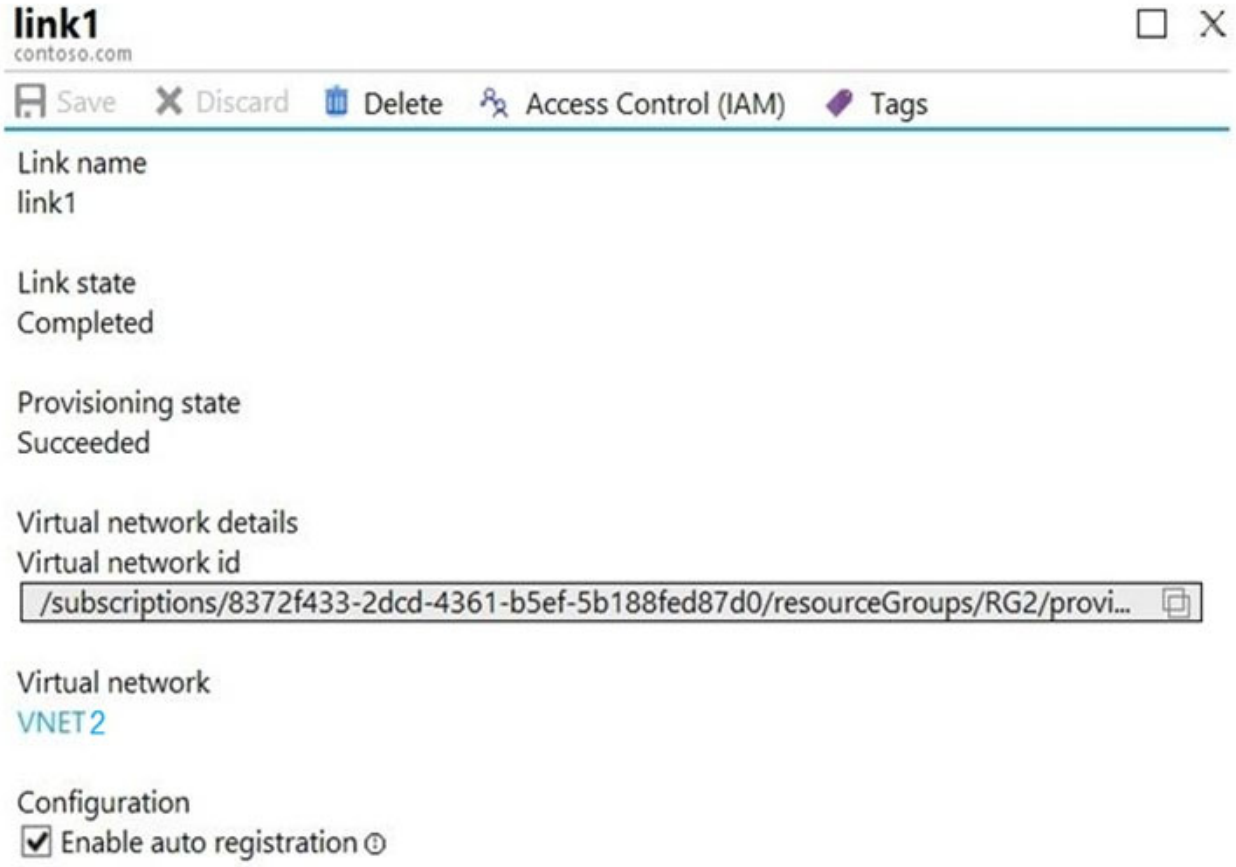

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
When VM1 starts, a record for VM1 is added to the contoso.com DNS zone.	○	○
When VM2 starts, a record for VM2 is added to the contoso.com DNS zone.	○	○
When VM3 starts, a record for VM3 is added to the adatum.com DNS zone.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
When VM1 starts, a record for VM1 is added to the contoso.com DNS zone.	○	○
When VM2 starts, a record for VM2 is added to the contoso.com DNS zone.	○	○
When VM3 starts, a record for VM3 is added to the adatum.com DNS zone.	○	○

Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-name-resolution-for-vms-and-role-instances https://docs.microsoft.com/en-us/azure/dns/private-dns-autoregistration

Community Discussion

SecExams

Question #562

You have an Azure subscription that contains the resources in the following table.

Name	Type	Azure region	Resource group
VNet1	Virtual network	West US	RG2
VNet2	Virtual network	West US	RG1
VNet3	Virtual network	East US	RG1
NSG1	Network security group (NSG)	East US	RG2

To which subnets can you apply NSG1?

A) the subnets on VNet1 only
B) the subnets on VNet2 and VNet3 only
C) the subnets on VNet2 only
D) the subnets on VNet3 only (Correct Answer)
E) the subnets on VNet1, VNet2, and VNet3

Explanation

Correct Answer:
D
All Azure resources are created in an Azure region and subscription. A resource can only be created in a virtual network that exists in the same region and subscription as the resource.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-vnet-plan-design-arm

Community Discussion

Correct Answer: D You can assign NSG to the Subnet of the VNet in the same region where NSG is. NSG1 is in East US and only VNet3 Subnets are in East US.

Answer is correct. "D". VNET3 only

628/1000 23/07/21 failed :(

I also failed first time...thought I could just wing it and get by..I got 567... Rewrite tomorrow....

I tried it on the portal. Only VNet3 is shown under the drop down menu, when i associate to other subnets.

Question #563

You have an Azure subscription that contains the resources in the following table.

Name	Type	Azure region	Resource group
VNet1	Virtual network	West US	RG2
VNet2	Virtual network	West US	RG1
VNet3	Virtual network	East US	RG1
NSG1	Network security group (NSG)	East US	RG2

To which subnets can you apply NSG1?

A) the subnets on VNet1 only
B) the subnets on VNet2 and VNet3 only
C) the subnets on VNet2 only
D) the subnets on VNet3 only (Correct Answer)
E) the subnets on VNet1, VNet2, and VNet3

Explanation

Correct Answer: D ?
All Azure resources are created in an Azure region and subscription. A resource can only be created in a virtual network that exists in the same region and subscription as the resource.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-vnet-plan-design-arm

Community Discussion

Question #564

DRAG DROP -

You have an Azure subscription that contains two virtual networks named VNet1 and VNet2. Virtual machines connect to the virtual networks.

The virtual networks have the address spaces and the subnets configured as shown in the following table.

Virtual network	Address space	Subnet	Peering
VNet1	10.1.0.0/16	10.1.0.0/24 10.1.1.0/26	VNet2
VNet2	10.2.0.0/16	10.2.0.0/24	VNet1

You need to add the address space of 10.33.0.0/16 to VNet1. The solution must ensure that the hosts on VNet1 and VNet2 can communicate.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

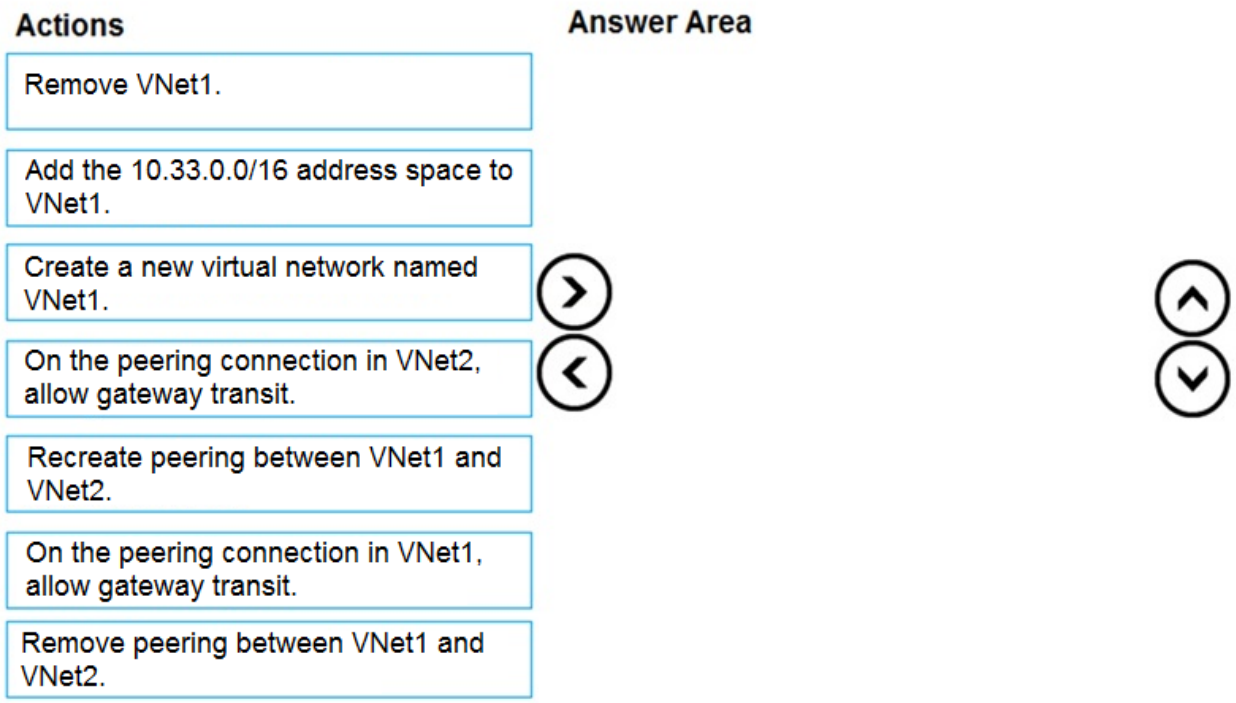

Explanation

Correct Answer:

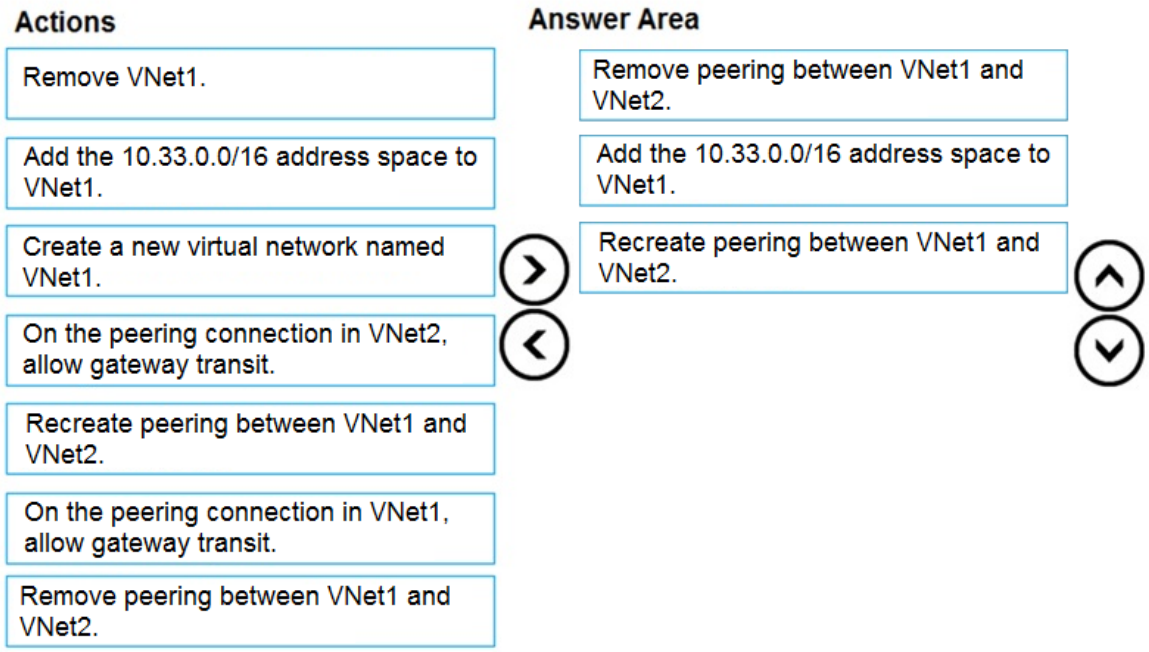

Step 1: Remove peering between Vnet1 and VNet2.
You can't add address ranges to, or delete address ranges from a virtual network's address space once a virtual network is peered with another virtual network.
To add or remove address ranges, delete the peering, add or remove the address ranges, then re-create the peering.
Step 2: Add the 10.44.0.0/16 address space to VNet1.
Step 3: Recreate peering between VNet1 and VNet2
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-manage-peering

Community Discussion

COrrect Answer: Step 1: Remove peering between Vnet1 and VNet2 You can't add address ranges to or delete address ranges from a virtual network's address space once a virtual network is peered with another virtual network. To add or remove address ranges, delete the peering, add or remove the address ranges, then re-create the peering. Step 2: Add the 10.33.0.0/16 address space to VNet1 Step 3: Recreate peering between VNet1 and VNet2 Reference: https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-manage-peering

Since September 2022 you can update the address space for peered virtual networks without removing the peering. "Updating the address space for peered virtual networks now is now generally available. This feature allows you to update the address space or resize for a peered virtual network without removing the peering." Source: https://

azure.microsoft.com/en-us/updates/resizing-of-peered-virtual-networks-is-now-generally-available/ https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-peering-overview#resize-the-address-space-of-azure-virtual-networks-that-are-peered

Correct Answer but this is the best reference: https://learn.microsoft.com/en-us/windows-server/networking/sdn/vnet-peering/sdn-vnet-peering Once you peer a virtual network with another virtual network, you cannot add or delete address ranges in the address space. Tip If you need to add address ranges: Remove the peering. Add the address space. Add the peering again.

Correct Answer but this is the best reference: https://learn.microsoft.com/en-us/windows-server/networking/sdn/vnet-peering/sdn-vnet-peering Once you peer a virtual network with another virtual network, you cannot add or delete address ranges in the address space. Tip If you need to add address ranges: Remove the peering. Add the address space. Add the peering again.

ignore me - is correct

SecExams

Question #565

DRAG DROP -

You have an Azure subscription that contains two virtual networks named VNet1 and VNet2. Virtual machines connect to the virtual networks.

The virtual networks have the address spaces and the subnets configured as shown in the following table.

Virtual network	Address space	Subnet	Peering
VNet1	10.1.0.0/16	10.1.0.0/24 10.1.1.0/26	VNet2
VNet2	10.2.0.0/16	10.2.0.0/24	VNet1

You need to add the address space of 10.33.0.0/16 to VNet1. The solution must ensure that the hosts on VNet1 and VNet2 can communicate.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

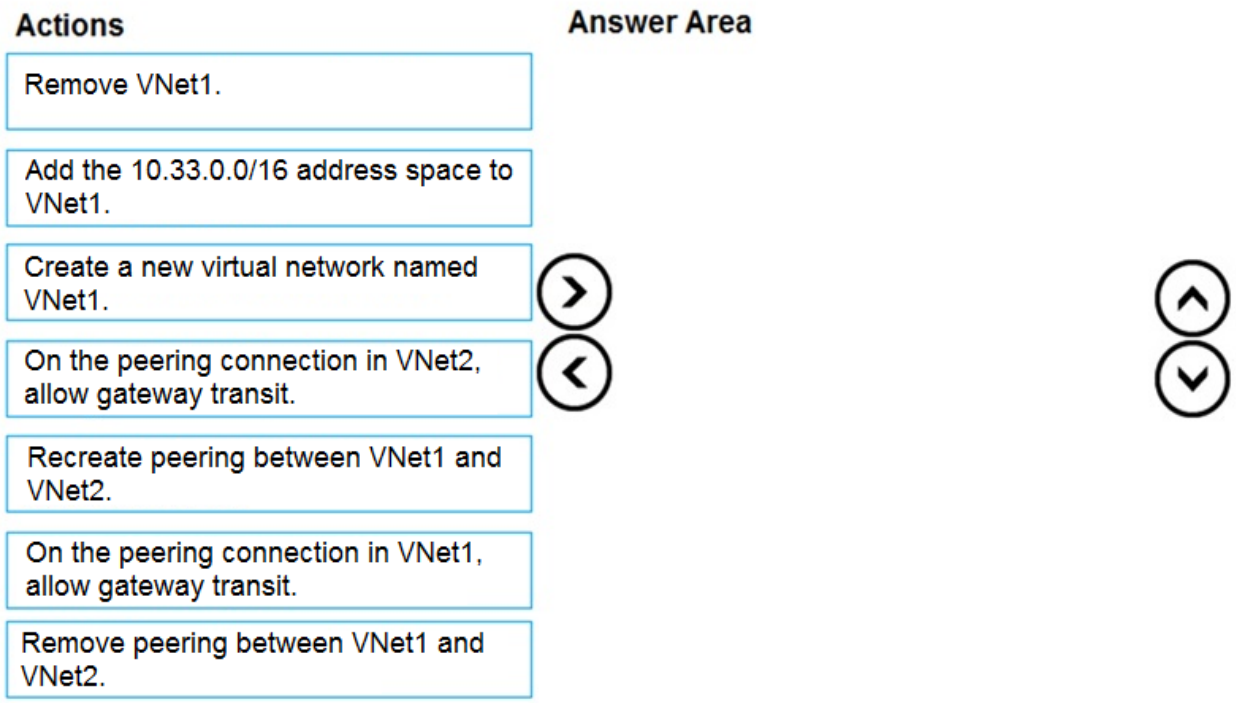

Explanation

Correct Answer:

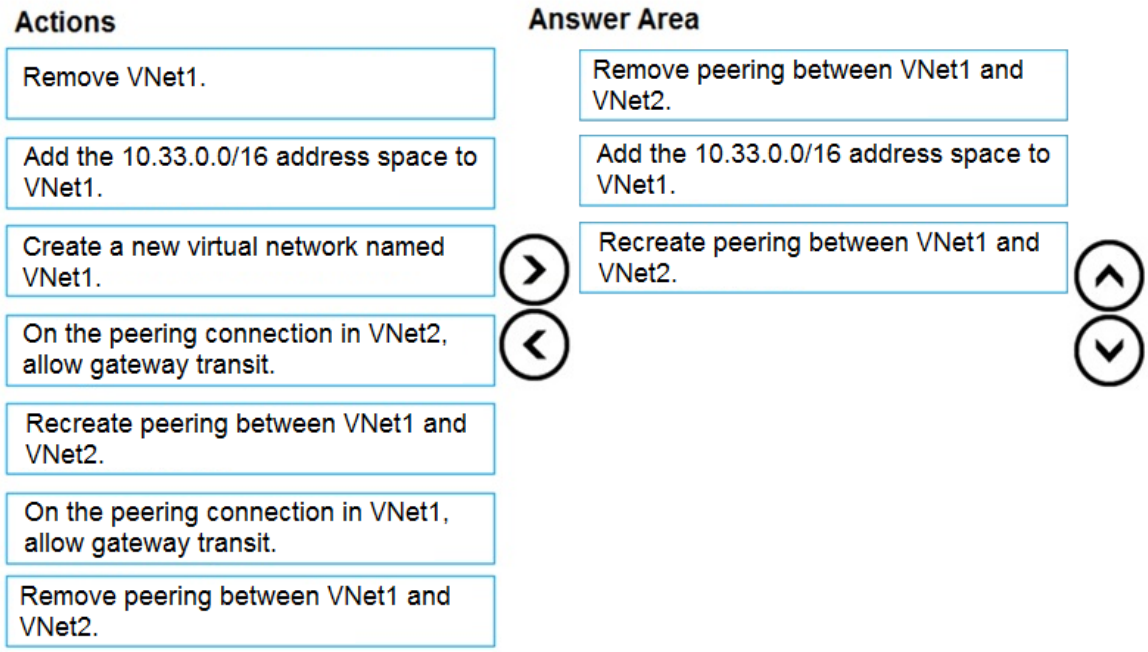

Step 1: Remove peering between Vnet1 and VNet2.
You can't add address ranges to, or delete address ranges from a virtual network's address space once a virtual network is peered with another virtual network.
To add or remove address ranges, delete the peering, add or remove the address ranges, then re-create the peering.
Step 2: Add the 10.44.0.0/16 address space to VNet1.
Step 3: Recreate peering between VNet1 and VNet2
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-manage-peering

Community Discussion

Question #566

HOTSPOT -

You have an Azure subscription that contains the resource groups shown in the following table.

Name	Location
RG1	West US
RG2	East US

RG1 contains the resources shown in the following table.

Name	Type	Location
storage1	Storage account	West US
VNet1	Virtual network	West US
NIC1	Network interface	West US
Disk1	Disk	West US
VM1	Virtual machine	West US

VM1 is running and connects to NIC1 and Disk1. NIC1 connects to VNET1.

RG2 contains a public IP address named IP2 that is in the East US location. IP2 is not assigned to a virtual machine.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can move storage1 to RG2.	○	○
You can move NIC1 to RG2.	○	○
If you move IP2 to RG1, the location of IP2 will change.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can move storage1 to RG2.	○	○
You can move NIC1 to RG2.	○	○
If you move IP2 to RG1, the location of IP2 will change.	○	○

Box 1: Yes -

You can move storage -

Box 2: No -
You can't move to a new resource group a NIC that is attached to a virtual machine.

Box 3: No -
Azure Public IPs are region specific and can't be moved from one region to another.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-support-resources https://docs.microsoft.com/en-us/azure/virtual-network/move-across-regions-publicip-powershell

SecExams

Community Discussion

Tested this in an identical lab: 1. YES. I was able to move the storage from RG1 to RG2, however it stayed in the West US region. 2. YES. I was able to move NIC1 from RG1 to RG2 which was associated with VM1 and VNET1 subnet1, however it stayed in the West US region. 3. NO. The location of IP2 did not change. However I was able to move LP2 from RG2 to RG1 as it isn't associated with any other resource, however it stayed in the East US region. All resources moved to the new resource groups, but the region did not change

Correct Answer: Box 1: Yes You can move the Storage Account to RG2, however it stayed in the West US region. You cannot change the Region, you need to recreate the Storage Account. Box 2: Yes You can move move NIC1 to RG2 which was associated with VM1 and VNET1 subnet1, however it stayed in the West US region. You can move a NIC to a different RG or Subscription by selecting (change) next to the RG or Subscription name. If you move the NIC to a new Subscription, you must move all resources related to the NIC with it. If the network interface is attached to a virtual machine, for example, you must also move the virtual machine, and other virtual machine-related resources. Box 3: No

You can move IP2 to RG1, as it isn't associated with any other resource, however it stayed in the East US region. The location will not change.

Note: Resources can be everywhere regardless of the resource group they belong to. The resource group is only a collection of metadata relative to the resources defined inside it. You can move a resource from one resource group to another group. The resources in a resource group can be located in different regions than the resource group. Reference: https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/overview

Note: Resources can be everywhere regardless of the resource group they belong to. The resource group is only a collection of metadata relative to the resources defined inside it. You can move a resource from one resource group to another group. The resources in a resource group can be located in different regions than the resource group. Reference: https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/overview

mlantonis - can I buy you a beer or coffee?

SecExams

Question #567

HOTSPOT -

You have an Azure subscription that contains the resource groups shown in the following table.

Name	Location
RG1	West US
RG2	East US

RG1 contains the resources shown in the following table.

Name	Type	Location
storage1	Storage account	West US
VNet1	Virtual network	West US
NIC1	Network interface	West US
Disk1	Disk	West US
VM1	Virtual machine	West US

VM1 is running and connects to NIC1 and Disk1. NIC1 connects to VNET1.

RG2 contains a public IP address named IP2 that is in the East US location. IP2 is not assigned to a virtual machine.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can move storage1 to RG2.	○	○
You can move NIC1 to RG2.	○	○
If you move IP2 to RG1, the location of IP2 will change.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can move storage1 to RG2.	○	○
You can move NIC1 to RG2.	○	○
If you move IP2 to RG1, the location of IP2 will change.	○	○

Box 1: Yes -

You can move storage -

Box 2: No -
You can't move to a new resource group a NIC that is attached to a virtual machine.

Box 3: No -
Azure Public IPs are region specific and can't be moved from one region to another.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-support-resources https://docs.microsoft.com/en-us/azure/virtual-network/move-across-regions-publicip-powershell

Community Discussion

Question #568

You have an Azure web app named webapp1.
You have a virtual network named VNET1 and an Azure virtual machine named VM1 that hosts a MySQL database. VM1 connects to VNET1.
You need to ensure that webapp1 can access the data hosted on VM1.
What should you do?

A) Deploy an internal load balancer
B) Peer VNET1 to another virtual network
C) Connect webapp1 to VNET1
D) Deploy an Azure Application Gateway (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

I think the answer should be C. <https://docs.microsoft.com/en-us/azure/app-service/web-sites-integrate-with-vnet>

Answer is wrong. It should be "C" Connect the webapp to VNET using webapp VNET integration. where webapp can access the resources in the VNET.

webapp only needs it own empty(not delegated nor has any resources within) subnet, not VNET (which can contain many subnets) and a /29 subnet is the smallest you can use for such a service.

webapp only needs it own empty(not delegated nor has any resources within) subnet, not VNET (which can contain many subnets) and a /29 subnet is the smallest you can use for such a service.

webapp only needs it own empty(not delegated nor has any resources within) subnet, not VNET (which can contain many subnets) and a /29 subnet is the smallest you can use for such a service.

SecExams

Question #569

You have an Azure web app named webapp1.
You have a virtual network named VNET1 and an Azure virtual machine named VM1 that hosts a MySQL database. VM1 connects to VNET1.
You need to ensure that webapp1 can access the data hosted on VM1.
What should you do?

A) Deploy an internal load balancer
B) Peer VNET1 to another virtual network
C) Connect webapp1 to VNET1

D) Deploy an Azure Application Gateway (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

SecExams

Question #570

You create an Azure VM named VM1 that runs Windows Server 2019.
VM1 is configured as shown in the exhibit. (Click the Exhibit tab.)

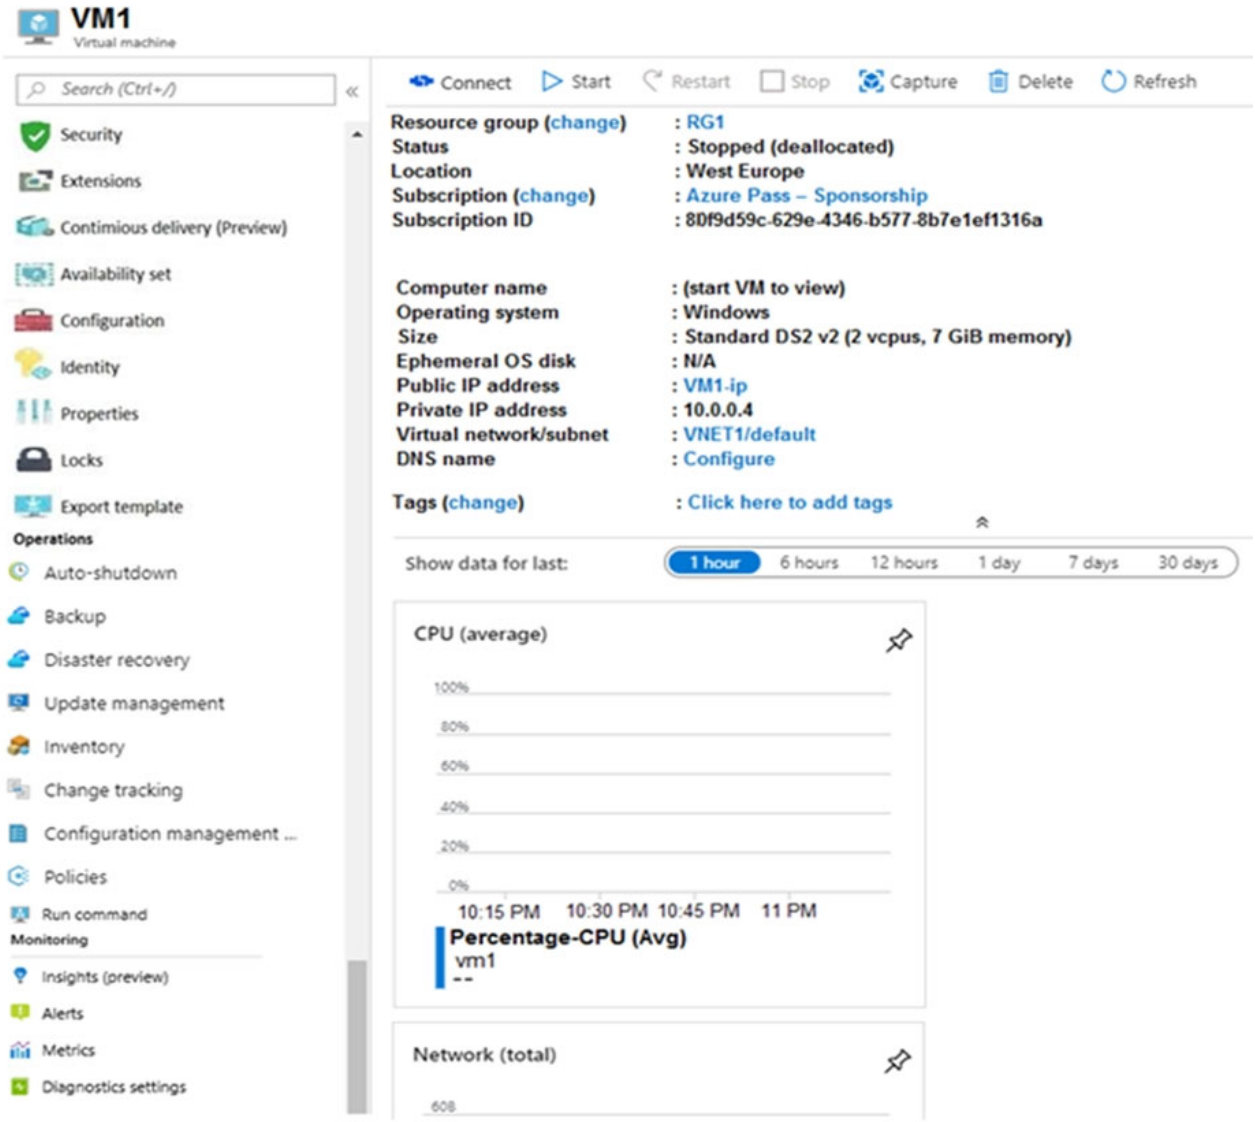

You need to enable Desired State Configuration for VM1.
What should you do first?

A) Connect to VM1.
B) Start VM1. (Correct Answer)
C) Capture a snapshot of VM1.
D) Configure a DNS name for VM1.

Explanation

Correct Answer:
B

Status is Stopped (Deallocated).
The DSC extension for Windows requires that the target virtual machine is able to communicate with Azure.
The VM needs to be started.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/dsc-windows

Community Discussion

I don't consider this "a dump", actually. I believe the vast majority of people here (me included) are actually studying for the exam hard (reading online documentation, experimenting in their Azure subscription, etc.) and using this just as a way to plug the holes in their knowledge (as one simply can't know every single detail and possible scenario regarding Azure).

I don't consider this "a dump", actually. I believe the vast majority of people here (me included) are actually studying for the exam hard (reading online documentation, experimenting in their Azure subscription, etc.) and using this just as a way to plug the holes in their knowledge (as one simply can't know every single detail and possible scenario regarding Azure).

Correct Answer: B Status is Stopped (Deallocated). The DSC extension for Windows requires that the target Virtual Machine is able to communicate with Azure. First you start the VM, because you need VM online to deploy DSC Extension. Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/dsc-windows

Came in 01/09/21 exam. Passed exam with 906 marks. 98% of the questions are from this dump.

100$ agreed Alex. Secondly I dont understand why is Microsoft testing this kind of stupidity? They should give us simulations and ask to solve the problems, make the exam 2 Hours - 10 - 15 simulations and 10 - 15 straight forward questions based on what they have actually published rather than wondering all the time what are they going to ask.

SecExams

Question #571

You create an Azure VM named VM1 that runs Windows Server 2019.
VM1 is configured as shown in the exhibit. (Click the Exhibit tab.)

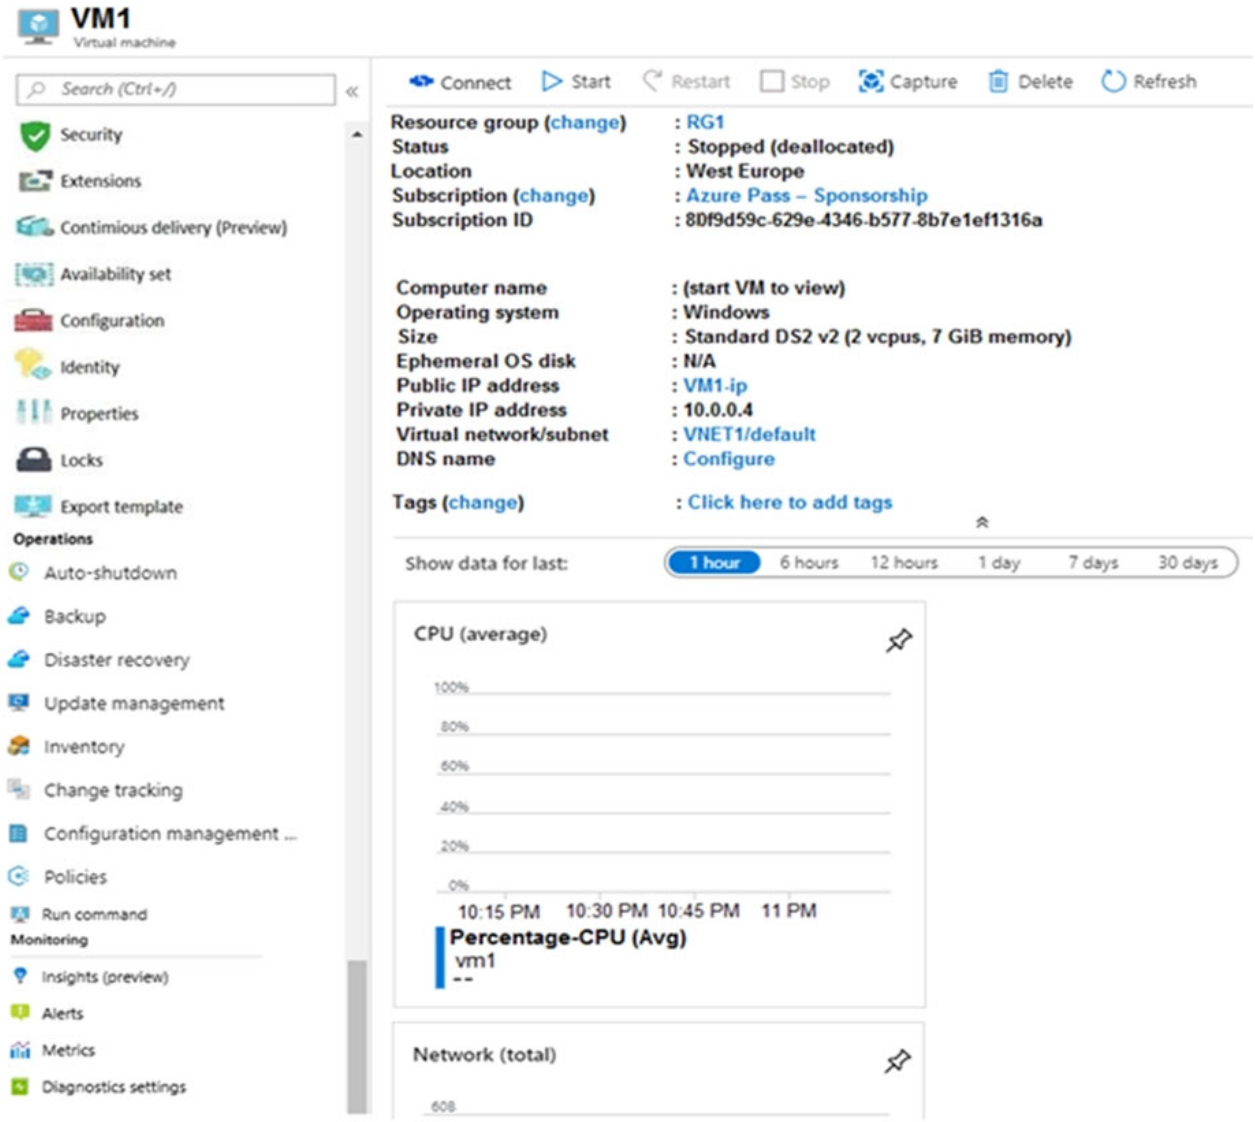

You need to enable Desired State Configuration for VM1.
What should you do first?

A) Connect to VM1.
B) Start VM1. (Correct Answer)
C) Capture a snapshot of VM1.
D) Configure a DNS name for VM1.

Explanation

Correct Answer: B ?
Status is Stopped (Deallocated).

The DSC extension for Windows requires that the target virtual machine is able to communicate with Azure.
The VM needs to be started.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/dsc-windows

Community Discussion

Question #572

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.
You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.
You need to ensure that visitors are serviced by the same web server for each request.
What should you configure?

A) Floating IP (direct server return) to Disabled
B) Session persistence to None
C) Floating IP (direct server return) to Enabled
D) Session persistence to Client IP (Correct Answer)

Explanation

Correct Answer:
D
With Sticky Sessions when a client starts a session on one of your web servers, session stays on that specific server. To configure An Azure Load-Balancer For
Sticky Sessions set Session persistence to Client IP or to Client IP and protocol.
On the following image you can see sticky session configuration:
Note:
✑ Client IP and protocol specifies that successive requests from the same client IP address and protocol combination will be handled by the same virtual machine.
✑ Client IP specifies that successive requests from the same client IP address will be handled by the same virtual machine.
Reference:
https://cloudopszone.com/configure-azure-load-balancer-for-sticky-sessions/

Community Discussion

from now on, you will see this question appears 10 times, good luck:)

This is correct

Selected Answer: D

Answer D: Session persistence to Client IP https://learn.microsoft.com/en-us/azure/load-balancer/distribution-mode-concepts Session persistence mode has two configuration types: Client IP (2-tuple) - Specifies that successive requests from the same client IP address will be handled by the same backend instance. Client IP and protocol (3-tuple) - Specifies that successive requests from the same client IP address and protocol combination will be handled by the same backend instance.

Spoiler alert :(

Spoiler alert :(

SecExams

Question #573

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.
You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.
You need to ensure that visitors are serviced by the same web server for each request.
What should you configure?

A) Floating IP (direct server return) to Disabled
B) Session persistence to None
C) Floating IP (direct server return) to Enabled
D) Session persistence to Client IP (Correct Answer)

Explanation

Correct Answer: D ?

With Sticky Sessions when a client starts a session on one of your web servers, session stays on that specific server. To configure An Azure Load-Balancer For
Sticky Sessions set Session persistence to Client IP or to Client IP and protocol.
On the following image you can see sticky session configuration:
Note:
✑ Client IP and protocol specifies that successive requests from the same client IP address and protocol combination will be handled by the same virtual machine.
✑ Client IP specifies that successive requests from the same client IP address will be handled by the same virtual machine.
Reference:
https://cloudopszone.com/configure-azure-load-balancer-for-sticky-sessions/

Community Discussion

SecExams

Question #574

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the following resources:
✑ A virtual network that has a subnet named Subnet1
✑ Two network security groups (NSGs) named NSG-VM1 and NSG-Subnet1
✑ A virtual machine named VM1 that has the required Windows Server configurations to allow Remote Desktop connections
NSG-Subnet1 has the default inbound security rules only.
NSG-VM1 has the default inbound security rules and the following custom inbound security rule:
✑ Priority: 100
✑ Source: Any
✑ Source port range: *
✑ Destination: *
✑ Destination port range: 3389
✑ Protocol: UDP
✑ Action: Allow
VM1 has a public IP address and is connected to Subnet1. NSG-VM1 is associated to the network interface of VM1. NSG-Subnet1 is associated to Subnet1.
You need to be able to establish Remote Desktop connections from the internet to VM1.
Solution: You add an inbound security rule to NSG-Subnet1 that allows connections from the Any source to the *destination for port range 3389 and uses the TCP protocol. You remove NSG-VM1 from the network interface of VM1.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
The default port for RDP is TCP port 3389. A rule to permit RDP traffic must be created automatically when you create your VM.
Note on NSG-Subnet1: Azure routes network traffic between all subnets in a virtual network, by default.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/troubleshooting/troubleshoot-rdp-connection

Community Discussion

My comments were incorrect, late night study :-). The answer is Yes. The main point i miss was that NSG-Subnet 1 is correctly modified with TCP 3389 and NSG-VM1 is removed. In this case you should be able to connect. - "Solution: You add an inbound security rule to NSG-Subnet1 that allows connections from the Any source to the *destination for port range 3389 and uses the TCP protocol. You remove NSG-VM1 from the network interface of VM1."

Correct Answer: A - Yes By adding the rule to NSG-Subnet1 you are allowing RDP on Subnet level. Then you delete NSG-VM1, so you are able to RDP. Note: A rule to permit RDP traffic may not be created automatically when you create your VM. Reference: https://docs.microsoft.com/en-us/troubleshoot/azure/virtual-machines/troubleshoot-rdp-connection

Agreed answer is incorrect. The answer should be Yes.

Agreed answer is incorrect. The answer should be Yes.

we only want to have RDP to VM1, but with this rule, we would allow RDP to all VMs in the Network, because of this I would go for No (B)

SecExams

Question #575

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the following resources:
✑ A virtual network that has a subnet named Subnet1
✑ Two network security groups (NSGs) named NSG-VM1 and NSG-Subnet1
✑ A virtual machine named VM1 that has the required Windows Server configurations to allow Remote Desktop connections
NSG-Subnet1 has the default inbound security rules only.
NSG-VM1 has the default inbound security rules and the following custom inbound security rule:
✑ Priority: 100
✑ Source: Any
✑ Source port range: *
✑ Destination: *
✑ Destination port range: 3389
✑ Protocol: UDP
✑ Action: Allow
VM1 has a public IP address and is connected to Subnet1. NSG-VM1 is associated to the network interface of VM1. NSG-Subnet1 is associated to Subnet1.
You need to be able to establish Remote Desktop connections from the internet to VM1.
Solution: You add an inbound security rule to NSG-Subnet1 that allows connections from the Any source to the *destination for port range 3389 and uses the TCP protocol. You remove NSG-VM1 from the network interface of VM1.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

The default port for RDP is TCP port 3389. A rule to permit RDP traffic must be created automatically when you create your VM.

Note on NSG-Subnet1: Azure routes network traffic between all subnets in a virtual network, by default.

Reference:

https://docs.microsoft.com/en-us/azure/virtual-machines/troubleshooting/troubleshoot-rdp-connection

Community Discussion

SecExams

Question #576

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the following resources:
✑ A virtual network that has a subnet named Subnet1
✑ Two network security groups (NSGs) named NSG-VM1 and NSG-Subnet1
✑ A virtual machine named VM1 that has the required Windows Server configurations to allow Remote Desktop connections
NSG-Subnet1 has the default inbound security rules only.
NSG-VM1 has the default inbound security rules and the following custom inbound security rule:
✑ Priority: 100
✑ Source: Any
✑ Source port range: *
✑ Destination: *
✑ Destination port range: 3389

Protocol: UDP -
▪
✑ Action: Allow
VM1 has a public IP address and is connected to Subnet1. NSG-VM1 is associated to the network interface of VM1. NSG-Subnet1 is associated to Subnet1.
You need to be able to establish Remote Desktop connections from the internet to VM1.
Solution: You add an inbound security rule to NSG-Subnet1 that allows connections from the internet source to the VirtualNetwork destination for port range 3389 and uses the UDP protocol.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
The default port for RDP is TCP port 3389. A rule to permit RDP traffic must be created automatically when you create your VM.
Note on NSG-Subnet1: Azure routes network traffic between all subnets in a virtual network, by default.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/troubleshooting/troubleshoot-rdp-connection

Community Discussion

Correct Answer: B - No The default port for RDP is TCP port 3389. Reference: https://docs.microsoft.com/en-us/troubleshoot/azure/virtual-machines/troubleshoot-rdp-connection

Such a silly question :). By default it will not work but you can make it work so there isn't really a good answer xD. By default servers accepts on both TCP and UDP. UDP will work as long as client machine(the one you are connecting from) will have registry updated to use UDP by default :> So the answer is "No" in but you can actually make it work if you change settings outside of azure.

Selected Answer: B

Answer is B. Have also tested in lab, definitely can't connect to UDP 3389 alone (although it is cited on several sites that it improves the experience in some cases).

I just tested - Crated an Azure VM (windows Server) with RDP coonections it showing RDP connection on TCP protocol port 3389. When you try to add an inbound rule and select "RDP" - it will automatically select "TCP" protocol and Destination port range " 3389" connection Answer is B

Selected Answer: B

RDP works on TCP 3389

Question #577

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the following resources:
✑ A virtual network that has a subnet named Subnet1
✑ Two network security groups (NSGs) named NSG-VM1 and NSG-Subnet1
✑ A virtual machine named VM1 that has the required Windows Server configurations to allow Remote Desktop connections
NSG-Subnet1 has the default inbound security rules only.
NSG-VM1 has the default inbound security rules and the following custom inbound security rule:
✑ Priority: 100
✑ Source: Any
✑ Source port range: *
✑ Destination: *
✑ Destination port range: 3389

Protocol: UDP -
▪
✑ Action: Allow
VM1 has a public IP address and is connected to Subnet1. NSG-VM1 is associated to the network interface of VM1. NSG-Subnet1 is associated to Subnet1.
You need to be able to establish Remote Desktop connections from the internet to VM1.
Solution: You add an inbound security rule to NSG-Subnet1 that allows connections from the internet source to the VirtualNetwork destination for port range 3389 and uses the UDP protocol.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
The default port for RDP is TCP port 3389. A rule to permit RDP traffic must be created automatically when you create your VM.
Note on NSG-Subnet1: Azure routes network traffic between all subnets in a virtual network, by default.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/troubleshooting/troubleshoot-rdp-connection

Community Discussion

SecExams

Question #578

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the following resources:
✑ A virtual network that has a subnet named Subnet1
✑ Two network security groups (NSGs) named NSG-VM1 and NSG-Subnet1
✑ A virtual machine named VM1 that has the required Windows Server configurations to allow Remote Desktop connections
NSG-Subnet1 has the default inbound security rules only.
NSG-VM1 has the default inbound security rules and the following custom inbound security rule:
✑ Priority: 100
✑ Source: Any
✑ Source port range: *
✑ Destination: *
✑ Destination port range: 3389
✑ Protocol: UDP
✑ Action: Allow
VM1 has a public IP address and is connected to Subnet1. NSG-VM1 is associated to the network interface of VM1. NSG-Subnet1 is associated to Subnet1.
You need to be able to establish Remote Desktop connections from the internet to VM1.
Solution: You add an inbound security rule to NSG-Subnet1 and NSG-VM1 that allows connections from the internet source to the VirtualNetwork destination for port range 3389 and uses the TCP protocol.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
The default port for RDP is TCP port 3389. A rule to permit RDP traffic must be created automatically when you create your VM.
Note on NSG-Subnet1: Azure routes network traffic between all subnets in a virtual network, by default.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/troubleshooting/troubleshoot-rdp-connection

Community Discussion

Answer is correct. YES. To enable RDP, you need to add "Allow" rule for 3389 port on TCP protocol. this is matches the given suggested solution. For the existing custom rule, priority doesn't matter if it is 100 or not. As "Network security group security rules are evaluated by priority using the 5-tuple information (source, source port, destination, destination port, and protocol) to allow or deny the traffic." So Azure checks the first rule, it finds that it has UDP. then It will check the second rule, it will find allow TCP on port 3389. So it will allow. Since the protocols are different, so those are totally different rules. Please read the page https://docs.microsoft.com/en-us/azure/virtual-network/network-security-groups-overview

Correct Answer: A - Yes RDP TCP is allowed at Subnet and on VM level NSGs. The default port for RDP is TCP port 3389. To enable RDP, you need to add "Allow" rule for 3389 port on TCP protocol. Reference: https://docs.microsoft.com/en-us/troubleshoot/azure/virtual-machines/troubleshoot-rdp-connection

Agree!! Yes and tested

Agree!! Yes and tested

Yeah, I tested it on my lab and you are right!

Question #579

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the following resources:
✑ A virtual network that has a subnet named Subnet1
✑ Two network security groups (NSGs) named NSG-VM1 and NSG-Subnet1
✑ A virtual machine named VM1 that has the required Windows Server configurations to allow Remote Desktop connections
NSG-Subnet1 has the default inbound security rules only.
NSG-VM1 has the default inbound security rules and the following custom inbound security rule:
✑ Priority: 100
✑ Source: Any
✑ Source port range: *
✑ Destination: *
✑ Destination port range: 3389
✑ Protocol: UDP
✑ Action: Allow
VM1 has a public IP address and is connected to Subnet1. NSG-VM1 is associated to the network interface of VM1. NSG-Subnet1 is associated to Subnet1.
You need to be able to establish Remote Desktop connections from the internet to VM1.
Solution: You add an inbound security rule to NSG-Subnet1 and NSG-VM1 that allows connections from the internet source to the VirtualNetwork destination for port range 3389 and uses the TCP protocol.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
The default port for RDP is TCP port 3389. A rule to permit RDP traffic must be created automatically when you create your VM.
Note on NSG-Subnet1: Azure routes network traffic between all subnets in a virtual network, by default.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-machines/troubleshooting/troubleshoot-rdp-connection

Community Discussion

SecExams

Question #580

SecExams

HOTSPOT -

You have a virtual network named VNet1 that has the configuration shown in the following exhibit.

```
Name                 : VNet1
ResourceGroupName    : Production
Location             : westus
Id                   : /subscriptions/14d26092-8e42-4ea7-b770-
9dcef70fb1ea/resourceGroups/Production/providers/Microsoft.Network/virtualNetworks/VNet1
Etag                 : W/"76f7edd6-d022-455b-aeae-376059318e5d"
ResourceGuid         : 562696cc-b2ba-4cc5-9619-0a735d6c34c7
ProvisioningState    : Succeeded
Tags                 :
AddressSpace         : {
                           "AddressPrefixes": [
                              "10.2.0.0/16"
                           ]
                       }
DhcpOptions          : {}
Subnets              : [
                            {
                           "Name": "default",
                           "Etag": "W/\ "76f7edd6-d022-455b-aeae-376059318e5d\"",
                             "Id": "/subscriptions/14d26092-8e42-4ea7-b770-
                             9dcef70fb1ea/resourceGroups/Production/providers/Microsoft.Network/
                             virtualNetworks/VNet1/subnets/default",
                             "AddressPrefix": "10.2.0.0/24",
                             "IpConfigurations": [],
                             "ResourceNavigationLinks": [],
                             "ServiceEndpoints": [],
                             "ProvisioningState": "Succeeded"
                             }
                     ]
VirtualNetworkPeerings   : []
EnableDDoSProtection     : false
EnableVmProtection       : false
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

Before a virtual machine on VNet1 can receive an IP address from 192.168.1.0/24, you must first

- add a network interface
- add a subnet
- add an address space
- delete a subnet
- delete an address space

Before a virtual machine on VNet1 can receive an IP address from 10.2.1.0/24, you must first

- add a network interface
- add a subnet
- add an address space
- delete a subnet
- delete an address space

Explanation

Correct Answer:

Answer Area

Before a virtual machine on VNet1 can receive an IP address from 192.168.1.0/24, you must first

- add a network interface
- add a subnet
- **add an address space**
- delete a subnet
- delete an address space

Before a virtual machine on VNet1 can receive an IP address from 10.2.1.0/24, you must first

- **add a network interface**
- add a subnet
- add an address space
- delete a subnet
- delete an address space

Box 1: add an address space -

Your IaaS virtual machines (VMs) and PaaS role instances in a virtual network automatically receive a private IP address from a range that you specify, based on the address space of the subnet they are connected to. We need to add the 192.168.1.0/24 address space.

Box 2: add a network interface -
The 10.2.1.0/24 network exists. We need to add a network interface.
Reference:
https://docs.microsoft.com/en-us/office365/enterprise/designing-networking-for-microsoft-azure-iaas

Community Discussion

- Add an address space - Add a subnet

Also wrong, the subnet range being created is 10.2.0.0 - 10.2.0.255 . So if you want to add an IP address from 10.2.1.0/24 you need to add a new subnet. Why are so many of these wrong?

You can almost ignore the answers / look at the questions, discussions, do your own research, and at the end if you didn't already lose your mind, then pass the exam ??♂

You can almost ignore the answers / look at the questions, discussions, do your own research, and at the end if you didn't already lose your mind, then pass the exam ??♂

You can almost ignore the answers / look at the questions, discussions, do your own research, and at the end if you didn't already lose your mind, then pass the exam ??♂

SecExams

Question #581

SecExams

HOTSPOT -

You have a virtual network named VNet1 that has the configuration shown in the following exhibit.

```
Name                 : VNet1
ResourceGroupName    : Production
Location             : westus
Id                   : /subscriptions/14d26092-8e42-4ea7-b770-
9dcef70fb1ea/resourceGroups/Production/providers/Microsoft.Network/virtualNetworks/VNet1
Etag                 : W/"76f7edd6-d022-455b-aeae-376059318e5d"
ResourceGuid         : 562696cc-b2ba-4cc5-9619-0a735d6c34c7
ProvisioningState    : Succeeded
Tags                 :
AddressSpace         : {
                           "AddressPrefixes": [
                              "10.2.0.0/16"
                           ]
                       }
DhcpOptions          : {}
Subnets              : [
                            {
                           "Name": "default",
                           "Etag": "W/\ "76f7edd6-d022-455b-aeae-376059318e5d\"",
                             "Id": "/subscriptions/14d26092-8e42-4ea7-b770-
                             9dcef70fb1ea/resourceGroups/Production/providers/Microsoft.Network/
                             virtualNetworks/VNet1/subnets/default",
                             "AddressPrefix": "10.2.0.0/24",
                             "IpConfigurations": [],
                             "ResourceNavigationLinks": [],
                             "ServiceEndpoints": [],
                             "ProvisioningState": "Succeeded"
                             }
                     ]
VirtualNetworkPeerings   : []
EnableDDoSProtection     : false
EnableVmProtection       : false
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

Before a virtual machine on VNet1 can receive an IP address from 192.168.1.0/24, you must first

- add a network interface
- add a subnet
- add an address space
- delete a subnet
- delete an address space

Before a virtual machine on VNet1 can receive an IP address from 10.2.1.0/24, you must first

- add a network interface
- add a subnet
- add an address space
- delete a subnet
- delete an address space

SecExams

Explanation

Correct Answer:

Answer Area

Before a virtual machine on VNet1 can receive an IP address from 192.168.1.0/24, you must first

- add a network interface
- add a subnet
- **add an address space**
- delete a subnet
- delete an address space

Before a virtual machine on VNet1 can receive an IP address from 10.2.1.0/24, you must first

- **add a network interface**
- add a subnet
- add an address space
- delete a subnet
- delete an address space

Box 1: add an address space -

Your IaaS virtual machines (VMs) and PaaS role instances in a virtual network automatically receive a private IP address from a range that you specify, based on the address space of the subnet they are connected to. We need to add the 192.168.1.0/24 address space.

Box 2: add a network interface -
The 10.2.1.0/24 network exists. We need to add a network interface.
Reference:
https://docs.microsoft.com/en-us/office365/enterprise/designing-networking-for-microsoft-azure-iaas

Community Discussion

Question #582

You have an Azure subscription that contains a virtual network named VNET1.
VNET1 contains the subnets shown in the following table.

Name	Connected virtual machines
Subnet1	VM1, VM2
Subnet2	VM3, VM4
Subnet3	VM5, VM6

Each virtual machine uses a static IP address.
You need to create network security groups (NSGs) to meet following requirements:
✑ Allow web requests from the internet to VM3, VM4, VM5, and VM6.
✑ Allow all connections between VM1 and VM2.
✑ Allow Remote Desktop connections to VM1.
✑ Prevent all other network traffic to VNET1.
What is the minimum number of NSGs you should create?

A) 1
B) 3
C) 4 (Correct Answer)
D) 12

Explanation

Correct Answer:
C
Each network security group also contains default security rules.
Note: A network security group (NSG) contains a list of security rules that allow or deny

network traffic to resources connected to Azure Virtual Networks (VNet).
NSGs can be associated to subnets, individual VMs (classic), or individual network interfaces (NIC) attached to VMs (Resource Manager).
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/security-overview#default-security-rules

Community Discussion

Correct Answer: A NSGs can be associated to subnets, individual VMs (classic), or individual network interfaces (NIC) attached to VMs (Resource Manager). You can associate zero, or one, NSG(s) to each VNet subnet and NIC in a virtual machine. The same NSG can be associated to as many subnets and NICs as you choose. So, you can create 1 NSG and associate it with all 3 Subnets. - Allow web requests from internet to VM3, VM4, VM5 and VM 6: You need to add an inbound rule to allow Internet TCP 80 to VM3, VM4, VM5 and VM6 static IP addresses. - Allow all connections between VM1 & VM2: You do not need an NSG as communication in the same VNet is allowed by default, without even configuring NSG. - Allow remote desktop to VM1: You need to add an inbound rule to allow RDP 3389 in VM1's static IP address . - Prevent all other network traffic to VNET1: You do not need to configure any NSG as the there is explicit deny rule (DenyAllInbound) in every NSG.

I believe it's wrong. I would go with 1 NSG only. NSGs can associate to multiple subnets. There is no conflict in rules so all can be in 1 NSG. My penny.

Answer valid! This question was on the exam 22/02/2023. Scored 920. Thanks guys!

Answer valid! This question was on the exam 22/02/2023. Scored 920. Thanks guys!

They have the STATIC IP, So you will provide the static ips of the vms as destinations and create rules per vm on ONE NSG

SecExams

Question #583

You have an Azure subscription that contains a virtual network named VNET1.
VNET1 contains the subnets shown in the following table.

Name	Connected virtual machines
Subnet1	VM1, VM2
Subnet2	VM3, VM4
Subnet3	VM5, VM6

Each virtual machine uses a static IP address.
You need to create network security groups (NSGs) to meet following requirements:
✑ Allow web requests from the internet to VM3, VM4, VM5, and VM6.
✑ Allow all connections between VM1 and VM2.
✑ Allow Remote Desktop connections to VM1.
✑ Prevent all other network traffic to VNET1.
What is the minimum number of NSGs you should create?

A) 1
B) 3
C) 4 (Correct Answer)
D) 12

Explanation

Correct Answer: C ?
Each network security group also contains default security rules.
Note: A network security group (NSG) contains a list of security rules that allow or deny network traffic to resources connected to Azure Virtual Networks (VNet).
NSGs can be associated to subnets, individual VMs (classic), or individual network interfaces (NIC) attached to VMs (Resource Manager).
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/security-overview#default-security-rules

Community Discussion

Question #584

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group
VNET1	Virtual network	RG1
VM1	Virtual machine	RG1

The Not allowed resource types Azure policy that has policy enforcement enabled is assigned to RG1 and uses the following parameters:
Microsoft.Network/virtualNetworks
Microsoft.Compute/virtualMachines
In RG1, you need to create a new virtual machine named VM2, and then connect VM2 to VNET1.
What should you do first?

A) Remove Microsoft.Compute/virtualMachines from the policy. (Correct Answer)
B) Create an Azure Resource Manager template
C) Add a subnet to VNET1.
D) Remove Microsoft.Network/virtualNetworks from the policy.

Explanation

Correct Answer:
A
The Not allowed resource types Azure policy prohibits the deployment of specified resource types. You specify an array of the resource types to block.
Virtual Networks and Virtual Machines are prohibited.
Reference:
https://docs.microsoft.com/en-us/azure/governance/policy/samples/not-allowed-resource-types

Community Discussion

Passed 11 Oct 2021 with 947. This question appeared, correct Answer is A

On the exam today, 1.feb.2022 Just 761/1000, but OK! :D Thanks to SecExams and to you all!

Answer is A because we already have the VNET in place, so the only thing that would get blocked by this policy would be the NEW vm we are creating

Exam Question on 01DEC 2022

so dump question

Question #585

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group
VNET1	Virtual network	RG1
VM1	Virtual machine	RG1

The Not allowed resource types Azure policy that has policy enforcement enabled is assigned to RG1 and uses the following parameters:
Microsoft.Network/virtualNetworks
Microsoft.Compute/virtualMachines
In RG1, you need to create a new virtual machine named VM2, and then connect VM2 to VNET1.
What should you do first?

A) Remove Microsoft.Compute/virtualMachines from the policy. (Correct Answer)
B) Create an Azure Resource Manager template
C) Add a subnet to VNET1.
D) Remove Microsoft.Network/virtualNetworks from the policy.

Explanation

Correct Answer: A ?
The Not allowed resource types Azure policy prohibits the deployment of specified resource types. You specify an array of the resource types to block.
Virtual Networks and Virtual Machines are prohibited.
Reference:
https://docs.microsoft.com/en-us/azure/governance/policy/samples/not-allowed-resource-types

Community Discussion

Question #586

Your company has an Azure subscription named Subscription1.
The company also has two on-premises servers named Server1 and Server2 that run Windows Server 2016. Server1 is configured as a DNS server that has a primary DNS zone named adatum.com. Adatum.com contains 1,000 DNS records.
You manage Server1 and Subscription1 from Server2. Server2 has the following tools installed:
✑ The DNS Manager console
✑ Azure PowerShell
✑ Azure CLI 2.0
You need to move the adatum.com zone to an Azure DNS zone in Subscription1. The solution must minimize administrative effort.
What should you use?

A) Azure CLI
B) Azure PowerShell (Correct Answer)
C) the Azure portal
D) the DNS Manager console

Explanation

Correct Answer:
B
Step 1: Installing the DNS migration script
Open an elevated PowerShell window (Administrative mode) and run following command
install-script PrivateDnsMigrationScript

Step 2: Running the script -
Execute following command to run the script

PrivateDnsMigrationScript.ps1 -
Reference:
https://docs.microsoft.com/en-us/azure/dns/private-dns-migration-guide

Community Discussion

Answer is incorrect, it should be A - Azure CLI. https://docs.microsoft.com/en-us/azure/dns/dns-import-export - Azure DNS supports importing and exporting zone files by using the Azure command-line interface (CLI). Zone file import is not currently supported via Azure PowerShell or the Azure portal. PrivateDNSMigrationScript is for migrating legacy Azure DNS private zones to the new Azure DNS private zone resource.

so basically we are just paying for a collection of questions and ability to ask others for answers....EXAMTOPICS has no responsibility to at least mark right answers...otherwise give that access to us so that as community we correct answers too

In my opinion Examtopic does a great job and I like to pay for this service. Incorrect answers are no problem for me and I learn a lot from these discussions.

In my opinion Examtopic does a great job and I like to pay for this service. Incorrect answers are no problem for me and I learn a lot from these discussions.

Yes, - and I am very happy with that, I enjoy reading the discussions

SecExams

Question #587

Your company has an Azure subscription named Subscription1.
The company also has two on-premises servers named Server1 and Server2 that run Windows Server 2016. Server1 is configured as a DNS server that has a primary DNS zone named adatum.com. Adatum.com contains 1,000 DNS records.
You manage Server1 and Subscription1 from Server2. Server2 has the following tools installed:

- ✑ The DNS Manager console
- ✑ Azure PowerShell
- ✑ Azure CLI 2.0

You need to move the adatum.com zone to an Azure DNS zone in Subscription1. The solution must minimize administrative effort.
What should you use?

A) Azure CLI
B) Azure PowerShell (Correct Answer)
C) the Azure portal

D) the DNS Manager console

Explanation

Correct Answer: B ?
Step 1: Installing the DNS migration script
Open an elevated PowerShell window (Administrative mode) and run following command
install-script PrivateDnsMigrationScript

Step 2: Running the script -
Execute following command to run the script

PrivateDnsMigrationScript.ps1 -
Reference:
https://docs.microsoft.com/en-us/azure/dns/private-dns-migration-guide

SecExams

Community Discussion

Question #588

You have a public load balancer that balances ports 80 and 443 across three virtual machines named VM1, VM2, and VM3.
You need to direct all the Remote Desktop Protocol (RDP) connections to VM3 only.
What should you configure?

A) an inbound NAT rule (Correct Answer)
B) a new public load balancer for VM3
C) a frontend IP configuration
D) a load balancing rule

Explanation

Correct Answer:
A
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/tutorial-load-balancer-port-forwarding-portal https://pixelrobots.co.uk/2017/08/azure-load-balancer-for-rds/

Community Discussion

An inbound NAT rule forwards incoming traffic to a specific virtual machine Service: RDP Protocol: TCP Port: 3389 Target VM =VM3

The difference between inbound NAT rules and port mapping in load balancer rules is that inbound NAT rules apply to direct forwarding to a VM, whereas load balancer rules forward traffic to a backend pool.

Answer valid! This question was on the exam 22/02/2023. Scored 920.

Answer valid! This question was on the exam 22/02/2023. Scored 920.

A is correct .... An inbound NAT rule forwards incoming traffic sent to frontend IP address and port combination. The traffic is sent to a specific virtual machine or instance in the backend pool. https://docs.microsoft.com/en-us/azure/load-balancer/components

SecExams

Question #589

You have a public load balancer that balances ports 80 and 443 across three virtual machines named VM1, VM2, and VM3.
You need to direct all the Remote Desktop Protocol (RDP) connections to VM3 only.
What should you configure?

A) an inbound NAT rule (Correct Answer)
B) a new public load balancer for VM3
C) a frontend IP configuration
D) a load balancing rule

Explanation

Correct Answer: A ?
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/tutorial-load-balancer-port-forwarding-portal https://pixelrobots.co.uk/2017/08/azure-load-balancer-for-rds/

Community Discussion

SecExams

Question #590

HOTSPOT -

You have an Azure subscription named Subscription1 that contains the virtual networks in the following table.

Name	Subnets
VNet1	Subnet11, Subnet12
VNet2	Subnet13

Subscription1 contains the virtual machines in the following table.

Name	Subnet	Availability set
VM1	Subnet11	AS1
VM2	Subnet11	AS1
VM3	Subnet11	*Not applicable*
VM4	Subnet11	*Not applicable*
VM5	Subnet12	*Not applicable*
VM6	Subnet12	*Not applicable*

In Subscription1, you create a load balancer that has the following configurations:

- ✑ Name: LB1
- ✑ SKU: Basic
- ✑ Type: Internal
- ✑ Subnet: Subnet12
- ✑ Virtual network: VNET1

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
LB1 can balance the traffic between VM1 and VM2.	○	○
LB1 can balance the traffic between VM3 and VM4.	○	○
LB1 can balance the traffic between VM5 and VM6.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
LB1 can balance the traffic between VM1 and VM2.	○	○
LB1 can balance the traffic between VM3 and VM4.	○	○
LB1 can balance the traffic between VM5 and VM6.	○	○

Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-standard-overview

Community Discussion

Correct Answer: Basic Load Balancer: Backend pool endpoints for Virtual machines in a single availability set or virtual machine scale set. Subnet12 association will be used to assign an IP for the internal load balancer, not to load balance the VMs in the Subnet. Box 1: Yes VM1 and VM are in the Availability Set. Box 2: No Both VMs are not part of any Availability Set or Scale Set. Box 3: No Both VMs are not part of any Availability Set or Scale Set. Reference: https://docs.microsoft.com/en-us/azure/load-balancer/skus

answer is correct y: vm1 and vm2 is same scale set no : both vms are in single VMs not in scale set or Av set no: same as 2 you can not use basic load balancer to balance between single VMs . the have to be in a scale set or availability set https://docs.microsoft.com/en-us/azure/load-balancer/skus

Correct my friend! "They are the machines or services that create a backend pool. The Basic Tier is quite limiting. It can only have a single availability set, virtual machine scale set or a single machine. The Standard Tier can span any virtual machine in a single virtual network which includes blends of scale sets, availability sets, and machines."

SecExams

Correct my friend! "They are the machines or services that create a backend pool. The Basic Tier is quite limiting. It can only have a single availability set, virtual machine scale set or a single machine. The Standard Tier can span any virtual machine in a single virtual network which includes blends of scale sets, availability sets, and machines."

BASIC SKU : Virtual machines in a single availability set or virtual machine scale set

SecExams

Question #591

HOTSPOT -

You have an Azure subscription named Subscription1 that contains the virtual networks in the following table.

Name	Subnets
VNet1	Subnet11, Subnet12
VNet2	Subnet13

Subscription1 contains the virtual machines in the following table.

Name	Subnet	Availability set
VM1	Subnet11	AS1
VM2	Subnet11	AS1
VM3	Subnet11	*Not applicable*
VM4	Subnet11	*Not applicable*
VM5	Subnet12	*Not applicable*
VM6	Subnet12	*Not applicable*

In Subscription1, you create a load balancer that has the following configurations:

- ✑ Name: LB1
- ✑ SKU: Basic
- ✑ Type: Internal
- ✑ Subnet: Subnet12
- ✑ Virtual network: VNET1

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
LB1 can balance the traffic between VM1 and VM2.	○	○
LB1 can balance the traffic between VM3 and VM4.	○	○
LB1 can balance the traffic between VM5 and VM6.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
LB1 can balance the traffic between VM1 and VM2.	○	○
LB1 can balance the traffic between VM3 and VM4.	○	○
LB1 can balance the traffic between VM5 and VM6.	○	○

Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-standard-overview

Community Discussion

SecExams

Question #592

HOTSPOT -

You have an Azure virtual machine that runs Windows Server 2019 and has the following configurations:

- Name: VM1
- Location: West US
- Connected to: VNET1
- Private IP address: 10.1.0.4
- Public IP addresses: 52.186.85.63
- DNS suffix in Windows Server: Adatum.com

You create the Azure DNS zones shown in the following table.

Name	Type	Location
Adatum.pri	Private	West Europe
Contoso.pri	Private	Central US
Adatum.com	Public	West Europe
Contoso.com	Public	North Europe

You need to identify which DNS zones you can link to VNET1 and the DNS zones to which VM1 can automatically register.

Which zones should you identify? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

DNS zones that you can link to VNET1:

- Adatum.com only
- Adatum.pri and adatum.com only
- The private zones only
- The public zones only

DNS zones to which VM1 can automatically register:

- Adatum.com only
- Adatum.pri and adatum.com only
- The private zones only
- The public zones only

Explanation

Correct Answer:

Answer Area

DNS zones that you can link to VNET1:

- Adatum.com only
- Adatum.pri and adatum.com only
- The private zones only
- The public zones only

DNS zones to which VM1 can automatically register:

- Adatum.com only
- Adatum.pri and adatum.com only
- The private zones only
- The public zones only

Reference:
https://docs.microsoft.com/en-us/azure/dns/private-dns-overview

Community Discussion

Correct Answer: Box 1: Private Box 2: Private You can only link VNETs to private DNS zones only and accordingly auto register a VNET only to a private DNS zones. Private DNS zones can be linked with VNETs (not public ones). And VM can auto-register to any private DNS zone linked with the Vnet and with auto-registration option set. To resolve the records of a private DNS zone from your virtual network, you must link the virtual network with the zone. Linked virtual networks have full access and can resolve all DNS records published in the private zone.

Answer is correct. Private zones only / Private zones only. You can only link Virtual networks to private DNS zones only and accordingly auto register a VNET only to a private DNS zones. check https://docs.microsoft.com/en-us/azure/dns/dns-zones-records https://docs.microsoft.com/en-us/azure/dns/private-dns-virtual-network-links

Both answers are correct. Private DNS zones can be linked with Vnets (not public ones). And VM can auto-register to any private DNS zone linked with the Vnet and with auto-registration option set.

Answer is correct. Private zones only / Private zones only. You can only link Virtual networks to private DNS zones only and accordingly auto register a VNET only to a private

DNS zones. check https://docs.microsoft.com/en-us/azure/dns/dns-zones-records https://docs.microsoft.com/en-us/azure/dns/private-dns-virtual-network-links

Answer is correct. Private zones only / Private zones only. You can only link Virtual networks to private DNS zones only and accordingly auto register a VNET only to a private DNS zones. check https://docs.microsoft.com/en-us/azure/dns/dns-zones-records https://docs.microsoft.com/en-us/azure/dns/private-dns-virtual-network-links

SecExams

Question #593

HOTSPOT -

You have an Azure virtual machine that runs Windows Server 2019 and has the following configurations:

- Name: VM1
- Location: West US
- Connected to: VNET1
- Private IP address: 10.1.0.4
- Public IP addresses: 52.186.85.63
- DNS suffix in Windows Server: Adatum.com

You create the Azure DNS zones shown in the following table.

Name	Type	Location
Adatum.pri	Private	West Europe
Contoso.pri	Private	Central US
Adatum.com	Public	West Europe
Contoso.com	Public	North Europe

You need to identify which DNS zones you can link to VNET1 and the DNS zones to which VM1 can automatically register.

Which zones should you identify? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

DNS zones that you can link to VNET1:

- Adatum.com only
- Adatum.pri and adatum.com only
- The private zones only
- The public zones only

DNS zones to which VM1 can automatically register:

- Adatum.com only
- Adatum.pri and adatum.com only
- The private zones only
- The public zones only

Explanation

Correct Answer:

Answer Area

DNS zones that you can link to VNET1:

- Adatum.com only
- Adatum.pri and adatum.com only
- The private zones only
- The public zones only

DNS zones to which VM1 can automatically register:

- Adatum.com only
- Adatum.pri and adatum.com only
- The private zones only
- The public zones only

Reference:
https://docs.microsoft.com/en-us/azure/dns/private-dns-overview

Community Discussion

SecExams

Question #594

DRAG DROP -

You have an on-premises network that you plan to connect to Azure by using a site-so-site VPN.

In Azure, you have an Azure virtual network named VNet1 that uses an address space of 10.0.0.0/16 VNet1 contains a subnet named Subnet1 that uses an address space of 10.0.0.0/24.

You need to create a site-to-site VPN to Azure.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

NOTE: More than one order of answer choice is correct. You will receive credit for any of the correct orders you select.

Select and Place:

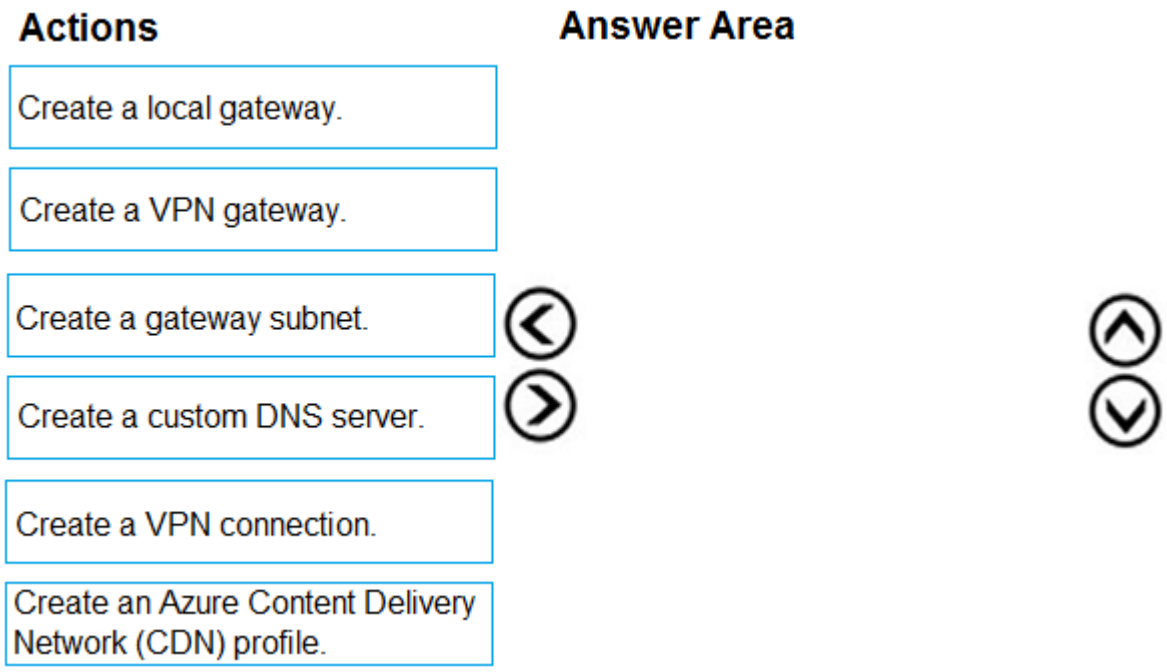

Explanation

Correct Answer:

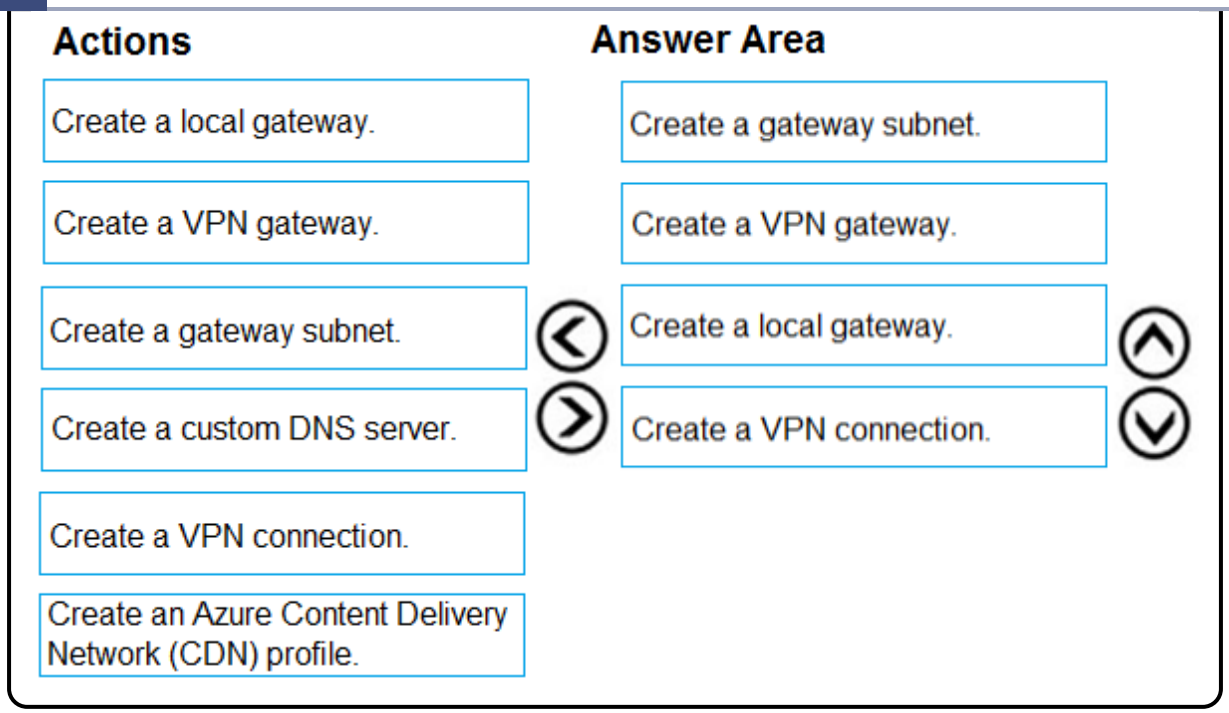

Community Discussion

The answers are in order and are correct. Always work from the Azure side first, it's a dependency. Dependency is the key to all order obviously... 1 - Start with a Gateway subnet. You need the subnet in place first before you can associate a VPN gateway with it, which is what is created next. 2 - Create a VPN gateway. Associate the VPN gateway with the gateway subnet you created (there are other steps but for the sake of what is available for answers, the prem side is now configured) Now for the premice side. 3. Create a local gateway. You need the local gateway in order to complete the tunnel, then you can create a VPN connection

Correct Answer: As per documentation: 1. Create a virtual network 2. Create a VPN gateway 3. Create a local network gateway 4. Create a VPN connection 5. Verify the connection 6. Connect to a virtual machine Reference: https://docs.microsoft.com/en-us/azure/vpn-gateway/tutorial-site-to-site-portal https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-vpn-gateway-settings https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-site-to-site-classic-portal

I hereby declare this answer fit for viewership?

I hereby declare this answer fit for viewership?

1. Create a gateway subnet 2. Create a VPN gateway 3. Create a local network gateway 4. Create a VPN connection

Question #595

DRAG DROP -

You have an on-premises network that you plan to connect to Azure by using a site-so-site VPN.

In Azure, you have an Azure virtual network named VNet1 that uses an address space of 10.0.0.0/16 VNet1 contains a subnet named Subnet1 that uses an address space of 10.0.0.0/24.

You need to create a site-to-site VPN to Azure.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

NOTE: More than one order of answer choice is correct. You will receive credit for any of the correct orders you select.

Select and Place:

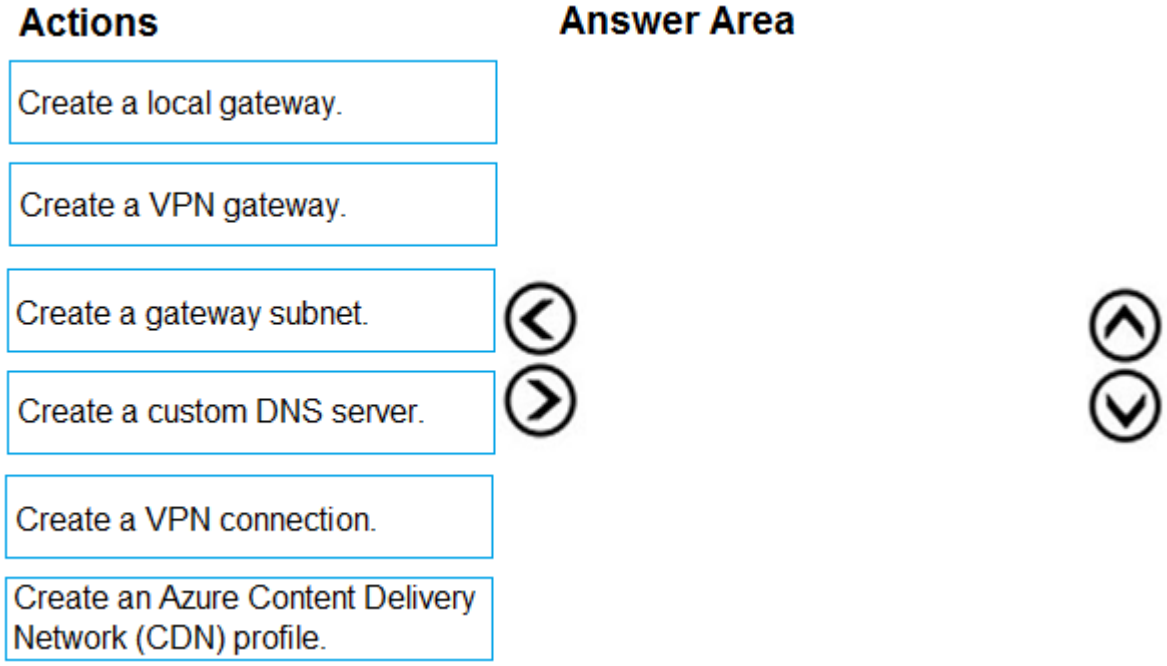

Explanation

Correct Answer:

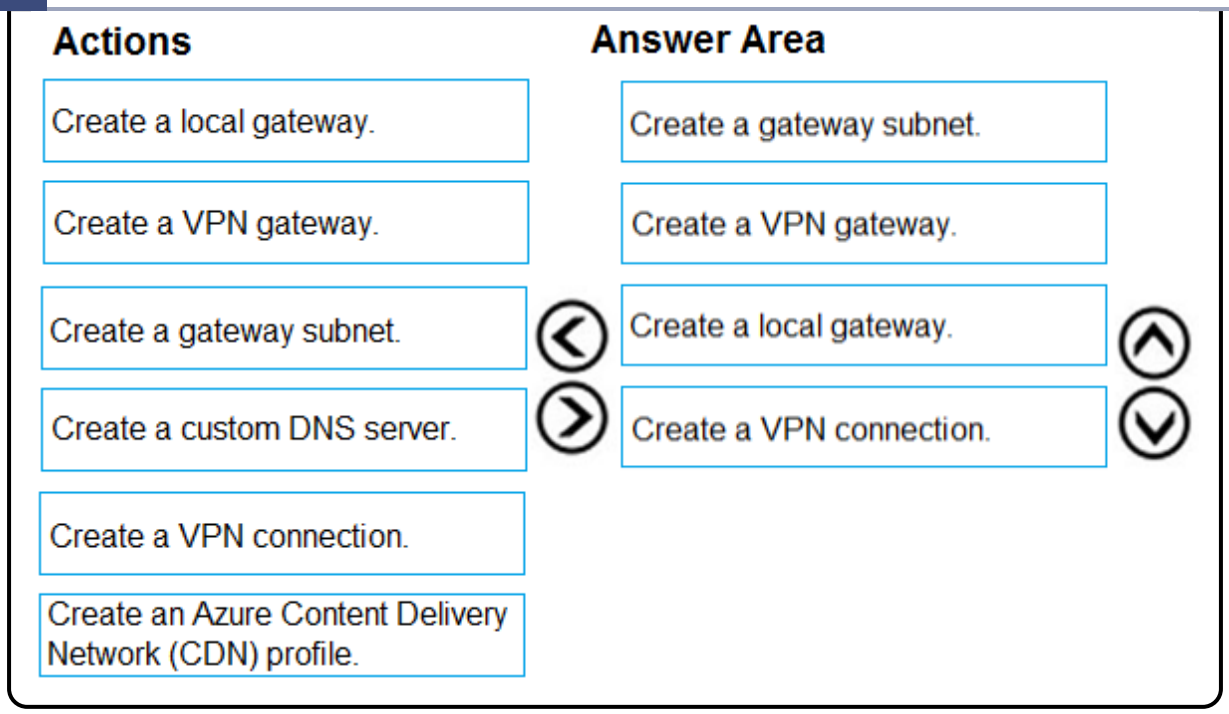

Community Discussion

Question #596

You have an Azure subscription that contains the resources in the following table.

Name	Type	Details
VNet1	Virtual network	*Not applicable*
Subnet1	Subnet	Hosted on VNet1
VM1	Virtual machine	On Subnet1
VM2	Virtual machine	On Subnet1

VM1 and VM2 are deployed from the same template and host line-of-business applications.

You configure the network security group (NSG) shown in the exhibit. (Click the Exhibit tab.)

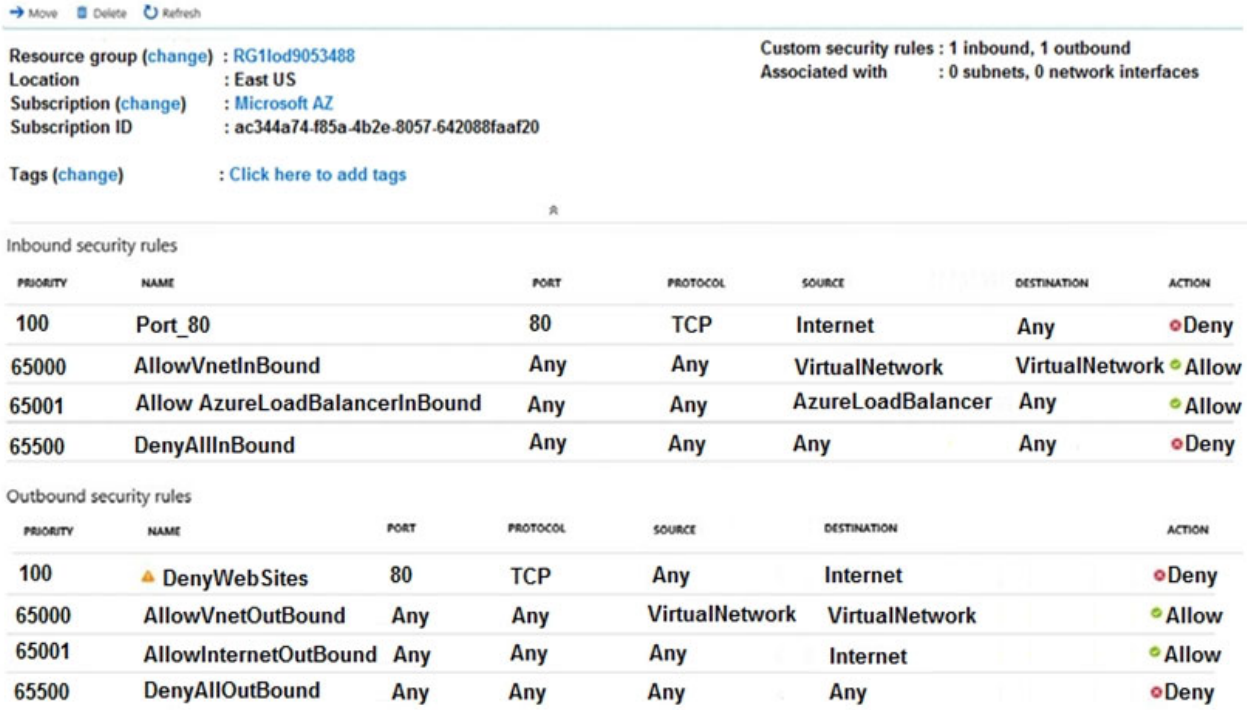

Move Delete Refresh

Resource group (change) : RG1lod9053488
Location : East US
Subscription (change) : Microsoft AZ
Subscription ID : ac344a74-f85a-4b2e-8057-642088faaf20

Tags (change) : Click here to add tags

Custom security rules : 1 inbound, 1 outbound
Associated with : 0 subnets, 0 network interfaces

Inbound security rules

PRIORITY	NAME	PORT	PROTOCOL	SOURCE	DESTINATION	ACTION
100	Port_80	80	TCP	Internet	Any	Deny
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Allow AzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny

Outbound security rules

PRIORITY	NAME	PORT	PROTOCOL	SOURCE	DESTINATION	ACTION
100	DenyWebSites	80	TCP	Any	Internet	Deny
65000	AllowVnetOutBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowInternetOutBound	Any	Any	Any	Internet	Allow
65500	DenyAllOutBound	Any	Any	Any	Any	Deny

You need to prevent users of VM1 and VM2 from accessing websites on the Internet over TCP port 80.

What should you do?

A) Disassociate the NSG from a network interface
B) Change the Port_80 inbound security rule.
C) Associate the NSG to Subnet1. (Correct Answer)
D) Change the DenyWebSites outbound security rule.

Explanation

Correct Answer:
C
You can associate or dissociate a network security group from a network interface or subnet.
The NSG has the appropriate rule to block users from accessing the Internet. We just need to associate it with Subnet1.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/manage-network-security-group

Community Discussion

Correct Answer: C Outbound rule “DenyWebSites” is setup correctly to block outbound internet traffic over port 80. In the screenshot it states, "Associated with: 0 subnets, 0 NIC's", so you need to associate the NSG to Subnet1.You can associate or dissociate a network security group from a NIC or Subnet. Reference: https://docs.microsoft.com/en-us/azure/virtual-network/manage-network-security-group

Answer is correct - C. Outbound rule: DenyWebSites is setup correctly to block outbound internet traffic over port 80.

Agreed, in screenshot it states "Associated with: 0 subnets, 0 NIC's" ;)

Agreed, in screenshot it states "Associated with: 0 subnets, 0 NIC's" ;)

Selected Answer: C

check mlantonis

Question #597

You have an Azure subscription that contains the resources in the following table.

Name	Type	Details
VNet1	Virtual network	*Not applicable*
Subnet1	Subnet	Hosted on VNet1
VM1	Virtual machine	On Subnet1
VM2	Virtual machine	On Subnet1

VM1 and VM2 are deployed from the same template and host line-of-business applications.
You configure the network security group (NSG) shown in the exhibit. (Click the Exhibit tab.)

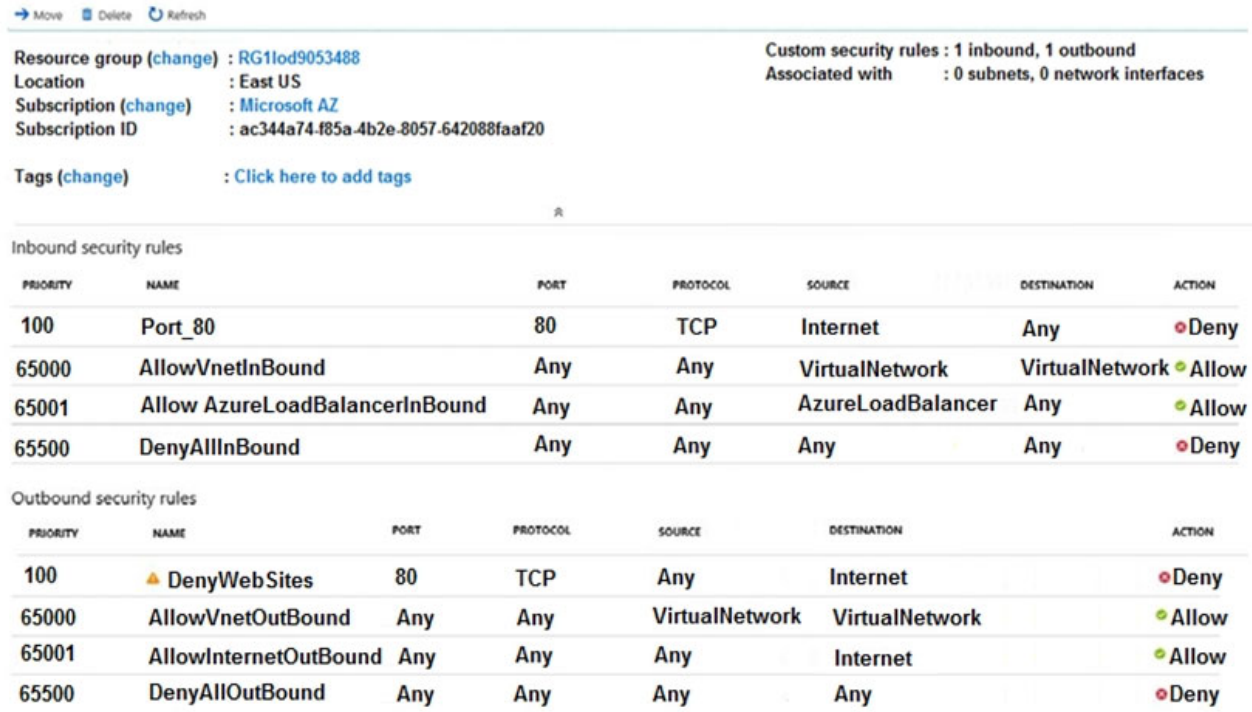

You need to prevent users of VM1 and VM2 from accessing websites on the Internet over TCP port 80.
What should you do?

A) Disassociate the NSG from a network interface
B) Change the Port_80 inbound security rule.
C) Associate the NSG to Subnet1. (Correct Answer)
D) Change the DenyWebSites outbound security rule.

Explanation

Correct Answer: C ?
You can associate or dissociate a network security group from a network interface or subnet.
The NSG has the appropriate rule to block users from accessing the Internet. We just need to associate it with Subnet1.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/manage-network-security-group

Community Discussion

SecExams

Question #598

You have two subscriptions named Subscription1 and Subscription2. Each subscription is associated to a different Azure AD tenant.
Subscription1 contains a virtual network named VNet1. VNet1 contains an Azure virtual machine named VM1 and has an IP address space of 10.0.0.0/16.
Subscription2 contains a virtual network named VNet2. VNet2 contains an Azure virtual machine named VM2 and has an IP address space of 10.10.0.0/24.
You need to connect VNet1 to VNet2.
What should you do first?

A) Move VM1 to Subscription2.
B) Move VNet1 to Subscription2.
C) Modify the IP address space of VNet2.
D) Provision virtual network gateways. (Correct Answer)

Explanation

Correct Answer:
D
The virtual networks can be in the same or different regions, and from the same or different subscriptions. When connecting VNets from different subscriptions, the subscriptions do not need to be associated with the same Active Directory tenant.
Configuring a VNet-to-VNet connection is a good way to easily connect VNets. Connecting a virtual network to another virtual network using the VNet-to-VNet connection type

(VNet2VNet) is similar to creating a Site-to-Site IPsec connection to an on-premises location. Both connectivity types use a VPN gateway to provide a secure tunnel using IPsec/IKE, and both function the same way when communicating.
The local network gateway for each VNet treats the other VNet as a local site. This lets you specify additional address space for the local network gateway in order to route traffic.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-vnet-vnet-resource-manager-portal

Community Discussion

Correct Answer: D There is no overlap between the VNets: VNet1: 10.0.0.0/16 - CIDR IP Range 10.0.0.0 - 10.0.255.255 VNet2: 10.10.0.0/24 - CIDR IP Range 10.10.0.0 - 10.0.0.255 Note: If a virtual network has address ranges that overlap with another virtual network or on-premises network, the two networks can't be connected. You can connect virtual networks (VNets) by using the VNet-to-VNet connection type. Virtual networks can be in different regions and from different subscriptions. When you connect VNets from different subscriptions, the subscriptions don't need to be associated with the same Active Directory tenant. Reference: https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-vnet-vnet-resource-manager-portal https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-vpngateways

Answer is correct. "D" . It is a VNET to VNET connection where there is no IP overlap exists. Also, No need to have the same Azure AD. They just need to have a Virtual network gateway to communicate using Public IP where it is secured using SSTP or IKEv2

Correct answer and well explained There is a typo in your VNet2 CIDR IP Rage : 10.10.0.0 - 10.10.0.255 (instead of 10.0.0.255) :)

Correct answer and well explained There is a typo in your VNet2 CIDR IP Rage : 10.10.0.0 - 10.10.0.255 (instead of 10.0.0.255) :)

I found answer D is the only one that makes sense as well but I actually miss "peering" here as this would be a way better way of connecting both VNET´s. Its supported for cross tenant and cross subscription connections so it would be more accurate.

SecExams

Question #599

You have two subscriptions named Subscription1 and Subscription2. Each subscription is associated to a different Azure AD tenant.
Subscription1 contains a virtual network named VNet1. VNet1 contains an Azure virtual machine named VM1 and has an IP address space of 10.0.0.0/16.
Subscription2 contains a virtual network named VNet2. VNet2 contains an Azure virtual machine named VM2 and has an IP address space of 10.10.0.0/24.
You need to connect VNet1 to VNet2.
What should you do first?

A) Move VM1 to Subscription2.
B) Move VNet1 to Subscription2.
C) Modify the IP address space of VNet2.
D) Provision virtual network gateways. (Correct Answer)

SecExams

Explanation

Correct Answer: D ?
The virtual networks can be in the same or different regions, and from the same or different subscriptions. When connecting VNets from different subscriptions, the subscriptions do not need to be associated with the same Active Directory tenant.
Configuring a VNet-to-VNet connection is a good way to easily connect VNets. Connecting a virtual network to another virtual network using the VNet-to-VNet connection type (VNet2VNet) is similar to creating a Site-to-Site IPsec connection to an on-premises location. Both connectivity types use a VPN gateway to provide a secure tunnel using IPsec/IKE, and both function the same way when communicating.
The local network gateway for each VNet treats the other VNet as a local site. This lets you specify additional address space for the local network gateway in order to route traffic.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-vnet-vnet-resource-manager-portal

Community Discussion

Question #600

SecExams

You plan to create an Azure virtual machine named VM1 that will be configured as shown in the following exhibit.

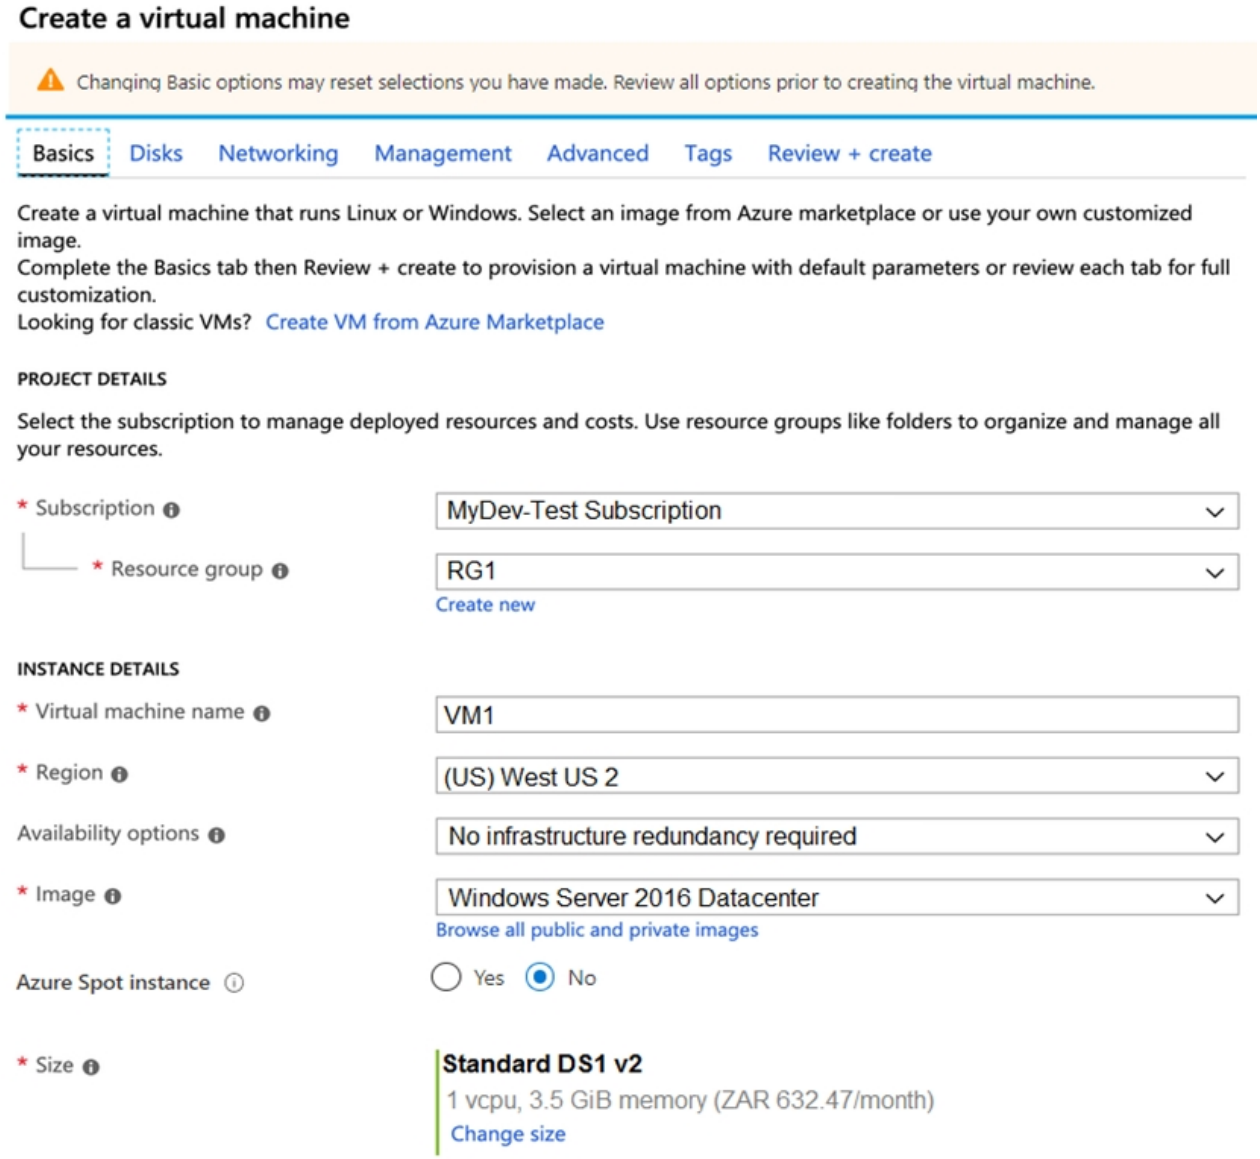

The planned disk configurations for VM1 are shown in the following exhibit.

SecExams

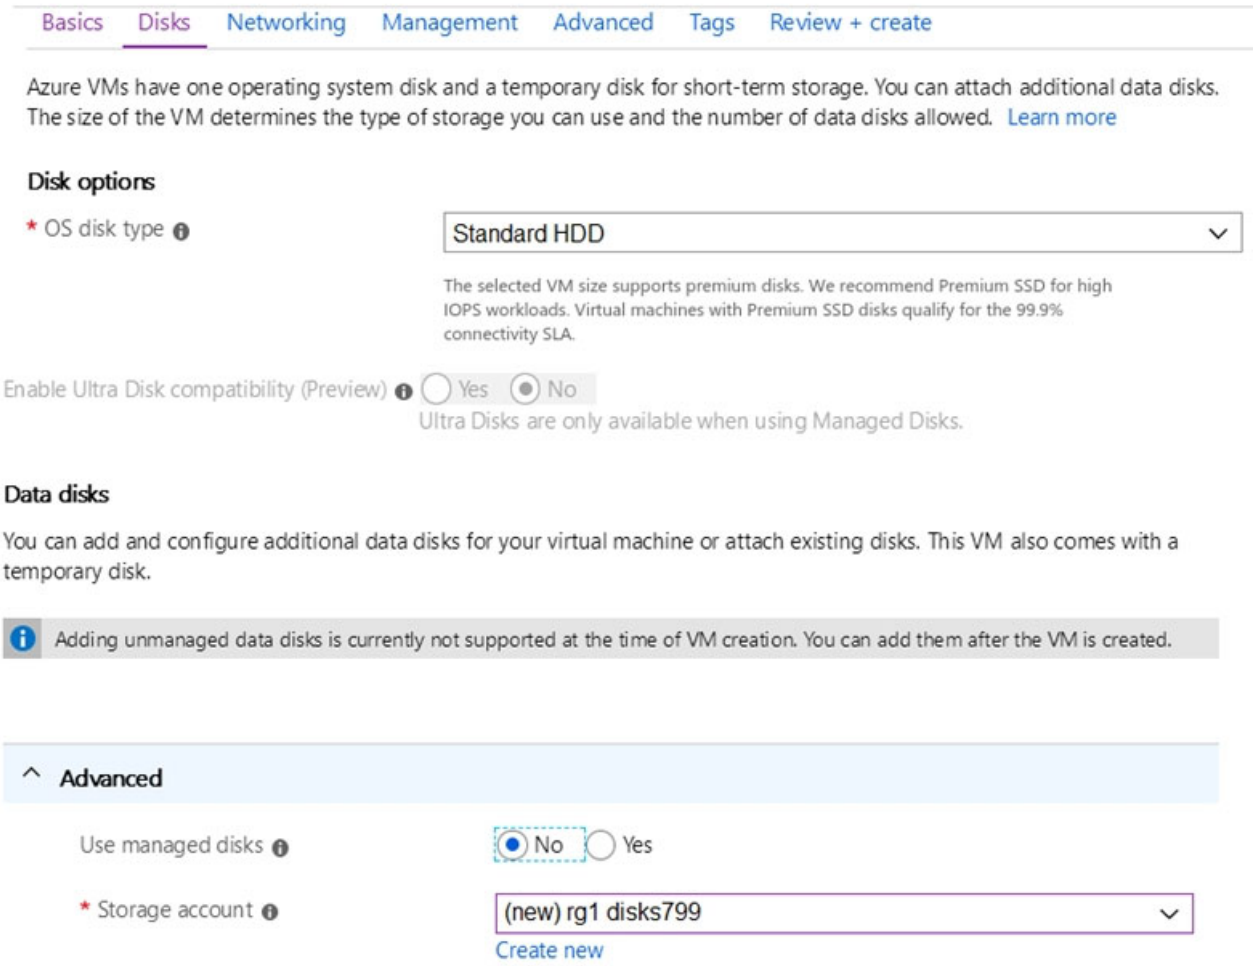

You need to ensure that VM1 can be created in an Availability Zone.
Which two settings should you modify? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Use managed disks (Correct Answer)
B) OS disk type
C) Availability options (Correct Answer)
D) Size
E) Image

Explanation

Correct Answer:
AC
A: Your VMs should use managed disks if you want to move them to an Availability Zone by using Site Recovery.
C: When you create a VM for an Availability Zone, Under Settings > High availability, select one of the numbered zones from the Availability zone dropdown.

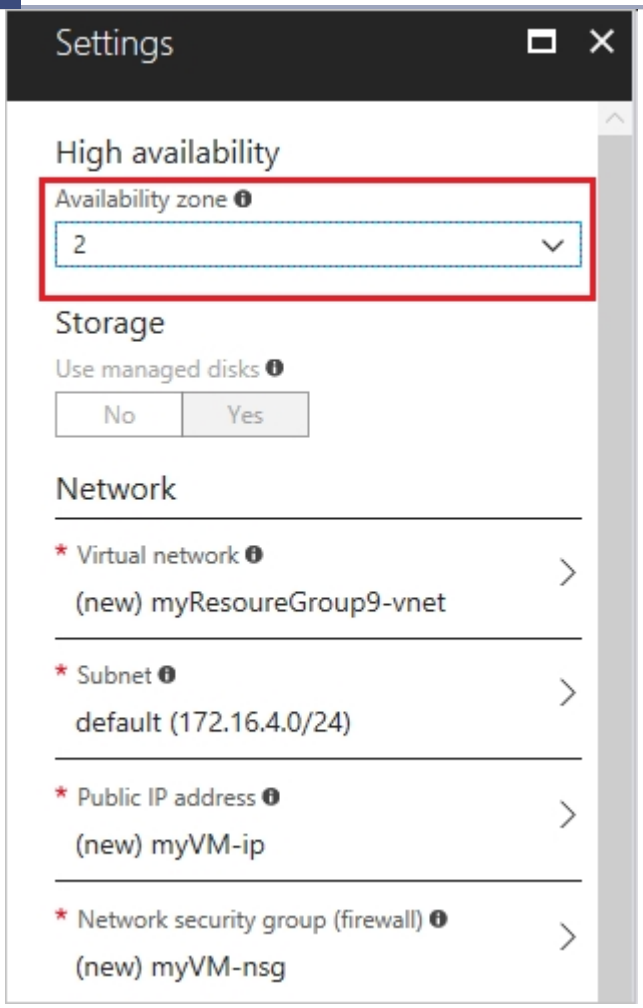

Reference:
https://docs.microsoft.com/en-us/azure/site-recovery/move-azure-vms-avset-azone
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/create-portal-availability-zone

Community Discussion

Correct Answer: A and C A: Your VMs should use managed disks if you want to move them to an Availability Zone by using Site Recovery. C: When you create a VM for an Availability Zone, Under Settings > High availability, select one of the numbered zones from the Availability zone dropdown. Reference: https://docs.microsoft.com/en-us/azure/site-recovery/move-azure-vms-avset-azone https://docs.microsoft.com/en-us/azure/virtual-machines/windows/create-portal-availability-zone https://docs.microsoft.com/en-us/azure/virtual-machines/manage-availability https://docs.microsoft.com/en-us/azure/availability-zones/az-overview#availability-zones

Explanation is correct but marked answer is wrong. should be Availability Zones and Managed Disks

Absolutely, you just need to make sure that you are also drunk during the exam.

Exam Question 08OCT22

Passed 11 Oct 2021 with 947. This question appeared, correct Answer is A C

SecExams

Question #601

SecExams

You plan to create an Azure virtual machine named VM1 that will be configured as shown in the following exhibit.

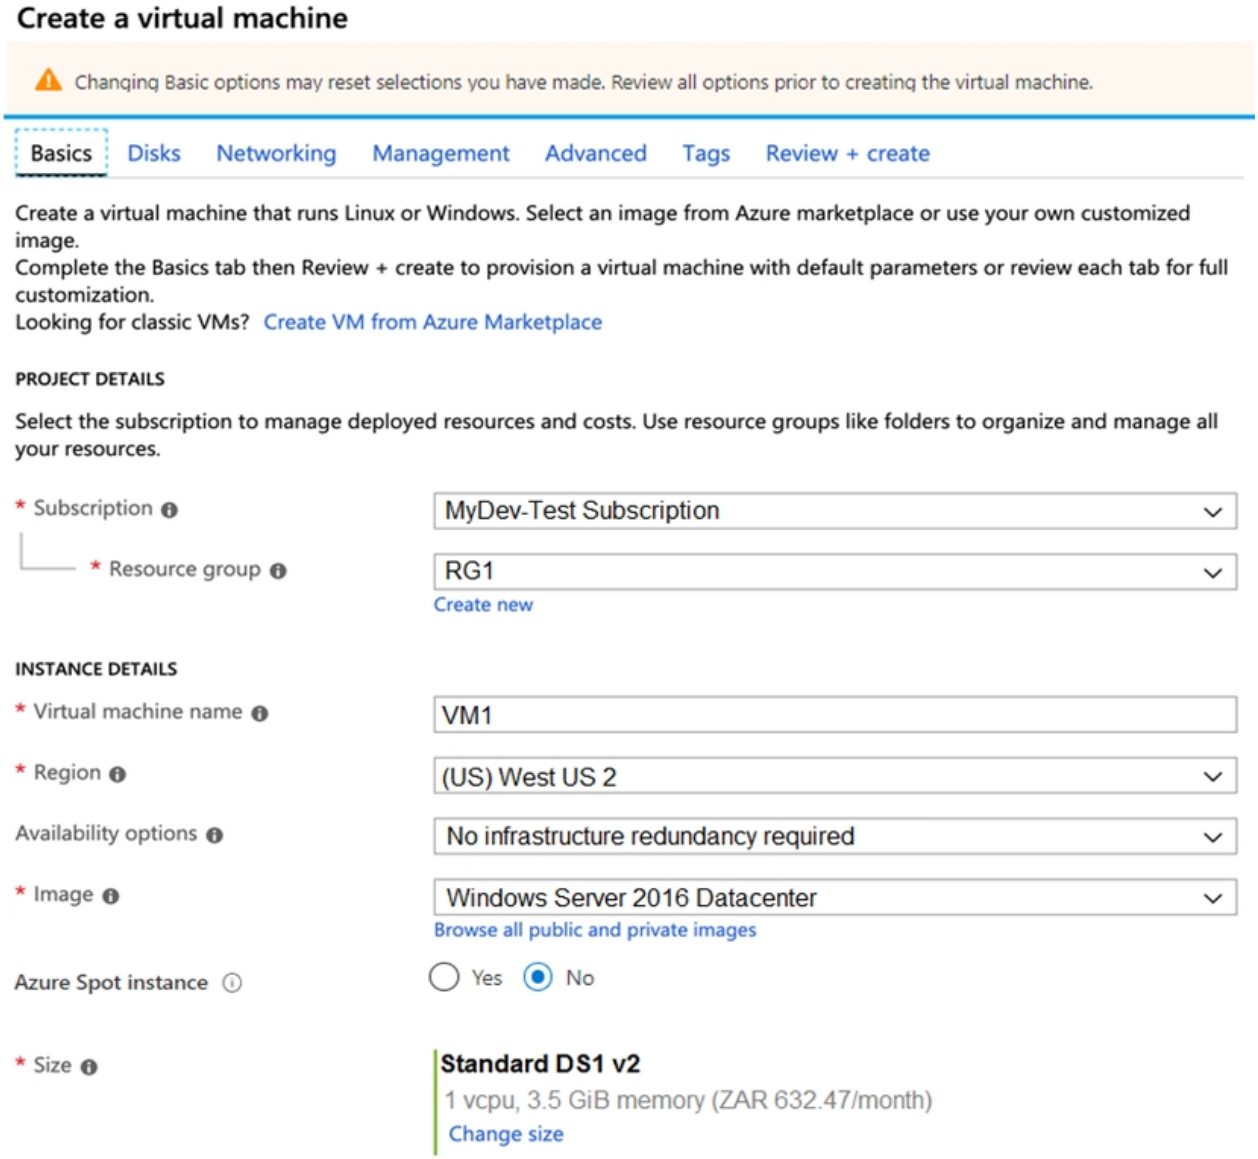

The planned disk configurations for VM1 are shown in the following exhibit.

SecExams

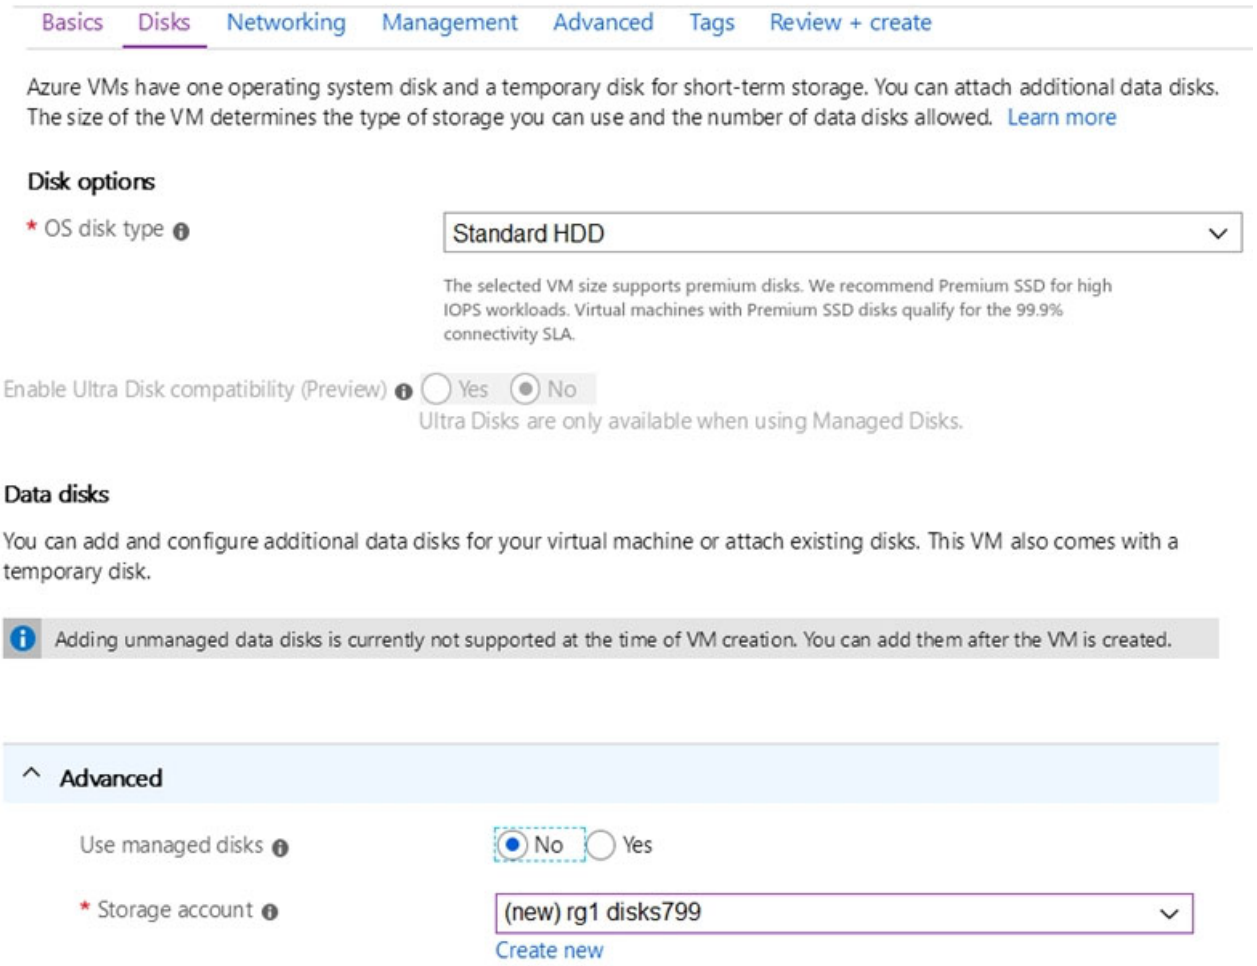

You need to ensure that VM1 can be created in an Availability Zone.
Which two settings should you modify? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Use managed disks (Correct Answer)
B) OS disk type
C) Availability options (Correct Answer)
D) Size
E) Image

Explanation

Correct Answer: AC ?
A: Your VMs should use managed disks if you want to move them to an Availability Zone by using Site Recovery.
C: When you create a VM for an Availability Zone, Under Settings > High availability, select one of the numbered zones from the Availability zone dropdown.

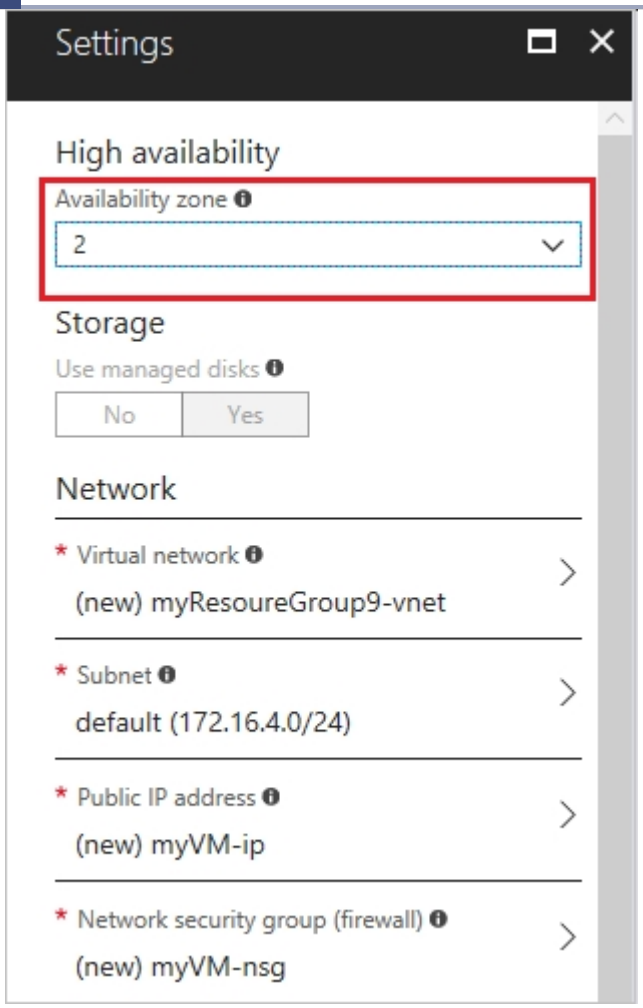

Reference:
https://docs.microsoft.com/en-us/azure/site-recovery/move-azure-vms-avset-azone
https://docs.microsoft.com/en-us/azure/virtual-machines/windows/create-portal-availability-zone

Community Discussion

Question #602

HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group	Location
RG1	Resource group	*Not applicable*	Central US
RG2	Resource group	*Not applicable*	West US
RG3	Resource group	*Not applicable*	East US
VMSS1	Virtual machine scale set	RG1	West US

VMSS1 is set to VM (virtual machines) orchestration mode.

You need to deploy a new Azure virtual machine named VM1, and then add VM1 to VMSS1.

Which resource group and location should you use to deploy VM1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Resource group:
- RG1 only
- RG2 only
- RG1 or RG2 only
- RG1, RG2, or RG3

Location:
- West US only
- Central US only
- Central US or West US only
- East US, Central US, or West US

Explanation

Correct Answer:

Answer Area

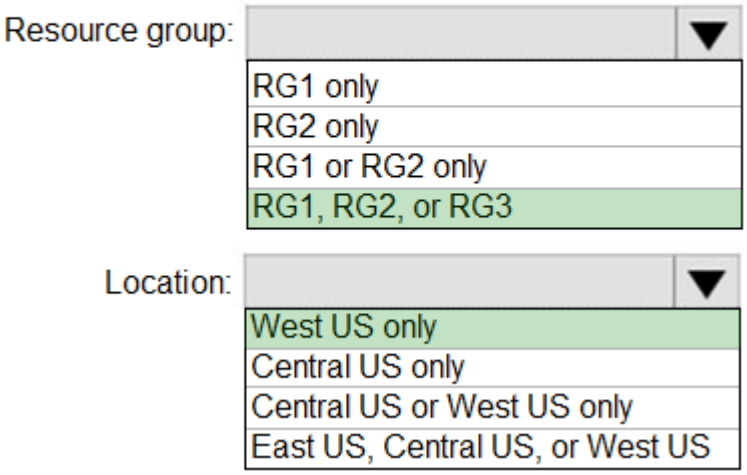

Box 1: RG1, RG2, or RG3 -
The resource group stores metadata about the resources. When you specify a location for the resource group, you're specifying where that metadata is stored.

Box 2: West US only -
Note: Virtual machine scale sets will support 2 distinct orchestration modes:
ScaleSetVM ɹ€" Virtual machine instances added to the scale set are based on the scale set configuration model. The virtual machine instance lifecycle - creation, update, deletion - is managed by the scale set.
VM (virtual machines) ɹ€" Virtual machines created outside of the scale set can be explicitly added to the scaleset.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/overview

Community Discussion

Correct Answer: Box 1: RG1, RG2, or RG3 The resource group stores metadata about the resources. When you specify a location for the resource group, you're specifying where that metadata is stored. The location of the RG doesn't influence the choice of the location of VM. best practice would be to create the VM1 in the RG1 because the scale set is in RG1. And Microsoft recommends that resources contained in a Resource Group share the same resource lifecycle. Box 2: West US only You can add the virtual machine to a scale set in the same region, zone, and resource group. Reference: https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/overview https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-orchestration-modes

Answer is correct. The location of the RG doesn't influence the choice of the location of VM. The location of the VM should be the same like the VM Scale set (single zone or zone redundant)

Answer is not correct. I just tested it in the lab and a new VM needed to be in the SAME resource group and region. Otherwise, a given VMSS was not available.

Answer is not correct. I just tested it in the lab and a new VM needed to be in the SAME resource group and region. Otherwise, a given VMSS was not available.

Box 1: RG1 only. The VM must be in the same resource group as the scale set. Reference : https://learn.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-attach-detach-vm?tabs=portal

SecExams

Question #603

HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group	Location
RG1	Resource group	*Not applicable*	Central US
RG2	Resource group	*Not applicable*	West US
RG3	Resource group	*Not applicable*	East US
VMSS1	Virtual machine scale set	RG1	West US

VMSS1 is set to VM (virtual machines) orchestration mode.

You need to deploy a new Azure virtual machine named VM1, and then add VM1 to VMSS1.

Which resource group and location should you use to deploy VM1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Resource group:
- RG1 only
- RG2 only
- RG1 or RG2 only
- RG1, RG2, or RG3

Location:
- West US only
- Central US only
- Central US or West US only
- East US, Central US, or West US

SecExams

Explanation

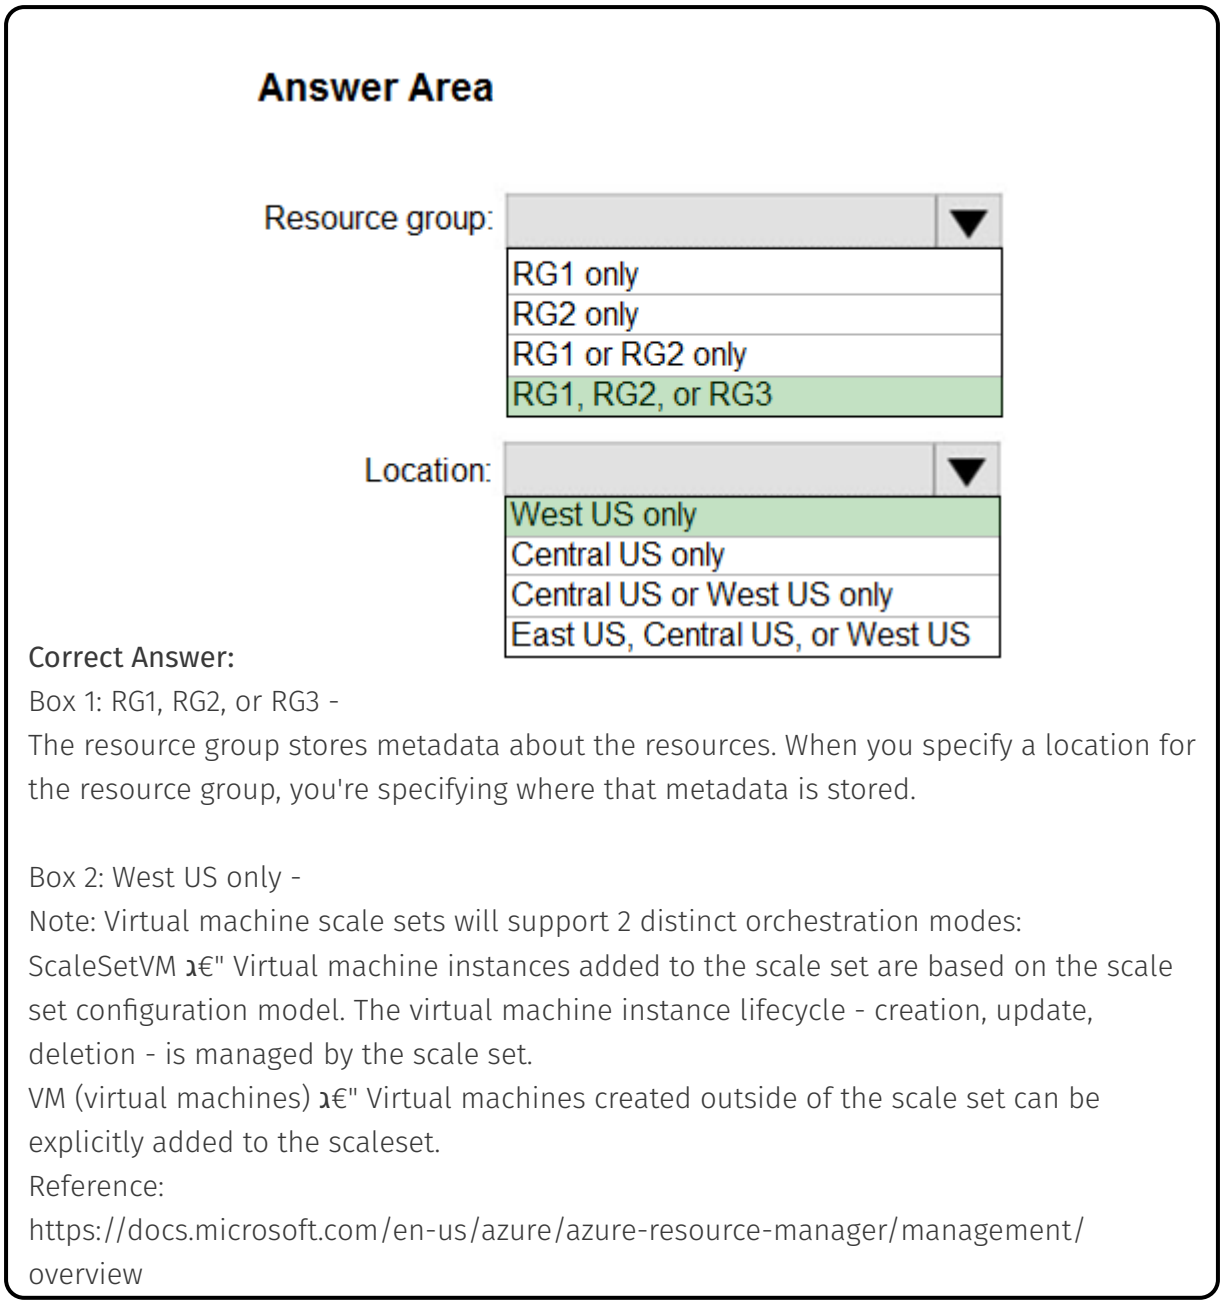

Correct Answer:

Box 1: RG1, RG2, or RG3 -

The resource group stores metadata about the resources. When you specify a location for the resource group, you're specifying where that metadata is stored.

Box 2: West US only -

Note: Virtual machine scale sets will support 2 distinct orchestration modes:

ScaleSetVM ג€" Virtual machine instances added to the scale set are based on the scale set configuration model. The virtual machine instance lifecycle - creation, update, deletion - is managed by the scale set.

VM (virtual machines) ג€" Virtual machines created outside of the scale set can be explicitly added to the scaleset.

Reference:

https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/overview

Community Discussion

Question #604

SecExams

HOTSPOT -

You have an Azure subscription that contains three virtual networks named VNET1, VNET2, and VNET3.

Peering for VNET1 is configured as shown in the following exhibit.

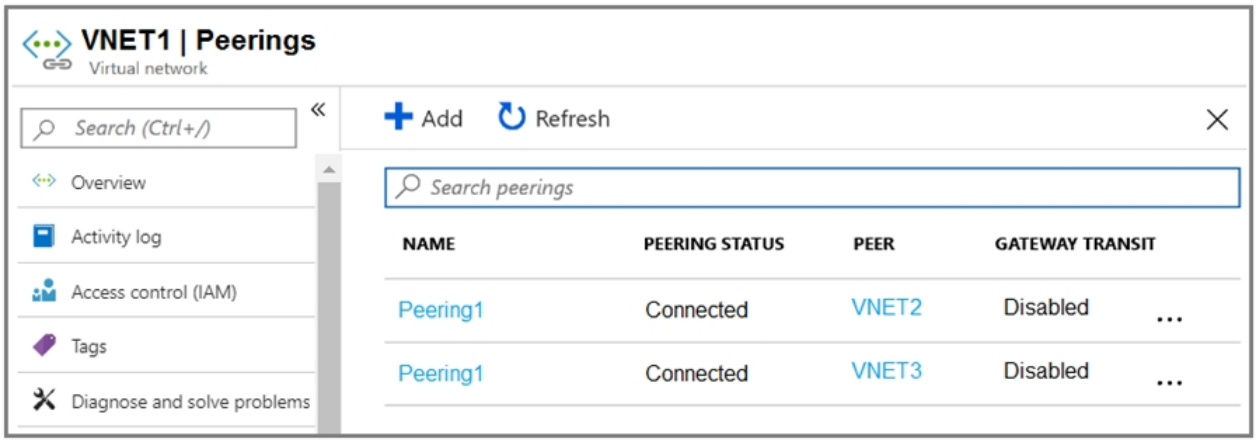

Peering for VNET2 is configured as shown in the following exhibit.

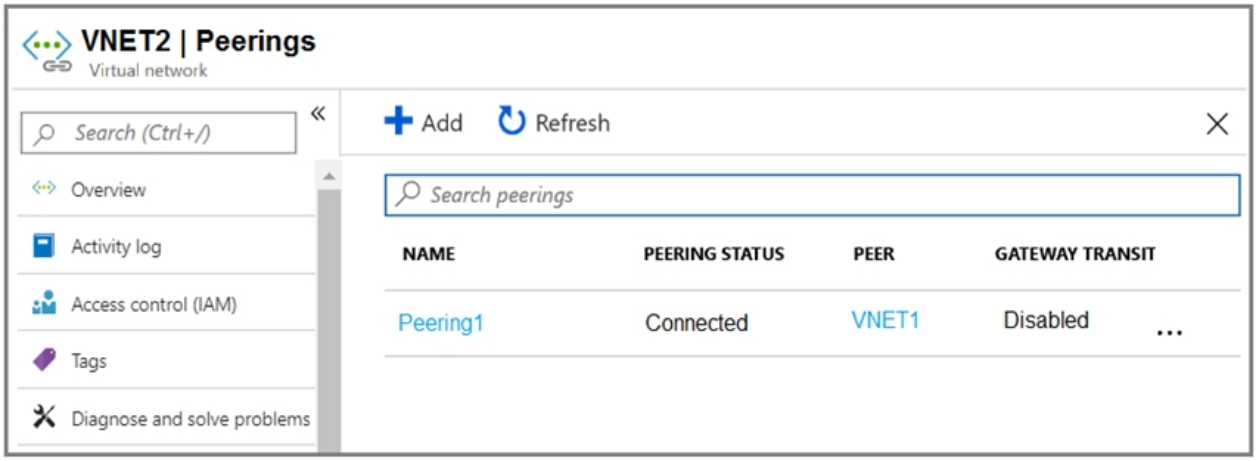

Peering for VNET3 is configured as shown in the following exhibit.

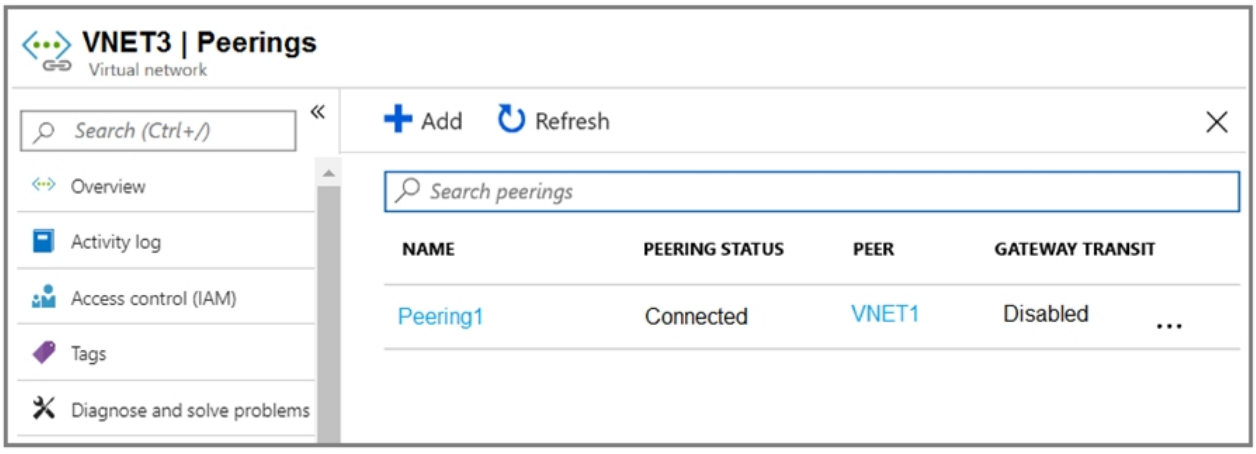

How can packets be routed between the virtual networks? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

Packets from VNET1 can be routed to:
- VNET2 only
- VNET3 only
- VNET2 and VNET3

Packets from VNET2 can be routed to:
- VNET1 only
- VNET3 only
- VNET1 and VNET3

Explanation

Correct Answer:

Answer Area

Packets from VNET1 can be routed to:
- VNET2 only
- VNET3 only
- VNET2 and VNET3 ✓

Packets from VNET2 can be routed to:
- VNET1 only ✓
- VNET3 only
- VNET1 and VNET3

Box 1. VNET2 and VNET3 -

Box 2: VNET1 -
Gateway transit is disabled.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-peering-overview

Community Discussion

Correct Answer: VNet1: Peered with VNet2 and VNet3 VNet2: Peered with VNet1 VNet3: Peered with VNet1 Box 1. VNET2 and VNET3 VNet1 is peered with VNet2 and VNet3. Also Gateway transit is disabled. Box 2: VNET1 only Gateway transit is disabled, so it can only communicate with the connected VNET1. Reference: https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-peering-overview https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-peering-gateway-transit

Answer Correct. Gateway transit is disabled so they can only communicate with VNET1. https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-peering-gateway-transit

As far as I know virtual peering is not transitive and Spoke-to-Spoke traffic is not allowed. Enabling Gateway transit allows for cross-premises communication but not for Spoke-to-Spoke traffic. The only way to make possible spoke-to-spoke traffic is to use an NVA in the HUB VNet

As far as I know virtual peering is not transitive and Spoke-to-Spoke traffic is not allowed. Enabling Gateway transit allows for cross-premises communication but not for Spoke-to-Spoke traffic. The only way to make possible spoke-to-spoke traffic is to use an NVA in the HUB VNet

Given answer is correct but explanation for part 2 is not Gateway transit only applies when there is a VPN gateway created and Gateway transit is a peering property that lets one virtual network use the VPN gateway in the peered virtual network for cross-premises or VNet-to-VNet connectivity hence really allows for reduced cost and administrative effort since only one VPN GW to manage and pay for So in summary the Gateway transit option that you enable allows you to use the VPN GW for rooting, Now assuming the VPN GW has all necessary routes then yes communication between VNET2 and VNET3 is possible but if for argument sake that the VPN GW dont have routes of VNET2 and VNET3 then both VNETs will NOT be able to communicate

SecExams

Question #605

SecExams

HOTSPOT -

You have an Azure subscription that contains three virtual networks named VNET1, VNET2, and VNET3.

Peering for VNET1 is configured as shown in the following exhibit.

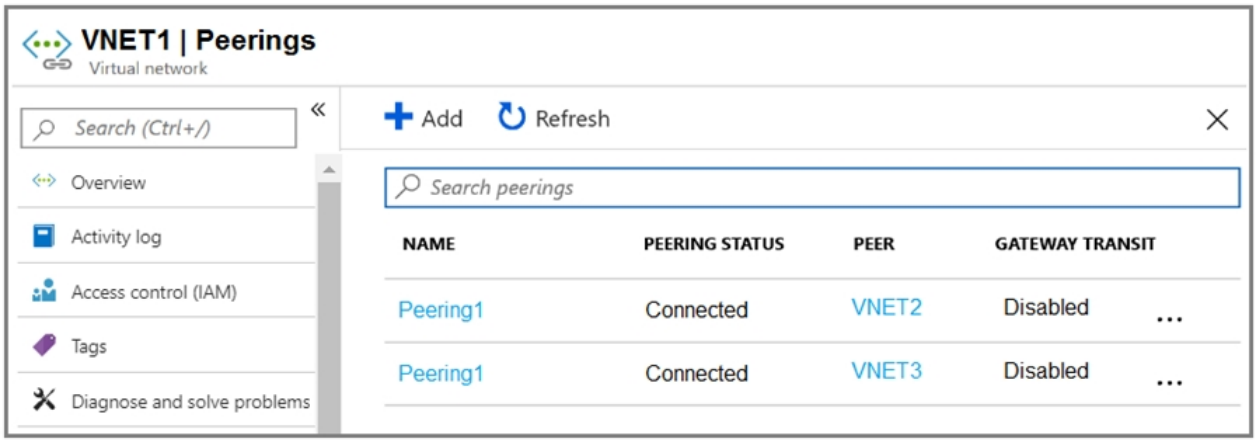

Peering for VNET2 is configured as shown in the following exhibit.

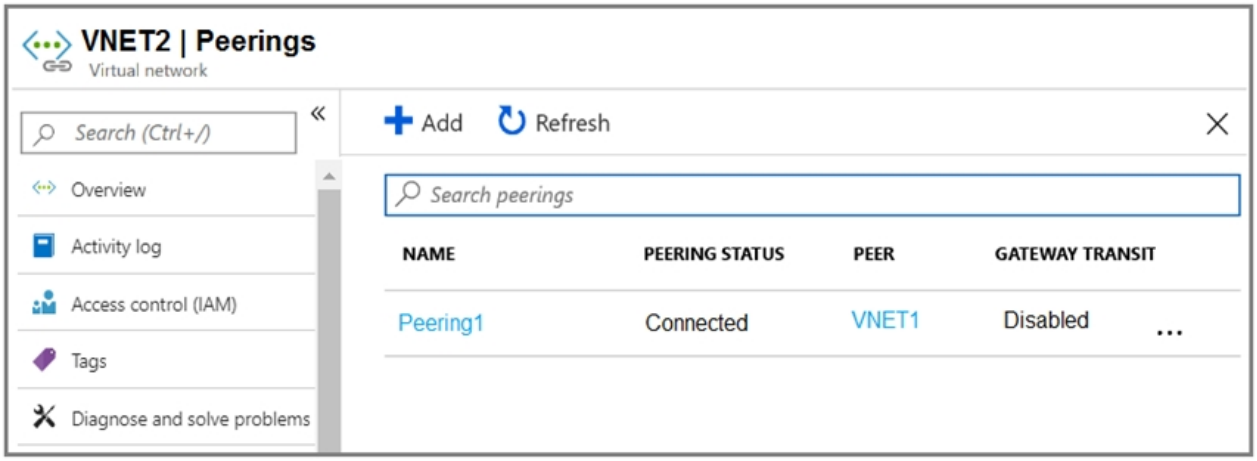

Peering for VNET3 is configured as shown in the following exhibit.

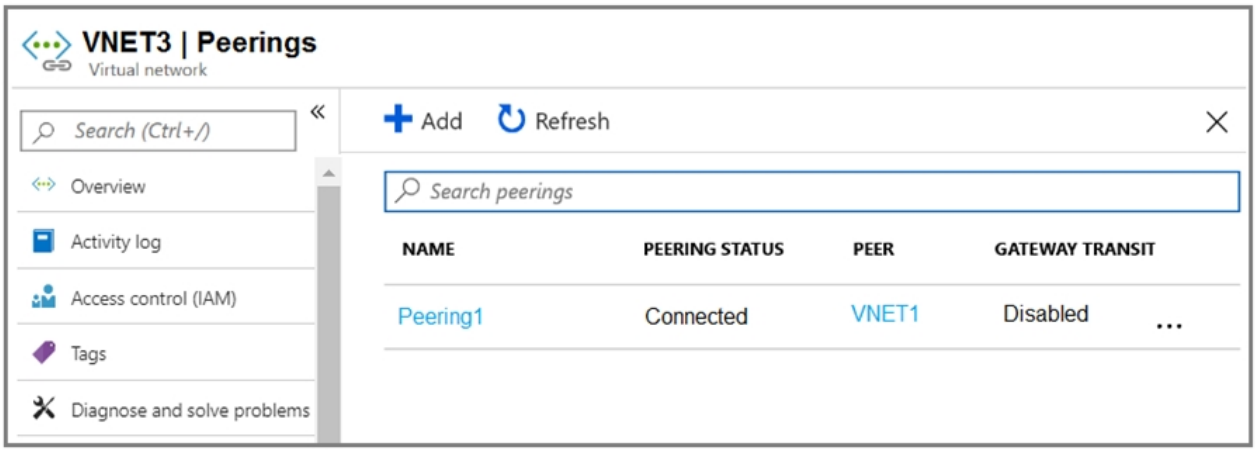

How can packets be routed between the virtual networks? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

Packets from VNET1 can be routed to:
- VNET2 only
- VNET3 only
- VNET2 and VNET3

Packets from VNET2 can be routed to:
- VNET1 only
- VNET3 only
- VNET1 and VNET3

Explanation

SecExams

Answer Area

Packets from VNET1 can be routed to:
- VNET2 only
- VNET3 only
- VNET2 and VNET3 (selected)

Packets from VNET2 can be routed to:
- VNET1 only (selected)
- VNET3 only
- VNET1 and VNET3

Correct Answer:
Box 1. VNET2 and VNET3 -

Box 2: VNET1 -
Gateway transit is disabled.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-peering-overview

Community Discussion

Question #606

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have a computer named Computer1 that has a point-to-site VPN connection to an Azure virtual network named VNet1. The point-to-site connection uses a self-signed certificate.
From Azure, you download and install the VPN client configuration package on a computer named Computer2.
You need to ensure that you can establish a point-to-site VPN connection to VNet1 from Computer2.
Solution: You modify the Azure Active Directory (Azure AD) authentication policies.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Instead export the client certificate from Computer1 and install the certificate on Computer2.
Note:
Each client computer that connects to a VNet using Point-to-Site must have a client certificate installed. You generate a client certificate from the self-signed root certificate, and then export and install the client certificate. If the client certificate is not installed, authentication fails.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site

Community Discussion

Correct Answer: B Instead export the client certificate from Computer1 and install the certificate on Computer2. A Point-to-Site (P2S) VPN gateway connection lets you create a secure connection to your virtual network from an individual client computer. A P2S connection is established by starting it from the client computer. This solution is useful for telecommuters who want to connect to Azure VNets from a remote location, such as from home or a conference. P2S VPN is also a useful solution to use instead of S2S VPN when you have only a few clients that need to connect to a VNet. This article applies to the Resource Manager deployment model.

Mlantonis if you are alive, God Bless You !!

Mlantonis if you are alive, God Bless You !!

B is correct: Each client computer that connects to a VNet using Point-to-Site must have a client certificate installed. You generate a client certificate from the self-signed root certificate, and then export and install the client certificate. If the client certificate is not installed, authentication fails.

Reference: https://docs.microsoft.com/en-us/azure/vpn-gateway/point-to-site-about https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site

SecExams

Question #607

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have a computer named Computer1 that has a point-to-site VPN connection to an Azure virtual network named VNet1. The point-to-site connection uses a self-signed certificate.
From Azure, you download and install the VPN client configuration package on a computer named Computer2.
You need to ensure that you can establish a point-to-site VPN connection to VNet1 from Computer2.
Solution: You modify the Azure Active Directory (Azure AD) authentication policies.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Instead export the client certificate from Computer1 and install the certificate on Computer2.
Note:
Each client computer that connects to a VNet using Point-to-Site must have a client certificate installed. You generate a client certificate from the self-signed root certificate, and then export and install the client certificate. If the client certificate is not installed, authentication fails.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site

Community Discussion

Question #608

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have a computer named Computer1 that has a point-to-site VPN connection to an Azure virtual network named VNet1. The point-to-site connection uses a self-signed certificate.
From Azure, you download and install the VPN client configuration package on a computer named Computer2.
You need to ensure that you can establish a point-to-site VPN connection to VNet1 from Computer2.
Solution: You join Computer2 to Azure Active Directory (Azure AD).
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
A client computer that connects to a VNet using Point-to-Site must have a client certificate installed.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site

Community Discussion

Correct Answer: B A client computer that connects to a VNet using Point-to-Site must have a client certificate installed. Instead export the client certificate from Computer1 and install the certificate on Computer2. A Point-to-Site (P2S) VPN gateway connection lets you create a secure connection to your virtual network from an individual client

computer. A P2S connection is established by starting it from the client computer. This solution is useful for telecommuters who want to connect to Azure VNets from a remote location, such as from home or a conference. P2S VPN is also a useful solution to use instead of S2S VPN when you have only a few clients that need to connect to a VNet. This article applies to the Resource Manager deployment model.

Answer is correct No

Reference: https://docs.microsoft.com/en-us/azure/vpn-gateway/point-to-site-about https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site

Reference: https://docs.microsoft.com/en-us/azure/vpn-gateway/point-to-site-about https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site

There are several versions of this question. The following are the correct and incorrect answers that can be presented. Correct Answer: Meets the goal. -Solution: You export the client certificate from Computer1 and install the certificate on Computer2. Incorrect Answers: Does not meet the goal. -Solution: You join Computer2 to Azure Active Directory (Azure AD). -Solution: You modify the Azure Active Directory (Azure AD) authentication policies.

SecExams

Question #609

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have a computer named Computer1 that has a point-to-site VPN connection to an Azure virtual network named VNet1. The point-to-site connection uses a self-signed certificate.
From Azure, you download and install the VPN client configuration package on a computer named Computer2.
You need to ensure that you can establish a point-to-site VPN connection to VNet1 from Computer2.
Solution: You join Computer2 to Azure Active Directory (Azure AD).
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
A client computer that connects to a VNet using Point-to-Site must have a client certificate installed.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site

Community Discussion

Question #610

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.
Another administrator plans to create several network security groups (NSGs) in the subscription.
You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.
Solution: You create a resource lock, and then you assign the lock to the subscription.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #611

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.
Another administrator plans to create several network security groups (NSGs) in the subscription.
You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.
Solution: You create a resource lock, and then you assign the lock to the subscription.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B

Community Discussion

Correct Answer: B - No You need to use a custom policy definition, because there is not a built-in policy and Resource Lock is an irrelevant solution. Reference: https://docs.microsoft.com/en-us/azure/azure-policy/policy-definition https://docs.microsoft.com/en-us/azure/governance/policy/samples/built-in-policies https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/lock-resources?tabs=json

An example of such policy is found here https://markgossa.blogspot.com/2018/11/azure-policy-deny-inbound-rdp-from.html

No, creating a resource lock and assigning it to the subscription will not meet the goal of automatically blocking TCP port 8080 between virtual networks when an NSG is created. To achieve this goal, you can create an Azure Policy that enforces the required network security rule across all the virtual networks in the subscription. The policy should specify the rule that blocks TCP port 8080 traffic between the virtual networks. When a new NSG is created, it will automatically be associated with the policy, and the required network security rule will be enforced. Resource locks are used to prevent accidental deletion or modification of Azure resources. They do not affect the behavior or configuration of resources such as NSGs.

In NSG, create a inbound security rule that set TCP8080 -> Deny and the priority number should be smaller.

No is answer

SecExams

Question #612

You have an Azure subscription named Subscription1. Subscription1 contains a virtual machine named VM1.

You have a computer named Computer1 that runs Windows 10. Computer1 is connected to the Internet.

You add a network interface named vm1173 to VM1 as shown in the exhibit. (Click the Exhibit tab.)

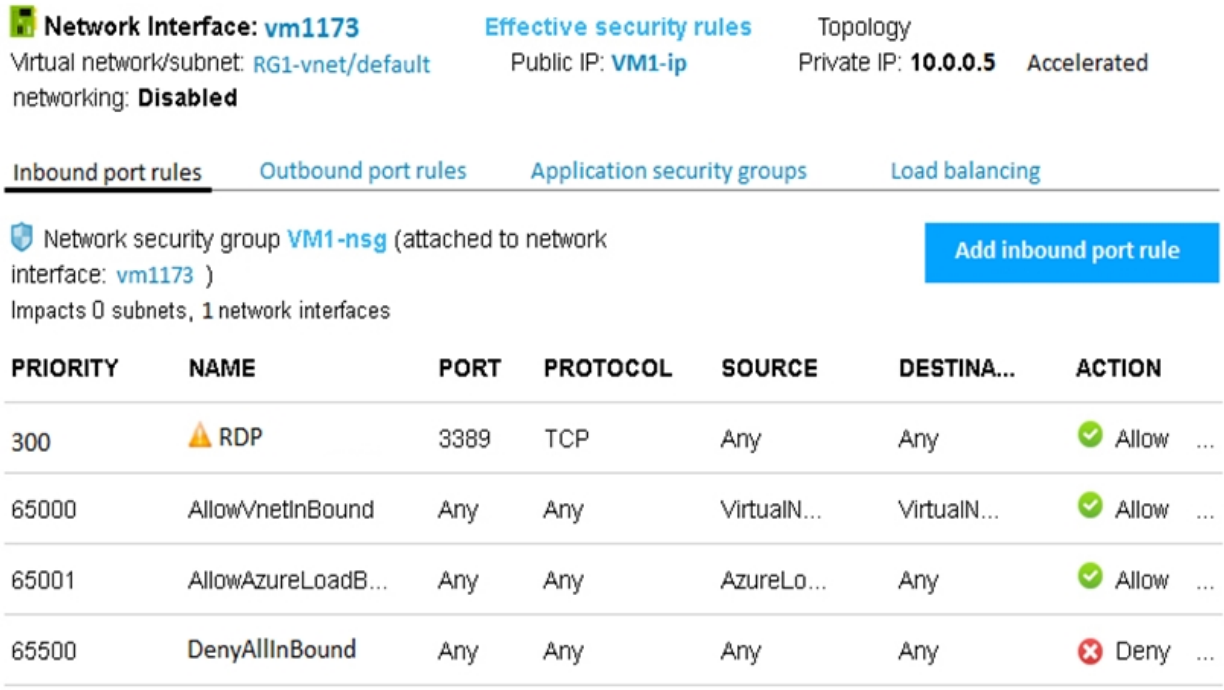

From Computer1, you attempt to connect to VM1 by using Remote Desktop, but the connection fails.

You need to establish a Remote Desktop connection to VM1.

What should you do first?

A) Change the priority of the RDP rule
B) Attach a network interface
C) Delete the DenyAllInBound rule
D) Start VM1 (Correct Answer)

Explanation

Correct Answer: D ?
Incorrect Answers:
A: Rules are processed in priority order, with lower numbers processed before higher numbers, because lower numbers have higher priority. Once traffic matches a rule,

processing stops. RDP already has the lowest number and thus the highest priority.
B: The network interface has already been added to VM.
C: The Outbound rules are fine.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/security-overview

Community Discussion

Question #613

You have an Azure subscription named Subscription1. Subscription1 contains a virtual machine named VM1.
You have a computer named Computer1 that runs Windows 10. Computer1 is connected to the Internet.
You add a network interface named vm1173 to VM1 as shown in the exhibit.
(Click the Exhibit tab.)

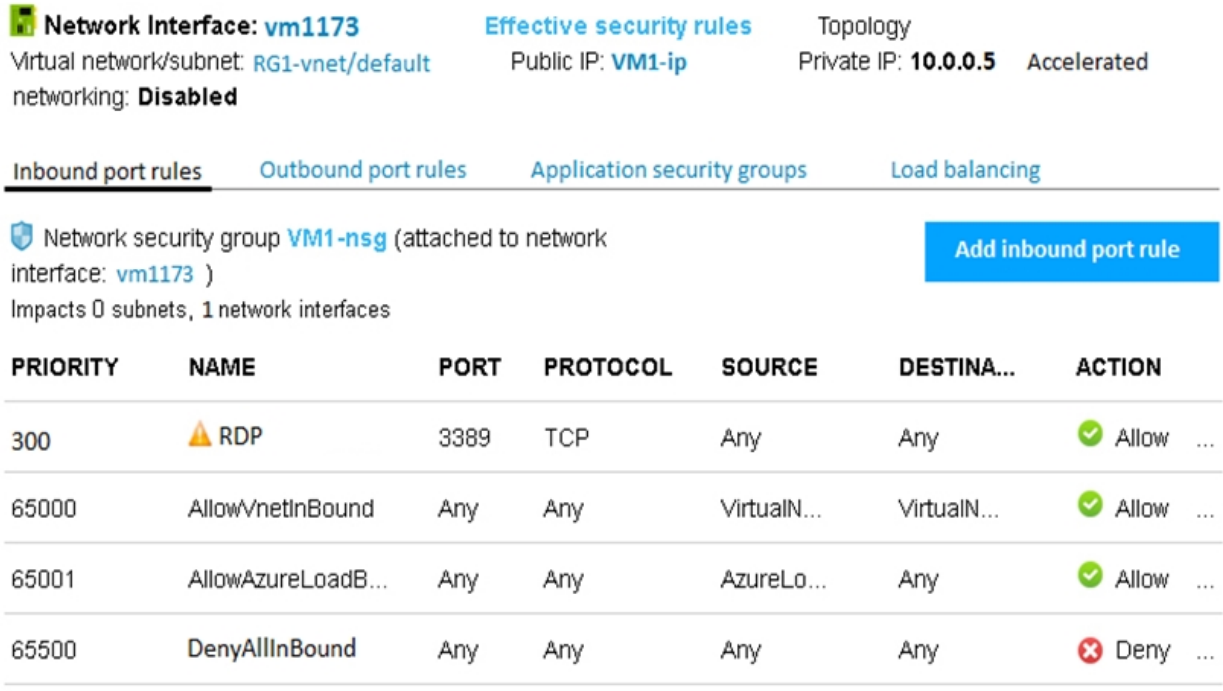

From Computer1, you attempt to connect to VM1 by using Remote Desktop, but the connection fails.
You need to establish a Remote Desktop connection to VM1.
What should you do first?

A) Change the priority of the RDP rule

B) Attach a network interface
C) Delete the DenyAllInBound rule
D) Start VM1 (Correct Answer)

Explanation

Correct Answer:
D
Incorrect Answers:
A: Rules are processed in priority order, with lower numbers processed before higher numbers, because lower numbers have higher priority. Once traffic matches a rule, processing stops. RDP already has the lowest number and thus the highest priority.
B: The network interface has already been added to VM.
C: The Outbound rules are fine.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/security-overview

Community Discussion

nevertheless a stupid question

Correct Answer: D Any resource with a dynamically assigned public IP address will display the 'name' you gave it when the resource it is assigned to is offline. A static address will be shown regardless of the resource state. This means that we need to start the VM1. A: RDP rule has the highest priority. priority. B: The network interface has already been added to VM1. C: DenyAllInBound has really low priority. Reference: https://docs.microsoft.com/en-us/azure/virtual-network/security-overview

The more stupid questions they give, the higher chances of passing the exam!

The more stupid questions they give, the higher chances of passing the exam!

So, if you're so smart what are you doing on this site?

Question #614

You have the Azure virtual machines shown in the following table.

Name	IP address	Connected to
VM1	10.1.0.4	VNET1/Subnet1
VM2	10.1.10.4	VNET1/Subnet2
VM3	172.16.0.4	VNET2/SubnetA
VM4	10.2.0.8	VNET3/SubnetB

A DNS service is installed on VM1.
You configure the DNS servers settings for each virtual network as shown in the following exhibit.

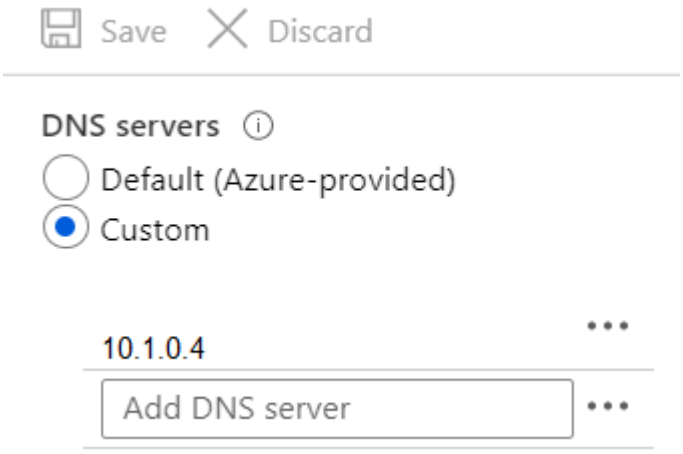

You need to ensure that all the virtual machines can resolve DNS names by using the DNS service on VM1.
What should you do?

A) Configure a conditional forwarder on VM1
B) Add service endpoints on VNET1
C) Add service endpoints on VNET2 and VNET3
D) Configure peering between VNET1, VNET2, and VNET3 (Correct Answer)

Explanation

Correct Answer: D ?
Virtual network peering enables you to seamlessly connect networks in Azure Virtual Network. The virtual networks appear as one for connectivity purposes. The traffic between virtual machines uses the Microsoft backbone infrastructure.
Incorrect Answers:
B, C: Virtual Network (VNet) service endpoint provides secure and direct connectivity to Azure services over an optimized route over the Azure backbone network.

Endpoints allow you to secure your critical Azure service resources to only your virtual networks. Service Endpoints enables private IP addresses in the VNet to reach the endpoint of an Azure service without needing a public IP address on the VNet.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoints-overview https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-peering-overview

Community Discussion

Question #615

You have the Azure virtual machines shown in the following table.

Name	IP address	Connected to
VM1	10.1.0.4	VNET1/Subnet1
VM2	10.1.10.4	VNET1/Subnet2
VM3	172.16.0.4	VNET2/SubnetA
VM4	10.2.0.8	VNET3/SubnetB

A DNS service is installed on VM1.
You configure the DNS servers settings for each virtual network as shown in the following exhibit.

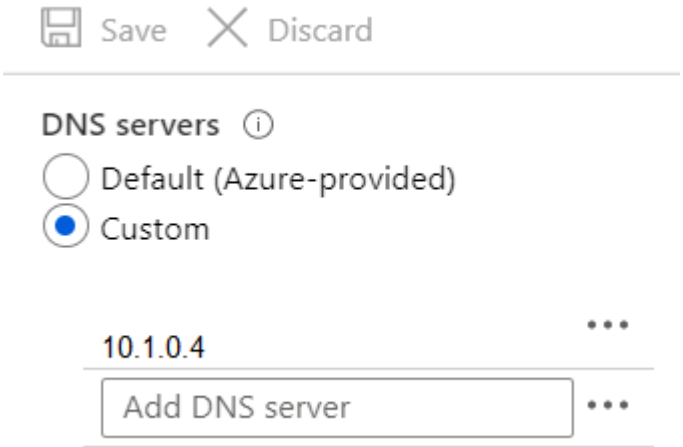

You need to ensure that all the virtual machines can resolve DNS names by using the DNS service on VM1.
What should you do?

A) Configure a conditional forwarder on VM1
B) Add service endpoints on VNET1

C) Add service endpoints on VNET2 and VNET3

D) Configure peering between VNET1, VNET2, and VNET3 (Correct Answer)

Explanation

Correct Answer:
D
Virtual network peering enables you to seamlessly connect networks in Azure Virtual Network. The virtual networks appear as one for connectivity purposes. The traffic between virtual machines uses the Microsoft backbone infrastructure.
Incorrect Answers:
B, C: Virtual Network (VNet) service endpoint provides secure and direct connectivity to Azure services over an optimized route over the Azure backbone network.
Endpoints allow you to secure your critical Azure service resources to only your virtual networks. Service Endpoints enables private IP addresses in the VNet to reach the endpoint of an Azure service without needing a public IP address on the VNet.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoints-overview https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-peering-overview

Community Discussion

Correct Answer: D Use Virtual network peering to connect virtual networks to be able to connect to other VMs in different VNETs. Virtual network peering enables you to seamlessly connect networks in Azure Virtual Network. The virtual networks appear as one for connectivity purposes. The traffic between virtual machines uses the Microsoft backbone infrastructure. B, C: Virtual Network (VNet) service endpoint provides secure and direct connectivity to Azure services over an optimized route over the Azure backbone network. Endpoints allow you to secure your critical Azure service resources to only your virtual networks. Service Endpoints enables private IP addresses in the VNet to reach the endpoint of an Azure service without needing a public IP address on the VNet.

Answer is correct. D. Use Virtual network peering to connect virtual networks to be able to connect to other VMs in different VNETs

In exam today! October 16, 2021

Answer is correct D But FYI ___ conditional forwarder is for external DNS not for internal (local) one " VM1 is Confiured as Internal DNS Server"

Selected Answer: D

Answer is correct. D. a: A conditional forwarder is a configuration option in a DNS server that lets you define a DNS domain, such as contoso.com, to forward queries to. b-c no

SecExams

Question #616

SecExams

HOTSPOT -

You have an Azure subscription that contains the Azure virtual machines shown in the following table.

Name	Connected to subnet
VM1	172.16.1.0/24
VM2	172.16.2.0/24

You add inbound security rules to a network security group (NSG) named NSG1 as shown in the following table.

Priority	Source	Destination	Protocol	Port	Action
100	172.16.1.0/24	172.16.2.0/24	TCP	Any	Allow
101	Any	172.16.2.0/24	TCP	Any	Deny

You run Azure Network Watcher as shown in the following exhibit.

SecExams

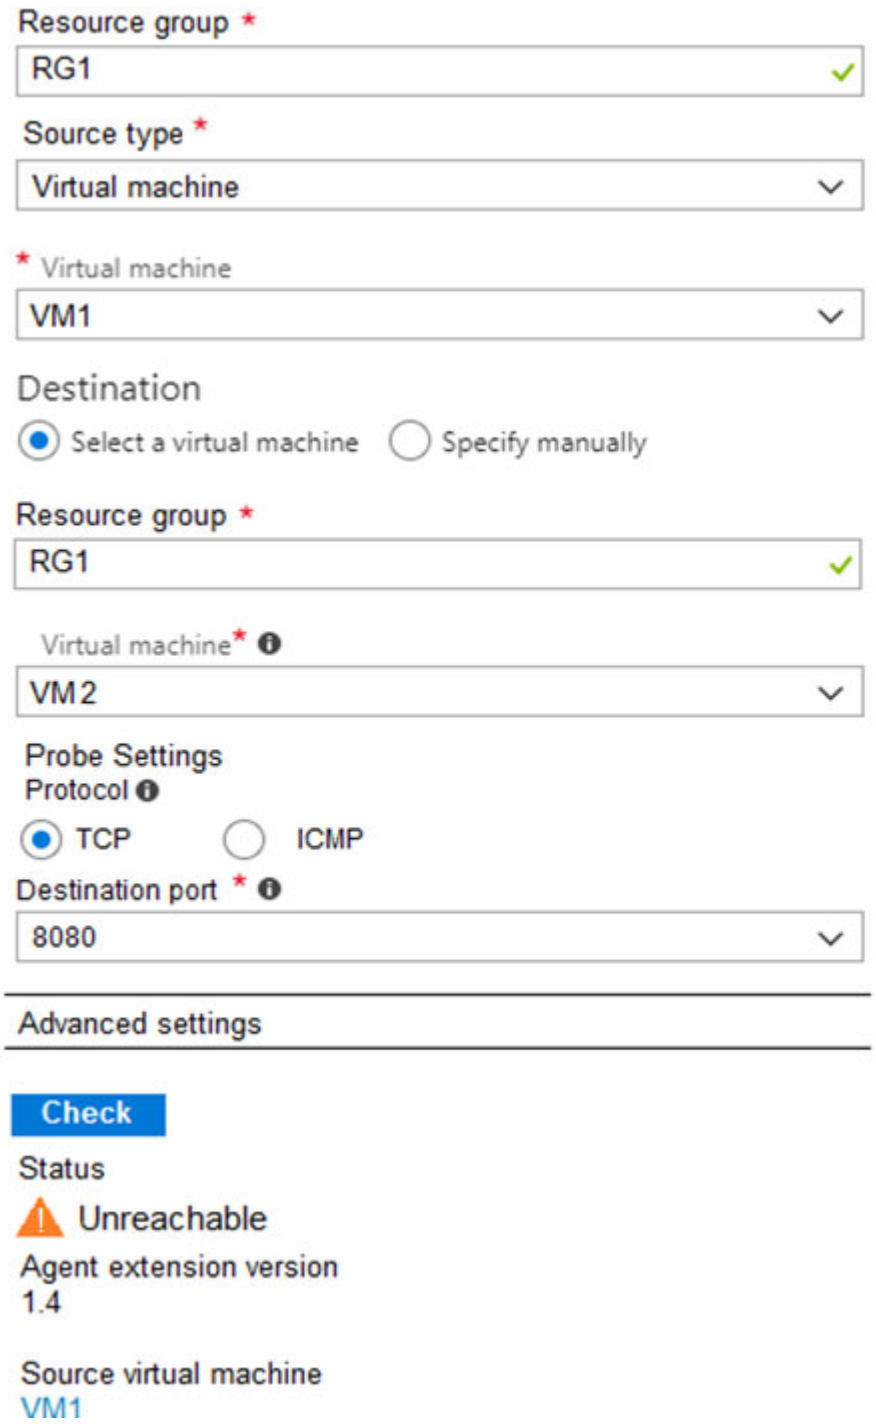

You run Network Watcher again as shown in the following exhibit.

SecExams

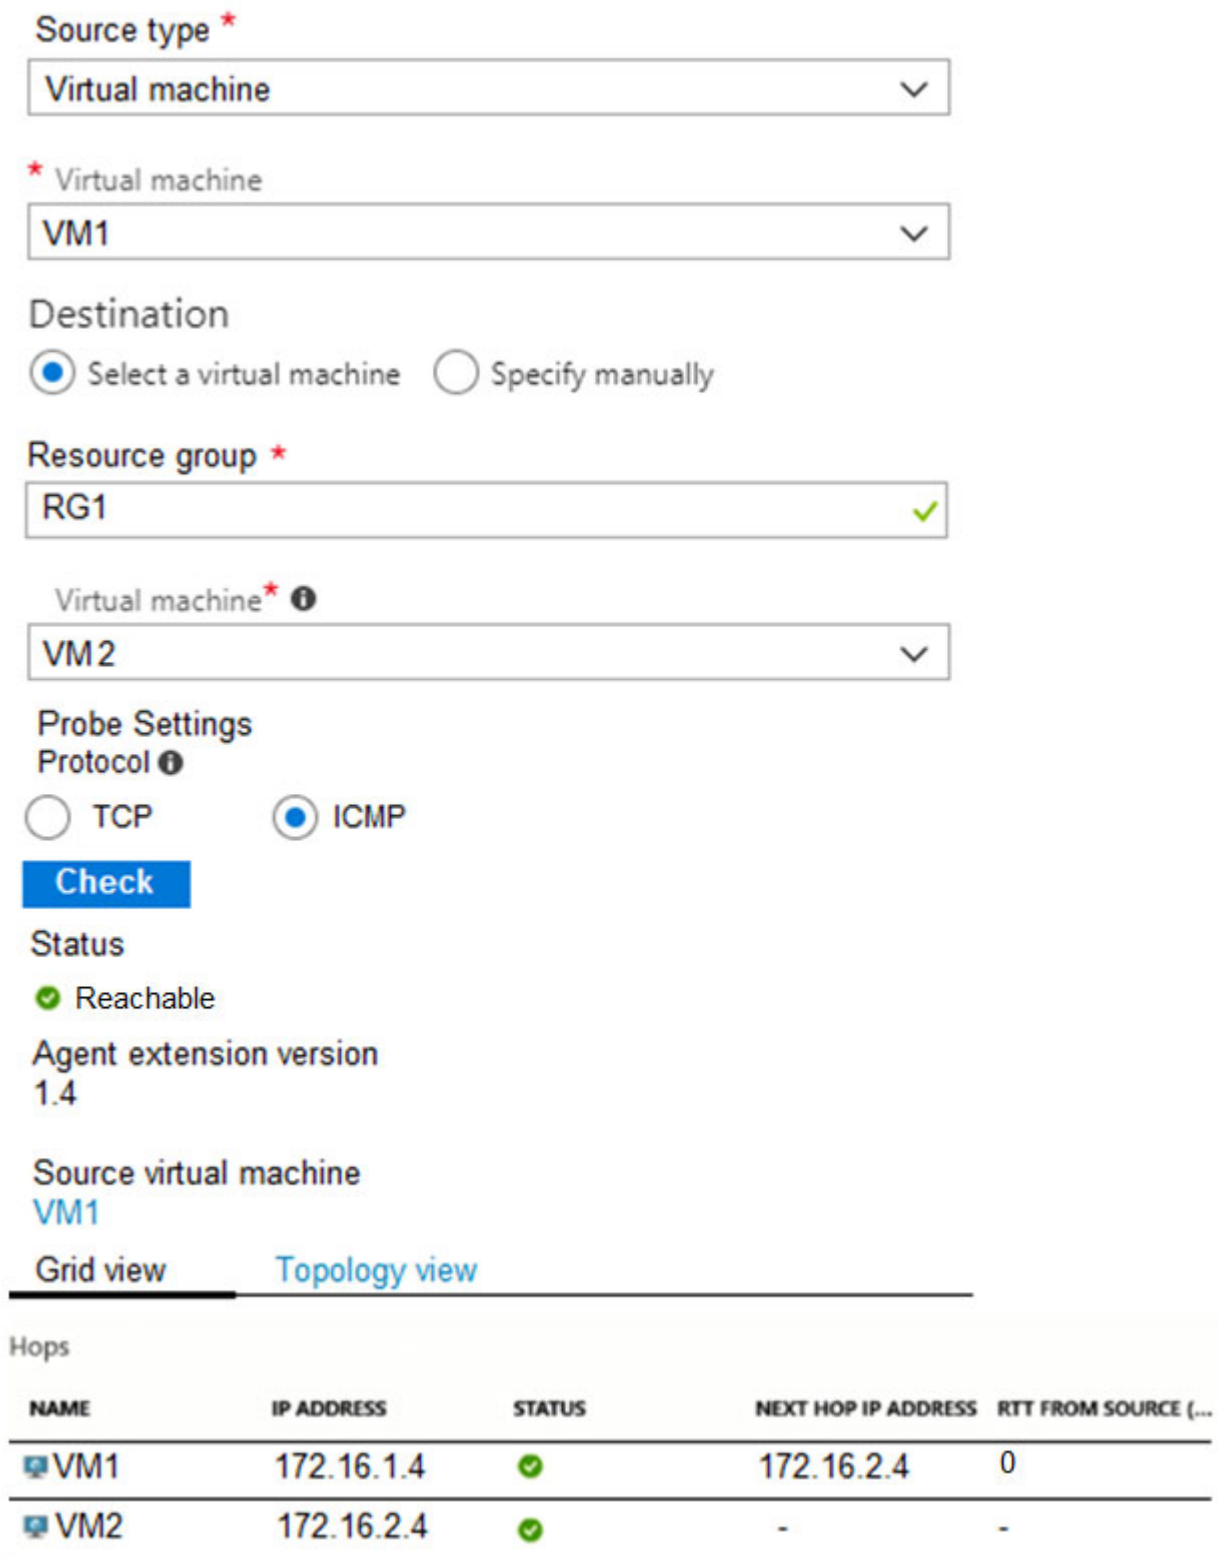

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
NSG1 limits VM1 traffic	○	○
NSG1 applies to VM2	○	○
VM1 and VM2 connect to the same virtual network	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
NSG1 limits VM1 traffic	○	●
NSG1 applies to VM2	●	○
VM1 and VM2 connect to the same virtual network	○	●

Box 1: No -
It limits traffic to VM2, but not VM1 traffic.

Box 2: Yes -
Yes, the destination is VM2.

Box 3: No -
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/network-security-group-how-it-works

Community Discussion

Question #617

SecExams

HOTSPOT -

You have an Azure subscription that contains the Azure virtual machines shown in the following table.

Name	Connected to subnet
VM1	172.16.1.0/24
VM2	172.16.2.0/24

You add inbound security rules to a network security group (NSG) named NSG1 as shown in the following table.

Priority	Source	Destination	Protocol	Port	Action
100	172.16.1.0/24	172.16.2.0/24	TCP	Any	Allow
101	Any	172.16.2.0/24	TCP	Any	Deny

You run Azure Network Watcher as shown in the following exhibit.

SecExams

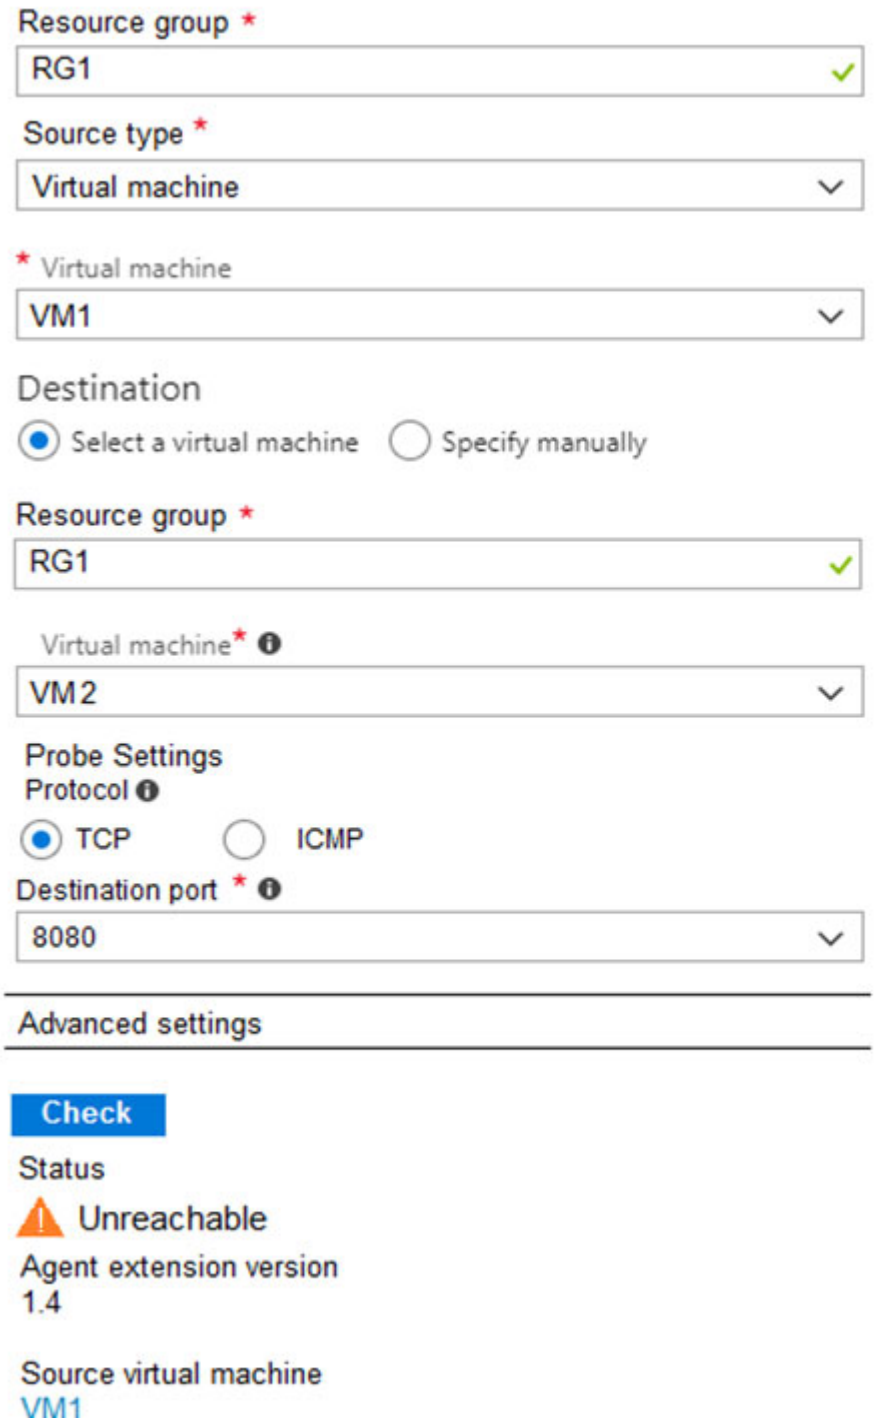

You run Network Watcher again as shown in the following exhibit.

SecExams

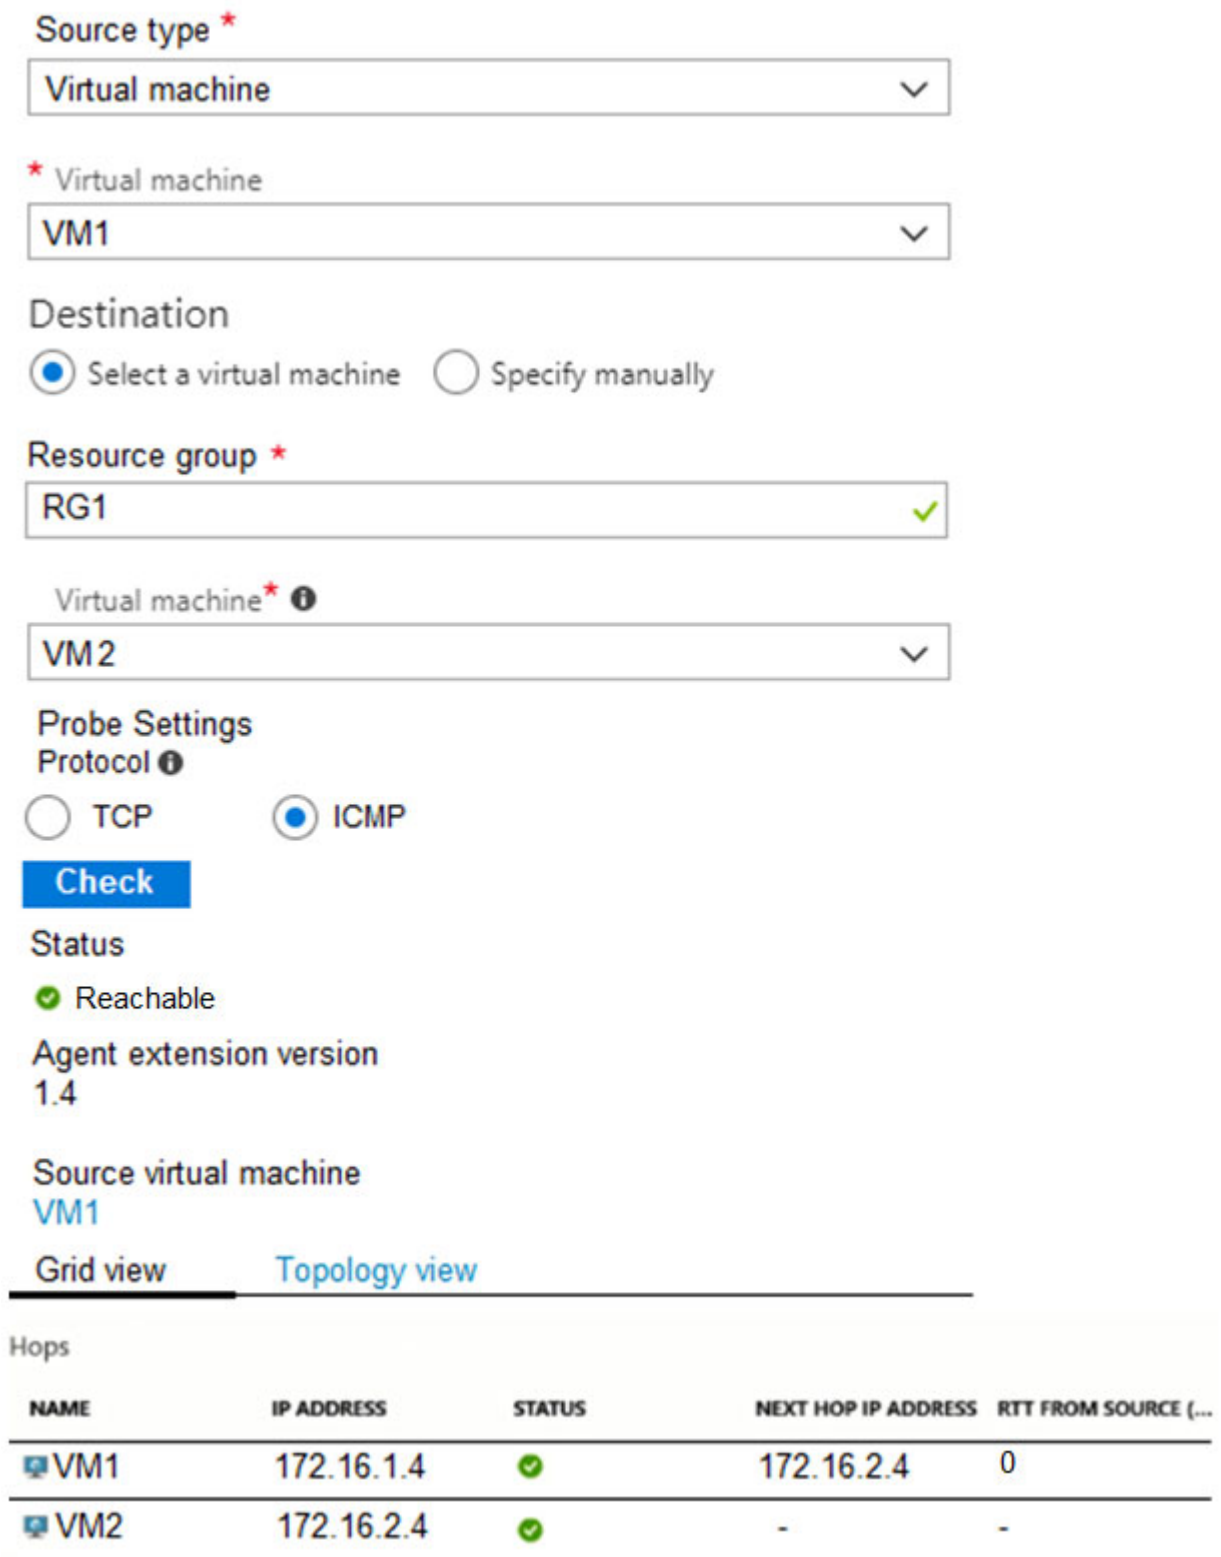

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
NSG1 limits VM1 traffic	○	○
NSG1 applies to VM2	○	○
VM1 and VM2 connect to the same virtual network	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
NSG1 limits VM1 traffic	○	●
NSG1 applies to VM2	●	○
VM1 and VM2 connect to the same virtual network	○	●

Box 1: No -
It limits traffic to VM2, but not VM1 traffic.

Box 2: Yes -
Yes, the destination is VM2.

Box 3: No -
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/network-security-group-how-it-works

Community Discussion

Correct Answer: Box 1: No NSG1 limits the traffic that is flowing into 172.16.2.0/24 (Subnet2), which host VM2. Box 2: Yes Since Network Watcher is showing that traffic from VM1 to VM2 is not reaching on the TCP port, that means that NSG1 is applied to VM2. We can understand for sure, that it is not applied to VM1. Box 3: Yes In Network Watcher, you can see that the next hop is the destination VM2. This means that they are part of the same virtual network.

N - Y - Y

Box 1: Agree Box 2: No - The TCP rule is an inbound rule which states that traffic is allowed to VM2 if it comes from VM1. It has higher priority than the TCP - Deny rule. So if the rule would apply to VM2, the traffic via port 8080 should succeed, IF there is something on VM2 using Port 8080.

Box 1: Agree Box 2: No - The TCP rule is an inbound rule which states that traffic is allowed to VM2 if it comes from VM1. It has higher priority than the TCP - Deny rule. So if the rule would apply to VM2, the traffic via port 8080 should succeed, IF there is something on VM2 using Port 8080.

Agree with this. It should be NNY

SecExams

Question #618

You have the Azure virtual network named VNet1 that contains a subnet named Subnet1. Subnet1 contains three Azure virtual machines. Each virtual machine has a public IP address.
The virtual machines host several applications that are accessible over port 443 to users on the Internet.
Your on-premises network has a site-to-site VPN connection to VNet1.
You discover that the virtual machines can be accessed by using the Remote Desktop Protocol (RDP) from the Internet and from the on-premises network.
You need to prevent RDP access to the virtual machines from the Internet, unless the RDP connection is established from the on-premises network. The solution must ensure that all the applications can still be accessed by the Internet users.
What should you do?

A) Modify the address space of the local network gateway

B) Create a deny rule in a network security group (NSG) that is linked to Subnet1 (Correct Answer)

C) Remove the public IP addresses from the virtual machines

D) Modify the address space of Subnet1

Explanation

Correct Answer: B ?

You can use a site-to-site VPN to connect your on-premises network to an Azure virtual network. Users on your on-premises network connect by using the RDP or SSH protocol over the site-to-site VPN connection. You don't have to allow direct RDP or SSH access over the internet.

Reference:

https://docs.microsoft.com/en-us/azure/security/fundamentals/network-best-practices

Community Discussion

Question #619

You have the Azure virtual network named VNet1 that contains a subnet named Subnet1. Subnet1 contains three Azure virtual machines. Each virtual machine has a public IP address.

The virtual machines host several applications that are accessible over port 443 to users on the Internet.

Your on-premises network has a site-to-site VPN connection to VNet1.

You discover that the virtual machines can be accessed by using the Remote Desktop Protocol (RDP) from the Internet and from the on-premises network.

You need to prevent RDP access to the virtual machines from the Internet, unless the RDP connection is established from the on-premises network. The solution must ensure that all the applications can still be accessed by the Internet users.

What should you do?

A) Modify the address space of the local network gateway

B) Create a deny rule in a network security group (NSG) that is linked to Subnet1 (Correct Answer)

C) Remove the public IP addresses from the virtual machines

D) Modify the address space of Subnet1

Explanation

Correct Answer:
B
You can use a site-to-site VPN to connect your on-premises network to an Azure virtual network. Users on your on-premises network connect by using the RDP or
SSH protocol over the site-to-site VPN connection. You don't have to allow direct RDP or SSH access over the internet.
Reference:
https://docs.microsoft.com/en-us/azure/security/fundamentals/network-best-practices

Community Discussion

Correct Answer: B You can use a site-to-site VPN to connect your on-premises network to an Azure virtual network. Users on your on-premises network connect by using the RDP or SSH protocol over the site-to-site VPN connection. You have to deny direct RDP or SSH access over the internet through an NSG. Reference: https://docs.microsoft.com/en-us/azure/security/fundamentals/network-best-practices

Definitely B. A makes no sense

Selected Answer: B

- You wake up. - VNet1 contains a subnet named Subnet1. - Subnet1 contains three Azure virtual machines. - Each virtual machine has a public IP address. - You drink some coffee. - The virtual machines host several applications that are accessible over port 443 to users on the Internet. - You make a sandwidch. - Your on-premises network has a site-to-site VPN connection to VNet1. - You discover that the virtual machines can be accessed by using the Remote Desktop Protocol (RDP) from the Internet and from the on-premises network. - You travel to the moon for vacations. - You need to prevent RDP access to the virtual machines from the Internet, unless the RDP connection is established from the on-premises network. - When you are back you receive a medall. - You figure out how to overcome speed of light. - The solution must ensure that all the applications can still be accessed by the Internet users.

Selected Answer: B

Yes, it's B. Obviously. But these MS answers re: NSGs are seriously leading newer folks into dangerous territory: you DO NOT create Deny rules for specific ports. Instead, DENY

everything - and only open what you NEED. Anything else is a disaster waiting to happen - especially in this scenario with machines directly facing the internet... TL/DR: answer B for the test but do the right thing in a real environment

Cleared the exam on 04/12/2023. This question came up. Make sure to read the comments in the discussion. It's really helpful.

Question #620

You have an Azure subscription that contains the resources in the following table.

Name	Type
ASG1	Application security group
NSG1	Network security group (NSG)
Subnet1	Subnet
VNet1	Virtual network
NIC1	Network interface
VM1	Virtual machine

Subnet1 is associated to VNet1. NIC1 attaches VM1 to Subnet1.
You need to apply ASG1 to VM1.
What should you do?

A) Associate NIC1 to ASG1 (Correct Answer)
B) Modify the properties of ASG1
C) Modify the properties of NSG1

Explanation

Correct Answer: A ?
Application Security Group can be associated with NICs.
References:
https://docs.microsoft.com/en-us/azure/virtual-network/security-overview#application-security-groups

Community Discussion

Question #621

You have an Azure subscription that contains the resources in the following table.

Name	Type
ASG1	Application security group
NSG1	Network security group (NSG)
Subnet1	Subnet
VNet1	Virtual network
NIC1	Network interface
VM1	Virtual machine

Subnet1 is associated to VNet1. NIC1 attaches VM1 to Subnet1.
You need to apply ASG1 to VM1.
What should you do?

A) Associate NIC1 to ASG1 (Correct Answer)
B) Modify the properties of ASG1
C) Modify the properties of NSG1

Explanation

Correct Answer:
A
Application Security Group can be associated with NICs.
References:
https://docs.microsoft.com/en-us/azure/virtual-network/security-overview#application-security-groups

Community Discussion

Full explanation: Correct Answer is A: Associate Virtual Machines An application security group is a logical collection of virtual machines (NICs). You join virtual machines to the application security group, and then use the application security group as a source or destination in NSG rules. The Networking blade of virtual machine properties has a new button called Configure The Application Security Groups for each NIC in the virtual machine. If you click this button, a pop-up blade will appear and you can select which (none, one, many) application security groups that this NIC should join, and then click Save to commit the change. https://petri.com/understanding-application-security-

groups-in-the-azure-portal#:~:text=You%20can%20start%20the%20process,Application%20Security%20Group%20blade%20appe

Correct Answer: A Application security groups enable you to configure network security as a natural extension of an application's structure, allowing you to group virtual machines and define network security policies based on those groups. You can reuse your security policy at scale without manual maintenance of explicit IP addresses. The platform handles the complexity of explicit IP addresses and multiple rule sets, allowing you to focus on your business logic. Reference: https://docs.microsoft.com/en-us/azure/virtual-network/application-security-groups https://tutorialsdojo.com/network-security-group-nsg-vs-application-security-group

Answer is correct. "A" ASG is a virtual grouping of VMs through their NIC. Accordingly, you need to connect NIC to ASG.

ASG are not much covered in the Learn module, not that I remember. Answer is correct

A is answer Associate Virtual Machines An application security group is a logical collection of virtual machines (NICs). You join virtual machines to the application security group, and then use the application security group as a source or destination in NSG rules. The Networking blade of virtual machine properties has a new button called Configure The Application Security Groups for each NIC in the virtual machine. If you click this button, a pop-up blade will appear and you can select which (none, one, many) application security groups that this NIC should join, and then click Save to commit the change. https://petri.com/understanding-application-security-groups-in-the-azure-portal#:~:text=You%20can%20start%20the%20process,Application%20Security%20Group%20blade%20appe

SecExams

Question #622

You have an Azure subscription named Subscription1 that contains an Azure virtual network named VNet1. VNet1 connects to your on-premises network by using
Azure ExpressRoute.
You plan to prepare the environment for automatic failover in case of ExpressRoute failure.
You need to connect VNet1 to the on-premises network by using a site-to-site VPN. The solution must minimize cost.
Which three actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Create a connection (Correct Answer)
B) Create a local site VPN gateway
C) Create a VPN gateway that uses the VpnGw1 SKU
D) Create a gateway subnet (Correct Answer)
E) Create a VPN gateway that uses the Basic SKU (Correct Answer)

Explanation

Correct Answer: ADE ?
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-site-to-site-resource-manager-portal

Community Discussion

Question #623

You have an Azure subscription named Subscription1 that contains an Azure virtual network named VNet1. VNet1 connects to your on-premises network by using
Azure ExpressRoute.
You plan to prepare the environment for automatic failover in case of ExpressRoute failure.
You need to connect VNet1 to the on-premises network by using a site-to-site VPN. The solution must minimize cost.
Which three actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Create a connection (Correct Answer)
B) Create a local site VPN gateway
C) Create a VPN gateway that uses the VpnGw1 SKU
D) Create a gateway subnet (Correct Answer)
E) Create a VPN gateway that uses the Basic SKU (Correct Answer)

Explanation

Correct Answer:
ADE
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-site-to-site-resource-manager-portal

Community Discussion

Correct Answer: A, B and C For a site to site VPN, you need: - a local gateway - a gateway subnet - a VPN gateway - a connection to connect the local gateway and the VPN gateway However, the question states that VNet1 connects to your on-premises network by using Azure ExpressRoute. For an ExpressRoute connection, VNET1 must already be configured with a gateway subnet so we don't need another one. Note: BasicSKU cannot coexist with ExpressRoute. You must use a non-Basic SKU gateway for both the ExpressRoute gateway and the VPN gateway.

Vnet1 is already connected by ExpressRoute, wich we presume that the subnet gateway was already created. SKU need to be VpnGw1 because Basic does not coexist with ExpressRoute. So, answers should be A, B and C.

Reference: https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-site-to-site-resource-manager-portal https://azure.microsoft.com/es-es/pricing/details/vpn-gateway

Reference: https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-site-to-site-resource-manager-portal https://azure.microsoft.com/es-es/pricing/details/vpn-gateway

here: https://docs.microsoft.com/en-us/azure/expressroute/expressroute-howto-coexist-resource-manager in which it reads, "Next, create your Site-to-Site VPN gateway. For more information about the VPN gateway configuration, see Configure a VNet with a Site-to-Site connection. The "GatewaySku is only supported for VpnGw1, VpnGw2, VpnGw3, Standard, and HighPerformance VPN gateways. ExpressRoute-VPN Gateway coexist configurations are not supported on the Basic SKU. The VpnType must be RouteBased."

SecExams

Question #624

HOTSPOT -

You have peering configured as shown in the following exhibit.

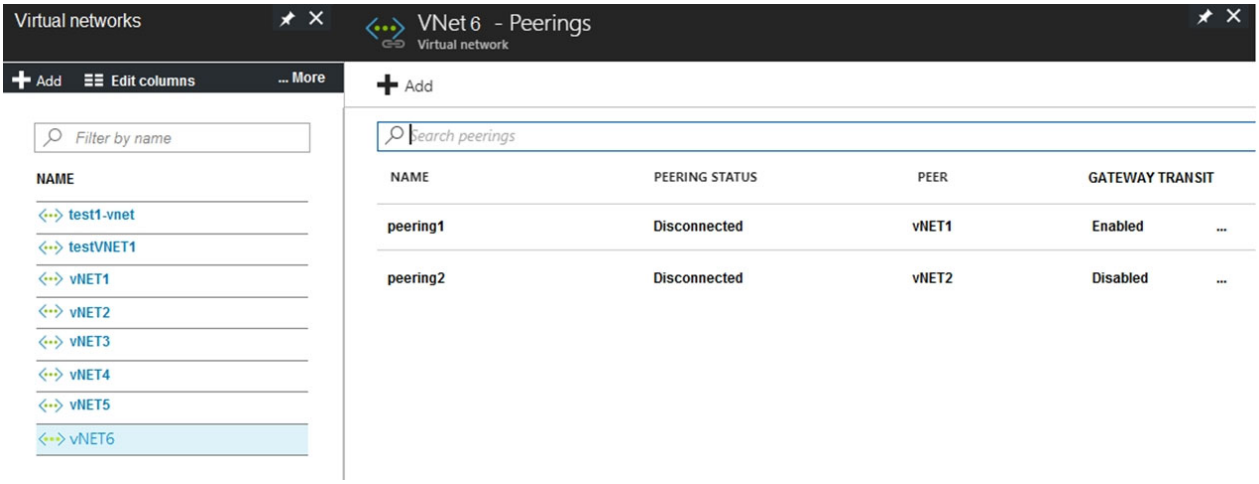

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Hosts on vNET6 can communicate with hosts on **[answer choice]**.

- vNET6 only
- vNET6 and vNET1 only
- vNET6, vNET1, and vNET2 only
- all the virtual networks in the subscription

To change the status of the peering connection to vNET1 to **Connected**, you must first **[answer choice]**.

- add a service endpoint
- add a subnet
- delete peering1
- modify the address space

Explanation

Correct Answer:

Answer Area

Hosts on vNET6 can communicate with hosts on **[answer choice]**.

- vNET6 only
- vNET6 and vNET1 only
- vNET6, vNET1, and vNET2 only
- all the virtual networks in the subscription

To change the status of the peering connection to vNET1 to **Connected**, you must first **[answer choice]**.

- add a service endpoint
- add a subnet
- delete peering1
- modify the address space

Box 1: vNET6 only -
Peering status to both VNet1 and Vnet2 are disconnected.

Box 2: delete peering1 -
Peering to Vnet1 is Enabled but disconnected. We need to update or re-create the remote peering to get it back to Initiated state.
Reference:
https://blog.kloud.com.au/2018/10/19/address-space-maintenance-with-vnet-peering/

Community Discussion

SecExams

Question #625

HOTSPOT -

You have peering configured as shown in the following exhibit.

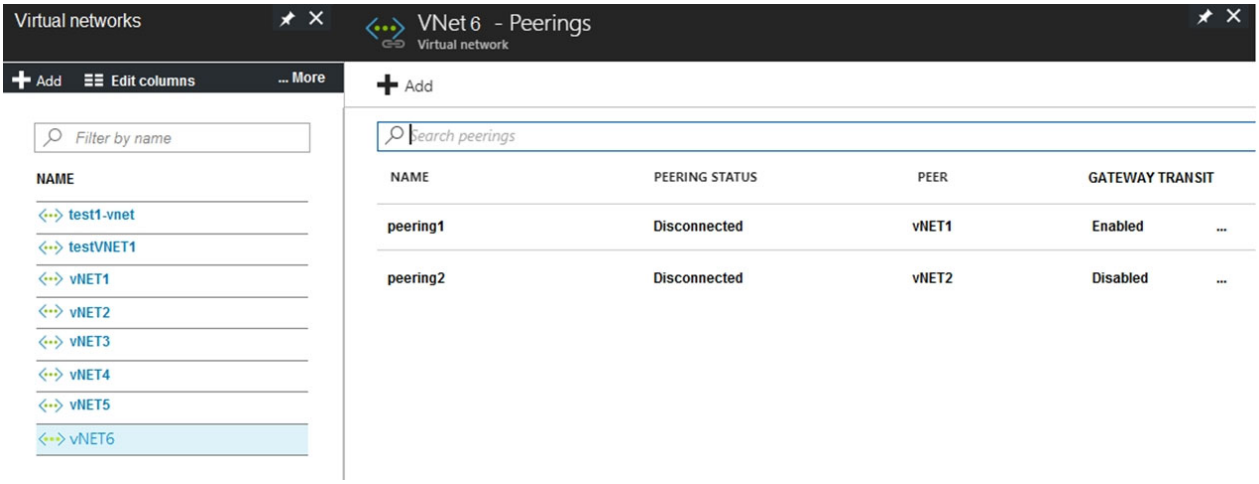

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Hosts on vNET6 can communicate with hosts on **[answer choice]**.

- vNET6 only
- vNET6 and vNET1 only
- vNET6, vNET1, and vNET2 only
- all the virtual networks in the subscription

To change the status of the peering connection to vNET1 to **Connected**, you must first **[answer choice]**.

- add a service endpoint
- add a subnet
- delete peering1
- modify the address space

Explanation

Correct Answer:

Answer Area

Hosts on vNET6 can communicate with hosts on **[answer choice]**.

- vNET6 only
- vNET6 and vNET1 only
- vNET6, vNET1, and vNET2 only
- all the virtual networks in the subscription

To change the status of the peering connection to vNET1 to **Connected**, you must first **[answer choice]**.

- add a service endpoint
- add a subnet
- delete peering1
- modify the address space

Box 1: vNET6 only -
Peering status to both VNet1 and Vnet2 are disconnected.

Box 2: delete peering1 -
Peering to Vnet1 is Enabled but disconnected. We need to update or re-create the remote peering to get it back to Initiated state.
Reference:
https://blog.kloud.com.au/2018/10/19/address-space-maintenance-with-vnet-peering/

Community Discussion

Correct Answer: Box 1: vNET6 only Peering status to both VNet1 and Vnet2 are disconnected. So, only communication inside vNET6. Box 2: delete peering1 Peering to vNET1 is enabled but disconnected. We need to delete the peering from both virtual networks, and then re-create them. You can't add address ranges to or delete address ranges from a virtual network's address space once a virtual network is peered with another virtual network. To add or remove address ranges, delete the peering, add or remove the address ranges, then re-create the peering. Reference: https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-troubleshoot-peering-issues#the-peering-status-is-disconnected

The Answer is correct. - Since both peerings are disconnected. then only communication inside VNet6 - It should be to create peerings on Vnet1 to enable. However, since it is an option here. Then the nearest one is to delete the peering also on Vnet6 then recreate again.

Confirmed. https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-troubleshoot-peering-issues#the-peering-status-is-disconnected

Confirmed. https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-troubleshoot-peering-issues#the-peering-status-is-disconnected

I remember a similar question like this, might be it on 2nd test

SecExams

Question #626

SecExams

HOTSPOT -

You have an Azure subscription that contains the resources in the following table.

Name	Type
VM1	Virtual machine
VM2	Virtual machine
LB1	Load balancer (Basic SKU)

You install the Web Server server role (IIS) on VM1 and VM2, and then add VM1 and VM2 to LB1.

LB1 is configured as shown in the LB1 exhibit. (Click the LB1 tab.)

Essentials ^

Resource group (change)	Backend pool
VMRG	Backend1 (2 virtual machines)
Location	Health probe
West Europe	Probe1(HTTP:80/Probe1.htm)
Subscription name (change)	Load balancing rule
Azure Pass	Rule1 (TCP/80)
Subscription ID	NAT rules
e65d2b22-fde8	-
SKU	Public IP address
Basic	104.40.178.194 (LB1)

Rule1 is configured as shown in the Rule1 exhibit. (Click the Rule1 tab.)

SecExams

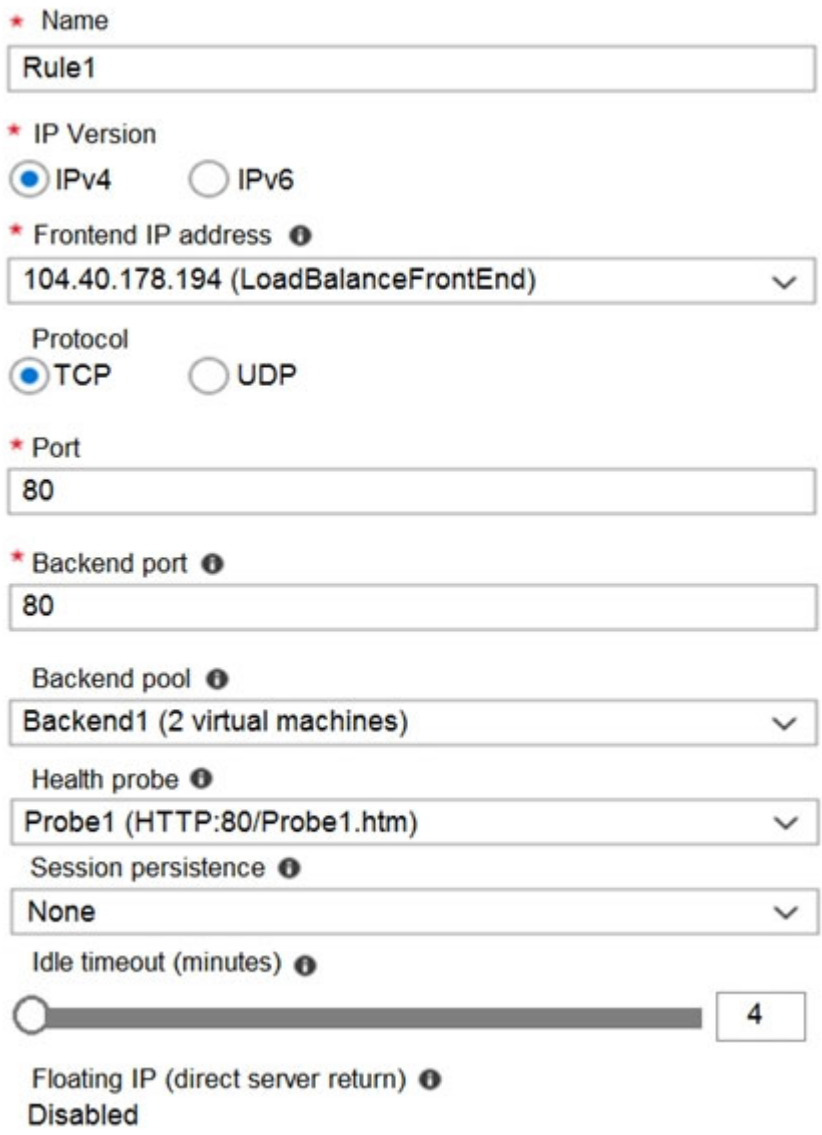

SecExams

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
VM1 is in the same availability set as VM2.	○	○
If Probe1.htm is present on VM1 and VM2, LB1 will balance TCP port 80 between VM1 and VM2.	○	○
If you delete Rule1, LB1 will balance all the requests between VM1 and VM2 for all the ports.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM1 is in the same availability set as VM2.	○	○
If Probe1.htm is present on VM1 and VM2, LB1 will balance TCP port 80 between VM1 and VM2.	○	○
If you delete Rule1, LB1 will balance all the requests between VM1 and VM2 for all the ports.	○	○

Box 1: Yes -
A Basic Load Balancer supports virtual machines in a single availability set or virtual machine scale set.

Box 2: Yes -
When using load-balancing rules with Azure Load Balancer, you need to specify health probes to allow Load Balancer to detect the backend endpoint status. The configuration of the health probe and probe responses determine which backend pool instances will receive new flows. You can use health probes to detect the failure of an application on a backend endpoint. You can also generate a custom response to a health probe and use the health probe for flow control to manage load or planned downtime. When a health probe fails, Load Balancer will stop sending new flows to the respective unhealthy instance. Outbound connectivity is not impacted, only inbound connectivity is impacted.

Box 3: No -
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/skus
https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-custom-probe-overview

Community Discussion

Question #627

SecExams

HOTSPOT -

You have an Azure subscription that contains the resources in the following table.

Name	Type
VM1	Virtual machine
VM2	Virtual machine
LB1	Load balancer (Basic SKU)

You install the Web Server server role (IIS) on VM1 and VM2, and then add VM1 and VM2 to LB1.

LB1 is configured as shown in the LB1 exhibit. (Click the LB1 tab.)

Essentials ^

Resource group (change)	Backend pool
VMRG	Backend1 (2 virtual machines)
Location	Health probe
West Europe	Probe1(HTTP:80/Probe1.htm)
Subscription name (change)	Load balancing rule
Azure Pass	Rule1 (TCP/80)
Subscription ID	NAT rules
e65d2b22-fde8	-
SKU	Public IP address
Basic	104.40.178.194 (LB1)

Rule1 is configured as shown in the Rule1 exhibit. (Click the Rule1 tab.)

SecExams

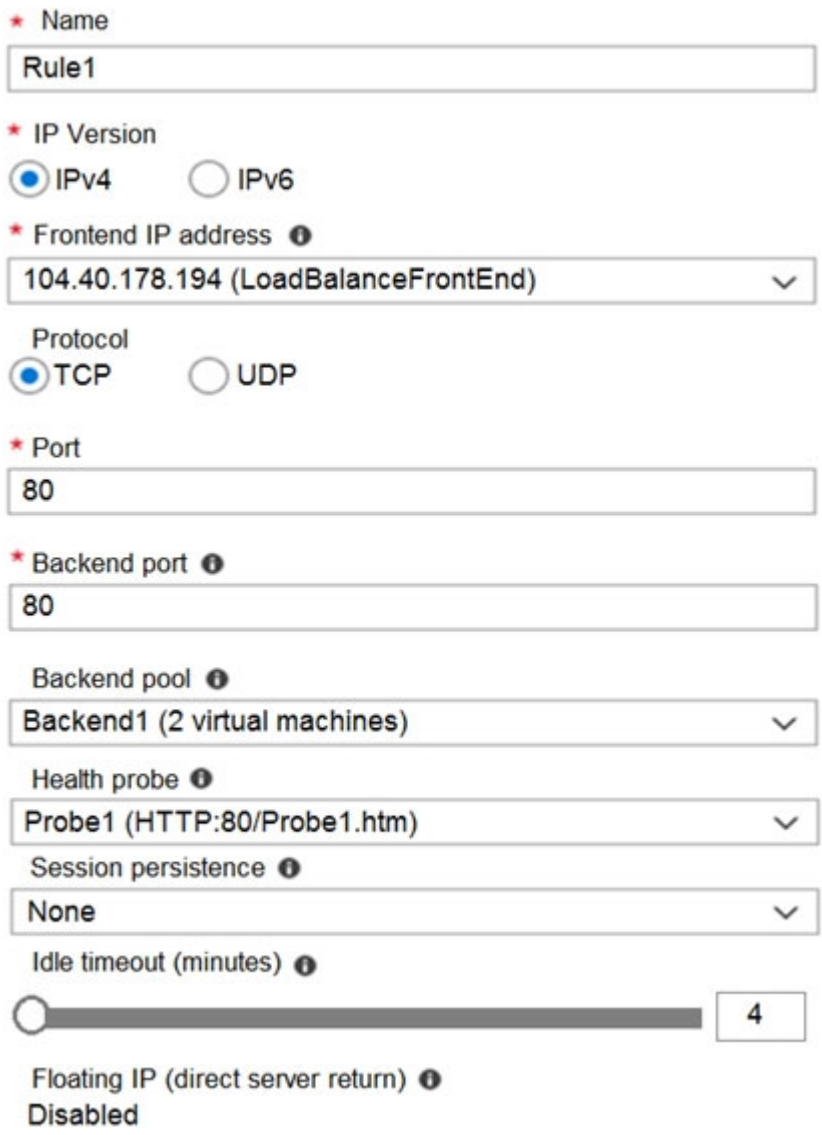

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
VM1 is in the same availability set as VM2.	○	○
If Probe1.htm is present on VM1 and VM2, LB1 will balance TCP port 80 between VM1 and VM2.	○	○
If you delete Rule1, LB1 will balance all the requests between VM1 and VM2 for all the ports.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM1 is in the same availability set as VM2.	○	○
If Probe1.htm is present on VM1 and VM2, LB1 will balance TCP port 80 between VM1 and VM2.	○	○
If you delete Rule1, LB1 will balance all the requests between VM1 and VM2 for all the ports.	○	○

Box 1: Yes -
A Basic Load Balancer supports virtual machines in a single availability set or virtual machine scale set.

Box 2: Yes -
When using load-balancing rules with Azure Load Balancer, you need to specify health probes to allow Load Balancer to detect the backend endpoint status. The configuration of the health probe and probe responses determine which backend pool instances will receive new flows. You can use health probes to detect the failure of an application on a backend endpoint. You can also generate a custom response to a health probe and use the health probe for flow control to manage load or planned downtime. When a health probe fails, Load Balancer will stop sending new flows to the respective unhealthy instance. Outbound connectivity is not impacted, only inbound connectivity is impacted.

Box 3: No -
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/skus
https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-custom-probe-overview

Community Discussion

Correct Answer: Box 1: Yes A Basic Load Balancer supports virtual machines in a single availability set or virtual machine scale set. Box 2: Yes When using load-balancing rules with Azure Load Balancer, you need to specify health probes to allow Load Balancer to

detect the backend endpoint status. The configuration of the health probe and probe responses determine which backend pool instances will receive new flows. You can use health probes to detect the failure of an application on a backend endpoint. You can also generate a custom response to a health probe and use the health probe for flow control to manage load or planned downtime. When a health probe fails, Load Balancer will stop sending new flows to the respective unhealthy instance. Outbound connectivity is not impacted, only inbound connectivity is impacted. Box 3: No There will be no loadbalancing between the VMs. Basic Load Balancer: Virtual machines in a single availability set or virtual machine scale set. Standard Load Balancer: Any virtual machines or virtual machine scale sets in a single virtual network.

agreed. it's on my exam yesterday and I passed it with 923.

agreed. it's on my exam yesterday and I passed it with 923.

Reference: https://docs.microsoft.com/en-us/azure/load-balancer/skus https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-custom-probe-overview

Reference: https://docs.microsoft.com/en-us/azure/load-balancer/skus https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-custom-probe-overview

SecExams

Question #628

HOTSPOT -

You have an Azure virtual machine named VM1 that connects to a virtual network named VNet1. VM1 has the following configurations:

- ✑ Subnet: 10.0.0.0/24
- ✑ Availability set: AVSet
- ✑ Network security group (NSG): None
- ✑ Private IP address: 10.0.0.4 (dynamic)
- ✑ Public IP address: 40.90.219.6 (dynamic)

You deploy a standard, Internet-facing load balancer named slb1.

You need to configure slb1 to allow connectivity to VM1.

Which changes should you apply to VM1 as you configure slb1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Before you create a backend pool on slb1, you must:

- Create and assign an NSG to VM1
- Remove the public IP address from VM1
- Change the private IP address of VM1 to static

Before you can connect to VM1 from slb1, you must:

- Create and configure an NSG
- Remove the public IP address from VM1
- Change the private IP address of VM1 to static

Explanation

Correct Answer:

Answer Area

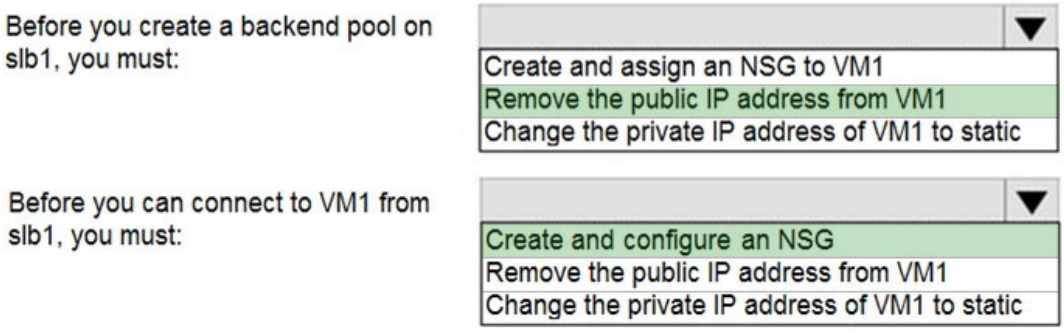

Change the private IP address of VM1 to static
Box 1: Remove the public IP address from VM1
Note: A public load balancer can provide outbound connections for virtual machines (VMs) inside your virtual network. These connections are accomplished by translating their private IP addresses to public IP addresses. Public Load Balancers are used to load balance internet traffic to your VMs.
Box 2: Create and configure an NSG
NSGs are used to explicitly permit allowed traffic. If you do not have an NSG on a subnet or NIC of your virtual machine resource, traffic is not allowed to reach this resource.
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-overview

Community Discussion

SecExams

Question #629

HOTSPOT -

You have an Azure virtual machine named VM1 that connects to a virtual network named VNet1. VM1 has the following configurations:

- ✑ Subnet: 10.0.0.0/24
- ✑ Availability set: AVSet
- ✑ Network security group (NSG): None
- ✑ Private IP address: 10.0.0.4 (dynamic)
- ✑ Public IP address: 40.90.219.6 (dynamic)

You deploy a standard, Internet-facing load balancer named slb1.

You need to configure slb1 to allow connectivity to VM1.

Which changes should you apply to VM1 as you configure slb1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Before you create a backend pool on slb1, you must:

- Create and assign an NSG to VM1
- Remove the public IP address from VM1
- Change the private IP address of VM1 to static

Before you can connect to VM1 from slb1, you must:

- Create and configure an NSG
- Remove the public IP address from VM1
- Change the private IP address of VM1 to static

Explanation

Correct Answer:

Answer Area

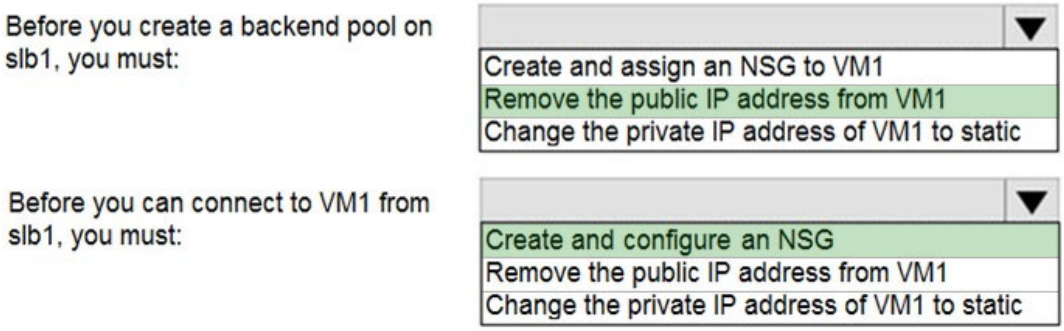

Change the private IP address of VM1 to static
Box 1: Remove the public IP address from VM1
Note: A public load balancer can provide outbound connections for virtual machines (VMs) inside your virtual network. These connections are accomplished by translating their private IP addresses to public IP addresses. Public Load Balancers are used to load balance internet traffic to your VMs.
Box 2: Create and configure an NSG
NSGs are used to explicitly permit allowed traffic. If you do not have an NSG on a subnet or NIC of your virtual machine resource, traffic is not allowed to reach this resource.
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-overview

Community Discussion

Correct Answer: Box 1: Remove the public IP address from VM1 Note: A public load balancer can provide outbound connections for virtual machines (VMs) inside your virtual network. These connections are accomplished by translating their private IP addresses to public IP addresses. Public Load Balancers are used to load balance internet traffic to your VMs. Load balancer and the public IP address SKU must match when you use them with public IP addresses. Only Basic SKU IPs work with the Basic SKU load balancer and only Standard SKU IPs work with Standard SKU load balancers. Box 2: Create and configure an NSG NSGs are used to explicitly permit allowed traffic. If you do not have an NSG on a subnet or NIC of your virtual machine resource, traffic is not allowed to reach this resource.

Guys !! its simple! Don't get confused with complicated text book explanation in comment section . 1) Remove Public IP address from VM1 --> Reason being when you create a LB and add VM to backend pool make sure VM doesn't have a Public IP assigned to it . 2) Create and configure an NSG . --> key thing to notice in question is "STANDAR LB " . Backend pool VM in standard LB should compulsorily have NSG associated to it and

configured with required port to be allowed. I created an LB with Basic sku and not standard.. Example : With basic sku LB i was able to connect vm via rdp without any nsg.. Now when I tested with standard LB I had to configure and NSG for the vm nic and allow port 3389 to rdp it.. Without nsg it won't allow to connect

the only reason to remove public IP is due to its nature (dynamic) only Basic SKU Public IP can be Dynamic or Static Standard SKU public IP can only be STATIC Standard SKU LB needs Standard SKU public IP or else remove it.

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. Answered: Box1: Remove the public IP address from VM1 Box2: Create and configure an NSG

the only reason to remove public IP is due to its nature (dynamic) only Basic SKU Public IP can be Dynamic or Static Standard SKU public IP can only be STATIC Standard SKU LB needs Standard SKU public IP or else remove it.

SecExams

Question #630

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Location
VNET1	Virtual network	East US
IP1	Public IP address	West Europe
RT1	Route table	North Europe

You need to create a network interface named NIC1.
In which location can you create NIC1?

A) East US and North Europe only
B) East US only (Correct Answer)
C) East US, West Europe, and North Europe
D) East US and West Europe only

Explanation

Correct Answer:
B
Before creating a network interface, you must have an existing virtual network in the

same location and subscription you create a network interface in.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface

Community Discussion

Correct Answer: B Before creating a network interface, you must have an existing virtual network in the same location and subscription you create a network interface in. If you try to create a NIC on a location that does not have any Vnets you will get the following error: "The currently selected subscription and location lack any existing virtual networks. Create a virtual network first." Reference: https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface

Correct. "Before creating a network interface, you must have an existing virtual network in the same location and subscription you create a network interface in."

Selected Answer: B

I took Exam of Azure- 104 at 27/2/2023 I score 920 points out of 1000 points. This was on it and my answer was: B

Selected Answer: B

I Luv Honey Because it is B Here is summary .. VNET=>VNIC=>VM=>NSG=>AV set all MUST be in same location

Selected Answer: B

Correct Answer: B

SecExams

Question #631

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Location
VNET1	Virtual network	East US
IP1	Public IP address	West Europe
RT1	Route table	North Europe

You need to create a network interface named NIC1.
In which location can you create NIC1?

A) East US and North Europe only
B) East US only (Correct Answer)
C) East US, West Europe, and North Europe
D) East US and West Europe only

Explanation

Correct Answer: B ?
Before creating a network interface, you must have an existing virtual network in the same location and subscription you create a network interface in.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface

Community Discussion

Question #632

You have Azure virtual machines that run Windows Server 2019 and are configured as shown in the following table.

Name	Virtual network name	DNS suffix configured in Windows Server
VM1	VNET1	Contoso.com
VM2	VNET2	Contoso.com

You create a public Azure DNS zone named adatum.com and a private Azure DNS zone named contoso.com.
For controso.com, you create a virtual network link named link1 as shown in the exhibit. (Click the Exhibit tab.)

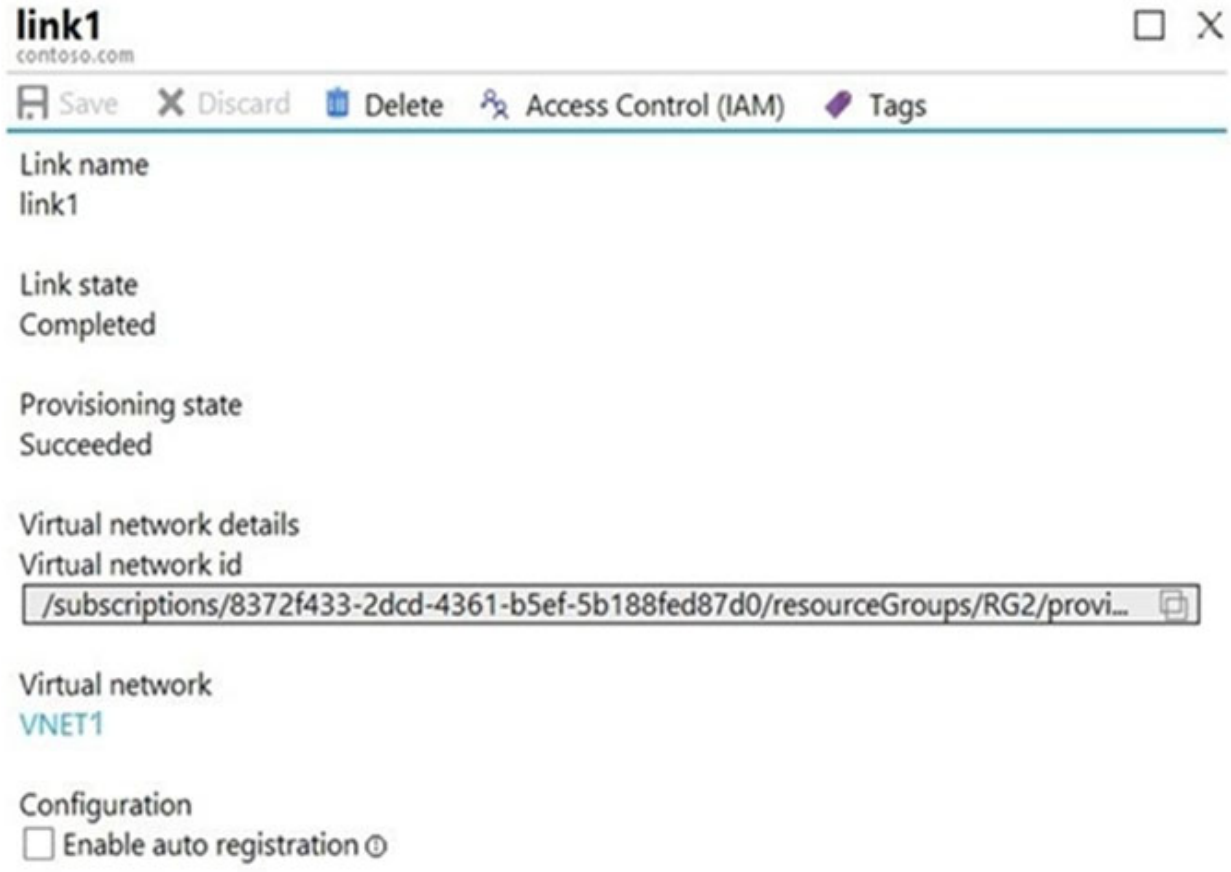

You discover that VM1 can resolve names in contoso.com but cannot resolve names in adatum.com. VM1 can resolve other hosts on the Internet.
You need to ensure that VM1 can resolve host names in adatum.com.
What should you do?

A) Update the DNS suffix on VM1 to be adatum.com (Correct Answer)

B) Configure the name servers for adatum.com at the domain registrar
C) Create an SRV record in the contoso.com zone
D) Modify the Access control (IAM) settings for link1

Explanation

Correct Answer:
A
If you use Azure Provided DNS then appropriate DNS suffix will be automatically applied to your virtual machines. For all other options you must either use Fully Qualified Domain Names (FQDN) or manually apply appropriate DNS suffix to your virtual machines.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-name-resolution-for-vms-and-role-instances

Community Discussion

Correct Answer: B Adatum.com is a public DNS zone. The Internet top level domain DNS servers need to know which DNS servers to direct DNS queries for adatum.com to. You configure this by configuring the name servers for adatum.com at the domain registrar.

I think the answer should be B

Selected Answer: B

I Luv Honey Because it is B Public DNS..you need create record for it @ your Domain Registrar..this is really NOT Azure question more of generic networking question

The question crearly states that adatum.com is a PUBLIC Azure DNS zone, while contoso.com is a PRIVATE Azure DNS zone. And the question is only asking about adatum.com, so it can't be a private DNS zone.

The question crearly states that adatum.com is a PUBLIC Azure DNS zone, while contoso.com is a PRIVATE Azure DNS zone. And the question is only asking about adatum.com, so it can't be a private DNS zone.

Question #633

You have Azure virtual machines that run Windows Server 2019 and are configured as shown in the following table.

Name	Virtual network name	DNS suffix configured in Windows Server
VM1	VNET1	Contoso.com
VM2	VNET2	Contoso.com

You create a public Azure DNS zone named adatum.com and a private Azure DNS zone named contoso.com.
For controso.com, you create a virtual network link named link1 as shown in the exhibit. (Click the Exhibit tab.)

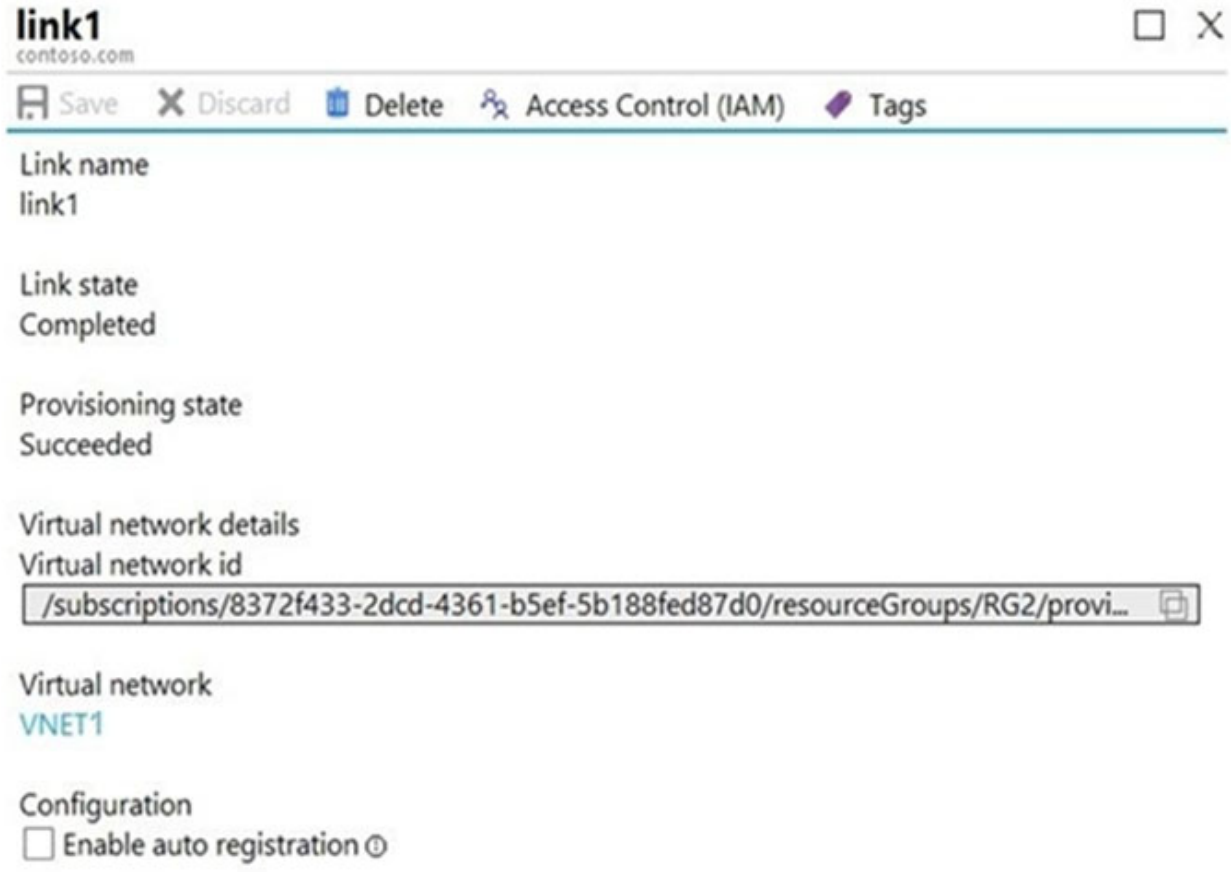

You discover that VM1 can resolve names in contoso.com but cannot resolve names in adatum.com. VM1 can resolve other hosts on the Internet.
You need to ensure that VM1 can resolve host names in adatum.com.
What should you do?

A) Update the DNS suffix on VM1 to be adatum.com (Correct Answer)

B) Configure the name servers for adatum.com at the domain registrar
C) Create an SRV record in the contoso.com zone
D) Modify the Access control (IAM) settings for link1

Explanation

Correct Answer: A ?
If you use Azure Provided DNS then appropriate DNS suffix will be automatically applied to your virtual machines. For all other options you must either use Fully Qualified Domain Names (FQDN) or manually apply appropriate DNS suffix to your virtual machines.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-name-resolution-for-vms-and-role-instances

Community Discussion

SecExams

Question #634

HOTSPOT -

You plan to use Azure Network Watcher to perform the following tasks:

✑ Task1: Identify a security rule that prevents a network packet from reaching an Azure virtual machine.

✑ Task2: Validate outbound connectivity from an Azure virtual machine to an external host.

Which feature should you use for each task? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Task1:

- IP flow verify
- Next hop
- Packet capture
- Security group view
- Traffic Analytics

Task2:

- Connection troubleshoot
- IP flow verify
- Next hop
- NSG flow logs
- Traffic Analytics

Explanation

Correct Answer:

Answer Area

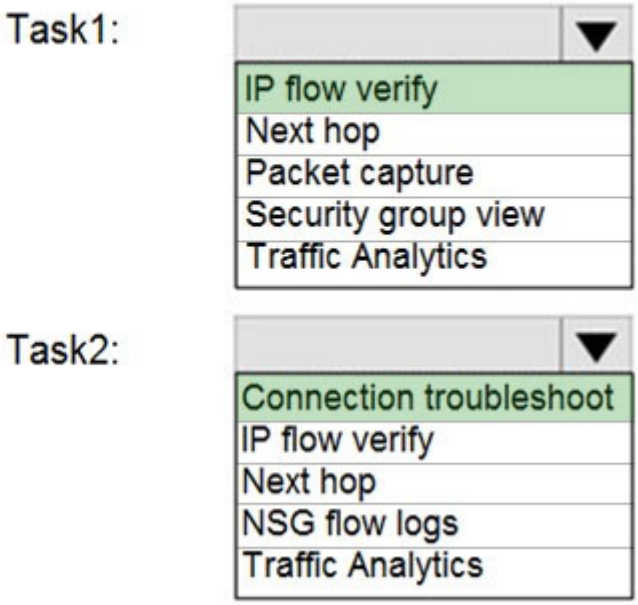

Box 1: IP flow verify -
At some point, a VM may become unable to communicate with other resources, because of a security rule. The IP flow verify capability enables you to specify a source and destination IPv4 address, port, protocol (TCP or UDP), and traffic direction (inbound or outbound). IP flow verify then tests the communication and informs you if the connection succeeds or fails. If the connection fails, IP flow verify tells you which.

Box 2: Connection troubleshoot -
Diagnose outbound connections from a VM: The connection troubleshoot capability enables you to test a connection between a VM and another VM, an FQDN, a URI, or an IPv4 address. The test returns similar information returned when using the connection monitor capability, but tests the connection at a point in time, rather than monitoring it over time, as connection monitor does. Learn more about how to troubleshoot connections using connection-troubleshoot.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview

Community Discussion

Correct Answer: Box 1: IP flow verify At some point, a VM may become unable to communicate with other resources, because of a security rule. The IP flow verify capability enables you to specify a source and destination IPv4 address, port, protocol (TCP or UDP), and traffic direction (inbound or outbound). IP flow verify then tests the

communication and informs you if the connection succeeds or fails. If the connection fails, IP flow verify tells you which. Box 2: Connection troubleshoot Diagnose outbound connections from a VM: The connection troubleshoot capability enables you to test a connection between a VM and another VM, an FQDN, a URI, or an IPv4 address. The test returns similar information returned when using the connection monitor capability, but tests the connection at a point in time, rather than monitoring it over time, as connection monitor does. Learn more about how to troubleshoot connections using connection-troubleshoot.

IP Flow Verify "You might override Azure's default rules, or create additional rules. At some point, a VM may become unable to communicate with other resources, because of a security rule. IP flow verify then tests the communication and informs you if the connection succeeds or fails." https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview#diagnose-network-traffic-filtering-problems-to-or-from-a-vm Connection Troubleshoot "The connection troubleshoot capability enables you to test a connection between a VM and another VM, an FQDN, a URI, or an IPv4 address" https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview#connection-troubleshoot

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. Answered: Box1: IP flow verify Box2: Connection troubleshoot

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. Answered: Box1: IP flow verify Box2: Connection troubleshoot

thanks for confirming. I'll be sitting the exam at the end of October.

SecExams

Question #635

HOTSPOT -

You plan to use Azure Network Watcher to perform the following tasks:

✑ Task1: Identify a security rule that prevents a network packet from reaching an Azure virtual machine.

✑ Task2: Validate outbound connectivity from an Azure virtual machine to an external host.

Which feature should you use for each task? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Task1:

- IP flow verify
- Next hop
- Packet capture
- Security group view
- Traffic Analytics

Task2:

- Connection troubleshoot
- IP flow verify
- Next hop
- NSG flow logs
- Traffic Analytics

Explanation

Correct Answer:

Answer Area

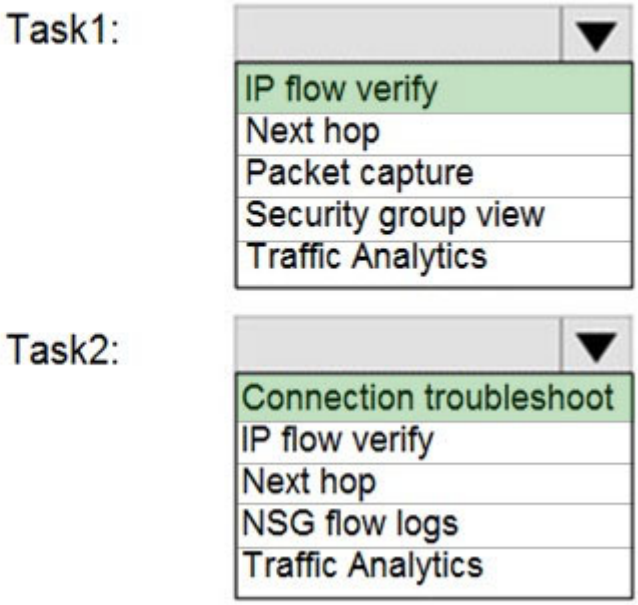

Box 1: IP flow verify -
At some point, a VM may become unable to communicate with other resources, because of a security rule. The IP flow verify capability enables you to specify a source and destination IPv4 address, port, protocol (TCP or UDP), and traffic direction (inbound or outbound). IP flow verify then tests the communication and informs you if the connection succeeds or fails. If the connection fails, IP flow verify tells you which.

Box 2: Connection troubleshoot -
Diagnose outbound connections from a VM: The connection troubleshoot capability enables you to test a connection between a VM and another VM, an FQDN, a URI, or an IPv4 address. The test returns similar information returned when using the connection monitor capability, but tests the connection at a point in time, rather than monitoring it over time, as connection monitor does. Learn more about how to troubleshoot connections using connection-troubleshoot.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview

Community Discussion

Question #636

SecExams

HOTSPOT -

You have an Azure subscription that contains the Azure virtual machines shown in the following table.

Name	Operating system	Subnet	Virtual network
VM1	Windows Server 2019	Subnet1	VNET1
VM2	Windows Server 2019	Subnet2	VNET1
VM3	Red Hat Enterprise Linux 7.7	Subnet3	VNET1

You configure the network interfaces of the virtual machines to use the settings shown in the following table.

Name	DNS server
VM1	*None*
VM2	192.168.10.15
VM3	192.168.10.15

From the settings of VNET1 you configure the DNS servers shown in the following exhibit.

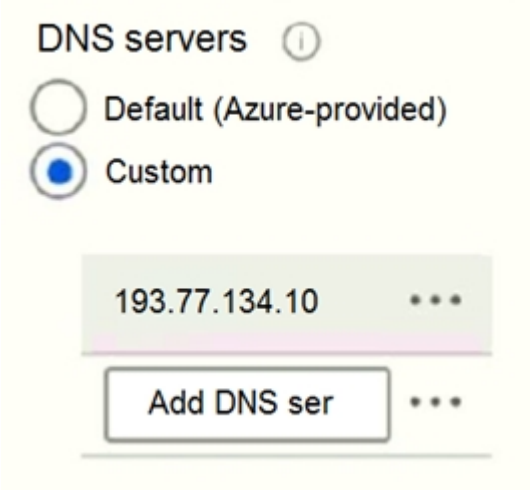

The virtual machines can successfully connect to the DNS server that has an IP address of 192.168.10.15 and the DNS server that has an IP address of 193.77.134.10.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
VM1 connects to 193.77.134.10 for DNS queries.	○	○
VM2 connects to 193.77.134.10 for DNS queries.	○	○
VM3 connects to 192.168.10.15 for DNS queries.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM1 connects to 193.77.134.10 for DNS queries.	○	○
VM2 connects to 193.77.134.10 for DNS queries.	○	○
VM3 connects to 192.168.10.15 for DNS queries.	○	○

Box 1: Yes -
You can specify DNS server IP addresses in the VNet settings. The setting is applied as the default DNS server(s) for all VMs in the VNet.

Box 2: No -
You can set DNS servers per VM or cloud service to override the default network settings.

Box 3: Yes -
You can set DNS servers per VM or cloud service to override the default network settings.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-faq#name-resolution-dns

Community Discussion

Correct Answer: NIC configured DNS servers takes precedence over VNET configured DNS servers. Box 1: Yes VM1 uses the VNET configured DNS 193.77.134.10. You can specify DNS server IP addresses in the VNet settings. The setting is applied as the default DNS server(s) for all VMs in the VNet. The DNS is set on the VNET level. Box 2: No VM2 uses the NIC configured DNS 192.168.10.15. You can set DNS servers per VM or cloud service to override the default network settings. This VM has 192.168.10.5 set as DNS server, so it overrides the default DNS set on VNET1. Box 3: Yes VM3 uses the NIC configured DNS 192.168.10.15 You can set DNS servers per VM or cloud service to override the default network settings. This VM has 192.168.10.5 set as DNS server, so it overrides the default DNS set on VNET1.

1. Yes - as per link the DNS is set on the VNET level 2. No - this VM has 192.168.10.5 set as DNS server so it overrides the default DNS set on VNET1 3. Yes - this VM has 192.168.10.5 set as DNS server so it overrides the default DNS set on VNET1

Because the IP addresses in the question are different ;)

Because the IP addresses in the question are different ;)

Because the IP addresses in the question are different ;)

SecExams

Question #637

SecExams

HOTSPOT -

You have an Azure subscription that contains the Azure virtual machines shown in the following table.

Name	Operating system	Subnet	Virtual network
VM1	Windows Server 2019	Subnet1	VNET1
VM2	Windows Server 2019	Subnet2	VNET1
VM3	Red Hat Enterprise Linux 7.7	Subnet3	VNET1

You configure the network interfaces of the virtual machines to use the settings shown in the following table.

Name	DNS server
VM1	*None*
VM2	192.168.10.15
VM3	192.168.10.15

From the settings of VNET1 you configure the DNS servers shown in the following exhibit.

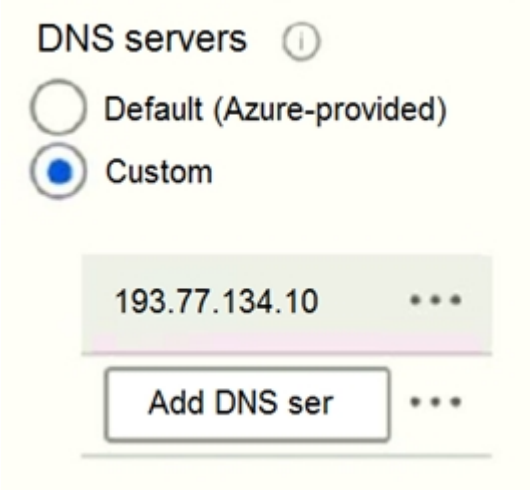

The virtual machines can successfully connect to the DNS server that has an IP address of 192.168.10.15 and the DNS server that has an IP address of 193.77.134.10.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
VM1 connects to 193.77.134.10 for DNS queries.	○	○
VM2 connects to 193.77.134.10 for DNS queries.	○	○
VM3 connects to 192.168.10.15 for DNS queries.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM1 connects to 193.77.134.10 for DNS queries.	○	○
VM2 connects to 193.77.134.10 for DNS queries.	○	○
VM3 connects to 192.168.10.15 for DNS queries.	○	○

Box 1: Yes -
You can specify DNS server IP addresses in the VNet settings. The setting is applied as the default DNS server(s) for all VMs in the VNet.

Box 2: No -
You can set DNS servers per VM or cloud service to override the default network settings.

Box 3: Yes -
You can set DNS servers per VM or cloud service to override the default network settings.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-faq#name-resolution-dns

Community Discussion

Question #638

HOTSPOT -

You have an Azure subscription that contains the resource groups shown in the following table.

Name	Lock name	Lock type
RG1	None	None
RG2	Lock	Delete

RG1 contains the resources shown in the following table.

Name	Type	Lock name	Lock type
storage2	Storage account	Lock1	Delete
VNET2	Virtual network	Lock2	Read-only
IP2	Public IP address	None	None

You need to identify which resources you can move from RG1 to RG2, and which resources you can move from RG2 to RG1.

Which resources should you identify? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Resources that you can move from RG1 to RG2:

- None
- IP1 only
- IP1 and storage1 only
- IP1 and VNET1 only
- IP1, VNET2, and storage1

Resources that you can move from RG2 to RG1:

- None
- IP2 only
- IP2 and storage2 only
- IP2 and VNET2 only
- IP2, VNET2, and storage2

SecExams

Explanation

Correct Answer:

Answer Area

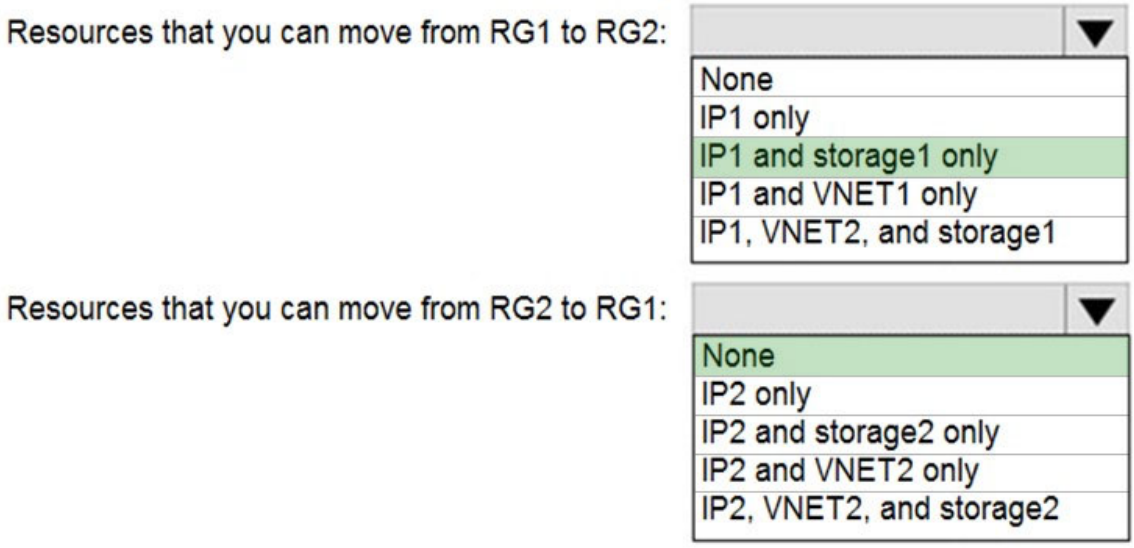

Box 1: IP1, Storage1 -
IP addresses and storage accounts can be moved.
Virtual networks cannot be moved.
There is no lock on RG1.

Box 2: None -
There is a delete lock on RG2.
Note: When you apply a lock at a parent scope, all resources within that scope inherit the same lock. Even resources you add later inherit the lock from the parent.
The most restrictive lock in the inheritance takes precedence.
CanNotDelete means authorized users can still read and modify a resource, but they can't delete the resource.
ReadOnly means authorized users can read a resource, but they can't delete or update the resource. Applying this lock is similar to restricting all authorized users to the permissions granted by the Reader role.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/lock-resources https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-support-resources

SecExams

Community Discussion

Correct Answer: Box 1: IP1, VNET2, and storage1 Box 2: IP2, VNET2, and storage2 Locks are designed for any update or removal. In this case we want to move only, we are not deleting, and we are not changing anything in the resource.

Don't see a table with IP1, storage1 and VNET1. To test anyway, I created storage2, VNET2 and IP2 in RG1. Then I applied the locks as stated in the tables. I was able to move all resources from RG1 to RG2. After that I could also move all resources from RG2 back to RG1. So based on the current information, I go for answer: IP1, VNET2, and storage1 IP2, VNET2, and storage2

The question should specify the resources are available in RG2, because if not there's nothing to move from RG2 to RG1. Its a misleading question

The question should specify the resources are available in RG2, because if not there's nothing to move from RG2 to RG1. Its a misleading question

Tested it in Lab today. RO or Delete locks does not have any impact for Move operation and it doesn`t matter if it comes from RG level or are directly attached to the resource. VNETS can be moved as well. Only limitation is VNET Peering needs to be disabled first. But is is not a case for this question. Correct Answer: Box 1: IP1, VNET2, and storage1 Box 2: IP2, VNET2, and storage2

SecExams

Question #639

HOTSPOT -

You have an Azure subscription that contains the resource groups shown in the following table.

Name	Lock name	Lock type
RG1	None	None
RG2	Lock	Delete

RG1 contains the resources shown in the following table.

Name	Type	Lock name	Lock type
storage2	Storage account	Lock1	Delete
VNET2	Virtual network	Lock2	Read-only
IP2	Public IP address	None	None

You need to identify which resources you can move from RG1 to RG2, and which resources you can move from RG2 to RG1.

Which resources should you identify? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Resources that you can move from RG1 to RG2:

- None
- IP1 only
- IP1 and storage1 only
- IP1 and VNET1 only
- IP1, VNET2, and storage1

Resources that you can move from RG2 to RG1:

- None
- IP2 only
- IP2 and storage2 only
- IP2 and VNET2 only
- IP2, VNET2, and storage2

SecExams

Explanation

Correct Answer:

Answer Area

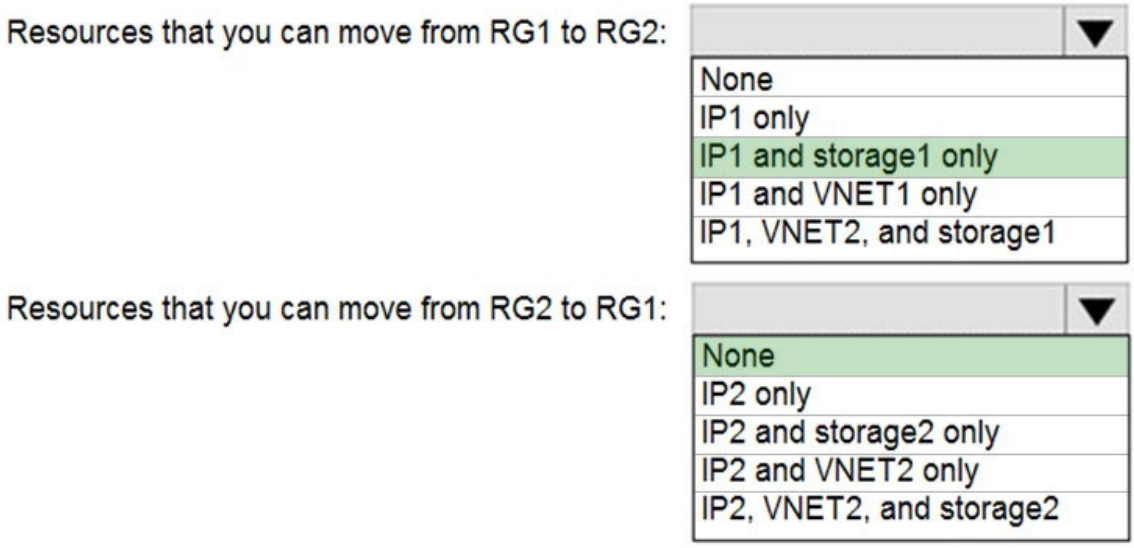

Box 1: IP1, Storage1 -
IP addresses and storage accounts can be moved.
Virtual networks cannot be moved.
There is no lock on RG1.

Box 2: None -
There is a delete lock on RG2.
Note: When you apply a lock at a parent scope, all resources within that scope inherit the same lock. Even resources you add later inherit the lock from the parent.
The most restrictive lock in the inheritance takes precedence.
CanNotDelete means authorized users can still read and modify a resource, but they can't delete the resource.
ReadOnly means authorized users can read a resource, but they can't delete or update the resource. Applying this lock is similar to restricting all authorized users to the permissions granted by the Reader role.
Reference:
https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/lock-resources https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-support-resources

SecExams

Community Discussion

Question #640

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Public IP SKU	Connected to	Status
VM1	*None*	VNET1/Subnet1	Stopped (deallocated)
VM2	Basic	VNET1/Subnet2	Running

You deploy a load balancer that has the following configurations:
✑ Name: LB1
✑ Type: Internal
✑ SKU: Standard
✑ Virtual network: VNET1
You need to ensure that you can add VM1 and VM2 to the backend pool of LB1.
Solution: You create a Basic SKU public IP address, associate the address to the network interface of VM1, and then start VM1.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
A Backend Pool configured by IP address has the following limitations:
✑ Standard load balancer only
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/backend-pool-management

Community Discussion

Correct Answer: B - No You can only attach virtual machines that are in the same location and on the same virtual network as the LB. Virtual machines must have a standard SKU public IP or no public IP. The LB needs to be a standard SKU to accept individual VMs outside an availability set or vmss. VMs do not need to have public IPs but if they do have them they have to be standard SKU. Vms can only be from a single network. When they don't have a public IP they are assigned an ephemeral IP. Also, when adding them to a backend pool, it doesn't matter in which status are the VMs. Note: Load balancer and the public IP address SKU must match when you use them with public IP addresses.

B. No Tested this and as you are creating the back end it says: "You can only attach virtual machines that are in the same location and on the same virtual network as the loadbalancer. Virtual machines must have a standard SKU public IP or no public IP." -It does not matter if the VM is stopped or started. -The LB needs to be a standard SKU to accept individual VMs outside an availability set or vmss. VMs do not need to have public IPs but if they do have them they have to be standard SKU. Vms can only be from a single network. https://docs.microsoft.com/en-us/azure/load-balancer/backend-pool-management -When they dont have a public IP they are assigned an ephemeral IP. https://docs.microsoft.com/en-us/azure/load-balancer/quickstart-load-balancer-standard-internal-portal?tabs=option-1-create-internal-load-balancer-standard#create-virtual-machines

It's not valid, because: LB1: Standard SKU VM1: Basic SKU public IP VM2: Basic SKU public IP

It's not valid, because: LB1: Standard SKU VM1: Basic SKU public IP VM2: Basic SKU public IP

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. Answered B

SecExams

Question #641

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Public IP SKU	Connected to	Status
VM1	*None*	VNET1/Subnet1	Stopped (deallocated)
VM2	Basic	VNET1/Subnet2	Running

You deploy a load balancer that has the following configurations:
✑ Name: LB1
✑ Type: Internal
✑ SKU: Standard
✑ Virtual network: VNET1
You need to ensure that you can add VM1 and VM2 to the backend pool of LB1.
Solution: You create a Basic SKU public IP address, associate the address to the network interface of VM1, and then start VM1.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
A Backend Pool configured by IP address has the following limitations:
✑ Standard load balancer only
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/backend-pool-management

Community Discussion

Question #642

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Public IP SKU	Connected to	Status
VM1	*None*	VNET1/Subnet1	Stopped (deallocated)
VM2	Basic	VNET1/Subnet2	Running

You deploy a load balancer that has the following configurations:
✑ Name: LB1
✑ Type: Internal
✑ SKU: Standard
✑ Virtual network: VNET1
You need to ensure that you can add VM1 and VM2 to the backend pool of LB1.
Solution: You create a Standard SKU public IP address, associate the address to the network interface of VM1, and then stop VM2.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
A Backend Pool configured by IP address has the following limitations:
✑ Standard load balancer only
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/backend-pool-management

Community Discussion

Correct Answer: B - No You can only attach virtual machines that are in the same location and on the same virtual network as the LB. Virtual machines must have a standard SKU public IP or no public IP. The LB needs to be a standard SKU to accept individual VMs outside an availability set or vmss. VMs do not need to have public IPs but if they do have them they have to be standard SKU. Vms can only be from a single network. When they don't have a public IP they are assigned an ephemeral IP. Also, when adding them to a backend pool, it doesn't matter in which status are the VMs. Note: Load balancer and the public IP address SKU must match when you use them with public IP addresses.

It's not valid, because: LB1: Standard SKU VM1: Standard SKU public IP VM2: Basic SKU public IP

It's not valid, because: LB1: Standard SKU VM1: Standard SKU public IP VM2: Basic SKU public IP

SecExams

There are several versions of this question. The following are the correct and incorrect answers that can be presented. Correct Answer: Meets the goal. -Solution: You create two Standard SKU public IP addresses and associate a Standard SKU public IP address to the network interface of each virtual machine. Incorrect Answers: Does not meet the goal. -Solution: You disassociate the public IP address from the network interface of VM2. -Solution: You create a Basic SKU public IP address, associate the address to the network interface of VM1, and then start VM1. -Solution: You create a Standard SKU public IP address, associate the address to the network interface of VM1, and then stop VM2.

Both Vm should have standard sku ip address.

Question #643

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Public IP SKU	Connected to	Status
VM1	*None*	VNET1/Subnet1	Stopped (deallocated)
VM2	Basic	VNET1/Subnet2	Running

You deploy a load balancer that has the following configurations:
✑ Name: LB1
✑ Type: Internal
✑ SKU: Standard
✑ Virtual network: VNET1
You need to ensure that you can add VM1 and VM2 to the backend pool of LB1.
Solution: You create a Standard SKU public IP address, associate the address to the network interface of VM1, and then stop VM2.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
A Backend Pool configured by IP address has the following limitations:
✑ Standard load balancer only
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/backend-pool-management

Community Discussion

Question #644

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Public IP SKU	Connected to	Status
VM1	*None*	VNET1/Subnet1	Stopped (deallocated)
VM2	Basic	VNET1/Subnet2	Running

You deploy a load balancer that has the following configurations:
✑ Name: LB1
✑ Type: Internal
✑ SKU: Standard
✑ Virtual network: VNET1
You need to ensure that you can add VM1 and VM2 to the backend pool of LB1.
Solution: You create two Standard SKU public IP addresses and associate a Standard SKU public IP address to the network interface of each virtual machine.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
A Backend Pool configured by IP address has the following limitations:
✑ Standard load balancer only
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/backend-pool-management

Community Discussion

Correct Answer: A - Yes You can only attach virtual machines that are in the same location and on the same virtual network as the LB. Virtual machines must have a standard SKU public IP or no public IP. The LB needs to be a standard SKU to accept individual VMs outside an availability set or vmss. VMs do not need to have public IPs but if they do have them they have to be standard SKU. Vms can only be from a single network. When they don't have a public IP they are assigned an ephemeral IP. Also, when adding them to a backend pool, it doesn't matter in which status are the VMs. Note: Load balancer and the public IP address SKU must match when you use them with public IP addresses.

Answer correct. You can only attach virtual machines that are in the same location and on the same virtual network as the loadbalancer. Virtual machines must have a standard SKU public IP or no public IP.

I don't understand, it is an internal load balancer, you place your VM behind an internal Load balancer when you do not want to expose them, what is the need of public ip in the first place? some questions are really weird

I think the answer should be no. The load balancer is an internal load balancer and nothing to do with SKU of a public ip is relevant in making the VMs to work.

There are several versions of this question. The following are the correct and incorrect answers that can be presented. Correct Answer: Meets the goal. -Solution: You create two Standard SKU public IP addresses and associate a Standard SKU public IP address to the network interface of each virtual machine. Incorrect Answers: Does not meet the goal. -Solution: You disassociate the public IP address from the network interface of VM2. -Solution: You create a Basic SKU public IP address, associate the address to the network interface of VM1, and then start VM1. -Solution: You create a Standard SKU public IP address, associate the address to the network interface of VM1, and then stop VM2.

SecExams

Question #645

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Public IP SKU	Connected to	Status
VM1	*None*	VNET1/Subnet1	Stopped (deallocated)
VM2	Basic	VNET1/Subnet2	Running

You deploy a load balancer that has the following configurations:
✑ Name: LB1
✑ Type: Internal
✑ SKU: Standard
✑ Virtual network: VNET1
You need to ensure that you can add VM1 and VM2 to the backend pool of LB1.
Solution: You create two Standard SKU public IP addresses and associate a Standard SKU public IP address to the network interface of each virtual machine.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
A Backend Pool configured by IP address has the following limitations:
✑ Standard load balancer only
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/backend-pool-management

Community Discussion

Question #646

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have a computer named Computer1 that has a point-to-site VPN connection to an Azure virtual network named VNet1. The point-to-site connection uses a self-signed certificate.
From Azure, you download and install the VPN client configuration package on a computer named Computer2.
You need to ensure that you can establish a point-to-site VPN connection to VNet1 from Computer2.
Solution: You export the client certificate from Computer1 and install the certificate on Computer2.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Each client computer that connects to a VNet using Point-to-Site must have a client certificate installed. You generate a client certificate from the self-signed root certificate, and then export and install the client certificate. If the client certificate is not installed, authentication fails.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site

Community Discussion

Correct Answer: A - Yes Export the client certificate from Computer1 and install the certificate on Computer2. Each client computer that connects to a VNet using Point-to-Site must have a client certificate installed. You generate a client certificate from the self-signed root certificate, and then export and install the client certificate. If the client certificate is not installed, authentication fails.

Same certificate can be used on multiple client machines ?

Same certificate can be used on multiple client machines ?

Answer is correct, Appear On Exam July 1 2021

This question came in the exam today 8/Mar/2022. I passed the exam, 95% questions came from here.

SecExams

Question #647

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have a computer named Computer1 that has a point-to-site VPN connection to an Azure virtual network named VNet1. The point-to-site connection uses a self-signed certificate.
From Azure, you download and install the VPN client configuration package on a computer named Computer2.
You need to ensure that you can establish a point-to-site VPN connection to VNet1 from Computer2.
Solution: You export the client certificate from Computer1 and install the certificate on Computer2.
Does this meet the goal?

A) Yes (Correct Answer)

B) No

Explanation

Correct Answer: A ?
Each client computer that connects to a VNet using Point-to-Site must have a client certificate installed. You generate a client certificate from the self-signed root certificate, and then export and install the client certificate. If the client certificate is not installed, authentication fails.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site

Community Discussion

SecExams

Question #648

You have an Azure virtual machine named VM1.
The network interface for VM1 is configured as shown in the exhibit. (Click the Exhibit tab.)

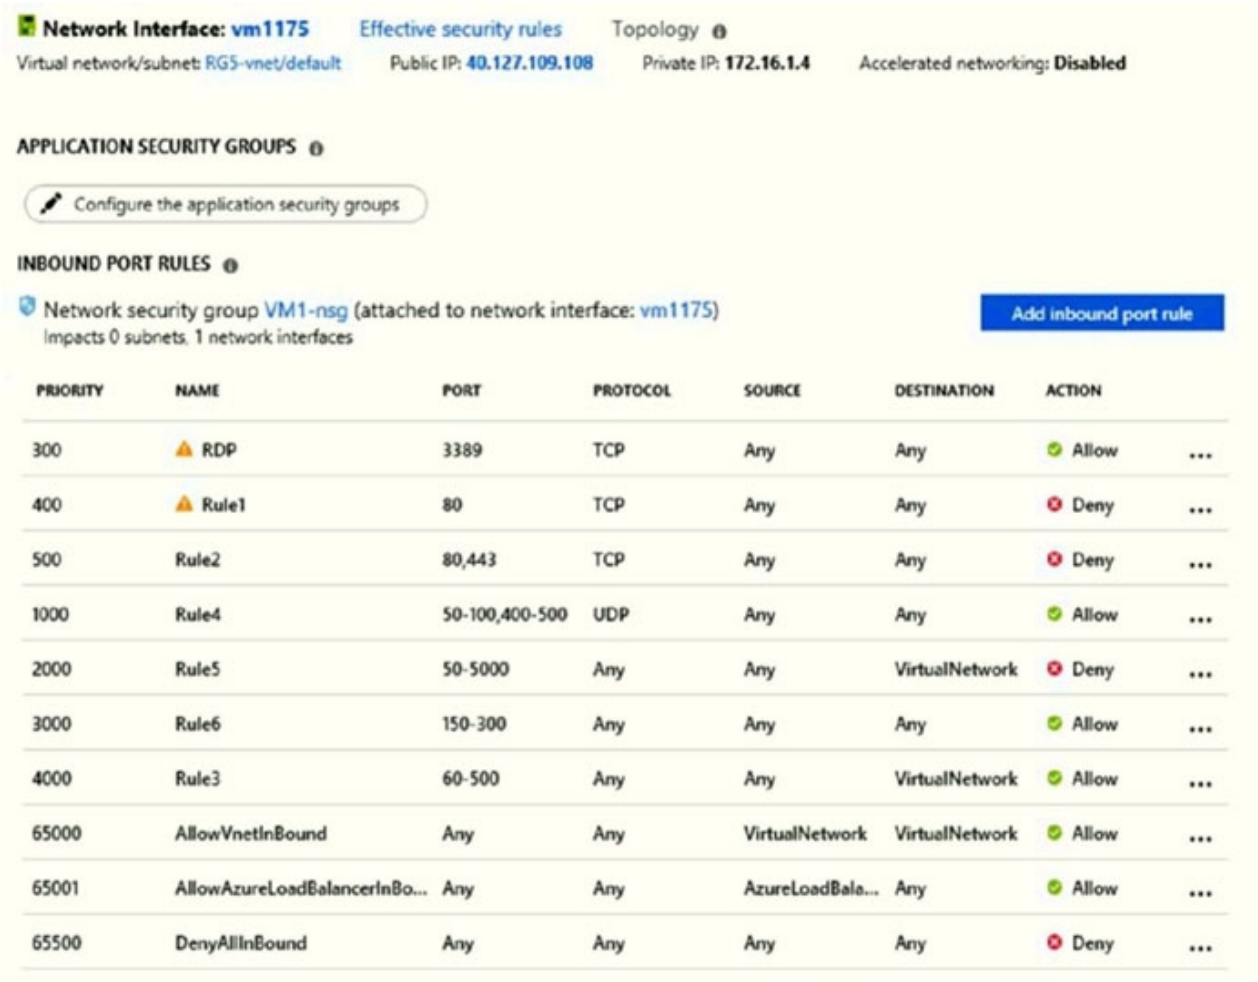

Network Interface: vm1175 Effective security rules Topology
Virtual network/subnet: RG5-vnet/default Public IP: 40.127.109.108 Private IP: 172.16.1.4 Accelerated networking: Disabled

APPLICATION SECURITY GROUPS

Configure the application security groups

INBOUND PORT RULES

Network security group VM1-nsg (attached to network interface: vm1175)
Impacts 0 subnets, 1 network interfaces

Add inbound port rule

PRIORITY	NAME	PORT	PROTOCOL	SOURCE	DESTINATION	ACTION
300	RDP	3389	TCP	Any	Any	Allow
400	Rule1	80	TCP	Any	Any	Deny
500	Rule2	80,443	TCP	Any	Any	Deny
1000	Rule4	50-100,400-500	UDP	Any	Any	Allow
2000	Rule5	50-5000	Any	Any	VirtualNetwork	Deny
3000	Rule6	150-300	Any	Any	Any	Allow
4000	Rule3	60-500	Any	Any	VirtualNetwork	Allow
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalancerInBo...	Any	Any	AzureLoadBala...	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny

You deploy a web server on VM1, and then create a secure website that is accessible by using the HTTPS protocol. VM1 is used as a web server only.
You need to ensure that users can connect to the website from the Internet.
What should you do?

A) Modify the protocol of Rule4
B) Delete Rule1
C) For Rule5, change the Action to Allow and change the priority to 401 (Correct Answer)
D) Create a new inbound rule that allows TCP protocol 443 and configure the rule to have a priority of 501.

Explanation

Correct Answer:

C
HTTPS uses port 443.
Rule2, with priority 500, denies HTTPS traffic.
Rule5, with priority changed from 2000 to 401, would allow HTTPS traffic.
Note: Priority is a number between 100 and 4096. Rules are processed in priority order, with lower numbers processed before higher numbers, because lower numbers have higher priority. Once traffic matches a rule, processing stops. As a result, any rules that exist with lower priorities (higher numbers) that have the same attributes as rules with higher priorities are not processed.
Note:
There are several versions of this question in the exam. The question has two possible correct answers:
1. Change the priority of Rule3 to 450.
2. For Rule5, change the Action to Allow and change the priority to 401.
Other incorrect answer options you may see on the exam include the following:
✑ Modify the action of Rule1.
✑ Change the priority of Rule6 to 100.
✑ For Rule4, change the protocol from UDP to Any.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/network-security-groups-overview

SecExams

Community Discussion

Correct Answer: C HTTPS uses port 443. Rule2, with priority 500, denies HTTPS traffic. Rule5, with priority changed from 2000 to 401, would allow HTTPS traffic. Note: Priority is a number between 100 and 4096. Rules are processed in priority order, with lower numbers processed before higher numbers, because lower numbers have higher priority. Once traffic matches a rule, processing stops. As a result, any rules that exist with lower priorities (higher numbers) that have the same attributes as rules with higher priorities are not processed.

Note: There are several versions of this question in the exam. The question has two possible correct answers: 1. Change the priority of Rule3 to 450. 2. For Rule5, change the Action to Allow and change the priority to 401. Other incorrect answer options you may see on the exam include the following: ✑ Modify the action of Rule1. ✑ Change the priority of Rule6 to 100. ✑ For Rule4, change the protocol from UDP to Any. Reference: https://docs.microsoft.com/en-us/azure/virtual-network/network-security-groups-overview

Note: There are several versions of this question in the exam. The question has two possible correct answers: 1. Change the priority of Rule3 to 450. 2. For Rule5, change the Action to Allow and change the priority to 401. Other incorrect answer options you may see on the exam include the following: ✑ Modify the action of Rule1. ✑ Change the priority of Rule6 to 100. ✑ For Rule4, change the protocol from UDP to Any. Reference: https://docs.microsoft.com/en-us/azure/virtual-network/network-security-groups-overview

Answer C is correct Although not the best solution (opening range 50-5000, when you only whant to allow https/443)

Yes, as many have commented, the correct answer is also a stupid answer that you would, if you were halfway competent, never implement in the real world. It is a poorly designed question that aspires to meet the goal of testing your ability to synthesis and analyze information, rather than simply regurgitate facts from memory. The best designed questions will require that you not only be able to recall facts but that you be able to use those facts to troubleshoot, resolve problems, or create solutions. However, the correct responses to the questions should not be bonkers stupid as this one is.

SecExams

Question #649

You have an Azure virtual machine named VM1.
The network interface for VM1 is configured as shown in the exhibit. (Click the Exhibit tab.)

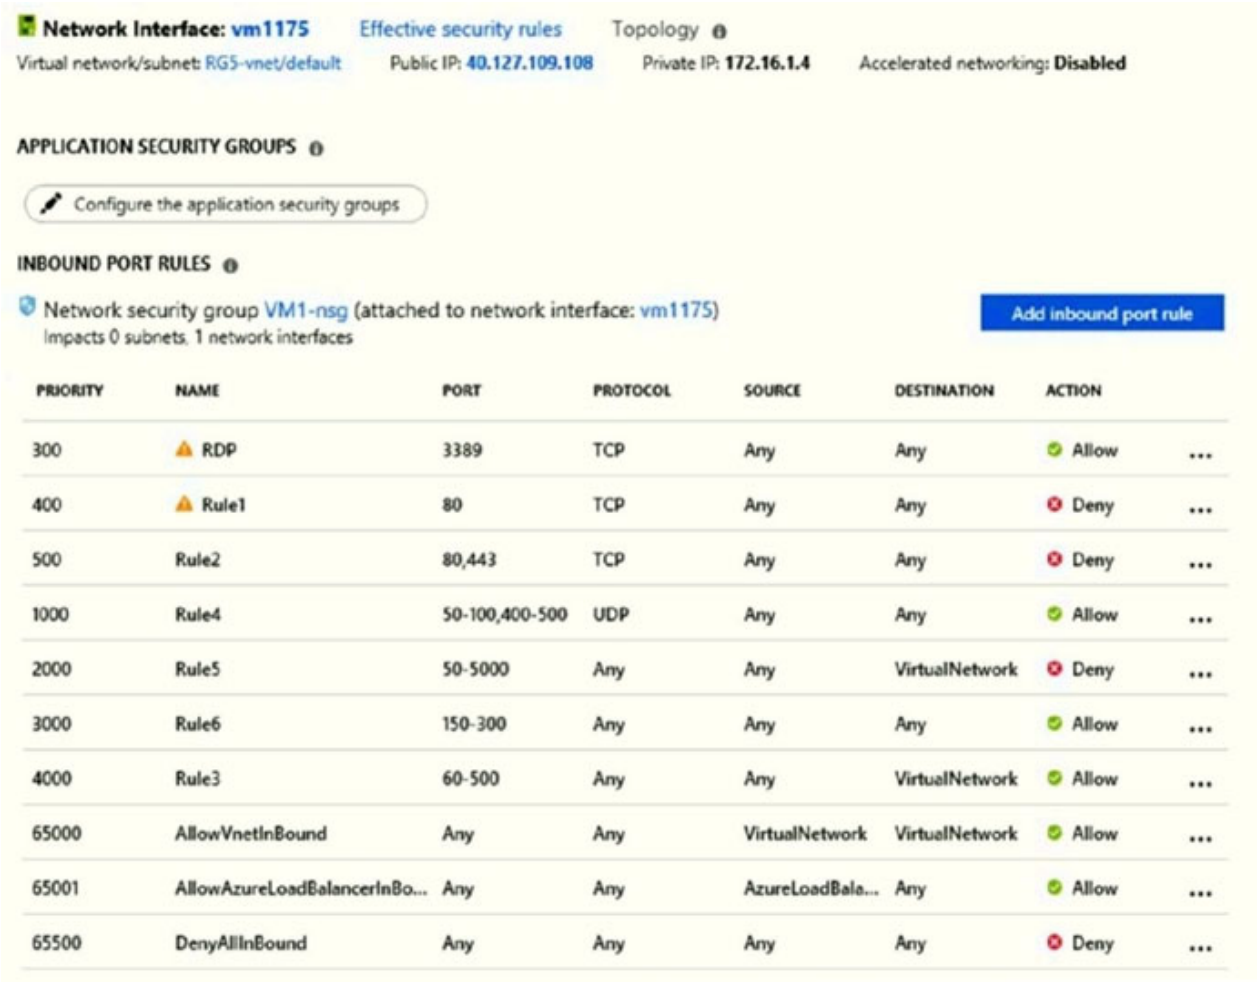

Network Interface: vm1175 Effective security rules Topology
Virtual network/subnet: RG5-vnet/default Public IP: 40.127.109.108 Private IP: 172.16.1.4 Accelerated networking: Disabled

APPLICATION SECURITY GROUPS

Configure the application security groups

INBOUND PORT RULES

Network security group VM1-nsg (attached to network interface: vm1175)
Impacts 0 subnets, 1 network interfaces

Add inbound port rule

PRIORITY	NAME	PORT	PROTOCOL	SOURCE	DESTINATION	ACTION
300	RDP	3389	TCP	Any	Any	Allow
400	Rule1	80	TCP	Any	Any	Deny
500	Rule2	80,443	TCP	Any	Any	Deny
1000	Rule4	50-100,400-500	UDP	Any	Any	Allow
2000	Rule5	50-5000	Any	Any	VirtualNetwork	Deny
3000	Rule6	150-300	Any	Any	Any	Allow
4000	Rule3	60-500	Any	Any	VirtualNetwork	Allow
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalancerInBo...	Any	Any	AzureLoadBala...	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny

You deploy a web server on VM1, and then create a secure website that is accessible by using the HTTPS protocol. VM1 is used as a web server only.
You need to ensure that users can connect to the website from the Internet.
What should you do?

A) Modify the protocol of Rule4
B) Delete Rule1
C) For Rule5, change the Action to Allow and change the priority to 401 (Correct Answer)
D) Create a new inbound rule that allows TCP protocol 443 and configure the rule to have a priority of 501.

Explanation

Correct Answer: C ?

HTTPS uses port 443.
Rule2, with priority 500, denies HTTPS traffic.
Rule5, with priority changed from 2000 to 401, would allow HTTPS traffic.
Note: Priority is a number between 100 and 4096. Rules are processed in priority order, with lower numbers processed before higher numbers, because lower numbers have higher priority. Once traffic matches a rule, processing stops. As a result, any rules that exist with lower priorities (higher numbers) that have the same attributes as rules with higher priorities are not processed.
Note:
There are several versions of this question in the exam. The question has two possible correct answers:
1. Change the priority of Rule3 to 450.
2. For Rule5, change the Action to Allow and change the priority to 401.
Other incorrect answer options you may see on the exam include the following:
✑ Modify the action of Rule1.
✑ Change the priority of Rule6 to 100.
✑ For Rule4, change the protocol from UDP to Any.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/network-security-groups-overview

Community Discussion

SecExams

Question #650

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.
Another administrator plans to create several network security groups (NSGs) in the subscription.
You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.
Solution: From the Resource providers blade, you unregister the Microsoft.ClassicNetwork provider.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
You should use a policy definition.
Resource policy definition used by Azure Policy enables you to establish conventions for resources in your organization by describing when the policy is enforced and what effect to take. By defining conventions, you can control costs and more easily manage your resources.
Reference:
https://docs.microsoft.com/en-us/azure/azure-policy/policy-definition

Community Discussion

Question #651

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.
Another administrator plans to create several network security groups (NSGs) in the subscription.
You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.
Solution: From the Resource providers blade, you unregister the Microsoft.ClassicNetwork provider.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
You should use a policy definition.
Resource policy definition used by Azure Policy enables you to establish conventions for resources in your organization by describing when the policy is enforced and what effect to take. By defining conventions, you can control costs and more easily manage your resources.
Reference:
https://docs.microsoft.com/en-us/azure/azure-policy/policy-definition

Community Discussion

Correct Answer: B - No You need to use a custom policy definition, because there is not a built-in policy. Resource policy definition used by Azure Policy enables you to establish

conventions for resources in your organization by describing when the policy is enforced and what effect to take. By defining conventions, you can control costs and more easily manage your resources. Reference: https://docs.microsoft.com/en-us/azure/azure-policy/policy-definition https://docs.microsoft.com/en-us/azure/governance/policy/samples/built-in-policies

Answer is correct

Tricky one but Vnets cannot communicate with other Vnets by default....

Azure Policy establishes conventions for resources. Policy definitions describe resource compliance conditions and the effect to take if a condition is met. A condition compares a resource property field or a value to a required value. Resource property fields are accessed by using aliases. When a resource property field is an array, a special array alias can be used to select values from all array members and apply a condition to each one. Learn more about conditions.

NO is the answer

SecExams

Question #652

HOTSPOT -

You manage two Azure subscriptions named Subscription1 and Subscription2.

Subscription1 has following virtual networks:

Name	Address space	Location
VNET1	10.10.10.0/24	West Europe
VNET2	172.16.0.0/16	West US

The virtual networks contain the following subnets:

Name	Address space	In virtual network
Subnet11	10.10.10.0/24	VNET1
Subnet21	172.16.0.0/18	VNET2
Subnet22	172.16.128.0/18	VNET2

Subscription2 contains the following virtual network:

- Name: VNETA
- Address space: 10.10.128.0/17
- Location: Canada Central

VNETA contains the following subnets:

Name	Address space
SubnetA1	10.10.130.0/24
SubnetA2	10.10.131.0/24

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
A Site-to-Site connection can be established between VNET1 and VNET2.	○	○
VNET1 and VNET2 can be peered.	○	○
VNET1 and VNETA can be peered.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
A Site-to-Site connection can be established between VNET1 and VNET2.	○	○
VNET1 and VNET2 can be peered.	○	○
VNET1 and VNETA can be peered.	○	○

Box 1: Yes -
With VNet-to-VNet you can connect Virtual Networks in Azure across different regions.

Box 2: Yes -
Azure supports the following types of peering:
✑ Virtual network peering: Connect virtual networks within the same Azure region.
✑ Global virtual network peering: Connecting virtual networks across Azure regions.

Box 3: No -
The virtual networks you peer must have non-overlapping IP address spaces.
Reference:
https://azure.microsoft.com/en-us/blog/vnet-to-vnet-connecting-virtual-networks-in-azure-across-different-regions/ https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-manage-peering#requirements-and-constraints

Community Discussion

Question #653

HOTSPOT -

You manage two Azure subscriptions named Subscription1 and Subscription2.

Subscription1 has following virtual networks:

Name	Address space	Location
VNET1	10.10.10.0/24	West Europe
VNET2	172.16.0.0/16	West US

The virtual networks contain the following subnets:

Name	Address space	In virtual network
Subnet11	10.10.10.0/24	VNET1
Subnet21	172.16.0.0/18	VNET2
Subnet22	172.16.128.0/18	VNET2

Subscription2 contains the following virtual network:

- Name: VNETA
- Address space: 10.10.128.0/17
- Location: Canada Central

VNETA contains the following subnets:

Name	Address space
SubnetA1	10.10.130.0/24
SubnetA2	10.10.131.0/24

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
A Site-to-Site connection can be established between VNET1 and VNET2.	○	○
VNET1 and VNET2 can be peered.	○	○
VNET1 and VNETA can be peered.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
A Site-to-Site connection can be established between VNET1 and VNET2.	○	○
VNET1 and VNET2 can be peered.	○	○
VNET1 and VNETA can be peered.	○	○

Box 1: Yes -
With VNet-to-VNet you can connect Virtual Networks in Azure across different regions.

Box 2: Yes -
Azure supports the following types of peering:
✑ Virtual network peering: Connect virtual networks within the same Azure region.
✑ Global virtual network peering: Connecting virtual networks across Azure regions.

Box 3: No -
The virtual networks you peer must have non-overlapping IP address spaces.
Reference:
https://azure.microsoft.com/en-us/blog/vnet-to-vnet-connecting-virtual-networks-in-azure-across-different-regions/ https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-manage-peering#requirements-and-constraints

Community Discussion

Correct Answer: VNET1: 10.10.10.0 - 10.10.10.255 VNET2: 172.16.0.0 - 172.16.255.255 VNETA: 10.10.128.0 - 10.10.255.255 Box 1: No To create a VNet to VNet VPN you need to have a special Gateway Subnet. Here, the VNet has no sufficient address space to create a Gateway Subnet and thus to establish a VNet to VNet VPN connection. Box 2: Yes For VNet peering the only consideration is that the VNets do not overlap. VNET1 and VNET2 do not

overlap. Box 3: Yes For VNet peering the only consideration is that the VNets do not overlap. VNET1 and VNETA do not overlap.

Not entirely true, i though so myself but then realized can be done with some difference here is link you can read..MS is so confusing sh*t...Make it simple Stupid I just dont see why not keep it peering for vnet-vnet and S-S for Azure and On-prem Hope this helps https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-vnet-vnet-resource-manager-portal

Not entirely true, i though so myself but then realized can be done with some difference here is link you can read..MS is so confusing sh*t...Make it simple Stupid I just dont see why not keep it peering for vnet-vnet and S-S for Azure and On-prem Hope this helps https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-vnet-vnet-resource-manager-portal

Not entirely true, i though so myself but then realized can be done with some difference here is link you can read..MS is so confusing sh*t...Make it simple Stupid I just dont see why not keep it peering for vnet-vnet and S-S for Azure and On-prem Hope this helps https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-vnet-vnet-resource-manager-portal

Not entirely true, i though so myself but then realized can be done with some difference here is link you can read..MS is so confusing sh*t...Make it simple Stupid I just dont see why not keep it peering for vnet-vnet and S-S for Azure and On-prem Hope this helps https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-vnet-vnet-resource-manager-portal

SecExams

Question #654

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.
The effective network security configurations for VM2 are shown in the following exhibit.

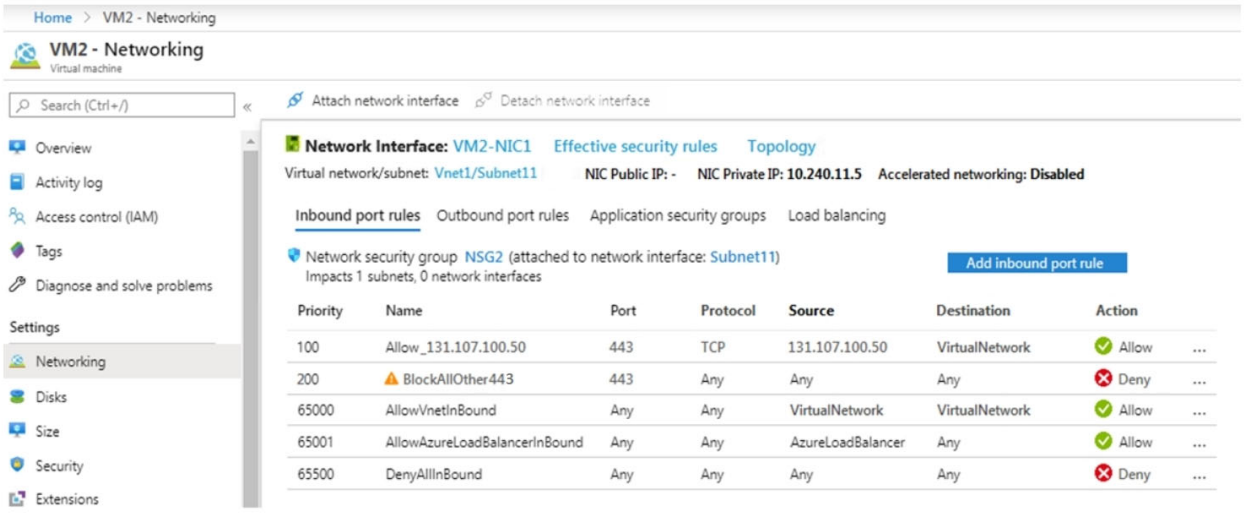

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.
You verify that the Load Balancer rules are configured correctly.
You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.
Solution: You create an inbound security rule that denies all traffic from the 131.107.100.50 source and has a cost of 64999.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Reference:
https://fastreroute.com/azure-network-security-groups-explained/

Community Discussion

SecExams

Question #655

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.
The effective network security configurations for VM2 are shown in the following exhibit.

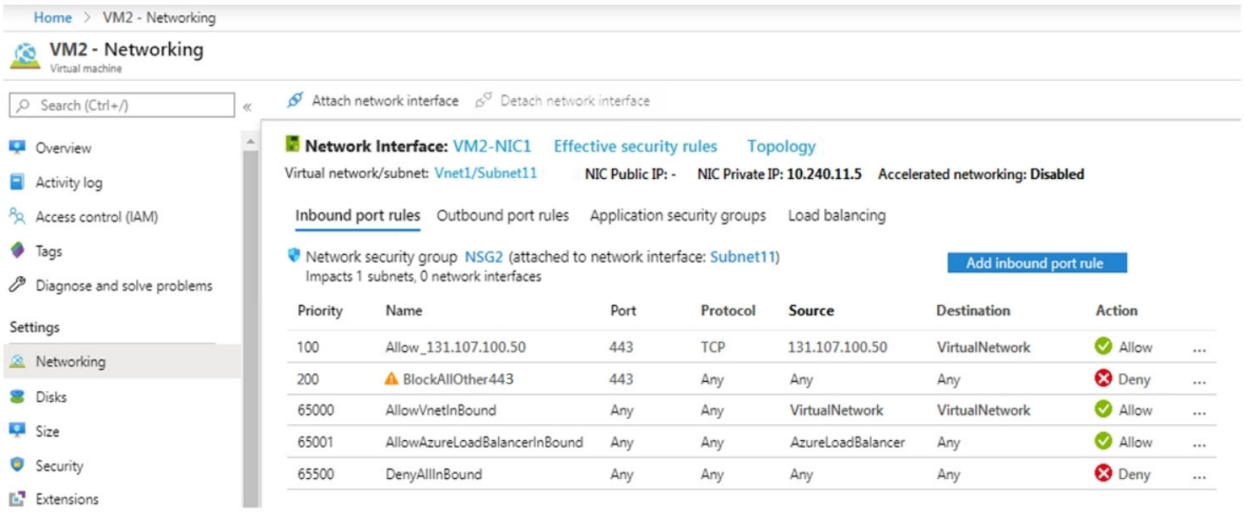

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.
You verify that the Load Balancer rules are configured correctly.
You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.
Solution: You create an inbound security rule that denies all traffic from the 131.107.100.50 source and has a cost of 64999.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:

B
Reference:
https://fastreroute.com/azure-network-security-groups-explained/

Community Discussion

"Attach network interface" Button is enabeld! That means, VM is Stopped and deallocated!

Correct Answer: B - No You want to establish a successful connection from 131.107.100.50 over TCP port 43, and the solution suggests to create a deny inbound rule with low priority. It doesn't make any sense. Virtual machines in load-balanced pools: The source port and address range applied are from the originating computer, not the load balancer. The destination port and address range are for the destination computer, not the load balancer. AllowAzureLoadBalancerInBound: The AzureLoadBalancer service tag translates to the virtual IP address of the host, 168.63.129.16 where the Azure health probe originates. Actual traffic does not travel through here, and if you don't use Azure Load Balancing, this rule can be overridden.

The Load Balancer backend pool VMs may not be responding to the probes due to any of the following reasons: - Load Balancer backend pool VM is unhealthy. - Load Balancer backend pool VM is not listening on the probe port. - Firewall, or a network security group is blocking the port on the Load Balancer backend pool VMs. - Other misconfigurations in Load Balancer. Note: Check if a Deny All network security groups rule on the NIC of the VM or the subnet that has a higher priority than the default rule that allows LB probes & traffic (network security groups must allow Load Balancer IP of 168.63.129.16). Reference: https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-troubleshoot-health-probe-status

The Load Balancer backend pool VMs may not be responding to the probes due to any of the following reasons: - Load Balancer backend pool VM is unhealthy. - Load Balancer backend pool VM is not listening on the probe port. - Firewall, or a network security group is blocking the port on the Load Balancer backend pool VMs. - Other misconfigurations in Load Balancer. Note: Check if a Deny All network security groups rule on the NIC of the VM or the subnet that has a higher priority than the default rule that allows LB probes & traffic (network security groups must allow Load Balancer IP of 168.63.129.16). Reference: https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-troubleshoot-health-probe-status

Very good observation !!!

Question #656

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.
The effective network security configurations for VM2 are shown in the following exhibit.

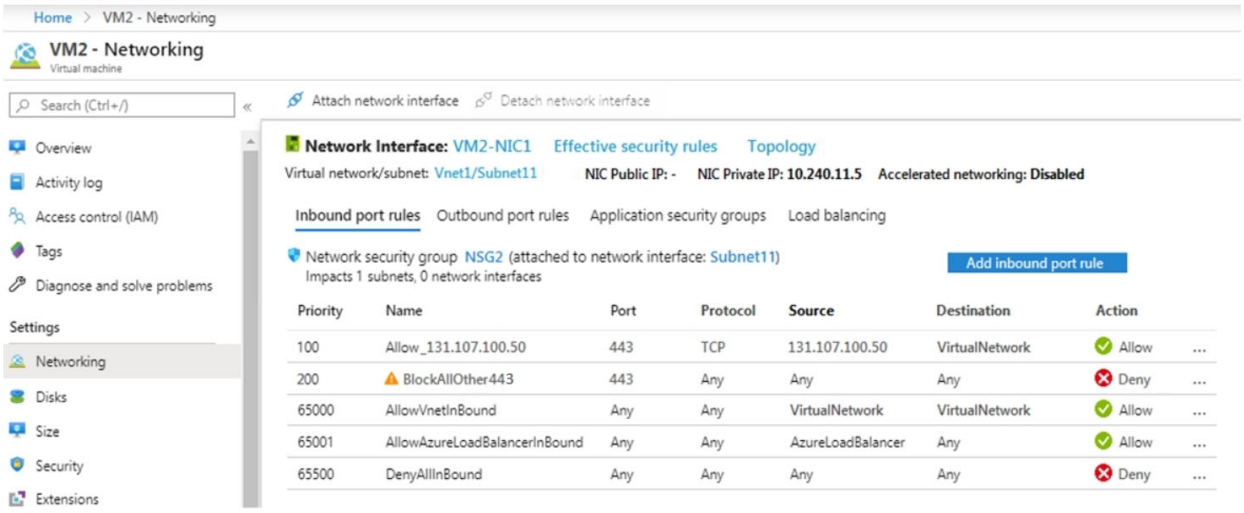

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.
You verify that the Load Balancer rules are configured correctly.
You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.
Solution: You delete the BlockAllOther443 inbound security rule.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B

Reference:
https://fastreroute.com/azure-network-security-groups-explained/

Community Discussion

Correct Answer: B - No Allow_131.107.100.50 rule has a higher priority (100) than BlockAllOther441 (200) and it allows inbound traffic over TCP 443 from source 131.107.100.50. App1 (VM1 and VM2) is in a VNet, so this rule applies. Unfortunately, we still cannot access App1, so the issue is somewhere else, maybe the VMs are off, or the firewall is blocking it.

Answer should be A (yes) I think. Because deleting rule BlockAllOther441, would cause default rule 65001 to allow the traffic from the loadbalancer reach VM1/VM2

It's a tricky question. It might also be YES. The Load Balancer backend pool VMs may not be responding to the probes due to any of the following reasons: - Load Balancer backend pool VM is unhealthy. - Load Balancer backend pool VM is not listening on the probe port. - Firewall, or a network security group is blocking the port on the Load Balancer backend pool VMs. - Other misconfigurations in Load Balancer. Note: Check if a Deny All network security groups rule on the NIC of the VM or the subnet that has a higher priority than the default rule that allows LB probes & traffic (network security groups must allow Load Balancer IP of 168.63.129.16). Reference: https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-troubleshoot-health-probe-status

It's a tricky question. It might also be YES. The Load Balancer backend pool VMs may not be responding to the probes due to any of the following reasons: - Load Balancer backend pool VM is unhealthy. - Load Balancer backend pool VM is not listening on the probe port. - Firewall, or a network security group is blocking the port on the Load Balancer backend pool VMs. - Other misconfigurations in Load Balancer. Note: Check if a Deny All network security groups rule on the NIC of the VM or the subnet that has a higher priority than the default rule that allows LB probes & traffic (network security groups must allow Load Balancer IP of 168.63.129.16). Reference: https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-troubleshoot-health-probe-status

An active "Attach network interface" suggests that VM2 is not running.

Question #657

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.
The effective network security configurations for VM2 are shown in the following exhibit.

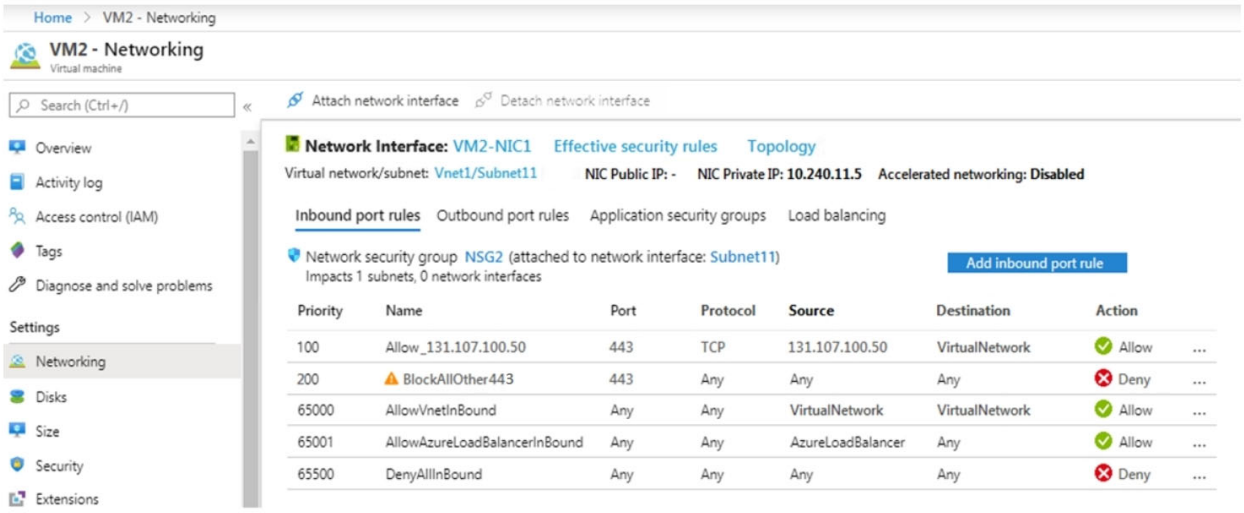

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.
You verify that the Load Balancer rules are configured correctly.
You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.
Solution: You delete the BlockAllOther443 inbound security rule.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Reference:
https://fastreroute.com/azure-network-security-groups-explained/

Community Discussion

SecExams

Question #658

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.
The effective network security configurations for VM2 are shown in the following exhibit.

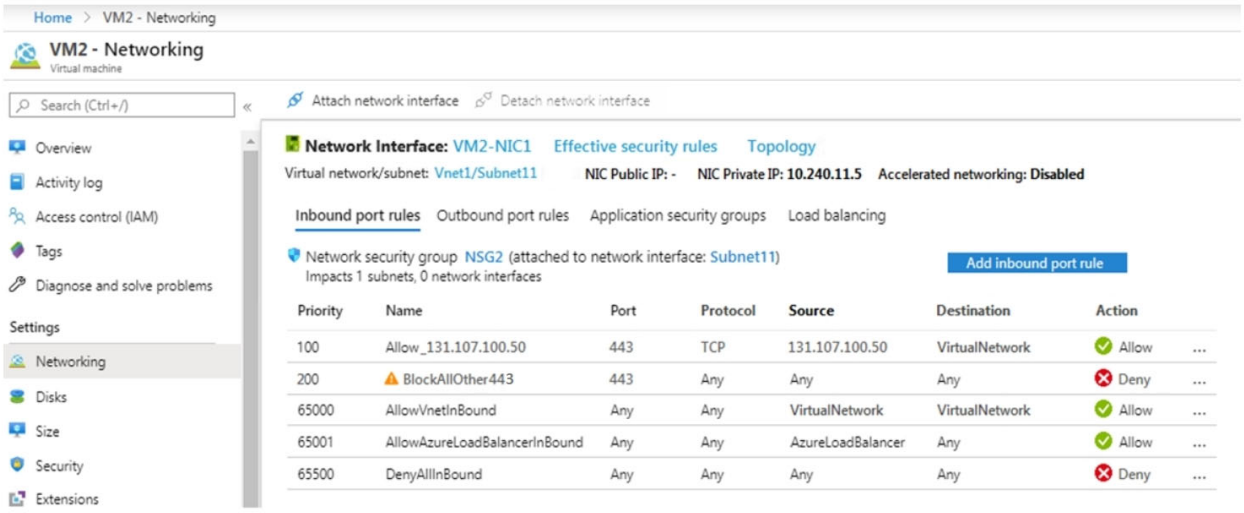

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.
You verify that the Load Balancer rules are configured correctly.
You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.
Solution: You modify the priority of the Allow_131.107.100.50 inbound security rule.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:

B
The rule currently has the highest priority.
Reference:
https://fastreroute.com/azure-network-security-groups-explained/

Community Discussion

Correct Answer: B - No Allow_131.107.100.50 rule has a higher priority (100). The issue is not related with the priority of the rule.

Answer is correct. Current rule is already at the highest priority.. i hope such questions appear in the exams to take away some of the stress.

Selected Answer: B

Just checked in Azure. The Attach Network Interface icon is lit, this means the VM is powered off.

Stop commenting like that dude.. Most Highly voted answers are still wrong on ET.

Stop commenting like that dude.. Most Highly voted answers are still wrong on ET.

SecExams

Question #659

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.
The effective network security configurations for VM2 are shown in the following exhibit.

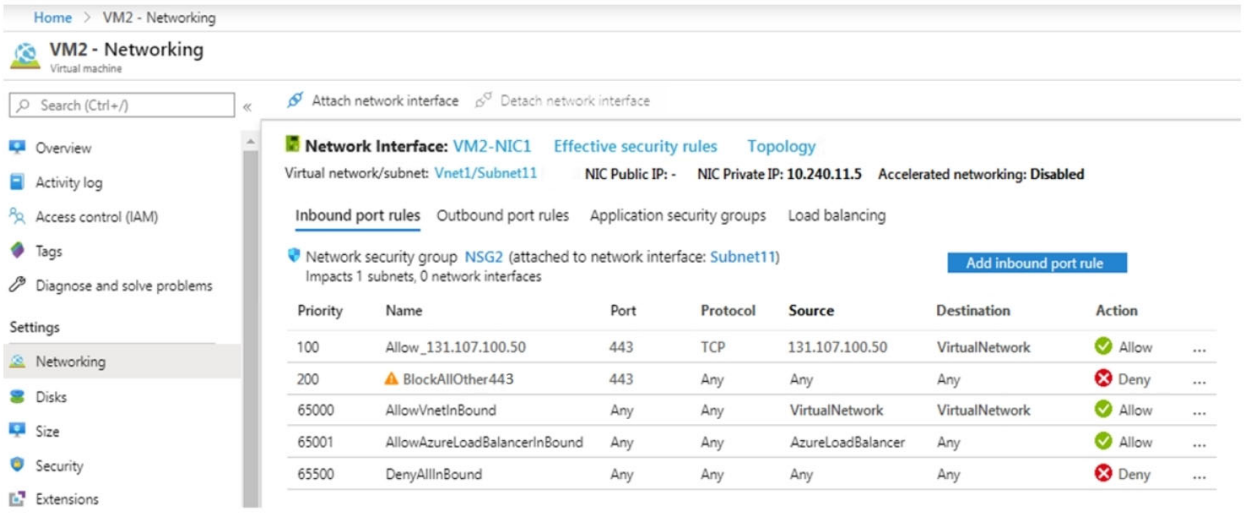

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.
You verify that the Load Balancer rules are configured correctly.
You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.
Solution: You modify the priority of the Allow_131.107.100.50 inbound security rule.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

The rule currently has the highest priority.
Reference:
https://fastreroute.com/azure-network-security-groups-explained/

Community Discussion

Question #660

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.
Another administrator plans to create several network security groups (NSGs) in the subscription.
You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.
Solution: You assign a built-in policy definition to the subscription.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Resource policy definition used by Azure Policy enables you to establish conventions for resources in your organization by describing when the policy is enforced and what effect to take. By defining conventions, you can control costs and more easily manage your resources.
Reference:
https://docs.microsoft.com/en-us/azure/azure-policy/policy-definition

Community Discussion

Exactly. I will memorise ALL of the built-in policies to ensure I am well prepared for the MS exam.

Exactly. I will memorise ALL of the built-in policies to ensure I am well prepared for the MS exam.

there is no such built-in policy (yet), that is why we need a custom one

Correct Answer: B - No You need to use a custom policy definition, because there is not a built-in policy. Resource policy definition used by Azure Policy enables you to establish conventions for resources in your organization by describing when the policy is enforced and what effect to take. By defining conventions, you can control costs and more easily manage your resources. Reference: https://docs.microsoft.com/en-us/azure/azure-policy/policy-definition https://docs.microsoft.com/en-us/azure/governance/policy/samples/built-in-policies

MS almost leads everyone to cheating with exam-dumps, I see no other reasonable way of understanding questions like this :)

SecExams

Question #661

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.
Another administrator plans to create several network security groups (NSGs) in the subscription.
You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.
Solution: You assign a built-in policy definition to the subscription.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Resource policy definition used by Azure Policy enables you to establish conventions for resources in your organization by describing when the policy is enforced and what effect to take. By defining conventions, you can control costs and more easily manage your resources.
Reference:
https://docs.microsoft.com/en-us/azure/azure-policy/policy-definition

Community Discussion

Question #662

You have an Azure subscription.
You plan to deploy an Azure Kubernetes Service (AKS) cluster to support an app named App1. On-premises clients connect to App1 by using the IP address of the pod.
For the AKS cluster, you need to choose a network type that will support App1.
What should you choose?

A) kubenet
B) Azure Container Networking Interface (CNI) (Correct Answer)
C) Hybrid Connection endpoints
D) Azure Private Link

Explanation

Correct Answer:
B
With Azure CNI, every pod gets an IP address from the subnet and can be accessed directly. These IP addresses must be unique across your network space.
Incorrect Answers:
A: The kubenet networking option is the default configuration for AKS cluster creation. With kubenet, nodes get an IP address from the Azure virtual network subnet. Pods receive an IP address from a logically different address space to the Azure virtual network subnet of the nodes. Network address translation (NAT) is then configured so that the pods can reach resources on the Azure virtual network.
C, D: AKS only supports Kubenet networking and Azure Container Networking Interface (CNI) networking
Reference:
https://docs.microsoft.com/en-us/azure/aks/concepts-network

Community Discussion

Answer is correct "B". To have previously reserved IP address for a certain Pod, you should use Azure Container Networking Interface (CNI)

Correct Answer: B

Selected Answer: B

Correct Answer: B Nodes = Kubenete Pods = CNI

The answer for this question is "B", correct. However, in real world, this is many times seen as a bad-practice: in k8s you should prefer connect to "services" instead of "pods-ips". Very bad practice...

The answer for this question is "B", correct. However, in real world, this is many times seen as a bad-practice: in k8s you should prefer connect to "services" instead of "pods-ips". Very bad practice...

Question #663

You have an Azure subscription.
You plan to deploy an Azure Kubernetes Service (AKS) cluster to support an app named App1. On-premises clients connect to App1 by using the IP address of the pod.
For the AKS cluster, you need to choose a network type that will support App1.
What should you choose?

A) kubenet
B) Azure Container Networking Interface (CNI) (Correct Answer)
C) Hybrid Connection endpoints
D) Azure Private Link

Explanation

Correct Answer: B ?
With Azure CNI, every pod gets an IP address from the subnet and can be accessed directly. These IP addresses must be unique across your network space.
Incorrect Answers:
A: The kubenet networking option is the default configuration for AKS cluster creation. With kubenet, nodes get an IP address from the Azure virtual network subnet. Pods receive an IP address from a logically different address space to the Azure virtual network subnet of the nodes. Network address translation (NAT) is then configured so that the pods can reach resources on the Azure virtual network.
C, D: AKS only supports Kubenet networking and Azure Container Networking Interface (CNI) networking

Reference:
https://docs.microsoft.com/en-us/azure/aks/concepts-network

Community Discussion

Question #664

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Public IP SKU	Connected to	Status
VM1	*None*	VNET1/Subnet1	Stopped (deallocated)
VM2	Basic	VNET1/Subnet2	Running

You deploy a load balancer that has the following configurations:
- Name: LB1
- Type: Internal
- SKU: Standard
- Virtual network: VNET1

You need to ensure that you can add VM1 and VM2 to the backend pool of LB1.
Solution: You disassociate the public IP address from the network interface of VM2.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B

Community Discussion

Correct Answer: A - Yes You can only attach virtual machines that are in the same location and on the same virtual network as the LB. Virtual machines must have a standard SKU public IP or no public IP. The LB needs to be a standard SKU to accept individual VMs outside an availability set or vmss. VMs do not need to have public IPs but if they do have them they have to be standard SKU. Vms can only be from a single network. When they don't have a public IP they are assigned an ephemeral IP. Also, when adding them to a backend pool, it doesn't matter in which status are the VMs. Note: Load balancer and the public IP address SKU must match when you use them with public IP addresses.

You can only attach virtual machines that have a standard SKU public IP configuration or no public IP configuration. All IP configurations must be on the same virtual network. ALso, VMs do not have to be powered on when adding them to a backend pool. So answer should be A (Yes)

It's valid, because: LB1: Standard SKU VM1: No public IP VM2: No public IP

It's valid, because: LB1: Standard SKU VM1: No public IP VM2: No public IP

2 possible ways - either no Public IPs on BE VMs or Std Public IPs on both VMs matching Std LB SKU

SecExams

Question #665

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Public IP SKU	Connected to	Status
VM1	*None*	VNET1/Subnet1	Stopped (deallocated)
VM2	Basic	VNET1/Subnet2	Running

You deploy a load balancer that has the following configurations:
- Name: LB1
- Type: Internal
- SKU: Standard
- Virtual network: VNET1

You need to ensure that you can add VM1 and VM2 to the backend pool of LB1.
Solution: You disassociate the public IP address from the network interface of VM2.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #666

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.
Another administrator plans to create several network security groups (NSGs) in the subscription.
You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.
Solution: You configure a custom policy definition, and then you assign the policy to the subscription.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Resource policy definition used by Azure Policy enables you to establish conventions for resources in your organization by describing when the policy is enforced and what effect to take. By defining conventions, you can control costs and more easily manage your resources.
Reference:
https://docs.microsoft.com/en-us/azure/azure-policy/policy-definition

Community Discussion

Correct Answer: A - Yes You need to use a custom policy definition, because there is not a built-in policy. Resource policy definition used by Azure Policy enables you to establish conventions for resources in your organization by describing when the policy is enforced

and what effect to take. By defining conventions, you can control costs and more easily manage your resources. Reference: https://docs.microsoft.com/en-us/azure/azure-policy/policy-definition https://docs.microsoft.com/en-us/azure/governance/policy/samples/built-in-policies

given answer is correct

There are several versions of this question. The following are the correct and incorrect answers that can be presented. Correct Answer: Meets the goal. -Solution: You configure a custom policy definition, and then you assign the policy to the subscription. Incorrect Answers: Does not meet the goal. -Solution: You create a resource lock, and then you assign the lock to the subscription. -Solution: From the Resource providers blade, you unregister the Microsoft.ClassicNetwork provider -Solution: You assign a built-in policy definition to the subscription.

A is correct!

I sure won't forget this one, ha!

SecExams

Question #667

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.
Another administrator plans to create several network security groups (NSGs) in the subscription.
You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.
Solution: You configure a custom policy definition, and then you assign the policy to the subscription.
Does this meet the goal?

A) Yes (Correct Answer)

B) No

Explanation

Correct Answer: A ?
Resource policy definition used by Azure Policy enables you to establish conventions for resources in your organization by describing when the policy is enforced and what effect to take. By defining conventions, you can control costs and more easily manage your resources.
Reference:
https://docs.microsoft.com/en-us/azure/azure-policy/policy-definition

Community Discussion

SecExams

Question #668

You have two Azure virtual networks named VNet1 and VNet2. VNet1 contains an Azure virtual machine named VM1. VNet2 contains an Azure virtual machine named VM2.
VM1 hosts a frontend application that connects to VM2 to retrieve data.
Users report that the frontend application is slower than usual.
You need to view the average round-trip time (RTT) of the packets from VM1 to VM2.
Which Azure Network Watcher feature should you use?

A) IP flow verify
B) Connection troubleshoot
C) Connection monitor (Correct Answer)
D) NSG flow logs

Explanation

Correct Answer:
C
The connection monitor capability monitors communication at a regular interval and informs you of reachability, latency, and network topology changes between the VM and the endpoint
Incorrect Answers:

A: The IP flow verify capability enables you to specify a source and destination IPv4 address, port, protocol (TCP or UDP), and traffic direction (inbound or outbound). IP flow verify then tests the communication and informs you if the connection succeeds or fails. If the connection fails, IP flow verify tells you which security rule allowed or denied the communication, so that you can resolve the problem.
B: The connection troubleshoot capability enables you to test a connection between a VM and another VM, an FQDN, a URI, or an IPv4 address. The test returns similar information returned when using the connection monitor capability, but tests the connection at a point in time, rather than monitoring it over time, as connection monitor does.
D: The NSG flow log capability allows you to log the source and destination IP address, port, protocol, and whether traffic was allowed or denied by an NSG.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview

Community Discussion

Correct Answer: C Connection monitor lets you know the round-trip time to make the connection, in milliseconds. Connection monitor probes the connection every 60 seconds, so you can monitor latency over time. Reference: https://docs.microsoft.com/en-us/azure/network-watcher/connection-monitor https://docs.microsoft.com/en-us/azure/network-watcher/connection-monitor-overview

I was really not sure, but found this about connection monitor: "Lets you know the round-trip time to make the connection, in milliseconds. Connection monitor probes the connection every 60 seconds, so you can monitor latency over time." So guess answer is right

Selected Answer: C

I took Exam of Azure- 104 at 27/2/2023 I score 920 points out of 1000 points. This was on it and my answer was: C

came in today's exam 25/6/2022

Selected Answer: C

The key is the word “average” which needs to run for a period of time which is what connection monitor does. If it is a one time only then it would be connection troubleshoot

Question #669

You have two Azure virtual networks named VNet1 and VNet2. VNet1 contains an Azure virtual machine named VM1. VNet2 contains an Azure virtual machine named VM2.
VM1 hosts a frontend application that connects to VM2 to retrieve data.
Users report that the frontend application is slower than usual.
You need to view the average round-trip time (RTT) of the packets from VM1 to VM2.
Which Azure Network Watcher feature should you use?

A) IP flow verify
B) Connection troubleshoot
C) Connection monitor (Correct Answer)
D) NSG flow logs

Explanation

Correct Answer: C ?
The connection monitor capability monitors communication at a regular interval and informs you of reachability, latency, and network topology changes between the VM and the endpoint
Incorrect Answers:
A: The IP flow verify capability enables you to specify a source and destination IPv4 address, port, protocol (TCP or UDP), and traffic direction (inbound or outbound). IP flow verify then tests the communication and informs you if the connection succeeds or fails. If the connection fails, IP flow verify tells you which security rule allowed or denied the communication, so that you can resolve the problem.
B: The connection troubleshoot capability enables you to test a connection between a VM and another VM, an FQDN, a URI, or an IPv4 address. The test returns similar information returned when using the connection monitor capability, but tests the connection at a point in time, rather than monitoring it over time, as connection monitor does.
D: The NSG flow log capability allows you to log the source and destination IP address, port, protocol, and whether traffic was allowed or denied by an NSG.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview

Community Discussion

Question #670

HOTSPOT -

You have an Azure subscription that contains the public load balancers shown in the following table.

Name	SKU
LB1	Basic
LB2	Standard

You plan to create six virtual machines and to load balance requests to the virtual machines. Each load balancer will load balance three virtual machines.

You need to create the virtual machines for the planned solution.

How should you create the virtual machines? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

The virtual machines that will be load balanced by using LB1 must:

- be connected to the same virtual network
- be created in the same resource group
- be created in the same availability set or virtual machine scale set
- run the same operating system

The virtual machines that will be load balanced by using LB2 must:

- be connected to the same virtual network
- be created in the same resource group
- be created in the same availability set or virtual machine scale set
- run the same operating system

Explanation

Correct Answer:

Answer Area

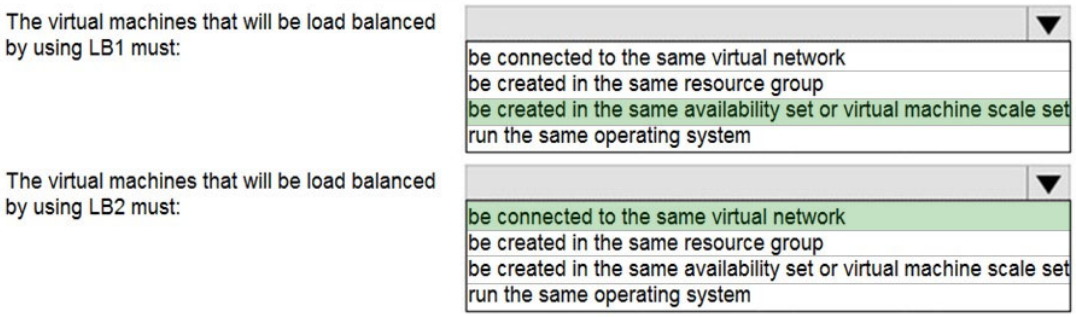

Box 1: be created in the same availability set or virtual machine scale set.
The Basic tier is quite restrictive. A load balancer is restricted to a single availability set, virtual machine scale set, or a single machine.
Box 2: be connected to the same virtual network
The Standard tier can span any virtual machine in a single virtual network, including blends of scale sets, availability sets, and machines.
Reference:
https://www.petri.com/comparing-basic-standard-azure-load-balancers

Community Discussion

Question #671

HOTSPOT -

You have an Azure subscription that contains the public load balancers shown in the following table.

Name	SKU
LB1	Basic
LB2	Standard

You plan to create six virtual machines and to load balance requests to the virtual machines. Each load balancer will load balance three virtual machines.

You need to create the virtual machines for the planned solution.

How should you create the virtual machines? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

The virtual machines that will be load balanced by using LB1 must:

- be connected to the same virtual network
- be created in the same resource group
- be created in the same availability set or virtual machine scale set
- run the same operating system

The virtual machines that will be load balanced by using LB2 must:

- be connected to the same virtual network
- be created in the same resource group
- be created in the same availability set or virtual machine scale set
- run the same operating system

Explanation

Correct Answer:

Answer Area

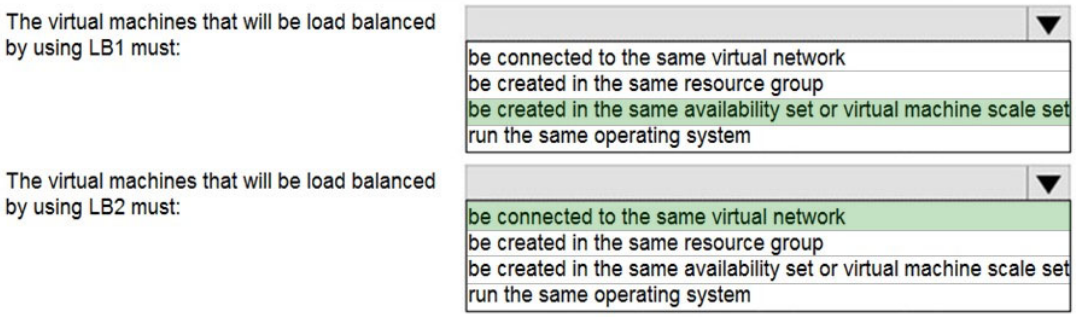

Box 1: be created in the same availability set or virtual machine scale set.
The Basic tier is quite restrictive. A load balancer is restricted to a single availability set, virtual machine scale set, or a single machine.
Box 2: be connected to the same virtual network
The Standard tier can span any virtual machine in a single virtual network, including blends of scale sets, availability sets, and machines.
Reference:
https://www.petri.com/comparing-basic-standard-azure-load-balancers

Community Discussion

Correct: Standard SKU: any virtual machines or virtual machine scale sets in a single virtual network. Basic SKU: Virtual machines in a single availability set or virtual machine scale set. https://docs.microsoft.com/en-us/azure/load-balancer/skus>

XD??????

XD??????

I really hate how the words "basic" and "standard" are pretty close to synonyms. It'd be like a restaurant having two sizes of drink: Regular or Medium.

The VMs should be in same VNet is applicable for both cases Basic nd standard LB, what a crap question

Question #672

HOTSPOT -

You have an on-premises data center and an Azure subscription. The data center contains two VPN devices. The subscription contains an Azure virtual network named VNet1. VNet1 contains a gateway subnet.

You need to create a site-to-site VPN. The solution must ensure that if a single instance of an Azure VPN gateway fails, or a single on-premises VPN device fails, the failure will not cause an interruption that is longer than two minutes.

What is the minimum number of public IP addresses, virtual network gateways, and local network gateways required in Azure? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

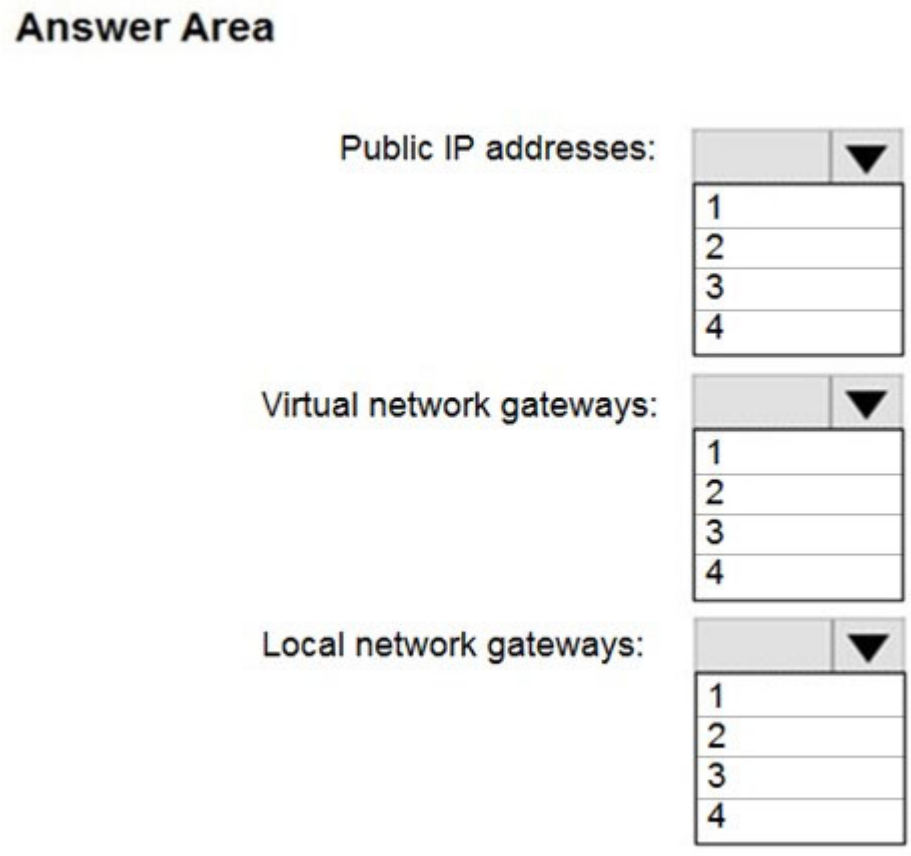

Explanation

Correct Answer:

Answer Area

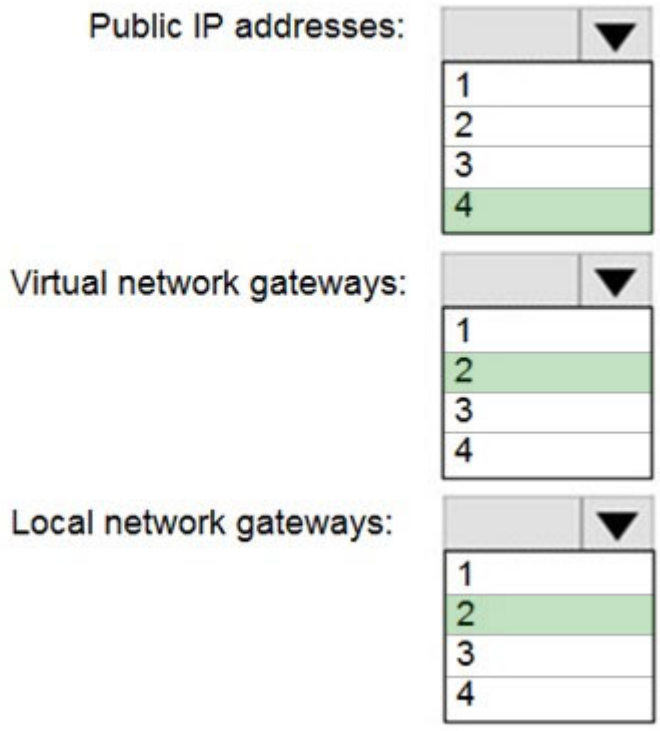

Box 1: 4 -
Two public IP addresses in the on-premises data center, and two public IP addresses in the VNET.
The most reliable option is to combine the active-active gateways on both your network and Azure, as shown in the diagram below.

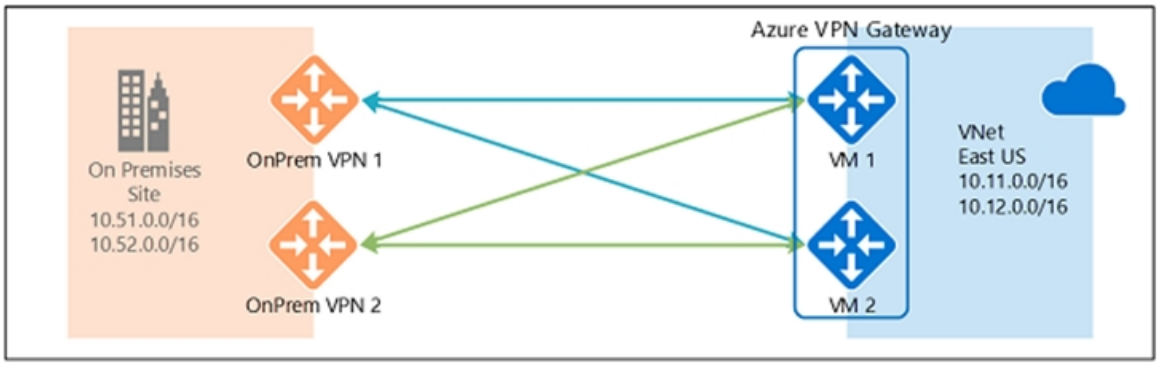

Box 2: 2 -
Every Azure VPN gateway consists of two instances in an active-standby configuration. For any planned maintenance or unplanned disruption that happens to the active instance, the standby instance would take over (failover) automatically, and resume the S2S VPN or VNet-to-VNet connections.

Box 3: 2 -
Dual-redundancy: active-active VPN gateways for both Azure and on-premises networks

Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-highlyavailable

Community Discussion

SecExams

Question #673

HOTSPOT -

You have an on-premises data center and an Azure subscription. The data center contains two VPN devices. The subscription contains an Azure virtual network named VNet1. VNet1 contains a gateway subnet.

You need to create a site-to-site VPN. The solution must ensure that if a single instance of an Azure VPN gateway fails, or a single on-premises VPN device fails, the failure will not cause an interruption that is longer than two minutes.

What is the minimum number of public IP addresses, virtual network gateways, and local network gateways required in Azure? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

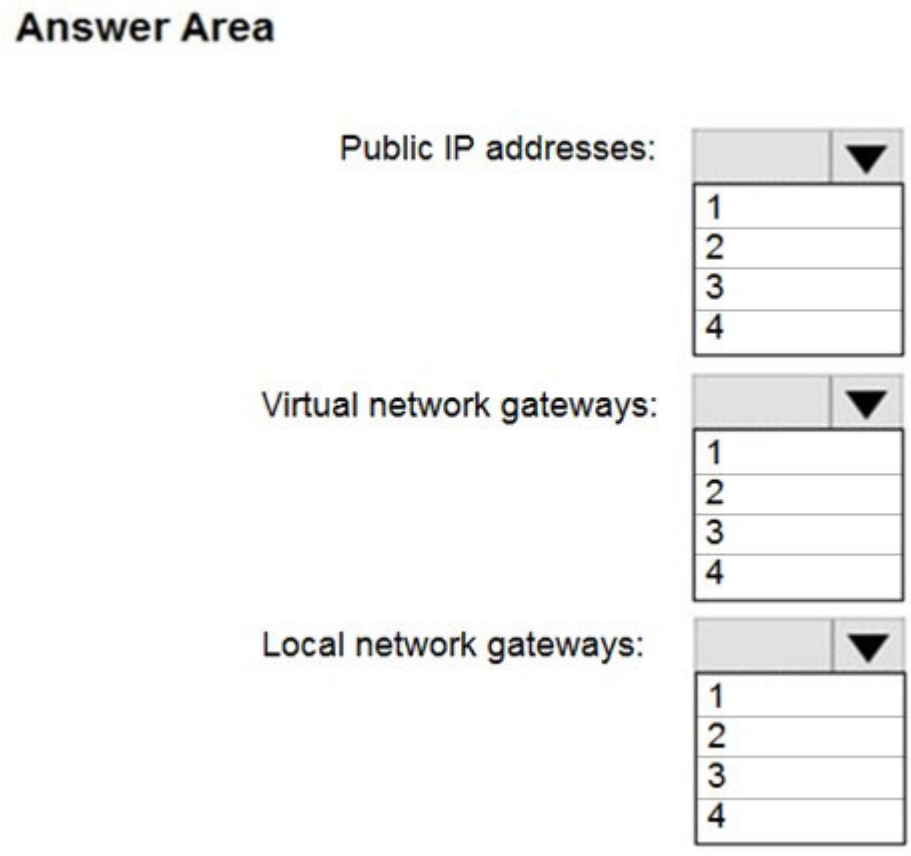

Explanation

Correct Answer:

Answer Area

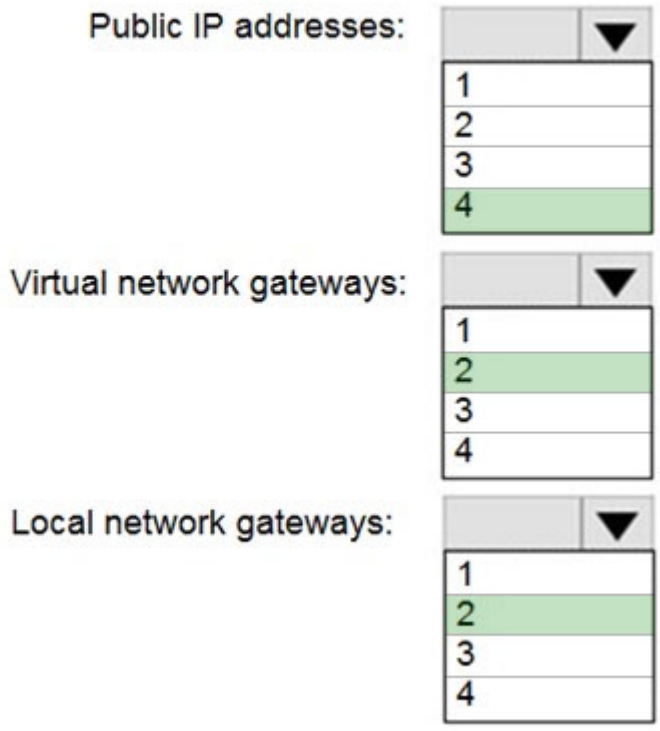

Box 1: 4 -
Two public IP addresses in the on-premises data center, and two public IP addresses in the VNET.
The most reliable option is to combine the active-active gateways on both your network and Azure, as shown in the diagram below.

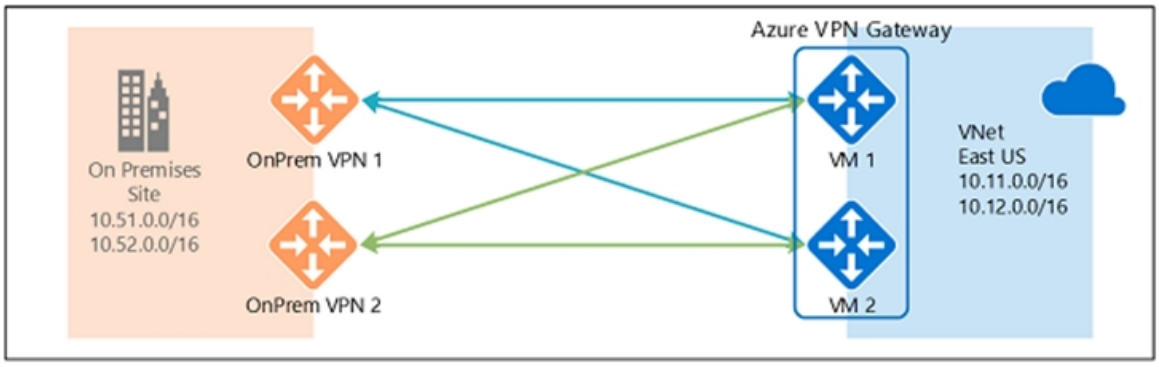

Box 2: 2 -
Every Azure VPN gateway consists of two instances in an active-standby configuration. For any planned maintenance or unplanned disruption that happens to the active instance, the standby instance would take over (failover) automatically, and resume the S2S VPN or VNet-to-VNet connections.

Box 3: 2 -
Dual-redundancy: active-active VPN gateways for both Azure and on-premises networks

Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-highlyavailable

Community Discussion

2 2 2 Appear in the Microsoft Exam Test Prep

Just got the question again in MeasureUp and this time they changed it. So correct answer is: - 2 Public IP´s - 2 Local network gateways - 1 Virtual network gateway And that finally makes sense to me. However I am struggling with MeasureUp question quality as this is misleading exam preperations.

Just got the question again in MeasureUp and this time they changed it. So correct answer is: - 2 Public IP´s - 2 Local network gateways - 1 Virtual network gateway And that finally makes sense to me. However I am struggling with MeasureUp question quality as this is misleading exam preperations.

Just got the question again in MeasureUp and this time they changed it. So correct answer is: - 2 Public IP´s - 2 Local network gateways - 1 Virtual network gateway And that finally makes sense to me. However I am struggling with MeasureUp question quality as this is misleading exam preperations.

Just got the question again in MeasureUp and this time they changed it. So correct answer is: - 2 Public IP´s - 2 Local network gateways - 1 Virtual network gateway And that finally makes sense to me. However I am struggling with MeasureUp question quality as this is misleading exam preperations.

SecExams

Question #674

You have an Azure subscription that contains two virtual machines as shown in the following table.

Name	Operating system	Location	IP address	DNS server
VM1	Windows Server 2019	West Europe	10.0.0.4	Default (Azure-provided)
VM2	Windows Server 2019	West Europe	10.0.0.5	Default (Azure-provided)

You perform a reverse DNS lookup for 10.0.0.4 from VM2.
Which FQDN will be returned?

A) vm1.core.windows.net
B) vm1.azure.com (Correct Answer)
C) vm1.westeurope.cloudapp.azure.com
D) vm1.internal.cloudapp.net

Explanation

Correct Answer: B ?

Community Discussion

Question #675

You have an Azure subscription that contains two virtual machines as shown in the following table.

Name	Operating system	Location	IP address	DNS server
VM1	Windows Server 2019	West Europe	10.0.0.4	Default (Azure-provided)
VM2	Windows Server 2019	West Europe	10.0.0.5	Default (Azure-provided)

You perform a reverse DNS lookup for 10.0.0.4 from VM2.
Which FQDN will be returned?

A) vm1.core.windows.net
B) vm1.azure.com (Correct Answer)
C) vm1.westeurope.cloudapp.azure.com
D) vm1.internal.cloudapp.net

Explanation

Correct Answer:
B

Community Discussion

Answer D Tested in lab, and got vm1.internal.cloudapp.net.

Correct Answer: D testadmin1@VMTEST1:~$ ping -c 5 VMTEST1 PING VMTEST1.qb3monnoaiyubgstehdkra0paa.ax.internal.cloudapp.net (10.0.0.4) 56(84) bytes of data. 64 bytes from vmtest1.internal.cloudapp.net (10.0.0.4): icmp_seq=1 ttl=64 time=0.013 ms 64 bytes from vmtest1.internal.cloudapp.net (10.0.0.4): icmp_seq=2 ttl=64 time=0.042 ms 64 bytes from vmtest1.internal.cloudapp.net (10.0.0.4): icmp_seq=3 ttl=64 time=0.040 ms 64 bytes from vmtest1.internal.cloudapp.net (10.0.0.4): icmp_seq=4 ttl=64 time=0.042 ms 64 bytes from vmtest1.internal.cloudapp.net (10.0.0.4): icmp_seq=5 ttl=64 time=0.044 ms --- VMTEST1.qb3monnoaiyubgstehdkra0paa.ax.internal.cloudapp.net ping statistics --- 5 packets transmitted, 5 received, 0% packet loss, time 4073ms rtt min/avg/max/mdev = 0.013/0.036/0.044/0.012 ms testadmin1@VMTEST1:~$

Selected Answer: D

D for Sure.. Reverse DNS is supported in all ARM based virtual networks. You can issue reverse DNS queries (PTR queries) to map IP addresses of virtual machines to FQDNs of virtual machines. All PTR queries for IP addresses of virtual machines will return FQDNs of form [vmname].internal.cloudapp.net Forward lookup on FQDNs of form [vmname].internal.cloudapp.net will resolve to IP address assigned to the virtual machine. If the virtual network is linked to an Azure DNS private zones as a registration virtual network, the reverse DNS queries will return two records. One record will be of the form [vmname].[privatednszonename] and the other will be of the form [vmname].internal.cloudapp.net

Selected Answer: D

internal.cloudapp.net is default DNS suffix for Azure provisioned DNS if no specific DNS is configured in the network

Look up Azure pass or you can get a free account with 200USD credit which you can convert to PAYG after 30 days.Free account has some restrictions but should be fine for labs.

Question #676

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.
The effective network security configurations for VM2 are shown in the following exhibit.

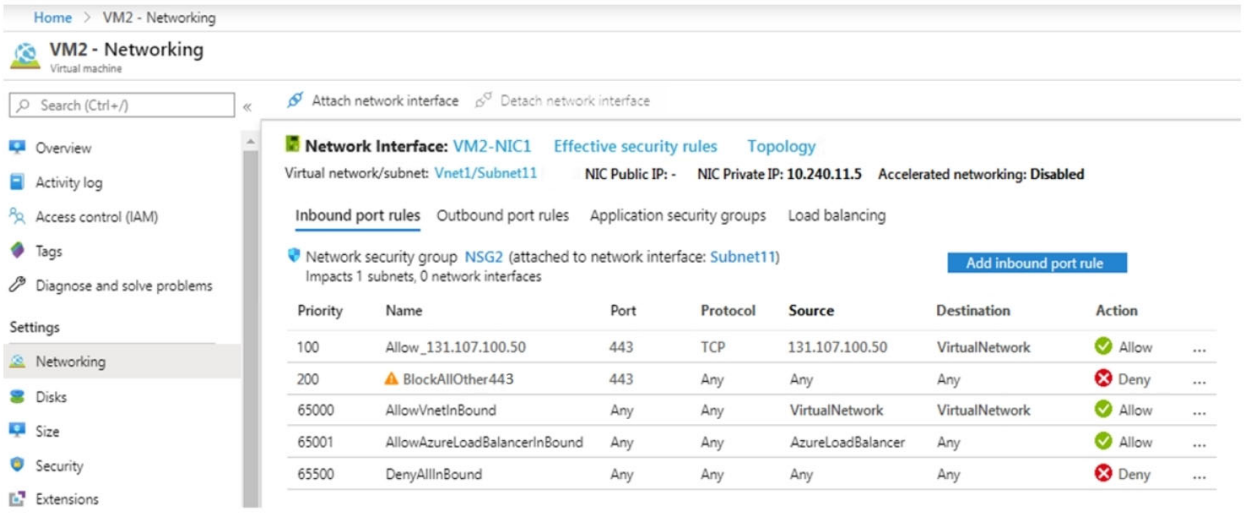

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.
You verify that the Load Balancer rules are configured correctly.
You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.
Solution: You create an inbound security rule that allows any traffic from the AzureLoadBalancer source and has a cost of 150.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?

Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/network-security-groups-overview

Community Discussion

SecExams

Question #677

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.
The effective network security configurations for VM2 are shown in the following exhibit.

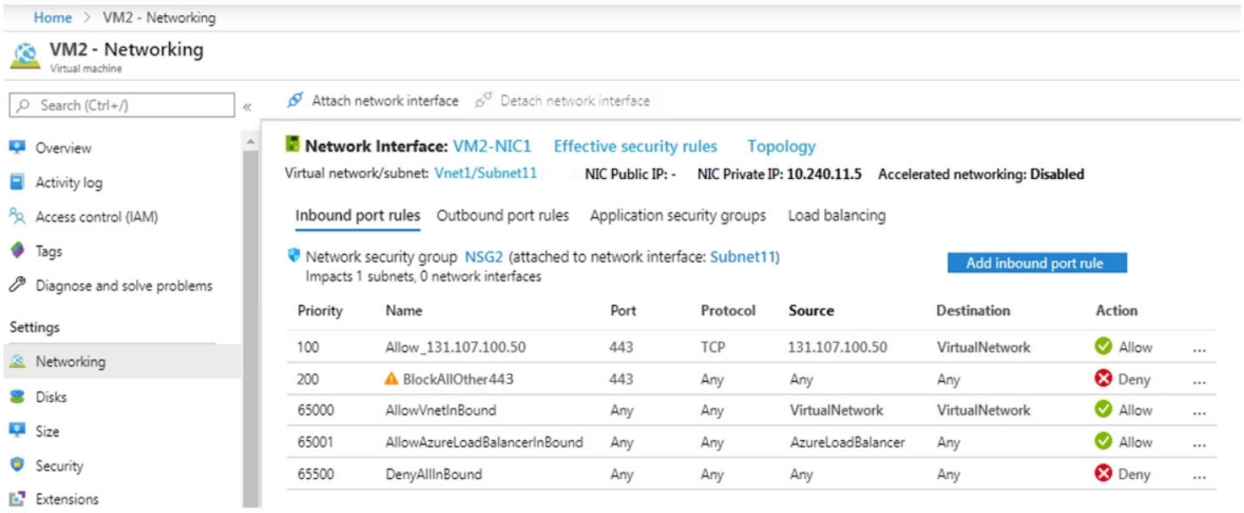

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.
You verify that the Load Balancer rules are configured correctly.
You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.
Solution: You create an inbound security rule that allows any traffic from the AzureLoadBalancer source and has a cost of 150.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:

A
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/network-security-groups-overview

Community Discussion

The rule with priority 200 blocks all inbound trafic. That involves the Azure Load Balancer health probe directed to the VM. That results in VM2 being considered unhealthy and the LB does not route traffic to it (hence the issue). By placing a rule with the priority 150 that allows the AzureLoadBalancer traffic tag, VM2 is discovered as functional/healthy, the LB directs traffic to it => problem solved.

the "attach network interface" button is available. I have tested this in lab and this button only appears clikable when the vm is stopped. Should this be the problem in the whole series of questions?

The answer is correct. 1- The fact the VM2 is offline does not mean anything, question states App1 is hosted on VM1 too so we can't assume both are offline (that's the exact reason a LB is deployed in the first place so you can shut down one VM and keep services running). 2- The question is displaying the NSG (required if using LB) so we can verify the rules, it will show up the same way if looked from VM1 so offline VM is irrelevant. 3- Rule 1 allows 443 from an specific IP, rule 2 deny all including LB 4- its suggested by the question a new rule that will allow LB traffic on 443 as well, before the deny which makes the answer correct. This could be done by moving rule 2 down just below the LB allow any rule.

The answer is correct. 1- The fact the VM2 is offline does not mean anything, question states App1 is hosted on VM1 too so we can't assume both are offline (that's the exact reason a LB is deployed in the first place so you can shut down one VM and keep services running). 2- The question is displaying the NSG (required if using LB) so we can verify the rules, it will show up the same way if looked from VM1 so offline VM is irrelevant. 3- Rule 1 allows 443 from an specific IP, rule 2 deny all including LB 4- its suggested by the question a new rule that will allow LB traffic on 443 as well, before the deny which makes the answer correct. This could be done by moving rule 2 down just below the LB allow any rule.

The answer is correct. 1- The fact the VM2 is offline does not mean anything, question states App1 is hosted on VM1 too so we can't assume both are offline (that's the exact reason a LB is deployed in the first place so you can shut down one VM and keep

services running). 2- The question is displaying the NSG (required if using LB) so we can verify the rules, it will show up the same way if looked from VM1 so offline VM is irrelevant. 3- Rule 1 allows 443 from an specific IP, rule 2 deny all including LB 4- its suggested by the question a new rule that will allow LB traffic on 443 as well, before the deny which makes the answer correct. This could be done by moving rule 2 down just below the LB allow any rule.

Question #678

You have an Azure subscription that contains a policy-based virtual network gateway named GW1 and a virtual network named VNet1.
You need to ensure that you can configure a point-to-site connection from an on-premises computer to VNet1.
Which two actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Add a service endpoint to VNet1
B) Reset GW1
C) Create a route-based virtual network gateway (Correct Answer)
D) Add a connection to GW1
E) Delete GW1 (Correct Answer)
F) Add a public IP address space to VNet1

Explanation

Correct Answer: CE ?
C: A VPN gateway is used when creating a VPN connection to your on-premises network. Route-based VPN devices use any-to-any (wildcard) traffic selectors, and let routing/forwarding tables direct traffic to different IPsec tunnels. It is typically built on router platforms where each IPsec tunnel is modeled as a network interface or VTI (virtual tunnel interface).
E: Policy-based VPN devices use the combinations of prefixes from both networks to define how traffic is encrypted/decrypted through IPsec tunnels. It is typically built on firewall devices that perform packet filtering. IPsec tunnel encryption and decryption are added to the packet filtering and processing engine.
Incorrect Answers:
F: Point-to-Site connections do not require a VPN device or a public-facing IP address.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/create-routebased-vpn-gateway-

portal https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-connect-multiple-policybased-rm-ps

Community Discussion

Question #679

You have an Azure subscription that contains a policy-based virtual network gateway named GW1 and a virtual network named VNet1.
You need to ensure that you can configure a point-to-site connection from an on-premises computer to VNet1.
Which two actions should you perform? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) Add a service endpoint to VNet1
B) Reset GW1
C) Create a route-based virtual network gateway (Correct Answer)
D) Add a connection to GW1
E) Delete GW1 (Correct Answer)
F) Add a public IP address space to VNet1

Explanation

Correct Answer:
CE
C: A VPN gateway is used when creating a VPN connection to your on-premises network. Route-based VPN devices use any-to-any (wildcard) traffic selectors, and let routing/forwarding tables direct traffic to different IPsec tunnels. It is typically built on router platforms where each IPsec tunnel is modeled as a network interface or VTI (virtual tunnel interface).
E: Policy-based VPN devices use the combinations of prefixes from both networks to define how traffic is encrypted/decrypted through IPsec tunnels. It is typically built on firewall devices that perform packet filtering. IPsec tunnel encryption and decryption are added to the packet filtering and processing engine.
Incorrect Answers:
F: Point-to-Site connections do not require a VPN device or a public-facing IP address.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/create-routebased-vpn-gateway-

portal https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-connect-multiple-policybased-rm-ps

Community Discussion

Correct Answer: C and E

Answer in proper order: E, C

Answer is E & C When you create the virtual network gateway for a VPN gateway configuration, you must specify a VPN type. The VPN type that you choose depends on the connection topology that you want to create. For example, a P2S connection requires a RouteBased VPN type. https://learn.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-vpn-gateway-settings. If you want to use a PolicyBased VPN type, you must use the Basic SKU. PolicyBased VPNs (previously called Static Routing) are not supported on any other SKU. PolicyBased Basic VPN Gateway does not support Point-to-Site connectivity. https://learn.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-skus-legacy.

First time seeing your answer very short without explanation :(.

First time seeing your answer very short without explanation :(.

SecExams

Question #680

SecExams

HOTSPOT -

You have an Azure subscription that contains the resources in the following table:

Name	Type
VMRG	Resource group
VNet1	Virtual network
VNet2	Virtual network
VM5	Virtual machine connected to VNet1
VM6	Virtual machine connected to VNet2

In Azure, you create a private DNS zone named adatum.com. You set the registration virtual network to VNet2. The adatum.com zone is configured as shown in the following exhibit:

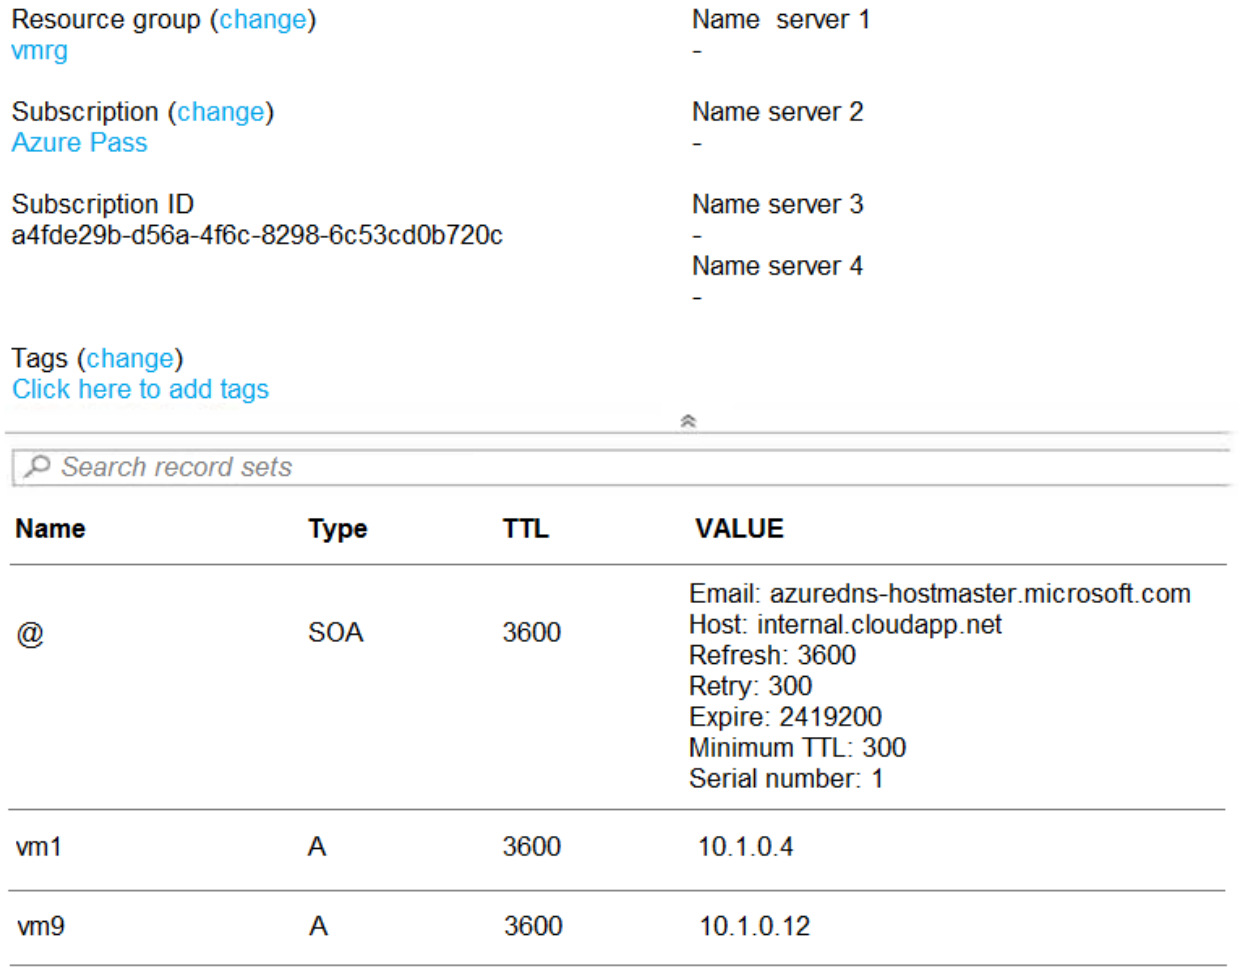

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
The A record for VM5 will be registered automatically in the adatum.com zone.	○	○
VM5 can resolve VM9.adatum.com.	○	○
VM6 can resolve VM9.adatum.com.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
The A record for VM5 will be registered automatically in the adatum.com zone.	○	○
VM5 can resolve VM9.adatum.com.	○	○
VM6 can resolve VM9.adatum.com.	○	○

Box 1: No -
Azure DNS provides automatic registration of virtual machines from a single virtual network that's linked to a private zone as a registration virtual network. VM5 does not belong to the registration virtual network though.

Box 2: No -
Forward DNS resolution is supported across virtual networks that are linked to the private zone as resolution virtual networks. VM5 does belong to a resolution virtual network.

Box 3: Yes -
VM6 belongs to registration virtual network, and an A (Host) record exists for VM9 in the DNS zone.
By default, registration virtual networks also act as resolution virtual networks, in the sense that DNS resolution against the zone works from any of the virtual machines within the registration virtual network.

SecExams

Reference:
https://docs.microsoft.com/en-us/azure/dns/private-dns-overview

Community Discussion

SecExams

Question #681

SecExams

HOTSPOT -

You have an Azure subscription that contains the resources in the following table:

Name	Type
VMRG	Resource group
VNet1	Virtual network
VNet2	Virtual network
VM5	Virtual machine connected to VNet1
VM6	Virtual machine connected to VNet2

In Azure, you create a private DNS zone named adatum.com. You set the registration virtual network to VNet2. The adatum.com zone is configured as shown in the following exhibit:

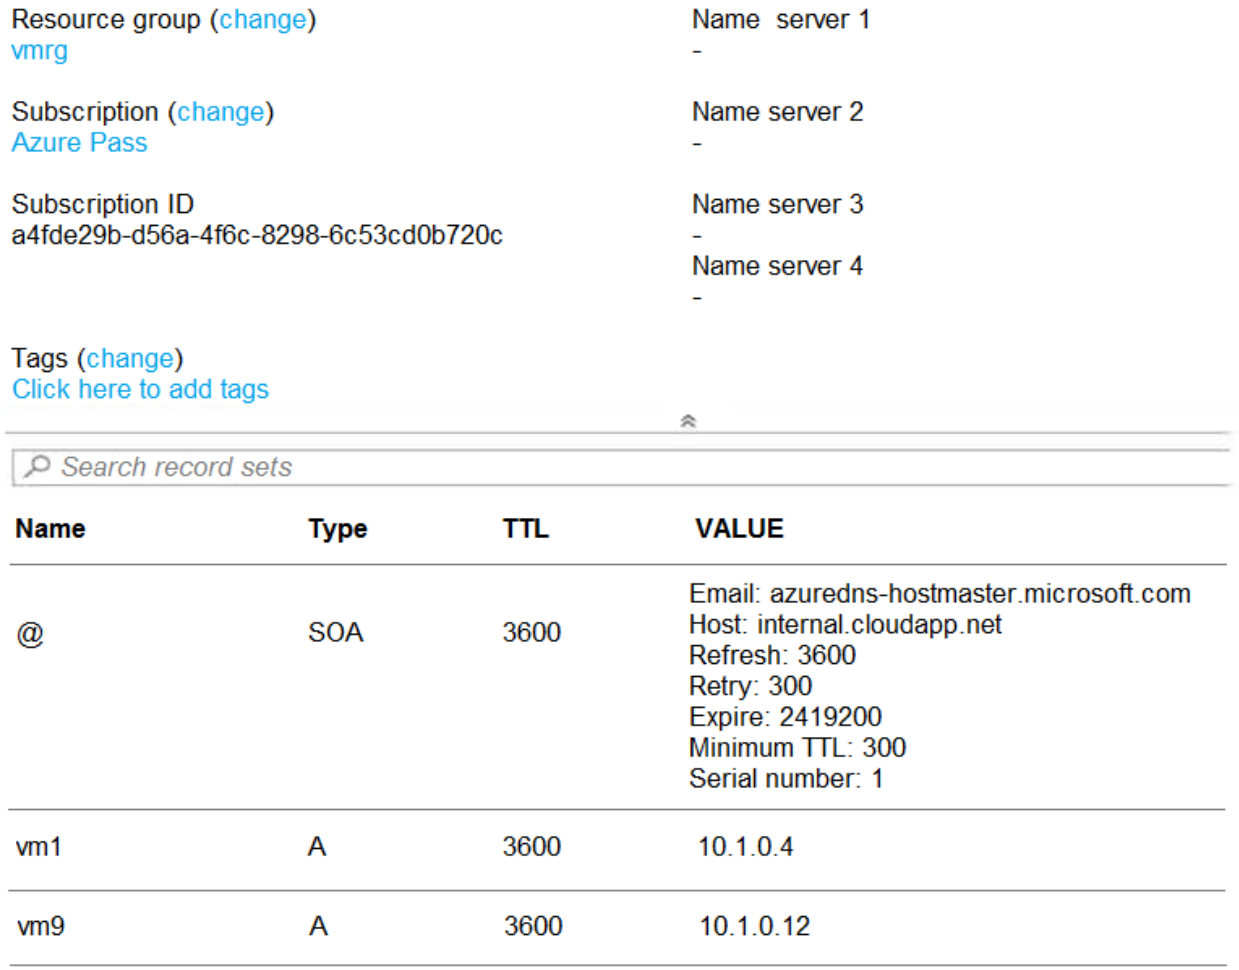

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
The A record for VM5 will be registered automatically in the adatum.com zone.	○	○
VM5 can resolve VM9.adatum.com.	○	○
VM6 can resolve VM9.adatum.com.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
The A record for VM5 will be registered automatically in the adatum.com zone.	○	○
VM5 can resolve VM9.adatum.com.	○	○
VM6 can resolve VM9.adatum.com.	○	○

Box 1: No -
Azure DNS provides automatic registration of virtual machines from a single virtual network that's linked to a private zone as a registration virtual network. VM5 does not belong to the registration virtual network though.

Box 2: No -
Forward DNS resolution is supported across virtual networks that are linked to the private zone as resolution virtual networks. VM5 does belong to a resolution virtual network.

Box 3: Yes -
VM6 belongs to registration virtual network, and an A (Host) record exists for VM9 in the DNS zone.
By default, registration virtual networks also act as resolution virtual networks, in the sense that DNS resolution against the zone works from any of the virtual machines within the registration virtual network.

Reference:
https://docs.microsoft.com/en-us/azure/dns/private-dns-overview

Community Discussion

Correct Answer: VNet1 (NOT A Registration Netvork) : VM5 VNet2 (IS A Registration Netvork) : VM1, VM6 and VM9 So here we go: 1. VM5 is in VNet1 - answer is NO. 2. VM5 is in VNet1 - answer is NO. 3. VM6 is in VNet2 - answer is YES.

I think the Answer is correct. NO, NO, YES. the second answer is NO because VM5 belongs to Vnet1 and the DNS is registered to Vnet2 therefore VM5 cannot reach the DNS service.

Agreed, there is no mention of Vnet peering, thus we can assume the two Vnet's is not connected.

Agreed, there is no mention of Vnet peering, thus we can assume the two Vnet's is not connected.

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. Answered: N N Y

SecExams

Question #682

SecExams

HOTSPOT -

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location
VNET1	West US
VNET2	West US
VNET3	East US

The subscription contains the private DNS zones shown in the following table.

Name	Location
Zone1.com	West US
Zone2.com	West US
Zone3.com	East US

You add virtual network links to the private DNS zones as shown in the following table.

Name	Private DNS zone	Virtual network	Enable auto registration
Link1	Zone1.com	VNET1	Yes
Link2	Zone2.com	VNET2	No
Link3	Zone3.com	VNET3	No

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can enable auto registration for Link2.	○	○
You can add a virtual network link for VNET1 to Zone3.com.	○	○
You can add a virtual network link for VNET2 to Zone1.com and enable auto registration.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can enable auto registration for Link2.	○	○
You can add a virtual network link for VNET1 to Zone3.com.	○	○
You can add a virtual network link for VNET2 to Zone1.com and enable auto registration.	○	○

Reference:
https://docs.microsoft.com/en-us/azure/dns/private-dns-virtual-network-links https://docs.microsoft.com/en-us/azure/dns/private-dns-autoregistration

Community Discussion

SecExams

Question #683

SecExams

HOTSPOT -

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location
VNET1	West US
VNET2	West US
VNET3	East US

The subscription contains the private DNS zones shown in the following table.

Name	Location
Zone1.com	West US
Zone2.com	West US
Zone3.com	East US

You add virtual network links to the private DNS zones as shown in the following table.

Name	Private DNS zone	Virtual network	Enable auto registration
Link1	Zone1.com	VNET1	Yes
Link2	Zone2.com	VNET2	No
Link3	Zone3.com	VNET3	No

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can enable auto registration for Link2.	○	○
You can add a virtual network link for VNET1 to Zone3.com.	○	○
You can add a virtual network link for VNET2 to Zone1.com and enable auto registration.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can enable auto registration for Link2.	○	○
You can add a virtual network link for VNET1 to Zone3.com.	○	○
You can add a virtual network link for VNET2 to Zone1.com and enable auto registration.	○	○

Reference:
https://docs.microsoft.com/en-us/azure/dns/private-dns-virtual-network-links https://docs.microsoft.com/en-us/azure/dns/private-dns-autoregistration

SecExams

Community Discussion

https://docs.microsoft.com/en-us/azure/dns/private-dns-virtual-network-links A virtual network can be linked to private DNS zone as a registration or as a resolution virtual network. Registration virtual network: A private DNS zone can have multiple registration virtual networks. However, every virtual network can only have one registration zone associated with it. Resolution virtual network: One private DNS zone can have multiple resolution virtual networks and a virtual network can have multiple resolution zones associated to it. 1. Yes No registration zone for VNET2. 2. Yes A virtual network can have multiple resolution zones associated to it. 3.Yes No registration zone for VNET2.

1. Yes 2. Yes. You can link VNET1 to Zone3.com A private DNS zone can have multiple registration virtual networks. However, every virtual network can only have one registration zone associated with it. 3. No. Auto registration is already enabled on Zone 1. When you add a link from VNET2 to Zone

Sorry I don't agree. ref: https://docs.microsoft.com/en-us/azure/dns/private-dns-autoregistration 1. Yes - "When you link a virtual network with a private DNS zone with this setting enabled", suggested is needs to be done when created, but you could recreate the link to do it. 2. No - "A specific virtual network can be linked to only one private DNS zone when automatic VM DNS registration is enabled", so if auto VM enabled only one zone. 3. No - as above, only one zone with Auto VM, although technically you could delete the other link and it would then work, but that seems out the scope of the question. Again another somewhat poorly written question. But I would say Yes, No, No.

Sorry I don't agree. ref: https://docs.microsoft.com/en-us/azure/dns/private-dns-autoregistration 1. Yes - "When you link a virtual network with a private DNS zone with this setting enabled", suggested is needs to be done when created, but you could recreate the link to do it. 2. No - "A specific virtual network can be linked to only one private DNS zone when automatic VM DNS registration is enabled", so if auto VM enabled only one zone. 3. No - as above, only one zone with Auto VM, although technically you could delete the other link and it would then work, but that seems out the scope of the question. Again another somewhat poorly written question. But I would say Yes, No, No.

Please test and verify before you make certain claims. In my understanding verified by tests: Y-Y-Y "You can enable auto registration for Link2": Yes This setting can be changed on an already existing link (provided that the change doesn't yield two VNET links with both auto registration on them, that will fail). "You can add a virtual network link for VNET1 to Zone3.com": Yes One private DNS zone can have multiple resolution virtual networks and a virtual network can have multiple resolution zones associated to it. https://learn.microsoft.com/en-us/azure/dns/private-dns-virtual-network-links "You can add a virtual network link for VNET2 to Zone1.com and enable auto registration": Yes The current link(s) for VNET2 does not have auto registration, so a new link with auto. reg. can be added.

SecExams

Question #684

SecExams

HOTSPOT -

You have an Azure subscription.

You plan to use an Azure Resource Manager template to deploy a virtual network named VNET1 that will use Azure Bastion.

How should you complete the template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

```
{
"type": "Microsoft.Network/virtualNetworks",
"name": "VNET1"
"apiVersion": "2019-02-01",
"location": "[resourceGroup().location]",
"properties": {
"addressSpace": {
"addressPrefixes": ["10.10.10.0/24"]
},
"subnets": [
{
        "name": [AzureBastionSubnet | AzureFirewallSubnet | LAN01 | RemoteAccessSubnet]
        "properties": {
          "addressPrefix": [10.10.10.0/27 | 10.10.10.0/29 | 10.10.10.0/30]
        }
      },
      {
          "name": "LAN02",
          "properties": {
              "addressPrefix": "10.10.10.128/25"
          }
        }
    ]
  }
}
```

Explanation

Correct Answer:

Answer Area

```
{
"type": "Microsoft.Network/virtualNetworks",
"name": "VNET1"
"apiVersion": "2019-02-01",
"location": "[resourceGroup().location]",
"properties": {
"addressSpace": {
"addressPrefixes": ["10.10.10.0/24"]
},
"subnets": [
{
        "name": [AzureBastionSubnet | AzureFirewallSubnet | LAN01 | RemoteAccessSubnet]
        "properties": {
          "addressPrefix": [10.10.10.0/27 | 10.10.10.0/29 | 10.10.10.0/30]
        }
      },
      {
          "name": "LAN02",
          "properties": {
              "addressPrefix": "10.10.10.128/25"
          }
        }
      ]
    }
}
```

Reference:
https://medium.com/charot/deploy-azure-bastion-preview-using-an-arm-template-15e3010767d6

Community Discussion

Question #685

SecExams

HOTSPOT -

You have an Azure subscription.

You plan to use an Azure Resource Manager template to deploy a virtual network named VNET1 that will use Azure Bastion.

How should you complete the template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

```
{
"type": "Microsoft.Network/virtualNetworks",
"name": "VNET1"
"apiVersion": "2019-02-01",
"location": "[resourceGroup().location]",
"properties": {
"addressSpace": {
"addressPrefixes": ["10.10.10.0/24"]
},
"subnets": [
{
        "name": [AzureBastionSubnet | AzureFirewallSubnet | LAN01 | RemoteAccessSubnet]
        "properties": {
          "addressPrefix": [10.10.10.0/27 | 10.10.10.0/29 | 10.10.10.0/30]
        }
      },
      {
          "name": "LAN02",
          "properties": {
              "addressPrefix": "10.10.10.128/25"
          }
        }
    ]
  }
}
```

Explanation

Correct Answer:

Answer Area

```
{
"type": "Microsoft.Network/virtualNetworks",
"name": "VNET1"
"apiVersion": "2019-02-01",
"location": "[resourceGroup().location]",
"properties": {
"addressSpace": {
"addressPrefixes": ["10.10.10.0/24"]
},
"subnets": [
{
        "name": [AzureBastionSubnet | AzureFirewallSubnet | LAN01 | RemoteAccessSubnet]
        "properties": {
          "addressPrefix": [10.10.10.0/27 | 10.10.10.0/29 | 10.10.10.0/30]
        }
      },
      {
          "name": "LAN02",
          "properties": {
              "addressPrefix": "10.10.10.128/25"
          }
        }
      ]
    }
}
```

Reference:
https://medium.com/charot/deploy-azure-bastion-preview-using-an-arm-template-15e3010767d6

Community Discussion

answer is correct + Subnet Name AzureBastionSubnet AzureBastionSubnet addresses A subnet within your VNet address space with a /27 subnet mask. For example, 10.1.1.0/27. https://docs.microsoft.com/en-us/azure/bastion/quickstart-host-portal

This question is outdated. At this very moment you can read at documentation: + Subnet Name | AzureBastionSubnet AzureBastionSubnet addresses | A subnet within your VNet address space with a subnet mask /26 or larger. For example, 10.1.1.0/26.

Correct. Have just gone to create a new Bastion resource in my lab. This info message is given: To associate a virtual network with a Bastion, it must contain a subnet with name AzureBastionSubnet and a prefix of at least /26. Also see documentation here: https://docs.microsoft.com/en-gb/azure/bastion/quickstart-host-portal For Azure Bastion resources deployed on or after November 2, 2021, the minimum AzureBastionSubnet size is /26 or larger (/25, /24, etc.). All Azure Bastion resources deployed in subnets of size /27 prior to this date are unaffected by this change and will continue to work, but we highly recommend increasing the size of any existing AzureBastionSubnet to /26 in case you choose to take advantage of host scaling in the future.

Correct. Have just gone to create a new Bastion resource in my lab. This info message is given: To associate a virtual network with a Bastion, it must contain a subnet with name AzureBastionSubnet and a prefix of at least /26. Also see documentation here: https://docs.microsoft.com/en-gb/azure/bastion/quickstart-host-portal For Azure Bastion resources deployed on or after November 2, 2021, the minimum AzureBastionSubnet size is /26 or larger (/25, /24, etc.). All Azure Bastion resources deployed in subnets of size /27 prior to this date are unaffected by this change and will continue to work, but we highly recommend increasing the size of any existing AzureBastionSubnet to /26 in case you choose to take advantage of host scaling in the future.

I passed on September 3, 2023. The options for this exam were updated to 10.0.0.0/26, not 27

SecExams

Question #686

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You manage a virtual network named VNet1 that is hosted in the West US Azure region.
VNet1 hosts two virtual machines named VM1 and VM2 that run Windows Server.
You need to inspect all the network traffic from VM1 to VM2 for a period of three hours.
Solution: From Azure Network Watcher, you create a packet capture.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
Network Watcher variable packet capture allows you to create packet capture sessions to track traffic to and from a virtual machine. Packet capture helps to diagnose network anomalies both reactively and proactively. Other uses include gathering network statistics, gaining information on network intrusions, to debug client-server communications and much more.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-packet-capture-overview

Community Discussion

Question #687

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You manage a virtual network named VNet1 that is hosted in the West US Azure region.
VNet1 hosts two virtual machines named VM1 and VM2 that run Windows Server.
You need to inspect all the network traffic from VM1 to VM2 for a period of three hours.
Solution: From Azure Network Watcher, you create a packet capture.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Network Watcher variable packet capture allows you to create packet capture sessions to track traffic to and from a virtual machine. Packet capture helps to diagnose network anomalies both reactively and proactively. Other uses include gathering network statistics, gaining information on network intrusions, to debug client-server communications and much more.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-packet-capture-overview

Community Discussion

If you initiated a packet capture from VM1 to VM2 and ran a capture for three hours, wouldn't you have file which contained all traffic between VM1 and VM2?

No Should use connection monitor for a period of time https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview

There are several versions of this question. The following are the possible Correct and Incorrect solutions. Correct solution: Meets the goal. -Solution: From Azure Network Watcher, you create a packet capture. Incorrect solution: Does not meet the goal. -Solution: From Azure Monitor, you create a metric on Network In and Network Out. -Solution: From Azure Network Watcher, you create a connection monitor. -Solution: From Performance Monitor, you create a Data Collector Set (DCS).

Still on test 01/05/2023

yes you would, considering you didn't specify any filtering which is optional.

SecExams

Question #688

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You manage a virtual network named VNet1 that is hosted in the West US Azure region.
VNet1 hosts two virtual machines named VM1 and VM2 that run Windows Server.
You need to inspect all the network traffic from VM1 to VM2 for a period of three hours.
Solution: From Azure Network Watcher, you create a connection monitor.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
Reference:

https://azure.microsoft.com/en-us/updates/general-availability-azure-network-watcher-connection-monitor-in-all-public-regions/

Community Discussion

Question #689

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You manage a virtual network named VNet1 that is hosted in the West US Azure region.
VNet1 hosts two virtual machines named VM1 and VM2 that run Windows Server.
You need to inspect all the network traffic from VM1 to VM2 for a period of three hours.
Solution: From Azure Network Watcher, you create a connection monitor.
Does this meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Reference:
https://azure.microsoft.com/en-us/updates/general-availability-azure-network-watcher-connection-monitor-in-all-public-regions/

Community Discussion

No. We need to inspect all the network traffic "from" VM1 "to" VM2 and not between the 2 VMs. Even if we were using Connection monitor, this one would inspect only network traffic over a specific port. And for a period of 3 hours, packet capture session time limit default value is 18000 seconds or 5 hours.

There are several versions of this question. The following are the possible Correct and Incorrect solutions. Correct solution: Meets the goal. -Solution: From Azure Network Watcher, you create a packet capture. Incorrect solution: Does not meet the goal. -Solution: From Azure Monitor, you create a metric on Network In and Network Out. -Solution: From Azure Network Watcher, you create a connection monitor. -Solution: From Performance Monitor, you create a Data Collector Set (DCS).

I have checked this and indeed connection monitor setup asks you for port and indeed the question asks you for all traffic.

I have checked this and indeed connection monitor setup asks you for port and indeed the question asks you for all traffic.

Selected Answer: B

B is the answer. https://learn.microsoft.com/en-us/azure/network-watcher/connection-monitor-overview Connection Monitor provides unified, end-to-end connection monitoring in Azure Network Watcher. The Connection Monitor feature supports hybrid and Azure cloud deployments. Network Watcher provides tools to monitor, diagnose, and view connectivity-related metrics for your Azure deployments. https://learn.microsoft.com/en-us/azure/network-watcher/network-watcher-packet-capture-overview Network Watcher variable packet capture allows you to create packet capture sessions to track traffic to and from a virtual machine. Packet capture helps to diagnose network anomalies both reactively and proactively. Other uses include gathering network statistics, gaining information on network intrusions, to debug client-server communications and much more.

SecExams

Question #690

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You manage a virtual network named VNet1 that is hosted in the West US Azure region.
VNet1 hosts two virtual machines named VM1 and VM2 that run Windows Server.
You need to inspect all the network traffic from VM1 to VM2 for a period of three hours.
Solution: From Performance Monitor, you create a Data Collector Set (DCS).
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Use the Connection Monitor feature of Azure Network Watcher.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview

Community Discussion

Question #691

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You manage a virtual network named VNet1 that is hosted in the West US Azure region.
VNet1 hosts two virtual machines named VM1 and VM2 that run Windows Server.
You need to inspect all the network traffic from VM1 to VM2 for a period of three hours.
Solution: From Performance Monitor, you create a Data Collector Set (DCS).
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Use the Connection Monitor feature of Azure Network Watcher.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview

Community Discussion

At least we can agree that this one is No :)

Sorry, my cocky answer above is incorrect, - Connection Monitor will only inspect traffic on a specific port, - we need Packet Capture, - which will capture all traffic

There are several versions of this question. The following are the possible Correct and Incorrect solutions. Correct solution: Meets the goal. -Solution: From Azure Network

Watcher, you create a packet capture. Incorrect solution: Does not meet the goal. - Solution: From Azure Monitor, you create a metric on Network In and Network Out. - Solution: From Azure Network Watcher, you create a connection monitor. -Solution: From Performance Monitor, you create a Data Collector Set (DCS).

Performance Monitor and a Data Collector Set huh. RIP Windows Server 70-410.

Nice try, but no banana. You need the trusty Connection Monitor in this scenario

SecExams

Question #692

DRAG DROP -

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vm1	Virtual machine	Uses a basic public IP address
vm2	Virtual machine	Uses a basic public IP address
nsg1	Network security group (NSG)	Allows incoming traffic from port 443
lb1	Azure Standard Load Balancer	**Not applicable**

You need to load balance HTTPS connections to vm1 and vm2 by using lb1.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

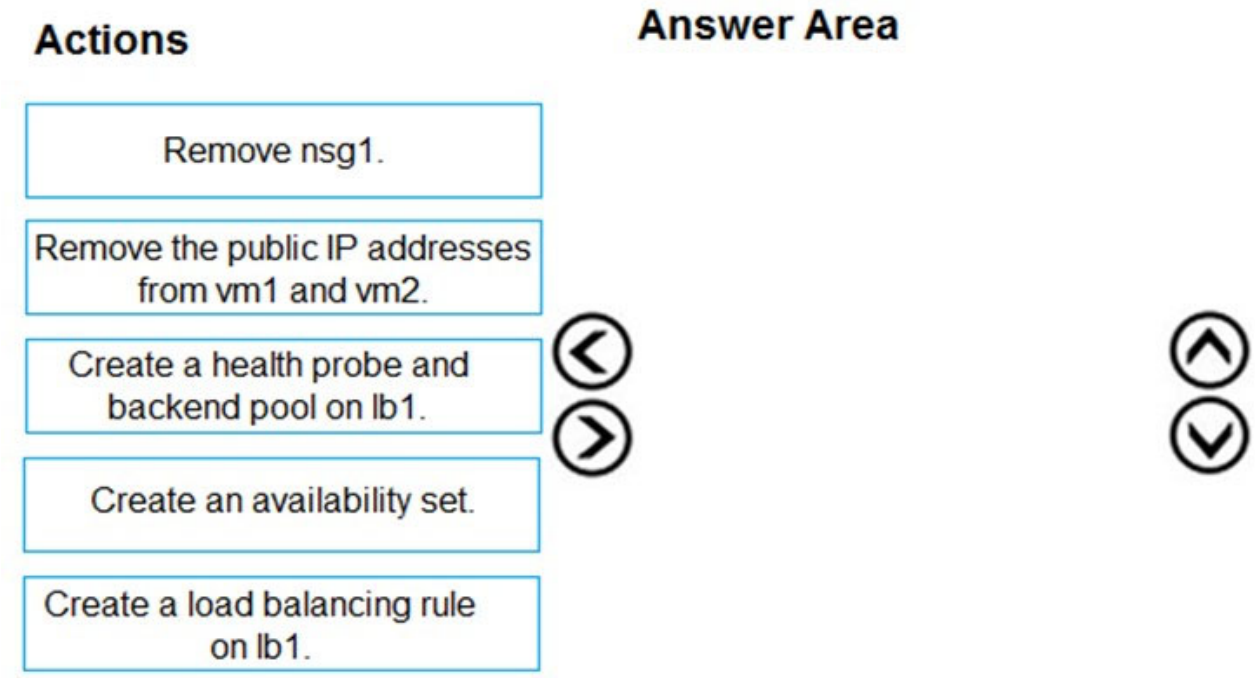

Explanation

Correct Answer:

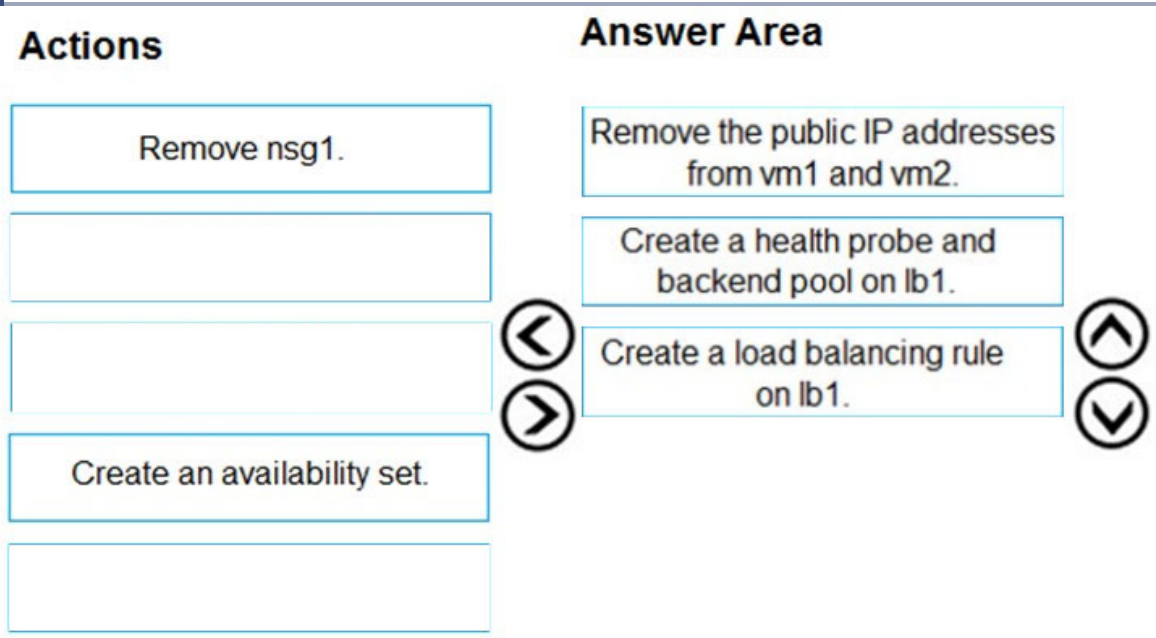

Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/tutorial-load-balancer-standard-public-zone-redundant-portal

Community Discussion

Question #693

DRAG DROP -

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vm1	Virtual machine	Uses a basic public IP address
vm2	Virtual machine	Uses a basic public IP address
nsg1	Network security group (NSG)	Allows incoming traffic from port 443
lb1	Azure Standard Load Balancer	**Not applicable**

You need to load balance HTTPS connections to vm1 and vm2 by using lb1.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

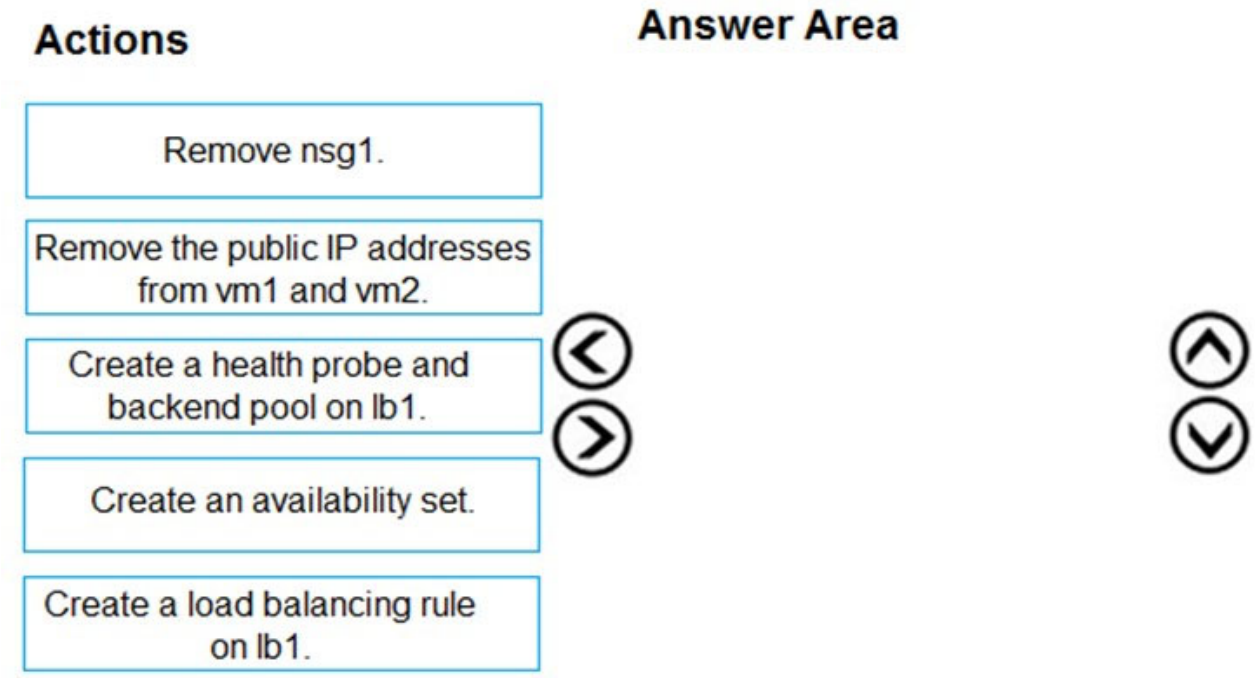

Explanation

Correct Answer:

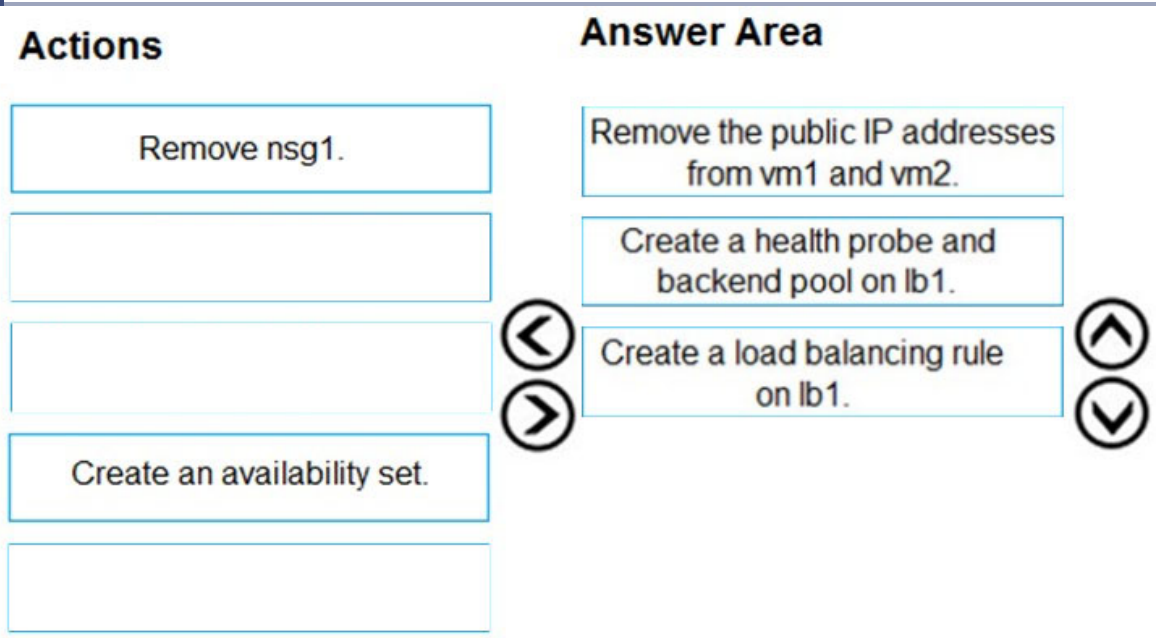

Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/tutorial-load-balancer-standard-public-zone-redundant-portal

Community Discussion

Answer is correct: 1) Remove the Public IP addresses. They are basic Public IPs and we're using a Standard Load Balancer which aren't compatible. 2) Create a backend pool and health probes. 3) Create a load balancer rule.

What if the machines are actually off? Seriously, just read the information that are given. NSG is not blocking port 80 by default so it is irrelevant.

What if the machines are actually off? Seriously, just read the information that are given. NSG is not blocking port 80 by default so it is irrelevant.

What if the machines are actually off? Seriously, just read the information that are given. NSG is not blocking port 80 by default so it is irrelevant.

What if the machines are actually off? Seriously, just read the information that are given. NSG is not blocking port 80 by default so it is irrelevant.

SecExams

Question #694

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You manage a virtual network named VNet1 that is hosted in the West US Azure region.
VNet1 hosts two virtual machines named VM1 and VM2 that run Windows Server.
You need to inspect all the network traffic from VM1 to VM2 for a period of three hours.
Solution: From Azure Monitor, you create a metric on Network In and Network Out.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Reference:
https://azure.microsoft.com/en-us/updates/general-availability-azure-network-watcher-connection-monitor-in-all-public-regions/

Community Discussion

Question #695

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You manage a virtual network named VNet1 that is hosted in the West US Azure region.
VNet1 hosts two virtual machines named VM1 and VM2 that run Windows Server.
You need to inspect all the network traffic from VM1 to VM2 for a period of three hours.
Solution: From Azure Monitor, you create a metric on Network In and Network Out.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Reference:
https://azure.microsoft.com/en-us/updates/general-availability-azure-network-watcher-connection-monitor-in-all-public-regions/

Community Discussion

nope, you create a packet capture.

nope, you create a packet capture.

God bless all you people putting the wrong answers on these so we can have people confidently correct you.

Selected Answer: B

You use the Packet Capture, not Connection Monitor nor Network watcher

As described here: https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-packet-capture-manage-portal Network Watcher packet capture allows you to create capture sessions to track traffic to and from a virtual machine.

SecExams

Question #696

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.
The effective network security configurations for VM2 are shown in the following exhibit.

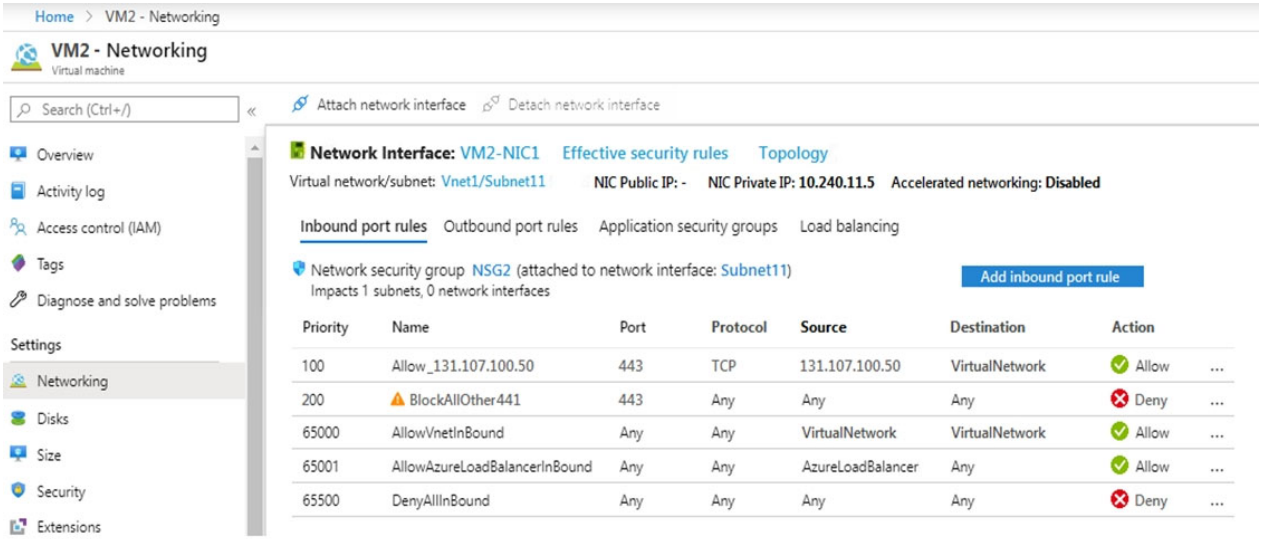

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.
You verify that the Load Balancer rules are configured correctly.
You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.
Solution: You create an inbound security rule that denies all traffic from the 131.107.100.50 source and has a priority of 64999.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Reference:
https://fastreroute.com/azure-network-security-groups-explained/

Community Discussion

SecExams

Question #697

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.
The effective network security configurations for VM2 are shown in the following exhibit.

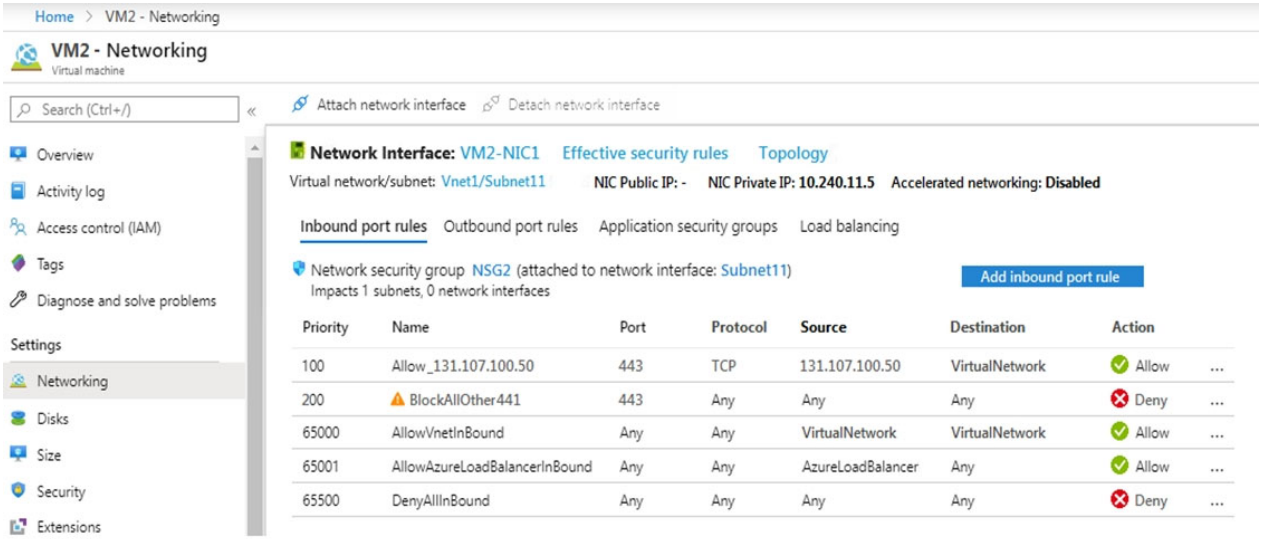

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.
You verify that the Load Balancer rules are configured correctly.
You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.
Solution: You create an inbound security rule that denies all traffic from the 131.107.100.50 source and has a priority of 64999.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Reference:
https://fastreroute.com/azure-network-security-groups-explained/

Community Discussion

i'm not a robot

Selected Answer: B

Answer B (No) When an Azure Load Balancer get created, it will probe backend to detect if the backend service is healthy or not, the probe packet is sent from source address "AzureLoadBalancer", the IP address of "AzureLoadBalancer" is always 168.63.129.16. https://msazure.club/addendum-of-azure-load-balancer-and-nsg-rules/ What is happening here is the LB Health Probe of TCP 443 to VM1 & VM2 are getting blocked by Rule 200 so it thinks both VM1 and VM2 are down. Hence App1 is failing as the LB won't direct any 443 traffic anywhere as it considers all Hosts are down. Make a new rule above 200 or move rule 65001 up to <200, so the Health Probe will start working again, it will find a health host and start to direct 443 traffic from 131.107.100.50 to it. App1 is alive!

You need to start the VM - check Attach Network which is available. This happens only when VM is turned off.

For this question (and other questions with similar context) this is the first time the explanation made total sense. Thank you!

For this question (and other questions with similar context) this is the first time the explanation made total sense. Thank you!

SecExams

Question #698

DRAG DROP -

You have an Azure subscription that contains two on-premises locations named site1 and site2.

You need to connect site1 and site2 by using an Azure Virtual WAN.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions	Answer Area
Create a virtual hub.	
Create VPN sites.	
Connect the virtual networks to the hub.	
Create a Virtual WAN resource.	
Connect the VPN sites to the hub.	

Explanation

Correct Answer:

Actions	Answer Area
	Create a Virtual WAN resource.
	Create a virtual hub.
Connect the virtual networks to the hub.	Create VPN sites.
	Connect the VPN sites to the hub.

Reference:
https://docs.microsoft.com/en-us/azure/virtual-wan/virtual-wan-site-to-site-portal

Community Discussion

Question #699

DRAG DROP -

You have an Azure subscription that contains two on-premises locations named site1 and site2.

You need to connect site1 and site2 by using an Azure Virtual WAN.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions	Answer Area
Create a virtual hub.	
Create VPN sites.	
Connect the virtual networks to the hub.	
Create a Virtual WAN resource.	
Connect the VPN sites to the hub.	

Explanation

Correct Answer:

Actions	Answer Area
	Create a Virtual WAN resource.
	Create a virtual hub.
Connect the virtual networks to the hub.	Create VPN sites.
	Connect the VPN sites to the hub.

Reference:
https://docs.microsoft.com/en-us/azure/virtual-wan/virtual-wan-site-to-site-portal

Community Discussion

Doing my AZ-104 this month, please pray for me

If he is not back to this site, he passed the exam ?

If he is not back to this site, he passed the exam ?

If he is not back to this site, he passed the exam ?

If he is not back to this site, he passed the exam ?

SecExams

Question #700

SecExams

HOTSPOT -

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Peered with	DNS server
VNET1	VNET2	Default (Azure-provided)
VNET2	VNET1	10.10.0.4

You have the virtual machines shown in the following table.

Name	IP address	Network interface	Connects to
Server1	10.10.0.4	NIC1	VNET1/Subnet1
Server2	172.16.0.4	NIC2	VNET1/Subnet2
Server3	192.168.0.4	NIC3	VNET2/Subnet2

You have the virtual network interfaces shown in the following table.

Name	DNS server
NIC1	Inherit from virtual network
NIC2	10.10.0.4
NIC3	Inherit from virtual network

Server1 is a DNS server that contains the resources shown in the following table.

Name	Type	Value
contoso.com	Primary DNS zone	**Not applicable**
Host1.contoso.com	A record	131.107.10.15

You have an Azure private DNS zone named contoso.com that has a virtual network link to VNET2 and the records shown in the following table.

Name	Type	Value
Host1	A record	131.107.200.20
Host2	A record	131.107.50.50

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

Statements	Yes	No
Server2 resolves host2.contoso.com to 131.107.50.50.	○	○
Server2 resolves host1.contoso.com to 131.107.10.15.	○	○
Server3 resolves host2.contoso.com to 131.107.50.50.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
Server2 resolves host2.contoso.com to 131.107.50.50.	○	○
Server2 resolves host1.contoso.com to 131.107.10.15.	○	○
Server3 resolves host2.contoso.com to 131.107.50.50.	○	○

Community Discussion

SecExams

Question #701

SecExams

HOTSPOT -

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Peered with	DNS server
VNET1	VNET2	Default (Azure-provided)
VNET2	VNET1	10.10.0.4

You have the virtual machines shown in the following table.

Name	IP address	Network interface	Connects to
Server1	10.10.0.4	NIC1	VNET1/Subnet1
Server2	172.16.0.4	NIC2	VNET1/Subnet2
Server3	192.168.0.4	NIC3	VNET2/Subnet2

You have the virtual network interfaces shown in the following table.

Name	DNS server
NIC1	Inherit from virtual network
NIC2	10.10.0.4
NIC3	Inherit from virtual network

Server1 is a DNS server that contains the resources shown in the following table.

Name	Type	Value
contoso.com	Primary DNS zone	**Not applicable**
Host1.contoso.com	A record	131.107.10.15

You have an Azure private DNS zone named contoso.com that has a virtual network link to VNET2 and the records shown in the following table.

Name	Type	Value
Host1	A record	131.107.200.20
Host2	A record	131.107.50.50

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

Statements	Yes	No
Server2 resolves host2.contoso.com to 131.107.50.50.	○	○
Server2 resolves host1.contoso.com to 131.107.10.15.	○	○
Server3 resolves host2.contoso.com to 131.107.50.50.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
Server2 resolves host2.contoso.com to 131.107.50.50.	○	○
Server2 resolves host1.contoso.com to 131.107.10.15.	○	○
Server3 resolves host2.contoso.com to 131.107.50.50.	○	○

Community Discussion

Solution seems wrong. Should be No/Yes/No (not tested) No: Server2 uses Server1 for DNS. Server1 has no host2.contoso.com record for 131.107.50.50. It would work if VNET1 hat a virtual network link to the private zone contoso.com. Yes: Server2 uses Server1 for DNS. Server1 has a host1.contoso.com record for 131.107.10.15 No: Server3 uses 10.10.0.4 as DNS (inherited from VNET2). 10.10.0.4 (Server1) has no record for host2.contoso.com. The virtual network link for the private zone contoso.com on VNET2 won't be used since the DNS from VNET1 is set on VNET2. VNET1 DNS is not aware of the private zone contoso.com. It would work if VNET1 had a virtual network link to the private zone contoso.com.

I just tested this for myself, results were: server 2 resolve host2.contoso.com - NO - only host1 exists in the server1-hosted DNS zone, so cannot resolve - and setting server2 to use server1 as a DNS server means it does not use any other DNS servers. server 2 resolve host1.contoso.com - YES to the server1 hosted DNS address ie. 131.107.10.15 server3 resolve host2.contoso.com - YES to the Azure hosted DNS address ie. 131.107.50.50. server3 can also resolve host1.contoso.com to the Azure hosted DNS address (of course). hope this helps :)

SecExams

actually I just noticed after reading the comments again that i forgot to set the server1 DNS server on VNET2 - when i did this and updated the servers, server3 could no longer resolve host2.contoso.com as it was using the server1 hosted DNS server. so i say the answer is NO-YES-NO

How Server3 uses 10.10.0.4 for DNS Server!? Could you explain, please? For NIC3 we have DNS settings "Inherit from virtual network". In addition Server3 is in VNET2. VNET2 is linked to the private zone contoso.com which has a record for host2.contoso.com. So Server3 would be able to resove it. I think the 3th is YES! N-Y-Y

How Server3 uses 10.10.0.4 for DNS Server!? Could you explain, please? For NIC3 we have DNS settings "Inherit from virtual network". In addition Server3 is in VNET2. VNET2 is linked to the private zone contoso.com which has a record for host2.contoso.com. So Server3 would be able to resove it. I think the 3th is YES! N-Y-Y

SecExams

Question #702

You have a virtual network named VNet1 as shown in the exhibit. (Click the Exhibit tab.)

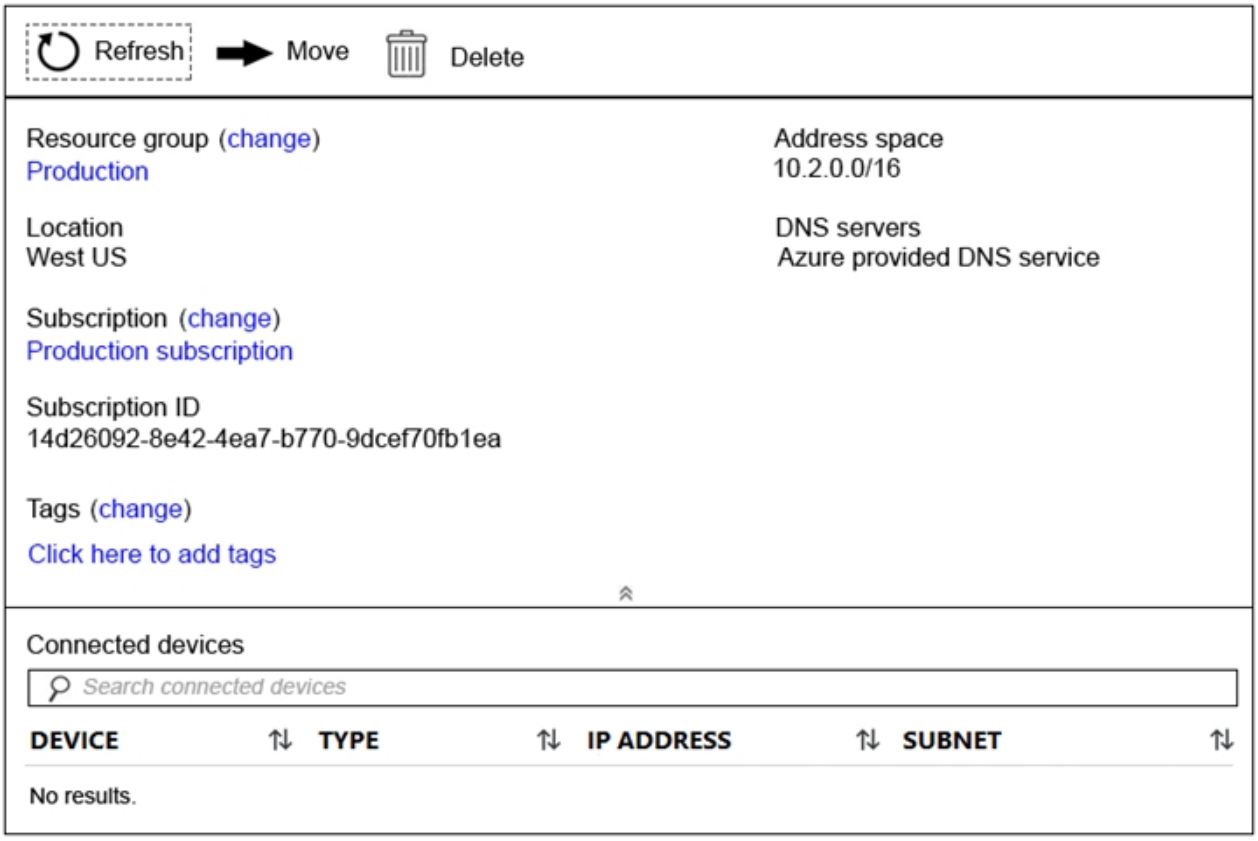

No devices are connected to VNet1.

You plan to peer VNet1 to another virtual network named VNet2. VNet2 has an address space of 10.2.0.0/16.

You need to create the peering.

What should you do first?

A) Modify the address space of VNet1. (Correct Answer)

B) Add a gateway subnet to VNet1.

C) Create a subnet on VNet1 and VNet2.

D) Configure a service endpoint on VNet2.

Explanation

Correct Answer: A ?

The virtual networks you peer must have non-overlapping IP address spaces. The exhibit indicates that VNet1 has an address space of 10.2.0.0/16, which is the same as VNet2, and thus overlaps. We need to change the address space for VNet1.

Reference:

https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-manage-peering#requirements-and-constraints https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-faq

Community Discussion

Question #703

You have a virtual network named VNet1 as shown in the exhibit. (Click the Exhibit tab.)

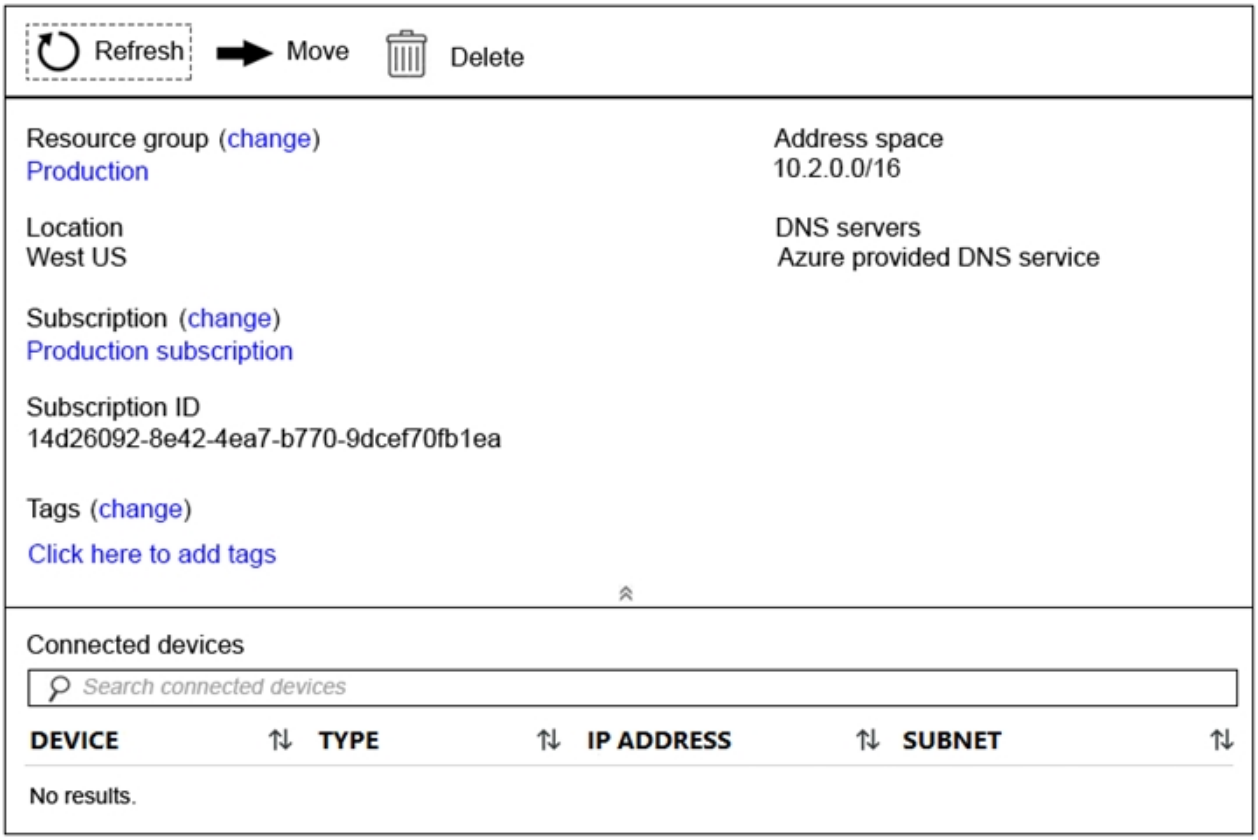

No devices are connected to VNet1.

You plan to peer VNet1 to another virtual network named VNet2. VNet2 has an address space of 10.2.0.0/16.

You need to create the peering.

What should you do first?

A) Modify the address space of VNet1. (Correct Answer)

B) Add a gateway subnet to VNet1.

C) Create a subnet on VNet1 and VNet2.

D) Configure a service endpoint on VNet2.

Explanation

Correct Answer:
A
The virtual networks you peer must have non-overlapping IP address spaces. The exhibit indicates that VNet1 has an address space of 10.2.0.0/16, which is the same as VNet2, and thus overlaps. We need to change the address space for VNet1.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-manage-peering#requirements-and-constraints https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-faq

Community Discussion

Correct. Modify the address space of VNET1, since it'd be overlapping with the one of VNET2 if you don't.

Selected Answer: A

A is the answer. https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-manage-peering?tabs=peering-portal#requirements-and-constraints The virtual networks you peer must have non-overlapping IP address spaces.

Selected Answer: A

Correct Answer: A The virtual networks you peer must have non-overlapping IP address spaces. Reference: https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-manage-peering#requirements-and-constraints

In exam today! October 16, 2021

A - modify the address space of VNET1 You have to do this because to eliminate the overlap between VNET1 and VNET2

Question #704

You have the Azure virtual machines shown in the following table.

Name	IP address	Virtual network
VM1	10.0.0.4	VNET1
VM2	10.0.0.5	VNET1

VNET1 is linked to a private DNS zone named contoso.com that contains the records shown in the following table.

Name	Type	TTL	Value	Auto registered
comp1	TXT	3600	10.0.0.5	False
comp2	A	3600	10.0.0.5	False
comp3	CNAME	3600	comp1.contoso.com	False
comp4	PTR	3600	10.0.0.5	False

You need to ping VM2 from VM1.

Which DNS names can you use to ping VM2?

A) comp2.contoso.com and comp4.contoso.com only

B) comp1.contoso.com, comp2.contoso.com, comp3.contoso.com, and comp4.contoso.com (Correct Answer)

C) comp2.contoso.com only

D) comp1.contoso.com and comp2.contoso.com only

E) comp1.contoso.com, comp2.contoso.com, and comp4.contoso.com only

Explanation

Correct Answer: B ?

Reference:

https://medium.com/azure-architects/exploring-azure-private-dns-be65de08f780

https://simpledns.plus/help/dns-record-types

Community Discussion

Question #705

You have the Azure virtual machines shown in the following table.

Name	IP address	Virtual network
VM1	10.0.0.4	VNET1
VM2	10.0.0.5	VNET1

VNET1 is linked to a private DNS zone named contoso.com that contains the records shown in the following table.

Name	Type	TTL	Value	Auto registered
comp1	TXT	3600	10.0.0.5	False
comp2	A	3600	10.0.0.5	False
comp3	CNAME	3600	comp1.contoso.com	False
comp4	PTR	3600	10.0.0.5	False

You need to ping VM2 from VM1.

Which DNS names can you use to ping VM2?

A) comp2.contoso.com and comp4.contoso.com only

B) comp1.contoso.com, comp2.contoso.com, comp3.contoso.com, and comp4.contoso.com (Correct Answer)

C) comp2.contoso.com only

D) comp1.contoso.com and comp2.contoso.com only

E) comp1.contoso.com, comp2.contoso.com, and comp4.contoso.com only

Explanation

Correct Answer:
B
Reference:
https://medium.com/azure-architects/exploring-azure-private-dns-be65de08f780
https://simpledns.plus/help/dns-record-types

Community Discussion

Correct Answer C: comp2.contoso.com only A record: Is used to map a DNS/domain name to an IP Ref:https://www.cloudflare.com/learning/dns/dns-records/dns-a-record/ TXT records in a lot of cases get used to prove ownership of a domain, it has other purposes

too. Reference: https://support.google.com/a/answer/2716800?hl=en#:~:text=TXT%20records%20are%20a%20type,and%20to%20ensure%20email%20security. PTR: A Reverse DNS lookup is used by remote hosts to determine who 'owns' an IP address. Reference: https://www.mailenable.com/kb/content/article.asp?ID=ME020206 CNAME records get used to redirect a DNS name or subdomain name to another DNS name or domain name or subdomain name. reference: https://support.dnsimple.com/articles/cname-record/ It would do good to read up on DNS record types and what they are used for, you will be lost if you don't have a basic understanding of it. https://ns1.com/resources/dns-types-records-servers-and-queries DNS is a key component In the IT field. I hope this info will help.

tested this, i say it is C - comp2.contoso.com ONLY. i created each of the records in my Azure DNS zone, a TXT record is not resolvable, an A record is resolvable, the CNAME is pointing to comp1 which again is not resolvable, and the PTR record should be an IP to a name, when i created the PTR record it wanted me to enter a domain name eg. contoso.com, not an IP address but i put the IP address in anyway, and it did not resolve. So i say it is C - comp2 ONLY

Got this in Feb 2023 exam.

Got this in Feb 2023 exam.

Selected Answer: C

C is the answer. https://learn.microsoft.com/en-us/azure/dns/dns-zones-records#record-types Each DNS record has a name and a type. Records are organized into various types according to the data they contain. The most common type is an 'A' record, which maps a name to an IPv4 address.

SecExams

Question #706

SecExams

HOTSPOT -

You have a network security group (NSG) named NSG1 that has the rules defined in the exhibit. (Click the Exhibit tab.)

```
PS C:\> Get-AzNetworkSecurityGroup -Name "NSG1" -ResourceGroupName "RG1" | Select -ExpandProperty SecurityRules

Name                                 : ALLOW_HTTPS
Id                                   : /subscriptions/09d06b22-ff51-48b7-a8be-947f15cbd69d/resourceGroups/RG1/
                                       providers/Microsoft.Network/networkSecurityGroups/NSG1/securityRules/AL
                                       LOW_HTTPS
Etag                                 : W/"8e3e9995-aa78-41e2-bfea-44b50c389873"
ProvisioningState                    : Succeeded
Description                          :
Protocol                             : TCP
SourcePortRange                      : {*}
DestinationPortRange                 : {443}
SourceAddressPrefix                  : {*}
DestinationAddressPrefix             : {*}
SourceApplicationSecurityGroups      : []
DestinationApplicationSecurityGroups : []
Access                               : Allow
Priority                             : 100
Direction                            : Inbound


Name                                 : DENY_PING
Id                                   : /subscriptions/09d06b22-ff51-48b7-a8be-947f15cbd69d/resourceGroups/RG1/
                                       providers/Microsoft.Network/networkSecurityGroups/NSG1/securityRules/DE
                                       NY_PING
Etag                                 : W/"8e3e9995-aa78-41e2-bfea-44b50c389873"
ProvisioningState                    : Succeeded
Description                          :
Protocol                             : ICMP
SourcePortRange                      : {*}
DestinationPortRange                 : {*}
SourceAddressPrefix                  : {VirtualNetwork}
DestinationAddressPrefix             : {*}
SourceApplicationSecurityGroups      : []
DestinationApplicationSecurityGroups : []
Access                               : Deny
Priority                             : 111
Direction                            : Outbound
```

NSG1 is associated to a subnet named Subnet1. Subnet1 contains the virtual machines shown in the following table.

Name	IP address
VM1	10.1.0.10
VM2	10.1.0.11

You need to add a rule to NSG1 to ensure that VM1 can ping VM2. The solution must use the principle of least privilege.

How should you configure the rule? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

Direction:
- Inbound
- Outbound

Source:
- Any
- 10.1.0.10
- 10.1.0.11
- 10.1.0.10; 10.1.0.11
- 10.1.0.0/28

Destination:
- Any
- 10.1.0.10
- 10.1.0.11
- 10.1.0.10; 10.1.0.11
- 10.1.0.0/28

Priority:
- 110
- 111
- 112

SecExams

Explanation

Correct Answer:

Answer Area

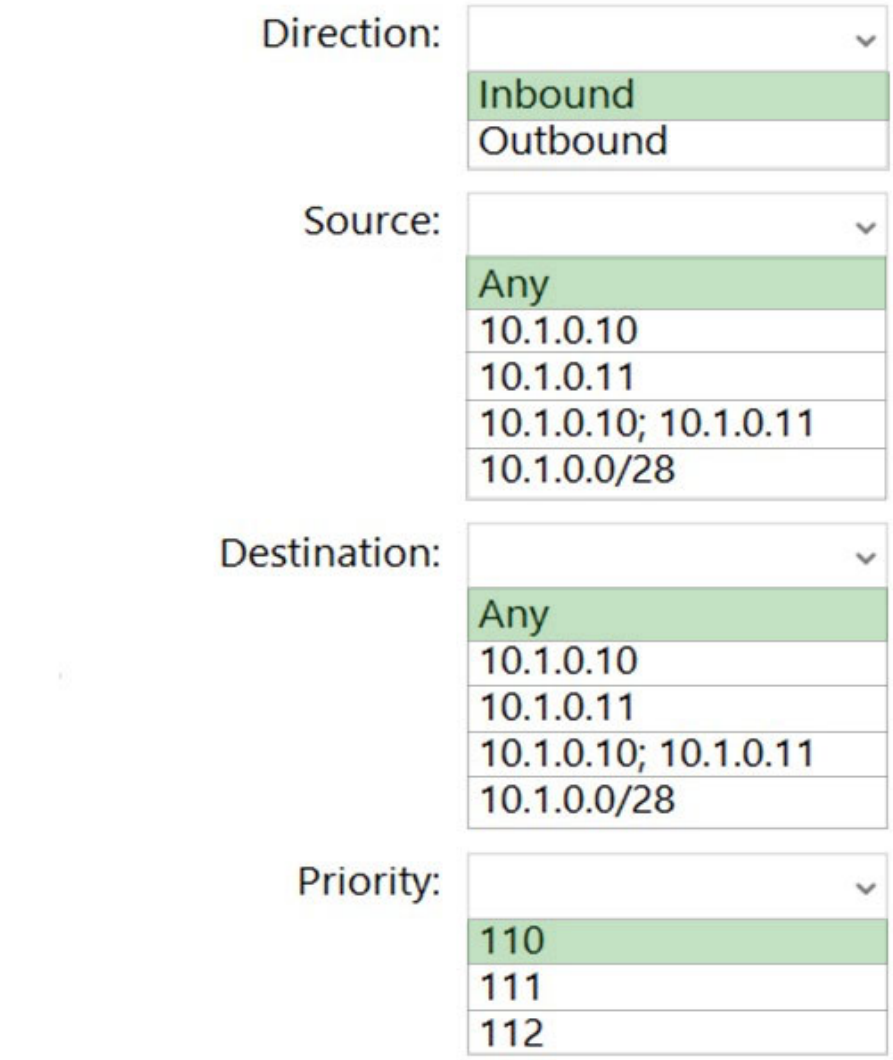

Reference:
https://www.thomasmaurer.ch/2019/09/how-to-enable-ping-icmp-echo-on-an-azure-vm/

Community Discussion

Answer is wrong. We need to undo the DENY_PING rule with the principle of least privilege. Direction: Outbound Source 10.1.0.10 (VM1) Destination: 10.1.0.11 (VM2) Priority: 110

Correct answer: Direction: Outbound Source 10.1.0.10 (VM1) Destination: 10.1.0.11 (VM2) Priority: 110 the given solution is not correct.

I can confirm it's speed2fast is correct. it's on my exam yesterday, I passed with score 923 and got 100% correct on all of the network related questions.

I can confirm it's speed2fast is correct. it's on my exam yesterday, I passed with score 923 and got 100% correct on all of the network related questions.

Since VM1 and VM2 are in the same subnet, NSG would apply both inbound and outbound rules to traffic. Your inbound rule could let the ICMP request reach VM2, but existing outbound rule would prevent it from going out of VM1 in the first place. Having an outbound rule with priority 110 overrides the existing Deny rule.

SecExams

Question #707

SecExams

HOTSPOT -

You have a network security group (NSG) named NSG1 that has the rules defined in the exhibit. (Click the Exhibit tab.)

```
PS C:\> Get-AzNetworkSecurityGroup -Name "NSG1" -ResourceGroupName "RG1" | Select -ExpandProperty SecurityRules

Name                                 : ALLOW_HTTPS
Id                                   : /subscriptions/09d06b22-ff51-48b7-a8be-947f15cbd69d/resourceGroups/RG1/
                                       providers/Microsoft.Network/networkSecurityGroups/NSG1/securityRules/AL
                                       LOW_HTTPS
Etag                                 : W/"8e3e9995-aa78-41e2-bfea-44b50c389873"
ProvisioningState                    : Succeeded
Description                          :
Protocol                             : TCP
SourcePortRange                      : {*}
DestinationPortRange                 : {443}
SourceAddressPrefix                  : {*}
DestinationAddressPrefix             : {*}
SourceApplicationSecurityGroups      : []
DestinationApplicationSecurityGroups : []
Access                               : Allow
Priority                             : 100
Direction                            : Inbound


Name                                 : DENY_PING
Id                                   : /subscriptions/09d06b22-ff51-48b7-a8be-947f15cbd69d/resourceGroups/RG1/
                                       providers/Microsoft.Network/networkSecurityGroups/NSG1/securityRules/DE
                                       NY_PING
Etag                                 : W/"8e3e9995-aa78-41e2-bfea-44b50c389873"
ProvisioningState                    : Succeeded
Description                          :
Protocol                             : ICMP
SourcePortRange                      : {*}
DestinationPortRange                 : {*}
SourceAddressPrefix                  : {VirtualNetwork}
DestinationAddressPrefix             : {*}
SourceApplicationSecurityGroups      : []
DestinationApplicationSecurityGroups : []
Access                               : Deny
Priority                             : 111
Direction                            : Outbound
```

NSG1 is associated to a subnet named Subnet1. Subnet1 contains the virtual machines shown in the following table.

Name	IP address
VM1	10.1.0.10
VM2	10.1.0.11

You need to add a rule to NSG1 to ensure that VM1 can ping VM2. The solution must use the principle of least privilege.

How should you configure the rule? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

Direction:
- Inbound
- Outbound

Source:
- Any
- 10.1.0.10
- 10.1.0.11
- 10.1.0.10; 10.1.0.11
- 10.1.0.0/28

Destination:
- Any
- 10.1.0.10
- 10.1.0.11
- 10.1.0.10; 10.1.0.11
- 10.1.0.0/28

Priority:
- 110
- 111
- 112

SecExams

Explanation

Correct Answer:

Answer Area

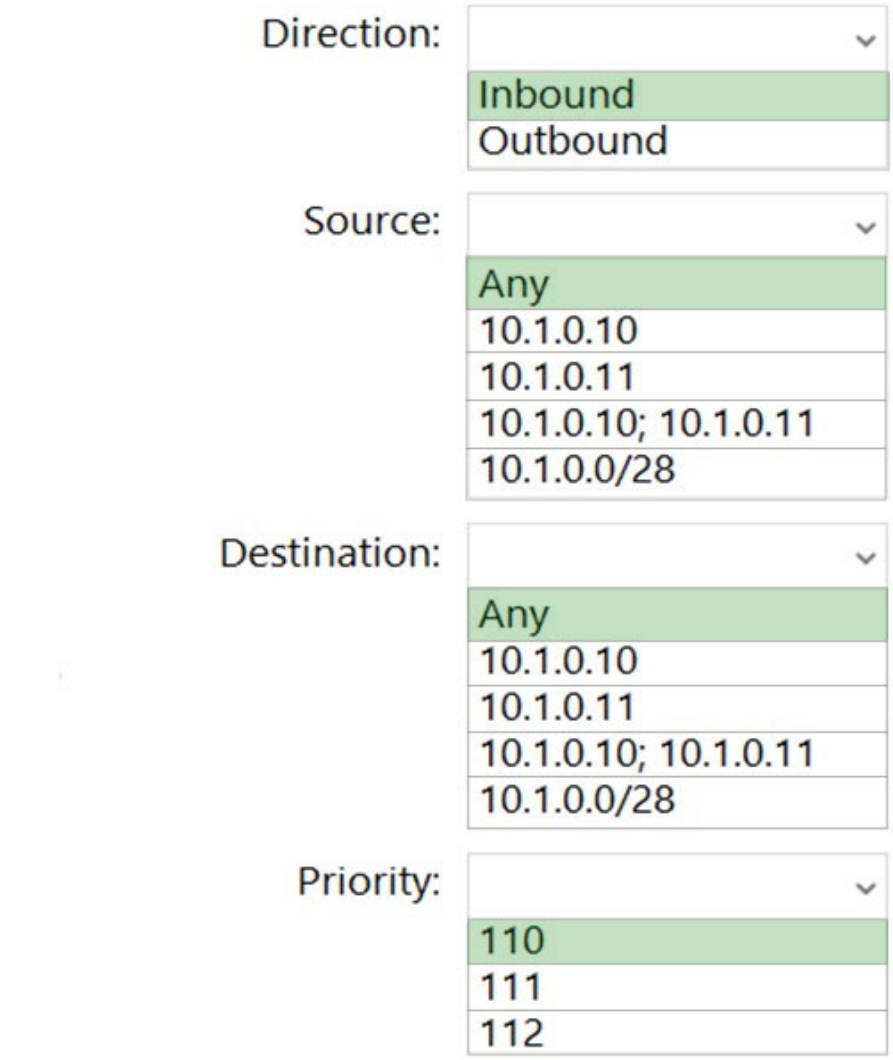

Reference:
https://www.thomasmaurer.ch/2019/09/how-to-enable-ping-icmp-echo-on-an-azure-vm/

Community Discussion

Question #708

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have a computer named Computer1 that has a point-to-site VPN connection to an Azure virtual network named VNet1. The point-to-site connection uses a self-signed certificate.
From Azure, you download and install the VPN client configuration package on a computer named Computer2.
You need to ensure that you can establish a point-to-site VPN connection to VNet1 from Computer2.
Solution: On Computer2, you set the Startup type for the IPSec Policy Agent service to Automatic.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer:
B
Each client computer that connects to a VNet using Point-to-Site must have a client certificate installed. You generate a client certificate from the self-signed root certificate, and then export and install the client certificate. If the client certificate is not installed, authentication fails.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site

Community Discussion

Correct Answer: B the certificate needs to be installed on the machine you are counting from.

Correct Answer: B You must export the client certificate from Computer1 and install the certificate on Computer2. The point-to-site connection uses a self-signed certificate.

Selected Answer: B

B is the answer. https://learn.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site#clientcert Each client computer that connects to a VNet using Point-to-Site must have a client certificate installed. You generate a client certificate from the self-signed root certificate, and then export and install the client certificate. If the client certificate isn't installed, authentication fails.

Selected Answer: B

Correct Answer: B

You have to export a self signed certificate from the root certificate and install it in the machine.

SecExams

Question #709

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have a computer named Computer1 that has a point-to-site VPN connection to an Azure virtual network named VNet1. The point-to-site connection uses a self-signed certificate.
From Azure, you download and install the VPN client configuration package on a computer named Computer2.
You need to ensure that you can establish a point-to-site VPN connection to VNet1 from Computer2.
Solution: On Computer2, you set the Startup type for the IPSec Policy Agent service to Automatic.
Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?
Each client computer that connects to a VNet using Point-to-Site must have a client certificate installed. You generate a client certificate from the self-signed root certificate, and then export and install the client certificate. If the client certificate is not installed, authentication fails.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site

Community Discussion

Question #710

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.
You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.
You need to ensure that visitors are serviced by the same web server for each request.
What should you configure?

A) Session persistence to Client IP and protocol (Correct Answer)
B) Protocol to UDP
C) Session persistence to None
D) Floating IP (direct server return) to Enabled

Explanation

Correct Answer:
A
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-distribution-mode?tabs=azure-portal

Community Discussion

The following options are available: None (hash-based) - Specifies that successive requests from the same client may be handled by any virtual machine. Client IP (source IP affinity two-tuple) - Specifies that successive requests from the same client IP address will be handled by the same virtual machine. Client IP and protocol (source IP affinity three-tuple) - Specifies that successive requests from the same client IP address and protocol combination will be handled by the same virtual machine. https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-distribution-mode?tabs=azure-portal The answer is A

Get ready!!! This question will now appear a million times in the next pages

Anser is correct :A

this was on exam 03oct2022 , I scored 870 and answered as Examtopics answer

Answer is correct: A

Question #711

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.
You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.
You need to ensure that visitors are serviced by the same web server for each request.
What should you configure?

A) Session persistence to Client IP and protocol (Correct Answer)
B) Protocol to UDP
C) Session persistence to None
D) Floating IP (direct server return) to Enabled

Explanation

Correct Answer: A ?
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-distribution-mode?tabs=azure-portal

Community Discussion

SecExams

Question #712

You have an Azure subscription that uses the public IP addresses shown in the following table.

Name	IP version	SKU	IP address assignment	Availability zone
IP1	IPv6	Basic	Static	**Not applicable**
IP2	IPv6	Basic	Dynamic	**Not applicable**
IP3	IPv6	Standard	Static	Zone-redundant

You need to create a public Azure Standard Load Balancer.
Which public IP addresses can you use?

A) IP1, IP2, and IP3
B) IP2 only
C) IP3 only (Correct Answer)
D) IP1 and IP3 only

Explanation

Correct Answer:
C
Matching SKUs are required for load balancer and public IP resources. You can't have a mixture of Basic SKU resources and standard SKU resources.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/ip-services/public-ip-addresses

Community Discussion

Selected Answer: C

I took Exam of Azure- 104 at 27/2/2023 I score 920 points out of 1000 points. This was on it and my answer was: C

Answer is correct: C

Answer: C A Basic Load Balancer can use the Basic SKU Public IP address's, but a Standard load balancer requires a Standard SKU Public IP address. Excerpt from link

below: The standard SKU is required if you associate the address to a standard load balancer. For more information about standard load balancers, see Azure load balancer standard SKU. https://learn.microsoft.com/en-us/azure/virtual-network/ip-services/virtual-network-public-ip-address Excerpt from link below: Key scenarios that you can accomplish using Azure Standard Load Balancer include: -Enable support for load-balancing of IPv6. https://learn.microsoft.com/en-us/azure/load-balancer/load-balancer-overview#why-use-azure-load-balancer

this was on exam 03oct2022 , I scored 870 and answered as Examtopics answer

C is the most correct. I don't think you can currently use IP6 for load balances yet. Needs to be IPv4 but all IPs are listed as 6 and there is no "None" option so just roll with it.

Question #713

You have an Azure subscription that uses the public IP addresses shown in the following table.

Name	IP version	SKU	IP address assignment	Availability zone
IP1	IPv6	Basic	Static	**Not applicable**
IP2	IPv6	Basic	Dynamic	**Not applicable**
IP3	IPv6	Standard	Static	Zone-redundant

You need to create a public Azure Standard Load Balancer.
Which public IP addresses can you use?

A) IP1, IP2, and IP3
B) IP2 only
C) IP3 only (Correct Answer)
D) IP1 and IP3 only

Explanation

Correct Answer: C ?
Matching SKUs are required for load balancer and public IP resources. You can't have a mixture of Basic SKU resources and standard SKU resources.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/ip-services/public-ip-addresses

Community Discussion

Question #714

You have an Azure subscription.
You are deploying an Azure Kubernetes Service (AKS) cluster that will contain multiple pods. The pods will use kubernet networking.
You need to restrict network traffic between the pods.
What should you configure on the AKS cluster?

A) the Azure network policy
B) the Calico network policy (Correct Answer)
C) pod security policies
D) an application security group

Explanation

Correct Answer: B ?
Reference:
https://docs.microsoft.com/en-us/azure/aks/use-network-policies

Community Discussion

Question #715

You have an Azure subscription.
You are deploying an Azure Kubernetes Service (AKS) cluster that will contain multiple pods. The pods will use kubernet networking.
You need to restrict network traffic between the pods.
What should you configure on the AKS cluster?

A) the Azure network policy
B) the Calico network policy (Correct Answer)
C) pod security policies

D) an application security group

Explanation

Correct Answer:
B
Reference:
https://docs.microsoft.com/en-us/azure/aks/use-network-policies

Community Discussion

Selected Answer: B

I think the correct answer is B. The question describes “the pods will use kubernet networking.” To provide network connectivity, AKS clusters can use kubenet (basic networking) or Azure CNI (advanced networking). Azure Network Policies supports Azure CNI only. Calico Network Policies supports both Azure CNI (Windows Server 2019 and Linux) and kubenet (Linux). Hence, the correct answer is B. Reference https://docs.microsoft.com/en-us/azure/aks/use-network-policies https://docs.microsoft.com/en-us/azure/aks/configure-kubenet

On exam 01.02.22 Answer: B

To summarize. You need calico network policy because this question explicitly stated "pods will use kubernet networking." which means you need a policy that can support kubernet networking. Look at supported networking options of the following link. https://learn.microsoft.com/en-us/azure/aks/use-network-policies#differences-between-azure-network-policy-manager-and-calico-network-policy-and-their-capabilities

To summarize. You need calico network policy because this question explicitly stated "pods will use kubernet networking." which means you need a policy that can support kubernet networking. Look at supported networking options of the following link. https://learn.microsoft.com/en-us/azure/aks/use-network-policies#differences-between-azure-network-policy-manager-and-calico-network-policy-and-their-capabilities

Selected Answer: B

was in the 09/01/2023 exam

Question #716

HOTSPOT -

You have an Azure subscription that contains a virtual network named VNet1. VNet1 uses an IP address space of 10.0.0.0/16 and contains the VPN Gateway and subnets in the following table:

Name	IP address range
Subnet0	10.0.0.0/24
Subnet1	10.0.1.0/24
Subnet2	10.0.2.0/24
GatewaySubnet	10.0.254.0/24

Subnet1 contains a virtual appliance named VM1 that operates as a router.

You create a routing table named RT1.

You need to route all inbound traffic from the VPN gateway to VNet1 through VM1.

How should you configure RT1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Address prefix
- 10.0.0.0/16
- 10.0.1.0/24
- 10.0.254.0/24

Next hop type
- Virtual appliance
- Virtual network
- Virtual network gateway

Assigned to
- GatewaySubnet
- Subnet0
- Subnet1 and Subnet2

Explanation

Correct Answer:

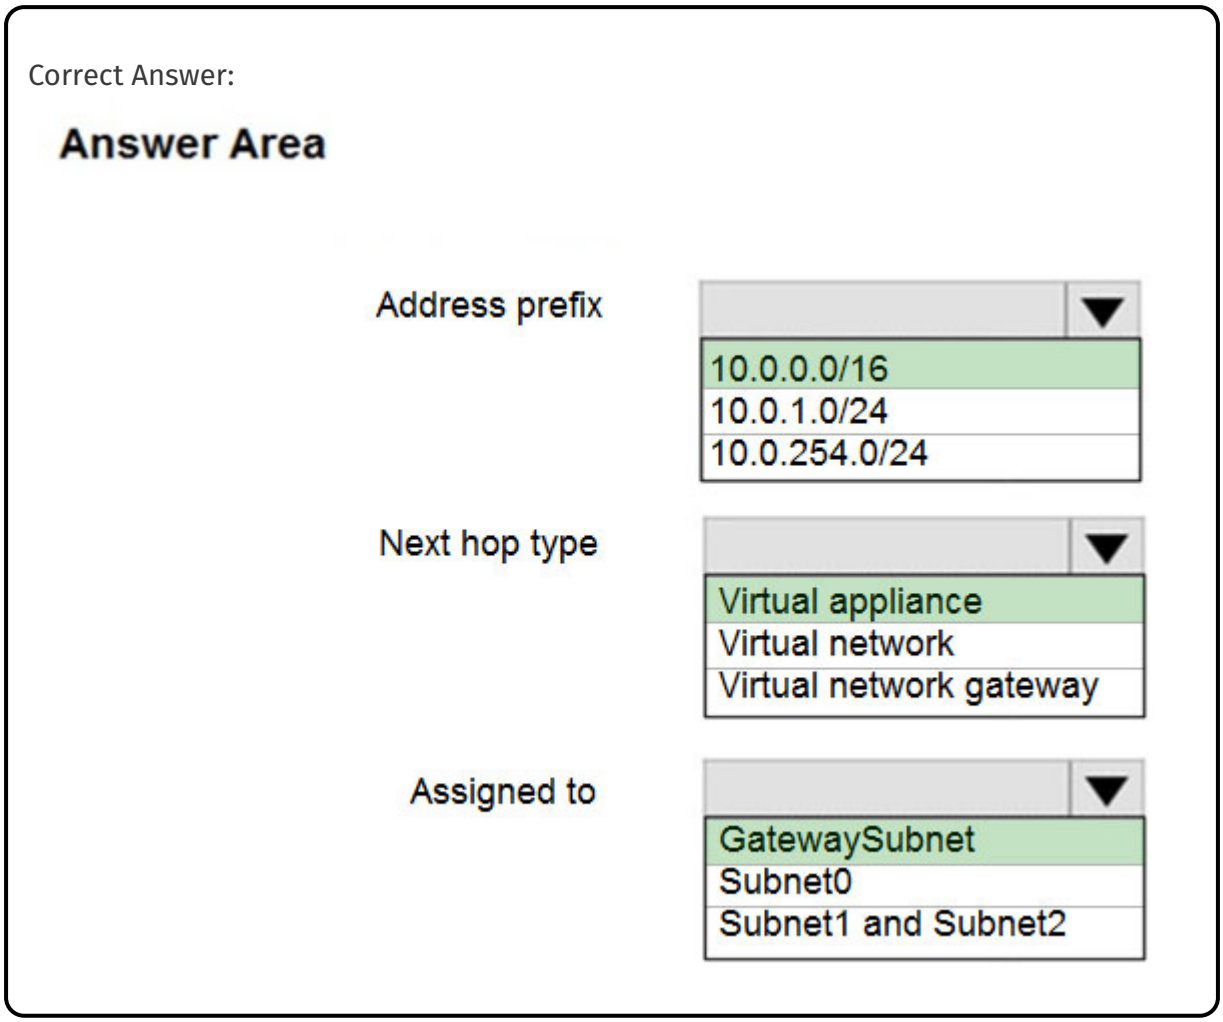

Community Discussion

SecExams

Question #717

HOTSPOT -

You have an Azure subscription that contains a virtual network named VNet1. VNet1 uses an IP address space of 10.0.0.0/16 and contains the VPN Gateway and subnets in the following table:

Name	IP address range
Subnet0	10.0.0.0/24
Subnet1	10.0.1.0/24
Subnet2	10.0.2.0/24
GatewaySubnet	10.0.254.0/24

Subnet1 contains a virtual appliance named VM1 that operates as a router.

You create a routing table named RT1.

You need to route all inbound traffic from the VPN gateway to VNet1 through VM1.

How should you configure RT1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Address prefix
- 10.0.0.0/16
- 10.0.1.0/24
- 10.0.254.0/24

Next hop type
- Virtual appliance
- Virtual network
- Virtual network gateway

Assigned to
- GatewaySubnet
- Subnet0
- Subnet1 and Subnet2

Explanation

Correct Answer:

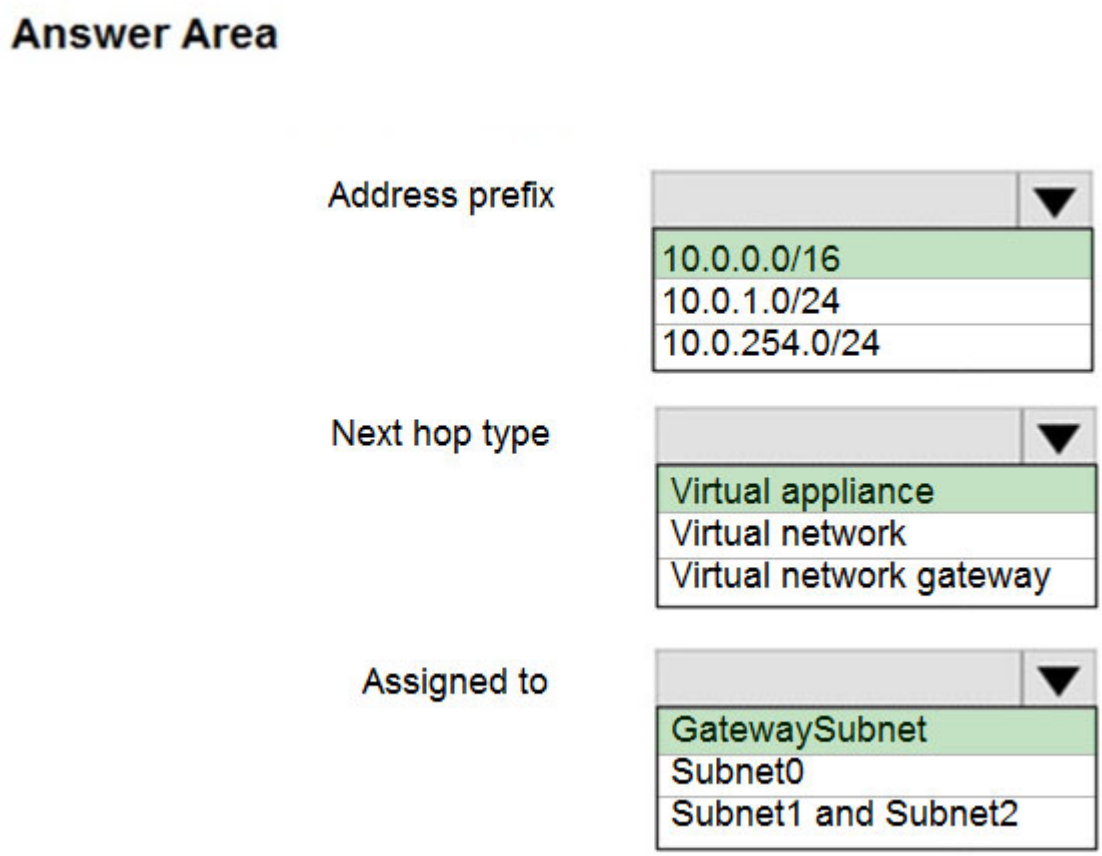

Community Discussion

Correct Answer: Box 1: 10.0.0.0/16 Address prefix destination-> Vnet 1 (Address space of Vnet1) Box 2: Virtual appliance Next hop type VM1 ->Virtual Appliance. You can specify IP address of VM 1 when configuring next hop as Virtual appliance. Box 3: Gateway Subnet Assigned to This route is to be followed by Gateway Subnet for the incoming traffic. You can associate routing table to the Subnet from Rout Table -> subnet ->Associate.

Answer is correct. See the explanation below from AZ-103 source. Address prefix-destination-> Vnet 1 (Address space of Vnet1) 2. Next Hop - VM1 ->Virtual Appliance (You can specify IP address of VM 1 when configuring next hop as virtual appliance) 3.Assignment - This route is to be followed by Gateway Subnet for the incoming traffic. You can associate routing table to the Subnet from Rout Table -> subnet ->Associate

finally he's back lol

finally he's back lol

ROUTE Address prefix = TO ROUTE Next Hop = THROUGH ROUTE Assignment = FROM

Question #718

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.
You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.
You need to ensure that visitors are serviced by the same web server for each request.
What should you configure?

A) Floating IP (direct server return) to Enabled
B) Floating IP (direct server return) to Disabled
C) a health probe
D) Session persistence to Client IP and Protocol (Correct Answer)

Explanation

Correct Answer: D ?
With Sticky Sessions when a client starts a session on one of your web servers, session stays on that specific server. To configure An Azure Load-Balancer For
Sticky Sessions set Session persistence to Client IP.
On the following image you can see sticky session configuration:

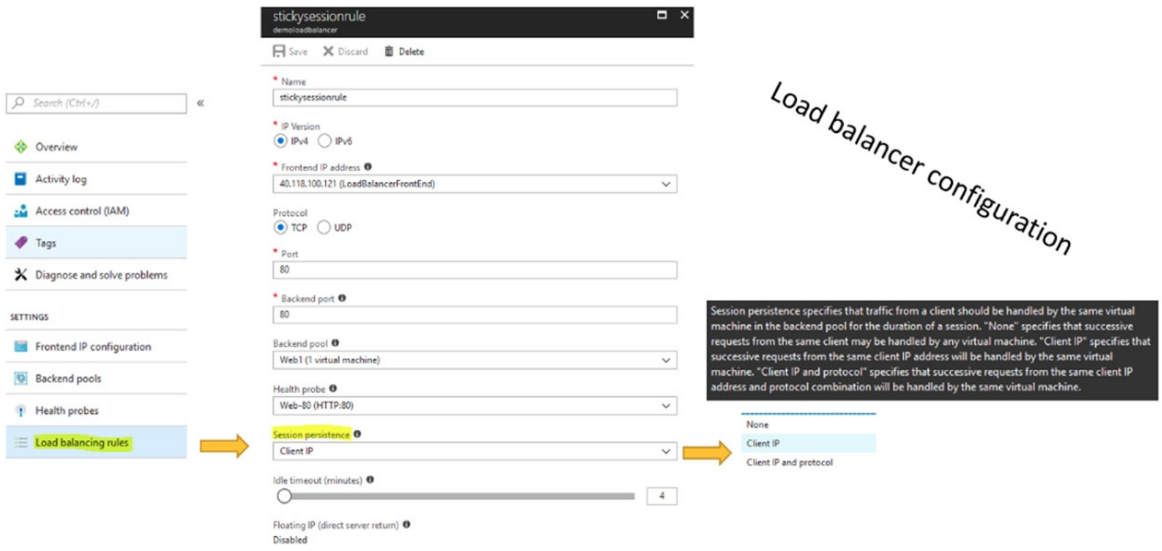

Note:
There are several versions of this question in the exam. The question can have other incorrect answer options, including the following:
1. Idle Time-out (minutes) to 20
2. Protocol to UDP
Reference:
https://cloudopszone.com/configure-azure-load-balancer-for-sticky-sessions/

Community Discussion

Question #719

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.
You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.
You need to ensure that visitors are serviced by the same web server for each request.
What should you configure?

A) Floating IP (direct server return) to Enabled
B) Floating IP (direct server return) to Disabled
C) a health probe
D) Session persistence to Client IP and Protocol (Correct Answer)

Explanation

Correct Answer:

D

With Sticky Sessions when a client starts a session on one of your web servers, session stays on that specific server. To configure An Azure Load-Balancer For Sticky Sessions set Session persistence to Client IP.

On the following image you can see sticky session configuration:

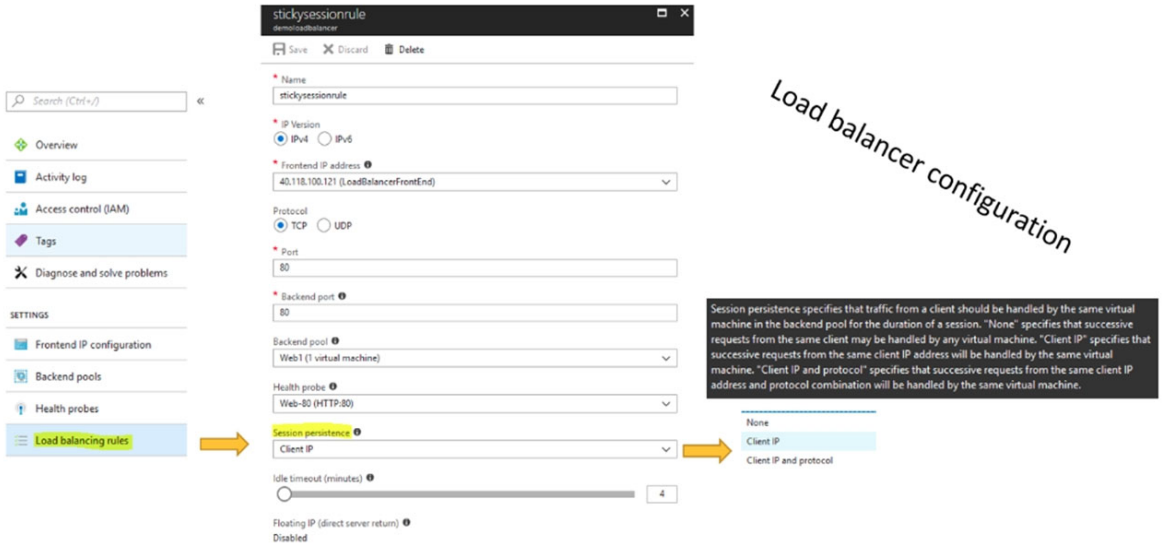

Note:

There are several versions of this question in the exam. The question can have other incorrect answer options, including the following:

1. Idle Time-out (minutes) to 20
2. Protocol to UDP

Reference:

https://cloudopszone.com/configure-azure-load-balancer-for-sticky-sessions/

Community Discussion

Correct Answer: D With Sticky Sessions when a client starts a session on one of your web servers, session stays on that specific server. To configure An Azure Load-Balancer for Sticky Sessions set Session persistence to Client IP.

Answer is correct, D - Session Persistence to Client IP and Protocol

Passed 11 Oct 2021 with 947. This question appeared, correct Answer is D

came in 8.8.2021 exam.

this was on exam 03oct2022 , I scored 870 and answered as Examtopics answer

SecExams

Question #720

HOTSPOT -

You have an Azure subscription that contains the virtual machines shown in the following table:

Name	Operating system	Connects to
VM1	Windows Server 2019	Subnet1
VM2	Windows Server 2019	Subnet2

VM1 and VM2 use public IP addresses. From Windows Server 2019 on VM1 and VM2, you allow inbound Remote Desktop connections.

Subnet1 and Subnet2 are in a virtual network named VNET1.

The subscription contains two network security groups (NSGs) named NSG1 and NSG2. NSG1 uses only the default rules.

NSG2 uses the default rules and the following custom incoming rule:

- Priority: 100
- Name: Rule1
- Port: 3389
- Protocol: TCP
- Source: Any
- Destination: Any
- Action: Allow

NSG1 is associated to Subnet1. NSG2 is associated to the network interface of VM2.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
From the Internet, you can connect to VM1 by using Remote Desktop.	○	○
From the Internet, you can connect to VM2 by using Remote Desktop.	○	○
From VM1, you can connect to VM2 by using Remote Desktop	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
From the Internet, you can connect to VM1 by using Remote Desktop.	○	○
From the Internet, you can connect to VM2 by using Remote Desktop.	○	○
From VM1, you can connect to VM2 by using Remote Desktop	○	○

Community Discussion

SecExams

Question #721

HOTSPOT -

You have an Azure subscription that contains the virtual machines shown in the following table:

Name	Operating system	Connects to
VM1	Windows Server 2019	Subnet1
VM2	Windows Server 2019	Subnet2

VM1 and VM2 use public IP addresses. From Windows Server 2019 on VM1 and VM2, you allow inbound Remote Desktop connections.

Subnet1 and Subnet2 are in a virtual network named VNET1.

The subscription contains two network security groups (NSGs) named NSG1 and NSG2. NSG1 uses only the default rules.

NSG2 uses the default rules and the following custom incoming rule:

- Priority: 100
- Name: Rule1
- Port: 3389
- Protocol: TCP
- Source: Any
- Destination: Any
- Action: Allow

NSG1 is associated to Subnet1. NSG2 is associated to the network interface of VM2.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
From the Internet, you can connect to VM1 by using Remote Desktop.	○	○
From the Internet, you can connect to VM2 by using Remote Desktop.	○	○
From VM1, you can connect to VM2 by using Remote Desktop	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
From the Internet, you can connect to VM1 by using Remote Desktop.	○	○
From the Internet, you can connect to VM2 by using Remote Desktop.	○	○
From VM1, you can connect to VM2 by using Remote Desktop	○	○

Community Discussion

Answer is correct . No, Yes, Yes. No: VM1 has default rules which denies any port open for inbound rules Yes: VM2 has custom rule allowing RDP port Yes: VM1 and VM2 are in the same Vnet. by default, communication are allowed

Correct Answer: Box 1: No NSG1 has default rules, which denies any port open for inbound rules Box 2: Yes NSG2 has custom Rule1, allowing RDP port 3389 with TCP. Box 3: Yes VM1 and VM2 are in the same Vnet. By default, communication is allowed.

Not agree. NO, NO, Yes. for the second NO: NSG1 is associated with subnet which blocks RDP and in order for RDP to work, both the subnet and the NIC NSGs need to allow RDP in.

Not agree. NO, NO, Yes. for the second NO: NSG1 is associated with subnet which blocks RDP and in order for RDP to work, both the subnet and the NIC NSGs need to allow RDP in.

No yes no. With nsg rdp ports need to be open in both

Question #722

You have an Azure subscription that contains two virtual machines named VM1 and VM2.
You create an Azure load balancer.
You plan to create a load balancing rule that will load balance HTTPS traffic between VM1 and VM2.
Which two additional load balancer resources should you create before you can create the load balancing rule? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) a frontend IP address
B) an inbound NAT rule
C) a virtual network
D) a backend pool (Correct Answer)
E) a health probe (Correct Answer)

Explanation

Correct Answer: DE ?
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/components

Community Discussion

Question #723

You have an Azure subscription that contains two virtual machines named VM1 and VM2.
You create an Azure load balancer.
You plan to create a load balancing rule that will load balance HTTPS traffic between VM1 and VM2.
Which two additional load balancer resources should you create before you can create the load balancing rule? Each correct answer presents part of the solution.
NOTE: Each correct selection is worth one point.

A) a frontend IP address
B) an inbound NAT rule
C) a virtual network
D) a backend pool (Correct Answer)
E) a health probe (Correct Answer)

Explanation

Correct Answer:
DE
Reference:
https://docs.microsoft.com/en-us/azure/load-balancer/components

Community Discussion

Selected Answer: DE

D and E. You can't create a LB without FrontEnd IP, so if we have a LB we also have a FrontEnd IP already. You can however create a LB without a backend pool and without any rules. If you want to add a rule to your LB later you have to create a backend pool and health probe first. Those are mandatory properties for a rule. I also tested it in my lab to be sure.

Selected Answer: AD

Answer ; A and D Select; Frontend IP When done with configuration steps. Select Next: Backend pools https://docs.microsoft.com/en-us/azure/load-balancer/quickstart-load-balancer-standard-public-portal

Tried in my lab as well this is correct. You need a frontend ip to create an empty load balancer which in this case the question says that it's created. adding a load balancing rule requires you to specify backend pool and health probe

Tried in my lab as well this is correct. You need a frontend ip to create an empty load balancer which in this case the question says that it's created. adding a load balancing rule requires you to specify backend pool and health probe

To create a load balancing rule to load balance HTTPS traffic between VM1 and VM2 using an Azure load balancer, you would need to create the following two additional load balancer resources: A. A frontend IP address: This IP address is used to receive incoming traffic and distribute it to the backend resources. It acts as the entry point for the load balancer. D. A backend pool: This defines the backend resources (in this case, VM1 and VM2) that will receive the load-balanced traffic. The load balancer distributes incoming traffic across the resources in the backend pool based on the configured load balancing rule. Therefore, options A and D are the correct answers.

SecExams

Question #724

You have an on-premises network that contains a database server named dbserver1.

You have an Azure subscription.

You plan to deploy three Azure virtual machines. Each virtual machine will be deployed to a separate availability zone.

You need to configure an Azure VPN gateway for a site-to-site VPN. The solution must ensure that the virtual machines can connect to dbserver1.

Which type of public IP address SKU and assignment should you use for the gateway?

A) a basic SKU and a static IP address assignment

B) a standard SKU and a static IP address assignment

C) a basic SKU and a dynamic IP address assignment (Correct Answer)

Explanation

Correct Answer: C ?
VPN gateway supports only Dynamic.
Note: VPN gateway requires a public IP address for its configuration. A public IP address is used as the external connection point of the VPN.
Specify in the values for Public IP address. These settings specify the public IP address object that gets associated to the VPN gateway. The public IP address is dynamically assigned to this object when the VPN gateway is created. The only time the Public IP address changes is when the gateway is deleted and re- created.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/tutorial-site-to-site-portal

Community Discussion

SecExams

Question #725

You have an on-premises network that contains a database server named dbserver1.
You have an Azure subscription.
You plan to deploy three Azure virtual machines. Each virtual machine will be deployed to a separate availability zone.
You need to configure an Azure VPN gateway for a site-to-site VPN. The solution must ensure that the virtual machines can connect to dbserver1.
Which type of public IP address SKU and assignment should you use for the gateway?

A) a basic SKU and a static IP address assignment
B) a standard SKU and a static IP address assignment
C) a basic SKU and a dynamic IP address assignment (Correct Answer)

Explanation

Correct Answer:
C
VPN gateway supports only Dynamic.
Note: VPN gateway requires a public IP address for its configuration. A public IP address

is used as the external connection point of the VPN.
Specify in the values for Public IP address. These settings specify the public IP address object that gets associated to the VPN gateway. The public IP address is dynamically assigned to this object when the VPN gateway is created. The only time the Public IP address changes is when the gateway is deleted and re- created.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/tutorial-site-to-site-portal

Community Discussion

Selected Answer: B

Ok this one is new but Lets talk about it: So this would be a "Zonal Gateway at least right"? Theres no talk about the gateway being Zoneredundant but for it to be even Zonal it needs to be an AZ-SKU Tier right? And those always come with a Standard Public IP SKU which is Static? So B? Heres my source https://docs.microsoft.com/en-us/azure/vpn-gateway/about-zone-redundant-vnet-gateways The explanation given here is definitley rubbish

Selected Answer: B

Focus on this part of the question: " Each virtual machine will be deployed to a separate availability zone." ALWAYS REMENBER THAT : - Basic Load Balancer: Virtual machines in a single availability set or virtual machine scale set. - Standard Load Balancer: Any virtual machines or virtual machine scale sets in a single virtual network. So in this case it's Standart

Speak English. You are on English site

Speak English. You are on English site

There is no reference to Load Balancers in the question.

Question #726

SecExams

HOTSPOT -

You have the Azure virtual machines shown in the following table.

Name	IP address	Virtual network
VM1	10.0.0.4	VNET1
VM2	172.16.0.4	VNET2
VM3	192.168.0.4	VNET3
VM4	192.168.0.5	VNET3

VNET1, VNET2, and VNET3 are peered.

Name	Type	Value
Server1	A	131.107.2.3
Server2	A	131.107.2.4

VNET1 and VNET2 are linked to an Azure private DNS zone named contoso.com that contains the records shown in the following table.

Name	Type	Value
Server1	A	131.107.3.3
Server2	A	131.107.3.4

The virtual networks are configured to use the DNS servers shown in the following table.

Virtual network	DNS server
VNET1	Default (Azure-provided)
VNET2	Custom: 192.168.0.5
VNET3	Custom: 192.168.0.5

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Statements	Yes	No
From VM1, server1.contoso.com resolves to 131.107.3.3.	○	○
From VM2, server1.contoso.com resolves to 131.107.3.3.	○	○
From VM3, server2.contoso.com resolves to 131.107.2.4.	○	○

Explanation

Correct Answer:

Statements	Yes	No
From VM1, server1.contoso.com resolves to 131.107.3.3.	○	○
From VM2, server1.contoso.com resolves to 131.107.3.3.	○	○
From VM3, server2.contoso.com resolves to 131.107.2.4.	○	○

Box 1: Yes -
VM1 is in VNET1. In VNET1 Server1 resolves to 131.107.3.3

Name	Type	Value
Server1	A	131.107.3.3
Server2	A	131.107.3.4

Box 2: No -
VM2 is in VNET2. VNET2 uses custom DNS server 192.168.05
Box 3: Yes

Community Discussion

Hi Admin, This looks like incomplete question or something is missing. Could you please correct this and add more discussion?

CORRECT ANSWER YES NO YES YES -For VM1,server1.contoso.com resolves to 131.107.3.3 VM1 is connected to VNET1 which has Default(Azure-Provided) DNS Server and linked to Azure Private DNS Server contoso.com (131.107.3.3 and 131.107.3.4 DNS Servers). That means VM1 has these 2 DNS servers for resloving. DNS Servers for VNET1 server1.contoso.com = 131.107.3.3 server2.contoso.com = 131.107.3.4 NO-For VM2,server1.contoso.com resolves to 131.107.3.3 VM2 belongs to VNET2 has Custom DNS:192.168.0.5 IP of VM4 (not takes from dedault Azure: the server1.contoso.com = 131.107.3.4 and server2.contoso.com = 131.107.3.4) -NO VM2 will resolve from VM4 (DNS Server1.contoso.com=131.107.2.3 and Server2.contoso.com=131.107.2.4) YES- For VM3,server2.contoso.com resolves to 131.107.2.4

VM3 belongs to VNET3 has Custom DNS:192.168.0.5 IP of VM4 (not takes from default Azure: the server1.contoso.com = 131.107.3.4 and server2.contoso.com = 131.107.3.4) VM3 will resolve from VM4 (DNS Server1.contoso.com=131.107.2.3 and Server2.contoso.com=131.107.2.4)

Another fucked-up question, still there untouched after months... They should really add a REPORT button instead of new SALES each week :)

This is one of the several questions asking which one has higher priority - the (custom) DNS bound to a VNET or the private DNS zone linked to the same VNET. According to my test (and also the answer from chatGPT), the private DNS zone has priority. It is the only one which is used if the request is going to a domain hosted by the private DNS zone. If the request is going to a domain which is not in the provate DNS zone, then the default or custom DNS for the VNET is used. Based on this, the answers are Y-Y-Y Why - because both VM1 and VM2 are linked to the private DNS zone, where we have the record for server1.contoso.com -> 131.107.3.3 Also, asuming that the missing explanation of the second table says "VM4 is DNS server and it has the following records", and VM3 points to this DNS server, it will see and resolve the server2.contoso.com -> 131.107.2.4. Note that VNET3 (where VM3 is) is not linked to the private DNS zone.

With some deduction, you can complete the question yourself. The IP of VM4 is used as custom DNS in VNET2 and VNET3. Therefore, VM4 is a DNS server. The table shown after 'VNET1, VNET2, and VNET3 are peered' is just displaying the records for the custom DNS server. So, some VMs use the private Azure DNS Zone and others use the custom DNS server. And both DNSs have server1 and server2 records. Knowing all that, you can now figure out what IP will be resolved in each case.

SecExams

Question #727

HOTSPOT -

You have two Azure virtual machines as shown in the following table.

Name	Operating system	Private IP address	Public IP address	DNS suffix configured in the operating system	Connected to
vm1	Windows Server 2019	10.0.1.4	131.107.50.20	Contoso.com	vnet1
vm2	SUSE Linux Enterprise Server 15 (SLES) SP2	10.0.1.5	131.107.90.80	**None**	vnet1

You create the Azure DNS zones shown in the following table.

Name	Type
Contoso.com	DNS zone
Fabrikam.com	Private DNS zone

You perform the following actions:

fabrikam.com, you add a virtual network link to vnet1 and enable auto ¾|¢| ✑ registration.

✑ For contoso.com, you assign vm1 and vm2 the Owner role.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Statements	Yes	No
The DNS A record for vm1 is added to contoso.com and has the IP address of 131.107.50.20.	○	○
The DNS A record for vm1 is added to fabrikam.com and has the IP address of 10.0.1.4.	○	○
The DNS A record for vm2 is added to fabrikam.com and has the IP address of 10.0.1.5.	○	○

Explanation

Correct Answer:

Statements	Yes	No
The DNS A record for vm1 is added to contoso.com and has the IP address of 131.107.50.20.	○	○
The DNS A record for vm1 is added to fabrikam.com and has the IP address of 10.0.1.4.	○	○
The DNS A record for vm2 is added to fabrikam.com and has the IP address of 10.0.1.5.	○	○

Box 1: Yes -
The DNS zone uses the Public IP address of vm1.

Box 2: Yes -
Fabrikam.com is a Private DNS zone. The private IP address is used.
Note: The Azure DNS private zones auto registration feature manages DNS records for virtual machines deployed in a virtual network. When you link a virtual network with a private DNS zone with this setting enabled, a DNS record gets created for each virtual machine deployed in the virtual network.
For each virtual machine, an A record and a PTR record are created. DNS records for newly deployed virtual machines are also automatically created in the linked private DNS zone.
Note: If you use Azure Provided DNS then appropriate DNS suffix will be automatically applied to your virtual machines. For all other options you must either use
Fully Qualified Domain Names (FQDN) or manually apply appropriate DNS suffix to your virtual machines.

Box 3: Yes -
Reference:
https://docs.microsoft.com/en-us/azure/dns/dns-zones-records
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-name-resolution-for-vms-and-role-instances

Community Discussion

SecExams

Question #728

HOTSPOT -

You have two Azure virtual machines as shown in the following table.

Name	Operating system	Private IP address	Public IP address	DNS suffix configured in the operating system	Connected to
vm1	Windows Server 2019	10.0.1.4	131.107.50.20	Contoso.com	vnet1
vm2	SUSE Linux Enterprise Server 15 (SLES) SP2	10.0.1.5	131.107.90.80	**None**	vnet1

You create the Azure DNS zones shown in the following table.

Name	Type
Contoso.com	DNS zone
Fabrikam.com	Private DNS zone

You perform the following actions:

fabrikam.com, you add a virtual network link to vnet1 and enable auto ¾|¢| ✑ registration.

✑ For contoso.com, you assign vm1 and vm2 the Owner role.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Statements	Yes	No
The DNS A record for vm1 is added to contoso.com and has the IP address of 131.107.50.20.	○	○
The DNS A record for vm1 is added to fabrikam.com and has the IP address of 10.0.1.4.	○	○
The DNS A record for vm2 is added to fabrikam.com and has the IP address of 10.0.1.5.	○	○

Explanation

Correct Answer:

Statements	Yes	No
The DNS A record for vm1 is added to contoso.com and has the IP address of 131.107.50.20.	○	○
The DNS A record for vm1 is added to fabrikam.com and has the IP address of 10.0.1.4.	○	○
The DNS A record for vm2 is added to fabrikam.com and has the IP address of 10.0.1.5.	○	○

Box 1: Yes -
The DNS zone uses the Public IP address of vm1.

Box 2: Yes -
Fabrikam.com is a Private DNS zone. The private IP address is used.
Note: The Azure DNS private zones auto registration feature manages DNS records for virtual machines deployed in a virtual network. When you link a virtual network with a private DNS zone with this setting enabled, a DNS record gets created for each virtual machine deployed in the virtual network.
For each virtual machine, an A record and a PTR record are created. DNS records for newly deployed virtual machines are also automatically created in the linked private DNS zone.
Note: If you use Azure Provided DNS then appropriate DNS suffix will be automatically applied to your virtual machines. For all other options you must either use
Fully Qualified Domain Names (FQDN) or manually apply appropriate DNS suffix to your virtual machines.

Box 3: Yes -
Reference:
https://docs.microsoft.com/en-us/azure/dns/dns-zones-records
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-name-resolution-for-vms-and-role-instances

Community Discussion

N Y Y? Only private AZ DNS Zones can use auto registration. The set DNS search suffix in the client changes nothing about that https://docs.microsoft.com/en-us/azure/dns/private-dns-autoregistration

N = none of the actions in question added the VM1 record to contoso.com dns Y = vnet1 is linked and auto-rego is enabled, records get added automatically. Y = vnet1 is linked and auto-rego is enabled, records get added automatically.

Checked in lab environment - Linus does auto register

Checked in lab environment - Linus does auto register

N - Public Ips wont auto register DNS Y - Auto registration is enabled N - Linux won't do auto registration

Question #729

You have an on-premises datacenter and an Azure subscription.
You plan to connect the datacenter to Azure by using ExpressRoute.
You need to deploy an ExpressRoute gateway. The solution must meet the following requirements:

- ✑ Support up to 10 Gbps of traffic.
- ✑ Support availability zones.
- ✑ Support FastPath.
- ✑ Minimize costs.

Which SKU should you deploy?

A) ERGw1AZ
B) ERGw2
C) ErGw3
D) ErGw3AZ (Correct Answer)

Explanation

Correct Answer: D ?
ErGw3Az supports FastPath.
The following table shows the features supported across each gateway type.

Gateway SKU	VPN Gateway and ExpressRoute coexistence	FastPath	Max Number of Circuit Connections
Standard SKU/ERGw1Az	Yes	No	4
High Perf SKU/ERGw2Az	Yes	No	8
Ultra Performance SKU/ErGw3Az	Yes	Yes	16

Note: ExpressRoute virtual network gateways can use the following SKUs:

Standard -

HighPerformance -

UltraPerformance -

ErGw1Az -

ErGw2Az -

ErGw3Az -
Reference:
https://docs.microsoft.com/en-us/azure/expressroute/expressroute-about-virtual-network-gateways

Community Discussion

Question #730

You have an on-premises datacenter and an Azure subscription.
You plan to connect the datacenter to Azure by using ExpressRoute.
You need to deploy an ExpressRoute gateway. The solution must meet the following requirements:

- ✑ Support up to 10 Gbps of traffic.
- ✑ Support availability zones.
- ✑ Support FastPath.
- ✑ Minimize costs.

Which SKU should you deploy?

A) ERGw1AZ
B) ERGw2
C) ErGw3
D) ErGw3AZ (Correct Answer)

Explanation

Correct Answer:
D
ErGw3Az supports FastPath.
The following table shows the features supported across each gateway type.

Gateway SKU	VPN Gateway and ExpressRoute coexistence	FastPath	Max Number of Circuit Connections
Standard SKU/ERGw1Az	Yes	No	4
High Perf SKU/ERGw2Az	Yes	No	8
Ultra Performance SKU/ErGw3Az	Yes	Yes	16

Note: ExpressRoute virtual network gateways can use the following SKUs:

Standard -

HighPerformance -

UltraPerformance -

ErGw1Az -

ErGw2Az -

ErGw3Az -
Reference:
https://docs.microsoft.com/en-us/azure/expressroute/expressroute-about-virtual-network-gateways

Community Discussion

Cant believe Azure expects us to memorize these abbreviations!

final answer: GTFOHms

As head of Xbox Game Studios i think this question is pretty dumb. A better question would have being "What's the price of Xbox Game Pass Ultimate".

Questions like these are what make me hate Azure certifications so much. They ask super specific questions that you have to learn by heart, when you shouldn't, and nobody in real life does. Also, they don't allow brain dumps. Instead, they want you to rely on their terrible documentation and only use tests officially supported by Microsoft. Try passing the exam using only that. Yes, you can do it, but seriously, good luck... Perhaps the reason people resort to brain dumps has to do with all that nonsense? I understand they ask complex questions to test your knowledge, but questions like this one are not complex, they are just pure evil.

Its all about marketing. It benefits them in the long run if all the certified admins have sku features memorized. We are most likely to gravitate towards their solutions as opposed to 3rd parties if we already memorized their offerings

SecExams

Question #731

HOTSPOT -

You have a virtual network named VNET1 that contains the subnets shown in the following table:

Name	Subnet	Network security group (NSG)
Subnet1	10.10.1.0/24	NSG1
Subnet2	10.10.2.0/24	*None*

You have Azure virtual machines that have the network configurations shown in the following table:

Name	Subnet	IP address	NSG
VM1	Subnet1	10.10.1.5	NSG2
VM2	Subnet2	10.10.2.5	*None*
VM3	Subnet2	10.10.2.6	*None*

For NSG1, you create the inbound security rule shown in the following table:

Priority	Source	Destination	Destination port	Action
101	10.10.2.0/24	10.10.1.0/24	TCP/1433	Allow

For NSG2, you create the inbound security rule shown in the following table:

Priority	Source	Destination	Destination port	Action
125	10.10.2.5	10.10.1.5	TCP/1433	Block

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
VM2 can connect to the TCP port 1433 services on VM1.	○	○
VM1 can connect to the TCP port 1433 services on VM2.	○	○
VM2 can connect to the TCP port 1433 services on VM3.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM2 can connect to the TCP port 1433 services on VM1.	○	○
VM1 can connect to the TCP port 1433 services on VM2.	○	○
VM2 can connect to the TCP port 1433 services on VM3.	○	○

Box 1: Yes -
The inbound security rule for NSG1 allows TCP port 1433 from 10.10.2.0/24 (or Subnet2 where VM2 and VM3 are located) to 10.10.1.0/24 (or Subnet1 where
VM1 is located) while the inbound security rule for NSG2 blocks TCP port 1433 from 10.10.2.5 (or VM2) to 10.10.1.5 (or VM1). However, the NSG1 rule has a higher priority (or lower value) than the NSG2 rule.

Box 2: Yes -
No rule explicitly blocks communication from VM1. The default rules, which allow communication, are thus applied.

Box 3: Yes -
No rule explicitly blocks communication between VM2 and VM3 which are both on Subnet2. The default rules, which allow communication, are thus applied.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/security-overview

Community Discussion

SecExams

Question #732

HOTSPOT -

You have a virtual network named VNET1 that contains the subnets shown in the following table:

Name	Subnet	Network security group (NSG)
Subnet1	10.10.1.0/24	NSG1
Subnet2	10.10.2.0/24	*None*

You have Azure virtual machines that have the network configurations shown in the following table:

Name	Subnet	IP address	NSG
VM1	Subnet1	10.10.1.5	NSG2
VM2	Subnet2	10.10.2.5	*None*
VM3	Subnet2	10.10.2.6	*None*

For NSG1, you create the inbound security rule shown in the following table:

Priority	Source	Destination	Destination port	Action
101	10.10.2.0/24	10.10.1.0/24	TCP/1433	Allow

For NSG2, you create the inbound security rule shown in the following table:

Priority	Source	Destination	Destination port	Action
125	10.10.2.5	10.10.1.5	TCP/1433	Block

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
VM2 can connect to the TCP port 1433 services on VM1.	○	○
VM1 can connect to the TCP port 1433 services on VM2.	○	○
VM2 can connect to the TCP port 1433 services on VM3.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM2 can connect to the TCP port 1433 services on VM1.	○	○
VM1 can connect to the TCP port 1433 services on VM2.	○	○
VM2 can connect to the TCP port 1433 services on VM3.	○	○

Box 1: Yes -
The inbound security rule for NSG1 allows TCP port 1433 from 10.10.2.0/24 (or Subnet2 where VM2 and VM3 are located) to 10.10.1.0/24 (or Subnet1 where
VM1 is located) while the inbound security rule for NSG2 blocks TCP port 1433 from 10.10.2.5 (or VM2) to 10.10.1.5 (or VM1). However, the NSG1 rule has a higher priority (or lower value) than the NSG2 rule.

Box 2: Yes -
No rule explicitly blocks communication from VM1. The default rules, which allow communication, are thus applied.

Box 3: Yes -
No rule explicitly blocks communication between VM2 and VM3 which are both on Subnet2. The default rules, which allow communication, are thus applied.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/security-overview

Community Discussion

I believe it should be No, Yes, Yes. The NSG2 on the NIC of VM1 blocks the request that passes through NSG1 which is attached on the subnet. There is no priority bypass between NSGs. Traffic is filtered independently between NSGs.

SecExams

1. NO - VM1 has the NSG1 on Subnet1, which allows traffic over port 1433 between Subnet2 and Subnet1. BUT NSG2 also applied on NIC level for VM1 that blocks the traffic on port 1433. Hence No traffic allowed. Answer is NO. 2. YES - For VM2 there are no NSGs applied neither on subnet or NIC level hence all traffic is allowed. 3. YES - For VM3 there are no NSGs applied neither on subnet or NIC level hence all traffic is allowed.

Subnet attached NSGs don't have priority over NIC attached NSGs. It depends of whether he traffic is inbound or outbound - https://learn.microsoft.com/en-us/azure/virtual-network/network-security-group-how-it-works

Subnet attached NSGs don't have priority over NIC attached NSGs. It depends of whether he traffic is inbound or outbound - https://learn.microsoft.com/en-us/azure/virtual-network/network-security-group-how-it-works

Subnet attached NSGs don't have priority over NIC attached NSGs. It depends of whether he traffic is inbound or outbound - https://learn.microsoft.com/en-us/azure/virtual-network/network-security-group-how-it-works

SecExams

Question #733

SecExams

HOTSPOT -

You have an Azure subscription named Subscription1.

Subscription1 contains the virtual machines in the following table:

Name	IP address
VM1	10.0.1.4
VM2	10.0.2.4
VM3	10.0.3.4

Subscription1 contains a virtual network named VNet1 that has the subnets in the following table:

Name	Address space	Connected virtual machine
Subnet1	10.0.1.0/24	VM1
Subnet2	10.0.2.0/24	VM2
Subnet3	10.0.3.0/24	VM3

VM3 has multiple network adapters, including a network adapter named NIC3. IP forwarding is enabled on NIC3. Routing is enabled on VM3.

You create a route table named RT1 that contains the routes in the following table:

Address prefix	Next hop type	Next hop address
10.0.1.0/24	Virtual appliance	10.0.3.4
10.0.2.0/24	Virtual appliance	10.0.3.4

You apply RT1 to Subnet1 and Subnet2.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
VM3 can establish a network connection to VM1.	○	○
If VM3 is turned off, VM2 can establish a network connection to VM1.	○	○
VM1 can establish a network connection to VM2.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM3 can establish a network connection to VM1.	○	○
If VM3 is turned off, VM2 can establish a network connection to VM1.	○	○
VM1 can establish a network connection to VM2.	○	○

IP forwarding enables the virtual machine a network interface is attached to:
✑ Receive network traffic not destined for one of the IP addresses assigned to any of the IP configurations assigned to the network interface.
Send network traffic with a different source IP address than the one assigned to one of a network interface's IP configurations.

▪

The setting must be enabled for every network interface that is attached to the virtual machine that receives traffic that the virtual machine needs to forward. A virtual machine can forward traffic whether it has multiple network interfaces or a single network interface attached to it.

Box 1: Yes -
The routing table allows connections from VM3 to VM1 and VM2. And as IP forwarding is enabled on VM3, VM3 can connect to VM1.

Box 2: No -
VM3, which has IP forwarding, must be turned on, in order for VM2 to connect to VM1.

Box 3: Yes -
The routing table allows connections from VM1 and VM2 to VM3. IP forwarding on VM3 allows VM1 to connect to VM2 via VM3.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-udr-overview
https://www.quora.com/What-is-IP-forwarding

Community Discussion

Question #734

SecExams

HOTSPOT -

You have an Azure subscription named Subscription1.

Subscription1 contains the virtual machines in the following table:

Name	IP address
VM1	10.0.1.4
VM2	10.0.2.4
VM3	10.0.3.4

Subscription1 contains a virtual network named VNet1 that has the subnets in the following table:

Name	Address space	Connected virtual machine
Subnet1	10.0.1.0/24	VM1
Subnet2	10.0.2.0/24	VM2
Subnet3	10.0.3.0/24	VM3

VM3 has multiple network adapters, including a network adapter named NIC3. IP forwarding is enabled on NIC3. Routing is enabled on VM3.

You create a route table named RT1 that contains the routes in the following table:

Address prefix	Next hop type	Next hop address
10.0.1.0/24	Virtual appliance	10.0.3.4
10.0.2.0/24	Virtual appliance	10.0.3.4

You apply RT1 to Subnet1 and Subnet2.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
VM3 can establish a network connection to VM1.	○	○
If VM3 is turned off, VM2 can establish a network connection to VM1.	○	○
VM1 can establish a network connection to VM2.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM3 can establish a network connection to VM1.	○	○
If VM3 is turned off, VM2 can establish a network connection to VM1.	○	○
VM1 can establish a network connection to VM2.	○	○

IP forwarding enables the virtual machine a network interface is attached to:
✑ Receive network traffic not destined for one of the IP addresses assigned to any of the IP configurations assigned to the network interface.
Send network traffic with a different source IP address than the one assigned to one of a network interface's IP configurations.
▪
The setting must be enabled for every network interface that is attached to the virtual machine that receives traffic that the virtual machine needs to forward. A virtual machine can forward traffic whether it has multiple network interfaces or a single network interface attached to it.

Box 1: Yes -
The routing table allows connections from VM3 to VM1 and VM2. And as IP forwarding is enabled on VM3, VM3 can connect to VM1.

Box 2: No -
VM3, which has IP forwarding, must be turned on, in order for VM2 to connect to VM1.

Box 3: Yes -
The routing table allows connections from VM1 and VM2 to VM3. IP forwarding on VM3 allows VM1 to connect to VM2 via VM3.
Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-udr-overview
https://www.quora.com/What-is-IP-forwarding

Community Discussion

Y = RT is not applied to VM3. VM3 will have the default route between subnets in a vnet. N = VM2 > Subnet2 has RT applied to it. VM3 is the next hop which is turned off. Y = VM3 has has IP forwarding enabled which can fwd traffic from VM1 to VM2.

Y/N/Y - VM3 is on the same VNET as VM2 and VM1, therefore, no routes are needed

Y/N/Y - VM3 is on the same VNET as VM2 and VM1, therefore, no routes are needed

I believe this is correct. Ordinarily all three should be able to speak to each other as they're all subnets within the same VNet. However, the route table directs them to the machine that is switched off, thus breaking contact. Answer is correct

Y N Y if UDR was not set, connectivity between three VMs would work by default. 1) With UDR, it still works, but return traffic from VM1 and VM2 to VM3 goes straight to VM3 instead of subnet gateway (which is one of reserverd subnet IPs) 2) and 3) are clear.

SecExams

Question #735

Your on-premises network contains an SMB share named Share1.

You have an Azure subscription that contains the following resources:

- A web app named webapp1
- A virtual network named VNET1

You need to ensure that webapp1 can connect to Share1.

What should you deploy?

A) an Azure Application Gateway
B) an Azure Active Directory (Azure AD) Application Proxy
C) an Azure Virtual Network Gateway (Correct Answer)

Explanation

Correct Answer: C ?
A Site-to-Site VPN gateway connection can be used to connect your on-premises network to an Azure virtual network over an IPsec/IKE (IKEv1 or IKEv2) VPN tunnel.
This type of connection requires a VPN device, a VPN gateway, located on-premises that has an externally facing public IP address assigned to it.
Incorrect Answers:
B: Application Proxy is a feature of Azure AD that enables users to access on-premises web applications from a remote client.

Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-site-to-site-resource-manager-portal

Community Discussion

Question #736

Your on-premises network contains an SMB share named Share1.

You have an Azure subscription that contains the following resources:

✑ A web app named webapp1

✑ A virtual network named VNET1

You need to ensure that webapp1 can connect to Share1.

What should you deploy?

A) an Azure Application Gateway
B) an Azure Active Directory (Azure AD) Application Proxy
C) an Azure Virtual Network Gateway (Correct Answer)

Explanation

Correct Answer:
C
A Site-to-Site VPN gateway connection can be used to connect your on-premises network to an Azure virtual network over an IPsec/IKE (IKEv1 or IKEv2) VPN tunnel.
This type of connection requires a VPN device, a VPN gateway, located on-premises that has an externally facing public IP address assigned to it.
Incorrect Answers:
B: Application Proxy is a feature of Azure AD that enables users to access on-premises web applications from a remote client.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-site-to-site-resource-manager-portal

Community Discussion

Correct Answer: C A Site-to-Site VPN gateway connection can be used to connect your on-premises network to an Azure virtual network over an IPsec/IKE (IKEv1 or IKEv2) VPN tunnel. This type of connection requires a VPN device, a VPN gateway, located on-premises that has an externally facing public IP address assigned to it. A: Application Gateway is for http, https and Websocket - Not SMB B: Application Proxy is also for accessing web applications on-prem - Not SMB. Application Proxy is a feature of Azure AD that enables users to access on-premises web applications from a remote client. Reference: https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-site-to-site-resource-manager-portal

With the answers that we have: Application Gateway is for http, https and Websocket - Not SMB Application Proxy is also for accessing web applications on-prem - Not SMB So the only answer can be VPN Gateway

you were missed until now , welcome back

you were missed until now , welcome back

This question appeared today in my exam. I answered C. Passed with 810 :-) 60/70% of questions are from here. Thanks guys!!! Keep up the good work

SecExams

Question #737

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.

You need to ensure that NGINX is available on all the virtual machines after they are deployed.

What should you use?

A) the Publish-AzVMDscConfiguration cmdlet
B) Azure Application Insights
C) Azure Custom Script Extension (Correct Answer)
D) the New-AzConfigurationAssignement cmdlet

Explanation

Correct Answer:
C

Note:
There are several versions of this question in the exam. The question has two correct answers:
1. a Desired State Configuration (DSC) extension
2. Azure Custom Script Extension
The question can have other incorrect answer options, including the following:
✑ Deployment Center in Azure App Service
✑ a Microsoft Intune device configuration profile
Reference:
https://docs.microsoft.com/en-us/azure/architecture/framework/devops/automation-configuration

Community Discussion

Correct Answer: C Note: There are several versions of this question in the exam. The question has two correct answers: 1. a Desired State Configuration (DSC) extension 2. Azure Custom Script Extension The question can have other incorrect answer options, including the following: ✑ the Publish-AzVMDscConfiguration cmdlet ✑ Azure Application Insights

C. Azure Custom Script Extension

Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/dsc-overview https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/tutorial-install-apps-template https://docs.microsoft.com/en-us/samples/mspnp/samples/azure-well-architected-framework-sample-state-configuration https://docs.microsoft.com/en-us/azure/architecture/framework/devops/automation-configuration

Reference: https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/dsc-overview https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/tutorial-install-apps-template https://docs.microsoft.com/en-us/samples/mspnp/samples/azure-well-architected-framework-sample-state-configuration https://docs.microsoft.com/en-us/azure/architecture/framework/devops/automation-configuration

i hope i get this question half as many times on the exam as it appears here.

Question #738

Your on-premises network contains a VPN gateway.
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vgw1	Virtual network gateway	Gateway for Site-to-Site VPN to the on-premises network
storage1	Storage account	Standard performance tier
Vnet1	Virtual network	Enabled forced tunneling
VM1	Virtual machine	Connected to Vnet1

You need to ensure that all the traffic from VM1 to storage1 travels across the Microsoft backbone network.
What should you configure?

A) a network security group (NSG) (Correct Answer)
B) service endpoints
C) Azure Peering Service
D) Azure Firewall

Explanation

Correct Answer:
A

Community Discussion

Selected Answer: B

I believe it should be B "Virtual Network (VNet) service endpoint provides secure and direct connectivity to Azure services over an optimized route over the Azure backbone network. " https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoints-overview

Admin, Let's get this fixed please. The correct answer is B.

Selected Answer: B

B is the answer. https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoints-overview Virtual Network (VNet) service endpoint provides secure and direct connectivity to Azure services over an optimized route over the Azure backbone network. Endpoints allow you to secure your critical Azure service resources to only your virtual networks. Service Endpoints enables private IP addresses in the VNet to reach the endpoint of an Azure service without needing a public IP address on the VNet.

https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoints-overview Check Limititations. So Ans is NSG

Selected Answer: B

Service Endpoints allow you to extend the Azure virtual network's private address space to Azure services, such as Azure Storage. By enabling Service Endpoints, the traffic between VM1 and storage1 remains within the Azure network fabric, utilizing the Microsoft backbone network.

SecExams

Question #739

You plan to deploy route-based Site-to-Site VPN connections between several on-premises locations and an Azure virtual network.
Which tunneling protocol should you use?

A) IKEv1
B) PPTP
C) IKEv2 (Correct Answer)
D) L2TP

Explanation

Correct Answer: C ?
A Site-to-Site (S2S) VPN gateway connection is used to connect your on-premises network to an Azure virtual network over an IPsec/IKE (IKEv1 or IKEv2) VPN tunnel. IKEv2 supports 10 S2S connections, while IKEv1 only supports 1.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-site-to-site-classic-portal https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-connect-multiple-policybased-rm-ps

Community Discussion

Question #740

You plan to deploy route-based Site-to-Site VPN connections between several on-premises locations and an Azure virtual network.
Which tunneling protocol should you use?

A) IKEv1
B) PPTP
C) IKEv2 (Correct Answer)
D) L2TP

Explanation

Correct Answer:
C
A Site-to-Site (S2S) VPN gateway connection is used to connect your on-premises network to an Azure virtual network over an IPsec/IKE (IKEv1 or IKEv2) VPN tunnel.
IKEv2 supports 10 S2S connections, while IKEv1 only supports 1.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-site-to-site-classic-portal https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-connect-multiple-policybased-rm-ps

Community Discussion

C. IKEv2 IPsec keyword is "Route-Based" coz "Policy-based" only supports IKEv1.

Keyword is several on-premises locations and an Azure virtual network. IKEv2 supports 10 S2S, IKEv1 supports only one.

Selected Answer: C

C is the answer. https://learn.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-connect-multiple-policybased-rm-ps#azure-support-for-policy-based-vpn

Selected Answer: C

Correct Answer: C

Selected Answer: C

Correct Answer: C

Question #741

You have an Azure subscription that has a Recovery Services vault named Vault1. The subscription contains the virtual machines shown in the following table:

Name	Operating system	Auto-shutdown
VM1	Windows Server 2012 R2	Off
VM2	Windows Server 2016	19:00
VM3	Ubuntu Server 18.04 LTS	Off
VM4	Windows 10	19:00

You plan to schedule backups to occur every night at 23:00.
Which virtual machines can you back up by using Azure Backup?

A) VM1 and VM3 only
B) VM1, VM2, VM3 and VM4 (Correct Answer)
C) VM1 and VM2 only
D) VM1 only

Explanation

Correct Answer:
B
Azure Backup supports backup of 64-bit Windows server operating system from Windows Server 2008.
Azure Backup supports backup of 64-bit Windows 10 operating system.
Azure Backup supports backup of 64-bit Ubuntu Server operating system from Ubuntu 12.04.
Azure Backup supports backup of VM that are shutdown or offline.
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-support-matrix-iaas https://docs.microsoft.com/en-us/azure/virtual-machines/linux/endorsed-distros

Community Discussion

Correct Answer: B Azure Backup supports backup of 64-bit Windows server operating system from Windows Server 2008. Azure Backup supports backup of 64-bit Windows 10 operating system. Azure Backup supports backup of 64-bit Ubuntu Server operating system from Ubuntu 12.04. Azure Backup supports backup of VM that are shutdown or offline. The Backup service installs the backup extension whether or not the VM is running.

Answer is Correct. "B". Backup is supported for the whole VM for all the OS types mentioned. Also, backup operation can be done while VM is offline or shutdown

good to see you, old friend

good to see you, old friend

Selected Answer: B

I luv Honey Because it is B Here is Summary: **Azure Backup supports backup of 64-bit Windows server operating system from Windows Server 2008. **Azure Backup supports backup of 64-bit Windows 10 operating system. **Azure Backup supports backup of 64-bit Debian operating system from Debian 7.9+. **Azure Backup supports backup of VM that are shutdown or offline or online

SecExams

Question #742

You have an Azure subscription that has a Recovery Services vault named Vault1. The subscription contains the virtual machines shown in the following table:

Name	Operating system	Auto-shutdown
VM1	Windows Server 2012 R2	Off
VM2	Windows Server 2016	19:00
VM3	Ubuntu Server 18.04 LTS	Off
VM4	Windows 10	19:00

You plan to schedule backups to occur every night at 23:00.
Which virtual machines can you back up by using Azure Backup?

A) VM1 and VM3 only

B) VM1, VM2, VM3 and VM4 (Correct Answer)

C) VM1 and VM2 only

D) VM1 only

Explanation

Correct Answer: B ?

Azure Backup supports backup of 64-bit Windows server operating system from Windows Server 2008.

Azure Backup supports backup of 64-bit Windows 10 operating system.

Azure Backup supports backup of 64-bit Ubuntu Server operating system from Ubuntu 12.04.

Azure Backup supports backup of VM that are shutdown or offline.

Reference:

https://docs.microsoft.com/en-us/azure/backup/backup-support-matrix-iaas https://docs.microsoft.com/en-us/azure/virtual-machines/linux/endorsed-distros

Community Discussion

Question #743

You have the Azure virtual machines shown in the following table:

Name	Azure region
VM1	West Europe
VM2	West Europe
VM3	North Europe
VM4	North Europe

You have a Recovery Services vault that protects VM1 and VM2.

You need to protect VM3 and VM4 by using Recovery Services.

What should you do first?

A) Create a new Recovery Services vault (Correct Answer)

B) Create a storage account

C) Configure the extensions for VM3 and VM4

D) Create a new backup policy

Explanation

Correct Answer:
A
A Recovery Services vault is a storage entity in Azure that houses data. The data is typically copies of data, or configuration information for virtual machines (VMs), workloads, servers, or workstations. You can use Recovery Services vaults to hold backup data for various Azure services
Reference:
https://docs.microsoft.com/en-us/azure/site-recovery/azure-to-azure-tutorial-enable-replicatio

Community Discussion

Correct Answer: A VM3 and VM4 are in a different region from VM1 and VM2. So, we need to create a new Recovery Services Vault in the same region with VM3 and VM4. For storage account, it is created automatically by Azure. A Recovery Services vault is a storage entity in Azure that houses data. The data is typically copies of data, or configuration information for virtual machines (VMs), workloads, servers, or workstations. You can use Recovery Services vaults to hold backup data for various Azure services.
Reference: https://docs.microsoft.com/en-us/azure/site-recovery/azure-to-azure-tutorial-enable-replication

Answer is correct. "A" Create a new Recovery Services Vault. As the VM3 and VM4 are in a different region. then we need to create a new one in the same region of VM3 and VM4 (data source). For storage account, it is created automatically by Azure. for more details checl https://docs.microsoft.com/bs-cyrl-ba/azure/backup/backup-create-rs-vault#create-a-recovery-services-vault

On the exam today, 1.feb.2022 Just 761/1000, but OK! :D Thanks to SecExams and to you all!

On exam 01.02.22 Answer: Create a new Recovery Services Vault

Selected Answer: A

Correct Answer: A VM3 and VM4 are in a different region from VM1 and VM2. So, we need to create a new Recovery Services Vault in the same region with VM3 and VM4. For storage account, it is created automatically by Azure.

Question #744

You have the Azure virtual machines shown in the following table:

Name	Azure region
VM1	West Europe
VM2	West Europe
VM3	North Europe
VM4	North Europe

You have a Recovery Services vault that protects VM1 and VM2.
You need to protect VM3 and VM4 by using Recovery Services.
What should you do first?

A) Create a new Recovery Services vault (Correct Answer)
B) Create a storage account
C) Configure the extensions for VM3 and VM4
D) Create a new backup policy

Explanation

Correct Answer: A ?
A Recovery Services vault is a storage entity in Azure that houses data. The data is typically copies of data, or configuration information for virtual machines (VMs), workloads, servers, or workstations. You can use Recovery Services vaults to hold backup data for various Azure services
Reference:
https://docs.microsoft.com/en-us/azure/site-recovery/azure-to-azure-tutorial-enable-replicatio

Community Discussion

Question #745

HOTSPOT -

You have an Azure subscription that contains an Azure Storage account named storage1 and the users shown in the following table.

Name	Member of
User1	Group1
User2	Group2
User3	Group1

You plan to monitor storage1 and to configure email notifications for the signals shown in the following table.

Name	Type	Users to notify
Ingress	Metric	User1 and User3 only
Egress	Metric	User1 only
Delete storage account	Activity log	User1, User2, and User3
Restore blob ranges	Activity log	User1 and User3 only

You need to identify the minimum number of alert rules and action groups required for the planned monitoring.

How many alert rules and action groups should you identify? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Alert rules:



Action groups:



Explanation

Correct Answer:

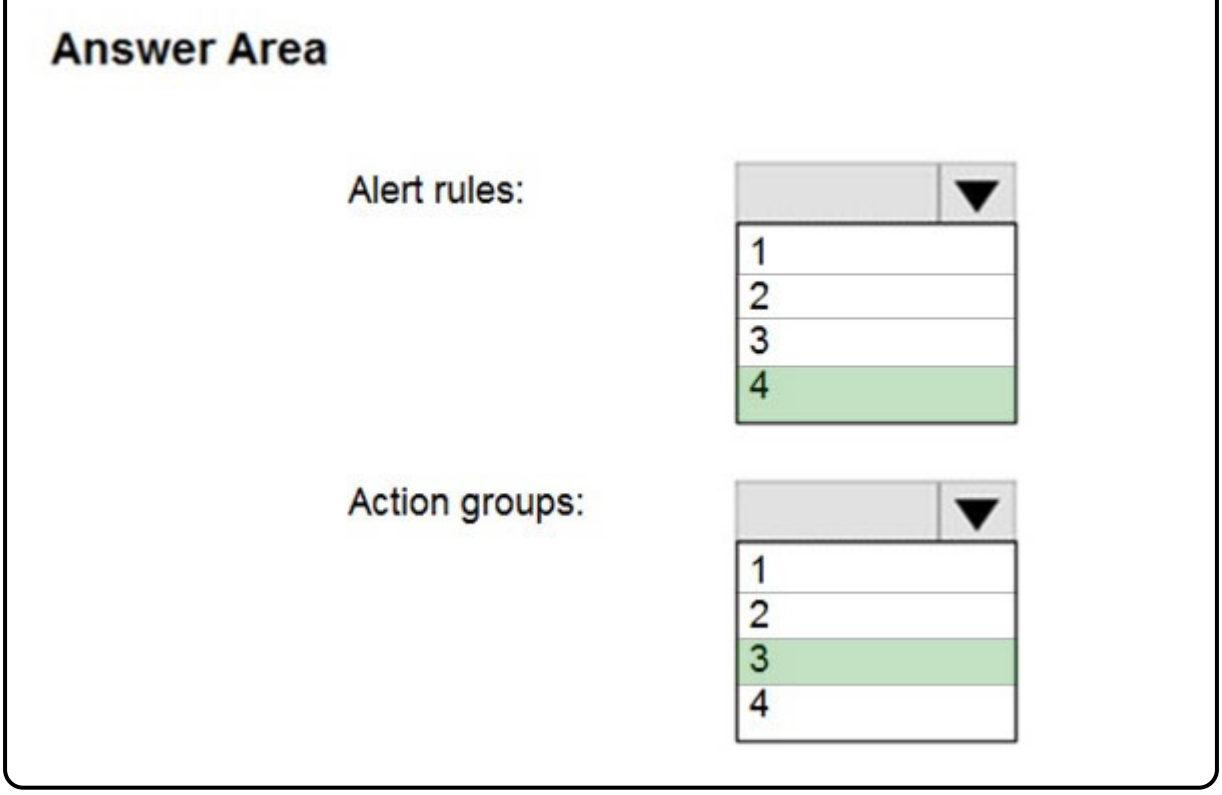

Community Discussion

Correct Answer: You can define only one activity log signal per alert rule. To alert on more signals, create another alert rule. Box 1: 4 You need 1 alert rule per 1 signal (1xIngress, 1xEgress, 1xDelete storage account, 1xRestore blob ranges). Box 2: 3 You need 3 Action Groups (1xUser1 and User3, 1xUser1 only, 1xUser1 User2 and User3). Check 'Users to notify' column.

Answer is correct. 4 Alert rules and 3 action groups

thanks for the explanation

thanks for the explanation

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. Answered: Box1: 4 Box2: 3

SecExams

Question #746

HOTSPOT -

You have an Azure subscription that contains an Azure Storage account named storage1 and the users shown in the following table.

Name	Member of
User1	Group1
User2	Group2
User3	Group1

You plan to monitor storage1 and to configure email notifications for the signals shown in the following table.

Name	Type	Users to notify
Ingress	Metric	User1 and User3 only
Egress	Metric	User1 only
Delete storage account	Activity log	User1, User2, and User3
Restore blob ranges	Activity log	User1 and User3 only

You need to identify the minimum number of alert rules and action groups required for the planned monitoring.

How many alert rules and action groups should you identify? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Alert rules:



Action groups:



Explanation

Correct Answer:

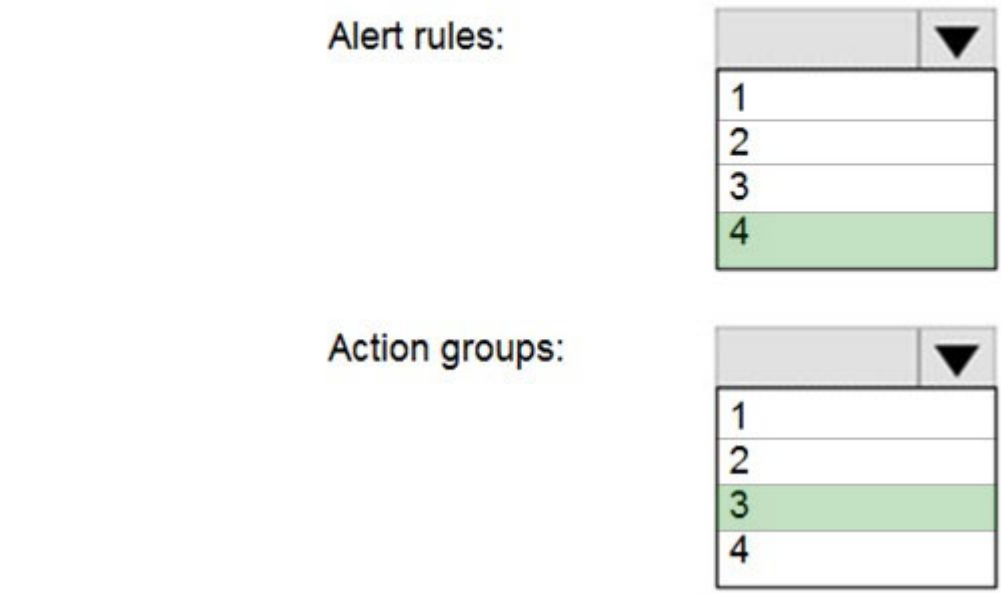

Community Discussion

Question #747

You have an Azure subscription that contains the identities shown in the following table.

Name	Type	Member of
User1	User	*None*
User2	User	Group1
Principal1	Managed identity	*None*
Principal2	Managed identity	Group1

User1, Principal1, and Group1 are assigned the Monitoring Reader role.
An action group named AG1 has the Email Azure Resource Manager Role notification type and is configured to email the Monitoring Reader role.
You create an alert rule named Alert1 that uses AG1.
You need to identity who will receive an email notification when Alert1 is triggered.
Who should you identify?

A) User1 and Principal1 only
B) User1, User2, Principal1, and Principal2
C) User1 only (Correct Answer)
D) User1 and User2 only

Explanation

Correct Answer:
C
Email will only be sent to Azure AD user members of the Monitoring Reader role. Email will not be sent to Azure AD groups or service principals.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/action-groups

Community Discussion

Correct Answer: C Email will only be sent to Azure AD user members of the Monitoring Reader role. Email will not be sent to Azure AD groups or service principals. Reference: https://docs.microsoft.com/en-us/azure/azure-monitor/platform/action-groups https://docs.microsoft.com/en-us/azure/azure-monitor/alerts/action-groups#email-azure-resource-manager-role

Answer is D. AG sends to users that have 'reader' role, User2 inherits that role through Group1 membership.

Yes it's not sent to a group. But User2 inherits of the Monitoring Reader role. So he will receive also the notification

Yes it's not sent to a group. But User2 inherits of the Monitoring Reader role. So he will receive also the notification

Did you actually test this? The question doesn't involve sending an email to a group but is instead concerned with role assignment inheritance from the group. The link you're all posting isn't necessarily relevant. User 2 should inherit the role assignment from the group, you can easily validate that in the portal. I am waiting out the 24hr lag period before testing. Alert group scoped to email on VM creation or deletion, one user assigned role directly and one via group. Will report back.

SecExams

Question #748

You have an Azure subscription that contains the identities shown in the following table.

Name	Type	Member of
User1	User	*None*
User2	User	Group1
Principal1	Managed identity	*None*
Principal2	Managed identity	Group1

User1, Principal1, and Group1 are assigned the Monitoring Reader role.
An action group named AG1 has the Email Azure Resource Manager Role notification type and is configured to email the Monitoring Reader role.
You create an alert rule named Alert1 that uses AG1.
You need to identity who will receive an email notification when Alert1 is triggered.
Who should you identify?

A) User1 and Principal1 only
B) User1, User2, Principal1, and Principal2
C) User1 only (Correct Answer)
D) User1 and User2 only

Explanation

Correct Answer: C ?
Email will only be sent to Azure AD user members of the Monitoring Reader role. Email will not be sent to Azure AD groups or service principals.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/platform/action-groups

Community Discussion

Question #749

SecExams

HOTSPOT -

You have an Azure virtual machine named VM1 and a Recovery Services vault named Vault1.

You create a backup policy named Policy1 as shown in the exhibit. (Click the Exhibit tab.)

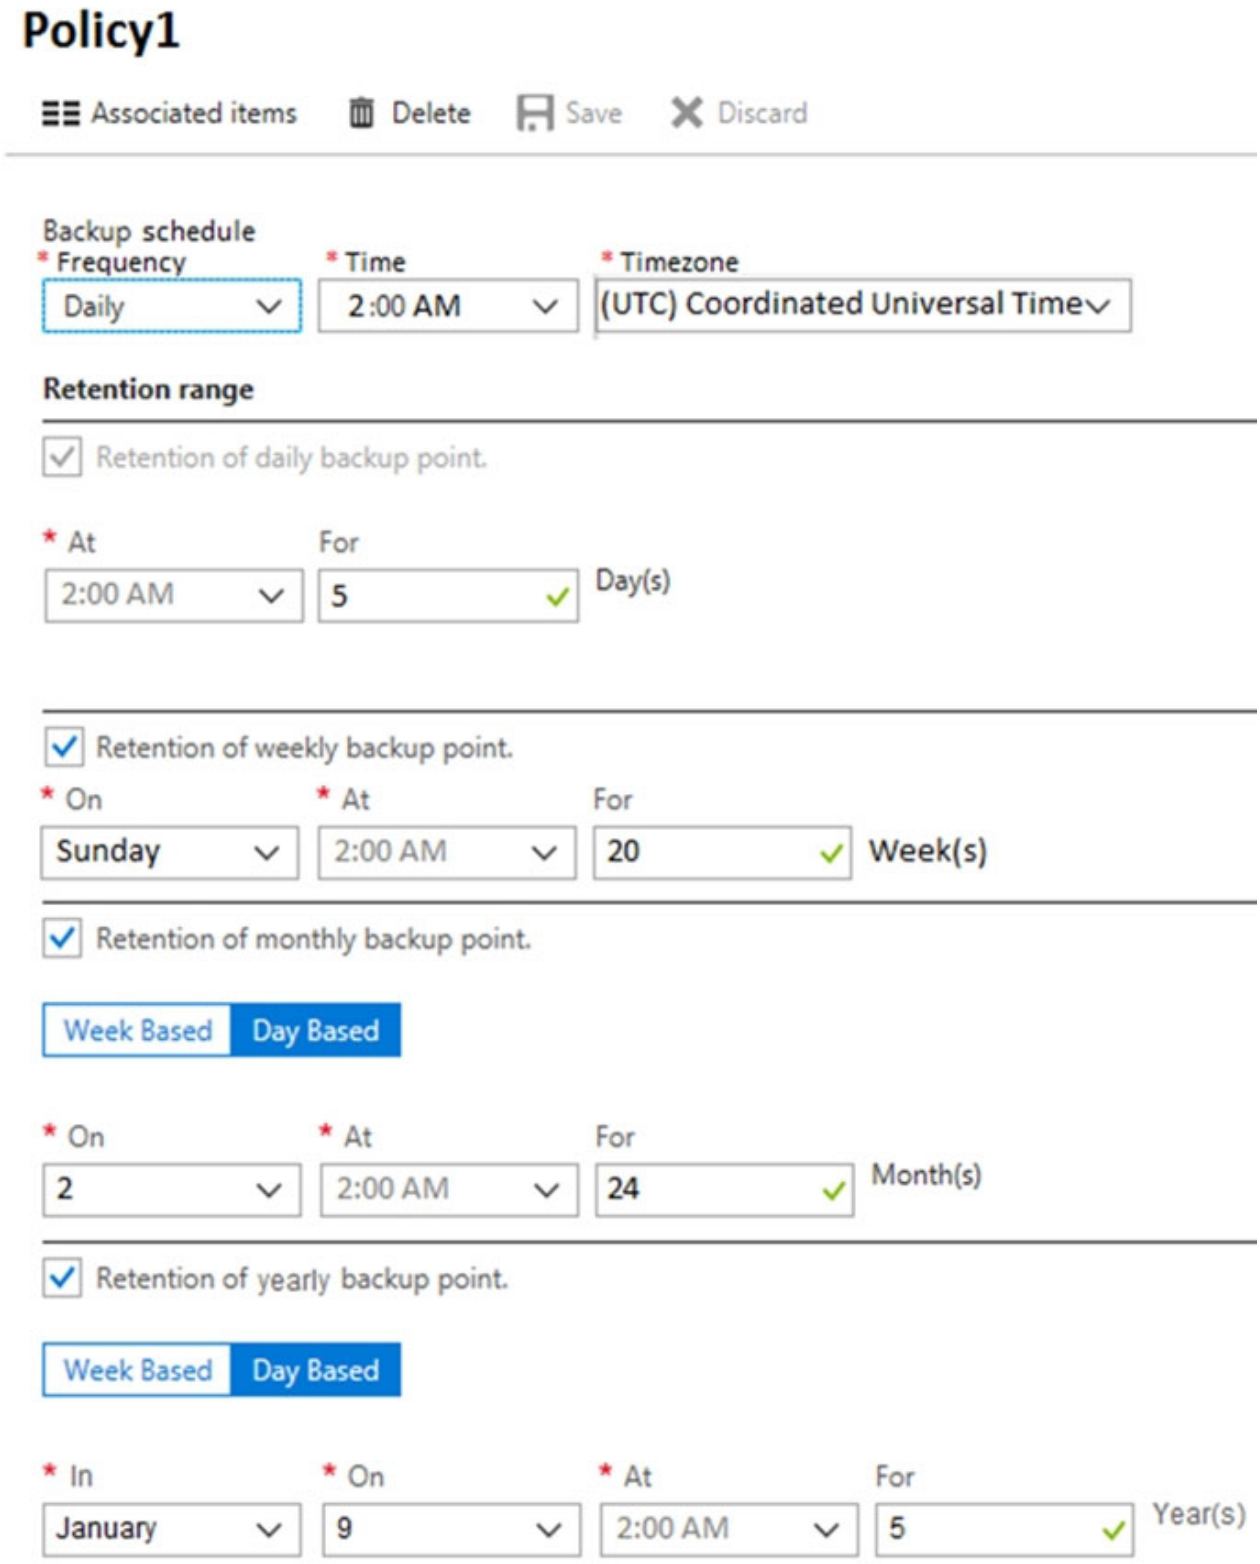

You configure the backup of VM1 to use Policy1 on Thursday, January 1 at 1:00

AM.

You need to identify the number of available recovery points for VM1.

How many recovery points are available on January 8 and January 15? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

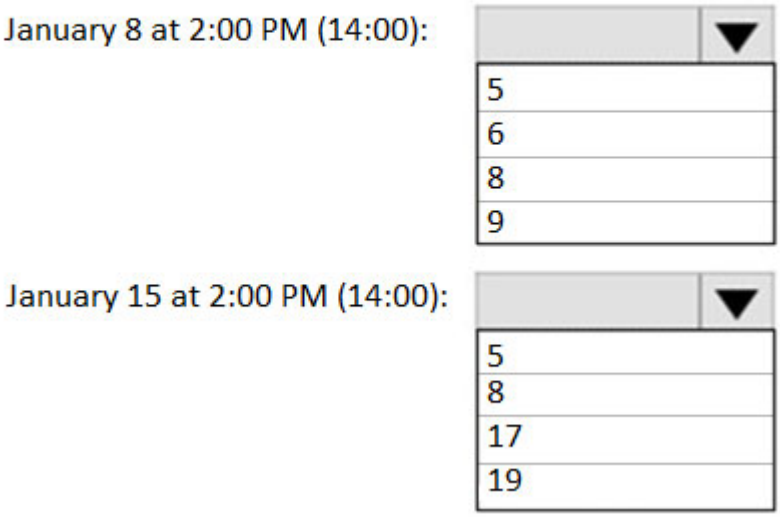

Explanation

Correct Answer:

Answer Area

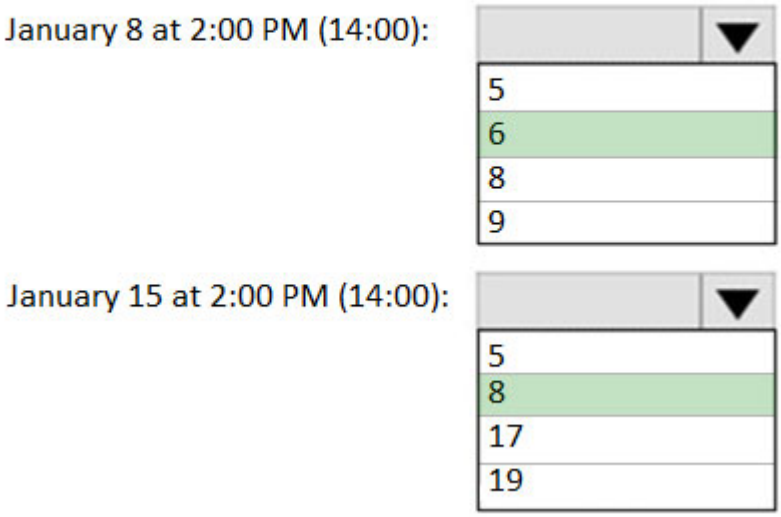

Box 1: 6 -
5 latest daily recovery points, which includes the weekly backup from the previous Sunday, plus the monthly recovery point.

Box 2: 8 -
5 latest daily recovery points, plus two weekly backups, plus the monthly recovery point.
Reference:
https://social.technet.microsoft.com/Forums/en-US/854ab6ae-79aa-4bad-ac65-471c4d422e94/daily-monthly-yearly-recovery-points-and-storage-used?forum=windowsazureonlinebackup

Community Discussion

Answer is correct in case yearly backup is also in the question. If we assumed we have yearly, then the answer will be: - @8 JAN: 5 daily backups (1 weekly backup included) + 1 monthly = 6 - @ 15 JAN: 5 daily backups (1 weekly backup included) + 1 weekly + 1 monthly +1 yearly = 8 backups

Correct Answer: Box 1: 6 5 latest daily recovery points, which includes the weekly backup from the previous Sunday, plus the monthly recovery point. 8th January = 5 daily backups (1 weekly backup included) + 1 Monthly = 6 backups Box 2: 8 5 latest daily recovery points, plus two weekly backups, plus the monthly recovery point. 15th January is a Friday = 5 daily backups (Monday - Friday) + 2 Weekly (2 Sundays) + 1 Monthly = 8 backups

its 6. We retain the 5 daily backups from January 4th - January 8th. There is a weekly backup on the 4th that we do NOT include in the count because it's already backed up by the 5-day retention period of the daily backups. Then we have a monthly backup on the 2nd, that is outside the 5-day retention period. 5 daily backups + 1 monthly backup = 6 backup points.

its 6. We retain the 5 daily backups from January 4th - January 8th. There is a weekly backup on the 4th that we do NOT include in the count because it's already backed up by the 5-day retention period of the daily backups. Then we have a monthly backup on the 2nd, that is outside the 5-day retention period. 5 daily backups + 1 monthly backup = 6 backup points.

its 6. We retain the 5 daily backups from January 4th - January 8th. There is a weekly backup on the 4th that we do NOT include in the count because it's already backed up by the 5-day retention period of the daily backups. Then we have a monthly backup on the 2nd, that is outside the 5-day retention period. 5 daily backups + 1 monthly backup = 6 backup points.

SecExams

Question #750

SecExams

HOTSPOT -

You have an Azure virtual machine named VM1 and a Recovery Services vault named Vault1.

You create a backup policy named Policy1 as shown in the exhibit. (Click the Exhibit tab.)

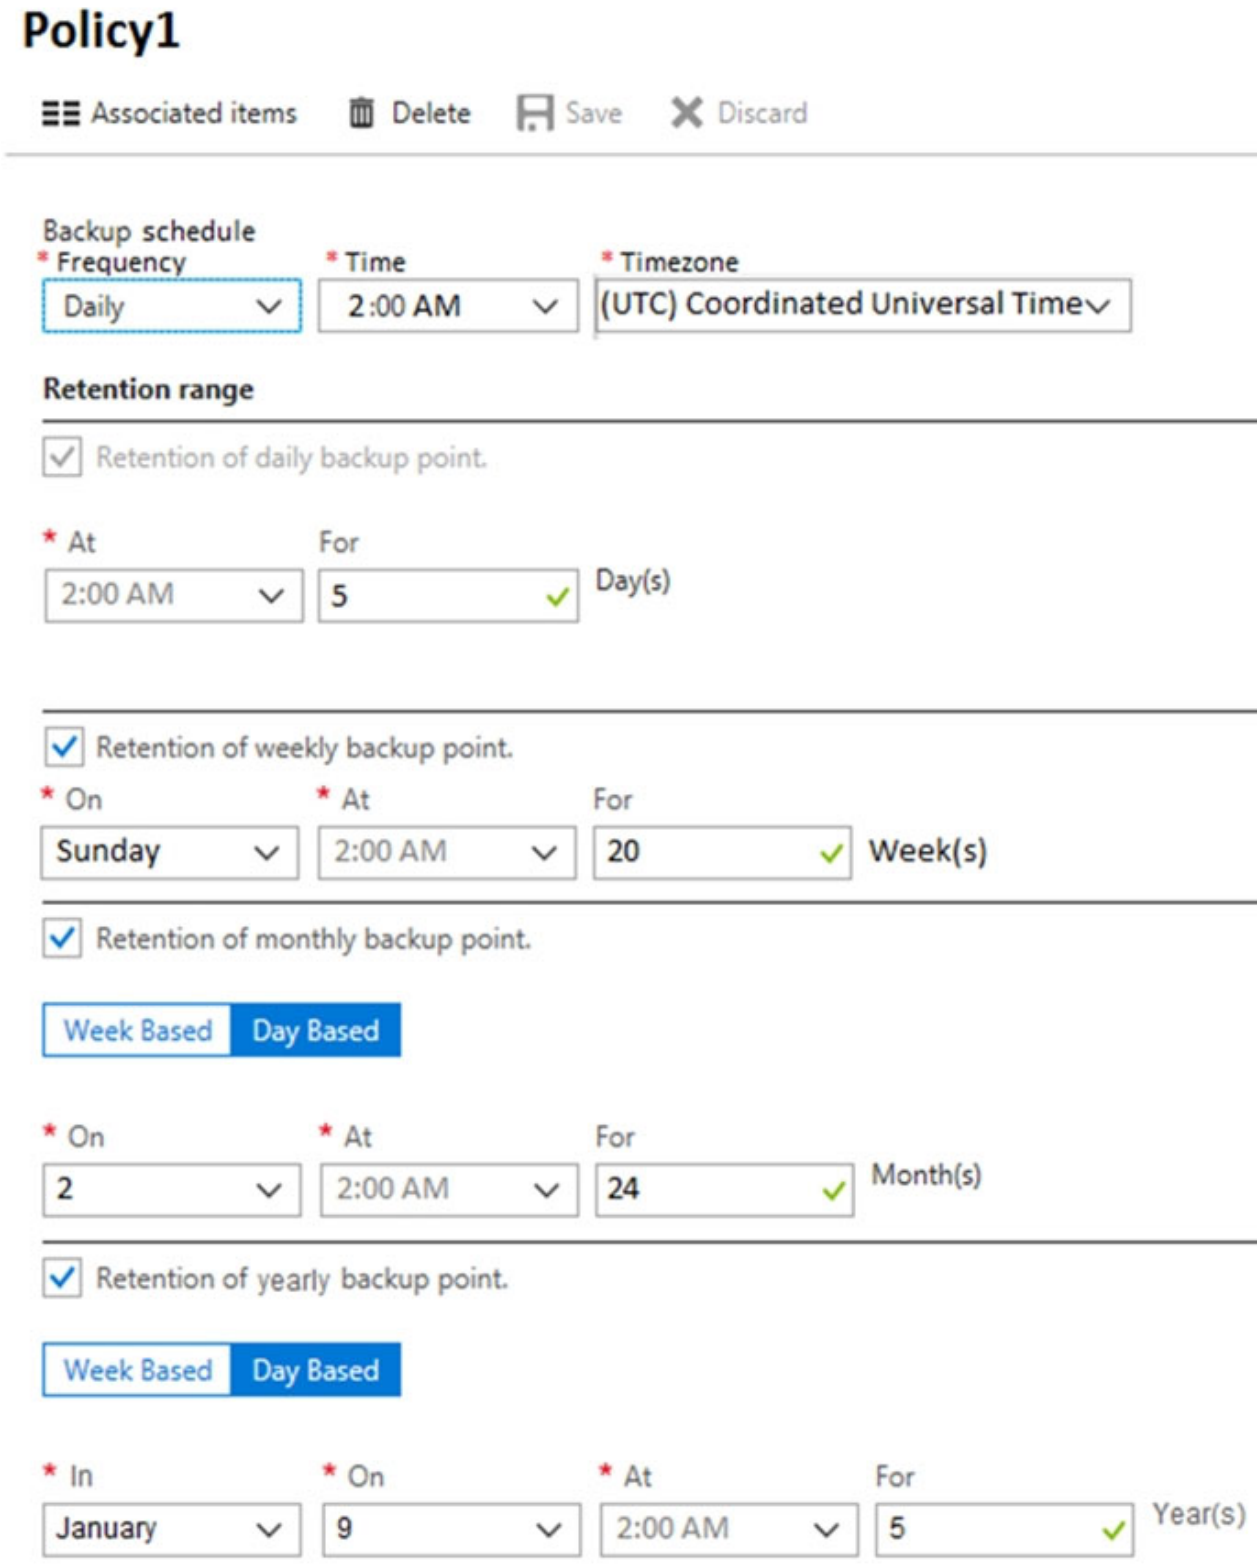

You configure the backup of VM1 to use Policy1 on Thursday, January 1 at 1:00

AM.

You need to identify the number of available recovery points for VM1.

How many recovery points are available on January 8 and January 15? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

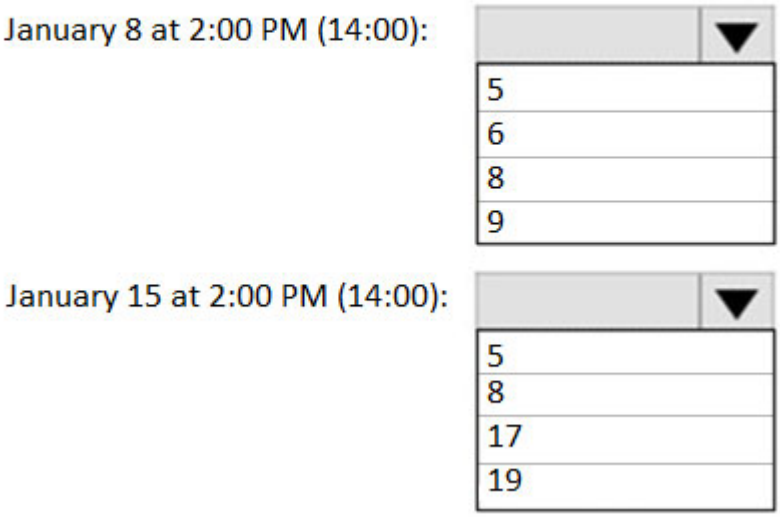

Explanation

Correct Answer:

Answer Area

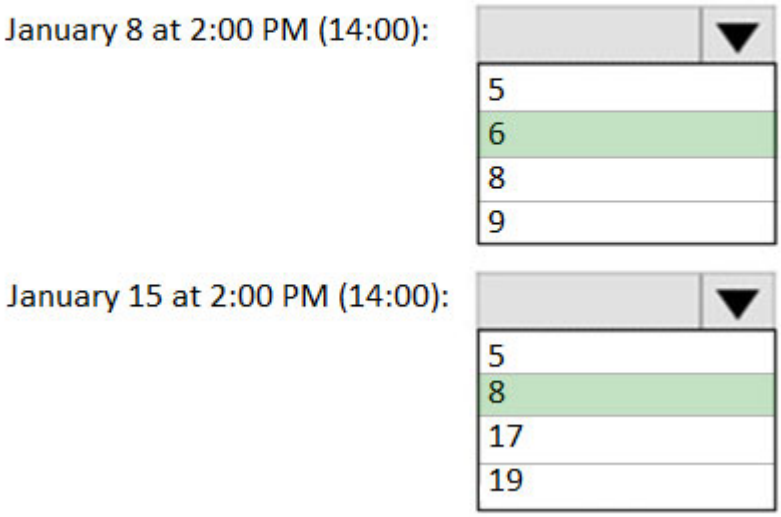

Box 1: 6 -
5 latest daily recovery points, which includes the weekly backup from the previous Sunday, plus the monthly recovery point.

Box 2: 8 -
5 latest daily recovery points, plus two weekly backups, plus the monthly recovery point.
Reference:
https://social.technet.microsoft.com/Forums/en-US/854ab6ae-79aa-4bad-ac65-471c4d422e94/daily-monthly-yearly-recovery-points-and-storage-used?forum=windowsazureonlinebackup

Community Discussion

Question #751

HOTSPOT -

You have the web apps shown in the following table.

Name	Web framework	Hosting environment
App1	Microsoft ASP.NET	An on-premises physical server that runs Windows Server 2019 and has Internet Information Services (IIS) configured
App2	Microsoft ASP.NET Core	An Azure virtual machine that runs Windows Server 2019 and has Internet Information Services (IIS) configured

You need to monitor the performance and usage of the apps by using Azure Application Insights. The solution must minimize modifications to the application code.

What should you do on each app? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

App1:

- Install the Log Analytics agent
- Install the Azure Monitor agent
- Use the Application Insights SDK
- Install the Application Insights Agent

App2:

- Install the Log Analytics agent
- Install the Azure Monitor agent
- Use the Application Insights SDK
- Install the Application Insights Agent

SecExams

Explanation

Correct Answer:

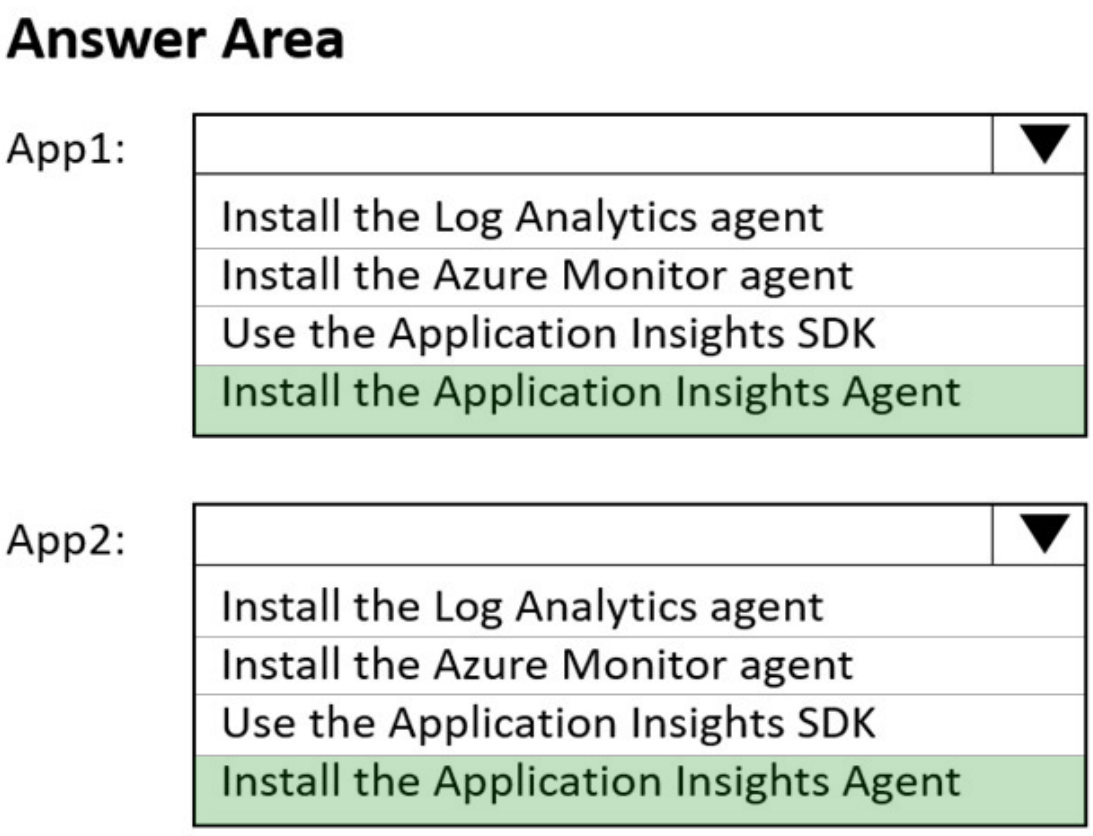

Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/app/azure-web-apps

Community Discussion

Correct. Application Insights Agent (formerly named Status Monitor V2) is a PowerShell module published to the PowerShell Gallery. It replaces Status Monitor. https://docs.microsoft.com/en-us/azure/azure-monitor/app/status-monitor-v2-overview https://docs.microsoft.com/en-us/azure/azure-monitor/app/status-monitor-v2-detailed-instructions

Correct There are two ways to enable application monitoring for OnPrem, VM or App Services Web APP: - Auto-instrumentation by using Application Insight Agent Manual instrumentation by installing the Application Insight SDK through code So as it's

mentioned the solution must minimize the modification then it's Application Insight Agent

Application Insights Agent (formerly named Status Monitor V2) is a PowerShell module published to the PowerShell Gallery. It replaces Status Monitor. Telemetry is sent to the Azure portal, where you can monitor your app. Note: The module currently supports codeless instrumentation of .NET and .NET Core web apps hosted with IIS. Use an SDK to instrument Java and Node.js applications. https://docs.microsoft.com/en-us/azure/azure-monitor/app/status-monitor-v2-overview

Answer is in the question. You need to monitor the performance and usage of the apps by using 'Azure Application Insights.' - Ans: Application Insights Agent.

Both C, D can be used for Application Insights. But Application insights SDK requires editing your application code so answer should be D which doesn't requires code editing.

SecExams

Question #752

HOTSPOT -

You have the web apps shown in the following table.

Name	Web framework	Hosting environment
App1	Microsoft ASP.NET	An on-premises physical server that runs Windows Server 2019 and has Internet Information Services (IIS) configured
App2	Microsoft ASP.NET Core	An Azure virtual machine that runs Windows Server 2019 and has Internet Information Services (IIS) configured

You need to monitor the performance and usage of the apps by using Azure Application Insights. The solution must minimize modifications to the application code.

What should you do on each app? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

App1:

- Install the Log Analytics agent
- Install the Azure Monitor agent
- Use the Application Insights SDK
- Install the Application Insights Agent

App2:

- Install the Log Analytics agent
- Install the Azure Monitor agent
- Use the Application Insights SDK
- Install the Application Insights Agent

SecExams

Explanation

Correct Answer:

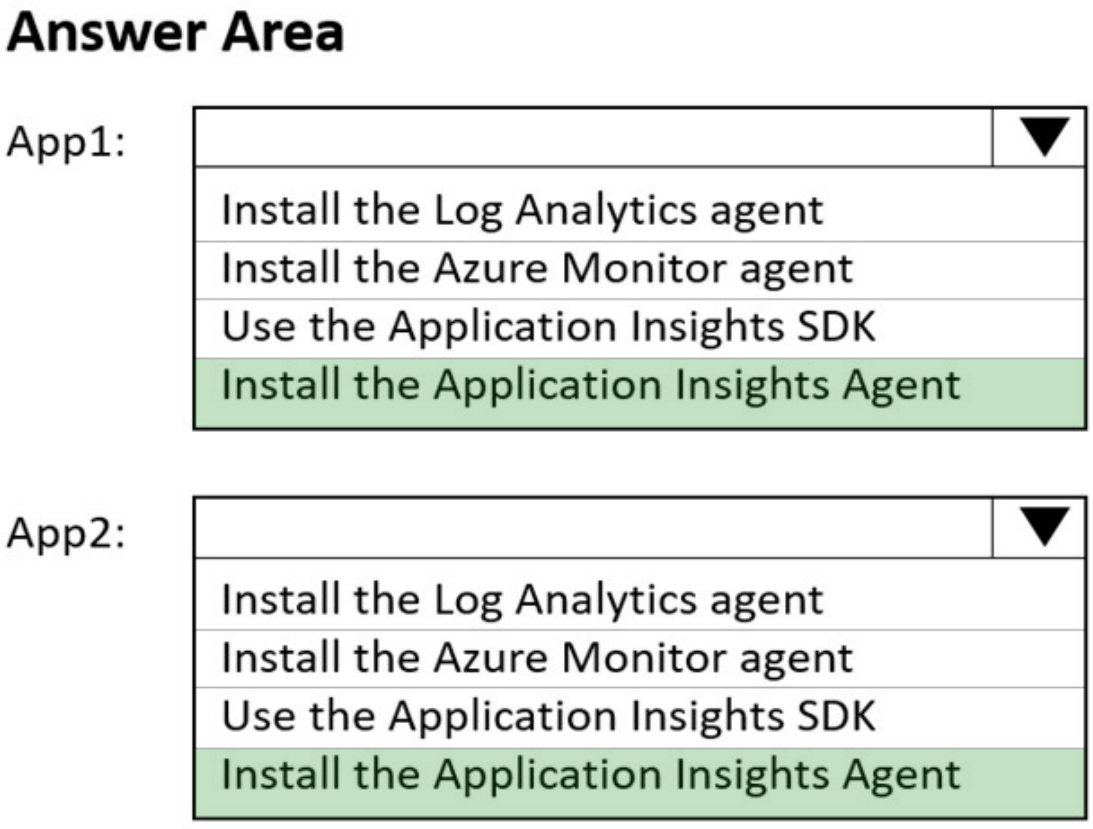

Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/app/azure-web-apps

Community Discussion

Question #753

You have an Azure virtual machine named VM1.
You use Azure Backup to create a backup of VM1 named Backup1.
After creating Backup1, you perform the following changes to VM1:
✑ Modify the size of VM1.
✑ Copy a file named Budget.xls to a folder named Data.
✑ Reset the password for the built-in administrator account.
✑ Add a data disk to VM1.
An administrator uses the Replace existing option to restore VM1 from Backup1.
You need to ensure that all the changes to VM1 are restored.
Which change should you perform again?

A) Modify the size of VM1.
B) Reset the password for the built-in administrator account.
C) Add a data disk.
D) Copy Budget.xls to Data. (Correct Answer)

Explanation

Correct Answer:
D
Reference:
https://docs.microsoft.com/en-us/azure/backup/about-azure-vm-restore

Community Discussion

If it's a single selection, I would select D. However, the test result reveals it should be two (C and D). I have tested this in Azure. Prepare 1. Create a Windows VM with size D2S_v3. 2. Backup the VM. Made changes after the backup. 1. Modify the VM size to DS1_v2. 2. RDP to the VM and create a new file. 3. Reset the password for the built-in administrator. 4. Add a data disk to the VM. Restore the VM from the backup. Here are the results: 1. VM size remains as DS1_v2. 2. RDP to VM with the changed password. 3. Data disk is gone. 4. A new file is gone. Conclusion, VM size and password will not be overridden by the restore process. You will need to perform the changes again: 1. Add a data disk 2. Copy the file.

Data disk is not gone, it just becomes unattached, as there is no option to re-attach disk, the only "change to perform again" is Copy Budget.xls to Data. No need to add/create a data disk again it already exists.

Data disk is not gone, it just becomes unattached, as there is no option to re-attach disk, the only "change to perform again" is Copy Budget.xls to Data. No need to add/create a data disk again it already exists.

Selected Answer: D

The correct answer is D, i.e., copy the file again. a. You don't need to resize the VM after backup. The latest size will be applicable. b. The latest credentials will work. c. This one is a bit ambiguous. The additional data disk will not be deleted after the restoration. However, you will have to attach it again to the VM. D. The file will be lost and needs to be created again.

If it already exists, then why copy Budget.xls again. ? Just simply Attaching will be enough.?

SecExams

Question #754

You have an Azure virtual machine named VM1.
You use Azure Backup to create a backup of VM1 named Backup1.
After creating Backup1, you perform the following changes to VM1:
✑ Modify the size of VM1.
✑ Copy a file named Budget.xls to a folder named Data.
✑ Reset the password for the built-in administrator account.
✑ Add a data disk to VM1.
An administrator uses the Replace existing option to restore VM1 from Backup1.
You need to ensure that all the changes to VM1 are restored.
Which change should you perform again?

A) Modify the size of VM1.
B) Reset the password for the built-in administrator account.
C) Add a data disk.
D) Copy Budget.xls to Data. (Correct Answer)

Explanation

Correct Answer: D ?
Reference:
https://docs.microsoft.com/en-us/azure/backup/about-azure-vm-restore

Community Discussion

SecExams

Question #755

SecExams

HOTSPOT -

You have an Azure Active Directory (Azure AD) tenant named contoso.onmicrosoft.com that contains the users shown in the following table.

Name	Member of	Role assigned
User1	Group1	*None*
User2	Group2	*None*
User3	Group1, Group2	User administrator

You enable password reset for contoso.onmicrosoft.com as shown in the Password Reset exhibit. (Click the Password Reset tab.)

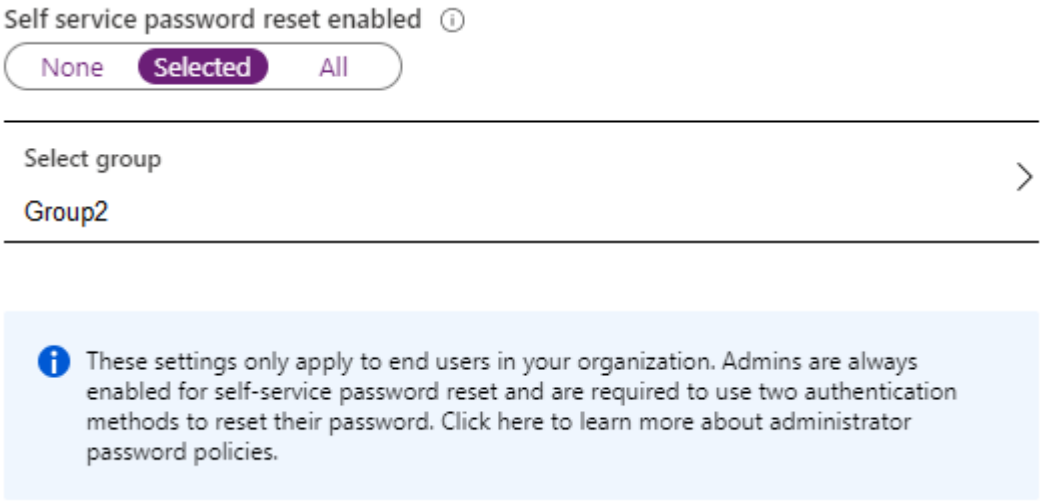

You configure the authentication methods for password reset as shown in the Authentication Methods exhibit. (Click the Authentication Methods tab.)

SecExams

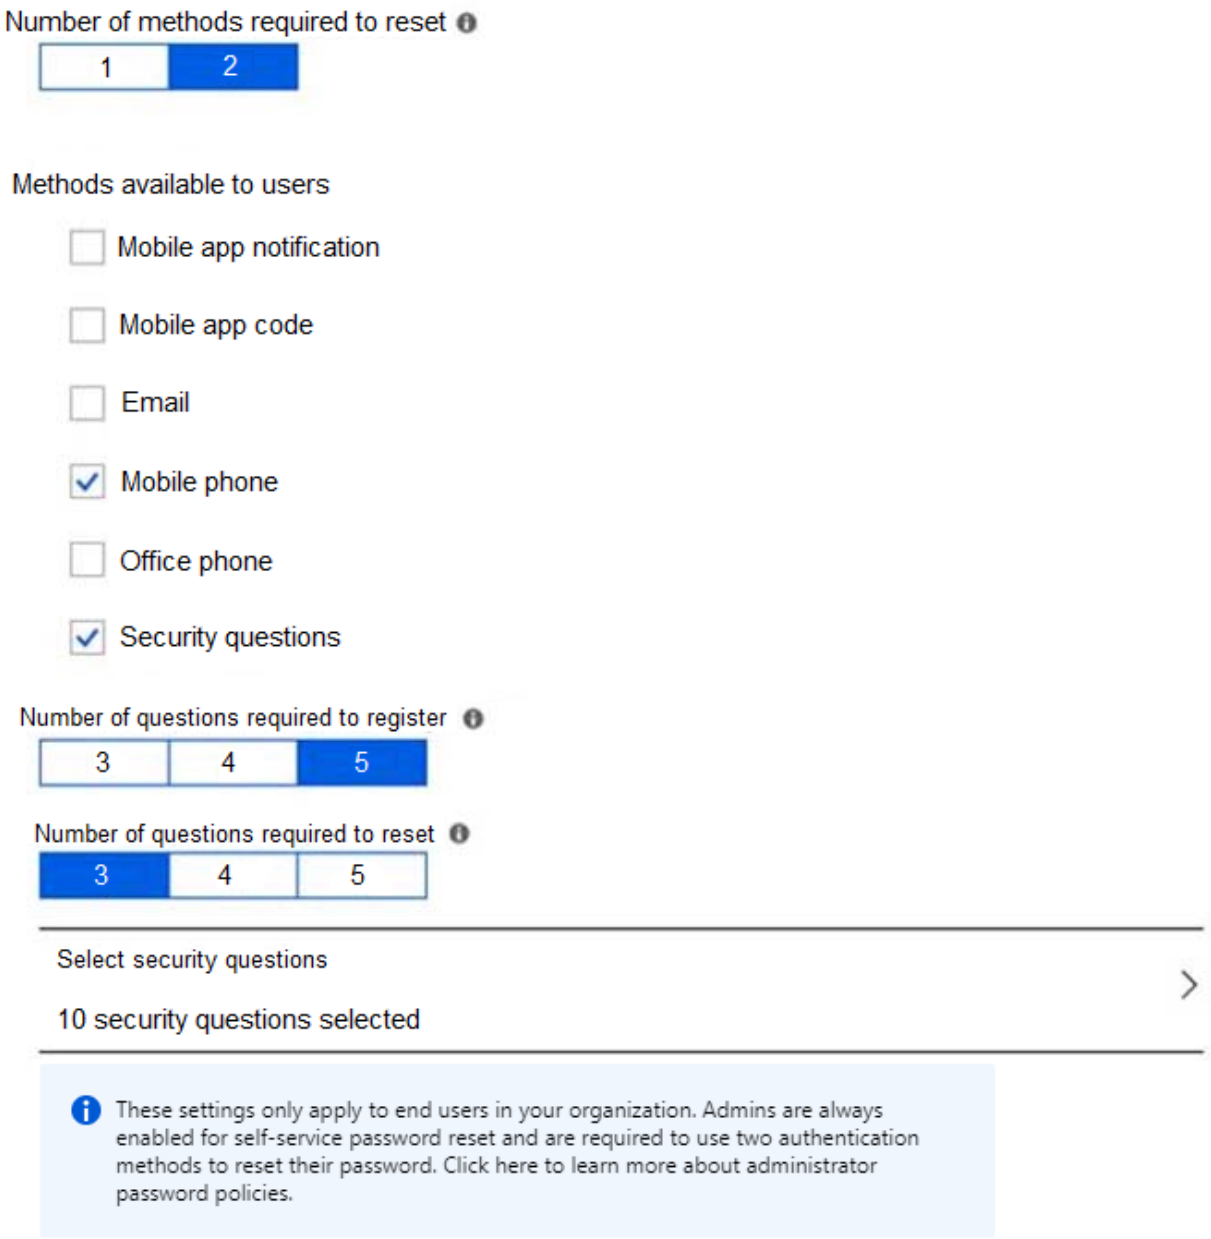

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

Statements	Yes	No
After User2 answers three security questions correctly, he can reset his password immediately.	○	○
If User1 forgets her password, she can reset the password by using the mobile phone app.	○	○
User3 can add security questions to the password reset process	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
After User2 answers three security questions correctly, he can reset his password immediately.	○	○
If User1 forgets her password, she can reset the password by using the mobile phone app.	○	○
User3 can add security questions to the password reset process	○	○

Box 1: No -
Two methods are required.

Box 2: No -
Self-service password reset is only enabled for Group2, and User1 is not a member of Group2.

Box 3: Yes -
As a User Administrator, User3 can add security questions to the reset process.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/authentication/quickstart-sspr
https://docs.microsoft.com/en-us/azure/active-directory/authentication/active-directory-passwords-faq

Community Discussion

Answer is not correct. It should be - NO: User2 needs 2 authentication methods. Security questions are not enough to reset password - NO: User1 is not part of the SSPR Group1 - NO: to be able to add security questions to the process. you need Global admin role https://docs.microsoft.com/en-us/azure/active-directory/authentication/tutorial-enable-sspr#prerequisites & https://docs.microsoft.com/en-us/azure/active-directory/roles/permissions-reference#user-administrator-permissions

C0rrect Answer: Box 1: No Two methods are required (Mobile phone and Security questions). Box 2: No Self-service password reset is only enabled for Group2, and User1 is not a member of Group2. Box 3: No To be able to add Security questions to the process, you need to be a Global Administrator. User3 is User Administrator, so User3 cannot add security questions to the reset process. User Administrator doesn't have MFA permissions. Reference: https://docs.microsoft.com/en-us/azure/active-directory/authentication/quickstart-sspr https://docs.microsoft.com/en-us/azure/active-directory/authentication/active-directory-passwords-faq https://docs.microsoft.com/en-us/azure/active-directory/authentication/tutorial-enable-sspr#prerequisites https://docs.microsoft.com/en-us/azure/active-directory/roles/permissions-reference#user-administrator

Sometimes, Some People Remember...

Sometimes, Some People Remember...

Sometimes, Some People Remember...

SecExams

Question #756

SecExams

HOTSPOT -

You have an Azure Active Directory (Azure AD) tenant named contoso.onmicrosoft.com that contains the users shown in the following table.

Name	Member of	Role assigned
User1	Group1	*None*
User2	Group2	*None*
User3	Group1, Group2	User administrator

You enable password reset for contoso.onmicrosoft.com as shown in the Password Reset exhibit. (Click the Password Reset tab.)

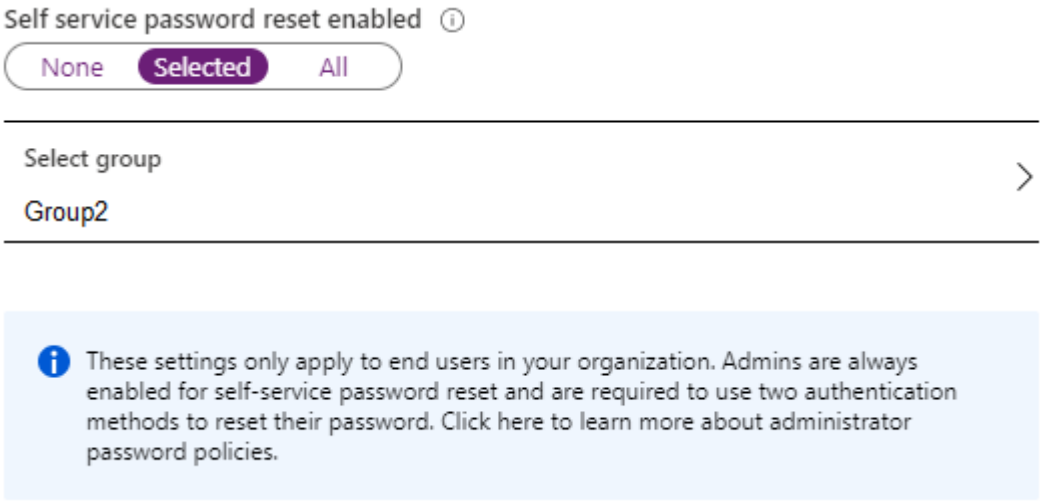

You configure the authentication methods for password reset as shown in the Authentication Methods exhibit. (Click the Authentication Methods tab.)

SecExams

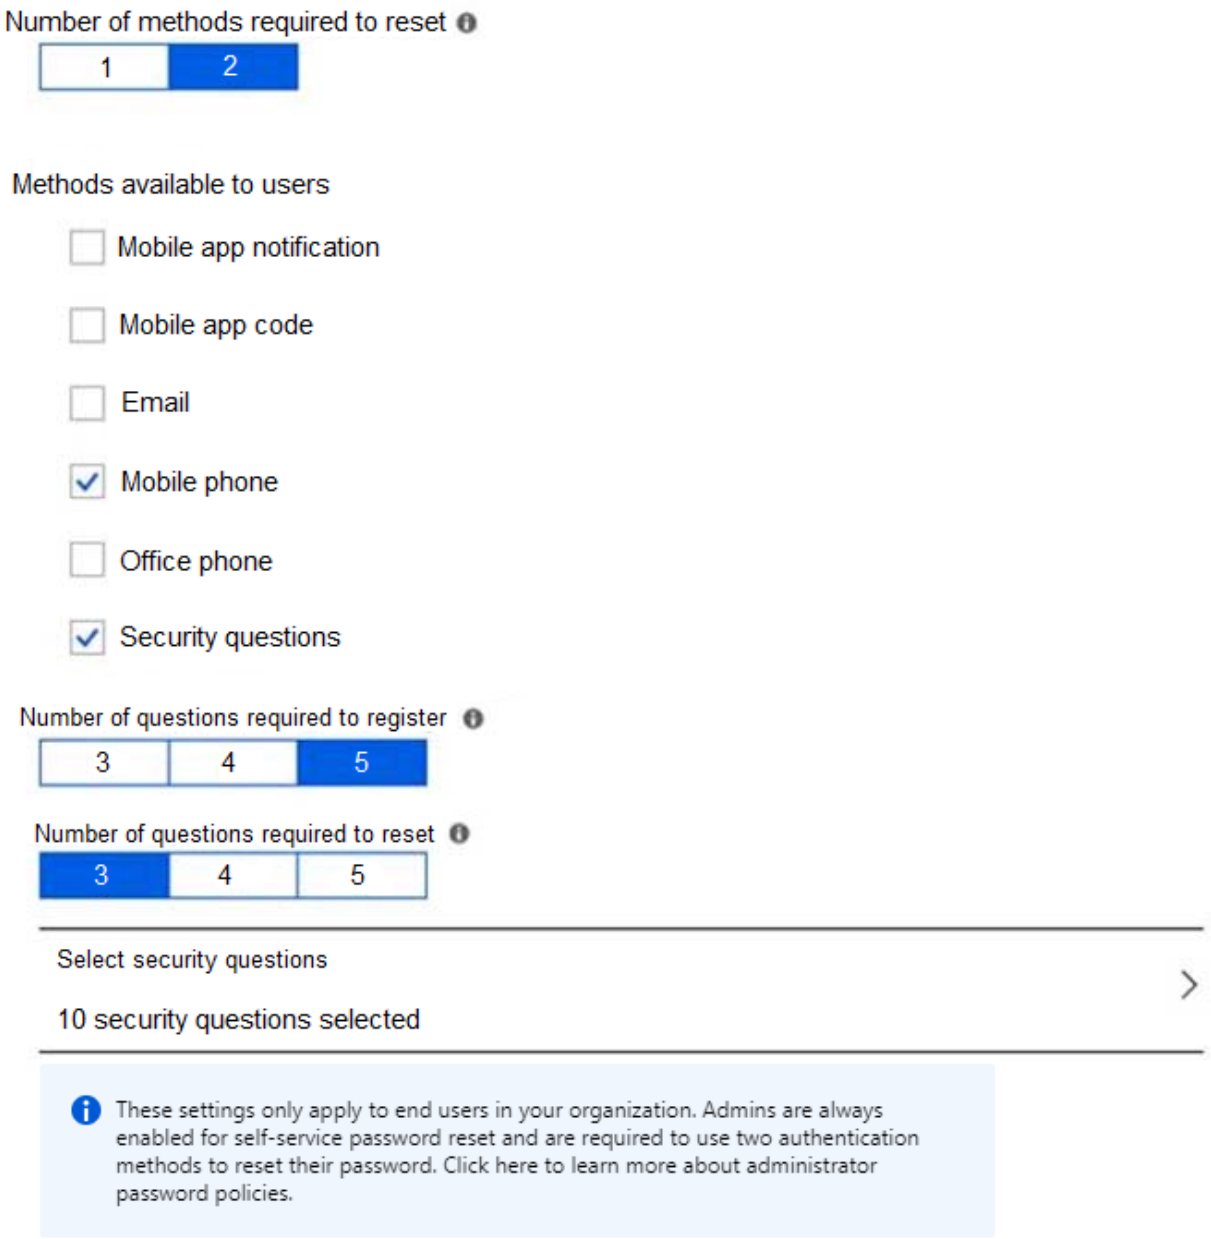

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

SecExams

Hot Area:

Answer Area

Statements	Yes	No
After User2 answers three security questions correctly, he can reset his password immediately.	○	○
If User1 forgets her password, she can reset the password by using the mobile phone app.	○	○
User3 can add security questions to the password reset process	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
After User2 answers three security questions correctly, he can reset his password immediately.	○	○
If User1 forgets her password, she can reset the password by using the mobile phone app.	○	○
User3 can add security questions to the password reset process	○	○

Box 1: No -
Two methods are required.

Box 2: No -
Self-service password reset is only enabled for Group2, and User1 is not a member of Group2.

Box 3: Yes -
As a User Administrator, User3 can add security questions to the reset process.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/authentication/quickstart-sspr
https://docs.microsoft.com/en-us/azure/active-directory/authentication/active-directory-passwords-faq

SecExams

Community Discussion

Question #757

Your company has a main office in London that contains 100 client computers.
Three years ago, you migrated to Azure Active Directory (Azure AD).
The company's security policy states that all personal devices and corporate-owned devices must be registered or joined to Azure AD.
A remote user named User1 is unable to join a personal device to Azure AD from a home network.
You verify that User1 was able to join devices to Azure AD in the past.
You need to ensure that User1 can join the device to Azure AD.
What should you do?

A) Assign the User administrator role to User1.
B) From the Device settings blade, modify the Maximum number of devices per user setting. (Correct Answer)
C) Create a point-to-site VPN from the home network of User1 to Azure.
D) From the Device settings blade, modify the Users may join devices to Azure AD setting.

Explanation

Correct Answer:
B
The Maximum number of devices setting enables you to select the maximum number of devices that a user can have in Azure AD. If a user reaches this quota, they will not be able to add additional devices until one or more of the existing devices are removed.
Incorrect Answers:
C: Azure AD Join enables users to join their devices to Active Directory from anywhere as long as they have connectivity with the Internet.
D: The Users may join devices to Azure AD setting enables you to select the users who can join devices to Azure AD. Options are All, Selected and None. The default is All.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/devices/device-management-azure-portal http://techgenix.com/pros-and-cons-azure-ad-join/

Community Discussion

Correct Answer: B Keyword: "user was able to connect the device in the past". The Maximum number of devices setting enables you to select the maximum number of devices that a user can have in Azure AD. If a user reaches this quota, they will not be able to add additional devices until one or more of the existing devices are removed. By default, the maximum number of devices per user is 50. Azure portal -> Azure Active Directory -> Devices Azure portal -> Azure Active Directory -> Users > Select a user > Devices

For those who choose D, please read the question carefully, "You verify that User1 was able to join devices to Azure AD in the past." So the join device setting should be ok, but he already reach the maximum number of devices per user. Answer B is correct.

Selected Answer: B

If you picked A....you're the reason breaches happen.

agree. by default the maximum number of devices per user is 50

agree. by default the maximum number of devices per user is 50

SecExams

Question #758

Your company has a main office in London that contains 100 client computers.
Three years ago, you migrated to Azure Active Directory (Azure AD).
The company's security policy states that all personal devices and corporate-owned devices must be registered or joined to Azure AD.
A remote user named User1 is unable to join a personal device to Azure AD from a home network.
You verify that User1 was able to join devices to Azure AD in the past.
You need to ensure that User1 can join the device to Azure AD.
What should you do?

A) Assign the User administrator role to User1.
B) From the Device settings blade, modify the Maximum number of devices per user setting. (Correct Answer)
C) Create a point-to-site VPN from the home network of User1 to Azure.
D) From the Device settings blade, modify the Users may join devices to Azure AD setting.

Explanation

Correct Answer: B ?

The Maximum number of devices setting enables you to select the maximum number of devices that a user can have in Azure AD. If a user reaches this quota, they will not be able to add additional devices until one or more of the existing devices are removed.

Incorrect Answers:

C: Azure AD Join enables users to join their devices to Active Directory from anywhere as long as they have connectivity with the Internet.

D: The Users may join devices to Azure AD setting enables you to select the users who can join devices to Azure AD. Options are All, Selected and None. The default is All.

Reference:

https://docs.microsoft.com/en-us/azure/active-directory/devices/device-management-azure-portal http://techgenix.com/pros-and-cons-azure-ad-join/

Community Discussion

SecExams

Question #759

HOTSPOT -

You have two Azure App Service app named App1 and App2. Each app has a production deployment slot and a test deployment slot.

The Backup Configuration settings for the production slots are shown in the following table.

App	Backup Every	Start backup schedule from	Retention (Days)	Keep at least one backup
App1	1 Days	January 6, 2021	0	Yes
App2	1 Days	January 6, 2021	30	Yes

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
On January 15, 2021, App1 will have only one backup in storage.	○	○
On February 6, 2021, you can access the backup of the App2 test slot from January 15, 2021.	○	○
On January 15, 2021, you can restore the App2 production slot backup from January 6 to the App2 test slot.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
On January 15, 2021, App1 will have only one backup in storage.	○	○
On February 6, 2021, you can access the backup of the App2 test slot from January 15, 2021.	○	○
On January 15, 2021, you can restore the App2 production slot backup from January 6 to the App2 test slot.	○	○

Community Discussion

NNY On January 15th you will have 9 backups as 0 day retention is defined as indefinite. [How many days to keep a backup before automatically deleting it. Set to 0 for indefinite retention.] https://docs.microsoft.com/en-us/cli/azure/webapp/config/backup?view=azure-cli-latest The DevOps / Web apps backup in the questions only includes the production slot. One cannot restore a test slot from a production slot backup. [If a slot is not specified, the API will create a backup for the production slot.] https://docs.microsoft.com/en-us/rest/api/appservice/web-apps/backup-slot January 6th backup will still be within the 30 days retention as of January 15th.

NNY 1. https://docs.microsoft.com/en-us/cli/azure/webapp/config/backup?view=azure-cli-latest --retention How many days to keep a backup before automatically deleting it. Set to 0 for indefinite retention. 2. didn't mention test slot backup at all 3. https://docs.microsoft.com/en-us/rest/api/appservice/web-apps/restore-slot we can restore a specific backup to another app (or deployment slot, if specified).

great, i love when they use zero and don't mean zero...

great, i love when they use zero and don't mean zero...

app1 dont' have a retention configured but option " keep at least one backup" is yes. on 15th have one backup. Y,N,Y

Question #760

HOTSPOT -

You have two Azure App Service app named App1 and App2. Each app has a production deployment slot and a test deployment slot.

The Backup Configuration settings for the production slots are shown in the following table.

App	Backup Every	Start backup schedule from	Retention (Days)	Keep at least one backup
App1	1 Days	January 6, 2021	0	Yes
App2	1 Days	January 6, 2021	30	Yes

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
On January 15, 2021, App1 will have only one backup in storage.	○	○
On February 6, 2021, you can access the backup of the App2 test slot from January 15, 2021.	○	○
On January 15, 2021, you can restore the App2 production slot backup from January 6 to the App2 test slot.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
On January 15, 2021, App1 will have only one backup in storage.	○	○
On February 6, 2021, you can access the backup of the App2 test slot from January 15, 2021.	○	○
On January 15, 2021, you can restore the App2 production slot backup from January 6 to the App2 test slot.	○	○

Community Discussion

SecExams

Question #761

HOTSPOT -

You have an Azure subscription that contains an Azure Active Directory (Azure AD) tenant named contoso.com. The tenant is synced to the on-premises Active Directory domain. The domain contains the users shown in the following table.

Name	Role
SecAdmin1	Security administrator
BillAdmin1	Billing administrator
User1	Reports reader

You enable self-service password reset (SSPR) for all users and configure SSPR to have the following authentication methods:

- ✑ Number of methods required to reset: 2
- ✑ Methods available to users: Mobile phone, Security questions
- ✑ Number of questions required to register: 3
- ✑ Number of questions required to reset: 3

You select the following security questions:

- ✑ What is your favorite food?
- ✑ In what city was your first job?
- ✑ What was the name of your first pet?

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
SecAdmin1 must answer the following question during the self-service password reset: In what city was your first job?	○	○
BillAdmin1 must answer the following question during the self-service password reset: What is your favorite food?	○	○
User1 must answer the following question during the self-service password reset: What was the name of your first pet?	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
SecAdmin1 must answer the following question during the self-service password reset: In what city was your first job?	○	○
BillAdmin1 must answer the following question during the self-service password reset: What is your favorite food?	○	○
User1 must answer the following question during the self-service password reset: What was the name of your first pet?	○	○

Box 1: No -
Administrator accounts are special accounts with elevated permissions. To secure them, the following restrictions apply to changing passwords of administrators:
On-premises enterprise administrators or domain administrators cannot reset their password through Self-service password reset (SSPR). They can only change their password in their on-premises environment. Thus, we recommend not syncing on-prem AD admin accounts to Azure AD. An administrator cannot use secret Questions & Answers as a method to reset password.

Box 2: Yes -
Self-service password reset (SSPR) is an Azure Active Directory feature that enables employees to reset their passwords without needing to contact IT staff.

Box 3: Yes -
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/authentication/howto-sspr-deployment

Community Discussion

By default, administrator accounts are enabled for self-service password reset, and a strong default two-gate password reset policy is enforced. This policy may be different from the one you have defined for your users, and this policy can't be changed. You should always test password reset functionality as a user without any Azure administrator roles assigned. With a two-gate policy, administrators don't have the ability to use security questions. The two-gate policy requires two pieces of authentication data, such as an email address, authenticator app, or a phone number. https://docs.microsoft.com/en-us/azure/active-directory/authentication/concept-sspr-policy#administrator-password-policy-differences Therefore I would say N N Y as

SecAdmin1 and BillAdmin1 are both administrators. NOTE: I have tried to test in lab but was unsuccessful (somehow SSPR isn't even recognized as being enabled, hell one of the user is taking forever to show an updated assigned role).

So after some research it does look like "Security questions aren't used as an authentication method during a sign-in event. Instead, security questions can be used during the self-service password reset (SSPR) process to confirm who you are. Administrator accounts can't use security questions as verification method with SSPR." so it means the administrator cannot use security questions as verification method for SSPR. so it would be N N Y . check the link the first line of the link. PLEASE LIKE THIS COMMENT Ref https://learn.microsoft.com/en-us/azure/active-directory/authentication/concept-authentication-security-questions

Answer: NO, NO, YES https://learn.microsoft.com/en-us/azure/active-directory/authentication/concept-sspr-policy By default, administrator accounts are enabled for self-service password reset, and a strong default two-gate password reset policy is enforced. This policy may be different from the one you have defined for your users, and this policy can't be changed. You should always test password reset functionality as a user without any Azure administrator roles assigned. With a two-gate policy, administrators don't have the ability to use security questions. The two-gate policy requires two pieces of authentication data, such as an email address, authenticator app, or a phone number.

Answer: NO, NO, YES https://learn.microsoft.com/en-us/azure/active-directory/authentication/concept-sspr-policy By default, administrator accounts are enabled for self-service password reset, and a strong default two-gate password reset policy is enforced. This policy may be different from the one you have defined for your users, and this policy can't be changed. You should always test password reset functionality as a user without any Azure administrator roles assigned. With a two-gate policy, administrators don't have the ability to use security questions. The two-gate policy requires two pieces of authentication data, such as an email address, authenticator app, or a phone number.

SSPR for Administrators isn't enabled on the tenant. SSPR for Administrators (SSPR-A) was the first implementation of SSPR. After SSPR for Users (SSPR-U) was introduced, users could have two separate configurations. The old SSPR-A implementation is used when an Azure AD account has an admin role, such as Global Administrator or Billing Administrator. However, the SSPR management on the Azure portal is for SSPR-U only. Therefore, SSPR-A might not be enabled on the tenant. https://docs.microsoft.com/en-us/troubleshoot/azure/active-directory/password-writeback-error-code-sspr-009

SecExams

Question #762

HOTSPOT -

You have an Azure subscription that contains an Azure Active Directory (Azure AD) tenant named contoso.com. The tenant is synced to the on-premises Active Directory domain. The domain contains the users shown in the following table.

Name	Role
SecAdmin1	Security administrator
BillAdmin1	Billing administrator
User1	Reports reader

You enable self-service password reset (SSPR) for all users and configure SSPR to have the following authentication methods:

- ✑ Number of methods required to reset: 2
- ✑ Methods available to users: Mobile phone, Security questions
- ✑ Number of questions required to register: 3
- ✑ Number of questions required to reset: 3

You select the following security questions:

- ✑ What is your favorite food?
- ✑ In what city was your first job?
- ✑ What was the name of your first pet?

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
SecAdmin1 must answer the following question during the self-service password reset: In what city was your first job?	○	○
BillAdmin1 must answer the following question during the self-service password reset: What is your favorite food?	○	○
User1 must answer the following question during the self-service password reset: What was the name of your first pet?	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
SecAdmin1 must answer the following question during the self-service password reset: In what city was your first job?	○	○
BillAdmin1 must answer the following question during the self-service password reset: What is your favorite food?	○	○
User1 must answer the following question during the self-service password reset: What was the name of your first pet?	○	○

Box 1: No -
Administrator accounts are special accounts with elevated permissions. To secure them, the following restrictions apply to changing passwords of administrators:
On-premises enterprise administrators or domain administrators cannot reset their password through Self-service password reset (SSPR). They can only change their password in their on-premises environment. Thus, we recommend not syncing on-prem AD admin accounts to Azure AD. An administrator cannot use secret Questions & Answers as a method to reset password.

Box 2: Yes -
Self-service password reset (SSPR) is an Azure Active Directory feature that enables employees to reset their passwords without needing to contact IT staff.

Box 3: Yes -
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/authentication/howto-sspr-deployment

Community Discussion

Question #763

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the following users in an Azure Active Directory tenant named contoso.onmicrosoft.com:

Name	Role	Scope
User1	Global administrator	Azure Active Directory
User2	Global administrator	Azure Active Directory
User3	User administrator	Azure Active Directory
User4	Owner	Azure Subscription

User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com.
You need to create new user accounts in external.contoso.onmicrosoft.com.
Solution: You instruct User1 to create the user accounts.
Does that meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer:
A
Only a global administrator can add users to this tenant.
Reference:
https://docs.microsoft.com/en-us/azure/devops/organizations/accounts/add-users-to-azure-ad

Community Discussion

Selected Answer: A

ARE YOU GUYS HIGH?? IT SAYS User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com." SO IF USER 1 has created the new tenant then obv it can create users within it as well and it is GA.

Selected Answer: B

B:No, when you create a new tenant, the creator is the only global admin and owner, he must first give access to others to allow anything. https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/active-directory-access-create-new-tenant#your-user-account-in-the-new-tenant

User1 create a New Tenant. When you create a new Azure AD tenant, you become the first user of that tenant ad the Owner. As the first user, you're automatically assigned the Global Admin role. ANSWER: Yes

Yes, but User 1 created the Tenant..

User1 create a New Tenant. When you create a new Azure AD tenant, you become the first user of that tenant ad the Owner. As the first user, you're automatically assigned the Global Admin role. ANSWER: Yes

SecExams

Question #764

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the following users in an Azure Active Directory tenant named contoso.onmicrosoft.com:

Name	Role	Scope
User1	Global administrator	Azure Active Directory
User2	Global administrator	Azure Active Directory
User3	User administrator	Azure Active Directory
User4	Owner	Azure Subscription

User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com.
You need to create new user accounts in external.contoso.onmicrosoft.com.
Solution: You instruct User1 to create the user accounts.
Does that meet the goal?

A) Yes (Correct Answer)
B) No

Explanation

Correct Answer: A ?
Only a global administrator can add users to this tenant.
Reference:
https://docs.microsoft.com/en-us/azure/devops/organizations/accounts/add-users-to-azure-ad

Community Discussion

Question #765

You have an existing Azure subscription that contains 10 virtual machines.
You need to monitor the latency between your on-premises network and the virtual machines.
What should you use?

A) Service Map
B) Connection troubleshoot
C) Network Performance Monitor (Correct Answer)
D) Effective routes

Explanation

Correct Answer:
C
Network Performance Monitor is a cloud-based hybrid network monitoring solution that helps you monitor network performance between various points in your network infrastructure. It also helps you monitor network connectivity to service and application endpoints and monitor the performance of Azure ExpressRoute.
You can monitor network connectivity across cloud deployments and on-premises locations, multiple data centers, and branch offices and mission-critical multitier applications or microservices. With Performance Monitor, you can detect network issues before users complain.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/insights/network-performance-monitor

Community Discussion

Network Watcher - a Suite of tools offering but not limited to the following * Connection Monitor - latency and network issues with IaaS devices over a PERIOD OF TIME * Connection troubleshoot - latency and network issues with IaaS devices ONE-TIME * IP Flow - latency and network issues at the VM LEVEL * Network Performance Monitor - latency and network issues in hybrid, ON-PREM, across environments

Correct Answer: C Network Watcher is a Suite of tools offering but not limited to the following: - Connection Monitor - latency and network issues with IaaS devices over a PERIOD OF TIME - Connection troubleshoot - latency and network issues with IaaS

devices ONE-TIME - IP Flow - latency and network issues at the VM LEVEL - Network Performance Monitor - latency and network issues in hybrid, ON-PREM, across environments. Reference: https://docs.microsoft.com/en-us/azure/azure-monitor/insights/network-performance-monitor https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview

Should be updated to "Connection Monitor" as Network Performance Monitor is deprecated.

Should be updated to "Connection Monitor" as Network Performance Monitor is deprecated.

great summary, thank you!

SecExams

Question #766

You have an existing Azure subscription that contains 10 virtual machines.
You need to monitor the latency between your on-premises network and the virtual machines.
What should you use?

A) Service Map
B) Connection troubleshoot
C) Network Performance Monitor (Correct Answer)
D) Effective routes

Explanation

Correct Answer: C ?
Network Performance Monitor is a cloud-based hybrid network monitoring solution that helps you monitor network performance between various points in your network infrastructure. It also helps you monitor network connectivity to service and application endpoints and monitor the performance of Azure ExpressRoute.
You can monitor network connectivity across cloud deployments and on-premises locations, multiple data centers, and branch offices and mission-critical multitier applications or microservices. With Performance Monitor, you can detect network issues before users complain.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/insights/network-performance-monitor

Community Discussion

SecExams

Question #767

SecExams

HOTSPOT -

You have an Azure App Service plan named ASP1.

CPU usage for ASP1 is shown in the following exhibit.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

The average CPU percentage is calculated **[answer choice]** per day

- once
- four times
- six times
- 24 times

ASP1 must be **[answer choice]** to optimize CPU usage

- scaled up
- scaled down
- scaled out

Explanation

Correct Answer:

Answer Area

The average CPU percentage is calculated **[answer choice]** per day

- once
- four times
- six times
- 24 times

ASP1 must be **[answer choice]** to optimize CPU usage

- scaled up
- scaled down
- scaled out

Box 1: four times -
From the exhibit we see that the time granularity is 6 hours: Last 30 days (Automatic - 6 hours).
CPU Percentage Last days Automatic - hours

Box 2: scaled up -
Scale up when:
* You see that your workloads are hitting some performance limit such as CPU or I/O limits.
* You need to quickly react to fix performance issues that can't be solved with classic database optimization.
* You need a solution that allows you to change service tiers to adapt to changing latency requirements.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/essentials/metrics-troubleshoot
https://azure.microsoft.com/en-us/overview/scaling-out-vs-scaling-up

Community Discussion

so to just explain a bit better hopefully :) look at the top right you can see it is auto updated every 6 hours so within 24hours it is checked 4 times (4*6=24h) . It would need to scale up to have a bigger CPU to support the load that is getting as it is currently 100%

Answer is correct Box 1 : look at the top right of the picture it says 6 hours so 24hours/ 6hours = 4 times box2: this is app plan and VM so you scale up only

Agree with the first answer, disgress on the second. Scaling up will incur the new, higher, cost at all times. You can alsow get more power into the app by scaling OUT; if you automate with autoscaling you can get the costs much lower. The AVERAGE usage is pretty low - so this app should scale out/in pretty well https://learn.microsoft.com/en-us/azure/architecture/best-practices/auto-scaling

Agree with the first answer, disgress on the second. Scaling up will incur the new, higher, cost at all times. You can alsow get more power into the app by scaling OUT; if you automate with autoscaling you can get the costs much lower. The AVERAGE usage is pretty low - so this app should scale out/in pretty well https://learn.microsoft.com/en-us/azure/architecture/best-practices/auto-scaling

Mlantonis we desperately need you

SecExams

Question #768

SecExams

HOTSPOT -

You have an Azure App Service plan named ASP1.

CPU usage for ASP1 is shown in the following exhibit.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

The average CPU percentage is calculated **[answer choice]** per day

- once
- four times
- six times
- 24 times

ASP1 must be **[answer choice]** to optimize CPU usage

- scaled up
- scaled down
- scaled out

Explanation

Correct Answer:

Answer Area

The average CPU percentage is calculated **[answer choice]** per day

- once
- four times
- six times
- 24 times

ASP1 must be **[answer choice]** to optimize CPU usage

- scaled up
- scaled down
- scaled out

Box 1: four times -
From the exhibit we see that the time granularity is 6 hours: Last 30 days (Automatic - 6 hours).
CPU Percentage Last days Automatic - hours

Box 2: scaled up -
Scale up when:
* You see that your workloads are hitting some performance limit such as CPU or I/O limits.
* You need to quickly react to fix performance issues that can't be solved with classic database optimization.
* You need a solution that allows you to change service tiers to adapt to changing latency requirements.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/essentials/metrics-troubleshoot
https://azure.microsoft.com/en-us/overview/scaling-out-vs-scaling-up

Community Discussion

Question #769

DRAG DROP -

You have an Azure Linux virtual machine that is protected by Azure Backup.

One week ago, two files were deleted from the virtual machine.

You need to restore the deleted files to an on-premises Windows Server 2016 computer as quickly as possible.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

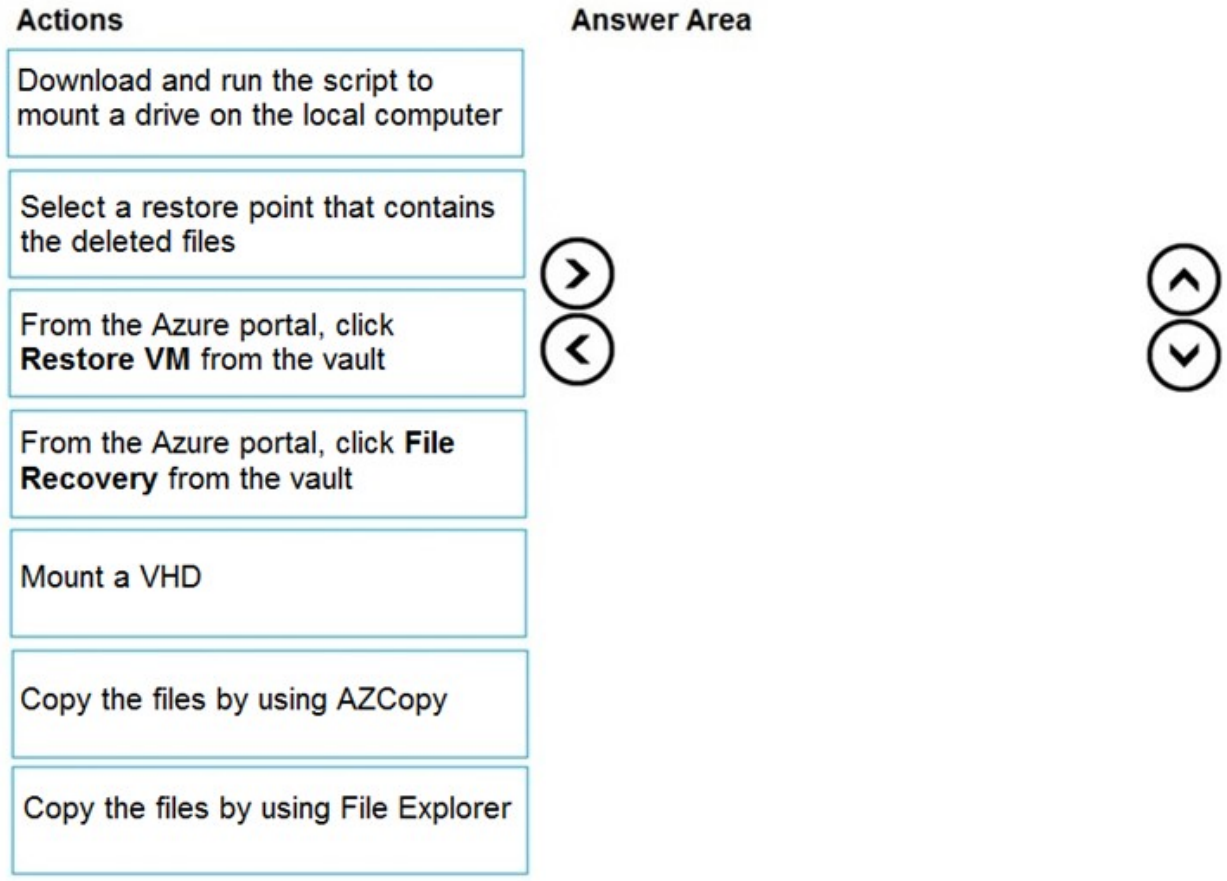

SecExams

Explanation

Correct Answer:

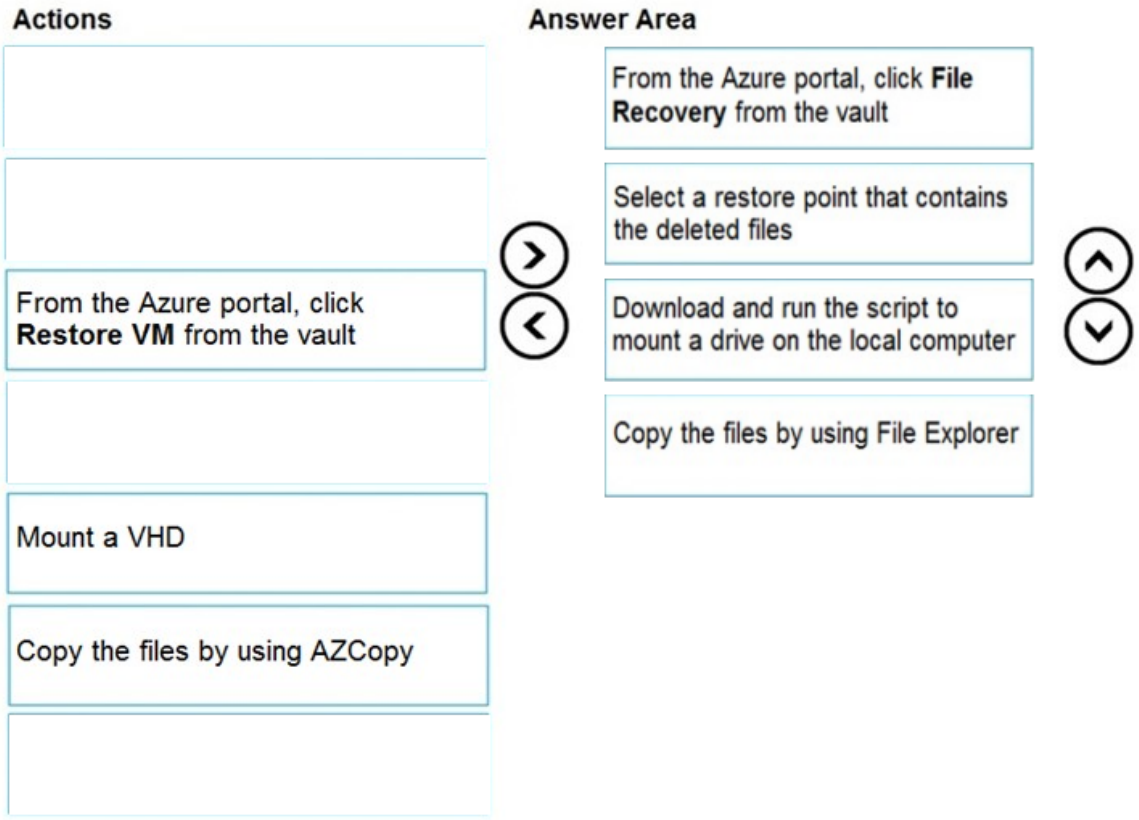

Step 1: From the Azure portal, click File Recovery from the vault
Step 2. Select a restore point that contains the deleted files
Step 3: Download and run the script to mount a drive on the local computer
Generate and download script to browse and recover files:
Step 4: Copy the files using File Explorer!
After the disks are attached, use Windows File Explorer to browse the new volumes and files. The restore files functionality provides access to all files in a recovery point.
Manage the files via File Explorer as you would for normal files.
Step 1-3 below:
To restore files or folders from the recovery point, go to the virtual machine and perform the following steps:
1. Sign in to the Azure portal and in the left pane, select Virtual machines. From the list of virtual machines, select the virtual machine to open that virtual machine's dashboard.
2. In the virtual machine's menu, select Backup to open the Backup dashboard.
3. In the Backup dashboard menu, select File Recovery.

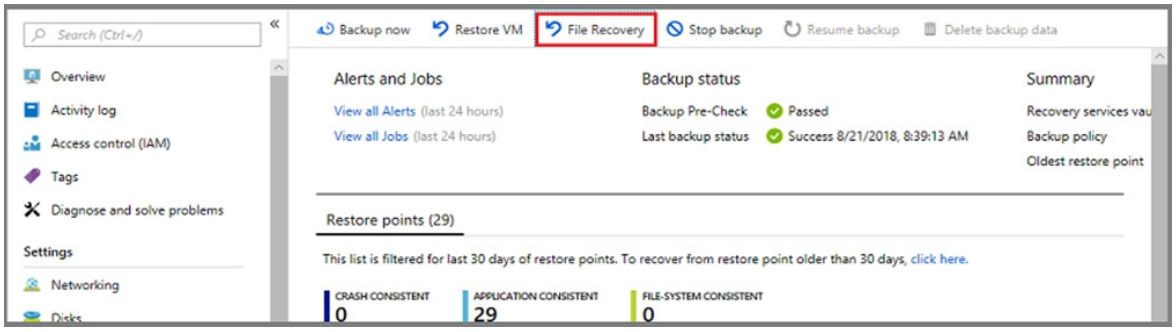

The File Recovery menu opens.

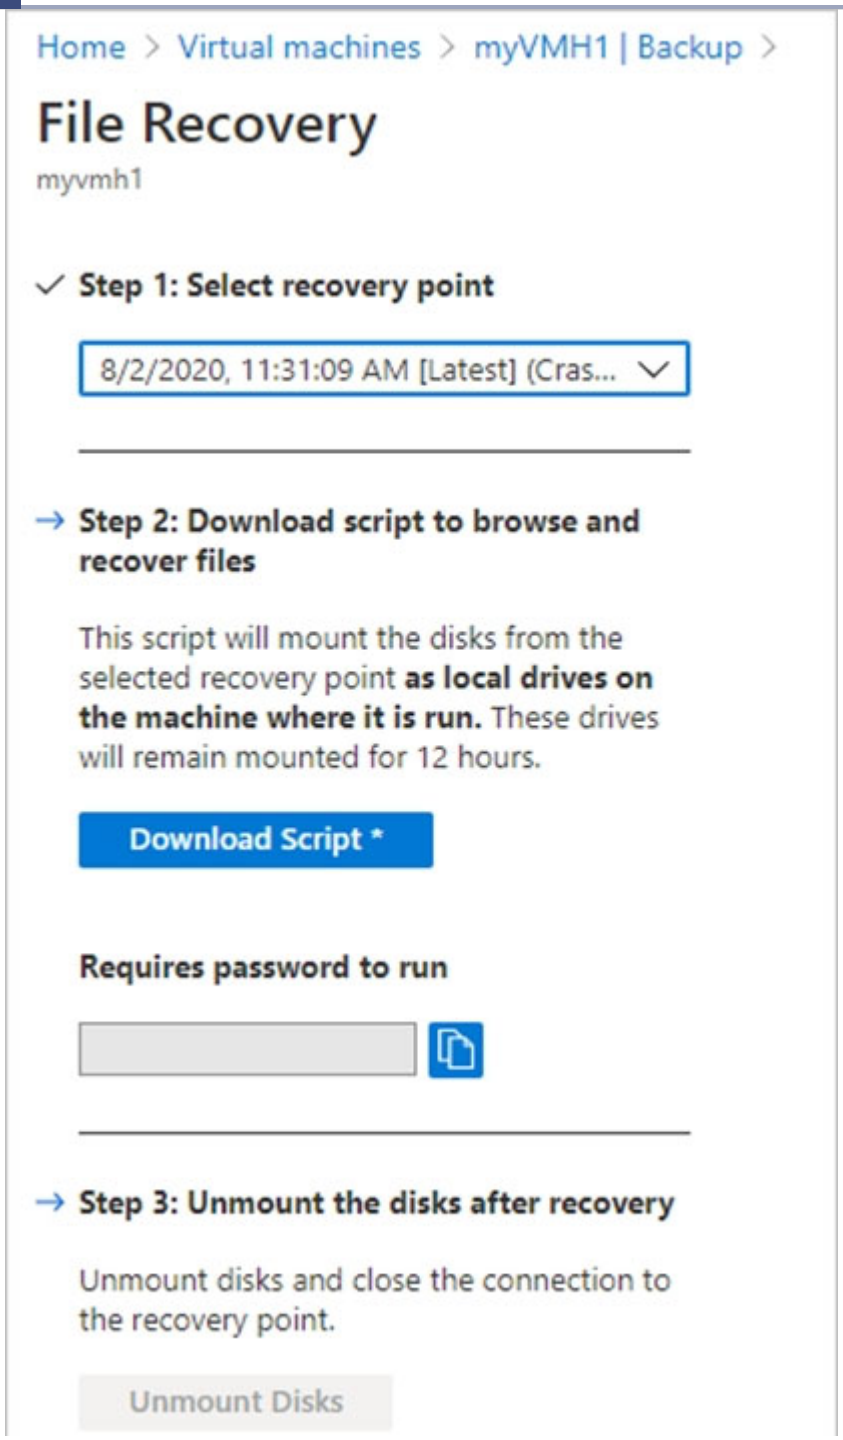

4. From the Select recovery point drop-down menu, select the recovery point that holds the files you want. By default, the latest recovery point is already selected.
5. Select Download Executable (for Windows Azure VMs) or Download Script (for Linux Azure VMs, a python script is generated) to download the software used to copy files from the recovery point.
Running the script and identifying volumes:
For Linux machines, a python script is generated. Download the script and copy it to the relevant/compatible Linux server.
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-azure-restore-files-from-vm

https://docs.microsoft.com/en-us/azure/backup/backup-azure-vms-automation#restore-files-from-an-azure-vm-backup

Community Discussion

Restore of Linux VM can be only performed on compatiblie Linux client. In my opinion correct order is: Step 1: From the Azure portal, click File Recovery from the vault Step 2. Select a restore point that contains the deleted files Step 3: Download and run the script to mount a drive on the local computer (LINUX!!!) Step 4. Copy the files by using AZCopy (yes, to blob storage and next to Windows 2016)

Watch out for below context: "You need to restore the deleted files to an on-premises Windows Server 2016 computer" Answer would be: Copy the files by using File Explorer. "You need to restore the deleted files to an on-premises computer" Answer would be: Copy the files by using AZ Copy.

we should restore As soon as possible. File explorer will be faster than AZCopy to blob storage and next to Windows 2016. I would select Step 1: From the Azure portal, click File Recovery from the vault Step 2. Select a restore point that contains the deleted files Step 3: Download and run the script to mount a drive on the local computer (Windows scripts can be created aswell) Step 4. Copy the files by using File explorer

we should restore As soon as possible. File explorer will be faster than AZCopy to blob storage and next to Windows 2016. I would select Step 1: From the Azure portal, click File Recovery from the vault Step 2. Select a restore point that contains the deleted files Step 3: Download and run the script to mount a drive on the local computer (Windows scripts can be created aswell) Step 4. Copy the files by using File explorer

It's an on-premise Windows Server. AzCopy will take way to long. Assuming that I have access to the server anyhow I can just copy files using File Explorer.

SecExams

Question #770

DRAG DROP -

You have an Azure Linux virtual machine that is protected by Azure Backup.

One week ago, two files were deleted from the virtual machine.

You need to restore the deleted files to an on-premises Windows Server 2016 computer as quickly as possible.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

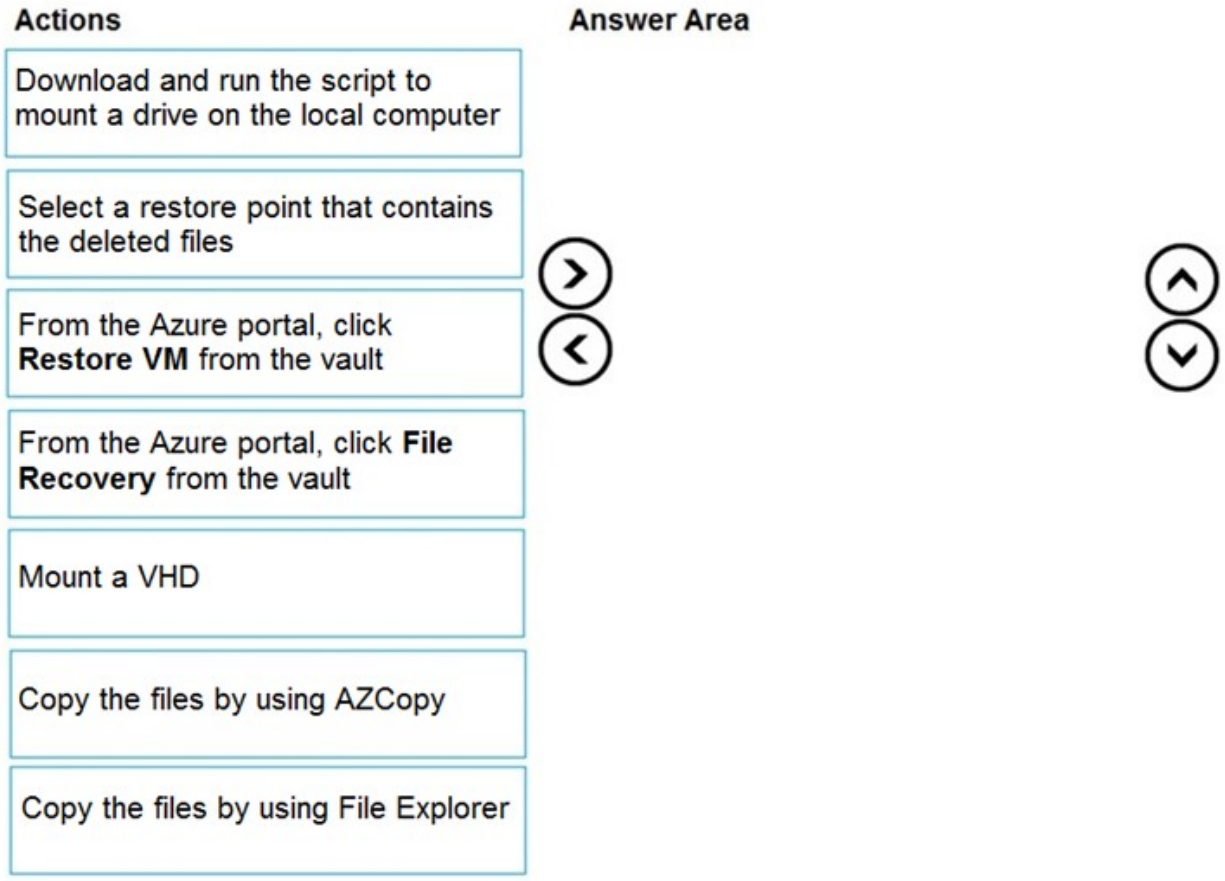

SecExams

Explanation

Correct Answer:

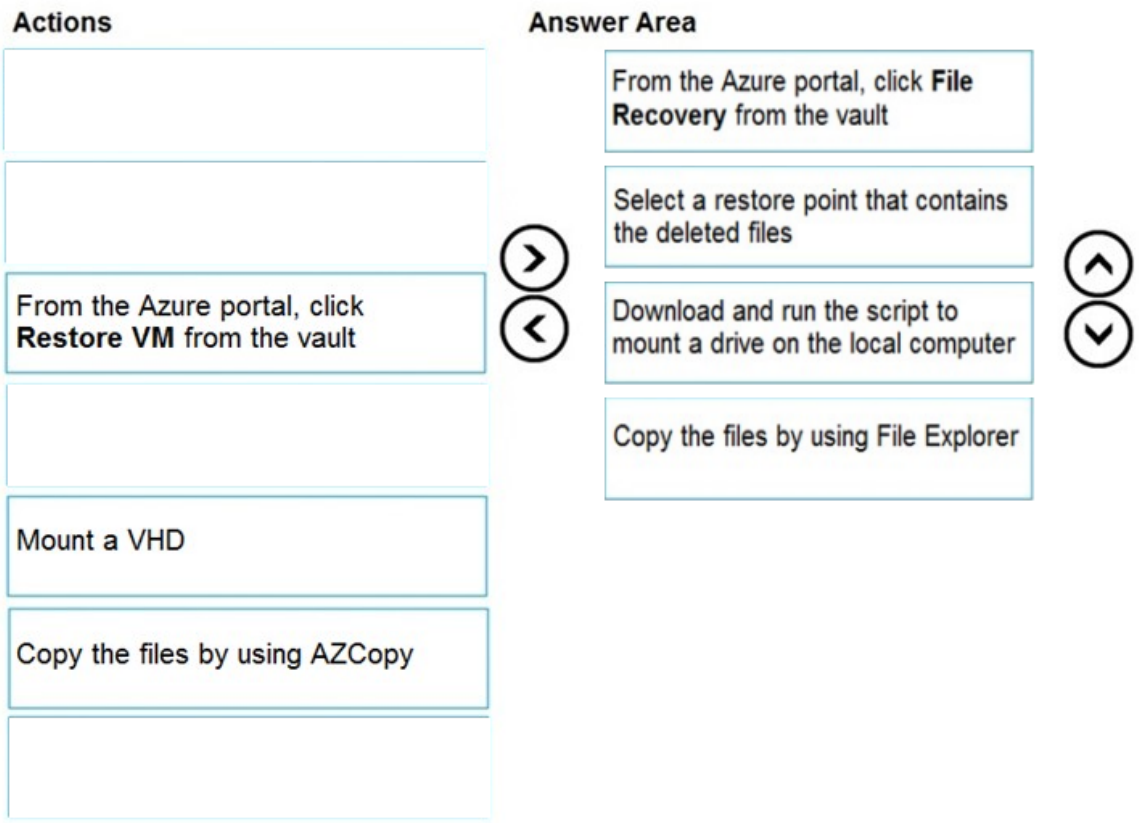

Step 1: From the Azure portal, click File Recovery from the vault
Step 2. Select a restore point that contains the deleted files
Step 3: Download and run the script to mount a drive on the local computer
Generate and download script to browse and recover files:
Step 4: Copy the files using File Explorer!
After the disks are attached, use Windows File Explorer to browse the new volumes and files. The restore files functionality provides access to all files in a recovery point.
Manage the files via File Explorer as you would for normal files.
Step 1-3 below:
To restore files or folders from the recovery point, go to the virtual machine and perform the following steps:
1. Sign in to the Azure portal and in the left pane, select Virtual machines. From the list of virtual machines, select the virtual machine to open that virtual machine's dashboard.
2. In the virtual machine's menu, select Backup to open the Backup dashboard.
3. In the Backup dashboard menu, select File Recovery.

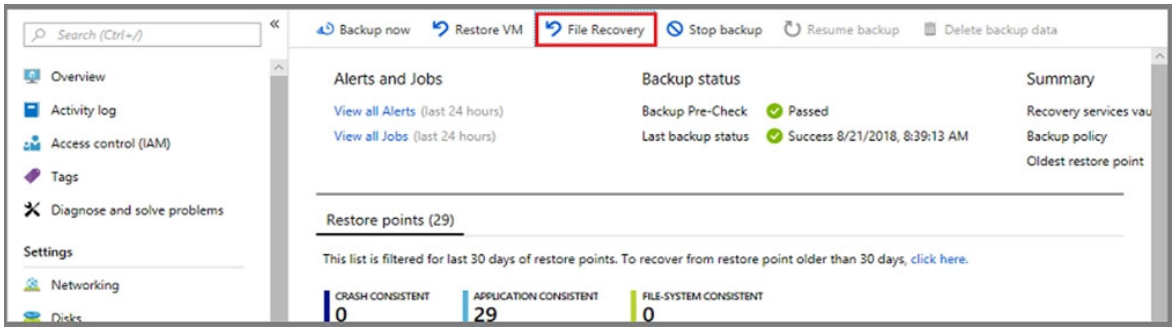

The File Recovery menu opens.

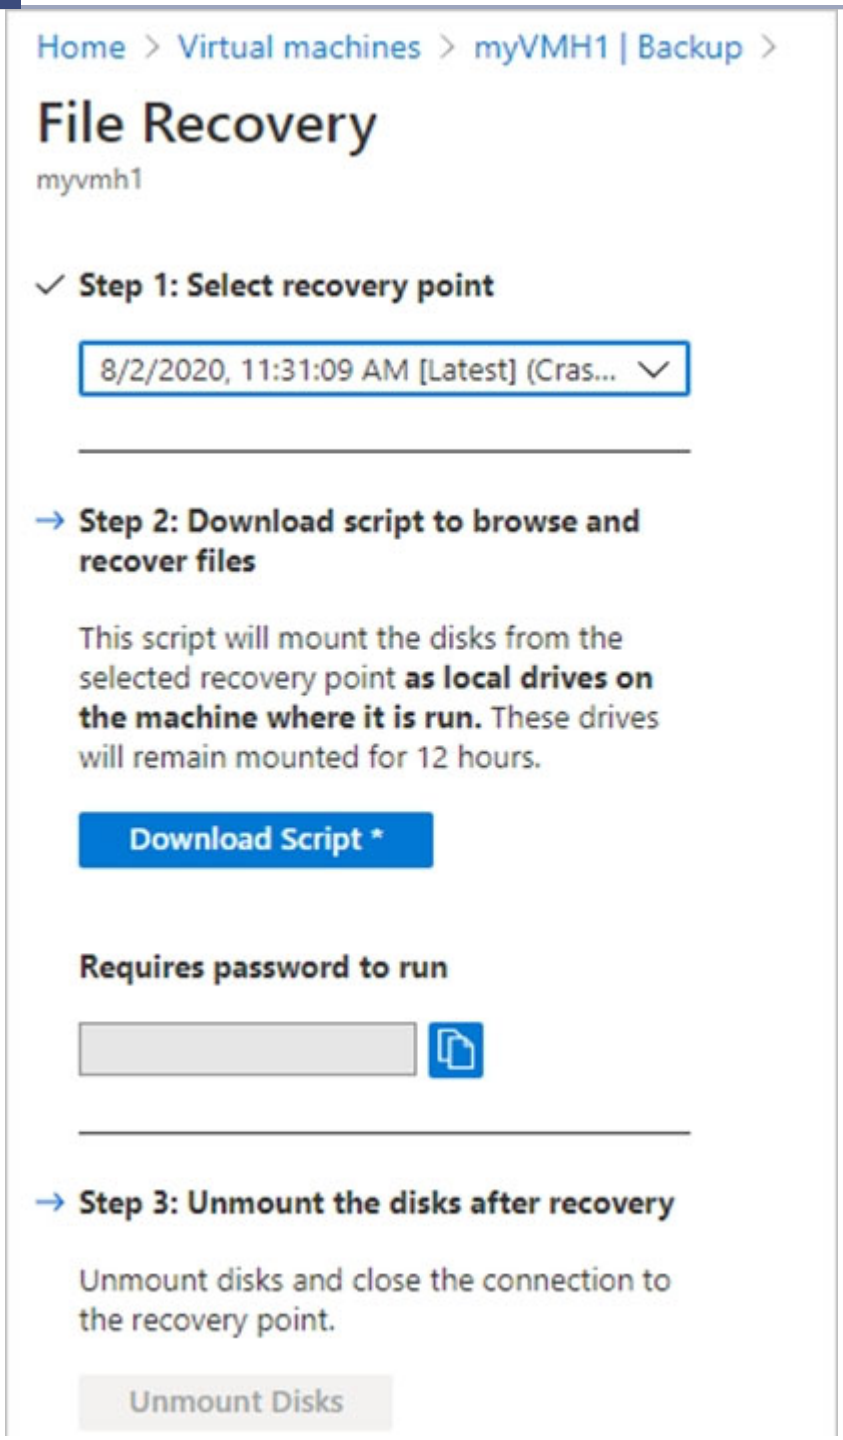

4. From the Select recovery point drop-down menu, select the recovery point that holds the files you want. By default, the latest recovery point is already selected.
5. Select Download Executable (for Windows Azure VMs) or Download Script (for Linux Azure VMs, a python script is generated) to download the software used to copy files from the recovery point.
Running the script and identifying volumes:
For Linux machines, a python script is generated. Download the script and copy it to the relevant/compatible Linux server.
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-azure-restore-files-from-vm

SecExams

https://docs.microsoft.com/en-us/azure/backup/backup-azure-vms-automation#restore-files-from-an-azure-vm-backup

Community Discussion

Question #771

HOTSPOT -

You purchase a new Azure subscription named Subscription1.

You create a virtual machine named VM1 in Subscription1. VM1 is not protected by Azure Backup.

You need to protect VM1 by using Azure Backup. Backups must be created at 01:00 and stored for 30 days.

What should you do? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

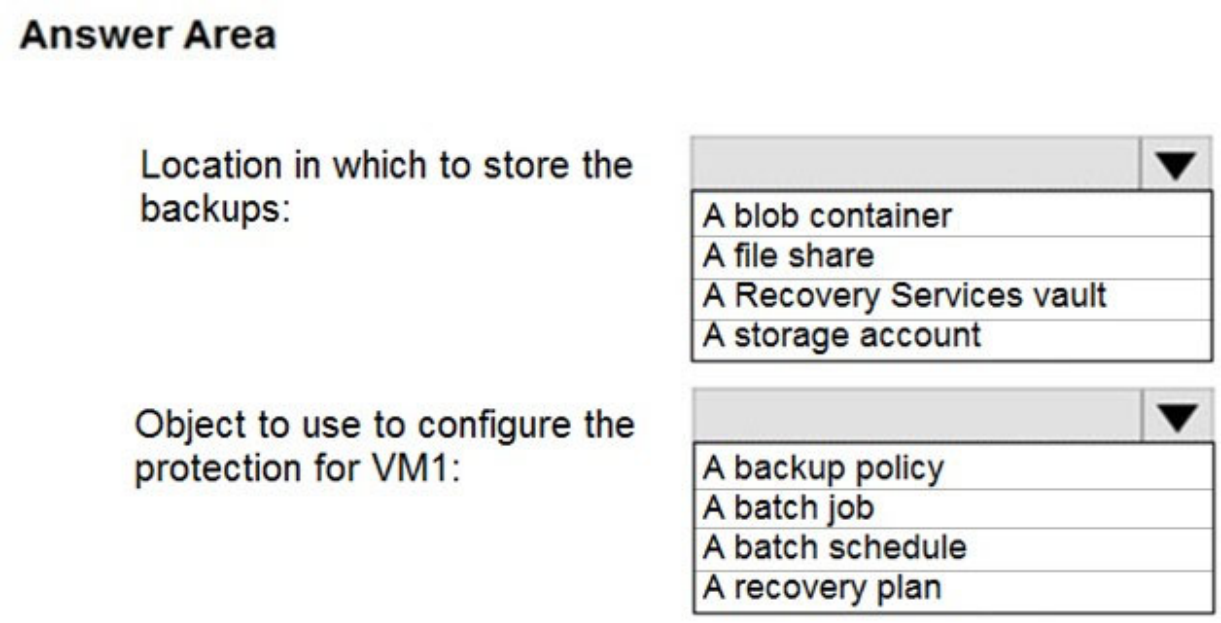

Explanation

Correct Answer:

Answer Area

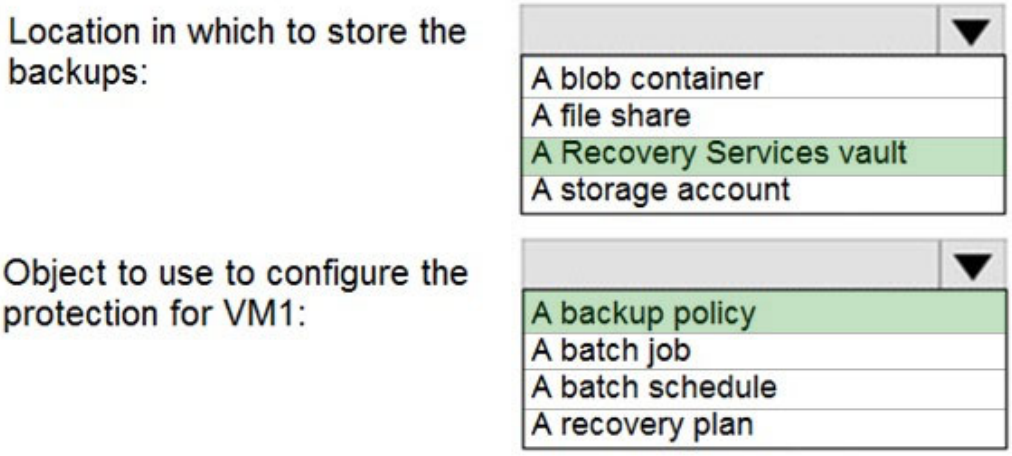

Box 1: A Recovery Services vault
You can set up a Recovery Services vault and configure backup for multiple Azure VMs.

Box 2: A backup policy -
In Choose backup policy, do one of the following:
✑ Leave the default policy. This backs up the VM once a day at the time specified, and retains backups in the vault for 30 days.
✑ Select an existing backup policy if you have one.
✑ Create a new policy, and define the policy settings.
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-azure-vms-first-look-arm

SecExams

Community Discussion

Correct Answer: Box 1: A Recovery Services vault You can set up a Recovery Services vault and configure backup for multiple Azure VMs. Box 2: A backup policy In Choose backup policy, do one of the following: ✑ Leave the default policy. This backs up the VM once a day at the time specified, and retains backups in the vault for 30 days. ✑ Select an existing backup policy if you have one. ✑ Create a new policy, and define the policy settings. Reference: https://docs.microsoft.com/en-us/azure/backup/backup-azure-vms-first-look-arm

Answers are correct

Cleared Exam 930 was appeared in exam 18/3/2023 ANS most upvoted

Got this in Feb 2023 exam.

took exam today, 24.11.2022 - this question shows up, passed with 900/1000

Question #772

HOTSPOT -

You purchase a new Azure subscription named Subscription1.

You create a virtual machine named VM1 in Subscription1. VM1 is not protected by Azure Backup.

You need to protect VM1 by using Azure Backup. Backups must be created at 01:00 and stored for 30 days.

What should you do? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Location in which to store the backups:

- A blob container
- A file share
- A Recovery Services vault
- A storage account

Object to use to configure the protection for VM1:

- A backup policy
- A batch job
- A batch schedule
- A recovery plan

Explanation

Correct Answer:

Answer Area

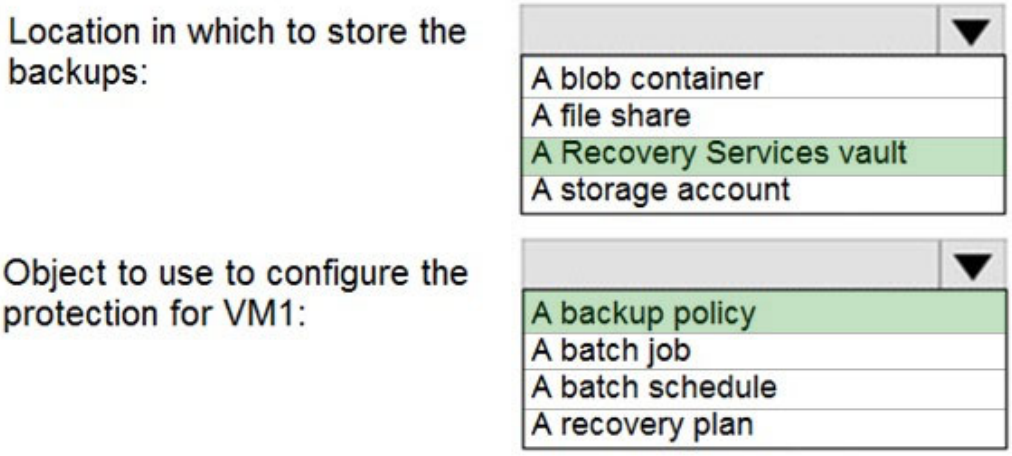

Box 1: A Recovery Services vault
You can set up a Recovery Services vault and configure backup for multiple Azure VMs.

Box 2: A backup policy -
In Choose backup policy, do one of the following:
✑ Leave the default policy. This backs up the VM once a day at the time specified, and retains backups in the vault for 30 days.
✑ Select an existing backup policy if you have one.
✑ Create a new policy, and define the policy settings.
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-azure-vms-first-look-arm

SecExams

Community Discussion

Question #773

You have an Azure virtual machine named VM1.
Azure collects events from VM1.
You are creating an alert rule in Azure Monitor to notify an administrator when an error is logged in the System event log of VM1.
Which target resource should you monitor in the alert rule?

A) virtual machine extension
B) virtual machine
C) metric alert

D) Azure Log Analytics workspace (Correct Answer)

Explanation

Correct Answer:
D
For the first step to create the new alert tule, under the Create Alert section, you are going to select your Log Analytics workspace as the resource, since this is a log based alert signal.
Reference:
https://docs.microsoft.com/en-us/windows-server/storage/storage-spaces/configure-azure-monitor

Community Discussion

Correct Anser: D For the first step to create the new alert tule, under the Create Alert section, you are going to select your Log Analytics workspace as the resource, since this is a log based alert signal. The log data goes to the analytics workspace and it is from there that the alert is triggered. Reference: https://docs.microsoft.com/en-us/windows-server/storage/storage-spaces/configure-azure-monitor

Answer is correct D

in exam 25/1/2024

If we create an Alert Rule under a resource, target resource type becomes the type of the resource. If we create an Alert Rule from Azure Monitor, Azure provides option to select a Target resource. As question says to create an Alert Rule for VM1, Target resource type becomes "Virtual Machine". Hence. answer is "B". Try creating one from Azure portal to get correct answer on your own.

B. virtual machine. You should monitor the virtual machine because it is the source of the events being collected by Azure, specifically the System event log of VM1. By creating an alert rule on the virtual machine, you can be notified when an error is logged in the System event log, allowing you to take appropriate action.

SecExams

Question #774

You have an Azure virtual machine named VM1.
Azure collects events from VM1.
You are creating an alert rule in Azure Monitor to notify an administrator when an error is logged in the System event log of VM1.
Which target resource should you monitor in the alert rule?

A) virtual machine extension
B) virtual machine
C) metric alert
D) Azure Log Analytics workspace (Correct Answer)

Explanation

Correct Answer: D ?
For the first step to create the new alert tule, under the Create Alert section, you are going to select your Log Analytics workspace as the resource, since this is a log based alert signal.
Reference:
https://docs.microsoft.com/en-us/windows-server/storage/storage-spaces/configure-azure-monitor

Community Discussion

Question #775

You have an Azure subscription that contains 100 virtual machines.
You regularly create and delete virtual machines.
You need to identify unattached disks that can be deleted.
What should you do?

A) From Azure Cost Management, view Cost Analysis
B) From Azure Advisor, modify the Advisor configuration
C) From Microsoft Azure Storage Explorer, view the Account Management properties
D) From Azure Cost Management, view Advisor Recommendations (Correct Answer)

Explanation

Correct Answer:
D
From Home ג€"> Cost Management + Billing ג€"> Cost Management, scroll down on the options and select View Recommendations:

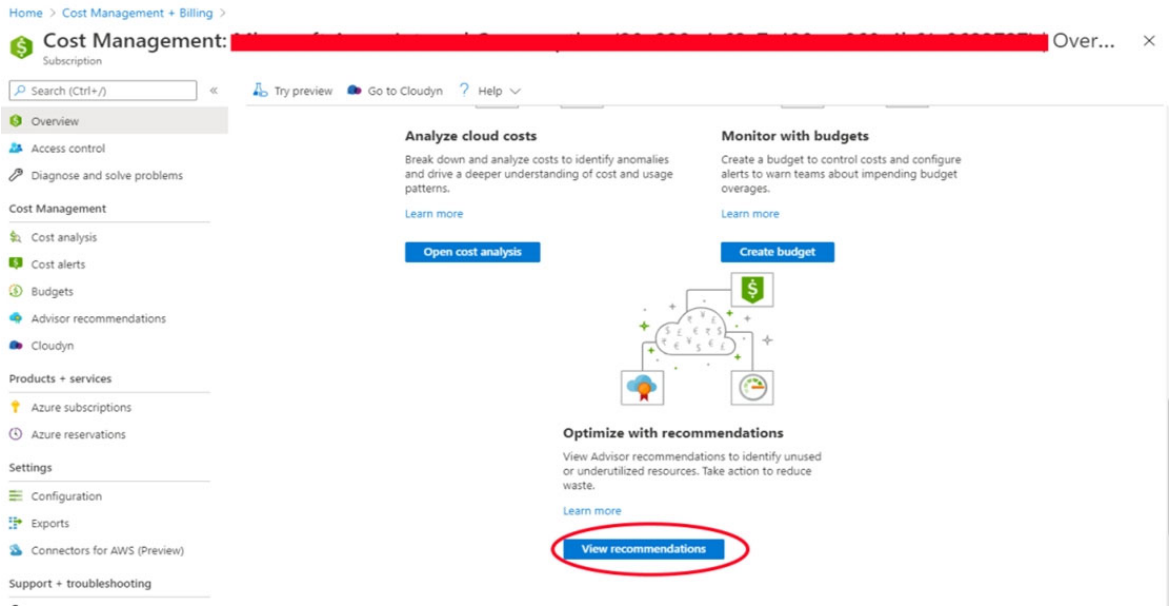

Azure Cost Management / Advisor -
From here you will see the recommendations for your subscription, if you have orphaned disks, they will be listed.
Reference:
https://codeserendipity.com/2020/07/08/microsoft-azure-find-unattached-disks-that-can-be-deleted-and-other-recommendations/

Community Discussion

Correct Answer: D From Home -> Cost Management + Billing -> Cost Management, scroll down on the options and select View Recommendations

I think the answer is correct, azure panel recommend you delete resources that are'nt in use, and if you have a lot of vm's it could be the easiest way

Watching: CyberKelev always put wrong answer

Watching: CyberKelev always put wrong answer

this would do it for you: D. From Azure Cost Management, view Advisor Recommendations

Question #776

You have an Azure subscription that contains 100 virtual machines.
You regularly create and delete virtual machines.
You need to identify unattached disks that can be deleted.
What should you do?

A) From Azure Cost Management, view Cost Analysis
B) From Azure Advisor, modify the Advisor configuration
C) From Microsoft Azure Storage Explorer, view the Account Management properties
D) From Azure Cost Management, view Advisor Recommendations (Correct Answer)

Explanation

Correct Answer: D ?
From Home ↄ€"> Cost Management + Billing ↄ€"> Cost Management, scroll down on the options and select View Recommendations:

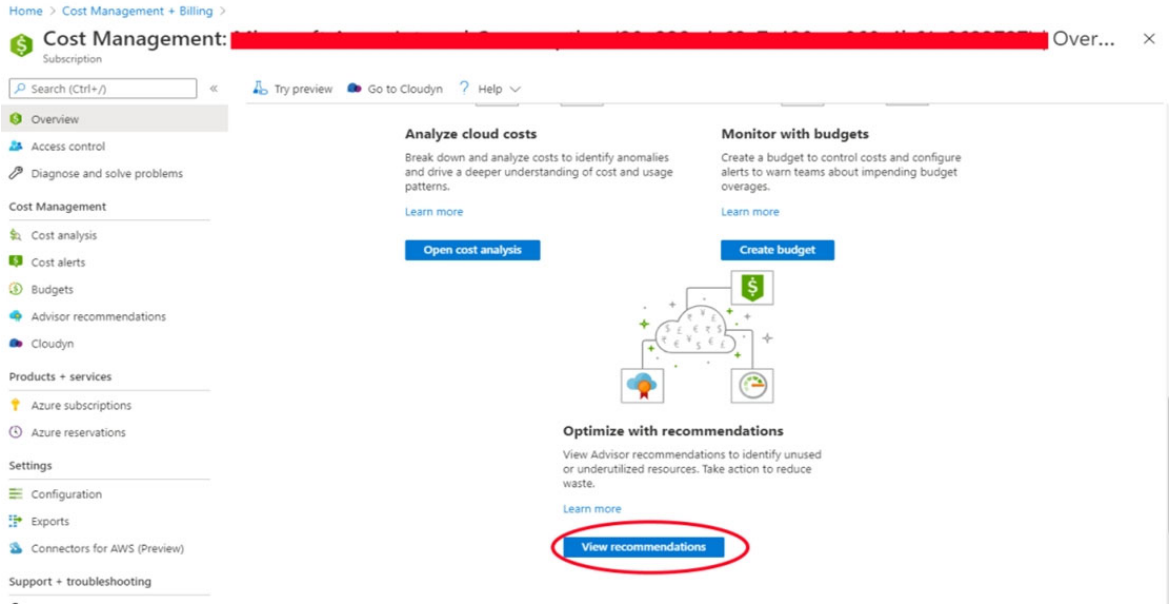

Azure Cost Management / Advisor -
From here you will see the recommendations for your subscription, if you have orphaned disks, they will be listed.
Reference:
https://codeserendipity.com/2020/07/08/microsoft-azure-find-unattached-disks-that-can-be-deleted-and-other-recommendations/

Community Discussion

Question #777

You have an Azure web app named webapp1.
Users report that they often experience HTTP 500 errors when they connect to webapp1.
You need to provide the developers of webapp1 with real-time access to the connection errors. The solution must provide all the connection error details.
What should you do first?

A) From webapp1, enable Web server logging (Correct Answer)
B) From Azure Monitor, create a workbook
C) From Azure Monitor, create a Service Health alert
D) From webapp1, turn on Application Logging

Explanation

Correct Answer:
A

Community Discussion

Correct Answer: A Raw HTTP request data is provided by Web server logging and the question mentions 500 error codes. You need to catch connection error. When the connection fails it happens on web server, not within application. You can do it opening the web application -> Application Service logs -> Web server logging (there are multiple switches there). You can also see the errors live going to "Log stream" pane. Web server logging Windows App Service file system or Azure Storage blobs Raw HTTP request data in the W3C extended log file format. Each log message includes data such as the HTTP method, resource URI, client IP, client port, user agent, response code, and so on.

I think A as well. You need to catch connection error. When the connection fails it happens on web server, not within application. You can do it openining the web application >> Application Service logs >> Web server logging (there are multiple switches there) You can also see the errors live going to "Log stream" pane

I don't like this question. HTTP 500 is an internal server error, not really a connection error. In my world this is mostly caused by the application code, so I would look into the application logs first. But as this question explicitly asks about connection errors, I am just confused.

No, 500 error code means "Internal Server Error" and usually is caused by the application itself. So application logging seems right here and will provide more useful information to developers than web server logs

No, 500 error code means "Internal Server Error" and usually is caused by the application itself. So application logging seems right here and will provide more useful information to developers than web server logs

SecExams

Question #778

You have an Azure web app named webapp1.
Users report that they often experience HTTP 500 errors when they connect to webapp1.
You need to provide the developers of webapp1 with real-time access to the connection errors. The solution must provide all the connection error details.
What should you do first?

A) From webapp1, enable Web server logging (Correct Answer)
B) From Azure Monitor, create a workbook
C) From Azure Monitor, create a Service Health alert
D) From webapp1, turn on Application Logging

Explanation

Correct Answer: A ?

Community Discussion

Question #779

You have an Azure web app named App1.
You need to monitor the availability of App1 by using a multi-step web test.
What should you use in Azure Monitor?

A) Azure Service Health
B) Azure Application Insights (Correct Answer)
C) the Diagnostic settings
D) metrics

Explanation

Correct Answer:
B
Upload the web test -
1. In the Application Insights portal on the Availability pane select Add Classic test, then select Multi-step as the SKU.
2. Upload your multi-step web test.
3. Set the test locations, frequency, and alert parameters.
4. Select Create.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/app/availability-multistep

Community Discussion

Selected Answer: B

this must be a new question...?

Selected Answer: B

Correct, naswer is B

B. Azure Application Insights. Azure Application Insights is a performance monitoring solution for web applications that allows you to monitor the availability of your application by using a multi-step web test. With Application Insights, you can create a

web test that specifies a series of HTTP requests to your web app and defines the expected responses. The web test will then periodically send requests to your app and verify that the responses match the expected results, providing you with real-time visibility into the availability of your app. Additionally, Application Insights provides a wealth of other monitoring and diagnostic capabilities, such as performance analysis, exception tracking, and logging, making it a comprehensive solution for monitoring the health and performance of your web app in Azure.

Correct but deprecated; https://learn.microsoft.com/en-us/azure/azure-monitor/app/availability-overview

Selected Answer: B

B is the answer. https://learn.microsoft.com/en-us/azure/azure-monitor/app/availability-multistep

SecExams

Question #780

You have an Azure web app named App1.
You need to monitor the availability of App1 by using a multi-step web test.
What should you use in Azure Monitor?

A) Azure Service Health
B) Azure Application Insights (Correct Answer)
C) the Diagnostic settings
D) metrics

Explanation

Correct Answer: B ?
Upload the web test -
1. In the Application Insights portal on the Availability pane select Add Classic test, then select Multi-step as the SKU.
2. Upload your multi-step web test.
3. Set the test locations, frequency, and alert parameters.
4. Select Create.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/app/availability-multistep

Community Discussion

Question #781

HOTSPOT -

You have an Azure subscription that has diagnostic logging enabled and is configured to send logs to a Log Analytics workspace.

You are investigating a service outage.

You need to view the event time, the event name, and the affected resources.

How should you complete the query? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

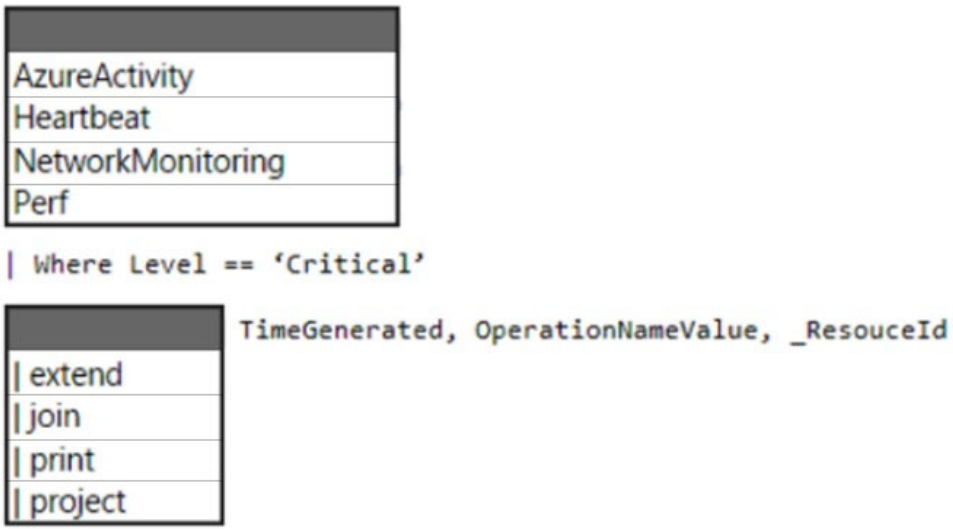

Explanation

Correct Answer:

Answer Area

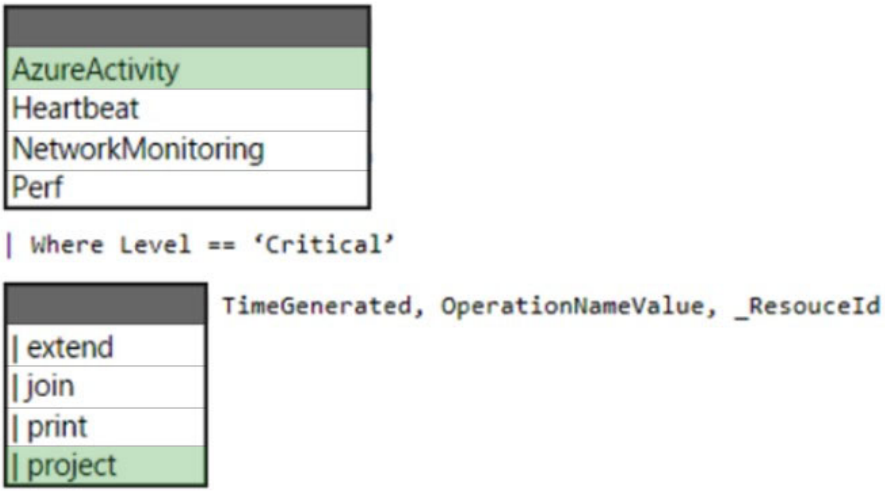

Box 1: AzureActivity -
The AzureActivity table has entries from the Azure activity log, which provides insight into subscription-level or management group-level events occuring in Azure.
Let's see only Critical entries during a specific week.
The where operator is common in the Kusto Query Language. where filters a table to rows that match specific criteria. The following example uses multiple commands. First, the query retrieves all records for the table. Then, it filters the data for only records that are in the time range. Finally, it filters those results for only records that have a Critical level.

AzureActivity -
| where TimeGenerated > datetime(10-01-2020) and TimeGenerated < datetime(10-07-2020)
| where Level == 'Critical'
Incorrect:
not Perf: The Perf table has performance data that's collected from virtual machines that run the Log Analytics agent.

Box 2: | project -
Select a subset of columns: project.
Use project to include only the columns you want. Building on the preceding example, let's limit the output to certain columns:

AzureActivity -
| where TimeGenerated > datetime(10-01-2020) and TimeGenerated < datetime(10-07-2020)
| where Level == 'Critical'
| project TimeGenerated, Level, OperationNameValue, ResourceGroup, _ResourceId
Reference:

https://github.com/MicrosoftDocs/dataexplorer-docs/blob/main/data-explorer/kusto/query/tutorial.md

Community Discussion

answer is correct https://www.shudnow.io/2020/03/06/retrieving-activity-log-data-from-azure-log-analytics-part-2/

Box 1: AzureActivity The AzureActivity table has entries from the Azure activity log, which provides insight into subscription-level or management group-level events occuring in Azure. Let's see only Critical entries during a specific week. Box 2: | project Use project to include only the columns you want. Building on the preceding example, let's limit the output to certain columns

1. AzureActivity 2. project https://learn.microsoft.com/en-us/azure/azure-monitor/essentials/activity-log?tabs=powershell#send-to-log-analytics-workspace Activity log data in a Log Analytics workspace is stored in a table called AzureActivity that you can retrieve with a log query in Log Analytics. https://learn.microsoft.com/en-us/azure/data-explorer/kusto/query/projectoperator Select the columns to include, rename or drop, and insert new computed columns.

AzureActivity | project

I agree!

SecExams

Question #782

HOTSPOT -

You have an Azure subscription that has diagnostic logging enabled and is configured to send logs to a Log Analytics workspace.

You are investigating a service outage.

You need to view the event time, the event name, and the affected resources.

How should you complete the query? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

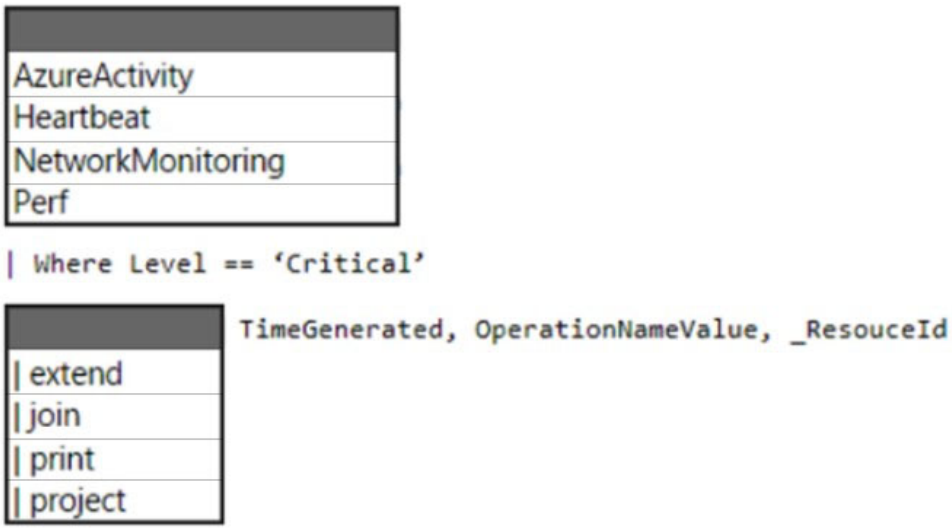

Explanation

Correct Answer:

Answer Area

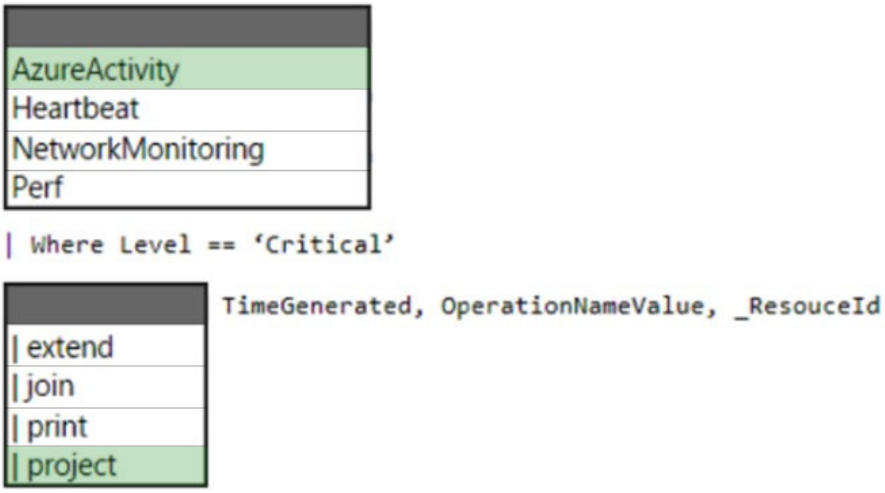

Box 1: AzureActivity -
The AzureActivity table has entries from the Azure activity log, which provides insight into subscription-level or management group-level events occuring in Azure.
Let's see only Critical entries during a specific week.
The where operator is common in the Kusto Query Language. where filters a table to rows that match specific criteria. The following example uses multiple commands. First, the query retrieves all records for the table. Then, it filters the data for only records that are in the time range. Finally, it filters those results for only records that have a Critical level.

AzureActivity -
| where TimeGenerated > datetime(10-01-2020) and TimeGenerated < datetime(10-07-2020)
| where Level == 'Critical'
Incorrect:
not Perf: The Perf table has performance data that's collected from virtual machines that run the Log Analytics agent.

Box 2: | project -
Select a subset of columns: project.
Use project to include only the columns you want. Building on the preceding example, let's limit the output to certain columns:

AzureActivity -
| where TimeGenerated > datetime(10-01-2020) and TimeGenerated < datetime(10-07-2020)
| where Level == 'Critical'
| project TimeGenerated, Level, OperationNameValue, ResourceGroup, _ResourceId
Reference:

https://github.com/MicrosoftDocs/dataexplorer-docs/blob/main/data-explorer/kusto/query/tutorial.md

Community Discussion

Question #783

You have a Recovery Services vault named RSV1. RSV1 has a backup policy that retains instant snapshots for five days and daily backup for 14 days.
RSV1 performs daily backups of VM1. VM1 hosts a static website that was updated eight days ago.
You need to recover VM1 to a point eight days ago. The solution must minimize downtime.
What should you do first?

A) Deallocate VM1.
B) Restore VM1 by using the Replace existing restore configuration option. (Correct Answer)
C) Delete VM1.
D) Restore VM1 by using the Create new restore configuration option.

Explanation

Correct Answer:
B
Replace existing:
You can restore a disk, and use it to replace a disk on the existing VM.
The current VM must exist. If it's been deleted, this option can't be used.
Azure Backup takes a snapshot of the existing VM before replacing the disk, and stores it in the staging location you specify. Existing disks connected to the VM are replaced with the selected restore point.
The snapshot is copied to the vault, and retained in accordance with the retention policy.
After the replace disk operation, the original disk is retained in the resource group. You can choose to manually delete the original disks if they aren't needed.
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-azure-arm-restore-vms

Community Discussion

I think its D. the B options needs you to shutdown the VM first, causing downtime. We must minimize downtime. Ref: https://petri.com/restore-an-azure-virtual-machines-disks-from-backup/

J'ai passé mon examen le 24/02/2023 avec une réussite de 810 points. Je vous conseille de faire tous les exercices, car il y a 70% de questions d'examen ici.

You have to speak in English here.

You have to speak in English here.

I think option D is correct - Even if it takes longer to create new VM the question only asks to "minimize downtime". Creating a new VM lets you to not touch the production website while still enables you to restore from backup and test the website independently. Once you are satisfied, it would be a simple switch that result in close to 0 downtime.

SecExams

Question #784

You have a Recovery Services vault named RSV1. RSV1 has a backup policy that retains instant snapshots for five days and daily backup for 14 days.
RSV1 performs daily backups of VM1. VM1 hosts a static website that was updated eight days ago.
You need to recover VM1 to a point eight days ago. The solution must minimize downtime.
What should you do first?

A) Deallocate VM1.
B) Restore VM1 by using the Replace existing restore configuration option. (Correct Answer)
C) Delete VM1.
D) Restore VM1 by using the Create new restore configuration option.

Explanation

Correct Answer: B ?
Replace existing:

You can restore a disk, and use it to replace a disk on the existing VM.
The current VM must exist. If it's been deleted, this option can't be used.
Azure Backup takes a snapshot of the existing VM before replacing the disk, and stores it in the staging location you specify. Existing disks connected to the VM are replaced with the selected restore point.
The snapshot is copied to the vault, and retained in accordance with the retention policy.
After the replace disk operation, the original disk is retained in the resource group. You can choose to manually delete the original disks if they aren't needed.
Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-azure-arm-restore-vms

Community Discussion

SecExams

Question #785

HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table.

Name	Type
VM1	Virtual machine
storage1	Storage account
Workspace1	Log Analytics workspace
DB1	Azure SQL database

You plan to create a data collection rule named DCR1 in Azure Monitor.

Which resources can you set as data sources in DCR1, and which resources can you set as destinations in DCR1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Data sources:

- VM1 only
- VM1 and storage1 only
- VM1, storage1, and DB1 only
- VM1, storage1, Workspace1, and DB1

Destinations:

- storage1 only
- Workspace1 only
- Workspace1 and storage1 only
- Workspace1, storage1, and DB1 only1

SecExams

Explanation

Correct Answer:

Answer Area

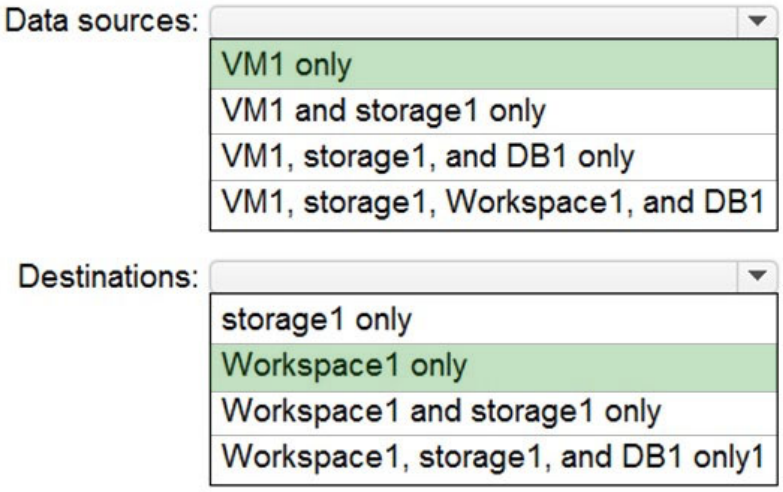

Box 1: VM1 only -
A virtual machine may have an association to multiple DCRs, and a DCR may have multiple virtual machines associated to it.
In the Resources tab, add the resources (virtual machines, virtual machine scale sets, Arc for servers) that should have the Data Collection Rule applied.

Box 2: Workspace1 only -
On the Destination tab, add one or more destinations for the data source. You can select multiple destinations of same of different types, for instance multiple Log Analytics workspaces (i.e. "multi-homing").
Note: The Data Collection Rules (or DCR) improve on a few key areas of data collection from VMs including like better control and scoping of data collection (e.g. collect from a subset of VMs for a single workspace), collect once and send to both Log Analytics and Azure Monitor Metrics, send to multiple workspaces (multi- homing for Linux), improved Windows event filtering, and improved extension management.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/agents/data-collection-rule-azure-monitor-agent

Community Discussion

Correct answer. Tested in Lab. First: You can only choose VM Second: Only Workspace

1. VM only. it uses Azure monitor agent which needs to be installed on a VM. 2. Workspace1 only. Data then gets sent to Workspace.

i found this reference, https://learn.microsoft.com/en-us/azure/azure-monitor/essentials/data-collection-rule-overview I think that only VM could be use too

i found this reference, https://learn.microsoft.com/en-us/azure/azure-monitor/essentials/data-collection-rule-overview I think that only VM could be use too

1. VM1 only 2. Workspace1 only https://learn.microsoft.com/en-us/azure/azure-monitor/essentials/data-collection-rule-structure#datasources https://learn.microsoft.com/en-us/azure/azure-monitor/essentials/data-collection-rule-structure#destinations This section contains a declaration of all the destinations where the data will be sent. Only Log Analytics is currently supported as a destination. Each Log Analytics destination will require the full Workspace Resource ID, as well as a friendly name that will be used elsewhere in the DCR to refer to this workspace.

SecExams

Question #786

HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table.

Name	Type
VM1	Virtual machine
storage1	Storage account
Workspace1	Log Analytics workspace
DB1	Azure SQL database

You plan to create a data collection rule named DCR1 in Azure Monitor.

Which resources can you set as data sources in DCR1, and which resources can you set as destinations in DCR1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Data sources:

- VM1 only
- VM1 and storage1 only
- VM1, storage1, and DB1 only
- VM1, storage1, Workspace1, and DB1

Destinations:

- storage1 only
- Workspace1 only
- Workspace1 and storage1 only
- Workspace1, storage1, and DB1 only1

SecExams

Explanation

Correct Answer:

Answer Area

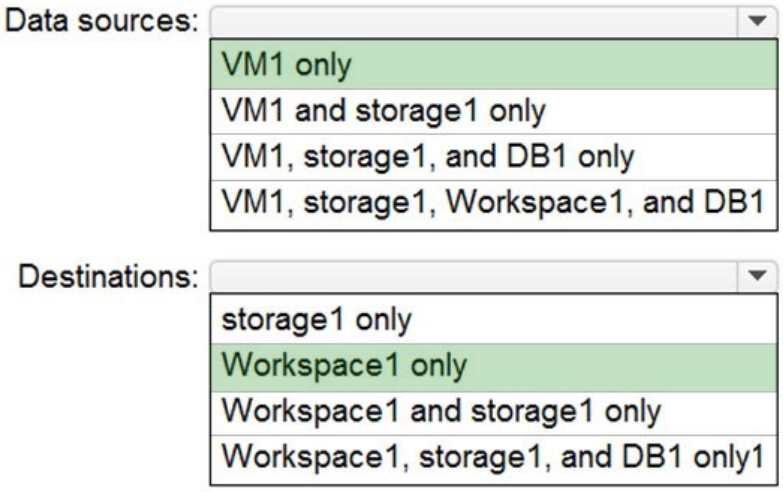

Box 1: VM1 only -
A virtual machine may have an association to multiple DCRs, and a DCR may have multiple virtual machines associated to it.
In the Resources tab, add the resources (virtual machines, virtual machine scale sets, Arc for servers) that should have the Data Collection Rule applied.

Box 2: Workspace1 only -
On the Destination tab, add one or more destinations for the data source. You can select multiple destinations of same of different types, for instance multiple Log Analytics workspaces (i.e. "multi-homing").
Note: The Data Collection Rules (or DCR) improve on a few key areas of data collection from VMs including like better control and scoping of data collection (e.g. collect from a subset of VMs for a single workspace), collect once and send to both Log Analytics and Azure Monitor Metrics, send to multiple workspaces (multi- homing for Linux), improved Windows event filtering, and improved extension management.
Reference:
https://docs.microsoft.com/en-us/azure/azure-monitor/agents/data-collection-rule-azure-monitor-agent

Community Discussion

Question #787

SecExams

HOTSPOT -

You have the role assignment file shown in the following exhibit.


```
[
    {
        "RoleAssignmentId": "e3108585-0e5d-4572-91a3-aa5d2df73999",
        "Scope": "/subscriptions/fb960108-fcdc-499b-886e-d9c31d3f26ff",
        "DisplayName": "User1",
        "SignInName": "User1@contoso.onmicrosoft.com",
        "RoleDefinitionName": "Owner",
        ...
    },
    {
        "RoleAssignmentId": "3bab4763-16a9-4d5d-9fcd-eee0cc31a21e",
        "Scope": "/subscriptions/fb960108-fcdc-499b-886e-d9c31d3f26ff/resourceGroups/RG2",
        "DisplayName": "User2",
        "SignInName": "User2@contoso.onmicrosoft.com",
        "RoleDefinitionName": "Owner",
        ...
    },
    {
        "RoleAssignmentId": "a071c023-40a3-4b7f-8680-1109b40270c5",
        "Scope": "/subscriptions/fb960108-fcdc-499b-886e-d9c31d3f26ff/resourceGroups/RG1/providers/
Microsoft.Compute/virtualMachines/VM1",
        "DisplayName": "User3",
        "SignInName": "User3@contoso.onmicrosoft.com",
        "RoleDefinitionName": "Owner",
        ...
    },
    {
        "RoleAssignmentId": "c5b9e7da-76d4-4888-93b5-8afb2bb780b4",
        "Scope": "/subscriptions/fb960108-fcdc-499b-886e-d9c31d3f26ff/resourceGroups/RG1",
        "DisplayName": "User4",
        "SignInName": "User4@contoso.onmicrosoft.com",
        "RoleDefinitionName": "Contributor",
        ...
    }
]
```


Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

[Answer choice] assigned the Owner role for VM1

- User3 is
- User3 and User4 are
- User1 and User3 are
- User1, User3, and User4 are
- User1, User2, User3, and User4

[Answer choice] can create a virtual machine in RG1

- User1 and User4
- User1, User2, and User3
- User1, User2, and User4
- User1, User3, and User4
- User1, User2, User3, and User4

Explanation

Correct Answer:

Answer Area

[Answer choice] assigned the Owner role for VM1

- User3 is
- User3 and User4 are
- User1 and User3 are
- User1, User3, and User4 are
- User1, User2, User3, and User4

[Answer choice] can create a virtual machine in RG1

- User1 and User4
- User1, User2, and User3
- User1, User2, and User4
- User1, User3, and User4
- User1, User2, User3, and User4

Community Discussion

Answers are correct: User1 - Owner of the subscription. (He can manage any resources in the subscription.) User 2 - Owner of RG2(He can manage any resources in the RG2.) User 3 - Owner of a single VM that is VM1.(he can manage VM1 only) User 4 - Contributor of RG1.(He can manage everything in RG1, even he can delete VMs in RG1. But cannot change RABC) Box1: Owner of VM1 - User1, User3 Box2 : Create VM in RG1 - User1,User4

very annoying ass question its on the test

passed today. this was on 23 Jun 2023. 100 % questions were from ET

The question is more down to if user 1 is "assigned" as a owner . Yes user 1 is an owner of VM1 but their role is inherited. Only User 3 is explicitly assigned the owner role for VM1. So it really depends on what the hell they mean by "assigned".

The question is more down to if user 1 is "assigned" as a owner . Yes user 1 is an owner of VM1 but their role is inherited. Only User 3 is explicitly assigned the owner role for VM1. So it really depends on what the hell they mean by "assigned".

Question #788

SecExams

HOTSPOT -

You have the role assignment file shown in the following exhibit.

```
[
    {
        "RoleAssignmentId": "e3108585-0e5d-4572-91a3-aa5d2df73999",
        "Scope": "/subscriptions/fb960108-fcdc-499b-886e-d9c31d3f26ff",
        "DisplayName": "User1",
        "SignInName": "User1@contoso.onmicrosoft.com",
        "RoleDefinitionName": "Owner",
        ...
    },
    {
        "RoleAssignmentId": "3bab4763-16a9-4d5d-9fcd-eee0cc31a21e",
        "Scope": "/subscriptions/fb960108-fcdc-499b-886e-d9c31d3f26ff/resourceGroups/RG2",
        "DisplayName": "User2",
        "SignInName": "User2@contoso.onmicrosoft.com",
        "RoleDefinitionName": "Owner",
        ...
    },
    {
        "RoleAssignmentId": "a071c023-40a3-4b7f-8680-1109b40270c5",
        "Scope": "/subscriptions/fb960108-fcdc-499b-886e-d9c31d3f26ff/resourceGroups/RG1/providers/
Microsoft.Compute/virtualMachines/VM1",
        "DisplayName": "User3",
        "SignInName": "User3@contoso.onmicrosoft.com",
        "RoleDefinitionName": "Owner",
        ...
    },
    {
        "RoleAssignmentId": "c5b9e7da-76d4-4888-93b5-8afb2bb780b4",
        "Scope": "/subscriptions/fb960108-fcdc-499b-886e-d9c31d3f26ff/resourceGroups/RG1",
        "DisplayName": "User4",
        "SignInName": "User4@contoso.onmicrosoft.com",
        "RoleDefinitionName": "Contributor",
        ...
    }
]
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

[Answer choice] assigned the Owner role for VM1

- User3 is
- User3 and User4 are
- User1 and User3 are
- User1, User3, and User4 are
- User1, User2, User3, and User4

[Answer choice] can create a virtual machine in RG1

- User1 and User4
- User1, User2, and User3
- User1, User2, and User4
- User1, User3, and User4
- User1, User2, User3, and User4

Explanation

Correct Answer:

Answer Area

[Answer choice] assigned the Owner role for VM1

- User3 is
- User3 and User4 are
- User1 and User3 are
- User1, User3, and User4 are
- User1, User2, User3, and User4

[Answer choice] can create a virtual machine in RG1

- User1 and User4
- User1, User2, and User3
- User1, User2, and User4
- User1, User3, and User4
- User1, User2, User3, and User4

Community Discussion

SecExams

Question #789

SecExams

HOTSPOT -

You have the following custom role-based access control (RBAC) role.

```
{
    "id": "b988327b-7dae-4d00-8925-1cc14fd68be4",
    "properties": {
        "roleName": "Role1",
        "description": "",
        "assignableScopes:" [
            "/subscriptions/c691ad84-99f2-42fd-949b-58afd7ef6ab3"
        ],
        "permissions": [
            {
                "actions": [
                    "Microsoft.Resources/subscription/resourceGroups/resources/read",
                    "Microsoft.Resources/subscription/resourceGroups/read",
                    "Microsoft.Resourcehealth/*",
                    "Microsoft.Authorization/*/read",
                    "Microsoft.Compute/*/read",
                    "Microsoft.Support/*",
                    "Microsoft.Authorization/*/read",
                    "Microsoft.Network/virtualNetworks/read",
                    "Microsoft.Resources/deployments/*",
                    "Microsoft.Resources/subscription/resourceGroups/read",
                    "Microsoft.Storage/storageAccounts/read",
                    "Microsoft.Compute/virtualMachines/start/action",
                    "Microsoft.Compute/virtualMachines/powerOff/action",
                    "Microsoft.Compute/virtualMachines/deallocate/action",
                    "Microsoft.Compute/virtualMachines/restart/action",
                    "Microsoft.Compute/virtualMachines/*",
                    "Microsoft.Compute/disks/*",
                    "Microsoft.Compute/availabilitySets/*",
                    "Microsoft.Network/virtualNetworks/subnets/join/action",
                    "Microsoft.Network/virtualNetworks/subnets/read",
                    "Microsoft.Network/virtualNetworks/subnets/virtualMachines/read",
                    "Microsoft.Network/networkinterfaces/*",
                    "Microsoft.Compute/snapshots/*"
                ]
                "notAction": [
                    "Microsoft.Authorization/*/Delete",
                    "Microsoft.Authorization/*/Write",
                    "Microsoft.Authorization/elevateAccess/Action"
                ]
            }
        ]
    }
}
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
Users that are assigned Role1 can assign Role1 to users.	◯	◯
Users that are assigned Role1 can deploy new virtual machines.	◯	◯
Users that are assigned Role1 can set a static IP address on a virtual machine.	◯	◯

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
Users that are assigned Role1 can assign Role1 to users.	○	○
Users that are assigned Role1 can deploy new virtual machines.	○	○
Users that are assigned Role1 can set a static IP address on a virtual machine.	○	○

Community Discussion

For Me N,Y,Y. Microsoft.Compute/virtualMachines/* Perform all virtual machine actions including create, update, delete, start, restart, and power off virtual machines. Execute scripts on virtual machines.

N - ms.auth/*/write is NOT allowed. Y - ms.comp/vm/* is allowed. Y - ms.net/netint/* is allowed.

The "resourceGroups/read" permission means that the user with that role can't create/modify/delete resource groups BUT if you have an existing RG, you can create a VM in it as you have the "Microsoft.Compute/VirtualMachines/*" permission that includes all the actions on VMs Correct answer imo would be N, Y, Y

The "resourceGroups/read" permission means that the user with that role can't create/modify/delete resource groups BUT if you have an existing RG, you can create a VM in it as you have the "Microsoft.Compute/VirtualMachines/*" permission that includes all the actions on VMs Correct answer imo would be N, Y, Y

Box 1: N Because doesn't have: Microsoft.Authorization/*/Write - Create roles, role assignments, policy assignments, policy definitions and policy set definitions Box 2; Yes Has been assigned; Microsoft.Compute/virtualMachines/* - Perform all virtual machine actions including create, update, delete, start, restart, and power off virtual machines. Execute scripts on virtual machines. Box 3: Y Has been assigned; Microsoft.Network/

networkInterfaces/* - Create and manage network interfaces See; https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles

SecExams

Question #790

SecExams

HOTSPOT -

You have the following custom role-based access control (RBAC) role.

```
{
    "id": "b988327b-7dae-4d00-8925-1cc14fd68be4",
    "properties": {
        "roleName": "Role1",
        "description": "",
        "assignableScopes:" [
            "/subscriptions/c691ad84-99f2-42fd-949b-58afd7ef6ab3"
        ],
        "permissions": [
            {
                "actions": [
                    "Microsoft.Resources/subscription/resourceGroups/resources/read",
                    "Microsoft.Resources/subscription/resourceGroups/read",
                    "Microsoft.Resourcehealth/*",
                    "Microsoft.Authorization/*/read",
                    "Microsoft.Compute/*/read",
                    "Microsoft.Support/*",
                    "Microsoft.Authorization/*/read",
                    "Microsoft.Network/virtualNetworks/read",
                    "Microsoft.Resources/deployments/*",
                    "Microsoft.Resources/subscription/resourceGroups/read",
                    "Microsoft.Storage/storageAccounts/read",
                    "Microsoft.Compute/virtualMachines/start/action",
                    "Microsoft.Compute/virtualMachines/powerOff/action",
                    "Microsoft.Compute/virtualMachines/deallocate/action",
                    "Microsoft.Compute/virtualMachines/restart/action",
                    "Microsoft.Compute/virtualMachines/*",
                    "Microsoft.Compute/disks/*",
                    "Microsoft.Compute/availabilitySets/*",
                    "Microsoft.Network/virtualNetworks/subnets/join/action",
                    "Microsoft.Network/virtualNetworks/subnets/read",
                    "Microsoft.Network/virtualNetworks/subnets/virtualMachines/read",
                    "Microsoft.Network/networkinterfaces/*",
                    "Microsoft.Compute/snapshots/*"
                ]
                "notAction": [
                    "Microsoft.Authorization/*/Delete",
                    "Microsoft.Authorization/*/Write",
                    "Microsoft.Authorization/elevateAccess/Action"
                ]
            }
        ]
    }
}
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
Users that are assigned Role1 can assign Role1 to users.	◯	◯
Users that are assigned Role1 can deploy new virtual machines.	◯	◯
Users that are assigned Role1 can set a static IP address on a virtual machine.	◯	◯

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
Users that are assigned Role1 can assign Role1 to users.	○	○
Users that are assigned Role1 can deploy new virtual machines.	○	○
Users that are assigned Role1 can set a static IP address on a virtual machine.	○	○

Community Discussion

SecExams

Question #791

SecExams

HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
VNET1	Virtual network	Contains subnet1 and subnet2
subnet1	Subnet	IP address space 10.3.0.0/24
subnet2	Subnet	IP address space 10.4.0.0/24
NSG1	Network security group (NS)	*None*
vm1	Virtual machine	IP address 10.3.0.15
vm2	Virtual machine	IP address 10.4.0.16
storage1	Storage account	*None*

NSG1 is configured as shown in the following exhibit.

Essentials JSON View

Resource group (change) : RG1
Location : East US 2
Subscription (change) : Microsoft Azure Sponsorship
Subscription ID :
Tags (change) : Click here to add tags

Custom security rules : 1 inbound, 2 outbound
Associated with : 1 subnets, 0 network interfaces

Inbound security rules

Priority	Name	Port	Protocol	Source	Destination	Action
110	HTTPS_VM1_Deny	443	TCP	Internet	10.3.0.15	Deny
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny

Outbound security rules

145	Storage_Access	443	TCP	VirtualNetwork	Storage	Allow
150	Block_Internet	Any	Any	VirtualNetwork	Internet	Deny
65000	AllowVnetOutBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowInternetOutBound	Any	Any	Any	Internet	Allow
65500	DenyAllOutBound	Any	Any	Any	Any	Deny

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
VM1 can access storage1.	○	○
VM2 can access VM1 by using the HTTPS protocol.	○	○
The security rules for NSG1 apply to any virtual machine on VNET1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM1 can access storage1.	◯	◯
VM2 can access VM1 by using the HTTPS protocol.	◯	◯
The security rules for NSG1 apply to any virtual machine on VNET1.	◯	◯

Community Discussion

I think is : Yes Yes No

I see people saying the question is incomplete but the point of the question is to see if you are paying attention enough to know what you think is missing. Note: NSG1 Applies to Subnet1 only. Yes - VM1 can access the Storage account because there is nothing blocking it the on the virtual network. There is a rule that actually allows outbound access to storage. Yes- VM2 is on the Same VNET there is nothing blocking access to it from VM1 on the Virtual network. The Deny rule for HTTPS_VM1_Deny is for inbound connections from the internet. No- You have a Inbound deny rule for VM1 from the the internet with a destination of the 10.3.0.15 which is in Subnet1. This proves the NSG is associated to Subnet1 and only subnet one because the image shows it is connected to only 1 subnet. VM2 is on Subnet2 which you can determined by its IP address. This means that NSG1 does not apply to VM2.

I'm assuming that the NSG is applied to Subnet1. Y. Outbound rules have 145 priority for allow storage1 access Y. Inbound rules has default Vnet to Vnet allow so VM2 can access VM1. The deny rule 110 is for Internet traffic coming in. N. We can see the NSG is associated to 1 subnet from the image.

I'm assuming that the NSG is applied to Subnet1. Y. Outbound rules have 145 priority for allow storage1 access Y. Inbound rules has default Vnet to Vnet allow so VM2 can access VM1. The deny rule 110 is for Internet traffic coming in. N. We can see the NSG is associated to 1 subnet from the image.

yep seems incomplete. it says it applies to 1 subnet but did not say which subnet.

SecExams

Question #792

SecExams

HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
VNET1	Virtual network	Contains subnet1 and subnet2
subnet1	Subnet	IP address space 10.3.0.0/24
subnet2	Subnet	IP address space 10.4.0.0/24
NSG1	Network security group (NS)	*None*
vm1	Virtual machine	IP address 10.3.0.15
vm2	Virtual machine	IP address 10.4.0.16
storage1	Storage account	*None*

NSG1 is configured as shown in the following exhibit.

Essentials JSON View

Resource group (change) : RG1
Location : East US 2
Subscription (change) : Microsoft Azure Sponsorship
Subscription ID :
Tags (change) : Click here to add tags

Custom security rules : 1 inbound, 2 outbound
Associated with : 1 subnets, 0 network interfaces

Inbound security rules

Priority	Name	Port	Protocol	Source	Destination	Action
110	HTTPS_VM1_Deny	443	TCP	Internet	10.3.0.15	Deny
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny

Outbound security rules

145	Storage_Access	443	TCP	VirtualNetwork	Storage	Allow
150	Block_Internet	Any	Any	VirtualNetwork	Internet	Deny
65000	AllowVnetOutBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowInternetOutBound	Any	Any	Any	Internet	Allow
65500	DenyAllOutBound	Any	Any	Any	Any	Deny

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
VM1 can access storage1.	○	○
VM2 can access VM1 by using the HTTPS protocol.	○	○
The security rules for NSG1 apply to any virtual machine on VNET1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM1 can access storage1.	○	○
VM2 can access VM1 by using the HTTPS protocol.	○	○
The security rules for NSG1 apply to any virtual machine on VNET1.	○	○

Community Discussion

Question #793

You have an Azure subscription named Subscription1 that contains two Azure virtual networks named VNet1 and VNet2. VNet1 contains a VPN gateway named VPNGW1 that uses static routing. There is a site-to-site VPN connection between your on-premises network and VNet1.

On a computer named Client1 that runs Windows 10, you configure a point-to-site VPN connection to VNet1.

You configure virtual network peering between VNet1 and VNet2. You verify that you can connect to VNet2 from the on-premises network. Client1 is unable to connect to VNet2.

You need to ensure that you can connect Client1 to VNet2.

What should you do?

A) Select Use the remote virtual network's gateway or Route Server on VNet1 to VNet2 peering.
B) Select Use the remote virtual network s gateway or Route Server on VNet2 to VNet1 peering.
C) Download and re-install the VPN client configuration package on Client1. (Correct Answer)
D) Enable BGP on VPNGW1.

Explanation

Correct Answer:
C

Community Discussion

After changes in topology it is needed to re-install the VPN client Answer is C

Selected Answer: C

correct answer C

Again question

Selected Answer: C

C is the answer. https://learn.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing If you make a change to the topology of your network and have Windows VPN clients, the VPN client package for Windows clients must be downloaded and installed again in order for the changes to be applied to the client.

Same question as Topic5 Question9 Nov2022

SecExams

Question #794

You have an Azure subscription named Subscription1 that contains two Azure virtual networks named VNet1 and VNet2. VNet1 contains a VPN gateway named VPNGW1 that uses static routing. There is a site-to-site VPN connection between your on-premises network and VNet1.
On a computer named Client1 that runs Windows 10, you configure a point-to-site VPN connection to VNet1.
You configure virtual network peering between VNet1 and VNet2. You verify that you can connect to VNet2 from the on-premises network. Client1 is unable to connect to VNet2.
You need to ensure that you can connect Client1 to VNet2.
What should you do?

A) Select Use the remote virtual network's gateway or Route Server on VNet1 to VNet2 peering.
B) Select Use the remote virtual network s gateway or Route Server on VNet2 to VNet1 peering.
C) Download and re-install the VPN client configuration package on Client1. (Correct Answer)
D) Enable BGP on VPNGW1.

Explanation

Correct Answer: C ?

Community Discussion

Question #795

SecExams

HOTSPOT -

You have two Azure subscriptions named Sub1 and Sub2. Sub1 is in a management group named MG1. Sub2 is in a management group named MG2.

You have the resource groups shown in the following table.

Name	Subscription
RG1	Sub1
RG2	Sub2

You have the virtual machines shown in the following table.

Name	Resource group
VM1	RG1
VM2	RG2
VM3	RG2

You assign roles to users as shown in the following table.

User	Role	Resource
User1	Virtual Machine Contributor	MG1
User1	Virtual Machine User Login	Sub2
User2	Virtual Machine Contributor	MG2
User2	Virtual Machine User Login	Sub1
User2	Virtual Machine User Login	VM3

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
User1 can sign in to VM1.	○	○
User2 can manage disks and disk snapshots of VM1.	○	○
User2 can manage disks and disk snapshots of VM3.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
User1 can sign in to VM1.	○	○
User2 can manage disks and disk snapshots of VM1.	○	○
User2 can manage disks and disk snapshots of VM3.	○	○

Community Discussion

I think the answers should be: N N N 1. User1 can sign in to VM1 No User1 is assigned as Virtual Machine Contributor in MG1. And Virtual Machine Contributor can't log in to VM as a regular user. 2. User2 can manage disks and disk snapshots of VM1 No Since User2 only has Virtual Machine User in Sub1, so he can log in to VM1 but can't manage disks or snapshots 3. User2 can manage disks and disk snapshots of VM3 No Virtual Machine Contributor only has permission to manage disks, but not disk snapshots (Disk Snapshot Contributor permission)

N - effective rights are virtual machine contributor. This doesn't grant login. N - effective rights are virtual machine login. This doesn't grant disk management. N - effective rights are virtual machine contributor. This does not grant snapshot access.

I think you're right. Virtual Machine contributor does have some Recovery Services permissions, but none for SnapShots. NNN https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#virtual-machine-contributor

I think you're right. Virtual Machine contributor does have some Recovery Services permissions, but none for SnapShots. NNN https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#virtual-machine-contributor

refer: https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles

SecExams

Question #796

SecExams

HOTSPOT -

You have two Azure subscriptions named Sub1 and Sub2. Sub1 is in a management group named MG1. Sub2 is in a management group named MG2.

You have the resource groups shown in the following table.

Name	Subscription
RG1	Sub1
RG2	Sub2

You have the virtual machines shown in the following table.

Name	Resource group
VM1	RG1
VM2	RG2
VM3	RG2

You assign roles to users as shown in the following table.

User	Role	Resource
User1	Virtual Machine Contributor	MG1
User1	Virtual Machine User Login	Sub2
User2	Virtual Machine Contributor	MG2
User2	Virtual Machine User Login	Sub1
User2	Virtual Machine User Login	VM3

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
User1 can sign in to VM1.	○	○
User2 can manage disks and disk snapshots of VM1.	○	○
User2 can manage disks and disk snapshots of VM3.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
User1 can sign in to VM1.	◯	◯
User2 can manage disks and disk snapshots of VM1.	◯	◯
User2 can manage disks and disk snapshots of VM3.	◯	◯

Community Discussion

Question #797

You have an Azure Active Directory (Azure AD) tenant that is linked to 10 Azure subscriptions.

You need to centrally monitor user activity across all the subscriptions.

What should you use?

A) Azure Application Insights Profiler
B) access reviews
C) Activity log filters
D) a Log Analytics workspace (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: D

keywords are "centrally monitor" and "all subs"

Log Analytics can monitor any resources regardless of the location of the resources. So It's the only one that can do central monitoring.

Log Analytics can monitor any resources regardless of the location of the resources. So It's the only one that can do central monitoring.

Log Analytics can monitor any resources regardless of the location of the resources. So It's the only one that can do central monitoring.

Log Analytics can monitor any resources regardless of the location of the resources. So It's the only one that can do central monitoring.

SecExams

Question #798

You have an Azure Active Directory (Azure AD) tenant that is linked to 10 Azure subscriptions.
You need to centrally monitor user activity across all the subscriptions.
What should you use?

A) Azure Application Insights Profiler
B) access reviews
C) Activity log filters
D) a Log Analytics workspace (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #799

DRAG DROP -

You have an Azure subscription that contains a virtual machine name VM1.

VM1 has an operating system disk named Disk1 and a data disk named Disk2.

You need to back up Disk2 by using Azure Backup.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

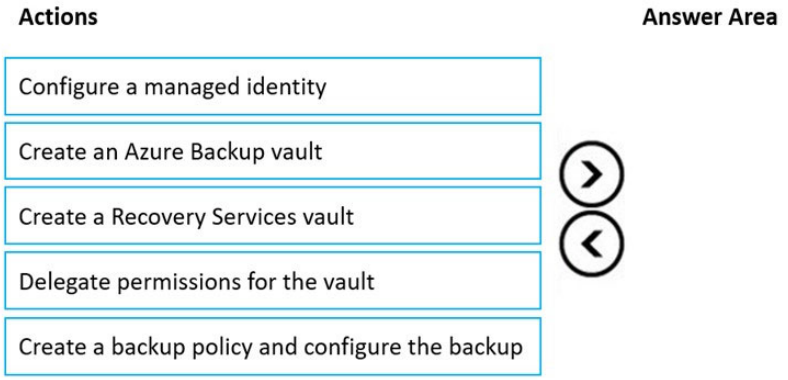

Explanation

Correct Answer:

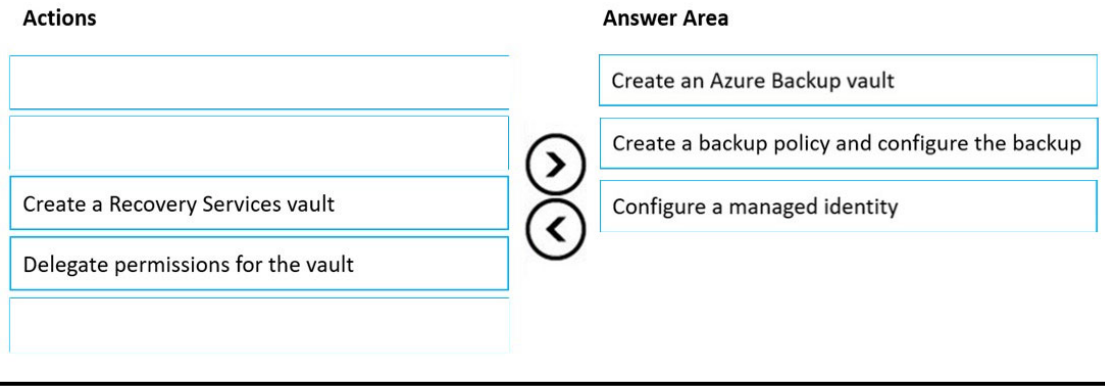

Community Discussion

Azure Recovery Services vaults can protect the following types of datasources: Azure Virtual machines SQL in Azure VM Azure Files (Azure Storage) SAP HANA in Azure VM Azure

Backup Server Azure Backup Agent DPM Azure Backup vaults can protect the following types of datasources: Azure Database for PostgreSQL servers Azure Blobs (Azure Storage) Azure Disks Kubernetes Service AVS Virtual machines

Correct Answer: 1- Create an Azure backup vault. 2- Create a backup policy and configure the backup 3- Configure a managed identity Link: https://docs.microsoft.com/en-us/azure/backup/backup-managed-disks#:~:text=Review%20%2B%20create.-,Configure%20backup,-Azure%20Disk%20backup

1 Create an Azure backup vault. 2 Create a backup policy and configure the backup 3 Configure a managed identity first 2 was no brainer, the 3rd threw me a bit but confirmed below. Azure disk backup: Backup vault uses managed identity to access other Azure resources.

Got this in Mar 23 exam. Good lucks guys

Got this in Feb 2023 exam.

SecExams

Question #800

DRAG DROP -

You have an Azure subscription that contains a virtual machine name VM1. VM1 has an operating system disk named Disk1 and a data disk named Disk2.

You need to back up Disk2 by using Azure Backup.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

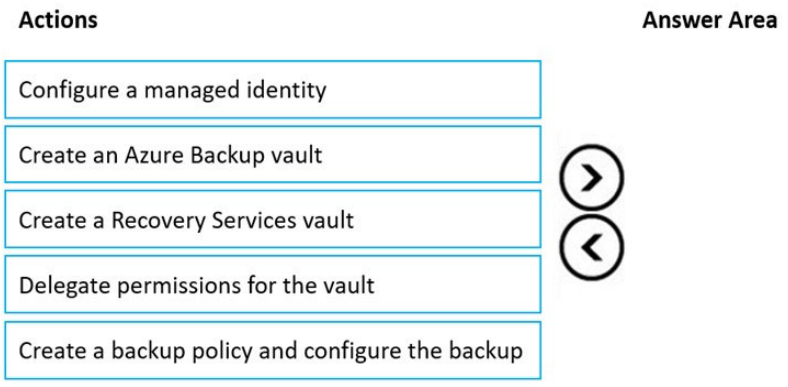

Explanation

Correct Answer:

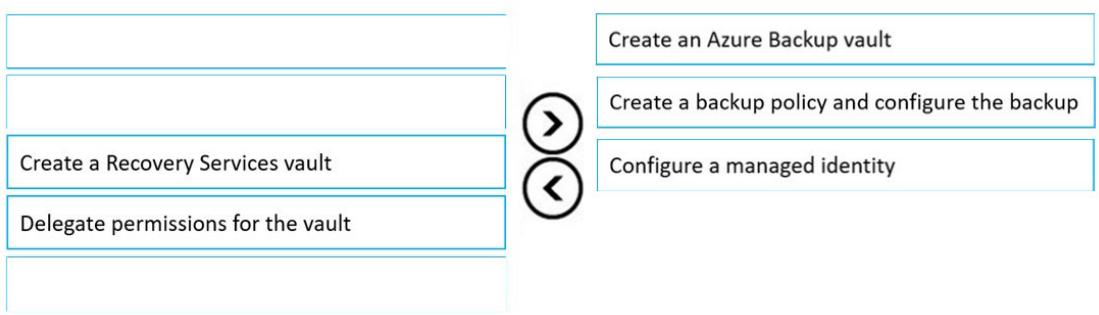

Community Discussion

SecExams

Question #801

You have a subnet named Subnet1 that contains Azure virtual machines. A network security group (NSG) named NSG1 is associated to Subnet1. NSG1 only contains the default rules.
You need to create a rule in NSG1 to prevent the hosts on Subnet1 form connecting to the Azure portal. The hosts must be able to connect to other internet hosts.
To what should you set Destination in the rule?

A) Application security group
B) IP Addresses
C) Service Tag (Correct Answer)
D) Any

Explanation

Correct Answer:
C

Community Discussion

You can use service tags to achieve network isolation and protect your Azure resources from the general Internet while accessing Azure services that have public endpoints. Create inbound/outbound network security group rules to deny traffic to/from Internet and allow traffic to/from AzureCloud or other available service tags of specific Azure services. https://docs.microsoft.com/en-us/azure/virtual-network/service-tags-overview

C - "Azure portal" is in the list of Service tag.

Selected Answer: C

A service tag represents a group of IP address prefixes from a given Azure service. Microsoft manages the address prefixes encompassed by the service tag and automatically updates the service tag as addresses change, minimizing the complexity of frequent updates to network security rules. You can use service tags to define network access controls on network security groups, Azure Firewall, and user-defined routes. Use service tags in place of specific IP addresses when you create security rules and routes Reference Virtual network service tags https://learn.microsoft.com/en-us/azure/virtual-network/service-tags-overview

AzurePortal service tag can be added to NSG in the portal but is not listed in the documentation. Moreover, looks like it won't work as intended - https://learn.microsoft.com/en-us/answers/questions/1198445/what-azureportal-service-tag-mean "This tag is currently not supported by NSG i.e. although you can list it in the nsg rule but it will not have the desired effect which coincides with your observation above. If you wish to block access to Azure Portal from your VM you can do it via Azure Firewall. Azure Firewall offers FQDN filtering functionality" That means the goal can't be achieved by Service Tag. AzureCloud tag is "All datacenter public IP addresses.", not the portal

Selected Answer: C

You can use service tags to achieve network isolation and protect your Azure resources from the general Internet while accessing Azure services that have public endpoints

SecExams

Question #802

You have a subnet named Subnet1 that contains Azure virtual machines. A network security group (NSG) named NSG1 is associated to Subnet1. NSG1 only contains the default rules.
You need to create a rule in NSG1 to prevent the hosts on Subnet1 form connecting to the Azure portal. The hosts must be able to connect to other internet hosts.
To what should you set Destination in the rule?

A) Application security group
B) IP Addresses
C) Service Tag (Correct Answer)
D) Any

Explanation

Correct Answer: C ?

Community Discussion

Question #803

You have an Azure subscription named Subscription1 that contains an Azure Log Analytics workspace named Workspace1.
You need to view the error events from a table named Event.
Which query should you run in Workspace1?

A) search in (Event) "error" (Correct Answer)
B) Event | where EventType is "error"
C) select * from Event where EventType == "error"
D) Get-Event Event | where {$_.EventType == "error"}

Explanation

Correct Answer:

A

Community Discussion

In this case the answer is A other options are: 1. Event | search "error" 2. Event | where EventType == "error" 3. search in (Event) "error"

Selected Answer: A

Answer is Correct

The first and third option works. The second option did not work for me. EventType does not exist. However this worked for me: Event | where EventLevelName == "Error"

The first and third option works. The second option did not work for me. EventType does not exist. However this worked for me: Event | where EventLevelName == "Error"

Selected Answer: A

Correct answer is A. Answer B is wrong because the operator 'is' is not valid. Instead we have to use '=='. See https://learn.microsoft.com/en-us/azure/data-explorer/kusto/query/datatypes-string-operators

SecExams

Question #804

You have an Azure subscription named Subscription1 that contains an Azure Log Analytics workspace named Workspace1.

You need to view the error events from a table named Event.

Which query should you run in Workspace1?

A) search in (Event) "error" (Correct Answer)

B) Event | where EventType is "error"

C) select * from Event where EventType == "error"

D) Get-Event Event | where {$_.EventType == "error"}

Explanation

Correct Answer: A ?

Community Discussion

Question #805

You have an Azure App Service web app named App1.
You need to collect performance traces for App1.
What should you use?

A) Azure Application Insights Profiler
B) the Activity log (Correct Answer)
C) the Deployment center
D) the Diagnose and solve problems settings

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: A

"With Application Insights Profiler, you can capture and view performance traces for your application in all these dynamic situations, automatically at-scale, without negatively affecting your end users." https://docs.microsoft.com/en-us/azure/azure-monitor/profiler/profiler-overview

A. Azure Application Insights Profiler

A. Azure Application Insights Profiler https://learn.microsoft.com/en-us/azure/azure-monitor/profiler/profiler-overview

In the question mentioned to collect not to view performance traces which you may find it in activity log

In the question mentioned to collect not to view performance traces which you may find it in activity log

Question #806

You have an Azure App Service web app named App1.
You need to collect performance traces for App1.
What should you use?

A) Azure Application Insights Profiler
B) the Activity log (Correct Answer)
C) the Deployment center
D) the Diagnose and solve problems settings

Explanation

Correct Answer: B ?

Community Discussion

A according to copilot ai it is A To collect performance traces for your Azure App Service web app named App1, you should use Application Insights Profiler. Application Insights Profiler allows you to monitor performance by providing detailed traces and snapshots of your application's activity, helping you identify performance bottlenecks and optimize your app's performance. You can enable it through the Azure Portal or your Application Insights configuration.

SecExams

Question #807

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.
Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -
Currently, Contoso uses multiple types of servers for business operations, including the following:
File servers
Domain controllers
Microsoft SQL Server servers

SecExams

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.
You have a public-facing application named App1. App1 is comprised of the following three tiers:
A SQL database
A web front end

A processing middle tier -
▪
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -
Contoso plans to implement the following changes to the infrastructure:
Move all the tiers of App1 to Azure.
Move the existing product blueprint files to Azure Blob storage.
Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -
Contoso must meet the following technical requirements:
Move all the virtual machines for App1 to Azure.
Minimize the number of open ports between the App1 tiers.
Ensure that all the virtual machines for App1 are protected by backups.
Copy the blueprint files to Azure over the Internet.
Ensure that the blueprint files are stored in the archive storage tier.
Ensure that partner access to the blueprint files is secured and temporary.
Prevent user passwords or hashes of passwords from being stored in Azure.
Use unmanaged standard storage for the hard disks of the virtual machines.
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
Minimize administrative effort whenever possible.

User Requirements -
Contoso identifies the following requirements for users:

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
Designate a new user named Admin1 as the service admin for the Azure subscription.
Admin1 must receive email alerts regarding service outages.
Ensure that a new user named User3 can create network objects for the Azure subscription. Question HOTSPOT -
You need to configure the Device settings to meet the technical requirements and the user requirements.
Which two settings should you modify? To answer, select the appropriate settings in the answer area.

SecExams

Hot Area:

Answer Area

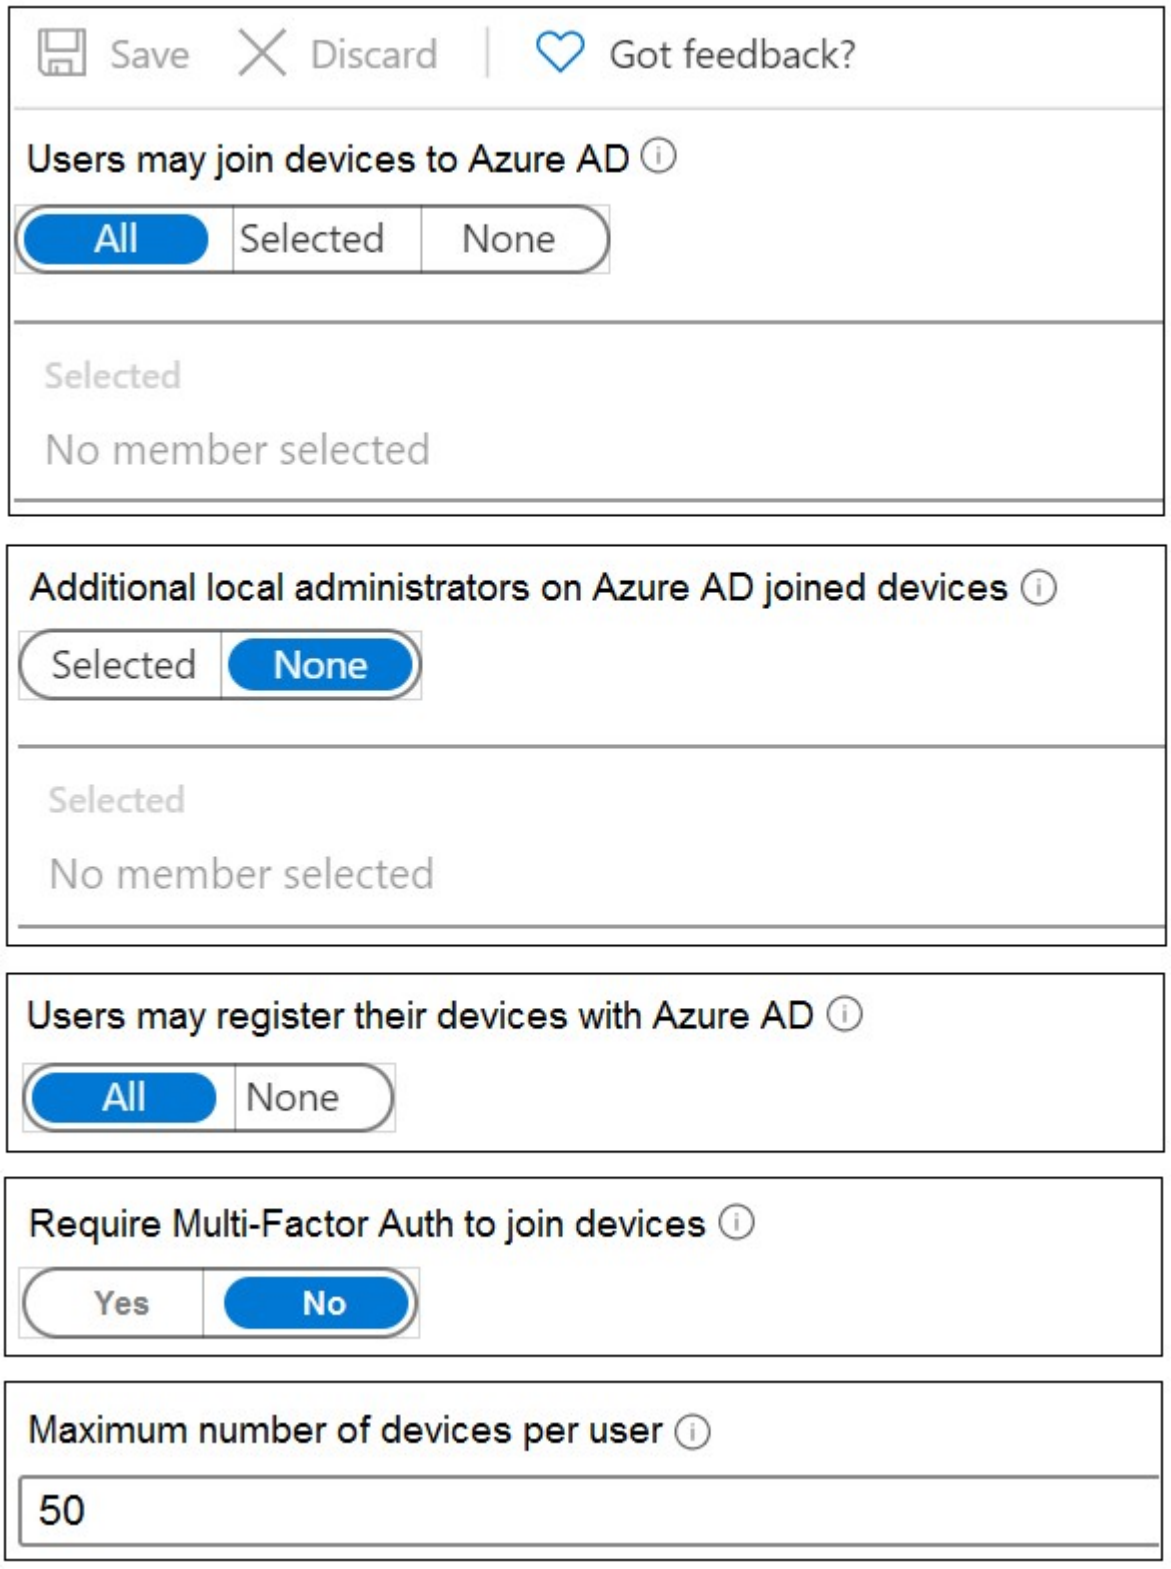

SecExams

Explanation

Correct Answer:

Answer Area

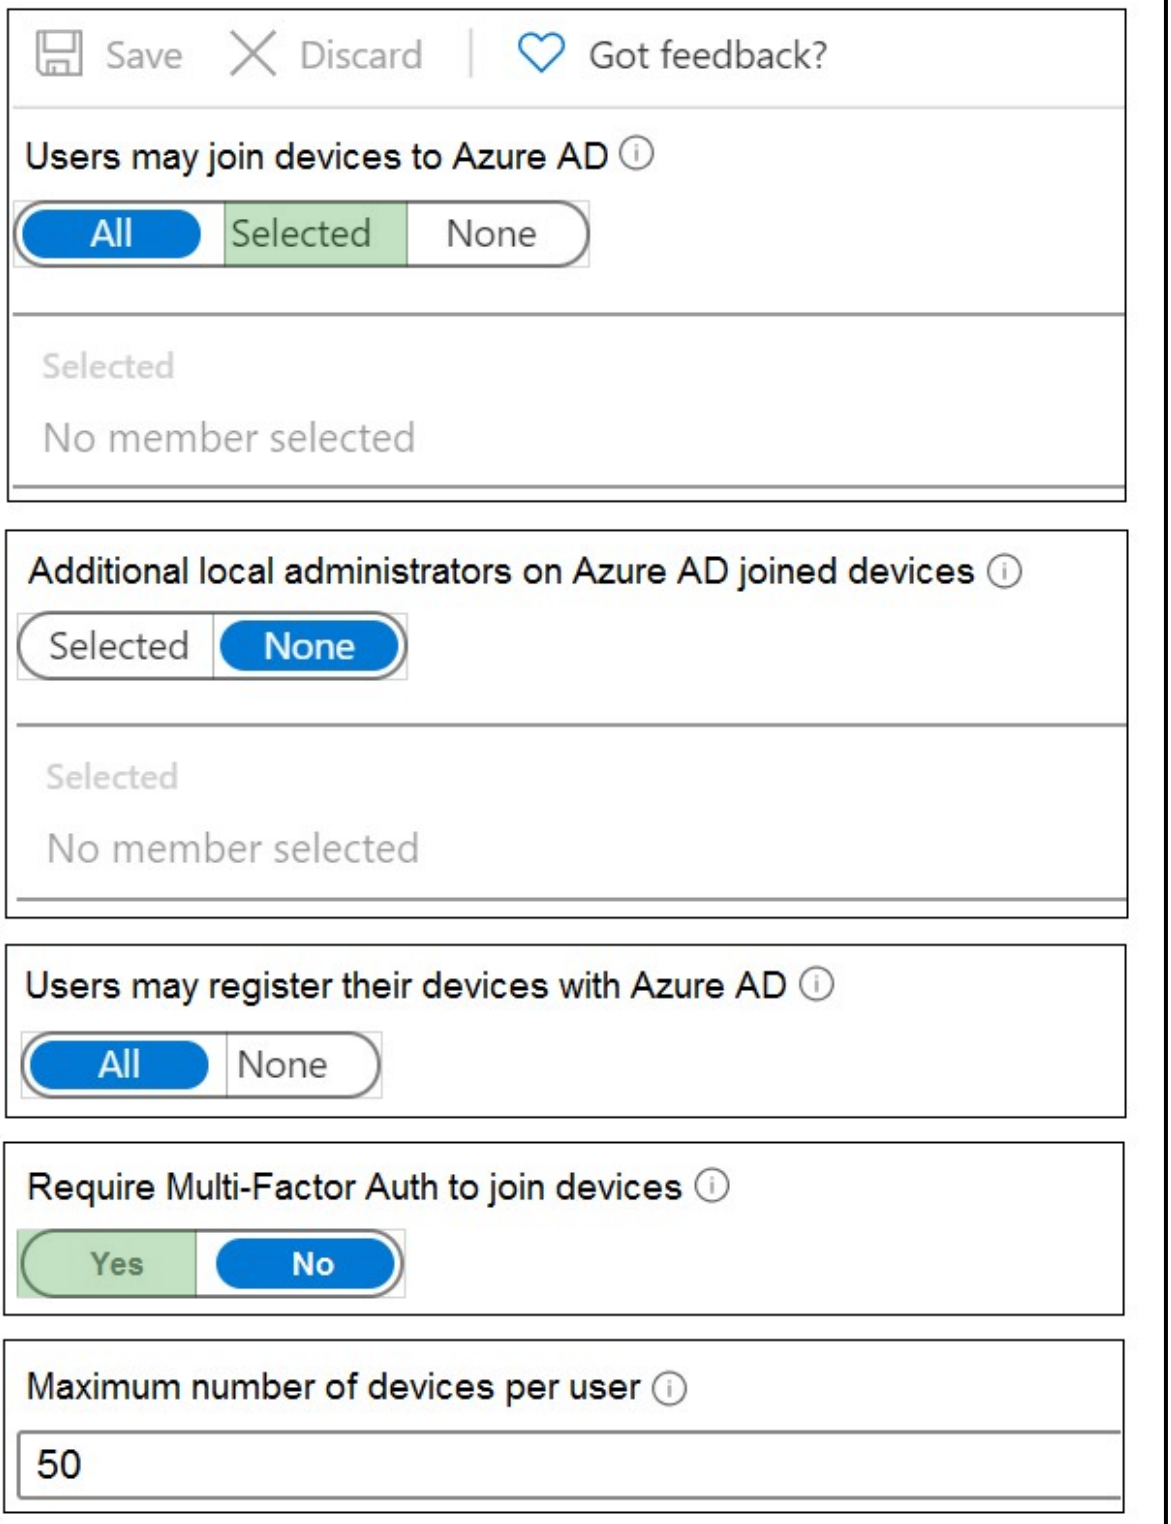

Box 1: Selected -

Only selected users should be able to join devices

SecExams

Box 2: Yes -
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.

Community Discussion

Correct Answer: Box 1: Selected As per User requirements “Ensure that only users who are part of a group named Pilot can join devices to Azure AD.” So, “Selected” must be selected for “User may join devices to Azure AD” Box 2: Yes As per User Requirements “Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity”. So, “Yes” must be selected for “Require Multi-Factor Auth to join devices”.

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. You just need to mark the box that should be changed so I marked the first one "User may join devices to Azure AD" and almost last box "Require Multi-Factor Auth to join devices"

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. You just need to mark the box that should be changed so I marked the first one "User may join devices to Azure AD" and almost last box "Require Multi-Factor Auth to join devices"

Correct Answer

On exam 2023-02-22. Almost all questions from here. Scored +900. You must retake twice all questions and follow the discussions to understand.

SecExams

Question #808

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.
Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -
Currently, Contoso uses multiple types of servers for business operations, including the following:
File servers
Domain controllers
Microsoft SQL Server servers

SecExams

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.
You have a public-facing application named App1. App1 is comprised of the following three tiers:
A SQL database
A web front end

A processing middle tier -
▪
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -
Contoso plans to implement the following changes to the infrastructure:
Move all the tiers of App1 to Azure.
Move the existing product blueprint files to Azure Blob storage.
Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -
Contoso must meet the following technical requirements:
Move all the virtual machines for App1 to Azure.
Minimize the number of open ports between the App1 tiers.
Ensure that all the virtual machines for App1 are protected by backups.
Copy the blueprint files to Azure over the Internet.
Ensure that the blueprint files are stored in the archive storage tier.
Ensure that partner access to the blueprint files is secured and temporary.
Prevent user passwords or hashes of passwords from being stored in Azure.
Use unmanaged standard storage for the hard disks of the virtual machines.
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
Minimize administrative effort whenever possible.

User Requirements -
Contoso identifies the following requirements for users:

SecExams

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
Designate a new user named Admin1 as the service admin for the Azure subscription.
Admin1 must receive email alerts regarding service outages.
Ensure that a new user named User3 can create network objects for the Azure subscription. Question HOTSPOT -
You need to configure the Device settings to meet the technical requirements and the user requirements.
Which two settings should you modify? To answer, select the appropriate settings in the answer area.

SecExams

Hot Area:

Answer Area

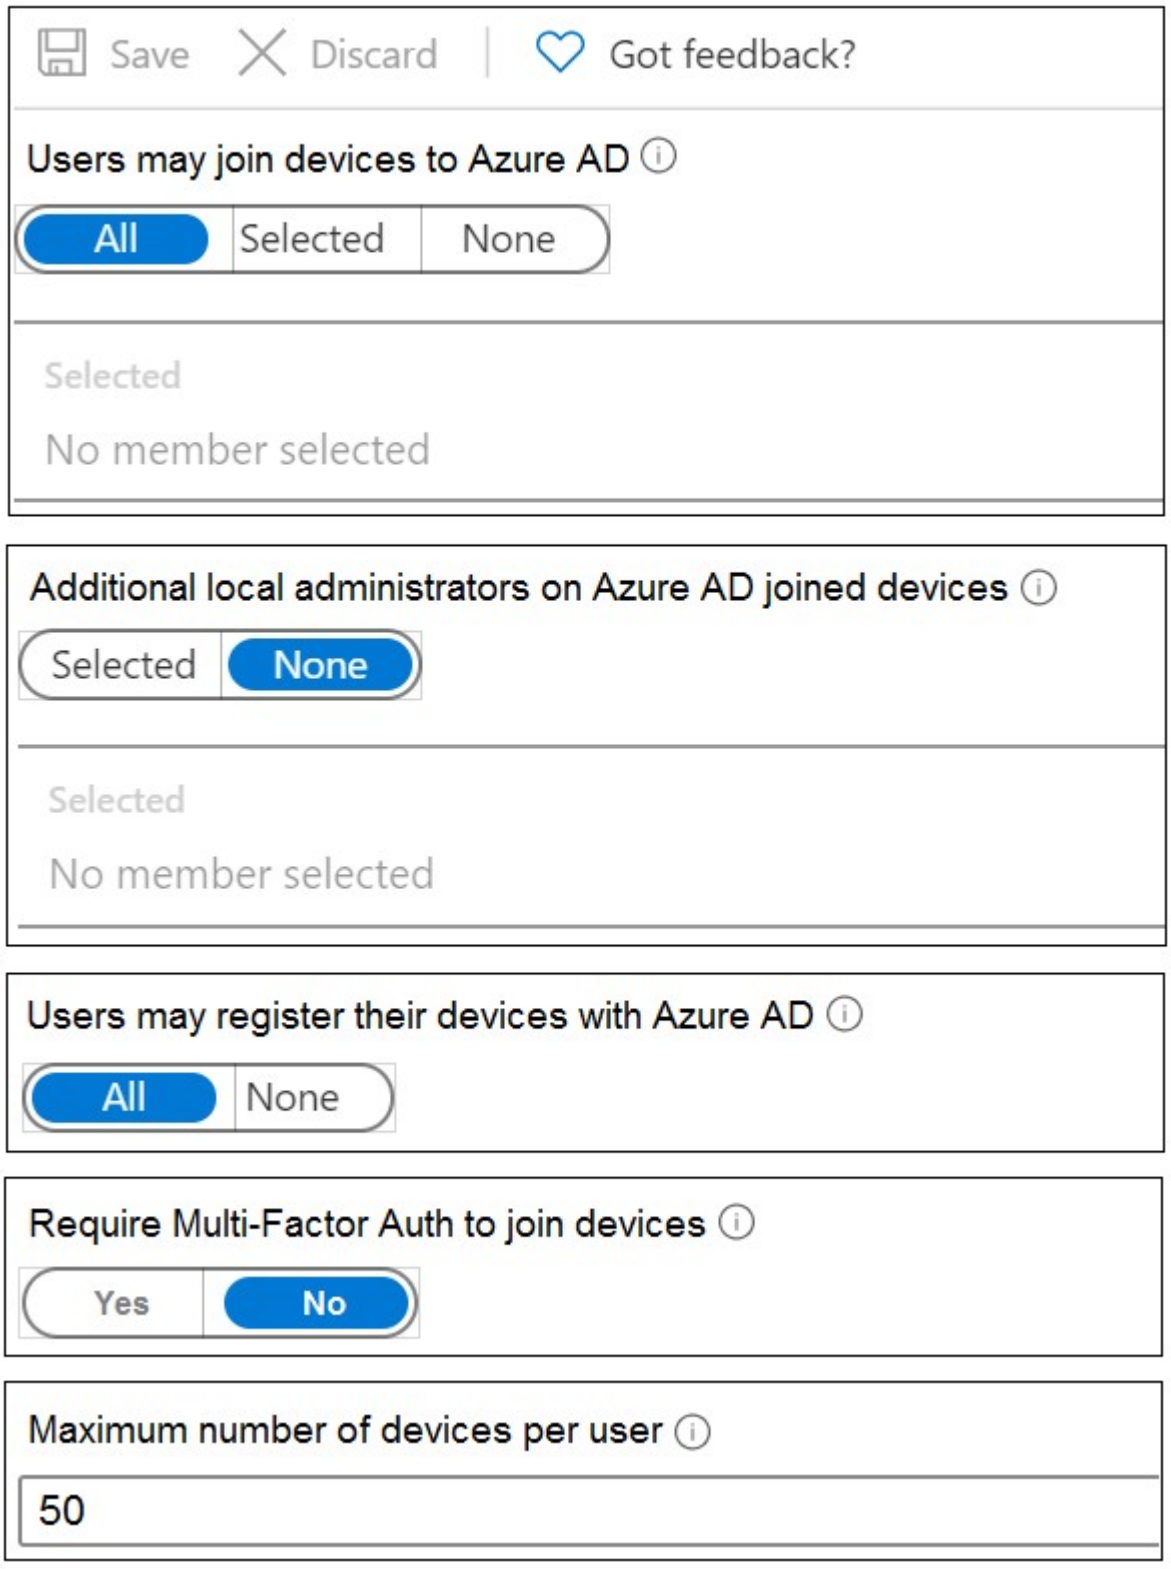

SecExams

Explanation

Correct Answer:

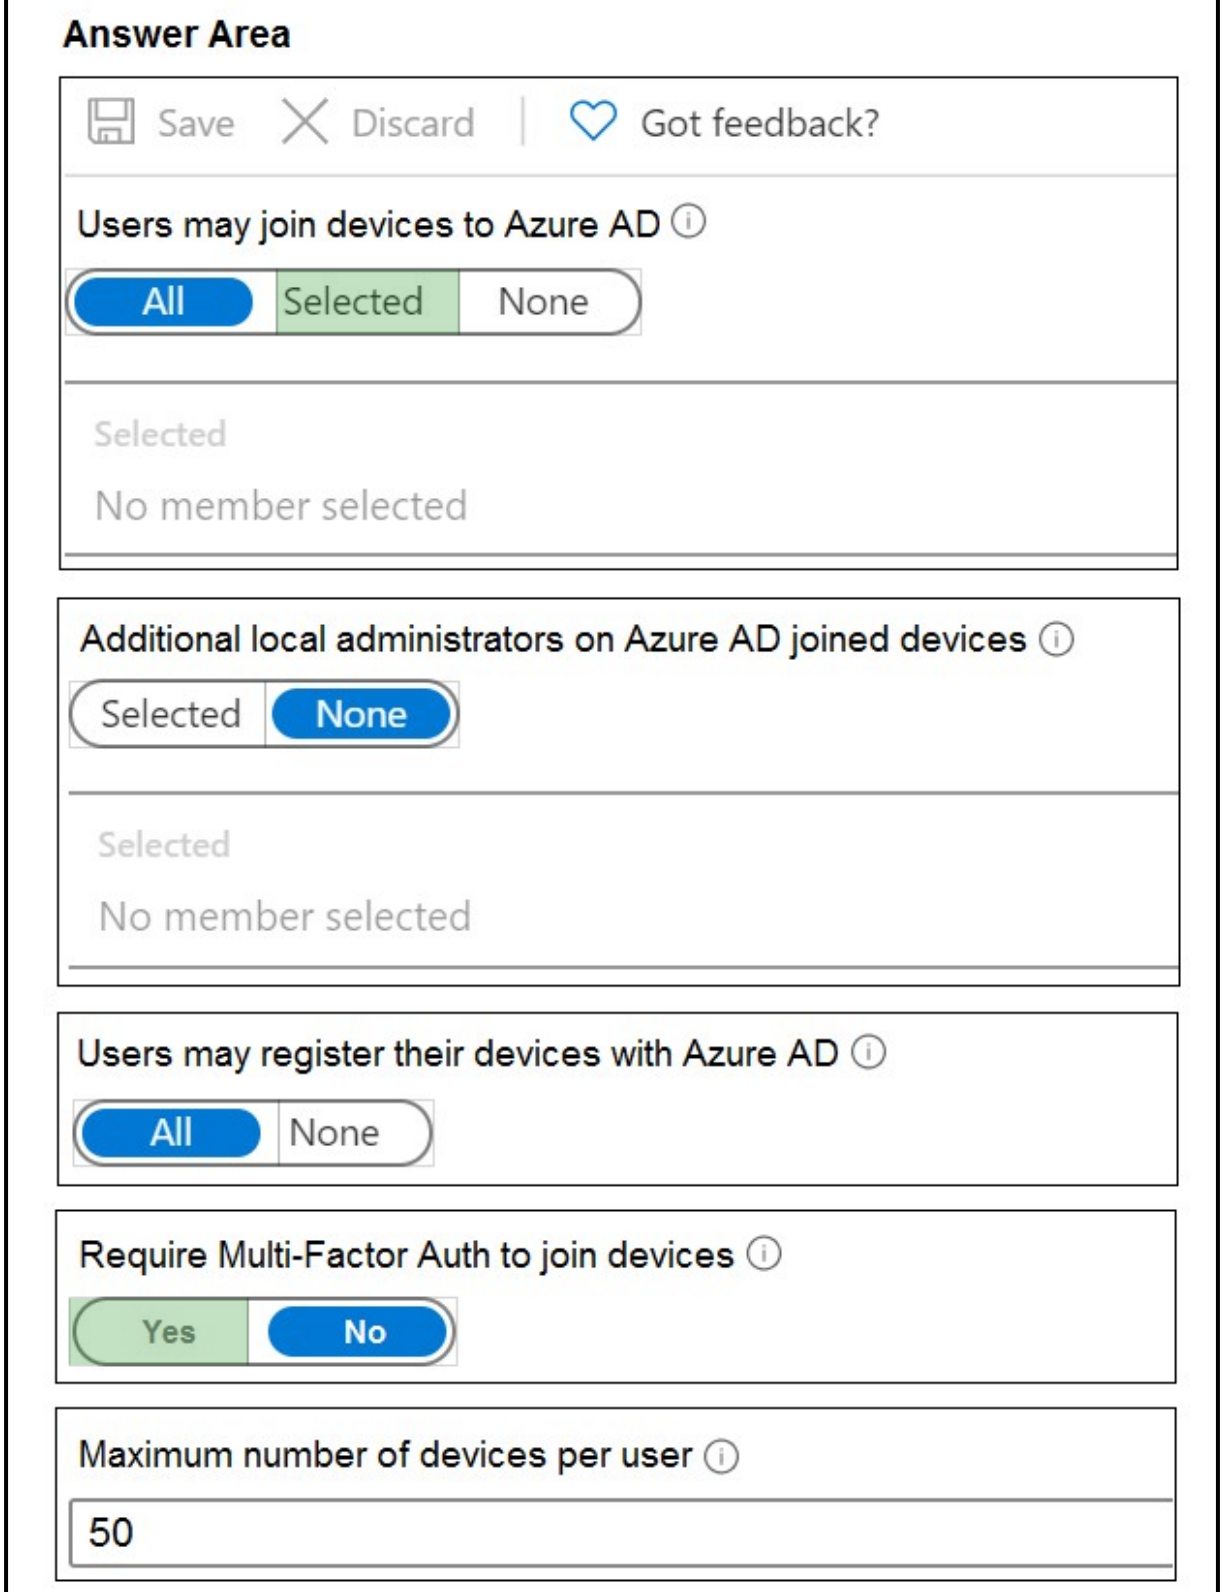

Box 1: Selected -

Only selected users should be able to join devices

SecExams

Box 2: Yes -
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.

Community Discussion

SecExams

Question #809

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.
Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -
Currently, Contoso uses multiple types of servers for business operations, including the following:
File servers
Domain controllers
Microsoft SQL Server servers

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.
You have a public-facing application named App1. App1 is comprised of the following three tiers:
A SQL database
A web front end

A processing middle tier -
▪
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -
Contoso plans to implement the following changes to the infrastructure:
Move all the tiers of App1 to Azure.
Move the existing product blueprint files to Azure Blob storage.
Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -
Contoso must meet the following technical requirements:
Move all the virtual machines for App1 to Azure.
Minimize the number of open ports between the App1 tiers.
Ensure that all the virtual machines for App1 are protected by backups.
Copy the blueprint files to Azure over the Internet.
Ensure that the blueprint files are stored in the archive storage tier.
Ensure that partner access to the blueprint files is secured and temporary.
Prevent user passwords or hashes of passwords from being stored in Azure.
Use unmanaged standard storage for the hard disks of the virtual machines.
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
Minimize administrative effort whenever possible.

User Requirements -
Contoso identifies the following requirements for users:

SecExams

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
Designate a new user named Admin1 as the service admin for the Azure subscription.
Admin1 must receive email alerts regarding service outages.
Ensure that a new user named User3 can create network objects for the Azure subscription. Question You need to meet the user requirement for Admin1.
What should you do?

A) From the Azure Active Directory blade, modify the Groups
B) From the Azure Active Directory blade, modify the Properties
C) From the Subscriptions blade, select the subscription, and then modify the Access control (IAM) settings
D) From the Subscriptions blade, select the subscription, and then modify the Properties (Correct Answer)

Explanation

Correct Answer:
D
Scenario:
✑ Designate a new user named Admin1 as the service admin for the Azure subscription.
✑ Admin1 must receive email alerts regarding service outages.
Follow these steps to change the Service Administrator in the Azure portal.
1. Make sure your scenario is supported by checking the limitations for changing the Service Administrator.
2. Sign in to the Azure portal as the Account Administrator.
3. Open Cost Management + Billing and select a subscription.
4. In the left navigation, click Properties.
5. Click Service Admin.
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/classic-administrators

Community Discussion

Correct Answer: D As per User Requirements “Designate a new user named Admin1 as the service admin for the Azure subscription.” So, In the Azure portal, you can view or change

the Service Administrator or view the Account Administrator on the properties blade of your subscription. Check this: https://i.imgur.com/fKzqPKq.png

Came in 01/09/21 exam. Passed exam with 906 marks. 98% of the questions are from this dump.

Thanks for input. I also passed. many of questions from the dump

Not longer the case now days. Properties is not listed anymore as of 8/17/23. IAM is the place to go.

Not longer the case now days. Properties is not listed anymore as of 8/17/23. IAM is the place to go.

SecExams

Question #810

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.
Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -
Currently, Contoso uses multiple types of servers for business operations, including the following:
File servers
Domain controllers
Microsoft SQL Server servers

SecExams

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.
You have a public-facing application named App1. App1 is comprised of the following three tiers:
A SQL database
A web front end

A processing middle tier -
▪
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -
Contoso plans to implement the following changes to the infrastructure:
Move all the tiers of App1 to Azure.
Move the existing product blueprint files to Azure Blob storage.
Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -
Contoso must meet the following technical requirements:
Move all the virtual machines for App1 to Azure.
Minimize the number of open ports between the App1 tiers.
Ensure that all the virtual machines for App1 are protected by backups.
Copy the blueprint files to Azure over the Internet.
Ensure that the blueprint files are stored in the archive storage tier.
Ensure that partner access to the blueprint files is secured and temporary.
Prevent user passwords or hashes of passwords from being stored in Azure.
Use unmanaged standard storage for the hard disks of the virtual machines.
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
Minimize administrative effort whenever possible.

User Requirements -
Contoso identifies the following requirements for users:

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
Designate a new user named Admin1 as the service admin for the Azure subscription.
Admin1 must receive email alerts regarding service outages.
Ensure that a new user named User3 can create network objects for the Azure subscription. Question You need to meet the user requirement for Admin1.
What should you do?

A) From the Azure Active Directory blade, modify the Groups
B) From the Azure Active Directory blade, modify the Properties
C) From the Subscriptions blade, select the subscription, and then modify the Access control (IAM) settings
D) From the Subscriptions blade, select the subscription, and then modify the Properties (Correct Answer)

Explanation

Correct Answer: D ?
Scenario:
✑ Designate a new user named Admin1 as the service admin for the Azure subscription.
✑ Admin1 must receive email alerts regarding service outages.
Follow these steps to change the Service Administrator in the Azure portal.
1. Make sure your scenario is supported by checking the limitations for changing the Service Administrator.
2. Sign in to the Azure portal as the Account Administrator.
3. Open Cost Management + Billing and select a subscription.
4. In the left navigation, click Properties.
5. Click Service Admin.
Reference:
https://docs.microsoft.com/en-us/azure/role-based-access-control/classic-administrators

Community Discussion

Question #811

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question HOTSPOT -

You need to configure Azure Backup to back up the file shares and virtual machines.

What is the minimum number of Recovery Services vaults and backup policies you should create? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Recovery Services vaults

1
2
3
4
7

Backup policies

1
2
3
4
5
6

Explanation

Correct Answer:

Answer Area

Recovery Services vaults

1
2
3
4
7

Backup policies

1
2
3
4
5
6

Box 1: 3 -
If you have data sources in multiple regions, create a Recovery Services vault for each region.
The File Shares and VMs are located in three Regions: West US, East US, Central US.

Box 2: 6 -
A backup policy is scoped to a vault. For each vault we need one backup policy for File Shares and one backup policy for VM.
Note:
Back up the Azure file shares and virtual machines by using Azure Backup

SecExams

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-create-rs-vault https://docs.microsoft.com/en-us/azure/backup/guidance-best-practices

Community Discussion

Came this question today and I choose 3 and 6 and my score was 900

To back up the file shares and virtual machines. one vault per region. 3 vaults for 3 regions File shares: 3 region. VMs: 3 region. so... vault = 3 backup policies = 3FS + 3VM = 6

Nice, but unfortunately that doesn't mean you got this question correct

Nice, but unfortunately that doesn't mean you got this question correct

Changing my answer for Box2 from 3 to 6. Tested this in lab and confirmed when creating policy have to define "Datasource type" which will be VM or file not both.

Question #812

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

SecExams

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question HOTSPOT -

You need to configure Azure Backup to back up the file shares and virtual machines.

What is the minimum number of Recovery Services vaults and backup policies you should create? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Recovery Services vaults

1
2
3
4
7

Backup policies

1
2
3
4
5
6

SecExams

Explanation

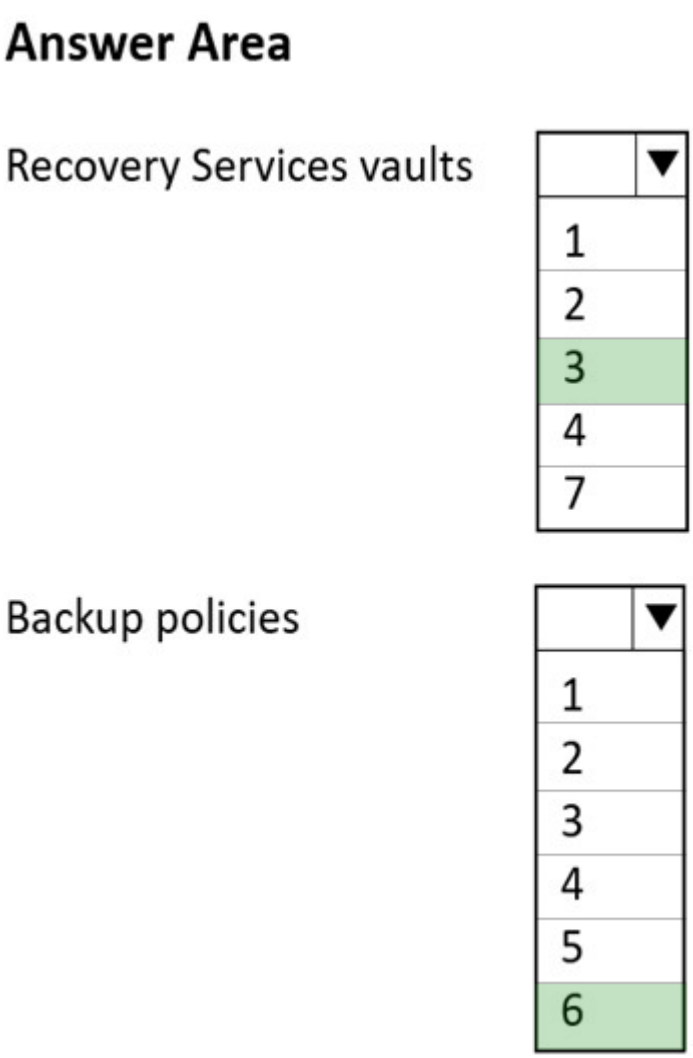

Correct Answer:

Box 1: 3 -

If you have data sources in multiple regions, create a Recovery Services vault for each region.

The File Shares and VMs are located in three Regions: West US, East US, Central US.

Box 2: 6 -

A backup policy is scoped to a vault. For each vault we need one backup policy for File Shares and one backup policy for VM.

Note:

Back up the Azure file shares and virtual machines by using Azure Backup

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

Reference:
https://docs.microsoft.com/en-us/azure/backup/backup-create-rs-vault https://docs.microsoft.com/en-us/azure/backup/guidance-best-practices

SecExams

Community Discussion

Question #813

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

SecExams

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question DRAG DROP -

You need to configure the alerts for VM1 and VM2 to meet the technical requirements.

Which three actions should you perform in sequence? To answer, move all actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

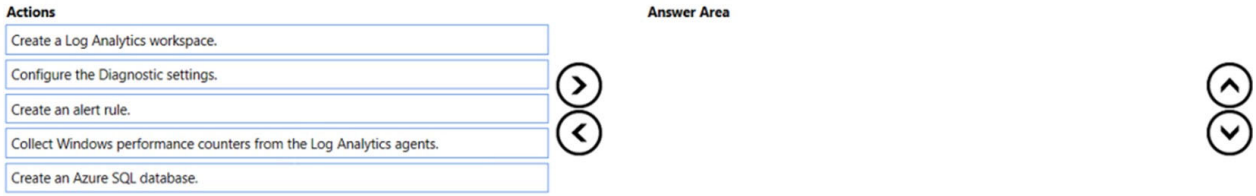

Explanation

Correct Answer:

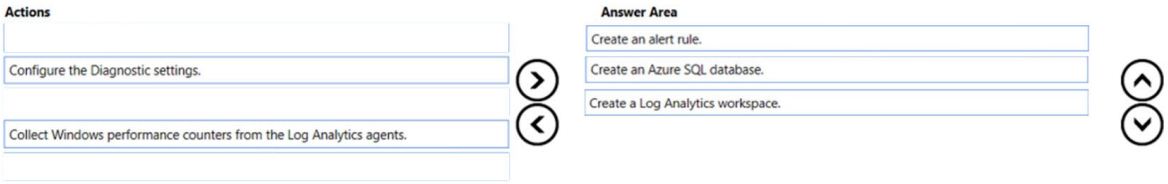

Community Discussion

Not sure but I think the answer should be : 1. Create a log Analytics workspace. 2. Collect windows performance counters from the Log Analytics agents. 3. Create an alert rule.

For me is Create alog Analytics->Collect Windows performance..->create an alert rule

Weird they give this as only correct option to this answer: the Log Analytics agent will be retired in 2024 and they're actively pushing Monitoring agent on us now. Shows that the exams - even newish questions - lag behind reality :-)

Weird they give this as only correct option to this answer: the Log Analytics agent will be retired in 2024 and they're actively pushing Monitoring agent on us now. Shows that the exams - even newish questions - lag behind reality :-)

This was in Exam 23-08-23

Question #814

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

SecExams

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question DRAG DROP -

SecExams

You need to configure the alerts for VM1 and VM2 to meet the technical requirements.

Which three actions should you perform in sequence? To answer, move all actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

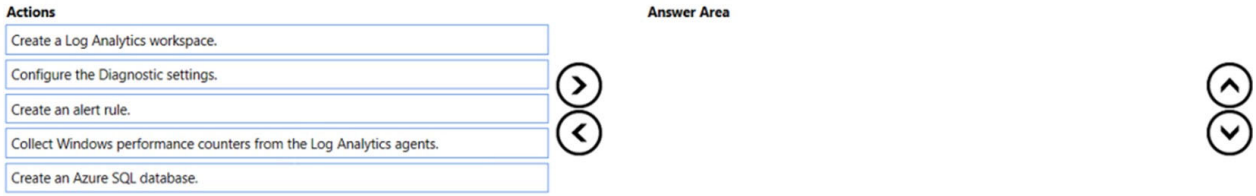

Explanation

Correct Answer:

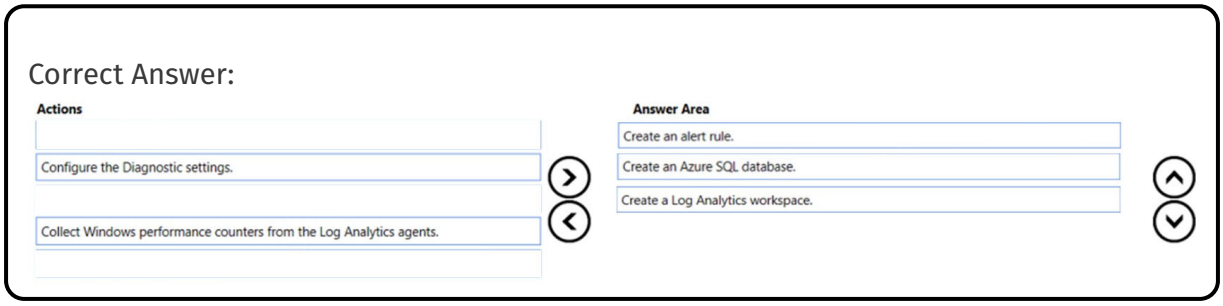

Community Discussion

Question #815

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question HOTSPOT -

You need to ensure that User1 can create initiative definitions, and User4 can assign initiatives to RG2. The solution must meet the technical requirements.
Which role should you assign to each user? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

User1:

- Contributor for RG1
- Contributor for Sub1
- Security Admin for RG1
- Resource Policy Contributor for Sub1

User4:

- Contributor for RG2
- Contributor for Sub1
- Security Admin for Sub1
- Resource Policy Contributor for RG2

Explanation

Correct Answer:

SecExams

Answer Area

User1:

- Contributor for RG1
- Contributor for Sub1
- Security Admin for RG1
- **Resource Policy Contributor for Sub1**

User4:

- Contributor for RG2
- Contributor for Sub1
- Security Admin for Sub1
- **Resource Policy Contributor for RG2**

Reference:
https://docs.microsoft.com/en-us/azure/governance/policy/overview

Community Discussion

I passed this exam today 24 Mars 2022 with score 900. This question was part of this exam. 90% of question s from the Dumps. Thank to y'all guys and especially @MLANTONIS great Guy !!!!!

passed 902. in exam 29.12.21 - resource policy contributor for sub1, resource contributor for rg2

Answer valid! This question was on the exam 22/02/2023. Scored 920.

Answer valid! This question was on the exam 22/02/2023. Scored 920.

MLANTONIS my boy, prise you

Question #816

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

SecExams

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question HOTSPOT -

SecExams

You need to ensure that User1 can create initiative definitions, and User4 can assign initiatives to RG2. The solution must meet the technical requirements.
Which role should you assign to each user? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

User1:

- Contributor for RG1
- Contributor for Sub1
- Security Admin for RG1
- Resource Policy Contributor for Sub1

User4:

- Contributor for RG2
- Contributor for Sub1
- Security Admin for Sub1
- Resource Policy Contributor for RG2

SecExams

Explanation

Correct Answer:

Answer Area

User1:

- Contributor for RG1
- Contributor for Sub1
- Security Admin for RG1
- **Resource Policy Contributor for Sub1**

User4:

- Contributor for RG2
- Contributor for Sub1
- Security Admin for Sub1
- **Resource Policy Contributor for RG2**

Reference:
https://docs.microsoft.com/en-us/azure/governance/policy/overview

Community Discussion

SecExams

Question #817

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

SecExams

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question You need to ensure

SecExams

that you can grant Group4 Azure RBAC read only permissions to all the Azure file shares.
What should you do?

A) On storage2, enable identity-based access for the file shares. (Correct Answer)
B) Recreate storage2 and set Hierarchical namespace to Enabled.
C) On storage1 and storage4, change the Account kind type to StorageV2 (general purpose v2).
D) Create a shared access signature (SAS) for storage1, storage2, and storage4.

Explanation

Correct Answer:
A
Azure Files supports identity-based authentication over Server Message Block (SMB) through on-premises Active Directory Domain Services (AD DS) and Azure Active Directory Domain Services (Azure AD DS).
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-files-active-directory-overview

Community Discussion

Selected Answer: A

I think is A, because storage1 and storage2 have enabled Azure Active Directory Domain services. I think that you have to enable in storage 2 identity-based access for the file shares too. https://docs.microsoft.com/en-us/azure/storage/files/storage-files-active-directory-overview#enable-identity-based-authentication

A. On storage2, enable identity-based access for the file shares. To grant Group4 Azure RBAC read-only permissions to all the Azure file shares, you should enable identity-based access for the file shares on storage2. Identity-based access enables you to manage access to file shares based on Azure AD identities, including users, groups, and service principals. By enabling identity-based access, you can grant access to specific users or groups and manage access control centrally from Azure AD. Recreating storage2 with Hierarchical namespace enabled (Option B) is not relevant to granting RBAC permissions to Azure file shares. Changing the account kind type to StorageV2 (general purpose v2) (Option C) is not relevant to granting RBAC permissions to Azure file shares. Creating a shared access signature (SAS) (Option D) provides temporary access to resources in storage accounts, but it does not allow you to grant RBAC permissions to

Azure file shares. Therefore, the correct answer is A. On storage2, enable identity-based access for the file shares.

the closest is A. the question is wrong. Azure RBAC is for Azure resource, not for File Share. Identity-based access is Azure AD which needs Azure AD role.

Agree on this.

Agree on this.

SecExams

Question #818

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

SecExams

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question You need to ensure

that you can grant Group4 Azure RBAC read only permissions to all the Azure file shares.
What should you do?

A) On storage2, enable identity-based access for the file shares. (Correct Answer)
B) Recreate storage2 and set Hierarchical namespace to Enabled.
C) On storage1 and storage4, change the Account kind type to StorageV2 (general purpose v2).
D) Create a shared access signature (SAS) for storage1, storage2, and storage4.

Explanation

Correct Answer: A ?
Azure Files supports identity-based authentication over Server Message Block (SMB) through on-premises Active Directory Domain Services (AD DS) and Azure Active Directory Domain Services (Azure AD DS).
Reference:
https://docs.microsoft.com/en-us/azure/storage/files/storage-files-active-directory-overview

Community Discussion

SecExams

Question #819

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.
Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -
Currently, Contoso uses multiple types of servers for business operations, including the following:
File servers
Domain controllers
Microsoft SQL Server servers

SecExams

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.
You have a public-facing application named App1. App1 is comprised of the following three tiers:
A SQL database
A web front end

A processing middle tier -
▪
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -
Contoso plans to implement the following changes to the infrastructure:
Move all the tiers of App1 to Azure.
Move the existing product blueprint files to Azure Blob storage.
Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -
Contoso must meet the following technical requirements:
Move all the virtual machines for App1 to Azure.
Minimize the number of open ports between the App1 tiers.
Ensure that all the virtual machines for App1 are protected by backups.
Copy the blueprint files to Azure over the Internet.
Ensure that the blueprint files are stored in the archive storage tier.
Ensure that partner access to the blueprint files is secured and temporary.
Prevent user passwords or hashes of passwords from being stored in Azure.
Use unmanaged standard storage for the hard disks of the virtual machines.
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
Minimize administrative effort whenever possible.

User Requirements -
Contoso identifies the following requirements for users:

SecExams

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
Designate a new user named Admin1 as the service admin for the Azure subscription.
Admin1 must receive email alerts regarding service outages.
Ensure that a new user named User3 can create network objects for the Azure subscription. Question You need to implement a backup solution for App1 after the application is moved.
What should you create first?

A) a recovery plan
B) an Azure Backup Server
C) a backup policy
D) a Recovery Services vault (Correct Answer)

Explanation

Correct Answer:
D
A Recovery Services vault is a logical container that stores the backup data for each protected resource, such as Azure VMs. When the backup job for a protected resource runs, it creates a recovery point inside the Recovery Services vault.
Scenario:
There are three application tiers, each with five virtual machines.
Move all the virtual machines for App1 to Azure.
Ensure that all the virtual machines for App1 are protected by backups.
Reference:
https://docs.microsoft.com/en-us/azure/backup/quick-backup-vm-portal

Community Discussion

Correct Answer: D As per requirements: - Move all the tiers of App1 to Azure. - There are three application tiers, each with five virtual machines. - Ensure that all the virtual machines for App1 are protected by backups. Before starting the backup process, you must create a Recovery Services Vault as an initial step, as a place for the backups, or restore points, to be stored. Later steps include downloading recovery services agent, installing and registering the agent. A Recovery Services vault is a logical container that stores the backup data for each protected resource, such as Azure VMs. When the backup job for a protected resource runs, it creates a recovery point inside the Recovery Services

vault. Reference: https://docs.microsoft.com/en-us/azure/backup/quick-backup-vm-portal https://docs.microsoft.com/en-us/azure/app-service/manage-backup https://docs.microsoft.com/en-us/azure/backup/tutorial-backup-windows-server-to-azure

correct

There are too many unneeded informations that makes my eye tired of reading the same content..!

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. Answered D

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. Answered D

SecExams

Question #820

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.
Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -
Currently, Contoso uses multiple types of servers for business operations, including the following:
File servers
Domain controllers
Microsoft SQL Server servers

SecExams

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.
You have a public-facing application named App1. App1 is comprised of the following three tiers:
A SQL database
A web front end

A processing middle tier -
▪
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -
Contoso plans to implement the following changes to the infrastructure:
Move all the tiers of App1 to Azure.
Move the existing product blueprint files to Azure Blob storage.
Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -
Contoso must meet the following technical requirements:
Move all the virtual machines for App1 to Azure.
Minimize the number of open ports between the App1 tiers.
Ensure that all the virtual machines for App1 are protected by backups.
Copy the blueprint files to Azure over the Internet.
Ensure that the blueprint files are stored in the archive storage tier.
Ensure that partner access to the blueprint files is secured and temporary.
Prevent user passwords or hashes of passwords from being stored in Azure.
Use unmanaged standard storage for the hard disks of the virtual machines.
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
Minimize administrative effort whenever possible.

User Requirements -
Contoso identifies the following requirements for users:

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
Designate a new user named Admin1 as the service admin for the Azure subscription.
Admin1 must receive email alerts regarding service outages.
Ensure that a new user named User3 can create network objects for the Azure subscription. Question You need to implement a backup solution for App1 after the application is moved.
What should you create first?

A) a recovery plan
B) an Azure Backup Server
C) a backup policy
D) a Recovery Services vault (Correct Answer)

Explanation

Correct Answer: D ?
A Recovery Services vault is a logical container that stores the backup data for each protected resource, such as Azure VMs. When the backup job for a protected resource runs, it creates a recovery point inside the Recovery Services vault.
Scenario:
There are three application tiers, each with five virtual machines.
Move all the virtual machines for App1 to Azure.
Ensure that all the virtual machines for App1 are protected by backups.
Reference:
https://docs.microsoft.com/en-us/azure/backup/quick-backup-vm-portal

Community Discussion

Question #821

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.
Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -
Currently, Contoso uses multiple types of servers for business operations, including the following:
File servers
Domain controllers
Microsoft SQL Server servers

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.
You have a public-facing application named App1. App1 is comprised of the following three tiers:
A SQL database
A web front end

A processing middle tier -
▪
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -
Contoso plans to implement the following changes to the infrastructure:
Move all the tiers of App1 to Azure.
Move the existing product blueprint files to Azure Blob storage.
Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -
Contoso must meet the following technical requirements:
Move all the virtual machines for App1 to Azure.
Minimize the number of open ports between the App1 tiers.
Ensure that all the virtual machines for App1 are protected by backups.
Copy the blueprint files to Azure over the Internet.
Ensure that the blueprint files are stored in the archive storage tier.
Ensure that partner access to the blueprint files is secured and temporary.
Prevent user passwords or hashes of passwords from being stored in Azure.
Use unmanaged standard storage for the hard disks of the virtual machines.
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
Minimize administrative effort whenever possible.

User Requirements -
Contoso identifies the following requirements for users:

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
Designate a new user named Admin1 as the service admin for the Azure subscription.
Admin1 must receive email alerts regarding service outages.
Ensure that a new user named User3 can create network objects for the Azure subscription. Question You need to move the blueprint files to Azure.
What should you do?

A) Generate an access key. Map a drive, and then copy the files by using File Explorer.
B) Use Azure Storage Explorer to copy the files. (Correct Answer)
C) Use the Azure Import/Export service.
D) Generate a shared access signature (SAS). Map a drive, and then copy the files by using File Explorer.

Explanation

Correct Answer: B ?
Azure Storage Explorer is a free tool from Microsoft that allows you to work with Azure Storage data on Windows, macOS, and Linux. You can use it to upload and download data from Azure blob storage.
Scenario:
Planned Changes include: move the existing product blueprint files to Azure Blob storage.
Technical Requirements include: Copy the blueprint files to Azure over the Internet.
Reference:
https://docs.microsoft.com/en-us/azure/machine-learning/team-data-science-process/move-data-to-azure-blob-using-azure-storage-explorer

Community Discussion

Question #822

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.
Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -
Currently, Contoso uses multiple types of servers for business operations, including the following:
File servers
Domain controllers
Microsoft SQL Server servers

SecExams

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.
You have a public-facing application named App1. App1 is comprised of the following three tiers:
A SQL database
A web front end

A processing middle tier -
▪
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -
Contoso plans to implement the following changes to the infrastructure:
Move all the tiers of App1 to Azure.
Move the existing product blueprint files to Azure Blob storage.
Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -
Contoso must meet the following technical requirements:
Move all the virtual machines for App1 to Azure.
Minimize the number of open ports between the App1 tiers.
Ensure that all the virtual machines for App1 are protected by backups.
Copy the blueprint files to Azure over the Internet.
Ensure that the blueprint files are stored in the archive storage tier.
Ensure that partner access to the blueprint files is secured and temporary.
Prevent user passwords or hashes of passwords from being stored in Azure.
Use unmanaged standard storage for the hard disks of the virtual machines.
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
Minimize administrative effort whenever possible.

User Requirements -
Contoso identifies the following requirements for users:

SecExams

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
Designate a new user named Admin1 as the service admin for the Azure subscription.
Admin1 must receive email alerts regarding service outages.
Ensure that a new user named User3 can create network objects for the Azure subscription. Question You need to move the blueprint files to Azure.
What should you do?

A) Generate an access key. Map a drive, and then copy the files by using File Explorer.
B) Use Azure Storage Explorer to copy the files. (Correct Answer)
C) Use the Azure Import/Export service.
D) Generate a shared access signature (SAS). Map a drive, and then copy the files by using File Explorer.

Explanation

Correct Answer:
B
Azure Storage Explorer is a free tool from Microsoft that allows you to work with Azure Storage data on Windows, macOS, and Linux. You can use it to upload and download data from Azure blob storage.
Scenario:
Planned Changes include: move the existing product blueprint files to Azure Blob storage.
Technical Requirements include: Copy the blueprint files to Azure over the Internet.
Reference:
https://docs.microsoft.com/en-us/azure/machine-learning/team-data-science-process/move-data-to-azure-blob-using-azure-storage-explorer

Community Discussion

Correct Answer: B As per requirements: - Move the existing product blueprint files to Azure Blob storage. - Copy the blueprint files to Azure over the Internet. - Ensure that the blueprint files are stored in the archive storage tier. - Ensure that partner access to the blueprint files is secured and temporary. - Minimize administrative effort whenever possible. Azure Storage Explorer is a free tool from Microsoft that allows you to work with Azure Storage data on Windows, macOS, and Linux. You can use it to upload and download data from Azure blob storage. It's the best solution, because copies data

through Internet and minimizes administrative effort. C: Azure Import/Export service is not using Internet, but ships data drives using a shipping carrier such as FedEx, UPS, or DHL. D: You can't use SAS with a mapped drive.

Answer is correct. "B" using Azure Storage Explorer. It matches all the requirements: - Move the existing product blueprint files to Azure Blob storage. - Copy the blueprint files to Azure over the Internet.

And you can add that it matchs the requirement "Minimize administrative effort whenever possible." Other solutions need more admin actions.

And you can add that it matchs the requirement "Minimize administrative effort whenever possible." Other solutions need more admin actions.

I was for D, thinking than the best approach was to use a SAS. It is possible to use a SAS on "Azure Storage Explorer" but option D also mentions map a drive, and that's different, it's using Windows Explorer and it doesn't support SAS.

SecExams

Question #823

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.
Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -
Currently, Contoso uses multiple types of servers for business operations, including the following:
File servers
Domain controllers
Microsoft SQL Server servers

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.
You have a public-facing application named App1. App1 is comprised of the following three tiers:
A SQL database
A web front end

A processing middle tier -
▪
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -
Contoso plans to implement the following changes to the infrastructure:
Move all the tiers of App1 to Azure.
Move the existing product blueprint files to Azure Blob storage.
Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -
Contoso must meet the following technical requirements:
Move all the virtual machines for App1 to Azure.
Minimize the number of open ports between the App1 tiers.
Ensure that all the virtual machines for App1 are protected by backups.
Copy the blueprint files to Azure over the Internet.
Ensure that the blueprint files are stored in the archive storage tier.
Ensure that partner access to the blueprint files is secured and temporary.
Prevent user passwords or hashes of passwords from being stored in Azure.
Use unmanaged standard storage for the hard disks of the virtual machines.
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
Minimize administrative effort whenever possible.

User Requirements -
Contoso identifies the following requirements for users:

SecExams

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
Designate a new user named Admin1 as the service admin for the Azure subscription.
Admin1 must receive email alerts regarding service outages.
Ensure that a new user named User3 can create network objects for the Azure subscription. Question HOTSPOT -
You need to identify the storage requirements for Contoso.
For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Statements	Yes	No
Contoso requires a storage account that supports Blob storage.	○	○
Contoso requires a storage account that supports Azure Table storage.	○	○
Contoso requires a storage account that supports Azure File Storage.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
Contoso requires a storage account that supports Blob storage.	○	○
Contoso requires a storage account that supports Azure Table storage.	○	○
Contoso requires a storage account that supports Azure File Storage.	○	○

Box 1: Yes -
Contoso is moving the existing product blueprint files to Azure Blob storage.
Use unmanaged standard storage for the hard disks of the virtual machines. We use Page

Blobs for these.

Box 2: No -
Box 3: No

Community Discussion

SecExams

Question #824

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.
Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -
Currently, Contoso uses multiple types of servers for business operations, including the following:
File servers
Domain controllers
Microsoft SQL Server servers

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.
You have a public-facing application named App1. App1 is comprised of the following three tiers:
A SQL database
A web front end

A processing middle tier -
▪
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -
Contoso plans to implement the following changes to the infrastructure:
Move all the tiers of App1 to Azure.
Move the existing product blueprint files to Azure Blob storage.
Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -
Contoso must meet the following technical requirements:
Move all the virtual machines for App1 to Azure.
Minimize the number of open ports between the App1 tiers.
Ensure that all the virtual machines for App1 are protected by backups.
Copy the blueprint files to Azure over the Internet.
Ensure that the blueprint files are stored in the archive storage tier.
Ensure that partner access to the blueprint files is secured and temporary.
Prevent user passwords or hashes of passwords from being stored in Azure.
Use unmanaged standard storage for the hard disks of the virtual machines.
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
Minimize administrative effort whenever possible.

User Requirements -
Contoso identifies the following requirements for users:

SecExams

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
Designate a new user named Admin1 as the service admin for the Azure subscription.
Admin1 must receive email alerts regarding service outages.
Ensure that a new user named User3 can create network objects for the Azure subscription. Question HOTSPOT -
You need to identify the storage requirements for Contoso.
For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Statements	Yes	No
Contoso requires a storage account that supports Blob storage.	○	○
Contoso requires a storage account that supports Azure Table storage.	○	○
Contoso requires a storage account that supports Azure File Storage.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
Contoso requires a storage account that supports Blob storage.	○	○
Contoso requires a storage account that supports Azure Table storage.	○	○
Contoso requires a storage account that supports Azure File Storage.	○	○

Box 1: Yes -
Contoso is moving the existing product blueprint files to Azure Blob storage.
Use unmanaged standard storage for the hard disks of the virtual machines. We use Page

Blobs for these.

Box 2: No -
Box 3: No

Community Discussion

As per requirements: - Move the existing product blueprint files to Azure Blob storage. - Copy the blueprint files to Azure over the Internet. - Ensure that the blueprint files are stored in the archive storage tier. - Use unmanaged standard storage for the hard disks of the virtual machines. - App1 is comprised of SQL database. Box 1: Yes Contoso is moving the existing product blueprint files to Azure Blob storage and requires using unmanaged standard storage for the hard disks of the virtual machines. We use Page Blobs for these. As mentioned, move the files to blob storage , in addition the unmanaged storage is used for VM's disks. Box 2: No Azure Tables are not needed as they act as structured NoSQL, which is not required with SQL on VM. Box 3: No Azure Files is not required here. As it is basically used for managed file shares accessed by NFS or SMB protocols. In addition, you can't archive them.

Answer is correct: - Yes: As mentioned, move the files to blob storage , in addition the unmanaged storage is used for VM's disks. - NO: Azure files is not required here. As it is basically used for managed file shares accessed by NFS or SMB protocols. In addition, you can't archive them https://feedback.azure.com/forums/217298-storage/suggestions/35343037-add-cold-and-archive-tiers-to-azure-files - NO: Azure tables are not needed as they act as structured NoSQL which is not required with SQL on VM.

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. Answered: Y N N

Was on exam 19 Aug 2022. Scored 870. Around 85% questions were also on ET. Answered: Y N N

Was on exam 10/23/22

Question #825

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

SecExams

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question HOTSPOT -

You need to create container1 and share1.

Which storage accounts should you use for each resource? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

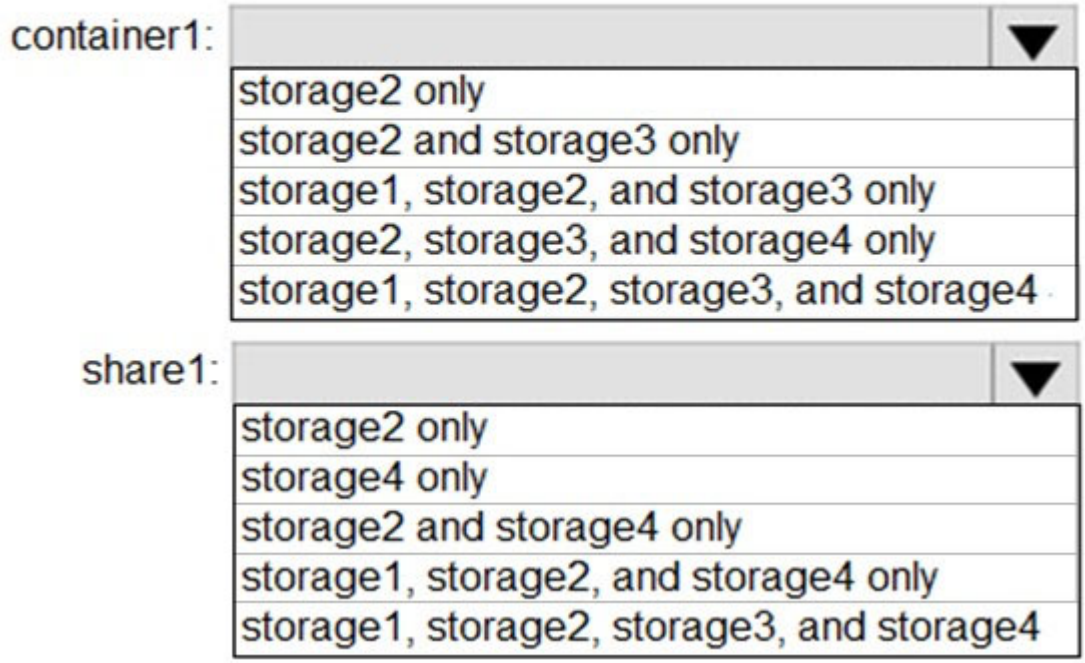

Explanation

Correct Answer:

Answer Area

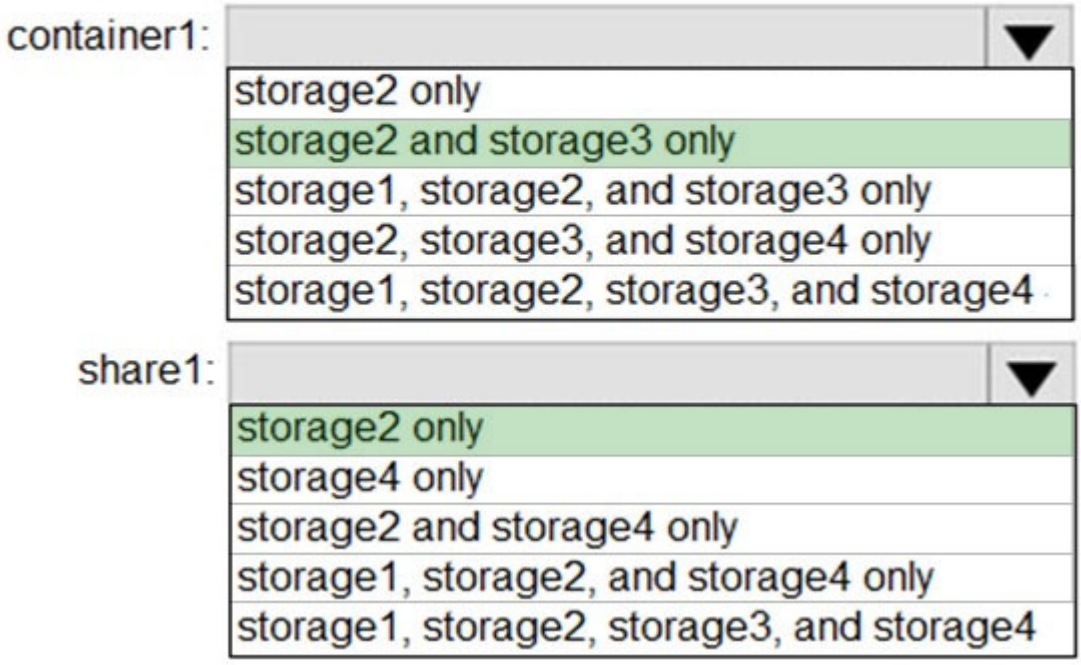

Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers
https://docs.microsoft.com/en-us/azure/storage/common/storage-account-overview

SecExams

Community Discussion

Question #826

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question HOTSPOT -

You need to create container1 and share1.

Which storage accounts should you use for each resource? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

container1:

- storage2 only
- storage2 and storage3 only
- storage1, storage2, and storage3 only
- storage2, storage3, and storage4 only
- storage1, storage2, storage3, and storage4

share1:

- storage2 only
- storage4 only
- storage2 and storage4 only
- storage1, storage2, and storage4 only
- storage1, storage2, storage3, and storage4

SecExams

Explanation

Correct Answer:

Answer Area

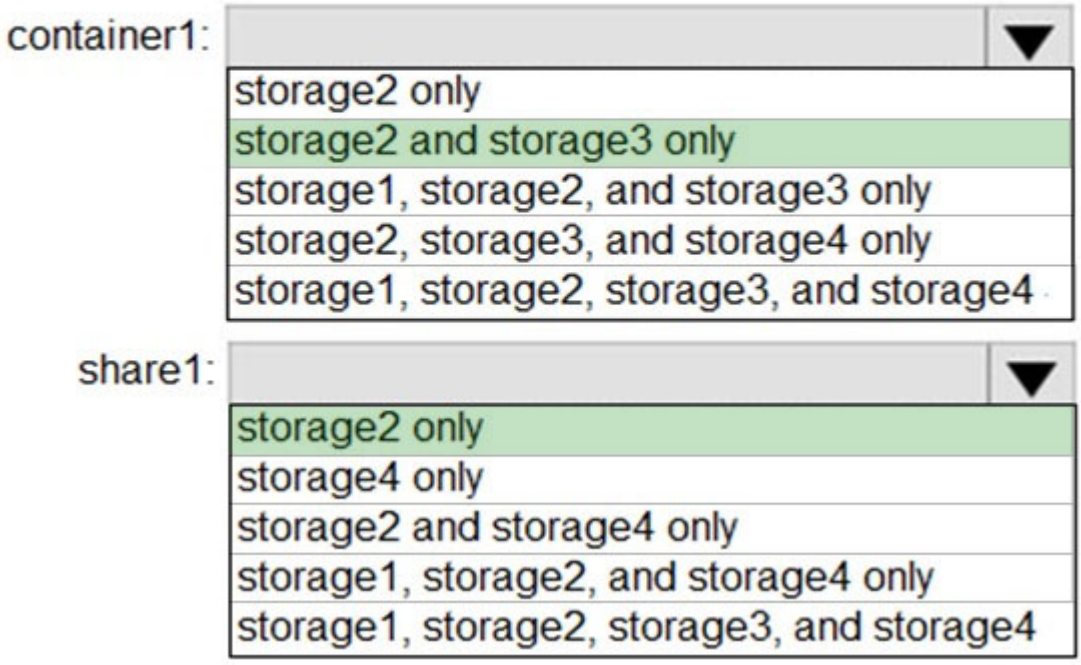

Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers
https://docs.microsoft.com/en-us/azure/storage/common/storage-account-overview

SecExams

Community Discussion

Storage (general-purpose v1) doesn't support tier. Standard (general-purpose v2) supports tier for Blob service and for Azure file. Premium BlockBlobStorage doesn't support tier. https://docs.microsoft.com/en-us/azure/storage/blobs/access-tiers-overview Legacy Standard BlobStorage supports tier. https://docs.microsoft.com/en-us/azure/storage/blobs/access-tiers-overview#default-account-access-tier-setting Premium FileStorage doesn't support tier. https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-create-file-share?tabs=azure-portal Container1 with tier: Can be created in storage2 (storagev2) and storage3. The question refers to BlobStorage (standard legacy one that supports tier) and not to BlockBlobStorage (Premium one that doesn't support tier). Share1 with tier: Can be created in storage2 (storagev2) only.

This question is unbelievable, isf I wouldn';t have ET, or other sources, I would have needed to learn a 50 odd matrix befoure I could answer this, this is no Exam question!

Please note that as of today, Only v2 storage accounts support tiers. Premium Blobs or Premium File Shares do not. So if this question came updated, answer accorindly. Container1: Storage2 Only share1: Storage2 Only

I apologize, please disregard my comment. Azure StorageV2 does support Fileshare hot/cool tier when the fileshare is created in portal

I apologize, please disregard my comment. Azure StorageV2 does support Fileshare hot/cool tier when the fileshare is created in portal

SecExams

Question #827

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

SecExams

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question HOTSPOT -

SecExams

You need to create storage5. The solution must support the planned changes.
Which type of storage account should you use, and which account should you configure as the destination storage account? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

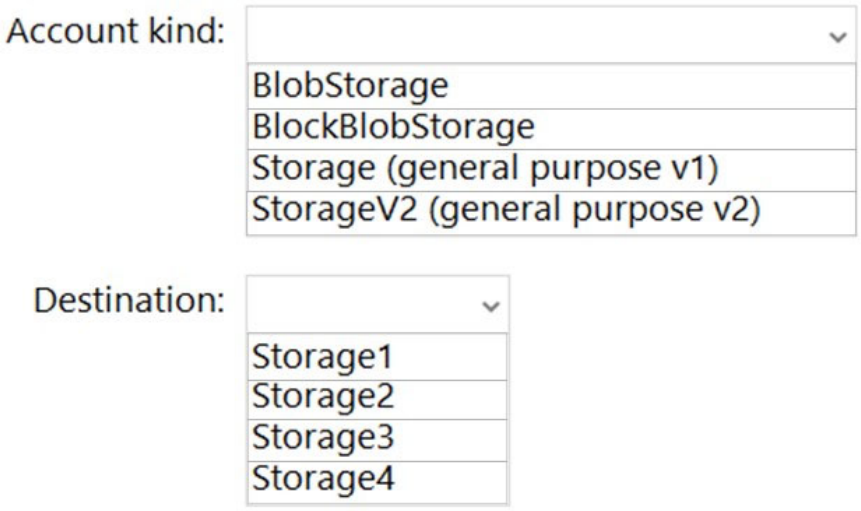

Explanation

Correct Answer:

Answer Area

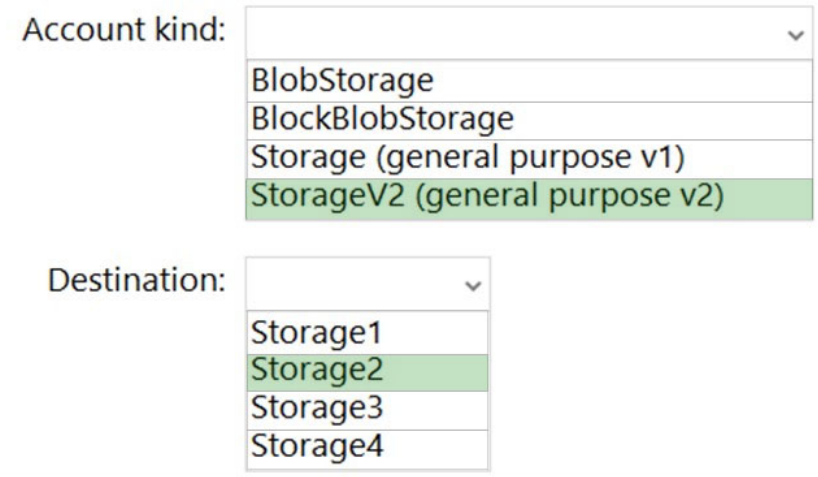

Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/object-replication-configure?tabs=portal

Community Discussion

SecExams

Question #828

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

SecExams

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question HOTSPOT -

You need to create storage5. The solution must support the planned changes.
Which type of storage account should you use, and which account should you configure as the destination storage account? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

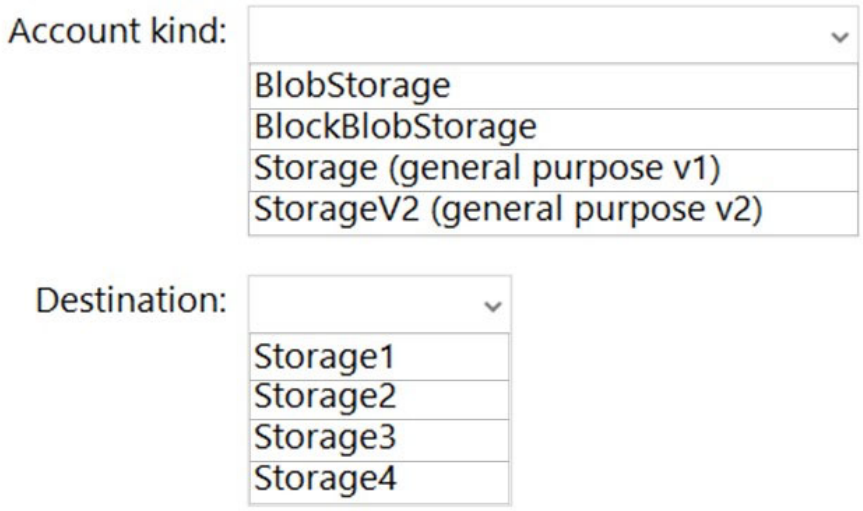

Explanation

Correct Answer:

Answer Area

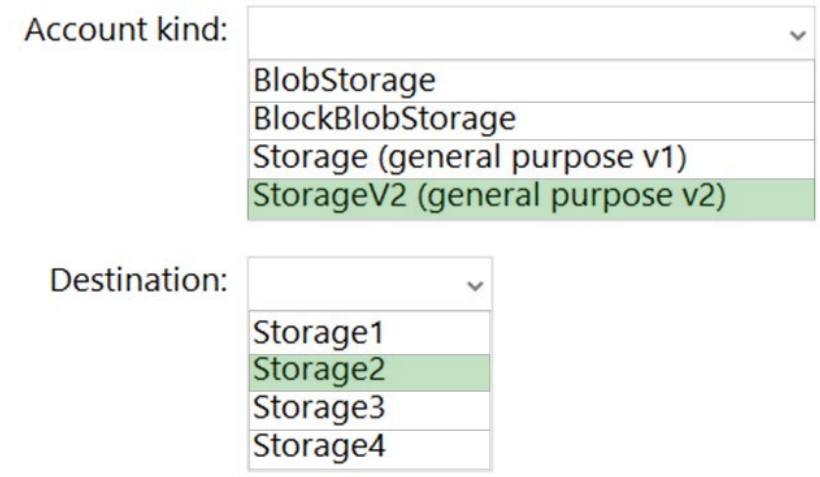

Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/object-replication-configure?tabs=portal

Community Discussion

Answer is correct: Storage V2 and Storage 2. We want to use replication for blobs and only that storage type is available. The other one is in Premium, which should never apply to the exams. Quoting from https://docs.microsoft.com/en-us/azure/storage/blobs/object-replication-configure?tabs=portal: "Before you configure object replication, create the source and destination storage accounts if they do not already exist. The source and destination accounts can be either general-purpose v2 storage accounts or premium block blob accounts (preview). "

I m very lonely here

Good. Its impossible to study with a lot of people around.

Good. Its impossible to study with a lot of people around.

I wish ET would provide notifications if someone replies to your comment. DevOpposite has no way of knowing you asked him something. Neither will I know if someone ever replied to my comment. All these comments will be lost to time.....like tears in rain....time to die.

SecExams

Question #829

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

SecExams

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question You need to identify

which storage account to use for the flow logging of IP traffic from VM5. The solution must meet the retention requirements.
Which storage account should you identify?

A) storage1
B) storage2
C) storage3 (Correct Answer)
D) storage4

Explanation

Correct Answer: C ?
We use the BlobStorage account storage3 for retention.
Storage lifecycle management offers a rule-based policy that you can use to transition blob data to the appropriate access tiers or to expire data at the end of the data lifecycle.
Note: Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/lifecycle-management-overview
https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-nsg-flow-logging-overview

Community Discussion

Question #830

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

SecExams

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

SecExams

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question You need to identify

SecExams

which storage account to use for the flow logging of IP traffic from VM5. The solution must meet the retention requirements.
Which storage account should you identify?

A) storage1
B) storage2
C) storage3 (Correct Answer)
D) storage4

Explanation

Correct Answer:
C
We use the BlobStorage account storage3 for retention.
Storage lifecycle management offers a rule-based policy that you can use to transition blob data to the appropriate access tiers or to expire data at the end of the data lifecycle.
Note: Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Reference:
https://docs.microsoft.com/en-us/azure/storage/blobs/lifecycle-management-overview
https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-nsg-flow-logging-overview

Community Discussion

Selected Answer: B

For at least two reasons, storage2 is the only candidate: - Location: The storage account used must be in the same region as the NSG. - Retention is available only if you use General Purpose v2 Storage accounts (GPv2). Reference: https://learn.microsoft.com/en-us/azure/network-watcher/network-watcher-nsg-flow-logging-overview

This scenario was my first set of questions yesterday 7th July 2023. Thanks to all the knowledgeable contributors and those to did lab tests to help confirm the right answers. I successfully aced it with 896 score. Going for the 305 now.

Answer valid! This question was on the exam 22/02/2023. Scored 920. Thanks guys!

Answer valid! This question was on the exam 22/02/2023. Scored 920. Thanks guys!

I agree that the answer is B. Documentation clearly states only General Purpose V2 Storage supports retention. It also states that the storage must be in the same location as the nsg. That much I get. But can someone explain to me how the NSG being in the same region as the storage applies to this question? I only see mention of 2 NSGs in the example and neither are applied to VNET 4 where VM 5 is. As far as I can tell, only the storage type is relevant to this question. I'm open to being wrong if someone can explain it. Thanks.

SecExams

Question #831

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.
The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.
All the resources used by Litware are hosted on-premises.
Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -
The network contains an Active Directory forest named litware.com. All domain

controllers are configured as DNS servers and host the litware.com DNS zone.
Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.
Litware.com contains a user named User1.
All the offices connect by using private connections.
Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.
All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.
The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -
Litware plans to implement the following changes:
Deploy Azure ExpressRoute to the Montreal office.
Migrate the virtual machines hosted on Server1 and Server2 to Azure.
Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).
Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -
Litware must meet the following technical requirements:
Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

▪

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.
Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.
Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.
Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.
Connect the New York office to VNet1 over the Internet by using an encrypted connection.
Create a workflow to send an email message when the settings of VM4 are modified.
Create a custom Azure role named Role1 that is based on the Reader role.
Minimize costs whenever possible. Question You discover that VM3 does NOT meet the technical requirements.
You need to verify whether the issue relates to the NSGs.
What should you use?

A) Diagram in VNet1
B) Diagnostic settings in Azure Monitor
C) Diagnose and solve problems in Traffic Manager profiles
D) The security recommendations in Azure Advisor
E) IP flow verify in Azure Network Watcher (Correct Answer)

Explanation

Correct Answer: E ?
Scenario: Contoso must meet technical requirements including:
Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.
IP flow verify checks if a packet is allowed or denied to or from a virtual machine. The information consists of direction, protocol, local IP, remote IP, local port, and remote port. If the packet is denied by a security group, the name of the rule that denied the packet is returned. While any source or destination IP can be chosen,
IP flow verify helps administrators quickly diagnose connectivity issues from or to the internet and from or to the on-premises environment.
Reference:
https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-ip-flow-verify-overview

Community Discussion

SecExams

Question #832

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.
The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.
All the resources used by Litware are hosted on-premises.
Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -
The network contains an Active Directory forest named litware.com. All domain

controllers are configured as DNS servers and host the litware.com DNS zone.
Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.
Litware.com contains a user named User1.
All the offices connect by using private connections.
Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.
All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.
The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -
Litware plans to implement the following changes:
Deploy Azure ExpressRoute to the Montreal office.
Migrate the virtual machines hosted on Server1 and Server2 to Azure.
Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).
Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -
Litware must meet the following technical requirements:
Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

▪

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.
Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.
Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.
Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.
Connect the New York office to VNet1 over the Internet by using an encrypted connection.
Create a workflow to send an email message when the settings of VM4 are modified.
Create a custom Azure role named Role1 that is based on the Reader role.
Minimize costs whenever possible. Question You discover that VM3 does NOT meet the technical requirements.
You need to verify whether the issue relates to the NSGs.
What should you use?

A) Diagram in VNet1
B) Diagnostic settings in Azure Monitor
C) Diagnose and solve problems in Traffic Manager profiles
D) The security recommendations in Azure Advisor
E) IP flow verify in Azure Network Watcher (Correct Answer)

Explanation

Correct Answer:
E
Scenario: Contoso must meet technical requirements including:
Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.
IP flow verify checks if a packet is allowed or denied to or from a virtual machine. The information consists of direction, protocol, local IP, remote IP, local port, and remote port. If the packet is denied by a security group, the name of the rule that denied the packet is returned. While any source or destination IP can be chosen,
IP flow verify helps administrators quickly diagnose connectivity issues from or to the internet and from or to the on-premises environment.
Reference:

https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-ip-flow-verify-overview

Community Discussion

correct use Test-AzNetworkWatcherIPFlow to get NSG security rule which blocked traffic + Get-AzEffectiveNetworkSecurityGroup to get details of NSG rules https://docs.microsoft.com/en-us/azure/network-watcher/diagnose-vm-network-traffic-filtering-problem-powershell

in exam today! October 16, 2021

why some much text for a simple question

take exam on next monday, pray for me~~!!

Selected Answer: E

IpFlow can check port traffic

SecExams

Question #833

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.
The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.
All the resources used by Litware are hosted on-premises.
Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -
The network contains an Active Directory forest named litware.com. All domain

controllers are configured as DNS servers and host the litware.com DNS zone.
Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.
Litware.com contains a user named User1.
All the offices connect by using private connections.
Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.
All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.
The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -
Litware plans to implement the following changes:
Deploy Azure ExpressRoute to the Montreal office.
Migrate the virtual machines hosted on Server1 and Server2 to Azure.
Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).
Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -
Litware must meet the following technical requirements:
Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

▪

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.
Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.
Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.
Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.
Connect the New York office to VNet1 over the Internet by using an encrypted connection.
Create a workflow to send an email message when the settings of VM4 are modified.
Create a custom Azure role named Role1 that is based on the Reader role.
Minimize costs whenever possible. Question You need to ensure that VM1 can communicate with VM4. The solution must minimize the administrative effort.
What should you do?

A) Create an NSG and associate the NSG to VM1 and VM4.
B) Establish peering between VNET1 and VNET3.
C) Assign VM4 an IP address of 10.0.1.5/24. (Correct Answer)
D) Create a user-defined route from VNET1 to VNET3.

Explanation

Correct Answer: C ?
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/tutorial-site-to-site-portal

Community Discussion

Question #834

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.
The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.
All the resources used by Litware are hosted on-premises.
Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -
The network contains an Active Directory forest named litware.com. All domain

controllers are configured as DNS servers and host the litware.com DNS zone.
Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.
Litware.com contains a user named User1.
All the offices connect by using private connections.
Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.
All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.
The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -
Litware plans to implement the following changes:
Deploy Azure ExpressRoute to the Montreal office.
Migrate the virtual machines hosted on Server1 and Server2 to Azure.
Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).
Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -
Litware must meet the following technical requirements:
Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

▪

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.
Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.
Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.
Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.
Connect the New York office to VNet1 over the Internet by using an encrypted connection.
Create a workflow to send an email message when the settings of VM4 are modified.
Create a custom Azure role named Role1 that is based on the Reader role.
Minimize costs whenever possible. Question You need to ensure that VM1 can communicate with VM4. The solution must minimize the administrative effort.
What should you do?

A) Create an NSG and associate the NSG to VM1 and VM4.
B) Establish peering between VNET1 and VNET3.
C) Assign VM4 an IP address of 10.0.1.5/24. (Correct Answer)
D) Create a user-defined route from VNET1 to VNET3.

Explanation

Correct Answer:
C
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/tutorial-site-to-site-portal

Community Discussion

I think this question is missing some critical info. Where does the VNET3 and 10.0.1.x/24 come from? No mentioning of them at all in the question!

The reason why critical information is missing is because here the question is attached to the wrong case. The question pertains to Contoso, Ltd Consulting, not Litware. See

Topic 15 Question 4 and it will all make sense...and the correct answer is “Establish peering between VNET1 and VNET3”

The reason why critical information is missing is because here the question is attached to the wrong case. The question pertains to Contoso, Ltd Consulting, not Litware. See Topic 15 Question 4 and it will all make sense...and the correct answer is “Establish peering between VNET1 and VNET3”

I`ve passed the exam today with 900 and had this question. It was connected to testlet which has VNET1-4 and VM1-5. Few maybe helpful info: I got two case studies (testlests), each having 5 questions , one at the begining and one at the end (and in between 53 questions). As you can see there is a lot missing questions in testlets but some of those were the same as previous "normal" cut from the case study content - I got some with storage that I think I saw earlier. From the rest questions I got about 4-5 new ones.

Thank you brother

SecExams

Question #835

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.
The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.
All the resources used by Litware are hosted on-premises.
Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -
The network contains an Active Directory forest named litware.com. All domain

controllers are configured as DNS servers and host the litware.com DNS zone.
Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.
Litware.com contains a user named User1.
All the offices connect by using private connections.
Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.
All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.
The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -
Litware plans to implement the following changes:
Deploy Azure ExpressRoute to the Montreal office.
Migrate the virtual machines hosted on Server1 and Server2 to Azure.
Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).
Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -
Litware must meet the following technical requirements:
Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

.

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.
Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.
Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.
Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.
Connect the New York office to VNet1 over the Internet by using an encrypted connection.
Create a workflow to send an email message when the settings of VM4 are modified.
Create a custom Azure role named Role1 that is based on the Reader role.
Minimize costs whenever possible. Question HOTSPOT -
You need to meet the connection requirements for the New York office.
What should you do? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

From the Azure portal:

- Create an ExpressRoute circuit only.
- Create a virtual network gateway only.
- Create a virtual network gateway and a local network gateway.
- Create an ExpressRoute circuit and an on-premises data gateway.
- Create a virtual network gateway and an on-premises data gateway.

In the New York office:

- Deploy ExpressRoute.
- Deploy a DirectAccess server.
- Implement a Web Application Proxy.
- Configure a site-to-site VPN connection.

Explanation

Correct Answer:

Answer Area

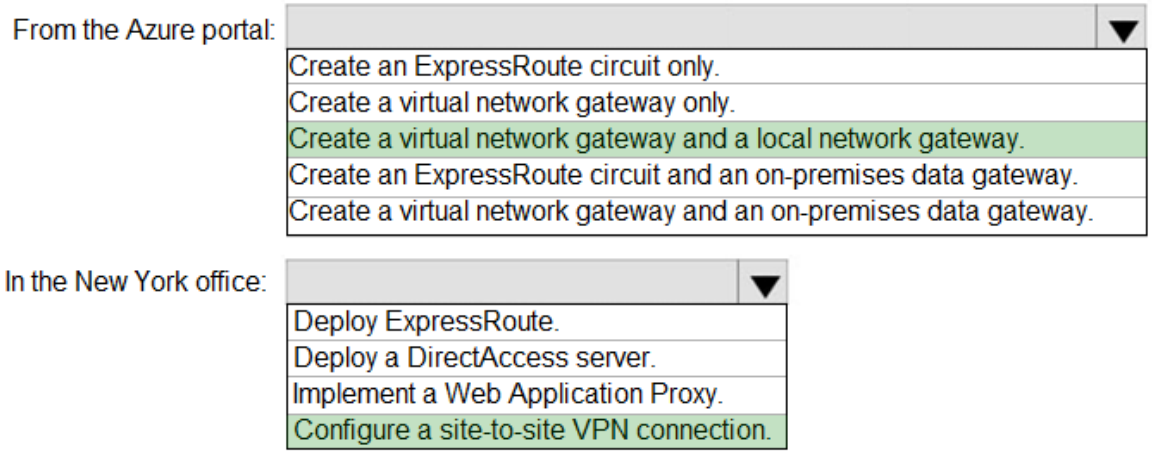

Box 1: Create a virtual network gateway and a local network gateway.
Azure VPN gateway. The VPN gateway service enables you to connect the VNet to the on-premises network through a VPN appliance. For more information, see
Connect an on-premises network to a Microsoft Azure virtual network. The VPN gateway includes the following elements:
✑ Virtual network gateway. A resource that provides a virtual VPN appliance for the VNet. It is responsible for routing traffic from the on-premises network to the VNet.
✑ Local network gateway. An abstraction of the on-premises VPN appliance. Network traffic from the cloud application to the on-premises network is routed through this gateway.
✑ Connection. The connection has properties that specify the connection type (IPSec) and the key shared with the on-premises VPN appliance to encrypt traffic.
✑ Gateway subnet. The virtual network gateway is held in its own subnet, which is subject to various requirements, described in the Recommendations section below.
Box 2: Configure a site-to-site VPN connection
On premises create a site-to-site connection for the virtual network gateway and the local network gateway.

SecExams

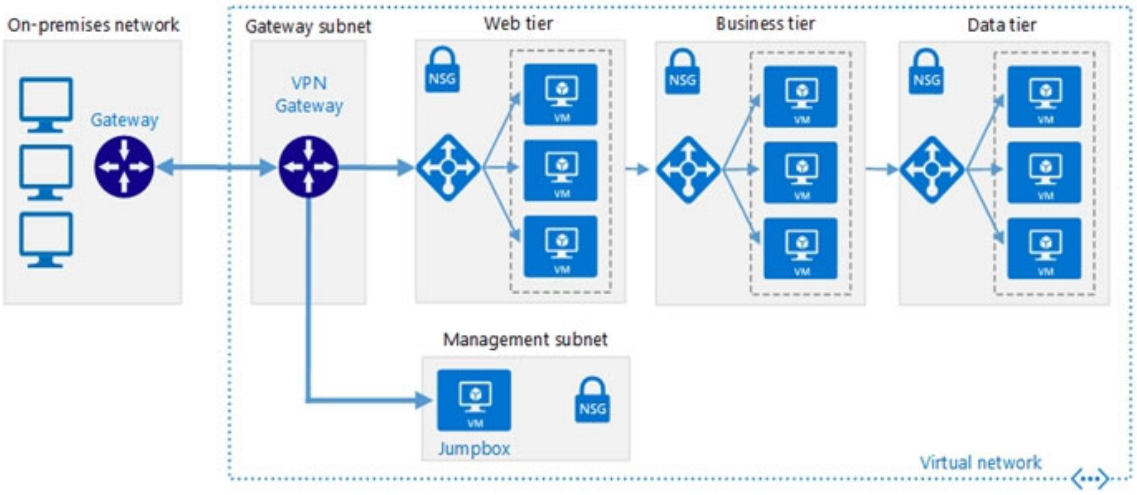

Scenario: Connect the New York office to VNet1 over the Internet by using an encrypted connection.

Incorrect Answers:

Azure ExpressRoute: Established between your network and Azure, through an ExpressRoute partner. This connection is private. Traffic does not go over the internet.

Reference:

https://docs.microsoft.com/en-us/azure/architecture/reference-architectures/hybrid-networking/vpn

Community Discussion

SecExams

Question #836

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.
The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.
All the resources used by Litware are hosted on-premises.
Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -
The network contains an Active Directory forest named litware.com. All domain

controllers are configured as DNS servers and host the litware.com DNS zone.
Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.
Litware.com contains a user named User1.
All the offices connect by using private connections.
Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.
All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.
The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -
Litware plans to implement the following changes:
Deploy Azure ExpressRoute to the Montreal office.
Migrate the virtual machines hosted on Server1 and Server2 to Azure.
Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).
Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -
Litware must meet the following technical requirements:
Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

▪

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.
Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.
Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.
Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.
Connect the New York office to VNet1 over the Internet by using an encrypted connection.
Create a workflow to send an email message when the settings of VM4 are modified.
Create a custom Azure role named Role1 that is based on the Reader role.
Minimize costs whenever possible. Question HOTSPOT -
You need to meet the connection requirements for the New York office.
What should you do? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

From the Azure portal:

- Create an ExpressRoute circuit only.
- Create a virtual network gateway only.
- Create a virtual network gateway and a local network gateway.
- Create an ExpressRoute circuit and an on-premises data gateway.
- Create a virtual network gateway and an on-premises data gateway.

In the New York office:

- Deploy ExpressRoute.
- Deploy a DirectAccess server.
- Implement a Web Application Proxy.
- Configure a site-to-site VPN connection.

Explanation

Correct Answer:

Answer Area

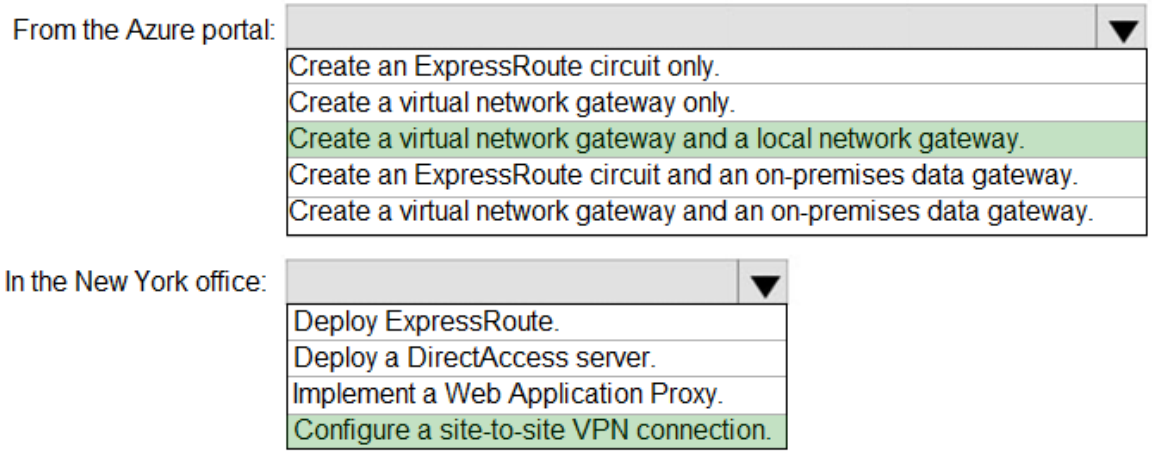

Box 1: Create a virtual network gateway and a local network gateway.
Azure VPN gateway. The VPN gateway service enables you to connect the VNet to the on-premises network through a VPN appliance. For more information, see
Connect an on-premises network to a Microsoft Azure virtual network. The VPN gateway includes the following elements:
✑ Virtual network gateway. A resource that provides a virtual VPN appliance for the VNet. It is responsible for routing traffic from the on-premises network to the
VNet.
✑ Local network gateway. An abstraction of the on-premises VPN appliance. Network traffic from the cloud application to the on-premises network is routed through this gateway.
✑ Connection. The connection has properties that specify the connection type (IPSec) and the key shared with the on-premises VPN appliance to encrypt traffic.
✑ Gateway subnet. The virtual network gateway is held in its own subnet, which is subject to various requirements, described in the Recommendations section below.
Box 2: Configure a site-to-site VPN connection
On premises create a site-to-site connection for the virtual network gateway and the local network gateway.

SecExams

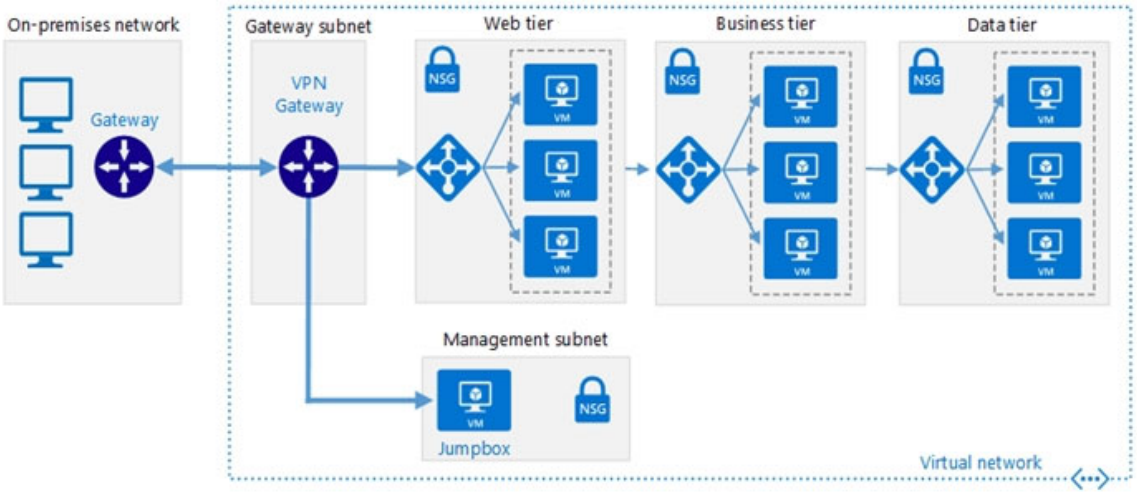

Scenario: Connect the New York office to VNet1 over the Internet by using an encrypted connection.
Incorrect Answers:
Azure ExpressRoute: Established between your network and Azure, through an ExpressRoute partner. This connection is private. Traffic does not go over the internet.
Reference:
https://docs.microsoft.com/en-us/azure/architecture/reference-architectures/hybrid-networking/vpn

Community Discussion

Answer copied from mlantonis: Box 1: Create a virtual network gateway and a local network gateway. Box 2: Configure a site-to-site VPN connection. As per requirements: - Connect the New York office to VNet1 over the Internet by using an encrypted connection. A Site-to-Site VPN gateway connection is used to connect your on-premises network to an Azure virtual network over an IPsec/IKE (IKEv1 or IKEv2) VPN tunnel. This type of connection requires a VPN device located on-premises that has an externally facing public IP address assigned to it. Site-to-Site VPN connection requires Virtual network gateway, Local network gateway and Gateway Subnet. Note: ExpressRoute connections don't go over the public Internet, the connection is private.

The first is create a virtual network gateway & a local network gateway in the Azure Portal. Please see the steps for S2S VPN Connection at https://docs.microsoft.com/en-us/azure/vpn-gateway/tutorial-site-to-site-portal

Yes today I face this question and my score was 900

just case studies, no labs

just case studies, no labs

SecExams

Question #837

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.
Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -
Currently, Contoso uses multiple types of servers for business operations, including the following:
File servers
Domain controllers
Microsoft SQL Server servers

SecExams

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.
You have a public-facing application named App1. App1 is comprised of the following three tiers:
A SQL database
A web front end

A processing middle tier -
▪
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -
Contoso plans to implement the following changes to the infrastructure:
Move all the tiers of App1 to Azure.
Move the existing product blueprint files to Azure Blob storage.
Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -
Contoso must meet the following technical requirements:
Move all the virtual machines for App1 to Azure.
Minimize the number of open ports between the App1 tiers.
Ensure that all the virtual machines for App1 are protected by backups.
Copy the blueprint files to Azure over the Internet.
Ensure that the blueprint files are stored in the archive storage tier.
Ensure that partner access to the blueprint files is secured and temporary.
Prevent user passwords or hashes of passwords from being stored in Azure.
Use unmanaged standard storage for the hard disks of the virtual machines.
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
Minimize administrative effort whenever possible.

User Requirements -
Contoso identifies the following requirements for users:

SecExams

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
Designate a new user named Admin1 as the service admin for the Azure subscription.
Admin1 must receive email alerts regarding service outages.
Ensure that a new user named User3 can create network objects for the Azure subscription. Question HOTSPOT -
You need to recommend a solution for App1. The solution must meet the technical requirements.
What should you include in the recommendation? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

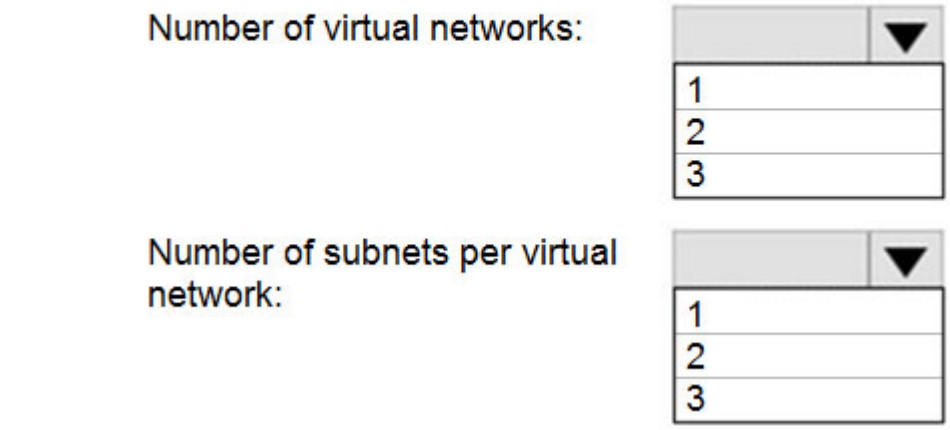

Explanation

Correct Answer:

Answer Area

Number of virtual networks: 1

Number of subnets per virtual network: 3

This reference architecture shows how to deploy VMs and a virtual network configured for an N-tier application, using SQL Server on Windows for the data tier.

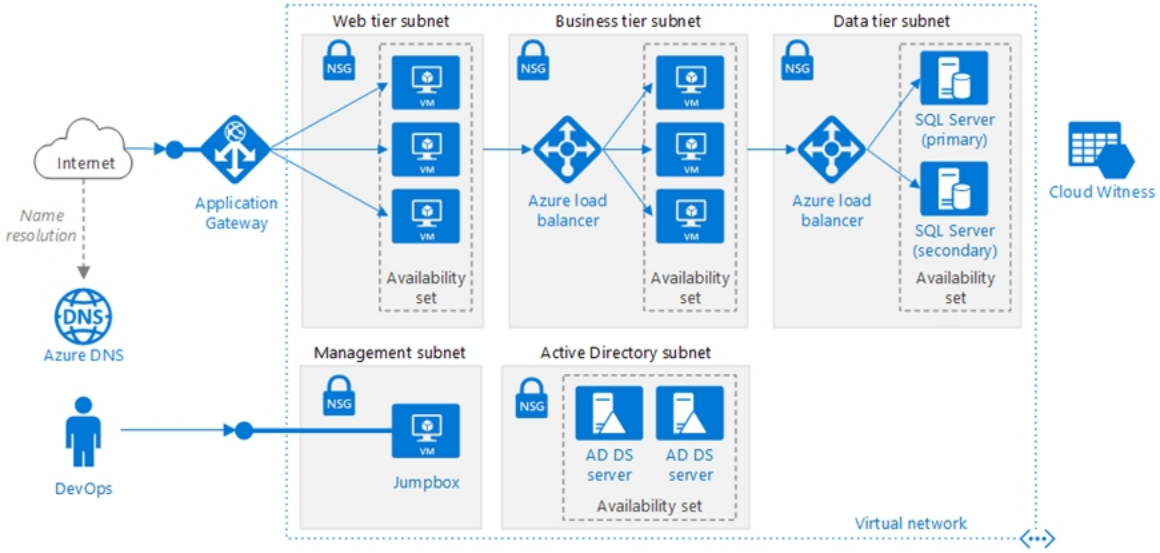

Scenario: You have a public-facing application named App1. App1 is comprised of the following three tiers:

- A SQL database
- A web front end
- A processing middle tier

Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Technical requirements include:

- Move all the virtual machines for App1 to Azure.
- Minimize the number of open ports between the App1 tiers.

Reference:

https://docs.microsoft.com/en-us/azure/architecture/reference-architectures/n-tier/n-tier-sql-server

Community Discussion

SecExams

Question #838

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.
Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -
Currently, Contoso uses multiple types of servers for business operations, including the following:
File servers
Domain controllers
Microsoft SQL Server servers

SecExams

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.
You have a public-facing application named App1. App1 is comprised of the following three tiers:
A SQL database
A web front end

A processing middle tier -
▪
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -
Contoso plans to implement the following changes to the infrastructure:
Move all the tiers of App1 to Azure.
Move the existing product blueprint files to Azure Blob storage.
Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -
Contoso must meet the following technical requirements:
Move all the virtual machines for App1 to Azure.
Minimize the number of open ports between the App1 tiers.
Ensure that all the virtual machines for App1 are protected by backups.
Copy the blueprint files to Azure over the Internet.
Ensure that the blueprint files are stored in the archive storage tier.
Ensure that partner access to the blueprint files is secured and temporary.
Prevent user passwords or hashes of passwords from being stored in Azure.
Use unmanaged standard storage for the hard disks of the virtual machines.
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
Minimize administrative effort whenever possible.

User Requirements -
Contoso identifies the following requirements for users:

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
Designate a new user named Admin1 as the service admin for the Azure subscription.
Admin1 must receive email alerts regarding service outages.
Ensure that a new user named User3 can create network objects for the Azure subscription. Question HOTSPOT -
You need to recommend a solution for App1. The solution must meet the technical requirements.
What should you include in the recommendation? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

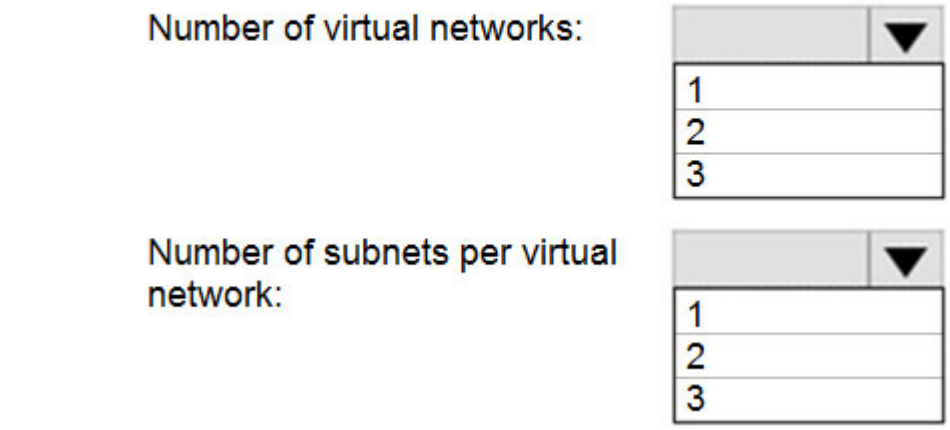

Explanation

Correct Answer:

Answer Area

Number of virtual networks: 1 2 3

Number of subnets per virtual network: 1 2 3

This reference architecture shows how to deploy VMs and a virtual network configured for an N-tier application, using SQL Server on Windows for the data tier.

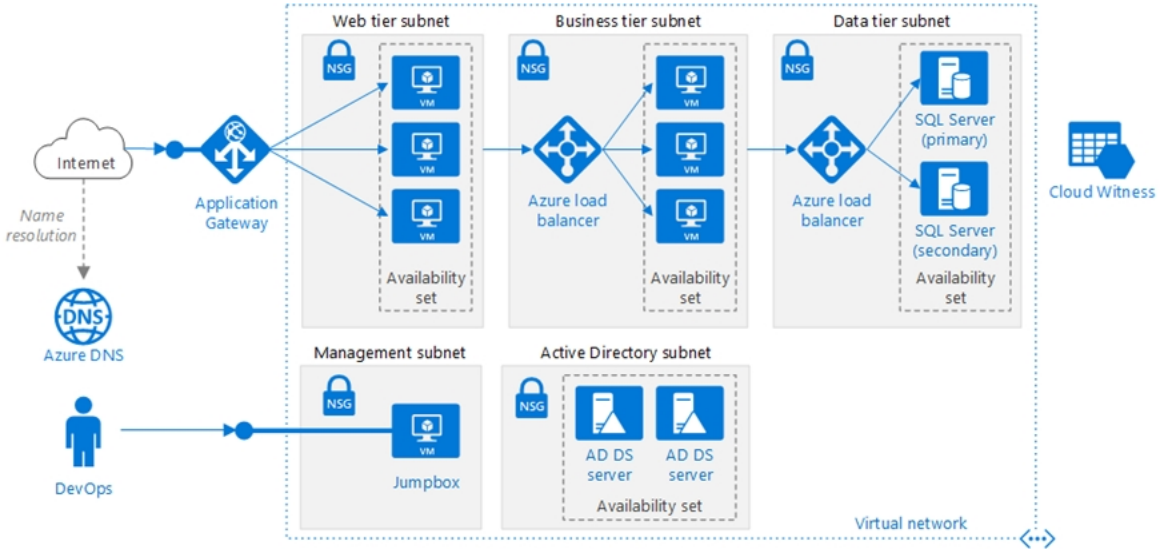

Scenario: You have a public-facing application named App1. App1 is comprised of the following three tiers:

- A SQL database
- A web front end
- A processing middle tier

Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Technical requirements include:

- Move all the virtual machines for App1 to Azure.
- Minimize the number of open ports between the App1 tiers.

Reference:

https://docs.microsoft.com/en-us/azure/architecture/reference-architectures/n-tier/n-tier-sql-server

Community Discussion

As per requirements: - You have a public-facing application named App1. App1 is comprised of the following three tiers: A SQL database, A web front end and A processing middle tier. Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only. - Move all the virtual machines for App1 to Azure. - Minimize the number of open ports between the App1 tiers. Box 1: 1 1 VNET and then follow the N-tier application architecture. Box 2: 3 3 Subnets (1 Subnet for each tier of the App1). The tiers can communicate each other, because they are inside the same VNET. Of course you would need additional NSGs to restrict traffic. Reference: https://docs.microsoft.com/en-us/azure/architecture/reference-architectures/n-tier/n-tier-sql-server

Answer is correct. 1 VNET 3 subnets

These case studies are huge, and yet you could just skip to the end, read the question, and very quickly ascertain the correct answer by going back and skim reading the requirement.

There is a special place in hell for people like you. If you're going just copy and paste a comment by mlantonis you might as well copy and paste the entire thing with the reference link.

There is a special place in hell for people like you. If you're going just copy and paste a comment by mlantonis you might as well copy and paste the entire thing with the reference link.

SecExams

Question #839

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.
Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -
Currently, Contoso uses multiple types of servers for business operations, including the following:
File servers
Domain controllers
Microsoft SQL Server servers

SecExams

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.
You have a public-facing application named App1. App1 is comprised of the following three tiers:
A SQL database
A web front end

A processing middle tier -
▪
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -
Contoso plans to implement the following changes to the infrastructure:
Move all the tiers of App1 to Azure.
Move the existing product blueprint files to Azure Blob storage.
Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -
Contoso must meet the following technical requirements:
Move all the virtual machines for App1 to Azure.
Minimize the number of open ports between the App1 tiers.
Ensure that all the virtual machines for App1 are protected by backups.
Copy the blueprint files to Azure over the Internet.
Ensure that the blueprint files are stored in the archive storage tier.
Ensure that partner access to the blueprint files is secured and temporary.
Prevent user passwords or hashes of passwords from being stored in Azure.
Use unmanaged standard storage for the hard disks of the virtual machines.
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
Minimize administrative effort whenever possible.

User Requirements -
Contoso identifies the following requirements for users:

SecExams

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
Designate a new user named Admin1 as the service admin for the Azure subscription.
Admin1 must receive email alerts regarding service outages.
Ensure that a new user named User3 can create network objects for the Azure subscription. Question You are planning the move of App1 to Azure.
You create a network security group (NSG).
You need to recommend a solution to provide users with access to App1.
What should you recommend?

A) Create an incoming security rule for port 443 from the Internet. Associate the NSG to the subnet that contains the web servers. (Correct Answer)
B) Create an outgoing security rule for port 443 from the Internet. Associate the NSG to the subnet that contains the web servers.
C) Create an incoming security rule for port 443 from the Internet. Associate the NSG to all the subnets.
D) Create an outgoing security rule for port 443 from the Internet. Associate the NSG to all the subnets.

Explanation

Correct Answer: A ?
Incoming and the web server subnet only, as users access the web front end by using HTTPS only.
Note Scenario: You have a public-facing application named App1. App1 is comprised of the following three tiers:
✑ A SQL database
✑ A web front end
✑ A processing middle tier
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Community Discussion

Question #840

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.
Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -
Currently, Contoso uses multiple types of servers for business operations, including the following:
File servers
Domain controllers
Microsoft SQL Server servers

SecExams

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.
You have a public-facing application named App1. App1 is comprised of the following three tiers:
A SQL database
A web front end

A processing middle tier -
▪
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -
Contoso plans to implement the following changes to the infrastructure:
Move all the tiers of App1 to Azure.
Move the existing product blueprint files to Azure Blob storage.
Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -
Contoso must meet the following technical requirements:
Move all the virtual machines for App1 to Azure.
Minimize the number of open ports between the App1 tiers.
Ensure that all the virtual machines for App1 are protected by backups.
Copy the blueprint files to Azure over the Internet.
Ensure that the blueprint files are stored in the archive storage tier.
Ensure that partner access to the blueprint files is secured and temporary.
Prevent user passwords or hashes of passwords from being stored in Azure.
Use unmanaged standard storage for the hard disks of the virtual machines.
Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
Minimize administrative effort whenever possible.

User Requirements -
Contoso identifies the following requirements for users:

SecExams

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
Designate a new user named Admin1 as the service admin for the Azure subscription.
Admin1 must receive email alerts regarding service outages.
Ensure that a new user named User3 can create network objects for the Azure subscription. Question You are planning the move of App1 to Azure.
You create a network security group (NSG).
You need to recommend a solution to provide users with access to App1.
What should you recommend?

A) Create an incoming security rule for port 443 from the Internet. Associate the NSG to the subnet that contains the web servers. (Correct Answer)
B) Create an outgoing security rule for port 443 from the Internet. Associate the NSG to the subnet that contains the web servers.
C) Create an incoming security rule for port 443 from the Internet. Associate the NSG to all the subnets.
D) Create an outgoing security rule for port 443 from the Internet. Associate the NSG to all the subnets.

Explanation

Correct Answer:
A
Incoming and the web server subnet only, as users access the web front end by using HTTPS only.
Note Scenario: You have a public-facing application named App1. App1 is comprised of the following three tiers:
✑ A SQL database
✑ A web front end
✑ A processing middle tier
Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Community Discussion

Congrats to anybody that got this far! Answer is correct

All the best to everyone that has arrived at this final page. My first comment tho. Good Luck and Good Health to everyone! Cheers!

Yes, everyone's discussion, comments and supportive opinions really make the forum and questions extremely constructive. Best of luck as well to your future endeavors!

Yes, everyone's discussion, comments and supportive opinions really make the forum and questions extremely constructive. Best of luck as well to your future endeavors!

Nothing to congrate mate. I am taking exam day after tomorrow and are sh*ting my pants because I know how much I do not know...

SecExams

Question #841

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

SecExams

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

SecExams

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question HOTSPOT -

You implement the planned changes for NSG1 and NSG2.
For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area:

Statements	Yes	No
From VM1, you can establish a Remote Desktop session to VM2.	○	○
From VM2, you can ping VM3.	○	○
From VM2, you can establish a Remote Desktop session to VM3.	○	○

SecExams

Explanation

Correct Answer:

Answer Area:

Statements	Yes	No
From VM1, you can establish a Remote Desktop session to VM2.	○	◉
From VM2, you can ping VM3.	◉	○
From VM2, you can establish a Remote Desktop session to VM3.	○	◉

Box 1: No -

NSG2 blocks RDP to VM2 -

Box 2: Yes -

ICMP is not blocked -

Box 3: No -

NSG2 blocks RDP from VM2 -

Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/network-security-group-how-it-works

Community Discussion

SecExams

Question #842

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

SecExams

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question HOTSPOT -

You implement the planned changes for NSG1 and NSG2.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area:

Statements	Yes	No
From VM1, you can establish a Remote Desktop session to VM2.	○	○
From VM2, you can ping VM3.	○	○
From VM2, you can establish a Remote Desktop session to VM3.	○	○

SecExams

Explanation

Correct Answer:

Answer Area:

Statements	Yes	No
From VM1, you can establish a Remote Desktop session to VM2.	○	◉
From VM2, you can ping VM3.	◉	○
From VM2, you can establish a Remote Desktop session to VM3.	○	◉

Box 1: No -

NSG2 blocks RDP to VM2 -

Box 2: Yes -

ICMP is not blocked -

Box 3: No -

NSG2 blocks RDP from VM2 -

Reference:
https://docs.microsoft.com/en-us/azure/virtual-network/network-security-group-how-it-works

Community Discussion

I think the Answers should be: YYN VM1 has inbound rules, so no restriction on outbound. VM2 has outbound rules, so no restrictions on inbound. Hence VM1 can establish RDP to VM2. VM2 —ping—> VM3: Yes(no restriction other than outbound RDP) VM2 —RDP—> VM3: No(outbound RDP is not allowed on VM2) Please correct me if I am wrong. Tmrw I have my exam.

From VM1, you can Esablish a Remote Desktop sesion to VM2: Yes They are in the same subnet and VM1 doesn't have restriction on outbound and VM2 doesn't have restriction on inbound From VM2, you can ping VM3: No Rule 400 only permit ping from 10.0.2.0/24 to 10.0.1.0/24. VM3 has 172.16.1.4 IP address From VM2, you can establish a Remote Desktop sesion to VM3: No Rule 200 only permit virtualNetwork (VNET1) destination RDP and VM3 is in VirtualNetwork VNET2

Sorry I can't update the answer and I have to make a new post: Finaly I think is : YYN From VM1, you can Esablish a Remote Desktop sesion to VM2: Yes They are in the same VNET and VM1 doesn't have restriction on outbound and VM2 doesn't have restriction on inbound From VM2, you can ping VM3: Yes Rule 400 only permit ping from 10.0.2.0/24 to 10.0.1.0/24. VM3 has 172.16.1.4 IP address, but there are implicit rules: any(port) any(protocol) virtualnetwork(source) to virtualnetwork (destination). The VNETs are peered and ping works. From VM2, you can establish a Remote Desktop sesion to VM3: No Rule 200 blocks RDP traffic

Sorry I can't update the answer and I have to make a new post: Finaly I think is : YYN From VM1, you can Esablish a Remote Desktop sesion to VM2: Yes They are in the same VNET and VM1 doesn't have restriction on outbound and VM2 doesn't have restriction on inbound From VM2, you can ping VM3: Yes Rule 400 only permit ping from 10.0.2.0/24 to 10.0.1.0/24. VM3 has 172.16.1.4 IP address, but there are implicit rules: any(port) any(protocol) virtualnetwork(source) to virtualnetwork (destination). The VNETs are peered and ping works. From VM2, you can establish a Remote Desktop sesion to VM3: No Rule 200 blocks RDP traffic

Sorry I can't update the answer and I have to make a new post: Finaly I think is : YYN From VM1, you can Esablish a Remote Desktop sesion to VM2: Yes They are in the same VNET and VM1 doesn't have restriction on outbound and VM2 doesn't have restriction on

inbound From VM2, you can ping VM3: Yes Rule 400 only permit ping from 10.0.2.0/24 to 10.0.1.0/24. VM3 has 172.16.1.4 IP address, but there are implicit rules: any(port) any(protocol) virtualnetwork(source) to virtualnetwork (destination). The VNETs are peered and ping works. From VM2, you can establish a Remote Desktop sesion to VM3: No Rule 200 blocks RDP traffic

SecExams

Question #843

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

SecExams

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question You need to add VM1

and VM2 to the backend pool of LB1.

What should you do first?

A) Connect VM2 to VNET1/Subnet1. (Correct Answer)

B) Redeploy VM1 and VM2 to the same availability zone.

C) Redeploy VM1 and VM2 to the same availability set.

D) Create a new NSG and associate the NSG to VNET1/Subnet1.

Explanation

Correct Answer: A ?

VM1 is already in VNET1/Subnet1.

VM2 is on VNET1/Subnet2, and must be moved to VNET1/Subnet1.

Note:

Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

Reference:

https://docs.microsoft.com/en-us/azure/load-balancer/quickstart-load-balancer-standard-internal-portal

Community Discussion

Question #844

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -
Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

SecExams

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	**None**
User2	Guest	**None**
User3	Member	**None**
User4	Member	**None**

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	**None**

User1 manages the resources in RG1. User4 manages the resources in RG2.
Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.
Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	**Not applicable**	**Not applicable**
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

SecExams

Requirements -

Planned Changes -
Contoso plans to implement the following changes:
Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.
Create a storage account named storage5 and configure storage replication for the Blob service.
Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.
Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.
.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -
Contoso must meet the following technical requirements:
Create container1 and share1.
Use the principle of least privilege.
Create an Azure AD security group named Group4.
Back up the Azure file shares and virtual machines by using Azure Backup.
Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.
Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.
Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1
Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.
Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares. Question You need to add VM1

and VM2 to the backend pool of LB1.

What should you do first?

A) Connect VM2 to VNET1/Subnet1. (Correct Answer)

B) Redeploy VM1 and VM2 to the same availability zone.

C) Redeploy VM1 and VM2 to the same availability set.

D) Create a new NSG and associate the NSG to VNET1/Subnet1.

Explanation

Correct Answer:

A

VM1 is already in VNET1/Subnet1.

VM2 is on VNET1/Subnet2, and must be moved to VNET1/Subnet1.

Note:

Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

Reference:

https://docs.microsoft.com/en-us/azure/load-balancer/quickstart-load-balancer-standard-internal-portal

Community Discussion

Selected Answer: C

You can not use basic load balancer to balance between single VMs . the have to be in a scale set or availability set

de ja vu

This was in Exam 23-08-23

This question is missing the SKU of the LB. If LB is standard , Opt A and C is correct. if LB is Basic, Opt C is correct. May be Opt C is the Wise Choice.

Found this Q in the exam 3/7/2023

SecExams

Question #845

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.
The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.
All the resources used by Litware are hosted on-premises.
Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -
The network contains an Active Directory forest named litware.com. All domain

controllers are configured as DNS servers and host the litware.com DNS zone.
Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.
Litware.com contains a user named User1.
All the offices connect by using private connections.
Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.
All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.
The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -
Litware plans to implement the following changes:
Deploy Azure ExpressRoute to the Montreal office.
Migrate the virtual machines hosted on Server1 and Server2 to Azure.
Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).
Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -
Litware must meet the following technical requirements:
Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

▪

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.
Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.
Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.
Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.
Connect the New York office to VNet1 over the Internet by using an encrypted connection.
Create a workflow to send an email message when the settings of VM4 are modified.
Create a custom Azure role named Role1 that is based on the Reader role.
Minimize costs whenever possible. Question HOTSPOT -
You need to implement Role1.
Which command should you run before you create Role1? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

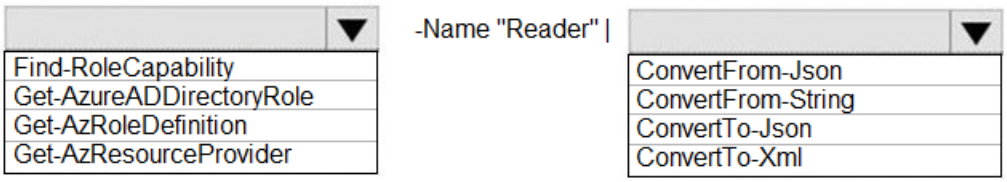

Explanation

Correct Answer:

Answer Area

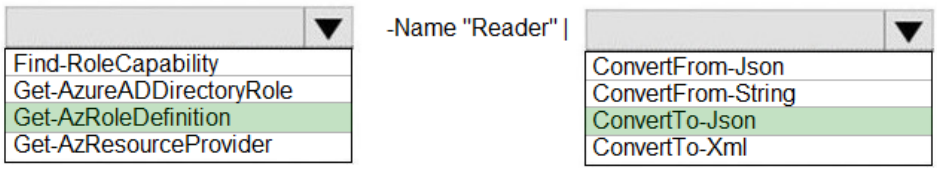

Community Discussion

Get-AzRoleDefinition -name "Reader" |ConvertTo-Json https://docs.microsoft.com/en-us/azure/role-based-access-control/role-definitions-list?tabs=roles

yes lets memorize all this azure cli commands... I got it correct becaouse I have a bit experience, but I look it up in the documentation

Addition: Create customer azure role from Json https://docs.microsoft.com/en-us/powershell/module/az.resources/new-azroledefinition?view=azps-6.2.0#example-2--create-using-json-file

Addition: Create customer azure role from Json https://docs.microsoft.com/en-us/powershell/module/az.resources/new-azroledefinition?view=azps-6.2.0#example-2--create-using-json-file

Answer valid! This question was on the exam 22/02/2023. Scored 920.

SecExams

Question #846

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.
The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.
All the resources used by Litware are hosted on-premises.
Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -
The network contains an Active Directory forest named litware.com. All domain

controllers are configured as DNS servers and host the litware.com DNS zone.
Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.
Litware.com contains a user named User1.
All the offices connect by using private connections.
Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.
All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.
The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -
Litware plans to implement the following changes:
Deploy Azure ExpressRoute to the Montreal office.
Migrate the virtual machines hosted on Server1 and Server2 to Azure.
Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).
Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -
Litware must meet the following technical requirements:
Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

.

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.
Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.
Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.
Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.
Connect the New York office to VNet1 over the Internet by using an encrypted connection.
Create a workflow to send an email message when the settings of VM4 are modified.
Create a custom Azure role named Role1 that is based on the Reader role.
Minimize costs whenever possible. Question HOTSPOT -
You need to implement Role1.
Which command should you run before you create Role1? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

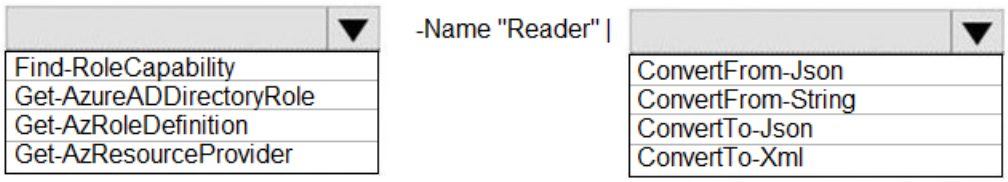

Explanation

Correct Answer:

Answer Area

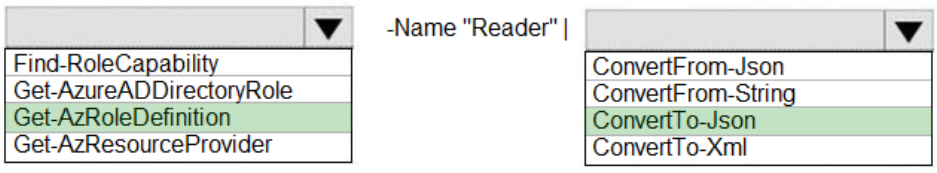

Community Discussion

SecExams

Question #847

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.
The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.
All the resources used by Litware are hosted on-premises.
Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -
The network contains an Active Directory forest named litware.com. All domain

controllers are configured as DNS servers and host the litware.com DNS zone.
Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.
Litware.com contains a user named User1.
All the offices connect by using private connections.
Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.
All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.
The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -
Litware plans to implement the following changes:
Deploy Azure ExpressRoute to the Montreal office.
Migrate the virtual machines hosted on Server1 and Server2 to Azure.
Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).
Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -
Litware must meet the following technical requirements:
Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

.

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.
Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.
Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.
Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.
Connect the New York office to VNet1 over the Internet by using an encrypted connection.
Create a workflow to send an email message when the settings of VM4 are modified.
Create a custom Azure role named Role1 that is based on the Reader role.
Minimize costs whenever possible. Question You need to recommend a solution to automate the configuration for the finance department users. The solution must meet the technical requirements.
What should you include in the recommendation?

A) Azure AD B2C
B) dynamic groups and conditional access policies (Correct Answer)
C) Azure AD Identity Protection
D) an Azure logic app and the Microsoft Identity Management (MIM) client

Explanation

Correct Answer:
B
Scenario: Ensure Azure Multi-Factor Authentication (MFA) for the users in the finance department only.
The recommendation is to use conditional access policies that can then be targeted to groups of users, specific applications, or other conditions.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/authentication/howto-mfa-userstates

Community Discussion

Answer is correct: "dynamic groups and conditional access policies" Last question, wish you all the best!

Congratulations! For reaching this end. 07/30/2021 AZ 104 passed with 909 points. About 70% of the questions were from here. Many given answers here are wrong. Look carefully in the comments, there are more often the correct answers. If you work through Microsoft Learn like I did, I'll give you a tip: Do everything you learn directly in Azure once yourself. This is the only way to have a chance to answer the questions that are not listed here.

I don't thinkg that many given answers are wrong here. I bought the Measure Up for$100 and got 206 questions there, none of those questions were in my exam which I failed with 640, after taking it and coming back here, SecExams have more relevant questions. Going through all Microsoft Learn is good, but it can take you months and it's huge, the knowledge there. For passing the exam, only dumps like these are good, even though you pass the exam, doesn't mean you can work with azure without properly working with it!

I don't thinkg that many given answers are wrong here. I bought the Measure Up for$100 and got 206 questions there, none of those questions were in my exam which I failed with 640, after taking it and coming back here, SecExams have more relevant questions. Going through all Microsoft Learn is good, but it can take you months and it's huge, the knowledge there. For passing the exam, only dumps like these are good, even though you pass the exam, doesn't mean you can work with azure without properly working with it!

Congrats on passing the exam. Comments and discussion are the main reasons why I am here. Apart from 1 course I could not find any place with authoritative answers. Many places where you can BUY a test exam - they have questions from here with WRONG answers. I have learned more from reading discussions here and FOLLOWING links attached to the official Microsoft documentation that I did from going through a course that should prepare me for 104

SecExams

Question #848

SecExams

Introductory Info Case study -
This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.
To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.
At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -
To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -
Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.
The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.
All the resources used by Litware are hosted on-premises.
Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -
The network contains an Active Directory forest named litware.com. All domain

controllers are configured as DNS servers and host the litware.com DNS zone.
Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.
Litware.com contains a user named User1.
All the offices connect by using private connections.
Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.
All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.
The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -
Litware plans to implement the following changes:
Deploy Azure ExpressRoute to the Montreal office.
Migrate the virtual machines hosted on Server1 and Server2 to Azure.
Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).
Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -
Litware must meet the following technical requirements:
Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

.

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.
Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.
Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.
Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.
Connect the New York office to VNet1 over the Internet by using an encrypted connection.
Create a workflow to send an email message when the settings of VM4 are modified.
Create a custom Azure role named Role1 that is based on the Reader role.
Minimize costs whenever possible. Question You need to recommend a solution to automate the configuration for the finance department users. The solution must meet the technical requirements.
What should you include in the recommendation?

A) Azure AD B2C
B) dynamic groups and conditional access policies (Correct Answer)
C) Azure AD Identity Protection
D) an Azure logic app and the Microsoft Identity Management (MIM) client

Explanation

Correct Answer: B ?
Scenario: Ensure Azure Multi-Factor Authentication (MFA) for the users in the finance department only.
The recommendation is to use conditional access policies that can then be targeted to groups of users, specific applications, or other conditions.
Reference:
https://docs.microsoft.com/en-us/azure/active-directory/authentication/howto-mfa-userstates

Community Discussion

Question #849

You have an Azure subscription named Subscription1 that contains an Azure Log Analytics workspace named Workspace1.

You need to view the error events from a table named Event.

Which query should you run in Workspace1?

A) select * from Event where EventType == "error"
B) Event | search "error" (Correct Answer)
C) Event | where EventType is "error"
D) Get-Event Event | where {$_.EventType == "error"}

Explanation

Correct Answer: B ?

Community Discussion

Question #850

You have an Azure App Services web app named App1.

You plan to deploy App1 by using Web Deploy.

You need to ensure that the developers of App1 can use their Azure AD credentials to deploy content to App1. The solution must use the principle of least privilege.

What should you do?

A) Assign the Owner role to the developers
B) Configure app-level credentials for FTPS (Correct Answer)
C) Assign the Website Contributor role to the developers

D) Configure user-level credentials for FTPS

Explanation

Correct Answer: B ?

Community Discussion

Question #851

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Active Directory (Azure AD) tenant named contoso.com.

You have a CSV file that contains the names and email addresses of 500 external users.

You need to create a guest user account in contoso.com for each of the 500 external users.

Solution: From Azure AD in the Azure portal, you use the Bulk invite users operation.

Does this meet the goal?

A) Yes

B) No (Correct Answer)

SecExams

Explanation

Correct Answer: B ?

Community Discussion

Selected Answer: A

Not sure why it's B but to me this is A https://learn.microsoft.com/en-us/entra/external-id/tutorial-bulk-invite Guest = Invite Bulk

SecExams

Question #852

HOTSPOT

-

You have an Azure subscription that is linked to an Azure AD tenant. The tenant contains the custom role-based access control (RBAC) roles shown in the following table.

Name	Description
Role1	Azure subscription role
Role2	Azure AD role

From the Azure portal, you need to create two custom roles named Role3 and Role4. Role3 will be an Azure subscription role. Role4 will be an Azure AD role.

Which roles can you clone to create the new roles? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Role3:

- Role1 only
- Built-in Azure subscription roles only
- Role1 and built-in Azure subscription roles only
- Built-in Azure subscription roles and built-in Azure AD roles only
- Role1, Role2, built-in Azure subscription roles, and built-in Azure AD roles

Role4:

- Role2 only
- Built-in Azure AD roles only
- Role2 and built-in Azure AD roles only
- Built-in Azure AD roles and built-in Azure subscription roles only
- Role1, Role2, built-in Azure AD, and built-in Azure subscription roles

SecExams

Explanation

Correct Answer:

Answer Area

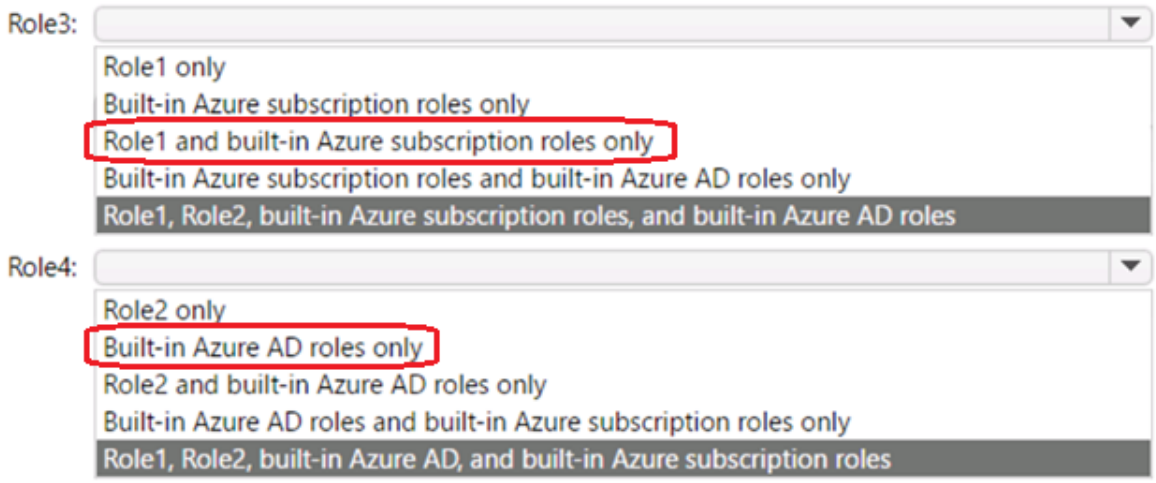

Community Discussion

SecExams

Question #853

DRAG DROP

-

You have an Azure subscription named Sub1 that contains two users named User1 and User2.

You need to assign role-based access control (RBAC) roles to User1 and User2. The users must be able to perform the following tasks in Sub1:

- User1 must view the data in any storage account.
- User2 must assign users the Contributor role for storage accounts.

The solution must use the principle of least privilege.

Which RBAC role should you assign to each user? To answer, drag the appropriate roles to the correct users. Each role may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

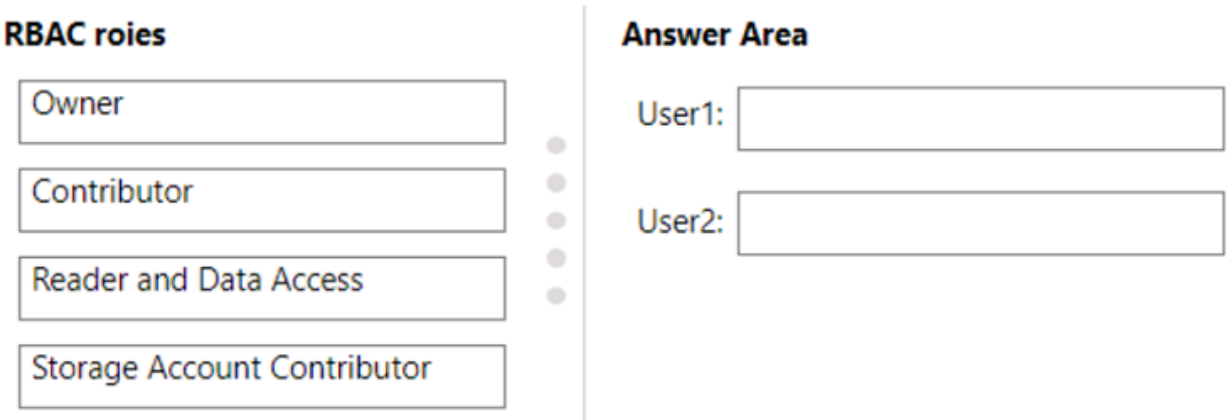

SecExams

Explanation

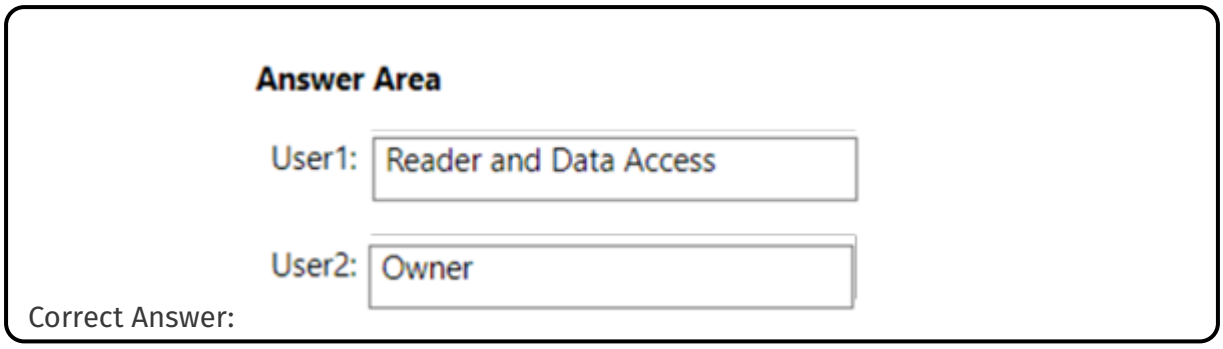

Correct Answer:

Community Discussion

Question #854

You have an Azure subscription that contains 10 virtual machines, a key vault named Vault1, and a network security group (NSG) named NSG1. All the resources are deployed to the East US Azure region.

The virtual machines are protected by using NSG1. NSG1 is configured to block all outbound traffic to the internet.

You need to ensure that the virtual machines can access Vault1. The solution must use the principle of least privilege and minimize administrative effort

What should you configure as the destination of the outbound security rule for NSG1?

A) an application security group
B) a service tag (Correct Answer)
C) an IP address range

Explanation

Correct Answer: B ?

Community Discussion

Question #855

You have an Azure AD tenant named adatum.com that contains the groups shown in the following table.

Name	Member of
Group1	*None*
Group2	Group1
Group3	Group2

Adatum.com contains the users shown in the following table.

Name	Member of
User1	Group1
User2	Group2
User3	Group3
User4	*None*

SecExams

You assign the Azure Active Directory Premium Plan 2 license to Group1 and User4.

Which users are assigned the Azure Active Directory Premium Plan 2 license?

A) User4 only
B) User1 and User4 only (Correct Answer)
C) User1, User2, and User4 only
D) User1, User2, User3, and User4

Explanation

Correct Answer: B ?

Community Discussion

SecExams

Question #856

SecExams

HOTSPOT

-

You have an Azure AD tenant named contoso.com.

You have two external partner organizations named fabrikam.com and litwareinc.com. Fabrikam.com is configured as a connected organization.

You create an access package as shown in the Access package exhibit. (Click the Access package tab.)

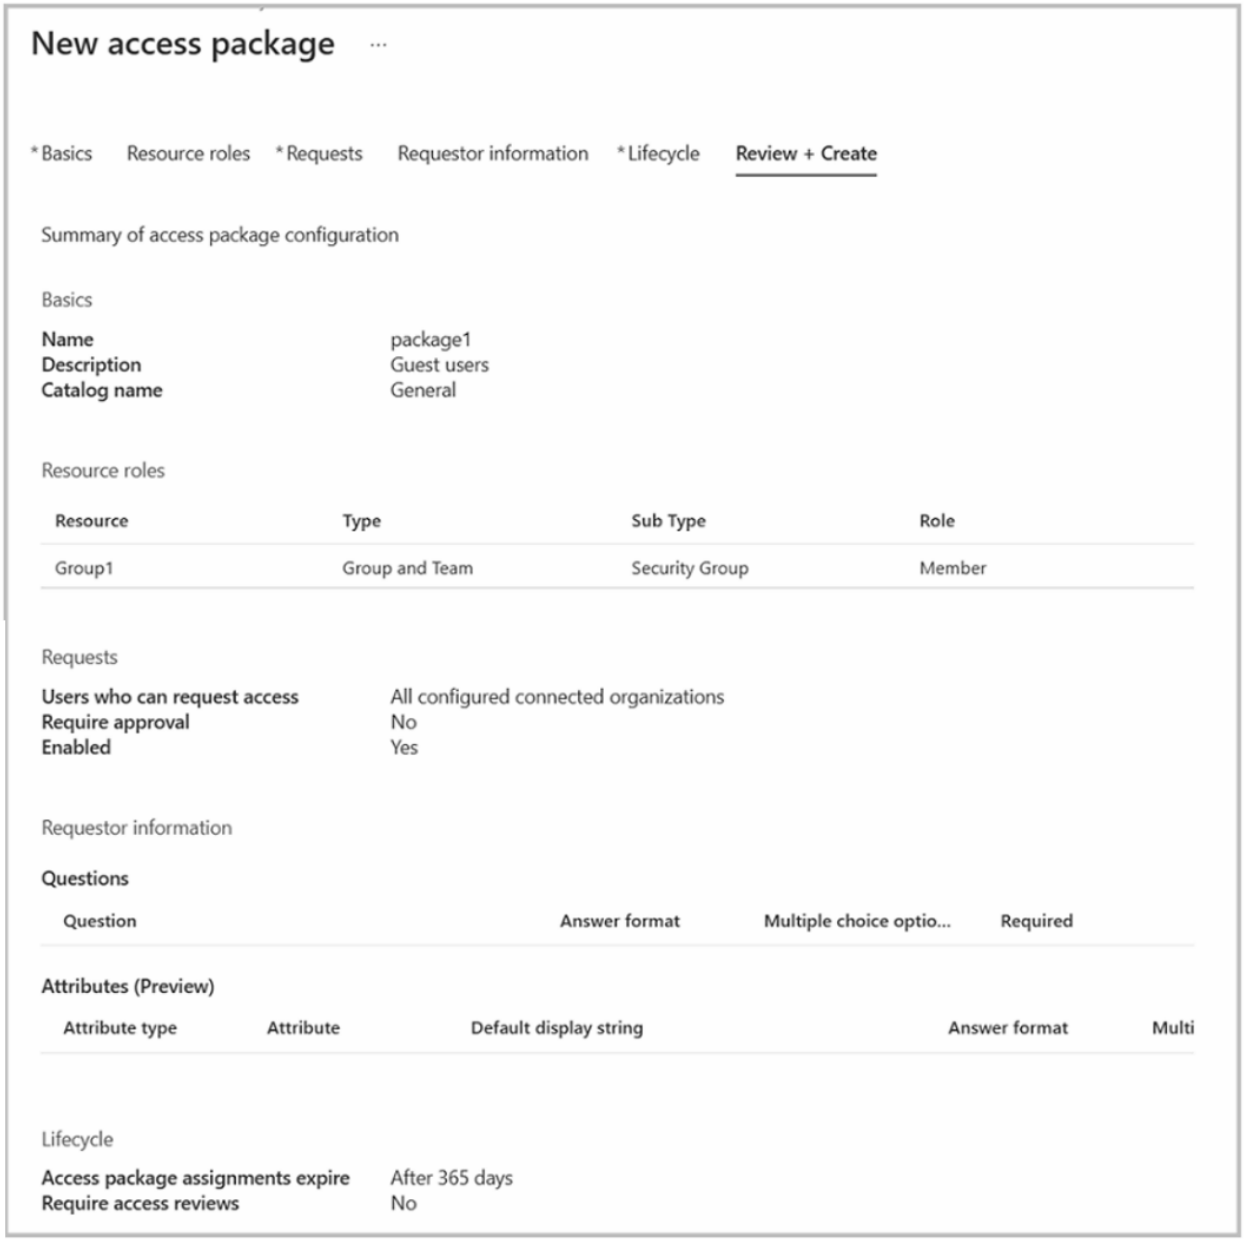

New access package ...

*Basics Resource roles *Requests Requestor information *Lifecycle Review + Create

Summary of access package configuration

Basics

Name	package1
Description	Guest users
Catalog name	General

Resource roles

Resource	Type	Sub Type	Role
Group1	Group and Team	Security Group	Member

Requests

Users who can request access	All configured connected organizations
Require approval	No
Enabled	Yes

Requestor information

Questions

Question	Answer format	Multiple choice optio...	Required

Attributes (Preview)

Attribute type	Attribute	Default display string	Answer format	Multi

Lifecycle

Access package assignments expire	After 365 days
Require access reviews	No

You configure the external user lifecycle settings as shown in the Lifecycle

exhibit. (Click the Lifecycle tab.)

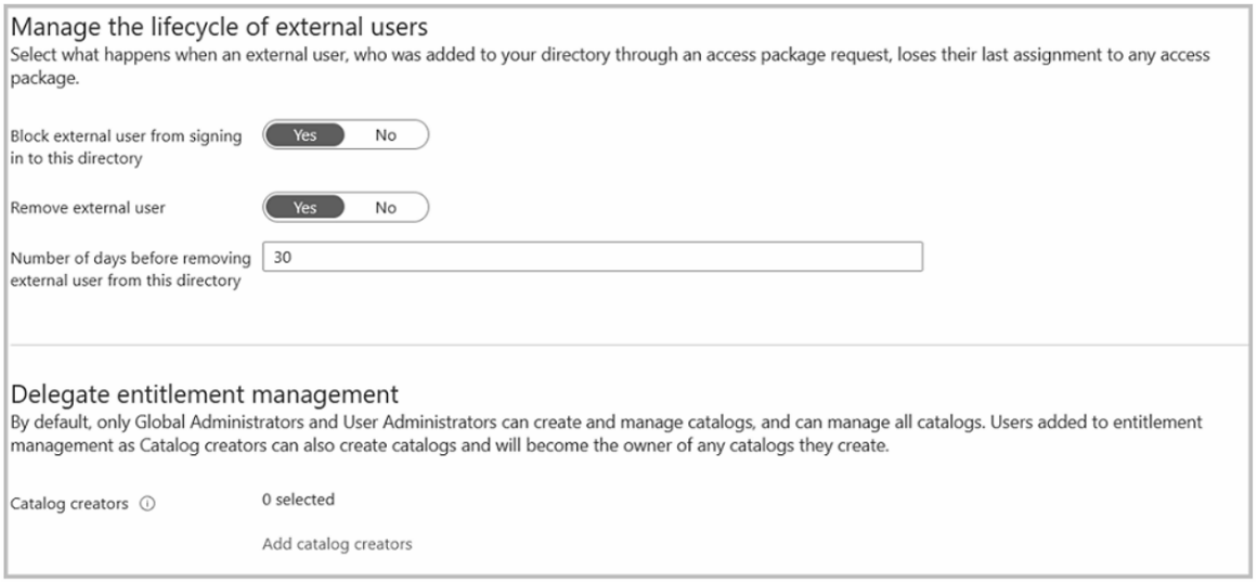

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Statements	Yes	No
Litwareinc.com users can be assigned to package1.	○	○
After 365 days, fabrikam.com users will be removed from Group1.	○	○
After 395 days, fabrikam.com users will be removed from the contoso.com tenant.	○	○

Explanation

Correct Answer:

Statements	Yes	No
Litwareinc.com users can be assigned to package1.	○	○
After 365 days, fabrikam.com users will be removed from Group1.	○	○
After 395 days, fabrikam.com users will be removed from the contoso.com tenant.	○	○

Community Discussion

SecExams

Question #857

HOTSPOT

-

You have an Azure subscription. The subscription contains a storage account named storage1 that has the lifecycle management rules shown in the following table.

Name	Blob prefix	If base were last modified more than (days ago)	Then
Rule1	container1/	3 days	Move to archive storage
Rule2	*Not applicable*	5 days	Move to cool storage
Rule3	container2/	10 days	Delete the blob
Rule4	container2/	15 days	Move to archive storage

On June 1, you store two blobs in storage1 as shown in the following table.

Name	Location	Access tier
File1	container1	Hot
File2	container2	Hot

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
On June 6, File1 will be stored in the Cool access tier.	◯	◯
On June 1, File2 will be stored in the Cool access tier.	◯	◯
On June 16, File2 will be stored in the Archive access tier.	◯	◯

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
On June 6, File1 will be stored in the Cool access tier.	○	○
On June 1, File2 will be stored in the Cool access tier.	○	○
On June 16, File2 will be stored in the Archive access tier.	○	○

Community Discussion

SecExams

Question #858

SecExams

HOTSPOT

-

You have an Azure subscription.

You plan to deploy a storage account named storage1 by using the following Azure Resource Manager (ARM) template.

SecExams

```
{
    "$schema": "http://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",
    "contentVersion": "1.0.0.0",
    "resources": [
        {
            "name": "storage1",
            "type": "Microsoft.Storage/storageAccounts",
            "apiVersion": "2021-08-01",
            "location": "East US",
            "properties": {
                "allowBlobPublicAccess": true,
                "defaultToOAuthAuthentication": false,
                "networkAcls": {
                    "bypass": "AzureServices",
                    "defaultAction": "Allow",
                    "ipRules": []
                }
            },
            "sku": {
                "name": "Standard_LRS"
            },
            "kind": "StorageV2"
        },
        {
            "name": "storage1/default",
            "type": "Microsoft.Storage/storageAccounts/blobServices",
            "apiVersion": "2021-08-01",
            "properties": {
                "restorePolicy": {
                    "enabled": true,
                    "days": 6
                },
                "deleteRetentionPolicy": {
                    "enabled": true,
                    "days": 7
                },
                "containerDeleteRetentionPolicy": {
                    "enabled": true,
                    "days": 7
                },
                "changeFeed": {
                    "enabled": true
                },
                "isVersioningEnabled": true
            },
            "dependsOn": [
                "[concat('Microsoft.Storage/storageAccounts/', 'storage1')]"
            ]
        }
    ]
}
```

For each of the following statements, select Yes if the statement is hue. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Statements	Yes	No
Changes made to the data in storage1 can be rolled back after seven days.	○	○
Only users located in the East US Azure region can connect to storage1.	○	○
Three copies of storage1 will be maintained in the East US Azure region.	○	○

Explanation

Correct Answer:

Statements	Yes	No
Changes made to the data in storage1 can be rolled back after seven days.	○	○
Only users located in the East US Azure region can connect to storage1.	○	○
Three copies of storage1 will be maintained in the East US Azure region.	○	○

Community Discussion

SecExams

Question #859

You have an on-premises server that contains a folder named D:\Folder1.

You need to copy the contents of D:\Folder1 to the public container in an Azure Storage account named contosodata.

Which command should you run?

A) az storage blob copy start D:\Folder1 https://contosodata.blob.core.windows.net/public
B) azcopy sync D:\folder1 https://contosodata.blob.core.windows.net/public --snapshot
C) azcopy copy D:\folder1 https://contosodata.blob.core.windows.net/public --recursive (Correct Answer)
D) az storage blob copy start-batch D:\Folder1 https://contosodata.blob.core.windows.net/public

Explanation

Correct Answer: C ?

Community Discussion

SecExams

Question #860

SecExams

HOTSPOT
-

You have an Azure subscription that contains a storage account named storage1. The storage1 account contains a container named container1.

You need to create a lifecycle management rule for storage1 that will automatically move the blobs in container1 to the lowest-cost tier after 90 days.

How should you complete the rule? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Explanation

Correct Answer:

Community Discussion

Question #861

DRAG DROP

-

You have an Azure subscription that contains a virtual machine named VM1.

You need to back up VM1. The solution must ensure that backups are stored across three availability zones in the primary region.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

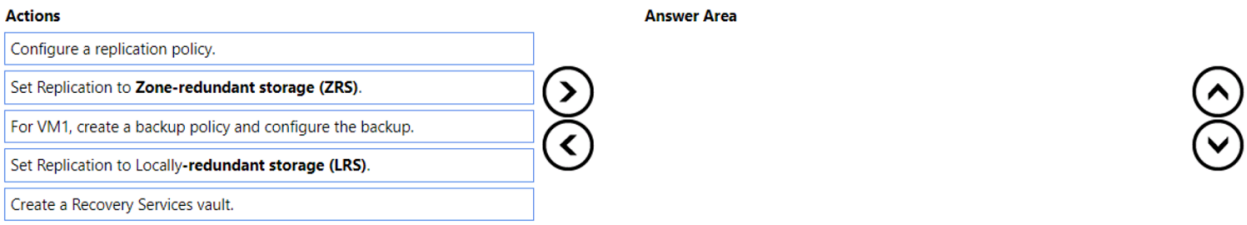

Explanation

Correct Answer:

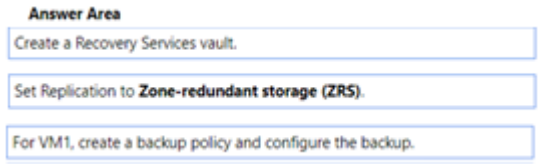

Community Discussion

Question #862

You have an Azure subscription named Subscription1.

You have 5 TB of data that you need to transfer to Subscription1.

You plan to use an Azure Import/Export job.

What can you use as the destination of the imported data?

A) an Azure Cosmos DB database
B) Azure File Storage (Correct Answer)
C) Azure SQL Database
D) a virtual machine

Explanation

Correct Answer: B ?

Community Discussion

SecExams

Question #863

You have an Azure subscription that contains the resources shown in the following table.

Name	Type
storage1	Storage account
container1	Blob container
table1	Storage table

You need to perform the tasks shown in the following table.

Name	Type
Task1	Create a new storage account.
Task2	Upload an append blob to container1.
Task3	Create a file share in storage1.
Task4	Add data to table1.

Which tasks can you perform by using Azure Storage Explorer?

A) Task1 and Task3 only
B) Task1, Task2, and Task3 only
C) Task1, Task3, and Task4 only
D) Task2, Task3, and Task4 only (Correct Answer)
E) Task1, Task2, Task3, and Task4

Explanation

Correct Answer: D ?

Community Discussion

Question #864

SecExams

HOTSPOT
-

You have an Azure AD user named User1 and a read-access geo-redundant storage (RA-GRS) account named contoso2023.

You need to meet the following requirements:

• User1 must be able to write blob data to contoso2023.
• The contoso2023 account must fail over to its secondary endpoint.

Which two settings should you configure? To answer, select the appropriate settings in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

SecExams

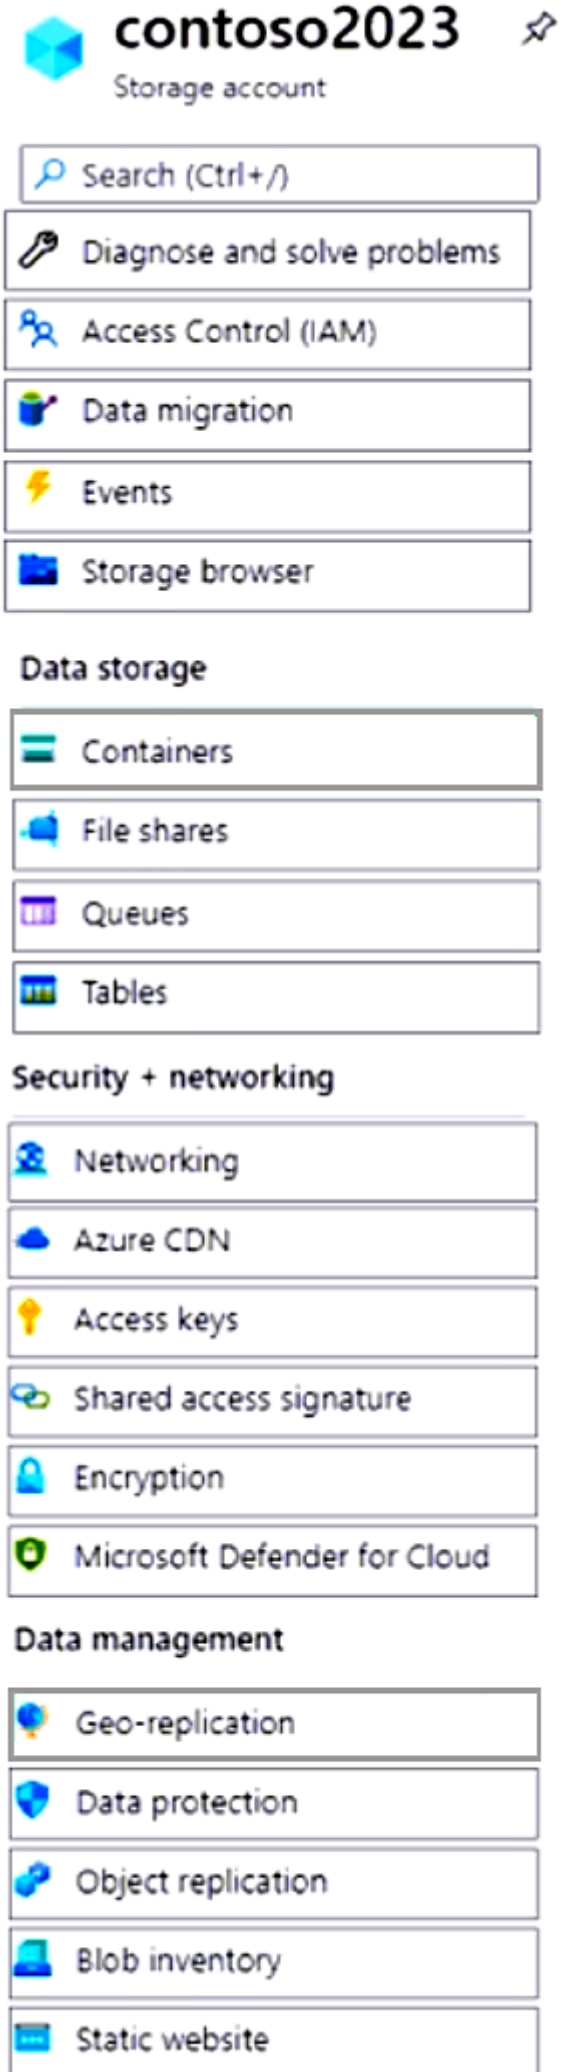
contoso2023
Storage account
Search (Ctrl+/)
Diagnose and solve problems
Access Control (IAM)
Data migration
Events
Storage browser
Data storage
Containers
File shares
Queues
Tables
Security + networking
Networking
Azure CDN
Access keys
Shared access signature
Encryption
Microsoft Defender for Cloud
Data management
Geo-replication
Data protection
Object replication
Blob inventory
Static website

SecExams

SecExams

Explanation

SecExams

SecExams

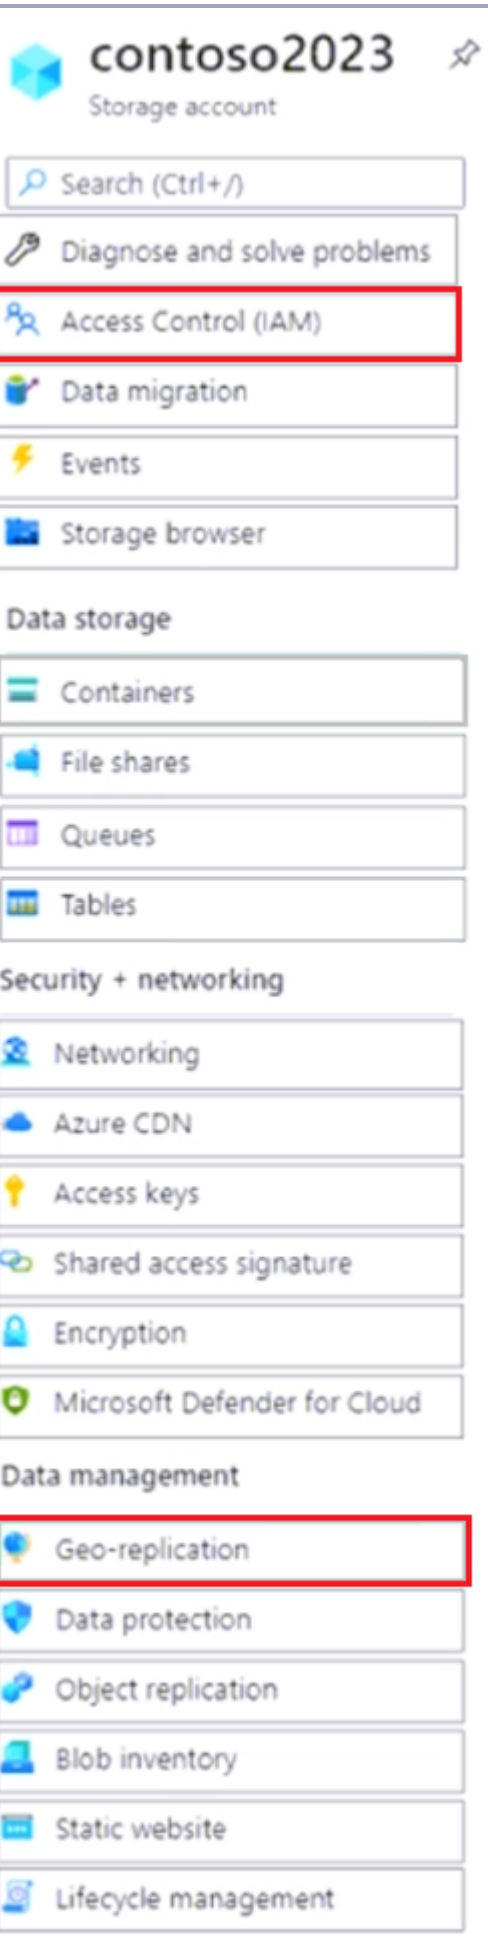

Correct Answer:

SecExams

Community Discussion

Question #865

You have an Azure subscription that contains a storage account named storage1.

You plan to create a blob container named container1.

You need to use customer-managed key encryption for container1.

Which key should you use?

A) an EC key that uses the P-384 curve only
B) an EC key that uses the P-521 curve only
C) an EC key that uses the P-384 curve or P-521 curve only
D) an RSA key with a key size of 4096 only
E) an RSA key type with a key size of 2048, 3072, or 4096 only (Correct Answer)

Explanation

Correct Answer: E ?

Community Discussion

Question #866

SecExams

HOTSPOT

-

You are creating an Azure Kubernetes Services (AKS) cluster as shown in the following exhibit.

SecExams

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

To ensure that you can create Windows containers in AKS1, you must **[answer choice]**.

- enable virtual nodes
- increase the number of node pools
- modify the Kubernetes version setting
- modify the Network configuration setting

To ensure that you can integrate AKS1 with an Azure container registry, you must modify the **[answer choice]** setting.

- AKS-managed Azure Active Directory
- Authentication method
- Authorized IP ranges
- Kubernetes version
- Network configuration

Explanation

Correct Answer:

Answer Area

To ensure that you can create Windows containers in AKS1, you must **[answer choice]**.

- enable virtual nodes
- increase the number of node pools
- modify the Kubernetes version setting
- modify the Network configuration setting

To ensure that you can integrate AKS1 with an Azure container registry, you must modify the **[answer choice]** setting.

- AKS-managed Azure Active Directory
- Authentication method
- Authorized IP ranges
- Kubernetes version
- Network configuration

Community Discussion

1) Modify the Network configuration setting "To run an AKS cluster that supports node pools for Windows Server containers, your cluster needs to use a network policy that uses Azure CNI (advanced) network plugin." Ref: https://learn.microsoft.com/en-us/azure/aks/learn/quick-windows-container-deploy-cli 2) AKS-Managed Azure Active Directory Ref: https://learn.microsoft.com/en-us/azure/aks/cluster-container-registry-integration?tabs=azure-cli

1. modify the Network configuration setting 2. AKS-managed Azure AD https://learn.microsoft.com/en-us/azure/aks/learn/quick-windows-container-deploy-cli#create-an-aks-cluster To run an AKS cluster that supports node pools for Windows Server containers, your cluster needs to use a network policy that uses Azure CNI (advanced) network plugin. https://learn.microsoft.com/en-us/azure/aks/cluster-container-registry-integration?tabs=azure-cli The AKS to ACR integration assigns the AcrPull role to the Azure Active Directory (Azure AD) managed identity associated with your AKS cluster.

topic 4 question 81 is missing.

https://learn.microsoft.com/en-us/azure/aks/learn/quick-windows-container-deploy-cli "To run an AKS cluster that supports node pools for Windows Server containers, your cluster needs to use a network policy that uses Azure CNI (advanced) network plugin." Above diagram uses Kubenet Network configuration - That needs to be modified to Azure CNI. Hence firt box answer is "modify the network configuration setting" To use Windows Server node pools, you must use Azure CNI. The use of kubenet as the network model is not available for Windows Server containers. Also, Windows Containers need their own Node pool as default AKS configuration is for Linux containers. There is a possibility of "increase the number of node pools" as well - as current node pool count is 1. However, first step would be to fix Network configuration.

By default, an AKS cluster is created with a node pool that can run Linux containers. Use az aks nodepool add command to add an additional node pool that can run Windows Server containers alongside the Linux node pool. https://learn.microsoft.com/en-us/azure/aks/learn/quick-windows-container-deploy-cli

SecExams

Question #867

SecExams

HOTSPOT

-

You are creating an Azure Kubernetes Services (AKS) cluster as shown in the following exhibit.

SecExams

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Answer Area

To ensure that you can create Windows containers in AKS1, you must **[answer choice]**.

- enable virtual nodes
- increase the number of node pools
- modify the Kubernetes version setting
- modify the Network configuration setting

To ensure that you can integrate AKS1 with an Azure container registry, you must modify the **[answer choice]** setting.

- AKS-managed Azure Active Directory
- Authentication method
- Authorized IP ranges
- Kubernetes version
- Network configuration

Explanation

Correct Answer:

Answer Area

To ensure that you can create Windows containers in AKS1, you must **[answer choice]**.

- enable virtual nodes
- increase the number of node pools
- modify the Kubernetes version setting
- modify the Network configuration setting

To ensure that you can integrate AKS1 with an Azure container registry, you must modify the **[answer choice]** setting.

- AKS-managed Azure Active Directory
- Authentication method
- Authorized IP ranges
- Kubernetes version
- Network configuration

Community Discussion

Question #868

HOTSPOT

-

You have an Azure subscription that contains an Azure Kubernetes Service (AKS) cluster named Cluster1. Cluster1 hosts a node pool named Pool1 that has four nodes.

You need to perform a coordinated upgrade of Cluster1. The solution must meet the following requirements:

• Deploy two new nodes to perform the upgrade.
• Minimize costs.

How should you complete the command? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

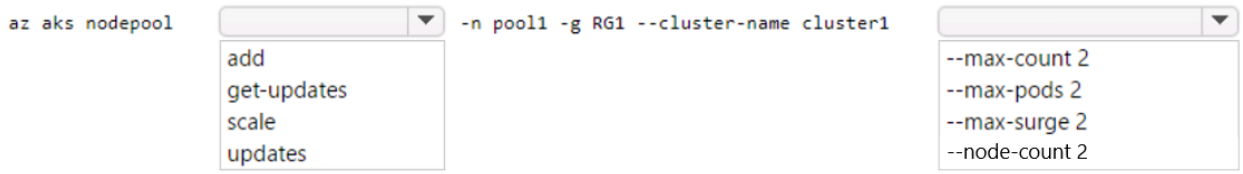

Explanation

Correct Answer:

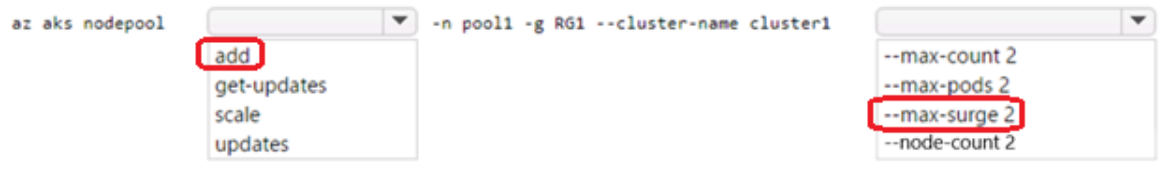

Community Discussion

Answer is WRONG. I assume there is a typo, where it says "updates" it should be "update". az aks nodepool **update** -n pool1 -g RG1 --cluster-name cluster1 **max-surge 2** https://learn.microsoft.com/en-us/cli/azure/aks/nodepool?view=azure-cli-latest We want to edit an existing node pool, so we cannot use "add": "Add a node pool to the managed Kubernetes cluster." We want to update the properties of the node pool, so we need to use: az aks nodepool update "Update a node pool properties." We want to set it up to use more nodes during an update, so this one is right: --max-surge "Extra nodes used to speed upgrade. When specified, it represents the number or percent used, eg. 5 or 33%."

Based on document, it is Box 1: Update Box 2: --max-surge I'm very new here, and I could be wrong. Here is the link. Please verify and don't take my word for it. https://learn.microsoft.com/en-us/azure/aks/upgrade-cluster?tabs=azure-cli

on exam 31/Jul/2023.

az aks nodepool add --name pool1 --resource-group RG1 --cluster-name cluster1 --node-count 2 This is what I would use to deploy two new nodes in the cluster, which is the first requirement. Then I would run az aks upgrade --resource-group RG1 --name cluster1 --kubernetes-version XX to actually upgrade the cluster. I can't test this unfortunately but it makes the most sense to me.

https://learn.microsoft.com/en-us/azure/aks/upgrade-aks-cluster?tabs=azure-cli#customize-node-surge-upgrade # Set max surge for a new node pool az aks nodepool add -n mynodepool -g MyResourceGroup --cluster-name MyManagedCluster --max-surge 33% # Update max surge for an existing node pool az aks nodepool update -n mynodepool -g MyResourceGroup --cluster-name MyManagedCluster --max-surge 5

SecExams

Question #869

HOTSPOT

-

You have an Azure subscription that contains an Azure Kubernetes Service (AKS) cluster named Cluster1. Cluster1 hosts a node pool named Pool1 that has four nodes.

You need to perform a coordinated upgrade of Cluster1. The solution must meet the following requirements:

• Deploy two new nodes to perform the upgrade.
• Minimize costs.

How should you complete the command? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

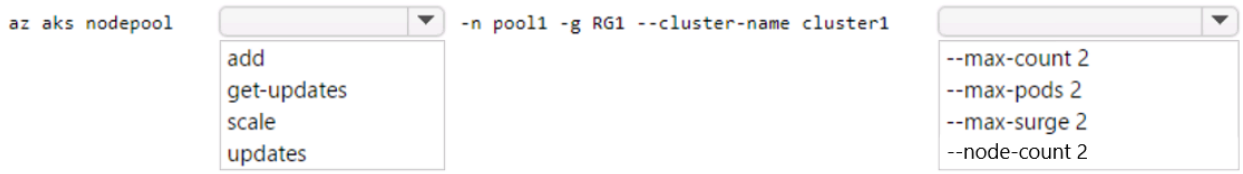

Explanation

Correct Answer:

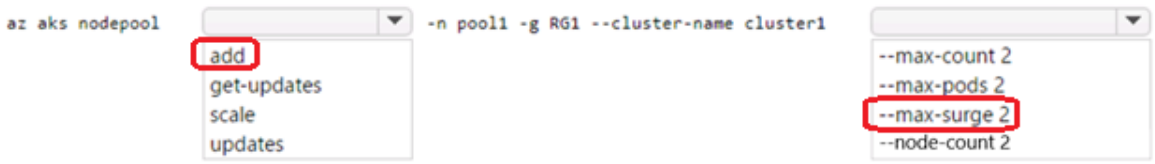

Community Discussion

Question #870

SecExams

HOTSPOT

-

You have an Azure subscription.

You create the following file named Deploy.json.

```
{
    "$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",
    "contentVersion": "1.0.0.0",
  "parameters": {
    "location": {
      "type": "string",
      "defaultValue": "westus"
    }
  },
    "resources": [
      {
        "apiVersion": "2019-04-01",
        "type": "Microsoft.Storage/storageAccounts",
        "name": "[concat(copyIndex(),'storage', uniqueString(resourceGroup().id))]",
        "location": "[resourceGroup().location]",
        "sku": {
          "name": "Premium_LRS"
        },
        "kind": "StorageV2",
        "properties": {},
        "copy": {
          "name": "storagecopy",
          "count": 3
        }
      }

    ]
  }
```

You connect to the subscription and run the following commands.

```
New-AzResourceGroup -Name RG1 -Location "centralus"
New-AzResourceGroupDeployment -ResourceGroupName RG1 -TemplateFile "deploy.json"
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
The commands will create four new resources.	○	○
The commands will create storage accounts in the West US Azure region.	○	○
The first storage account that is created will have a prefix of 0.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
The commands will create four new resources.	○	○
The commands will create storage accounts in the West US Azure region.	○	○
The first storage account that is created will have a prefix of 0.	○	○

Community Discussion

Answers: Yes / No / Yes Y: The 4 resources created are the RG1 resource group + the 3 storage accounts N: the location of the storage accounts is defined by the parameter "location" in the "resources" item that has the value of the Resource Group (stated by the "resourceGroup().location" function that returns the location of the resource group RG1 which is in Central US) Y: the names of the storages account have the prefix given by the copyIndex() function in "name": "[concat(copyIndex(),'storage',uniqueString(resourceGroup().id))]", which starts at the position 0

N - RG != resource Y - Westus is in the template. no parameter override given Y

EDIT: the override is "location": "[resourceGroup().location]" so : N- 3 storage accounts N- central us Y- count iteration always starts with 0 Y

EDIT: the override is "location": "[resourceGroup().location]" so : N- 3 storage accounts N- central us Y- count iteration always starts with 0 Y

EDIT: the override is "location": "[resourceGroup().location]" so : N- 3 storage accounts N- central us Y- count iteration always starts with 0 Y

SecExams

Question #871

SecExams

HOTSPOT

-

You have an Azure subscription.

You create the following file named Deploy.json.

```
{
    "$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",
    "contentVersion": "1.0.0.0",
  "parameters": {
    "location": {
      "type": "string",
      "defaultValue": "westus"
    }
  },
    "resources": [
      {
        "apiVersion": "2019-04-01",
        "type": "Microsoft.Storage/storageAccounts",
        "name": "[concat(copyIndex(),'storage', uniqueString(resourceGroup().id))]",
        "location": "[resourceGroup().location]",
        "sku": {
          "name": "Premium_LRS"
        },
        "kind": "StorageV2",
        "properties": {},
        "copy": {
          "name": "storagecopy",
          "count": 3
        }
      }

    ]
  }
```

You connect to the subscription and run the following commands.

```
New-AzResourceGroup -Name RG1 -Location "centralus"
New-AzResourceGroupDeployment -ResourceGroupName RG1 -TemplateFile "deploy.json"
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
The commands will create four new resources.	○	○
The commands will create storage accounts in the West US Azure region.	○	○
The first storage account that is created will have a prefix of 0.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
The commands will create four new resources.	○	○
The commands will create storage accounts in the West US Azure region.	○	○
The first storage account that is created will have a prefix of 0.	○	○

Community Discussion

Question #872

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.

You need to ensure that NGINX is available on all the virtual machines after they are deployed.

What should you use?

A) Azure Custom Script Extension (Correct Answer)

B) Deployment Center in Azure App Service

C) the Publish-AzVMDscConfiguration cmdlet
D) the New-AzConfigurationAssignment cmdlet

Explanation

Correct Answer:
A

Community Discussion

Selected Answer: A

A is the answer. https://learn.microsoft.com/en-us/azure/virtual-machines/extensions/custom-script-windows The Custom Script Extension downloads and runs scripts on Azure virtual machines (VMs). This extension is useful for post-deployment configuration, software installation, or any other configuration or management task. You can download scripts from Azure Storage or GitHub, or provide them to the Azure portal at extension runtime.

Same as question 79. Duplication in the questions is unfortunate. We paid to see a variety of different questions across all the subject matter domain. Please remove the duplicates.

Same as Question 89. https://www.secexams.com/discussions/microsoft/view/95713-exam-az-104-topic-4-question-89-discussion

There are two ways to ensure specific things are installed. One is by using DesiredStateConfiguration extension, and the other is by running a custom script along with a custom script extension. In this case the only available option is custom script. So A)

It is not the *Publish-AzVMDscConfiguration cmdlet* because that cmdlet just "uploads a Desired State Configuration (DSC) script to Azure blob storage, which later can be applied to Azure virtual machines using the Set-AzVMDscExtension cmdlet." https://learn.microsoft.com/en-us/powershell/module/az.compute/publish-azvmdscconfiguration?view=azps-9.2.0

SecExams

Question #873

HOTSPOT

-

You have an Azure subscription that contains a resource group named RG1.

You plan to use an Azure Resource Manager (ARM) template named template1 to deploy resources. The solution must meet the following requirements:

• Deploy new resources to RG1.
• Remove all the existing resources from RG1 before deploying the new resources.

How should you complete the command? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Explanation

Correct Answer:

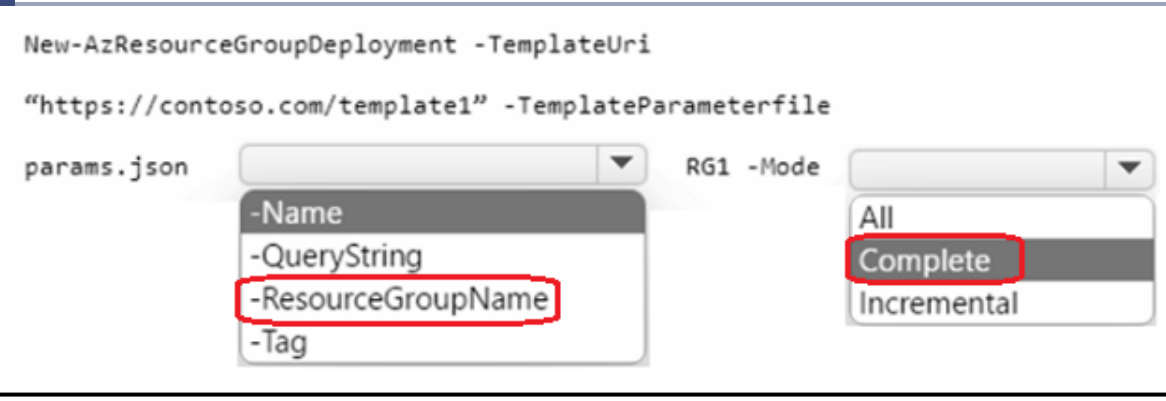

Community Discussion

correct answer -Mode Specifies the deployment mode. The acceptable values for this parameter are: Complete: In complete mode, Resource Manager deletes resources that exist in the resource group but are not specified in the template. Incremental: In incremental mode, Resource Manager leaves unchanged resources that exist in the resource group but are not specified in the template. https://learn.microsoft.com/en-us/powershell/module/az.resources/new-azresourcegroupdeployment?view=azps-9.2.0 There is no such mode called "All"

Passed today on 29Jan23 with a score of 970. This question was in the exam. The provided answer is correct. "-ResourceGroupName" and "Complete".

1. -ResourceGroupName 2. Complete https://learn.microsoft.com/en-us/powershell/module/az.resources/new-azresourcegroupdeployment?view=azps-9.3.0#-resourcegroupname Specifies the name of the resource group to deploy. https://learn.microsoft.com/en-us/powershell/module/az.resources/new-azresourcegroupdeployment?view=azps-9.3.0#-mode Specifies the deployment mode. The acceptable values for this parameter are: -Complete: In complete mode, Resource Manager deletes resources that exist in the resource group but are not specified in the template. - Incremental: In incremental mode, Resource Manager leaves unchanged resources that exist in the resource group but are not specified in the template.

Got this in Feb 2023 exam.

Got this in Feb 2023 exam.

SecExams

Question #874

HOTSPOT

-

You have an Azure subscription that contains a resource group named RG1.

You plan to use an Azure Resource Manager (ARM) template named template1 to deploy resources. The solution must meet the following requirements:

• Deploy new resources to RG1.
• Remove all the existing resources from RG1 before deploying the new resources.

How should you complete the command? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Explanation

Correct Answer:

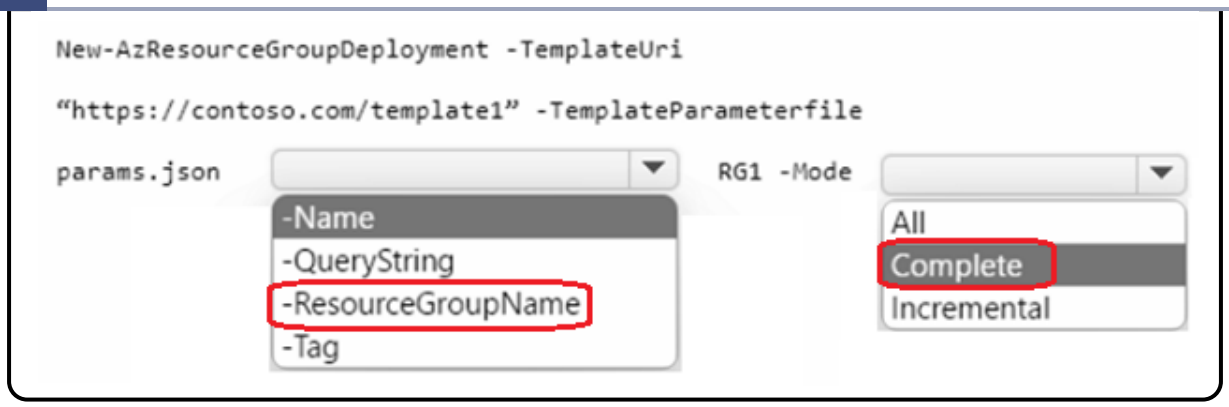

Community Discussion

SecExams

Question #875

SecExams

HOTSPOT

-

You have an Azure App Service web app named app1.

You configure autoscaling as shown in following exhibit.

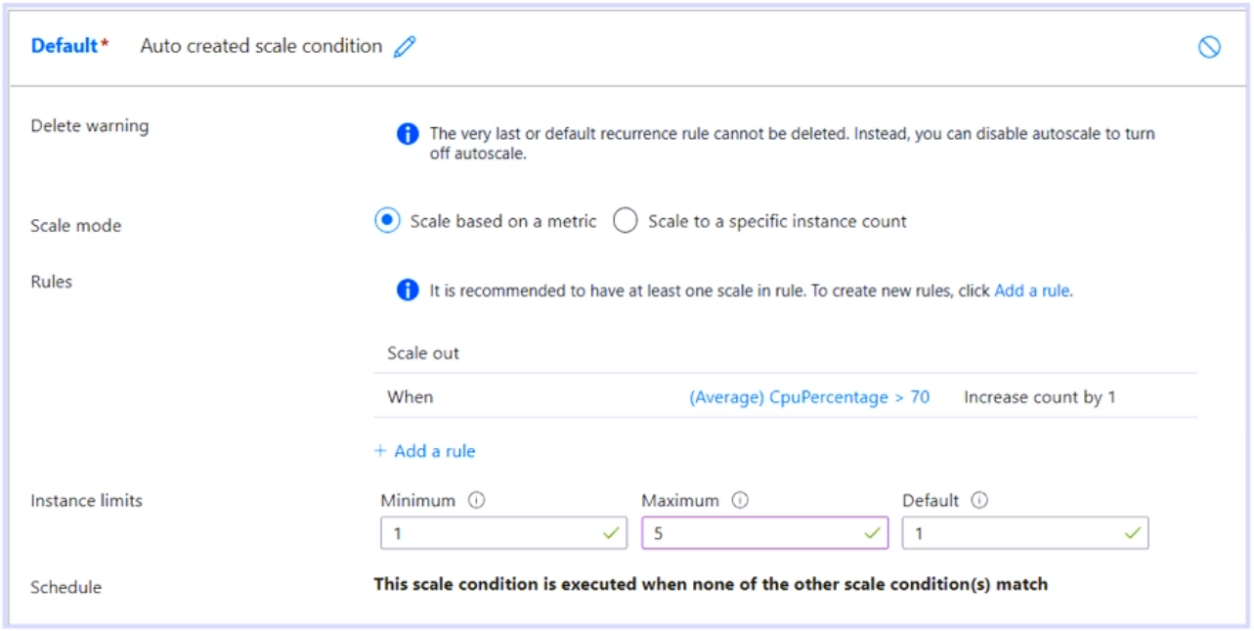

You configure the autoscale rule criteria as shown in the following exhibit.

SecExams

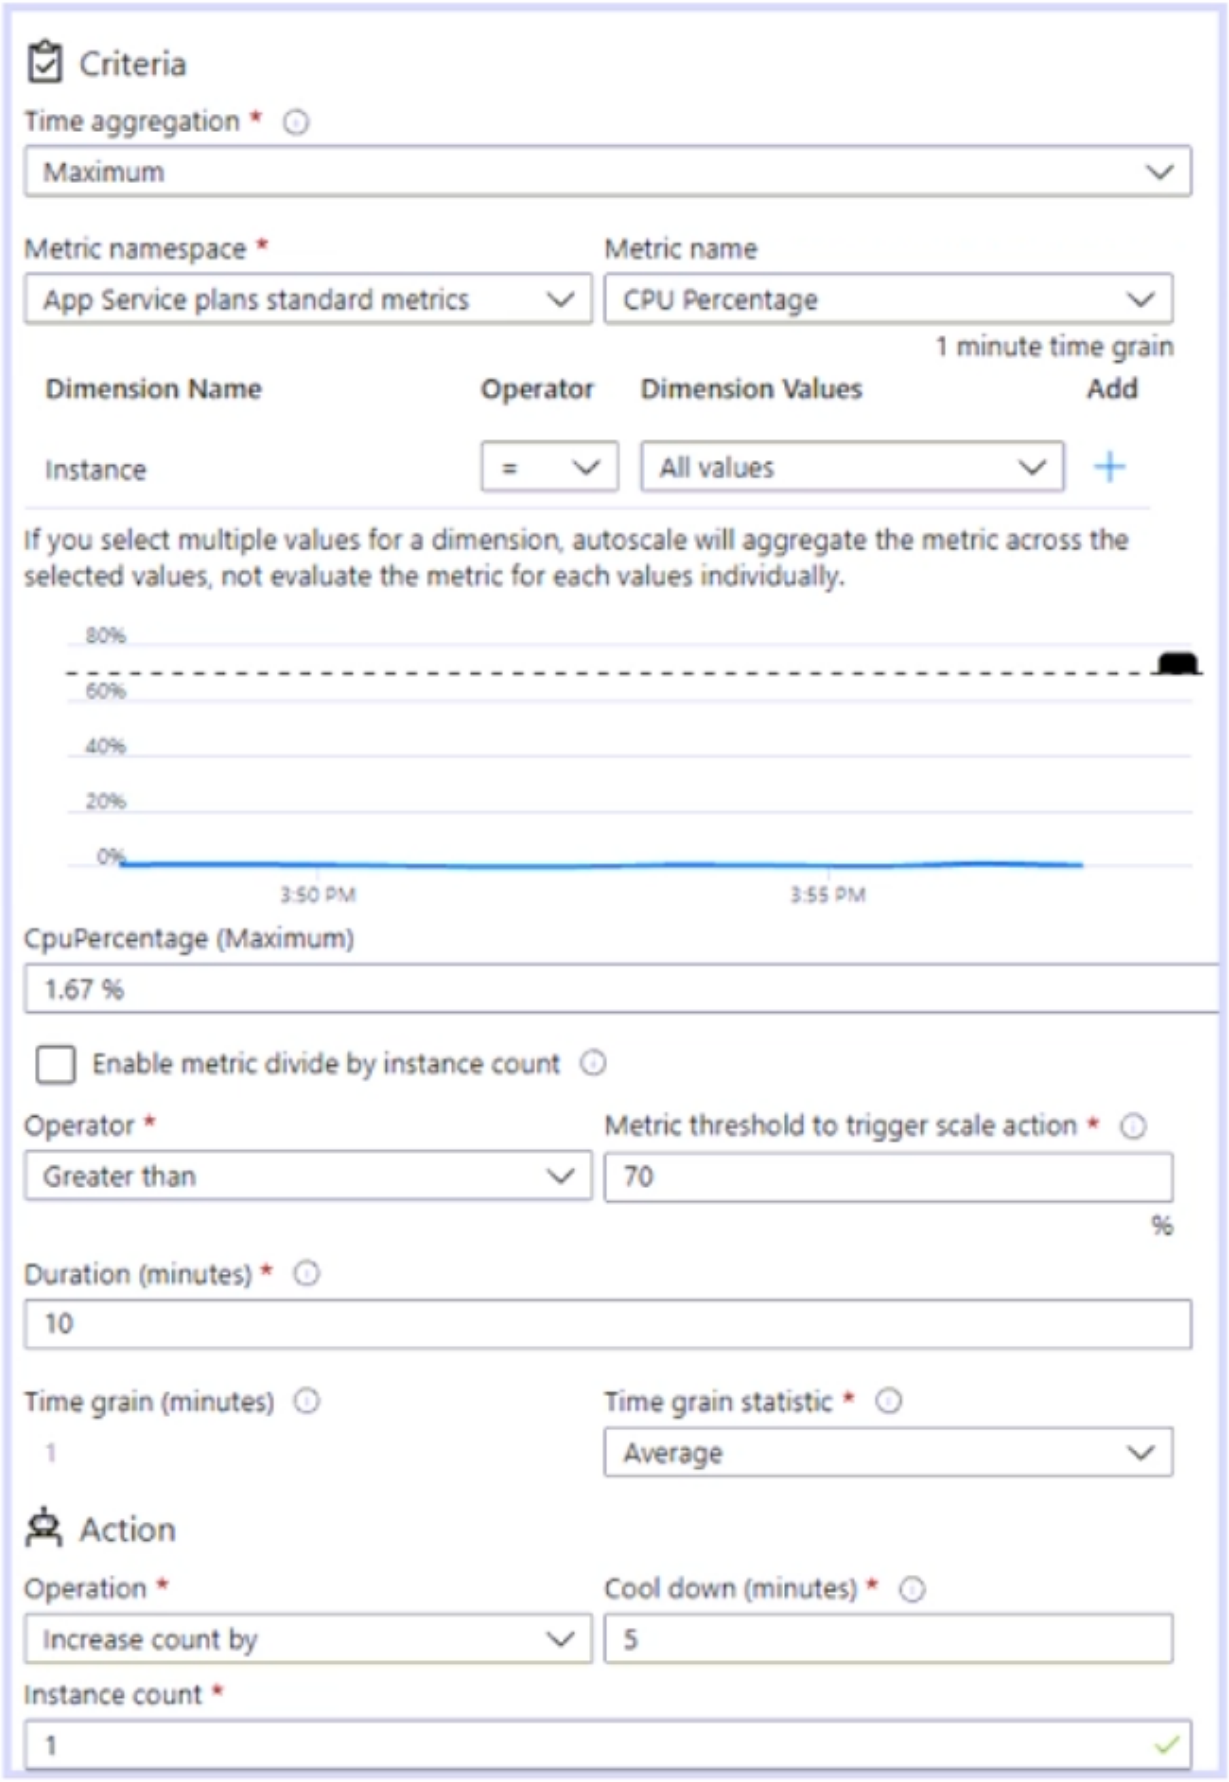

Use the drop-down menus to select the answer choice that answers each

question based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

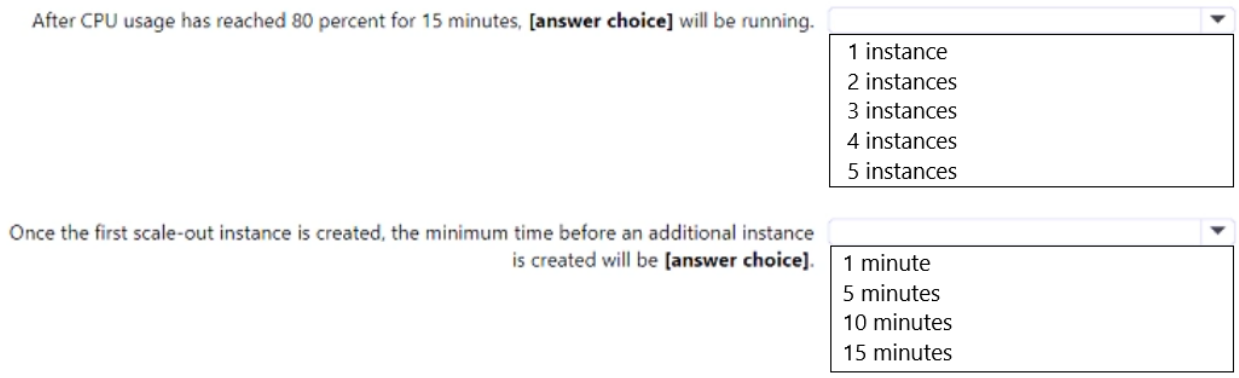

Explanation

Correct Answer:

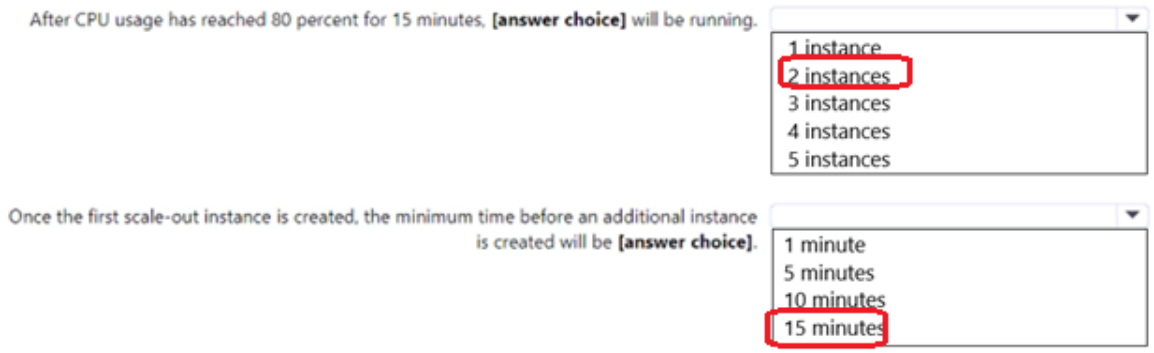

Community Discussion

2, 15 Initial instance is 1 as specified in first figure. 80% for 15 minutes reaches 10 minutes duration, but haven't reached second turn of scale out, so only one new instance is created. Since cool down time is 5 minutes, which means after one scale happens, it will count 5 minutes before counting a new 10 minutes, so 15 minutes total.

I don't know why but it seems that majority of people commenting here don't know exactly how autoscaling works. So let me explain few things. Duration value is only used for data range - how much data autoscaling system has to aggregate to determine if rule applies or not. Cooldown - how much time has to pass before next autoscale operation

to trigger. So once you start you app the first autoscale may happen not earlier than after duration value (because you need specific data range). Each next will happen every cooldown value. So: - first scale out will happen after 10 minutes (duration value) - next scale out will happen after 15 minutes (+5 minutes of cooldown) Therefore answer for first question is 3 instances Second one is simpler. Scaling operation just happened. So next scaling may happen after cooldown time which is 5 minutes.

This is not how it works, after 5min of CD Azure doesn't need to wait another 10 min...after 5 min CD if the CPU is still greater than 70% it will increment another instance.

This is not how it works, after 5min of CD Azure doesn't need to wait another 10 min...after 5 min CD if the CPU is still greater than 70% it will increment another instance.

BTW my answers are 2 and 5

SecExams

Question #876

SecExams

HOTSPOT

-

You have an Azure App Service web app named app1.

You configure autoscaling as shown in following exhibit.

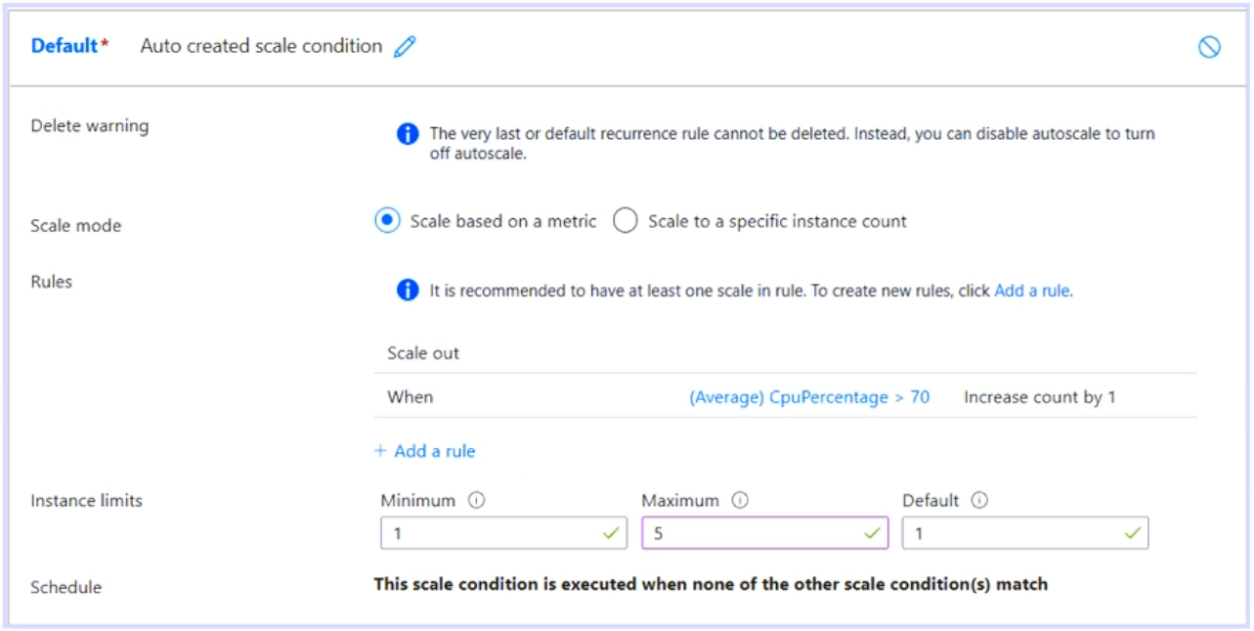

You configure the autoscale rule criteria as shown in the following exhibit.

SecExams

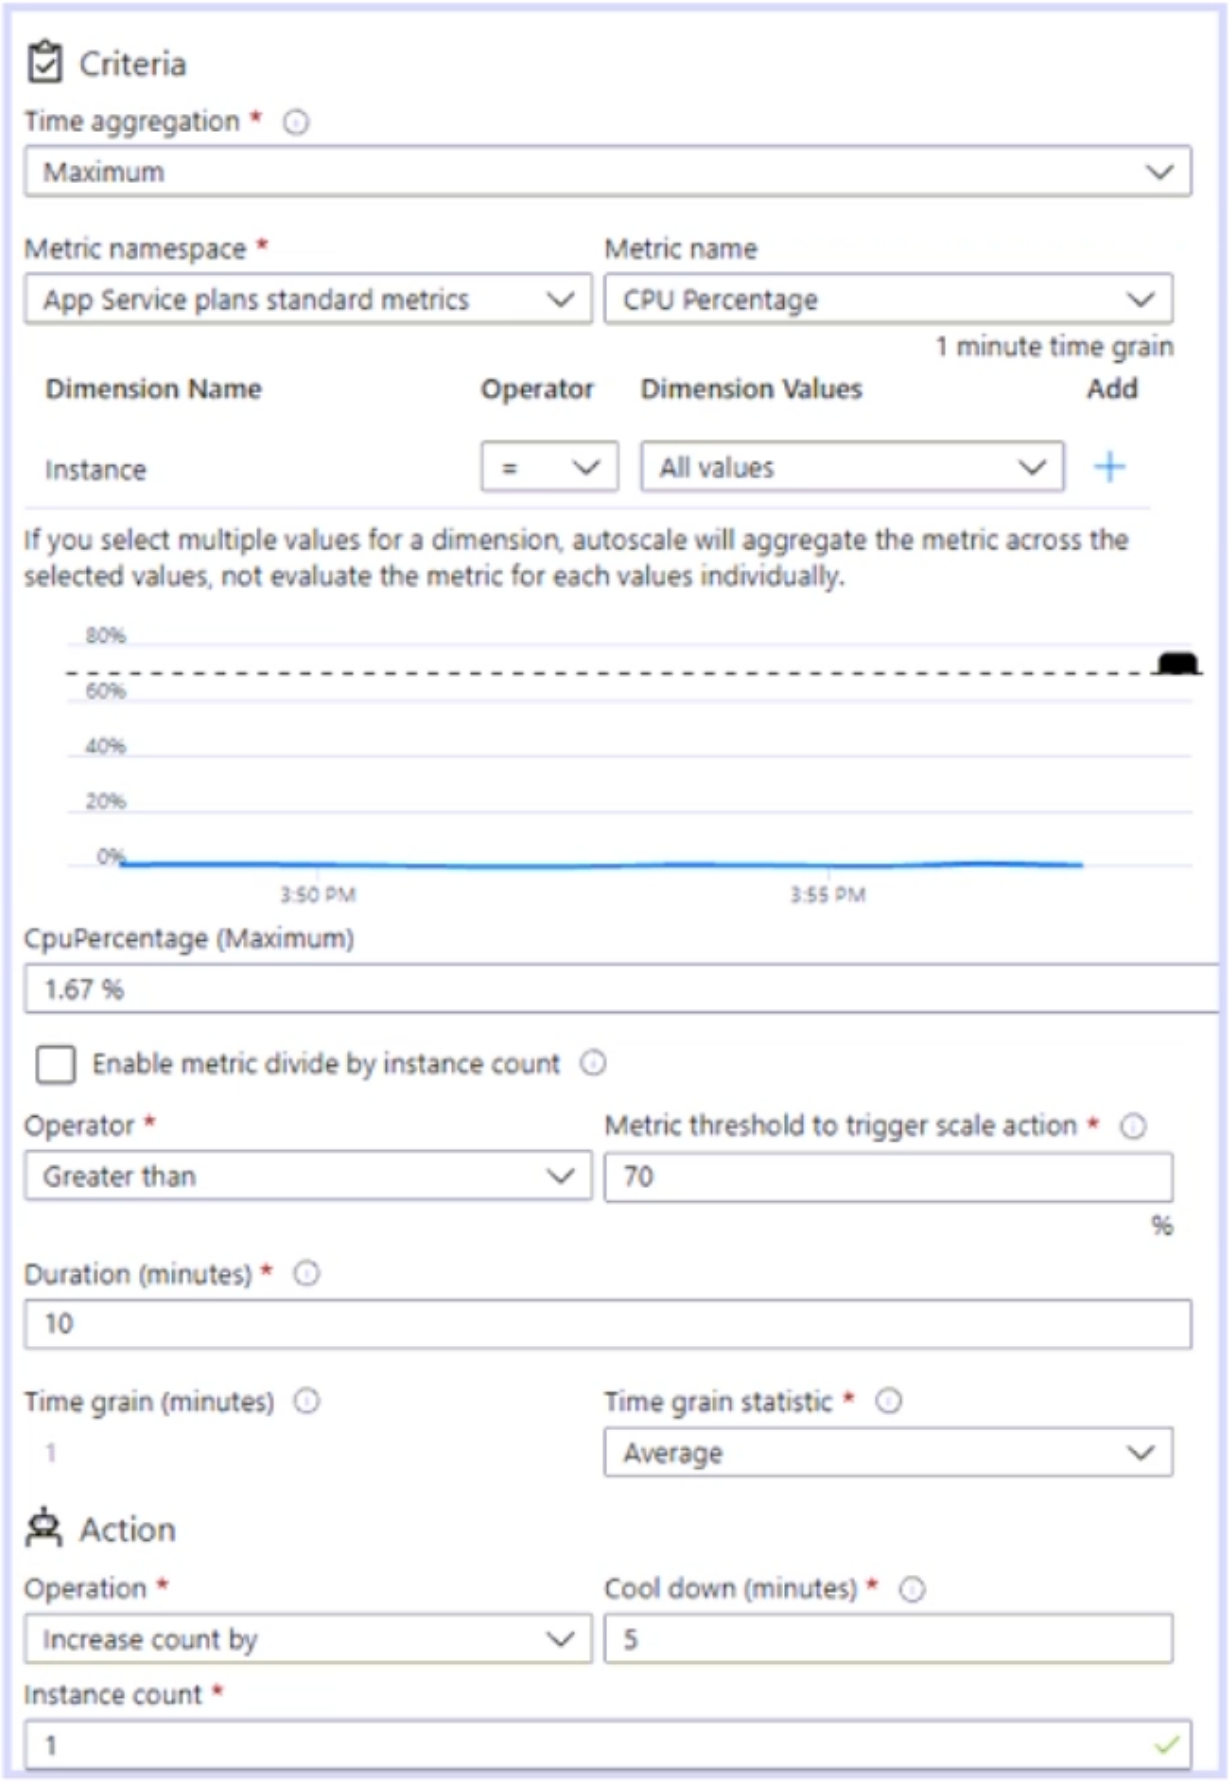

Use the drop-down menus to select the answer choice that answers each

question based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

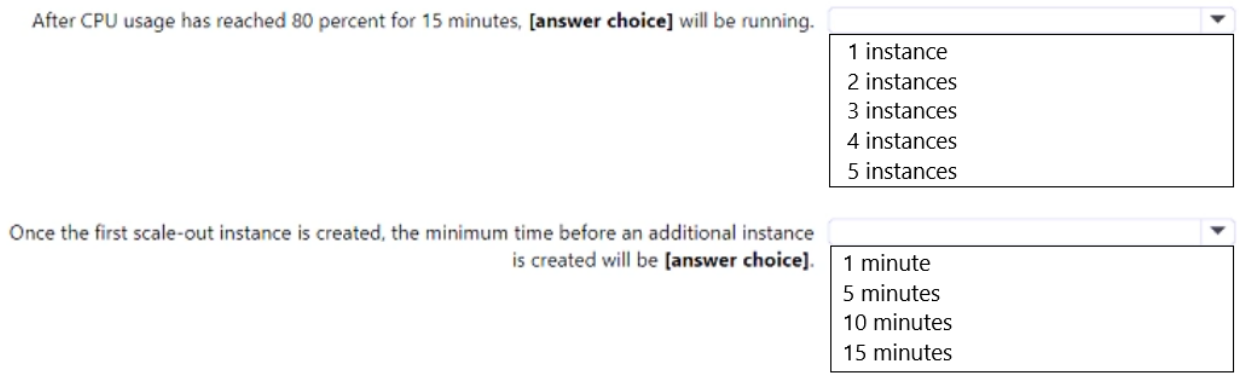

Explanation

Correct Answer:

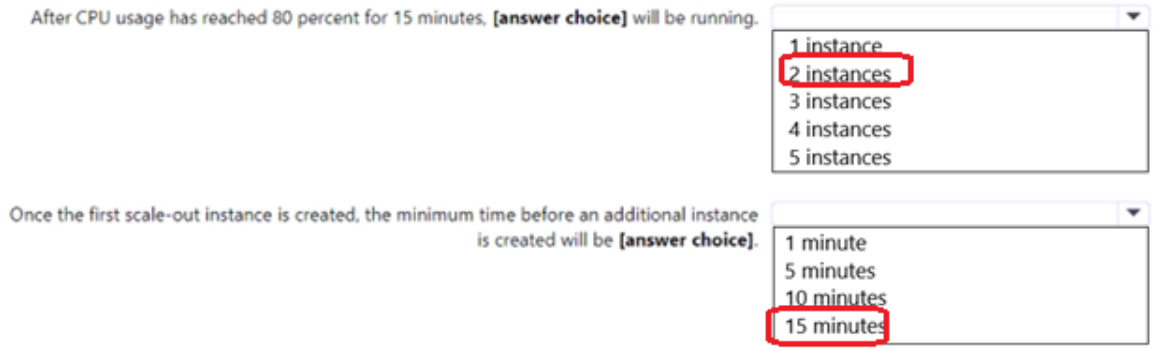

Community Discussion

Question #877

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
VNET1	Virtual network	Azure region: US East Contains the following subnets: • Subnet1: 172.16.1.0/24 • Subnet2: 172.16.2.0/24 • Subnet3: 172.16.3.0/24
VNET2	Virtual network	Azure region: West US Contains the following subnets: • DemoSubnet1: 172.16.1.0/24 • RecoverySubnetA: 172.16.5.0/24 • RecoverySubnetB: 172.16.3.0/24 • TestSubnet1:172.16.2.0/24
VM1	Virtual machine	Connected to Subnet2

You configure Azure Site Recovery to replicate VM1 between the US East and West US regions.

You perform a test failover of VM1 and specify VNET2 as the target virtual network.

When the test version of VM1 is created, to which subnet will the virtual machine be connected?

A) TestSubnet1 (Correct Answer)
B) DemoSubnet1
C) RecoverySubnetA
D) RecoverySubnetB

Explanation

Correct Answer: A ?

Community Discussion

Question #878

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
VNET1	Virtual network	Azure region: US East Contains the following subnets: • Subnet1: 172.16.1.0/24 • Subnet2: 172.16.2.0/24 • Subnet3: 172.16.3.0/24
VNET2	Virtual network	Azure region: West US Contains the following subnets: • DemoSubnet1: 172.16.1.0/24 • RecoverySubnetA: 172.16.5.0/24 • RecoverySubnetB: 172.16.3.0/24 • TestSubnet1:172.16.2.0/24
VM1	Virtual machine	Connected to Subnet2

You configure Azure Site Recovery to replicate VM1 between the US East and West US regions.

You perform a test failover of VM1 and specify VNET2 as the target virtual network.

When the test version of VM1 is created, to which subnet will the virtual machine be connected?

A) TestSubnet1 (Correct Answer)
B) DemoSubnet1
C) RecoverySubnetA
D) RecoverySubnetB

Explanation

Correct Answer:

A

Community Discussion

Selected Answer: B

B is the answer. https://learn.microsoft.com/en-us/azure/site-recovery/azure-to-azure-network-mapping The subnet of the target VM is selected based on the name of the subnet of the source VM. - If a subnet with the same name as the source VM subnet is available in the target network, that subnet is set for the target VM. - If a subnet with the same name doesn't exist in the target network, the first subnet in the alphabetical order is set as the target subnet.

Selected Answer: B

LOL, alphabetical order my a.... Never would have guessed

There are two rules: 1) If a destination subnet exists with the same name as the source subnet, then that one will be selected as a failover target. 2) If a subnet of the same name does not exist in the destination VNET, then the first subnet according the alphabetical order will be selected. Rule 2 applies for this question, B is therefore the correct answer. See zellck's source: https://learn.microsoft.com/en-us/azure/site-recovery/azure-to-azure-network-mapping#specify-a-subnet

There are two rules: 1) If a destination subnet exists with the same name as the source subnet, then that one will be selected as a failover target. 2) If a subnet of the same name does not exist in the destination VNET, then the first subnet according the alphabetical order will be selected. Rule 2 applies for this question, B is therefore the correct answer. See zellck's source: https://learn.microsoft.com/en-us/azure/site-recovery/azure-to-azure-network-mapping#specify-a-subnet

There are two rules: 1) If a destination subnet exists with the same name as the source subnet, then that one will be selected as a failover target. 2) If a subnet of the same name does not exist in the destination VNET, then the first subnet according the alphabetical order will be selected. Rule 2 applies for this question, B is therefore the correct answer. See zellck's source: https://learn.microsoft.com/en-us/azure/site-recovery/azure-to-azure-network-mapping#specify-a-subnet

SecExams

Question #879

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Protocol to UDP
B) Session persistence to None
C) Floating IP (direct server return) to Disabled
D) Session persistence to Client IP (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #880

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Protocol to UDP
B) Session persistence to None
C) Floating IP (direct server return) to Disabled
D) Session persistence to Client IP (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: D

D is the answer. https://learn.microsoft.com/en-us/azure/load-balancer/distribution-mode-concepts Session persistence: Client IP - Traffic from the same client IP is routed to the same backend instance

Somebody realy wants us to remember this ...

This question appeared at least 5 times.

Same as Question 108. https://www.secexams.com/discussions/microsoft/view/94077-exam-az-104-topic-5-question-108-discussion

Correct Answer

Question #881

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.

You need to ensure that NGINX is available on all the virtual machines after they are deployed.

What should you use?

A) the Publish-AzVMDscConfiguration cmdlet
B) a Microsoft Endpoint Manager device configuration profile
C) Deployment Center in Azure App Service
D) a Desired State Configuration (DSC) extension (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: D

Correct Answer D. a Desired State Configuration (DSC) extension

Selected Answer: D

D. a Desired State Configuration (DSC) extension

Selected Answer: D

correct answer D

These questions are like filler question to relax the people, appearing regularly after some questions so that people do not feel overwhelmed.

I love it!!!

Question #882

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Floating IP (direct server return) to Disabled
B) Session persistence to Client IP (Correct Answer)
C) Protocol to UDP
D) Idle Time-out (minutes) to 20

Explanation

Correct Answer: B ?

Community Discussion

Question #883

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Floating IP (direct server return) to Disabled
B) Session persistence to Client IP (Correct Answer)
C) Protocol to UDP
D) Idle Time-out (minutes) to 20

Explanation

Correct Answer:
B

Community Discussion

i hope i get this question on the exam half as often as it appears here.

Same as Question 108. https://www.secexams.com/discussions/microsoft/view/94077-exam-az-104-topic-5-question-108-discussion

Selected Answer: B

B is the answer. https://learn.microsoft.com/en-us/azure/load-balancer/distribution-mode-concepts Session persistence: Client IP - Traffic from the same client IP is routed to the same backend instance

Selected Answer: B

correct B. Session persistence to Client IP

I feel like I've seen this same question about 10 times already

Question #884

You have an Azure subscription that contains 20 virtual machines, a network security group (NSG) named NSG1, and two virtual networks named VNET1 and VNET2 that are peered.

You plan to deploy an Azure Bastion Basic SKU host named Bastion1 to VNET1.

You need to configure NSG1 to allow inbound access to the virtual machines via Bastion1.

Which port should you configure for the inbound security rule?

A) 22
B) 443 (Correct Answer)
C) 389
D) 8080

Explanation

Correct Answer: B ?

Community Discussion

Question #885

You have an Azure subscription that contains 20 virtual machines, a network security group (NSG) named NSG1, and two virtual networks named VNET1 and VNET2 that are peered.

You plan to deploy an Azure Bastion Basic SKU host named Bastion1 to VNET1.

You need to configure NSG1 to allow inbound access to the virtual machines via Bastion1.

Which port should you configure for the inbound security rule?

A) 22
B) 443 (Correct Answer)
C) 389
D) 8080

Explanation

Correct Answer:
B

Community Discussion

Correct answer A....As Bastion connects to VM via port 22/3389..Azure portal connects to Bastion via port 443..as the question is to inbound rule for vm from Bastion...Correct answer is PORT 22...option A

Selected Answer: B

Correct Answer B. 443 Using Bastion your RDP/SSH session is over TLS on port 443. https://learn.microsoft.com/en-us/azure/bastion/bastion-overview If you say port 22 then what about windows VM as it is not mentioned that the VM is windows or Linux? You will have to allow port 443 in NSG.

Correct Answer is B. The Azure Bastion will create a public IP that needs port 443 enabled on the public IP for ingress traffic. Port 3389/22 are NOT required to be opened on the AzureBastionSubnet https://learn.microsoft.com/en-us/azure/bastion/bastion-nsg

Correct Answer is B. The Azure Bastion will create a public IP that needs port 443 enabled on the public IP for ingress traffic. Port 3389/22 are NOT required to be opened on the AzureBastionSubnet https://learn.microsoft.com/en-us/azure/bastion/bastion-nsg

I disagree. You're talking about traffic from Internet -> Bastion. The question is asking about traffic from Bastion -> VMs. Read further down in that link you provided. "Egress Traffic to target VMs: Azure Bastion will reach the target VMs over private IP. The NSGs need to allow egress traffic to other target VM subnets for port 3389 and 22." I think the correct answer is A, and we have to assume that these are Linux VMs Bastion is connecting to over SSH.

SecExams

Question #886

SecExams

HOTSPOT
-

Your network contains an on-premises Active Directory Domain Services (AD DS) domain named contoso.com. The domain contains the servers shown in the following table.

Name	IP address	Role
DC1	192.168.2.1/16	Domain controller DNS server
Server1	192.168.2.50/16	Member server

You plan to migrate contoso.com to Azure.

You create an Azure virtual network named VNET1 that has the following settings:

• Address space: 10.0.0.0/16
• Subnet:
o Name: Subnet1
o IPv4: 10.0.1.0/24

You need to move DC1 to VNET1. The solution must ensure that the member servers in contoso.com can resolve AD DS DNS names.

How should you configure DC1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

IP address

- Obtain an IP address automatically
- Use 10.0.1.3
- Use 10.0.2.1
- Use 192.168.2.1

Name resolution

- Configure VNET1 to use a custom DNS server
- Configure VNET1 to use the default Azure-provided DNS server
- Create an Azure Private DNS zone named contoso.com
- Create an Azure public DNS zone named contoso.com

SecExams

Explanation

Correct Answer:

Answer Area

IP address

- Obtain an IP address automatically
- Use 10.0.1.3
- Use 10.0.2.1
- Use 192.168.2.1

Name resolution

- Configure VNET1 to use a custom DNS server
- Configure VNET1 to use the default Azure-provided DNS server
- Create an Azure Private DNS zone named contoso.com
- Create an Azure public DNS zone named contoso.com

Community Discussion

Question #887

SecExams

HOTSPOT
-

Your network contains an on-premises Active Directory Domain Services (AD DS) domain named contoso.com. The domain contains the servers shown in the following table.

Name	IP address	Role
DC1	192.168.2.1/16	Domain controller DNS server
Server1	192.168.2.50/16	Member server

You plan to migrate contoso.com to Azure.

You create an Azure virtual network named VNET1 that has the following settings:

• Address space: 10.0.0.0/16
• Subnet:
o Name: Subnet1
o IPv4: 10.0.1.0/24

You need to move DC1 to VNET1. The solution must ensure that the member servers in contoso.com can resolve AD DS DNS names.

How should you configure DC1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

IP address

- Obtain an IP address automatically
- Use 10.0.1.3
- Use 10.0.2.1
- Use 192.168.2.1

Name resolution

- Configure VNET1 to use a custom DNS server
- Configure VNET1 to use the default Azure-provided DNS server
- Create an Azure Private DNS zone named contoso.com
- Create an Azure public DNS zone named contoso.com

Explanation

Correct Answer:

Answer Area

IP address

- Obtain an IP address automatically
- Use 10.0.1.3
- Use 10.0.2.1
- Use 192.168.2.1

Name resolution

- Configure VNET1 to use a custom DNS server
- Configure VNET1 to use the default Azure-provided DNS server
- Create an Azure Private DNS zone named contoso.com
- Create an Azure public DNS zone named contoso.com

Community Discussion

I think the answers should be: 1) Obtain an IP address automatically The first 4 IP addresses within a subnet space are getting reserved for Azure automatically. Thus, 10.0.1.3 can't be the right answer. 10.0.2.1 is in the VNET space but falls out of the subnet space. 192.168.2.1 is just out of the VNET. 2) Configure VNET1 to use a custom DNS server This VNET1 should use our pre-created DNS server as its DNS server so tahat the member servers in contoso.com can resolve AD DS DNS names. Pls do not hesitate to correct me if I am wrong :)

Another dumb correct response. The only correct responses appear to be to use a dynamic IP address and custom DNS. But, in the real world, you would never configure a DC to use a dynamic IP address. Imagine the chaos if it is rebooted and acquires a different IP address and the SRV records are possibly not updated, not to mention the fact that now the client DNS configurations are pointing to an incorrect DNS address and won't be able to resolve A and SRV records for the domain. Madness.

IDK... 1) ok 2) if you set IP address automatically, what do you set in custom DNS? I think is better create a private DNS...

IDK... 1) ok 2) if you set IP address automatically, what do you set in custom DNS? I think is better create a private DNS...

A&A is correct! Obtain an IP address automatically Configure VNET1 to use a custom DNS server

SecExams

Question #888

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Session persistence to None
B) a health probe

C) Session persistence to Client IP (Correct Answer)
D) Idle Time-out (minutes) to 20

Explanation

Correct Answer: C ?

Community Discussion

Question #889

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Session persistence to None
B) a health probe
C) Session persistence to Client IP (Correct Answer)
D) Idle Time-out (minutes) to 20

Explanation

Correct Answer:
C

Community Discussion

My favourite question - I always get it right! ;)

i hope i get this question on the exam half as often as it appears here.

Selected Answer: C

this question is maybe 10 times in this dump.

Imagine this question not to be asked in the exam itself.

Selected Answer: C

Correct Answer C. Session persistence to Client IP

Question #890

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Azure region	Resource group
VNET1	West US	RG1
VNET2	Central US	RG1
VNET3	Central US	RG2
VNET4	West US	RG2

You need to deploy an Azure firewall named AF1 to RG1 in the West US Azure region.

To which virtual networks can you deploy AF1?

A) VNET1, VNET2, VNET3, and VNET4
B) VNET1 and VNET2 only
C) VNET1 only (Correct Answer)
D) VNET1, VNET2, and VNET4 only
E) VNET1 and VNET4 only

Explanation

Correct Answer: C ?

Community Discussion

SecExams

Question #891

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Azure region	Resource group
VNET1	West US	RG1
VNET2	Central US	RG1
VNET3	Central US	RG2
VNET4	West US	RG2

You need to deploy an Azure firewall named AF1 to RG1 in the West US Azure region.

To which virtual networks can you deploy AF1?

A) VNET1, VNET2, VNET3, and VNET4
B) VNET1 and VNET2 only
C) VNET1 only (Correct Answer)
D) VNET1, VNET2, and VNET4 only
E) VNET1 and VNET4 only

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: C

C. VNET1 only No idea why people are saying option E as the question clearly states that "You need to deploy an Azure firewall named AF1 to RG1 in the West US", so RG1 in the West US region means the correct answer is C(VNET1).

Are there any firewall resource group restrictions? Yes. The firewall, VNet, and the public IP address all must be in the same resource group. https://learn.microsoft.com/en-us/azure/firewall/firewall-faq

Are there any firewall resource group restrictions? Yes. The firewall, VNet, and the public IP address all must be in the same resource group. https://learn.microsoft.com/en-us/azure/firewall/firewall-faq

Selected Answer: E

Should be E - Vnet 1 and Vnet 4. As all resources, the resource group is just a logical grouping and the real limitations do come from the region. An Azure Firewall can be used with peered networks, but as the question does not mention peering the firewall cannot be applied to networks in another region. "You can deploy Azure Firewall on any virtual network, but customers typically deploy it on a central virtual network and peer other virtual networks to it in a hub-and-spoke model. You can then set the default route from the peered virtual networks to point to this central firewall virtual network. Global VNet peering is supported, but it isn't recommended because of potential performance and latency issues across regions. For best performance, deploy one firewall per region." I also just tried it out, I cannot connect an Azure Firewall to a VNET which is in another region.

You right "Are there any firewall resource group restrictions? Yes. The firewall, VNet, and the public IP address all must be in the same resource group." https://learn.microsoft.com/en-us/azure/firewall/firewall-faq#are-there-any-firewall-resource-group-restrictions

SecExams

Question #892

You have an on-premises network.

You have an Azure subscription that contains three virtual networks named VNET1. VNET2. and VNET3. The virtual networks are peered and connected to the on-premises network. The subscription contains the virtual machines shown in the following table.

Name	Location	Connected to
VM1	West US	VNET1
VM2	West US	VNET1
VM3	West US	VNET2
VM4	Central US	VNET3

You need to monitor connectivity between the virtual machines and the on-premises network by using Connection Monitor.

What is the minimum number of connection monitors you should deploy?

A) 1
B) 2 (Correct Answer)
C) 3
D) 4

Explanation

Correct Answer: B ?

Community Discussion

Question #893

You have an on-premises network.

You have an Azure subscription that contains three virtual networks named VNET1. VNET2. and VNET3. The virtual networks are peered and connected to the on-premises network. The subscription contains the virtual machines shown in the following table.

Name	Location	Connected to
VM1	West US	VNET1
VM2	West US	VNET1
VM3	West US	VNET2
VM4	Central US	VNET3

You need to monitor connectivity between the virtual machines and the on-premises network by using Connection Monitor.

What is the minimum number of connection monitors you should deploy?

A) 1
B) 2 (Correct Answer)
C) 3
D) 4

Explanation

Correct Answer:
B

Community Discussion

So you came back, scrolled through all of the ~450 questions until you found the ones which where in your exam and posted this because of altruism? I dont think so.

So you came back, scrolled through all of the ~450 questions until you found the ones which where in your exam and posted this because of altruism? I dont think so.

Selected Answer: B

Connection monitor resource: A region-specific Azure resource. https://learn.microsoft.com/en-us/azure/network-watcher/connection-monitor-create-using-portal#before-you-begin

Why wouldn't you believe that? This is a great deed from someone who just took the exam and is back to help the others. I appreciate this.

Why wouldn't you believe that? This is a great deed from someone who just took the exam and is back to help the others. I appreciate this.

SecExams

Question #894

SecExams

HOTSPOT

-

You plan to deploy the following Azure Resource Manager (ARM) template.

SecExams

```
{
  "$schema":"https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",
  "contentVersion":"1.0.0.0",
  "parameters":{},
  "variables":{
    "vnetId":"[resourceId('Microsoft.Network/virtualNetworks/', 'VNET1')],
    "lbId":"[resourceId('Microsoft.Network/loadBalancers/', 'LB1')]",
    "sku":"Standard",
    "netname":"APP1"
  },
  "resources":[
    {
      "apiVersion":"2017-08-01",
      "type":"Microsoft.Network/loadBalancers/",
      "name":"LB1",
      "location":"EastUS",
      "sku":{
        "name":"[variables('sku')]"
      },
      "properties":{
        "frontendIPConfiguration":[
          {
            "name":"[variables('netname')]",
            "properties":{
              "subnet":{
                "id":"[concat(variables('vnetId'),'/subnets/', variables('netname'))]"
              },
              "privateIPAllocationMethod":"Dynamic"
            }
          }
        ],
        "backendAddressPools":[
          {
            "name":"concat(variables('netname'), '-Servers')]"
          }
        ],
        "loadBalancingRules":[
          {
            "name":"APP1",
            "properties":{
              "frontendIPConfiguration":{
                "id":"[concat(variables('lbId'),'/frontendIPConfigurations/', variables('netname'))]"
              },
              "backendAddressPool":{
                "id":"[concat(variables('lbId'),'/backendAddressPool/', variables('netname'))]"
              },
              "probe":{
                "id":"[concat(variables('lbId'),'/probes/probe')]"
              },
              "backendPort":8080,
              "protocol":"Tcp",
              "frontendPort":80,
              "enableFloatingIP":false,
              "idleTimeoutInMinutes":4,
              "loadDistribution":"SourceIPProtocol"
            }
          }
        ],
        "probes":[
          {
            "name":"probe",
            "properties":{
              "protocol":"Tcp",
              "port":8080,
              "intervalInSeconds":15,
              "numberOfProbes":2
            }
          }
        }
      ]
    }
  }
  ]
}
```

For each of the following statements, select Yes if the statement is true.

Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
LB1 will be connected to a subnet named VNET1/netname	○	○
LB1 can be deployed only to the resource group that contains VNET1	○	○
The value of the `sku` variable can be provided as a parameter when the template is deployed from a command prompt	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
LB1 will be connected to a subnet named VNET1/netname	○	○
LB1 can be deployed only to the resource group that contains VNET1	○	○
The value of the `sku` variable can be provided as a parameter when the template is deployed from a command prompt	○	○

Community Discussion

Question #895

SecExams

HOTSPOT

-

You plan to deploy the following Azure Resource Manager (ARM) template.

SecExams

```
{
  "$schema":"https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",
  "contentVersion":"1.0.0.0",
  "parameters":{},
  "variables":{
    "vnetId":"[resourceId('Microsoft.Network/virtualNetworks/', 'VNET1')],
    "lbId":"[resourceId('Microsoft.Network/loadBalancers/', 'LB1')]",
    "sku":"Standard",
    "netname":"APP1"
  },
  "resources":[
    {
      "apiVersion":"2017-08-01",
      "type":"Microsoft.Network/loadBalancers/",
      "name":"LB1",
      "location":"EastUS",
      "sku":{
        "name":"[variables('sku')]"
      },
      "properties":{
        "frontendIPConfiguration":[
          {
            "name":"[variables('netname')]",
            "properties":{
              "subnet":{
                "id":"[concat(variables('vnetId'),'/subnets/', variables('netname'))]"
              },
              "privateIPAllocationMethod":"Dynamic"
            }
          }
        ],
        "backendAddressPools":[
          {
            "name":"concat(variables('netname'), '-Servers')]"
          }
        ],
        "loadBalancingRules":[
          {
            "name":"APP1",
            "properties":{
              "frontendIPConfiguration":{
                "id":"[concat(variables('lbId'),'/frontendIPConfigurations/', variables('netname'))]"
              },
              "backendAddressPool":{
                "id":"[concat(variables('lbId'),'/backendAddressPool/', variables('netname'))]"
              },
              "probe":{
                "id":"[concat(variables('lbId'),'/probes/probe')]"
              },
              "backendPort":8080,
              "protocol":"Tcp",
              "frontendPort":80,
              "enableFloatingIP":false,
              "idleTimeoutInMinutes":4,
              "loadDistribution":"SourceIPProtocol"
            }
          }
        ],
        "probes":[
          {
            "name":"probe",
            "properties":{
              "protocol":"Tcp",
              "port":8080,
              "intervalInSeconds":15,
              "numberOfProbes":2
            }
          }
        }
      ]
    }
  }
  ]
}
```

For each of the following statements, select Yes if the statement is true.

Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
LB1 will be connected to a subnet named VNET1/netname	○	○
LB1 can be deployed only to the resource group that contains VNET1	○	○
The value of the `sku` variable can be provided as a parameter when the template is deployed from a command prompt	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
LB1 will be connected to a subnet named VNET1/netname	○	◉
LB1 can be deployed only to the resource group that contains VNET1	◉	○
The value of the `sku` variable can be provided as a parameter when the template is deployed from a command prompt	○	◉

Community Discussion

I would say that the correct answer is NO NO NO. Box 1: instead of "netname" there should be the value of netname variable Box 2: I don't see Resource Group mentioned anywhere in the template Box 3: I don't see parameters being referred anywhere in the template, only variables are referred, e.g. "sku" variable.

It's NO - YES - NO Box 1: NO - the value of 'netname' is 'App1', so it's created in the App1 subnet (not netname) Box 2: YES - There's no OTHER resource groups specified so it

assumes it needs to find the resource in the one you're deploying to. reference: https://learn.microsoft.com/en-us/azure/azure-resource-manager/templates/template-functions-resource#remarks-3 Box 3: NO - 'sku' is a variable, not a parameter - so you can't use it as a parameter.

Box 1: No - "netname" is the name of the variable Box 2: No - the LB must be in the same region as the virtual network, but the Resource group can be anywhere Box 3: No - There are no parameter defined in the template

Box 1: No - "netname" is the name of the variable Box 2: No - the LB must be in the same region as the virtual network, but the Resource group can be anywhere Box 3: No - There are no parameter defined in the template

I get so tired of these "yes or no" questions. It's basically 3 questions in 1. Disgusting material.

SecExams

Question #896

You have an Azure subscription that contains a storage account. The account stores website data.

You need to ensure that inbound user traffic uses the Microsoft point-of-presence (POP) closest to the user's location.

What should you configure?

A) private endpoints
B) Azure Firewall rules
C) Routing preference (Correct Answer)
D) load balancing

Explanation

Correct Answer: C ?

Community Discussion

Question #897

You have an Azure subscription that contains a storage account. The account stores website data.

You need to ensure that inbound user traffic uses the Microsoft point-of-presence (POP) closest to the user's location.

What should you configure?

A) private endpoints
B) Azure Firewall rules
C) Routing preference (Correct Answer)
D) load balancing

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: C

C is correct. https://learn.microsoft.com/en-us/azure/storage/common/network-routing-preference#microsoft-global-network-versus-internet-routing

Selected Answer: C

The correct option to configure for ensuring inbound user traffic uses the Microsoft point-of-presence (POP) closest to the user's location is option C, Routing preference. Routing preference in Azure Traffic Manager allows you to specify how to route traffic to your Azure service endpoints based on various criteria, such as the geographic location of the client or the endpoint, the performance of the endpoint, or the priority of the endpoint. By configuring routing preference, you can direct incoming user traffic to the Microsoft point-of-presence (POP) closest to the user's location, ensuring the best possible user experience. This can be achieved by selecting the "Performance" routing method in Azure Traffic Manager, which uses DNS-based traffic routing to direct users to the endpoint that offers the best performance from the user's location.

I agree, the source provided justifies this choice in my opinion.

I agree, the source provided justifies this choice in my opinion.

Selected Answer: C

The article linked by Muffray explains it well enough why it should be C.

Question #898

You have two Azure virtual machines named VM1 and VM2 that run Windows Server. The virtual machines are in a subnet named Subnet1. Subnet1 is in a virtual network named VNet1.

You need to prevent VM1 from accessing VM2 on port 3389.

What should you do?

A) Create a network security group (NSG) that has an outbound security rule to deny destination port 3389 and apply the NSG to the network interface of VM1. (Correct Answer)
B) Configure Azure Bastion in VNet1.
C) Create a network security group (NSG) that has an outbound security rule to deny source port 3389 and apply the NSG to Subnet1.
D) Create a network security group (NSG) that has an inbound security rule to deny source port 3389 and apply the NSG to Subnet1.

Explanation

Correct Answer: A ?

Community Discussion

Question #899

You have two Azure virtual machines named VM1 and VM2 that run Windows Server. The virtual machines are in a subnet named Subnet1. Subnet1 is in a virtual network named VNet1.

You need to prevent VM1 from accessing VM2 on port 3389.

What should you do?

A) Create a network security group (NSG) that has an outbound security rule to deny destination port 3389 and apply the NSG to the network interface of VM1. (Correct Answer)
B) Configure Azure Bastion in VNet1.
C) Create a network security group (NSG) that has an outbound security rule to deny source port 3389 and apply the NSG to Subnet1.
D) Create a network security group (NSG) that has an inbound security rule to deny source port 3389 and apply the NSG to Subnet1.

Explanation

Correct Answer:
A

Community Discussion

Answer is correct. However, it will prevent VM1 from connecting to any machine using 3389, not just VM2

A: The rule works although it will prevent VM1 from connecting to anything on 3389 they way it is described in the question (no limit to the destination IP detailed). Configuring a Bastion will do nothing to prevent VM1 from accessing VM2 in anyway. C & D are wrong as they are SOURCE port Deny not destination port Deny. A connection to remote port of 3389 is not going to be from a source port of 3389 (especially if RDP is already listening on these VMs as that port will be unavailable as a source port), it could be any port in 1024-65535.

which is crazy . what are they tying to teach people. "How to lock yourself up"?

which is crazy . what are they tying to teach people. "How to lock yourself up"?

The rule could be further tightened by specifying both source and destination in the rule. That would address your concern.

Question #900

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
App1	App Service	Virtual network integration enabled for VNET1
ASP1	App Service plan	Standard SKU
VNET1	Virtual network	*None*
Firewall1	Azure Firewall	Connected to VNET1

You need to manage outbound traffic from VNET1 by using Firewall1.

What should you do first?

A) Configure the Hybrid Connection Manager.
B) Upgrade ASP1 to the Premium SKU.
C) Create a route table. (Correct Answer)
D) Create an Azure Network Watcher.

Explanation

Correct Answer: C ?

Community Discussion

Question #901

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
App1	App Service	Virtual network integration enabled for VNET1
ASP1	App Service plan	Standard SKU
VNET1	Virtual network	*None*
Firewall1	Azure Firewall	Connected to VNET1

You need to manage outbound traffic from VNET1 by using Firewall1.

What should you do first?

A) Configure the Hybrid Connection Manager.
B) Upgrade ASP1 to the Premium SKU.
C) Create a route table. (Correct Answer)
D) Create an Azure Network Watcher.

Explanation

Correct Answer:
C

Community Discussion

Route all traffic to the firewall When you create a virtual network, Azure automatically creates a default route table for each of its subnets and adds system default routes to the table. In this step, you create a user-defined route table that routes all traffic to the firewall, and then associate it with the App Service subnet in the integrated virtual network. Section3 in document. https://learn.microsoft.com/en-us/azure/app-service/network-secure-outbound-traffic-azure-firewall

Selected Answer: C

C is the answer. https://learn.microsoft.com/en-us/azure/app-service/network-secure-outbound-traffic-azure-firewall#3-route-all-traffic-to-the-firewall When you create a

virtual network, Azure automatically creates a default route table for each of its subnets and adds system default routes to the table. In this step, you create a user-defined route table that routes all traffic to the firewall, and then associate it with the App Service subnet in the integrated virtual network.

Dude mind your business. Though you don't care, some people actually care if a question has been in the exams recently.

Dude mind your business. Though you don't care, some people actually care if a question has been in the exams recently.

Dude mind your business. Though you don't care, some people actually care if a question has been in the exams recently.

SecExams

Question #902

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Kind	Location
storage1	StorageV2	Central US
storage2	BlobStorage	West US
storage3	BlockBlobStorage	West US
storage4	FileStorage	East US

You deploy a web app named App1 to the West US Azure region.

You need to back up App1. The solution must minimize costs.

Which storage account should you use as the target for the backup?

A) storage1
B) storage2
C) storage3
D) storage4 (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: B

To minimize costs, you should use the storage account that is in the same region as the web app that you are backing up. In this case, the web app is in the West US region, so you should use storage2

This is confusing as F*ck. The ETE states Storage 4 and everyone and their mothers are saying A to B. How are we supposed to know which one is correct if there is 3 possible answers to the question?

Sharing ChatGPT's answer with you guys. To minimize the cost of the backup solution, you should choose the storage account that is located in the same region as the web app. In this case, the web app is located in the West US region, so the best option for the backup target would be storage2 or storage3, which are also located in West US. However, since storage2 is a BlobStorage account type and storage3 is a BlockBlobStorage account type, you should consider the specific requirements of your backup solution. If your backup needs to store only block blobs, then storage3 would be the more appropriate choice. On the other hand, if your backup requires different types of blobs (page blobs, append blobs, and block blobs), then storage2 might be a better fit. Therefore, the best option for the backup target would be either storage2 or storage3, depending on the specific requirements of your backup solution.

Was in test yesterday, got it right!!

Selected Answer: B

OpenAI "Since you need to back up a web app named App1 deployed to the West US Azure region and you want to minimize costs, you should choose a storage account in the same region as the web app. Out of the available options, only storage2 and storage3 are located in the West US region. Among these two, Blob Storage (storage2) is the most cost-effective option for storing backups. Therefore, the correct answer is B. storage2."

SecExams

Question #903

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Kind	Location
storage1	StorageV2	Central US
storage2	BlobStorage	West US
storage3	BlockBlobStorage	West US
storage4	FileStorage	East US

You deploy a web app named App1 to the West US Azure region.

You need to back up App1. The solution must minimize costs.

Which storage account should you use as the target for the backup?

A) storage1
B) storage2
C) storage3
D) storage4 (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #904

SecExams

HOTSPOT
-

You have an Azure subscription that is linked to an Azure AD tenant. The tenant contains two users named User1 and User2.

The subscription contains the resources shown in the following table.

Name	Type	Description
RG1	Resource group	*None*
VM1	Virtual machine	Created in RG1

The subscription contains the alert rules shown in the following table.

Name	Scope	Condition
Alert1	RG1	All Administrative operations
Alert2	VM1	All Administrative operations

The users perform the following action:

• User1 creates a new virtual disk and attaches the disk to VM1
• User2 creates a new resource tag and assigns the tag to RG1 and VM1

Which alert rules are triggered by each user? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

User1:

- No alert is triggered
- Only Alert1 is triggered
- Only Alert2 is triggered
- Alert1 and Alert2 are triggered

User2:

- No alert is triggered
- Only Alert1 is triggered
- Only Alert2 is triggered
- Alert1 and Alert2 are triggered

SecExams

Explanation

Correct Answer:

Answer Area

User1:

- No alert is triggered
- Only Alert1 is triggered
- Only Alert2 is triggered
- Alert1 and Alert2 are triggered

User2:

- No alert is triggered
- Only Alert1 is triggered
- Only Alert2 is triggered
- Alert1 and Alert2 are triggered

SecExams

Community Discussion

Tested in a lab. User 1 - Alert 1 and Alert 2 fired Alert 1 operations: Microsoft.Compute/virtualMachines/write Microsoft.Compute/disks/write Alert 2 operations: Microsoft.Compute/virtualMachines/write User 2 - Alert 1 fired Alert 1 operations: Microsoft.Resources/tags/write

Please correct me if I'm linking a wrong resource but according to https://learn.microsoft.com/en-us/azure/azure-monitor/essentials/activity-log-schema#administrative-category "Every action taken by a user or application using Resource Manager is modeled as an operation on a particular resource type. If the operation type is Write, Delete, or Action, the records of both the start and success or fail of that operation are recorded in the Administrative category. Administrative events also include any changes to Azure role-based access control in a subscription." Therefore operations described in this question are administrative operations. So First selection should be only Alert2 as it is related only to VM, and second selection should be Alert1 and Alert2 as operation relates to both RG and VM.

I tested this in my lab. User1: Alert1 and Alert2 are triggered. User2 : Alert1 and Alert2 are triggered. User1 operations: - Microsoft.Compute/virtualMachines/write (on the VM itself, triggering Alert2) - Microsoft.Compute/disks/write (on the RG, triggering Alert1) User2 Operations: Microsoft.Resources/tags/write (on the RG, triggering Alert1) Microsoft.Resources/tags/write (on the VM, triggering Alert2)

I have tested in the lab! User 1 - Alert 1 and Alert 2 fired (tested with creating new data disk in same RG1 and in different RG and in both scenario the alerts fired for both VM&RG1) User 2 - Alert 1 and Alert 2 fired (this is very clear as you creating a tag and assign for both VM and RG!

why do you insist on the existence of the magical RG-X that resides in the shadow realm and is controlled by lizard people? If we have RG1 and the VM1 is in RG1 then it only makes sense that the disk created for VM1 is in RG1 aswell.

SecExams

Question #905

SecExams

HOTSPOT
-

You have an Azure subscription that is linked to an Azure AD tenant. The tenant contains two users named User1 and User2.

The subscription contains the resources shown in the following table.

Name	Type	Description
RG1	Resource group	*None*
VM1	Virtual machine	Created in RG1

The subscription contains the alert rules shown in the following table.

Name	Scope	Condition
Alert1	RG1	All Administrative operations
Alert2	VM1	All Administrative operations

The users perform the following action:

• User1 creates a new virtual disk and attaches the disk to VM1
• User2 creates a new resource tag and assigns the tag to RG1 and VM1

Which alert rules are triggered by each user? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

User1:

- No alert is triggered
- Only Alert1 is triggered
- Only Alert2 is triggered
- Alert1 and Alert2 are triggered

User2:

- No alert is triggered
- Only Alert1 is triggered
- Only Alert2 is triggered
- Alert1 and Alert2 are triggered

SecExams

Explanation

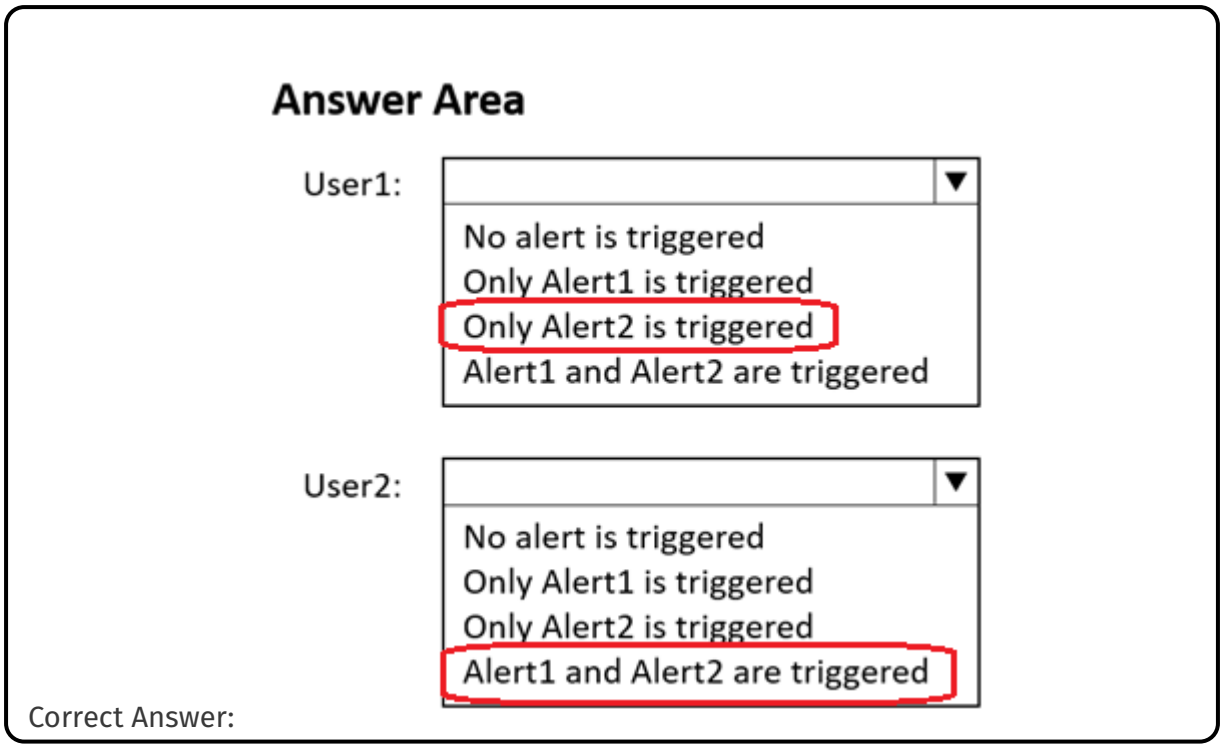

Correct Answer:

Community Discussion

Question #906

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.

You need to ensure that NGINX is available on all the virtual machines after they are deployed.

What should you use?

A) a Desired State Configuration (DSC) extension (Correct Answer)

B) the New-AzConfigurationAssignment cmdlet

C) Azure Application Insights

D) a Microsoft Endpoint Manager device configuration profile

Explanation

Correct Answer:
A

Community Discussion

Selected Answer: A

Duplicate question, answer is DSC. There is another version of this question where Custom Script Extension is the right answer and there is no DSC option to choose.

if this exam doesnt show up in exam,i'd be really disappointed i've seen this one like 10times now! yikes!!!

Same as Question 67. https://www.secexams.com/discussions/microsoft/view/67546-exam-az-104-topic-4-question-67-discussion

Found this Q in the exam 3/7/2023

On exam 4/22/23 DSC

SecExams

Question #907

You have an Azure subscription that contains eight virtual machines and the resources shown in the following table.

Name	Description
storage1	Storage account
storage2	Storage account
KeyVault1	Key vault
VNET1	Virtual network with a single subnet that has five virtual machines connected
VNET2	Virtual network with a single subnet that has three virtual machines connected

You need to configure access for VNET1. The solution must meet the following requirements:

• The virtual machines connected to VNET1 must be able to communicate with the virtual machines connected to VNET2 by using the Microsoft backbone.
• The virtual machines connected to VNET1 must be able to access storage1, storage2, and Azure AD by using the Microsoft backbone.

What is the minimum number of service endpoints you should add to VNET1?

A) 1
B) 2
C) 3
D) 5 (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: B

My answer: 2 First service endpoint: One service endpoint for Microsoft.Storage added to VNET1. The question asks how many to add to VNET1. When adding service endpoints on the VNET1 side you only get to choose the service (Microsoft.Storage) not the actual storage accounts. Once you add this service endpoint it can be then linked to on the storage side for both accounts. Second Service Endpoint: Microsoft.AzureActiveDirectory. Total:2

Selected Answer: B

Should be B, 2 service endpoints. VM is not a service endpoint type. So the first question is irrelevant. Both storage accounts must have service endpoints in vnet 1, so awnser should be 2

Yes B (2 s-e:s) but not for the reason you or other people below state You create one Service Endpoint per Azure service per Vnet (Vnet-to-Vnet does not require nor can it be configured with service endpoints) Hence: 1 service endpoint for Vnet1 to Microsoft.Storage service 1 service endpoint for Vnet1 to Microsoft.KeyVault service Try it your self in portal and you'll see https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoints-overview

Yes B (2 s-e:s) but not for the reason you or other people below state You create one Service Endpoint per Azure service per Vnet (Vnet-to-Vnet does not require nor can it be configured with service endpoints) Hence: 1 service endpoint for Vnet1 to Microsoft.Storage service 1 service endpoint for Vnet1 to Microsoft.KeyVault service Try it your self in portal and you'll see https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoints-overview

The question does not require adding a Key Vault service endpoint. Why should we add it?

SecExams

Question #908

You have an Azure subscription that contains eight virtual machines and the resources shown in the following table.

Name	Description
storage1	Storage account
storage2	Storage account
KeyVault1	Key vault
VNET1	Virtual network with a single subnet that has five virtual machines connected
VNET2	Virtual network with a single subnet that has three virtual machines connected

You need to configure access for VNET1. The solution must meet the following requirements:

• The virtual machines connected to VNET1 must be able to communicate with the virtual machines connected to VNET2 by using the Microsoft backbone.
• The virtual machines connected to VNET1 must be able to access storage1, storage2, and Azure AD by using the Microsoft backbone.

What is the minimum number of service endpoints you should add to VNET1?

A) 1
B) 2
C) 3
D) 5 (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #909

You need to configure an Azure web app named contoso.azurewebsites.net to host www.contoso.com.

What should you do first?

A) Create A records named www.contoso.com and asuid.contoso.com.
B) Create a TXT record named asuid that contains the domain verification ID.
C) Create a CNAME record named asuid that contains the domain verification ID. (Correct Answer)
D) Create a TXT record named www.contoso.com that has a value of contoso.azurewebsites.net.

Explanation

Correct Answer:
C

Community Discussion

nice to see 3 answers

Selected Answer: B

should be a TXT record, B https://learn.microsoft.com/en-us/azure/app-service/app-service-web-tutorial-custom-domain?tabs=a%2Cazurecli

This so confusing! Wont use these dumps in next exams. Many unclear answers.

This so confusing! Wont use these dumps in next exams. Many unclear answers.

From that link : "To add a custom domain to your app, you need to verify your ownership of the domain by adding a verification ID as a TXT record with your domain provider."

Question #910

You need to configure an Azure web app named contoso.azurewebsites.net to host www.contoso.com.

What should you do first?

A) Create A records named www.contoso.com and asuid.contoso.com.
B) Create a TXT record named asuid that contains the domain verification ID.
C) Create a CNAME record named asuid that contains the domain verification ID. (Correct Answer)
D) Create a TXT record named www.contoso.com that has a value of contoso.azurewebsites.net.

Explanation

Correct Answer: C ?

Community Discussion

Question #911

You have an Azure subscription that contains 10 network security groups (NSGs), 10 virtual machines, and a Log Analytics workspace named Workspace1. Each NSG is connected to a virtual machine.

You need to configure an Azure Monitor Network Insights alert that will be triggered when suspicious network traffic is detected.

What should you do first?

A) Deploy Connection Monitor.
B) Configure data collection endpoints.
C) Configure a private link.
D) Configure NSG flow logs. (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: D

To configure an Azure Monitor Network Insights alert that will be triggered when suspicious network traffic is detected, you should first configure NSG flow logs. NSG flow logs provide information about traffic that is allowed or denied by an NSG. By configuring NSG flow logs, you will be able to monitor the traffic passing through your NSGs and detect any suspicious activity.

Selected Answer: D

I think D is correct. https://learn.microsoft.com/en-us/azure/network-watcher/network-insights-overview#traffic The Traffic tab provides access to all NSGs configured for NSG flow logs and Traffic Analytics for the selected set of subscriptions, grouped by location.

Mlantonis where are you!!

Selected Answer: A

Hmmm...not often I disagree with 100% vote but here goes: The question specifically says there is a Log Analytics workspace named Workspace1. A Log Analytics Workspace is used for Connection Monitor, NOT NSG Flow Logs, which use a storage account instead. NSG Flow Logs: https://learn.microsoft.com/en-us/azure/network-watcher/network-watcher-nsg-flow-logging-overview#read-and-export-flow-logs) Connection Monitor: https://learn.microsoft.com/en-us/azure/network-watcher/connection-monitor-overview#data-collection-analysis-and-alerts) So answer is A

Also https://learn.microsoft.com/en-us/azure/network-watcher/network-watcher-nsg-flow-logging-overview " Identify unknown or undesired traffic." in Common use cases

SecExams

Question #912

You have an Azure subscription that contains 10 network security groups (NSGs), 10 virtual machines, and a Log Analytics workspace named Workspace1. Each NSG is connected to a virtual machine.

You need to configure an Azure Monitor Network Insights alert that will be triggered when suspicious network traffic is detected.

What should you do first?

A) Deploy Connection Monitor.
B) Configure data collection endpoints.
C) Configure a private link.
D) Configure NSG flow logs. (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

SecExams

Question #913

SecExams

HOTSPOT
-

You have an Azure subscription named Sub1 that contains the resources shown in the following table.

Name	Description
RG1	Resource group
Action1	Action group that sends an email message to admin1@contoso.com

Sub1 contains the following alert rule:

• Name: Alert1
• Scope: All resource groups in Sub1
o Include all future resources
• Condition: All administrative operations
• Actions: Action1

Sub1 contains the following alert processing rule:

• Name: Rule1
• Scope: Sub1
• Rule type: Suppress notifications
• Apply the rule: On a specific time
o Start: August 10, 2022
o End: August 13, 2022

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

SecExams

Statements	Yes	No
If you create a resource group in Sub1 on August 11, 2022, Alert1 is listed in the Azure portal.	○	○
If you create a resource group in Sub1 on August 12, 2022, an email message is sent to admin1@contoso.com.	○	○
If you add a tag to RG1 on August 15, 2022, an email message is sent to admin1@contoso.com.	○	○

Explanation

Correct Answer:

Statements	Yes	No
If you create a resource group in Sub1 on August 11, 2022, Alert1 is listed in the Azure portal.	○	○
If you create a resource group in Sub1 on August 12, 2022, an email message is sent to admin1@contoso.com.	○	○
If you add a tag to RG1 on August 15, 2022, an email message is sent to admin1@contoso.com.	○	○

Community Discussion

Y - "alert is listed" does not mean a notification in my understanding therefore yes N - The date is within suppression rule boundaries therefore email will be suppressed Y - The date is outside suppression rule boundaries

YNY is the answer. https://learn.microsoft.com/en-us/azure/azure-monitor/alerts/alerts-processing-rules?tabs=portal#what-should-this-rule-do Suppression: This action removes all the action groups from the affected fired alerts. So, the fired alerts won't invoke any of their action groups, not even at the end of the maintenance window. Those fired alerts will still be visible when you list your alerts in the portal, Azure Resource Graph, API, or PowerShell.

Got this in Feb 2023 exam.

Got this in Feb 2023 exam.

writing mine tomorrow, wish me lick :D

Question #914

SecExams

HOTSPOT
-

You have an Azure subscription named Sub1 that contains the resources shown in the following table.

Name	Description
RG1	Resource group
Action1	Action group that sends an email message to admin1@contoso.com

Sub1 contains the following alert rule:

• Name: Alert1
• Scope: All resource groups in Sub1
o Include all future resources
• Condition: All administrative operations
• Actions: Action1

Sub1 contains the following alert processing rule:

• Name: Rule1
• Scope: Sub1
• Rule type: Suppress notifications
• Apply the rule: On a specific time
o Start: August 10, 2022
o End: August 13, 2022

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

SecExams

Statements	Yes	No
If you create a resource group in Sub1 on August 11, 2022, Alert1 is listed in the Azure portal.	○	○
If you create a resource group in Sub1 on August 12, 2022, an email message is sent to admin1@contoso.com.	○	○
If you add a tag to RG1 on August 15, 2022, an email message is sent to admin1@contoso.com.	○	○

Explanation

Correct Answer:

Statements	Yes	No
If you create a resource group in Sub1 on August 11, 2022, Alert1 is listed in the Azure portal.	●	○
If you create a resource group in Sub1 on August 12, 2022, an email message is sent to admin1@contoso.com.	○	●
If you add a tag to RG1 on August 15, 2022, an email message is sent to admin1@contoso.com.	●	○

Community Discussion

Question #915

You need to ensure that VM1 can communicate with VM4. The solution must minimize administrative effort.

What should you do?

A) Create a user-defined route from VNET1 to VNET3.
B) Create an NSG and associate the NSG to VM1 and VM4.
C) Assign VM4 an IP address of 10.0.1.5/24.
D) Establish peering between VNET1 and VNET3. (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

VNETs are non-transitive

VNETs are non-transitive

The correct option is D. Establish peering between VNET1 and VNET3. To ensure that VM1 can communicate with VM4, we need to establish connectivity between the two virtual networks (VNET1 and VNET3) where the VMs reside. VNet peering enables us to connect two virtual networks together so that VMs in either network can communicate with each other. With VNet peering, the virtual networks are connected directly using the Azure backbone network, so we do not need to create any user-defined routes or assign specific IP addresses to VMs. Additionally, peering reduces administrative effort by eliminating the need for complex network configurations.

Selected Answer: D

i can´t see any issue to create a peering D. Establish peering between VNET1 and VNET3.

VM1 is connected to VNET1, VM4 is connected to VNET3, so establish a peering between the two can ensure VM1 can communicate with VM4

SecExams

Question #916

You need to ensure that VM1 can communicate with VM4. The solution must minimize administrative effort.

What should you do?

A) Create a user-defined route from VNET1 to VNET3.
B) Create an NSG and associate the NSG to VM1 and VM4.
C) Assign VM4 an IP address of 10.0.1.5/24.
D) Establish peering between VNET1 and VNET3. (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #917

You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1.

Subscription1 has a user named User1. User1 has the following roles:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.

What should you do?

A) Assign User1 the Network Contributor role for VNet1.
B) Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1.
C) Assign User1 the Owner role for VNet1. (Correct Answer)
D) Assign User1 the Network Contributor role for RG1.

Explanation

Correct Answer: C ?

Community Discussion

Question #918

SecExams

HOTSPOT

-

You have an Azure subscription that contains the users shown in the following table.

Name	Member of
User1	Group1
User2	Group2
User3	Group3

The groups are configured as shown in the following table.

Name	Type	Azure AD roles can be assigned to the group
Group1	Security	Yes
Group2	Security	Yes
Group3	Microsoft 365	Yes

You have a resource group named RG1 as shown in the following exhibit.

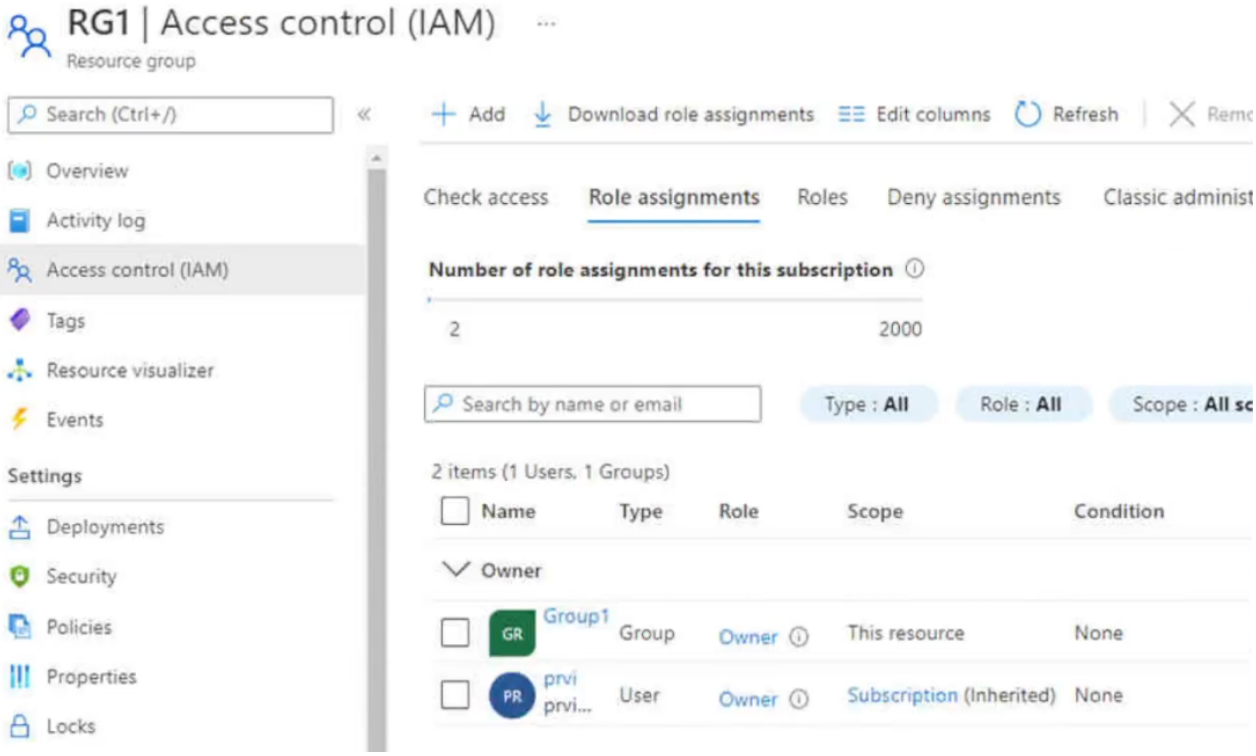

SecExams

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

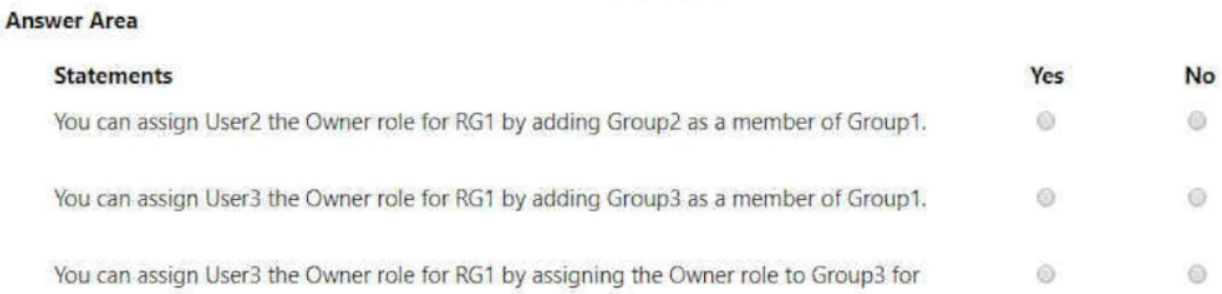

Explanation

Correct Answer:

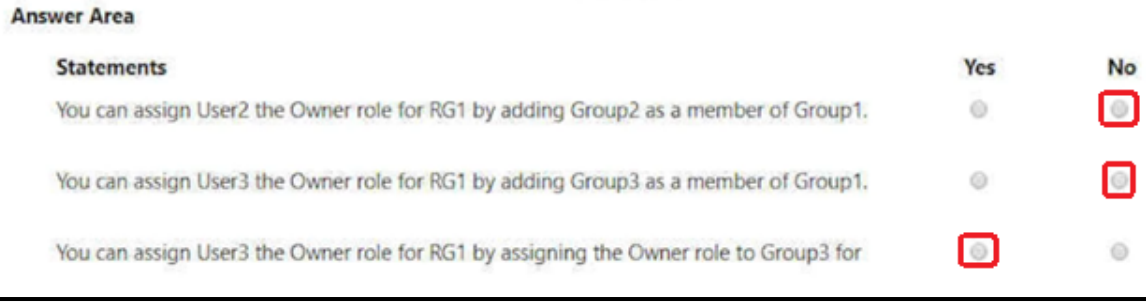

Community Discussion

SecExams

Question #919

SecExams

HOTSPOT
-

You have an Azure subscription that contains a user named User1 and a storage account named storage1. The storage1 account contains the resources shown in the following table.

Name	Type
container1	Container
folder1	File share
Table1	Table

User1 is assigned the following roles for storage1:

• Storage Blob Data Reader
• Storage Table Data Contributor
• Storage File Data SMB Share Contributor

For storage1, you create a shared access signature (SAS) named SAS1 that has the settings shown in the following exhibit. (Click the Exhibit tab.)

SecExams

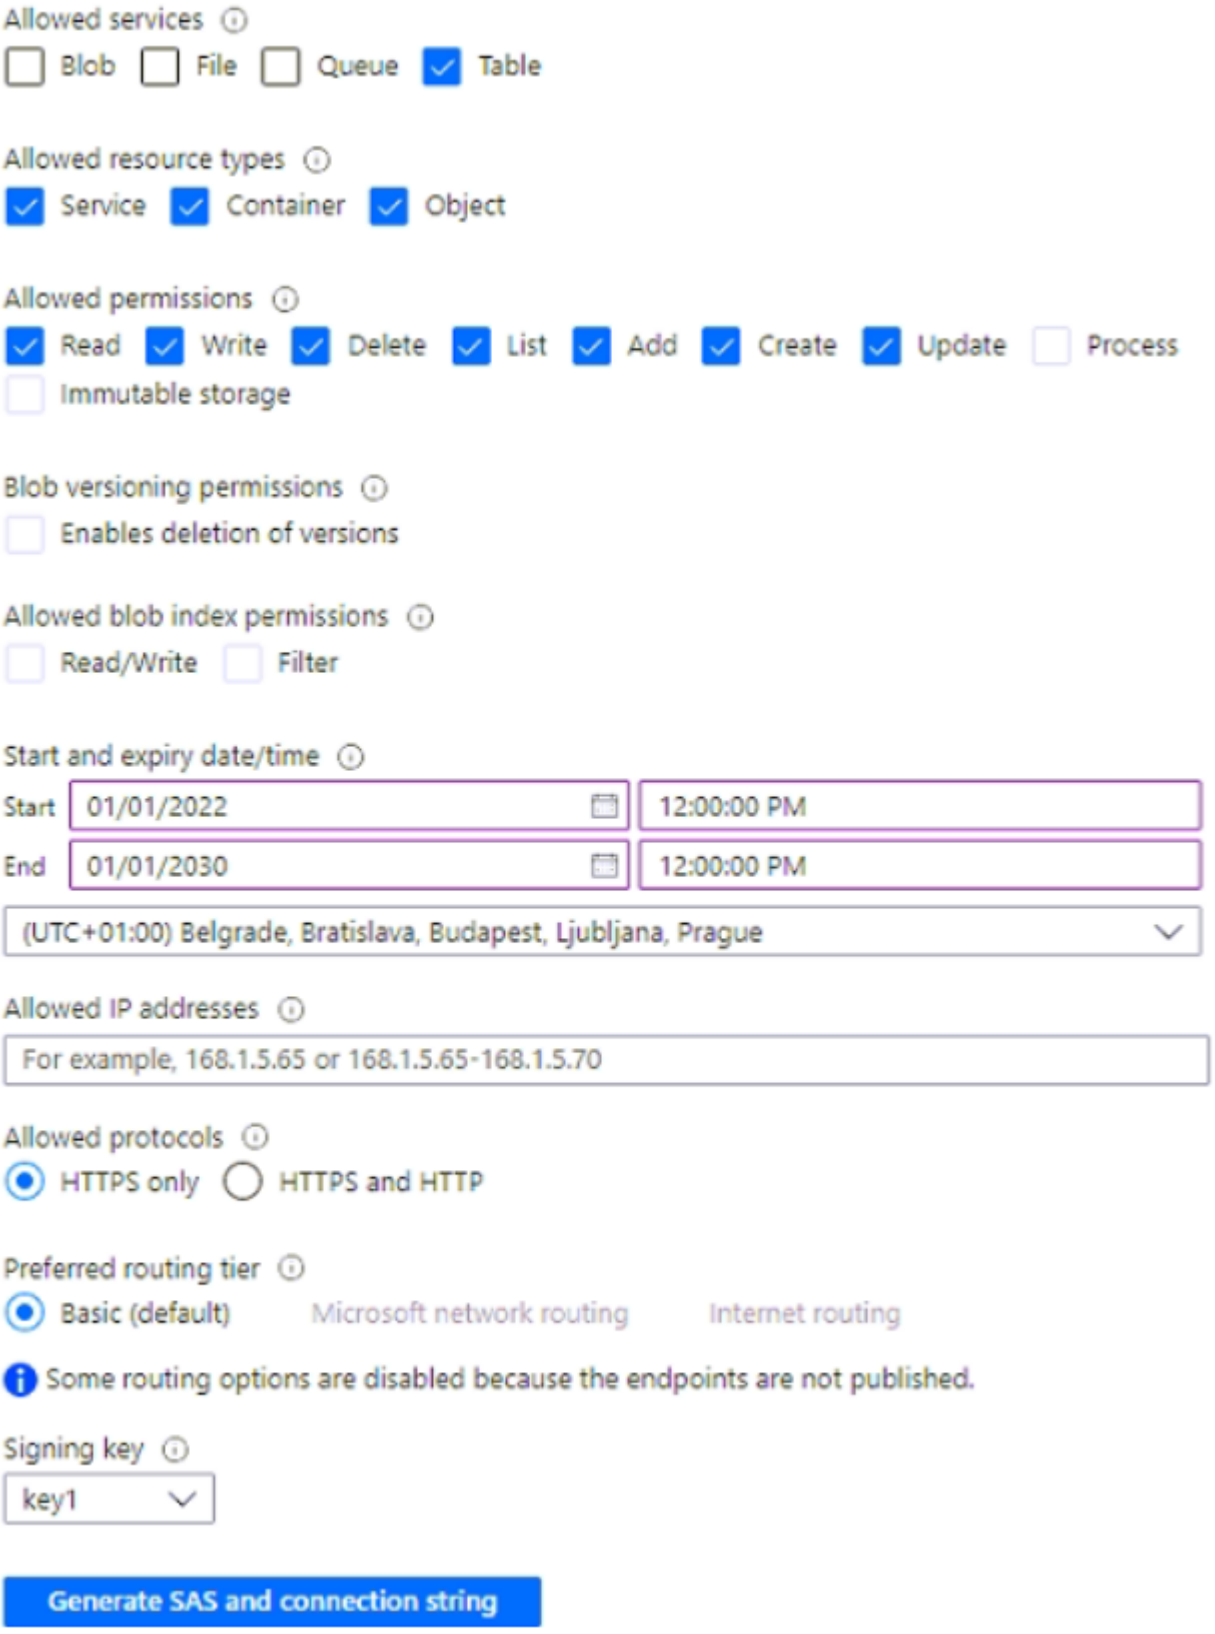

To which resources can User1 write by using SAS1 and key1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

key1:
- Table1 only
- Table1 and container1 only
- folder1 and Table1 only
- folder1 and container1 only
- Table1, folder1, and container1

SAS1:
- Table1 only
- Table1 and container1 only
- folder1 and Table1 only
- folder1 and container1 only
- Table1, folder1, and container1

SecExams

Explanation

Correct Answer:

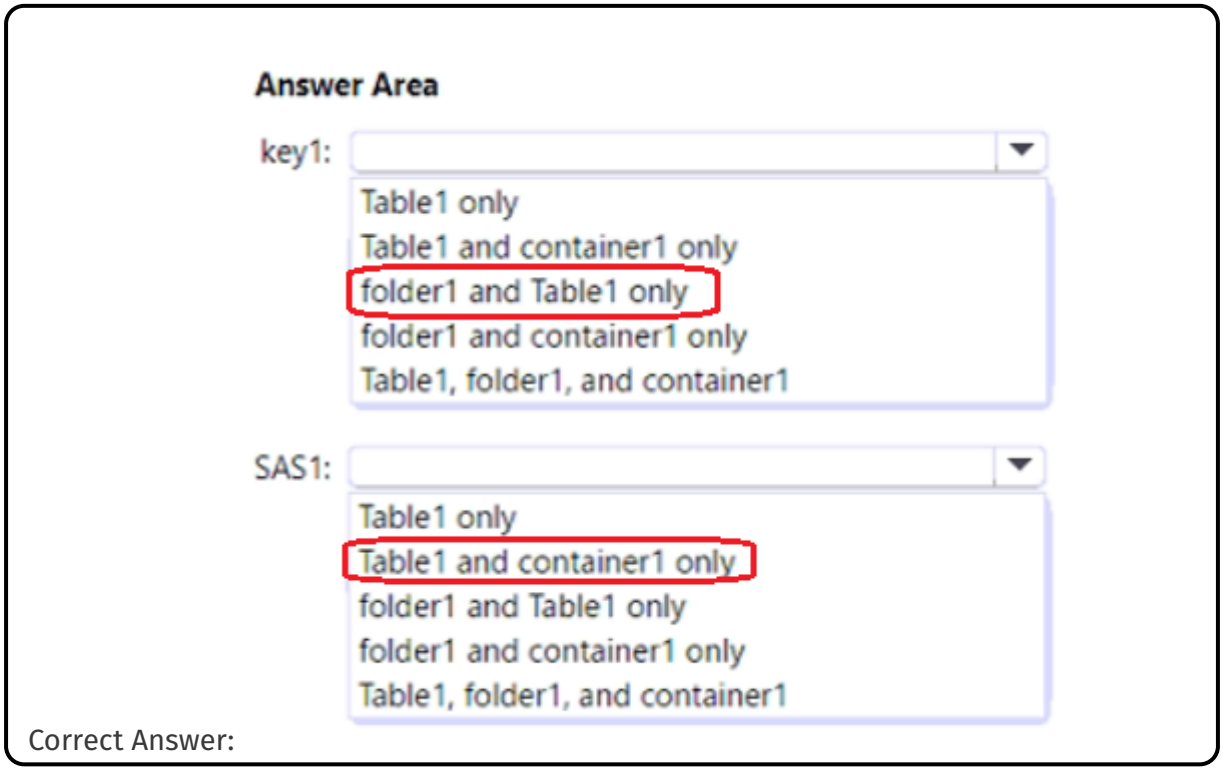

Community Discussion

Question #920

SecExams

HOTSPOT

-

You have an Azure subscription that contains the storage account shown in the following exhibit.

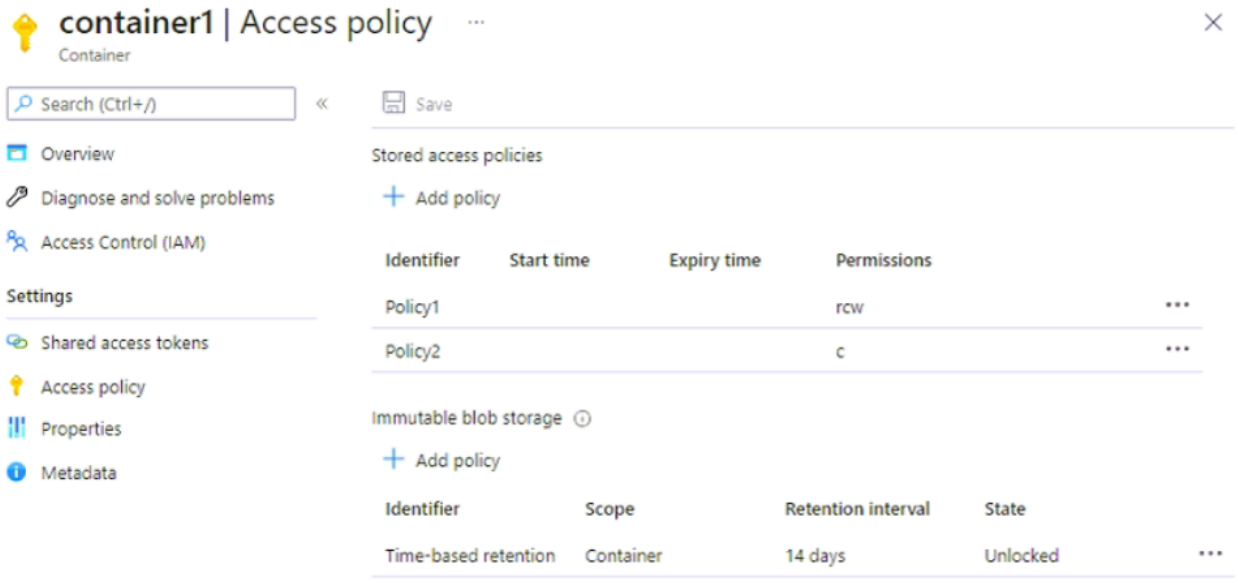

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic

NOTE: Each correct selection is worth one point.

Answer Area

The maximum number of additional stored access policies that you can create for container1 is **[answer choice]**.

0
1
3
5
6

The maximum number of additional immutable blob storage policies that you can create for container1 is **[answer choice]**.

0
1
2
4
5

Explanation

Correct Answer:

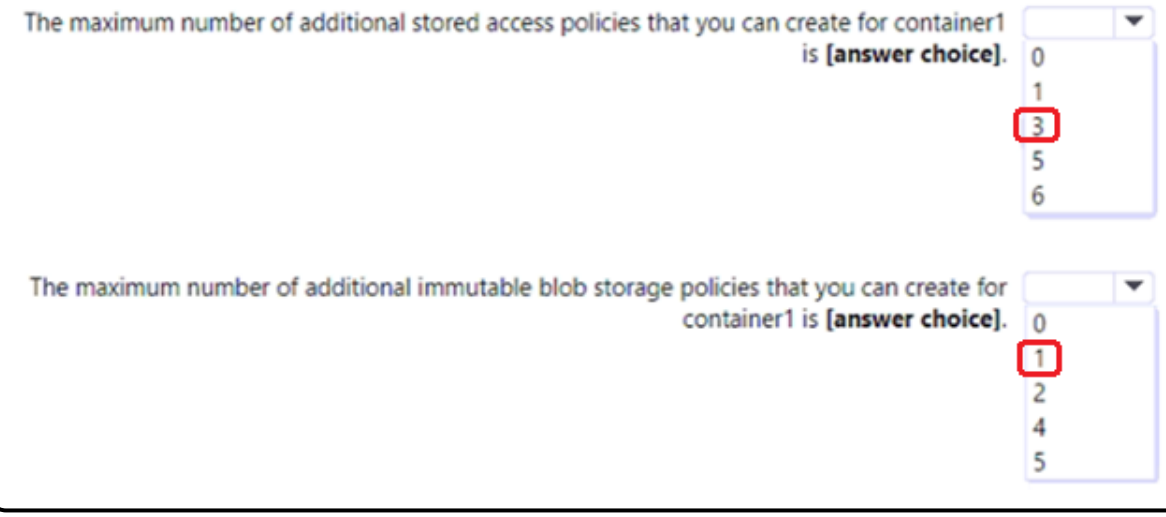

Community Discussion

Question #921

You have an Azure subscription named Subscription1.

You have 5 TB of data that you need to transfer to Subscription1.

You plan to use an Azure Import/Export job.

What can you use as the destination of the imported data?

A) Azure Blob Storage (Correct Answer)
B) Azure Data Lake Store
C) Azure SQL Database
D) a virtual machine

Explanation

Correct Answer: A ?

Community Discussion

Question #922

You have an Azure subscription. The subscription contains a storage account named storage1 that has the lifecycle management rules shown in the following table.

Name	If base blobs were last modified more than (days)	Then
Rule1	5 days	Move to cool storage
Rule2	5 days	Delete the blob
Rule3	5 days	Move to archive storage

On June 1, you store a blob named File1 in the Hot access tier of storage1.

What is the state of File1 on June 7?

A) stored in the Cool access tier
B) stored in the Archive access tier
C) stored in the Hot access tier
D) deleted (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #923

HOTSPOT

-

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Kind	Redundancy
storage1	StorageV2	Geo-zone-redundant storage (GZRS)
storage2	BlobStorage	Read-access geo-redundant storage (RA-GRS)
storage3	BlockBlobStorage	Zone-redundant storage (ZRS)

You need to identify which storage accounts support lifecycle management, and which storage accounts support moving data to the Archive access tier.

Which storage accounts should you use? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Lifecycle management:

- storage1 only
- storage2 only
- storage1 and storage3 only
- storage2 and storage3 only
- storage1, storage2, and storage3

The Archive access tier:

- storage1 only
- storage2 only
- storage1 and storage3 only
- storage2 and storage3 only
- storage1, storage2, and storage3

SecExams

Explanation

Correct Answer:

Answer Area

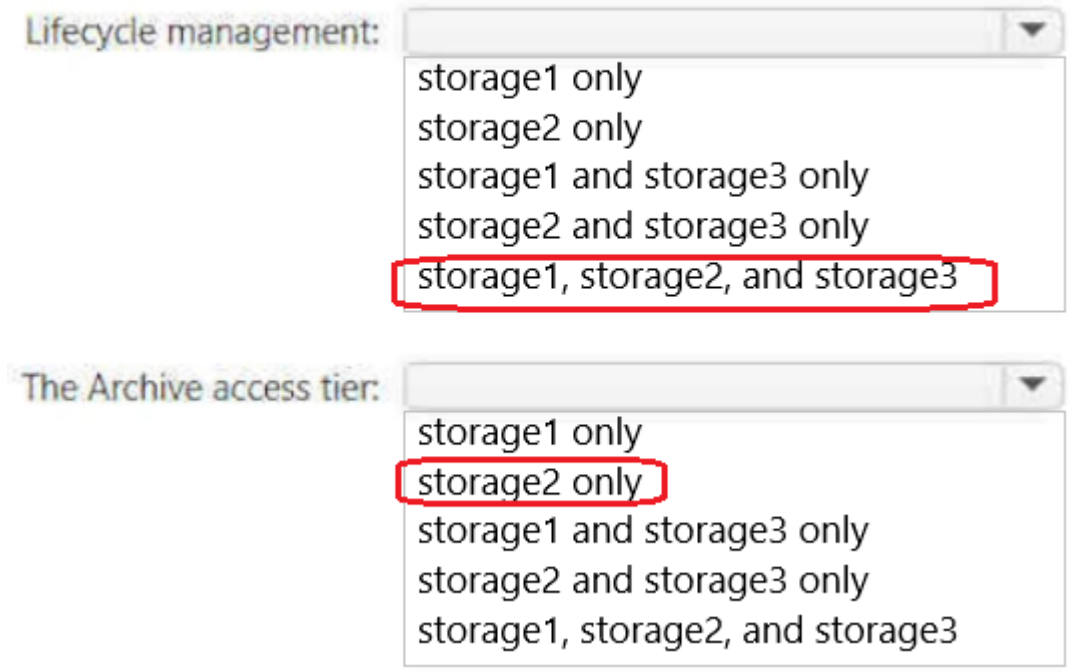

Community Discussion

SecExams

Question #924

You have an Azure subscription.

You plan to deploy the Azure container instances shown in the following table.

Name	Operating system
Instance1	Nano Server installation of Windows Server 2019
Instance2	Server Core installation of Windows Server 2019
Instance3	Linux
Instance4	Linux

Which instances can you deploy to a container group?

A) Instance1 only
B) Instance2 only
C) Instance1 and Instance2 only (Correct Answer)
D) Instance3 and Instance4 only

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: D

Answer is D. https://learn.microsoft.com/en-us/azure/container-instances/container-instances-container-groups Multi-container groups currently support only Linux containers. For Windows containers, Azure Container Instances only supports deployment of a single container instance. While we are working to bring all features to Windows containers, you can find current platform differences in the service

Selected Answer: D

Read the question carefully. The instances you are about to deploy will be deployed "in a Container Group", making it a multi-instance container group. As per the article referred below, its only available for Linux Containers for now: https://learn.microsoft.com/en-us/azure/container-instances/container-instances-container-groups Multi-container groups

currently support only Linux containers. For Windows containers, Azure Container Instances only supports deployment of a single container instance.

BRUH, you are talking about Container Instances, not Container Groups... "Multi-container groups currently support only Linux containers. For Windows containers, Azure Container Instances only supports deployment of a single container instance. While we are working to bring all features to Windows containers, you can find current platform differences in the service Overview." https://learn.microsoft.com/en-us/azure/container-instances/container-instances-container-groups

BRUH, you are talking about Container Instances, not Container Groups... "Multi-container groups currently support only Linux containers. For Windows containers, Azure Container Instances only supports deployment of a single container instance. While we are working to bring all features to Windows containers, you can find current platform differences in the service Overview." https://learn.microsoft.com/en-us/azure/container-instances/container-instances-container-groups

Selected Answer: D

D is the answer. https://learn.microsoft.com/en-us/azure/container-instances/container-instances-container-groups#what-is-a-container-group Multi-container groups currently support only Linux containers. For Windows containers, Azure Container Instances only supports deployment of a single container instance.

SecExams

Question #925

You have an Azure subscription.

You plan to deploy the Azure container instances shown in the following table.

Name	Operating system
Instance1	Nano Server installation of Windows Server 2019
Instance2	Server Core installation of Windows Server 2019
Instance3	Linux
Instance4	Linux

Which instances can you deploy to a container group?

A) Instance1 only
B) Instance2 only
C) Instance1 and Instance2 only (Correct Answer)

D) Instance3 and Instance4 only

Explanation

Correct Answer: C ?

Community Discussion

Question #926

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.

You need to ensure that NGINX is available on all the virtual machines after they are deployed.

What should you use?

A) Azure Custom Script Extension (Correct Answer)
B) Deployment Center in Azure App Service
C) the New-AzConfigurationAssignment cmdlet
D) Azure AD Application Proxy

Explanation

Correct Answer:
A

Community Discussion

Key word 'NGINX' always will be '...extension'. It was in all of this questions.

Selected Answer: A

This question comes up maybe 4 times in this dump, answer is still A

This question has come up probably 30 times so far. It better be on my exam now lol

Selected Answer: A

A is the answer. https://learn.microsoft.com/en-us/azure/virtual-machines/extensions/custom-script-windows The Custom Script Extension downloads and runs scripts on Azure virtual machines (VMs). This extension is useful for post-deployment configuration, software installation, or any other configuration or management task. You can download scripts from Azure Storage or GitHub, or provide them to the Azure portal at extension runtime.

I have seen this question no less than 3 times in the different question sets. Please, remove the duplicates.

SecExams

Question #927

You have an Azure subscription that contains the resources shown in the following table.

Name	Type
VM1	Virtual machine
App1	Web app
contoso.com	Azure Active Directory Domain Services (Azure AD DS) domain

All the resources connect to a virtual network named VNet1.

You plan to deploy an Azure Bastion host named Bastion1 to VNet1.

Which resources can be protected by using Bastion1?

A) VM1 only (Correct Answer)
B) contoso.com only
C) App1 and contoso.com only
D) VM1 and contoso.com only
E) VM1, App1, and contoso.com

Explanation

Correct Answer: A ?

Community Discussion

Question #928

You have an Azure subscription that contains the resources shown in the following table.

Name	Type
VM1	Virtual machine
App1	Web app
contoso.com	Azure Active Directory Domain Services (Azure AD DS) domain

All the resources connect to a virtual network named VNet1.

You plan to deploy an Azure Bastion host named Bastion1 to VNet1.

Which resources can be protected by using Bastion1?

A) VM1 only (Correct Answer)
B) contoso.com only
C) App1 and contoso.com only
D) VM1 and contoso.com only
E) VM1, App1, and contoso.com

Explanation

Correct Answer:
A

Community Discussion

Be aware when checking CyberKelev comments - I think he is a troll as most of the time he posts wrong answers. Always verify with other comments

Selected Answer: A

A is the answer. https://learn.microsoft.com/en-us/azure/bastion/bastion-overview Azure Bastion is a service you deploy that lets you connect to a virtual machine using your browser and the Azure portal, or via the native SSH or RDP client already installed on your local computer. The Azure Bastion service is a fully platform-managed PaaS service that you provision inside your virtual network. It provides secure and seamless RDP/SSH connectivity to your virtual machines directly from the Azure portal over TLS. When you connect via Azure Bastion, your virtual machines don't need a public IP address, agent, or special client software.

Selected Answer: A

correct answer A -- https://learn.microsoft.com/en-us/azure/bastion/bastion-overview

Bastion only connects to RDP and SSH in the back end. Neither a WebApp and a AD DS listen on 3389 or 22 (i.e. provide no services on these ports) so Bastion can't even connect to them, let alone protect them. Bastions protect VMs by allowing you to connect to them to manage them in a more secure way (i.e. RDP to Windows and SSH to Linux)

Bastion only connects to RDP and SSH in the back end. Neither a WebApp and a AD DS listen on 3389 or 22 (i.e. provide no services on these ports) so Bastion can't even connect to them, let alone protect them. Bastions protect VMs by allowing you to connect to them to manage them in a more secure way (i.e. RDP to Windows and SSH to Linux)

SecExams

Question #929

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Session persistence to None
B) a health probe
C) Session persistence to Client IP and protocol (Correct Answer)
D) Idle Time-out (minutes) to 20

Explanation

Correct Answer: C ?

Community Discussion

SecExams

Question #930

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Session persistence to None
B) a health probe
C) Session persistence to Client IP and protocol (Correct Answer)
D) Idle Time-out (minutes) to 20

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: C

For the hundredth time, it's ,C.

i hope i get this question on the exam half as often as it appears here.

Correct - Answer C

at first i was angry about repeating questions, but now that i have gone through almost 500 of them, i am thankful to see this one like an old friend. It just means i don't have to play connect the dots with another question that has 7 resource tables in it...

Selected Answer: C

C is the answer. https://learn.microsoft.com/en-us/azure/load-balancer/distribution-mode-concepts Session persistence: Client IP and protocol - Traffic from the same client IP and protocol is routed to the same backend instance

Question #931

You have an Azure subscription that contains a storage account named storage1 in the North Europe Azure region.

You need to ensure that when blob data is added to storage1, a secondary copy is created in the East US region. The solution must minimize administrative effort.

What should you configure?

A) operational backup
B) object replication
C) geo-redundant storage (GRS) (Correct Answer)
D) a lifecycle management rule

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: B

With GRS you can't choose the Destination region and for North Europe the paired region is West Europe so correct answer Object replication.

Selected Answer: B

Object replication is a feature that allows you to replicate data, such as blobs, across different storage accounts or containers within the same storage account. This can be configured to automatically copy data from one storage location to another, either within

the same region or across different regions. Object replication can be used to create disaster recovery solutions or to distribute data globally for better performance and availability. It is similar to GRS but it is more flexible as you can choose the storage account and container to replicate the data. The GRS of a North Europe region is a secondary copy of the data stored in a different region. The exact location of the secondary region will depend on the specific Azure region you have selected. For the North Europe region, the secondary copy is stored in the West Europe region. This means that if there is an outage or disaster in the North Europe region, your data will still be available in the West Europe region. This provides a high level of data durability and protection.

Easy to confirm in lab (just did) and you're absolutely right

Easy to confirm in lab (just did) and you're absolutely right

Curious to know, what is everyone using for a labs? Previously used 30 the days trial but that has expired. Thanks all.

SecExams

Question #932

You have an Azure subscription that contains a storage account named storage1 in the North Europe Azure region.

You need to ensure that when blob data is added to storage1, a secondary copy is created in the East US region. The solution must minimize administrative effort.

What should you configure?

A) operational backup
B) object replication
C) geo-redundant storage (GRS) (Correct Answer)
D) a lifecycle management rule

Explanation

Correct Answer: C ?

Community Discussion

Question #933

You have an Azure subscription that contains two Log Analytics workspaces named Workspace1 and Workspace2 and 100 virtual machines that run Windows Server.

You need to collect performance data and events from the virtual machines. The solution must meet the following requirements:

- Logs must be sent to Workspace1 and Workspace 2.
- All Windows events must be captured.
- All security events must be captured.

What should you install and configure on each virtual machine?

A) the Azure Monitor agent (Correct Answer)
B) the Windows Azure diagnostics extension (WAD)
C) the Windows VM agent

Explanation

Correct Answer:
A

Community Discussion

Selected Answer: A

A is the answer. https://learn.microsoft.com/en-us/azure/azure-monitor/agents/agents-overview Azure Monitor Agent (AMA) collects monitoring data from the guest operating system of Azure and hybrid virtual machines and delivers it to Azure Monitor for use by features, insights, and other services, such as Microsoft Sentinel and Microsoft Defender for Cloud. Azure Monitor Agent replaces all of Azure Monitor's legacy monitoring agents.

wake up experts tell us the answer

Selected Answer: A

Answer is correct https://learn.microsoft.com/en-us/azure/azure-monitor/agents/agents-overview#install-the-agent-and-configure-data-collection

A is answer

Selected Answer: A

Azure Monitor agent will help with the collection of all of these; https://learn.microsoft.com/en-us/azure/azure-monitor/agents/data-collection-rule-azure-monitor-agent?tabs=portal The only thing that might be an issue here is that we're writing to 2 LA workspaces, but the documentation states that you can use data rules to ingest multiple sources and write to multiple destinations.

SecExams

Question #934

You have an Azure subscription that contains two Log Analytics workspaces named Workspace1 and Workspace2 and 100 virtual machines that run Windows Server.

You need to collect performance data and events from the virtual machines. The solution must meet the following requirements:

- Logs must be sent to Workspace1 and Workspace 2.
- All Windows events must be captured.
- All security events must be captured.

What should you install and configure on each virtual machine?

A) the Azure Monitor agent (Correct Answer)
B) the Windows Azure diagnostics extension (WAD)
C) the Windows VM agent

Explanation

Correct Answer: A ?

Community Discussion

SecExams

Question #935

You have an Azure subscription that contains a virtual machine named VM1 and an Azure function named App1.

You need to create an alert rule that will run App1 if VM1 stops.

What should you create for the alert rule?

A) an application security group
B) a security group that has dynamic device membership
C) an action group (Correct Answer)
D) an application group

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: C

Answer is correct, C. An action group is a collection of actions that are triggered by an Azure alert. In this scenario, you need to create an alert rule that will run App1 if VM1 stops, and for this purpose, you need to create an action group. An action group defines the set of actions to be taken when an alert is triggered, such as running an Azure function, sending an email, or creating an Azure ticket. By creating an action group and associating it with the alert rule, you can automate the process of running App1 if VM1 stops, without the need for manual intervention. This helps ensure that critical systems, such as App1, are automatically activated when necessary, improving the overall reliability and availability of your Azure services.

Got this in Feb 2023 exam.

Got this in Feb 2023 exam.

Create an action group. In Home > Monitor | Alerts > Action groups > Create action group > Actions tab, select action type "Azure Function" and choose the Function app and Function.

Selected Answer: C

C is the answer. https://learn.microsoft.com/en-us/azure/azure-monitor/alerts/alerts-create-new-alert-rule You create an alert rule by combining: - The resources to be monitored. - The signal or telemetry from the resource. - Conditions. Then you define these elements for the resulting alert actions by using: - Alert processing rules - Action groups

Question #936

You have an Azure subscription that contains a virtual machine named VM1 and an Azure function named App1.

You need to create an alert rule that will run App1 if VM1 stops.

What should you create for the alert rule?

A) an application security group
B) a security group that has dynamic device membership
C) an action group (Correct Answer)
D) an application group

Explanation

Correct Answer: C ?

Community Discussion

Question #937

You have an Azure subscription that contains a virtual network named VNet1.

VNet1 uses two ExpressRoute circuits that connect to two separate on-premises datacenters.

You need to create a dashboard to display detailed metrics and a visual representation of the network topology.

What should you use?

A) Azure Monitor Network Insights (Correct Answer)
B) a Data Collection Rule (DCR)
C) Azure Virtual Network Watcher
D) Log Analytics

Explanation

Correct Answer:
A

Community Discussion

Selected Answer: A

A is the answer. https://learn.microsoft.com/en-us/azure/network-watcher/network-insights-overview Azure Monitor Network Insights provides a comprehensive and visual representation through topologies, of health and metrics for all deployed network resources, without requiring any configuration. It also provides access to network monitoring capabilities like Connection Monitor, flow logging for network security groups (NSGs), and Traffic Analytics. And it provides other network diagnostic features.

This is a little tricky as both Network Watcher and Azure Monitor Network Insights offer topology visualization but the focus/use cases are different. Network watcher is more monitoring network traffic and security. Azure monitor network insights is more for application performance and dependencies. If I had to pick based on the question saying “detailed metrics” I would go with azure monitor network insights rather and something that focuses on traffic/security... so just semantics?

This is a little tricky as both Network Watcher and Azure Monitor Network Insights offer topology visualization but the focus/use cases are different. Network watcher is more monitoring network traffic and security. Azure monitor network insights is more for application performance and dependencies. If I had to pick based on the question saying “detailed metrics” I would go with azure monitor network insights rather and something that focuses on traffic/security... so just semantics?

Ans: C expl: Azure Virtual Network Watcher, on the other hand, is a service that provides network topology visualization, diagnostic and visualization tools, and information on virtual network security flow. It allows you to see the topology of your virtual network, and also provides detailed metrics and visual representation of the network topology which is the requirement mentioned in the question.

Thanks for breaking it down so clearly.

SecExams

Question #938

You have an Azure subscription that contains a virtual network named VNet1.

VNet1 uses two ExpressRoute circuits that connect to two separate on-premises datacenters.

You need to create a dashboard to display detailed metrics and a visual representation of the network topology.

What should you use?

A) Azure Monitor Network Insights (Correct Answer)
B) a Data Collection Rule (DCR)
C) Azure Virtual Network Watcher
D) Log Analytics

Explanation

Correct Answer: A ?

Community Discussion

Question #939

You deploy Azure virtual machines to three Azure regions

Each region contains a virtual network. Each virtual network contains multiple subnets peered in a full mesh topology.

Each subnet contains a network security group (NSG) that has defined rules.

A user reports that he cannot use port 33000 to connect from a virtual machine in one region to a virtual machine in another region.

Which two options can you use to diagnose the issue? Each correct answer presents a complete solution.

NOTE: Each correct selection is worth one point.

A) Azure Virtual Network Manager
B) IP flow verify (Correct Answer)
C) Azure Monitor Network Insights (Correct Answer)
D) Connection troubleshoot
E) elective security rules

Explanation

Correct Answer:
BC

Community Discussion

Selected Answer: BD

BD is the answer. https://learn.microsoft.com/en-us/azure/network-watcher/network-watcher-ip-flow-verify-overview IP flow verify checks if a packet is allowed or denied to or from a virtual machine. The information consists of direction, protocol, local IP, remote IP, local port, and a remote port. If the packet is denied by a security group, the name of the rule that denied the packet is returned. While any source or destination IP can be chosen, IP flow verify helps administrators quickly diagnose connectivity issues from or to the internet and from or to the on-premises environment.

Got this in Feb 2023 exam.

Got this in Feb 2023 exam.

Exactly the same question was on todays exam. (7th April 2023)

https://learn.microsoft.com/en-us/azure/network-watcher/network-watcher-connectivity-overview The connection troubleshoot feature of Network Watcher provides the capability to check a direct TCP connection from a virtual machine to a virtual machine (VM), fully qualified domain name (FQDN), URI, or IPv4 address. Network scenarios are complex, they're implemented using network security groups, firewalls, user-defined routes, and resources provided by Azure. Complex configurations make troubleshooting connectivity issues challenging. Network Watcher helps reduce the amount of time to find and detect connectivity issues. The results returned can provide insights into whether a connectivity issue is due to a platform or a user configuration issue. Connectivity can be checked with PowerShell, Azure CLI, and REST API.

SecExams

Question #940

You deploy Azure virtual machines to three Azure regions

Each region contains a virtual network. Each virtual network contains multiple subnets peered in a full mesh topology.

Each subnet contains a network security group (NSG) that has defined rules.

A user reports that he cannot use port 33000 to connect from a virtual machine in one region to a virtual machine in another region.

Which two options can you use to diagnose the issue? Each correct answer presents a complete solution.

NOTE: Each correct selection is worth one point.

A) Azure Virtual Network Manager
B) IP flow verify (Correct Answer)
C) Azure Monitor Network Insights (Correct Answer)
D) Connection troubleshoot
E) elective security rules

Explanation

Correct Answer: BC ?

Community Discussion

Question #941

You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1.

Subscription1 has a user named User1. User1 has the following roles:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.

What should you do?

A) Remove User1 from the Security Reader role for Subscript on 1. Assign User1 the Contributor role for RG1.
B) Assign User1 the Owner role for VNet1. (Correct Answer)
C) Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription 1.
D) Assign User1 the Contributor role for VNet1.

Explanation

Correct Answer: B ?

Community Discussion

Question #942

Your on-premises network contains a VPN gateway.

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vgw1	Virtual network gateway	Gateway for Site-to-Site VPN to the on-premises network
storage1	Storage account	Standard performance tier
Vnet1	Virtual network	Enabled forced tunneling
VM1	Virtual machine	Connected to Vnet1

You need to ensure that all the traffic from VM1 to storage1 travels across the Microsoft backbone network.

What should you configure?

A) Azure Application Gateway
B) private endpoints (Correct Answer)
C) a network security group (NSG)
D) Azure Virtual WAN

Explanation

Correct Answer: B ?

Community Discussion

Question #943

HOTSPOT

-

You have an Azure subscription that contains a user named User1 and the resources shown in the following table.

Name	Type
RG1	Resource group
networkinterface1	Virtual network interface
NSG1	Network security group (NSG)

NSG1 is associated to networkinterface1.

User1 has role assignments for NSG1 as shown in the following table.

Role	Scope
Contributor	This resource
Reader	Subscription (Inherited)
Storage Account Contributor	Resource group (Inherited)

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
User1 can create a storage account in RG1.	○	○
User1 can modify the DNS settings of networkinterface1.	○	○
User1 can create an inbound security rule to filter inbound traffic to networkinterface1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
User1 can create a storage account in RG1.	○	○
User1 can modify the DNS settings of networkinterface1.	○	○
User1 can create an inbound security rule to filter inbound traffic to networkinterface1.	○	○

Community Discussion

Question #944

You have an Azure subscription named Subscription1.

You have 5 TB of data that you need to transfer to Subscription1.

You plan to use an Azure Import/Export job.

What can you use as the destination of the imported data?

A) an Azure Cosmos DB database
B) Azure Data Lake Store
C) Azure Blob storage (Correct Answer)
D) Azure Data Factory

Explanation

Correct Answer: C ?

Community Discussion

Question #945

SecExams

HOTSPOT
-

You have an Azure subscription that contains a storage account named storage1. The storage1 account contains a container named container1.

You create a blob lifecycle rule named rule1.

You need to configure rule1 to automatically move blobs that were NOT updated for 45 days from contained to the Cool access tier.

How should you complete the rule? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

SecExams

Explanation

Correct Answer:

Community Discussion

Question #946

You have an Azure subscription that has the public IP addresses shown in the following table.

Name	IP version	SKU	Tier	IP address assignment
IP1	IPv4	Standard	Regional	Static
IP2	IPv4	Standard	Global	Static
IP3	IPv4	Basic	Regional	Dynamic
IP4	IPv4	Basic	Regional	Static
IP5	IPv6	Standard	Regional	Static

You plan to deploy an Instance of Azure Firewall Premium named FW1.

Which IP addresses can you use?

A) IP2 only
B) IP1 and IP2 only
C) IP1, IP2, and IP5 only
D) IP1, IP2, IP4, and IP5 only (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: B

B should be the correct answer instead. https://learn.microsoft.com/en-us/azure/virtual-network/ip-services/public-ip-addresses#at-a-glance Azure Firewall - Dynamic IPv4: No - Static IPv4: Yes - Dynamic IPv6: No - Static IPv6: No https://learn.microsoft.com/en-us/azure/virtual-network/ip-services/configure-public-ip-firewall Azure Firewall is a cloud-based network security service that protects your Azure Virtual Network resources. Azure Firewall requires at least one public static IP address to be configured. This IP or set of IPs are used as the external connection point to the firewall. Azure Firewall supports

standard SKU public IP addresses. Basic SKU public IP address and public IP prefixes aren't supported.

IP5 is in IPv6 Static which isn't supported link bellow date of 08 Feb 2023 https://learn.microsoft.com/en-us/azure/virtual-network/ip-services/public-ip-addresses#at-a-glance

IP5 is in IPv6 Static which isn't supported link bellow date of 08 Feb 2023 https://learn.microsoft.com/en-us/azure/virtual-network/ip-services/public-ip-addresses#at-a-glance

Because there is no IP1 only, then the answer is B.

Because there is no IP1 only, then the answer is B.

SecExams

Question #947

You have an Azure subscription that has the public IP addresses shown in the following table.

Name	IP version	SKU	Tier	IP address assignment
IP1	IPv4	Standard	Regional	Static
IP2	IPv4	Standard	Global	Static
IP3	IPv4	Basic	Regional	Dynamic
IP4	IPv4	Basic	Regional	Static
IP5	IPv6	Standard	Regional	Static

You plan to deploy an Instance of Azure Firewall Premium named FW1.

Which IP addresses can you use?

A) IP2 only
B) IP1 and IP2 only
C) IP1, IP2, and IP5 only
D) IP1, IP2, IP4, and IP5 only (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #948

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) a health probe
B) Floating IP (direct server return) to Enabled
C) Session persistence to Client IP and protocol (Correct Answer)
D) Protocol to UDP

Explanation

Correct Answer: C ?

Community Discussion

Question #949

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) a health probe
B) Floating IP (direct server return) to Enabled
C) Session persistence to Client IP and protocol (Correct Answer)
D) Protocol to UDP

Explanation

Correct Answer:
C

Community Discussion

lol, everyone is so fed up seeing this question again and again that no one commented on this one. This is the comment no one will read, hopefully, ?

I love seeing this one, one less question to learn out of the 43,356 questions we have to get through

Whoever said that the definition of insanity is doing the same thing over and over again and expecting different results has obviously never had to go through AZ-104 questions

Kagebunshin no jutsu!

The az-104 exams itself is repetition of questions and so this is normal

Question #950

You have an Azure subscription that contains 10 virtual machines and the resources shown in the following table.

Name	Type	Description
VNET1	Virtual network	*none*
Bastion1	Basic SKU Azure Bastion host	Subnet size /26

You need to ensure that Bastion1 can support 100 concurrent SSH users. The solution must minimize administrative effort.

What should you do first?

A) Resize the subnet of Bastion1
B) Configure host scaling.
C) Create a network security group (NSG)
D) Upgrade Bastion1 to the Standard SKU (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #951

You have an Azure subscription that contains 10 virtual machines and the resources shown in the following table.

Name	Type	Description
VNET1	Virtual network	*none*
Bastion1	Basic SKU Azure Bastion host	Subnet size /26

You need to ensure that Bastion1 can support 100 concurrent SSH users. The solution must minimize administrative effort.

What should you do first?

A) Resize the subnet of Bastion1
B) Configure host scaling.
C) Create a network security group (NSG)
D) Upgrade Bastion1 to the Standard SKU (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: D

D is the answer. https://learn.microsoft.com/en-us/azure/bastion/configuration-settings#instance When you configure Azure Bastion using the Basic SKU, two instances are created. If you use the Standard SKU, you can specify the number of instances. This is called host scaling. Each instance can support 20 concurrent RDP connections and 40 concurrent SSH connections for medium workloads. Once the concurrent sessions are exceeded, an additional scale unit (instance) is required.

Just one advice here - read, think and ONLY after post. Standard SKU for bastion support up to 50 instances. /26 it have 64 IPs, with 59 usable. That it means the IPs are ENOUGH to deploy maxim supported number of bastion instances. The relation between number

of session and required IPs in the bastion subnet is not 1 to 1 - is 25 to 1. That means one IP is used for one instance that can support up to 25 concurrent sessions. For 100 sessions, you need 4 instances that will need 4 IPs. I hope I bring some clarity here.

Selected Answer: D

D. Upgrade Bastion1 to the Standard SKU. To support 100 concurrent SSH users, you need to upgrade the Basic SKU Azure Bastion to the Standard SKU. The Basic SKU only supports 10 concurrent SSH users, while the Standard SKU supports up to 100 concurrent SSH users. Resizing the subnet of Bastion1 or creating an NSG would not directly address the need to support more concurrent SSH users, and host scaling is not applicable in this scenario.

Selected Answer: A

/26 just support 64ip. We need 100

Selected Answer: A

/26 just support 64ip. We need 100 concurrent connections.

SecExams

Question #952

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Session persistence to Client IP and protocol (Correct Answer)
B) Protocol to UDP
C) Session persistence to None
D) Floating IP (direct server return) to Disabled

Explanation

Correct Answer: A ?

Community Discussion

Question #953

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Session persistence to Client IP and protocol (Correct Answer)
B) Protocol to UDP
C) Session persistence to None
D) Floating IP (direct server return) to Disabled

Explanation

Correct Answer:
A

Community Discussion

I'm never going to remember this one :(

this is a joke at this point

Do not take the exam if you're wrong on this question.

Well, it was on todays exam, and I'm pretty sure I got it right ;-)

Guys I think a question about Session persistence to Client IP and protocol might be in the exam

Question #954

You have an Azure subscription.

You need to receive an email alert when a resource lock is removed from any resource in the subscription.

What should you use to create an activity log alert in Azure Monitor?

A) a resource, a condition, and an action group (Correct Answer)
B) a resource, a condition, and a Microsoft 365 group
C) a Log Analytics workspace, a resource, and an action group
D) a data collection endpoint, an application security group, and a resource group

Explanation

Correct Answer: A ?

Community Discussion

Question #955

You have an Azure subscription.

You need to receive an email alert when a resource lock is removed from any resource in the subscription.

What should you use to create an activity log alert in Azure Monitor?

A) a resource, a condition, and an action group (Correct Answer)
B) a resource, a condition, and a Microsoft 365 group
C) a Log Analytics workspace, a resource, and an action group
D) a data collection endpoint, an application security group, and a resource group

Explanation

Correct Answer:
A

Community Discussion

Selected Answer: A

A is the answer. https://learn.microsoft.com/en-us/azure/azure-monitor/alerts/alerts-create-new-alert-rule You create an alert rule by combining: - The resources to be monitored. - The signal or telemetry from the resource. - Conditions. Then you define these elements for the resulting alert actions by using: - Alert processing rules - Action groups

Got this question on exam.

Selected Answer: A

A. a resource, a condition, and an action group is what you should use to create an activity log alert

The correct answer is A "You create an alert rule by combining: The resources to be monitored. The signal or telemetry from the resource. Conditions" https://

learn.microsoft.com/en-us/azure/azure-monitor/alerts/alerts-create-new-alert-rule?tabs=metric

A is the answer

Question #956

You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1.

Subscription1 has a user named User1. User1 has the following roles:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.

What should you do?

A) Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1.
B) Assign User1 the Access Administrator role for VNet1. (Correct Answer)
C) Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1.
D) Assign User1 the Network Contributor role for RG1.

Explanation

Correct Answer: B ?

Community Discussion

Question #957

HOTSPOT

-

You have three Azure subscriptions named Sub1, Sub2, and Sub3 that are linked to an Azure AD tenant.

The tenant contains a user named User1, a security group named Group1, and a management group named MG1. User is a member of Group1.

Sub1 and Sub2 are members of MG1. Sub1 contains a resource group named RG1. RG1 contains five Azure functions.

You create the following role assignments for MG1:

- Group1: Reader
- User1: User Access Administrator

You assign User the Virtual Machine Contributor role for Sub1 and Sub2.

Answer Area

Statements	Yes	No
The Group1 members can view the configurations of the Azure functions.	○	○
User1 can assign the Owner role for RG1.	○	○
User1 can create a new resource group and deploy a virtual machine to the new group.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
The Group1 members can view the configurations of the Azure functions.	○	○
User1 can assign the Owner role for RG1.	○	○
User1 can create a new resource group and deploy a virtual machine to the new group.	○	○

Community Discussion

Question #958

You have an Azure subscription that contains the resources shown in the following table.

Name	Description
share1	File share in storage1
storage1	Storage account
User1	Azure AD user

You need to assign User1 the Storage File Data SMB Share Contributor role for share1.

What should you do first?

A) Enable identity-based data access for the file shares in storage1.
B) Modify the security profile for the file shares in storage1.
C) Select Default to Azure Active Directory authorization in the Azure portal for storage1.
D) Configure Access control (IAM) for share1. (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #959

You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1.

Subscription1 has a user named User1. User1 has the following roles:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.

What should you do?

A) Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1.
B) Assign User1 the User Access Administrator role for VNet1. (Correct Answer)
C) Remove User1 from the Security Reader and Reader roles for Subscription1.
D) Assign User1 the Contributor role for VNet1.

Explanation

Correct Answer: B ?

Community Discussion

Question #960

You have an Azure subscription named Subscription1.

You have 5 TB of data that you need to transfer to Subscription1.

You plan to use an Azure Import/Export job.

What can you use as the destination of the imported data?

A) an Azure Cosmos DB database
B) Azure Blob Storage (Correct Answer)
C) Azure SQL Database
D) the Azure File Sync Storage Sync Service

Explanation

Correct Answer: B ?

Community Discussion

Question #961

You plan to create an Azure Storage account named storage1 that will contain a file share named share1.

You need to ensure that share1 can support SMB Multichannel. The solution must minimize costs.

How should you configure storage?

A) Premium performance with locally-redundant storage (LRS) (Correct Answer)
B) Standard performance with zone-redundant storage (ZRS)
C) Premium performance with geo-redundant storage (GRS)
D) Standard performance with locally-redundant storage (LRS)

Explanation

Correct Answer: A ?

Community Discussion

Question #962

You have an Azure subscription named Subscription1.

You have 5 TB of data that you need to transfer to Subscription1.

You plan to use an Azure Import/Export job.

What can you use as the destination of the imported data?

A) Azure Data Lake Store
B) Azure File Storage (Correct Answer)
C) Azure SQL Database
D) the Azure File Sync Storage Sync Service

Explanation

Correct Answer: B ?

Community Discussion

SecExams

Question #963

You have an Azure subscription that contains a storage account named storage1.

You plan to use conditions when assigning role-based access control (RBAC) roles to storage1.

Which storage1 services support conditions when assigning roles?

A) containers only (Correct Answer)
B) file shares only
C) tables only
D) queues only
E) containers and queues only
F) files shares and tables only

Explanation

Correct Answer: A ?

Community Discussion

SecExams

Question #964

SecExams

HOTSPOT

-

You have an Azure subscription that contains the resource groups shown in the following table.

Name	Region
RG1	West US
RG2	West US
RG3	East US

The subscription contains the virtual networks shown in the following table.

Name	Resource group	Region	Subnet	Subnet IP address space
VNet1	RG1	West US	Subnet1	10.1.0.0/16
VNet2	RG2	Central US	Subnet2	10.2.0.0/24
VNet3	RG3	East US	Subnet3	10.3.0.0/24

You plan to deploy the Azure Kubernetes Service (AKS) clusters shown in the following table.

Name	Resource group	Region	Number of nodes	Network configuration
AKS1	RG1	West US	30	Azure Container Network Interface (CNI)
AKS2	RG2	West US	100	Azure Container Network Interface (CNI)
AKS3	RG3	East US	50	Kubenet

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

Statements	Yes	No
You can deploy AKS1 to VNet2.	○	○
You can deploy AKS2 to VNet1.	○	○
You can deploy AKS3 to VNet3.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can deploy AKS1 to VNet2.	○	●
You can deploy AKS2 to VNet1.	●	○
You can deploy AKS3 to VNet3.	●	○

Community Discussion

Question #965

DRAG DROP

-

You have a Windows 11 device named Device and an Azure subscription that contains the resources shown in the following table.

Name	Description
VNET1	Virtual network
VM1	Virtual machine that runs Windows Server 2022 and does **NOT** have a public IP address Connected to VNET1
Bastion1	Azure Bastion Basic SKU host connected to VNET1

Device1 has Azure PowerShell and Azure Command-Line Interface (CLI) installed.

From Device1, you need to establish a Remote Desktop connection to VM1.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

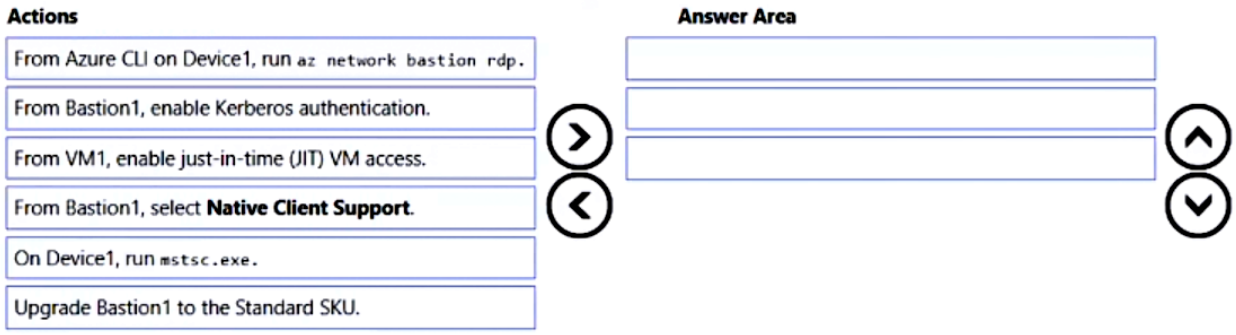

Explanation

Correct Answer:

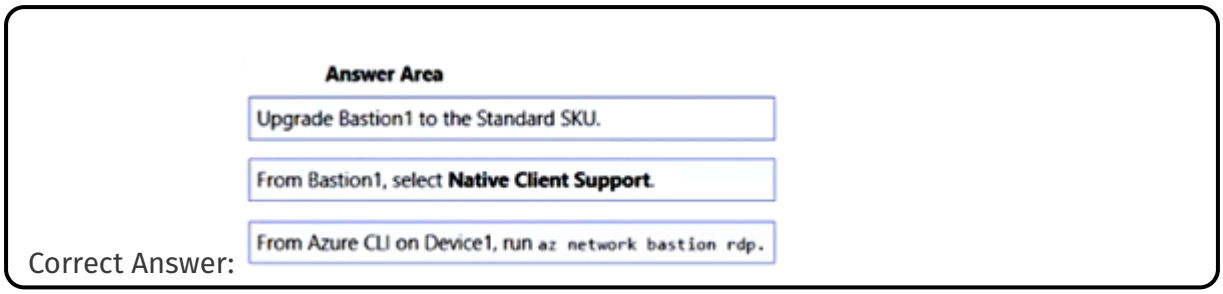

Community Discussion

SecExams

Question #966

DRAG DROP

-

You have a Windows 11 device named Device and an Azure subscription that contains the resources shown in the following table.

Name	Description
VNET1	Virtual network
VM1	Virtual machine that runs Windows Server 2022 and does **NOT** have a public IP address Connected to VNET1
Bastion1	Azure Bastion Basic SKU host connected to VNET1

Device1 has Azure PowerShell and Azure Command-Line Interface (CLI) installed.

From Device1, you need to establish a Remote Desktop connection to VM1.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

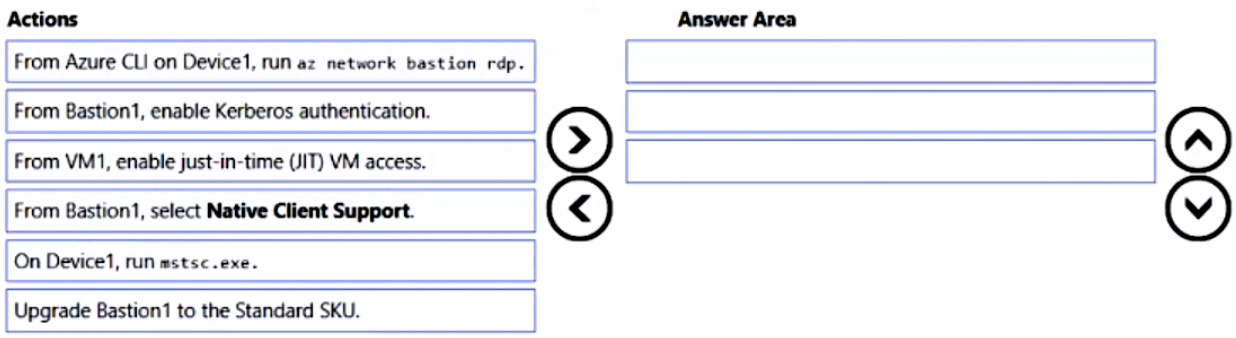

Explanation

Correct Answer:

Answer Area

Upgrade Bastion1 to the Standard SKU.

From Bastion1, select **Native Client Support**.

From Azure CLI on Device1, run `az network bastion rdp`.

Community Discussion

Explanation: Azure Bastion is a service you deploy that lets you connect to a virtual machine using your browser and the Azure portal, or via the native SSH or RDP client already installed on your local computer. The native client feature lets you connect to your target VMs via Bastion using Azure CLI, and expands your sign-in options to include local SSH key pair and Azure Active Directory (Azure AD). Using the native client requires the Standard SKU tier for Azure Bastion. First, we need to upgrade the SKU of our Azure Bastion instance. Second, we need to enable the native client support from the configuration settings of Bastion1 in the Azure Portal. Third, we need to sign in to our Azure account and select the subscription containing the Bastion resource as shown below:

Correct Answer! Nobrainer :) Just learn from ET, no need for another study material. I passed the exam yesterday with 930 out of 1000. Best of luck guys

Navigate to the Configuration page for your Bastion resource. Verify that the SKU Tier is Standard. If it isn't, select Standard. Select the box for Native Client Support, then apply your changes. To connect via RDP, use the following command (az network bastion rdp --name "<BastionName>" --resource-group "<ResourceGroupName>" --target-resource-id "<VMResourceId>") https://learn.microsoft.com/en-us/azure/bastion/connect-native-client-windows

az login az account list az account set --subscription "<subscription ID>" Lastly, we run the following command to connect via RDP. You'll then be prompted to input your credentials. You can use either a local username and password, or your Azure AD credentials. az network bastion rdp --name "<BastionName>" --resource-group "<ResourceGroupName>" --target-resource-id "<VMResourceId>"

SecExams

az login az account list az account set --subscription "<subscription ID>" Lastly, we run the following command to connect via RDP. You'll then be prompted to input your credentials. You can use either a local username and password, or your Azure AD credentials. az network bastion rdp --name "<BastionName>" --resource-group "<ResourceGroupName>" --target-resource-id "<VMResourceId>"

Question #967

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Floating IP (direct server return) to Enabled
B) Session persistence to Client IP (Correct Answer)
C) Protocol to UDP
D) Idle Time-out (minutes) to 20

Explanation

Correct Answer: B ?

Community Discussion

Question #968

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Floating IP (direct server return) to Enabled
B) Session persistence to Client IP (Correct Answer)
C) Protocol to UDP
D) Idle Time-out (minutes) to 20

Explanation

Correct Answer:
B

Community Discussion

I'm just mad now

If I continue to see this question, I'm pretty sure I will have a nightmare in which someone kills me while continuously screaming "Session persistence to Client IP!"

If anyone gets this wrong on the exam they deserve to fail hahahaha

It is the way or trick to increase the total number of questions

again and again

Question #969

SecExams

HOTSPOT

-

You have an Azure AD tenant named adatum.com that contains the groups shown in the following table.

Name	Type	Member of
Group1	Security	*None*
Group2	Security	Group1

Adatum.com contains the users shown in the following table.

Name	Member of
User1	Group1
User2	Group2

You assign an Azure Active Directory Premium P2 license to Group1 as shown in the following exhibit.

SecExams

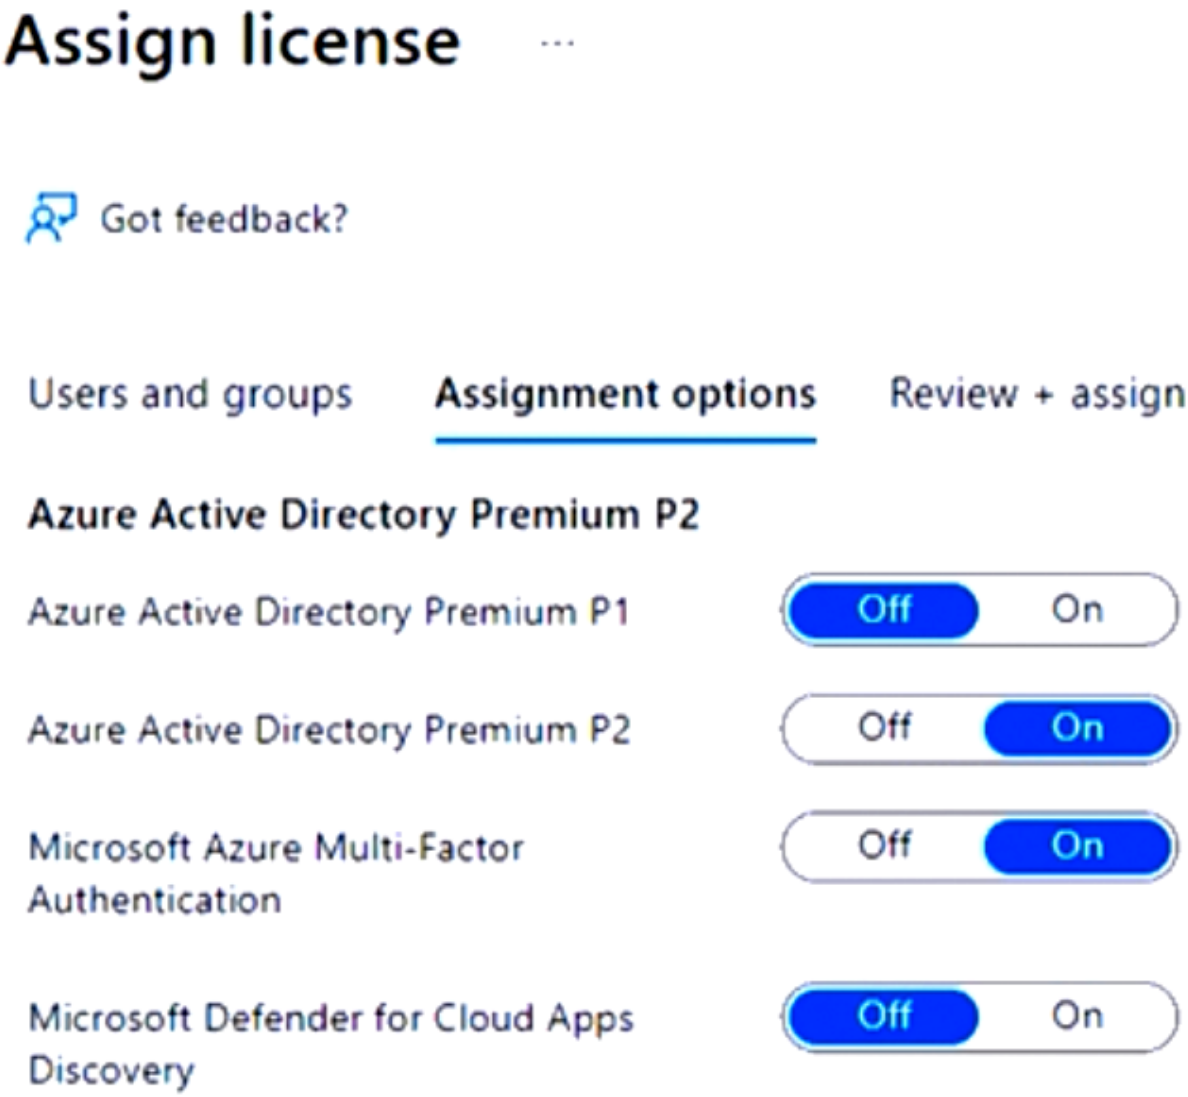

SecExams

Group2 is NOT directly assigned a license.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
You can assign User1 the Microsoft Defender for Cloud Apps Discovery license.	○	○
You can remove the Azure Active Directory Premium P2 license from User1.	○	○
User2 is assigned the Azure Active Directory Premium P2.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can assign User1 the Microsoft Defender for Cloud Apps Discovery license.	○	■
You can remove the Azure Active Directory Premium P2 license from User1.	■	○
User2 is assigned the Azure Active Directory Premium P2.	■	○

SecExams

Community Discussion

Question #970

SecExams

HOTSPOT

-

You have an Azure subscription that has offices in the East US and West US Azure regions.

You plan to create the storage account shown in the following exhibit.

SecExams

Create a storage account ...

Basics Advanced Networking Data protection Encryption Tags **Review**

Basics

Subscription	Azure subscription 1
Resource Group	RG1
Location	eastus
Storage account name	adatum22
Deployment model	Resource manager
Performance	Premium
Premium account type	File shares
Replication	Zone-redundant storage (ZRS)

Advanced

Secure transfer	Enabled
Allow storage account key access	Enabled
Allow cross-tenant replication	Disabled
Default to Azure Active Directory authorization in the Azure portal	Disabled
Blob public access	Enabled
Minimum TLS version	Version 1.2
Permitted scope for copy operations (preview)	From any storage account
Enable hierarchical namespace	Disabled
Enable network file system v3	Disabled
Enable SFTP	Disabled
Large file shares	Disabled

Networking

Network connectivity	Public endpoint (all networks)
Default routing tier	Microsoft network routing
Endpoint type	Standard

Data protection

Point-in-time restore	Disabled
Blob soft delete	Disabled

SecExams

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

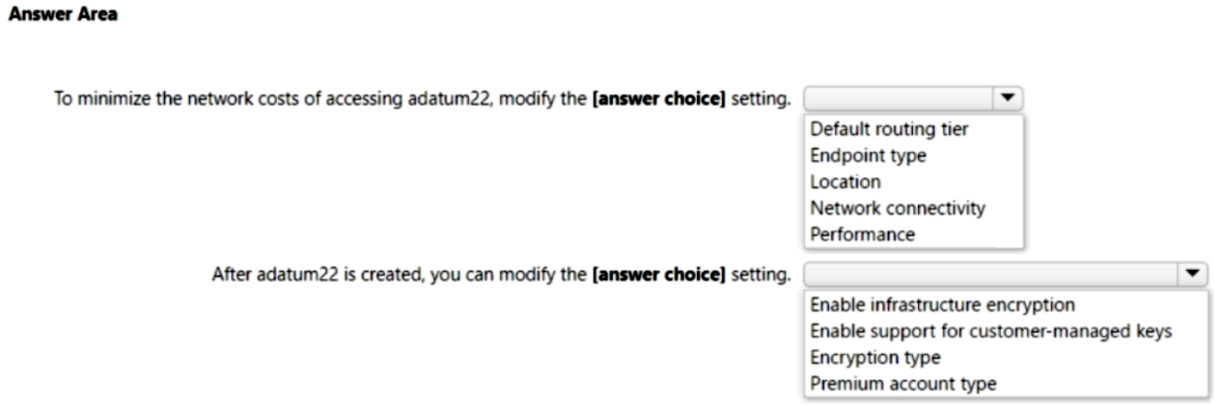

Explanation

Correct Answer:

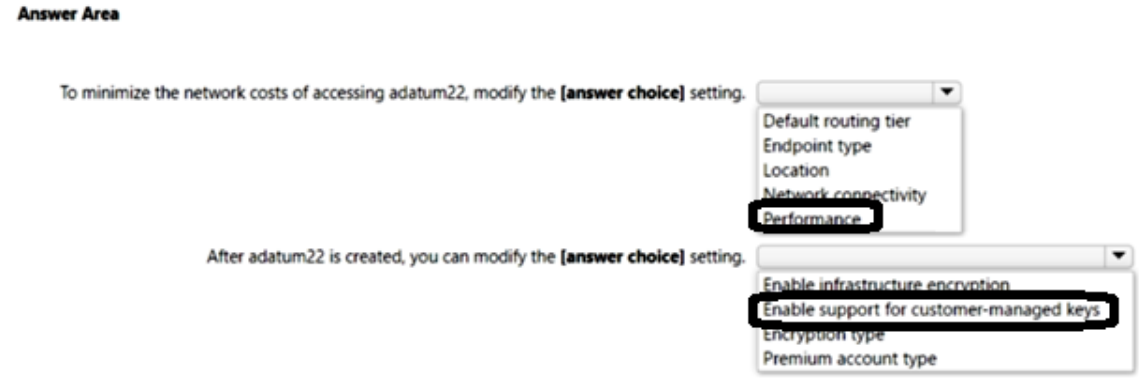

Community Discussion

Question #971

HOTSPOT

-

You have an Azure subscription.

You plan to deploy a new storage account.

You need to configure encryption for the account. The solution must meet the following requirements:

• Use a customer-managed key stored in a key vault.
• Use the maximum supported bit length.

Which type of key and which bit length should you use? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

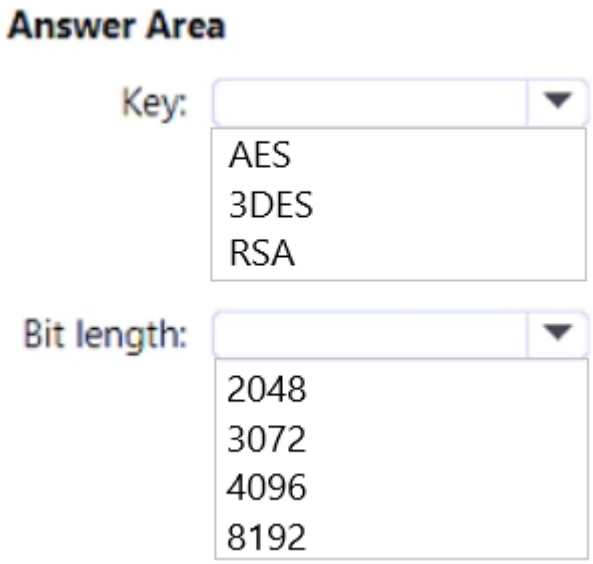

SecExams

Explanation

Correct Answer:

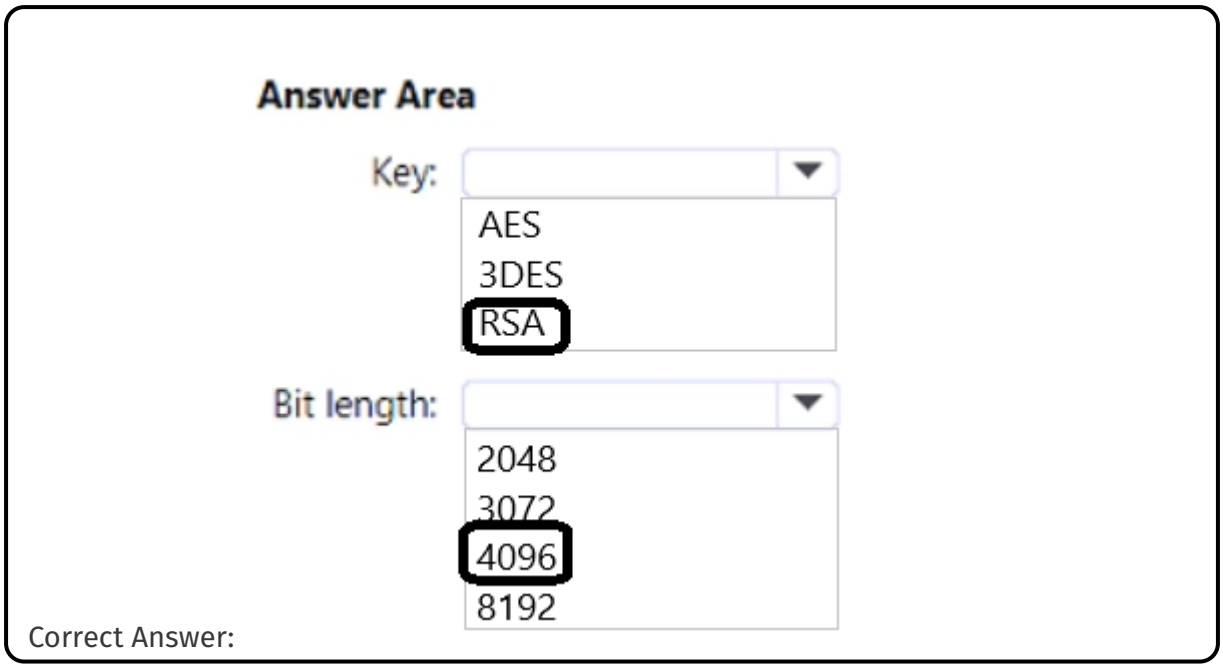

Community Discussion

Question #972

HOTSPOT

-

You have an Azure subscription.

You need to deploy a virtual machine by using an Azure Resource Manager (ARM) template.

How should you complete the template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

```
{
    "$schema": "https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",
    ...
            "type": "Microsoft.Compute/virtualMachines",
            ...
            "dependsOn": [
                "[                    ('Microsoft.Network/networkInterfaces/', 'VM1')]"
            ],
            "properties": {
                "storageProfile": {
                    "                ":{
                        "publisher": "MicrosoftWindowsServer",
                        "Offer" : "WindowsServer",
                        "sku" : "2019-Datacenter",
                        "version" : "latest"
                    ...
}
```

reference
resourceId
Union

Array
Image
ImageReference
vhd

Explanation

Correct Answer:

Answer Area

Community Discussion

- dependsON: resoureceID - storageProfile: ImageReference ref: https://learn.microsoft.com/en-us/azure/virtual-machines/windows/ps-template

The dependsOn property specifies the resources that must be created before the virtual machine can be created. In this case, the virtual machine must depend on the network interface. The storageProfile property specifies the storage configuration for the virtual machine. In this case, the virtual machine will use an image from the Microsoft Windows Server image gallery.

This was in Exam 23-08-23

- dependsON: resoureceID - storageProfile: ImageReference Reference : https://learn.microsoft.com/en-us/azure/azure-resource-manager/templates/resource-dependency#dependson https://learn.microsoft.com/en-us/javascript/api/@azure/arm-compute/storageprofile?view=azure-node-latest

Correct

Question #973

HOTSPOT

-

You have an Azure subscription.

You need to deploy a virtual machine by using an Azure Resource Manager (ARM) template.

How should you complete the template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

```
{
    "$schema": "https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",
    ...
            "type": "Microsoft.Compute/virtualMachines",
            ...
            "dependsOn": [
                "[                    ('Microsoft.Network/networkInterfaces/', 'VM1')]"
            ],
            "properties": {
                "storageProfile": {
                    "                ":{
                        "publisher": "MicrosoftWindowsServer",
                        "Offer" : "WindowsServer",
                        "sku" : "2019-Datacenter",
                        "version" : "latest"
                    ...
}
```

reference
resourceId
Union

Array
Image
ImageReference
vhd

Explanation

Correct Answer:

Answer Area

Community Discussion

Question #974

You have an Azure subscription that has the public IP addresses shown in the following table.

Name	IP version	SKU	Tier	IP address assignment
IP1	IPv4	Standard	Regional	Static
IP2	IPv4	Standard	Global	Static
IP3	IPv4	Basic	Regional	Dynamic
IP4	IPv4	Basic	Regional	Static
IP5	IPv6	Basic	Regional	Dynamic

You plan to deploy an Azure Bastion Basic SKU host named Bastion1.

Which IP addresses can you use?

A) IP1 only
B) IP1 and IP2 only (Correct Answer)
C) IP3, IP4, and IP5 only
D) IP1, IP2, IP4, and IP5 only
E) IP1, IP2, IP3, IP4, and IP5

Explanation

Correct Answer: B ?

Community Discussion

Question #975

You have an Azure subscription that has the public IP addresses shown in the following table.

Name	IP version	SKU	Tier	IP address assignment
IP1	IPv4	Standard	Regional	Static
IP2	IPv4	Standard	Global	Static
IP3	IPv4	Basic	Regional	Dynamic
IP4	IPv4	Basic	Regional	Static
IP5	IPv6	Basic	Regional	Dynamic

You plan to deploy an Azure Bastion Basic SKU host named Bastion1.

Which IP addresses can you use?

A) IP1 only
B) IP1 and IP2 only (Correct Answer)
C) IP3, IP4, and IP5 only
D) IP1, IP2, IP4, and IP5 only
E) IP1, IP2, IP3, IP4, and IP5

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: A

Tested in sandbox - IPv4 - Static - Standard - Global: Error during the selection in the interface - A Global Tier PublicIPAddress cannot be attached to Bastions. - IPv4 - Static - Standard - Regional: OK - IPv4 - Static - Basic - Regional Error during the selection in the interface - Static public IP addresses cannot be associated. - IPv4 - Dynamic - Basic - Regional Error during the selection in the interface - The SKU type for the public IP address does not match the SKU type of the load balancer (?? I don't know why this message). - IPv6 - Static - Standard - Regional: Error during deployment (The selected

IPv6 public IP address is not supported for Azure Bastion. To fix this, please recreate your Azure Bastion with an IPv4 public IP address. (Code: PublicIpAddressVersionNotSupported))

The answer is correct: B Azure Bastion supports standard SKU public IP addresses: https://learn.microsoft.com/en-us/azure/virtual-network/ip-services/configure-public-ip-bastion

This link has it clarified - https://learn.microsoft.com/en-us/azure/bastion/configuration-settings - Bastion whether its basic or standard requires Standard Public IPs which are static.

This link has it clarified - https://learn.microsoft.com/en-us/azure/bastion/configuration-settings - Bastion whether its basic or standard requires Standard Public IPs which are static.

This link has it clarified - https://learn.microsoft.com/en-us/azure/bastion/configuration-settings - Bastion whether its basic or standard requires Standard Public IPs which are static.

SecExams

Question #976

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Floating IP (direct server return) to Disabled
B) Floating IP (direct server return) to Enabled
C) a health probe
D) Session persistence to Client IP (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #977

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Floating IP (direct server return) to Disabled
B) Floating IP (direct server return) to Enabled
C) a health probe
D) Session persistence to Client IP (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

I bet this is not the last time I see this question before I reach the end :)

If I were to bet against you, I would probably lose with a 99.99% chance...

If I were to bet against you, I would probably lose with a 99.99% chance...

wow new question! :P

It would be so funny if this appear multiple times on the real exam.

Question #978

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Floating IP (direct server return) to Enabled
B) Idle Time-out (minutes) to 20
C) a health probe
D) Session persistence to Client IP (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #979

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Floating IP (direct server return) to Enabled
B) Idle Time-out (minutes) to 20
C) a health probe
D) Session persistence to Client IP (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Haha like I said in the previous question's comment ;)

LOL! In the previous question, I replied to you that if I were to bet against you, I would lose. I said that without knowing that this was the next question. Sadly, I was right...

LOL! In the previous question, I replied to you that if I were to bet against you, I would lose. I said that without knowing that this was the next question. Sadly, I was right...

Just dying now lol

Admin has run out of question : Admin : Copy Paste question that everyone dooes not know the answer :D *

Question #980

You have two Azure subscriptions named Sub1 and Sub2.

Sub1 contains a virtual machine named VM1 and a storage account named storage1.

VM1 is associated to the resources shown in the following table.

Name	Type
Disk1	Operating system disk
NetInt1	Network interface
VNet1	Virtual network

You need to move VM1 to Sub2.

Which resources should you move to Sub2?

A) VM1, Disk1, and NetInt1 only
B) VM1, Disk1, and VNet1 only
C) VM1, Disk1, and storage1 only
D) VM1, Disk1, NetInt1, and VNet1 (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

SecExams

Question #981

You have two Azure subscriptions named Sub1 and Sub2.

Sub1 contains a virtual machine named VM1 and a storage account named storage1.

VM1 is associated to the resources shown in the following table.

Name	Type
Disk1	Operating system disk
NetInt1	Network interface
VNet1	Virtual network

You need to move VM1 to Sub2.

Which resources should you move to Sub2?

A) VM1, Disk1, and NetInt1 only
B) VM1, Disk1, and VNet1 only
C) VM1, Disk1, and storage1 only
D) VM1, Disk1, NetInt1, and VNet1 (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: D

When you move a virtual machine from one subscription to another, you need to ensure that all the dependent resources are also moved along with it. In the given scenario, VM1 is associated with the resources Disk1 (OS Disk), NetInt1 (Network Interface), and VNet1 (Virtual Network), and the storage account named storage1 is not associated with VM1. Therefore, to move VM1 to Sub2, you need to move the following resources: VM1: This is the virtual machine that you want to move to Sub2. Disk1: This is the OS disk for VM1, and

it contains the operating system and boot files. NetInt1: This is the network interface that is attached to VM1 and provides connectivity to the virtual network. VNet1: This is the virtual network that is associated with VM1, and it provides the network connectivity to the virtual machine.

Sub2 is a subscription

Sub2 is a subscription

https://learn.microsoft.com/en-us/azure/azure-resource-manager/management/move-limitations/networking-move-limitations

Selected Answer: D

D is correct.

SecExams

Question #982

SecExams

HOTSPOT
-

You have an Azure subscription that contains the alerts shown in the following exhibit.

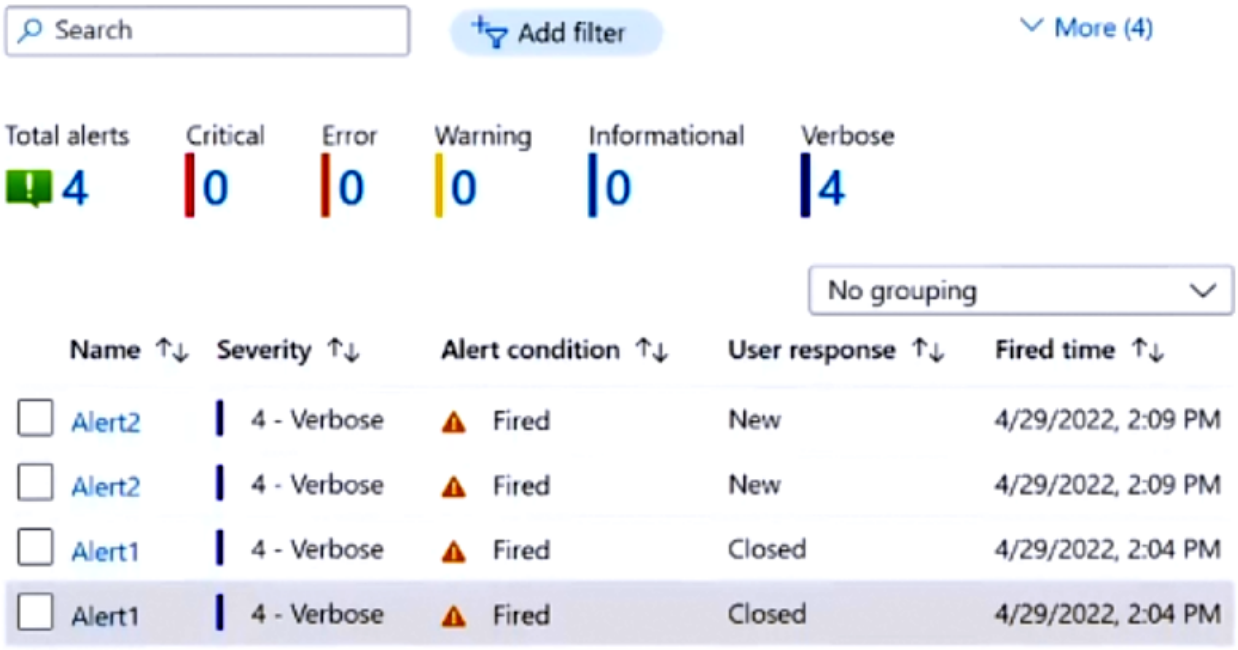

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Answer Area

For Alert1, User response **[answer choice]**.

- cannot be changed
- can be changed to New only
- can be changed to Acknowledged only
- can be changed to New or Acknowledged

For Alert2, User response **[answer choice]**.

- cannot be changed
- can be changed to Acknowledged only
- can be changed to closed only
- can be changed to Acknowledged or Closed

SecExams

Explanation

Correct Answer:

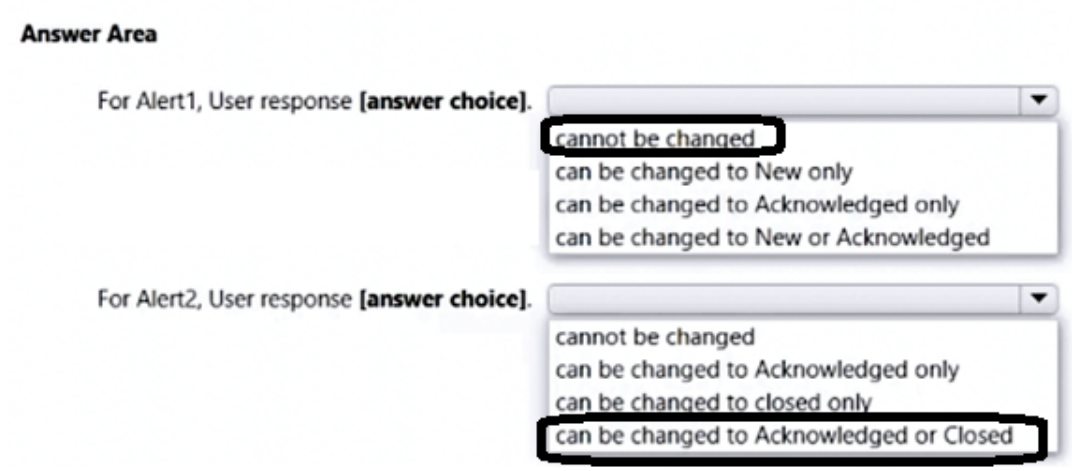

Community Discussion

SecExams

Question #983

SecExams

HOTSPOT

-

You have an Azure subscription that contains the alerts shown in the following exhibit.

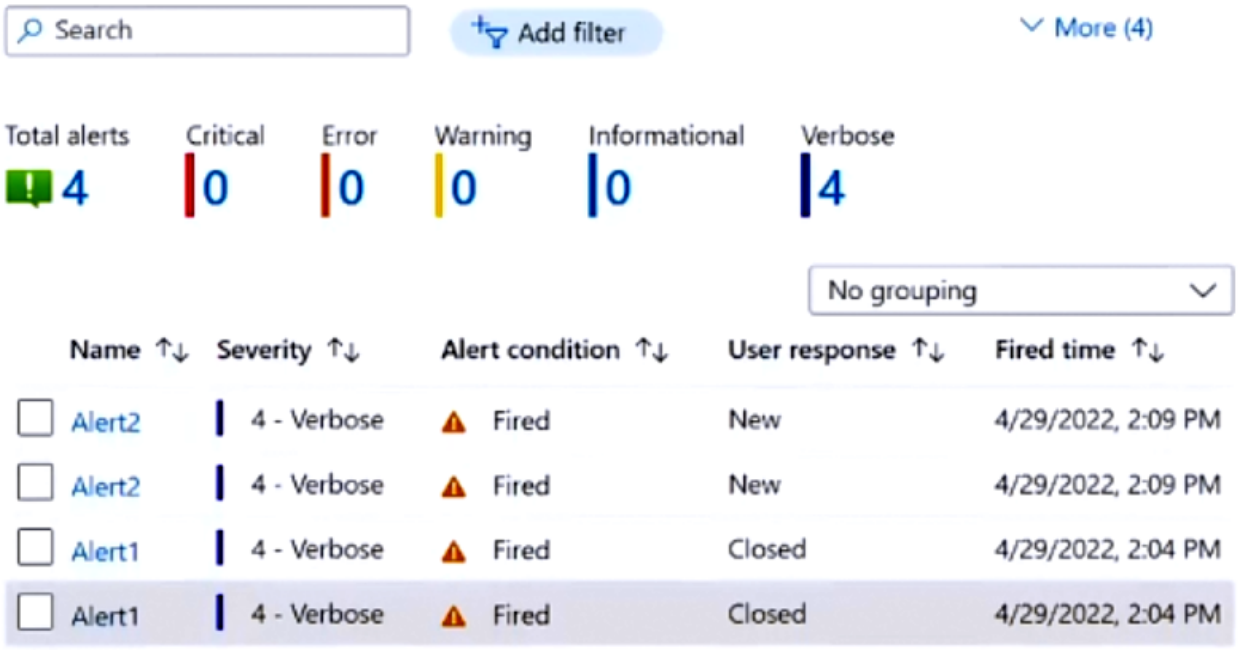

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Answer Area

For Alert1, User response **[answer choice]**.

- cannot be changed
- can be changed to New only
- can be changed to Acknowledged only
- can be changed to New or Acknowledged

For Alert2, User response **[answer choice]**.

- cannot be changed
- can be changed to Acknowledged only
- can be changed to closed only
- can be changed to Acknowledged or Closed

Explanation

Correct Answer:

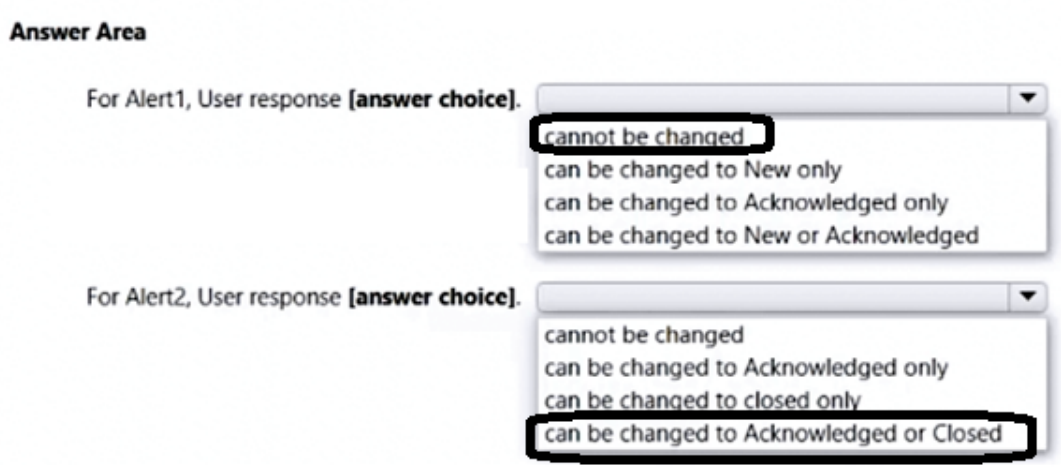

Community Discussion

Tested in lab. Correct answer for: Box1: can be changed to New or Acknowledged Explanation: "Changing the user response doesnt affect the alert condition" is what the portal says while changing the response of an alert whose user response is closed Box2: can be changed to Acknowledged or Closed

Answers are correct Based on the information presented in the graphic: For Alert1, the user response is closed and it cannot be changed. For Alert2, the user response is new and it can be changed to Acknowledged or Closed

"If an alert is in the Closed state, you can "reopen" the alert by changing the alert state to New or Acknowledged" Link: https://learn.microsoft.com/en-us/training/modules/configure-azure-alerts/2b-manage-azure-monitor-alerts

"If an alert is in the Closed state, you can "reopen" the alert by changing the alert state to New or Acknowledged" Link: https://learn.microsoft.com/en-us/training/modules/configure-azure-alerts/2b-manage-azure-monitor-alerts

SecExams

"If an alert is in the Closed state, you can "reopen" the alert by changing the alert state to New or Acknowledged" Link: https://learn.microsoft.com/en-us/training/modules/configure-azure-alerts/2b-manage-azure-monitor-alerts

SecExams

Question #984

HOTSPOT

-

You have a hybrid deployment of Azure Active Directory (Azure AD) that contains the users shown in the following table.

Name	User type	On-premises sync enabled
User1	Member	No
User2	Member	Yes
User3	Guest	No

You need to modify the JobTitle and UsageLocation attributes for the users.

For which users can you modify the attributes from Azure AD? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

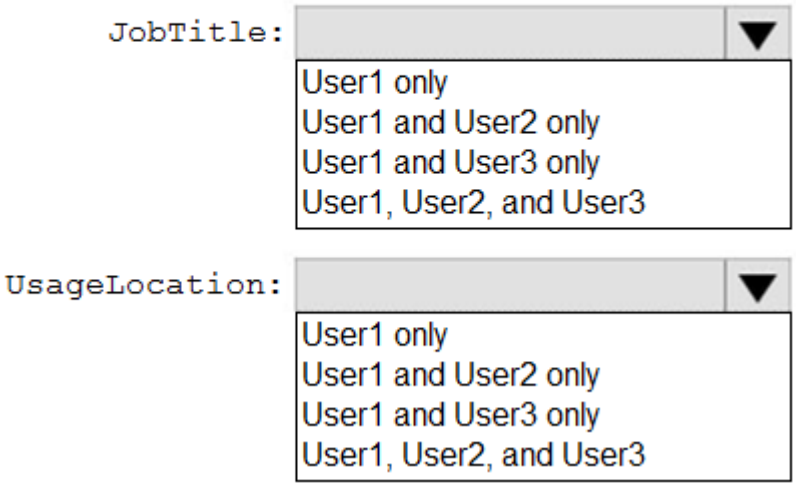

Explanation

Correct Answer:

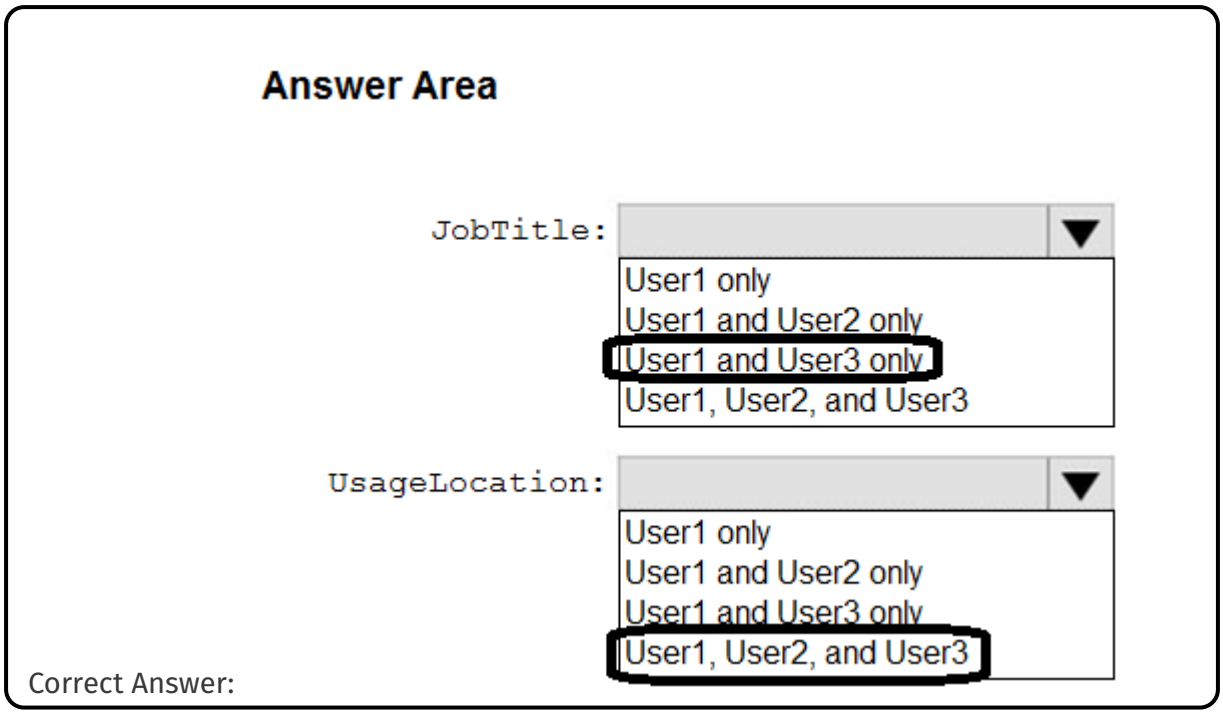

Community Discussion

Question #985

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Active Directory (Azure AD) tenant named contoso.com.

You have a CSV file that contains the names and email addresses of 500 external users.

You need to create a guest user account in contoso.com for each of the 500 external users.

Solution: You create a PowerShell script that runs the New-MgUser cmdlet for each external user.

Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #986

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Active Directory (Azure AD) tenant named contoso.com.

You have a CSV file that contains the names and email addresses of 500 external users.

You need to create a guest user account in contoso.com for each of the 500 external users.

Solution: You create a PowerShell script that runs the New-MgInvitation cmdlet for each external user.

Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #987

You have an Azure Storage account that contains 5,000 blobs accessed by multiple users.

You need to ensure that the users can view only specific blobs based on blob index tags.

What should you include in the solution?

A) a role assignment condition
B) a stored access policy
C) just-in-time (JIT) VM access
D) a shared access signature (SAS) (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #988

You have an Azure Storage account named storage1.

For storage1, you create an encryption scope named Scope1.

Which storage types can you encrypt by using Scope?

A) file shares only
B) containers only (Correct Answer)
C) file shares and containers only
D) containers and tables only
E) file shares, containers, and tables only
F) file shares, containers, tables, and queues

Explanation

Correct Answer: B ?

Community Discussion

Selected Answer: F

The confusion might stem from the specific storage types that can utilize encryption scopes in Azure Storage. While it's true that encryption scopes are often associated with blobs (containers), it's important to note that they can also apply to other types of storage, including tables and queues. The correct understanding is that encryption scopes can be used for: File shares Containers (blobs) Tables Queues So, the most accurate answer is F: file shares, containers, tables, and queues. If many are voting for answer B, they might be misunderstanding the broader applicability of encryption scopes.

SecExams

Question #989

HOTSPOT

-

You need to configure a new Azure App Service app named WebApp1. The solution must meet the following requirements:

• WebApp1 must be able to verify a custom domain name of app.contoso.com.
• WebApp1 must be able to automatically scale up to eight instances.
• Costs and administrative effort must be minimized.

Which pricing plan should you choose, and which type of record should you use to verify the domain? To answer, select the appropriate options in the answer area.

NOTE: Each correct answer is worth one point.

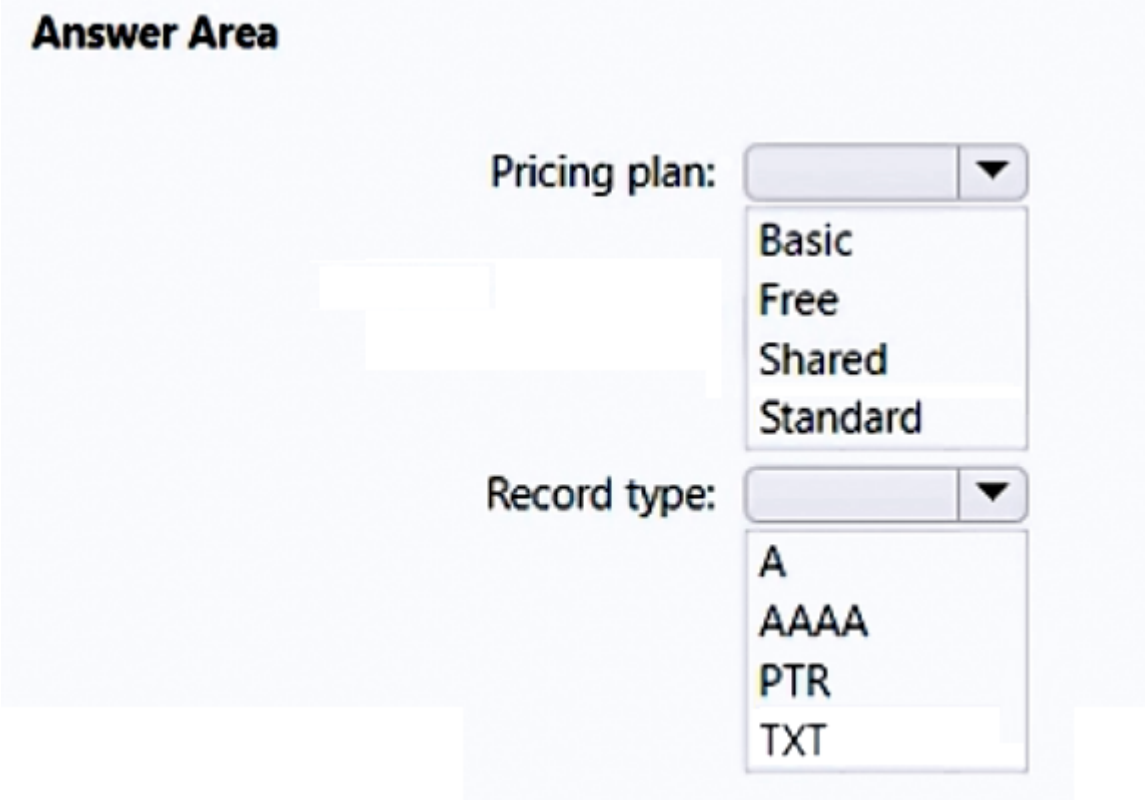

SecExams

Explanation

Correct Answer:

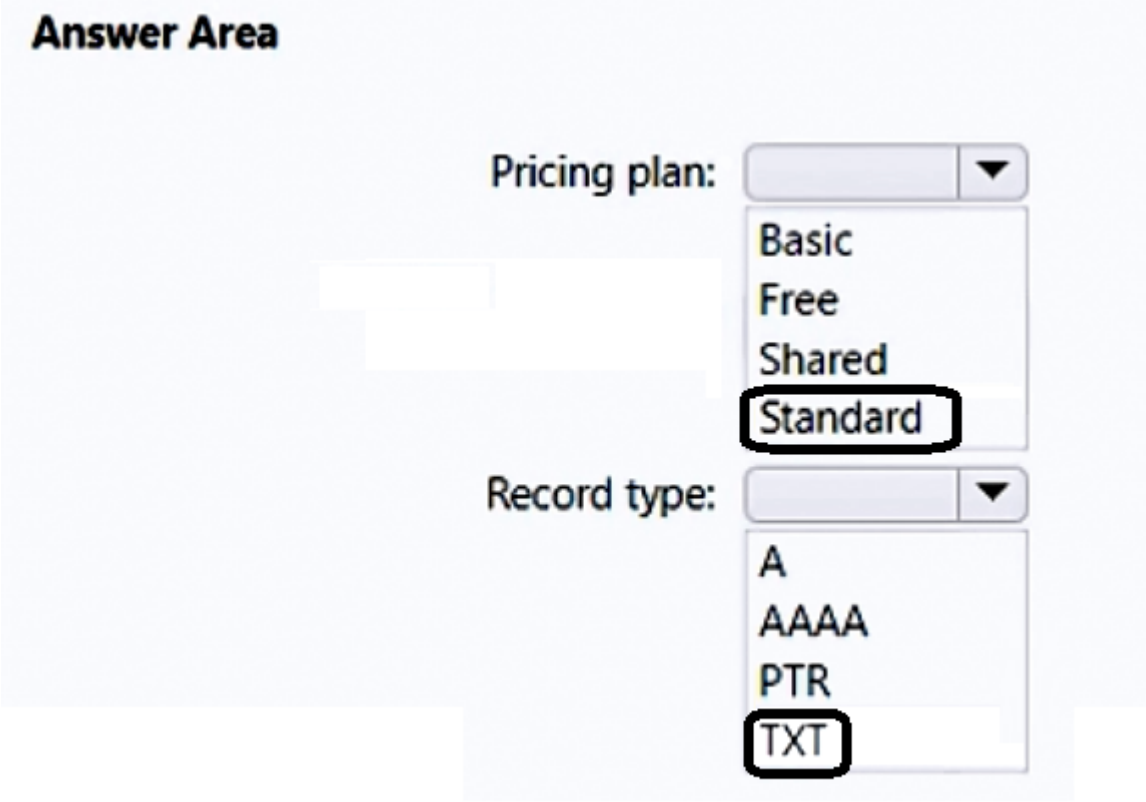

Community Discussion

WebApp1 must be able to verify a custom domain name of app.contoso.com. All paid tiers (Basic, Standard, Premium, Isolated) allow for custom domains. WebApp1 must be able to automatically scale up to eight instances. Auto-scaling is a feature that is available in the Standard, Premium, and Isolated tiers. It is not available in the Basic tier, which allows you to manually scale up to 3 instances. Costs and administrative effort must be minimized. Pricing Plan: Given these requirements, the best option is the "Standard" tier. It offers both auto-scaling and custom domains, while being less expensive than the Premium or Isolated tiers. The Basic tier does not support auto-scaling, and the Free and Shared tiers do not support custom domains or auto-scaling. For verifying a custom domain, Azure uses a CNAME or TXT record. The A record cannot be used for domain verification Pricing Plan: Standard Record Type: TXT

New Question for June 24 2023

exam on 31/Jul/2023

To verify a domain, Azure uses TXT and MX record.

To verify a domain, Azure uses TXT and MX record.

SecExams

Question #990

HOTSPOT

-

You need to configure a new Azure App Service app named WebApp1. The solution must meet the following requirements:

• WebApp1 must be able to verify a custom domain name of app.contoso.com.
• WebApp1 must be able to automatically scale up to eight instances.
• Costs and administrative effort must be minimized.

Which pricing plan should you choose, and which type of record should you use to verify the domain? To answer, select the appropriate options in the answer area.

NOTE: Each correct answer is worth one point.

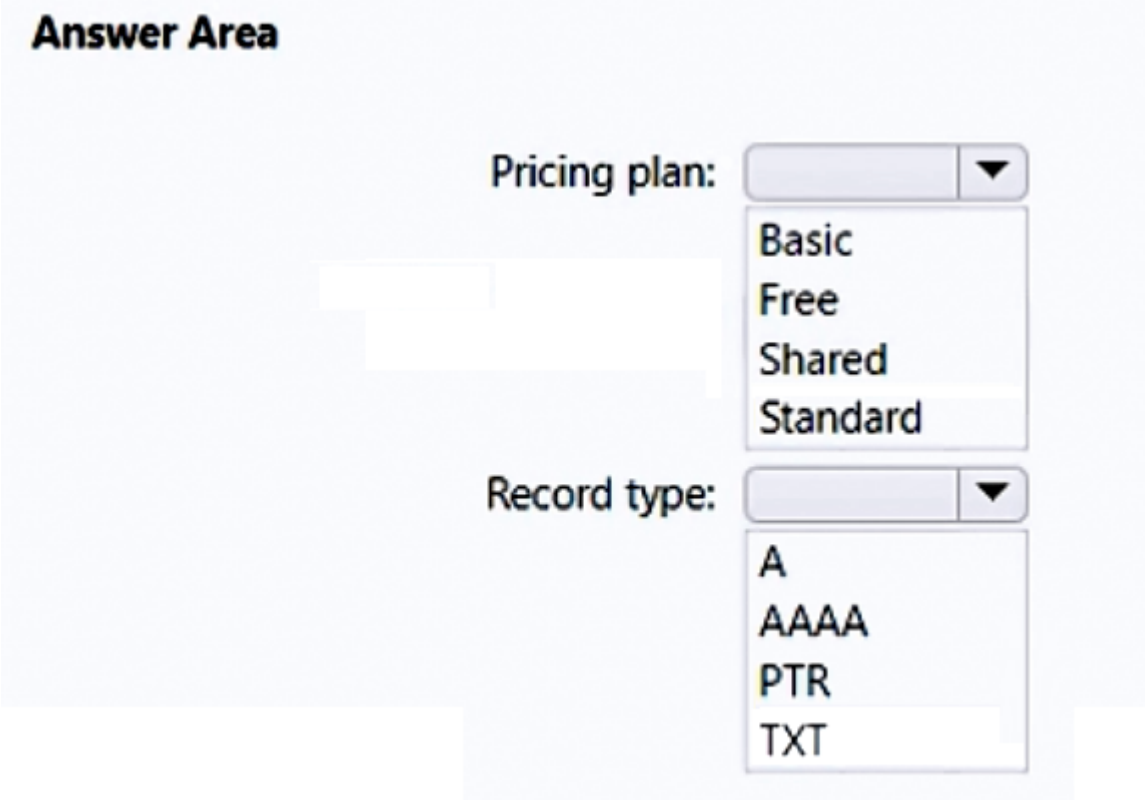

SecExams

Explanation

Correct Answer:

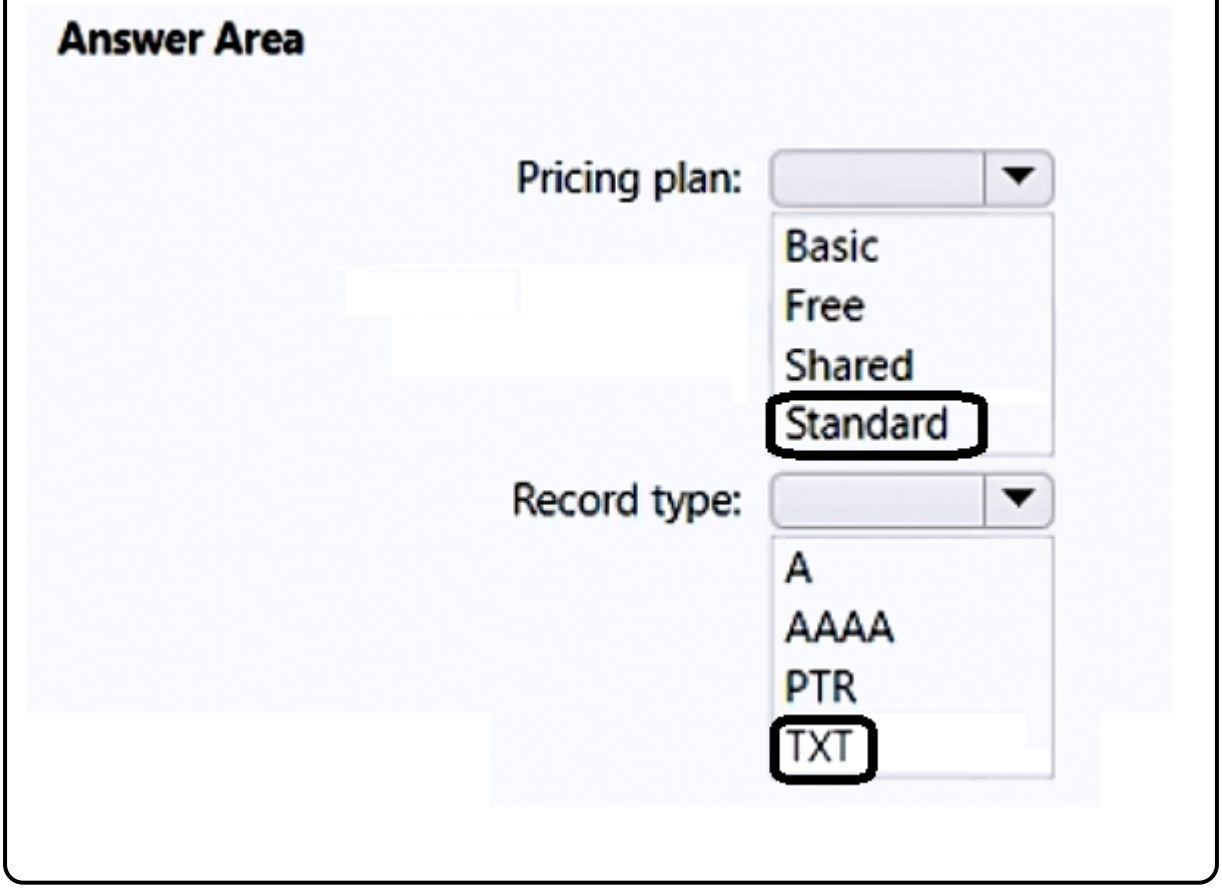

Community Discussion

SecExams

Question #991

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Session persistence to Client IP and protocol (Correct Answer)
B) Idle Time-out (minutes) to 20
C) Session persistence to None
D) Floating IP (direct server return) to Enabled

Explanation

Correct Answer: A ?

Community Discussion

SecExams

Question #992

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Session persistence to Client IP and protocol (Correct Answer)
B) Idle Time-out (minutes) to 20
C) Session persistence to None
D) Floating IP (direct server return) to Enabled

Explanation

Correct Answer:
A

Community Discussion

This is one of those questions, that in the exam I'm going to have to pretend to be reading it before answering, just so it wouldn't be suspicious.

this question came in the exam 25/9/2023

let me think ...

Please update this dump with real new questions. This question appeared in the dump more than 6 times already.

it's the one you can save time on.

Question #993

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Floating IP (direct server return) to Disabled
B) Idle Time-out (minutes) to 20
C) a health probe
D) Session persistence to Client IP (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Selected Answer: B

Question #994

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Floating IP (direct server return) to Disabled
B) Idle Time-out (minutes) to 20
C) a health probe
D) Session persistence to Client IP (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

in 20 years we still be remenbering it

Come on moderator do your job and clean these duplicates out please.

Enough we get it Already!

This is making me laugh so hard. How many times has this been filling up spaces for this dumps?

And here it comes again.... :-)

Question #995

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Session persistence to Client IP (Correct Answer)
B) Idle Time-out (minutes) to 20
C) Session persistence to None
D) Protocol to UDP

Explanation

Correct Answer: A ?

Community Discussion

Question #996

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

A) Session persistence to Client IP (Correct Answer)
B) Idle Time-out (minutes) to 20
C) Session persistence to None
D) Protocol to UDP

Explanation

Correct Answer:
A

Community Discussion

I'm going to ask for a refund.

Hopefully it's also mitiple times in the real exam ;-)

I must admit, after seeing 400+ questions and being on my way to 500, seeing this question over and over again makes me happy cause I'm gonna be done with this faster. Keep spamming that shit, I am tired from all these damn questions LOL

Duplicates were added to fool us and make us think they ET has added new questions form the new exam update..

3 times in a row, 5 times on this page... and 20 times in total or so Please remove the duplicates of this question

Question #997

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.

You need to ensure that NGINX is available on all the virtual machines after they are deployed.

What should you use?

A) the Publish-AzVMDscConfiguration cmdlet
B) a Microsoft Endpoint Manager device configuration profile
C) Azure Application Insights
D) a Desired State Configuration (DSC) extension (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Please, clean this dump. Remove duplicate, triplicate questions. This is not a new question. Update with real new questions. Thank you!

Selected Answer: A

A. Session persistence to Client IP is the correct one

Another old friend

Selected Answer: D

DSC extension

Come on moderator do your job and clean these duplicates out please.

Question #998

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.

You need to ensure that NGINX is available on all the virtual machines after they are deployed.

What should you use?

A) Azure Custom Script Extension (Correct Answer)
B) Deployment Center in Azure App Service
C) the New-AzConfigurationAssignment cmdlet
D) a Microsoft Endpoint Manager device configuration profile

Explanation

Correct Answer:
A

Community Discussion

Haven't seen this one in a while ;-)

What are doing these clowns?

i think i will add mastery of script extensions and session persistence in my resume

me too :)

me too :)

Question #999

You have an Azure subscription that contains a Recovery Services vault named Vault1.

You need to enable multi-user authorization (MAU) for Vault1.

Which resource should you create first?

A) an administrative unit
B) a managed identity
C) a resource guard (Correct Answer)
D) a custom Azure role

Explanation

Correct Answer: C ?

Community Discussion

Question #1000

You have an Azure subscription that contains a Recovery Services vault named Vault1.

You need to enable multi-user authorization (MAU) for Vault1.

Which resource should you create first?

A) an administrative unit
B) a managed identity
C) a resource guard (Correct Answer)
D) a custom Azure role

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: C

Given answer looks correct, see; https://learn.microsoft.com/en-us/azure/backup/multi-user-authorization?tabs=azure-portal&pivots=vaults-recovery-services-vault Before you start Testing scenarios Create a Resource Guard Enable MUA on a Recovery Services vault Protected operations on a vault using MUA Authorize critical operations on a vault Disable MUA on a Recovery Services vault

Selected Answer: C

https://learn.microsoft.com/en-us/azure/backup/multi-user-authorization?tabs=azure-portal&pivots=vaults-recovery-services-vault

Selected Answer: C

https://learn.microsoft.com/en-us/azure/backup/multi-user-authorization?tabs=azure-portal&pivots=vaults-recovery-services-vault#before-you-start Before you start Ensure the Resource Guard and the Recovery Services vault are in the same Azure region. Ensure the Backup admin does not have Contributor permissions on the Resource Guard. You can choose to have the Resource Guard in another subscription of the same directory or in another directory to ensure maximum isolation. Ensure that your subscriptions containing the Recovery Services vault as well as the Resource Guard (in different subscriptions or tenants) are registered to use the providers - Microsoft.RecoveryServices and Microsoft.DataProtection . For more information, see Azure

Selected Answer: A

While creating a resource guard (option C) is related to enhancing security for Azure resources, it is specifically focused on protecting resources from accidental deletion or modification, rather than directly enabling multi-user authorization (MAU) for a Recovery Services vault. To enable MAU, the first step is to create an administrative unit (option A), as it directly relates to managing the users involved in multi-user authorization for actions on the Recovery Services vault.

SecExams

Question #1001

SecExams

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.

The effective network security configurations for VM2 are shown in the following exhibit.

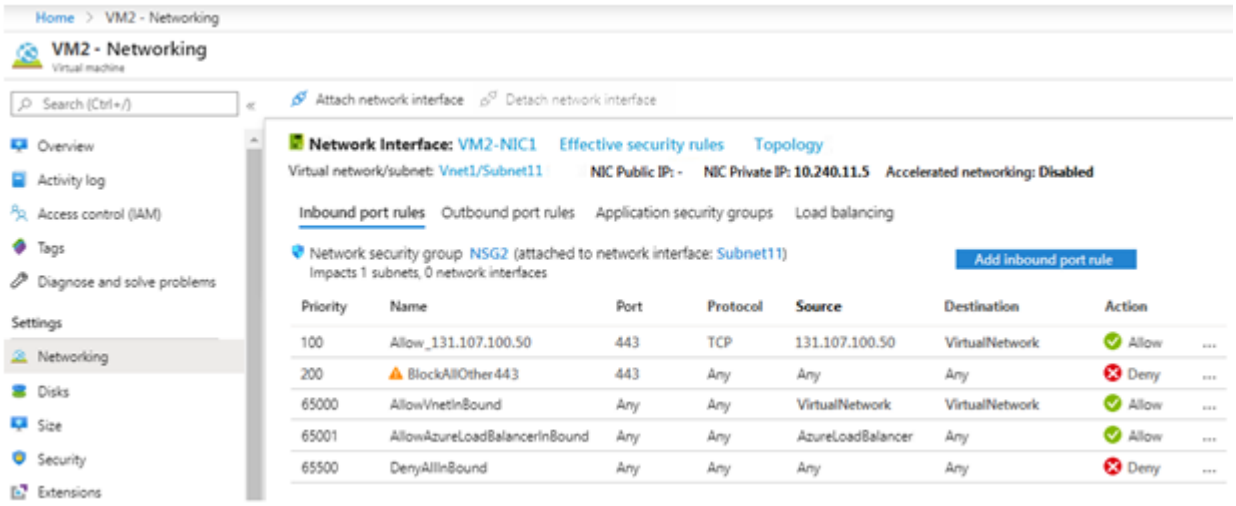

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.

You verify that the Load Balancer rules are configured correctly.

You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.

Solution: You create an inbound security rule that allows any traffic from the AzureLoadBalancer source and has a priority of 150.

Does this meet the goal?

A) Yes (Correct Answer)

B) No

Explanation

Correct Answer: A ?

Community Discussion

SecExams

Question #1002

SecExams

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.

The effective network security configurations for VM2 are shown in the following exhibit.

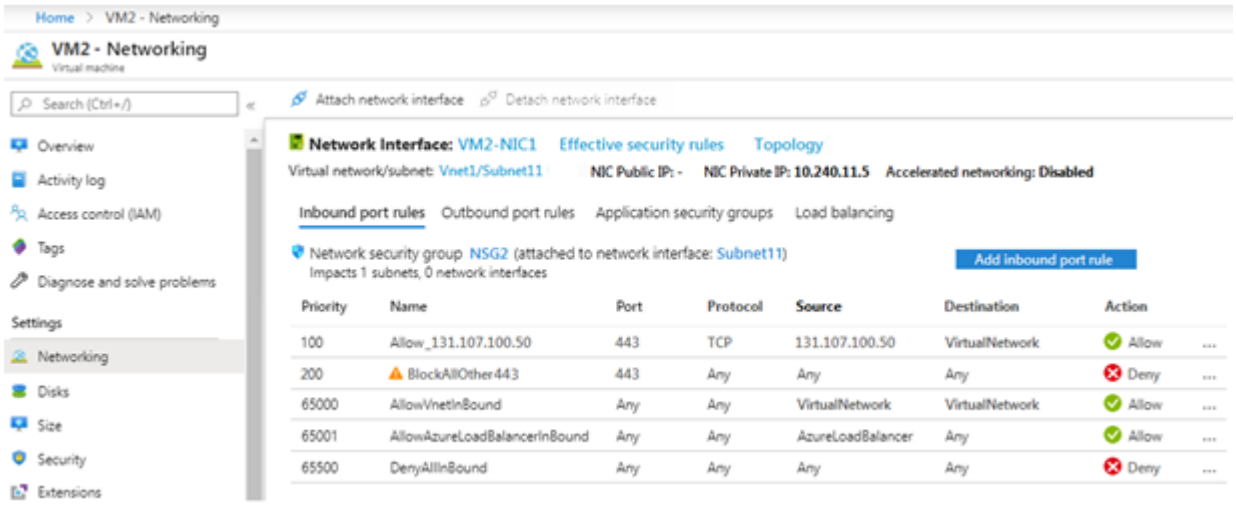

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.

You verify that the Load Balancer rules are configured correctly.

You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.

Solution: You create an inbound security rule that allows any traffic from the AzureLoadBalancer source and has a priority of 150.

Does this meet the goal?

A) Yes (Correct Answer)

B) No

Explanation

Correct Answer:
A

Community Discussion

Answer is 'NO' B, there is rule in place to allow 131.107.100.50 over TCP port 443 with higher priority of 100. Adding a new rule of priority of 150 will not made any difference.

Selected Answer: A

Presuming it's the health probe on 443 which is at fault and is required to ensure LB is processing as intended, the given answer is correct. https://learn.microsoft.com/en-us/azure/load-balancer/load-balancer-custom-probe-overview "Azure Load Balancer rules require a health probe to detect the endpoint status. The configuration of the health probe and probe responses determines which backend pool instances receive new connections. Use health probes to detect the failure of an application. Generate a custom response to a health probe. Use the health probe for flow control to manage load or planned downtime. When a health probe fails, the load balancer stops sending new connections to the respective unhealthy instance. Outbound connectivity isn't affected, only inbound."

I take it back. This Question was in my exam today and I specifically looked at the "Attach network interface" button and it was grayed out (not enabled like in this screenshot). I passed the exam with 909 and my answer today was YES (big thanks to everyone that posted here, especially mlantonis).

I take it back. This Question was in my exam today and I specifically looked at the "Attach network interface" button and it was grayed out (not enabled like in this screenshot). I passed the exam with 909 and my answer today was YES (big thanks to everyone that posted here, especially mlantonis).

SecExams

The VM IS OFF. Thats why its not working (look at the top where it says "attach network" Adding that rule isn't going to change anything, as there is already a higher priority rule allowing that traffic. So...no. that isn't going to fix the issue.

Question #1003

Your on-premises network contains a VPN gateway.

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vgw1	Virtual network gateway	Gateway for Site-to-Site VPN to the on-premises network
storage1	Storage account	Standard performance tier
Vnet1	Virtual network	Enabled forced tunneling
VM1	Virtual machine	Connected to Vnet1

You need to ensure that all the traffic from VM1 to storage1 travels across the Microsoft backbone network.

What should you configure?

A) Azure Application Gateway
B) service endpoints (Correct Answer)
C) Azure AD Application Proxy
D) Azure Virtual WAN

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

Given answer is correct see; https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoints-overview "Virtual Network (VNet) service endpoint provides secure and direct connectivity to Azure services over an optimized route over the Azure backbone network. Endpoints allow you to secure your critical Azure service resources to only your virtual networks. Service Endpoints enables private IP addresses in the VNet to reach the endpoint of an Azure service without needing a public IP address on the VNet."

in exam 26/12/2023

Selected Answer: B

Probably correct answer - B: "Virtual Network (VNet) service endpoint provides secure and direct connectivity to Azure services over an optimized route over the Azure backbone network." https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoints-overview

SecExams

Question #1004

You create an Azure VM named VM1 that runs Windows Server 2019.

VM1 is configured as shown in the exhibit. (Click the Exhibit tab.)

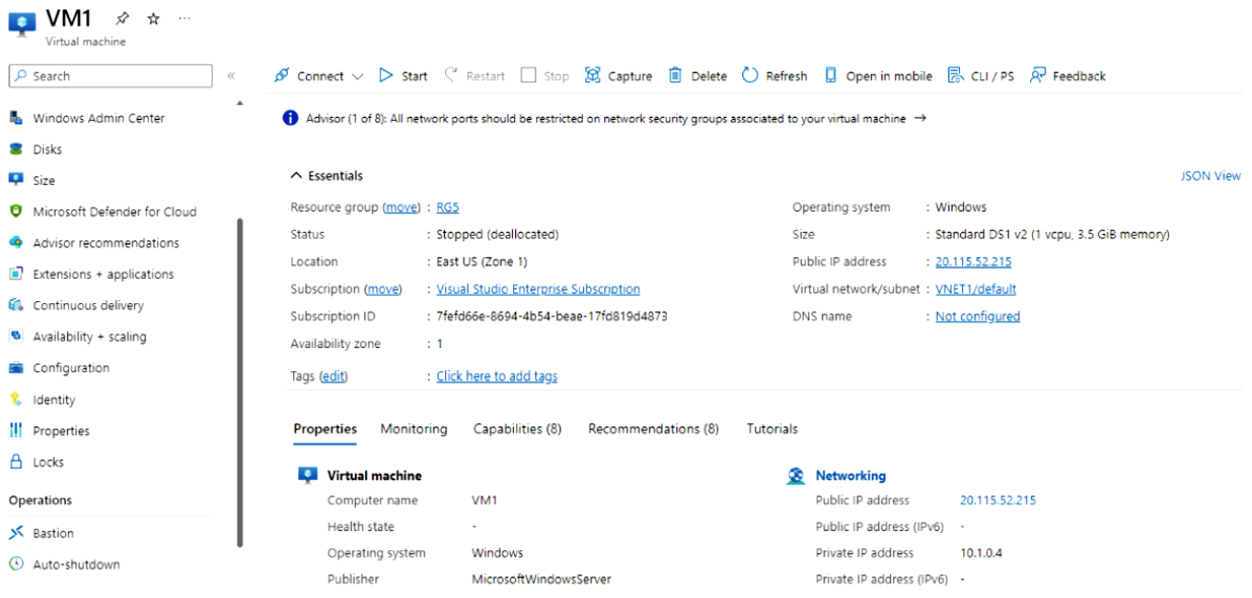

You need to enable Desired State Configuration for VM1.

What should you do first?

A) Connect to VM1.
B) Start VM1. (Correct Answer)
C) Capture a snapshot of VM1.
D) Configure a DNS name for VM1.

Explanation

Correct Answer: B ?

Community Discussion

Question #1005

You create an Azure VM named VM1 that runs Windows Server 2019.

VM1 is configured as shown in the exhibit. (Click the Exhibit tab.)

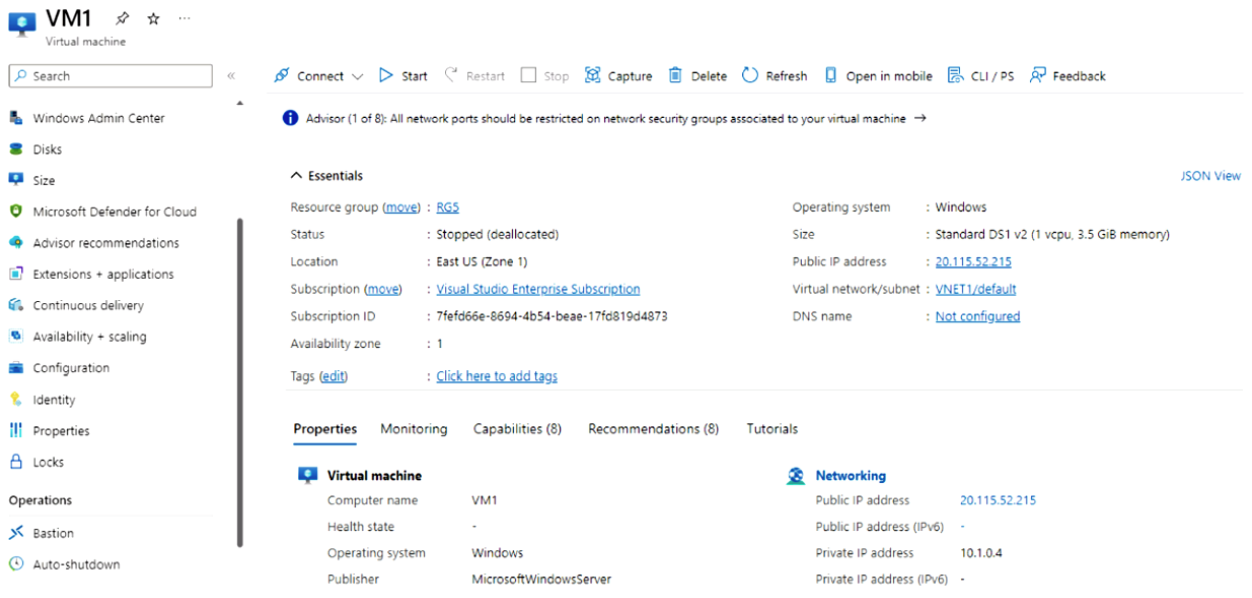

You need to enable Desired State Configuration for VM1.

What should you do first?

A) Connect to VM1.
B) Start VM1. (Correct Answer)
C) Capture a snapshot of VM1.
D) Configure a DNS name for VM1.

Explanation

Correct Answer:
B

Community Discussion

All these are repeated questions, and if you are at this point then you have contributor access and paid subscription.. so we miss Mlantos comments here..

mlantonis

mlantonis

Selected Answer: B

Given answer is correct, see; https://learn.microsoft.com/en-us/azure/virtual-machines/extensions/dsc-windows "The DSC extension for Windows requires that the target virtual machine is able to communicate with Azure and the location of the configuration package (.zip file) if it is stored in a location outside of Azure."

Selected Answer: B If we need to connect to the VM, it should be running. The provided screenshot shows that it is stopped. Ref: https://learn.microsoft.com/en-us/azure/automation/quickstarts/dsc-configuration#enable-a-virtual-machine

SecExams

Question #1006

You have an Azure subscription named Subscription1 that contains virtual network named VNet1. VNet1 is in a resource group named RG1.

A user named User1 has the following roles for Subscription1:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.

What should you do?

A) Assign User1 the Contributor role for VNet1.
B) Assign User1 the Network Contributor role for VNet1.
C) Assign User1 the User Access Administrator role for VNet1. (Correct Answer)
D) Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the

Contributor role for Subscription1.

Explanation

Correct Answer: C ?

Community Discussion

Question #1007

You have an Azure subscription named Subscription1 that contains virtual network named VNet1. VNet1 is in a resource group named RG1.

User named User1 has the following roles for Subscription1:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.
What should you do?

A) Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1.
B) Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1.
C) Assign User1 the Network Contributor role for VNet1.
D) Assign User1 the User Access Administrator role for VNet1. (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #1008

HOTSPOT

-

You have an Azure Storage account named storage1 that uses Azure Blob storage and Azure File storage.

You need to use AzCopy to copy data to the blob storage and file storage in storage1.

Which authentication method should you use for each type of storage? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Blob storage:

- Azure AD only
- Shared access signatures (SAS) only
- Azure AD and shared access signatures (SAS)

File storage:

- Azure AD only
- Shared access signatures (SAS) only
- Azure AD and shared access signatures (SAS)

Explanation

Correct Answer:

Answer Area

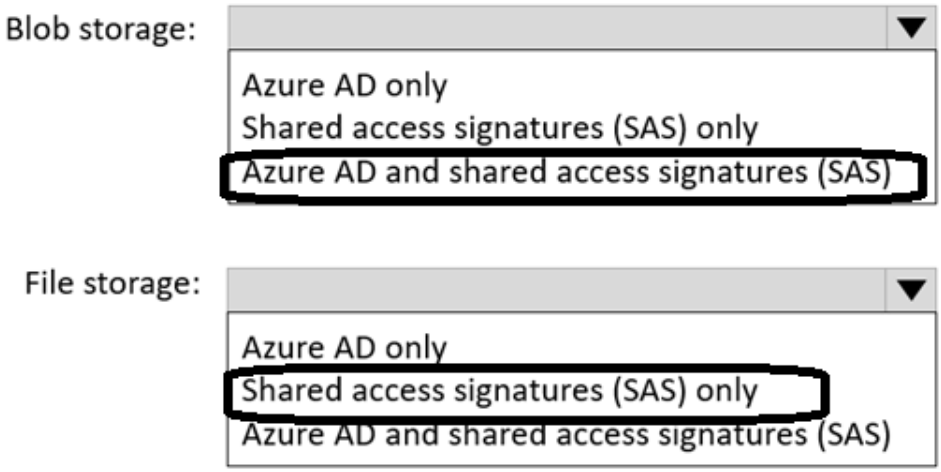

Community Discussion

SecExams

Question #1009

HOTSPOT

-

You have an Azure AD tenant that contains a user named External User.

External User authenticates to the tenant by using .

You need to ensure that External User authenticates to the tenant by using .

Which two settings should you configure from the Overview blade? To answer, select the appropriate settings in the answer area.

NOTE: Each correct answer is worth one point.

Answer Area

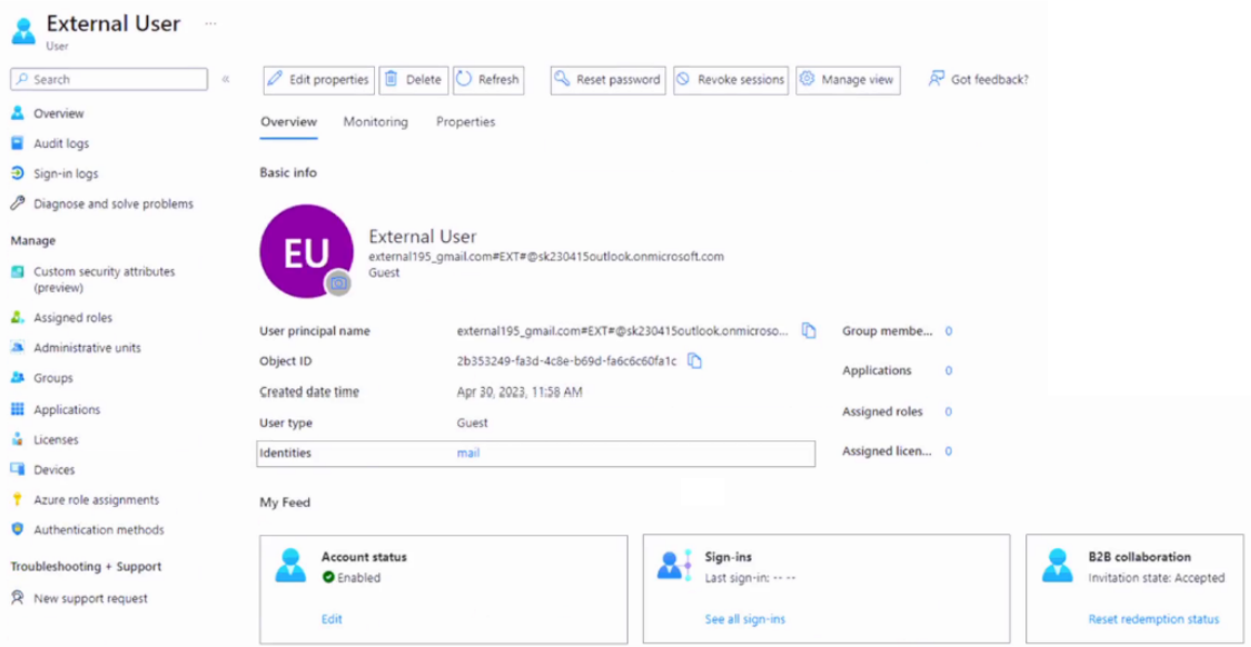

Explanation

Correct Answer:

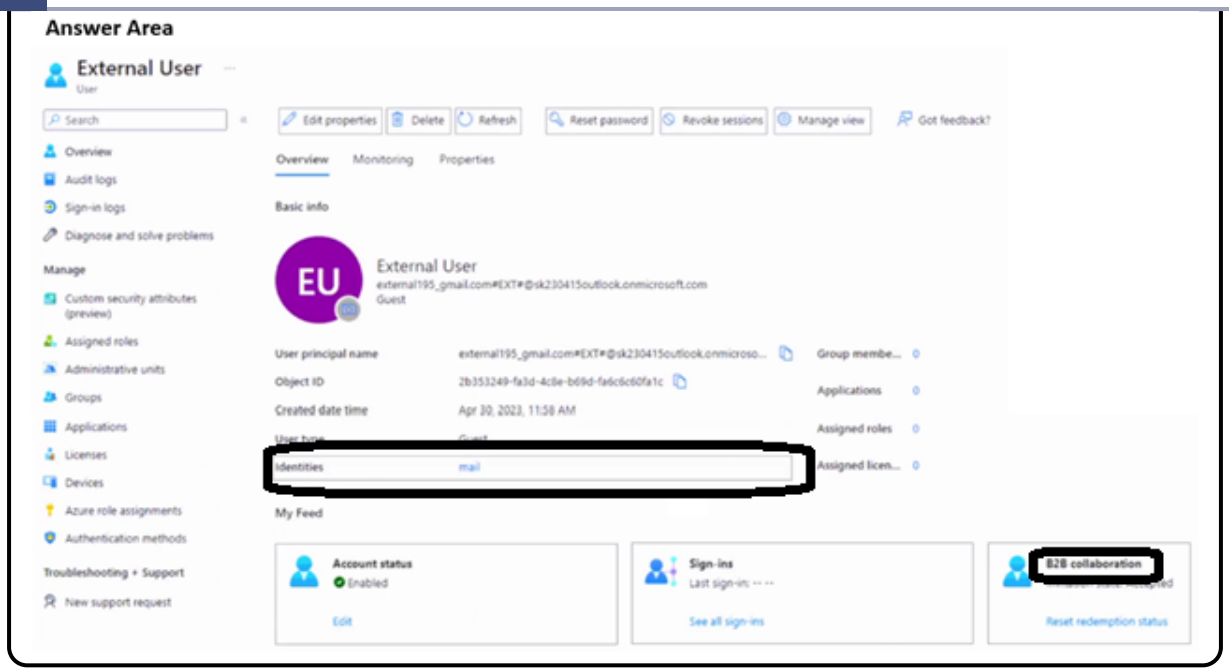

Community Discussion

Question #1010

You have an Azure subscription that contains the resources shown in the following table.

Name	Description
RG1	Resource group
RG2	Resource group
storage1	Storage account in RG1
Workspace1	Azure Synapse Analytics workspace in RG2

You need to assign Workspace1 a role to allow read, write, and delete operations for the data stored in the containers of storage1.

Which role should you assign?

A) Storage Account Contributor
B) Contributor

C) Storage Blob Data Contributor (Correct Answer)

D) Reader and Data Access

Explanation

Correct Answer: C ?

Community Discussion

Question #1011

You have an Azure subscription named Subscription1 that contains virtual network named VNet1. VNet1 is in a resource group named RG1.

A user named User1 has the following roles for Subscription1:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.

What should you do?

A) Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1.

B) Assign User1 the Contributor role for VNet1.

C) Assign User1 the Owner role for VNet1. (Correct Answer)

D) Assign User1 the Network Contributor role for RG1.

Explanation

Correct Answer: C ?

Community Discussion

Question #1012

You have an Azure AD tenant that contains the groups shown in the following table.

Name	Type	Security
Group1	Security	Enabled
Group2	Mail-enabled security	Enabled
Group3	Microsoft 365	Enabled
Group4	Microsoft 365	Disabled

You purchase Azure Active Directory Premium P2 licenses.

To which groups can you assign a license?

A) Group1 only
B) Group1 and Group3 only (Correct Answer)
C) Group3 and Group4 only
D) Group1, Group2, and Group3 only
E) Group1, Group2, Group3, and Group4

Explanation

Correct Answer: B ?

Community Discussion

Question #1013

HOTSPOT

-

You have an Azure AD tenant.

You need to create a Microsoft 365 group that contains only members of a marketing department in France.

How should you complete the dynamic membership rule? To answer, select the appropriate options in the answer area.

NOTE: Each correct answer is worth one point.

Answer Area

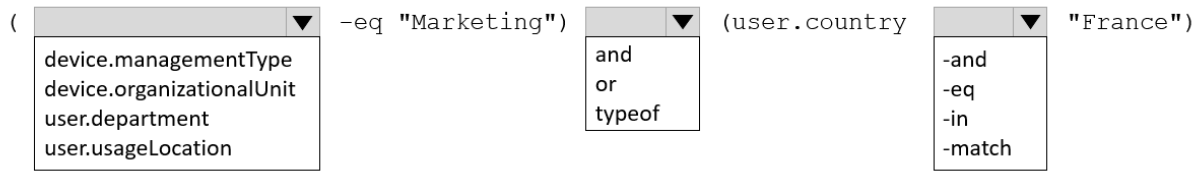

Explanation

Correct Answer:

Answer Area

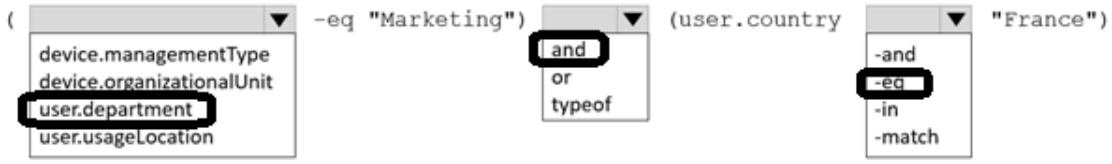

Community Discussion

SecExams

Question #1014

SecExams

HOTSPOT
-

You have an Azure AD tenant.

You need to modify the Default user role permissions settings for the tenant. The solution must meet the following requirements:

• Standard users must be prevented from creating new service principals.
• Standard users must only be able to use PowerShell or Microsoft Graph to manage their own Azure resources.

Which two settings should you modify? To answer, select the appropriate settings in the answer area.

NOTE: Each correct answer is worth one point.

SecExams

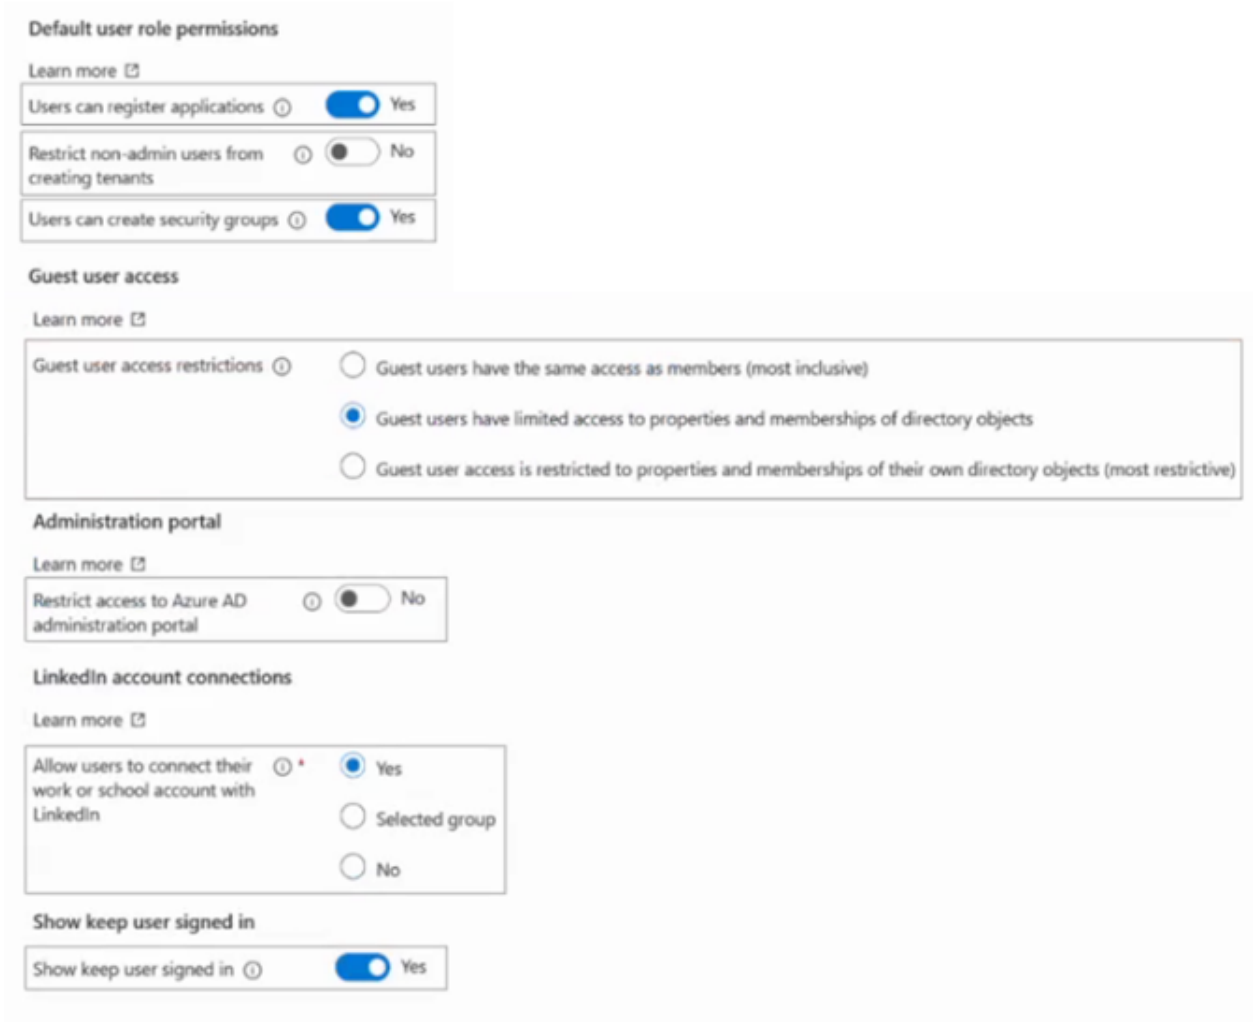

Explanation

Correct Answer:

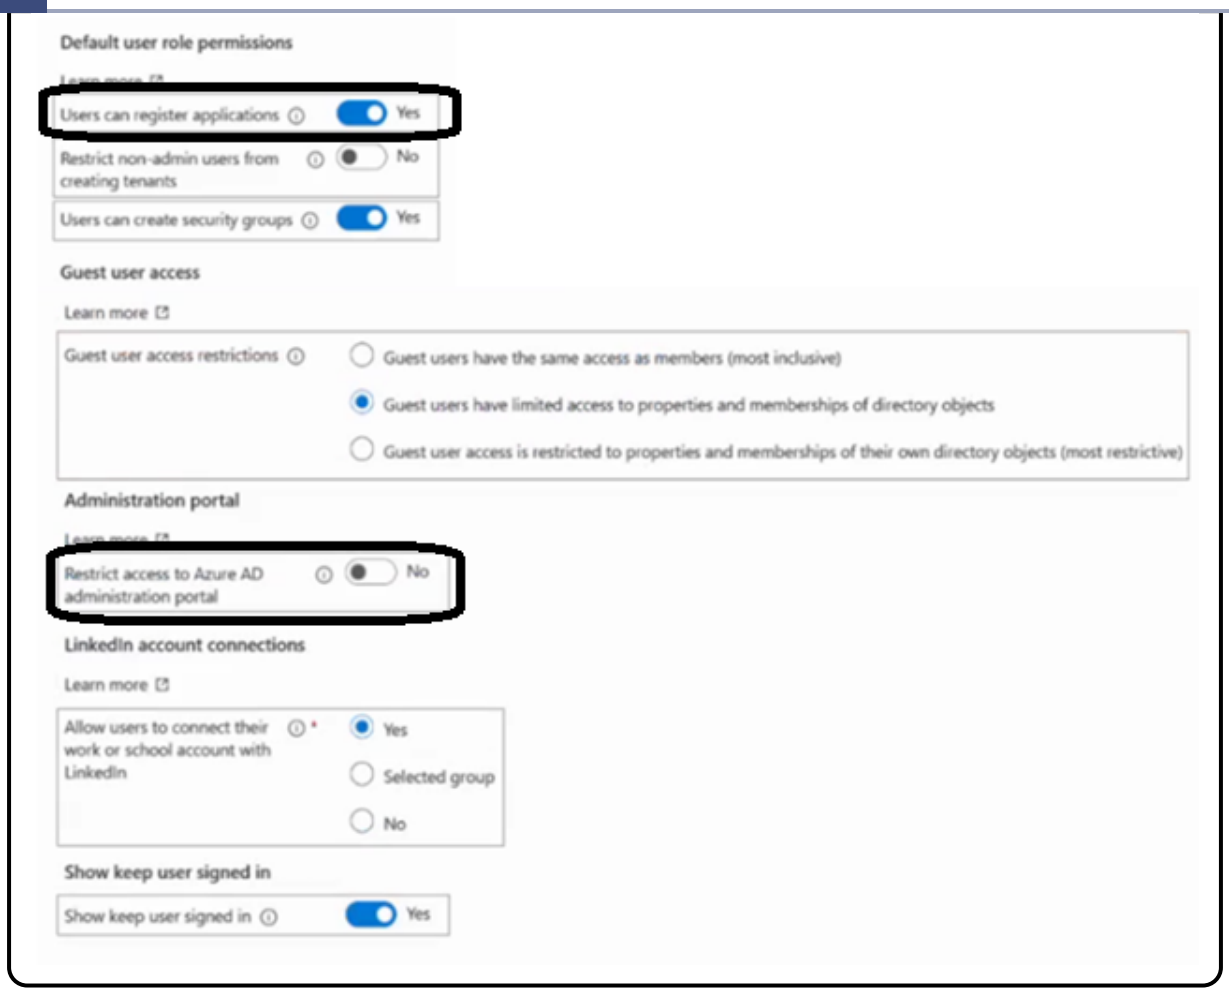

Community Discussion

Question #1015

SecExams

HOTSPOT

-

You have an Azure subscription named Sub1 that contains the blob containers shown in the following table.

Name	In storage account	Contains blob
cont1	storage1	blob1
cont2	storage2	blob2
cont3	storage3	blob3

Sub1 contains two users named User1 and User2. Both users are assigned the Reader role at the Sub1 scope.

You have a condition named Condition1 as shown in the following exhibit.

```
(
 (
  !(ActionMatches{'Microsoft.Storage/storageAccounts/blobServices/containers/blobs/read'})
 )
 OR
 (
 @Resource[Microsoft.Storage/storageAccounts/blobServices/containers:name] StringEquals 'cont1'
 )
)
```

You have a condition named Condition2 as shown in the following exhibit.

```
(
 (
  !(ActionMatches{'Microsoft.Storage/storageAccounts/blobServices/containers/blobs/write'})
 )
 OR
 (
 @Resource[Microsoft.Storage/storageAccounts/blobServices/blobs:path] StringLike '*2*'
 )
)
```

You assign roles to User1 and User2 as shown in the following table.

User	Role	Scope	Role assignment condition
User1	Storage Blob Data Reader	sub1	Condition1
User2	Storage Blob Data Owner	storage1	Condition2

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
User1 can read blob2.	○	○
User1 can read blob3.	○	○
User2 can read blob1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
User1 can read blob2.	●	○
User1 can read blob3.	●	○
User2 can read blob1.	○	●

Community Discussion

N, N, Y

Question #1016

HOTSPOT

-

You have an Azure subscription.

You plan to create a role definition to meet the following requirements:

- Users must be able to view the configuration data of a storage account.
- Users must be able to perform all actions on a virtual network.
- The solution must use the principle of least privilege.

What should you include in the role definition for each requirement? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

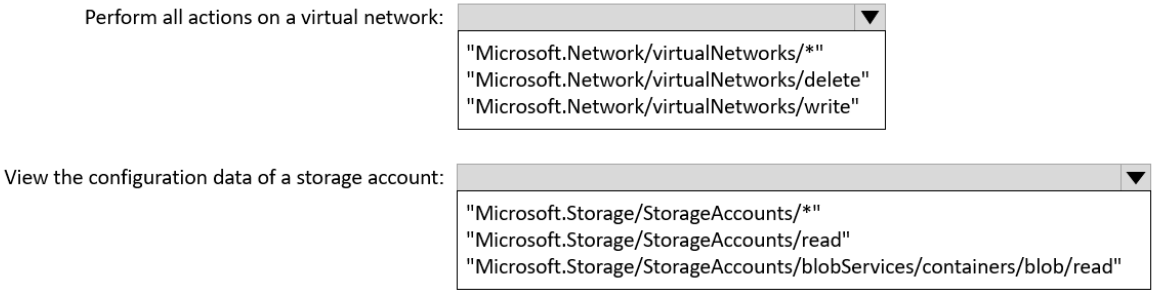

Explanation

Correct Answer:

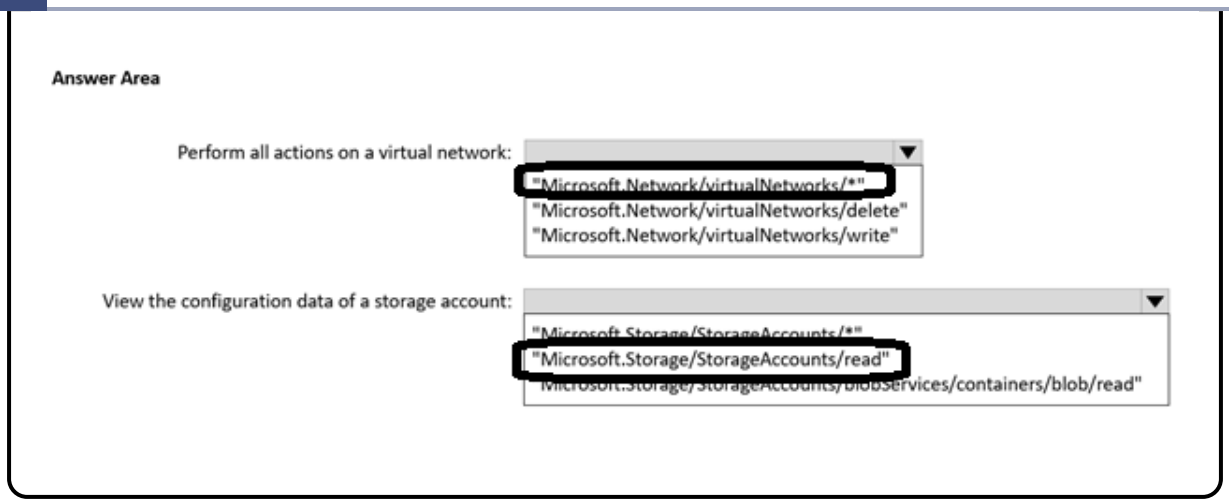

Community Discussion

SecExams

Question #1017

You have an Azure subscription named Subscription1.

You have 5 TB of data that you need to transfer to Subscription1.

You plan to use an Azure Import/Export job.

What can you use as the destination of the imported data?

A) Azure Data Factory
B) the Azure File Sync Storage Sync Service
C) Azure File Storage (Correct Answer)
D) Azure SQL Database

Explanation

Correct Answer: C ?

Community Discussion

Question #1018

HOTSPOT

-

You have an Azure subscription that contains a virtual machine named VM1.

To VM1, you plan to add a 1-TB data disk that meets the following requirements:

- Provides data resiliency in the event of a datacenter outage.
- Provides the lowest latency and the highest performance.
- Ensures that no data loss occurs if a host fails.

You need to recommend which type of storage and host caching to configure for the new data disk.

Answer Area

Storage type:

- Premium SSD that uses locally-redundant storage (LRS)
- Premium SSD that uses zone-redundant storage (ZRS)
- Standard SSD that uses locally-redundant storage (LRS)
- Standard SSD that uses zone-redundant storage (ZRS)

Host caching:

- None
- Read-only
- Read/Write

Explanation

Correct Answer:

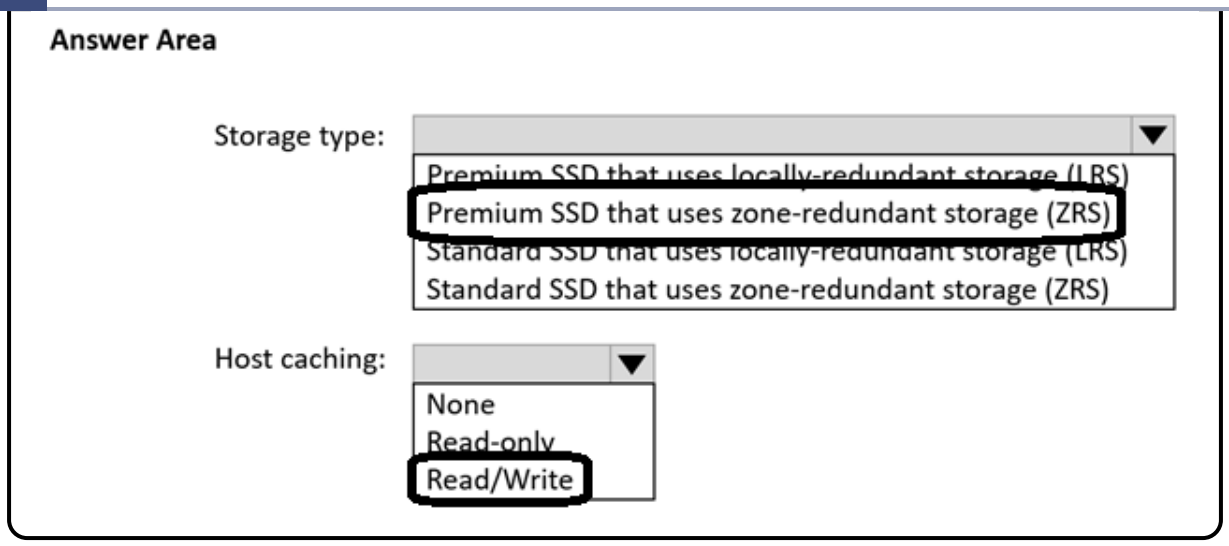

Community Discussion

SecExams

Question #1019

You have an Azure virtual machine named VM1 and an Azure key vault named Vault1.

On VM1, you plan to configure Azure Disk Encryption to use a key encryption key (KEK).

You need to prepare Vault1 for Azure Disk Encryption.

Which two actions should you perform on Vault1? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

A) Select Azure Virtual machines for deployment.
B) Create a new key. (Correct Answer)
C) Create a new secret.
D) Configure a key rotation policy.
E) Select Azure Disk Encryption for volume encryption. (Correct Answer)

Explanation

Correct Answer: BE ?

Community Discussion

Question #1020

You have an Azure subscription that contains a virtual machine named VM1 and an Azure key vault named KV1.

You need to configure encryption for VM1. The solution must meet the following requirements:

- Store and use the encryption key in KV1.
- Maintain encryption if VM1 is downloaded from Azure.
- Encrypt both the operating system disk and the data disks.

Which encryption method should you use?

A) customer-managed keys
B) Confidential disk encryption
C) Azure Disk Encryption (Correct Answer)
D) encryption at host

Explanation

Correct Answer: C ?

Community Discussion

SecExams

Question #1021

HOTSPOT

-

You have an Azure subscription that contains a storage account named storage1.

You need to configure a shared access signature (SAS) to ensure that users can only download blobs securely by name.

Which two settings should you configure? To answer, select the appropriate settings in the answer area.

NOTE: Each correct answer is worth one point.

Answer Area

Explanation

Correct Answer:

Answer Area

Community Discussion

SecExams

Question #1022

SecExams

HOTSPOT

-

You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Location	vCPUs	Generation
VM1	West Europe	8	2
VM2	East US	2	1
VM3	West US	12	1

You create an Azure Compute Gallery named ComputeGallery1 as shown in the Azure Compute Gallery exhibit. (Click the Azure Compute Gallery tab.)

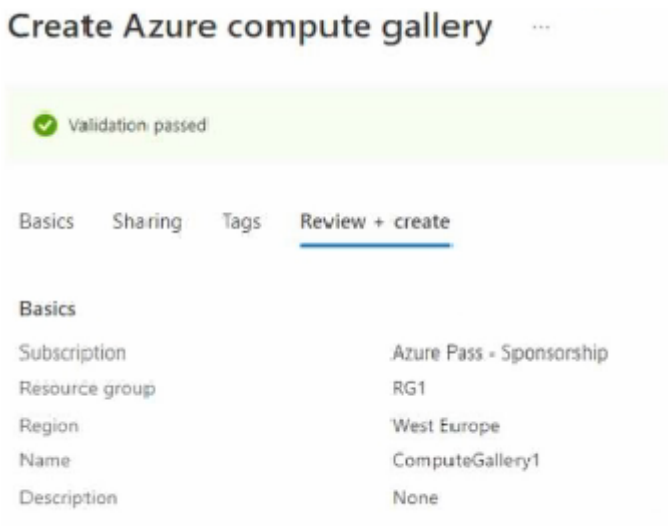

In ComputeGallery1, you create a virtual machine image definition named Image1 as shown in the image definition exhibit. (Click the Image Definition tab.)

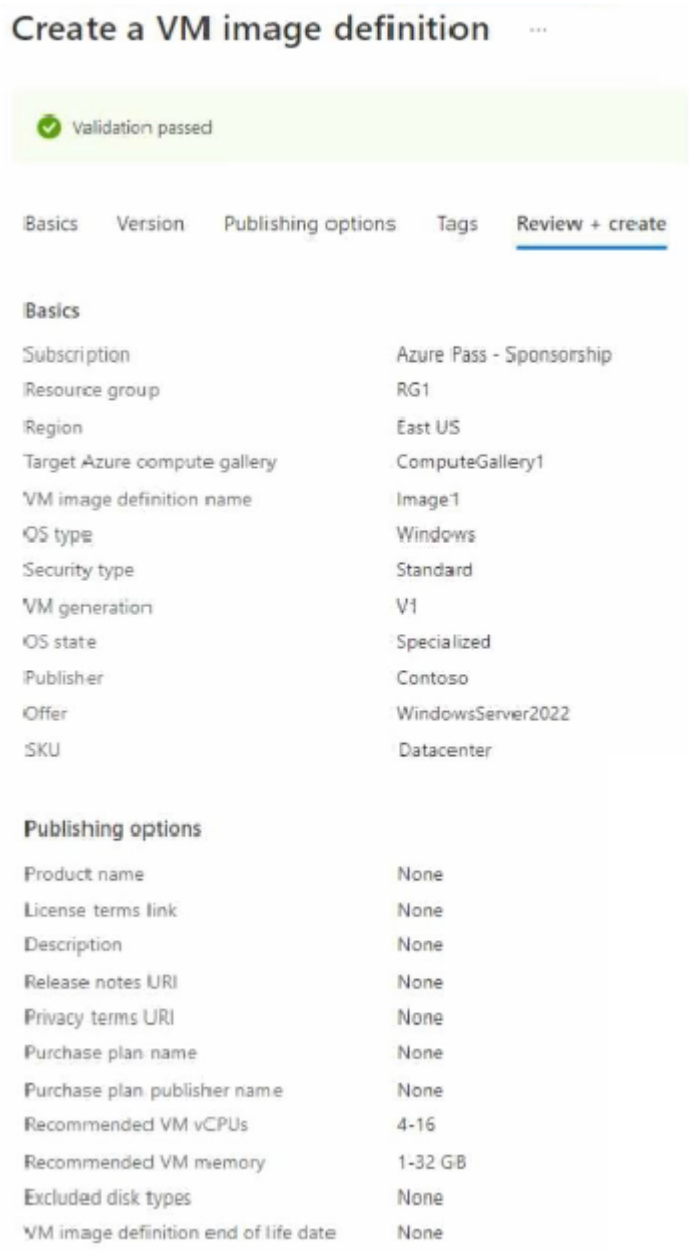

For each of the following statements, select Yes if the statement is true. Otherwise, select No,

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

Statements	Yes	No
The operating system disk of VM1 can be used as a source for a version of Image1.	○	○
The operating system disk of VM2 can be used as a source for a version of Image1.	○	○
The operating system disk of VM3 can be used as a source for a version of Image1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
The operating system disk of VM1 can be used as a source for a version of Image1.	○	■
The operating system disk of VM2 can be used as a source for a version of Image1.	○	■
The operating system disk of VM3 can be used as a source for a version of Image1.	■	○

Community Discussion

So many people here are making assumptions without actually testing or validating them. The answer is YYY - Tested in Lab. Neither the region, vCPU count, nor the VM generation had any impact on my ability to select a particular VM OS disk as a source for an image version.

Steps I took via the Azure Portal: - Created a new VM in Central US. Per the Overview blade, VM generation = V2, vCPUs = 1. - Created a new Compute Gallery in West Europe. - Added a new VM image definition to the Compute Gallery exactly as per the definition in the question (East US, VM generation = V1, same recommended CPUs, etc.). When configuring the image version as part of the image VM image definition deployment, I had the option to switch between regions. I selected Central US, and was able to then select the OS disk from the Gen2 VM I created in Central US as the source for the image

version. I was then able to successfully deploy the VM image definition along with the version.

Steps I took via the Azure Portal: - Created a new VM in Central US. Per the Overview blade, VM generation = V2, vCPUs = 1. - Created a new Compute Gallery in West Europe. - Added a new VM image definition to the Compute Gallery exactly as per the definition in the question (East US, VM generation = V1, same recommended CPUs, etc.). When configuring the image version as part of the image VM image definition deployment, I had the option to switch between regions. I selected Central US, and was able to then select the OS disk from the Gen2 VM I created in Central US as the source for the image version. I was then able to successfully deploy the VM image definition along with the version.

NYY image definition needs V1 generation, but vCPU and memory are only recommendations. Text from Azure Portal while creating image definition: "These recommendations are informational only, and do not constrain VM specification"

I agree with you. I did the same and confirm.

SecExams

Question #1023

SecExams

HOTSPOT

-

You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Location	vCPUs	Generation
VM1	West Europe	8	2
VM2	East US	2	1
VM3	West US	12	1

You create an Azure Compute Gallery named ComputeGallery1 as shown in the Azure Compute Gallery exhibit. (Click the Azure Compute Gallery tab.)

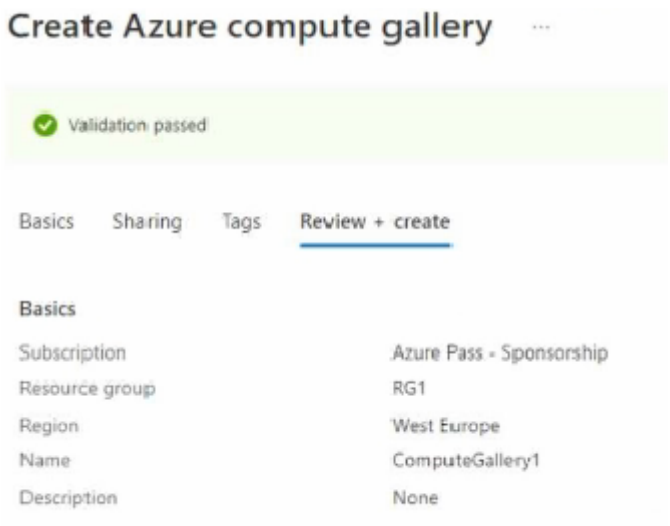

In ComputeGallery1, you create a virtual machine image definition named Image1 as shown in the image definition exhibit. (Click the Image Definition tab.)

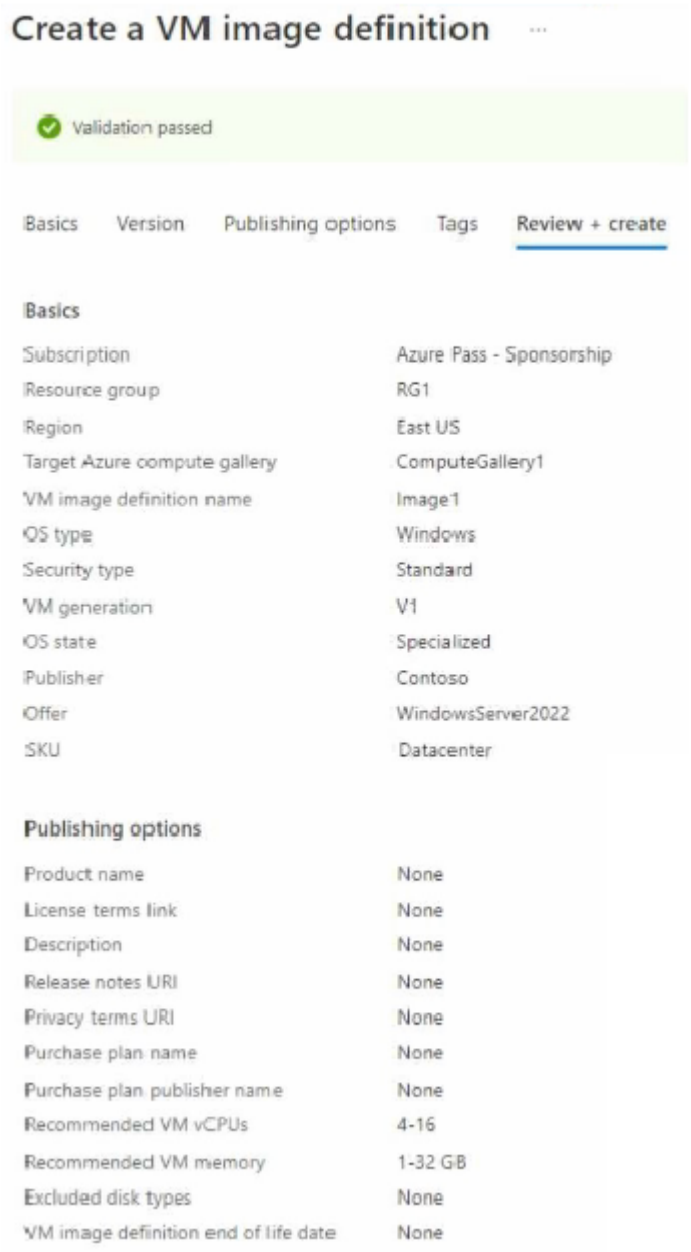

For each of the following statements, select Yes if the statement is true. Otherwise, select No,

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

Statements	Yes	No
The operating system disk of VM1 can be used as a source for a version of Image1.	○	○
The operating system disk of VM2 can be used as a source for a version of Image1.	○	○
The operating system disk of VM3 can be used as a source for a version of Image1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
The operating system disk of VM1 can be used as a source for a version of Image1.	○	■
The operating system disk of VM2 can be used as a source for a version of Image1.	○	■
The operating system disk of VM3 can be used as a source for a version of Image1.	■	○

Community Discussion

Question #1024

You plan to create the Azure web apps shown in the following table.

Name	Runtime stack
WebApp1	.NET 6 (LTS)
WebApp2	ASP.NET V4.8
WebApp3	PHP 8.1
WebApp4	Python 3.11

SecExams

What is the minimum number of App Service plans you should create for the web apps?

A) 1
B) 2 (Correct Answer)
C) 3
D) 4

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

Since Python on Windows is no longer supported, we have to use Linux platform. ASP.NET is only supported on Windows platform. So we need at least 2 App Service plan

Selected Answer: B

https://learn.microsoft.com/en-us/azure/app-service/overview Can run only on Windows: .NET, ASP.NET Can run only on Linux: Python Can run on either Windows/Linux:

PHP From Azure documentation: ASP.NET Core (on Windows or Linux) ASP.NET (on Windows) PHP (on Windows or Linux) Ruby (on Linux) Node.js (on Windows or Linux) Java (on Windows or Linux) Python (on Linux) HTML Custom container (Windows or Linux)

As stated in the reference, thanks for the pointing this out! https://learn.microsoft.com/en-us/visualstudio/python/publish-to-app-service-windows?view=vs-2022

As stated in the reference, thanks for the pointing this out! https://learn.microsoft.com/en-us/visualstudio/python/publish-to-app-service-windows?view=vs-2022

Correct Answer: B .NET: Windows and Linux ASP .NET: Windows only PHP: Windows and Linux Python: Windows and Linux Also, you can't use Windows and Linux Apps in the same App Service Plan, because when you create a new App Service plan you have to choose the OS type. You can't mix Windows and Linux apps in the same App Service plan. So, you need 2 ASPs. Reference: https://docs.microsoft.com/en-us/azure/app-service/overview

SecExams

Question #1025

You plan to create the Azure web apps shown in the following table.

Name	Runtime stack
WebApp1	.NET 6 (LTS)
WebApp2	ASP.NET V4.8
WebApp3	PHP 8.1
WebApp4	Python 3.11

What is the minimum number of App Service plans you should create for the web apps?

A) 1
B) 2 (Correct Answer)
C) 3

D) 4

Explanation

Correct Answer: B ?

Community Discussion

SecExams

Question #1026

SecExams

HOTSPOT

-

You have an Azure subscription that contains the resource groups shown in the following table.

Name	Location
RG1	East US
RG2	West US

You create the following Azure Resource Manager (ARM) template named deploy.json.

```
{
 "$schema": "https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",
 "contentVersion": "1.0.0.0",
 "parameters": {}
 "variables": {},
 "resources": [
   {
     "type": "Microsoft.Resources/resourceGroups",
     "apiVersion": "2018-05-01",
     "location": "eastus",
     "name": "[concat('RG', copyIndex())]",
       "copy": {
       "name": "copy",
       "count": 4
       }
    }
  ],
  "outputs": {}
}
```

You deploy the template by running the following cmdlet.

```
New-AzSubscriptionDeployment -Location westus -TemplateFile deploy.json
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
The template creates a resource group named RG0 in the East US Azure region.	○	○
The template creates four new resource groups.	○	○
The template creates a resource group named RG3 in the West US Azure region.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
The template creates a resource group named RG0 in the East US Azure region.	■	○
The template creates four new resource groups.	■	○
The template creates a resource group named RG3 in the West US Azure region.	○	■

Community Discussion

1. Yes. RG0 will be created with location from template file. For subscription level deployments, you must provide a location for the deployment. The location of the deployment is separate from the location of the resources you deploy. The deployment location specifies where to store deployment data. 2. No. Only RG0 and RG3 will be created, RG1 and RG2 already exist and can't be created. 3. No. RG3 will be created in east region. https://learn.microsoft.com/en-us/azure/azure-resource-manager/templates/deploy-to-subscription?tabs=azure-cli#deployment-location-and-name

WRONG! Correct Answers: 1. No. Because of location parameters RGs will be created in west us region 2. Yes. Copy 4 in arm template 3. Yes. name: [concat('RG', copyIndex())] with count 4 will produce four RG: RG0, RG1,RG2,RG3 in west us region

https://learn.microsoft.com/en-us/azure/azure-resource-manager/templates/deploy-to-subscription?tabs=azure-powershell "For subscription level deployments, you must provide a location for the deployment. The location of the deployment is separate from the location of the resources you deploy. The deployment location specifies where to store deployment data."

https://learn.microsoft.com/en-us/azure/azure-resource-manager/templates/deploy-to-subscription?tabs=azure-powershell "For subscription level deployments, you must provide a location for the deployment. The location of the deployment is separate from the location of the resources you deploy. The deployment location specifies where to store deployment data."

Im not 100% sure on this but i think its: Y > copyindex starts with 0 and location is predefined in the ARM template N > RG1 & RG2 already exists. Since it uses the copyindex as postfix, this will fail (it starts with 0, then 1, 2, 3 but 1 and 2 already exists) N > location is predefined in de ARM template which is EAST US

SecExams

Question #1027

SecExams

HOTSPOT

-

You have an Azure subscription that contains the resource groups shown in the following table.

Name	Location
RG1	East US
RG2	West US

You create the following Azure Resource Manager (ARM) template named deploy.json.

```
{
 "$schema": "https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",
 "contentVersion": "1.0.0.0",
 "parameters": {}
 "variables": {},
 "resources": [
   {
     "type": "Microsoft.Resources/resourceGroups",
     "apiVersion": "2018-05-01",
     "location": "eastus",
     "name": "[concat('RG', copyIndex())]",
       "copy": {
       "name": "copy",
       "count": 4
       }
    }
  ],
  "outputs": {}
}
```

You deploy the template by running the following cmdlet.

```
New-AzSubscriptionDeployment -Location westus -TemplateFile deploy.json
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
The template creates a resource group named RG0 in the East US Azure region.	○	○
The template creates four new resource groups.	○	○
The template creates a resource group named RG3 in the West US Azure region.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
The template creates a resource group named RG0 in the East US Azure region.	■	○
The template creates four new resource groups.	■	○
The template creates a resource group named RG3 in the West US Azure region.	○	■

Community Discussion

Question #1028

SecExams

You have an Azure App Service app named App1 that contains two running instances.

You have an autoscale rule configured as shown in the following exhibit.

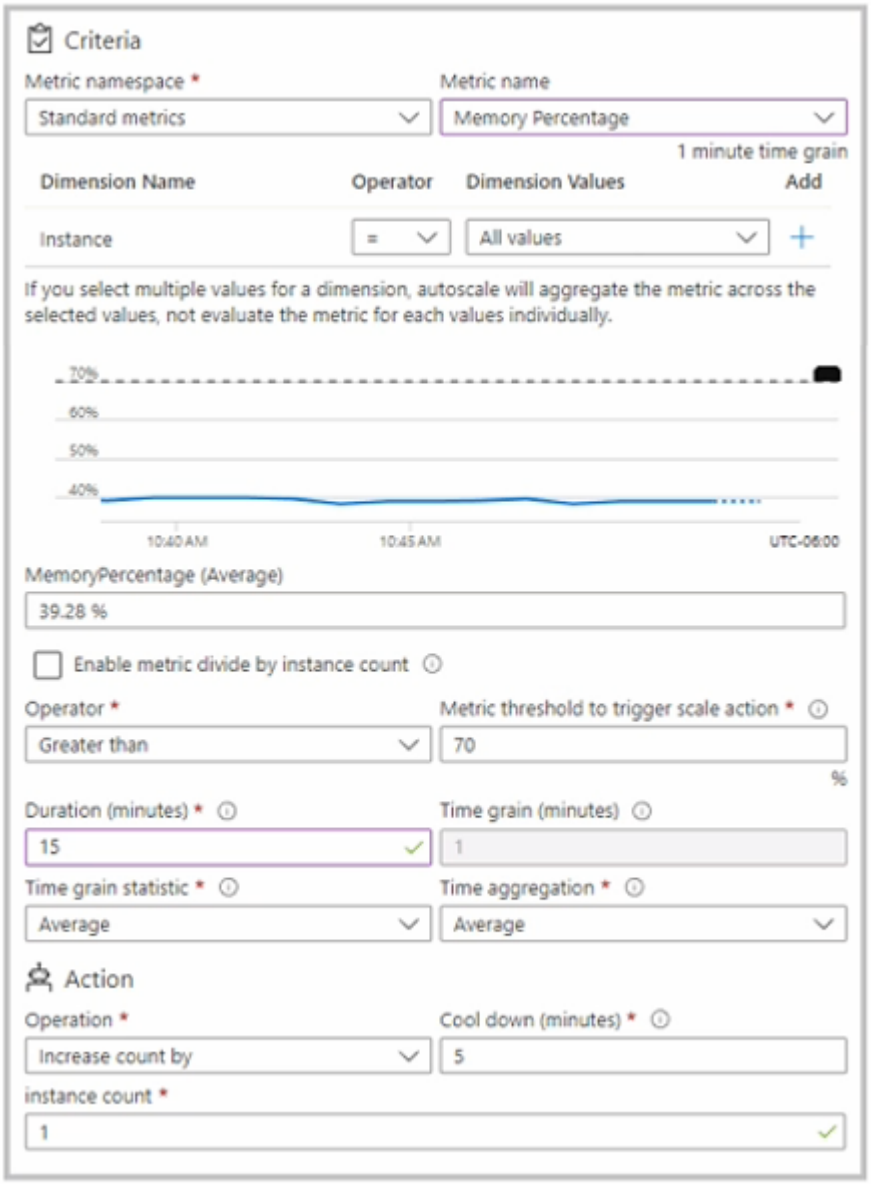

For the Instance limits scale condition setting, you set Maximum to 5.

During a 30-minute period, App1 uses 80 percent of the available memory.

What is the maximum number of instances for App1 during the 30-minute period?

A) 2 (Correct Answer)

B) 3
C) 4
D) 5

Explanation

Correct Answer:
A

Community Discussion

Selected Answer: D

Start at 2 instances, after 15 min, > 70%, then +1 instance Cooling 5 mins, still >70%, then +1 instance Cooling 5 mins, still > 70%, then +1 instance Cooling 5 mins, still >70%, since max 5 instances, keep 5 instances only

Selected Answer: B

2 instances then after 15min : 3 instances. After 5min cooldown start counting. So correct answer : 3 instances

It's 15+5. So every 20 minutes, not 5 minutes. Answer A is correct

Answer D. for the scaler to kick in, it needs to be 15 minutes of average use above x % that is set. so once the load starts, it will wait 15 minutes until that rule is met, and a scale up will happen. once it scales up at the 15 minute mark, the 5 minute cooldown starts. at 20 minute mark, the scaler will LOOK BACK at the PAST 15 minutes to see if during that time the usage was still higher than x% and scale up again. then it will wait another 5 minutes, check the PAST 15 minutes again, scale up again, etc. etc. the previous performance data doesnt get thrown out after each scale, it keeps on sliding the dataset its checking forward. imagine if this was a real app and you get hit by huge traffic surge. like your company release a new product. what this would do in your method is scale up one instance every 20 minutes, so it might mean multiple hours of degraded performance while it catches up to demand, while the reality and my explanation, it would kick in after 15 minutes and then keep scaling every 5 minutes which is a much faster and reasonable solution.

Answer D. for the scaler to kick in, it needs to be 15 minutes of average use above x % that is set. so once the load starts, it will wait 15 minutes until that rule is met, and a scale up will happen. once it scales up at the 15 minute mark, the 5 minute cooldown

starts. at 20 minute mark, the scaler will LOOK BACK at the PAST 15 minutes to see if during that time the usage was still higher than x% and scale up again. then it will wait another 5 minutes, check the PAST 15 minutes again, scale up again, etc. etc. the previous performance data doesnt get thrown out after each scale, it keeps on sliding the dataset its checking forward. imagine if this was a real app and you get hit by huge traffic surge. like your company release a new product. what this would do in your method is scale up one instance every 20 minutes, so it might mean multiple hours of degraded performance while it catches up to demand, while the reality and my explanation, it would kick in after 15 minutes and then keep scaling every 5 minutes which is a much faster and reasonable solution.

SecExams

Question #1029

SecExams

You have an Azure App Service app named App1 that contains two running instances.

You have an autoscale rule configured as shown in the following exhibit.

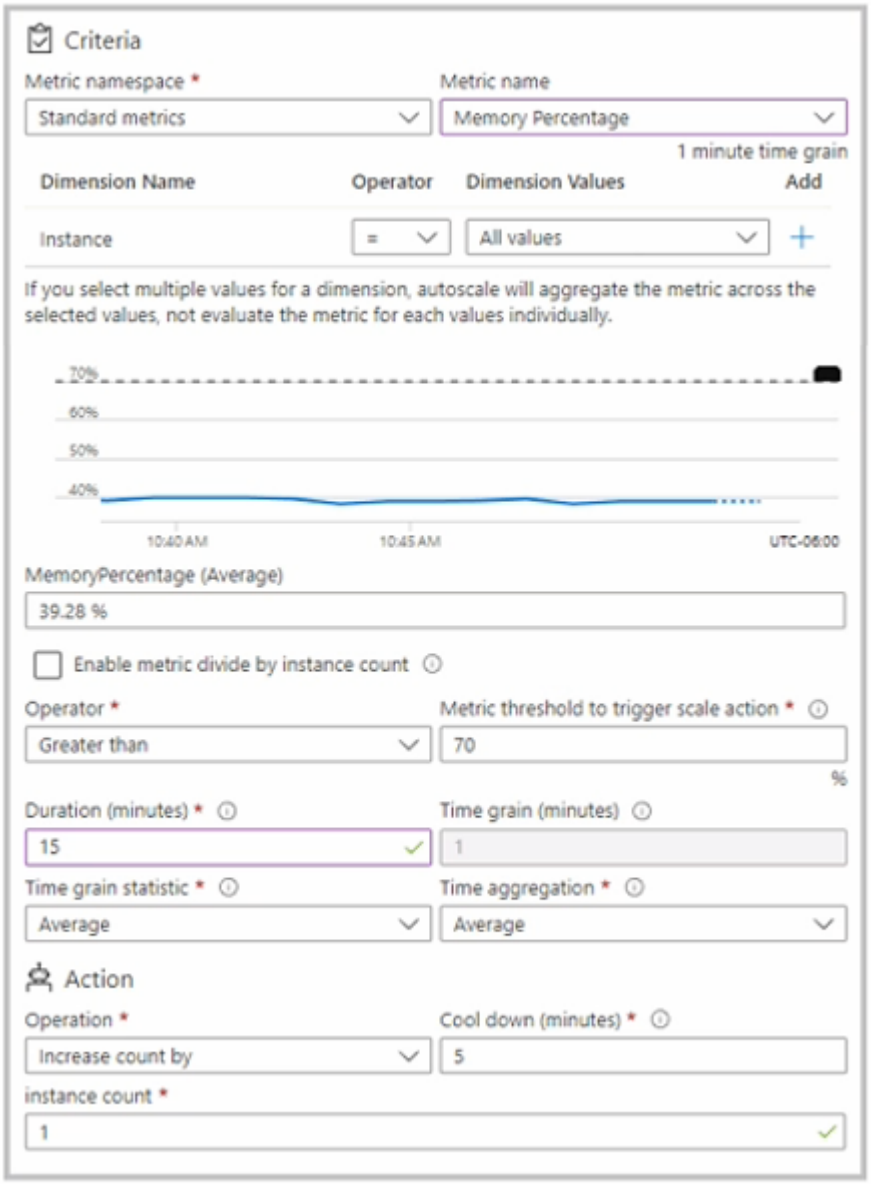

For the Instance limits scale condition setting, you set Maximum to 5.

During a 30-minute period, App1 uses 80 percent of the available memory.

What is the maximum number of instances for App1 during the 30-minute period?

A) 2 (Correct Answer)

B) 3
C) 4
D) 5

Explanation

Correct Answer: A ?

Community Discussion

SecExams

Question #1030

SecExams

HOTSPOT

-

You have an Azure subscription that contains the container images shown in the following table.

Name	Operating system
Image1	Windows Server
Image2	Linux

You plan to use the following services:

- Azure Container Instances
- Azure Container Apps
- Azure App Service

In which services can you run the images? To answer, select the options in the answer area.

NOTE: Each correct answer is worth one point.

Answer Area

Image1:

- Azure Container Instances only
- Azure Container Apps only
- Azure Container Instances and App Services only
- Azure Container Apps and App Services only
- Azure Container Instances, Azure Container Apps, and App Services

Image2:

- Azure Container Instances only
- Azure Container Apps only
- Azure Container Instances and App Services only
- Azure Container Apps and App Services only
- Azure Container Instances, Azure Container Apps, and App Services

Explanation

Correct Answer:

Answer Area

Community Discussion

How the fuck "Azure Container Apps" isn't supported on windows WTF?

Correct - Azure Container Instances can schedule both Windows and Linux containers with the same API. You can specify your OS type preference when you create your container groups. Some features are currently restricted to Linux containers. https://learn.microsoft.com/en-us/azure/container-instances/container-instances-overview - Azure Container Apps supports: Any Linux-based x86-64 (linux/amd64) container image with no required base image Containers from any public or private container registry Sidecar and init containers https://learn.microsoft.com/en-us/azure/container-apps/containers - Azure App Service is an HTTP-based service for hosting web applications, REST APIs, and mobile back ends. You can develop in your favorite language, be it .NET, .NET Core, Java, Node.js, PHP, and Python. Applications run and scale with ease on both Windows and Linux-based environments.https://learn.microsoft.com/en-us/azure/app-service/overview

MicroSoft: We'll make you suffer.

MicroSoft: We'll make you suffer.

Answer is correct Azure Container Apps supports: Any Linux-based x86-64 (linux/amd64) container image with no required base image Containers from any public or private container registry Sidecar and init containers https://learn.microsoft.com/en-us/azure/container-apps/containers

SecExams

Question #1031

SecExams

HOTSPOT

-

You have an Azure subscription that contains the container images shown in the following table.

Name	Operating system
Image1	Windows Server
Image2	Linux

You plan to use the following services:

- Azure Container Instances
- Azure Container Apps
- Azure App Service

In which services can you run the images? To answer, select the options in the answer area.

NOTE: Each correct answer is worth one point.

Answer Area

Image1:

- Azure Container Instances only
- Azure Container Apps only
- Azure Container Instances and App Services only
- Azure Container Apps and App Services only
- Azure Container Instances, Azure Container Apps, and App Services

Image2:

- Azure Container Instances only
- Azure Container Apps only
- Azure Container Instances and App Services only
- Azure Container Apps and App Services only
- Azure Container Instances, Azure Container Apps, and App Services

Explanation

Correct Answer:

Answer Area

Community Discussion

SecExams

Question #1032

You have an Azure AD tenant named contoso.com.

You have an Azure subscription that contains an Azure App Service web app named App1 and an Azure key vault named KV1. KV1 contains a wildcard certificate for contoso.com.

You have a user named that is assigned the Owner role for App1 and KV1.

You need to configure App1 to use the wildcard certificate of KV1.

What should you do first?

A) Create an access policy for KV1 and assign the Microsoft Azure App Service principal to the policy. (Correct Answer)

B) Assign a managed user identity to App1.

C) Configure KV1 to use the role-based access control (RBAC) authorization system.

D) Create an access policy for KV1 and assign the policy to User1.

Explanation

Correct Answer:
A

Community Discussion

Please check this tutorial https://learn.microsoft.com/en-us/azure/key-vault/general/tutorial-net-create-vault-azure-web-app First Step is to Assign a managed identity to the App. Answer: B

In this scenario, you have an Azure App Service web app (App1) and an Azure Key Vault (KV1) containing a wildcard certificate for contoso.com. You want to configure App1 to use the wildcard certificate from KV1. To achieve this, you need to grant the necessary permissions to App1. Access to Key Vault secrets and certificates is managed using Azure AD-based authentication and authorization. The Microsoft Azure App Service principal represents the App Service web app in Azure AD. The correct approach is to create an

access policy in KV1 that grants the necessary permissions to the Microsoft Azure App Service principal associated with App1. By doing so, you allow App1 to access the certificate stored in KV1. So, the first step you should take is: A. Create an access policy for KV1 and assign the Microsoft Azure App Service principal to the policy. Once you've granted the necessary access to the App Service principal, the web app (App1) will be able to use the wildcard certificate from KV1 for its secure connections.

I'm also in for answer B, since answer A needs a service principal. The only way to get one for a service is a managed identity (system or user generated). https://learn.microsoft.com/en-us/azure/key-vault/general/assign-access-policy?tabs=azure-portal https://learn.microsoft.com/en-us/azure/key-vault/general/authentication

I'm also in for answer B, since answer A needs a service principal. The only way to get one for a service is a managed identity (system or user generated). https://learn.microsoft.com/en-us/azure/key-vault/general/assign-access-policy?tabs=azure-portal https://learn.microsoft.com/en-us/azure/key-vault/general/authentication

I am now 1 week and 2 days smarter lol, my initial answer was correct. You don't need to select the App1 managed identity as I assumed in the above comment, you can simply choose the Microsoft Azure App Service principal which will cover App1 as well and eliminate the need to create a separate identity for it.

SecExams

Question #1033

You have an Azure AD tenant named contoso.com.

You have an Azure subscription that contains an Azure App Service web app named App1 and an Azure key vault named KV1. KV1 contains a wildcard certificate for contoso.com.

You have a user named that is assigned the Owner role for App1 and KV1.

You need to configure App1 to use the wildcard certificate of KV1.

What should you do first?

A) Create an access policy for KV1 and assign the Microsoft Azure App Service principal to the policy. (Correct Answer)

B) Assign a managed user identity to App1.
C) Configure KV1 to use the role-based access control (RBAC) authorization system.
D) Create an access policy for KV1 and assign the policy to User1.

Explanation

Correct Answer: A ?

Community Discussion

SecExams

Question #1034

SecExams

HOTSPOT

-

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location	IP address space	Subnet
VNet1	East US	10.1.128.0/23	Subnet1
VNet2	East US	192.168.0.0/16	Subnet21, Subnet23
VNet3	East US	172.16.0.0/16	Subnet3

The subnets have the IP address spaces shown in the following table.

Name	IP address space
Subnet1	10.1.128.0/24
Subnet21	192.168.0.0/17
Subnet22	192.168.128.0/17
Subnet3	172.16.1.0/24

SecExams

You plan to create a container app named contapp1 in the East US Azure region.

You need to create a container app environment named con-env1 that meets the following requirements:

• Uses its own virtual network.
• Uses its own subnet.
• Is connected to the smallest possible subnet.

To which virtual networks can you connect con-env1, and which subnet mask should you use? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

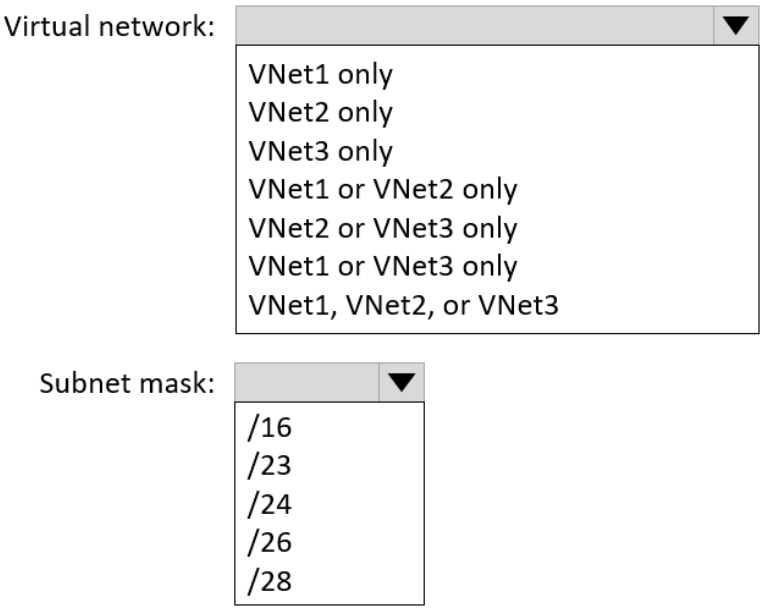

Explanation

Correct Answer:

Answer Area

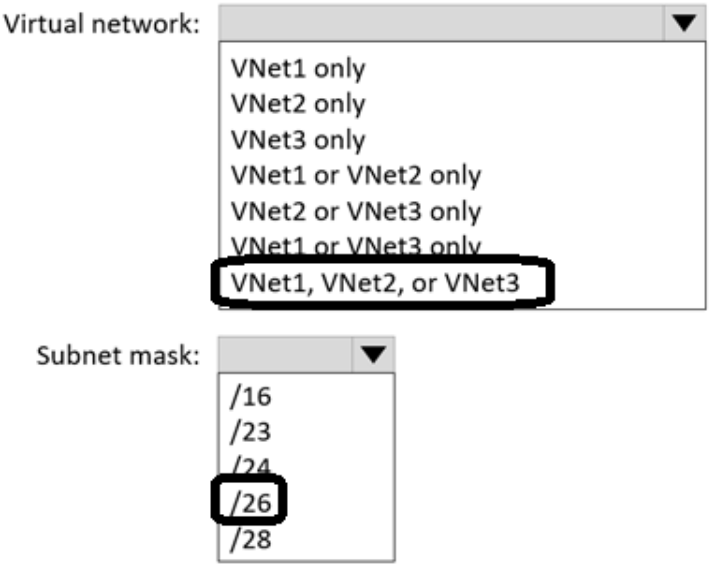

Community Discussion

SecExams

Question #1035

SecExams

HOTSPOT
-

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location	IP address space	Subnet
VNet1	East US	10.1.128.0/23	Subnet1
VNet2	East US	192.168.0.0/16	Subnet21, Subnet23
VNet3	East US	172.16.0.0/16	Subnet3

The subnets have the IP address spaces shown in the following table.

Name	IP address space
Subnet1	10.1.128.0/24
Subnet21	192.168.0.0/17
Subnet22	192.168.128.0/17
Subnet3	172.16.1.0/24

SecExams

You plan to create a container app named contapp1 in the East US Azure region.

You need to create a container app environment named con-env1 that meets the following requirements:

• Uses its own virtual network.
• Uses its own subnet.
• Is connected to the smallest possible subnet.

To which virtual networks can you connect con-env1, and which subnet mask should you use? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

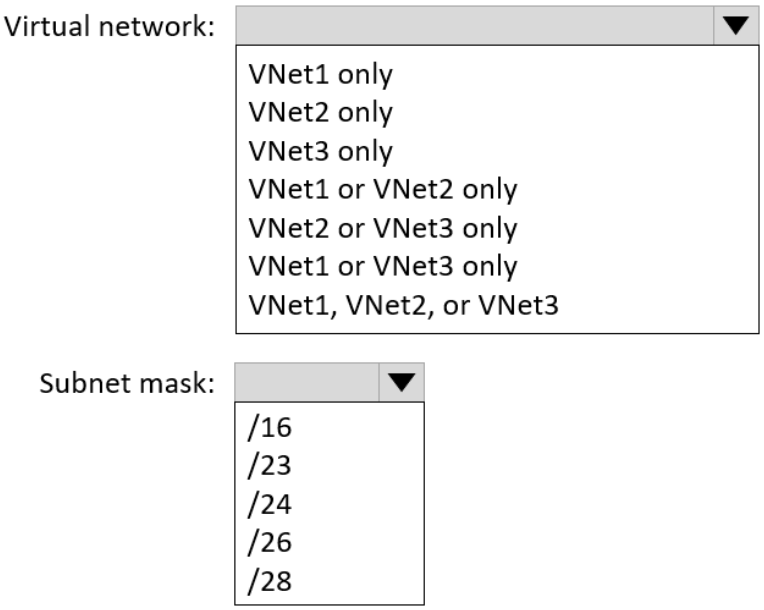

Explanation

Correct Answer:

Answer Area

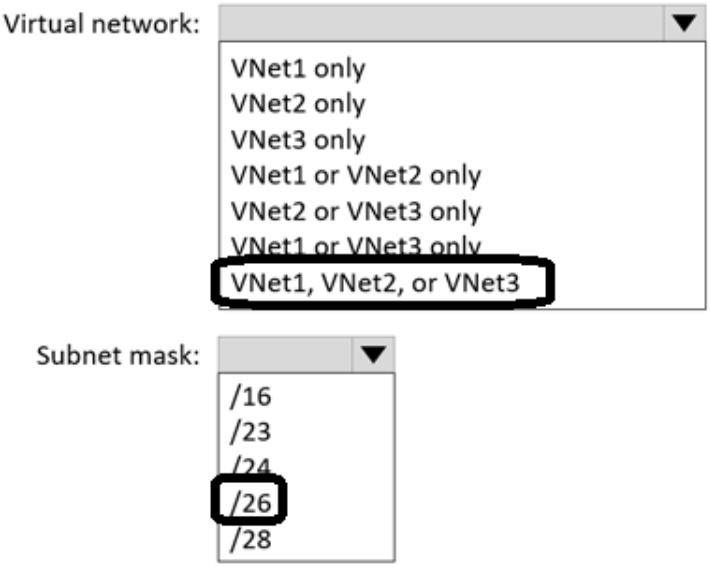

Community Discussion

Its VNET 3 only and /23 So we need a /23 mask, this means 512 IPs I am a total newbie with this so i tried to find out what the possible IP Ranges are: - VNET 1 10.1.128.0/23 = 10.1.128.0 - 10.1.129.255 (512 IPs) - Sub 1 10.1.128.0/24 = 10.1.128.0 - 10.1.128.255 (256) -> Not enough IPs available - VNET 2 192.168.0.0/16 = 192.168.0.0-192.168.255.255 - Sub21 192.168.0.0 /17 = 192.168.0.0 - 192.168.127.255 - Sub22 192.168.128.0/17 = 192.168.128.0 - 192.168.255.255 -> The subnets take out the whole range of VNET 2 - VNET 3 172.16.0.0/16 = 172.16.0.0 - 172.16.255.255 - Sub3 172.16.1.0/24 = 172.16.1.0 - 172.16.1.255 -> VNET 3 still has most of the range for a /23 available. For example we could make the following /23 subnet: 172.16.2.0/23 = 172.16.2.0 - 172.16.3.255 Please correct me if i am wrong!

VNET 3 only and /23. Why? According to Microsoft - Consumption only environment - Container Apps. It needs a subnet with IPs in Range 512. -/23 is the minimum subnet size required for virtual network integration. -The Container Apps runtime reserves a minimum of 60 IPs for infrastructure in your VNet. The reserved amount may increase up to 256 addresses as apps in your environment scale. Reference: https://learn.microsoft.com/en-us/azure/container-apps/networking?tabs=azure-cli#consumption-only-environment

VNET 3 only and /23. Why? According to Microsoft - Consumption only environment - Container Apps. It needs a subnet with IPs in Range 512. -/23 is the minimum subnet size required for virtual network integration. -The Container Apps runtime reserves a minimum of 60 IPs for infrastructure in your VNet. The reserved amount may increase up to 256 addresses as apps in your environment scale. Reference: https://learn.microsoft.com/en-us/azure/container-apps/networking?tabs=azure-cli#consumption-only-environment

Your reasoning sounds correct to me. But its a very silly question, having to number crunch IP subnets like this is a CCNA.

Your reasoning sounds correct to me. But its a very silly question, having to number crunch IP subnets like this is a CCNA.

SecExams

Question #1036

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location
Vnet1	US East
Vnet2	US East
Vnet3	US East
Vnet4	UK South
Vnet5	UK South
Vnet6	UK South
Vnet7	Asia East
Vnet8	Asia East
Vnet9	Asia East
Vnet10	Asia East

All the virtual networks are peered. Each virtual network contains nine virtual machines.

You need to configure secure RDP connections to the virtual machines by using Azure Bastion.

What is the minimum number of Bastion hosts required?

A) 1
B) 3 (Correct Answer)
C) 9
D) 10

Explanation

Correct Answer: B ?

Community Discussion

SecExams

Question #1037

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location
Vnet1	US East
Vnet2	US East
Vnet3	US East
Vnet4	UK South
Vnet5	UK South
Vnet6	UK South
Vnet7	Asia East
Vnet8	Asia East
Vnet9	Asia East
Vnet10	Asia East

All the virtual networks are peered. Each virtual network contains nine virtual machines.

You need to configure secure RDP connections to the virtual machines by using Azure Bastion.

What is the minimum number of Bastion hosts required?

A) 1
B) 3 (Correct Answer)
C) 9
D) 10

Explanation

Correct Answer:
B

Community Discussion

Azure Bastion and VNet peering can be used together. When VNet peering is configured, you don't have to deploy Azure Bastion in each peered VNet. This means if you have an Azure Bastion host configured in one virtual network (VNet), it can be used to connect to VMs deployed in a peered VNet without deploying an additional bastion host. For more information about VNet peering, see About virtual network peering. Azure Bastion works with the following types of peering: Virtual network peering: Connect virtual networks within the same Azure region. Global virtual network peering: Connecting virtual networks across Azure regions. Answer is A

Answer is A. We required only one Bastion. https://learn.microsoft.com/en-us/azure/bastion/vnet-peering Azure Bastion works with the following types of peering: Virtual network peering: Connect virtual networks within the same Azure region. Global virtual network peering: Connecting virtual networks across Azure regions.

B. 3 Explanation: Azure Bastion and VNet peering can be used together. When VNet peering is configured, you don't have to deploy Azure Bastion in each peered VNet. This means if you have an Azure Bastion host configured in one virtual network (VNet), it can be used to connect to VMs deployed in a peered VNet without deploying an additional bastion host. For more information about VNet peering, see About virtual network peering. Azure Bastion works with the following types of peering: Virtual network peering: Connect virtual networks within the same Azure region. Global virtual network peering: Connecting virtual networks across Azure regions. The question states that VNET peering is enabled, NOT Global VNET peering, thus you need a bastion host in each region.

Selected Answer: A

Only below region Azure Bastion is allowed Azure Bastion is available in any of these regions via the Azure portal: West US East US West Europe South Central US Australia East Japan East

SecExams

Doesn't the very fact that a vnet in one region is peered to vnets in ither regions mean that global peering is effectively used? Otherwise you could not pair vnets in different regions!

SecExams

Question #1038

SecExams

HOTSPOT

-

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location	Peered with
VNet1	East US	VNet2
VNet2	East US	VNet1, VNet3
VNet3	West US	VNet2

The subscription contains the virtual machines shown in the following table.

Name	Operating system	Connected to
VM1	Windows	VNet1
VM2	Linux	VNet2
VM3	Windows	VNet3

Each virtual machine contains only a private IP address.

You create an Azure bastion for VNet1 as shown in the following exhibit.

SecExams

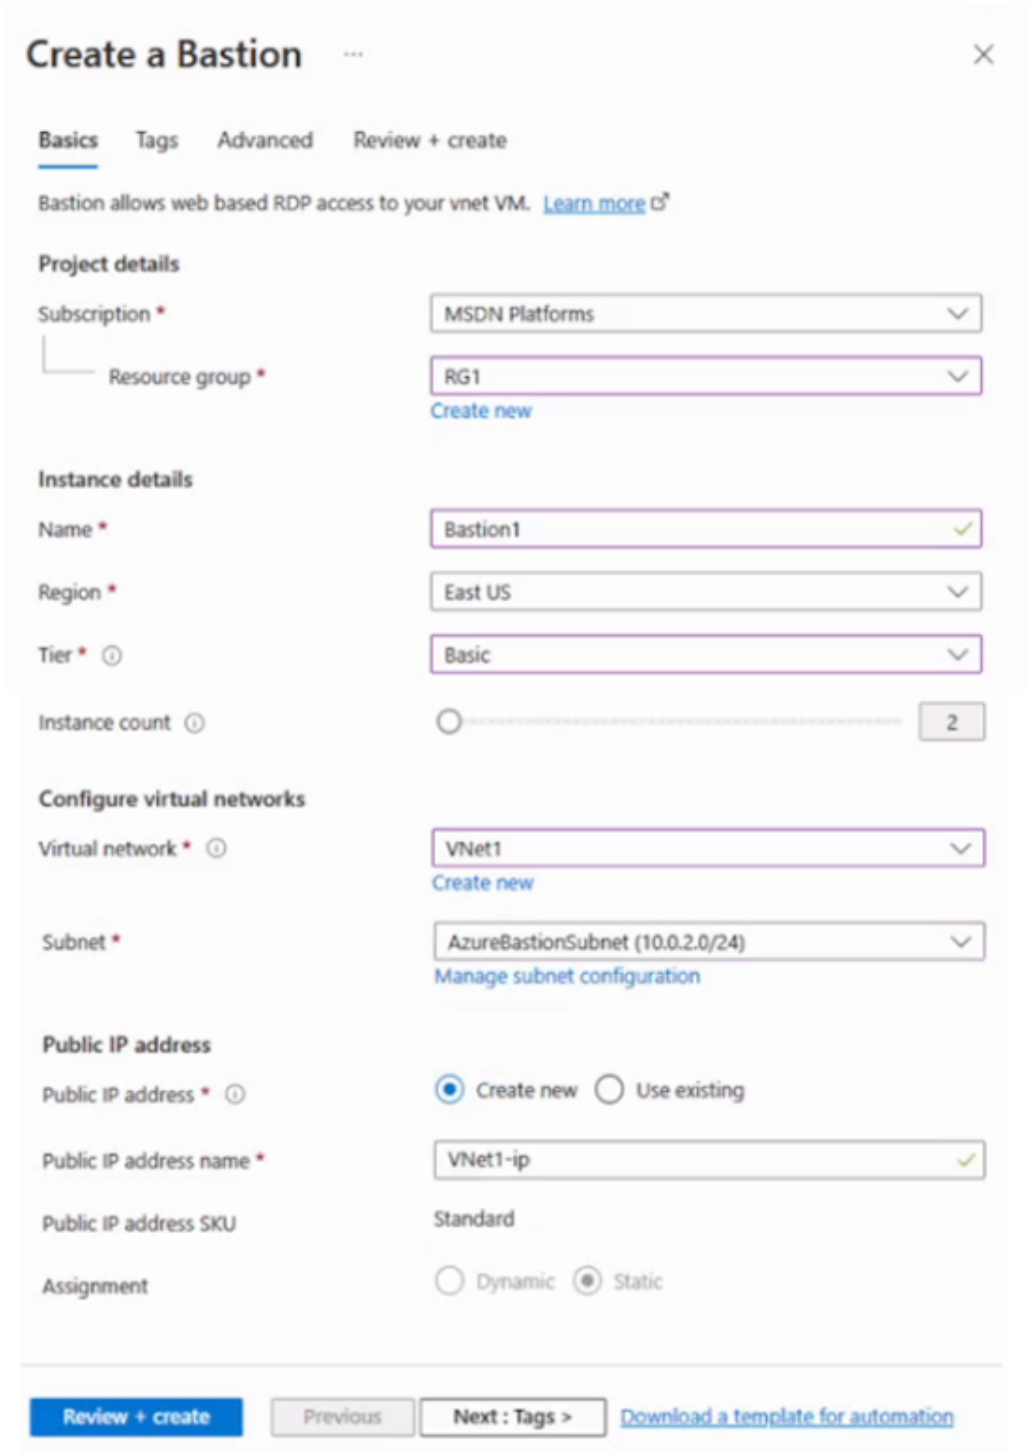

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
The Remote Desktop Connection client (mstsc.exe) can be used to connect to VM1 through Bastion1.	○	○
The Azure portal can use SSH to connect to VM2 through Bastion1.	○	○
The Azure portal can be used to connect to VM3 through Bastion1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
The Remote Desktop Connection client (mstsc.exe) can be used to connect to VM1 through Bastion1.	●	○
The Azure portal can use SSH to connect to VM2 through Bastion1.	●	○
The Azure portal can be used to connect to VM3 through Bastion1.	○	●

Community Discussion

Question #1039

SecExams

HOTSPOT

-

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location	Peered with
VNet1	East US	VNet2
VNet2	East US	VNet1, VNet3
VNet3	West US	VNet2

The subscription contains the virtual machines shown in the following table.

Name	Operating system	Connected to
VM1	Windows	VNet1
VM2	Linux	VNet2
VM3	Windows	VNet3

Each virtual machine contains only a private IP address.

You create an Azure bastion for VNet1 as shown in the following exhibit.

SecExams

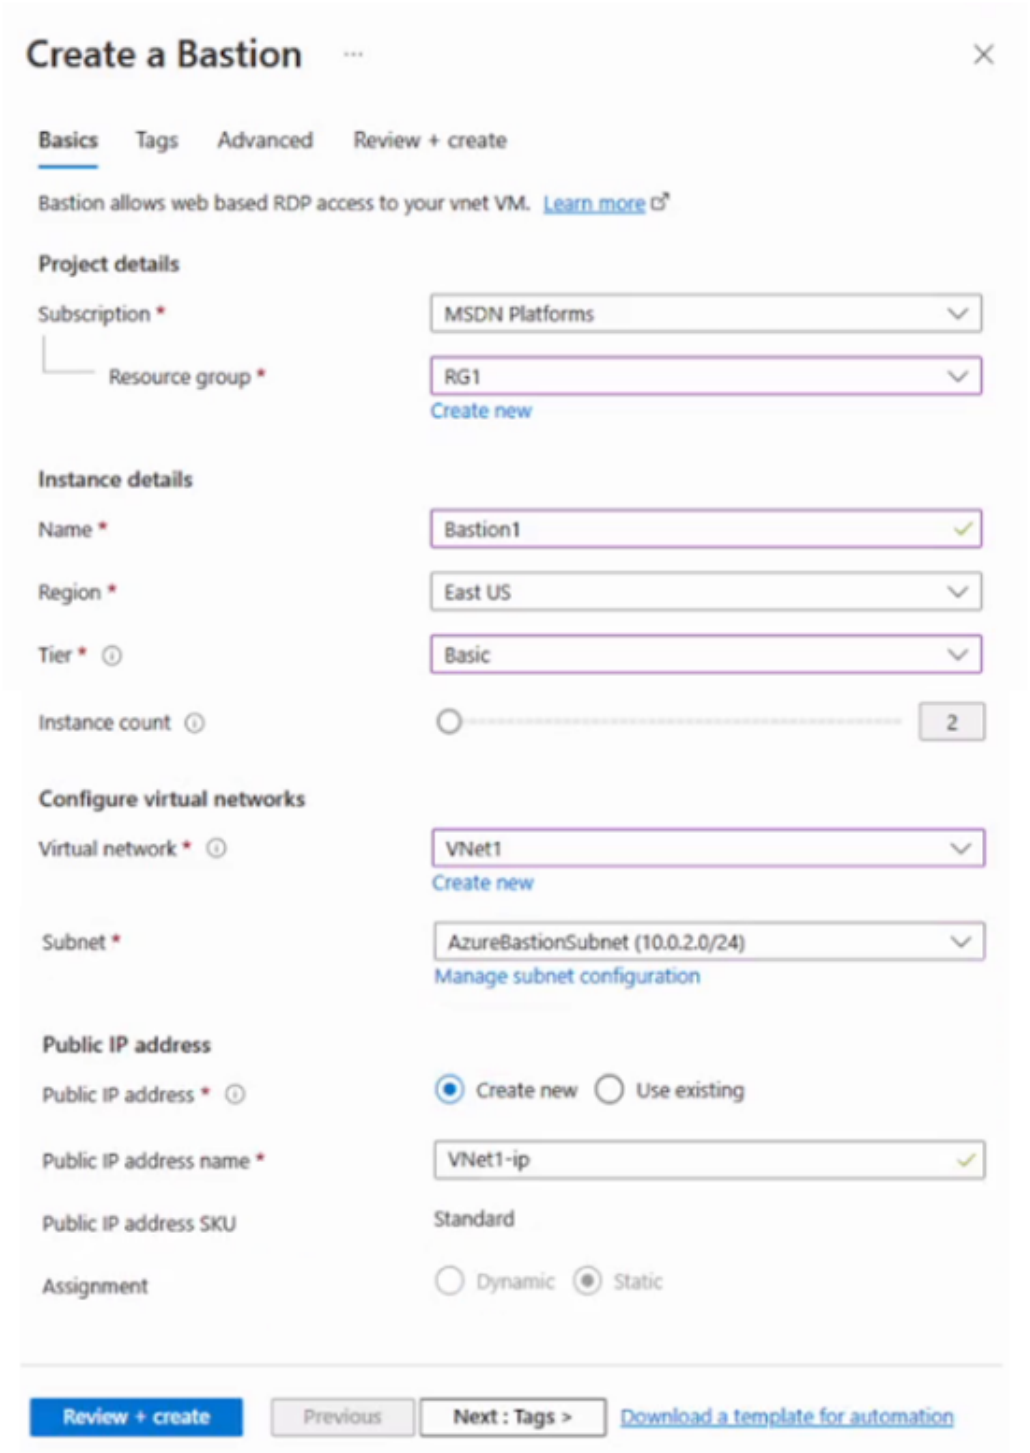

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
The Remote Desktop Connection client (mstsc.exe) can be used to connect to VM1 through Bastion1.	○	○
The Azure portal can use SSH to connect to VM2 through Bastion1.	○	○
The Azure portal can be used to connect to VM3 through Bastion1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
The Remote Desktop Connection client (mstsc.exe) can be used to connect to VM1 through Bastion1.	■	○
The Azure portal can use SSH to connect to VM2 through Bastion1.	■	○
The Azure portal can be used to connect to VM3 through Bastion1.	○	■

Community Discussion

the 1st is "No" mstsc is a native client and is supported only by Standard Bastion the 2nd is "Yes"? if the poor wording means connecting through Azure Portal by SSH, that's what Basic Bastion supports. the 3rd is "No" No peering from the Bastion enabled Vnet1

I would say NO YES NO Basic SKU cannot connect to VM using a native client https://learn.microsoft.com/en-us/azure/bastion/bastion-overview

First question is 'Yes' - rationale: mstsc is is a command line interface used to run the Microsoft Remote Desktop (RDP) client. Based on Bastion Basic SKU, access via RDP is supported on Basic and Standard Bastion. Link reference: https://learn.microsoft.com/en-us/azure/bastion/configuration-settings#skus

First question is 'Yes' - rationale: mstsc is is a command line interface used to run the Microsoft Remote Desktop (RDP) client. Based on Bastion Basic SKU, access via RDP is supported on Basic and Standard Bastion. Link reference: https://learn.microsoft.com/en-us/azure/bastion/configuration-settings#skus

Yes, it can. Check https://learn.microsoft.com/en-us/azure/bastion/configuration-settings#skus

SecExams

Question #1040

SecExams

HOTSPOT

-

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location
VNet1	West Europe
VNet2	Southeast Asia
VNet3	South Central US

The subscription contains the subnets shown in the following table.

Name	Virtual network	Service endpoint
Subnet1	VNet1	*None*
Subnet2	VNet2	Microsoft.Storage
Subnet3	VNet3	Microsoft.Storage
Subnet4	VNet4	*None*

The subscription contains the storage accounts shown in the following table.

Name	Location	Kind
storage1	West Europe	StorageV2
storage2	South Central US	BlobStorage
storage3	Southeast Asia	StorageV2

You create a service endpoint policy named Policy1 in the South Central US Azure region to allow connectivity to all the storage accounts in the subscription.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
Policy1 can be applied to Subnet3.	○	○
Only storage1 and storage2 can be accessed from VNet2.	○	○
Only storage2 can be accessed from VNet3.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
Policy1 can be applied to Subnet3.	◉	○
Only storage1 and storage2 can be accessed from VNet2.	○	◉
Only storage2 can be accessed from VNet3.	◉	○

Community Discussion

Question #1041

SecExams

HOTSPOT

-

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location
VNet1	West Europe
VNet2	Southeast Asia
VNet3	South Central US

The subscription contains the subnets shown in the following table.

Name	Virtual network	Service endpoint
Subnet1	VNet1	*None*
Subnet2	VNet2	Microsoft.Storage
Subnet3	VNet3	Microsoft.Storage
Subnet4	VNet4	*None*

The subscription contains the storage accounts shown in the following table.

Name	Location	Kind
storage1	West Europe	StorageV2
storage2	South Central US	BlobStorage
storage3	Southeast Asia	StorageV2

You create a service endpoint policy named Policy1 in the South Central US Azure region to allow connectivity to all the storage accounts in the subscription.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
Policy1 can be applied to Subnet3.	○	○
Only storage1 and storage2 can be accessed from VNet2.	○	○
Only storage2 can be accessed from VNet3.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
Policy1 can be applied to Subnet3.	●	○
Only storage1 and storage2 can be accessed from VNet2.	○	●
Only storage2 can be accessed from VNet3.	●	○

Community Discussion

I would go for Y N N 1) YES Virtual networks must be in the same region as the service endpoint policy. https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoint-policies-overview#limitations 2) NO - By default, if no policies are attached to a subnet with endpoints, you can access all storage accounts in the

service as VNET2 is in diff region this policy is definetly not applied to subnet 2 3) NO - Policy allows all storage accounts + IMHO its not full vnet3 to be considered.

Answer is correct Box 1: Y Virtual networks must be in the same region as the service endpoint policy https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoint-policies-overview#limitations Box 2: N VNet2 is in SEA Region, so it can only connect to the stoacc in SEA Region through Service Endpoint, which is storage3 Box 3: Y VNet3 is in the South Central US region, and so is the storage2

with 3 I would agree to YES if we assume there is only subnet3 there - so the statement should be only storage2 can be accessed from subnet3 (not vnet3 entirely)

with 3 I would agree to YES if we assume there is only subnet3 there - so the statement should be only storage2 can be accessed from subnet3 (not vnet3 entirely)

I agree, article state if an endpoint is applied but no policy you can access all resources in the endpoint. "Once a policy is configured on that subnet, only the resources specified in the policy can be accessed from compute instances in that subnet. Access to all other storage accounts is denied."

SecExams

Question #1042

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.

You need to ensure that NGINX is available on all the virtual machines after they are deployed.

What should you use?

A) the New-AzConfigurationAssignment cmdlet
B) Azure Application Insights
C) the Publish-AzVMDscConfiguration cmdlet
D) a Desired State Configuration (DSC) extension (Correct Answer)

Explanation

Correct Answer:

D

Community Discussion

Selected Answer: D

yes, we all know now

repeated questin answer is D

Question #1043

You have an Azure subscription that contains a resource group named RG1 and a virtual network named VNet1.

You plan to create an Azure container instance named container1.

You need to be able to configure DNS name label scope reuse for container1.

What should you configure for container1?

A) the private networking type
B) the public networking type (Correct Answer)
C) a new subnet on VNet1
D) a confidential SKU

Explanation

Correct Answer: B ?

Community Discussion

Question #1044

You have an Azure subscription that contains a resource group named RG1 and a virtual network named VNet1.

You plan to create an Azure container instance named container1.

You need to be able to configure DNS name label scope reuse for container1.

What should you configure for container1?

A) the private networking type
B) the public networking type (Correct Answer)
C) a new subnet on VNet1
D) a confidential SKU

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

Answer is correct: Public networking type allows you to assign a DNS name label to the container instance that is globally unique within Azure, and it's accessible from the internet. This is typically used when you want to expose a service hosted in a container to the public. Private networking type would not allow you to configure DNS name label scope reuse because it doesn't expose the container instance to the public internet, and it typically operates within a virtual network (VNet) for private communication. Creating a new subnet on VNet1 (Option C) is related to configuring the network settings of the virtual network and isn't directly related to configuring DNS name label scope reuse for the container instance. A confidential SKU (Option D) is not related to DNS name label scope reuse or networking configurations. It is used for specific security and confidentiality requirements.

checked that in a lab, DNS name reuse is available only when the public networking type selected

Selected Answer: B

For Azure portal users, you can set the DNS name reuse policy on the Networking tab during the container instance creation process using the DNS name label scope reuse field. Available after choosing public network type https://learn.microsoft.com/en-us/azure/container-instances/how-to-reuse-dns-names#create-a-container-instance

B is correct

Answer is correct. https://learn.microsoft.com/en-us/azure/container-instances/how-to-reuse-dns-names

SecExams

Question #1045

SecExams

HOTSPOT

-

You have the Azure virtual machines shown in the following table.

Name	IP address	Virtual network
VM1	10.0.0.4	VNET1
VM2	172.16.0.4	VNET2
VM3	192.168.0.4	VNET3
VM4	192.168.0.5	VNET3

VNET1, VNET2, and VNET3 are peered.

VM4 has a DNS server that is authoritative for a zone named contoso.com and contains the records shown in the following table.

Name	Type	Value
Server1	A	131.107.3.3
Server2	A	131.107.3.4

The virtual networks are configured to use the DNS servers shown in the following table.

Virtual network	DNS server
VNET1	Default (Azure-provided)
VNET2	Custom: 192.168.0.5
VNET3	Custom: 192.168.0.5

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
From VM1, server1.contoso.com resolves to 131.107.3.3.	○	○
From VM2, server1.contoso.com resolves to 131.107.3.3.	○	○
From VM3, server2.contoso.com resolves to 131.107.2.4.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
From VM1, server1.contoso.com resolves to 131.107.3.3.	◉	○
From VM2, server1.contoso.com resolves to 131.107.3.3.	○	◉
From VM3, server2.contoso.com resolves to 131.107.2.4.	◉	○

Community Discussion

Question #1046

SecExams

HOTSPOT

-

You have the Azure virtual machines shown in the following table.

Name	IP address	Virtual network
VM1	10.0.0.4	VNET1
VM2	172.16.0.4	VNET2
VM3	192.168.0.4	VNET3
VM4	192.168.0.5	VNET3

VNET1, VNET2, and VNET3 are peered.

VM4 has a DNS server that is authoritative for a zone named contoso.com and contains the records shown in the following table.

Name	Type	Value
Server1	A	131.107.3.3
Server2	A	131.107.3.4

The virtual networks are configured to use the DNS servers shown in the following table.

Virtual network	DNS server
VNET1	Default (Azure-provided)
VNET2	Custom: 192.168.0.5
VNET3	Custom: 192.168.0.5

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
From VM1, server1.contoso.com resolves to 131.107.3.3.	○	○
From VM2, server1.contoso.com resolves to 131.107.3.3.	○	○
From VM3, server2.contoso.com resolves to 131.107.2.4.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
From VM1, server1.contoso.com resolves to 131.107.3.3.	●	○
From VM2, server1.contoso.com resolves to 131.107.3.3.	○	●
From VM3, server2.contoso.com resolves to 131.107.2.4.	●	○

Community Discussion

Looks like section of question is missing, but I'd go with NYN.

it's NNN VNET 1,2,3 are peered VM4 has Authority. VM3 and VM4 are in same VNET But last question has wrong IP address so NO

Apologies its NYN the 3 IP is wrong

Some information are missing here. See Topic 5 Question 93 https://www.secexams.com/discussions/microsoft/view/78995-exam-az-104-topic-5-question-93-discussion/

This is one of the several questions asking which one has higher priority - the (custom) DNS bound to a VNET or the private DNS zone linked to the same VNET. According to my test (and also the answer from chatGPT), the private DNS zone has priority. It is the only one which is used if the request is going to a domain hosted by the private DNS zone. If the request is going to a domain which is not in the provate DNS zone, then the default or custom DNS for the VNET is used. Based on this, the answers are Y-Y-Y Why - because both VM1 and VM2 are linked to the private DNS zone, where we have the record for server1.contoso.com -> 131.107.3.3 Also, asuming that the missing explanation of the second table says "VM4 is DNS server and it has the following records", and VM3 points to this DNS server, it will see and resolve the server2.contoso.com -> 131.107.2.4. Note that VNET3 (where VM3 is) is not linked to the private DNS zone. https://www.secexams.com/discussions/microsoft/view/78995-exam-az-104-topic-5-question-93-discussion/ commentary: Trevor_VT

SecExams

Question #1047

DRAG DROP

-

You have an Azure subscription that contains a resource group named RG1.

You plan to create an Azure Resource Manager (ARM) template to deploy a new virtual machine named VM1. VM1 must support the capture of performance data.

You need to specify resource dependencies for the ARM template.

In which order should you deploy the resources? To answer, move all resources from the list of resources to the answer area and arrange them in the correct order.

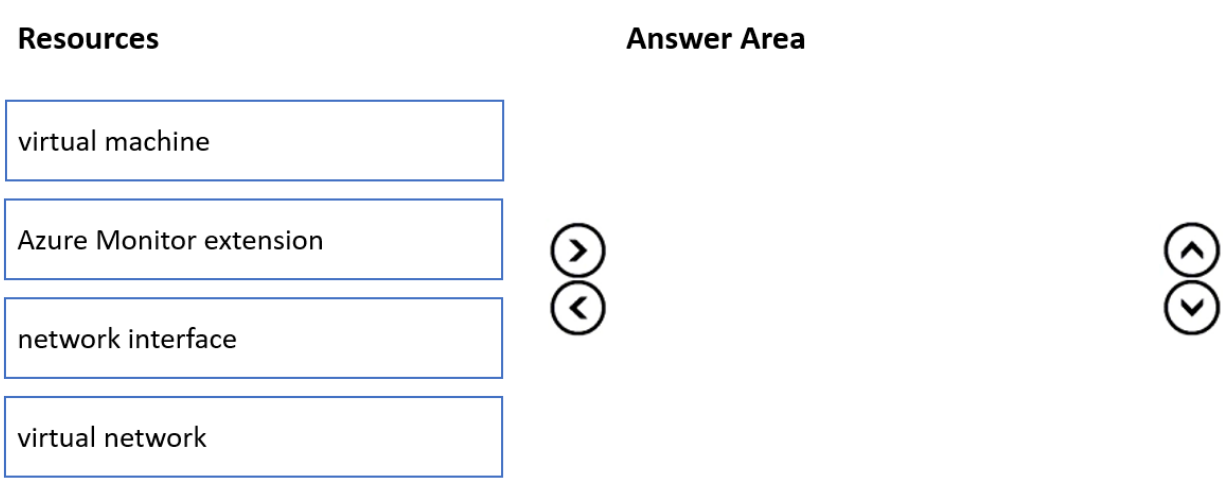

SecExams

Explanation

Correct Answer:

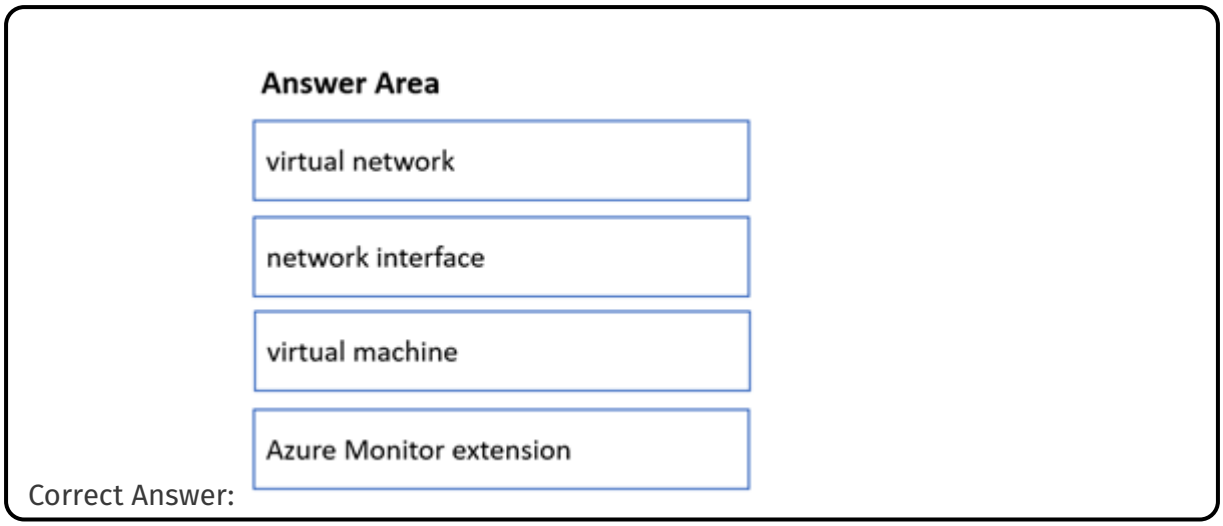

Community Discussion

SecExams

Question #1048

DRAG DROP

-

You have an Azure subscription that contains a resource group named RG1.

You plan to create an Azure Resource Manager (ARM) template to deploy a new virtual machine named VM1. VM1 must support the capture of performance data.

You need to specify resource dependencies for the ARM template.

In which order should you deploy the resources? To answer, move all resources from the list of resources to the answer area and arrange them in the correct order.

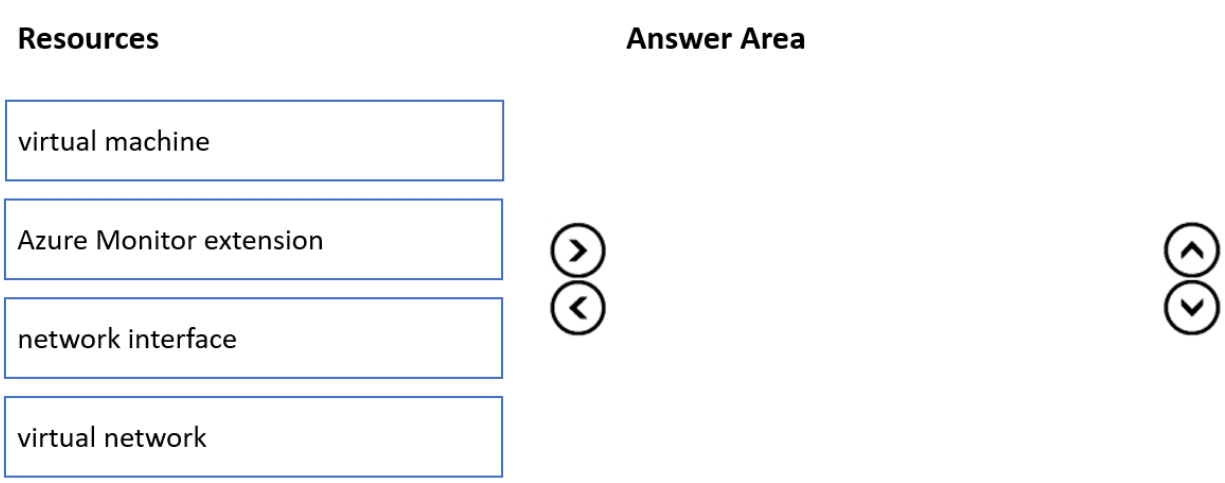

Explanation

Correct Answer:

Answer Area

virtual network

network interface

virtual machine

Azure Monitor extension

Community Discussion

Correct order First, create a network 2nd, create an interface 3rd, create VM 4th, install an extension.

Correct

Correct

This question was in exam 01/03/2024

Correct

SecExams

Question #1049

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.

You need to ensure that NGINX is available on all the virtual machines after they are deployed.

What should you use?

A) a Desired State Configuration (DSC) extension (Correct Answer)

B) a Microsoft Intune device configuration profile

C) the Publish-AzVMDscConfiguration cmdlet
D) the New-AzConfigurationAssignment cmdlet

Explanation

Correct Answer:
A

Community Discussion

Selected Answer: A

...BUT have you considered session persistence? >;)

Selected Answer: A

Answer correct

secexams.com correct

Selected Answer: A

correct

SecExams

Question #1050

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Region	Peers with
VNet1	West US	VNet2
VNet2	West US	VNet1, VNet3
VNet3	East US	VNet2

The subscription contains the virtual machines shown in the following table.

Name	Connected to
VM1	VNet1
VM2	VNet2
VM3	VNet3

All the virtual machines have only private IP addresses.

You deploy an Azure Bastion host named Bastion1 to VNet1.

To which virtual machines can you connect through Bastion1?

A) VM1 only
B) VM1 and VM2 only (Correct Answer)
C) VM1 and VM3 only
D) VM1, VM2, and VM3

SecExams

Explanation

Correct Answer: B ?

Community Discussion

SecExams

Question #1051

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Region	Peers with
VNet1	West US	VNet2
VNet2	West US	VNet1, VNet3
VNet3	East US	VNet2

The subscription contains the virtual machines shown in the following table.

Name	Connected to
VM1	VNet1
VM2	VNet2
VM3	VNet3

All the virtual machines have only private IP addresses.

You deploy an Azure Bastion host named Bastion1 to VNet1.

To which virtual machines can you connect through Bastion1?

A) VM1 only
B) VM1 and VM2 only (Correct Answer)
C) VM1 and VM3 only
D) VM1, VM2, and VM3

SecExams

Explanation

Correct Answer:
B

Community Discussion

VM1 and VM2, because they are peered.

Selected Answer: B

B is correct because of peering

vnet3 isn't peered with vnet1. hence can't include vm3 imho

vnet3 isn't peered with vnet1. hence can't include vm3 imho

Selected Answer: B

Correct answer is B (VM1 and VM2) because Bastion is deployed to VNEt1, which is peered with VNet2. D would be correct answer if Bastion was deployed in VNet2, which is not the case.

SecExams

Question #1052

You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.

You need to ensure that NGINX is available on all the virtual machines after they are deployed.

What should you use?

A) a Microsoft Intune device configuration profile
B) a Desired State Configuration (DSC) extension
C) Azure Application Insights

D) Deployment Center in Azure App Service (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: B

If you still have to check this question answer then its time to take some rest XD.

Selected Answer: B

Jajajajaja, en serio la pusieron mal??

Selected Answer: B

B is correct

Selected Answer: B

Answer is indeed B. I have seen this question many times. You've 2 correct solutions with this one. 1. Desired State Configuration (DSC) extension 2. Azure Custom Script extension Reference: Topic 5: Question 99

Selected Answer: B

Answer is B. I have seen this question like 20/30 times

SecExams

Question #1053

SecExams

HOTSPOT

-

You create a Recovery Services vault backup policy named Policy1 as shown in the following exhibit:

SecExams

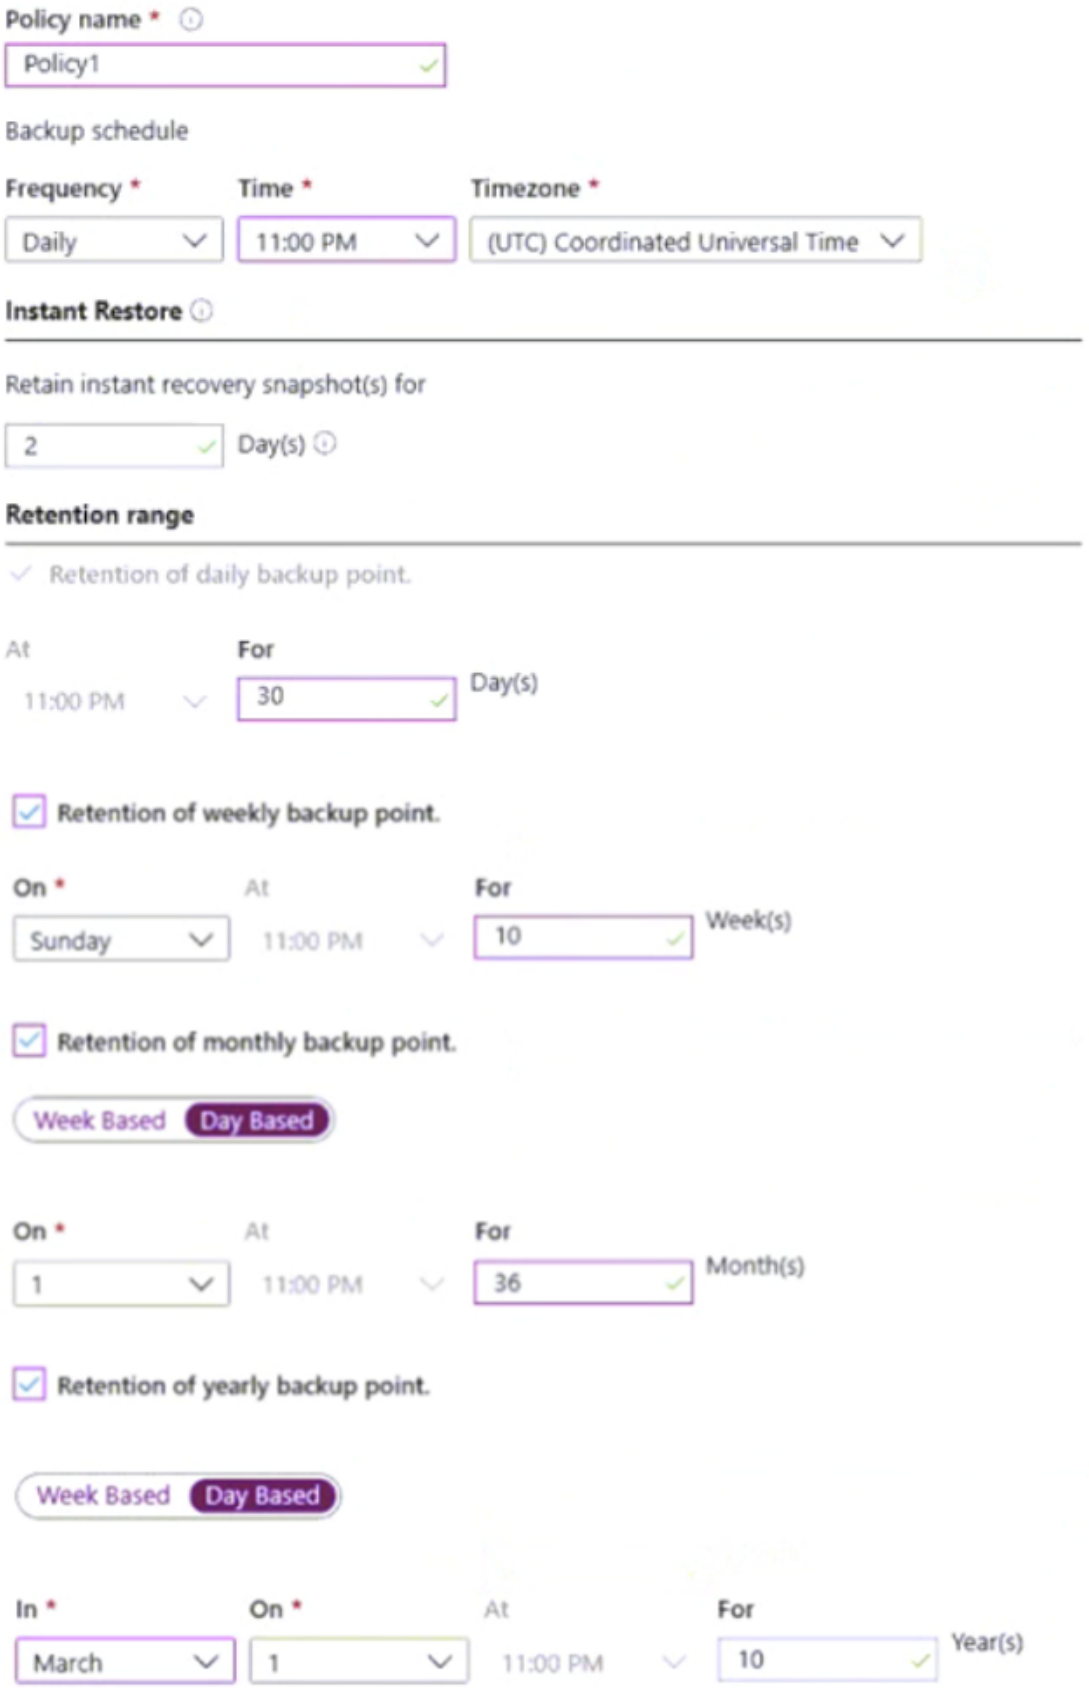
Policy name *
Policy1
Backup schedule
Frequency *
Time *
Timezone *
Daily
11:00 PM
(UTC) Coordinated Universal Time
Instant Restore
Retain instant recovery snapshot(s) for
2
Day(s)
Retention range
Retention of daily backup point.
At
For
11:00 PM
30
Day(s)
Retention of weekly backup point.
On *
At
For
Sunday
11:00 PM
10
Week(s)
Retention of monthly backup point.
Week Based
Day Based
On *
At
For
1
11:00 PM
36
Month(s)
Retention of yearly backup point.
Week Based
Day Based
In *
On *
At
For
March
1
11:00 PM
10
Year(s)

SecExams

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Answer Area

The backup that occurs on Sunday, March 1, will be retained for **[answer choice]**.

- 30 days
- 10 weeks
- 36 months
- 10 years

The backup that occurs on Sunday, November 1, will be retained for **[answer choice]**.

- 30 days
- 10 weeks
- 36 months
- 10 years

Explanation

Correct Answer:

Answer Area

The backup that occurs on Sunday, March 1, will be retained for **[answer choice]**.

- 30 days
- 10 weeks
- 36 months
- 10 years

The backup that occurs on Sunday, November 1, will be retained for **[answer choice]**.

- 30 days
- 10 weeks
- 36 months
- 10 years

Community Discussion

Question #1054

SecExams

HOTSPOT

-

You create a Recovery Services vault backup policy named Policy1 as shown in the following exhibit:

SecExams

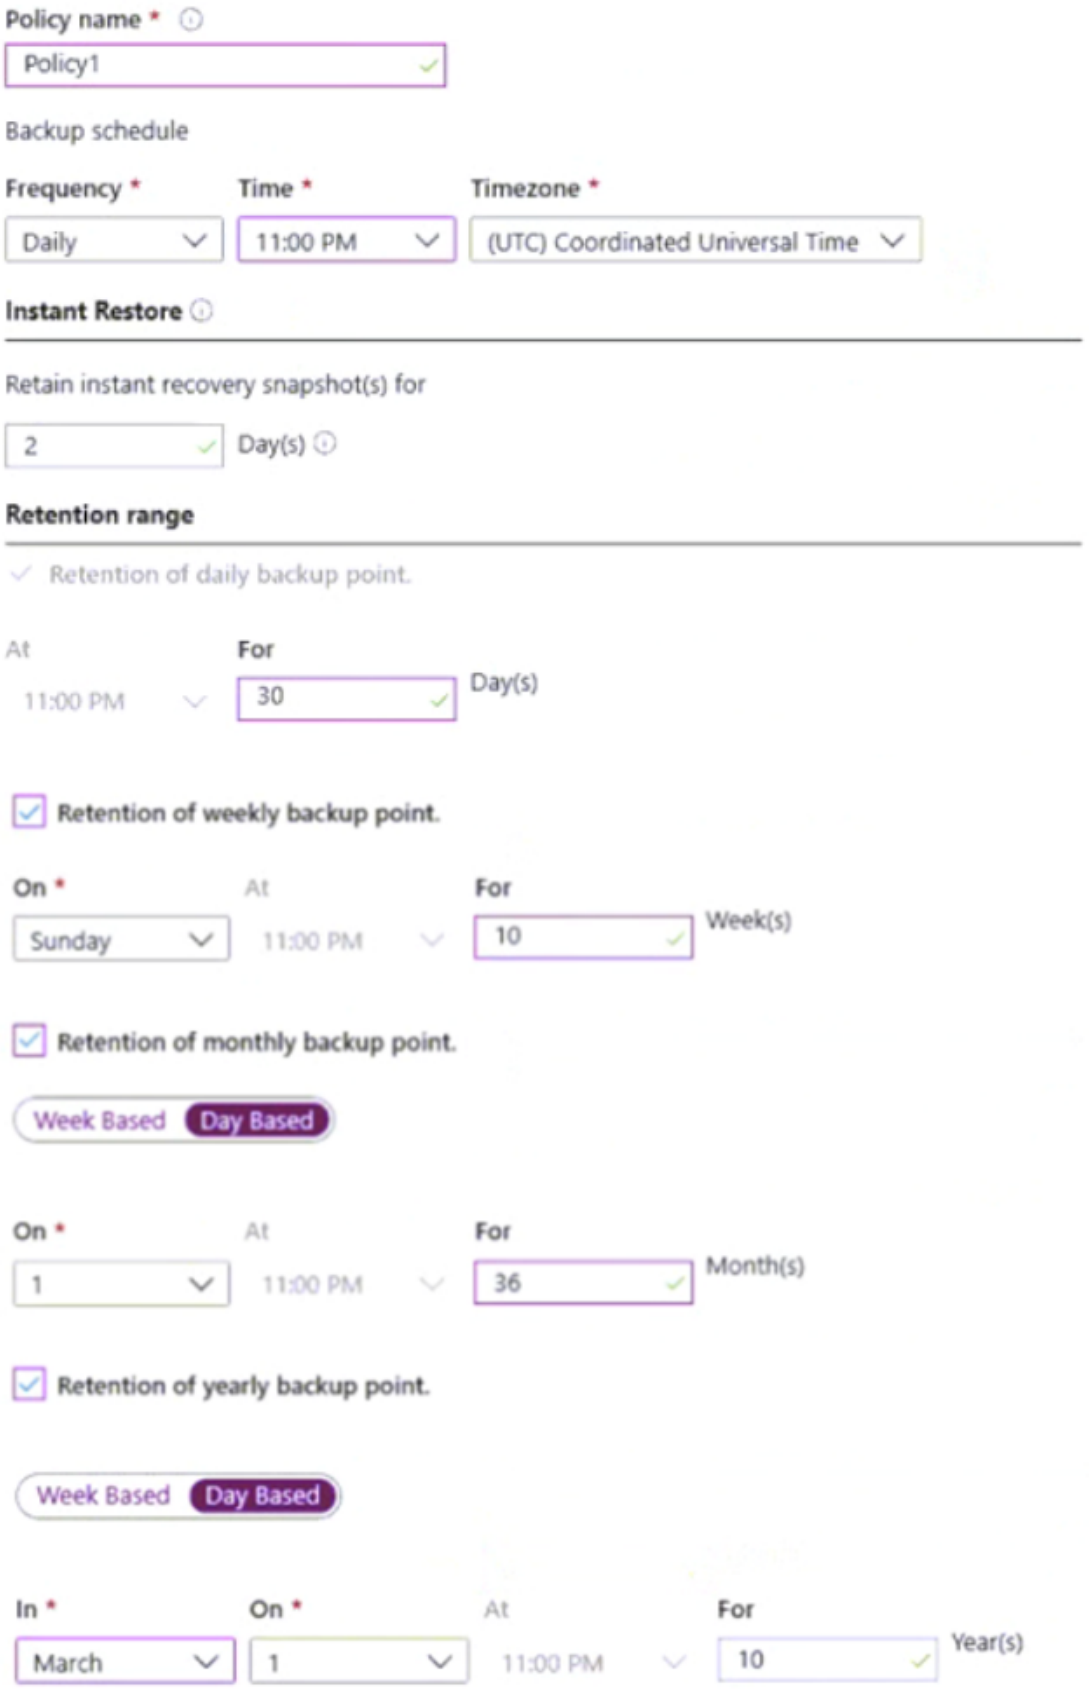
Policy name *
Policy1
Backup schedule
Frequency *
Time *
Timezone *
Daily
11:00 PM
(UTC) Coordinated Universal Time
Instant Restore
Retain instant recovery snapshot(s) for
2
Day(s)
Retention range
Retention of daily backup point.
At
For
11:00 PM
30
Day(s)
Retention of weekly backup point.
On *
At
For
Sunday
11:00 PM
10
Week(s)
Retention of monthly backup point.
Week Based
Day Based
On *
At
For
1
11:00 PM
36
Month(s)
Retention of yearly backup point.
Week Based
Day Based
In *
On *
At
For
March
1
11:00 PM
10
Year(s)

SecExams

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Answer Area

The backup that occurs on Sunday, March 1, will be retained for **[answer choice]**.

- 30 days
- 10 weeks
- 36 months
- 10 years

The backup that occurs on Sunday, November 1, will be retained for **[answer choice]**.

- 30 days
- 10 weeks
- 36 months
- 10 years

Explanation

Correct Answer:

Answer Area

The backup that occurs on Sunday, March 1, will be retained for **[answer choice]**.

- 30 days
- 10 weeks
- 36 months
- 10 years

The backup that occurs on Sunday, November 1, will be retained for **[answer choice]**.

- 30 days
- 10 weeks
- 36 months
- 10 years

Community Discussion

Correct answer Box 1: 10 years The yearly backup point occurs to 1 March and its retention period is 10 years. Box 2: 36 months The monthly backup point occurs on the 1 of every month and its retention period is 36 months. Note: Azure retention policy takes the longest period of retention for each backup. In case of conflict between 2 different policies. Reference: https://docs.microsoft.com/en-us/microsoft-365/compliance/retention?view=o365-worldwide

Answers are correct: 1) 10 Years 2) 36 Months

It was in EXAM, thanks Examtopic.

Great, one question which I could solve by myself !!! Correct answers: Box 1: 10 years Box 2: 36 months Good luck all, and thank me later! :D

If backup points fall on the same date, yearly backup point will be the priority, then monthly, weekly and last daily. Ans: 1) 10 Years 2) 36 Months Ref: https://youtu.be/K1NFwu5PNrU?si=IeDULk3fff0OT_aK

SecExams

Question #1055

SecExams

HOTSPOT

-

You have an Azure subscription that contains the vaults shown in the following table.

Name	Type
Recovery1	Recovery Services vault
Backup1	Azure Backup vault

You deploy the virtual machines shown in the following table.

Name	Operating system	Security Configuration
VM1	Windows Server	Azure Disk Encryption
VM2	Linux	Trusted launch

SecExams

You have the backup policies shown in the following table.

Name	Type	In vault
Policy1	Standard	Recovery1
Policy2	Enhanced	Recovery2
Policy3	*Not applicable*	Backup1

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
VM1 can be backed up by using Policy1.	○	○
VM2 can be backed up by using Policy3.	○	○
VM2 can be backed up by using Policy2.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM1 can be backed up by using Policy1.	◉	○
VM2 can be backed up by using Policy3.	○	◉
VM2 can be backed up by using Policy2.	◉	○

Community Discussion

Question #1056

SecExams

HOTSPOT

-

You have an Azure subscription that contains the vaults shown in the following table.

Name	Type
Recovery1	Recovery Services vault
Backup1	Azure Backup vault

You deploy the virtual machines shown in the following table.

Name	Operating system	Security Configuration
VM1	Windows Server	Azure Disk Encryption
VM2	Linux	Trusted launch

SecExams

You have the backup policies shown in the following table.

Name	Type	In vault
Policy1	Standard	Recovery1
Policy2	Enhanced	Recovery2
Policy3	*Not applicable*	Backup1

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
VM1 can be backed up by using Policy1.	○	○
VM2 can be backed up by using Policy3.	○	○
VM2 can be backed up by using Policy2.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM1 can be backed up by using Policy1.	◉	○
VM2 can be backed up by using Policy3.	○	◉
VM2 can be backed up by using Policy2.	◉	○

Community Discussion

A: "yes"; B: "no" (like the others) but C should be "no", because the target of Policy2 is Recovery2, which don't exist

A:yes B:No Azure Backup vaults is not support backup Azure virtual machines *Azure Backup vaults can protect the follwing types of datasource: 1- Azure Disks 2- Azure Blobs (Azure Storage) 3- Azure database for PostgreSQL server 4- Kubernetes services C:yes, enhanced support Trusted Launch You must enable backup of Trusted Launch VM

through enhanced policy only. https://learn.microsoft.com/en-us/azure/backup/backup-azure-vms-enhanced-policy?tabs=azure-portal

good catch. its questions like these that make me wonder if this is just a typo or a legit attempt at tripping us

good catch. its questions like these that make me wonder if this is just a typo or a legit attempt at tripping us

shouldn't last one be no? Recovery 2 is not mentioned

Question #1057

You have an Azure subscription. The subscription contains virtual machines that connect to a virtual network named VNet1.

You plan to configure Azure Monitor for VM Insights.

You need to ensure that all the virtual machines only communicate with Azure Monitor through VNet1.

What should you create first?

A) a data collection rule (DCR)
B) a Log Analytics workspace
C) an Azure Monitor Private Link Scope (AMPLS) (Correct Answer)
D) a private endpoint

Explanation

Correct Answer: C ?

Community Discussion

Question #1058

You have an Azure subscription. The subscription contains virtual machines that connect to a virtual network named VNet1.

You plan to configure Azure Monitor for VM Insights.

You need to ensure that all the virtual machines only communicate with Azure Monitor through VNet1.

What should you create first?

A) a data collection rule (DCR)
B) a Log Analytics workspace
C) an Azure Monitor Private Link Scope (AMPLS) (Correct Answer)
D) a private endpoint

Explanation

Correct Answer:
C

Community Discussion

The answer seems correct. With Private Link you can: -Connect privately to Azure Monitor without opening up any public network access. -Ensure your monitoring data is only accessed through authorized private networks. -Prevent data exfiltration from your private networks by defining specific Azure Monitor resources that connect through your private endpoint. -Securely connect your private on-premises network to Azure Monitor by using Azure ExpressRoute and Private Link. -Keep all traffic inside the Azure backbone network. https://learn.microsoft.com/en-us/azure/azure-monitor/logs/private-link-security#advantages

Selected Answer: C

The first thing you need to create is an Azure Monitor Private Link Scope (AMPLS). This will define the scope of the Azure Monitor resources that the virtual machines in VNet1 will be able to communicate with. Once you have created the AMPLS, you can create a private endpoint for VNet1 to connect to Azure Monitor. The private endpoint will allow

the virtual machines in VNet1 to communicate with Azure Monitor directly, without having to go through the public internet. Finally, you can create a data collection rule (DCR) to enable VM Insights on the virtual machines in VNet1. The DCR will tell Azure Monitor to collect data from the virtual machines and send it to the Log Analytics workspace.

I'm confused. I thought the Log Analytics had to be added first, and then the PLS after that?

https://learn.microsoft.com/en-us/azure/azure-monitor/logs/private-link-configure

https://learn.microsoft.com/en-us/azure/azure-monitor/logs/private-link-configure

SecExams

Question #1059

SecExams

HOTSPOT

-

You have an Azure subscription that contains the vaults shown in the following table.

Name	Type
Backup1	Backup vault
Recovery1	Recovery Services vault

SecExams

You create a storage account that contains the resources shown in the following table.

Name	Type
cont1	Blob container
share1	File share

To which vault can you back up cont1 and share1? To answer, select the appropriate options in the answer area.

NOTE: Each correct answer is worth one point.

Answer Area

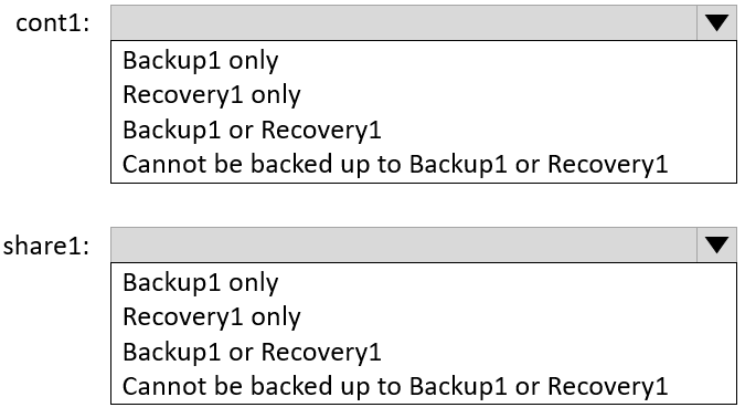

Explanation

Correct Answer:

Answer Area

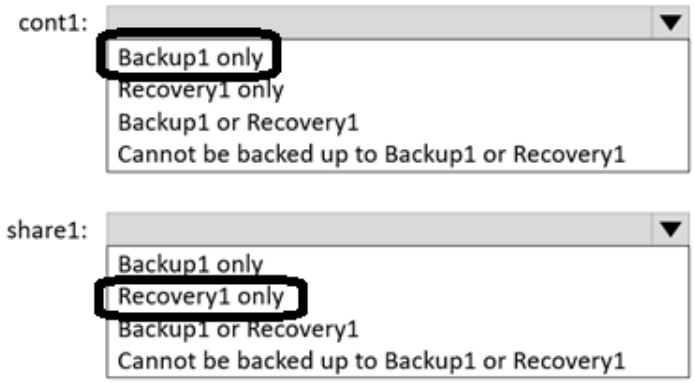

Community Discussion

Question #1060

SecExams

HOTSPOT

-

You have an Azure subscription that contains the vaults shown in the following table.

Name	Type
Backup1	Backup vault
Recovery1	Recovery Services vault

SecExams

You create a storage account that contains the resources shown in the following table.

Name	Type
cont1	Blob container
share1	File share

To which vault can you back up cont1 and share1? To answer, select the appropriate options in the answer area.

NOTE: Each correct answer is worth one point.

Answer Area

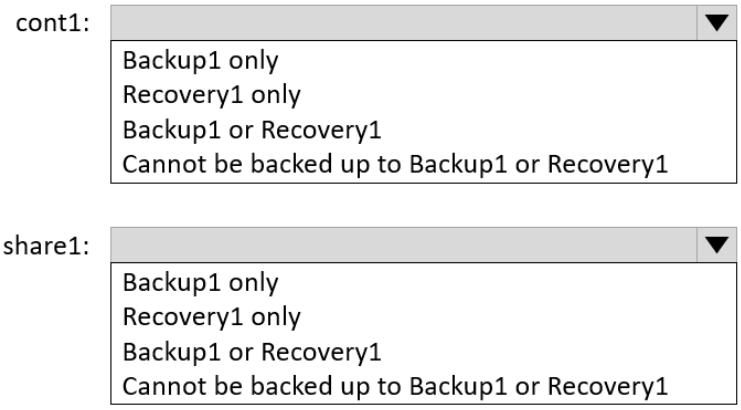

Explanation

Correct Answer:

Answer Area

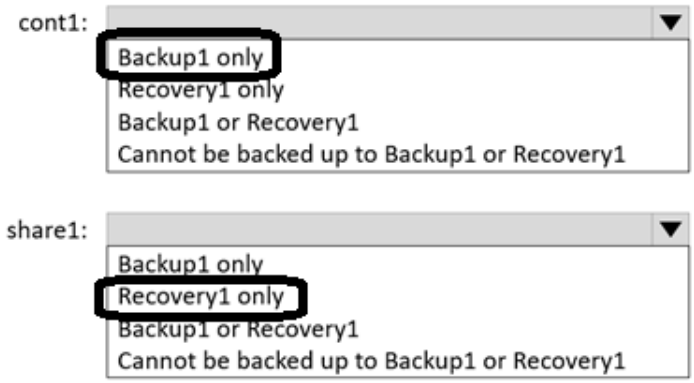

Community Discussion

Correct answer: Backup1 & Recovery1 https://learn.microsoft.com/en-us/answers/questions/405915/what-is-difference-between-recovery-services-vault

a) Backup1 -- blob containers are backed up to Azure Backup vaults b) Recovery1 -- Azure Files are backed up to Azure Recovery Services vaults https://learn.microsoft.com/en-us/answers/questions/405915/what-is-difference-between-recovery-services-vault

cont1: Backup1 share1: Recovery1 https://learn.microsoft.com/en-us/answers/questions/405915/what-is-difference-between-recovery-services-vault

Cont1 = Backup1 Share1 = Backup1

Wrong Azure backup for both scenarios

Question #1061

You have an Azure subscription that contains an Azure Stream Analytics job named Job1.

You need to monitor input events for Job1 to identify the number of events that were NOT processed.

Which metric should you use?

A) Out-of-Order Events
B) Output Events
C) Late Input Events
D) Backlogged Input Events (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #1062

You have an Azure subscription that contains an Azure Stream Analytics job named Job1.

You need to monitor input events for Job1 to identify the number of events that were NOT processed.

Which metric should you use?

A) Out-of-Order Events
B) Output Events
C) Late Input Events
D) Backlogged Input Events (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: D

Correct answer: D Out-of-Order Events Number of events received out of order that were either dropped or given an adjusted time stamp, based on the event ordering policy. This metric can be affected by the configuration of the Out-of-Order Tolerance Window setting. Output Events Amount of data that the Stream Analytics job sends to the output target, in number of events. Late Input Events Events that arrived later than the configured tolerance window for late arrivals. Learn more about Azure Stream Analytics event order considerations. Backlogged Input Events Number of input events that are backlogged. A nonzero value for this metric implies that your job can't keep up with the number of incoming events. If this value is slowly increasing or is consistently nonzero, you should scale out your job. To learn more, see Understand and adjust streaming units. Reference: https://learn.microsoft.com/en-us/azure/stream-analytics/stream-analytics-job-metrics

To monitor input events for an Azure Stream Analytics job and identify the number of events that were NOT processed, you should use the "Backlogged Input Events" metric.

The correct option is: D. Backlogged Input Events This metric represents the number of input events that are waiting to be processed because of issues such as query errors, throttling, or other processing limitations. Monitoring this metric can help you identify events that have not been processed as expected.

Selected Answer: D

el answer es D

Selected Answer: D

The "Backlogged Input Events" metric tracks the number of input events that have not been processed yet, indicating events that are waiting in the job's input queue to be processed. This is useful for identifying any backlog or delays in event processing.

Selected Answer: D

D. Backlogged Input Events

SecExams

Question #1063

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Active Directory (Azure AD) tenant named contoso.com.

You have a CSV file that contains the names and email addresses of 500 external users.

You need to create a guest user account in contoso.com for each of the 500 external users.

Solution: You create a PowerShell script that runs the New-MgUser cmdlet for each user.

Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #1064

SecExams

HOTSPOT

-

You purchase a new Azure subscription.

You create an Azure Resource Manager (ARM) template named deploy.json as shown in the following exhibit.

SecExams

```
{
  "$schema":
"https://schema.management.azure.com/schemas/2019-04-
01/deploymentTemplate.json#",
  "contentVersion": "1.0.0.0",
  "paramters": {
      "obj1": {
        "type": "object",
        "defaultValue": {
          "propA": "one",
          "propB": "two",
          "propC": "three",
          "propD": {
             "propD-1": "sub",
             "propD-2": "sub"
          }
      }
  },
  "par1": {
    "type": "string",
    "allowedValues": [
    "centralus",
   "eastus",
  "westus" ],
  "defaultValue": "eastus"
     }
  },
  "variables": {
  "var1": [
     "westus",
     "centraus"
     "eastus"
  ]
},
  "resources": [
      {
        "type": "Microsoft.Resources/resrouceGroups",
        "apiVersion": "2018-05-01",
        "location": "eastus",
        "name": [concat('RGS', copyIndex())]"
        "copy": {
        "name": "copy",
        "count": 2
        }
  },
  {
        "type": "Microsoft.Resources/resourceGroups",
        "apiVersion": "2018-05-01",
        "location": [last(variables('var1'))]",
        "name": "[concat('ResGrp', '8')]"
       },
     {
        "type": "Microsoft.Resources/resourceGroups",
        "apiVersion": "2018-05-01",
        "location": "[parameters('part1')]",
        "name": "[concat('RGroup', length(parameters('obj1')))]"
  }
  ],
  "outputs": {}
}
```

SecExams

You connect to the subscription and run the following command.

New-AzDeployment –Location westus –TemplateFile “deploy.json”

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
Three resource groups are created when you run the script.	○	○
A resource group named RGroup5 is created.	○	○
All the resource groups are created in the East US Azure region.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
Three resource groups are created when you run the script.	◉	○
A resource group named RGroup5 is created.	○	◉
All the resource groups are created in the East US Azure region.	◉	○

Community Discussion

Question #1065

You have an Azure subscription that contains a storage account named storage1. The storage1 account contains a container named container1.

You need to configure access to container1. The solution must meet the following requirements:
• Only allow read access.
• Allow both HTTP and HTTPS protocols.
• Apply access permissions to all the content in the container.

What should you use?

A) an access policy
B) a shared access signature (SAS) (Correct Answer)
C) Azure Content Delivery Network (CDN)
D) access keys

Explanation

Correct Answer: B ?

Community Discussion

SecExams

Question #1066

You need to create an Azure Storage account named storage1. The solution must meet the following requirements:

- Support Azure Data Lake Storage.
- Minimize costs for infrequently accessed data.
- Automatically replicate data to a secondary Azure region.

Which three options should you configure for storage1? Each correct answer presents part of the solution.

NOTE: Each correct answer is worth one point.

A) zone-redundant storage (ZRS)
B) the Cool access tire (Correct Answer)
C) geo-redundant storage (GRS) (Correct Answer)
D) the Hot access tier
E) hierarchical namespace (Correct Answer)

Explanation

Correct Answer: BCE ?

Community Discussion

SecExams

Question #1067

You have an Azure subscription.

You plan to deploy the resources shown in the following table.

Name	Type
IP1	Microsoft.Network/publicIPAddresses
NSG1	Microsoft.Network/networkSecurityGroups
VNET1	Microsoft.Network/virtualNetworks
NIC1	Microsoft.Network/networkInterfaces
VM1	Microsoft.Compute/virtualMachines

You need to create a single Azure Resource Manager (ARM) template that will be used to deploy the resources.

Which resource should be added to the dependsOn section for VM1?

A) VNET1
B) NIC1 (Correct Answer)
C) IP1
D) NSG1

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: B

Therefore, the most direct and crucial dependency for VM1 among the listed resources is NIC1 (Option B). The NIC acts as the bridge between the VM and the other network resources like the virtual network, public IP, and network security group. Hence, it's essential to ensure that NIC1 is deployed before VM1. https://learn.microsoft.com/en-us/azure/templates/microsoft.compute/virtualmachines?pivots=deployment-language-arm-template https://learn.microsoft.com/en-us/azure/azure-resource-manager/templates/resource-dependency https://learn.microsoft.com/en-us/azure/azure-resource-

manager/templates/template-tutorial-create-templates-with-dependent-resources?tabs=CLI

Answer is B

Selected Answer: B

https://learn.microsoft.com/en-us/azure/azure-resource-manager/templates/media/template-tutorial-create-templates-with-dependent-resources/resource-manager-template-dependent-resources-diagram.png

B is correct

{..., { "type": "Microsoft.Compute/virtualMachines", "apiVersion": "2022-11-01", "name": "[format('{0}{1}', variables('vmPrefix'), copyIndex())]", "location": "[parameters('location')]", "dependsOn": ["[resourceId('Microsoft.Network/networkInterfaces',format('{0}-{1}', variables('nicPrefix'),copyIndex()))]"], ...} https://learn.microsoft.com/en-us/azure/azure-resource-manager/templates/resource-dependency

SecExams

Question #1068

You have an Azure subscription.

You plan to deploy the resources shown in the following table.

Name	Type
IP1	Microsoft.Network/publicIPAddresses
NSG1	Microsoft.Network/networkSecurityGroups
VNET1	Microsoft.Network/virtualNetworks
NIC1	Microsoft.Network/networkInterfaces
VM1	Microsoft.Compute/virtualMachines

You need to create a single Azure Resource Manager (ARM) template that will be used to deploy the resources.

Which resource should be added to the dependsOn section for VM1?

A) VNET1

B) NIC1 (Correct Answer)

C) IP1

D) NSG1

Explanation

Correct Answer: B ?

Community Discussion

Question #1069

You have an Azure subscription that contains an Azure SQL database named DB1.

You plan to use Azure Monitor to monitor the performance of DB1. You must be able to run queries to analyze log data.

Which destination should you configure in the Diagnostic settings of DB1?

A) Send to a Log Analytics workspace. (Correct Answer)
B) Archive to a storage account.
C) Stream to an Azure event hub.

Explanation

Correct Answer: A ?

Community Discussion

Question #1070

You have an Azure subscription that contains an Azure SQL database named DB1.

You plan to use Azure Monitor to monitor the performance of DB1. You must be able to run queries to analyze log data.

Which destination should you configure in the Diagnostic settings of DB1?

A) Send to a Log Analytics workspace. (Correct Answer)
B) Archive to a storage account.
C) Stream to an Azure event hub.

Explanation

Correct Answer:
A

Community Discussion

Selected Answer: A

The first one to comment

Selected Answer: A

To be able to run queries and analyze log data for Azure SQL database DB1, you should configure the Diagnostic settings to send the logs to a Log Analytics workspace. A. Send to a Log Analytics workspace: This option allows you to send the diagnostic logs to a Log Analytics workspace, which serves as a central repository for log data. You can then run queries and perform analysis on the log data using Azure Monitor Logs.

Selected Answer: A

Data sent to a Log Analytics workspace can be consumed by SQL Analytics, which provides intelligent monitoring of your databases including performance reports, alerts, and mitigation recommendations. Moreover, data in a Log Analytics workspace can be analyzed alongside other monitoring data collected, and also allows you to leverage other Azure Monitor features such as alerts and visualizations https://

learn.microsoft.com/en-us/azure/azure-sql/database/metrics-diagnostic-telemetry-logging-streaming-export-configure?view=azuresql&tabs=azure-portal https://www.sqlservercentral.com/articles/monitoring-azure-sql-databases#:~:text=If%20not%2C%20just%20search%20for%20Log%20Analytics%20workspace,Set%20the%2 https://techcommunity.microsoft.com/t5/azure-database-support-blog/azure-sql-db-and-log-analytics-better-together-part-1/ba-p/794833

Question #1071

You have an Azure subscription. The subscription contains virtual machines that run Windows Server.

You have a data collection rule (DCR) named Rule1.

You plan to use the Azure Monitor Agent to collect events from Windows System event logs.

You only need to collect system events that have an ID of 1001.

Which type of query should you use for the data source in Rule1?

A) SQL
B) XPath (Correct Answer)
C) KQL

Explanation

Correct Answer: B ?

Community Discussion

Question #1072

You have an Azure subscription. The subscription contains virtual machines that run Windows Server.

You have a data collection rule (DCR) named Rule1.

You plan to use the Azure Monitor Agent to collect events from Windows System event logs.

You only need to collect system events that have an ID of 1001.

Which type of query should you use for the data source in Rule1?

A) SQL
B) XPath (Correct Answer)
C) KQL

Explanation

Correct Answer:
B

Community Discussion

Microsoft: We will find that 1 sentence in our entire Doc which mentioned a language which wasn't mentioned in any our courses and we'll 100% ask everybody about it, because...of reasons..

The correct answer is B. Whilst you can use KQL to filter for events with ID 101, this implies that the Data Collection Rule ingests all events into the Log Analytics Workspace, thus driving up costs. This question specifically asks for the data source configuration as part of creating Rule1. If you are only interested in Event ID 1001 you should filter it from the start, when configuring the Data Collection Rule. To do that, you must use an XPath query. https://learn.microsoft.com/en-us/azure/azure-monitor/agents/data-collection-rule-azure-monitor-agent?tabs=portal#filter-events-using-xpath-queries

Selected Answer: B

Custom data source in Azure Portal says: "Use XPath queries to filter event logs and limit data collection"

KQL https://learn.microsoft.com/en-us/azure/azure-monitor/essentials/data-collection-rule-structure

i like how entire event filtering system is implemented into log analytics with KQL, so a lot of people get sort of comfortable with that, BUT HERE, in this one place, instead of filtering event ingress like a normal person, you have to use some random unheard of toaster syntax

Question #1073

You have an Azure subscription that contains a virtual machine named VM1.

You have an on-premises datacenter that contains a domain controller named DC1. ExpressRoute is used to connect the on-premises datacenter to Azure.

You need to use Connection Monitor to identify network latency between VM1 and DC1.

What should you install on DC1?

A) the Azure Connected Machine agent for Azure Arc-enabled servers
B) the Azure Network Watcher Agent virtual machine extension
C) the Log Analytics agent
D) an Azure Monitor agent extension (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #1074

You have an Azure subscription that contains a virtual machine named VM1.

You have an on-premises datacenter that contains a domain controller named DC1. ExpressRoute is used to connect the on-premises datacenter to Azure.

You need to use Connection Monitor to identify network latency between VM1 and DC1.

What should you install on DC1?

A) the Azure Connected Machine agent for Azure Arc-enabled servers
B) the Azure Network Watcher Agent virtual machine extension
C) the Log Analytics agent
D) an Azure Monitor agent extension (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: D

Connection monitor supports the Azure Monitor agent extension, which eliminates any dependency on the legacy Log Analytics agent. See here: https://learn.microsoft.com/en-us/azure/network-watcher/azure-monitor-agent-with-connection-monitor The following (older) link talks about setting up the Log Analytics agent: https://learn.microsoft.com/en-us/azure/network-watcher/connection-monitor-overview#agents-for-on-premises-machines

Nice a 50/50 split between answers...

Selected Answer: A

Here's what you need to do: - First, enable DC1 to become a Azure Arc-enabled server - Then install the Azure Connected Machine agent (option A) - And only then, install the

Azure Monitor agent (includes a, Azure Monitor agent extension) So, correct answer is A. It's nicely explained here: https://learn.microsoft.com/en-us/azure/network-watcher/azure-monitor-agent-with-connection-monitor#agents-for-on-premises-machines

Selected Answer: D

D As per 11/15/2023: Install Azure Monitor agent to enable the Network Watcher extension. https://learn.microsoft.com/en-us/azure/network-watcher/azure-monitor-agent-with-connection-monitor

Selected Answer: D

Connection Monitor now supports the Azure Monitor Agent extension. This support eliminates any dependency on the legacy Log Analytics agent. https://learn.microsoft.com/en-us/azure/network-watcher/connection-monitor-create-using-portal#create-a-connection-monitor

SecExams

Question #1075

You have an Azure subscription that has Traffic Analytics configured.

You deploy a new virtual machine named VM1 that has the following settings:

- Region: East US
- Virtual network: VNet1
- NIC network security group: NSG1

You need to monitor VM1 traffic by using Traffic Analytics.

Which settings should you configure?

A) Diagnostic settings for VM1
B) NSG flow logs for NSG1 (Correct Answer)
C) Diagnostic settings for NSG1
D) Insights for VM1

Explanation

Correct Answer:
B

Community Discussion

NSG Flow logs for NSG1 https://learn.microsoft.com/en-us/azure/network-watcher/traffic-analytics

Selected Answer: B

NSG flow logs are a feature of Azure Network Watcher that allows logging of information about IP traffic flowing through a network security group. This data can be used by Traffic Analytics to analyze network traffic in your environment. By enabling NSG flow logs for NSG1, the Network Security Group associated with VM1, you would be able to monitor the traffic of VM1 using Traffic Analytics https://learn.microsoft.com/en-us/azure/network-watcher/traffic-analytics https://learn.microsoft.com/en-us/azure/network-watcher/nsg-flow-logs-tutorial

Selected Answer: B

To monitor VM1 traffic using Traffic Analytics, you need to have NSG flow logs enabled for the network security group that is associated with the virtual machine's network interface. Traffic Analytics is powered by NSG flow logs, which record information about IP traffic flowing through an NSG. Therefore, the correct setting to configure is: B. NSG flow logs for NSG1

Option C: Diagnostic settings for NSG Traffic Analytics relies on NSG flow logs for its data source. To enable Traffic Analytics for VM1, you need to configure diagnostic settings for NSG1, as it is the NSG associated with VM1's NIC. This allows NSG flow logs to be sent to a storage account, and Traffic Analytics can then process and analyze these logs.

SecExams

Question #1076

You have an Azure subscription that has Traffic Analytics configured.

You deploy a new virtual machine named VM1 that has the following settings:

- Region: East US
- Virtual network: VNet1
- NIC network security group: NSG1

You need to monitor VM1 traffic by using Traffic Analytics.

Which settings should you configure?

A) Diagnostic settings for VM1
B) NSG flow logs for NSG1 (Correct Answer)
C) Diagnostic settings for NSG1
D) Insights for VM1

Explanation

Correct Answer: B ?

Community Discussion

SecExams

Question #1077

You have an Azure subscription. The subscription contains 10 virtual machines that run Windows Server. Each virtual machine hosts a website in IIS and has the Azure Monitor Agent installed.

You need to collect the IIS logs from each virtual machine and store them in a Log Analytics workspace.

What should you configure first?

A) a data collection endpoint (Correct Answer)
B) an Azure Monitor Private Link Scope (AMPLS)
C) Diagnostic settings
D) VM insights
E) a private endpoint

Explanation

Correct Answer:
A

Community Discussion

Data Collection End Point https://learn.microsoft.com/en-us/azure/azure-monitor/essentials/data-collection-endpoint-overview?tabs=portal

I feel like Azure has a lot of services (some of them nested) that do the same thing and cause confusion because they have differing names

Option C: Diagnostic settings To collect and forward logs to Log Analytics, you should configure diagnostic settings on each virtual machine. Diagnostic settings allow you to collect various types of data, including IIS logs, and send them to a Log Analytics workspace.

A. DCE is correct See: "Collect IIS logs with Azure Monitor Agent" https://learn.microsoft.com/en-us/azure/azure-monitor/agents/data-collection-iis

Selected Answer: A

A. a data collection endpoint https://learn.microsoft.com/en-us/azure/azure-monitor/vm/tutorial-monitor-vm-guest

Question #1078

You have an Azure subscription. The subscription contains 10 virtual machines that run Windows Server. Each virtual machine hosts a website in IIS and has the Azure Monitor Agent installed.

You need to collect the IIS logs from each virtual machine and store them in a Log Analytics workspace.

What should you configure first?

A) a data collection endpoint (Correct Answer)
B) an Azure Monitor Private Link Scope (AMPLS)
C) Diagnostic settings
D) VM insights
E) a private endpoint

Explanation

Correct Answer: A ?

Community Discussion

Question #1079

Your on-premises network contains a VPN gateway.

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vgw1	Virtual network gateway	Gateway for Site-to-Site VPN to the on-premises network
storage1	Storage account	Standard performance tier
Vnet1	Virtual network	Enabled forced tunneling
VM1	Virtual machine	Connected to Vnet1

You need to ensure that all the traffic from VM1 to storage1 travels across the Microsoft backbone network.

What should you configure?

A) Azure AD Application Proxy
B) private endpoints (Correct Answer)
C) a network security group (NSG)
D) Azure Peering Service

Explanation

Correct Answer: B ?

Community Discussion

Question #1080

Your on-premises network contains a VPN gateway.

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vgw1	Virtual network gateway	Gateway for Site-to-Site VPN to the on-premises network
storage1	Storage account	Standard performance tier
Vnet1	Virtual network	Enabled forced tunneling
VM1	Virtual machine	Connected to Vnet1

You need to ensure that all the traffic from VM1 to storage1 travels across the Microsoft backbone network.

What should you configure?

A) Azure AD Application Proxy
B) service endpoints (Correct Answer)
C) a network security group (NSG)
D) Azure Firewall

Explanation

Correct Answer: B ?

Community Discussion

Question #1081

Your on-premises network contains a VPN gateway.

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vgw1	Virtual network gateway	Gateway for Site-to-Site VPN to the on-premises network
storage1	Storage account	Standard performance tier
Vnet1	Virtual network	Enabled forced tunneling
VM1	Virtual machine	Connected to Vnet1

You need to ensure that all the traffic from VM1 to storage1 travels across the Microsoft backbone network.

What should you configure?

A) Azure Application Gateway
B) service endpoints (Correct Answer)
C) a network security group (NSG)
D) Azure Peering Service

Explanation

Correct Answer: B ?

Community Discussion

Question #1082

You have an Azure subscription named Sub1 that contains the resources shown in the following table.

Name	Type
MG1	Management group
RG1	Resource group
VM1	Virtual machine

You create a user named Admin1.

To what can you add Admin1 as a co-administrator?

A) RG1
B) MG1
C) Sub1 (Correct Answer)
D) VM1

Explanation

Correct Answer: C ?

Community Discussion

Question #1083

SecExams

HOTSPOT

-

You have an Azure Storage account named storage1 that contains two containers named container1 and container2. Blob versioning is enabled for both containers.

You periodically take blob snapshots of critical blobs.

You create the following lifecycle management policy.

SecExams

```
{
  "rules": [
    {
      "enabled": true,
      "name": "rule1",
      "type": "Lifecycle",
      "definition": {
        "actions": {
          "version": {
            "tierToCool": {
              "daysAfterCreationGreaterThan": 15
              },
              "tierToArchive": {
                "daysAfterLastTierChangeGreaterThan": 7,
                "daysAfterCreationGreaterThan": 30
              }
            }
          },
          "filters": {
            "blobTypes": [
              "blockBlob"
            ],
            "prefixMatch": [
              "container1/"
            ]
          }
        }
      }
    ]
}
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

Statements	Yes	No
A blob snapshot automatically moves to the Cool access tier after 15 days.	○	○
A blob version in container2 automatically moves to the Archive access tier after 30 days.	○	○
A rehydrated version automatically moves to the Archive access tier after 30 days.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
A blob snapshot automatically moves to the Cool access tier after 15 days.	●	○
A blob version in container2 automatically moves to the Archive access tier after 30 days.	○	●
A rehydrated version automatically moves to the Archive access tier after 30 days.	○	●

Community Discussion

Question #1084

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Kind	Performance	Replication	Access tier
storage1	Storage (general purpose v1)	Premium	Locally-redundant storage (LRS)	*Not applicable*
storage2	StorageV2 (general purpose v2)	Standard	Locally-redundant storage (LRS)	Cool
storage3	StorageV2 (general purpose v2)	Standard	Read-access geo-redundant storage (RA-GRS)	Hot
storage4	BlobStorage	Premium	Locally-redundant storage (LRS)	Hot

Which storage account can be converted to zone-redundant storage (ZRS) replication?

A) storage1
B) storage2 (Correct Answer)
C) storage3
D) storage4

Explanation

Correct Answer: B ?

Community Discussion

Question #1085

You have an Azure subscription that contains the devices shown in the following table.

Name	Platform
Device1	Windows
Device2	Ubuntu Linux
Device3	macOS
Device4	Android

On which devices can you install Azure Storage Explorer?

A) Device1 only
B) Device1 and Device2 only
C) Device1 and Device3 only
D) Device1, Device2, and Device3 only (Correct Answer)
E) Device1, Device3, and Device4 only

Explanation

Correct Answer: D ?

Community Discussion

SecExams

Question #1086

SecExams

HOTSPOT

-

You have an Azure Storage account named storage1 that contains a container named container1. The container1 container stores thousands of image files.

You plan to use an Azure Resource Manager (ARM) template to create a blob inventory rule named rule1.

You need to ensure that only blobs whose names start with the word finance are stored daily as a CSV file in container1.

How should you complete rule1? To answer, select the options in the answer area.

NOTE: Each correct answer is worth one point.

SecExams

Answer Area

```
. . .
  {
      "definition": {
        "filters": {
          "blobTypes":
                                  appendBlob
                                  blockBlob
                                  pageBlob
          "includeBlobVersions": true,
          "includeSnapshots": true,
          "prefixMatch":
                                  container1/*
                                  container1/finance
        },                        finance
        "format": "string",
        "objectType": "blob",
        "schedule": "daily",
        "schemaFields": ["Name"]
      },
      "destination": "CSV",
      "enabled": true,
      "name": "rule1"
    }
. . .
```

SecExams

Explanation

Correct Answer:

SecExams

Answer Area

```
. . .
   {
          "definition": {
            "filters": {
              "blobTypes":  [                ▼]
                            appendBlob
                            blockBlob
                            pageBlob
              "includeBlobVersions": true,
              "includeSnapshots": true,
              "prefixMatch":  [              ▼]
                            container1/*
                            container1/finance
                            finance
            },
            "format": "string",
            "objectType": "blob",
            "schedule": "daily",
            "schemaFields": ["Name"]
          },
          "destination": "CSV",
          "enabled": true,
          "name": "rule1"
        }
. . .
```

Community Discussion

Question #1087

HOTSPOT

-

You have an Azure subscription that contains a storage account named storage1. The storage1 account contains blobs in a container named container1.

You plan to share access to storage1.

You need to generate a shared access signature (SAS). The solution must meet the following requirements:

• Ensure that the SAS can only be used to enumerate and download blobs stored in container1.
• Use the principle of least privilege.

Which three settings should you enable? To answer, select the appropriate settings in the answer area.

Explanation

Correct Answer:

Community Discussion

SecExams

Question #1088

HOTSPOT

-

You have an Azure subscription. The subscription contains a storage account named storage1 that has the lifecycle management rules shown in the following table.

Name	Blob prefix	If base were last modified more than (days ago)	Then
Rule1	container1/	3 days	Move to archive storage
Rule2	*Not applicable*	5 days	Move to cool storage
Rule3	container2/	10 days	Delete the blob
Rule4	container2/	15 days	Move to archive storage

On June 1, you store two blobs in storage1 as shown in the following table.

Name	Location	Access tier
File1	container1	Hot
File2	container2	Hot

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
On June 6, File1 will be stored in the Cool access tier.	◯	◯
On June 7, File2 will be stored in the Cool access tier.	◯	◯
On June 16, File2 will be stored in the Archive access tier.	◯	◯

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
On June 6, File1 will be stored in the Cool access tier.	○	◉
On June 7, File2 will be stored in the Cool access tier.	◉	○
On June 16, File2 will be stored in the Archive access tier.	○	◉

Community Discussion

SecExams

Question #1089

You have an Azure subscription.

You create the following Azure Resource Manager (ARM) template named Template.json.

```
{
  "$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",
  "contentVersion": "1.0.0.0",
  "parameters": {},
  "variables": {},
  "resources": [
    {
      "type": "Microsoft.Resources/resourceGroups",
      "apiVersion": "2022-12-01",
      "location": "eastus",
      "name": "Marketing"
    }
  ],
  "outputs": {}
}
```

You need to deploy Template.json.

Which PowerShell cmdlet should you run from Azure Cloud Shell?

A) New-AzSubscriptionDeployment
B) New-AzManagementGroupDeployment
C) New-AzResourceGroupDeployment (Correct Answer)
D) New-AzTenantDeployment

Explanation

Correct Answer: C ?

Community Discussion

Question #1090

You have an Azure subscription.

You create the following Azure Resource Manager (ARM) template named Template.json.

```
{
  "$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",
  "contentVersion": "1.0.0.0",
  "parameters": {},
  "variables": {},
  "resources": [
    {
      "type": "Microsoft.Resources/resourceGroups",
      "apiVersion": "2022-12-01",
      "location": "eastus",
      "name": "Marketing"
    }
  ],
  "outputs": {}
}
```

You need to deploy Template.json.

Which PowerShell cmdlet should you run from Azure Cloud Shell?

A) New-AzSubscriptionDeployment
B) New-AzManagementGroupDeployment
C) New-AzResourceGroupDeployment (Correct Answer)
D) New-AzTenantDeployment

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: A

A is correct because RG is already mentioned in the template.

Selected Answer: D

A is correct answer. Tested in the lab. New-AzSubscriptionDeployment -Location eastus -TemplateFile template_q101.json

A is correct. I selected D by mistake. Can't edit previous post.

A is correct. I selected D by mistake. Can't edit previous post.

Selected Answer: A

New-AzSubscriptionDeployment is the correct answer, as the New-AzResourceDeployment is used to deploy in an existing resource group. You can use New-AzSubscriptionDeployment(which is an alias for New-AzDeployment) to deploy resources at subscription level. "The New-AzResourceGroupDeployment cmdlet adds a deployment to an existing resource group" https://learn.microsoft.com/en-us/powershell/module/az.resources/new-azresourcegroupdeployment?view=azps-10.4.1 https://learn.microsoft.com/en-us/azure/azure-resource-manager/templates/deploy-to-subscription?tabs=azure-powershell

SecExams

Question #1091

You have an Azure subscription that contains a resource group named RG1.

You plan to create a storage account named storage1.

You have a Bicep file named File1.

You need to modify File1 so that it can be used to automate the deployment of storage1 to RG1.

Which property should you modify?

A) kind (Correct Answer)
B) scope
C) sku

D) location

Explanation

Correct Answer: A ?

Community Discussion

Question #1092

You have an Azure subscription that contains a resource group named RG1.

You plan to create a storage account named storage1.

You have a Bicep file named File1.

You need to modify File1 so that it can be used to automate the deployment of storage1 to RG1.

Which property should you modify?

A) kind (Correct Answer)
B) scope
C) sku
D) location

Explanation

Correct Answer:
A

Community Discussion

The answer is scope. We would use scope to target the resource group for storage account. https://ochzhen.com/blog/create-resource-group-azure-bicep

I cross checked, and is scope. Location is actually Geo Location, not resource location.

I cross checked, and is scope. Location is actually Geo Location, not resource location.

Selected Answer: B

kind, sku and location are required https://learn.microsoft.com/en-us/azure/templates/microsoft.storage/storageaccounts?pivots=deployment-language-bicep#storageaccounts kind: Specify the type of script. Currently, Azure PowerShell and Azure CLI scripts are supported. The values are AzurePowerShell and AzureCLI https://learn.microsoft.com/en-us/azure/azure-resource-manager/bicep/deployment-script-bicep#sample-bicep-files

Selected Answer: B

The correct answer is B. scope. Here's why: scope property explicitly specifies the resource group where the storage account will be deployed. It's essential to align this with the desired target resource group, RG1, in this case. kind property already indicates the type of resource being deployed (a storage account), so it doesn't need alteration. sku property defines the performance and pricing tier, but it's not directly related to deployment targeting. location property specifies the Azure region for deployment, but it can be set as a variable or input parameter, not necessarily within the scope property itself. To ensure successful deployment of storage1 to RG1, modify the scope property in File1 to reference RG1

SecExams

Question #1093

SecExams

HOTSPOT

-

Your company purchases a new Azure subscription.

You create a file named Deploy.json as shown in the following exhibit.

SecExams

```
{
  "$schema": "https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",
  "contentVersion": "1.0.0.0",
  "parameters": {},
  "variables": {},
  "resources": [
    {
      "type": "Microsoft.Resources/resourceGroups",
      "apiVersion": "2018-05-01",
      "location": "eastus",
      "name": "[concat('RG', copyIndex())]",
      "copy": {
      "name": "copy",
      "count": 3
      }
    },
    {
      "type": "Microsoft.Resources/deployments",
      "apiVersion": "2021-04-01",
      "name": "lockDeployment",
      "resourceGroup": "RG1",
       "dependsOn": ["[resourceId('Microsoft.Resources/resourceGroups/', 'RG1')]"],
      "properties": {
        "mode": "Incremental",
        "template": {
          "$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",
          "contentVersion": "1.0.0.0",
          "parameters": {},
          "variables": {},
          "resources": [
            {
              "type": "Microsoft.Authorization/locks",
              "apiVersion": "2016-09-01",
              "name": "rgLock",
              "properties": {
                "level": "CanNotDelete"
              }
            }
          ]
        }
      }
    },
    {
      "type": "Microsoft.Resources/deployments",
      "apiVersion": "2021-04-01",
      "name": "lockDeployment",
      "resourceGroup": "RG2",
       "dependsOn": ["[resourceId('Microsoft.Resources/resourceGroups/', 'RG2')]"],
      "properties": {
        "mode": "Incremental",
        "template": {
          "$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",
          "contentVersion": "1.0.0.0",
          "parameters": {},
          "variables": {},
          "resources": [
            {
              "type": "Microsoft.Authorization/locks",
              "apiVersion": "2016-09-01",
              "name": "rgLock",
              "properties": {
                "level": "ReadOnly"
              }
            }
          ]
        }
      }
    }
  ],
  "outputs": {}
}
```

You connect to the subscription and run the following cmdlet.

New-AzDeployment -Location westus -TemplateFile “deploy.json”

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
You can deploy a virtual machine to RG1.	○	○
You can deploy a virtual machine to RG2.	○	○
You can manually create a resource group named RG3.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can deploy a virtual machine to RG1.	◉	○
You can deploy a virtual machine to RG2.	○	◉
You can manually create a resource group named RG3.	◉	○

Community Discussion

SecExams

Question #1094

SecExams

HOTSPOT

-

Your company purchases a new Azure subscription.

You create a file named Deploy.json as shown in the following exhibit.

SecExams

```
{
  "$schema": "https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",
  "contentVersion": "1.0.0.0",
  "parameters": {},
  "variables": {},
  "resources": [
    {
      "type": "Microsoft.Resources/resourceGroups",
      "apiVersion": "2018-05-01",
      "location": "eastus",
      "name": "[concat('RG', copyIndex())]",
      "copy": {
      "name": "copy",
      "count": 3
      }
    },
    {
      "type": "Microsoft.Resources/deployments",
      "apiVersion": "2021-04-01",
      "name": "lockDeployment",
      "resourceGroup": "RG1",
       "dependsOn": ["[resourceId('Microsoft.Resources/resourceGroups/', 'RG1')]"],
      "properties": {
        "mode": "Incremental",
        "template": {
          "$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",
          "contentVersion": "1.0.0.0",
          "parameters": {},
          "variables": {},
          "resources": [
            {
              "type": "Microsoft.Authorization/locks",
              "apiVersion": "2016-09-01",
              "name": "rgLock",
              "properties": {
                "level": "CanNotDelete"
              }
            }
          ]
        }
      }
    },
    {
      "type": "Microsoft.Resources/deployments",
      "apiVersion": "2021-04-01",
      "name": "lockDeployment",
      "resourceGroup": "RG2",
       "dependsOn": ["[resourceId('Microsoft.Resources/resourceGroups/', 'RG2')]"],
      "properties": {
        "mode": "Incremental",
        "template": {
          "$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",
          "contentVersion": "1.0.0.0",
          "parameters": {},
          "variables": {},
          "resources": [
            {
              "type": "Microsoft.Authorization/locks",
              "apiVersion": "2016-09-01",
              "name": "rgLock",
              "properties": {
                "level": "ReadOnly"
              }
            }
          ]
        }
      }
    }
  ],
  "outputs": {}
}
```

You connect to the subscription and run the following cmdlet.

New-AzDeployment -Location westus -TemplateFile “deploy.json”

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
You can deploy a virtual machine to RG1.	○	○
You can deploy a virtual machine to RG2.	○	○
You can manually create a resource group named RG3.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
You can deploy a virtual machine to RG1.	◉	○
You can deploy a virtual machine to RG2.	○	◉
You can manually create a resource group named RG3.	◉	○

Community Discussion

YNY The deployment creates 3 RGs called RG0, RG1, RG2 as the index is 0-based. You can deploy to RG1 as the lock is delete. You can't deploy to RG2 as the lock is read-only, hence it can't be modified.

YNY is correct

Index value starts with 0. So the ARM template is creating RG01, RG1, and RG2. Hence, the answer to the third one is YES. https://learn.microsoft.com/en-us/azure/azure-resource-manager/templates/copy-resources

Thanks for the link! It says, though, that the count for the index value starts at 0 - so the resource groups created here are RG0, RG1 and RG2. RG3 can be created manually afterwards.

Thanks for the link! It says, though, that the count for the index value starts at 0 - so the resource groups created here are RG0, RG1 and RG2. RG3 can be created manually afterwards.

SecExams

Question #1095

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group	Location
RG1	Resource group	*Not applicable*	Central US
RG2	Resource group	*Not applicable*	West US
VMSS1	Virtual machine scale set	RG2	West US
Proximity1	Proximity placement group	RG1	West US
Proximity2	Proximity placement group	RG2	Central US
Proximity3	Proximity placement group	RG1	Central US

You need to configure a proximity placement group for VMSS1.

Which proximity placement groups should you use?

A) Proximity2 only

B) Proximity1, Proximity2, and Proximity3
C) Proximity1 only (Correct Answer)
D) Proximity1 and Proximity3 only

Explanation

Correct Answer: C ?

Community Discussion

Question #1096

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group	Location
RG1	Resource group	*Not applicable*	Central US
RG2	Resource group	*Not applicable*	West US
VMSS1	Virtual machine scale set	RG2	West US
Proximity1	Proximity placement group	RG1	West US
Proximity2	Proximity placement group	RG2	Central US
Proximity3	Proximity placement group	RG1	Central US

You need to configure a proximity placement group for VMSS1.

Which proximity placement groups should you use?

A) Proximity2 only
B) Proximity1, Proximity2, and Proximity3
C) Proximity1 only (Correct Answer)
D) Proximity1 and Proximity3 only

Explanation

Correct Answer:
C

Community Discussion

Answer is correct, Proximity 1 only because they have the same location in West US.

Selected Answer: C

To get VMs as close as possible, achieving the lowest possible latency, you should deploy them within a proximity placement group. A proximity placement group is a logical grouping used to make sure that Azure compute resources are physically located close to each other. Proximity placement groups are useful for workloads where low latency is a requirement.

Answer C is correct, as VMSS1 is in the proximity of Proximity1

Selected Answer: C

as MS -> A proximity placement group is a logical grouping used to make sure that Azure compute resources are physically located close to each other. https://learn.microsoft.com/en-us/azure/virtual-machines/windows/proximity-placement-groups-portal

SecExams

Question #1097

You have an Azure subscription.

You plan to migrate 50 virtual machines from VMware vSphere to the subscription.

You create a Recovery Services vault.

What should you do next?

A) Configure an extended network.
B) Create a recovery plan.
C) Deploy an Open Virtualization Application (OVA) template to vSphere.
D) Configure a virtual network. (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #1098

You have an Azure subscription.

You plan to migrate 50 virtual machines from VMware vSphere to the subscription.

You create a Recovery Services vault.

What should you do next?

A) Configure an extended network.
B) Create a recovery plan.
C) Deploy an Open Virtualization Application (OVA) template to vSphere.
D) Configure a virtual network. (Correct Answer)

Explanation

Correct Answer:
D

Community Discussion

Selected Answer: D

Correct Answer (D) - In order to migrate 50 VMs to Azure using Azure Site Recovery, one needs: - Recovery Service Vault (which is created) - Configure virtual network - configure extended network (next step after)

The most appropriate next step after creating a Recovery Services vault, given the options, would be: C. Deploy an Open Virtualization Application (OVA) template to vSphere. This step involves deploying the Azure Site Recovery Configuration Server as an OVA template on the vSphere environment. The configuration server is a key component of the Site Recovery process, and it facilitates the discovery of VMs, manages replication, and coordinates recovery operations. Once this is deployed and configured, you can then proceed to set up replication, and after that, create and configure recovery plans.

Correct, see this reference: https://learn.microsoft.com/en-us/azure/site-recovery/tutorial-prepare-azure

Correct, see this reference: https://learn.microsoft.com/en-us/azure/site-recovery/tutorial-prepare-azure

The correct answer is C - To migrate VMware vSphere VMs to Azure, you need to set up an Azure Migrate appliance that is used for discovery, assessment, and migration of VMware VMs. You can set up the appliance using an OVA template that you download from the Azure portal and import into VMware vSphere. The other options are not correct because: Configuring an extended network is not required for migration. You only need to set up a virtual network that Azure VMs will join after migration. Creating a recovery plan is not necessary for migration. A recovery plan is used to orchestrate failover and recovery of replicated machines in Azure Site Recovery. Configuring a virtual network is not the next step after creating a Recovery Services vault. You need to set up the Azure Migrate appliance first, and then configure the replication settings, which include the virtual network. https://learn.microsoft.com/en-us/azure/migrate/tutorial-migrate-vmware

SecExams

Question #1099

SecExams

HOTSPOT
-

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location	Peered with
VNet1	East US	VNet2
VNet2	East US	VNet1

Each virtual network has 50 connected virtual machines.

You need to implement Azure Bastion. The solution must meet the fallowing requirements:

- Support host scaling.
- Support uploading and downloading files.
- Support the virtual machines on both VNet1 and VNet2.
- Minimize the number of addresses on the Azure Bastion subnet.

How should you configure Azure Bastion? To answer, select the options in the answer area.

NOTE: Each correct answer is worth one point.

SecExams

Answer Area

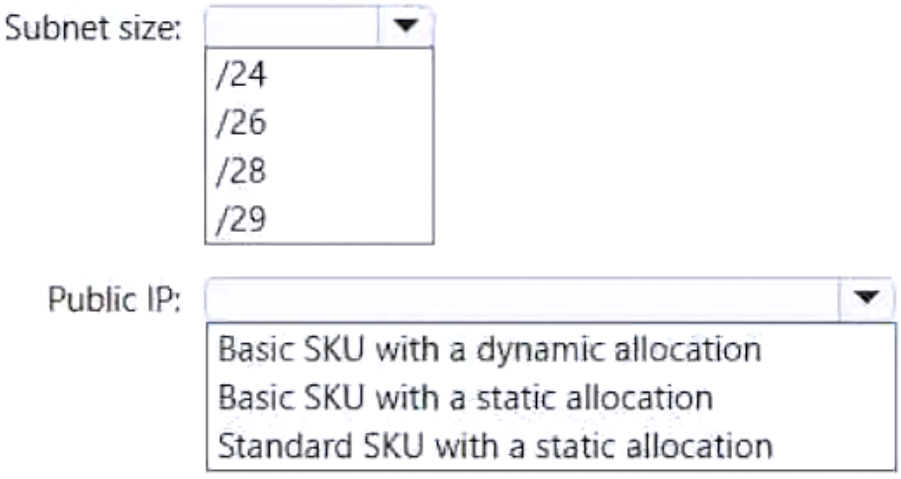

SecExams

Explanation

Correct Answer:

Answer Area

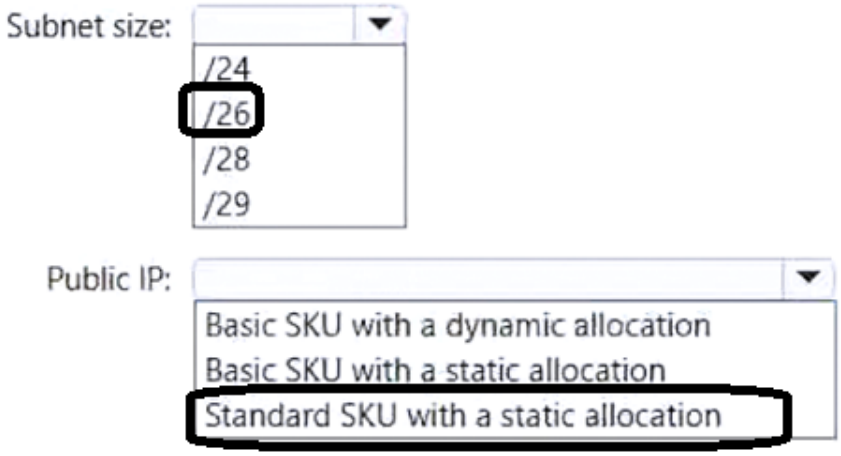

Community Discussion

Subnet size: /26 The recommended subnet size for Azure Bastion is /26 "Subnet size must be /26 or larger (/25, /24 etc.)." "For host scaling, a /26 or larger subnet is

recommended. Using a smaller subnet space limits the number of scale units" "For Azure Bastion resources deployed on or after November 2, 2021, the minimum AzureBastionSubnet size is /26 or larger (/25, /24, etc.)" Public IP: Standard SKU with a static allocation Only Azure Bastion Standard SKU supports 'Host scaling' and 'Upload or download files'. Besides that, Public IP address recomended by Microsoft must be Standard and Static References: https://learn.microsoft.com/en-us/azure/bastion/configuration-settings https://learn.microsoft.com/en-us/azure/bastion/bastion-faq

I correct myself. One Bastion only supports a max of 50 connections anyways, so a /26 will do :) Sorry for the confusion!

I correct myself. One Bastion only supports a max of 50 connections anyways, so a /26 will do :) Sorry for the confusion!

Subnet size: /24. The problem with /26 is that it provides only 64 IPs (minus the 5? that Azure reserves). There are 50 VMs on each VNET that must be supported. If we assume that means with simultaneous connections, 100 IPs are required and /26 is too small.

1- you need subnet size /25 = 128IPs that can host upto 126 vms since /25 is not in the answer box then then best answer here is /24=256 which can host upto 254 vms. 2- sku should be standard with static allocation

SecExams

Question #1100

SecExams

HOTSPOT
-

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location	Peered with
VNet1	East US	VNet2
VNet2	East US	VNet1

Each virtual network has 50 connected virtual machines.

You need to implement Azure Bastion. The solution must meet the fallowing requirements:

- Support host scaling.
- Support uploading and downloading files.
- Support the virtual machines on both VNet1 and VNet2.
- Minimize the number of addresses on the Azure Bastion subnet.

How should you configure Azure Bastion? To answer, select the options in the answer area.

NOTE: Each correct answer is worth one point.

SecExams

Answer Area

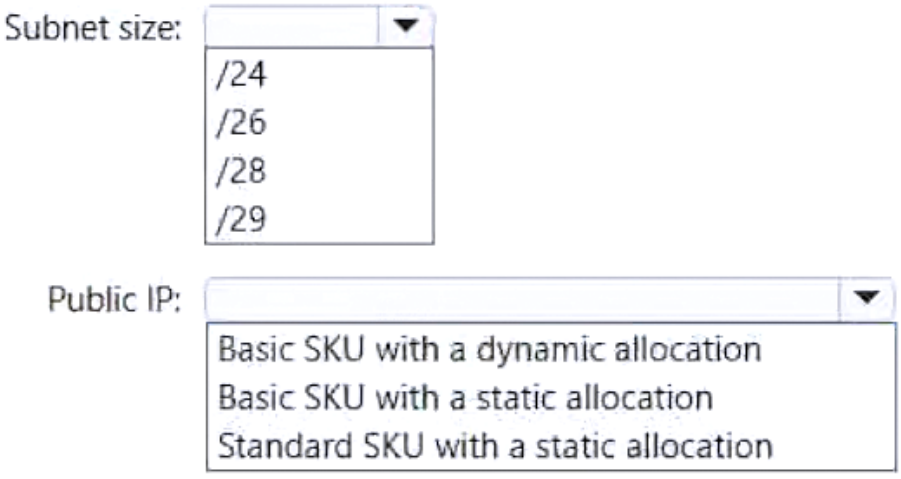

SecExams

Explanation

Correct Answer:

Answer Area

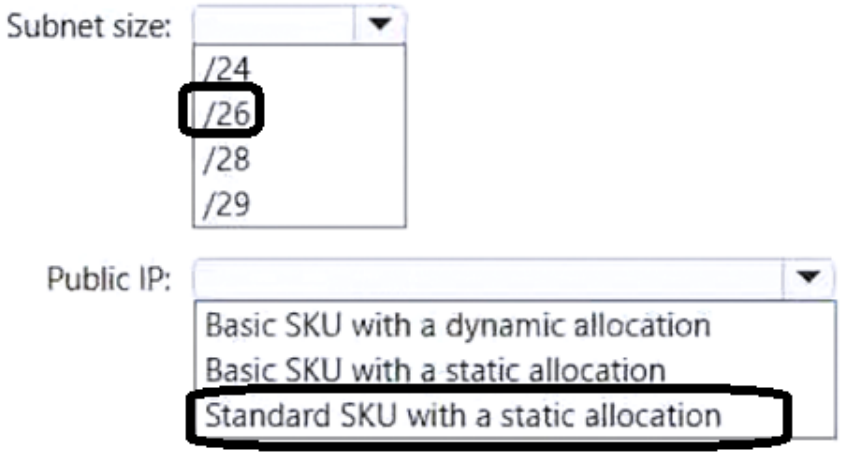

Community Discussion

Question #1101

SecExams

HOTSPOT

-

You have an Azure subscription that contains two storage accounts named contoso101 and contoso102.

The subscription contains the virtual machines shown in the following table.

Name	Connected to	Public IP address SKU
VM1	VNet1/Subnet1	Basic
VM2	VNet1/Subnet2	Standard

VNet1 has service endpoints configured as shown in the Service endpoints exhibit. (Click the Service endpoints tab.)

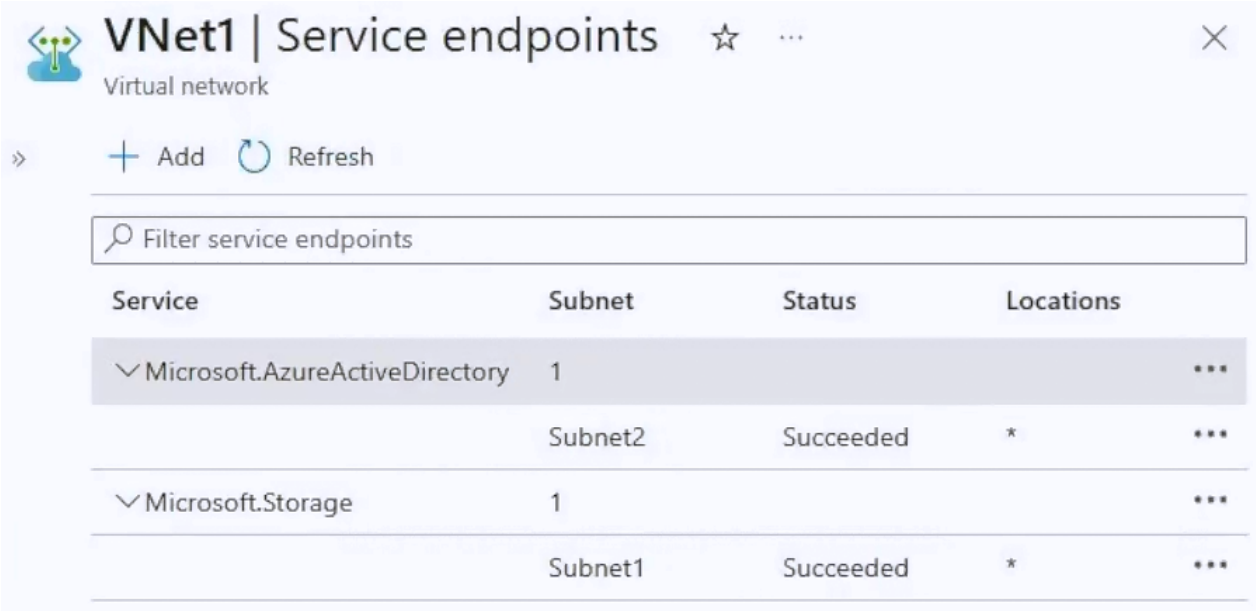

The Microsoft.Storage service endpoint has the service endpoint policy shown in the Microsoft.Storage exhibit. (Click the Microsoft.Storage tab.)

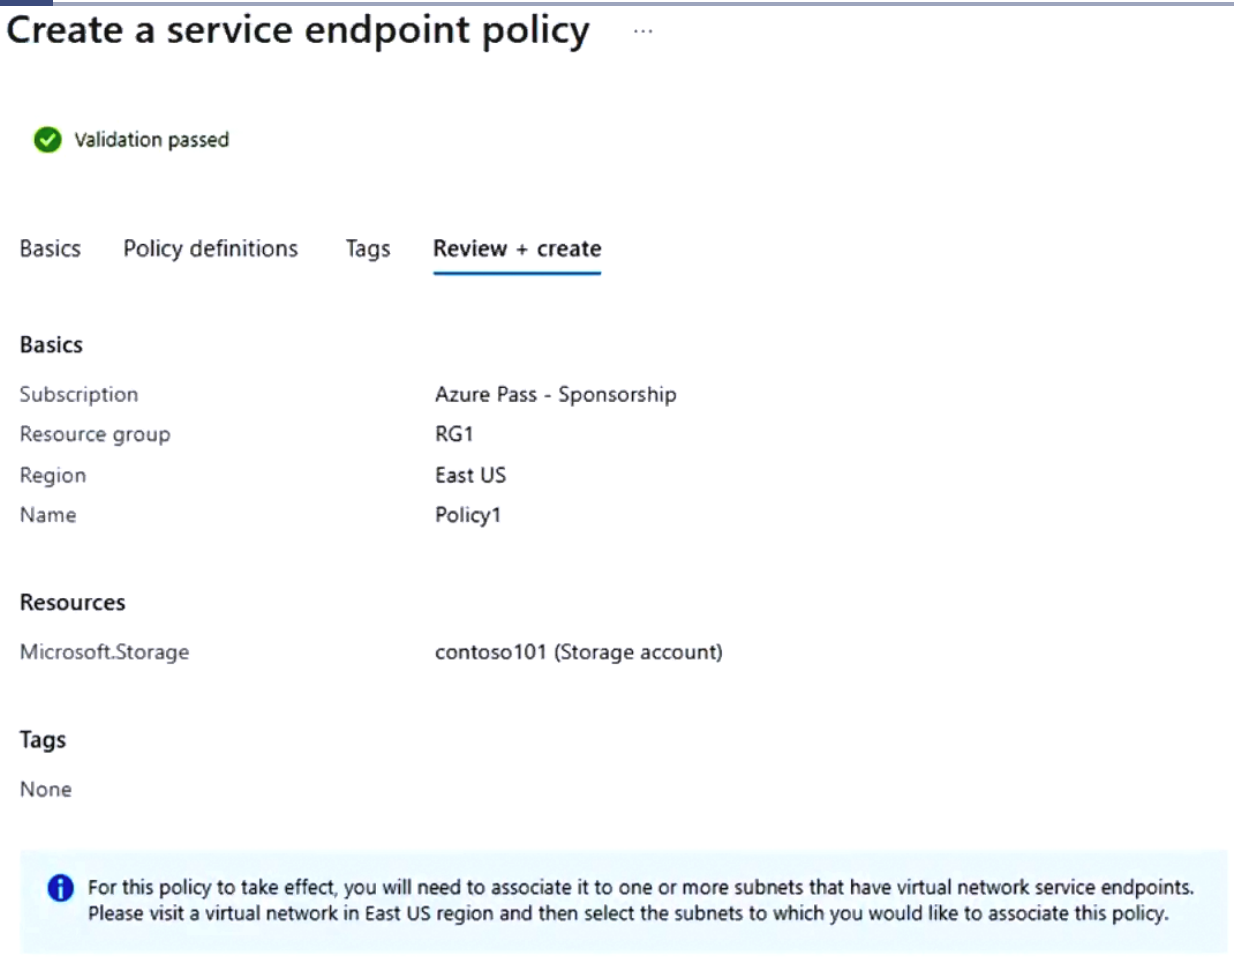

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
VM1 can access contoso102.	○	○
VM2 can access contoso101.	○	○
VM2 uses a private IP address to access Azure AD.	○	○

Explanation

Correct Answer:

Answer Area

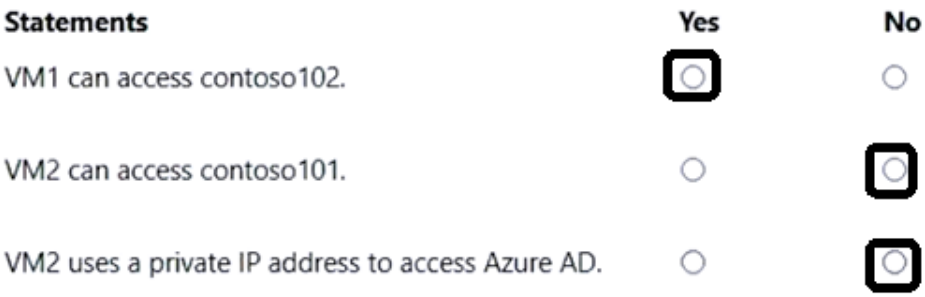

Statements	Yes	No
VM1 can access contoso102.	○	○
VM2 can access contoso101.	○	○
VM2 uses a private IP address to access Azure AD.	○	○

Community Discussion

Ok, I'm the first to comment, yeah! Not a reason to be very cheerful, as I've not worked with service endpoints in practice yet... But well, here's my take on this: NNY - N: The service endpoint policy only covers storage account contoso101, not contoso102 (in subnet2). In my interpretation that means that contoso102 is not accessible from VM1 (subnet1). - N: The service endpoint is only available for clients from subnet1, VM2 is in subnet2 and therefore doesn't have access. - Y: There's a service endpoint for Azure AD for subnet2, which VM2 can use, therefore a private IP address is sufficient to reach the service. (I am VERY much open to feedback and corrections on all this!)

NYN. N: VM1 in VNET1/Subnet1 traffic is limited by the endpoint policy to ONLY the constoso101.(see Ref1) Y: VM2 in subnet 2, there's no sevice enpoint for subnet2 so it will reach out to it through the service Public IP, there's no mention that storage accounts are configuired to limit traffic to the VNET1 address space so we assume it's not configured. N: it uses public IP, Microsoft.AzureActiveDirectory is used only for supporting data late storages not for connecting to AzureAD/Entra doesn't support Service endpoints. Ref1: https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoint-policies-overview#configuration Ref2: https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoints-overview#limitations

YNY https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoints-overview Going to give it shot. Y Storage is generally accessible unless something restricts it, no service end point has been created on storage 1 so its public ip

should still be accessible since there is no indication its been restricted. Creating the end point would have since you have to close the public ip to do so. N Since resource has service endpoint established its public access is restricted and since the service endpoint is scoped to subnet2 VMs in subnet1 cant access it. Y Since Azure AD Service endpoint is created for this resource and its scoped to subnet2 vms on subnet2 can access that resource as if it was in it's vnet using private endpoint.

Answer: Y,N,Y

Answer: Y,N,Y

SecExams

Question #1102

SecExams

HOTSPOT

-

You have an Azure subscription that contains two storage accounts named contoso101 and contoso102.

The subscription contains the virtual machines shown in the following table.

Name	Connected to	Public IP address SKU
VM1	VNet1/Subnet1	Basic
VM2	VNet1/Subnet2	Standard

VNet1 has service endpoints configured as shown in the Service endpoints exhibit. (Click the Service endpoints tab.)

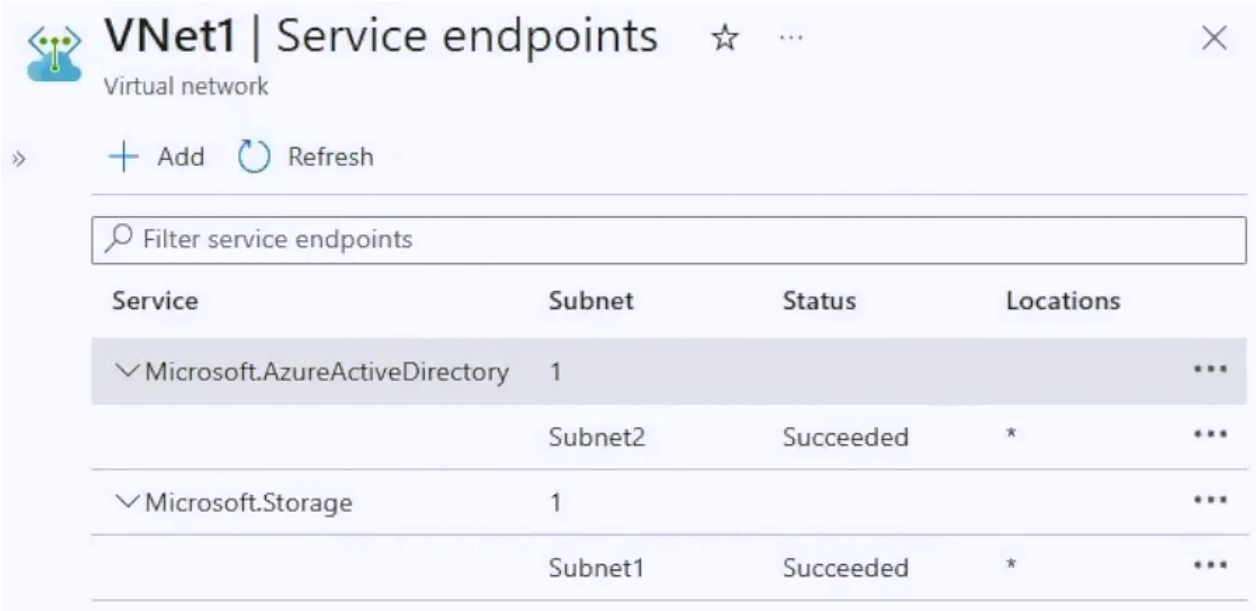

The Microsoft.Storage service endpoint has the service endpoint policy shown in the Microsoft.Storage exhibit. (Click the Microsoft.Storage tab.)

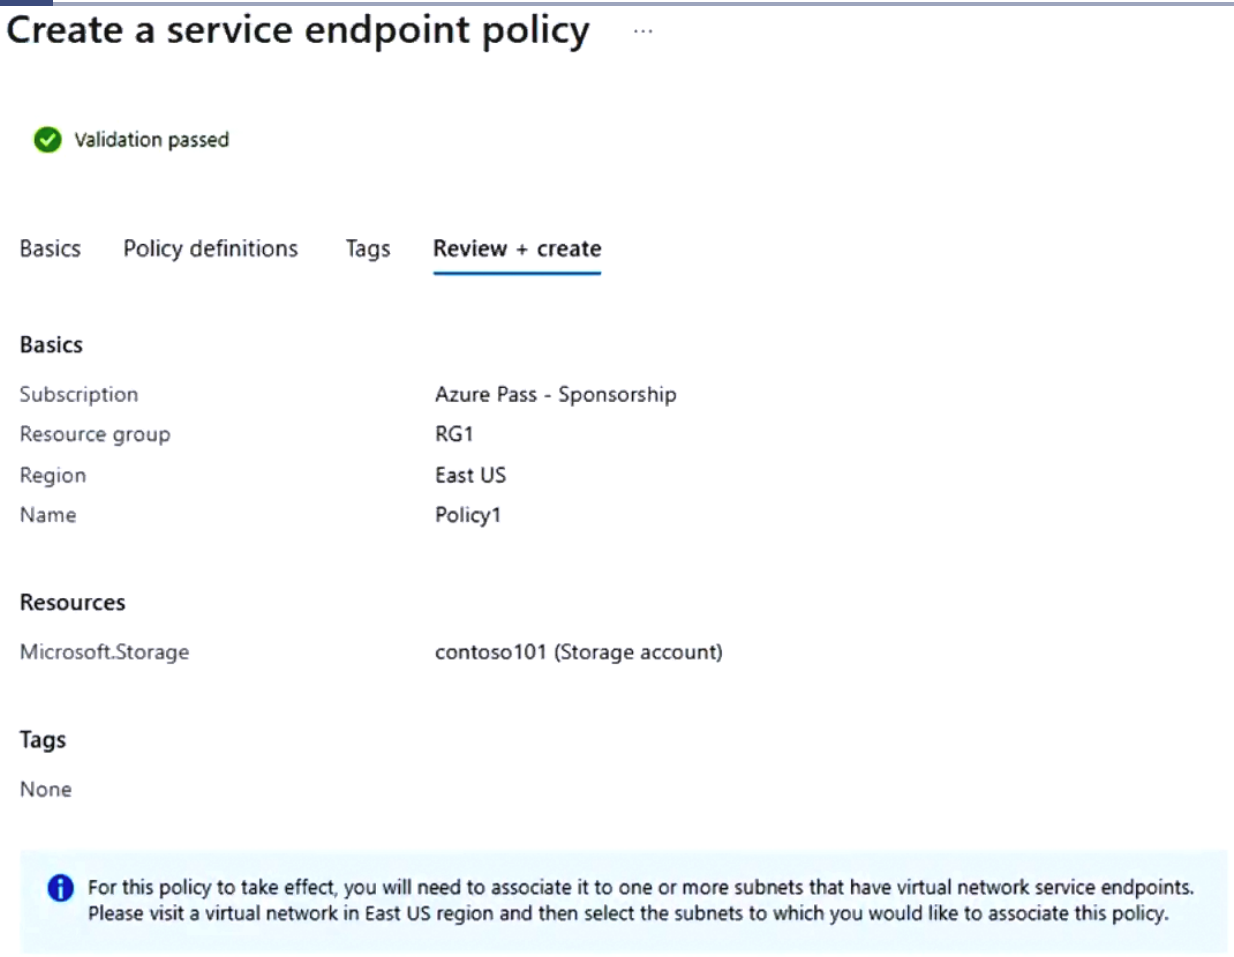

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
VM1 can access contoso102.	○	○
VM2 can access contoso101.	○	○
VM2 uses a private IP address to access Azure AD.	○	○

Explanation

Correct Answer:

Answer Area

Community Discussion

Question #1103

You have an Azure subscription that contains multiple virtual machines in the West US Azure region.

You need to use Traffic Analytics in Azure Network Watcher to monitor virtual machine traffic.

Which two resources should you create? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

A) a Log Analytics workspace (Correct Answer)
B) an Azure Monitor workbook
C) a storage account (Correct Answer)
D) a Microsoft Sentinel workspace
E) a Data Collection Rule (DCR) in Azure Monitor

Explanation

Correct Answer:
AC

Community Discussion

Selected Answer: AE

To use Traffic Analytics in Azure Network Watcher to monitor virtual machine traffic, you need to create the following resources: A. A Log Analytics workspace - Traffic Analytics requires a Log Analytics workspace to store and analyze network traffic data. E. A Data Collection Rule (DCR) in Azure Monitor - You need to create a Data Collection Rule within Azure Monitor to specify what data should be collected and sent to the Log Analytics workspace, including the network traffic data for Traffic Analytics. So, options A and E are the correct answers.

Selected Answer: AC

To use Traffic Analytics in Azure Network Watcher, you need to create a Log Analytics workspace and a storage account. A Log Analytics workspace is a cloud-based repository that collects and stores data from various sources, such as NSG flow logs. A storage account is a container that provides a unique namespace to store and access your data objects in Azure Storage. You need to enable NSG flow logs and configure them to send data to both the Log Analytics workspace and the storage account. Traffic Analytics analyzes the NSG flow logs and provides insights into traffic flow in your Azure cloud.

Selected Answer: AC

Read the questions guys, we are using Network Watcher to log network traffic between VMs, therefore you do not need a DCR in Azure Monitor as the question does not specify which type of data it is looking for. You just need a storage account to store traffic logs and then Log Analytics workplace to analyze the data.

Selected Answer: AC

Traffic analytics requires the following prerequisites: - An Azure Log Analytics workspace with read and write access - NSG flow logs enabled for the network security groups you want to monitor or VNet flow logs enabled for the virtual network you want to monitor. To enhttps://www.secexams.com/exams/microsoft/az-104/view/54/#able one of the flow logs you need a storage account where they can store the logs so Traffic analitycs

aggregates them later and pushes them to the workspace https://learn.microsoft.com/en-us/azure/network-watcher/traffic-analytics#prerequisites

Selected Answer: AC

Tested this. Before you can create a Data Collection Rule you need to create an NSG Flow Log. The NSG Flow Log requires you to create a new storage account. It would not let me use the existing one I am using for VMs, files, blobs etc.

Question #1104

You have an Azure subscription that contains multiple virtual machines in the West US Azure region.

You need to use Traffic Analytics in Azure Network Watcher to monitor virtual machine traffic.

Which two resources should you create? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

A) a Log Analytics workspace (Correct Answer)
B) an Azure Monitor workbook
C) a storage account (Correct Answer)
D) a Microsoft Sentinel workspace
E) a Data Collection Rule (DCR) in Azure Monitor

Explanation

Correct Answer: AC ?

Community Discussion

Question #1105

You have an Azure subscription that contains a virtual machine named VM1.

You plan to deploy an Azure Monitor alert rule that will trigger an alert when CPU usage on VM1 exceeds 80 percent.

You need to ensure that the alert rule sends an email message to two users named User1 and User2.

What should you create for Azure Monitor?

A) an action group (Correct Answer)
B) a mail-enabled security group
C) a distribution group
D) a Microsoft 365 group

Explanation

Correct Answer:
A

Community Discussion

Selected Answer: A

Correct. "Alerts consist of: - Action groups - Alert conditions - User response - Alert processing rules" https://learn.microsoft.com/en-us/azure/azure-monitor/alerts/alerts-overview

Selected Answer: A

A s correct

It was in EXAM, thanks Examtopic.

Selected Answer: A

option A - Action Group

Question #1106

You have an Azure subscription that contains a virtual machine named VM1.

You plan to deploy an Azure Monitor alert rule that will trigger an alert when CPU usage on VM1 exceeds 80 percent.

You need to ensure that the alert rule sends an email message to two users named User1 and User2.

What should you create for Azure Monitor?

A) an action group (Correct Answer)
B) a mail-enabled security group
C) a distribution group
D) a Microsoft 365 group

Explanation

Correct Answer: A ?

Community Discussion

Question #1107

SecExams

HOTSPOT

-

You have a Microsoft Entra tenant that contains the groups shown in the following table.

Name	Type	Has an assigned license
Group1	Security	Yes
Group2	Security	No
Group3	Microsoft 365	Yes
Group4	Microsoft 365	No

The tenant contains the users shown in the following table.

Name	Member of	Has a direct assigned license
User1	*None*	Yes
User2	Group1	No
User3	Group4	Yes
User4	*None*	No

Which users and groups can you delete? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

Users:

- User4 only
- User1 and User4 only
- User2 and User4 only
- User1, User2, User3, and User4

Groups:

- Group2 only
- Group2 and Group3 only
- Group2 and Group4 only
- Group1, Group2, Group3, and Group4

SecExams

Explanation

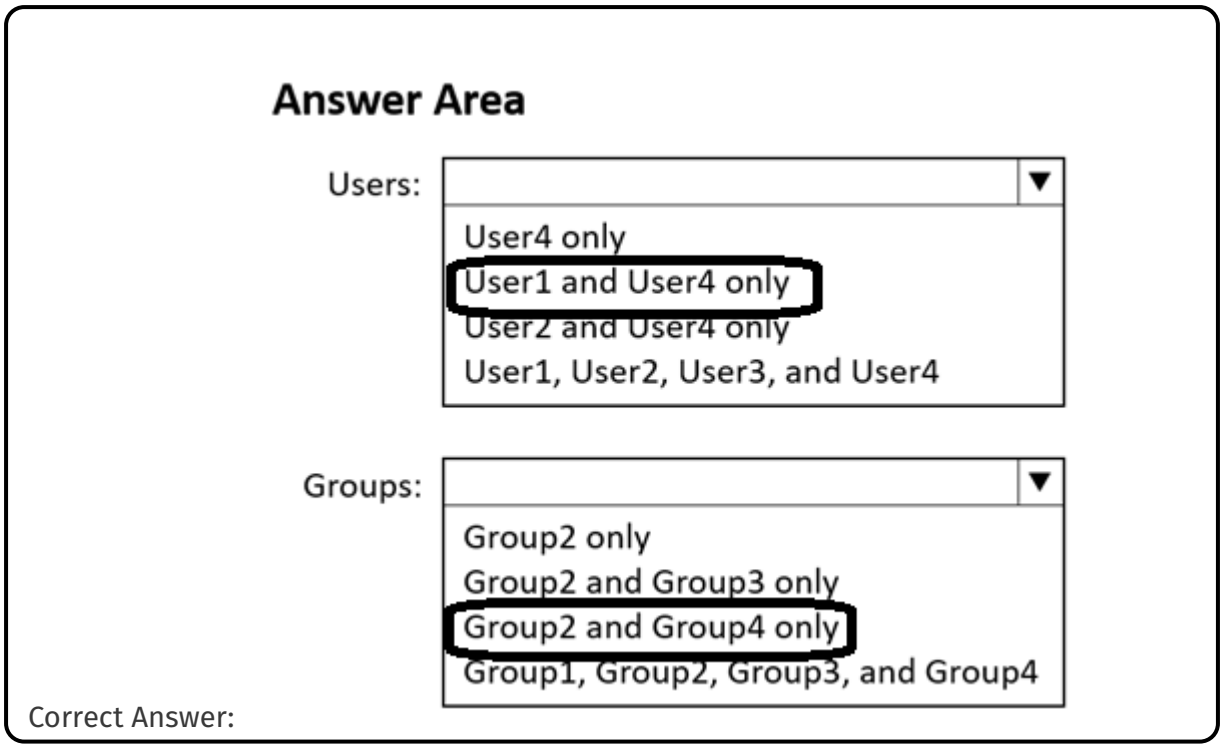

Correct Answer:

Community Discussion

Question #1108

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Location
VM1	Virtual machine	East US
storage1	Storage account	West US

You need to ensure that data transfers between storage1 and VM1 do NOT traverse the internet

What should you configure for storage1?

A) data protection

B) a private endpoint (Correct Answer)

C) Public network access in the Firewalls and virtual networks settings

D) a shared access signature (SAS)

Explanation

Correct Answer: B ?

Community Discussion

SecExams

Question #1109

SecExams

HOTSPOT

-

You have an Azure Storage account named contoso2024 that contains the resources shown in the following table.

Name	Type	Contents
container1	Blob container	File1
share1	Azure Files share	File2

You have users that have permissions for contoso2024 as shown in the following table.

Name	Permission
User1	Reader role
User2	Storage Account Contributor role
User3	Has an access key for contoso2024

The contoso2024 account is configured as shown in the following exhibit.

SecExams

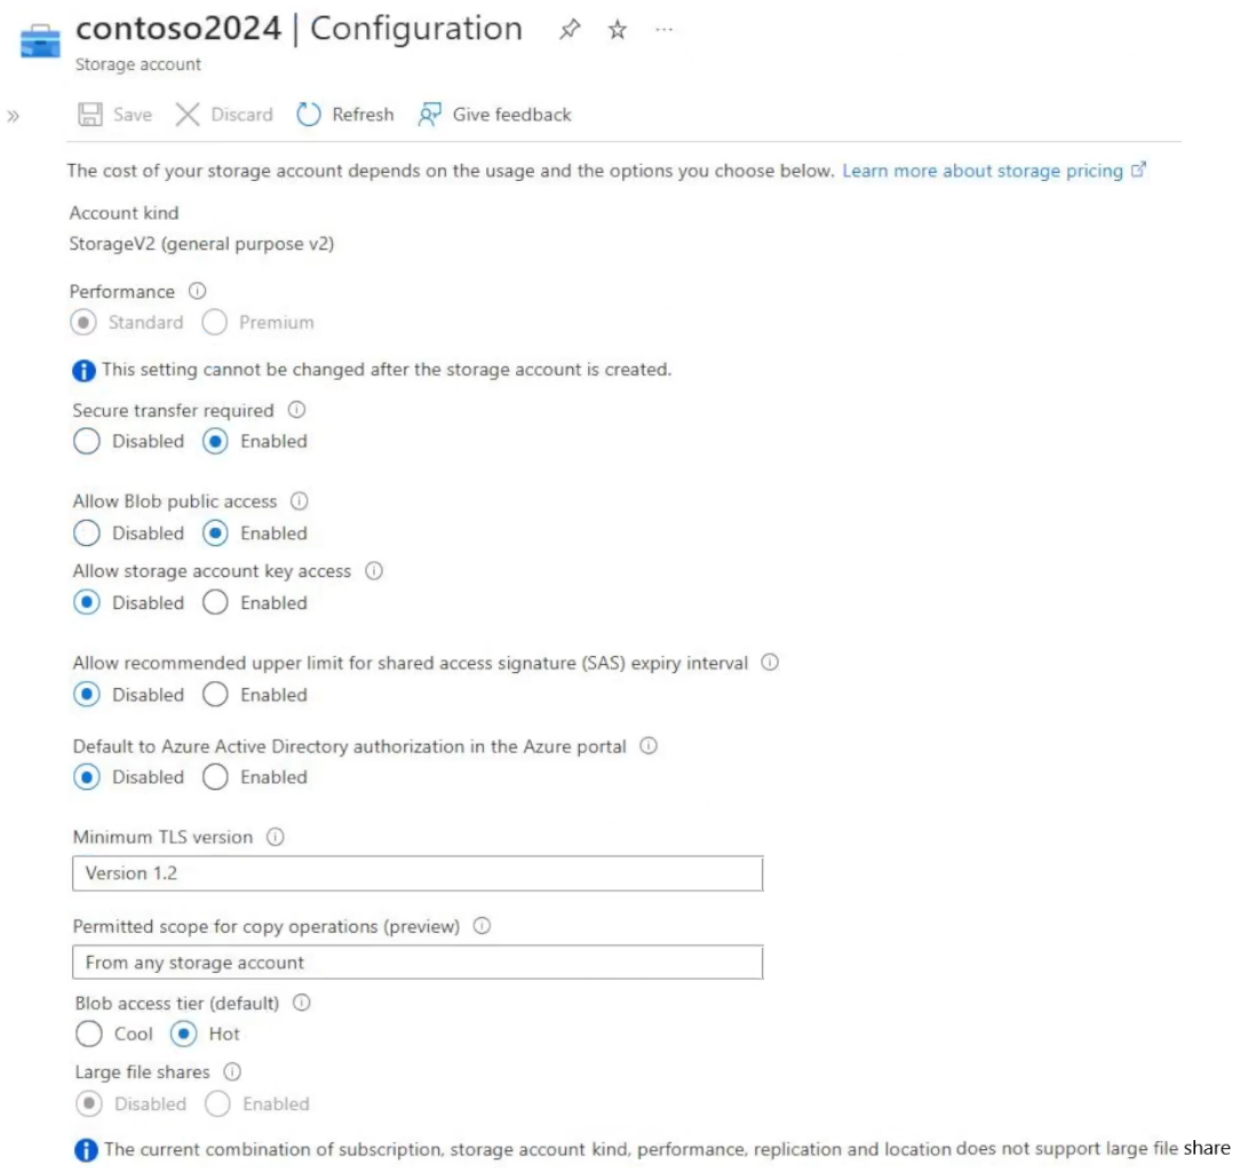

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
User1 can read File1.	○	○
User2 can read File2.	○	○
User3 can read File1 and File2.	○	○

Explanation

Correct Answer:

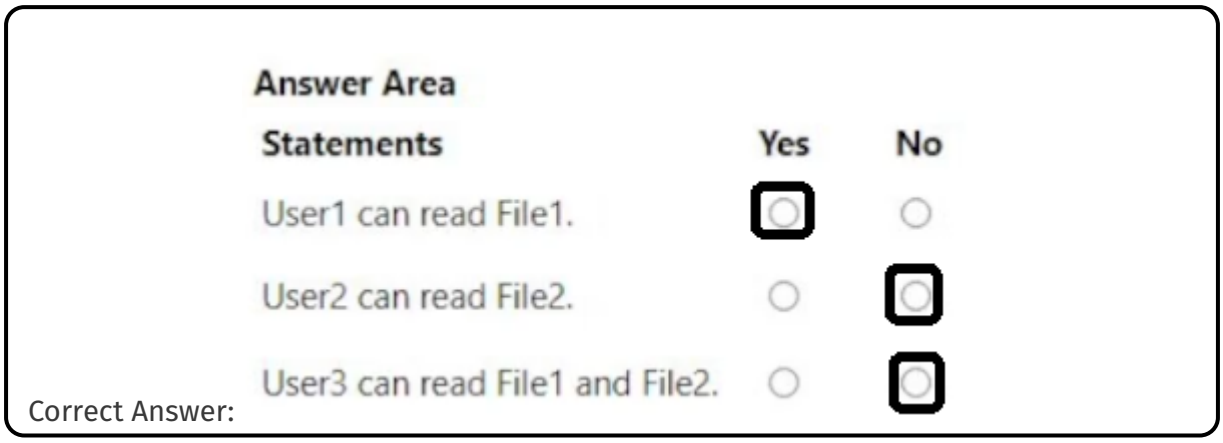

Community Discussion

SecExams

Question #1110

SecExams

HOTSPOT

-

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Subnet	Subnet-associated network security group (NSG)	Peered with
VNet1	Subnet1	NSG1	VNet2
VNet2	Subnet2	NSG2	VNet1

The subscription contains the virtual machines shown in the following table.

Name	Connected to
VM1	Subnet1
VM2	Subnet2

The subscription contains the Azure App Service web apps shown in the following table.

Name	Description
WebApp1	Uses the Premium pricing tier and has virtual network integration with VNet1
WebApp2	Uses the Isolated pricing tier and is deployed to Subnet2

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

Statements	Yes	No
WebApp1 can communicate with VM2.	○	○
NSG1 controls inbound traffic to WebApp1.	○	○
WebApp2 can communicate with VM1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
WebApp1 can communicate with VM2.	◉	○
NSG1 controls inbound traffic to WebApp1.	○	◉
WebApp2 can communicate with VM1.	○	◉

Community Discussion

Question #1111

SecExams

HOTSPOT

-

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Subnet	Subnet-associated network security group (NSG)	Peered with
VNet1	Subnet1	NSG1	VNet2
VNet2	Subnet2	NSG2	VNet1

The subscription contains the virtual machines shown in the following table.

Name	Connected to
VM1	Subnet1
VM2	Subnet2

The subscription contains the Azure App Service web apps shown in the following table.

Name	Description
WebApp1	Uses the Premium pricing tier and has virtual network integration with VNet1
WebApp2	Uses the Isolated pricing tier and is deployed to Subnet2

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

Statements	Yes	No
WebApp1 can communicate with VM2.	○	○
NSG1 controls inbound traffic to WebApp1.	○	○
WebApp2 can communicate with VM1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
WebApp1 can communicate with VM2.	◉	○
NSG1 controls inbound traffic to WebApp1.	○	◉
WebApp2 can communicate with VM1.	○	◉

Community Discussion

YNN Point 1: Yes: Using virtual network integration enables your app to access: Resources in the virtual network you're integrated with. Resources in virtual networks peered to the virtual network your app is integrated with including global peering connections. Point 2: NO: Virtual network integration is used only to make outbound calls from your app into your virtual network Point 3: NO: There are some limitations with using virtual network integration: The feature isn't available for Isolated plan apps in an App Service Environment Reference: https://learn.microsoft.com/en-us/azure/app-service/overview-vnet-integration

YNY check https://learn.microsoft.com/en-us/azure/app-service/overview-vnet-integration

Agree with YNY, the Isolated tier only means that the Web App is hosted in a private, dedicated Azure environment rather than sharing the runtime environment with other customers (for shared plans) or dedicated which is running on... well... dedicated VM instances.

GitHub Copilot webapp1 can communicate with vm2: Yes Explanation: webapp1 is integrated with vnet1 and vnet1 is peered with vnet2, which vm2 is connected to. So, webapp1 can communicate with vm2. nsg1 controls inbound traffic to webapp1: No Explanation: nsg1 is associated with subnet1, not directly with webapp1. It controls the inbound traffic to the subnet1, not to the webapp1. webapp2 can communicate with vm1: Yes Explanation: webapp2 is deployed to subnet2 and subnet2 is in vnet2. vnet2 is peered with vnet1, which vm1 is connected to. So, webapp2 can communicate with vm1.

Your 3rd answer is wrong. It shoudl be "YES". Isolated apps does not need vnet intergation feature bcoz it is a Network-isolated application hosting , meaning the app is deployed into a subnet, which is inside vnet in this question. Since there is peering between vnet1 and vnet2, the app can communicate with a VM in the other vnet.

SecExams

Question #1112

You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Region	Resource group
RG1	Resource group	West Europe	*Not applicable*
RG2	Resource group	North Europe	*Not applicable*
Vault1	Recovery Services vault	West Europe	RG1

You create virtual machines in Subscription1 as shown in the following table.

Name	Resource group	Region	Operating system
VM1	RG1	West Europe	Windows Server 2022
VM2	RG1	North Europe	Windows Server 2022
VM3	RG2	West Europe	Windows Server 2022
VMA	RG1	West Europe	Ubuntu Server 20.04
VMB	RG1	North Europe	Ubuntu Server 20.04
VMC	RG2	West Europe	Ubuntu Server 20.04

You plan to use Vault1 for the backup of as many virtual machines as possible.

Which virtual machines can be backed up to Vault1?

A) VM1 only
B) VM3 and VMC only
C) VM1, VM2, VM3, VMA, VMB, and VMC
D) VM1, VM3, VMA, and VMC only (Correct Answer)
E) VM1 and VM3 only

Explanation

Correct Answer: D ?

Community Discussion

Question #1113

You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Region	Resource group
RG1	Resource group	West Europe	*Not applicable*
RG2	Resource group	North Europe	*Not applicable*
Vault1	Recovery Services vault	West Europe	RG1

You create virtual machines in Subscription1 as shown in the following table.

Name	Resource group	Region	Operating system
VM1	RG1	West Europe	Windows Server 2022
VM2	RG1	North Europe	Windows Server 2022
VM3	RG2	West Europe	Windows Server 2022
VMA	RG1	West Europe	Ubuntu Server 20.04
VMB	RG1	North Europe	Ubuntu Server 20.04
VMC	RG2	West Europe	Ubuntu Server 20.04

You plan to use Vault1 for the backup of as many virtual machines as possible.

Which virtual machines can be backed up to Vault1?

A) VM1 only
B) VM3 and VMC only
C) VM1, VM2, VM3, VMA, VMB, and VMC
D) VM1, VM3, VMA, and VMC only (Correct Answer)
E) VM1 and VM3 only

Explanation

Correct Answer:
D

Community Discussion

D: VM1, VM3, VMA, and VMC only Explanation: only the West Europe VMs: You need a vault in every Azure region that contains VMs you want to back up. You can't back up to a different region. Azure Backup supports application-consistent backups for both Windows and Linux VMs There is no restriction that prevents backups from being performed on a Recovery Services Vault located in another resource Group Reference: https://learn.microsoft.com/en-us/azure/virtual-machines/backup-recovery

Question #1114

You have an Azure subscription that contains an Azure container registry named ContReg1.

You enable the Admin user for ContReg1.

Which username can you use to sign in to ContReg1?

A) root
B) admin (Correct Answer)
C) administrator
D) ContReg1

Explanation

Correct Answer: B ?

Community Discussion

Selected Answer: B

When you enable the Admin user for an Azure Container Registry, the default username is admin. You'll use this username, along with the registry's generated password, to sign in to the container registry.

Question #1115

You have an Azure subscription that contains an Azure container registry named ContReg1.

You enable the Admin user for ContReg1.

Which username can you use to sign in to ContReg1?

A) root
B) admin (Correct Answer)
C) administrator
D) ContReg1

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: D

tested in LAB when you go to this Option in the Portal - next to the "Mark" is a Explanation Field and when you hover over it, it say -> the admin user is identical to the Name of the Container Registry. The Name of the Container Registry is ContReg1 therefore is the admin user ContReg1 and that means D

Selected Answer: B

https://learn.microsoft.com/en-us/azure/container-registry/container-registry-authentication?tabs=azure-cli#admin-account

B: admin Reference: https://learn.microsoft.com/en-us/azure/container-registry/container-registry-authentication?tabs=azure-cli#admin-account

Andreas_Czech is right. Tested in the portal: "If activated, you can use the registry name as username and admin user access key as password to docker login to your container registry."

Andreas_Czech is right. Tested in the portal: "If activated, you can use the registry name as username and admin user access key as password to docker login to your container registry."

Question #1116

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location
VNet1	West US
VNet2	Central Europe

You need to ensure that all the traffic between VNet1 and VNet2 traverses the Microsoft backbone network.

What should you configure?

A) a private endpoint
B) peering
C) Express Route (Correct Answer)
D) a route table

Explanation

Correct Answer:
C

Community Discussion

Selected Answer: B

The traffic between virtual machines in peered virtual networks uses the Microsoft backbone infrastructure. https://learn.microsoft.com/en-us/azure/virtual-network/virtual-network-peering-overview ExpressRoute private peering supports connectivity between multiple virtual networks. Although this behavior happens by default when linking virtual networks to the same ExpressRoute circuit, Microsoft doesn't recommend

this solution. To establish connectivity between virtual networks, VNet peering should be implemented instead for the best performance possible. https://learn.microsoft.com/en-us/azure/expressroute/virtual-network-connectivity-guidance

am i the only one who saw 'Microsoft backbone network' and instantly thought private endpoint

Selected Answer: A

a private endpoint: https://learn.microsoft.com/en-us/azure/azure-app-configuration/concept-private-endpoint

A - Private Endpoint

me too

SecExams

Question #1117

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location
VNet1	West US
VNet2	Central Europe

You need to ensure that all the traffic between VNet1 and VNet2 traverses the Microsoft backbone network.

What should you configure?

A) a private endpoint
B) peering
C) Express Route (Correct Answer)
D) a route table

Explanation

Correct Answer: C ?

Community Discussion

Question #1118

You have the Azure virtual networks shown in the following table.

Name	Address space	Subnet	Resource group Azure region
VNet1	10.11.0.0/16	10.11.0.0/17	West US
VNet2	10.11.0.0/17	10.11.0.0/25	West US
VNet3	10.10.0.0/22	10.10.1.0/24	East US
VNet4	192.168.16.0/22	192.168.16.0/24	North Europe

SecExams

Which virtual networks can you peer with VNet1?

A) VNet2, VNet3, and VNet4
B) VNet2 only (Correct Answer)
C) VNet3 and VNet4 only
D) VNet2 and VNet3 only

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: C

Vnet1 and Vnet2 overlap therefor the Vnet3 & Vnet4 is correct and should be able to peer together | Name | Address space | Subnet | Resource group | Azure region | | VNet1 | 10.11.0.0/16 | 10.11.0.0/17 | | West US | | VNet2 | 10.11.0.0/17 | 10.11.0.0/25 | | West US | | VNet3 | 10.10.0.0/22 | 10.10.1.0/24 | | East US | | VNet4 | 192.168.16.0/22 | 192.168.16.0/24 | | North Europe |

C - VNET 3 and VNET4

Selected Answer: C

C. 1 and 2 overlap so 3 and 4 only.

Selected Answer: C

VNet3 and VNet4 only. VNet2 range overlaps VNet1

Selected Answer: C

comment just to mark C

Question #1119

You have the Azure virtual networks shown in the following table.

Name	Address space	Subnet	Resource group Azure region
VNet1	10.11.0.0/16	10.11.0.0/17	West US
VNet2	10.11.0.0/17	10.11.0.0/25	West US
VNet3	10.10.0.0/22	10.10.1.0/24	East US
VNet4	192.168.16.0/22	192.168.16.0/24	North Europe

Which virtual networks can you peer with VNet1?

A) VNet2, VNet3, and VNet4
B) VNet2 only (Correct Answer)
C) VNet3 and VNet4 only
D) VNet2 and VNet3 only

Explanation

Correct Answer: B ?

Community Discussion

Question #1120

You have an Azure subscription.

You are creating a new Azure container instance that will have the following settings:

- Container name: cont1
- SKU: Standard
- OS type: Windows
- Networking type: Public
- Memory (GiB): 2.5
- Number of CPU cores: 2

You discover that the Private setting for Networking type is unavailable.

You need to ensure that cont1 can be configured to use private networking.

Which setting should you change?

A) Memory (GiB)
B) Networking type (Correct Answer)
C) Number of CPU cores
D) OS type
E) SKU

Explanation

Correct Answer:
B

Community Discussion

Selected Answer: D

D OS TYPE Currently https://learn.microsoft.com/en-us/azure/container-instances/media/container-instances-quickstart-portal/qs-portal-04.png

Selected Answer: B

I've just tried to create a new Windows container with private networking and was successfull. The notification about private networking not being available to Windows is gone as well.

Okay how is this supposed to determine that I can be a solutions architect?

D: OS TYPE Private networking is Not supported yet for Windows containers In this link of the documentation we can see that in the networking section, there is a comment that says "Private: this is not yet available for windows containers" https://learn.microsoft.com/en-us/azure/container-instances/container-instances-quickstart-portal

The page you shared doesn't mention what you just stated. Where is Mlantonis?

SecExams

Question #1121

You have an Azure subscription.

You are creating a new Azure container instance that will have the following settings:

- Container name: cont1
- SKU: Standard
- OS type: Windows
- Networking type: Public
- Memory (GiB): 2.5
- Number of CPU cores: 2

You discover that the Private setting for Networking type is unavailable.

You need to ensure that cont1 can be configured to use private networking.

Which setting should you change?

A) Memory (GiB)
B) Networking type (Correct Answer)
C) Number of CPU cores

D) OS type
E) SKU

Explanation

Correct Answer: B ?

Community Discussion

SecExams

Question #1122

SecExams

HOTSPOT

-

You have a Microsoft Entra tenant that is linked to the subscriptions shown in the following table.

Name	Management group	Parent management group
Sub1	Tenant Root Group	*Not applicable*
Sub2	MG1	Tenant Root Group
Sub3	MG2	Tenant Root Group

You have the resource groups shown in the following table.

Name	Subscription	Description
RG1	Sub1	Contains a storage account named storage1
RG2	Sub2	Contains a web app named App1
RG3	Sub3	Contains a virtual machine named VM1

You assign roles to users as shown in the following table.

User	Role	Scope
User1	Contributor	MG2
User2	Storage Account Contributor	storage1
User3	User Access Administrator	Tenant Root Group

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
User1 can resize VM1.	○	○
User2 can create a new storage account in RG1.	○	○
User3 can assign User1 the Owner role for RG3.	○	○

SecExams

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
User1 can resize VM1.	◉	○
User2 can create a new storage account in RG1.	○	◉
User3 can assign User1 the Owner role for RG3.	◉	○

Community Discussion

SecExams

Question #1123

Your on-premises network contains a VPN gateway.

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vgw1	Virtual network gateway	Gateway for Site-to-Site VPN to the on-premises network
storage1	Storage account	Standard performance tier
Vnet1	Virtual network	Enabled forced tunneling
VM1	Virtual machine	Connected to Vnet1

You need to ensure that all the traffic from VM1 to storage1 travels across the Microsoft backbone network.

What should you configure?

A) a network security group (NSG)
B) private endpoints (Correct Answer)
C) Microsoft Entra Application Proxy

D) Azure Virtual WAN

Explanation

Correct Answer: B ?

Community Discussion

Question #1124

You have a Microsoft Entra tenant.

You plan to perform a bulk import of users.

You need to ensure that imported user objects are added automatically as the members of a specific group based on each user's department. The solution must minimize administrative effort.

Which two actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

A) Create groups that use the Assigned membership type.
B) Create an Azure Resource Manager (ARM) template.
C) Create groups that use the Dynamic User membership type. (Correct Answer)
D) Write a PowerShell script that parses an import file.
E) Create an XML file that contains user information and the appropriate attributes.
F) Create a CSV file that contains user information and the appropriate attributes. (Correct Answer)

Explanation

Correct Answer: CF ?

Community Discussion

Question #1125

You have an Azure subscription that contains a storage account named storage1.

You need to ensure that the access keys for storage1 rotate automatically.

What should you configure?

A) a backup vault
B) redundancy for storage1
C) lifecycle management for storage1
D) an Azure key vault (Correct Answer)
E) a Recovery Services vault

Explanation

Correct Answer: D ?

Community Discussion

SecExams

Question #1126

SecExams

HOTSPOT

-

You have an Azure subscription linked to a hybrid Microsoft Entra tenant. The tenant contains the users shown in the following table.

Name	On-premises sync enabled
User1	No
User2	Yes

You create the Azure Files shares shown in the following table.

Name	Storage account
share1	contoso2024
share2	contoso2024
share3	contoso2025

You configure identity-based access for contoso2024 as shown in the following exhibit.

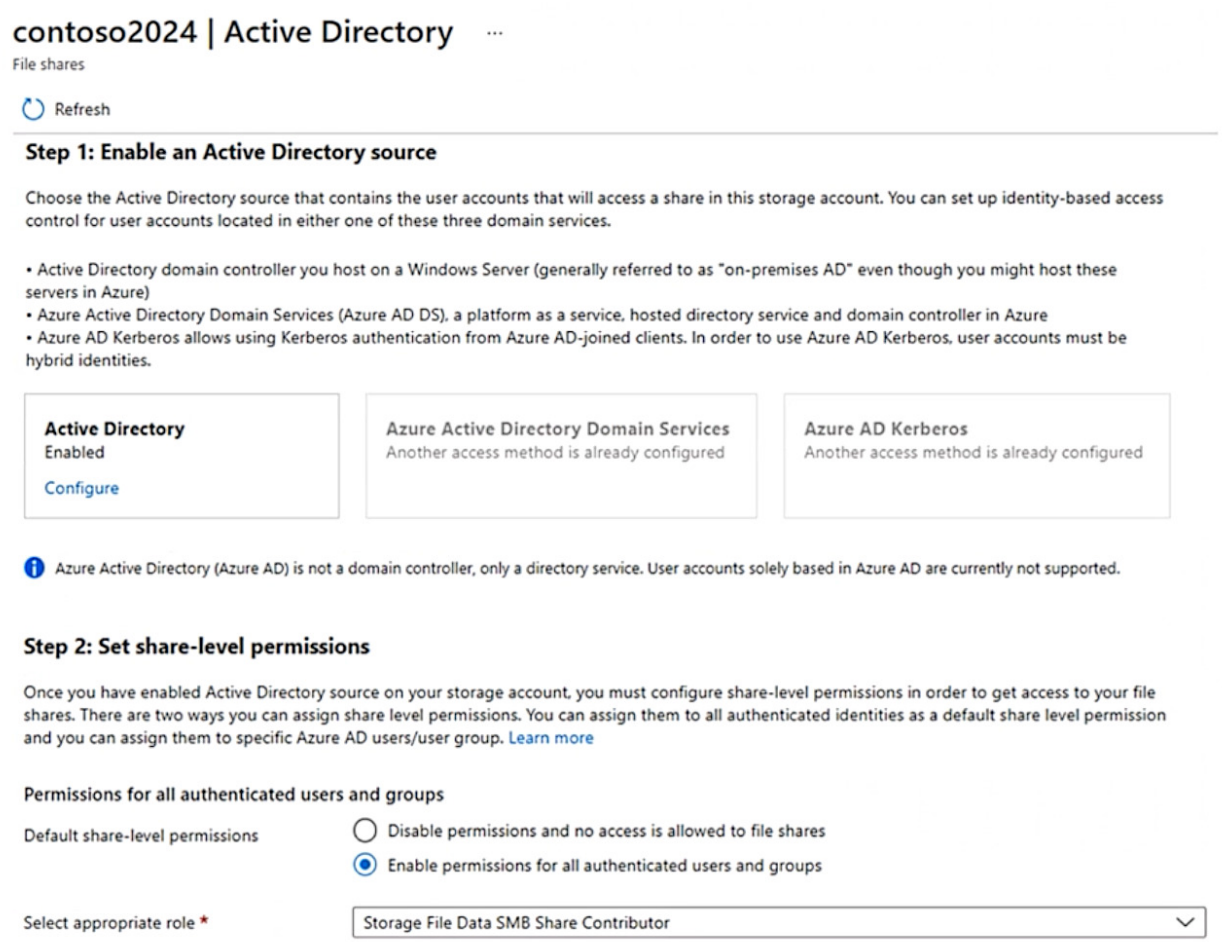

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
User1 can access the content in share1.	○	○
User2 can access the content in share2.	○	○
User2 can access the content in share3.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
User1 can access the content in share1.	○	◉
User2 can access the content in share2.	◉	○
User2 can access the content in share3.	○	◉

Community Discussion

Question #1127

You have an Azure subscription.

You plan to create an Azure container registry named ContReg1.

You need to ensure that you can push and pull signed images for ContReg1.

What should you do for ContReg1?

A) Enable encryption by using a customer-managed key.
B) Create a connected registry.
C) Add a token.
D) Enable content trust. (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

SecExams

Question #1128

HOTSPOT

-

You have an Azure subscription that has the Azure container registries shown in the following table.

Name	Service tier
ContReg1	Premium
ContReg2	Standard
ContReg3	Basic

You plan to use ACR Tasks and configure private endpoint connections.

Which container registries support ACR Tasks and private endpoints? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

ACR Tasks:

- ContReg1 only
- ContReg1 and ContReg2 only
- ContReg1, ContReg2, and ContReg3

Private endpoints:

- ContReg1 only
- ContReg1 and ContReg2 only
- ContReg1, ContReg2, and ContReg3

Explanation

Correct Answer:

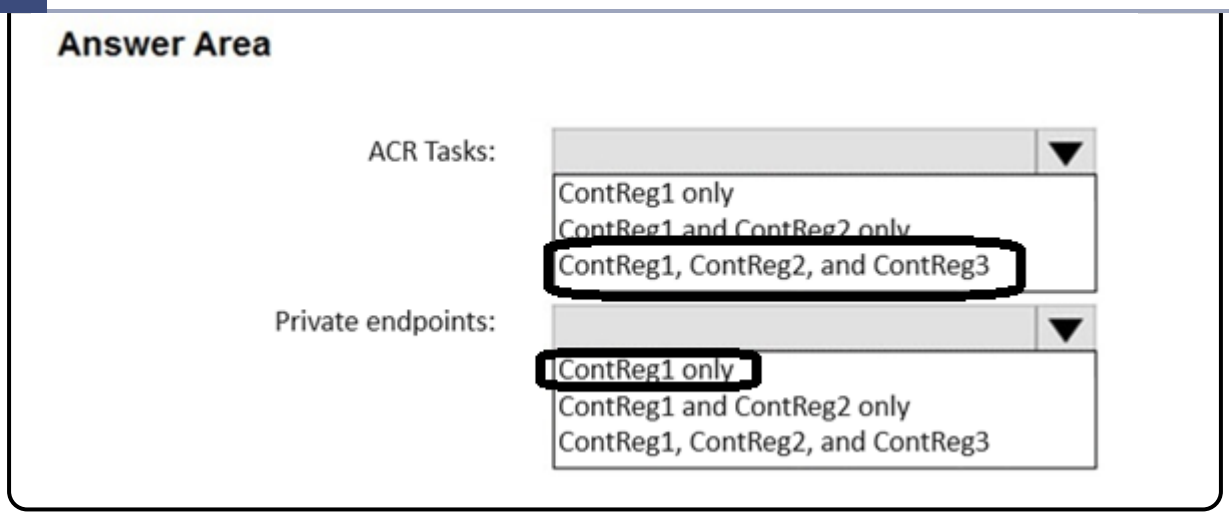

Community Discussion

SecExams

Question #1129

You plan to deploy several Azure virtual machines that will run Windows Server 2022 in a virtual machine scale set by using an Azure Resource Manager template.

You need to ensure that NGINX is available on all the virtual machines after they are deployed.

What should you use?

A) Azure Custom Script Extension (Correct Answer)
B) Deployment Center in Azure App Service
C) Microsoft Entra Application Proxy
D) the Publish-AzVMDscConfiguration cmdlet

Explanation

Correct Answer: A ?

Community Discussion

Question #1130

You have an Azure subscription that contains a container group named Group1. Group1 contains two Azure container instances as shown in the following table.

Name	Resource request	Resource limit
container1	2 CPUs	2 CPUs
container2	3 CPUs	4 CPUs

You need to ensure that container2 can use CPU resources without negatively affecting container1.

What should you do?

A) Increase the resource limit of container1 to three CPUs.
B) Increase the resource limit of container2 to six CPUs.
C) Remove the resource limit for both containers.
D) Decrease the resource limit of container2 to two CPUs. (Correct Answer)

Explanation

Correct Answer: D ?

Community Discussion

Question #1131

You have an Azure subscription.

You plan to deploy a container.

You need to recommend which Azure services can scale the container automatically.

What should you recommend?

A) Azure Container Apps only

B) Azure Container Instances only

C) Azure Container Apps or Azure App Service only (Correct Answer)

D) Azure Container Instances or Azure App Service only

E) Azure Container Apps, Azure Container Instances, or Azure App Service

Explanation

Correct Answer: C ?

Community Discussion

SecExams

Question #1132

HOTSPOT

-

You have an Azure subscription that uses Azure Container Instances.

You have a computer that has Azure Command-Line Interface (CLI) and Docker installed.

You create a container image named image1.

You need to provision a new Azure container registry and add image1 to the registry.

Which command should you run for each requirement? To answer, select the options in the answer area.

NOTE: Each correct answer is worth one point.

Answer Area

Provision a new container registry:

- az acr build
- az acr create
- az container create
- docker create

Add image1 to the registry:

- az acr create
- az container create
- docker pull
- docker push

SecExams

Explanation

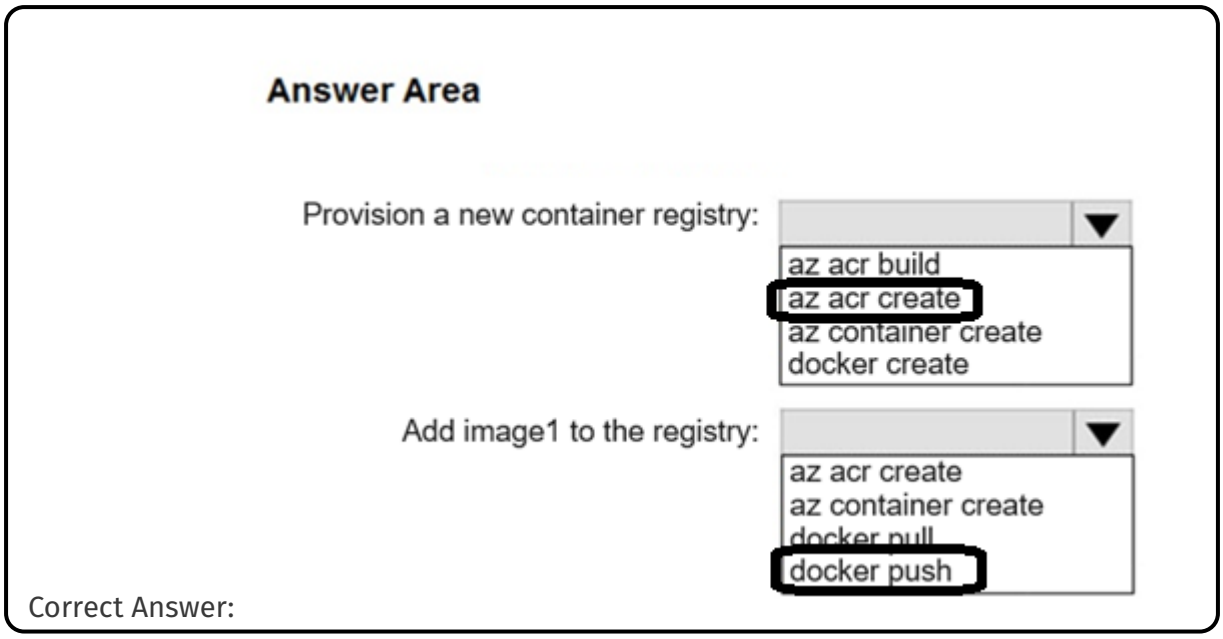

Correct Answer:

Community Discussion

Question #1133

You have an Azure virtual network named VNet1 that contains the following settings:

- IPv4 address space: 172.16.10.0/24
- Subnet name: Subnet1
- Subnet address range: 172.16.10.0/25

What is the maximum number of virtual machines that can connect to Subnet1?

A) 24
B) 25
C) 123 (Correct Answer)
D) 128
E) 251

Explanation

Correct Answer: C ?

Community Discussion

Question #1134

You have an Azure subscription that contains the Microsoft Entra identities shown in the following table.

Name	Type
User1	User
Group1	Security group
Group2	Microsoft 365 group

You need to enable self-service password reset (SSPR).

For which identities can you enable SSPR in the Azure portal?

A) User1 only
B) Group1 only
C) User1 and Group1 only (Correct Answer)
D) Group1 and Group2 only
E) User1, Group1, and Group2

Explanation

Correct Answer: C ?

Community Discussion

Question #1135

SecExams

HOTSPOT

-

Your network contains an on-premises Active Directory Domain Services (AD DS) domain.

The domain contains the identities shown in the following table.

Name	Description	In organizational unit (OU)
User1	User	OU2
User2	User	OU1
Group1	Global group that contains User1	OU1

You have an Azure subscription that contains a storage account named storage1. The file shares in storage1 have an identity source of AD DS and Default share-level permissions set to Enable permissions for all authenticated users and groups.

You create an Azure Files share named share1 that has the roles shown in the following table.

Identity	Role
User2	Storage File Data SMB Share Reader
Group1	Storage File Data SMB Share Contributor

You have a Microsoft Entra tenant that contains a cloud-only user named User3.

You use Microsoft Entra Connect to sync OU1 from the AD DS domain to the Microsoft Entra tenant.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

SecExams

Answer Area

Statements	Yes	No
User1 can access content in share1.	○	○
User2 can access content in share1.	○	○
User3 can access content in share1.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
User1 can access content in share1.	○	○
User2 can access content in share1.	○	○
User3 can access content in share1.	○	○

Community Discussion

Question #1136

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure container registry named Registry1 that contains an image named image1.

You receive an error message when you attempt to deploy a container instance by using image1.

You need to be able to deploy a container instance by using image1.

Solution: You assign the AcrPull role to ACR-Tasks-Network for Registry1.

Does this meet the goal?

A) Yes (Correct Answer)

B) No

Explanation

Correct Answer: A ?

Community Discussion

Question #1137

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure container registry named Registry1 that contains an image named image1.

You receive an error message when you attempt to deploy a container instance by using image1.

You need to be able to deploy a container instance by using image1.

Solution: You select Use dedicated data endpoint for Registry1.

Does this meet the goal?

A) Yes

B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #1138

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure container registry named Registry1 that contains an image named image1.

You receive an error message when you attempt to deploy a container instance by using image1.

You need to be able to deploy a container instance by using image1.

Solution: You create a private endpoint connection for Registry1.

Does this meet the goal?

A) Yes

B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #1139

SecExams

HOTSPOT -

You have an Azure container registry named contoso2023 as shown in the following exhibit.

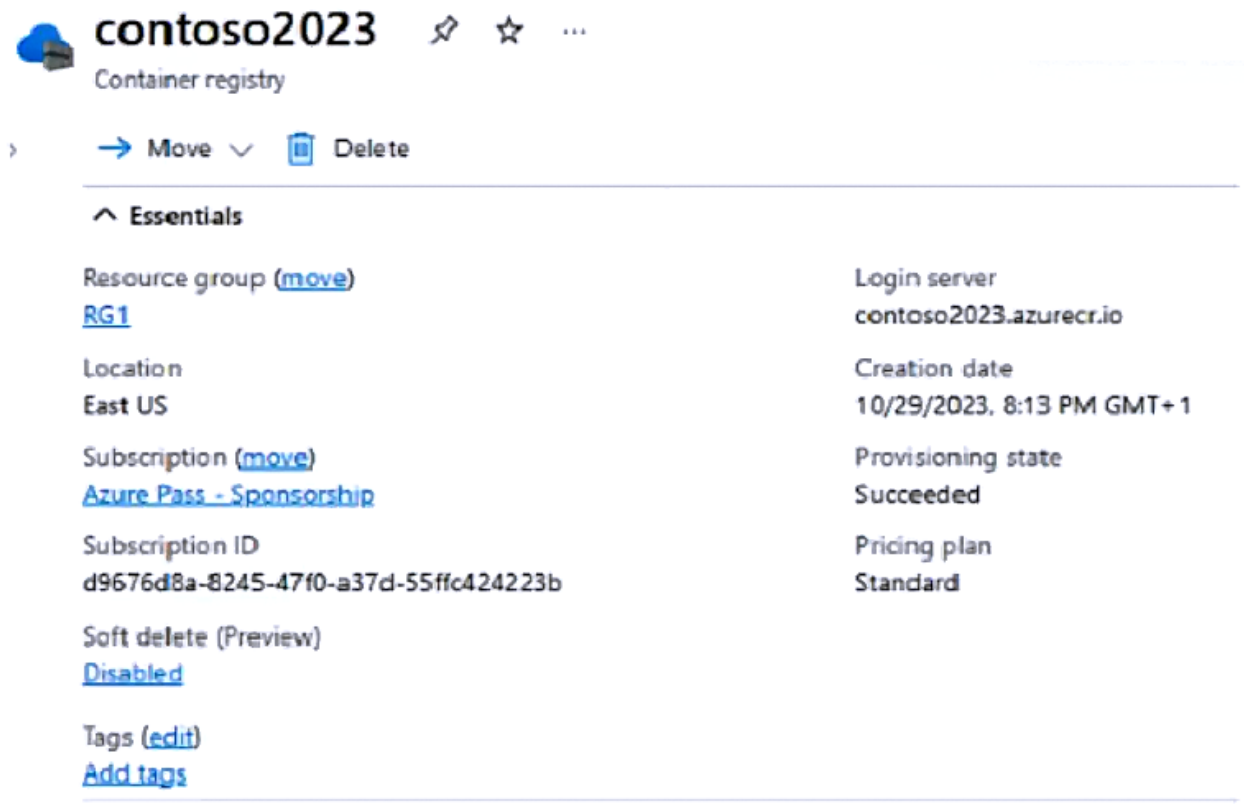

You need to enable contoso2023 to use a dedicated data endpoint.

Which two settings should you configure for contoso2023? To answer, select the appropriate settings in the answer area.

NOTE: Each correct answer is worth one point.

SecExams

Answer Area

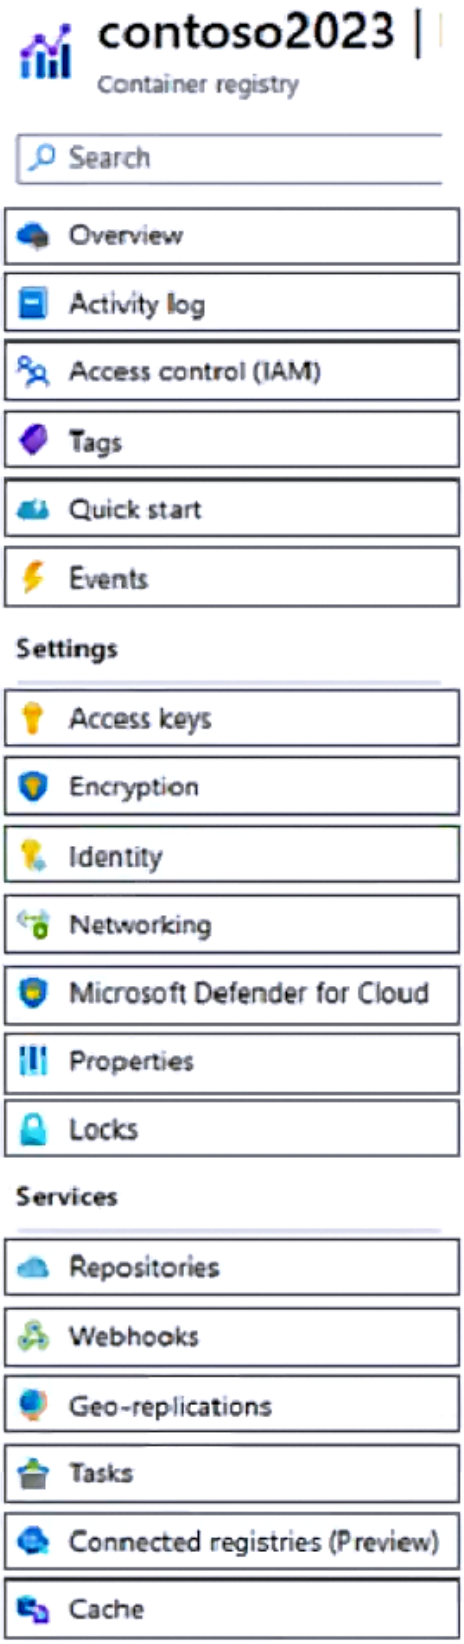

SecExams

Explanation

Correct Answer:

Answer Area

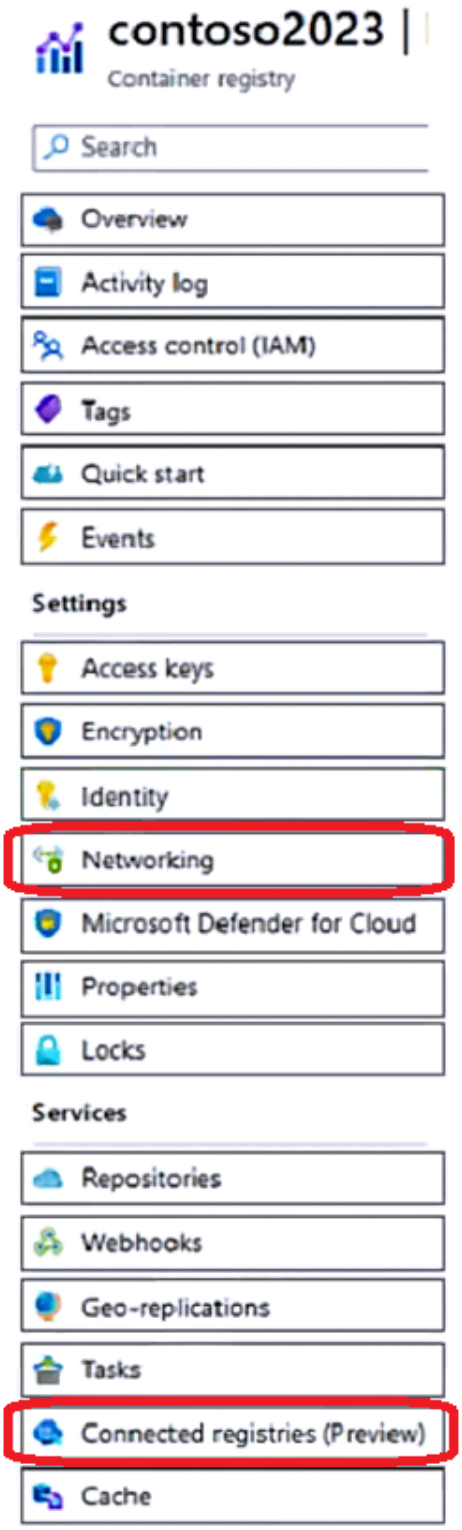

SecExams

Community Discussion

Question #1140

You have an Azure subscription that contains the resources shown in the following table.

Name	Location	Description
VNet1	East US	Virtual network
Subnet1	East US	Subnet on VNet1
NIC1	East US	Network interface

You create a route table named RT1 in the East US Azure region.

To which resources can you associate RT1?

A) VNet1 only
B) Subnet1 only (Correct Answer)
C) VNet1 and NIC1 only
D) Subnet1 and NIC1 only
E) VNet1, Subnet1, and NIC1

Explanation

Correct Answer: B ?

Community Discussion

Question #1141

You have an Azure subscription.

You create a routing table named RT1.

You need to add a route to RT1 that specifies the next hop IP address.

Which next hop type should you select?

A) Internet
B) Virtual network gateway
C) Virtual network (Correct Answer)
D) Virtual appliance

Explanation

Correct Answer: C ?

Community Discussion

Selected Answer: C

virtual appliance

Selected Answer: D

Ai says c network is wrong answer d virtual appliance

Selected Answer: C

agree

Question #1142

You have two Azure subscriptions named Sub1 and Sub2 that are linked to separate Microsoft Entra tenants.

Name	Location	Subscription
VNet1	East US	Sub1
VNet2	East US	Sub1
VNet3	West US	Sub1
VNet4	East US	Sub2
VNet5	Central US	Sub2

You have the virtual networks shown in the following table.

Which virtual networks can you peer with VNet1?

A) VNet2 only
B) VNet2 and VNet3 only
C) VNet2 and VNet4 only
D) VNet2, VNet3, and VNet4 only
E) VNet2, VNet3, VNet4, and VNet5 (Correct Answer)

Explanation

Correct Answer: E ?

Community Discussion

Question #1143

SecExams

HOTSPOT -

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location	Cloud type
VNet1	East US	Azure Government
VNet2	West US 2	Public
VNet3	China East	Azure China

You have the peering options shown in the following exhibit.

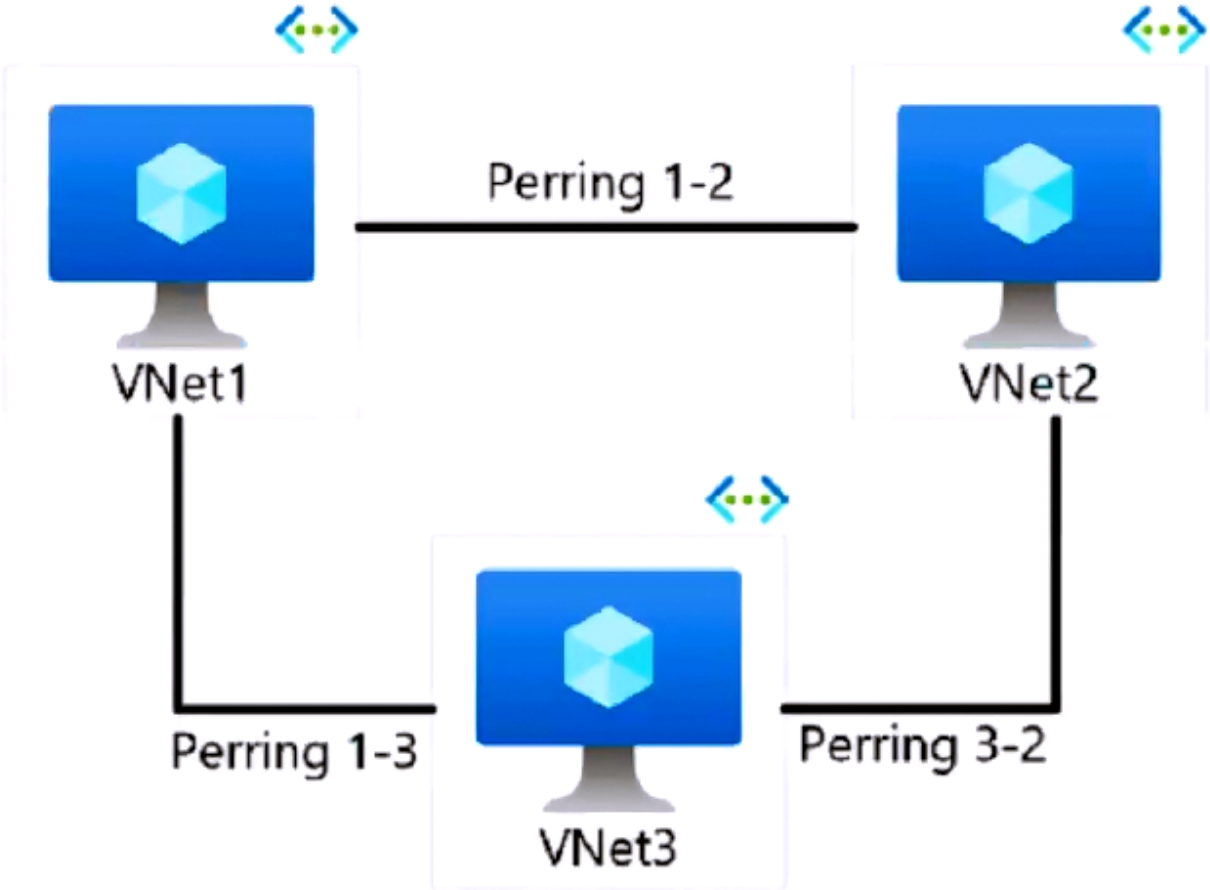

You need to design a communication strategy for the resources on the virtual networks.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

SecExams

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
Peering 1-2 is a possible configuration.	○	○
Peering 1-3 is a possible configuration.	○	○
Peering 3-2 is a possible configuration.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
Peering 1-2 is a possible configuration.	○	◉
Peering 1-3 is a possible configuration.	◉	○
Peering 3-2 is a possible configuration.	○	◉

Community Discussion

Question #1144

You have an Azure subscription that contains a storage account named storage1.

You need to allow access to storage1 from selected networks and your home office. The solution must minimize administrative effort.

What should you do first for storage1?

A) Add a private endpoint. (Correct Answer)
B) Modify the Public network access settings.
C) Select Internet routing.
D) Modify the Access Control (IAM) settings.

Explanation

Correct Answer: A ?

Community Discussion

Selected Answer: B

copilot says :The correct answer is B. Modify the Public network access settings. By modifying these settings, you can specify that only selected networks and your home office have access to the storage account, which minimizes administrative effort.

SecExams

Question #1145

DRAG DROP -

You have a Microsoft Entra tenant.

You need to ensure that when a new Microsoft 365 group is created, the group name is automatically formatted as follows:

```
<Department><Group name>
```

Which three actions should you perform in sequence in the Microsoft Entra admin center? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

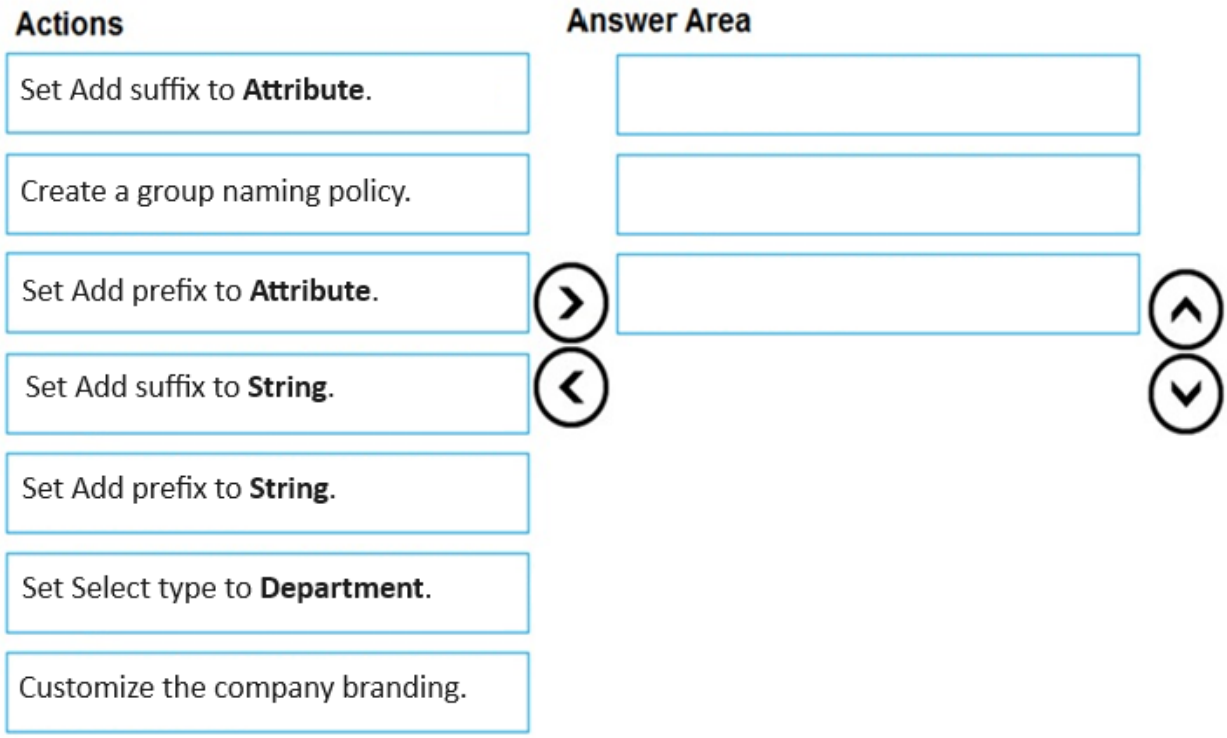

SecExams

Explanation

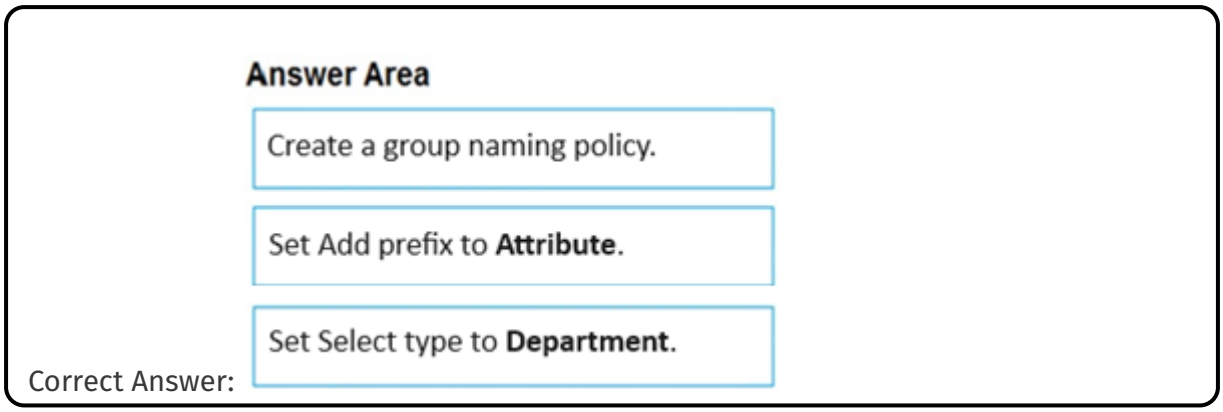

Community Discussion

I have chosen B & Copilot AI did the same

Question #1146

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Kind	Performance	Replication	Access tier
storage1	StorageV2 (general purpose v2)	Standard	Locally redundant storage (LRS)	Cool
storage2	StorageV2 (general purpose v2)	Standard	Read-access geo-redundant storage (RA-GRS)	Hot
storage3	BlobStorage	Premium	Locally redundant storage (LRS)	Hot

Which storage account can be converted to zone-redundant storage (ZRS) replication?

A) storage1 only (Correct Answer)
B) storage2 only
C) storage3 only
D) storage2 and storage3
E) storage1, storage2, and storage3

Explanation

Correct Answer: A ?

Community Discussion

Question #1147

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Storage account named storage1.

You need to enable a user named User1 to list and regenerate storage account keys for storage1.

Solution: You assign the Reader and Data Access role to User1.

Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #1148

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Storage account named storage1.

You need to enable a user named User1 to list and regenerate storage account keys for storage1.

Solution: You assign the Storage Account Key Operator Service Role to User1.

Does this meet the goal?

A) Yes (Correct Answer)

B) No

Explanation

Correct Answer: A ?

Community Discussion

Question #1149

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Storage account named storage1.

You need to enable a user named User1 to list and regenerate storage account keys for storage1.

Solution: You assign the Storage Account Encryption Scope Contributor Role to User1.

Does this meet the goal?

A) Yes
B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #1150

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure container registry named Registry1 that contains an image named image1.

You receive an error message when you attempt to deploy a container instance by using image1.

You need to be able to deploy a container instance by using image1.

Solution: You set Admin user to Enable for Registry1.

Does this meet the goal?

A) Yes

B) No (Correct Answer)

Explanation

Correct Answer: B ?

Community Discussion

Question #1151

You have an Azure subscription that contains three virtual machines named VM1, VM2, and VM3. All the virtual machines are in an availability set named AVSet1.

You need to scale up VM1 to a new virtual machine size, but the intended size is unavailable.

What should you do first?

A) Create a proximity placement group.
B) Deallocate VM1. (Correct Answer)
C) Convert AvSet1 into a managed availability set.
D) Shut down VM3 and VM3.

Explanation

Correct Answer: B ?

Community Discussion

Question #1152

You have an Azure subscription that contains the resources shown in the following table.

Name	Type
VM1	Virtual machine
VNet1	Virtual network
NIC1	Network interface
LB1	Load balancer
VPN1	Virtual network gateway

You create a public IP address named IP1.

Which two resources can you associate to IP1? Each correct answer presents a complete solution.

NOTE: Each correct selection is worth one point.

A) VM1
B) LB1 (Correct Answer)
C) NIC1 (Correct Answer)
D) VPN1
E) VNet1

Explanation

Correct Answer: BC ?

Community Discussion

Question #1153

SecExams

HOTSPOT -

You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Public IP address	Connected to
VM1	131.107.10.10	VNet1/Subnet1
VM2	150.120.10.10	VNet1/Subnet2
VM3	170.20.10.10	VNet1/Subnet1

The subscription contains a storage account named contoso2024 as shown in the following exhibit.

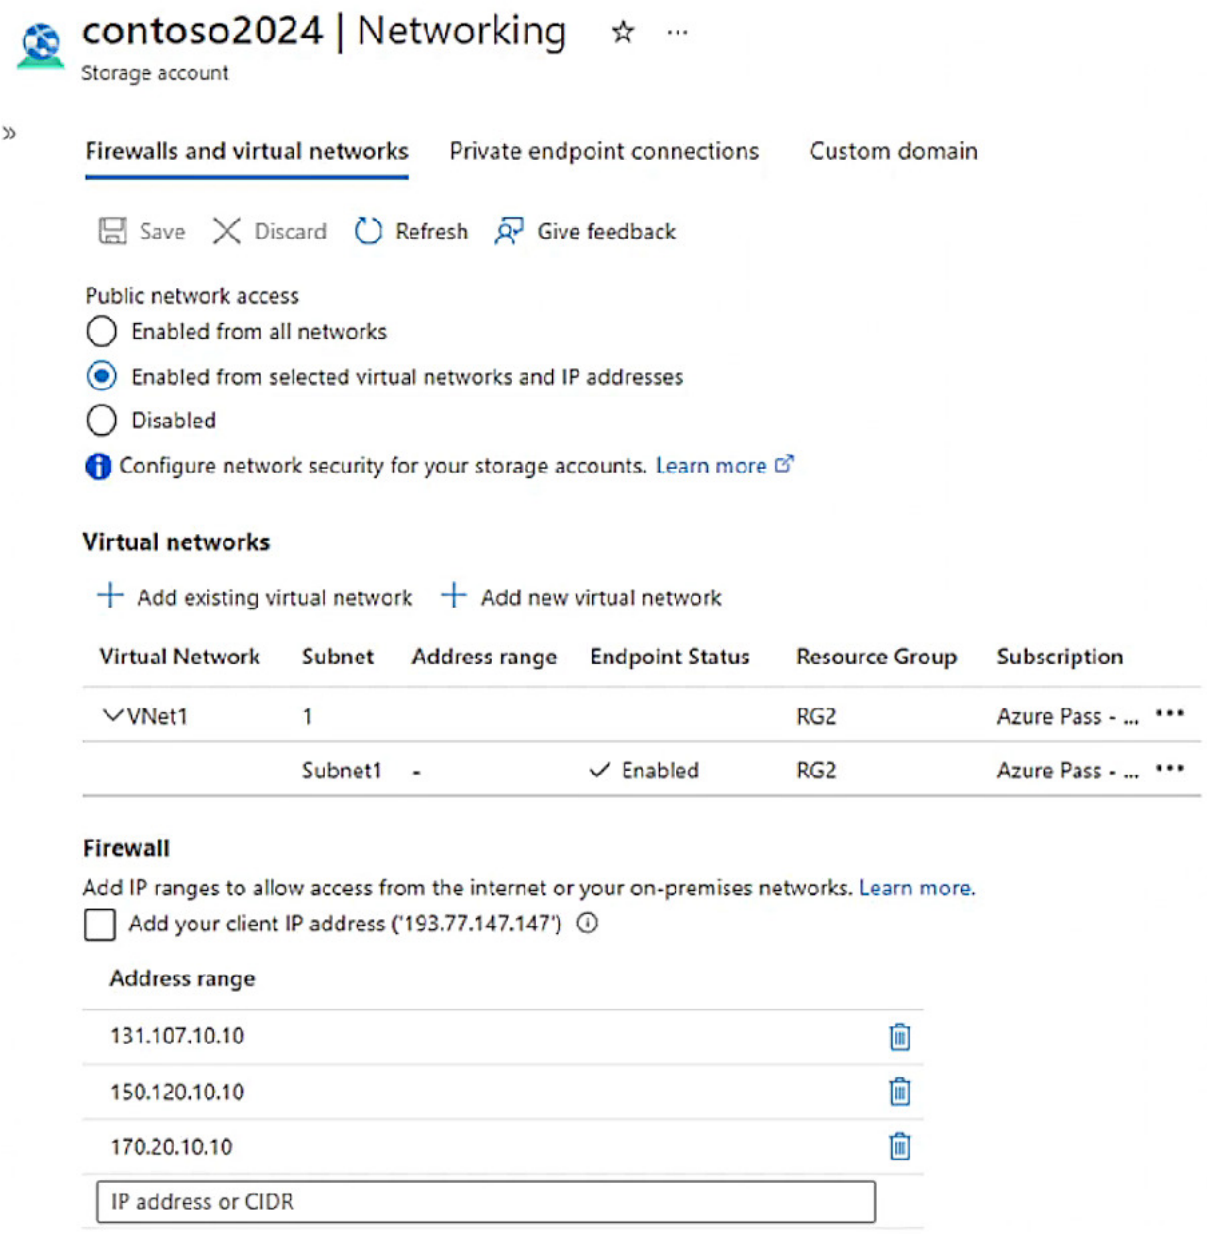

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

Answer Area

Statements	Yes	No
VM1 can connect to contoso2024 by using 131.107.10.10.	○	○
VM2 can connect to contoso2024 by using 150.120.10.10.	○	○
VM3 must use its private IP address to connect to contoso2024.	○	○

Explanation

Correct Answer:

Answer Area

Statements	Yes	No
VM1 can connect to contoso2024 by using 131.107.10.10.	●	○
VM2 can connect to contoso2024 by using 150.120.10.10.	○	●
VM3 must use its private IP address to connect to contoso2024.	○	●

Community Discussion