

# Transfer Learning: how to learn from little data

The biggest constraint in training a model is obtaining a sufficient amount of training data.

The deeper (greater number of layers) your model

- the more weights/parameters need to be estimated
- increases the quantity of training data

Recall our lecture on Interpreting the layers of a Neural Network

- layers close to the input seem to learn simple features
- layer  $l$  creates new features that are combinations of features of layer  $(l - 1)$

Is it possible that we can "re-use" feature transformations ?

- Use the layers closest to input for a NN trained on a "source" Task
- But apply these layers (and their transformations on input) to a new "target" Task ?


Yes !

This is called *Transfer Learning*

Create a NN for the new Task by

- using some number of layers (closest to input) of a *trained* model for some source task
- appending new *untrained* layers for the target task
  - final "head": regression, classification

**Pre-trained model: Source Task**

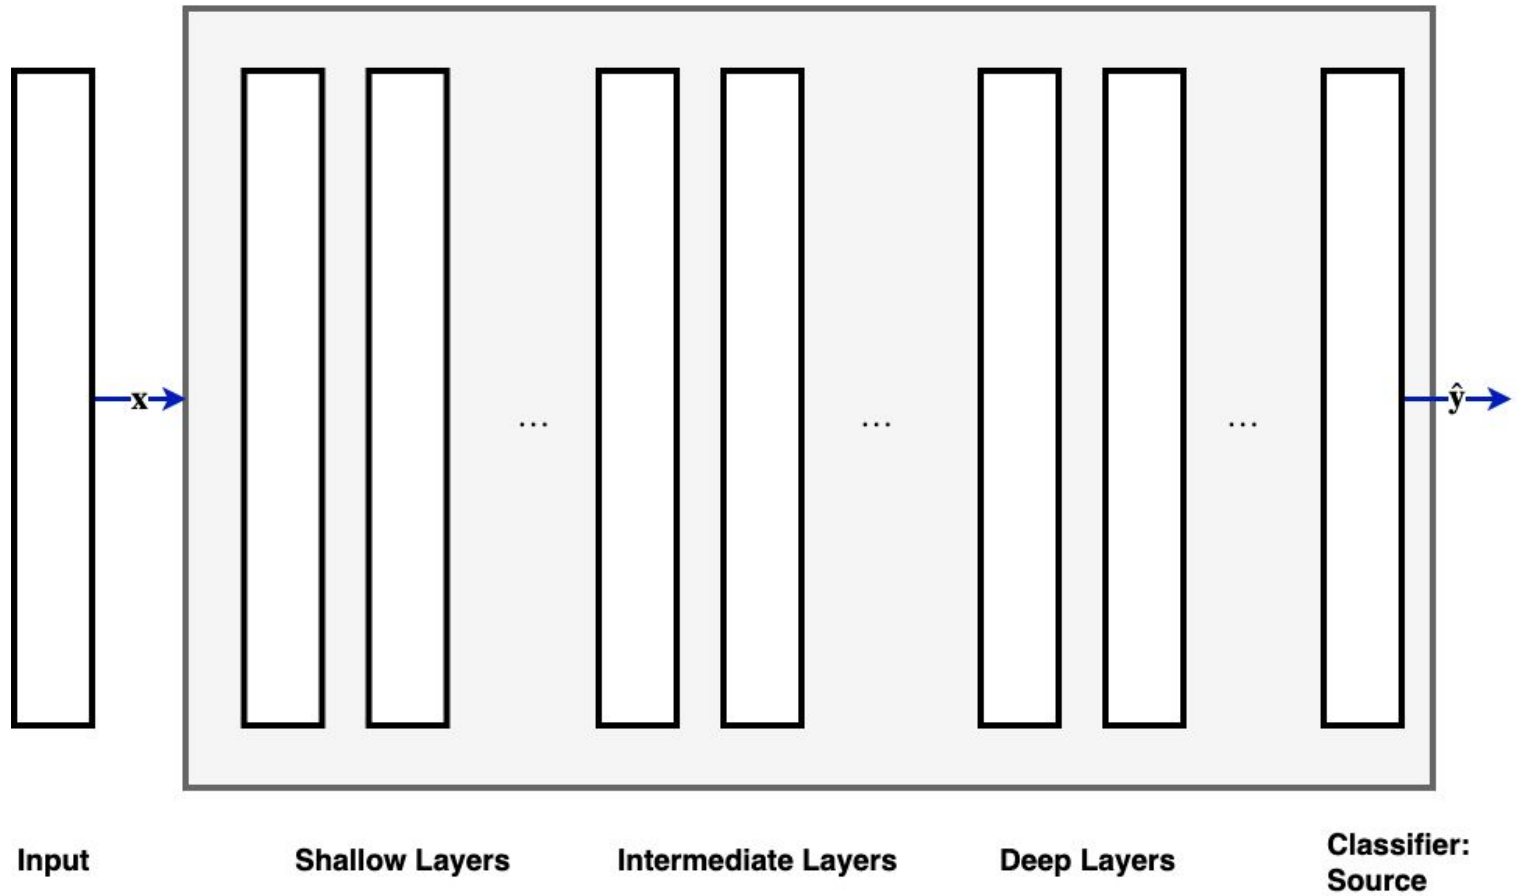

Quite often, the Source task's model

- has been trained on lots of data
- has been trained for large amounts of time
  - 2-3 weeks for image models
- has a very large number of parameters

The Transfer Learning approach imports the Source task's layer (with weights) at no cost !

The new layers added for the Target task might be able to benefit from the feature transformations created by the Source Task.

This means

- the Target task training modifies *only* the parameters of the new layers
  - *freeze* the weights of the imported Source layers
- By using a small number of parameters
  - Target task can be trained on a small amount of training data

# How to choose the prefix of the Source task

Where do we truncate the Source task's model ?

In other words: how deep should the prefix of the Source model's NN be ?

Consider the features created at the final layer of the prefix:


- Very shallow
  - Features learned may be too simple
  - Target may be able to benefit from deeper prefix
- Too deep
  - Features learned may be *too specialized* to the Source task

In other words: experiment !




Transfer Learning: replace the head of the pre-trained model

---

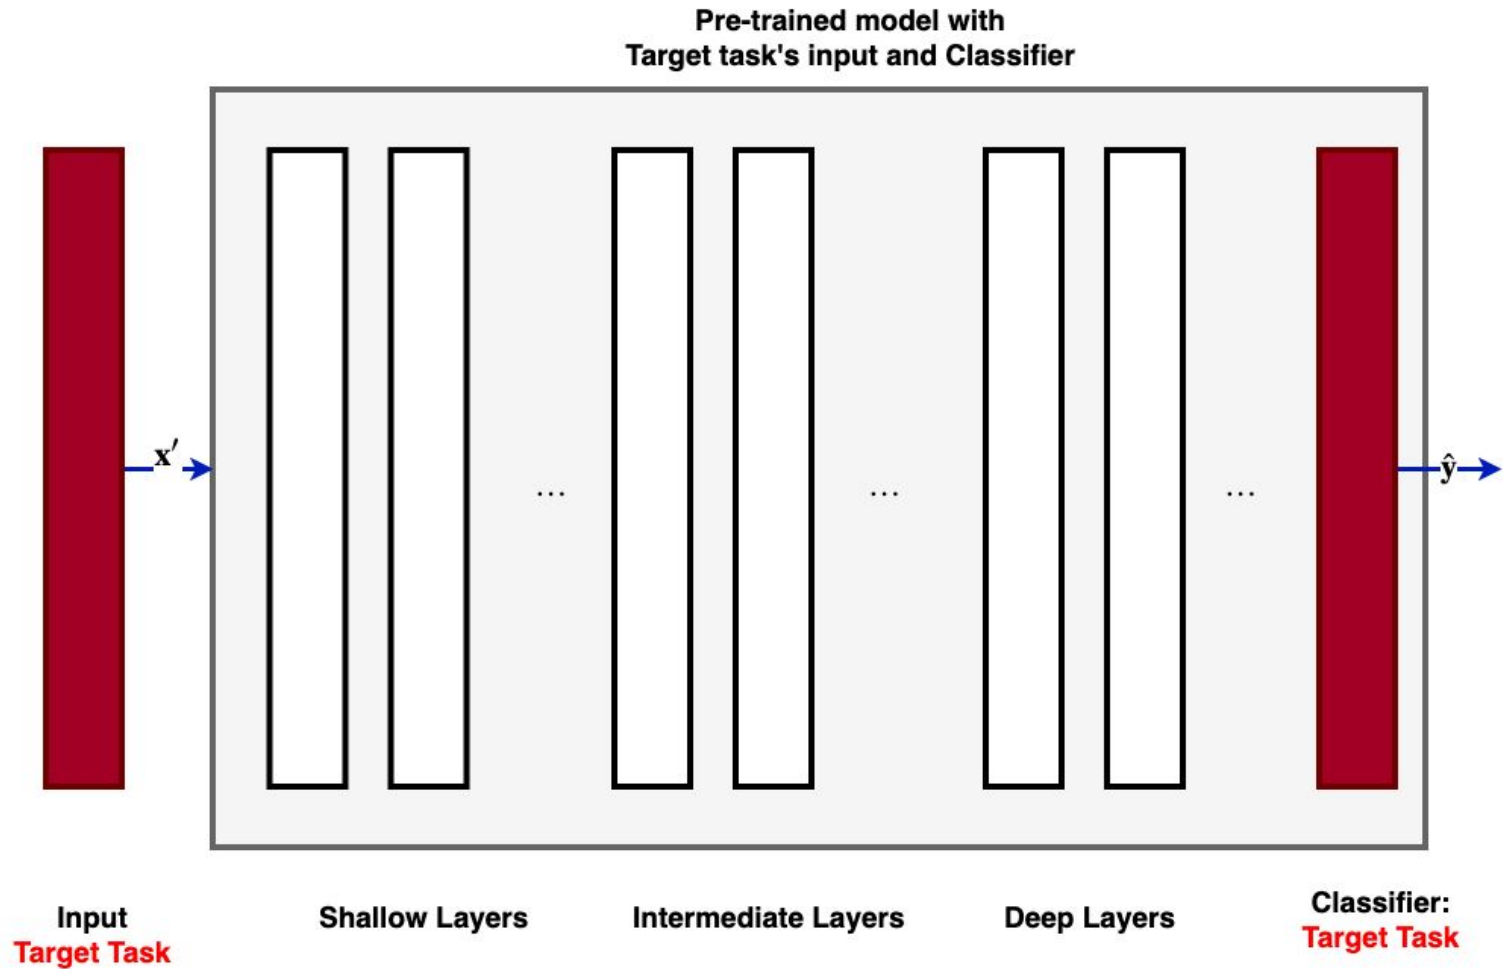

Transfer Learning: replace the head, deep layers of the pre-trained model

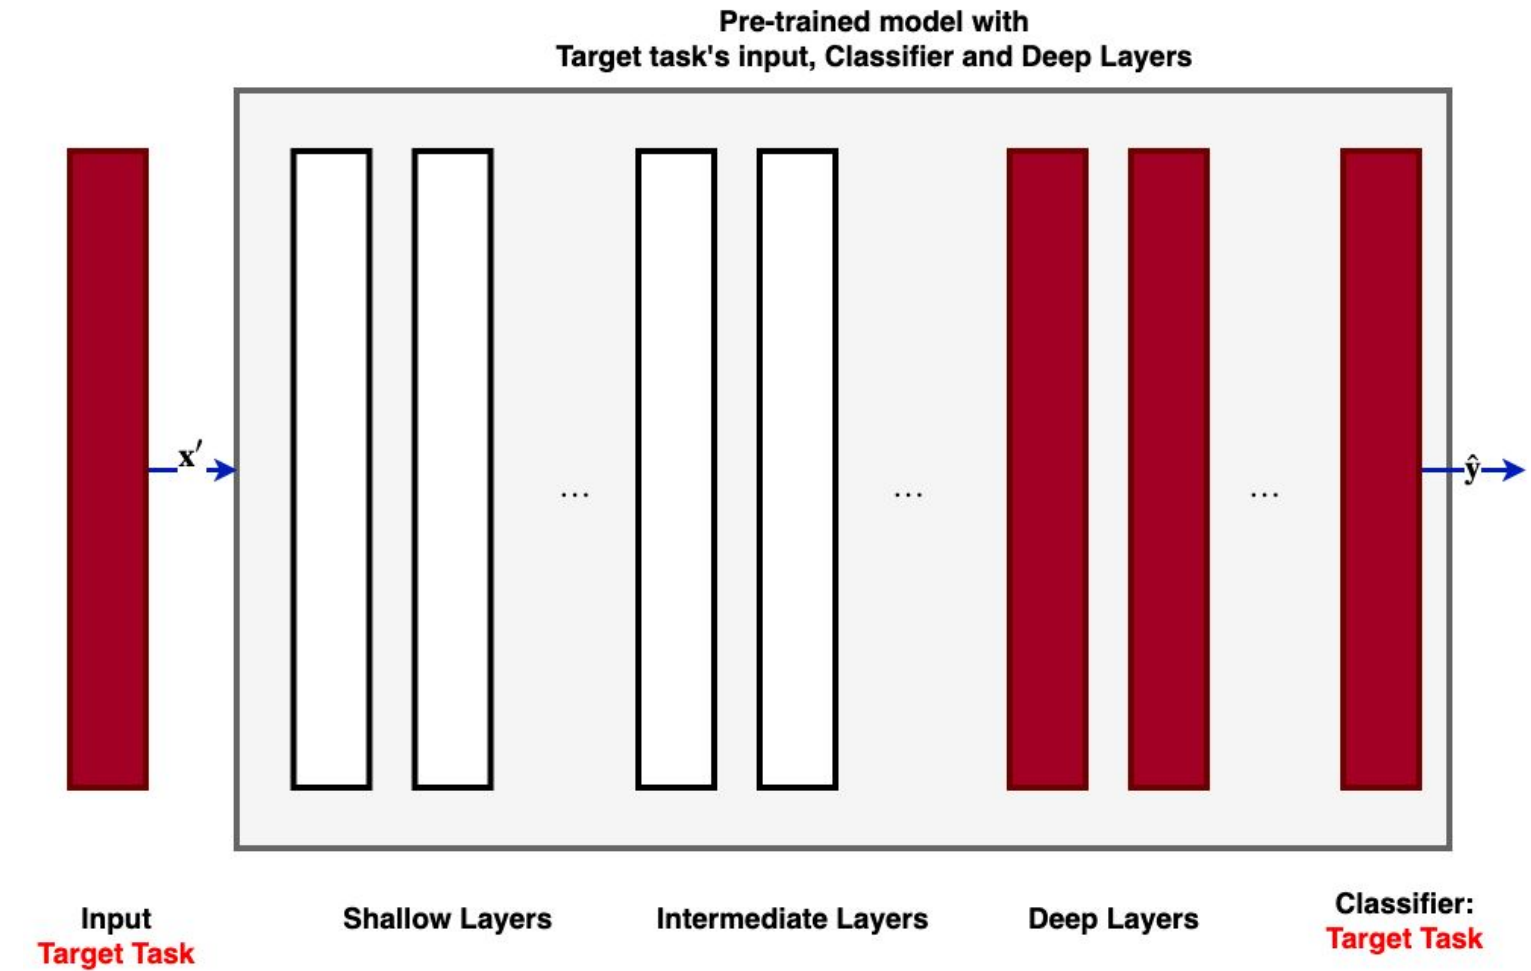

Transfer

## Limitations of Transfer Learning

There is no guarantee that the features learned by the Source task will be useful for the Target task

- greater chance if tasks/domains are similar

# Training the Target task

Why do we freeze the weights of the imported Source prefix ?

- the weights of the Target task's suffix are uninitialized
  - large gradients to start
- so early in training: we don't to destroy the weights in the prefix

After the suffix is trained, we sometimes

- unfreeze the latter layers of the prefix
- train with a *much lower* learning rate than the suffix

In other words: we try to "fine-tune" the prefix.

The key is fine-tuning

- wait until Suffix has been trained enough to generate small gradients
- differential learning rates per layer
  - the Prefix has been trained on lots of examples
  - don't want to alter these weights based on the small number of Target training examples

# **Transfer learning in Keras**

```
target_model = Sequential() # Import the prefix of source_model # - Import the architecture # - and the
weights # Freeze the imported weights for layer in source_model.layer[:num_prefix_layers]:
target_model.add( layer, trainable=False ) # Add the Suffix of the target task to the model
target_model.add( ... )
```

# Pre-trained Models in Keras

## Image

ImageNet pre-trained models (<https://keras.io/applications/>).

## NLP

Pre-trained word embeddings  
([https://keras.io/examples/pretrained\\_word\\_embeddings/](https://keras.io/examples/pretrained_word_embeddings/)).



# Model zoo

Open source, pre-trained models (<https://modelzoo.co>)

# Conclusion

Transfer learning is a method to make you highly productive

- Leverage an existing model that may have been very expensive to train
  - Revolutionized Image Processing and Natural Language Processing
- "Cut off the head" and retrain *new head* on smaller number of examples

But there is still an element of art in knowing how much of the head to cut off

- Deeper layers may have over-specialized; best to cut them off
- Shallower layers may only recognize generic features; best to keep more of them

In [4]: `print("Done")`

Done