

The Premise Language

version 3.0

by

Michael S P Miller

The Premise Language

The Premise Language

version 3.0

by

Michael S. P. Miller

Copyright © 2013 – 2025. Michael S. P. Miller.

All Rights Reserved. No part of this book may be reproduced in any form by any electronic or mechanical means (including photocopying, recording, or information storage and retrieval systems) without permission in writing from the author—except in the case of a reviewer who may quote brief passages embodied in critical articles or in a review.

Trademarked names may appear throughout this book. Rather than use a trademark symbol with every occurrence of a trademarked name, names are used in an editorial fashion, with no intention of infringement of the respective owner's trademark or copyright. The same applies to quotations or synopses of copyrighted material.

The information in this book is distributed on an “as is” basis, without warranty. Although every precaution has been taken in the preparation of this work, neither the author nor the publisher shall have any liability to any person or entity with respect to any loss or damage caused directly or indirectly by the information contained in this book. The source code examples and specifications in this book are for illustrative purposes only, and are therefore provided as is, without warranty of any kind, neither expressed nor implied that the examples work or are fit for a particular purpose. The author and publisher assume no responsibility or liability for damages or losses, neither incidental nor consequential, incurred as a result of using the provided specifications or source code.

The Premise Language™, The Premise Programming Language™ and The SubThought Logo™, the [P] logo™, are Copyright © 2013 – 2025 SubThought Corporation. All Rights Reserved.

For comments on the SubThought Premise Language contact: subthought@hotmail.com

For electronic inquiries or permissions contact: subthought@hotmail.com.

by mail: SubThought Corporation, 254 N. Lake Ave. #213, Pasadena, CA 91101 USA

This book was published in the United States of America.

Paperback ISBN-13: 979-8-849321-64-6

Hardcover ISBN-13: 979-8-849796-21-5

Paperback ISBN-10: 8-849321-64-3

Hardcover ISBN-10: 8-849796-21-8

Cover by Michael S. P. Miller

Document version: 3.020

For those who seek truth.

Contents

Contents	11
Figures	12
Tables.....	12
Acknowledgements	13
Disclaimer	13
Introduction.....	15
1. Getting Started	19
2. The Interpreter.....	21
3. Taxonomy	25
4. Control Flow	64
5. Code Examples	78
6. Foundation Modules	115
7. Quick Reference	116
8. Function Reference	127
Bibliography.....	669
Index	671

Figures

Figure 1. The Premise Interpreter Architecture	21
Figure 2. Data type taxonomy.	25

Tables

Table 1. Premise Taxonomy	26
Table 2. Premise Taxonomy (cntd.).....	27
Table 3. Function Quick Reference.....	125

Acknowledgements

“Do you see over yonder, friend Sancho, thirty or forty hulking giants? I intend to do battle with them and slay them.”

— Miguel de Cervantes Saavedra, Don Quixote

This work was not possible without the efforts and advice of Dr. Sheldon Linker, whose collaboration on terminology and functionality was most welcome, and combined with his proficient coding skills led to the 2013 Java implementation of a just in time interpreter: The Premise 0.1 Executive. Suzuki Hisao's lucid and concise C# implementation of Nukata Lisp Lite was insightful, as was Peter Norvig's implementation of JScheme. Allen Holub's book Compiler Design in C was also instructive, particularly in the area regarding approaches to tokenization and parsing. Christian Queinnec's tome, Lisp In Small Pieces, also provided invaluable insights on expression evaluation. Christian's encouragement on this project was greatly appreciated. Roland Hausser's left associative grammar was pivotal in the tokenizer design.

The author would also like to thank Aaron Hosford for his suggestions on numeric similarity metrics, Ryan Hewitt for his comments on prototype construction, Brian Will for his ideas on restricted scoping, Dr. Ghassan Azar, Todd Kaufmann, Dr. Michael Schuresko, Robert Rossi, Jean-Louis Villecroze and the rest of the Premise Language group for their constructive feedback and suggestions.

Disclaimer

The source code examples and specifications in this book are for illustrative purposes only, and are therefore provided as is, without warranty of any kind, neither expressed nor implied that the examples work or are fit for a particular purpose. The author and publisher assume no responsibility or liability for damages or losses, neither incidental nor consequential, incurred as a result of using the provided specifications or source code, up to and including loss of business, injury, or death.

Introduction

The Premise Language is a functional prototype programming language which combines high level intrinsic primitives with seamless object persistence. The goal of the Premise Language is to provide a platform for artificial intelligence programming. Software agents written in Premise share a knowledge base where they can create, modify, and delete object instances amongst themselves in a stigmergic manner. Premise is influenced by Lisp, Self, JavaScript, OPS5, and CLIPS.

The Premise Language was developed by Michael S. P. Miller and Sheldon O. Linker during 2013 and 2014. In creating a platform for agent based programming for intelligent systems (JCB English and The Piagetian Modeler) they found a need for a very high level language in which to code asynchronous agent processes to perform complex pattern matching and inference. They explored the Sapir-Whorf hypothesis as it relates to computer programming—namely, that the primitive operations available in a computer language influence the way software developers frame and solve problems, and it was early determined that the primitives of the needed language should be very high level and include logical and similarity-based pattern matching, inference, messaging, stigmergy, and asynchrony. The language combines elements of declarative, functional, and imperative programming with seamless persistent object storage and retrieval. The goals of The Premise Language are simple:

- To define memory as a portable abstraction across different physical implementations. Premise uses a persistent object store as its memory.
- To facilitate the fast formation of relationships in a persistent memory. Constructing persisted records in Premise is the same as asserting facts to the working memory of other declarative language platforms such as CLIPS or OPS.
- To allow rapid interrogation of relationships in the memory.
- To provide scalability to billions of persisted records.
- To explore the Sapir Whorf hypothesis as it relates to computer programming: that the constructs available in computer languages influence the way people think about and solve problems.
- To explore the stigmergic programming paradigm, where objects constructed by one agent are later used or consumed by other agents.
- To provide a clear and concise API.

The Premise Language serves as a testbed for agent programming. Functions are the primary unit of processing. Numbers, strings, literals, prototypes, persisted records, lexicons, lists and calls provide the primary data types. The Premise Language opens up new possibilities for knowledge representation and artificial intelligence programming.

We hope you enjoy using this language.

Michael Miller

February 2019 (version 1.0)

July 2025 (version 3.0)

Document Conventions

The following are conventions used in this document.

Source Code

Premise source code will appear in Courier New font in a colored text region. The gray text region depicts a session in the Premise interpreter.

```
> (take "{a b c}")
.: {a b c}
```

A green text region depicts Premise source code snippets that appear in a file editor.

```
(relation Problem
  :Name  :Status
)
```

A blue text region depicts non-Premise source code snippets that appear in a file editor.

```
SELECT DISTINCT LENGTH(CategoryName)
  FROM Category
```

Source Code Comments

In-line comments are denoted by semicolons. Everything from the comment to the end of the line is ignored by the interpreter.

```
; this is an in-line comment
```

Multi-line comments are delimited by double quotation marks. Everything between the delimiters is treated as a single string and returned as-is by the interpreter. A free standing string, not part of a function or macro call, evaluates to itself, and thus can be used as a comment.

```
"this is a
multi-line
comment"
```

Language Style Conventions

As a matter of style, each of the following language elements is written in a specific case:

Modules	are written in Pascal case.
Types	are written in Pascal case.
:Slots	are written in Pascal case with a preceding colon.
!methods	are written in camel case with a preceding exclamation point.
functions	use camel case for verbs and Pascal case for nouns.
?locals	(local variables) are in camel case with a preceding question mark.
?Modular	(modular variables) are in Pascal case with a preceding question mark.
?Global	(global variables) are in Pascal case with a preceding question mark.
?CONSTANTS	are written in upper case with a preceding question mark.

1. Getting Started

To use the Premise Language, download the Premise executable to a folder on your computer then extract the file using standard decompression software.

To run the Premise evaluator type the following:

premise

Example:

```
c:\projects\SubThought\>premise
[Premise :Version 3.0.1 20250801.001 :OS Windows 11 :Edition Community]
Enter your code followed by a blank line. Type (help), (copyright) or (license) for
information. Type (grok (file path "file.pr")) to read a file. Type (bye) to exit.
> (copyright)
.: "Copyright (c) 2014-2025 SubThought Corporation, All Rights Reserved."
>
```


2. The Interpreter

The goal of Premise is to facilitate fast persistent relationship formation in a client server environment. Clients connect to the server and execute expressions. The expressions create and modify records in the object store.

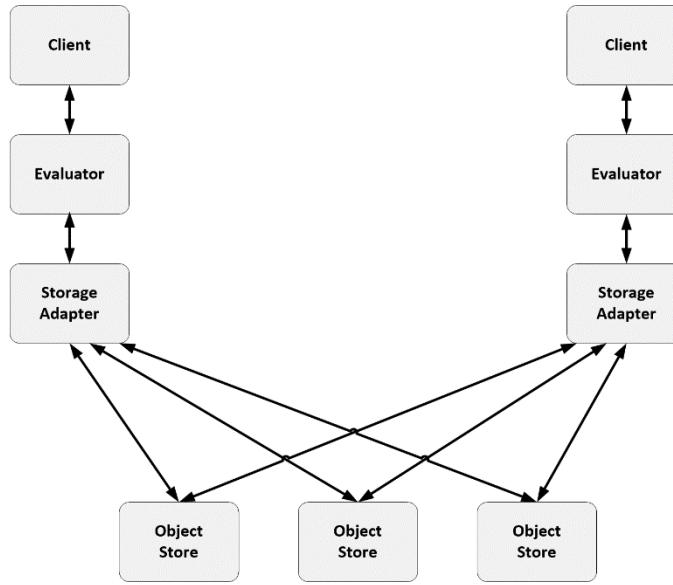


Figure 1. The Premise Interpreter Architecture

The Premise Language interpreter follows several guiding principles, among them:

1. Metacircular evaluation. Parts of Premise are written in the Premise Language itself.
2. A Lisp-1 approach to symbol and function lookup is employed. This means that symbols and functions can share the same symbol environment. Because symbols are prefixed by question marks and functions are not, the difference between the variable "?foo" and the function "foo" is evident. This eliminates one source of complexity for Lisp like languages.
3. The main point of The Premise Language is to build shared structures. To that end, relations, premises, and certain containers are persisted in an object store (e.g., a RAM database) to facilitate pattern matching over persisted records, and to facilitate concurrent access to shared structures.

The Read Evaluate Print Loop

The Premise Language interpreter, otherwise known as the Read Evaluate Print Loop, allows users to enter expressions at the prompt (i.e., >). The interpreter evaluates the expression and returns the result. The result is printed after the ergo sign (i.e., .:). For example, when the literal true is entered at the prompt, it evaluates to itself and is returned by the interpreter as follows:

```
> true  
. : true
```

An expression that adds two numbers together would return the sum like this:

```
> (+ 1 2)  
. : 3
```

To print "Hello World" one would type the following.

```
> (tell user "Hello, World. \n")  
Hello, World.  
. : told
```

Imperative Programming

The Premise Language facilitates imperative, functional, and declarative programming. For example, adding the numbers from one to ten in an imperative style could involve defining a variable **total** to store the result, and looping an iteration variable from 1 to 10.

```
> (function sum {?numbers}  
  (let ?total 0) ; assume ?total is 0  
  (for ?n in ?numbers  
    (set ?total (+ ?total ?n))) ; set ?total to the result of adding ?total and ?n  
    ?total) ; return ?total  
. : sum  
 > (sum {1 2 3 4 5 6 7 8 9 10}) ; test the function  
. : 55
```

Functional Programming

Adding numbers in a functional style might involve generating a list of numbers, walking through the list, and adding the numbers until we reach the end of the list. This approach eliminates the need for a **total** variable since the result is recursively kept on the program stack.

```
> (function sum1 {?numbers}
  (if (void-p ?numbers)           ; if the list of numbers is empty
      0                         ; return zero
    else
      (+ (@ ?numbers)           ; add the first number
          (sum (rest ?numbers)))) ; to the sum of the remaining numbers
  )

.: sum1

> (range 1 to 10)               ; generate a list of numbers
.: {1 2 3 4 5 6 7 8 9 10}

> (sum1 (range 1 to 10))        ; test the function
.: 55
```

An even more concise approach to sum uses the function **reduce**.

```
> (function sum2 {?numbers}
  (reduce ?numbers +)
  )

.: sum2

> (sum2 (range 1 to 10))
.: 55
```

Declarative Programming

Declarative programming involves establishing a set facts and writing a query or rule to utilize the facts. In The Premise Language, this approach utilizes relation instances, called "thoughts."

```
> (relation Addend           ; make an Addend relation
  :Value
  :Counted false
)

.: Addend

> (step ?i from 1 to 10
  (new Addend :Value ?i))      ; make the individual addends

.: Addend_10

> (relation Total           ; make a total relation
  :Result 0
)

.: Total

> (new Total)               ; make a new total

.: Total_1

> (with
  [Total ^ as ?total]          ; match the Total
  [Addend ^ as ?addend :Value as ?value :Counted = false] ; match uncounted
  do
  (put ?addend :Counted true)   ; indicate that the addend was used
  (==> ?total + :Result ?value) ; apply + to :Result and ?value, put in :Result slot
  (:Result ?total))            ; return the :Result slot value

.: 55
```

3. Taxonomy

The following figure depicts the intrinsic data types of the Premise Language. The italicized types are abstract.

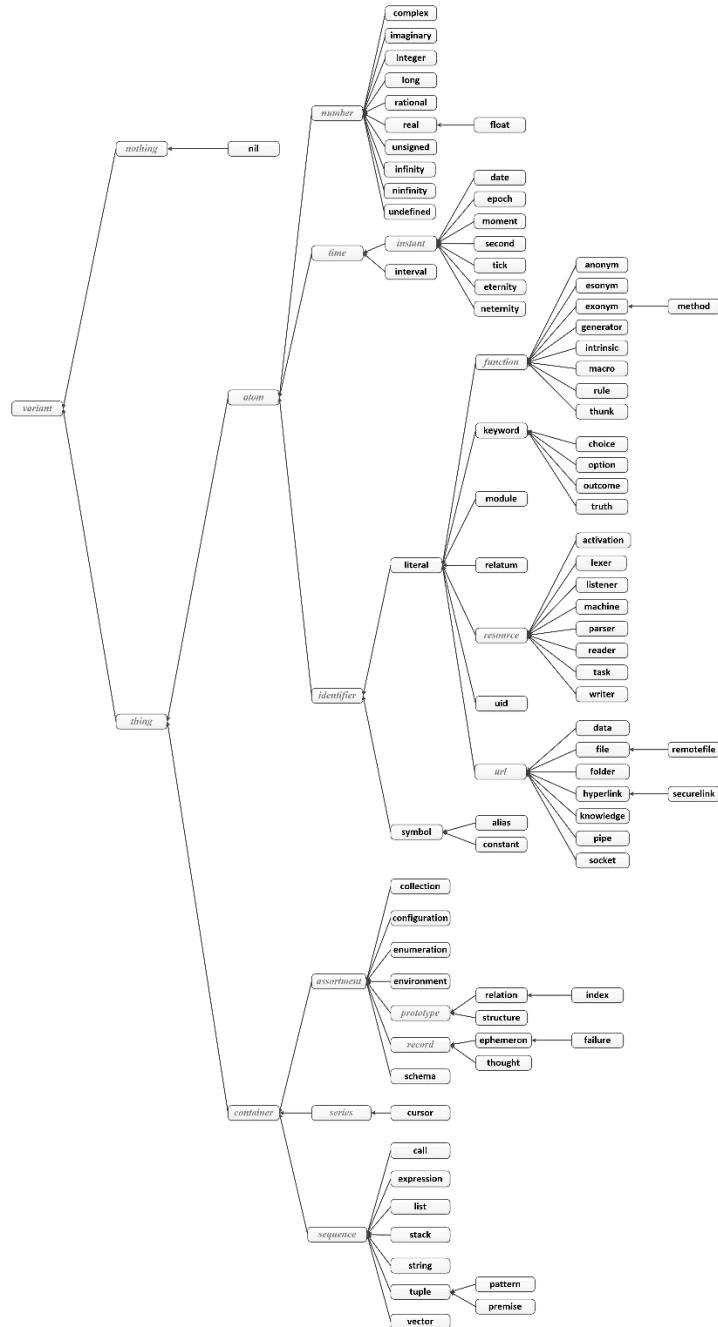


Figure 2. Data type taxonomy.

Types	Description
<i>variant</i>	an abstract value of any type
<i>nothing</i>	a value representing nothing.
nil	an unspecified value.
<i>thing</i>	a value representing something.
<i>atom</i>	an abstract simple thing
number	a number
complex	a number with real and imaginary parts
imaginary	a coefficient for the square root of -1
integer	a 64 bit integer
long	an integer longer than 64 bits
rational	a number as numerator / denominator
real	a decimal number in scientific notation
float	a 128 bit floating point number
unsigned	an unsigned 64 bit integer.
<i>time</i>	an abstract measurement
<i>instant</i>	a single point in time.
tick	a nanosecond
moment	a nanoyear (0.0031573275 seconds)
second	a second
date	a UTC date
interval	a period between two time instants
<i>identifier</i>	a non-delimited case insensitive string
symbol	a question prefixed mutable variable
constant	a question prefixed immutable variable
alias	an alias for a symbol.
literal	an undelimited alphanumeric sequence
function	a literal that defines a function
anonym	an anonymous function
esonym	an internally named function
exonym	a user named function
generator	a function that creates a series
intrinsic	a language intrinsic function
macro	a user named macro
rule	a spontaneously executed rule
thunk	an evaluation delay
keyword	a reserved literal
choice	a value set for a symbol
option	a literal function parameter option
outcome	a function result
truth	a truth value
method	an exclamation prefixed function literal
module	a literal defining a module
slot	a colon prefixed property identifier
resource	a generic resource
assortment	an unordered grouping
collection	a assortment of keys
configuration	an assortment of persisted key value pairs.
enumeration	an assortment of name to number pairs
environment	an assortment of symbol to value pairs
ephemeron	an unpersisted structure instance
relation	a persisted relationship
lexicon	an assortment of key to value pairs
structure	an ephemeral relationship
thought	a persisted relationship instance
continuation	a continuation resource
data	a data connection resource
file	a file resource
index	a relation access resource
iterator	a traversal resource
knowledge	a knowledge base
listener	a task to listen on a port
pipe	an input output resource
series	a possibly infinite list.
cursor	a list of premises
task	a task resource
uid	a unique identifier

Table 1. Premise Taxonomy

<code>sequence</code>	an ordered grouping
<code>call</code>	a function call
<code>expression</code>	one or more variants
<code>list</code>	a sequence of variants
<code>string</code>	a delimited character sequence
<code>vector</code>	a byte array
<code>tuple</code>	an abstract relationship
<code>pattern</code>	a thought matching expression
<code>premise</code>	a persisted relation instance

Table 2. Premise Taxonomy (cntd.)

Variants

In Premise, all values are typed. Variables (also called symbols) are bound to typed values, but the variables themselves are not typed. A variant is a value that can be any type. Variants are either nothing or something (i.e. a thing).

Nothing

The type **nothing** represents values that do not exist. The value **nil** represents something that is unspecified. Typically when a value is not provided for a property of an object, the default value will be **nil**. The function **is** can be used to determine whether or not a value is unspecified.

Things

The type **thing** represents a value that exists. The function **thing-p** can be used to detect a value that is not **nil**. The thing type is subdivided into **atom** and **sequence**.

Atoms

An atom is a number, time value , or identifier.

Numbers

The number data type encapsulates several sub types: integer, long, rational, real, imaginary, and complex.

Integers

Positive and negative decimal integers up to 64 bits are supported.

```
-5  
+999999999999999999
```

```
+3  
-999999999999999999
```

Radix

Integers from radix 2 through radix 36 of the form \#TDDrSN... are supported, where T is a taxon indicator (n:Integer, g:Long, b:Big, r:Real, f:Float, i:Imaginary, u:Unsigned, c:Complex), D is a decimal number between zero and nine, S is an optional sign for positive (+) or negative (-) number, and N is a number from zero (0) to nine (9) or an uppercase letter from A through Z. The radix combination DD must be within the range of 2 to 36 inclusive and the digits N must be less than DD. For example #2r has digits 0 and 1 while #16r has digits 0 through F.

```
\#n02r+10110
```

```
\#n16r-778CF20
```

```
\#n36r+84QQN250MLQZ
```

Binary

Binary integers (\#n2r) are supported in the abbreviated form #\nbSN... for N equals 0 or 1.

```
\#nb+1010
```

```
\#nb-10101
```

```
\#nb0
```

Octal

Octal integers (\#n8r) are supported in the form #noSN... for N from 0 to 7.

```
\#no+1234
```

```
\#no+0
```

```
\#no+72342
```

Decimal

Decimal integers (\#n10r) are supported by default and also in the form \#ndSN... for N from 0 to 9.

```
\#nd+9821
```

```
\#nd+0
```

```
\#nd-8290553
```

Hexadecimal

Hexadecimal integers (#n16r) are supported in the form #nxSN... for N from 0 to F.

```
\#nx-00FF
```

```
\#nx0
```

```
\#nx829CAFF3
```

Hexatrigesimal

Hexatrigesimal integers (\#n36r) are supported in the form \e#nzSN... for N from 0 to Z.

```
\#nz-QA5N
```

```
\#nz0
```

```
\#nz+70M6Z8P
```

Longs

A long number is a decimal integer that is 128 bits.

```
\#gd+10000000000000000000000000000000
```

```
\#gd-80000000000000000000000000000000
```

Big

A big number is a decimal integer that is longer than 128 bits.

```
\#bd+10000000000000000000000000000000
```

```
\#bd-80000000000000000000000000000000
```

```
\#bd2392837492837965821879810568725187197293872938749283749287658273648276387628376248  
73648273648726384768273684276348726384762874823648276348726384762834762876348273648726  
38476824768237648276348273648276384726834762837648768
```

Rationals

Rational numbers have a decimal integer numerator over a decimal integer denominator.

```
3/4
```

```
-8/20
```

Reals & Floats

Real numbers are 64 bit decimal floating-point numbers in scientific notation. A **float** is a sub type of real. Float numbers are 128 bits, have higher precision and a smaller range than real numbers. Floats can be used for monetary values. Float calculations must be made explicit by wrapping them in the float function , e.g. (+ (float 100) (float 200)), or prefixing #fd before the number.

```
10.0  
(real 0.001)  
\#rd+2342.243  
\#rd-54.50
```

```
-98768762983.237876867749  
(float -2342.0e-23)  
\#fd+234.0e+0  
\#fd124.95
```

Imaginaries

Imaginary numbers are decimal numbers having a floating point number suffixed by the letter "i" (representing the square root of -1).

```
\#id+21
```

```
\#id-5.0
```

```
#\id2.9
```

```
#\id-9.93
```

Complexes

Complex numbers include a decimal real part plus a decimal imaginary part.

```
\#cd+55+34i  
\#cd+0-2i
```

```
#\cd-2.35+7i  
\cd75+i
```

```
#cd-32-14.3i  
\cd0+i
```

Unsigned

Unsigned decimal integers up to 64 bits are supported. They are prefixed by the letter "u"

```
\#ud+0  
\#ud+18446744073709551615
```

```
\ud+3  
\ud+99999999999999999999
```

Infinity

The infinity taxon represents a positive infinite number.

```
infinity
```

```
\%Infinity
```

Ninfinity

The ninfinity taxon represents a negative infinite number.

```
ninfinity
```

```
\%Ninfinity
```

Undefined

The undefined taxon represents an impossible or undefined number.

```
undefined
```

```
\%Undefined
```

Time

Time is supported in several varieties: dates, epochs, intervals, moments, seconds, and ticks.

Dates

A date represents time as a universal time coordinate (YYYY-MM-DDThh:mm:ss.sZ) in Zulu time or with an offset.

```
\@d2016-11-24T08:15:30-08:00  
\@d1990-01-10T09:30:00.001Z
```

Epochs

The epoch data abstraction represents time in unix epochs as a 128 bit integer value prefixed by the letter "e". An epoch represents the number of seconds since midnight January 1, 1970.

```
\@e10          \@e592          \@e60
```

Intervals

The interval data abstraction represents a time coordinate as a pair of time points. The lesser time point is followed by the greater time point.

```
\@i{\@m2012001005050000 \@m2025500000000000}      \@i{\@s3 \@s10}  
\@i{\@d2012-05-19 \@d2013-07-23}                  \@i{\@u946 \@u1577}
```

Moments

The moment data abstraction represents time in nano-years (approximately 0.0031573275 seconds) as a 16 digit, 64 bit, integer value prefixed by the letter "m".

\@m2025500000000000	\@m-1	
\@m2012001005050000	\@m+3000	; approximately 10 seconds

Seconds

The seconds data abstraction represents time in seconds as a 64 bit integer value prefixed by the letter "s".

\@s10	\@s592	\@s60
-------	--------	-------

Ticks

The tick data abstraction represents time in nanoseconds as a 64 bit integer value prefixed by the letter "t".

\@t2342	\@t100000
---------	-----------

Eternity

The eternity taxon represents an infinite amount of time in the future.

eternity	\%Eternity
----------	------------

Neternity

The neternity taxon represents an infinite amount of time in the past.

neternity	\%Neternity
-----------	-------------

Indefinite

The indefinite taxonrepresents an undefined time.

`indefinite`

`\%Indefinite`

Impossible

The impossible taxonrepresents an impossible time, typically a result of an invalid operation.

`impossible`

`\%Impossible`

Identifiers

An identifier is an alphanumeric sequence of characters not delimited by quotes.

Symbols

A symbol is a variable, i.e., an identifier that has both a name and an associated value. In the Premise Language, symbols are literals starting with a question mark and ending with a sequence of numeric or alphanumeric characters. When symbols are declared their value is immediately set to an initial value. Referencing an undeclared symbol will cause a failure. Symbols are typically written in lowercase. Dots in the symbol name indicate a symbol within a particular module. For example:

```
?height      ?User.width      ?length      ?2
```

Constants

A constant is a symbol whose value cannot change. By convention constants are written in uppercase.

```
?MAX-LIMIT      ?WIDTH-MIN      ?*DEFAULT-LENGTH*
```

References

A symbol reference is a pointer to a symbol. A reference allows a symbol to be passed as a parameter.

```
(reference ?MAX-LIMIT)           (reference ?2)
[Reference :Symbol ?MAX-LIMIT]    [Reference :Symbol ?2]
```

Symbol Scoping

Symbol scope refers to the environment a symbol belongs to. A symbol may have one of five scopes: global, module, lexical, dynamic, task, and restricted.

Global Scope

Global symbols are declared using the **global** function.

```
> (do (global ?X 1)
      (function g (tell user ($$ ?X \s)) (set ?X 2))
      (function f (global ?X 3) (g)))
(f)
(tell user ($ ?X ($)))))

3 2 .: told
```

Module Scope

A symbol may be scoped to the current module using the **modular** function.

```
> (do (global ?X 1)
      (function g (tell user ($$ ?X \s)) (set ?X 2))
      (function f (modular ?X 3) (g)))
(f)
(tell user ($ ?X ($)))))

3 1 .: told
```

Lexical Scope

Lexical scoping in Premise is achieved via the **so**, **let**, and **def** macros. Multiple tasks may access the same lexical symbol. The **so** macro creates a new scope, while **let** and **def** adds symbols to the existing scope.

```
> (do (global ?X 1)
      (function g (tell user ($$ ?X \s)) (set ?X 2))
      (function f (so {?X 3} (g)))
      (f)
      (tell user ($ ?X ($)))))

3 1 .: told

> (do (global ?X 1)
      (function g (tell user ($$ ?X \s)) (set ?X 2))
      (function f (let ?X 3) (g)))
      (f)
      (tell user ($ ?X ($)))))

3 1 .: told
```

Dynamic Scope

A **dynamic** scope creates temporary global symbols.

```
> (do (global ?X 1)
      (function g (tell user ($$ ?X \s)) (set ?X 2))
      (function f (dynamic {?X 3} (g)))
      (f)
      (tell user ($ ?X ($)))))

3 2 .: told
```

Task Scope

Symbols **local** to a particular task are shielded from changes by other tasks.

```
> (do (global ?X 1)
      (function g (tell user ($$ ?X \s)) (set ?X 2))
      (function f (local {?X 3} (g)))
      (f)
      (tell user ($ ?X ($)))))

3 1 .: told
```

Restricted Scope

Resctricted scopes **only** shadow symbols and prohibit free symbols.

```
> (do (global ?x 1)
      (function g (tell user ($$ ?x \s)) (set ?x 2))
      (function f (only {?x} (g)))
      (f)
      (tell user ($ ?x ($)))))

1 1 .: told
```

Symbol Assignment

Symbols may be bound to values in a variety of ways.

Fix

The **fix** macro declares symbols in the current environment, with taxon restrictions, returning true.

```
> (fix integer ?age 10 string ?name "John Doe" literal ?fruit  grape)
.: true
> ?age  ?name  ?fruit
.: 10 "John Doe" grape
```

Let

The **let** macro declares and initializes symbols in the current environment, returning true.

```
> (let ?X 1 ?Y 2 ?Z 3)
.: true
> (let {?a ?b ?c} {dog cat fish})
.: true
> ?a ?b ?c ?X ?Y ?Z
.: dog cat fish 1 2 3
```

Def

The **def** macro declares and initializes symbols, returning the value of the last assignment.

```
> (def {?a ?b ?c} {dog cat fish} ?X 1 ?Y 2 ?Z 3)
.: 3
> ?a ?b ?c ?X ?Y ?Z
.: dog cat fish 1 2 3
```

Tie

The **tie** macro updates declared symbols, returning the last assigned value.

```
> (tie ?X 1 ?Y (++ ?X) ?Z (++ Y))  
. : 3  
  
> (tie {?X ?Z} {2 2})  
. : 2  
  
> ?X ?Y ?Z  
. : 2 2 2
```

--> Before Tie

The **before tie** macro captures a symbol's return value before binding the symbol to an expression.

```
> (global ?X 1 ?Y 1 ?Z 1)  
. : true  
  
> (<-- ++ ?X)  
. : 1  
  
> ?X  
. : 2
```

--> After Tie

The **after tie** macro captures a symbol's return value after binding the symbol to an expression .

```
> (global ?X 1)  
. : true  
  
> (--> + ?X 1)  
. : 2  
  
> ?X  
. : 2
```

Set

The **set** macro updates declared symbols, and returns **true**.

```
> (set ?X 1 ?Y (++ ?X) ?Z (++ Y))  
. : true  
> ?X ?Y ?Z  
. : 1 2 3
```

Bind

The **bind** macro declares symbols in the current environment and binds them to object property values, object method values, sequence positions, or functions, and then returns **true**.

```
> (relation Counter  
  :Value 0 :Resets 0 :Reclaim false  
)  
. : Counter  
  
> (new Counter)  
. : Counter_1  
  
> (bind Counter_1 :Value ?value)  
. : true  
  
> ?value  
. : 0  
  
> (bind {a b c d e f g} 1 ?first # ?last)  
. : true
```

Literals

Literals are non-numeric constants which evaluate to themselves. Typically, literals begin with an alphabetic or punctuation character (such as colon or exclamation point), and contain contiguous sequences of alphabetic, numeric, underscore or period characters. Literals provide names for functions, relationship prototypes, enumeration values, and so forth. Some examples of literals are as follows:

a	one	:2	three
a_1	a_12-34	hello-world	the_quick_brown_fox
*	!	::=	-a-curious-literal

Structures

Structures are unpersisted ephemeral relationships, created with the **structure** function.

```
> (structure Fault :What :Where :When)  
..: Fault  
  
> (Structure Message :Sender :Recipient :Content)  
..: Message
```

Slots

Slots are literals preceded by a colon. Some examples are:

```
:Height
```

```
:Width
```

```
:Length
```

```
:321
```

```
^
```

The identifier slot is the caret character: ^.

Slots hold data values. In relation definitions, slots are followed by values called **defaults**. In instances, slots are followed by actual values called **terms**. When no default or referent is present for a slot, the value **nil** is implied.

The following are examples of relationship prototypes with slots and defaults.

```
(structure Red  
  :Object corvette  
  :Size little )
```

```
(structure Phrase  
  :Saying "Who goes there"  
  :Count 14 )
```

The following are some examples of premises with slots and terms.

```
[Red ^ Red_56 :Object corvette :Size litte]  
[Event ^ Event_101 :Subject bird]  
[Basket ^ Basket_12 :Items {apple banana orange}]
```

When a call has a relation slot as its first item and a premise or thought as the second item, the call will return value of the slot within the premise or from the thought.

```
> (:Color [Fruit :Color Green])  
. : Green
```

```
> (:Quantifier Fact_35)  
. : Some
```

Relations

A persisted relationship is comprised of a type literal, slots, methods, and default values. A thought premise has a relation literal, slots, methods, and actual values. Relationships are defined using the **relation** function. Thoughts are created using the **new** or the **knew** function. Finally, there are three kinds of slots for a Relationship: data slots (prefixed with a colon), method slots (prefixed with an exclamation point), and identity slots (using the caret character to name the slot).

The **relation** function is used to define a relationship. The relation definition starts with a left parenthesis, followed by the literal **relation**, followed by an identifier for the type name, followed by any relation dependencies (each dependency is preceded by the **uses** keyword), then the slots and default values, methods and function names, and finally ending with a right parenthesis.

A relationship prototype must be defined before a new thought can be formed. Consider the following definitions:

```
> (relation Fruit
  :Color
  :Weight 1.0
  !eat      Fruit_eat
)
.: Fruit
```

```
> (relation Apple
  uses Fruit
  :Color red
)
.: Apple
```

```
> (relation Delicious
  uses Apple
  :Color yellow
)
.: Delicious
```

The Identity Slot

Thoughts have an identity slot (^) that contains the identifier value which uniquely demarcates the thought. Some examples of thought identifiers are

Sentence_1

Red_34

sov_74

Vocalization_9202

Instance_983

Thought premises also contain an identity slot. For example,

```
> (premise Red_1)
.: [Red ^ Red_1 :Object corvette :Size little]
> (premise Event_29)
.: [Event ^ Event_29 :subject bird]
```

A self reference value (\^) can be used when forming thoughts using the **new** function. Self (\^) is equivalent to a "this" variable in some structured languages such as C++, or the ?me variable in Premise.

```
(new Car :make Dodge :model RAM :year 2010 :id \^)
```

Methods

Methods are literals preceded by an exclamation point. Some examples are:

```
!action           !cleanup          !onNew           !onOld
```

Relationships have several built in methods which can be implemented by the developer: a constructor (!onNew), destructor (!onOld), copy method (!onCopy), and an update method (!onSet). The **!onNew** method initializes a premise. The **!onOld** method disposes of a premise.

Calling a method will look up the function name located in the method and invoke the function on the arguments. The methods `cloneMe` and `Concept_Add` will be retrieved when invoked.

```
[MyObject  !save   saveMe   !clone  cloneMe]  
[Concept    :Datum  0  !add   Concept_add ]
```

There are two ways of invoking a method. Methods are invoked using the `call` function or by using the method name as a function (i.e, by placing the method name first in a call followed by the instance containing the method). A method not found failure will be thrown if the instance does not contain the method.

```
(call  !start  car_255  ?myKey)      ; invoking a method using the call function.  
(!start  car_255  ?myKey)      ; invoking a method using the method name.
```

When a call has a method as its first item and a premise or identifier as the second item, the call will return the value of applying the method to the remaining arguments.

```
> (relation Foo
  :Datum 100
  !add2  Foo_addTwo
)

.: Foo

> (function Foo_addTwo {?me}
  (==> ?me + :Datum 2)
)

.: Foo_addTwo
```

```
> (new Foo :Datum 1000)

.: Foo_1

> (:Datum Foo_1)

.: 1000

> (!add2 Foo_1)

.: 1002
```

Resources

A resource is a literal which represents a tuple. Resources can be created for tasks, files, assortments, data connections, and so forth. Typically a resource will indicate the type of resource, followed by a hyphen, followed by an integer resource number.

File-45
Lexicon-87

Task-32
Environment-67

Data-988
Colors

Assortments

Assortments are resources that hold unordered elements, associations, bindings, or enumerations.

Collections

Collections are sets that contain only keys. They are created with the **collection** function.

```
> (collection
  the quick brown fox 21  "over the" lazy dogs [MyObject ^ MyObject_32] )

.: Collection-1
```

Configuration

Configurations are key value pairs that are persisted to a file. They are created with the **configuration** function.

```
> (configuration "file://localhost.com/c$/apps/Premise/"  
  "/mind/agent/delay" \@m35  
  "/mind/activation/history/maximum" 15)  
  
. : Configuration-1
```

Environments

Environments contain identifier to value bindings. They are created with the **environment** function.

```
> (environment nil  
  (symbol x) 32  times10 (given {?x} (* ?x 10)) )  
  
. : Environment-1
```

Enumerations

Enumerations contain literal elements. Each element of the enumeration has a position. By default the first element will have position one, the second two, and so forth. If any of the arguments to the enumeration function is numeric, then that argument will set the position for the preceding literal. Enumerations are created with the **enumeration** function.

```
> (enumeration Colors red orange yellow )  
  
. : Enumeration-1  
  
> (enumeration Controls clock 100 timer 200 start 300)  
  
. : Enumeration-2
```

Ephemeros

Ephemeros are manifested structures created with the **new** function. A Fault ephemeron can be defined as follows. Because they are short lived, ephemeros are represented as premises, and do not have a unique identifier. They keys for an ephemeron are fixed and are defined by the structure the ephemeron instantiates.

```
> (new Fault :What AnError :Where RightHere :When Now)
.: [Fault :What AnError :Where RightHere :When Now]
> (new Message :Sender Me :Recipient Todd :Content "Hello There")
.: [Message :Sender Me :Recipient Todd :Content "Hello There"]
```

Thoughts

A relation is a prototype defines a fixed record structure. A thought is an instance of a relation that has predefined keys, and can be added to memory using the **new** function. Each thought instance has a literal identifier. In the case below, Apple_1 and Delicious_34 are identifiers for thoughts.

```
> (new Apple :Weight 2.0)
.: Apple_1
> (new Delicious)
.: Delicious_34
```

Lexicons

Lexicons contain value to value associations. They are created with the **lexicon** function.

```
> (lexicon
  {a b c} "123" the {"t" "th" "the" "he" "e"} :Every body )
.: Lexicon-1
> (entries Lexicon-1)
.: {{a b c} "123"}{the {"t" "th" "the" "he" "e"}}{:Every body}}
```

Continuations

Continuations enable jumps into functions. They are created with the **continuation** function.

```
> (function factorial_hps {?n ?k)
  (assume ?a 1)
  (continuation ?m ?a)
  (if (<= ?n 0)
    (continue ?k ?a)
  else
    (--> -- ?n)
    (continue ?m (* (++ ?n) ?a)))))

.: factorial_hps

> (function factorial {?n}
  (assume ?r nil)
  (continuation ?k ?r)
  (if (nil-p ?r) (factorial_hps ?n ?k) else ?r))

.: factorial

> (factorial 5)

.: 120
```

Data

Data resources enable the use of information sources. They are created with the **data** function.

```
> (global ?Data (data driver sqlserver server "//servername" port 1433
  database mydata user "myUid" password "123456"))

.: Data-1

> (fetch ?Data "select top 2 empid, name, salary from employee")

.: {{1 "John Smith" 10.50}{2 "Jane Johnson" 12.00} }

> (disconnect ?Data)

.: disconnected
```

Files

File resources enable the reading and writing of files. They are created with the **file** function.

```
> (write (file name "quick.txt" seek 1) "The quick brown fox")
.: File-1
> (close file-1)
.: closed
```

Tasks

Tasks are expressions that can be evaluated in separate threads of execution. They are created with the **task** function.

```
> (task (/ 1000 57) (** 4 20) (** 4 20))
.: {Task-1 Task-2 Task-3}
> (complete task-1 task-2)
.: {Task-1 Task-2}
> (await task-1)
.: 17.54385964912281
> (await task-2)
.: 1099511627776
> (concurrent task-3)
.: {Task-3}
> (await task-3)
.: 1099511627776
> (free {task-1 task-2 task-3})
.: freed
```

Indices

Index resources are used to increased the speed of instance retrieval. They are created with the **index** function.

```
> (relation Car :Make :Model :Year)  
.: Car  
  
> (index Car :Make :Model)  
.: Car_Index_1  
  
> (index Car :Model)  
.: Car_Index_2  
  
> (new Car :Make A :Model M1)  
.: Car_1  
  
> (with Car ^ as ?i :Model M1) list ?i  
.: {Car_1}  
  
> (drop Car_Index_1)  
.: dropped  
  
> (drop Car_Index_2)  
.: dropped
```

Keyword Literals

Certain literals are keywords that have a distinctive meaning. Keywords can optionally be prefixed with \% to be explicit about the use of the keyword. For example, the **Truth** keyword grouping represents a possible logical states.

<code>true</code>	<code>false</code>	<code>unknown</code>
<code>\%True</code>	<code>\%False</code>	<code>\%Unknown</code>

Reserved Literals

The function literals that comprise the Premise Language are reserved and should not be redefined in their native modules since attempting to do so would redefine the behavior of the language.

Modules

Modules are name spaces. A module literal is used to avoid literal collisions and provide modularity in Premise code. Modules are delimited by dots (.) within a literal. There are several initial modules.

Apex	Global environment
Base	Foundational functions
IO	File & Messaging functions
KB	Knowledge access
Math	Math functions
Tasks	Task functions
User	Default environment

All modules are global, meaning that the modules cannot be concatenated or nested. Modules are declared with the **module** function, and modified with the **extend** function, and deleted with the **discard** function.

Sequences

Sequences are ordered groupings of values. The main function of a sequence is to group values into arrays, sets, or bags of items. The Premise Language provides functions for accessing sequences as a series of elements.

Calls

A call is a parenthetical expression which when evaluated, will result in a value. For example, the expression `(+ 1 2 3)` is a call which when evaluated will result in the value 6. The first item in the expression is the left parenthesis, followed by a function literal followed by any actual parameters, followed by a right parenthesis. The function literal may be either a language intrinsic function or a user defined function. An empty call, `()`, returns itself.

```
(+ 1 2 3)
```

```
(trim " abc ")
```

```
()
```

Functions

Functions (also called *exonyms*) are defined using **function**.

```
> (function foo {?a ?b}
  (+ ?a ?b)
  )
.: foo
```

```
> (function bar {?a ?b}
  (* ?a ?b)
  )
.: bar
```

Functions are invoked by creating a call—wrapping the name and arguments in parentheses.

```
> (foo 10 20)
.: 30
```

```
> (bar 10 20)
.: 200
```

Parameter Lists

There are several ways define the parameters to a function

1. No parameter list.

```
(function forgetEveryone
  (each (with Person) old)
)
```

2. As a list containing zero parameters

```
(function helloWorld {}
  (tell user "Hello World")
)
```

3. As a list containing one or more required parameters

```
(function addThem {?x ?y}
  (+ ?x ?y)
)
```

4. As a list containing a variadic remainder parameter which contains all passed arguments.

```
(function addAll {& ?numbers}
  (tell user ($ the sum of ?numbers is (apply + ?numbers) \n))
)
```

5. As a list containing optional parameters.

```
(function result {+ ?y}
  (--> default ?y 0)
  (tell user ($ result = ?y \n))
)
```

6. As a list containing optional parameters with default values.

```
(function result {+ ?y = 0}
  (tell user ($ result = ?y \n))
)
```

7. As a list containing required, optional, or remainder parameters.

```
(function result {?x + ?y = 1 & ?z}
  (tell user ($ result = (apply * (& ?x ?y ?z)) \n))
)
```

8. As a list containing required and optional keyword parameters.

```
(function result {{color ?c} + % {length ?n} = 0 {width ?w} = 0
  {height ?h} = 0}
  (tell user ($ color ?c))
  (tell user ($$ , \s length \s ?n , \s width \s ?w , \s height \s ?h ))
)
```

9. Function parameters are automatically evaluated by default. Macro parameters are unevaluated by default.

```
(macro result {?x ?y ?z}
  (tell user ($$ (eval ?x( " , " (eval ?y) " , " (eval ?z) \n)))
)
```

Parameter Specifications

Any required parameters are specified first. A failure is caused if a required parameter is not supplied with an argument when a function is called.

```
(function addThem {?x ?y} ; ?x and ?y are required.
  "Add two numbers."
  (+ ?x ?y)
)
```

The optional parameter sigil, the plus sign (+), precedes any optional ordered parameters. Optional parameters are processed sequentially and are bound to **nil** if no default values are specified.

```
(function AddTwoToFive {?a ?b + ?c = 0 ?d = 0 ?e}
  "Add between two and five numbers."
  (apply + (& ?a ?b ?c ?d ?e)
)
```

Default values may immediately follow an optional parameter symbol. The default value sigil, the equal sign (=), precedes a default value to a symbol. Default values may only be literals, times, numbers, or strings. The default value must not be a symbol, resource, tuple, call, or list.

```
(function addThem {+ ?x = 0 ?y = 0}; ?x and ?y both default to zero.  
  "Add two numbers."  
  (+ ?x ?y)  
)
```

A keyword parameter is a list containing a keyword pattern and symbol pair (e.g., {literal ?symbol}). Keyword parameters may be supplied instead of a symbol. They keyword literal is matched to the arguments and the value following the literal is placed into the variable.

```
(macro myFor {?y {as ?x} & ?body}  
  (eval (` (for , ?x in , ?y , ?body)))  
)
```

A function or macro containing required keyword parameters would be called as follows

```
(myFor {Jane Jack Joe} as ?name (tell user ($ ?name \n)))
```

Optional keywords are matched sequentially. Unordered keywords require the unordered keywords sigil, the percent sign (%). Unordered keyword arguments are matched in any order they occur in the argument list if their formal parameters follow the unordered keywords sigil.

```
(macro myStep { ' ?v {from ?a} + % {to ?z} {by ?i} = 1 & ?body}  
  (eval (` (step , ?v from , ?a to , ?z by (default , ?i 1) , ?body)))  
)
```

A variadic parameter sigil, the ampersand (&), ties the remaining arguments together into a list for the subsequent symbol. Only one symbol is permitted after the ampersand. The remainder parameter will be bound to an empty list if no actual parameters are supplied.

```
(function AddTwoOrMore {?x ?y & ?z}  
  (if (void-p ?z)  
    (+ ?x ?y)  
  else  
    (apply + (& ?x ?y ?z)))  
)
```

It would be called as follows

```
(myStep ?i to 100 by 2 from 1  (tell user ($ ?i \n)))
```

In functions, all arguments are evaluated before the function body is applied. This is not the case for macros. Macro parameters remain unevaluated until they are explicitly evaluated with the **eval** function within the body of the macro definition.

```
(macro callLength {?f}
  (ensure Call ?f)
  (# (eval ?f))
)
```

More examples...

```
(function foo
  "No parameter list."
  (do nothing))

(function foo {}
  "Zero length param list."
  (do nothing))

(function foo {?x ?y}
  "Fixed number of required parameters."
  (+ ?x ?y))

(function foo {+ ?x = 0 ?y = 0}
  "Optional parameters with default values."
  (+ ?x ?y))

(function foo {?w + ?x ?y & ?z}
  "Required, optional, and remaining parameters."
  (--> default ?x 0)
  (--> default ?y 0)
  (apply + (& ?w ?x ?y ?z)))

(function foo {+ ?w = 0 ?x = 0 ?y = 0 & ?z }
  "Optional and remaining parameters with default values."
  (apply + (& ?w ?x ?y ?z)))

(macro define {?name ?args & ?body}
  "Unevaluated parameters."
  (eval (` (function , ?name , ?args ,_ ?body))))
```

Auto-named Functions

Auto-named functions (also called *endonyms*) are created by omitting the function name in the definition. When the function name is omitted, the Premise interpreter will automatically generate a function name for the function.

```
> (function {?x ?y}
  (* ?x ?y)
)
. : fn-24
```

```
> (function {& ?args}
  (apply * ?args)
)
. : fn-25
```

```
> (function
  (with Truck ^ as ?t
    do (old ?t)))
. : fn-26
```

Anonymous Functions

Anonymous functions (i.e., also called *anonyms*) are implemented using **given**. An anonym expression can stand in for a named or auto-named function call.

```
> ((given {?x ?y} (* ?x ?y)) 2 3)           ; same effect as (fn-24 2 3)
. : 6
```

Generators

A generator is a function that creates a series. Generators are created using the **generator** function. When a generator is invoked it will produce a series.

```
> (generator generateABC {}
  (yield a)
  (yield b)
  (yield c)
  (stop))

. : generateABC

> (collect ?e in (generateABC) ?e)
. : {a b c}

> (generateABC)

. : {...}
```

Macros

A macro is a call that evaluates an expanded expression. Macros are defined using **macro**. The back quote function (`) expands an expression by substituting subexpressions that follow commas, then it evaluates the resultant expression.

```
> (macro plus {?a ?b}
  (eval (` (+ , ?a , ?b)))
)
.: plus
```

```
> (macro prod {?a ?b}
  (eval (` (* , ?a , ?b)))
)
.: prod
```

Macros are invoked by wrapping the macro name and arguments in parentheses.

```
> (plus 10 20)
.: 30
```

```
> (prod 10 20)
.: 200
```

Expressions

Expressions are sequences of zero or more variants without any delimiters. Expressions are usually found inside sequences such as lists, tuples, or calls.

an expression another expression	don't do that He said, Sure why not?
-------------------------------------	---

Lists

Lists are ordered groupings of values which evaluate to themselves. Lists are malleable so they can be extended or reduced and elements can be inserted or deleted. This malleability allows lists to represent stacks or queues or orderings. The empty list, {}, may be used in code for clarity. Lists are created with the **list** function.

{a b c}	{1 2 3}	{ }
---------	---------	-----

Vectors

Vectors are sequences of numbers delimited by pipes (vertical bar). Numbers are not supported as a distinct data type; instead a byte is an integer written in base 16.

```
| 0 |           | 1 2 3 |           | \#xFF \#xE2 \#xC8 |           | \#FFE2C872 |
```

Strings

Strings are sequences of characters delimited by double quotes. Characters are not supported as a distinct data type, instead characters are strings of length 1.

```
"a string"          "don't do that"  
"another string"    "He said, 'Sure why not?'"
```

Backslashes provide character escaping. Doubling the backslash character within a string provides an escape for the backslash character. For Example \\ will represent a single \. Other escape characters are as follows:

<u>Escape Sequences</u>	<u>Character Generated</u>
\\\	\
\'	'
\n	newline
\t	tab
\"	"

<u>Escape Sequences</u>	<u>Character Generated</u>
\\\	\
\'	'
\n	newline
\t	tab
\"	"

Character values can be generated using the backslash character. The octal values \o0 to \o177777, Unicode values \u0000 to \uFFFF, and decimal values \d0 to \d65535 can be contained in strings to select specific characters.

Tuples

Tuples are elements delimited by square brackets. For example [1 2 3] or [a b c]. Tuples are often used to represent relationships. Relationship tuples are comprised of a literal type and zero or more key-value pairs (called terms) enclosed in square brackets. For example

```
[Fault :What nil :Where nil :When nil]
```

is a tuple. Resources, ephemeros, and instances can all be represented as tuples.

Premises

Premises are tuples that represent language objects.

```
> (premise (new Fault :What "Printer Error" :Where "Line 287"
           :When "2014-003-16T21:54"))

.: [Fault :What "Printer Error" :Where "Line 287" :When "2014-003-16T21:54"]
```

For a relationship or thought, the **premise** function will retrieve a premise representation of the relationship or thought. The **uses** keyword coalesces many relations into one. Consider the following example where the **get** function retrieves the instance E_1.

```
> (relation A
   :X 0
   )

.: A

> (relation B
   :Y 1
   )

.: B

> (relation C
   :Z 0
   )

.: C

> (relation D
   uses A uses B uses C
   )

.: D
```

```
> (new D)

.: D_1

> (premise D_1)

.: [D ^ D_1 :X 0 :Y 1 :Z 0]

> (relation E
   uses D
   :Z 2
   )

.: E

> (new E)

.: E_1

> (premise E_1)

.: [E ^ E_1 :X 0 :Y 1 :Z 2]
```

Patterns

A pattern is a premise that is used to match thoughts. A pattern consists of a relation name or thought identifier list and some combination of slot bindings, slot tests, or both, enclosed within square brackets. A slot binding is a slot name, followed by **as** or **each**, followed by a symbol. A slot test is either a call containing a function that returns a truth value, or a slot name, followed by a predicate function name, followed by a value . Some examples of patterns are as follows:

```
[Prediction :What ?what :Start ?start] ; two slot bindings  
[Hypothesis ^ ?me :If ?if :Then ?then] ; three slot bindings  
[Solution as ?s :Duration > \@t5000] ; one binding one test
```

Patterns can be used in **with** function calls in order to perform rule based inference. For example, we first create a relation and some instances like this:

```
> (relation Fact :All :Are)  
. : Fact  
  
> (new Fact :All people :Are mortal)  
. : Fact_1  
  
> (new Fact :All philosophers :Are people)  
. : Fact_2
```

Then the **with** expression can infer a conclusion

```
> (with [Fact :All as ?S :Are as ?M]  
        [Fact :All = ?M :Are ?P])  
get  
  (knew Fact :All ?S :Are ?P))  
  
. : [Fact ^ Fact_3 :All philosophers :Are mortal]
```

The patterns in the **with** expression above that matched the thoughts Fact_1 and Fact_2 are

```
[Fact :All ?M :Are ?P] matches Fact_1 and Fact_2  
[Fact ^ ?f :All ?S (= (:Are ?f) ?M)] matches Fact_2 only.
```

Finally, the **knew** function attempts to find an existing thought whose slots match the values. If none are found, then the function creates a new thought.

```
> (knew Fact All ?S :Are ?P)  
. : Fact_3
```

4. Control Flow

The following expressions permit alterations to the normal sequential flow of expression evaluation.

Conditional Expressions

Conditional expressions branch the flow of evaluation to alternate paths.

if

The if macro provides branched conditional flow of evaluation.

```
> (if (= 1 2)
    (tell user ($ An impossibility.))
    (tell user ($ I'm certain. \n))
  or (= 2 1)
    (tell user ($ Another impossibility.))
    (tell user ($ Most definitely. \n))
  or (/= 1 1)
    (tell user ($ A total absurdity.))
    (tell user ($ Without a doubt. \n))
  else
    (tell user ($ The world is right as rain. \n))
  HelloWorld)

The world is right as rain.
.: HelloWorld
```

case

The case macro provides branching based on a value.

```
> (case red
  of green (tell user ($ Nature's)) (tell user ($ glory. \n))
  of blue (tell user ($ A wondrous)) (tell user ($ beauty. \n))
  in {brown black purple indigo violet} (tell user ($ A fabulous selection. \n))
  else
    (tell user ($ Hmm... I didn't consider that one.))
    (tell user ($ ($) Bravo. \n))

Hmmm... I didn't consider that one. Bravo.
.: nil
```

on

The **on** macro provides branched conditional flow of evaluation.

```
> (on (= 1 2)
      (tell user ($ A truth.))
      (tell user ($ An impossibility. \n)))

An impossibility
.: told

> (on (= 1 1)
      (tell user ($ Without a doubt. \n))
      (tell user ($ A total absurdity.)))

Without a doubt.
.: told
```

try

The **try** macro provides exception handling or subroutine resumption.

```
> (try
    (signal Failure :Name MyFault :Text "Failed Miserably")
    learn ?failure
    (tell user ($ Handled ?failure \n))
    proceed
    (tell user ($ Resumed execution \n))
    finally
    (tell user ($ Done. \n)))

Handled [Failure :Name MyFault :Text "Failed Miserably"]
Done.
.: nil

> (try
    (escape)
    learn ?f
    (tell user ($ Handled ?failure \n))
    (resignal ?f)
    proceed
    (tell user ($ Resumed execution \n))
    finally
    (tell user ($ Done. \n)))

Resumed execution
Done.
```

Looping Expressions

Certain expressions are used to loop through a sequence or iterate over a series of values.

loop

The **loop** macro allows conditional repetition of one or more expressions.

```
> (global ?I 100)
.: true
> (loop (--> -- ?I) until (= ?I 90))
.: 90
> (loop (--> ++ ?I) while (< ?I 100))
.: 100
> (loop (--> -- ?i) repeat 100)
.: 0
```

for

The **for** macro repeatedly binds one or more symbols through elements of a sequence.

```
> (for ?x in {hello world} (tell user ($$ ?x \s)))
hello world .: told
> (for ?x in "hello world" (tell user ($$ ?x \s)))
h e l l o   w o r l d .: told
> (for ?k ?v in {a 1 b 2 c 3 d 4}
  (tell user ($ ?k ($$ ?v ,))))
a 1, b 2, c 3, d 4, .: told
> (for ?x ?y ?z per {{a 1 $}{b 2 @}{c 3 #}{d 4 /}}
  (tell user ($ ?x ?y ($$ ?z ,))))
a 1 $, b 2 @, c 3 #, d 4 /, .: told
```

[step](#)

The **step** macro increments or decrements a symbol over a series of numeric values.

```
> (step ?i from 5 to 9
  (tell user ($$ "?i = " ?i ", " )))

?i = 5, ?i = 6, ?i = 7, ?i = 8, ?i = 9, .: told

> (step ?i from 100 to 50 by -10
  (tell user ($$ "?i = " ?i ", " )))

?i = 100, ?i = 90, ?i = 80, ?i = 70, ?i = 60, ?i = 50, .: told

> (step ?i from 0 to 0.5 by 0.1
  (tell user ($$ "?i = " ?i ", " )))

?i = 0, ?i = 0.1, ?i = 0.2, ?i = 0.3, ?i = 0.4, ?i = 0.5, .: told
```

[repeat](#)

The **repeat** macro allows repetition of one or more expressions for a specified number of iterations.

```
> (repeat 1000 (--> ++ ?i))

.: 1100

> (repeat 5 (tell user ($$ hi \s))

hi hi hi hi hi .: told
```

[count](#)

The **count** macro repeatedly binds one or more symbols to elements of a sequence and returns the count..

```
> (count ?x in {the quick brown fox} as ?total
  (tell user ($ ?x \t))

the      quick      brown      fox      .: 4
```


[while](#)

The while macro allows repetition of one or more expressions while a condition is true.

```
> (global ?N 0)

.: true

> (while (< ?N 5)
  (tell user ($ ?N \n))
  (--> ++ ?N))

0
1
2
3
4
.: 5
```

[until](#)

The until macro provides repetition of one or more expressions until a condition is true.

```
> (global ?S {a b c d 1 2 3 4} ?i 0 ?result {})

.: true

> (until (number-p (@ ?S (--> ++ ?i)))
  (& ?result {{(@ ?S ?i) bar}}))

.: {{a bar}{b bar}{c bar}{d bar}}
```

[Escape Expressions](#)

Escape expressions redirect the flow of control.

[confirm](#)

The **confirm** macro signals a failure if the test fails.

```
> (function multiply {?a ?b}
  (confirm (taxon-p ?a number) since ($ ?a must be a number))
  (confirm (taxon-p ?b number) since ($ ?b must be a number))
  (* ?a ?b))

.: multiply

> (multiply 10 banana)

.: [Failure :Name DataTypeFailure :Text "banana must be a number"]
```

[confute](#)

The **confute** macro signals a failure if the test succeeds.

```
> (confute (= red blue) since "colors must be different")

.: false

> (function reducing {?sequence ?function}
  (ensure sequence ?sequence function ?function)
  (confute (<= (# ?sequence) 1) since "Two or more elements are required.")
  (let ?result (@ ?sequence))
  (for ?element in (rest ?sequence) (--> ?function ?result ?element)))

.: reducing

> (reducing {1} +)

.: [Failure :Name Confutation :Text "Two or more elements are required."]
```

Related

[break](#)

The **break** macro transfers control out of the containing loop.

```
> (do (step ?i from 1 to 10
           (if (= ?i 3) (break nil))
           (tell user ($ ?i \n)))
       (tell user ($ done \n)))

1
2
done
.: nil
```

[continue](#)

The **continue** macro transfers control to the next iteration of the containing loop.

```
> (for ?letter in "Premise"
      (if (in "meis" ?letter) (continue))
      (tell user ($ Letter is ($$ ?letter .) \n)))

Letter is P.
Letter is r.
.: nil
```

[exit](#)

The **exit** macro transfers control out of the current task. Whereas return may exit from a nested function, exit terminates the task. Exit can be thought of as a task level return.

```
> (concurrent
    (step ?x from 1 to 999999999
        (if (> ?x 100) (exit exited)))

.: {Task-1}

> (await task-1)

.: exited

> (free task-1)

.: freed
```

signal

The **signal** macro transfers control to an encompassing try expression.

```
> (function myFun
  (try
    (signal Failure :Name BadAttitude :Text "example")
    learn ?f
    (case (:Name ?f)
      of BadAttitude
        (tell user ($ Caught inside myFun. \n))
        (resignal ?f)))
  )

.: myFun

> (function main {& ?args}
  (try
    (myFun)
    learn ?f
    (case (:Name ?f)
      of BadAttitude
        (tell user ($ Caught inside main. \n))))
  )

.: main

> (main)

Caught inside myFun.
Caught inside main.
.: nil
```

resume

The **resume** macro transfers control to a location, potentially updating local symbols. The general pattern for continuations in Premise is as follows:

1. Declare and initialize a result symbol (so {?result start})
 2. Take the current location (location ?k)
 3. Branch based on result or other information. (case ?result
of start (start ?k ?result ?info)
of finish (finish ?result)))

```
> (function makeSandwich {?k}
  (tell user ($ Made a sandwich.))
  (resume ?k ?sandwich true))

.: makeSandwich

> (function eatSandwich
  (tell user ($ Ate the sandwich.)))

.: eatSandwich

(function ImHungry
  (so {?sandwich false} (location ?k)
    (if ?sandwich (eatSandwich) else (makeSandwich ?k)))))

.: ImHungry

> (ImHungry)

Made a sandwich.
Ate the sandwich.
.: told
```

return

The **return** macro transfers control out of the current function.

```
> (function a {?i} (if (= ?i 5) (return nil)) (tell user ($ ?i \n)))  
. : a  
  
> (function b {?i} (if (> ?i 4) (return 4 from b)) (tell user ($ ?i \n)) (return 2))  
. : b  
  
> (function c {?k ?v} (return {?k ?v} from function))  
. : c  
  
> (function d (a 30))
```

```

.: d

> (do
  (a 5)
  (a 1)
  (assume ?i (b 5))
  (tell user ($ ?i \n))
  (tell user ($ (@ (c 100 90) 2) \n))
  (d))

1
4
90
30
.: nil

```

[ensure](#)

The **ensure** macro transfers control to an encompassing try expression if a type check fails.

```

> (function multiply {?a ?b}
  (ensure number ?a number ?b)
  (* ?a ?b))

.: multiply

> (multiply 10 banana)

.: [Failure :Name EnsureType :Text "The value banana must be a number"]

> (multiply 10 5)

.: 50

```

[escape](#)

The **escape** function transfers control to an encompassing try expression containing a **proceed** tag.

```

> (try
  (escape)
  proceed
  (tell user ($ Resumed execution \n))
  finally
  (tell user ($ Done. \n)))

Resumed execution
Done.

```

go

The **go** macro transfers control to a function.

```
> (relation Queue   :Items {} :Capacity 10
    !count (given {?me} (# (:Items ?me)))
    !full-p (given {?me} (>= (!count ?me) (:Capacity ?me))))  
.  
. : Queue  
  
> (function produce {?q}
    (tell user ($ producing \n))
    (if (not (!full-p ?q))
        (repeat (random 1 to (- (:Capacity ?q) (!count ?q)))
            (enq ?q :Queue (new Item))))
        (go consume ?q)))  
.  
. : produce  
  
> (function consume {?q}
    (tell user ($ consuming \n))
    (if (more-p (:Queue ?q))
        (repeat (random 1 to (# (:Queue ?q)))
            (deliver (pop (:Queue ?q)))))
        (either (void-p (:Queue ?q))
            done
            (go produce ?q)))  
.  
> (produce (new Queue))  
  
producing  
consuming  
.  
. : done
```

Multitasking Expressions

The Premise Language facilitates asynchronous and concurrent expression evaluation.

concurrent

The **concurrent** function runs expressions asynchronously and returns immediately.

```
> (concurrent (+ 1 2 3 4) (/ 1000 57))  
.: {task-1 task-2}  
  
> (await task-1)  
.: 10  
  
> (await task-2)  
.: 17.54385964912281  
  
> (free {task-1 task-2})  
.: nil
```

complete

The **complete** function executes expressions concurrently and returns after all have completed.

```
> (complete (step ?i from 0 to 50000000 (do nothing))  
           (step ?i from 1 to 10000000 (do nada)))  
.: {Task-1 Task-2}  
  
> (await task-1)  
.: nothing  
  
> (await task-2)  
.: nada  
  
> (free {task-1 task-2})  
.: freed
```

[scatter](#)

The **scatter** function applies functions in parallel and returns a list of results.

```
> (function double {?x} (* ?x 2))  
.: double  
  
> (scatter {5} {++ -- double})  
.: {6 4 10}  
  
> (scatter {{the quick brown fox jumped over the lazy dogs}}  
{except rest top last})  
.: {{the quick brown fox jumped over the lazy }  
{quick brown fox jumped over the lazy dogs}  
{the}  
{dogs}})  
  
> (scatter {2 3 4} {+ * -})  
.: {9 24 -5}
```

5. Code Examples

The following are simple examples demonstrating the language.

Inference

Logical pattern matching and declarative inference.

```
(relation Statement
  :All
  :Are
)

(new Statement :All people :Are mortal)

(new Statement :All philosophers :Are people)

(with [Statement :All as ?s :Are as ?m]
      [Statement :All = ?m :Are as ?p]
  list
    (knew Statement :All ?s :Are ?p))
```

```
> (relation Statement
  :All
  :Are
)

.: Statement

> (new Statement :All people :Are mortal)

.: Statement_1

> (new Statement :All philosophers :Are people)

.: Statement_2

> (with [Statement :All as ?s :Are as ?m]
      [Statement :All = ?m :Are as ?p]
  list
    (knew Statement :All ?s :Are ?p))

.: {Statement_3}

> (with Statement)

.: {[Statement ^ Statement_1 :All people :Are mortal]
  [Statement ^ Statement_2 :All philosophers :Are people]
  [Statement ^ Statement_3 :All philosophers :Are mortal]})
```

Memoization

Memoization is the process of saving intermediate results for lookup rather than recomputation. Once a value has been computed, it can be memorized so that if the value is needed again, it can be easily retrieved rather than recomputed. The following example uses memoization in computing Fibonacci numbers.

```
> (relation Memoized
  :Number
  :Result
  )

. : Memoized

> (new Memoized :Number 0 :Result 0)

. : Memoized_1

> (new Memoized :Number 1 :Result 1)

. : Memoized_2

> (function fib {?n}
  (confirm (>= ?n 0) since
    ($ ?n must be zero or more.))
  (with
    [Memoized ^ :Number as ?n :Result as ?r] ; if a matching instance exists
    do
      (return ?r)) ; then return, otherwise do nothing
    (assume ?result (+ (fib (- ?n 1)) (fib (- ?n 2))))
    (new Memoized :Number ?n :Result ?result)
    (return ?result)
  )
  . : fib

> (fib 7)

. : 13

> (with Memoized)

. : {[Memoized ^ Memoized_1 :Number 0 :Result 0]
  [Memoized ^ Memoized_2 :Number 1 :Result 1]
  [Memoized ^ Memoized_4 :Number 3 :Result 2]
  [Memoized ^ Memoized_6 :Number 5 :Result 5]
  [Memoized ^ Memoized_3 :Number 2 :Result 1]
  [Memoized ^ Memoized_8 :Number 7 :Result 13]
  [Memoized ^ Memoized_7 :Number 6 :Result 8]
  [Memoized ^ Memoized_5 :Number 4 :Result 3]}
```

Programming Patterns

Event driven programming.

```
> (structure Event
  :Topic
  :Content
  )

.: Event

> (relation Fault
  :Who
  :What
  :Where
  :When
  )

.: Fault

> (function dispatcher {?message}
  (try
    (assume ?taken (take ?message)
           ?event (either (takeable-p ?taken) (@ ?taken) else nil)

    (ensure Event ?event)

    (let ?event :Topic as ?topic :Content as ?content)
    (case ?topic
      of Percept (onPerceptReceived ?content)
      of Ping     (onPingReceived    ?content)
      else
        (signal Failure :Name BadTopic :Text ($ Unknown topic ?topic)))
    (tell user ($ Handled ?message))
    learn ?failure
    (new Fault :Who Dispatcher :What ?failure :When (date)
              :Where {dispatcher ?message}))
  )
  )

.: dispatcher

> (global ?URL (config "/application/eventUrlAndPort"))

.: true

> (listener ?URL dispatcher) ; creates a message loop

.: Listener-1

> (tell ?URL ($ (new Event :Topic Ping :Content {:Sent (moment)})))

.: told
Handled [Event :Topic Ping :Content {:Sent \@m201804991265124}]

> (free Listener-1 cancel yes)

.: freed
```

Similarity Based Matching

The `~` and `best` language intrinsics perform similarity based comparisons to support case-based reasoning.

```
> (~ {a b c} {a d e})  
.: 0.2  
  
> (~ "a b c" "a d e")  
.: 0.090909091  
  
> (~ 57 890)  
.: 0.00119904076738  
  
> (best 2001 (range 1 to 1000000) 5)  
.: {{2001 1} {2000 0.5} {2002 0.5} {1999 0.3333333333333333} {2003 0.3333333333333333}}  
  
> (best "this" {"that" "hat" "hit" "with" "isthmus"} 3)  
.: {{"that" 0.1111111111111111} {"hat" 0.0833333333333333} {"hit" 0.0833333333333333}}
```

Asynchrony and Concurrency

The **concurrent**, **complete**, and **task** functions run expressions asynchronously, concurrently, or as required. The concurrence function **complete** returns after all tasks have completed whereas the asynchronicity function **concurrent** returns immediately after invocation. The **task** function creates a task for deferred execution. The functions each return a list of task handles.

```
> (concurrent (step ?i from 1 to 30000000 (do something)) ; runs asynchronously
   (step ?j from 1 to 60000000 (do something-else)))

.: {Task-1 Task-2}

> (ready-p task-1)

.: false

> (await task-1)

.: something

> (await task-2 1000 timed-out) ; adding timeout and default args

.: timed-out
```

```

> (await task-2)

.: something-else

> (free {task-1 task-2})

.: freed

> (complete (step ?i from 1 to 30000000 (do someOtherThing)) ; runs concurrently
    (step ?j from 1 to 60000000 (do anotherThing)
    (step ?k from 1 to 100000000 (do oneLastThing))

.: {Task-3 Task-4 Task-5}

> (cancel task-5)

.: cancelled

> (await task-3 0 timed-out)

.: someOtherThing

> (await task-4 0 timed-out)

.: anotherThing

> (free {task-3 task-4})

.: freed

> (function sayHello {}
  (for ?c in "hello " (tell user ($ ?c)))))

.: sayHello

> (global ?Tasks (task (sayHello) (sayHello) (sayHello) (sayHello)))

.: true

> (free (complete ?Tasks))

hhehelelohl lello l ol o .: freed

> (function sayHello {}
  (critical printing
  (for ?c in "hello " (tell user ($ ?c)))))

.: sayHello

> (set ?Tasks (task (sayHello) (sayHello) (sayHello) (sayHello)))

.: true

> (free (complete ?Tasks))

hello hello hello hello .: freed

> (undeclare ?Tasks)

.: undeclared

```

Sequences

A sequence is a string, a list, or a tuple. The language provides functions to manipulate sequences (e.g, # element, make, bind, for).

```
> (@ "ABC" 2)      ; find the second element of the string
.: "B"

> (@ {The quick brown fox jumped over the lazy dogs} 5)
.: jumped

> (copy {A B C} 1 X 3 Z)  ; copy list, replacing positions 1 and 3
.: {X B Z}

> (copy "ABC" 1 X 3 Z) ; copy string, replacing positions 1 and 3
.: "XBZ"

> ?v1
.: [Failure :Name UndefinedSymbol :Text "Symbol ?v is undefined."]

> (let {A B C} 1 ?v1 2 ?v2)
.:      true

> ?v1
.: A

> (let "ABC" 1 ?s1 2 ?s2)
.: true

?s1
.: "A"

> ?s2
.: "B"

> (for ?c in "the quick brown fox"
  (tell user ($ ?c)))
the quick brown fox .: told

> (for ?n in {1 2 3}
  (tell user ($$ (* ?n 10) \s )))
10 20 30 .: told
```

Tuples

Premises are tuples and there are specific functions to manipulate premises (e.g., get, let, set, zap).

```
> (relation Foo :Bar :Baz)
.: Foo

> (new Foo :Bar 100)
.: Foo_1

> (premise Foo_1)
.: [Foo ^ Foo_1 :Bar 100 :Baz nil]

> ?bar
.: [Failure :Name UndefinedSymbol :Text "Symbol ?bar is undefined."]

> (let (premise Foo_1) :Bar as ?bar)
.: true

> ?bar
.: 100

> (put Foo_1 :Baz "The quick brown fox")
.: Foo_1

> (zap Foo_1 :Bar)
.: Foo_1

> (premise Foo_1)
.: [Foo ^ Foo_1 :Bar nil :Baz "The quick brown fox"]

> (zap Foo_1)
.: Foo_1

> (premise Foo_1)
.: [Foo ^ Foo_1 :Bar nil :Baz nil]
```

Assortments

Assortments are tuples that contain unordered items. Assortments such as collections, lexicons, environments, and enumerations are provided along with specific functions to manipulate them (e.g., add, cut, item, keys, put, the, tie, values, etc.).

```
> (lexicon q nil)
.: Lexicon-1
> (add Lexicon-1 "z" foo)
.: Lexicon-1
> (add Lexicon-1 84 nil)
.: Lexicon-1
> (entries Lexicon-1)
.: {{q nil}{'z' foo}{84 nil}}
> (cut Lexicon-1 "z")
.: Lexicon-1
> (entries Lexicon-1)
.: {{84 nil}{q nil}}
> (lexicon :Length 24 :Width 12 :Height 9 :Units inch)
.: Lexicon-2
> (@ Lexicon-2 :Length)
.: 24
> (@ Lexicon-2 :Width)
.: 12
> ?width
.: [Failure :Name UndefinedSymbol :Text "Symbol ?width is undefined."]
> ?height
.: [Failure :Name UndefinedSymbol :Text "Symbol ?height is undefined."]
> (bind Lexicon-2 :Width ?width :Height ?height)
.: true
> ?width
.: 12
```

```

> ?height
.: 9

> (keys Lexicon-2)
.: {:Height :Length :Units :Width}

> (values Lexicon-2)
.: {inch 12 24 9}

> (enumeration Colors
    red orange yellow green blue indigo violet)

.: Enumeration-1

> (@ Enumeration-1 red)

.: 1

> (keys (enum Colors))
.: {red orange yellow green blue indigo violet}

> (values Enumeration-1)
.: {1 2 3 4 5 6 7}

> (@ Enumeration-1 green)

.: 4

> (entries Enumeration-1)
.: {{red 1}{orange 2}{yellow 3}{green 4}{blue 5}{indigo 6}{violet 7}}

> (enumeration Controls
    clock 100
    timer 200
    start 300)

.: Enumeration-2

> (@ (enum Controls) timer)
.: 200

> (keys Enumeration-2)
.: {clock start timer}

> (collect ?key ?value per (sort (entries Enumeration-2) {< 2}) ?key)
.: {clock timer start}

```

```

> (enumeration Highways

  Maine-Miami          ; defaults to 1
  Maine-Idaho          ; defaults to 2
  Michigan-Washington 10
  NewYork-Louisiana   ;will be 11
  Massachusetts-Oregon 20
  Ohfile-Florida       ; will be 21
  NewJersey-Oregon 30
  Michigan-Alabama
  NewJersey-California 40
  Michigan-Florida
  Maryland-Nevada 50
  Wisconsin-Louisiana
  Illinois-California 60
  Minnesota-Louisiana
  NorthCarolina-Arizona 70
  JeffersonHighway
  Georgia-California 80
  NorthDakota-Texas
  Florida-Texas 90
  Montana-Nevada
  Washington-California 101)

.: Enumeration-3

> (sort (values (enum Highways)) <)
.: {1 2 10 11 20 21 30 31 40 41 50 51 60 61 70 71 80 81 90 91 101}

> (@ (enum Highways) NewJersy-California)
.: 40

```

Rules

The **rule** function creates a rule that asynchronously match thoughts. Rules are run spontaneously when thoughts match the rule's preconditions. There is no guarantee as to when or whether a particular rule will execute. The rule may be cancelled and reclaimed using the **reclaim** function.

```
> (reasoning)

.: false

> (reasoning on)

.: true

> (relation Summation :Result 0)

.: Summation

> (relation Addend :Value 0 :Status pending)

.: Addend

> (rule
  when  [Summation ^ as ?sum]
         [Addend ^ as ?add :Value as ?value :Status = pending]
  do
    (==> ?sum + :Result ?value)
    (put ?add :Status added))

.: Rule-1

> (new Addend :Value 5)

.: Addend_1

> (premise Addend_1)

.: [Addend ^ Addend_1 :Value 5 :Status pending]

> (new Summation)

.: Summation_1

> (premise Summation_1)

.: [Summation ^ Summation_1 :Result 5]

> (premise Addend_1)

.: [Addend ^ Addend_1 :Value 5 :Status added]

> (new Addend :Value 7)

.: Addend_2

> (premise Addend_2)

.: [Addend ^ Addend_2 :Value 7 :Status added]
```

```

> (premise Summation_1)

. : [Summation ^ Summation_1 :Result 12]

> (new Addend :Value 11)

. : Addend_3

> (premise Addend_3)

. : [Addend ^ Addend_3 :Value 11 :Status = added]

> (premise Summation_1)

. : [Summation ^ Summation_1 :Result 23]

> (free Rule-1)

. : freed

> (rule when [Addend ^ as ?a :Status = added] do (old ?a))

. : Rule-2

> (with Addend)

. : {}

> (with Summation)

. : {[Summation ^ Summation_1 :Result 23]}

> (old Summation_1)

. : gone

> (nix Summation)

. : nixed

> (nix Addend)

. : nixed

> (free (rules))

. : freed

> (reasoning off)

. : false

```

Functions

Functions are defined using the function intrinsic. Function names may not be preceded by a question mark. Functions may have no parameter list, an empty parameter list, or a list containing, required, optional, remainder or keyword parameters.

```
> (function factorial {?n}           ; named function with a parameter list
  (reduce (range 1 to ?n) *)
)

.: factorial

> (factorial 4)

.: 24

> (function prime-p {?n}      ; named function with required parameter
  (if (< ?n 2)
    (return false)
  else
    (step ?i from 1 to (++ (ceiling (root ?n)))
      (if (and (> ?i 1) (< ?i ?n) (zero-p (% ?n ?i)))
        (return false))))
  true
)

.: prime-p

> (prime-p 2)

.: true

> (prime-p 6)

.: false

> (function sum {& ?args}      ; named function with a remaining parameter variable
  returns number
  (apply + ?args)
)

.: sum

> (sum 1 2 3 4)

.: 10
```

```

> (function addTwoToFive {?1 ?2 + ?3 = 0 ?4 = 0 ?5 = 0} ; named function with optional
  (apply + (& ?1 ?2 ?3 ?4 ?5)) ; defaulted parameters
)

.: addTwoToFive

> (addTwoToFive 5 5)

.: 10

> (addTwoToFive 5 6 7 8)

.: 26

> (function addAll {?1 ?2 + ?3 = 0 ?4 = 0 & ?rest} ; named function with optional and
  (apply + (& ?1 ?2 ?3 ?4 ?rest)) ; remainder parameters
)

.: addAll

> (addAll 1 2 3 4 5 6 7 8 9 10)

.: 55

> (function forgetIt {?relation} ; named function
  (confirm (relation-p ?prototype) since ($ ?relation must be a relation.))
  (for ?x in (with ?relation) (old ?x))
  forgotten
)

.: forgetIt

> (with Statement)

.: {[Statement ^ Statement_1 :All people :Are mortal]
  [Statement ^ Statement_2 :All philosophers :Are people]
  [Statement ^ Statement_3 :All philosophers :Are mortal]}

> (forgetIt Statement)

.: forgotten

> (with Statement)

.: {}

> (function {& ?args} ; auto-named function with
  (apply * ?args) ; remaining parameter variable
)

.: fn-1

```

```

> (fn-1 1 2 3 4)

.: 24

> (function transitivity ; no parameters
  (with [Statement :All as ?a :Are as ?b]
    [Statement :All = ?b :Are as ?c]
    do
      (knew Statement :All ?a :Are ?c))
  )

.: transitivity

> (macro myFor {?x {in ?y} & ?body} ; a required keyword parameter
  (eval (` (apply for (& , ?x in , ?y ,_ ?body))))
  )

.: myFor

> (myFor ?name in {Jane John Sally} (tell user ($ ?name \n)))

Jane
John
Sally

.: told

> (macro myStep {?v {from ?a} {to ?z} + {by ?i = 1} & ?body} ; optional keyword
  (eval (` (step , ?v from , ?a to , ?z by , ?i ,_ ?body))))
  )

.: myStep

> (myStep ?x from 1 to 5 by 2 (tell user ($ ?x \n)))

1
3
5

.: told

> (myStep ?x from 1 to 5 (tell user ($ ?x \n)))

1
2
3
4
5

.: told

```

Modules

Modules are literals that encapsulate function definitions. In practice, a function has a module preceding the function name, (as in “module.function”). Functions having a module in their literal are “qualified”. Functions without modules are “unqualified”. The module intrinsic creates modules. The extend intrinsic allows more function definitions to be added to a module. The using intrinsic sets or returns the current module. The require intrinsic allows functions to be visible between modules.

```
> (modules)                                ; view the modules collection
. : {Apex Base IO KB Math Tasks User}

> (use User)                               ; work in a specific module
. : User

> (module Arithmetic           ; define a new module Arithmetic
      (function sum {& ?args}
        (apply + ?args)
      )
    )
. : Arithmetic

> (modules)
. : {Arithmetic Apex Base IO KB Math Tasks User}

> (sum 1 2 3 4)                          ; is sum visible from user module?
. : [Failure :Name ArgumentValue :Text "The function sum isn't found"]

> (Arithmetic.sum 1 2 3 4)                ; is fully qualified function visible?
. : 10

> (require Arithmetic as a)   ; user module requires definitions
. : Arithmetic

> (sum 1 2 3 4) ; now sum is visible
. : 10

> (a.sum 1 2 3 4) ; now a.sum is visible
. : 10

> (Arithmetic.sum 1 2 3 4) ; still accessible as Arithmetic.sum
. : 10
```

```
> (extend Arithmitic  
  (function product {& ?args}      ; add a new function  
    (apply * ?args)  
  )  
)  
. : Arithmetic
```

Delegates

Delegates are functions that are passed as parameters to other functions.

```
> (relation Product  :Name  :Price )
.: Product

> (relation Cart   :Items  {}  !total  Cart_Total )
.: Cart

> (function Cart_Total {?me ?SubTotDelegate ?TotalDelegate ?DiscountDelegate}
  (ensure Cart ?me Function ?SubTotDelegate Function ?TotalDelegate
    Function ?DiscountDelegate)
  (assume ?subTotal (sum (map (:Items ?me) :Price)))
  (?SubTotDelegate ?subTotal)
  (?DiscountDelegate ($ Discounts applied.\n))
  (?TotalDelegate (:Items ?me) ?subTotal))

.: Cart_Total

> (relation Program  :Cart  !onNew (given {?me} (put ?me :Cart (new Cart))))
.: Program

> (function main {& ?args}
  (assume ?me (new Program))

  (enq (:Cart ?me) :Items (new Product :Name Cheese :Price 5.50))
  (enq (:Cart ?me) :Items (new Product :Name Bread :Price 7.00))
  (enq (:Cart ?me) :Items (new Product :Name Milk :Price 4.65))
  (enq (:Cart ?me) :Items (new Product :Name Eggs :Price 5.95))

  (tell user ($ Your total is
    (!total (:Cart ?me)
      (given {?sub} (tell user ($ The subtotal is ?sub \n)))
      (given {?products ?sub}
        (if (> (# ?products) 3)
          (* ?sub 0.90)
          else ?sub))
      (given {?msg} (tell user ?msg)))
    \n \n)))

.: main

> (main)

The subtotal is 23.10
Discounts Applied.
Your total is 20.7

.: told
```

Poker Hand Analyzer

This function tells what kind of poker hand each player has.

```
> (enumeration Suits
  Clubs  Diamonds  Hearts  Spades
)

.: Enumeration-1

> (enumeration Ranks
  Ace   Two   Three  Four   Five   Six   Seven
  Eight Nine  Ten    Jack   Queen  King  Joker
)

.: Enumeration-2

> (relation Card
  :Rank
  :Suit
  :Dealt
)

.: Card

> (relation Player
  :Order
  :Cards {}
  :Hand Unknown
)

.: Player

> (function setup
  (repeat 2 ; use 2 decks
    (for ?suit ?i per (entries (enum Suits))
      (for ?rank ?j per (entries (enum Ranks))
        (if (/= ?rank Joker) (new Card :Rank ?rank :Suit ?suit))))))
  (assume ?order 0)
  (repeat (random 2 to 8) (new Player :Order (--> ++ ?order)))
)

.: setup

> (function deal
  (with Card ^ as ?card do (bind ?card :Dealt false))
  (with Player ^ as ?player do (bind ?player :Cards {} :Hand unknown))
  (assume ?players (which Player sort :Order < )
    ?cards (shuffle (which Card)))
  (repeat (config "/Game/Poker/CardsPerPlayer")
    (for ?player in ?players
      (so {?card (pop ?cards)}
        (enq ?player :Cards ?card)
        (put ?card :Dealt true)))
    )
  dealt
)

.: deal
```

```

> (enumeration Hands
  Nothing
  OnePair
  TwoPairs
  ThreeOfAKind
  Straight
  Flush
  FullHouse
  FourOfAKind
  StraightFlush
)

.Enumeration-3

> (function analyze
  (with [Player ^ as ?p :Cards as ?cards :Hand = Unknown]
    [Card ^ as ?c1 (contains ?cards ?c1) :Suit as ?s :Rank as ?r]
    (assume ?n (position Ranks ?r))
    [Card ^ as ?c2 (contains ?cards ?c2) :Suit = ?s :Rank = (@ Rank (+ ?n 1))]
    [Card ^ as ?c3 (contains ?cards ?c3) :Suit = ?s :Rank = (@ Rank (+ ?n 2))]
    [Card ^ as ?c4 (contains ?cards ?c4) :Suit = ?s :Rank = (@ Rank (+ ?n 3))]
    [Card ^ as ?c5 (contains ?cards ?c5) :Suit = ?s :Rank = (@ Rank (+ ?n 4))]
    (/= ?c1 ?c2 ?c3 ?c4 ?c5)
  do
    (put ?p :Hand StraightFlush))

  (with [Player ^ as ?p :Cards as ?cards :Hand = Unknown]
    [Card ^ as ?c1 (contains ?cards ?c1) :Rank = ?r]
    [Card ^ as ?c2 (contains ?cards ?c2) :Rank = ?r]
    [Card ^ as ?c3 (contains ?cards ?c3) :Rank = ?r]
    [Card ^ as ?c4 (contains ?cards ?c4) :Rank = ?r]
    (/= ?c1 ?c2 ?c3 ?c4)
  do
    (put ?p :Hand FourOfAKind))

  (with [Player ^ as ?p :Cards as ?cards :Hand = Unknown]
    [Card ^ as ?c1 (contains ?cards ?c1) :Rank as ?m]
    [Card ^ as ?c2 (contains ?cards ?c2) :Rank = ?m]
    [Card ^ as ?c3 (contains ?cards ?c3) :Rank = ?m]
    [Card ^ as ?c4 (contains ?cards ?c4) :Rank as ?n (/= ?m ?n)]
    [Card ^ as ?c5 (contains ?cards ?c5) :Rank = ?n]
    (/= ?c1 ?c2 ?c3 ?c4 ?c5)
  do
    (put ?p :Hand FullHouse))

  (with [Player ^ as ?p :Cards as ?cards :Hand = Unknown]
    [Card ^ as ?c1 (contains ?cards ?c1) :Suit as ?s]
    [Card ^ as ?c2 (contains ?cards ?c2) :Suit = ?s]
    [Card ^ as ?c3 (contains ?cards ?c3) :Suit = ?s]
    [Card ^ as ?c4 (contains ?cards ?c4) :Suit = ?s]
    [Card ^ as ?c5 (contains ?cards ?c5) :Suit = ?s]
    (/= ?c1 ?c2 ?c3 ?c4 ?c5)
  do
    (put ?p :Hand Flush))

  (with [Player ^ as ?p Cards ?cards :Hand = Unknown]
    [Card ^ as ?c1 (contains ?cards ?c1) :Rank as ?r]
    (assume ?n (position Ranks ?r))
    [Card ^ as ?c2 (contains ?cards ?c2) :Rank = (@ Ranks (+ ?n 1))]
    [Card ^ as ?c3 (contains ?cards ?c3) :Rank = (@ Ranks (+ ?n 2))]
    [Card ^ as ?c4 (contains ?cards ?c4) :Rank = (@ Ranks (+ ?n 3))]
    [Card ^ as ?c5 (contains ?cards ?c5) :Rank = (@ Ranks (+ ?n 4))]
```

```

( /= ?c1 ?c2 ?c3 ?c4 ?c5)
do
  (put ?p :Hand Straight))

(with [Player ^ as ?p :Cards as ?cards :Hand = Unknown]
  [Card ^ as ?c1 (contains ?cards ?c1) :Rank as ?n]
  [Card ^ as ?c2 (contains ?cards ?c2) :Rank = ?n]
  [Card ^ as ?c3 (contains ?cards ?c3) :Rank = ?n]
  (/= ?c1 ?c2 ?c3)
do
  (put ?p :Hand ThreeOfAKind))

(with [Player ^ as ?p :Cards as ?cards :Hand = Unknown]
  [Card ^ as ?c1 (contains ?cards ?c1) :Rank as ?m]
  [Card ^ as ?c2 (contains ?cards ?c2) :Rank = ?m]
  [Card ^ as ?c3 (contains ?cards ?c3) :Rank as ?n (/= ?m ?n)]
  [Card ^ as ?c4 (contains ?cards ?c4) :Rank = ?n]
  (/= ?c1 ?c2 ?c3 ?c4)
do
  (put ?p :Hand TwoPairs))

(with [Player ^ as ?p :Cards as ?cards :Hand = Unknown]
  [Card ^ as ?c1 (contains ?cards ?c1) :Rank as ?m]
  [Card ^ as ?c2 (contains ?cards ?c2) :Rank = ?m]
  (/= ?c1 ?c2)
do
  (put ?p :Hand OnePair))

(with [Player ^ as ?p :Cards as ?cards :Hand = Unknown]
  do
    (put ?p :Hand Nothing))
ready
)

:: analyze

> (do (setup) (deal) (analyze))

:: ready

```

OPS5 Comparison

The OPS5 programming language was developed by Charles Forgy in the late 1970s. OPS is an acronym for "Official Production System" and it is a rule based programming language primarily used for expert system development. The following is an OPS5 program that implements a model of cars.

OPS5

```
(literalize car
  age          ; new or old
  condition    ; good or junk
)

(p old-not-junk
  (car ^age old ^condition <> good)
--->
  (write (crlf) that is believable))

(p good-not-old
  (car ^age <> old ^condition good)
--->
  (write (crlf) that is possible))

(p new-and-junk
  (car ^age new ^condition junk)
--->
  (write (crlf) There are no new, junk cars))

(copy car ^age new ^condition good)
```

Premise

```
(relation Car
  :Age          ; new or old
  :Condition    ; good or junk
)

(rule old-not-junk
  when [Car :Age = old :Condition /= good]
  do   (tell user ($ that is believable \n)))

(rule good-not-old
  when [Car :Age /= old :Condition = good]
  do   (tell user ($ that is possible \n)))

(rule new-and-junk
  when [Car :Age = new :Condition = junk]
  do   (tell user ($ There are no new, junk cars \n)))

(new Car :Age new :Condition good)
```

CLIPS Comparison

The C Language Integrated Production System, CLIPS, was developed in 1985 by NASA and was based on Charles Forgy's OPS languages and the Automated Reasoning Tool language from Inference Corporation. The example below is derived from <https://en.wikipedia.org/wiki/CLIPS>.

CLIPS

```
(deftemplate problem
  (slot name)
  (slot status))

(defrule rule1
  (problem (name ignition_key) (status on))
  (problem (name engine) (status wont_start))
  (problem (name headlights) (status don't_work))
  =>
  (confirm (problem (name battery) (status faulty)))))

(deffacts trouble_shooting
  (problem (name ignition_key) (status on))
  (problem (name engine) (status wont_start))
  (problem (name headlights) (status don't_work)))
```

Premise

```
(relation Problem
  :Name
  :Status
)

(rule rule1
  when [Problem :Name = ignitionKey :Status = on]
    [Problem :Name = engine :Status = WontStart]
    [Problem :Name = headlights :Status = DontWork]
  do
    (knew Problem :Name battery :Status faulty)
)

(function troubleshooting
  (new Problem :Name ignitionKey :Status on)
  (new Problem :Name engine :Status WontStart)
  (new Problem :Name headlights :Status DontWork)
)

(troubleshooting)
```

SQL Comparison

Structured Query Language (SQL) is a language for programming relational database management systems (RDMS). SQL was first described by Edgar F. Codd in 1970.

Relationships

In Structured Query Language, entities and the relationships among them are central to the language. Entities (and relationships) are defined by **Tables** which have **Columns**.

SQL

```
CREATE TABLE Region (
    RegionID INTEGER NOT NULL,
    Name VARCHAR(50) NOT NULL
);

CREATE TABLE Country (
    CountryID INTEGER NOT NULL,
    Name VARCHAR(50) NOT NULL
);

CREATE TABLE Customer (
    CustomerID INTEGER NOT NULL AUTO_INCREMENT,
    RegionID INTEGER NOT NULL,
    CountryID INTEGER NOT NULL,
);
;

CREATE TABLE Order (
    OrderID INTEGER NOT NULL AUTO_INCREMENT,
    CustomerID VARCHAR(10)
);
;

CREATE TABLE Category (
    CategoryID INTEGER NOT NULL AUTO_INCREMENT,
    CategoryName VARCHAR(100) NOT NULL,
    Description MEDIUMTEXT
);
;

CREATE TABLE Product (
    ProductID INTEGER NOT NULL AUTO_INCREMENT,
    ProductName VARCHAR(100) NOT NULL,
    CategoryID INTEGER,
    UnitsInStock FLOAT,
    UnitPrice FLOAT
    Discontinued BIT
);
;

CREATE TABLE Employee (
    EmployeeID INTEGER NOT NULL AUTO_INCREMENT,
    EmployeeName VARCHAR(100) NOT NULL,
    ReportsTo INTEGER,
    Sold FLOAT
);
;
```

Premise

```
(relation Region
  :Name
)

(relation Country
  :Name
)

(relation Customer
  :Region
  :Country
)

(relation Order
  :CustomerId
)

(relation Category
  :CategoryId
  :CategoryName
  :Description
)

(relation Product
  :ProductId
  :ProductName
  :CategoryId
  :UnitsInStock
  :UnitPrice
  :Discontinued  false
)

(relation Employee
  :EmployeeId
  :EmployeeName
  :ReportsTo
  :Sold
)
```

Select All

A select all query retrieves all attributes of an entity.

SQL

```
SELECT *
  FROM Category
```

Premise

```
(which Category)
```

Selecting a single column

In SQL a single column is selected by specifying the name of the column in a select query.

SQL

```
SELECT CategoryName
  FROM Category
```

Premise

```
(with [Category as ?c]
  list (:CategoryName ?c))
```

```
(with [Category :CategoryName as ?n]
  list ?n)
```

Selecting multiple columns

In SQL multiple columns are selected by naming each column in a select query.

SQL

```
SELECT CategoryName, Description  
      FROM Category
```

Premise

```
(with [Category :CategoryName as ?n :Description as ?d]  
    list {?n ?d})
```

Selecting a calculated column

A calculated column is one in which a function is applied to one or more existing columns in a table.

SQL

```
SELECT LENGTH(CategoryName)  
      FROM Category
```

Premise

```
(with [Category :CategoryName as ?n]  
    list (# ?n))
```

Selecting distinct values

SQL

```
SELECT DISTINCT LENGTH(CategoryName)
  FROM Category
```

Premise

```
(distinct
  (with [Category :CategoryName as ?n]
    list (# ?n)))
```

Selecting a scalar value

SQL

```
SELECT MAX(LENGTH(CategoryName) )
  FROM Category
```

Premise

```
(max (with [Category :CategoryName as ?n]
      list (# ?n)))
```

Filtering results by Equality

SQL

```
SELECT *
  FROM Product
 WHERE UnitsInStock = 0
```

Premise

```
(which Product
 :UnitsInStock = 0)
```

Filtering results by Inequality

SQL

```
SELECT *
  FROM Product
 WHERE NOT (UnitPrice > 10)
```

Premise

```
(which Product
 :UnitPrice as ?p
 (not (> ?p 10)))
```

```
(which Product
 :UnitPrice <= 10 )
```

Filtering results by a range

SQL

```
SELECT *
  FROM Product
 WHERE UnitPrice BETWEEN 5 AND 9
```

Premise

```
(which Product
 :UnitPrice as ?u
 (<= 5 ?u 9))
```

Multiple filter conditions

SQL

```
SELECT *
  FROM Product
 WHERE Discontinued = 1
   AND UnitsInStock <> 0
```

Premise

```
(which Product
 :Discontinued 1
 :UnitsInStock not 0)
```

Order by value ascending

SQL

```
SELECT *  
      FROM Product  
ORDER BY UnitPrice
```

Premise

```
(which Product  
  sort :UnitPrice < )
```

Order by value descending

SQL

```
SELECT *  
      FROM Product  
ORDER BY UnitPrice DESC
```

Premise

```
(which Product  
  sort :UnitPrice > )
```

Limit number of results

SQL

```
SELECT TOP 5 *
  FROM Product
ORDER BY UnitPrice
```

Premise

```
(top (which Product
      sort :UnitPrice < )
    5)
```

Paged results

SQL

```
WITH part1 AS (
  SELECT *
  FROM Product
  ORDER BY UnitPrice)
SELECT *
FROM part1
WHERE RRN(part1) BETWEEN 5 AND 10
```

Premise

```
(mid (which Product
      sort :UnitPrice < )
    5
    10)
```

Group by value

SQL

```
SELECT TOP 100 UnitPrice
    FROM (SELECT Product.UnitPrice,
                COUNT(*) AS Count
            FROM Product
           GROUP BY Product.UnitPrice)
ORDER BY Count DESC
```

Premise

```
(with (top (with [Product as ?p :UnitPrice as ?u]
               list {:_UnitPrice ?u
                     :Count (with [Product :UnitPrice as ?u] tally)}
                     sort :Count > )
              100) each ?x
      list (:UnitPrice ?x))
```

Inner Join

SQL

```
SELECT p. *
   FROM Product p,
        Category c
  WHERE c.CategoryName = "Beverages" AND
        c.CategoryID = p.CategoryID
```

Premise

```
(with
  [Product ^ as ?p :CategoryName = "Beverages" :CategoryID as ?id]
  [Category :CategoryID = ?id]
  list (premise ?p))
```

Left Join

SQL

```
SELECT c.CustomerID, COUNT(o.OrderID)
  FROM Customer c
LEFT JOIN Order o
    ON o.CustomerID = c.CustomerID
 GROUP BY c.CustomerID
```

Premise

```
(with
  [Customer :CustomerId as ?i]
  list {:_CustomerId ?i :Count (with [Order :CustomerId = ?i] tally) }
```

```
(with
  [Customer :CustomerId as ?i]
  [Order :OrderId as ?j]
  (left ?i ?j)
  group {?i (when (any ?i) 1 0)}
  by 1 into ?group
  list {:_CustomerId (@ ?group 1)
        :Count (summation ?pair in (rest ?g) (@ ?pair 2)) } )
```

Concatenate

SQL

```
SELECT customer.CompanyName
  FROM Customer AS customer
 WHERE customer.CompanyName LIKE "A%"
UNION ALL
SELECT customer.CompanyName
  FROM Customer AS customer
 WHERE customer.CompanyName LIKE "E%"
```

Premise

```
(union
 (with [Customer :CompanyName as ?n] (like ?n "A%") list ?n)
 (with [Customer :CompanyName as ?n] (like ?n "E%") list ?n))
```

Create, Update and Delete

SQL

```
INSERT INTO Category (CategoryName, Description)
    VALUES ("Merchandising", "Cool products");

INSERT INTO Product (ProductName, CategoryID)
    SELECT TOP (1) "Red Jacket", CategoryID
        FROM Category
    WHERE CategoryName = "Merchandising";

UPDATE Product
    SET Product.ProductName = "Green Jacket"
    WHERE Product.ProductName = "Red Jacket";

DELETE FROM Product
    WHERE Product.ProductName = "Green Jacket";

DELETE FROM Category
    WHERE Category.CategoryName = "Merchandising";
```

Premise

```
(new Category :CategoryName "Merchandising"
    :Description "Cool Products")

(new Product :ProductName "Red Jacket"
    :CategoryId (each Category ^ as ?c
                    :CategoryName "Merchandising"
                    give (:CategoryId ?c)))

(with [Product ^ as ?p :ProductName = "Red Jacket"]
    do (put ?p :ProductName "Green Jacket"))

(with [Product ^ as ?p :ProductName = "Green Jacket"]
    do (old ?p))

(with [Category ^ as ?c :CategoryName = "Merchandising"]
    do (old ?c))
```

Recursive Query

SQL

```
WITH EmployeeHierarchy (EmployeeID,
                        LastName,
                        FirstName,
                        ReportsTo,
                        HierarchyLevel) AS
( SELECT EmployeeID
    , LastName
    , FirstName
    , ReportsTo
    , 1 as HierarchyLevel
  FROM Employees
 WHERE ReportsTo IS NULL

 UNION ALL

 SELECT e.EmployeeID
       , e.LastName
       , e.FirstName
       , e.ReportsTo
       , eh.HierarchyLevel + 1 AS HierarchyLevel
     FROM Employees e
INNER JOIN EmployeeHierarchy eh
      ON e.ReportsTo = eh.EmployeeID
) SELECT *
      FROM EmployeeHierarchy
ORDER BY HierarchyLevel, LastName, FirstName
```

Premise

```
(relation EmployeeHierarchy
 :EmployeeId :LastName :FirstName :ReportsTo :HierarchyLevel )

(with (union
 (with [Employee ^ as ?e :ReportsTo is nothing :EmployeeId as ?i
       :LastName as ?n :FirstName as ?f]
      list (knew EmployeeHierarchy :EmployeeId ?i :LastName ?n
            :FirstName ?f :HierarchyLevel 1))
 (with
   [EmployeeHierarchy ^ as ?eh :EmployeeId as ?i :HierarchyLevel as ?h]
   [Employee ^ as ?e :EmployeeId as ?j :LastName as ?n :FirstName as ?f
     :ReportsTo ?i]
      list (knew EmployeeHierarchy :EmployeeId ?j :LastName ?n
            :FirstName ?f :HierarchyLevel (+ ?h 1))))
 as ?result
 list (premise ?result)
 sort :HierarchyLevel < :LastName < :FirstName < )
```

6. Foundation Modules

The SubThought Premise is divided into several modules which contain built-in (i.e., intrinsic) functions. Each module has a particular area of responsibility. For example, the IO module facilitates communication while the knowledge base module declares foundational functions.

Apex

This module contains the global environment.

Base

This module provides control structures and special forms.

IO

This module contains messaging, file, and the console functions.

KB

This module provides access functions to knowledge bases.

Math

This module provides arithmetic, trigonometric, and statistical functions.

Tasks

This module has functions that manage asynchronous and concurrent tasks.

User

This module contains the default environment.

7. Quick Reference

A synopsis of each function follows.

1	(-- number)	Decrements a number by 1.
2	(- number ...)	Subtraction.
3	(@ container place ...)	Retrieves elements from a sequence or assortment.
4	(# container)	Returns the number of elements.
5	(\$ value ...)	Creates a new string with intervening spaces.
6	(\$\$ value ...)	Creates a new string by eliding arguments.
7	(% command arguments)	Performs an operating system command
8	(& value ...)	Merges arguments into a new sequence.
9	(&& value ...)	Merges arguments into a new sequences and removes nils.
10	(* number number ...)	Multiplication.
11	(** base exponent)	Exponentiation.
12	(/ dividend divisor ...)	Division.
13	(// number degree)	N th Root.
14	(/~ value ₁ value ₂)	Calculates the dissimilarity between two values.
15	(/= value ₁ value ₂ ...)	Returns true if any values are not equal.
16	(~ value ₁ value ₂)	Calculates the similarity between two values.
17	(' variant)	Quotes a variant.
18	(` variant)	Expands a variant by substituting values.
19	(+ number number ...)	Addition.
20	(++ number)	Increments a number by 1.
21	(<- function symbol value ...)	The value before tying a symbol to a new value.
22	(< value value ...)	True if each value is less than the next.
23	(<= value value ...)	True if each value is less or equal to the next.
24	(<== container function place value ...)	The value before replacement.
25	(= value value ...)	True if each value is equal to the next.
26	(>== container function place value ...)	The value after replacement.
27	(> value value ...)	True if each value is greater than the next.
28	(>-> function symbol value ...)	The value after tying a symbol to a new value.
29	(>= value value ...)	True if each value is greater or equal to the next.
30	(\n quantity)	Returns a string containing one or more new lines.
31	(\s quantity)	Returns a string containing one or more spaces.
32	(^ thought)	Returns a SubThought identifier.
33	(abolish symbols environment)	Deletes symbols from an environment.
34	(abort tasks)	Forcibly terminates one or more tasks
35	(about)	Provides system and version information.
36	(abs number)	Calculates the absolute value.
37	(absent url)	True if a file, folder, or url does not exist.
38	(acosecant number geometry metrum)	Calculates the inverse cosecant.
39	(acosine number geometry metrum)	Calculates the inverse cosine.
40	(acotangent number geometry metrum)	Calculates the inverse cotangent.
41	(actual symbol)	Returns the underlying symbol referenced by an alias.
42	(add assortment entry ...)	Modifies an assortment by adding entries.
43	(address url)	Returns the address of a URL web resource.
44	(agent job url handler delay)	Creates an agent.
45	(alias symbol)	Returns a reference to a symbol.
46	(align sequence ordering)	Returns a sorted list using the provided ordering.
47	(all condition ...)	True if all relevant knowledge satisfies all of the conditions.
48	(alphabetic-p value)	True if the first position of a string is alphabetic.
49	(alphanumeric-p value)	True if the first position of a string is whitespace.

50	(and <i>truth truth ...</i>)	Logical conjunction.
51	(any <i>condition ...</i>)	True if some relevant knowledge satisfies all of the conditions.
52	(append <i>sequence value ...</i>)	Inserts values at the end of a sequence.
53	(apply <i>function arguments environment</i>)	Applies a function to a list of arguments.
54	(arguments <i>what</i>)	Returns a list of arguments to a call or task.
55	(arity <i>function kind</i>)	Returns the number of symbols in a function's parameter list.
56	(array <i>dimensions option</i>)	Returns a multi dimensional list.
57	(asecant <i>number geometry metrum</i>)	Calculates the inverse secant.
58	(asine <i>number geometry metrum</i>)	Calculates the inverse sine.
59	(ask <i>who message timeout default</i>)	Sends a message to a recipient and awaits a response.
60	(atangent <i>number geometry metrum</i>)	Calculates the inverse tangent.
61	(attach <i>knowledge</i>)	Registers a knowledge base.
62	(average <i>symbol ... binding sequence expression ...</i>)	The arithmetic mean of a sequence.
63	(avg <i>value ...</i>)	The arithmetic mean.
64	(await <i>task timeout default</i>)	Returns the result of a task.
65	(before-p <i>interval₁ interval₂ tolerance</i>)	True if an interval finishes before a second interval.
66	(beginning <i>interval</i>)	Returns the beginning instant of an interval
67	(best <i>probe candidates option ...</i>)	Returns the best matching candidates.
68	(beyond <i>sequence position</i>)	True if a position is outside a sequence.
69	(big <i>value</i>)	Converts a value to a big number.
70	(bind <i>container assignment ...</i>)	Assigns symbols to values in sequences or assortments.
71	(bion <i>name work</i>)	Returns a resource that hosts a cluster of cells for doing tasks.
72	(bindings <i>pattern</i>)	Returns a list of symbol value pairs for an environment or premise.
73	(bitwise <i>number op ...</i>)	Performs bitwise operations.
74	(bound <i>function</i>)	Returns the symbols that are bound in a function.
75	(bound-p <i>symbol</i>)	True if a symbol has a value.
76	(bracket <i>truth</i>)	Returns 1 if a truth expression is true, 0 otherwise.
77	(break <i>value</i>)	Terminates a loop.
78	(busy-p <i>task</i>)	True if a task has not completed.
79	(but <i>sequence quantity</i>)	Creates a subsequence of all except the last elements.
80	(bye)	Terminates the interpreter.
81	(call <i>value ...</i>)	Creates an unevaluated call.
82	(can <i>expression result error</i>)	Evaluates an expression while suppressing failures.
83	(cancel <i>tasks option ...</i>)	Cooperatively cancels tasks.
84	(cancelled-p <i>task</i>)	True if a task has been cancelled.
85	(canonify <i>variant</i>)	Makes equal values identical.
86	(capitalize <i>string option</i>)	Capitalizes a string.
87	(case <i>probe clause ... else-clause</i>)	Branches execution based on a value.
88	(categorize <i>sequence predicate ...</i>)	Creates a list of equivalence sets.
89	(cede <i>alias</i>)	Transfers a value between symbols.
90	(ceiling <i>number</i>)	Rounds a number towards positive infinity.
91	(cell <i>bion work</i>)	Returns a resource that hosts tasks.
92	(channel <i>task</i>)	Returns a url to the arguments of a task.
93	(char <i>unicode</i>)	Converts a Unicode value into a one position string.
94	(choose <i>sequence selector transform</i>)	Returns the arguments satisfying a function.
95	(clear <i>container</i>)	Eliminates all entries from an assortment or sequence.
96	(clip <i>value minimum maximum</i>)	Returns a value within a clipped range.
97	(clone <i>atom modification ...</i>)	Clones an atom with possible modifications.
98	(close <i>url</i>)	Closes a file or data url.
99	(closure <i>scope type name params expression ...</i>)	Creates a function or macro with a defined environment.
100	(coalesce <i>symbol ... gate expression ...</i>)	Returns a merged sequence.
101	(collect <i>symbol ... gate expression ...</i>)	Returns a transformed sequence.
102	(collection <i>element ...</i>)	Returns an unorderd collection of elements.
103	(combine <i>assortment entry ...</i>)	Creates a new assortment by combining entries.
104	(common <i>sequences</i>)	Creates a sequence of common elements among subsequences.

105	(comparable-p <i>value₁</i> <i>value₂</i>)	Returns true if the values can be compared.
106	(compare <i>value₁</i> <i>value₂</i>)	Returns < (less), = (equal), or > (greater).
107	(complete <i>expression ...</i>)	Runs expressions concurrently until completion.
108	(complex <i>real</i> <i>imaginary</i>)	Converts a value to a complex number.
109	(compose <i>functions</i> <i>arguments</i>)	Applies functions in reverse order using the arguments.
110	(conceive <i>knowledge</i>)	Creates a knowledge base.
111	(concurrent <i>expression ...</i>)	Evaluates expressions asynchronously.
112	(configuration <i>url</i> <i>association ...</i>)	Creates a configuration file.
113	(confirm <i>condition</i> since <i>reason</i>)	Tests that a condition is true.
114	(confute <i>condition</i> since <i>reason</i>)	Tests that a condition is false.
115	(connect <i>data</i>)	Connects to a data resource.
116	(constant <i>assignment ...</i>)	Creates a constant.
117	(contains <i>assortment</i> <i>value</i>)	True if a value is present in an assortment.
118	(continue <i>result</i>)	Continues to the next iteration of a loop.
119	(convertible-p <i>value</i> <i>taxon</i>)	True if the value can be converted to the taxon.
120	(copy <i>sequence</i> <i>count</i>)	Copies a sequence.
121	(copyright)	Displays copyright information.
122	(correlate <i>list₁</i> <i>list₂</i>)	Finds the correlation coefficient of two lists.
123	(cosecant <i>number</i> <i>geometry</i> <i>metrum</i>)	Calculates the cosecant.
124	(cosine <i>number</i> <i>geometry</i> <i>metrum</i>)	Calculates the cosine.
125	(cotangent <i>number</i> <i>geometry</i> <i>metrum</i>)	Calculates the cotangent.
126	(count <i>symbol ... binding</i> <i>sequence as counter expression ...</i>)	Counts the iterations and returns the last expression.
127	(critical <i>locks</i> <i>option ... expression ...</i>)	Serializes evaluations across regions of code.
128	(cut <i>assortment</i> <i>key ...</i>)	Removes elements from assortments by key.
129	(data <i>option ...</i>)	Creates a data url.
130	(date <i>yr mth day hrs mins secs zone zmins</i>)	Creates a new date or returns the current date.
131	(declared-p <i>symbol</i> <i>environment</i>)	True if a symbol exists in an environment.
132	(decode <i>source</i> <i>format</i>)	Decodes a string.
133	(def <i>assignment ...</i>)	Adds symbols to the current environment returning last value.
134	(default <i>value ...</i>)	Returns the first non-nil value.
135	(definitions <i>environment</i>)	Retrieves literal value pairs in an environment.
136	(defunct <i>function</i>)	Undefines a function in a module.
137	(degrees <i>radians</i>)	Converts radians into degrees.
138	(delete <i>sequence</i> <i>value ...</i>)	Modifies sequence by deleting values.
139	(dependencies <i>module</i>)	Returns a module's dependencies.
140	(deq <i>container</i> <i>place</i> <i>option</i>)	Removes an element from an embedded sequence.
141	(describe <i>literal</i>)	Returns descriptions of a literal.
142	(detach <i>knowledge</i>)	Unregisters a knowledge base.
143	(difference <i>sequence₁</i> <i>sequence₂</i> <i>operation</i>)	Returns the difference of two sequences.
144	(did <i>expression</i>)	Evaluates an expression and suppresses failures.
145	(digit <i>number</i> <i>position</i>)	Returns the digit in the specified position of a number.
146	(digit-p <i>value</i>)	True if the first position of a string is a digit.
147	(digits <i>number</i>)	Returns the digits comprising a number.
148	(dimensions <i>sequence</i>)	Returns the lengths of each dimension in a sequence.
149	(discard <i>module</i>)	Discards a module.
150	(disjoint-p <i>sequence</i> <i>sequence ...</i>)	True if no elements are common among sequences.
151	(distinct <i>sequence</i>)	Creates a new sequence without duplicate elements.
152	(distribute <i>sequence</i> <i>function</i> <i>result</i>)	Applies a function to a sequence in parallel.
153	(divide <i>dividend</i> <i>divisor</i> <i>default</i>)	Performs safe division.
154	(divisible-p <i>dividend</i> <i>divisor</i>)	True if the divisor evenly divides the dividend.
155	(do <i>expression ...</i>)	Creates a lexical scope.
156	(done)	Terminates a generator.
157	(drop <i>index</i>)	Removes a relation index.
158	(duplicate <i>source</i> <i>target</i> <i>option</i>)	Duplicates a file or contents of a folder.
159	(during-p <i>interval₁</i> <i>interval₂</i> <i>tolerance</i>)	True if an interval occurs within a second interval.

160	(dynamic <i>assignments expression ...</i>)	Creates a dynamic environment for symbols.
161	(e)	Returns Euler's number, 2.718281828459045.
162	(each <i>symbol ... binding reversal sequence ... premises option ... action</i>)	Combines for and with to iterate over sequences to match patterns against the knowledge base.
163	(encode <i>source format</i>)	Encodes a string.
164	(enq <i>container place entry</i>)	Inserts an element into an embedded sequence.
165	(ensure check ...)	Performs type checking.
166	(entries assortment)	Retrieves key value pairs for an assortment.
167	(enum <i>name</i>)	Retrieves enumerated assortment.
168	(enumeration <i>name element ...</i>)	Defines an enumerated assortment.
169	(enumerations)	Returns a list of all enumerations.
170	(environment <i>parent entry ...</i>)	Creates a new context for symbols and functions.
171	(epoch time)	Returns a Unix epoch or the current epoch.
172	(eradicate <i>knowledge</i>)	Deletes a knowledge base.
173	(erase <i>file option ...</i>)	Deletes files or folders.
174	(escape)	Escapes to the next resume tag in the stack.
175	(eval <i>expression environment</i>)	Evaluates an expression.
176	(even-p <i>number</i>)	True if the number is even.
177	(every <i>symbol ... binding sequence expression ... test</i>)	True if a predicate is true for every element in a sequence.
178	(exactly <i>quantity of sequence clause within margin</i>)	True if a number of elements satisfy a clause.
179	(exchange <i>sequence substitution ...</i>)	Creates a new sequence with values swapped.
180	(excludes <i>sequence element option ...</i>)	True if a sequence does not contain an element.
181	(exists-p <i>value</i>)	True if a value is a thing..
182	(exit <i>value</i>)	Explicitly ends a task using a return value.
183	(exponential <i>number significand</i>)	Calculates the base ten exponent of a number.
184	(expression <i>value ...</i>)	Creates an expression.
185	(extend <i>module expression ...</i>)	Adds new definitions to a module.
186	(facility <i>name parameters expression ...</i>)	Creates a private function in a module.
187	(few <i>symbol ... binding sequence expression ... test</i>)	True if a predicate is true for less than half the elements in a sequence.
188	(file <i>option ...</i>)	Opens or creates a file.
189	(files <i>option ...</i>)	Returns a list of file names.
190	(fill <i>symbol from start to end by increment with expression</i>)	Fills a list with the result of an expression.
191	(filter <i>sequence predicate</i>)	Returns a sequence of elements that satisfy a predicate.
192	(find <i>features candidates option ...</i>)	Returns the best matching candidates.
193	(finishes-p <i>interval₁ interval₂ tolerance</i>)	True if two intervals finish together.
194	(finishing <i>interval</i>)	Returns the finishing instant of an interval.
195	(fix <i>declaration ...</i>)	Adds symbols to the current environment returns true.
196	(float <i>value</i>)	Converts a value to a floating number.
197	(floor <i>number</i>)	Rounds a number towards negative infinity.
198	(fold <i>symbol ... in sequence into expression ...</i>)	Transforms a sequence into a value.
199	(folder <i>option ...</i>)	Creates or locates a folder in the file system.
200	(folders <i>option ...</i>)	Returns a list of sub folders.
201	(for <i>symbol ... binding reversal sequence ... expression ...</i>)	Iterates over the elements in a sequence.
202	(forever <i>expression ...</i>)	Repeatedly evaluates expressions.
203	(forgo <i>dependency module</i>)	Removes a dependent module.
204	(format <i>template value ...</i>)	Formats a string.
205	(fractional <i>number</i>)	Returns the fractional portion of a number.
206	(free <i>resources</i>)	Releases resources.
207	(full <i>first second</i>)	True if values are equal or either value is nil.
208	(function <i>scope name params returning</i>)	Creates a public function in a module.

	<i>expression ...)</i>	
209	(functions <i>module</i>)	Returns a list of functions defined in a module.
210	(gather <i>symbol ... binding sequence expression ... test</i>)	Returns a sequence of elements that satisfy a predicate.
211	(generator <i>name parameters expression ...)</i>	Creates a series generator.
212	(get <i>container key ...)</i>	Retrieves a value using one or more keys.
213	(given { parameter ... } expression ...)	Creates an anonymous function.
214	(global assignment ...)	Creates global symbols.
215	(go <i>function argument ...)</i>	Transfers control to a function.
216	(grok <i>what</i>)	Evaluates expressions in a url or file.
217	(group <i>list by key ... into symbol expression ...)</i>	Combines sublists by position or key.
219	(halt <i>compute</i>)	Terminates a cell or bion.
220	(has <i>assortment key</i>)	True if a key is present in an assortment.
221	(hash <i>value option ...)</i>	Computes a hash code.
223	(help <i>function</i>)	Describes a function.
224	(hyperlink <i>option ...)</i>	Creates a hyperlink.
225	(id <i>resource</i>)	Returns a resource number.
226	(identical-p <i>value value ...)</i>	True if all values occupy the same memory location.
227	(identity <i>value</i>)	Returns the value itself.
228	(idle <i>duration</i>)	Pauses for a specified interval.
229	(if <i>condition expression ... or-clause ... else-clause</i>)	Branched conditional evaluation.
230	(imaginary <i>value</i>)	Converts a value to an imaginary number.
231	(in <i>value container option ...)</i>	True if a value is in a sequence or assortment.
232	(includes <i>sequence element option ...)</i>	True if a value is in a sequence.
233	(index <i>relation slot ...)</i>	Creates an index on slots of a relation.
234	(indices <i>relation</i>)	Returns a list of indices for a relation.
235	(infix <i>sequence delimiter</i>)	Creates a new sequence with interposed delimiters.
236	(inside <i>value</i>)	Creates an expression from a sequence or assortment.
237	(insert <i>sequence position value ...)</i>	Creates a new sequence by inserting values.
238	(insort <i>sequence value option ...)</i>	Inserts a value into a sorted sequence.
239	(instantiate <i>expression</i>)	Creates an expression with premises in place of thoughts.
240	(integer <i>value</i>)	Converts a value to an integer.
241	(interleave <i>sequence sequence ...)</i>	Merges arguments into a new sequence.
242	(intersection <i>sequence sequence ...)</i>	Creates a sequence of common elements.
243	(intersects-p <i>sequence sequence ...)</i>	True if any elements are common among sequences.
244	(interval <i>start finish</i>)	Creates a time interval.
245	(into <i>relation thoughts</i>)	Creates new thoughts based on existing thoughts.
246	(invoke <i>call environment</i>)	Invokes a call.
247	(is <i>value predicate</i>)	True if the value is true or if the applied predicate returns true.
248	(junction <i>scope name params expression ...)</i>	Creates a public function where arguments are evaluated in parallel.
249	(key <i>assortment value</i>)	Finds the key for a value in an assortment.
250	(keys <i>assortment</i>)	Creates a list of keys for an assortment.
251	(keywords)	Creates the list of Premise keywords.
252	(knew <i>relation criterion ...)</i>	Finds or creates a thought.
253	(knowledge <i>option ...)</i>	Finds or creates a knowledge base.
254	(known <i>pattern ... option ...)</i>	True if the patterns match.
255	(lacks <i>assortment key</i>)	True if a key is absent from an assortment.
256	(last <i>sequence count</i>)	Creates a subsequence of the last elements.
257	(left <i>first second</i>)	True if values are equal or the second value is nil.
258	(let <i>assignment ...)</i>	Adds symbols to the current environment returning true.
259	(lexemes <i>string</i>)	Creates an uppercase string with spaces between words.
260	(lexicon <i>association ...)</i>	Creates a lexicon.
261	(lexicons)	Creates a list of all lexicons.
262	(license)	Prints the software license.

263	(like sequence pattern)	Compares a pattern to a sequence.
264	(list value ...)	Creates a list.
265	(literal value)	Creates a literal.
266	(local assignments expression ...)	Creates a task level scope.
267	(location symbol)	Sets a symbol to the current location.
268	(log number base)	Logarithm.
269	(long value)	Converts a value to a long number.
270	(loop expression ... gate)	Repeatedly evaluates expressions.
271	(lowercase string)	Converts a string to lower case.
272	(macro name parameters expression ...)	Creates a public macro in a module.
273	(macros module)	Creates a list of macros defined in a module.
274	(make prototype term ...)	Creates a record by creating a relationship if it does not exist.
275	(map sequence ... function)	Applies a function to elements across sequences.
276	(max value ...)	Finds the maximum element.
277	(maximum symbol ... binding sequence expression ...)	Finds the maximum element.
278	(may expression)	Evaluates an expression while suppressing failures.
279	(median value ...)	Finds the middle value of a sequence.
280	(meets-p interval ₁ interval ₂ tolerance)	True if an interval finishes when a second interval starts.
281	(meron value)	Returns the meronomic prototype of a value.
282	(meron-p value meron)	True if the value is a meron or is of the specific meronomic type.
283	(meronymy value)	Returns the meronomic prototypes of a value.
284	(method scope name params expression ...)	Creates a public method in a prototype.
285	(mid sequence start stop skip)	Copies a subsequence of a sequence.
286	(min value ...)	Finds the minimum element.
287	(minimum symbol ... binding sequence expression ...)	Finds the minimum element.
288	(missing assortment value)	True if a value is absent from an assortment.
289	(mod dividend modulus)	Finds the remainder after division.
290	(modular module expression ...)	Evaluates expressions in module's scope.
291	(module name definition ...)	Creates a module.
292	(modules)	Creates a list of known modules.
293	(moment units secs mins hours days year)	Creates a moment or returns the current moment.
294	(more-p sequence)	True if a container has more than zero elements.
295	(morph arguments functions)	Applies functions in succession using the arguments.
296	(most symbol ... binding sequence expression ... test)	True if the predicate is true for more than half of the elements in a sequence.
297	(move source destination)	Moves or renames one or more files.
298	(my)	Returns the current cell resource.
299	(nall condition ...)	True if not all relevant knowledge satisfies all of the conditions.
300	(nand truth truth ...)	Negated logical conjunction.
301	(negative-p number)	True if a number is negative.
302	(nevery symbol ... binding sequence expression ... test)	True if the predicate is false for any element in the sequence.
303	(new prototype term ...)	Creates a record.
304	(next series)	Advances a series to the next element.
305	(ngrams string length)	Creates a list of substrings.
306	(nix prototype)	Deletes a prototype.
307	(no condition ...)	True if no relevant knowledge satisfies all of the conditions.
308	(none symbol ... binding sequence expression ... test)	True if the predicate is false for all sequence elements.
309	(nor truth truth ...)	Negated logical disjunction.
310	(not value predicate)	True if a value is false, or if the applied predicate returns false.
311	(nothing)	Returns nothing.
312	(null-p value)	True if a value is not a thing..
313	(odd-p number)	True if a number is odd.

314	(old thought)	Deletes a thought.
315	(omit sequence value ...)	Creates a new sequence with values removed.
316	(on condition true-case false-case)	Branched conditional evaluation.
317	(only symbols expression ...)	Creates a restricted scope.
318	(open url)	Opens a file or data url.
319	(or truth truth ...)	Logical disjunction.
320	(out value sequence option ...)	True if a value is absent from a sequence.
321	(overlaps-p interval₁ interval₂ tolerance)	True if an interval finishes after a second interval starts.
322	(pad sequence length value side)	Creates a new padded sequence.
323	(parameters what)	Returns a list of parameters for a function, call, or task.
324	(partition sequence pivot comparer)	Creates a list of equivalence sets for a pivot element.
325	(path folder separator file)	Concatenates a folder and file name.
326	(pattern expression ...)	Creates a pattern containing the supplied expressions.
327	(perform environment method instance ...)	Invokes a method within an environment.
328	(pi)	Returns 3.141592653589793.
329	(pick sequence quantity)	Creates a list of randomly selected elements.
330	(pipe option ...)	Creates a pipe.
331	(pop sequence position)	Returns the element removed from a sequence.
332	(posit module url)	Writes module expressions to a url.
333	(position sequence element option ...)	Finds the position of an element or subsequence in a sequence.
334	(positions sequence)	Returns positions of an element in a sequence or position value pairs.
335	(positive-p number)	True if a number is greater than zero.
336	(premise value)	Creates a premise representation of a value.
337	(probability events A operation B)	Calculates the probability over a series.
338	(proceed location set assignment ...)	Transfers control to a location.
339	(product symbol ... binding sequence expression ...)	Multiplies an expression over a range of values.
340	(punctuation-p string)	True if the first position of a string is punctuation.
341	(push sequence value position)	Modifies a sequence by inserting a value.
342	(put container entry ...)	Updates values in an assortment or sequence.
343	(qualified module function)	Prepends a module to a function name.
344	(qualifiers identifier)	Creates a list of modules associated with an identifier.
345	(quantify sequence predicate option ...)	Returns a quantifier for elements satisfying a test.
346	(quantity symbol ... binding sequence expression ... test)	Returns the number of elements satisfying a test.
347	(radians degrees)	Converts degrees to radians.
348	(radix number base)	Converts a number to a base.
349	(random lower to upper precision)	Creates a random number.
350	(range first to last by increment)	Creates a list of numbers.
351	(rational numerator denominator)	Converts values to a rational number.
352	(read file count bits)	Creates a string or stream.
353	(ready-p task)	True if a task has completed.
354	(real value)	Converts a value to a real number.
355	(reasoning toggle)	Toggles asynchronous rule execution.
356	(reclaim)	Performs garbage collection.
357	(reduce sequence function)	Converts a sequence into a value.
358	(relation name inclusion ... definition ...)	Creates a relation.
359	(relations)	Returns a list of defined relations.
360	(release locks)	Releases locks on critical sections.
361	(remove assortment value ...)	Creates a new assortment by removing values.
362	(repeat count expression ...)	Loops a specified number of times.
363	(replace container entries option)	Modifies an assortment or sequence by with replacement values.
364	(require module as moniker from url ... options ...)	Retrieves an absent module from a url.
365	(reset series)	Resets a series for reuse.
366	(resignal type term ...)	Resignals a failure.

367	(resize sequence length default)	Modifies the length of a sequence.
368	(rest sequence skip)	Creates a subsequence of all except the first elements.
369	(retract rules)	Eliminates rules.
370	(return value from function)	Terminates a function call.
371	(reverse sequence)	Creates a reversed sequence.
372	(right first second)	True if values are equal or the first value is nil.
373	(rip assortment value ...)	Removes elements from assortments by value.
374	(round number)	Rounds a number to the nearest integer.
375	(rule name properties when premises option ... action ...)	Creates a rule.
376	(rules)	Creates a list of all rules.
377	(same value value ...)	True if all values are equal or contain equal elements.
378	(scale list scalar ... function)	Applies a function to a list of numbers and scalar values.
379	(scatter arguments functions)	Applies functions in parallel returning a list of results.
380	(scope keyval ...)	Finds an environment or gets the current environment.
381	(seal prototype)	Prohibits new records.
382	(secant number geometry metrum)	Calculates the secant of the number.
383	(seconds seconds)	Creates a seconds value or returns seconds since year zero.
384	(seek file position)	Repositions a file resource to a new read/write location.
385	(self)	Returns the currently executing task resource.
386	(separator kind)	Creates a separator string.
387	(series iterable)	Creates a series.
388	(service url handler)	Creates and starts a web service.
389	(set manner assignment ...)	Assigns symbols to values in tandem returning true.
390	(settings url association ...)	Creates a configuration file..
391	(sever assortment key ...)	Creates a new assortment by removing keys.
392	(shuffle sequence seed)	Creates a reordered sequence.
393	(sigma list)	Calculates the sigma of a sequence.
394	(sign number option ...)	Returns the sign of a number as a number, sigil, or word.
395	(signal type term ...)	Signals a failure.
396	(significand number kind)	Calculates the modified significand as a number between 1 and 10, or zero.
397	(sine number geometry metrum)	Calculates the sine of a number.
398	(so bindings expression ...)	Creates a scope with bindings.
399	(socket option ...)	Creates a TCP socket.
400	(some symbol ... binding sequence expression ... test)	True if the test is true for any element in the sequence.
401	(sort sequence ordering option ...)	Creates a sorted sequence.
402	(split sequence delimiter)	Creates a list of subsequences divided at a delimiter.
403	(starts-p interval ₁ interval ₂ tolerance)	True if two intervals start together.
404	(statistics numbers)	Finds the mean, median, sigma, and count of a list of numbers.
405	(step symbol from i limit j by k expression ...)	Loops a symbol over a numeric range to evaluate expressions.
406	(stream streamable)	Creates a stream.
407	(string value ...)	Converts a value to a string.
408	(structure name inclusion ... definition ...)	Creates a structure.
409	(structures)	Creates a list of all structures.
410	(sub sequence entry ...)	Replaces a subsequence within a sequence.
411	(subset-p subset superset)	True if all elements in a subset are in a superset.
412	(substitute sequence entries)	Modifies a sequence replacing subsequences.
413	(subsumes-p superset subset ...)	True if all elements in each subset are in the superset.
414	(sum value ...)	Calculates the arithmetic sum.
415	(summation symbol ... binding sequence expression ...)	Adds an expression over a set of values.
416	(supply arguments function environment)	Applies a function to an argument list.
417	(suppose knowledge facts facts action goals by strategies via operators limit quantity)	Performs hypothetico-deductive reasoning from facts to goals.

	gate <i>condition within timeframe before timepoint options options</i>)	
418	(survey <i>format relation slot</i>)	Creates a list of referents or referent-count pairs.
419	(swap <i>sequence substitution ...</i>)	Modifies a sequence by interchanging values.
420	(symbol <i>name</i>)	Creates a symbol.
421	(symbols <i>environment ancestors</i>)	Lists the symbols in an environment.
422	(take <i>readable count</i>)	Creates an expression from a readable sequence.
423	(takeable <i>readable desired</i>)	Calculates the number of expressions that can be read.
424	(tally <i>pattern</i>)	Returns the number of matches in the knowledge base.
425	(tangent <i>number geometry metrum</i>)	Calculates the tangent.
426	(tarry <i>tasks expression ...</i>)	Allows tasks to complete on their own.
427	(task <i>scope expression ...</i>)	Creates a list of tasks for deferred evaluation.
428	(tasks)	Creates a list of all tasks.
429	(taxon <i>value</i>)	Returns the datatype of a value.
430	(taxon-p <i>value taxon</i>)	True if the value is of the specific taxonomic type.
431	(taxonomy <i>value</i>)	Returns a list of datatypes for a value.
432	(tell <i>who message timeout</i>)	Sends a message to a recipient.
433	(there <i>url</i>)	True if a file, folder, or url exists.
434	(this <i>series</i>)	The current element of a series.
435	(thought <i>relation id</i>)	Finds an extant thought.
436	(thunk <i>expression ...</i>)	Creates a thunk in a module.
437	(thunks <i>module</i>)	Returns a list of thunks defined in a module.
438	(tick <i>nanoseconds</i>)	Creates a tick or returns nanoseconds since year zero.
439	(tie <i>manner assignment ...</i>)	Assigns symbols to values returning the last assigned value.
440	(time <i>unit operation time ...</i>)	Performs time operations.
441	(top <i>sequence count</i>)	Creates a subsequence of the first elements.
442	(transfer <i>source destination option ...</i>)	Transfers a value from one sequence to another.
443	(traverse <i>symbol binding sequence limit dimensions expression ...</i>)	Loops through the coordinates of a sequence.
444	(trim <i>sequence option ...</i>)	Creates a sequence without front and rear delimiters.
445	(truncate <i>number</i>)	Rounds a number towards zero.
446	(try <i>expression ... learn symbol recovery ... resume resumption ... finally cleanup ...</i>)	Evaluates expressions and recovers from failures.
447	(tuple <i>value ...</i>)	Creates a tuple.
448	(uid)	Creates a unique identifier.
449	(unbound <i>function</i>)	Creates a list of free symbols for a function.
450	(unbound-p <i>symbol</i>)	True if a symbol is unbound.
451	(unicode <i>string</i>)	The Unicode of a string's first position.
452	(union <i>sequence sequence ...</i>)	Concatenates sequences removing duplicates.
453	(union <i>sequence sequence ...</i>)	Concatenates sequences removing duplicates.
454	(unique <i>prefix</i>)	Creates a unique literal based on a prefix.
455	(unless <i>condition false-case true-case</i>)	Branched conditional execution.
456	(unlike <i>sequence pattern</i>)	True if a pattern does not match a sequence.
457	(unqualified <i>function</i>)	The function literal without the module prefix.
458	(unseal <i>prototype</i>)	Permits new records for a prototype.
459	(unsigned <i>value</i>)	Converts a value to an unsigned number.
460	(until <i>condition expression ...</i>)	Loops expressions until a condition is true.
461	(unwrap <i>module</i>)	Permits modifications to a module.
462	(uppercase <i>string</i>)	Converts a string to uppercase.
463	(uppercase-p <i>value</i>)	True if a string's first position is upper case.
464	(url <i>option ...</i>)	Creates a URL resource.
465	(use <i>knowledge expression ...</i>)	Evaluates expressions in a knowledge base scope.
466	(using <i>scope expression ...</i>)	Accesses a scope.
467	(values <i>assortment</i>)	Creates a list of values for an assortment.
468	(vector <i>atom ...</i>)	Creates a vector of atoms.
469	(version)	Provides version information.

470	(void-p sequence)	True if a container has zero elements.
471	(wait tasks timeout)	Waits for tasks to end.
472	(which pattern options ...)	Creates a list of thoughts for a pattern.
473	(while condition expression ...)	Loops expressions while a condition is true.
474	(whitespace-p value)	True if the first position of a string is whitespace.
475	(with premises option ... action expression)	Matches patterns against the knowledge base.
476	(within sequence position)	True if a position is inside a sequence.
477	(wrap module)	Prohibits modifications to a module.
478	(write writeable value ...)	Writes values to a writeable resource.
479	(xnor truth truth)	Logical equivalance.
480	(xor truth truth)	Logical exclusive disjunction.
481	(yield value)	Returns a result from a series generator.
482	(zap container place ...)	Updates associations and sequences with nil values.
483	(zero-p number)	True if a number is zero.

Table 3. Function Quick Reference

8. Function Reference

This chapter outlines each function in detail.

-- *decrement*

Decrements a number by 1.

Syntax

(-- *number*)

Module

Base

Parameters

Name	Data Type	Qty	Description
number	variant	1	A number or list to be decremented by 1.

Results

Data Type	Description
number	The decremented number.

Remarks

This function decrements the argument by 1. If an argument is a list, then each element of the list is decremented.

Example

```
> (-- 1)
.: 0
> (-- -1)
.: -2
> (-- -1000+i)
.: -1001+i
> (-- {5 -8 90 32})
.: {4 -9 89 31}
```

Related

[++ increment](#)

- *subtraction*

Subtraction.

Syntax

(- *number ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
number	variant	1+	A number or list to be subtracted.

Results

Data Type	Description
variant	The difference of all supplied numbers as a number or a list of differences.

Remarks

If there is one argument, the sign is reversed. If there are two or more arguments, all arguments are subtracted from the first. If any of the arguments are **unknown**, **infinity** or **ninfinity** (i.e. negative infinity), the result shall respectively be **unknown**, **infinity**, or **ninfinity**. If an argument is a list, then each element of the list is subtracted. If a scalar and a list are subtracted, then the scalar is subtracted from each element of the list.

Example

```
> (- 1 2 3 4 5)
.: -13
> (- 1)
.: -1
> (- (- 1))
.: 1
> (- {3 4 5} 2 {1 0 2})
.: {0 2 1}
```

Related

+ addition, / division , * multiplication

@ element

Retrieves elements from a sequence or assortment.

Syntax

```
(@ container place ... )
```

place ::= integer
place ::= #
place ::= { integer ... }
place ::= key

Module

Base

Parameters

Name	Data Type	Qty	Description
container	thing	1	A sequence, assortment, or record.
place	variant	0+	An integer position, the literal # for the last item, or a list of positions designating a coordinate, or an assortment key.

Results

Data Type	Description
expression	Returns the item(s) at the position(s).

Remarks

For sequences, this function returns the element(s) at the one-based position in the sequence. If place is not specified, the first element is returned. If place is the literal #, then the last item is returned. If place is a number or list of numbers, the item at the place within the sublist is returned. If the sequence is empty, or if a coordinate or position does not exist, the function fails. For assortments, the place is a required parameter and must correspond to a key within the assortment, otherwise the function fails.

Example

```
> (@ "abcde")
.: "a"

> (@ {{a}{b}}{c}{d}) {1 2 1}
.: b

> (@ (lexicon a 1 b 2 c 3) a c)
.: 1 3
```

Related

size, add, append, cut, put, enq, deq, has, lacks

size

Returns the number of elements.

Syntax

(# *container*)

Module

Base

Parameters

Name	Data Type	Qty	Description
container	thing	1	A sequence, assortment or resource.

Results

Data Type	Description
integer	The number of elements.

Remarks

Returns the number of elements in a sequence or assortment. If a file resource is provided, then it returns the file size in bytes.

Example

```
> (# {a b c d e})
.: 5

> (# "she sells sea shells")
.: 20

> (# (lexicon a b c d))
.: 2

> (# (environment (scope) ?a 1 ?b 2 ?c 3 ?d 7))
.: 4

> (# (entries (enumeration Colors red orange yellow)))
.: 3

> (# (file (path "." "/" "premise.out")))
.: 436
```

Related

@ *element*

\$ concatenate

Creates a new string with intervening spaces .

Syntax

`($ value ...)`

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	0+	A value

Results

Data Type	Description
string	The concatenated string.

Remarks

Returns the concatenation of all values presented. All values are converted to strings, then concatenated. A space is preserved between each argument. Leading and trailing spaces are omitted. Any occurrence of the literal `\s` is replaced with a space. Any occurrence of the literal `\n` is replaced with a newline.

Example

```
> ($ the quick "brown" fox)
.: "the quick brown fox"

> ($ "the quick" \s "brown fox")
.: "the quick    brown fox"

> ($ {the quick} {} {brown fox})
.: "{the quick} {} {brown fox}"

> ($ atom \n molecule)
.: "atom
molecule"

> ($)
.: ""
```

Related

`$$ elide, string`

\$\$ elide

Creates a new string by eliding arguments.

Syntax

`($$ value ...)`

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	0+	A value

Results

Data Type	Description
string	The concatenated string without spaces.

Remarks

Returns the elision of all values presented. All values are converted to strings, then concatenated. Spaces are removed between arguments as are leading and trailing spaces. Any occurrence of the literal `\s` is replaced with a space. Any occurrence of the literal `\n` is replaced with a newline.

Example

```
> ($$ the quick "brown" fox)
.: "thequickbrownfox"

> ($$ the quick \s \s brown fox)
.: "thequick  brownfox"

> ($$ {the quick} {} {brown fox})
.: "{the quick}{}{brown fox}"

> ($$ atom \n molecule)
.: "atom
molecule"

> ($$)
.: ""
```

Related

`$ concatenate, string`

% shell

Executes a shell command.

Syntax

(% *command argument ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
command	literal	1	A shell command.
argument	Expression	0+	An argument to the command

Results

Data Type	Description
expression	The output of the command as a list of strings and an integer result.

Remarks

Returns an expression containing a list of strings from the output of the command and an integer result.

Example

```
> (% pwd)
.: {"user/moi"} 0
> (% mkdir tmp)
.: {} 0
> (% ls)
.: {"tmp"} 0
> (% rmdir tmp)
.: {} 0
```

Related

[files, folders](#)

& merge

Merges arguments into a new sequence.

Syntax

(& value ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	0+	A value

Results

Data Type	Description
sequence	The merged sequence.

Remarks

Returns a flattened sequence merging all subsequences of the same type. If the first element is not a sequence, then a list is returned. The sequence type shall be that of the first element.

Example

```
> (& {1 2 3} 4 5 {6} {7} {8 9} 10)
.: {1 2 3 4 5 6 7 8 9 10}

> (& [1 2 3] 4 5 [6] [7] [8 9] 10)
.: [1 2 3 4 5 6 7 8 9 10]

> (& |1 2 3| |4 5| |6| |7| |8 9| |10|)
.: |1 2 3 4 5 6 7 8 9 10| 

> (& {the quick} {} [brown fox])
.: {the quick brown fox}

> (& atom)
.: {atom}

> (&)
.: {}
```

Related

&& abridge, mid, insert, pop, push, swap, transfer

&& abridge

Merges arguments into a new sequences and removes nils.

Syntax

(&& value ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	0+	A value

Results

Data Type	Description
sequence	The merged sequence without nils.

Remarks

The **&&** function returns a flattened sequence concatenating all values except nils.

Example

```
> (&& {} the quick brown fox {} nil nil jumped)
.: {the quick brown fox jumped}
> (&& [the quick] nil [] nil [brown [fox]])
.: [the quick brown [fox]]
> (&&)
.: {}
> (&& nil nil nil)
.: {}
```

Related

& merge, mid, insert, pop, push, swap, transfer

* *multiplication*

Multiply.

Syntax

(* *number number ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
number	variant	2+	A number or list of numbers.

Results

Data Type	Description
variant	The product of all factors or a list of products.

Remarks

Returns the product of the arguments. If an argument is a list, then each element of the list is multiplied. If a scalar and a list are multiplied, then the scalar is multiplied with each element of the list. All lists must be of the same length.

Example

```
> (* 1 2 3)
.: 6
> (* {1 2 3} 5 {2 4 6})
.: {10 40 90}
```

Related

/ division, % modulo, + addition, - subtraction, ** exponent

**** exponentiation**

Raises a base number to an exponent.

Syntax

(**** root exponent**)

Module

Base

Parameters

Name	Data Type	Qty	Description
root	variant	1	A number or list of numbers.
exponent	variant	1	A number or list of numbers.

Results

Data Type	Description
variant	The root raised to the indicated power or list of the same.

Remarks

If (**** root exponent**) = *number*, and (**/\ 1 exponent**) = *degree* then (**/\ number degree**) = *root*.
If no denominator is specified, this function returns the square root of the number..

Example

```
> (** 2 3)
.: 8
> (** (e) 2)
.: 7.3890461484
> (** {2 4 6} 2)
.: {4 16 36}
> (** 2 {2 3 4})
.: {4 8 16}
> (** {2 3 4} {2 3 4})
.: {4 27 256}
> (** 4 0.5)
.: 2
```

Related

* multiplication, / division, root

/ *division*

Division.

Syntax

(/ *dividend divisor ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
dividend	variant	1	A number or list of numbers.
divisor	.aogalk	0+	A number or list of numbers.

Results

Data Type	Description
variant	Returns the quotient of the numbers or a list of quotients.

Remarks

Returns the quotient of the values. If there is one value presented, this function returns the reciprocal of the value. If there are two values, it divides the first value by the second. If there are more than two values, it divides the result by each successive number. Division by zero shall result in the literal **unknown** being returned. All list arguments must be the same length. If an argument is a list, then each element of the list is divided. If a scalar and a list are divided, then the scalar is divided by each element of the list.

Example

```
> (/ 5.0 2)
.: 2.5
> {/ {4 5 6} 4.0}
.: {1 1.25 1.5}
> (/ {4 5 6} {1.0 2.0 3.0})
.: {4 2.5 2}
> (/ 5 0)
.: undefined
```

Related

// safe divide, * multiplication, + addition, - subtraction, % modulo

// *nth root*

Returns the *n*th root of a number.

Syntax

(// *number degree*)

Module

Base

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
degree	number	0-1	A number (Default is 2)

Results

Data Type	Description
variant	The root.

Remarks

If $(** \text{root} \text{ exponent}) = \text{number}$, and $(/\ 1 \text{ exponent}) = \text{degree}$ then $(// \text{number} \text{ degree}) = \text{root}$.
If no denominator is specified, this function returns the square root of the number.

Example

```
(// 866020)
.: 930.6019557254326

(// 9)
.: 3

(// 8 3)
.: 2

(// 27 3)
.: 3
```

Related

** *exponentiation, log*

// safe divide

Performs division or returns a default value in case of an undefined result.

Syntax

Syntax

(// dividend divisor default)

Module

Base

Parameters

Name	Data Type	Qty	Description
dividend	variant	1	A number.or a list.
divisor	variant	1	A number.or a list.
default	variant	0-1	A number or a list. If not supplied, unknown is returned.

Results

Data Type	Description
number	Returns either the quotient of the numerators and denominators or the default.

Remarks

Returns the quotient of the values or the default. It divides the dividend by the divisor. If the default is not supplied, **undefined** is returned. All list arguments must be the same length. If an argument is a list, then each element of the list is divided. If a scalar and a list are divided, then the scalar is divided by each element of the list.

Example

```
> (// 1.0 2)
.: 0.5

> (// 5 0 0)
.: 0

> { // {4 5 6} 0}
.: {undefined undefined undefined}

> { // {4 5 6} {1 2 0} -1)
.: {4 2.5 -1}
```

Related

/ division, * multiplication, + addition, - subtraction, % modulo

/~ dissimilarity

Calculates the dissimilarity between two values.

Syntax

(/~/ *value₁* *value₂*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	2	Any value

Results

Data Type	Description
real	The degree of dissimilarity between the two arguments.

Remarks

Returns a number between 0 and 1, which identifies how dissimilar two numbers are.

Returns a number between 0 and 1. For numbers the following formula is used:

```
(- 1 (/ 1 (+ 1 (abs (- ?v1 ?v2)))))
```

If the values are of different types, they are treated as strings. For strings, lists of trigrams (ngrams of size 3) are generated and compared. For lists in general the following formula is used:

```
(- 1 (- (/ (# (intersection ?v1 ?v2)) (min (# ?v1) (# ?v2)))
           (* 0.1 (/ (# (difference ?v1 ?v2)) (min (# ?v1) (# ?v2))))))
```

If either list is empty, zero is returned.

Example

```
> (/~/ {a b c} {a d e})
.: 0.73333333333333334

> (/~/ "a b c" "a d e")
.: 0.21428571428571425

> (/~/ 57 890)
.: 0.9988009592326139
```

Related

~ similarity, like, unlike, = equal, /= unequal

/= unequal

Returns true if any values are not equal.

Syntax

(/= *value₁* *value₂* ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	2+	A value to be compared.

Results

Data Type	Description
truth	Returns true if all values are not the same

Remarks

Returns true if any values are not the same. Once two values are determined to be equal, the function short circuits and no further processing occurs.

For example (/= 1 2 3 5 3 6). Since 1≠2, we need to keep looking. Since 2≠3, we need to keep looking. Since 3≠5, we need to keep looking. Since 5≠3, we need to keep looking. However, since 3=3 (positions 3 and 5), false can be returned.

In the case of (/= (f ?x) (g ?x) (h ?x)), if f(?x) ≠ g(?x), h(?x) gets called. But, if f(x) = g(x), h(x) does not get called and false is returned.

Example

```
> (/= 1 2 3)
.: true
> (/= 1 1 1)
.: false
```

Related

= *equal*, ~ *similarity*, /~ *dissimilarity*

~ similarity

Calculates the similarity between two values.

Syntax

(~ *value₁* *value₂*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	2	Any value

Results

Data Type	Description
float	A similarity measure between 0 and 1.

Remarks

Returns a number between 0 and 1. For numbers the following formula is used:

```
(/ 1 (+ 1 (abs (- ?v1 ?v2))))
```

If the values are of different types, they are treated as strings. For strings, lists of trigrams (ngrams of size 3) are generated and compared. For lists in general the following formula is used:

```
(- (/ (# (intersection ?v1 ?v2)) (min (# ?v1) (# ?v2)))
     (* 0.1 (/ (# (difference ?v1 ?v2)) (min (# ?v1) (# ?v2)))))
```

If either list is empty, zero is returned.

Example

```
> (~ {a b c} {a d e})
.: 0.26666666666666666666
> (~ "a b c" "a d e")
.: 0.21428571428571425
> (~ 57 890)
.: 0.001199040767386091
```

Related

/~ dissimilarity, = equal, /= unequal, like, unlike

' quote

Quotes a variant.

Syntax

(' *variant*)

Module

Base

Parameters

Name	Data Type	Qty	Description
variant	variant	1	A variant to be quoted

Results

Data Type	Description
variant	The value after quoting.

Remarks

The quote character signifies the quote function. All arguments are returned unevaluated.

Example

```
> (' foo)
.: foo
> (' (+ 1 2 3))
.: (+ 1 2 3)
> (' "a string")
.: "a string"
> (' (foo))
.: (foo)
> (' (+ 1 , (* 2 3)))
.: (+ 1 , (* 2 3))
```

Related

`expand, eval, function, macro, quote, unquote

` expand

Expands a variant by substituting values.

Syntax

(` *variant*)

Module

Base

Parameters

Name	Data Type	Qty	Description
variant	variant	1	A variant to be expanded

Results

Data Type	Description
variant	The argument after expansion.

Remarks

The backquote character is the expand function. The argument is returned unevaluated unless it is preceded by or contains a comma (and underscore), in which case the value following the comma shall be evaluated in the present scope (or in which case the value following the underscore must evaluate to a list which shall be merged into the existing expression).

Example

```
> (` (+ 1 2 "3"))
.: (+ 1 2 "3")

> (assume {?a 1 ?b 2 ?c {3 4 5}}  (` {, ?a , ?b , ?c}))
.: {1 2 {3 4 5}}

> (assume {?a 1 ?b 2 ?c {3 4 5}}  (` {, ?a , ?b ,_ ?c}))
.: {1 2 3 4 5}

> (` (foo))
.: (foo)

> (` (+ (+ 1 1) ,(* 2 3)))
.: (+ (+ 1 1) 6)
```

Related

' quote, eval, function, macro

+ *addition*

Addition.

Syntax

(+ *number* *number* . . .)

Module

Base

Parameters

Name	Data Type	Qty	Description
number	variant	2+	A number or list of numbers.

Results

Data Type	Description
variant	The sum or a list of sums.

Remarks

Calculates the sum of the values. The values must all be numbers or lists containing numbers. If an argument is a list, then each element of the list is added. If a scalar and a list are added, then the scalar is added to each element of the list. All lists must be the same length.

Example

```
> (+ 1 2 3)
.: 6
> (+ 5 {6 7 8 9 10})
.: {11 12 13 14 15}
> (+ {1 2 3} {4 5 6} 8)
.: {13 15 17}
```

Related

- minus, * multiply, / divide

++ increment

Increments a number by 1.

Syntax

(++ *number*)

Module

Base

Parameters

Name	Data Type	Qty	Description
number	variant	1	A number or list of numbers.

Results

Data Type	Description
variant	The incremented number or list of numbers.

Remarks

This function increments the argument by 1. If the argument is a list then each number in the list is incremented by one.

Example

```
> (++ 1)
.: 2

> (++ 100)
.: 101

> (++ {99 -101 0})
.: {100 -100 1}
```

Related

-- decrement

<-- before tie

The value before tying a symbol to a new value.

Syntax

(<-- *function symbol value ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
function	literal	1	A function
symbol	symbol	1	A symbol
value	value	0+	A value used in the function call.

Results

Data Type	Description
variant	Returns the value bound to the symbol before the function is applied.

Remarks

None

Example

```
> (let ?n 0)
  .: true
> (<-- + ?n 7)
  .: 0
> ?n
  .: 7
```

Related

--> *after tie, assume, assign, global, local, put, set, swap, tie*

< less

True if each value is less than the next.

Syntax

(< *value value ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	2+	A value to be compared.

Results

Data Type	Description
truth	True if values are increasing.

Remarks

Returns true if each value is less than its successor from left to right, and false otherwise. All values must be of the same type (either a literal, number, or string)

Example

```
(< a b c)
.: true

(< "johnny" "ralph" "sam")
.: true

(< 3 6 2 8)
.: false

(< Amanda Samantha Zelda)
.: true
```

Related

<= less or equal, > greater, >= greater or equal , = equal , /= unequal

<= less or equal

True if each value is less or equal to the next.

Syntax

(<= *value* *value* ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	2+	A value to be compared.

Results

Data Type	Description
truth	True if values are increasing.

Remarks

Returns true if each value is less than its successor from left to right, and false otherwise. All values must be of the same type, and must be numbers, literals, or strings.

Example

```
> (<= a b b c)
.: true

> (<= "johnny" "ralph" "sam")
.: true

> (<= 3 6 2 8)
.: false
```

Related

< less, > greater, >= greater or equal , = equal , /= unequal

<== before put

The value before replacement.

Syntax

(<== *container function place value ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
container	variant	1	A sequence or assortment.
function	function	1	A function
place	variant	1	A key or position.
value	value	0+	a value used in the function call.

Results

Data Type	Description
variant	Returns the new place value

Remarks

None

Example

```
> (relation Q :x 0)
.: Q

> (global ?Q (new Q))
.: true

> (<== ?Q + :x 1)
.: 0

> (<== ?Q ++ :x)
.: 1

> (:x ?Q)
.: 2
```

Related

==> after put

= *equal*

True if each value is equal to the next.

Syntax

(= *value value ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	2+	A value to be compared.

Results

Data Type	Description
truth	True if all values are the same

Remarks

Returns true if each value is the same as its successor from left to right, and false otherwise. All values must be of the same type, and must be numbers, literals, or strings. Short circuits if false. Two items are = if their representation is the same regardless of whether or not they occupy the same location in memory (viz. identical).

Example

```
> (= a a a a)
.: true

> (= "johnny" "ralph" "sam")
.: false

> (= 3 3)
.: true
```

Related

< less , <= less or equal, > greater, >= greater or equal, /= unequal, identical

==> after put

The value after replacement.

Syntax

(==> container function place value ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
container	variant	1	A sequence or assortment.
function	function	1	A function
place	variant	1	A key or position.
value	value	0+	a value used in the function call.

Results

Data Type	Description
variant	Returns the new place value

Remarks

None

Example

```
> (relation Q :x 0)
.: Q

> (global ?Q (new Q))
.: true

> (==> ?Q + :x 1)
.: 1

> (==> ?Q ++ :x)
.: 2

> (:x ?Q)
.: 2
```

Related

<=> before put

> *greater*

True if each value is greater than the next.

Syntax

(> *value value ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	value	2+	A value to be compared.

Results

Data Type	Description
truth	True if values are decreasing.

Remarks

Returns true if each value is greater than its successor from left to right, and false otherwise. All values must be of the same type, and must be numbers, literals, or strings.

Example

```
> (> c b a)
.: true

> (> "johnny" "ralph" "sam")
.: false

> (> 3 6 2 8)
.: false
```

Related

< less , <= less or equal , >= greater or equal , = equal , /= unequal

--> *after tie*

The value after tying a symbol to a new value.

Syntax

(--> *function symbol value ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
function	literal	1	A function
symbol	symbol	1	A symbol
value	value	0+	A value used in the function call.

Results

Data Type	Description
variant	Returns the last value bound to the symbol.

Remarks

None

Example

```
> (assume {?length 0}
  (for ?m in (modules)
    (--> + ?length (# ?m))))
.: 23
> (# (reduce (modules) $))
.: 23
```

Related

--> *before tie*, constant, dynamic, global, local, put, set, swap, tie, use

>= *greater or equal*

True if each value is greater or equal to the next.

Syntax

(>= value value ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	value	2+	A value to be compared.

Results

Data Type	Description
truth	True if values are increasing.

Remarks

Returns true if each value is greater or equal to its successor from left to right, and false otherwise.
All values must be of the same type, and must be numbers, literals, or strings.

Example

```
> (>= c b a)
.: true

> (>= "johnny" "ralph" "sam")
.: false

> (>= "sam" "ralph" "johnny")
.: true

> (>= 8 7 6 3)
.: true
```

Related

< less , <= less or equal, > greater, = equal , /= unequal

\n newline

Returns a string containing one or more new lines.

Syntax

(\n *quantity*)

Module

Base

Parameters

Name	Data Type	Qty	Description
quantity	number	0-1	The number of new lines to create. Default is 1.

Results

Data Type	Description
string	A string containing a single new line character.

Remarks

None.

Example

```
> (\n)
:
"
"

> (\n 3)
:
"
"
```

Related

\$ concatenate, \$\$ elide, \s space, string

\s space

Returns a string containing one or more spaces.

Syntax

(\s *quantity*)

Module

Base

Parameters

Name	Data Type	Qty	Description
quantity	number	0-1	The number of spaces to create. Default is 1.

Results

Data Type	Description
string	A string containing a single space.

Remarks

None.

Example

```
> (\s)
.: " "
> (\s 15)
.: "
```

Related

\$ concatenate, \$\$ elide, \n newline, string

^ thought id

Returns a SubThought identifier.

Syntax

(*^ thought*)

Module

Base

Parameters

Name	Data Type	Qty	Description
thought	variant	1	A SubThought premise or SubThought identifier

Results

Data Type	Description
thought	Returns the SubThought identifier.

Remarks

Returns the identifier for a thought.

Example

```
> (relation A :S1 0 :S2 1)
.: A
> (new A)
.: A_1
> (premise A_1)
.: [A ^ A_1 :S1 0 :S2 1]
> (^ (premise A_1))
.: A_1
> (^ A_1)
.: A_1
> (^ FOO)
.: nil
```

Related

[id](#), [instantiate](#), [premise](#), [type](#)

abolish

Deletes symbols from an environment.

Syntax

(abolish *symbols* *environment*)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbols	variant	1	A symbol or a list of symbols.
environment	environment	0-1	The environment containing the symbol(s).

Results

Data Type	Description
literal	Returns the literal abolished .

Remarks

Disassociates the symbol or symbols from their respective values in the specified environment. If unspecified, each symbol is sought in the current scope or an ancestor environment, all the way up to the global environment. If the symbol is found, it is disassociated, then deleted. If the symbol is not found, it is ignored..

Example

```
> (def ?person DrWho)
.: DrWho
> ?person
.: DrWho
> (abolish ?person)
.: abolished
> ?person
.: [Failure :Name UnboundSymbol :Text "The symbol ?person is unbound"]
```

Related

-- before tie, --> after tie, assign, assume, constant, dynamic, global, let, local, only , set, tie

abort

Forcibly terminates one or more tasks.

Syntax

(abort *tasks* **)**

Module

Tasks

Parameters

Name	Data Type	Qty	Description
tasks	variant	1	A single task resource or a list of task resources.

Results

Data Type	Description
variant	Returns the tasks or list of tasks.

Remarks

Immediately terminates an executing task.

Example

```
> (concurrent (step ?i from 1 to 100000 (if (cancelled-p (self)) (break oops))
finished)
              (step ?i from 1 to 100000 finished))

.: {Task-57 Task-58}

> (cancel task-57)

.: task-57

> (await task-57)

.: oops

> (abort task-58)

.: task-58

> (free {task-57 task-58})

.: freed
```

Related

await, cancel, cancelled-p, complete, critical, do, done-p, reclaim , start, task, task-p, tasks

about

Provides system and version information.

Syntax

(about)

Module

Base

Parameters

None

Results

None

Remarks

Returns system and version information.

Example

```
> (about)
.: [Premise :Version 1.1.0 :Build 20200430.001 :OS Win64 :Edition Community]
```

Related

bye, eval, quote

abs

Returns the absolute value.

Syntax

(abs number)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	variant	1	A number or a list.

Results

Data Type	Description
variant	A non-negative number or a list of non-negative numbers.

Remarks

Returns a non-negative number or a list of non-negative numbers. If the number is negative it is multiplied by -1. If the number is positive no change occurs.

Example

```
> (abs 100)
.: 100

> (abs -100)
.: 100

> (abs ninfinity)
.: ninfinity

> (abs unknown)
.: unknown

> (abs {0 -2 -99 24 56 infinity})
.: {0 2 99 24 56 infinity}
```

Related

- subtraction , + addition , % modulo, / division, * multiplication

absent

True if a file, folder, or url does not exist.

Syntax

(**absent** *url*)

Module

IO

Parameters

Name	Data Type	Qty	Description
url	url	1	A url.

Results

Data Type	Description
truth	True if the url does not exist.

Remarks

This function checks whether or not the url exists.

Example

```
> (let ?url (ul path "quick.txt"))
  .: true

> (if (absent ?url)
  (let ?file (file url ?url seek 1 mode write erase yes))
  (write ?file "The quick brown fox")
  (close ?file))

.: closed
```

Related

file, folder, there, url

acosecant

Returns the inverse cosecant.

Syntax

(acosecant *number geometry metrum*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
geometry	literal	0-1	One of: cir (cle), hyp (erbola). Default is circle.
metrum	literal	0-1	One of: degrees , radians . Default is radians.

Results

Data Type	Description
number	The inverse cosecant of the number.

Remarks

Example

```
> (acosecant 0.3927)
.: 1.570796326-1.58686085i

> (acosecant 0.3927 cir radians)
.: 1.570796326-1.58686085i

> (acosecant 135 cir degrees)
.: 0.438313704

> (acosecant (pi) hyp radians)
.: 0.31316588045

> (acosecant 45 hyp degrees)
.: 1.06202877524
```

Related

cosine, tangent

acosine

Returns the inverse cosine.

Syntax

(**acosine** *number geometry metrum*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
geometry	literal	0-1	One of: cir (cle), hyp (erbola). Default is circle.
metrum	literal	0-1	One of: degrees , radians . Default is radians.

Results

Data Type	Description
number	The inverse cosine of the number.

Remarks

None.

Example

```
> (acosine 1.570796326794)
.: 0+1.0322747855i

> (acosine cir 1.570796326794 radians)
.: 0+1.0322747855i

> (acosine cir 22.5 degrees)
.: 1.1672317198

> (acosine hyp 4.712388980384 radians)
.: 2.23188925305

> (acosine hyp 90 degrees)
.: 0.9136433572987
```

Related

[cosine](#), [tangent](#)

acotangent

Returns the inverse cotangent.

Syntax

(**acotangent** *number geometry metrum*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
geometry	literal	0-1	One of: cir (cle), hyp (erbola). Default is circle.
metrum	literal	0-1	One of: degrees , radians . Default is radians.

Results

Data Type	Description
number	The inverse cotangent of the number.

Remarks

Example

```
> (acotangent 0.785398163397)
.: 0.905022576

> (acotangent cir 0.785398163397 radians)
.: 0.905022576

> (acotangent cir 180 degrees)
.: 0.3081690711

> (acotangent hyp 2.356194490192 radians)
.: 0.453062565662

> (acotangent hyp 120 degrees)
.: 0.519695325409
```

Related

cosine, tangent

actual

Returns a the underlying symbol referenced by an alias.

Syntax

(actual alias)

Module

Base

Parameters

Name	Data Type	Qty	Description
alias	alias	1	A symbol reference

Results

Data Type	Description
symbol	Returns the symbol referenced by the alias.

Remarks

The convention for denoting alias symbols is to use two question marks: ??name.

Example

```
> (structure ListNode :Val :Next)
  .: ListNode

> (function IsPalindrome2 {ListNode ?tail alias ??head}
  (ensure ListNode (actual ??head))
  (if (null-p ?tail)
    (return true)
  or (and (IsPalindrome2 (:Next ?tail)) (= (:Val ?tail) (:Val ??head)))
    (set ??head (:Next ??head))
    (return true)
  else (return false)))

.: IsPalindrome2

> (function IsPalindrome {?head}
  (ensure ListNode ?head)
  (return (IsPalindrome2 ?head (alias ?head)))))

.: IsPalindrome

> (IsPalindrome
  (new ListNode :Val a :Next (new ListNode :Val b :Next (new ListNode :Val a))))
  .: true
```

Related

alias, assume, dynamic, given, global, let, scope, set, tie

add

Modifies an assortment by adding entries.

Syntax

(**add** *assortment entry ...*)

entry ::= *key value*

entry ::= *key*

Module

Base

Parameters

Name	Data Type	Qty	Description
assortment	assortment	1	An assortment or sequence
entry	expression	1+	A key, or key value pair.

Results

Data Type	Description
assortment	The modified assortment.

Remarks

Collections require only a key for each entry. Assortments require a key and value for each entry.

Example

```
> (entries (add (lexicon) a 1 b 2 c 3))  
.: {{a 1}{b 2}{c 3}}  
  
> (entries (add (collection) 1 2 3 4 5))  
.: {{1 1}{2 2}{3 3}{4 4}{5 5}}
```

Related

size, cut, deq, enq, get, insert, key, keys, push, put, rip, values, zap

address

Returns the address of a URL web resource.

Syntax

(address *url*)

Module

IO

Parameters

Name	Data Type	Qty	Description
url	URL	1	A url web resource.

Results

Data Type	Description
string	A valid URL in a string.

Remarks

If no arguments are provided, then this function returns the universal resource locator for the SubThought Premise interpreter running on the current cell.

Example

```
> (address (url))
.: "http://localhost"

> (address (url scheme https))
.: "https://localhost"

> (url scheme https host "www.youtube.com" path "watch" query "v=ja76cnLKSL4")
.: Url-3

> (address Url-3)
.: "https://www.youtube.com/watch?v=ja76cnLKSL4"
```

Related

[url](#), [url-p](#)

agent

Creates an agent.

Syntax

(agent *job url handler delay* **)**

Module

IO

Parameters

Name	Data Type	Qty	Description
job	function	1	A niladic function for the agent to repeatedly perform.
url	url	1	A Universal Resource Locator..
handler	function	1	An message handler function.
delay	time	0-1	The delay between job executions. Default is 1 second.

Results

Data Type	Description
agent	The agent task.

Remarks

This function creates an asynchronous agent task that repeatedly performs a job and also processes incoming messages. The message handler function should receive a sender url and a message string.

Example

```
> (let ?url (url scheme tcp port 5001))

.: true

> (function reply {url ?sender string ?message} (tell ?sender "OK"))

.: reply

> (function job {} (tell user ($ 1)))

.: job

> (agent job ?url reply \@s0.5)

.: Agent-1

> (do (start Agent-1) (wait 3) (cancel Agent-1) (free Agent-1))

111111.: freed
```

Related

ask, cancel, service, pause, perform, start, tell

alias

Returns a reference to a symbol.

Syntax

(**alias** *symbol*)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1	A symbol

Results

Data Type	Description
alias	Returns a symbol reference.

Remarks

The convention for denoting alias symbols is to use two question marks: ??name.

Example

```
> (structure ListNode :Val :Next)
  .: ListNode

> (function IsPalindrome2 {ListNode ?tail alias ??head}
  (ensure ListNode (actual ??head))
  (if (null-p ?tail)
    (return true)
  or (and (IsPalindrome2 (:Next ?tail)) (= (:Val ?tail) (:Val ??head)))
    (set ??head (:Next ??head))
    (return true)
  else (return false)))

.: IsPalindrome2

> (function IsPalindrome {?head}
  (ensure ListNode ?head)
  (return (IsPalindrome2 ?head (alias ?head)))))

.: IsPalindrome

> (IsPalindrome
  (new ListNode :Val a :Next (new ListNode :Val b :Next (new ListNode :Val a))))
  .: true
```

Related

actual, assume, dynamic, given, global, let, scope, set, tie

align

Returns a sorted list using the provided ordering.

Syntax

(align sequence ordering)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence of unordered elements.
ordering	sequence	1	An ordered sequence.

Results

Data Type	Description
sequence	An ordered sequence.

Remarks

Places items in the sequence in the specified ordering. If items in the sequence do not appear in the ordering, they are appended to the result in the order of appearance.

Example

```
> (align {b d c f} {a b c d})  
. : {b c d f}  
  
> (align "72qaj8x" "zyx123a")  
. : "x2a7qj8"
```

Related

[insort](#), [sort](#)

all

True if all relevant knowledge satisfies all the premises.

Syntax

```
(all premise ... )  
  
premises ::= premise  
premises ::= premise premises  
premises ::= premise premises  
premises ::= premise restriction ... premises  
restriction ::= (predicate value ...)  
premise ::= [category descriptor ... ]  
category ::= type  
category ::= list  
descriptor ::= slot binding  
descriptor ::= slot condition  
binding ::= as symbol  
binding ::= each symbol  
condition ::= slot = value  
condition ::= slot is unary-predicate  
condition ::= slot not value  
condition ::= slot binary-predicate value  
condition ::= slot n-ary-predicate value-list  
condition ::= (predicate value ...)
```

Module

Base

Parameters

Name	Data Type	Qty	Description
premise	variant	1+	A pattern, call, or truth value.

Results

Data Type	Description
truth	True if all values are not nil.

Remarks

True if all values are not nil, false otherwise. Evaluates values one at a time. If a value is nil then it returns immediately, ignoring remaining values. . If the value is an iterator, then a cursor is created over which the remaining values are tested until truth or falsity is determined.

Example

```
> (all one two three)
.: true
> (all a b nil)
.: false
```

Related

[any](#), [no](#), [nall](#)

alphabetic-p

True if the first position of a string is alphabetic.

Syntax

(**alphabetic-p** *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value.

Results

Data Type	Description
truth	True if the value is a string and the first position is alphabetic.

Remarks

Can be upper case or lower case.

Example

```
> (alphabetic-p {a b c})  
. : false  
  
> (alphabetic-p "a b c")  
. : true  
  
> (alphabetic-p " a b c")  
. : false  
  
> (alphabetic-p 450)  
. : false  
  
> (alphabetic-p "450")  
. : false  
  
> (alphabetic-p "Hello World.")  
. : true
```

Related

capitalized-p, letter-p, lowercase-p, uppercase-p

alphanumeric-p

True if the first position of a string is a number or a letter.

Syntax

(alphanumeric-p value)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value.

Results

Data Type	Description
truth	True if the value is a string and the first position is alphanumeric.

Remarks

True if the first position of the value is an upper or lower case alphabetic character or a digit.

Example

```
> (alphanumeric-p {a b c})  
. : false  
  
> (alphanumeric-p "a b c")  
. : true  
  
> (alphanumeric-p " a b c")  
. : false  
  
> (alphanumeric-p 450)  
. : false  
  
> (alphanumeric-p "450")  
. : true
```

Related

capitalized-p, letter-p, lowercase-p, uppercase-p

and

Logical conjunction.

Syntax

(**and** *truth* *truth* ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
truth	truth	2+	A truth value

Results

Data Type	Description
truth	True if all arguments are true.

Remarks

Evaluates the values presented one at a time. If any of the values is false, this function returns false immediately, ignoring any remaining values. This function fails if any argument is not truth.

Example

```
> (and (is 234 (given {?x} (= (taxon ?x) number)))
       (is abc (given {?x} (= (taxon ?x) literal))))
 
.: true

> (and true true true true false)

.: false
```

Related

exists, nand, nil, nor, not, or, xor

any

True if any relevant knowledge satisfies all the premises.

Syntax

```
(any premise ... )  
  
premises ::= premise  
premises ::= premise premises  
premises ::= premise premises  
premises ::= premise restriction ... premises  
restriction ::= (predicate value ...)  
premise ::= [category descriptor ... ]  
category ::= type  
category ::= list  
descriptor ::= slot binding  
descriptor ::= slot condition  
binding ::= as symbol  
binding ::= each symbol  
condition ::= slot = value  
condition ::= slot is unary-predicate  
condition ::= slot not value  
condition ::= slot binary-predicate value  
condition ::= slot n-ary-predicate value-list  
condition ::= (predicate value ...)
```

Module

Base

Parameters

Name	Data Type	Qty	Description
premise	variant	1+	A pattern, call, or truth value.

Results

Data Type	Description
truth	True if any value is not nil.

Remarks

True if any value is not nil. Returns immediately upon encountering the first non-nil value. If the value is an iterator, then a cursor is created over which the remaining values are tested until truth or falsity is determined.

Example

```
> (any nil nil apple)
.: true

> (any one two three four)
.: true

> (any nil nil)
.: false
```

Related

[all](#), [default](#), [is](#), [nall](#), [no](#)

append

Inserts values at the end of a sequence.

Syntax

(append *sequence* *value* ... **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence
value	variant	1+	A value.

Results

Data Type	Description
sequence	The modified sequence.

Remarks

Inserts the value into the end of a sequence.

Example

```
> (let ?s {})
.: true

> (append ?s a b c)
.: {a b c}

> (append ?s d e f)
.: {a b c d e f}

> ?s
.: {a b c d e f}
```

Related

@, add, fix, insert, pop, push, swap

apply

Applies a function to a list of arguments.

Syntax

(apply *function arguments environment*)

Module

Base

Parameters

Name	Data Type	Qty	Description
function	function	1	The name of a function to invoke
arguments	list	1	A list containing actual parameters.
environment	environment	0-1	An optional environment.

Results

Data Type	Description
value	The result from applying the function.

Remarks

Applies the function to the list using the supplied environment, or the current scope if no environment is provided. The function is applied to the entire list and the result is returned.

Example

```
> (apply + {1 2 3})  
. : 6  
  
> (so { ?x 9  
        ?s (scope) }  
  (so { ?x 3 }  
      (apply + {1 2 ?x} ?s)))  
. : 12
```

Related

count, gather, invoke, map, morph, reduce, supply

arguments

Returns a list of arguments to a call, or task.

Syntax

(arguments *what* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
what	variant	1	A task or call.

Results

Data Type	Description
list	A list of arguments to the task or call.

Remarks

Functions are defined using the **function** intrinsic function. If the name is supplied then the function is a user named function (also called an **exonym**), otherwise it is an automatically named function (called an **esonym**). If a parameter list is supplied then it shall bind the formal parameter symbols to any actual parameter expressions provided. The first symbols in the parameter list are required. If a plus sign is provided, then those symbols following the plus sign are optional. Each optional parameter may have a default value (specified with an equal sign and the value). If no default value is specified, the default value shall be **nil**. If an ampersand is provided, then the symbol following it is bound to a list of remaining (variadic) actual parameter values. Keyword parameters (literal symbol pairs) may be provided as required or optional. The entire parameter list may be omitted. The function shall be accessible from other modules by prefixing it with the module name in which it was defined.

Example

```
> (function {?n} (+ 1 ?n))

.: fn-1

> (function plusN {?n + ?i = 1} (+ ?n ?i))

.: plusN

> (function addAll {& ?nums} (apply + ?nums))

.: addAll

> (fn-1 100)

.: 101

> (plusN 100)

.: 101

> (function tryParseNum {?s}
  (let ?convertible (convertible-p ?s number))
  {?convertible (if ?convertible (@ (take ?s))))}

> (tryParseNum "foo")

.: {false nil}

> (tryParseNum "123")

.: {true 123}

> (function dont {{try ?what} + {at ?where = nil}}
  (apply (given {?s}(tell user ?s))
         ($ don't try ?what (unless (any ?where) "" ($ at ?where)))))

.: dont

> (dont try "skydiving into a volcano")

don't try skydiving into a volcano
.: told

> (dont try this at home)

don't try this at home
.: told
```

Related

arguments, call, function, task, parameters

arity

Returns the number of symbols in a function's parameter list.

Syntax

(arity *function kind*)

Module

Base

Parameters

Name	Data Type	Qty	Description
function	function	1	A function or function name .
kind	literal	0-1	One of required , optional , variadic , or all (default).

Results

Data Type	Description
integer	Returns the number of symbols matching the parameter kind.

Remarks

None

Example

```
> (function foo {?a + ?b ?c & ?d}
   (tell user ($ (&& ?a ?b ?c ?d))))  

.: foo  

> (arity foo)  

.: 4  

> (arity foo required)  

.: 1  

> (arity foo optional)  

.: 2  

> (arity foo variadic)  

.: 1
```

Related

has, in, member, within

array

Returns a multi dimensional list.

Syntax

(array *dimensions* *option*)

dimensions ::= *size*
dimensions ::= { *size* ... }

Module

Base

Parameters

Name	Data Type	Qty	Description
dimensions	variant	1	A number or list of numbers for each dimension
option	expression	1	A key value pair, either of expression (default), or each function.

Results

Data Type	Description
list	A list.

Remarks

If option is **of** then all elements of the list are initialized to the same value. If option is **each**, during initialization, the function receives the current coordinate and the value is used for the position.

Example

```
> (array 5)
.: {nil nil nil nil nil}

> (array 5 of 0)
.: {0 0 0 0 0}

> (array 5 each (given {?x}(random 0 to 9)))
.: {7 5 8 2 4}

> (array {2 2} each (given {?coordinate}(reduce ?coordinate +)))
.: {{2 3}{3 4}}
```

Related

@, bind, edit, make

asecant

Returns the inverse secant.

Syntax

(asecant *number* *geometry* *metrum*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
geometry	literal	0-1	One of: cir (cle), hyp (erbola). Default is circle.
metrum	literal	0-1	One of: degrees , radians . Default is radians.

Results

Data Type	Description
number	The inverse secant of the number.

Remarks

Example

```
> (asecant 2.356194490192)
.: 1.13248262224

> (asecant cir 2.356194490192 radians)
.: 1.13248262224

> (asecant cir 120 degrees)
.: 1.0730291831

> (asecant hyp 0.3927 radians)
.: 1.58686

> (asecant hyp 45 degrees)
.: 0.72336752453
```

Related

cosecant, secant

asine

Returns the inverse sine.

Syntax

(**asine** *number geometry metrum*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
geometry	literal	0-1	One of: cir (cle), hyp (erbola). Default is circle.
metrum	literal	0-1	One of: degrees , radians . Default is radians.

Results

Data Type	Description
number	The inverse sine of the number.

Remarks

Example

```
> (asine 0.3927)
.: 0.403566

> (asine cir 0.3927 radians)
.: 0.403566

> (asine cir 95 degrees)
.: 1.570796326+1.092133189i

> (asine hyp 3.141592653589 radians)
.: 1.862295743311

> (asine hyp 120 degrees)
.: 1.4850704719
```

Related

[cosine](#), [sine](#)

ask

Sends a message to a recipient and awaits a response.

Syntax

(**ask** *who message option ...*)

Module

IO

Parameters

Name	Data Type	Qty	Description
who	literal	1	A URL or the literal user for the console.
message	string	0-1	A message or query.
option	expression	0+	Key value pairs timeout <i>instant</i> – delay before terminating request, default <i>value</i> – value to return upon timeout, columns <i>list</i> – a column list is the first record, if omitted then no columns are listed. (default). skip <i>number</i> – skips a number of records limit <i>number</i> – number of records or #. (default is 1). meta where – either before or within . (default is before).

Results

Data Type	Description
variant	The response. The value nil is returned if no response was given.

Remarks

Sends a message to the recipient and waits for a response. If **user** is specified for who, then the input is taken from the console. If the url is a data url, then this function retrieves query results from the data url. If the option **columns** is provided along with a list of columns, and the option meta is provided along with a location (**before** or **within**) then each column name is inserted either in the list element before the data, or within each data list.

Example

```
> (ask user "What is your name?")  
  
What is your name? Michael  
. : "Michael"  
  
> (service (url scheme tcp port 5950)  
           (function reply {?sender ?message}  
             (tell ?sender ($ received ?message))))  
  
. : Service-1  
  
> (start Service-1)  
  
. : Service-1
```

```

> (ask (url scheme tcp port 5950) "secret" timeout \@s5 default NobodyHome)

.: "received secret"

> (def ?data (data driver sqlserver server "//servername" port 1433
                     database mydata user "myUid" password "123456"))

.: Data-1

> (open ?data)

.: Data-1

> (ask Data-1 "select top 10 empid, name, salary from employee" record values)

.: {{1 "John Smith" 10.50}{2 "Jane Johnson" 12.00} ...}

> (ask ?data
      "select empid, name, wage from employee limit 2"
      columns {empid name wage}
      limit 2)

.: {{empid name wage} {1 "John Smith" 10.50} {2 "Jane Johnson" 12.00} ...}

> (ask ?data "select empid, name, wage from employee" limit 2)

.: {{1 "John Smith" 10.50}{2 "Jane Johnson" 12.00} ...}

> (ask ?data "select top 2 empid, name, wage from employee" meta within
             columns {:Id :Name :Rate})

.: {{:Id 1 :Name "John Smith" :Rate 10.50}
    {:Id 2 :Name "Jane Johnson" :Rate 12.00} ...}

> (ask ?data "select top 2 empid, name, wage from employee"
      columns {:Id :Name :Rate} meta before)

.: {{:Id :Name :Rate} {1 "John Smith" 10.50} {2 "Jane Johnson" 12.00} ...}

> (close ?data)

.: Data-1

```

Related

[cancel](#), [free](#), [Service](#), [start](#), [tell](#)

atangent

Returns the inverse tangent.

Syntax

(**atangent** *number geometry metrum*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
geometry	literal	0-1	One of: cir (cle), hyp (erbola). Default is circle.
metrum	literal	0-1	One of: degrees , radians . Default is radians.

Results

Data Type	Description
number	The inverse tangent of the number.

Remarks

None.

Example

```
> (atangent 2.356194490192)
.: 1.4691228248
> (atangent 2.356194490192 cir radians)
.: 1.4691228248
> (atangent 120 cir degrees)
.: 1.12533883288
> (atangent 0.785398163397 hyp radians)
.: 1.05930617082
> (atangent 85 hyp degrees)
.: 0.8181615399-1.5707963267i
```

Related

[tangent](#)

attach

Registers a knowledge base.

Syntax

(**attach** *knowledge*)

Module

IO

Parameters

Name	Data Type	Qty	Description
knowledge	knowledge	1	A knowledge base

Results

Data Type	Description
knowledge	The opened knowledge base.

Remarks

Enables lookup and modification of a knowledge base.

Example

```
> (def ?kb (knowledge url "file:///c:/premise/kb/defaultKb.mdb"))

.: Knowledge-1

> (attach ?kb)

.: Knowledge-1

> (relation Fact :All :Are)

.: Fact

> (detach ?kb)

.: Knowledge-1

> (free (cede (alias ?kb)))

.: freed
```

Related

conceive, detach, each, eradicate, get, knowledge, knowing, put, using, which, with

average

The arithmetic mean of a sequence.

Syntax

(**average** *symbol*... *binding* *sequence* *expression*...)

Module

Math

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	A symbol.
binding	literal	1	The literal in or per .
sequence	sequence	1	A sequence.
expression	expression	1+	any expression involving variables from the pattern(s)

Results

Data Type	Description
variant	The result of applying the plus function to the expression for the indicated range.

Remarks

If the binding **in** is specified, each symbol is bound to successive elements of the sequence. If the binding **per** is specified, each element is expected to be a sequence, so that each symbol is bound to subelements of each subsequence. If there are insufficient elements to bind to the symbols then the function fails. The last expression shall be evaluated and the average function shall be applied to both that expression and any prior result. The final value returned is the sum of all expressions divided by the length of the sequence.

Example

```
> (average ?x in (range 1 to 4) ?x)
.: 2.5

> (average ?fruit ?count per {{apple 1}{pear 2}{banana 3}{coconut 4}} ?count)
.: 2.5
```

Related

fold, product, summation

avg

The arithmetic mean.

Syntax

(**avg** *value* ...)

Module

Math

Parameters

Name	Data Type	Qty	Description
value	variant	1+	An number or list of numbers.

Results

Data Type	Description
number	The arithmetic mean of all elements in the sequence.

Remarks

Returns the arithmetic mean. If the list or expression is empty, it returns zero. If the only value is a list then all elements within the list are compared, otherwise, all subsequent values are compared

Example

```
> (avg {1 2 3 4 5})  
. : 3  
  
> (avg {})  
. : 0  
  
> (avg 1 2 3 4 5)  
. : 3  
  
> (avg {1 2 3} 4 {6 3 2})  
. : {3.66667 3 3}
```

Related

max, median, min, statistics, sigma, sum

await

Returns the result of a task.

Syntax

`(await task timeout default)`

Module

Tasks

Parameters

Name	Data Type	Qty	Description
task	task	1	A task resource
timeout	instant	0-1	The amount of time to wait for the task. The default is eternity which implies to wait indefinitely
default	variant	0-1	The value to return once the timeout is reached. If unspecified, then nil is returned.

Results

Data Type	Description
value	The task result, or nil.

Remarks

The await function waits for either the timeout duration or the task to complete.

Example

```
> (concurrent (repeat 10000000 foo))  
.: Task-2  
> (await Task-2 \@t100000 timed-out)  
.: timed-out  
> (await Task-2)  
.: foo
```

Related

[wait](#), [busy-p](#), [complete](#), [do](#), [done-p](#), [free](#), [task](#), [tarry](#)

before-p

True if an interval finishes before a second interval.

Syntax

(before-p *interval₁* *interval₂* *tolerance*)

Module

Base

Parameters

Name	Data Type	Qty	Description
interval ₁	interval	1	An interval
interval ₂	interval	1	An interval
tolerance	instant	0-1	Amount of variation. (Defaults to zero ticks).

Results

Data Type	Description
truth	True if interval ₁ finishes some time before interval ₂ .

Remarks

None.

Example

```
> (before-p  \@i{\@s1 \@s2}  \@i{\@s2 \@s4})  
.: false  
  
> (before-p  \@i{\@s1 \@s5}  \@i{\@s6 \@s8})  
.: true  
  
> (before-p  \@i{\@s1 \@s9}  \@i{\@s4 \@s6})  
.: false  
  
> (before-p  \@i{\@s4 \@s6}  \@i{\@s8 \@s9})  
.: true  
  
> (before-p  \@i{\@s4 \@s6}  \@i{\@s6 \@s9} \@s1)  
.: false
```

Related

during-p, finishes-p, meets-p, overlaps-p, starts-p

beginning

Returns the instant an interval begins.

Syntax

(beginning *interval*)

Module

Base

Parameters

Name	Data Type	Qty	Description
interval	interval	1	An interval

Results

Data Type	Description
instant	The beginning value of the interval.

Remarks

None.

Example

```
> (beginning \@i{\@s1 \@s2})  
. : \@s1  
> (beginning \@i{\@s1 \@s5})  
. : \@s1  
> (beginning \@i{\@s4 \@s6})  
. : \@s4
```

Related

[finishing](#)

best

Returns the best matching candidates.

Syntax

(best *probe* *candidates* *option ...* **)**

option ::= key value

Module

Base

Parameters

Name	Data Type	Qty	Description
probe	variant	1	The value to compare to the candidates
candidates	list	1	The candidates to be compared
option	expression	0+	<p>Key value pairs , where a key is one of:</p> <p>limit - The number of matches to return. (default is 1)</p> <p>minscore - value below which candidates shall not be considered. Default is ninfinity</p> <p>maxscore – Value above which candidates are acceptable. Default is 1.</p> <p>transform – The literal name of a value transformation function.</p> <p>comparer - The literal name of a comparison function</p>

Results

Data Type	Description
list	A sorted list of lists containing candidate - score pairs.

Remarks

Best compares a probe to candidates and returns the best matching candidate(s) with match score(s). It uses the similarity function (\sim) as the default comparer. If provided, transforms are applied before comparison. Finally, a comparer can accept two values and returns a score representing the degree of similarity where higher means more similar.

Example

```
> (best "this" {"there" "that" "though" "thin"})  
. : {{"thin" 0.142857}}  
  
> (best 345 (range 1 to 1000000) limit 5 minscore -1 maxscore 1 comparer ~)  
. : {{345 1}{344 0.5}{346 0.5}{343 0.333333}{347 0.333333}}
```

Related

\sim similarity, $/\sim$ dissimilarity

beyond

True if a position is outside a sequence.

Syntax

(beyond *sequence position*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.
position	variant	1	A number or coordinate (i.e. a list of numbers).

Results

Data Type	Description
truth	Returns true if the position is not in the sequence, false otherwise.

Remarks

None.

Example

```
> (beyond "not empty" 5)
.: false

> (beyond {not empty} 1)
.: false

> (beyond "" 1)
.: true

> (beyond {{a b}{c d}{e f}} {3 2})
.: false

> (beyond {{a b}{c d}{e f}} {7 4})
.: true
```

Related

@ *element*, length, void, more, within

big

Converts a value to a big number.

Syntax

(big *value* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A number value or the literal minimum or maximum

Results

Data Type	Description
monadic	An monadic number.

Remarks

A big number is bounded by memory. if the value cannot be converted to a big number, the function fails. The fractional part of the number is truncated. A suffix **b** denotes a big number.

Example

```
> (big {a b c})
.: [Failure :Name ArgumentValue :Text "{a b c} is not a number."]

> (big "a b c")
.: [Failure :Name ArgumentValue :Text "'a b c' is not a number."]

> (big 500.3)
.: 500b

> (big "23.4")
.: 23b

> (big
"2982039842304982039842187591823741209250293823978298234187235897234234237429387903
984203948203984209813719875209856087197129871")

.:
2982039842304982039842187591823741209250293823978298234187235897234234237429387903
84203948203984209813719875209856087197129871b
```

Related

[ceiling](#), [complex](#), [floor](#), [integer](#), [long](#), [radix](#), [rational](#), [real](#), [round](#), [truncate](#), [unsigned](#)

bind

Assigns symbols to values in sequences or assortments.

Syntax

```
(bind container assignment ... )  
assignment ::= slot variable  
assignment ::= function variable  
assignment ::= position variable  
assignment ::= {slot ... } as variable  
assignment ::= {function ... } as variable  
assignment ::= {position ... } as variable
```

Module

Base

Parameters

Name	Data Type	Qty	Description
container	variant	1	A sequence or assortment
assignment	expression	1+	A key symbol, or position symbol, or list symbol pair.

Results

Data Type	Description
truth	Returns the value true.

Remarks

The key may be a position, function, slot, method, list of functions, or other value.

Example

```
> (relation Node :Data :Next)  
. : Node  
  
> (new Node :Data C :Next (new Node :Data B :Next (new Node :Data A)))  
. : Node_3  
  
> (bind Node_3 :Data ?last {:Next :Next :Data} ?first)  
. : true  
  
> (bind {a b {c {d e}}} 1 ?a {3 2 2} ?e (given {?x} (uppercase ($ (@ ?x)))) ?a)  
. : true
```

Related

dynamic, given, global, scope, set, tie

bindings

Returns a list of symbol value pairs for a pattern.

Syntax

(bindings *pattern option ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
pattern	variant	1	A premise or pattern
option	expression	0+	An option for retrieving the bindings. limit n - the number of results to return.

Results

Data Type	Description
list	A list of all symbol value pairs

Remarks

Returns a series containing binding lists that match the pattern. If no symbols are in the pattern, then a premise is returned for each match and **nil** is specified for the symbol.

Example

```
> (relation Poll :Response)
  .: Poll

> (step ?i from 1 to 1000
  (new Poll :Response (on (> (random 0 to 1) 0) Yes No)))

.: Poll_1000

> (for ?bindings in (bindings [Poll :Responses as ?response] limit 5)
  (tell user ($ ?bindings))

{?response yes} {?response no} {?response yes} {?response no} {?response no}
.: told

> (for ?bindings in (bindings [Poll :Responses yes] limit 4)
  (tell user ($ ?bindings))

{nil [Poll ^ Poll_1 :Response yes]} {nil [Poll ^ Poll_3 :Response yes]}
{nil [Poll ^ Poll_8 :Response yes]} {nil [Poll ^ Poll_9 :Response yes]}
.: told
```

Related

tally, using, which, with

bion

Returns a resource that hosts a cluster of cells for doing tasks.

Syntax

(bion *name* *work*)

Module

Tasks

Parameters

Name	Data Type	Qty	Description
name	string	0-1	The name of the bion
work	string	0-1	The work to be done.

Results

Data Type	Description
bion	A bion resource.

Remarks

None.

Example

```
> (function main {}

  (let ?bion (bion) ?cell (cell ?bion))
  (start ?cell)
  (let ?task (task ?cell (scope) (given {string ?name} ($ Hello, ?name)))

    (tell user (await (start ?task "World")))

    (halt ?cell)
    (halt ?bion)

    (free ?cell)
    (free ?bion)
  )

.: main
> (main)

Hello World
.: freed
```

Related

cell, halt, start, task

bitwise

Performs bitwise operations.

Syntax

(**bitwise** *number* *op* ...)

op ::= *operation number*

op ::= **not**

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
op	expression	1+	<p>an operation or operation value pair where the operation is either and, or, not, nand, nor, xor, <<, >>, or count and where the value is a number <i>y</i> such that:</p> <p>and <i>y</i> – performs logical and or <i>y</i> – performs logical or not – performs complement nand <i>y</i> – performs logical nand nor <i>y</i> – performs logical nor xor <i>y</i> – performs exclusive or xnor <i>y</i> – performs exclusive or << <i>y</i> – performs left shift of <i>x</i> for <i>y</i> iterations >> <i>y</i> – performs right shift of <i>x</i> for <i>y</i> iterations count <i>y</i> – returns the number of bits that = <i>y</i> (where <i>y</i> is either 1 or 0)</p>

Results

Data Type	Description
number	Result depends on the operation.

Remarks

Each operation is performed in succession and the final result is returned.

Example

```
> (bitwise 2 and 3)
.: 2

> (bitwise 31 or 14)
.: 31

> (unsigned (bitwise 31 or 14 and 2))
.: 2

> (function countOneBits {?a}
  (bitwise ?a count 1))

.: countOneBits

> (countOneBits 255)
.: 8

> (bitwise 31 xor 14 count 1)
.: 2

> (function countConversionBits {?a ?b}
  (bitwise ?a xor ?b count 1))

.: countConversionBits
```

Related

+ *plus*, - *minus*, *unsigned*

bound

Returns the symbols that are bound in a function.

Syntax

(bound *function*)

Module

Base

Parameters

Name	Data Type	Qty	Description
function	variant	1	A function.

Results

Data Type	Description
list	A list of symbols.

Remarks

None.

Example

```
> (function foo {?x ?y + ?z}
  (bar ?x ?y)
  (baz ?z ?a))

.: foo

> (bound foo)

.: {?x ?y ?z}

> (unbound foo)

.: {?a}

> (bound (' (given {?s} (@ ?s ?p)))))

.: {?s}

> (unbound (' (given {?s} (@ ?s ?p)))))

.: {?p}
```

Related

[unbound](#)

bound-p

True if a symbol has a value.

Syntax

(bound-p *symbol*)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1	A symbol.

Results

Data Type	Description
bool	True if the symbol is bound.

Remarks

None.

Example

```
> (let ?a 1 ?b 2)
.: true
> (bound-p ?a)
.: true
> (bound-p ?b)
.: true
> (bound-p ?c)
.: false
```

Related

[unbound-p](#)

bracket

Returns 1 if a truth expression is true, 0 if false, and -1 if unknown.

Syntax

(bracket *truth*)

Module

Base

Parameters

Name	Data Type	Qty	Description
truth	truth	1	A truth value

Results

Data Type	Description
integer	Returns 1 if the truth value is true, 0 if false, and -1 if unknown..

Remarks

None.

Example

```
> (bracket true)
.: 1
> (bracket false)
.: 0
> (bracket banana)
.: [Failure :Name InvalidType :Text "A truth was expected instead of banana."]
> (bracket unknown)
.: -1
```

Related

all, any, convert, every, nall, nevery, no, none, some,

break

Terminates a loop.

Syntax

(**break** *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	0-1	Any value to be returned. Default is nil.

Results

Data Type	Description
variant	Returns the value if provided, otherwise returns nil

Remarks

Exits a loop with a return value or nil if no return value is specified. Can be used for a **do** loop.

Example

```
> (for ?item in (range 1 to 1000000)
    (if (= ?item 123456) (break))
    done)

.: nil

> (for ?item in (range 1 to 1000000)
    (if (= ?item 123456) (break foo))
    done)

.: foo
```

Related

[fail](#), [resume](#), [return](#), [try](#)

busy-p

True if a task has not completed.

Syntax

(**busy-p** *task*)

Module

Tasks

Parameters

Name	Data Type	Qty	Description
task	task	1	A task resource.

Results

Data Type	Description
truth	True if the task has not completed

Remarks

Returns true if the task has not completed, false otherwise. The opposite of this function is **ready-p**.

Example

```
> (let ?task (@ (concurrent (idle \@s100))))  
.: true  
  
> (do (idle \@s20)  
      (if (busy-p ?task)  
          running  
          else  
          (free ?task)))  
  
.: running
```

Related

cancel, cancelled-p, wait, await, complete, ready-p, reclaim, tarry, task

but

Creates a subsequence of all except the last elements.

Syntax

(**but** *sequence quantity*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A list or string
quantity	number	0-1	The number of elements to omit. Defaults to 1.

Results

Data Type	Description
sequence	The selected sub sequence

Remarks

If quantity is omitted, then all but the last item is returned. This is the opposite of **rest**.

Example

```
> (but {a b c d e f})  
. : {a b c d e}  
  
> (but {a b c d e f} 3)  
. : {a b c}  
  
> (but "abcde" 2)  
. : "abc"
```

Related

@ *element, last, rest, top*

bye

Terminates the interpreter.

Syntax

(bye)

Module

Base

Parameters

Name	Data Type	Qty	Description
code	integer	0-1	An integer exit code. (Default is zero.)

Results

None

Remarks

Terminates the read-eval-print loop.

Example

```
> (bye)
Bye!
```

Related

exit

call

Creates a call.

Syntax

(call *value* ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	0+	A value

Results

Data Type	Description
call	The concatenated call.

Remarks

Returns an unevaluated call. Note the call must have at least one value, preferably a literal. Note that an empty call cannot be invoked.

Example

```
> (call foo {})
.: (foo {})

> (call tell me "hello world")
.: (tell user "hello world"))

> (call)
.: [Failure :Name ArgumentRequired :Text "A required argument was not supplied."]

> (call given {?x} (+ ?x ?x))
.: (given {?x} (+ ?x ?x))
```

Related

\$, &, closure, eval, invoke, list, tuple, quote

can

Evaluates an expression while suppressing failures.

Syntax

(**can** *expression result error*)

Module

Base

Parameters

Name	Data Type	Qty	Description
expression	variant	1	An expression to evaluate.
result	alias	0-1	A symbol alias.
error	alias	0-1	A symbol alias

Results

Data Type	Description
truth	Returns true if no failure occurred; result and error shall contain respective values

Remarks

If the expression succeeds, the result symbol shall contain the result the evaluated expression and the error symbol shall be **nil**. If the expression fails, the result shall be **nil** and the error symbol shall contain the failure.

Example

```
> (let ?result nil ?error nil)
.: true

> (can (string x) (alias ?result) (alias ?error))

.: true

> ?result ?error

.: "x" nil

.: (can (integer x) (alias ?result) (alias ?error))

.: false

> ?result ?error

.: nil [Failure :Name TypeConversion :Text "Cannot convert x to Integer."]
```

Related

assert, did, ensure, fail, finally, may, try

cancel

Cooperatively cancels tasks.

Syntax

(cancel *tasks* **)**

Module

Tasks

Parameters

Name	Data Type	Qty	Description
tasks	variant	1	A single task resource or a list of task resources.

Results

Data Type	Description
variant	Returns the tasks or list of tasks.

Remarks

Cancels an executing task. The task shall be signaled to terminate. The task must call **cancelled-p** to determine whether to terminate, and if so, call **exit** or **return**.

Example

```
> (concurrent (step ?i from 1 to 100000 (if (cancelled-p (self)) (break oops))
finished)
              (step ?i from 1 to 100000 finished))

.: {Task-57 Task-58}

> (cancel task-57)

.: task-57

> (await task-57)

.: oops

> (abort task-58)

.: task-58

> (free {task-57 task-58})

.: freed
```

Related

[wait](#), [abort](#), [await](#), [cancelled-p](#), [complete](#), [critical](#), [do](#), [done-p](#), [reclaim](#) , [start](#), [task](#), [task-p](#), [tasks](#)

cancelled-p

True if a task has been cancelled.

Syntax

(cancelled-p task)

Module

Tasks

Parameters

Name	Data Type	Qty	Description
task	task	1	A task resource

Results

Data Type	Description
truth	True if the task has been cancelled.

Remarks

The task may be cancelled using the **cancel** function. The cancel function sets a flag which must be recognized by the running task so that it can cooperatively terminate itself. Therefore all tasks should routinely invoke the cancelled-p function to determine whether they must terminate.

Example

```
> (concurrent (step ?i from 1 to infinity
    (if (cancelled-p (self)) (break quitting))
    finished))

.: {Task-57}

> (idle \@s5)

.: ready

> (cancel task-57)

.: cancelled

> (await task-57)

.: quitting
```

Related

wait, abort, await, cancel, cancelled-p, complete, do, reclaim, self, task

canonify

Makes equal values identical.

Syntax

(**canonify** *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	0-1	A thing..

Results

Data Type	Description
variant	The canonified value.

Remarks

Calling canonify with no arguments shall clear the canon of all stored values.

Example

```
> (global ?Original "The quick brown fox" ?Clone (clone ?Original))  
. : true  
> (= ?Original ?Clone)  
. : true  
> (identical-p ?Original ?Clone)  
. : false  
> (set ?Original (canonify ?Original) ?Clone (canonify ?Clone))  
. : true  
> (identical-p ?Original ?Clone)  
. : true
```

Related

=, clone, copy, make, identical-p, identity, same

capitalize

Capitalizes a string.

Syntax

(capitalize *string option* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
string	string	1	A string to capitalize
option	expression	0-1	A key value pair words <i>which-</i> where <i>which</i> is all or first (default).

Results

Data Type	Description
string	The capitalized string

Remarks

Capitalizes the string.

Example

```
> (capitalize "the quick brown fox")
.: "The quick brown fox"

> (capitalize "the quick brown fox" words all)
.: "The Quick Brown Fox"

> (capitalize "the quick brown fox" words first)
.: "The quick brown fox"
```

Related

[lowercase, uppercase](#)

case

Branches execution based on a value.

Syntax

(**case** *probe clause ... else-clause*)

clause ::= of value expression ...
clause ::= in {value ...} expression ...
else-clause ::= else expression ...

Module

Base

Parameters

Name	Data Type	Qty	Description
probe	variant	1	a value to compare
clause	expression	1+	Test value and expressions to be evaluated
else-clause	expression	0-1	A default case and expressions to be evaluated

Results

Data Type	Description
value	The last value in the successful clause

Remarks

The first expression is evaluated and its result is matched against the **of** or **in** values. The comparison stops as soon as the first match is made. When that happens, the various expressions following the value are evaluated, one at a time. If no **of** or **in** expression is matched, then if an **else** clause exists, the expressions are evaluated, otherwise **nil** is returned.

Example

```
> (global ?Value a)
.: true

> (case ?Value
    of b nope
     in {c d} nope
     else not-found)

.: not-found
```

Related

and, if, not, or, unless

categorize

Returns a list of equivalence sets.

Syntax

(categorize sequence predicate ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.
predicates	function	1+	Unary truth predicates.

Results

Data Type	Description
list	A list of sublists each containing elements partitioned by a predicate..

Remarks

A result sublist is returned for each predicate which determines if each item belongs in the respective equivalence set. If the predicate is true for the item, it is added to the result sublist.

Example

```
> (categorize (3 5 2 0 5 8 9) even odd zero)
.: {{even 2 0 8}{odd 3 5 5 9}{zero 0}}
> (categorize "abcdefghijklk" (given {?x} (< ?x "e")))
.: {{(given {?x} (< ?x "e")) "a" "b" "c" "d")}}
```

Related

[partition](#)

cede

Transfers a value between symbols.

Syntax

(cede *alias*)

Module

Base

Parameters

Name	Data Type	Qty	Description
alias	alias	1	A symbol alias

Results

Data Type	Description
variant	the value formerly held by the symbol .

Remarks

Transfers a value from one symbol to another, ensuring only one symbol is pointing to a value.

Example

```
> (function matrix+ {??a ??b}
  (ensure Alias ??a Alias ??b)
  (let ?r (cede ??a))
  (traverse ?i into ??b limit (dimensions ?r)
    (==> ?r + ?i (@ ??b ?i)) )
  (set ??b nil)
  (return ?r))

.: matrix+

> (let ?x (array {9000 9000} each (given {?c}(random 0 to 1)))
  ?y (array {9000 9000} each (given {?c}(random 0 to 1)))
  ?z (matrix+ (alias ?x) (alias ?y)))

.: true

> (is ?x null-p) (is ?y null-p) (is ?z null-p)
.: true true false
```

Related

copy, new, relation

ceiling

Rounds a number towards positive infinity.

Syntax

(ceiling number)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number

Results

Data Type	Description
number	The next higher positive integer.

Remarks

Returns the next highest positive integer.

Example

```
> (ceiling 100.5)
.: 101
> (ceiling -100.5)
.: -100
```

Related

[floor](#), [round](#), [truncate](#)

cell

Creates a resource for performing tasks.

Syntax

(cell *bion work* **)**

Module

Tasks

Parameters

Name	Data Type	Qty	Description
bion	bion	1	A bion resource.
work	string	0-1	The work to be done.

Results

Data Type	Description
cell	A cell resource.

Remarks

None.

Example

```
(function main {}

  (let ?bion (bion) ?cell (cell ?bion))

  (start ?cell)

  (let ?task (task ?cell (scope) (given {string ?name} ($ Hello, ?name)))

    (tell user (await (start ?task "World")))

    (halt ?cell)
    (halt ?bion)

    (free ?cell)
    (free ?bion)
  )

  .: main
> (main)

Hello World
.: freed
```

Related

[bion](#), [halt](#), [start](#), [task](#)

channel

Returns a url to the arguments of a task.

Syntax

(channel *task* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
task	task	1	A task.

Results

Data Type	Description
url	A url.

Remarks

Functions are defined using the **function** intrinsic function. If the name is supplied then the function is a user named function (also called an **exonym**), otherwise it is an automatically named function (called an **esonym**). If a parameter list is supplied then it shall bind the formal parameter symbols to any actual parameter expressions provided. The first symbols in the parameter list are required. If a plus sign is provided, then those symbols following the plus sign are optional. Each optional parameter may have a default value (specified with an equal sign and the value). If no default value is specified, the default value shall be **nil**. If an ampersand is provided, then the symbol following it is bound to a list of remaining (variadic) actual parameter values. Keyword parameters (literal symbol pairs) may be provided as required or optional. The entire parameter list may be omitted. The function shall be accessible from other modules by prefixing it with the module name in which it was defined.

Example

```
> (function {?n} (+ 1 ?n))

.: fn-1

> (function plusN {?n + ?i = 1} (+ ?n ?i))

.: plusN

> (function addAll {& ?nums} (apply + ?nums))

.: addAll

> (fn-1 100)

.: 101

> (plusN 100)

.: 101

> (function tryParseNum {?s}
  (let ?convertible (convertible-p ?s number))
  {?convertible (if ?convertible (@ (take ?s))))}

> (tryParseNum "foo")

.: {false nil}

> (tryParseNum "123")

.: {true 123}

> (function dont {{try ?what} + {at ?where = nil}}
  (apply (given {?s}(tell user ?s))
         ($ don't try ?what (unless (any ?where) "" ($ at ?where)))))

.: dont

> (dont try "skydiving into a volcano")

don't try skydiving into a volcano
.: told

> (dont try this at home)

don't try this at home
.: told
```

Related

arguments, call, function, task, parameters

char

Converts a Unicode value into a one position string.

Syntax

(char unicode)

Module

Base

Parameters

Name	Data Type	Qty	Description
unicode	variant	1	A unicode value between 0 and 65535 or the literal maximum or minimum .

Results

Data Type	Description
string	A string containing the character.

Remarks

None.

Example

```
> (char 65)
.: "A"
```

Related

unicode

choose

Returns the elements of a sequence that satisfies a function.

Syntax

(choose *sequence selector transform*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence of values.
selector	function	1	The function to be applied.
transform	function	0-1	A function that returns a key given a sequence element prior to computing the selector.

Results

Data Type	Description
list	A list of elements satisfying the function.

Remarks

Returns the elements in the sequence that satisfy the function. If the sequence is empty, it returns an empty list. The transform function takes elements of the sequence and returns numbers before computing the function of the transformed sequence.

Example

```
> (choose {1 2 3 4 5} max)
.: {5}

> (choose {a b c d e} max)
.: {e}

> (choose {} max)
.: {}

> (choose {{a 0}{b 1}{c 2}{d 0}} min (given {?item} (@ ?item 2)))
.: {{a 0}{d 0}}
```

Related

max, min, partition

clear

Eliminates all entries from an assortment or sequence.

Syntax

(**clear** *container*)

Module

Base

Parameters

Name	Data Type	Qty	Description
container	thing	1	An assortment or sequence.

Results

Data Type	Description
thing	The modified assortment or sequence.

Remarks

This function clears dynamic assortments and sequences. The **clear** function shall fail on fixed assortments (i.e. enumerations, records, and prototypes). For fixed assortments use **zap** to set slots values to **nil**.

Example

```
> (def ?s (lexicon a 1 b 2 c 3 d 4) ?list {a b c})  
.: {a b c}  
> (entries ?s)  
.: {{a 1}{b 2}{c 3}{d 4}}  
> (entries (clear ?s))  
.: {}  
> (clear ?list)  
.: {}  
> ?list  
.: {}
```

Related

[add](#), [includes](#), [item](#), [items](#), [keys](#), [reclaim](#), <#>, [tie](#), [values](#)

clip

Returns a value within a clipped range.

Syntax

(clip *number minimum maximum*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
minimum	number	1	A number (default is ninfinity)
maximum	number	1	A number (default is infinity)

Results

Data Type	Description
number	Returns the number constrained to the range.

Remarks

If the value is greater than the maximum, the maximum is returned. If the value is less than the minimum, the minimum is returned, otherwise the value is returned.

Example

```
> (clip 3 0 5)
.: 3

> (clip 7 0 5)
.: 5

> (clip -4 0 5)
.: 0

> (clip 84 ninfinity 100)
.: 84

>(clip 84 0 infinity)
.: 84
```

Related

[max](#), [min](#)

clone

Clones an atom with possible modifications.

Syntax

(clone *atom modification ...*)

modification ::= key value

Module

Base

Parameters

Name	Data Type	Qty	Description
atom	atom	1	An atomic value..
modification	expression	0+	A key value pair.

Results

Data Type	Description
thing	The copy.

Remarks

A duplicate or shallow copy of the original value is made. Zero or more modifications may be specified and applied after the value is cloned. If the value is a SubThought and the relation has an !onNew method defined, that method is first run on the clone. If an !onClone event method is defined, then the onClone method is invoked thereafter. The clone event (!onClone) requires two parameters {?clone ?original}. To clone sequences use the **copy** function.

Example

```
> (relation Car
    :Make      :Model      :Year      :Version 1
    !onClone  (function Car_clone {?m ?o} (==> ?m ++ :Version (:Version ?o)))

.: Car

> (premise (new Car :Make  oole :Model civic :Year 2000))

.: [Car ^ Car_1 :Make  oole :Model civic :Version 1 :Year 2000 !onClone Car_clone]

> (premise (clone Vehicle_1 :Year 2016))

.: [Car ^ Car_2 :Make  oole :Model civic :Version 2 :Year 2016 !onClone Car_clone]
```

Related

copy, new, relation

close

Closes a file or data url.

Syntax

(**close** *url*)

Module

IO

Parameters

Name	Data Type	Qty	Description
url	url	1	A file or data url.

Results

Data Type	Description
url	The url.

Remarks

Closes an open url.

Example

```
> (def ?file (file name "kwikfox.txt"))

.: File-1

> (open ?file)

.: File-1

> (let ?contents (read ?file #))

.: true

> ?contents

.: "The quick brown fox jumped over the lazy dogs."

> (close ?file)

.: File-1
```

Related

[close](#), [data](#), [file](#), [open](#)

closure

Creates a public function in a module.

Syntax

`(closure scope type name parameters expression ...)`

```
parameters ::=  
parameters ::= {}  
parameters ::= {required ...}  
parameters ::= {required ... + optional ...}  
parameters ::= { + optional ...}  
parameters ::= {required ... + optional ... & remaining}  
parameters ::= { & remaining}
```

Module

Base

Parameters

Name	Data Type	Qty	Description
scope	environment	0-1	An environment or module name.
type	literal	1	The literal function or macro
name	literal	0-1	The name of the function. If not supplied then the name shall follow the pattern fn-<number> .
parameters	list	0-1	A list containing symbols, keywords, sigils, and keyword symbol associations.
expression	variant	1+	One or more expressions to be evaluated.

Results

Data Type	Description
literal	The name of the function

Remarks

The closure intrinsic defines a function or macro with an explicit scope. A new scope shall be constructed for the function (or macro) using symbols and function definitions contained in the ancestral scopes. If the name is supplied, then the function is a user named function (also called an **exonym**), otherwise it is an automatically named function (called an **esonym**). If a parameter list is supplied then it shall bind the formal parameter symbols to any actual parameter expressions provided. The first symbols in the parameter list are required. If a plus sign is provided, then those symbols following the plus sign are optional. Each optional parameter may have a default value (specified with an equal sign and the value). If no default value is specified, the default value shall be **nil**. If an ampersand is provided, then the symbol following it is bound to a list of remaining (variadic) actual parameter values. Keyword parameters (literal symbol pairs) may be provided as required or optional. The entire parameter list may be omitted. The function shall be accessible from other modules by prefixing it with the module name in which it was defined.

Example

```
> (closure (scope) function {?n} (+ 1 ?n))  
. : fn-1  
  
> (closure (scope) function plusN {?n + ?i = 1} (+ ?n ?i))  
. : plusN  
  
> (fn-1 100)  
. : 101  
  
> (plusN 100)  
. : 101  
  
> (closure (scope go -1)  
  function tryParseNum {?s}  
  (let ?convertible (convertible-p ?s number))  
  {?convertible (if ?convertible (@ (take ?s))))})  
  
. : tryParseNum  
  
> (tryParseNum "foo")  
. : {false nil}  
  
> (tryParseNum "123")  
. : {true 123}  
  
> (closure (scope of User)  
  macro set2 {?value ?var1 ?var2}  
  "puts value into two variables in parallel"  
  (eval (` (set , ?var1 , ?value , ?var2 , ?value))))  
  
. : set2  
  
> (let ?x1 nil ?x2 nil) ?x1 ?x2  
. : true nil nil  
  
(set2 (+ 2 2) ?x1 ?x2)  
  
> ?x1 ?x2  
. : 4 4
```

Related

arguments, call, extend, function, macro, module, modules, parameters

coalesce

Returns a merged sequence.

Syntax

(**coalesce** *symbol* ... *gate expression* ...)

gate ::= in sequence

gate ::= per sequence

gate ::= from expression ... until predicate

gate ::= from expression ... while predicate

gate ::= from i limit j by k

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	An iteration variable
gate	expression	1	One of the gates expressions listed above. where i is the initial value of the symbol, limit is any of to , above , below or go . where j is the final value of the symbol, and k is the optional increment.
expression	variant	1+	An expression that potentially transforms the iteration variable

Results

Data Type	Description
list	A new merged list after the transformation is applied

Remarks

In the case of **in** or **per** For each element in the sequence, the element is stored in the symbol, and then the expressions are evaluated. If **from** is specified, each symbol is bound to the initially evaluated expression. If **to** is specified, the symbol is assumed to be a number, and the last number is included in the iteration. If **below** or **above** is specified the last number is excluded from the iteration. If **go** is specified, then the j value is the number of iterations. On each iteration the expressions are evaluated, and the last expression is collected into a merged result list.

Example

```
> (collect ?n in {1 2 3 4} {(* ?n 3) (* ?n 2)}))

.: {{3 2}{6 4}{9 6}{12 8}}


> (coalesce ?n from 1 while (<= ?n 4) {(* ?n 3) (* ?n 2)}))

.: {3 2 6 4 9 6 12 8}

> (collect ?x ?y per {{1 1}{1 2}{2 5}} {(/ ?x ?y) (* ?x y)})

.: {{1 1}{0.5 2}{0.4 10}}


> (coalesce ?x ?y per {{1 1}{1 2}{2 5}} {(/ ?x ?y) (* ?x y)})

.: {1 1 0.5 2 0.4 10}

> (coalesce ?n in {1 2 3 4} {(* ?n 3)}))

.: {3 6 9 12}

> (coalesce ?i from 1 to 9 by 2 {?i})

.: {1 3 5 7 9}

> (coalesce ?n from 1 below 5 {(* ?n 3)})

.: {3 6 9 12}

> (coalesce ?i from 1 go 4 (pick {a b c d e f g h i j} ?i))

.: {c h b e a c d j c f e b h j c}
```

Related

collect, filter, map , reduce, scale

collect

Returns a transformed sequence.

Syntax

(**collect** *symbol* ... *gate expression* ...)

gate ::= in sequence

gate ::= per sequence

gate ::= from expression ... until predicate

gate ::= from expression ... while predicate

gate ::= from i limit j by k

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	An iteration variable
gate	expression	1	One of the gates expressions listed above. where i is the initial value of the symbol, limit is any of to , above , below or go . where j is the final value of the symbol, and k is the optional increment.
expression	variant	1+	An expression that potentially transforms the iteration variable

Results

Data Type	Description
list	A new list after the transformation is applied

Remarks

In the case of **in** or **per** For each element in the sequence, the element is stored in the symbol, and then the expressions are evaluated. If **from** is specified, each symbol is bound to the initially evaluated expression. If **to** is specified, the symbol is assumed to be a number, and the last number is included in the iteration. If **below** or **above** is specified the last number is excluded from the iteration. If **go** is specified, then the j value is the number of iterations. On each iteration the expressions are evaluated, and the last expression is collected into a result list.

Example

```
> (collect ?n in {1 2 3 4} (* ?n 3))
.: {3 6 9 12}

> (collect ?x ?y per {{1 1}{1 2}{2 5}} (/ ?x ?y))
.: {1 0.5 0.4}

> (collect ?i from 1 to 9 by 2 ?i)
.: {1 3 5 7 9}

> (collect ?n from 1 below 5 (* ?n 3))
.: {3 6 9 12}

> (collect ?i from 1 go 4 (pick {a b c d e f g h i j} ?i))
.: {{c} {h b} {e a c} {d j c f} {e b h j c}}
```

Related

[coalesce](#), [filter](#), [map](#), [reduce](#), [scale](#)

collection

Returns an unorderd collection of elements.

Syntax

(collection *element ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
element	variant	0+	A key.

Results

Data Type	Description
collection	A collection.

Remarks

A collection is an unordered set of elements.

Example

```
> (collection
    {a b c} "foo" bar 500 [Fruit :Name Apple])
.: Collection-1

> (has Collection-1 foo)
.: false

> (has Collection-1 "foo")
.: true
```

Related

enumeration, environment, lexicon

combine

Creates a new assortment by combining entries.

Syntax

(combine *assortment entry ...* **)**

entry ::= key value

entry ::= key

Module

Base

Parameters

Name	Data Type	Qty	Description
assortment	assortment	1	An assortment or sequence
entry	expression	1+	A key, or key value pair.

Results

Data Type	Description
assortment	The modified assortment.

Remarks

Collections require only a key for each entry. Assortments require a key and value for each entry. Use the **add** function to modify an assortment.

Example

```
> (entries (add (lexicon) a 1 b 2 c 3))  
.: {{a 1}{b 2}{c 3}}  
> (entries (add (collection) 1 2 3 4 5))  
.: {{1 1}{2 2}{3 3}{4 4}{5 5}}
```

Related

[add](#)

common

Creates a sequence of common elements among subsequences.

Syntax

(**common** *sequences*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequences	sequence	1	A sequence containing sequences

Results

Data Type	Description
sequence	A list of common items

Remarks

Returns the intersection of the subsequences, i.e., the elements common to all subsequences.

Example

```
> (common {{1 2 3 4} {2 3 4 5}})  
.: {2 3 4}  
  
> (common {{2 3 4 5} {4 5 6 7}})  
.: {4 5}  
  
> (common (map {[Data :A {1 2 3 4}] [Data :A {2 3 4 5}]} (given {?d} (:A ?d))))  
.: {4}  
  
> (common {"abc" "bcd" "cde"})  
.: "c"
```

Related

[difference](#), [intersection](#), [union](#)

comparable-p

Returns true if the values can be compared.

Syntax

(**comparable-p** *value₁* *value₂*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	2	A value

Results

Data Type	Description
truth	Returns true if the values can be compared.

Remarks

Returns **true** if the values are of the same type and their elements are of the same type, false otherwise.

Example

```
(comparable-p 1 2)
.: true

(comparable-p 2 x)
.: false

(comparable-p {1 2 3 4}{2 3 4 5})
.: true

(comparable-p {1 2 3 4}{a b c d})
.: false

(comparable-p b a)
.: true

(comparable-p z {a b c})
.: false
```

Related

= equal, /= unequal

compare

Returns less, equal, or greater.

Syntax

(compare *value₁* *value₂*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	2	A value

Results

Data Type	Description
literal	Returns < (less than), = (equals), or > (greater than).

Remarks

Returns the less than literal if the first value is less than the second value, the equal literal if the values are equal, and the greater than literal if the first value is greater than the second value. The function fails if the values are not comparable (i.e., of the same type).

Example

```
(compare 1 2)
.: <
(compare 2 1)
.: >
(compare {1 2 3 4}{2 3 4 5})
.: <
(compare a a)
.: =
(compare b a)
.: >
```

Related

=equal, /=unequal

complete

Runs expressions concurrently.

Syntax

(complete *expression* ... **)**

Module

Tasks

Parameters

Name	Data Type	Qty	Description
expression	variant	1+	An expression to be evaluated.

Results

Data Type	Description
list	A list of task resources.

Remarks

Executes the expressions concurrently, and returns after the last expression completes, returning a list of task handles. If expression is not a task, then the expression is converted to a task prior to execution.

Example

```
> (complete
    (step ?i from 0 to 50000000 (do nothing))
    (step ?i from 1 to 10000000 (do something)))))

.: {task-1 task-2}

> (free (wait {task-1 task-2}))

.: freed
```

Related

abort, await, concurrent, do, busy-p, free, ready-p, start, tarry, task, tasks, wait

complex

Converts a value to a complex number.

Syntax

(complex *real* *imaginary*)

Module

Base

Parameters

Name	Data Type	Qty	Description
real	real	1	A number value or the literal minimum or maximum
imaginary	imaginary	1	A number value or the literal minimum or maximum

Results

Data Type	Description
complex	A complex number.

Remarks

If the values cannot be converted to a complex number, the function fails.

Example

```
> (complex {a b c})  
. : [Failure :Name ArgumentValue :Text "{a b c} is not a number."]  
  
> (complex "a b c")  
. : [Failure :Name ArgumentValue :Text "'a b c' is not a number."]  
  
> (complex 500 8i)  
. : 500+8i  
  
> (complex 500.3 0)  
. : 500.3+0i  
  
> (complex "23.4" "0i")  
. : 23.4+0i
```

Related

[ceiling](#), [complex](#), [floor](#), [long](#), [rational](#), [real](#), [round](#), [truncate](#),

compose

Applies functions in reverse order using the arguments.

Syntax

(compose *functions arguments*)

Module

Base

Parameters

Name	Data Type	Qty	Description
functions	list	1	A list of functions to be applied in reverse order.
arguments	variant	0-1	The arguments to the last function in the functions list.

Results

Data Type	Description
value	The result of the last call

Remarks

If the arguments parameter is an empty list, the rightmost function is assumed to be niladic (requiring no arguments). The rightmost function is applied to the arguments parameter, then the second from rightmost is applied to the result, and so on, until all functions are applied. The final result is returned. The opposite function is **morph**. The **scatter** function applies functions in parallel.

Example

```
> (function double {?x} (* ?x 2))

.: double

> (compose {double ++ ++ ++} {0})

.: 6

> (compose {rest but rest but}
            {{the quick brown fox jumped over the lazy dogs}})

.: {brown fox jumped over the}

> (compose {double ++ ++ +} {2 3 4})

.: 22
```

Related

apply, map, morph, scatter

conceive

Creates a knowledge base.

Syntax

(**conceive** *knowledge*)

Module

IO

Parameters

Name	Data Type	Qty	Description
knowledge	knowledge	1	A knowledge base

Results

Data Type	Description
knowledge	The opened knowledge base.

Remarks

Constructs a new knowledge base if one does not already exist.

Example

```
> (conceive (def ?kb (knowledge name defaultKB path "c://premise/kb/")))

.: defaultKB

> (attach ?kb)

.: defaultKB

> (relation Fact :All :Are)

.: Fact

> (detach ?kb)

.: defaultKB

> (free (cede (alias ?kb)))

.: freed
```

Related

attach, detach, each, eradicate, get, knowing, knowledge, put, using, which, with

concurrent

Evaluates expressions asynchronously.

Syntax

(concurrent *expression ...* **)**

Module

Tasks

Parameters

Name	Data Type	Qty	Description
expression	variant	1+	An expression to be evaluated.

Results

Data Type	Description
list	The executing task resources.

Remarks

If expression is not a task, then the expression is converted to a task. Each task is then started asynchronous and a list of the executing tasks is returned.

Example

```
> (concurrent (+ 1 2 3 4) (/ 1000 57) (** 4 20))
.: {Task-1 Task-2 Task-3}

> (await task-1)
.: 10

> (await task-2)
.: 17.54385964912281

> (await task-3)
.: 1099511627776

> (free task-1 task-2 task-3)
.: nil

> (free (tarry (concurrent (+ 1 2 3 4) (/ 1000 57) (** 4 20))))
.: freed
```

Related

await, busy-p, cancel, cancelled-p, conclude, critical, is, free , ready-p, self, tarry, task, tasks, wait

configuration

Creates a configuration file.

Syntax

(configuration url association ...)

association ::= section settings

settings ::= { setting setting }

setting ::= key value

Module

Base

Parameters

Name	Data Type	Qty	Description
url	url	1	A url.
association	expression	0+	A section literal and list of key value pairs.

Results

Data Type	Description
value	The value associated with the key.

Remarks

This function creates a configuration file at the specified URL. The file constis of sections that have key value pairs.

Example

```
> (configuration "c$/apps/premise/myApp.cfg" security {User John password "foo"}))  
. : Configuration-1  
  
> (get Configuration-1 security password)  
. : "foo"  
  
> (put (get Configuration-1 security) password "bar")  
. : Lexicon-248  
  
> (get Configuration-1 security password)  
. : "bar"
```

Related

[add](#), [cut](#), [erase](#), [get](#), [put](#)

confirm

Tests that a condition is true.

Syntax

(confirm *condition* **since** *reason*)

Module

Base

Parameters

Name	Data Type	Qty	Description
condition	truth	1	The test. If it evaluates to false the function fails
since	literal	0-1	The literal since.
reason	string	0-1	The failure text to display. Defaults to "Assertion failure." if not supplied.

Results

Data Type	Description
truth	Returns true if test is true.

Remarks

If the since keyword and reason are omitted, the failure text shall be "Failed condition." The failure name is always "Confirmation".

Example

```
> (confirm (= red blue) since "colors must be the same")
.: [Failure :Name Assertion :Text "colors must be the same"]

> (function reducing {?sequence ?function}
  (ensure sequence ?sequence function ?function)
  (confirm (> (# ?sequence) 1) since "Two or more elements are required.")
  (let ?result (@ ?sequence))
  (for ?element in (rest ?sequence) (--> ?function ?result ?element)))

.: reducing

> (reducing {1} +)

.: [Failure :Name Confirmation :Text "Two or more elements are required."]
```

Related

confute, ensure, fail, signal, try

confute

Tests that a condition is false.

Syntax

(confute condition since reason)

Module

Base

Parameters

Name	Data Type	Qty	Description
condition	truth	1	The test. If it evaluates to false the function fails
since	literal	0-1	The literal since .
reason	string	0-1	The failure text to display. Defaults to "Rejection failure." if not supplied.

Results

Data Type	Description
truth	Returns false if test is false.

Remarks

If the since keyword and reason are omitted, the failure text shall be "Failed condition." The failure name is always "Confutation."

Example

```
> (confute (= red blue) since "colors must be different")
.: false

> (function reducing {?sequence ?function}
  (ensure sequence ?sequence function ?function)
  (confute (<= (# ?sequence) 1) since "Two or more elements are required.")
  (let ?result (@ ?sequence))
  (for ?element in (rest ?sequence) (--> ?function ?result ?element)))
.: reducing

> (reducing {1} +)
.: [Failure :Name Confutation :Text "Two or more elements are required."]
```

Related

confirm, ensure, fail, signal, try

constant

Creates a constant.

Syntax

(**constant** *assignment* ...)

assignment ::= *symbol* *value*

Module

Base

Parameters

Name	Data Type	Qty	Description
assignment	expression	1+	Symbol and value pairs.

Results

Data Type	Description
truth	Returns the value true.

Remarks

Creates constant symbols in the current environment. Any attempts to put a different value into the symbol shall create a failure. Calling **constant** again on the symbols is allowed.

Example

```
> (constant ?SECRET "mysecret")
.: true
> ?SECRET
.: "mysecret"
> (constant ?MIN_ENTRIES 300
            ?MAX_ENTRIES 400)
.: true
> ?MAX_ENTRIES
.: 400
```

Related

<-- before tie, --> after tie, global, dynamic, modular, local

contains

True if a value is present in an assortment.

Syntax

(**contains** *assortment* *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
assortment	assortment	1	A sequence or assortment
value	variant	1	A value.

Results

Data Type	Description
truth	Returns true if the key is present. or false if the key is absent.

Remarks

None

Example

```
> (lexicon :A 1 :B 2 !m X_foo :C 3)
.: Lexicon-1

> (contains Lexicon-1 3)
.: true

> (contains Lexicon-1 X_foo)
.: true

> (contains Lexicon-1 elephant)
.: false
```

Related

has, lacks, missing

continue

Continues to the next iteration of a loop.

Syntax

(**continue** *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	0-1	A return value for the next iteration.

Results

Data Type	Description
value	Returns the value if provided, otherwise returns nil

Remarks

If this is executed within a loop, then the next iteration resumes until the loop is completed. If this is executed outside of a loop, then the value is returned. If no value is supplied, nil is returned.

Example

```
> (for ?item in (range 1 to 1000000)
   (if (< ?item 123456)
       (continue)
     else
       (break)))

.: nil

> (for ?item in (range 1 to 1000000)
   (if (< ?item 123456)
       (continue)
     else
       (break foo)))

.: foo
```

Related

[break](#), [fail](#), [return](#), [try](#)

convertible-p

True if the value can be converted to the datatype.

Syntax

(convertible-p *value taxon*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	The value to be converted
taxon	literal	1	The name of the target data type

Results

Data Type	Description
truth	Returns true if the value can be converted to the data type.

Remarks

If the value can be converted converted to the given data type, then this function returns true, otherwise it returns false.

Example

```
> (convertible-p {a b c} string)
.: true

> (convertible-p "500" number)
.: true

> (convertible-p "500" literal)
.: false

> (convertible-p "{wxy}" number)
.: false
```

Related

[datatype](#), [datais](#), [relation-p](#), [type](#), [is](#)

copy

Copies a sequence.

Syntax

(copy *sequence count*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence
count	integer	0-1	The number of times to repeat the sequence. Default is 1.

Results

Data Type	Description
sequence	The copied sequence.

Remarks

A shallow copy of the original sequence is made and replicated. All elements of the sequence are repeated the specified number of times.

Example

```
> (copy "a" 5)
.: "aaaaa"
> (copy {the quick brown fox} 3)
.: {the quick brown fox the quick brown fox the quick brown fox}
> (copy "hello")
.: "hello"
> (copy ($ hello world \s) 2)
.: "hello world  hello world"
```

Related

[copy](#), [new](#), [relation](#)

copyright

Displays copyright information.

Syntax

(copyright)

Module

Base

Parameters

None

Results

Data Type	Description
nil	The value nil .

Remarks

Prints copyright information.

Example

```
> (copyright)
(c) 2014-2020 Michael S P Miller  All Rights Reserved
.: nil
```

Related

[bye](#), [help](#), [license](#)

correlate

Finds the correlation coefficient of two lists.

Syntax

(correlate *list₁* *list₂*)

Module

Math

Parameters

Name	Data Type	Qty	Description
list	list	2	Lists.

Results

Data Type	Description
number	The correlation coefficient.

Remarks

Compares only the number of elements in the shorter of the two lists.

Example

```
(correlate {1 2 3 4 5} {4 3 2 1 0})  
. : -1  
  
(correlate {1 2 3 4 5} {6 7 8 9 10})  
. : 1  
  
(correlate {1 2 3 4 5} {6 3 8 2 10})  
. : 0.33071891
```

Related

probability, statistics, survey

cosecant

Returns the cosecant.

Syntax

(**cosecant** *number geometry metrum*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
geometry	literal	0-1	One of: cir (cle), hyp (erbola). Default is circle.
metrum	literal	0-1	One of: degrees , radians . Default is radians.

Results

Data Type	Description
number	The cosecant of the number.

Remarks

Example

```
> (cosecant 0.785398)
.: 1.414213793

> (cosecant cir 0.785398 radians)
.: 1.414213793

> (cosecant cir 45 degrees)
.: 1.4142135623

> (cosecant hyp 1.5708 radians)
.: 0.434535467

> (cosecant hyp 90 degrees)
.: 0.434537208
```

Related

asecant, secant

cosine

Returns the cosine.

Syntax

(cosine *number geometry metrum*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
geometry	literal	0-1	One of: cir (cle), hyp (erbola). Default is circle.
metrum	literal	0-1	One of: degrees , radians . Default is radians.

Results

Data Type	Description
number	The cosine of the number.

Remarks

None.

Example

```
> (cosine 0.785398)
.: 0.707106896
> (cosine cir 0.785398 radians)
.: 0.707106896
> (cosine cir 45 degrees)
.: 0.707106896
> (cosine hyp 1.5708 radians)
.: 2.50918693
> (cosine hyp 90 degrees)
.: 2.509178478
```

Related

asine, sine

cotangent

Returns the cotangent.

Syntax

(cotangent *number* *geometry* *metrum*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
geometry	literal	0-1	One of: cir (cle), hyp (erbola). Default is circle.
metrum	literal	0-1	One of: degrees , radians . Default is radians.

Results

Data Type	Description
number	The cotangent of the number.

Remarks

Example

```
> (cotangent 0)
.: infinity

> (cotangent cir 1.5708 radians)
.: 0

> (cotangent cir 45 degrees)
.: 1

> (cotangent hyp 1.5708 radians)
.: 1.09033

> (cotangent hyp 90 degrees)
.: 1.0903314107
```

Related

[atangent](#), [tangent](#)

count

Counts the iterations and returns the last expression.

Syntax

(**count** *symbol* ... *binding sequence as counter expression ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	An iteration variable
binding	literal	1	The literal in , per , or over .
sequence	sequence	1	A sequence (string or list)
as	literal	1	The literal as
counter	symbol	1	A counter variable
expression	expression	0+	An expression.

Results

Data Type	Description
variant	Returns the last expression in the sequence.

Remarks

None.

Example

```
> (count ?word in {the quick brown fox} as ?n
    (tell user ($ ?n ?word \n)) ?n)
1 the
2 quick
3 brown
4 fox
.: 4
```

Related

collect, exactly, filter, gather, quantify, quantity

critical

Serializes evaluations across regions of code.

Syntax

(critical *locks* *option ... expression ...*)

Module

Tasks

Parameters

Name	Data Type	Qty	Description
locks	list	0-1	A list of literals representing critical section locks
option	expression	0+	A key value pair: retries <i>integer</i> - number of times to retry any lock. (default is 0) lockwait <i>time</i> - how long to wait for a lock. (default is 2,000,000 ticks) within <i>time</i> - the overall time to obtain all locks (default is 1 second)
expression	variant	1+	An expression to be evaluated.

Results

Data Type	Description
variant	The value of the last expression.

Remarks

The critical section is used to serialize the execution of the contained expressions. Any other sections with the same tags shall be blocked. Generates failure if the locks cannot be obtained on the tags under the default or indicated conditions, or if a lock was forcibly released during execution.

Example

```
> (function sayHello {}
  (critical {printing}
    (for ?c in "hello " (tell user ?c)))

.: sayHello

> (free (wait (concurrent (sayHello) (sayHello) (sayHello)))

hello hello hello .: freed
```

Related

[release](#)

cut

Removes elements from assortments by key.

Syntax

(**cut** *assortment* *key* ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
container	thing	1	An assortment.
key	variant	0+	A key.

Results

Data Type	Description
assortment	The modified assortment or sequence.

Remarks

Assortments are modified destructively. To delete nondestructively use the **remove** function.

Example

```
> (entries (collection a b c d))
.: {{a a} {b b} {c c} {d d}}
> (entries (cut (lexicon a 1 b 2 c 3 d 4) b d))
.: {{a 1}{c 3}}
```

Related

[rip](#), [remove](#)

data

Creates a data url.

Syntax

(data option ...)

Module

IO

Parameters

Name	Data Type	Qty	Description
option	expression	1+	<p>Any key value pair of the following:</p> <p>connect <i>string</i> - use the specified connection string. poolszie <i>poolszie</i> - maximum # of connections provider <i>platform</i> - either mssql, odbc, maria, pgsql</p> <p>or build the connection string from the following elements.</p> <p>driver <i>name</i> - the driver server <i>address</i> - server address version <i>number</i> - server version class <i>class</i> - class name of driver host <i>address</i> - host address port <i>port</i> - server port for database service instance <i>instance</i> - server instance name integratedSecurity <i>truth</i> - true or false database <i>name</i> - database name user <i>username</i> - user name password <i>password</i> - user password trusted <i>yesorno</i> - trusted connection yes or no. source <i>name</i> - data source name protocol <i>protocol</i> - database protocol subprotocol <i>subprotocol</i> - database sub protocol subname <i>subname</i> - sub name</p>

Results

Data Type	Description
url	A data url.

Remarks

None

Example

```
> (open (data driver sqlserver server "//servername" port 1433
           database mydata user "myUid" password "123456"))

.: Data-1

> (ask Data-1 "select top 2 empid, name, salary from employee"
           format row columns {name wage})

.: {{1 "John Smith" 10.50}{2 "Jane Johnson" 12.00} }

> (close Data-1)

.: Data-1

> (open (data host "localhost" database "sample" user "username"
           password "secret" connections 3))

.: Data-2

> (tell Data-2 "update employee set wage = wage + 1.00;")

.: executed

> (close Data-2)

.: Data-2

> (global ?data
      (open (data class "com.microsoft.jdbc.sqlserver.SQLServerDriver"
              subprotocol "sqlserver"
              subname "//serverName:port;database=db;user=uid;password=pwd")))

.: true

> (function valueslist {?rows}
      ($ (inside (infix (map (collect ?row in ?rows (inside (infix ?row ,)))
                               call)
                  , ))))

.: valuelist

> (tell ?data ($ "insert Employee (name, hours, wage) values "
      (valueslist {"Jane Johnson" 40 10.50}
                  {"John Smith" 5 10.50})))

.: 2

> (close ?data)

.: Data-3
```

Related

[disconnect, tell, fetch, store](#)

date

Creates a new date or returns the current date.

Syntax

(date yr mth day hrs mins secs zone zmins)

Module

Base

Parameters

Name	Data Type	Qty	Description
yr	integer	0-1	Four digits: The year (e.g., 2018, 2024)
mth	integer	0-1	A number between 1 and 12
day	integer	0-1	A number between 1 and 31
hrs	integer	0-1	A number between 0 and 23
mins	integer	0-1	A number between 0 and 59
secs	real	0-1	A real number between 0 and 59
zone	integer	0-1	A number between -12 and 12.
zmins	integer	0-1	A number between -12 and 12.

Results

Data Type	Description
date	The UTC date.

Remarks

If no arguments are provided, this function returns the current date in Coordinated Universal Time. Otherwise, it attempts to construct a date from the supplied arguments.

Example

```
> (date)
.: \@d2014-09-16T02:15:51.97152+00:00
> (date 2018 5 18 0 0 0 0 0)
.: \@d2018-05-18T00:00:00.00000+00:00
```

Related

epoch, moment, tick

declared-p

True if a symbol exists in an environment.

Syntax

(**declared-p** *symbol environment*)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1	A symbol
environment	environment	0-1	An environment.

Results

Data Type	Description
truth	True if the symbol has been declared.

Remarks

If location is omitted, the symbol is sought in the current environment.

Example

```
> (extend Example
  (modular ?hello  World))

.: bar

> (declared-p ?User.hello)

.: false

> (declared-p ?Example.hello)

.: true
```

Related

function-p, symbol-p,

decode

Decodes a string.

Syntax

(decode *source format*)

Module

Base

Parameters

Name	Data Type	Qty	Description
source	string	1	A string to decode.
format	literal	1	One of { base16 , base32 , base64 , utf8 , none }

Results

Data Type	Description
string	The encoded string

Remarks

Each entry in the elements list may be a literal or a list containing a literal and an index.

Example

```
> (encode "The quick brown fox" base16)
.: "54686520717569636B2062726F776E20666F78"

> (encode "The quick brown fox" base64)
.: "VGhlIHF1aWNrIGJyb3duIGZveA=="

> (encode "The quick brown fox" none)
.: "The quick brown fox"

> (decode "54686520717569636B2062726F776E20666F78" base16)
.: "The quick brown fox"

> (decode "VGhlIHF1aWNrIGJyb3duIGZveA==" base64)
.: "The quick brown fox"

> (decode "The quick brown fox" none)
.: "The quick brown fox"
```

Related

[encode](#)

def

Adds symbols to the current environment returning the last assigned value.

Syntax

(**def** *manner* *assignment* ...)

assignment ::= *symbol* *value*

Module

Base

Parameters

Name	Data Type	Qty	Description
manner	literal	0-1	The manner in which the assignments are performed either the literal parallel or tandem (default if omitted)
assignment	expression	1+	A symbol and value pair.

Results

Data Type	Description
variant	Returns the last assigned value.

Remarks

Sequentially creates symbols in the current environment. Each symbol shall replace any extant symbol with the same name in the environment. Returns the value of the last assignment.

Example

```
> (def ?person DrWho)
.: DrWho
> ?person
.: DrWho
```

Related

<-- before tie, --> after tie, assume, constant, dynamic, given, global, let, local, set

default

Returns the first non-nil value.

Syntax

(default *value* ... **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1+	A value to be returned.

Results

Data Type	Description
value	The first value that is not nil.

Remarks

Returns the first value which is not nil. If all values are nil, then nil is returned.

Example

```
> (default nil 1 2 3)
.: 1

> (default nil a b c)
.: a

> (default nil)
.: nil

> (default nil nil nil nil 1)
.: 1
```

Related

[any](#), [is](#) , [no](#)

definitions

Retrieves literal value pairs in an environment.

Syntax

(definitions *environment* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
environment	environment	1	An environment

Results

Data Type	Description
list	A list of all symbol value pairs

Remarks

Returns a list containing all literal value pairs.

Example

```
> (using User
    (definitions (scope)))
.: {}

> (extend User
    (function foo {} hello)
    (function bar {} world))

.: User

> (using User
    (definitions (scope)))
.: {{foo "(function foo {} hello)"}
 {bar "(function bar {} world)"}}
```

Related

[symbols](#)

defunct

Undefines a function in a module.

Syntax

(defunct *function*)

Module

Base

Parameters

Name	Data Type	Qty	Description
function	literal	1	A fully qualified function name.

Results

Data Type	Description
literal	The name of the function.

Remarks

Undefines a function or causes a failure if the function does not exist. Returns the name of the function if successful. Looks for the function in the current module if module is omitted.

Example

```
> (function foo bar)
.: foo

> (describe foo)
.: {"(function User.foo {} bar)"}

> (defunct foo)
.: foo

> (describe foo)
.: nil
```

Related

[defined](#), [describe](#), [function](#), [macro](#), [nix](#), [relation](#)

degrees

Converts radians into degrees.

Syntax

(degrees radians)

Module

Math

Parameters

Name	Data Type	Qty	Description
radians	real	1	a number in radians.

Results

Data Type	Description
number	The number of degrees.

Remarks

The radians are multiplied by $180 / \pi$, or roughly 57.29578049044297, for the conversion.

Example

```
> (round (degrees (* (/ 4 9) (pi))))  
. : 80  
> (round (degrees 1.4))  
. : 80  
> (round (degrees 0.7864815))  
. : 45
```

Related

cosine, radians, sine, tangent

delete

Modifies a sequence by deleting values.

Syntax

(**delete** *sequence value ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.
value	variant	0+	A value.

Results

Data Type	Description
assortment	The modified assortment

Remarks

Destructively modifies a sequence by deleting the values. To create a new sequence with values omitted use the **omit** function.

Example

```
> (delete {a b c d e f g} a b)
.: {c d e f g}

> (delete {a 1 nil b 2 c 3 nil nil d  nil 4} nil)
.: {a 1 b 2 c 3 d 4}
```

Related

[pop](#), [push](#),

dependencies

Returns a module's dependencies.

Syntax

(dependencies *module*)

Module

Base

Parameters

Name	Data Type	Qty	Description
module	literal	1	A module

Results

Data Type	Description
list	A list of modules upon which the argument depends.

Remarks

Returns dependencies of a module.

Example

```
> (module a
  (function foo bar))

.: a

> (module b
  (function bar baz))

.: b

> (module c
  (require a)
  (require b)
  (function baz {}
    {(foo) (bar)}))

.: c

> (dependencies c)
.: {a b}
```

Related

discard, extend, forgo, module, require, grok, using

deq

Removes an element from an embedded sequence.

Syntax

(**deq** *container place option*)

option ::= all value

option ::= at position

option ::= the value

Module

Base

Parameters

Name	Data Type	Qty	Description
container	thing	1	An assortment or sequence.
place	variant	1	A key or position.
option	expression	0-1	One of all value - Removes all occurrences of the value. at position - A number or the literal #. Default is 1. the value - Removes the first occurrence of the value.

Results

Data Type	Description
variant	Returns the container.

Remarks

If no options are provided, the last item of the sequence is removed.

Example

```
> (deq (lexicon 1 {a a b} 2 {d e f}) 2)
.: Lexicon-1
> (get Lexicon-1 2)
.: {d e}
> (get (deq Lexicon-1 1 all a) 1)
.: {b}
```

Related

add, cut, enq, get, has, key, keys, peek, put, values

describe

Returns descriptions of a literal.

Syntax

(describe *literal*)

Module

Base

Parameters

Name	Data Type	Qty	Description
literal	literal	1	A function, module, relation, or other defined item.

Results

Data Type	Description
list	A possibly empty list of descriptions.

Remarks

Returns a list of string descriptions.

Example

```
> (describe foo)
.: {}

> (relation Foo :Bar :Baz)
.: Foo

> (function foo {} bar)
.: foo

> (describe foo)
.: {"(function User.foo {} bar)" "(relation Foo :Bar nil :Baz nil)"}  

```

Related

[defined](#), [defunct](#), [function](#), [macro](#), [nix](#), [relation](#)

detach

Unregisters a knowledge base.

Syntax

(**detach** *knowledge*)

Module

IO

Parameters

Name	Data Type	Qty	Description
knowledge	knowledge	1	A knowledge base.

Results

Data Type	Description
knowledge	The knowledge base.

Remarks

Unregisters an attached knowledge base.

Example

```
> (def ?kb (knowledge url "file:///c:/premise/kb/esoteric.mdb"))

.: Knowledge-1

> (attach ?kb)

.: Knowledge-1

> (use ?kb)

.: Knowledge-1

> (relation Fact :All :Are)

.: Fact

> (detach ?kb)

.: Knowledge-1

> (free (cede (alias ?kb)))

.: freed
```

Related

attach, conceive, each, eradicate, knowledge, knowing, get, put, using, which, with

difference

Returns the difference of two sequences.

Syntax

(difference sequence₁ sequence₂ operation)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	2	A list or string
operation	literal	0-1	One of : set - returns the set difference. (default) sym - returns symmetric difference

Results

Data Type	Description
list	Set difference of sequence1 and sequence2

Remarks

If the operation is **set**, this function returns a sequence containing elements from the first sequence not in the second. If the operation is **symmetric**, it returns items that are not in the intersection of the provided sequences. Sequences must be of the same data type, e.g., either all lists or all strings.

Example

```
> (difference "abcd" "abef" set)
.: "cd"
> (difference {1 2 3 4} {2 3 4 5} sym)
.: {1 5}
> (difference {1 2 3} {5 4 3 2})
.: {1}
```

Related

common, intersection, union

did

Evaluates an expression and suppresses failures.

Syntax

(did *expression* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
expression	variant	1	An expression to evaluate.

Results

Data Type	Description
expression	Returns a truth success value, the result , and a possible failure

Remarks

If the expression fails, success shall be false, the result shall be nil, and the failure shall contain the generated failure.

Example

```
> (did (string x))
.: true "x" nil

> (did (integer x))
.: false nil [Failure :Name TypeConversion :Text "Cannot convert x to Integer."]
> (bind ?success ?result ?error (did (string "hello world")))
.: true
> ?success ?result ?error
.: true "hello world" nil
```

Related

[assert](#), [can](#), [ensure](#), [fail](#), [finally](#), [may](#), [try](#)

digit

Returns the digit in the specified position of a number.

Syntax

(digit *number position*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number.
position	number	1	The position of the digit within the number

Results

Data Type	Description
variant	The indicated digit (a number between 0 an 9) or nil.

Remarks

Returns the digit in the position of the fractional normed significand (0.nnnnn) of a number. If the position is out of range, nil is returned.

Example

```
> (digit 500 1)
.: 5
> (digit 500 2)
.: 0
> (digit 500 3)
.: 0
> (digit 500 4)
.: nil
> (digit (pi) 7)
.: 2
```

Related

digits, exponential, fractional, sign, significand,

digit-p

True if the first position of a string is a digit.

Syntax

(digit-p *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A variant.

Results

Data Type	Description
truth	Returns true if the first position is a digit.

Remarks

None

Example

```
> (digit-p "The Quick BROWN fox")
.: false
> (digit-p "100")
.: true
> (digit-p foo)
.: false
> (digit-p 100)
.: false
```

Related

[alphanumeric-p](#), [capitalized-p](#), [lowercase-p](#), [uppercase-p](#)

digits

Returns the digits comprising a number.

Syntax

(digits *number*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number.

Results

Data Type	Description
string	The digits.

Remarks

Returns the fractional digits in the normed significand (0.nnnnn) of a number as a string. Trailing zeros are deleted while leading fractional zeros are preserved.

Example

```
> (digits 500)
.: "500"

> (digits 0.00465)
.: "00465"

> (digits -1050.064)
.: "1050064"

> (digits -2302.023900)
.: "23020239"

> (digits 000.003500)
.: "0035"
```

Related

digit, exponential, fractional, sign, significand

dimensions

Returns the lengths of each dimension in a sequence.

Syntax

(dimensions *sequence*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.

Results

Data Type	Description
list	The length of each dimension in a sequence.

Remarks

This function returns the length of each nested sequence as a list. The function assumes that the entire sequence has a uniform number of elements in each dimension.

Example

```
> (dimensions {{{a}{b}{c}}{ {d}{e}{f}}})  
. : {2 3 1}  
  
> (dimensions {a b c d})  
. : {4}  
  
> (dimensions {{a b c}{d e f}})  
. : {2 3}  
  
> (dimensions "abc")  
. : {3}
```

Related

[array](#)

discard

Discards a module.

Syntax

(discard *module*)

Module

Base

Parameters

Name	Data Type	Qty	Description
module	literal	1	A module

Results

Data Type	Description
literal	The literal discarded

Remarks

Removes an unwrapped module from the modules collection if no functions are defined in the module, causes a failure otherwise.

Example

```
> (module module1
  (function foo {} bar))

.: module1

> (for ?fn in (functions module1)
  (defunct (qualified module1 ?fn)))

.: nil

> (discard module1)

.: discarded
```

Related

dependencies, discard, extend, forgo, module, require, grok, use

disjoint-p

True if no elements are common among sequences.

Syntax

(disjoint-p sequence sequence ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	2+	A sequence

Results

Data Type	Description
truth	True if no elements are common to any sequences.

Remarks

Returns true if, for the provided sequences, no elements are common to any sequences.

Example

```
> (disjoint-p {1 2 3 4}{2 3 4 5)
.: false
> (disjoint-p {2 3 4 5}{1 6 7 8})
.: true
> (disjoint-p {1 2 3 4}{2 3 4 5}{3 4 5 6}{4 5 6 7})
.: false
> (disjoint-p "abc" "def" "ghi")
.: true
```

Related

intersects-p, subset-p

distinct

Creates a new sequence without duplicate elements.

Syntax

(distinct *sequence*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.

Results

Data Type	Description
sequence	A new sequence with duplicates removed

Remarks

Creates a new sequence containing unique items.

Example

```
> (distinct {1 2 2 2 3 4 2 3 4 5})  
. : {1 2 3 4 5}  
> (distinct "abcabcdcde")  
. : "abcde"
```

Related

[difference](#), [intersection](#), [union](#)

distribute

Applies a function in parallel to a sequence.

Syntax

(**distribute** *sequence* *function* *result*)

Module

Tasks

Parameters

Name	Data Type	Qty	Description
sequence	list	1	A list containing the arguments to each function.
function	function	1	The function to be distributed and processed in parallel.
result	literal	0-1	The literal tasks or values (default).

Results

Data Type	Description
list	If tasks is specified, a list of tasks is returned immediately, otherwise a list of values are returned upon completion of all the tasks.

Remarks

Returns a list of tasks for each element of the sequence by applying the function to each element.

Example

```
> (distribute {5 6 7} (given {?x} (* ?x 2)))
.: {10 12 14}

> (distribute {5 6 7} (given {?x} (* ?x 2)) tasks)
.: {task-1 task-2 task-3}

> (map {task-1 task-2 task-3} await)
.: {10 12 14}

> (distribute {2 3 4} (given {?x} (morph {?x} {++ ++ ++})) values)
.: {5 6 7}
```

Related

apply, concurrent, complete, compose, map, mete, morph, scatter

divide

Safe division.

Syntax

(divide dividend divisor default)

Module

Base

Parameters

Name	Data Type	Qty	Description
dividend	variant	1	A number.or a list.
divisor	variant	1	A number.or a list.
default	variant	0-1	A number or a list. If not supplied, unknown is returned.

Results

Data Type	Description
number	Returns the quotient of the numerator and denominators or the default.

Remarks

Returns the quotient of the values or the default. It divides the dividend by the divisor. If the default is not supplied, **unknown** is returned. All list arguments must be the same length. If an argument is a list, then each element of the list is divided. If a scalar and a list are divided, then the scalar is divided by each element of the list.

Example

```
> (divide 1.0 2)
.: 0.5

> (divide 5 0 0)
.: 0

> {divide {4 5 6} 0}
.: {undefined undefined undefined}

> {divide {4 5 6} {1 2 0} -1}
.: {4 2.5 -1}
```

Related

/ division, * multiplication, + addition, - subtraction, % modulo

divisible-p

True if the divisor evenly divides the dividend.

Syntax

(divisible-p *dividend divisor*)

Module

Base

Parameters

Name	Data Type	Qty	Description
dividend	number	1	The value to be divided
divisor	number	1	The value to divide by

Results

Data Type	Description
truth	True if the modulus of the dividend and divisor equals zero.

Remarks

Causes a failure if the arguments are not numbers, or if the arguments cannot be converted to the same type for comparison (for example, an imaginary compared to an integer).

Example

```
> (divisible-p 501 10)
.: false
> (divisible-p 500 10)
.: true
> (divisible-p 28 7)
.: true
```

Related

datatype, type, is

do

Creates a lexical scope.

Syntax

(**do** *expression* ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
expression	variant	0+	Expressions to be evaluated.

Results

Data Type	Description
variant	Returns the value of the last executed expression.

Remarks

Each expression is executed in succession and the value of the last expression is returned.

Example

```
> (do foo)
.: foo
> (do foo bar baz)
.: baz
> (do (step ?x from 1 to 500      nothing)
       (step ?y from 501 to 1000    nothing)
       (step ?z from 1000 to 2000  nothing)
     done)
.: done
```

Related

wait, abort,, await, complete, done-p, reclaim, use, for, iterate, loop, step, task, until, while

done

Terminates a generator.

Syntax

(done)

Module

Base

Parameters

None

Results

Data Type	Description
escape	Returns an escape.

Remarks

None.

Example

```
> (generator myGenerator {?interrupt}
  (yield 1)
  (yield 2)
  (if ?interrupt (done))
  (yield 3)
  (yield 4)
  (done))

.: myGenerator

> (collect ?x in (myGenerator true) ?x)

.: {1 2}

> (collect ?x in (myGenerator false) ?x)

.: {1 2 3 4}
```

Related

[generator](#), [generator-p](#), [yield](#)

drop

Removes a relation index.

Syntax

(drop *index* ... **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
index	index	1+	A relation index or list of indicies

Results

Data Type	Description
expression	The literal dropped and the number of indices dropped.

Remarks

Removes an index from a relation if one exists, otherwise causes a failure.

Example

```
> (relation Car :Make :Model :Year)
.: Car

> (index Car :Make :Model)

.: Car_Index_1

> (index Car :Year)

.: Car_Index_2

> (drop Car_Index_1)

.: dropped 1

> (drop Car_Index_2)

.: dropped 1
```

Related

[relation](#), [index](#), [indices](#)

duplicate

Duplicates a file or contents of a folder.

Syntax

(duplicate source target option)

Module

IO

Parameters

Name	Data Type	Qty	Description
source	url	1	A source url.
target	url	1	A target url.
option	expression	0-1	A key value pair, one of overwrite yes no – (default is no).

Results

Data Type	Description
literal	The literal duplicated .

Remarks

Duplicates files on a file system.

Example

```
> (let ?f (file name "foo.txt"))

.: true

> (write ?f "The quick brown fox")

.: File-1

> (close ?f)

.: closed

> (duplicate (url ?f) (url path "bar.txt"))

.: duplicated

> (duplicate (url ?f) (url path "baz.txt") overwrite yes)

.: duplicated
```

Related

[erase](#), [move](#)

during-p

True if an interval occurs within a second interval.

Syntax

(during-p *interval₁* *interval₂* *tolerance*)

Module

Base

Parameters

Name	Data Type	Qty	Description
interval ₁	interval	1	An interval
interval ₂	interval	1	An interval
tolerance	instant	0-1	Amount of variation. (Defaults to zero ticks).

Results

Data Type	Description
truth	True if interval ₁ occurs within interval ₂ .

Remarks

None.

Example

```
> (during-p  \@i{\@s1 \@s2}  \@i{\@s3 \@s4})  
.: false  
  
> (during-p  \@i{\@s1 \@s5}  \@i{\@s1 \@s8})  
.: true  
  
> (during-p  \@i{\@s1 \@s9}  \@i{\@s4 \@s6})  
.: false  
  
> (during-p  \@i{\@s4 \@s6}  \@i{\@s1 \@s9})  
.: true  
  
> (during-p  \@i{\@s7 \@s9}  \@i{\@s3 \@s8} \@s1)  
.: true
```

Related

before-p, finishes-p, meets-p, overlaps-p, starts-p

dynamic

Creates a dynamic environment for symbols.

Syntax

(dynamic *assignments expression ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
assignments	list	1	A list of symbol value pairs
expression	variant	0+	An expression

Results

Data Type	Description
truth	Returns the value true.

Remarks

Creates temporary global variables existing only for the duration of the scope.

Example

```
> (function appendToFile {& ?messages}
  (dynamic {?file nil}
    (try
      (set ?file (file name "myfile.out"))
      (seek ?file #)
      (for ?s in ?messages (write ?file ?s))
      (close ?file)
      appended
      learn ?f
        ?f)
    )
  .: appendToFile
```

Related

<-- before tie, --> after tie, assume, assign, constant, global, local, modular

e

Returns Euler's number, 2.718281828459045.

Syntax

(e)

Module

Math

Parameters

None.

Results

Data Type	Description
real	Returns the constant 2.718281828459045 .

Remarks

None.

Example

```
> (e)
.: 2.7182818284590451
```

Related

pi

each

Combines for and with to iterate over sequences matching patterns to the knowledge base.

Syntax

```
(each symbol ... binding reversal sequence ... premises option ... action )  
premises ::= premise  
premises ::= premise premises  
premises ::= premise restriction ... premises  
restriction ::= (predicate value ...)  
premise ::= [category descriptor ...]  
category ::= type  
category ::= list  
descriptor ::= slot binding  
descriptor ::= slot condition  
binding ::= in  
binding ::= per  
binding ::= over  
binding ::= across  
reversal ::= across  
condition ::= slot = value  
condition ::= slot /= value  
condition ::= slot is unary-predicate  
condition ::= slot not unary-predicate  
condition ::= slot binary-predicate value  
condition ::= slot n-ary-predicate value-list  
condition ::= (predicate value ...)  
option ::= scan number  
option ::= limit number  
option ::= group slot ... by slot ... into symbol  
option ::= merge value ...  
option ::= sort ordering ...  
action ::= deem value1 else value2  
action ::= do expression ...  
action ::= give expression  
action ::= list value ...  
action ::= tally  
action ::= yield expression  
ordering ::= term comparator
```

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	An iteration variable
binding	literal	1	The literal in , per , over , or across .
reversal	literal	0-1	The literal reverse .
sequence	sequence	1+	A list or string
premises	expression	1+	One or more premises
option	expression	0-2	Either scan , limit , group , merge , sort , or any combination.
action	literal	0-1	Either deem , do , give , list , tally , yield .
expression	expression	0+	An expression

Results

Data Type	Description
value	The last value returned on the last iteration.

Remarks

Symbols and sequences are required for **in**, **per**, and **over**. If the binding **in** is specified, each symbol is bound to successive elements of the sequence. If the binding **per** is specified, each element is expected to be a sequence, so that each symbol is bound to sub-elements of each subsequence. If the binding **over** is specified, each symbol is bound to overlapping elements of the sequence. If the binding **across** is specified, each symbol is bound to elements of the corresponding sequence (i.e, first symbol to the first sequence, second to the second, etc.). If there are insufficient elements to bind to the symbols then the function fails. If the literal **reverse** is present, the sequence is traversed in reverse. On each iteration, all the premises are evaluated. Note that a predicate is a truth function, **scan** tells the number of matches to attempt (default is **infinity**), and **limit** tells how many results to return (default is **infinity**). If the action is **deem**, then the subsequent value is returned if the final descriptor is matched, otherwise the else value is returned. If the action is **do**, then for each match the expressions are run, and for the last match, the last value of the last expression is returned, or nil is returned if all descriptors were false or had no matches. If the action is **give**, then the expression is immediately returned from the each call on the first match, akin to **return from each**. If the action is **yield**, then the expression is immediately returned from the each call, but may be resumed with a **next** function call. When all matches are completed, the **done** function is implicitly called to terminate the generator. If the action is **group**, followed by a list of slots and values from which the group is picked, then the literal **by** and a set of slots and values that determines the grouping inclusion , and finally the literal **into** followed by a symbol to which the group shall be bound on each iteration. If the action is either **list** (or **merge**), then a (merged) list is returned or an empty list if nothing matched. If the action is **sort** then the list of slots and comparators should follow. (Note that **list** is required if the sort action is selected.) If the action is **tally**, then the number of matched premises is returned, or zero if no matches.

(**each** symbol ... binding reversal sequence ... premises option ... action expression ...))

Is equivalent to

(**for** symbol ... binding reversal sequence ... (**with** premises option ... action expression ...))

The difference between **for** and **each** is that in a for expression, on every iteration, all the expressions following the sequence(s) are evaluated and the return value is the result of the last expression evaluated on the last iteration. In the **each** expression, the premises following the sequence(s) are evaluated, and if any premise is false, the next iteration occurs, otherwise, if all the premises are true, the action is taken, and the action expressions are evaluated.

Example

```

> (relation Sport
  :Name
  :PlayersPerTeam)

.: Sport

> (relation Team
  :Name
  :Sport
  :Players {})

.: Team

> (relation Person
  :Name
  :Skills
  :Teams {})

.: Person

> (relation Skill
  :Sport
  :Level)

.: Skill

> (repeat (random 1 to 10)
  (let ?sport (new Sport :Name (unique "sport"))
    :PlayersPerTeam (random 1 to 12)))
  (repeat (* (random 1 to 10) 2) ; even number of teams
    (let ?team (new Team :Name (unique "team") :Sport ?sport)))
  Leagues)

.: Leagues

> (assume {?sports      (which Sport)
  ?sportCount (# ?sports)
  ?teams       (which Team)}
  (do
    (let ?abilities (pick ?sports (random 1 to ?sportCount))
      ?player      (new Person :Name (unique "person")
        :Skills (collect ?sport in ?abilities
          (new Skill
            :Sport ?sport
            :Level (random 1 to 10)))))

    (each ?sport in ?abilities
      (let ?team (@ (sort (which ?teams :Sport = ?sport)
        (given {?a ?b} (<= (# (:Players ?a))
          (# (:Players ?b)))))))
      do
        (enq ?team :Players ?player)
        (enq ?player :Teams ?team)))
  )
)
```

```
until (every ?team in ?teams
      (>= (# (:Players ?team)) (# (:PlayersPerTeam (:Sport ?team))))))
Players)

.: Players

> (collect ?sport in (which Sport)
  {?sport (avg (which Skill :Sport = ?sport :Level as ?level list ?level))})
.: {{sport3 4.9} {sport1 7.898} {sport2 6.382} {sport4 8.452}}
```

Related

which, with

encode

Encodes a string.

Syntax

(**encode** *source format*)

Module

Base

Parameters

Name	Data Type	Qty	Description
source	string	1	A string to encode.
format	literal	1	One of { base16 , base64 , utf8 , utf16 , none }

Results

Data Type	Description
string	The encoded string

Remarks

Converts a string to the specified format.

Example

```
> (encode "The quick brown fox" base16)
.: "54686520717569636B2062726F776E20666F78"

> (encode "The quick brown fox" base64)
.: "VGhlIHF1aWNrIGJyb3duIGZveA=="

> (encode "The quick brown fox" none)
.: "The quick brown fox"

> (decode "54686520717569636B2062726F776E20666F78" base16)
.: "The quick brown fox"

> (decode "VGhlIHF1aWNrIGJyb3duIGZveA==" base64)
.: "The quick brown fox"

> (decode "The quick brown fox" none)
.: "The quick brown fox"
```

Related

[decode](#)

enq

Inserts an element into an embedded sequence.

Syntax

(**enq** *container place entry*)

entry ::= *position value*

entry ::= **unique** *value*

entry ::= *value*

Module

Base

Parameters

Name	Data Type	Qty	Description
container	assortment	1	An assortment or tuple
place	variant	1	A key or position.
entry	expression	1	Any of the following: value - appends the value to the sequence. <i>position value</i> - inserts the value at the position. <i>coordinate value</i> - inserts the value in the list coordinate. unique <i>value</i> - appends value if it is not already present.

Results

Data Type	Description
variant	The modified container.

Remarks

If only a single value is provided for *entry*, then the value is appended to the sequence. If an integer position and value is provided, then the value is inserted at the position. If the keyword **unique** is provided, then the value is appended to the sequence if it does not already exist

Example

```
> (let ?a {{} {1 2 3} {}})  
.: true  
> (enq ?a {2 2} 8)  
.: {{} {1 8 2 3} {}}
```

Related

add, cut, deq, get, has, key, keys, peek, put, values

ensure

Performs type checking.

Syntax

(**ensure** *check* ...)

check ::= *kind value*
check ::= {*kind* ...} *value*
kind ::= *taxon*
kind ::= *meron*

Module

Base

Parameters

Name	Data Type	Qty	Description
check	expression	1+	A datatype, prototype, or list containing datatypes and prototypes.

Results

Data Type	Description
truth	Returns true if all values correspond to their indicated types.

Remarks

If any of the values do not correspond to their designated types, then the function fails; otherwise the function returns **true**.

Example

```
> (function multiply {?a ?b + ?c}
  (ensure number ?a number ?b {number nil} ?c)
  (* ?a ?b (default ?c 1)))

.: multiply

> (multiply 10 banana)

.: [Failure :Name InvalidArg :Text "Expected a number, encountered banana."]

> (multiply 10 5)

.: 50
```

Related

[assert](#), [can](#), [did](#), [fail](#), [may](#), [try](#)

entries

Retrieves key value pairs for an assortment.

Syntax

(**entries** *assortment*)

Module

Base

Parameters

Name	Data Type	Qty	Description
assortment	assortment	1	An assortment.

Results

Data Type	Description
list	A list of all key value pairs

Remarks

Returns a list containing key value pairs for an association.

Example

```
> (entries (lexicon a 1 b 2 c 3 d 4))
.: {{a 1} {b 2} {c 3} {d 4}}
> (entries (structure Foo :X :Y :Z apple))
.: {{relation Foo} {:X nil} {:Y nil} {:Z apple}}
```

Related

[bindings](#), [definitions](#), [positions](#)

enum

Retrieves an enumerated assortment.

Syntax

`(enum name)`

Module

Base

Parameters

Name	Data Type	Qty	Description
name	literal	1	The name of a defined enumeration

Results

Data Type	Description
literal	The name of the enumeration

Remarks

Each entry in the elements list may be a literal or a list containing a literal and a number. If a number is present, the number shall be assigned to the preceding literal as the index of that literal, and the next literal shall have an index of the number plus one, unless another index is present. For example, the arguments a, b 7, c: a shall be assigned the value 1, b shall be assigned the value 7, and c shall be assigned the value 8. An enumeration is an immutable assortment so it cannot be modified.

Example

```
> (enumeration MySimpleType a b 7 c)
.: Enumeration-1
> (keys Enumeration-1)
.: {a b c}
> (entries (enum MySimpleType))
.: {{a 1}{b 7}{c 8}}
> (values (enum MySimpleType))
.: {1 7 8}
```

Related

[add](#), [cut](#), [elem](#), [enumerations](#), [elems](#), [entries](#), [size](#)

enumeration

Defines an enumerated assortment.

Syntax

(enumeration *name element ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
name	literal	1	The name of an enumeration
element	expression	1+	A literal or literal number pair.

Results

Data Type	Description
literal	The name of the enumeration

Remarks

Each entry in the elements list may be a literal or a list containing a literal and a number. If a number is present, the number shall be assigned to the preceding literal as the index of that literal, and the next literal shall have an index of the number plus one, unless another index is present. For example, the arguments a, b 7, c: a shall be assigned the value 1, b shall be assigned the value 7, and c shall be assigned the value 8. An enumeration is an immutable assortment so it cannot be modified.

Example

```
> (enumeration MySimpleType a b 7 c)
.: Enumeration-1
> (keys Enumeration-1)
.: {a b c}
> (entries Enumeration-1)
.: {{a 1}{b 7}{c 8}}
> (values Enumeration-1)
.: {1 7 8}
```

Related

add, cut, elem, enum, enumerations, elems, entries, size

enumerations

Returns a list of all enumerations.

Syntax

(enumerations)

Module

Base

Parameters

None.

Results

Data Type	Description
list	Returns a list of enumerations.

Remarks

None.

Example

```
> (enumerations)
.: {}

> (enumeration MySimpleType {a b c})
.: MySimpleType
> (enumerations)
.: {MySimpleType}
```

Related

[enumeration](#)

environment

Creates a new context for symbols and functions.

Syntax

(environment *parent* *entry* ...)

entry ::= *symbol value*

entry ::= *function definition*

Module

Base

Parameters

Name	Data Type	Qty	Description
parent	environment	0-1	An environment or the value nil.
entry	expression	0+	A symbol and value pair or function and definition pair.

Results

Data Type	Description
literal	A resource to the environment

Remarks

Entries with literal keys are retrieved via the **definitions** function, while entries with symbol keys are retrieved with the **bindings** function. All entries may be retrieved using the **entries** function.

Example

```
> (environment nil (symbol A) "hello world")
.: Environment-1

> (add Environment-1 foo (given {?x} (+ ?x 1)))
.: Environment-1

> (add Environment-1 bar (function bar {?x} (* ?x 2)))
.: Environment-1

> (entries Environment-1)
.: {{?A "hello world"} {foo (given {?x} (+ ?x 1))} {bar (fn bar {?x} (* ?x 2))}}
```

Related

@, add, includes, cut, entries, environment-p, keys, reclaim, #, values

epoch

Returns a Unix epoch or the current epoch.

Syntax

(epoch *time*)

Module

Base

Parameters

Name	Data Type	Qty	Description
time	time	0-1	A date, moment, seconds or tick value.

Results

Data Type	Description
epoch	The Unix time in seconds since January 1, 1970 (UTC).

Remarks

Converts the supplied time to a Unix epoch.

Example

```
> (epoch 2014-11-29T23:39:29.741)
.: \@e1417333169
> (epoch \@m2014939313515537)
.: \@e1481565910
> (epoch \@t63573798191026000)
.: \@e1481565910
> (epoch (date))
.: \@e1533235279
> (epoch)
.: \@e1533235284
> (epoch (tick))
.: \@e1533235295
```

Related

date, moment, tick

eradicate

Deletes a knowledge base.

Syntax

(**eradicate** *knowledge*)

Module

IO

Parameters

Name	Data Type	Qty	Description
knowledge	knowledge	1	A knowledge base

Results

Data Type	Description
knowledge	The opened knowledge base.

Remarks

Deletes an existing knowledge base.

Example

```
> (conceive (def ?kb (knowledge name defaultKB path "c://premise/kb/")))

.: defaultKB

> (attach ?kb)

.: defaultKB

> (relation Fact :All :Are)

.: Fact

> (detach ?kb)

.: defaultKB

> (eradicate ?kb)

.: defaultKB

> (free (cede (alias ?kb)))

.: freed
```

Related

attach, conceive, detach, each, get, knowledge, knowing, put, using, which, with

erase

Deletes files or folders.

Syntax

(**erase** *file option ...*)

option ::= key value

Module

IO

Parameters

Name	Data Type	Qty	Description
file	file	1	A file resource.
option	expression	0-1	Key value pairs where a key is one of force yes no - forcibly erase the file. Default is no . type {file or folder} - what to erase. Default is file .

Results

Data Type	Description
literal	The literal erased .

Remarks

This function attempts to delete a file. If successful it returns **erased**, otherwise it causes a failure.

Example

```
> (let ?path (file path (path "quick.txt")))

.: true

> (erase ?path force yes)

.: erased

> (erase (url scheme folder path (folder "c:/foo")) type folder)

.: erased
```

Related

[close](#), [file-p](#), [files](#), [folders](#), [file](#), [read](#), [seek](#), [write](#)

escape

Escapes to the next resume tag in the call graph.

Syntax

(escape)

Module

Base

Parameters

None.

Results

Data Type	Description
Failure	A failure.

Remarks

Returns control to the most proximate resume tag of a try function on the expression call graph.

Example

```
> (try
  (try
    (signal Failure :Name User :Text "A big problem")
    learn ?e
    (tell user ($ Learned ?e \n))
    (tell user ($ Rethrowing... \n))
    (escape))
  learn ?f
  (tell user ($ Learned ?f again. \n))
  resume
  (tell user ($ Resuming \n))
  finally
  done)

Learned [Failure :Name User :Text "A big problem"]
Rethrowing...
Resuming
.: done
```

Related

confirm, confute, ensure, fail, signal, try

eval

Evaluates an expression.

Syntax

(**eval** *expression environment*)

Module

Base

Parameters

Name	Data Type	Qty	Description
expression	expression	1	An expression to be evaluated
environment	environment	0-1	An environment

Results

Data Type	Description
value	The result of evaluating the expression

Remarks

Evaluates the expression and returns the resulting value. If no environment is provided, the current scope is used. The environment parameter is always evaluated in the current scope while the expression is evaluated in the provided scope, or the current scope if argument 2 is omitted.

Example

```
> (eval (+ 1 2 3 4))  
. : 10  
  
> (' (+ 1 2 3 4))  
. : (+ 1 2 3 4)  
  
> (eval (' (' (+ 1 2 3 4))) (scope))  
. : (+ 1 2 3 4)  
  
> (eval (eval (' (' (+ 1 2 3 4)))))  
. : 10
```

Related

'*quote*, `*expand*, *apply*, *call*, *invoke*

even-p

True if the number is even.

Syntax

(even-p *number*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number

Results

Data Type	Description
truth	True if the number is even.

Remarks

None.

Example

```
> (even-p 500)
.: true
> (even-p 0)
.: true
> (even-p -23)
.: false
```

Related

odd-p, negative-p, positive-p, zero-p

every

True if a predicate is true for every element in a sequence.

Syntax

(**every** *symbol* ... *binding sequence expression* ... *test*)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	An iteration variable
binding	literal	1	The literal in , per , or over .
sequence	sequence	1	A list or string
expression	expression	0+	An expression.
test	truth	1	A truth expression

Results

Data Type	Description
truth	True if every element satisfies the predicate, else false.

Remarks

If the binding **in** is specified, each symbol is bound to successive elements of the sequence. If the binding **per** is specified, each element is expected to be a sequence, so that each symbol is bound to sub-elements of each subsequence. If the binding **over** is specified, each symbol is bound to overlapping elements of the sequence. If there are insufficient elements to bind to the symbols then the function fails. The expressions and test are evaluated. If the sequence is empty the function fails.

Example

```
> (every ?n in {1 2 3 4} (= number (taxon ?n)))
.: true

> (every ?m ?n per {{1 2} {3 4}} (< ?m ?n))
.: true

> (every ?m ?n over {4 3 2 1} (divisible-p ?m ?n))
.: false
```

Related

few, most, nevery, none, some

exactly

True if a number of elements satisfy a clause.

Syntax

(**exactly** *quantity* **of** *sequence* **clause** **within** *margin*)

Module

Base

Parameters

Name	Data Type	Qty	Description
quantity	number	1	A number
of	literal	1	The literal of
sequence	sequence	1	A sequence
clause	expression	1	A key value pair. One of is <i>value</i> - a sequence element, are <i>value</i> - a sequence element, satisfies <i>predicate</i> - a unary truth function. satisfy <i>predicate</i> - a unary truth function.
within	literal	0-1	The literal within
margin	number	0-1	A number. (default is zero).

Results

Data Type	Description
truth	True if exactly quantity elements satisfies the predicate

Remarks

The predicate must return true or false.

Example

```
(exactly 4 of {1 2 3 4} satisfies number-p)
.: true

(exactly 1 of {1 a 3 4} is a)
.: true

(exactly 3 of {1 2 3 4} satisfy odd-p within 1)
.: true
```

Related

= *equal*,

exchange

Creates a new a sequence with values swapped.

Syntax

(**exchange** *sequence substitution ...*)

substitution ::= prior-position later-position

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A list or a string.
substitution	expression	1+	A prior and later position pair. A position may be a number or a list of numbers..

Results

Data Type	Description
sequence	The modified sequence

Remarks

Returns a copy of the original sequence with substitutions made. For destructive modification of a sequence use the **swap** function.

Example

```
> (exchange {A B C} 1 3)
.:{C B A}

> (exchange "ABCD" 1 3)
.: 'CBAD'

> (exchange {{1 2 3}{4 5 6}} {2 1} {1 3})
.: {{1 2 4}{3 5 7}}
```

Related

@ *element*, append, fix, push, pop, swap

excludes

True if a sequence does not contain an element.

Syntax

(excludes *sequence* *element* *option ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.
element	variant	1	A value
option	expression	0-2	A key value pair. Any of depth <i>number</i> - Number or # (for any depth). Default is 1. transform <i>function</i> - A function to transform the element..

Results

Data Type	Description
truth	True if the element is not in the sequence.

Remarks

If the element and sequence are strings, then a string search is performed.

Example

```
> (excludes {a b c d e f g} x)
.: true

> (excludes "cbazyx" "a")
.: false
```

Related

includes, excludes, in, occurrences, out, pick, position

exists-p

True if a value is a thing.

Syntax

(exists-p *value* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1+	A value

Results

Data Type	Description
truth	True if the values is a thing.

Remarks

None.

Example

```
> (exists-p yes)
.: true
> (exists-p nil)
.: false
> (exists-p (nothing))
.: false
> (exists-p 3.1415926)
.: true
```

Related

null-p

exit

Explicitly ends a task using a return value.

Syntax

(exit *value*)

Module

Tasks

Parameters

Name	Data Type	Qty	Description
value	variant	0-1	A return value. Defaults to nil if not specified.

Results

Data Type	Description
value	The argument value

Remarks

Forcibly ends a task. Calling **exit** from the interpreter shall not exit the interpreter. The **bye** function must be called to exit the interpreter.

Example

```
> (concurrent (step ?x from 1 to 999999999
           (if (> ?x 1000000) (exit exited))) ;
.: {Task-343}

> (await task-343)

.: exited

> (free task-343)

.: freed

> (exit done)

.: done
```

Related

[wait](#), [abort](#), [await](#), [complete](#), [do](#), [task](#)

exponential

Returns the base ten exponent of a number.

Syntax

(**exponential** *number significand*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number.
significand	literal	0-1	One of normed , scientific , integer . Default is scientific.

Results

Data Type	Description
number	The exponent.

Remarks

The normed significand represents the number as a fraction (0.nnnn). The scientific significand represents the number as a decimal between 1.0 and 10.0 (n.nnnn). The integer significand represents the number as an integer (nnnn). The exponential represents the power of 10 to which the significand must be raised to accurately reflect the number.

Example

```
> (exponential 500)
.: 2

> (exponential 0)
.: 1

> (exponential -1000 normed)
.: 4

> (exponential -2302.023900 integer)
.: -4

> (exponential 0.003500 scientific)
.: -3
```

Related

digit, digits, fractional, sign, significand,

expression

Creates an expression.

Syntax

(expression *value* ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	0+	Any value

Results

Data Type	Description
expression	Returns a expression containing the values.

Remarks

Expressions are lists without delimiters. An empty expression has no printed representation.

Example

```
> (expression a b c {d})  
. : a b c {d}  
  
> (expression "a b c")  
. : "a b c"  
  
> (let ?a 1 ?b 2)  
. : true  
  
> (bind ?a ?b (expression ?b ?a))  
. : true  
  
> ?a ?b  
. : 2 1  
  
> (void-p (expression))  
. : true
```

Related

inside, is, void-p

extend

Adds new definitions to a module.

Syntax

(extend *module expression ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
module	literal	1	The module containing the extended definitions
expression	expression	0+	An expression.

Results

Data Type	Description
literal	The module literal.

Remarks

Allows new definitions to occur in the target module. The module must be unwrapped.

Example

```
> (use User)
.: User

> (extend MyModule (function foo {} 100))
.: MyModule

> (MyModule.foo)
.: 100
```

Related

dependencies, discard, forgo, module, modules, require, grok, use

facility

Creates a private function in a module.

Syntax

(facility *name* *parameters* *expression* ... **)**

```
parameters ::=  
parameters ::= {}  
parameters ::= {required ...}  
parameters ::= {required ... + optional ...}  
parameters ::= { + optional ...}  
parameters ::= {required ... + optional ... & remaining}  
parameters ::= { & remaining}
```

Module

Base

Parameters

Name	Data Type	Qty	Description
name	literal	0-1	The name of the function. If not supplied then the name shall follow the pattern fn-<number> .
parameters	list	0-1	A list containing symbols, keywords, sigils, and keyword symbol associations.
expression	variant	0+	One or more expressions to be evaluated.

Results

Data Type	Description
literal	The name of the function

Remarks

Facilities are module level functions which are not accessible outside of the module in which they are created. If the name is supplied then the facility is a named facility, otherwise it is automatically named (auto-named). If a parameter list is supplied then it shall bind the formal parameter symbols to any actual parameter expressions provided. The first symbols in the parameter list are required. If a plus sign is provided, then those symbols following are optional. If an ampersand is provided, then the symbol following is bound to a list of remaining actual parameter values. Keyword parameters (literal symbol pairs) may be provided as required or optional. The entire parameter list may be omitted.

Example

```
> (module SuperMath

  (facility power {?x + ?y = 1}           ; private to the module
   (** ?x ?y)
  )

  (function superpower {& ?numbers}        ; public to the module
   (if (void-p ?numbers)
       (return unknown))
   (let ?result (@ ?numbers))
   (for ?n in (rest ?numbers)
     (--> power ?result ?n))
   ?result
  )
)

.: SuperMath

> (use User)

.: User

> (SuperMath.superpower 2 3 4)

.: 4096

> (SuperMath.power 2 3)

.: [Failure :Name UndefinedFunction :Text "The function SuperMath.power is not
defined"]

> (facility-p power SuperMath)

.: true

> (function-p power SuperMath)

.: false
```

Related

call, extend, functions, macro, module, modules

few

True if a predicate is true for less than half the elements in a sequence.

Syntax

(few symbol ... binding sequence expression ... test)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	An iteration variable
binding	literal	1	The literal in , per , or over .
sequence	sequence	1	A list or string
expression	expression	0+	An expression.
test	truth	1	A truth expression

Results

Data Type	Description
truth	True if less than half the elements satisfies the predicate

Remarks

If the binding **in** is specified, each symbol is bound to successive elements of the sequence. If the binding **per** is specified, each element is expected to be a sequence, so that each symbol is bound to sub-elements of each subsequence. If the binding **over** is specified, each symbol is bound to overlapping elements of the sequence. If there are insufficient elements to bind to the symbols then the function fails. The expressions and test are evaluated.

Example

```
> (few ?n in {1 2 3 4} (= (taxon ?n) number))
.: false

> (few ?m ?n per {{2 1} {3 4} {7 9}} (< ?m ?n))
.: false

> (few ?m ?n over {4 2 3 7} (divisible-p ?m ?n))
.: true
```

Related

every, nevery, most, none, some

file

Opens or creates a file.

Syntax

(**file** *url option ...*)

Module

IO

Parameters

Name	Data Type	Qty	Description
url	url	1	A url to the file.
option	expression	0+	A key value pair. Any of mode <i>mode</i> - append , create , open (default), truncate . access <i>access</i> - read , write , or readwrite (default). sharing <i>share</i> - none , read (default), write , or readwrite . seek <i>location</i> - a number from 1 (default) to # (eof). content type - binary (default) or text . from <i>place</i> - memory or network (default). buffer size - minimum buffer size (default is 1).

Results

Data Type	Description
file	A file literal.

Remarks

Opens a file for reading or writing and returns a file resource. If the file does not exist then it is created. If **from** memory is specified, the contents of the file is first cached locally to memory then accessed. If **from** network is specified, the contents of the file is accessed over the network.

Example

```
> (let ?url (url "file://localhost/C:/temp/quick.txt"))

.: true

> (if (there ?url)
    (let ?file (file ?url mode append))
    (write ?file "The quick brown fox")
    (close ?file)
    (free ?file))

.: closed
```

Related

[close](#), [erase](#), [free](#), [read](#), [seek](#), [there](#), [write](#)

files

Returns a list of file names.

Syntax

(files folder)

Module

IO

Parameters

Name	Data Type	Qty	Description
folder	folder	1	A folder.

Results

Data Type	Description
list	A list file name strings.

Remarks

If the path is invalid, the function fails. Files or symbolic links to files are returned.

Example

```
> (files path (path "c" (separator volume)))
.: {"homework.txt" "temp.txt" "mypath.lnk"}
```

Related

folder, folders, links, there, path, separator

fill

Fills a list with the result of an expression.

Syntax

`(fill symbol from start to end by increment with expression)`

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1	A variable iterator
from	literal	0-1	The literal from .
start	number	0-1	A number. If from is given this is required. Defaults to 1.
to	literal	1	The literal to .
finish	number	1	A number.
by	literal	0-1	The literal by .
increment	number	0-1	A number. If by is supplied this is required.
with	literal	1	the literal with .
expression	variant	1	a value to populate the list

Results

Data Type	Description
list	A list of the indicated length containing the value of the expression.

Remarks

The value of the variable iterator is available to the expression when building the list.

Example

```
> (fill ?i to 3 with ($ "foo-" ?i))
.: {"foo-1" "foo-2" "foo-3"}
> (fill ?j to 5 with (* ?j 2))
.: {2 4 6 8 10}
> (fill ?x from -4 to 6 by 2 with {?x})
.: {{-4}{-2}{0}{2}{4}{6}}
```

Related

[fill](#), [pad](#), [range](#)

filter

Returns a sequence of elements that satisfy a predicate.

Syntax

(filter *sequence predicate* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.
predicate	function	1	A truth function.

Results

Data Type	Description
list	A new list containing elements satisfying the predicate.

Remarks

For each element in the sequence, if the predicate is true for the element, the element is concatenated into a result list, otherwise the item is excluded from the result list. Finally, the result list is returned.

Example

```
> (filter {1 2 3 4} even-p)
.: {2 4}
> (filter {1 2 3 4 5 6} (given {?n} (divisible-p ?n 3)))
.: {3 6}
```

Related

apply, coalesce, collect, gather, reduce, sort, map, quantity

find

Returns the best matching candidates.

Syntax

(find *features candidates option ...* **)**

option ::= key value

Module

Base

Parameters

Name	Data Type	Qty	Description
features	List	1	The features to compare to the candidates
candidates	list	1	The candidates to be compared
option	expression	0+	<p>Key value pairs , where a key is one of:</p> <p>limit - The number of matches to return. (default is 1)</p> <p>minscore - value above which candidates shall be considered. Default is ninfinity</p> <p>maxscore – Value below which candidates are acceptable. Default is 1.</p> <p>transform – The literal name of a value transformation function.</p> <p>comparer - The literal name of a comparison function</p>

Results

Data Type	Description
list	A sorted list of lists containing candidate - score pairs.

Remarks

Find compares a set of features to those of candidates and returns the best matching candidate(s) with match score(s). It uses the similarity function (\sim) as the default comparer. If provided, transforms are applied before comparison. Finally, a comparer can accept two values and returns a score representing the degree of similarity where higher means more similar.

Example

```
> (find {"t" "th" "thi" "his" "is" "s"}  
        {"there" "that" "though" "thin"})  
        comparer (given {?x} (ngrams ?x 3)))  
  
. : {{"thin" 0.142857}}
```

Related

\sim similarity, $/\sim$ dissimilarity

finishes-p

True if two intervals finish together.

Syntax

(finishes-p *interval₁* *interval₂* *tolerance*)

Module

Base

Parameters

Name	Data Type	Qty	Description
interval ₁	interval	1	An interval
interval ₂	interval	1	An interval
tolerance	instant	0-1	Amount of variation. (Defaults to zero ticks).

Results

Data Type	Description
truth	True if interval ₁ finishes with interval ₂ .

Remarks

None.

Example

```
> (finishes-p  \@i{\@s1 \@s2}  \@i{\@s3 \@s4})  
.: false  
  
> (finishes-p  \@i{\@s1 \@s5}  \@i{\@s4 \@s5})  
.: true  
  
> (finishes-p  \@i{\@s1 \@s9}  \@i{\@s4 \@s6})  
.: false  
  
> (finishes-p  \@i{\@s4 \@s9}  \@i{\@s1 \@s9})  
.: true  
  
> (finishes-p  \@i{\@s7 \@s9}  \@i{\@s3 \@s8} \@s1)  
.: true
```

Related

before-p, during-p, meets-p, overlaps-p, starts-p

finishing

Returns the instant an interval finishes.

Syntax

(finishing *interval*)

Module

Base

Parameters

Name	Data Type	Qty	Description
interval	interval	1	An interval

Results

Data Type	Description
instant	The finishing value of the interval.

Remarks

None.

Example

```
> (finishing \@i{\@s1 \@s2})  
. : \@s2  
> (finishing \@i{\@s1 \@s5})  
. : \@s5  
> (finishing \@i{\@s4 \@s6})  
. : \@s6
```

Related

[beginning](#)

fix

Adds symbols to the current environment.

Syntax

(fix *declaration* ...)

declaration ::= taxon symbol value

Module

Base

Parameters

Name	Data Type	Qty	Description
declaration	expression	1+	A taxon, symbol and value triple.

Results

Data Type	Description
Truth	Returns true.

Remarks

Sequentially creates symbols in the current environment. Each symbol shall replace any extant symbol with the same name in the environment. The taxon shall restrict the type of the symbol. If the default does not match the taxon, a failure shall be triggered.

Example

```
> (fix literal ?person DrWho)
.: true
> ?person
.: DrWho
> (fix integer ?x 1
    float   ?y 2.0
    long    ?z 3n)
.: true
```

Related

-- before tie, --> after tie, constant, dynamic, fix, global, local, set, tie

float

Converts a value to a floating number.

Syntax

(float *value* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A number or the literal minimum or maximum .

Results

Data Type	Description
float	A float number.

Remarks

If the value cannot be converted to a float, the function fails.

Example

```
> (float {a b c})  
. : [Failure :Name ArgumentValue :Text "{a b c} is not a float"]  
  
> (float "a b c")  
. : [Failure :Name ArgumentValue :Text "'a b c' is not a float"]  
  
> (float 500)  
. : 500.0f  
  
> 500.0f  
. : 500.0f  
  
> (float "23.4")  
. : 23.4f
```

Related

[complex](#), [imaginary](#), [integer](#), [long](#), [rational](#), [real](#)

floor

Rounds a number towards negative infinity.

Syntax

(floor *number*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number

Results

Data Type	Description
number	The next lower integer.

Remarks

Returns the next lower positive integer.

Example

```
> (floor 100.5)
.: 100
> (floor -100.5)
.: -101
```

Related

[ceiling](#), [round](#), [truncate](#)

fold

Transforms a sequence into a value.

Syntax

(fold symbol ... in sequence into expression ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	2+	Iteration variables
in	literal	1	The literal in
sequence	sequence	1	A sequence (string or list)
into	literal	1	The literal into
expression	variant	1+	A expression that transforms the iteration variables

Results

Data Type	Description
list	A new list after the transformation is applied

Remarks

The first element of the list is stored in the first symbol and the second element is stored in the second symbol (and so forth), then the expressions are evaluated. The result of the last expression is stored in the first symbol while the next element(s) in the sequence is (or are) stored in the second symbol (and so on). This is repeated until all elements are processed

Example

```
> (fold ?x ?y in {1 2 3 4 5} into (* ?x ?y))
.: 120

> (generator OneToFive (yield 1)(yield 2)(yield 3)(yield 4)(yield 5)(done))
.: OneToFive

> (fold ?i ?j ?k in (OneToFive) into (+ ?i ?j ?k))
.: 15
```

Related

[reduce](#)

folder

Creates or locates a folder in the file system.

Syntax

(folder url)

Module

IO

Parameters

Name	Data Type	Qty	Description
url	url	1	A url to the file.

Results

Data Type	Description
folder	A folder resource.

Remarks

Returns a folder resource.

Example

```
> (let ?path (path "." (separator) "temp"))

.: true

> (there path ?path)

.: false

> (folder path ?path)

.: folder-1

> (there path ?path)

.: true
```

Related

[file](#), [file-p](#), [folder-p](#), [path](#), [read](#), [separator](#), [write](#)

folders

Returns a list of sub folders.

Syntax

(folders option ...)

Module

IO

Parameters

Name	Data Type	Qty	Description
option	expression	1+	A key value pair. One of url <i>url</i> - full url to the file. host <i>host</i> - name of the host computer volume <i>volume</i> - name of the disk volume path <i>path</i> - name of the path to the folder name <i>name</i> - name of the folder

Results

Data Type	Description
list	A list of folders strings in the specified path.

Remarks

If the path is invalid, the function fails. Otherwise, a list of sub folders is returned for the path.

Example

```
>(folders path (path "."))
.: {"build" "META-INF" "WebContent"}
```

Related

erase, file, files, folder, there, path, separator

for

Iterates over the elements in a sequence.

Syntax

(**for** *symbol* ... *binding reversal sequence* ... *expression* ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	An iteration variable
binding	literal	1	The literal in , per , over , or across .
reversal	literal	0-1	The literal reverse .
sequence	sequence	1+	A list or string
expression	variant	0+	The expression(s) to evaluate

Results

Data Type	Description
value	The last value returned on the last iteration.

Remarks

Symbols and sequences are required for **in**, **per**, and **over**. If the binding **in** is specified, each symbol is bound to successive elements of the sequence. If the binding **per** is specified, each element is expected to be a sequence, so that each symbol is bound to sub-elements of each subsequence. If the binding **over** is specified, each symbol is bound to overlapping elements of the sequence. If the binding **across** is specified, each symbol is bound to elements of the corresponding sequence (i.e, first symbol to the first sequence, second to the second, etc.). If there are insufficient elements to bind to the symbols then the function fails. If the literal **reverse** is present, the sequence is traversed in reverse. On each iteration, all the expressions are executed. The return value is the result of the last call evaluated on the last iteration.

Example

```
> (for ?c in reverse "the quick brown fox"  (tell user ?c))

xof nworb xciuq eht.: told

> (for ?key ?value per {{k1 v1}{k2 v2}{k3 v3}}
   (tell user ($ ?key ($$ ?value , (\s)))))

k1 v1, k2 v2, k3 v3, .: told
```

Related

count, do, each, loop, repeat, step, until, while

forever

Repeatedly evaluates expressions until a failure is encountered.

Syntax

(forever *expression ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	An iteration variable
binding	literal	1	The literal in , per , over , or across .
reversal	literal	0-1	The literal reverse .
sequence	sequence	1+	A list or string
expression	variant	0+	The expression(s) to evaluate

Results

Data Type	Description
value	The last value returned on the last iteration.

Remarks

On each iteration, all the expressions are executed. The return value is the result of the last call evaluated on the last iteration.

Example

```
> (forever
  (try  (print ">> " (eval (ask user "* ")))
    learn ?error (print ">> " ?error)))

* hello
>> hello

*
```

Related

count, do, each, loop, repeat, step, until, while

forgo

Removes a dependent module.

Syntax

(forgo *dependency module*)

Module

Base

Parameters

Name	Data Type	Qty	Description
dependency	literal	1	A dependent module.
module	literal	0-1	A module. Default to the module obtained by (use).

Results

Data Type	Description
module	Returns the module.

Remarks

Removes a module from the current module's dependencies list.

Example

```
> (dependencies User)
.: {Premise}

> (extend User (require (module Algebra)))
.: Algebra

> (dependencies User)
.: {Premise Algebra}

> (forgo Algebra User)
.: User

> (dependencies User)
.: {Premise }
```

Related

dependencies, discard, extend, forgo, module, require, grok, use

format

Formats a string.

Syntax

(format template value ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
template	string	1	A format template. which uses the following directives: ~c - formats a number as currency ~e - formats a number as an exponential ~f - formats a floating point number ~g - formats a long number ~n - formats an integer number ~s - formats a string. ~v - formats a generic variant ~~ - formats a single tilde character
value	variant	0+	A value to be formatted.

Results

Data Type	Description
string	A formatted string

Remarks

The formatted result is returned.

Example

```
> (format "~v ~v" hello world)
.: "hello world"
```

Related

\$ concatenate, \$\$ elide, ask, capitalize, char, lowercase, tell, trim, uppercase

fractional

Returns the fractional portion of a number.

Syntax

(fractional *number*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number.

Results

Data Type	Description
number	The fractional portion.

Remarks

The fractional portion is the number minus the floor of the number.

Example

```
> (fractional 300)
.: 0.0
> (fractional 0.564)
.: 0.564
> (fractional -2302.023900)
.: -0.0239
> (fractional 0.003500)
.: 0.0035
```

Related

digit, digits, exponential, sign, significand

free

Releases resources.

Syntax

(free *resources* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
resources	variant	1	A single resource or list of resources.

Results

Data Type	Description
literal	Returns the literal freed if successful.

Remarks

None.

Example

```
> (free
  (tarry (complete
            (do (idle \@s5) something)
            (do (idle \@s5) something-else)
            (do (idle \@s5) one-more-thing)))))

.: freed

> (free
  (cancel (complete
            (do (idle \@s5) something)
            (do (idle \@s5) something-else)
            (do (idle \@s5) one-more-thing)
            mode immediate))

.: freed
```

Related

concurrent, cancel, complete, reclaim, tarry, task, wait

full

True if values are equal or either value is nil.

Syntax

(full *first second* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
first	variant	1	A value to be compared.
second	variant	1	A value to be compared.

Results

Data Type	Description
truth	True if all values are the same or if either is nil

Remarks

Returns true if each value is the same or if either value is **nil**. Both values must be of the same type, and must be numbers, literals, or strings. Short circuits if false. Two items are equivalent if their representation is the same regardless of whether or not they occupy the same location in memory (viz. identical). Return false otherwise.

Example

```
> (full a a)
.: true

> (full "johnny" "ralph")
.: false

> (full 3 nil)
.: true

> (full nil 4)
.: true
```

Related

< less , <= less or equal, > greater, >= greater or equal, /= unequal, identical, left, right

function

Creates a public function in a module.

Syntax

(function *scope name parameters returning expression ...* **)**

parameters ::=
parameters ::= {}
parameters ::= {required ...}
parameters ::= {required ... + optional ...}
parameters ::= {required ... + optional ... % keyword}
parameters ::= {required ... + optional ... % keyword ... & remaining}
parameters ::= {required ... % keyword ... & remaining}
parameters ::= {required ... & remaining}
parameters ::= { + optional ...}
parameters ::= { + optional ... % keyword}
parameters ::= { + optional ... % keyword ... & remaining}
parameters ::= { + optional ... & remaining}
parameters ::= { % keyword ...}
parameters ::= { % keyword ... & remaining}
parameters ::= { & remaining}

Module

Base

Parameters

Name	Data Type	Qty	Description
scope	environment	0-1	An environment. If not supplied, a new one is made.
name	literal	0-1	The name of the function. If not supplied then the name shall follow the pattern fn-<number> .
parameters	list	0-1	A list containing symbols, keywords, sigils, and keyword symbol associations.
returning	expression	0-1	The expression “ returns taxon ”, where taxon is a taxon or meron.
expression	variant	1+	One or more expressions to be evaluated.

Results

Data Type	Description
literal	The name of the function

Remarks

Functions are defined using the **function** intrinsic function. If the name is supplied then the function is a user named function (also called an **exonym**), otherwise it is an automatically named function (called an **esonym**). If a parameter list is supplied then it shall bind the formal parameter symbols to any actual parameter expressions provided. The first symbols in the parameter list are required. If a plus sign is provided, then those symbols following the plus sign are optional. Each optional parameter may have a default value (specified with an equal sign and the value). If no default value is specified, the default value shall be **nil**. If a percent sign is supplied the next symbols are keyword symbols where the supplied slot shall have the same name as the symbol parameter excepting the first character of the name which shall be a colon for the slot and a question mark for the symbol. If an ampersand is provided, then the symbol following it is bound to a list of remaining (variadic) actual parameter values. The entire parameter list may be omitted.

If the literal **returns** follows the (non)extant parameter list then the next literal is either a taxon or a meron. which restricts the result of the function. The function shall be accessible from other modules by prefixing it with the module name in which it was defined.

Example

```
> (function {?n} (+ 1 ?n))
.: fn-1

> (function plusN {?n + ?i = 1} (+ ?n ?i))
.: plusN

> (function (scope) addAll {& ?nums} (apply + ?nums))
.: addAll

> (fn-1 100)
.: 101

> (plusN 100)
.: 101

> (function tryParseNum {String ?s}
  (let ?convertible (convertible-p ?s number))
  {?convertible (if ?convertible (@ (take ?s))))}

> (tryParseNum "foo")
.: {false nil}

> (tryParseNum "123")
.: {true 123}
```

```
> (function dont {{try ?what} + {at ?where = nil}}
  (apply (given {?s}(tell user ?s))
         ($ don't try ?what (unless (any ?where) "" ($ at ?where)))))

.: dont

> (dont try "skydiving into a volcano")

don't try skydiving into a volcano
.: told

> (dont try this at home)

don't try this at home
.: told
```

Related

arguments, call, extend, functions, junction, macro, module, modules, parameters

functions

Returns a list of functions defined in a module.

Syntax

(functions *module*)

Module

Base

Parameters

Name	Data Type	Qty	Description
module	literal	0-1	A module. If not provided defaults to the current module.

Results

Data Type	Description
list	A list of functions defined in the module.

Remarks

The module must be a literal in the list obtained by calling the (**modules**) function. If the module is not provided this function uses the current module (obtained via the (**use**) function).

Example

```
> (module Mine
    (function foo {} bar))

.: Mine

> (functions Mine)

.: {foo}

> (use User)

.: User

> (function hello {} world)

.: hello

> (functions)

.: {hello}
```

Related

function, module, modules, symbols

gather

Returns a sequence of elements that satisfy a predicate.

Syntax

(**gather** *symbol* ... *binding* *sequence* *expression* ... *test*)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	An iteration variable
binding	literal	1	The literal in , per , or over .
sequence	sequence	1	A sequence (string or list)
expression	variant	0+	An expression.
test	truth	1	A truth expression

Results

Data Type	Description
sequence	A sequence containing the elements that satisfy the test.

Remarks

If the binding **in** is specified, each symbol is bound to successive elements of the sequence. If the binding **per** is specified, each element is expected to be a sequence, so that each symbol is bound to sub-elements of each subsequence. If the binding **over** is specified, each symbol is bound to overlapping elements of the sequence. If there are insufficient elements to bind to the symbols then the function fails. The expressions and test are evaluated. If the last value returned is a true truth value, the item is concatenated into a result list, otherwise the item is excluded from the result list. Finally, the result list is returned.

Example

```
> (gather ?n in {-3 -2 -1 0 1 2 3 4} (even-p ?n))  
.: {-2 0 2 4}  
  
> (gather ?x ?y per {{4 2}{7 3}{1 2}{15 5}} (divisible-p ?x ?y))  
.: {{4 2}{15 5}}
```

Related

coalesce, collect, filter

generator

Creates a series generator.

Syntax

(generator *name* *parameters* *expression* ... **)**

parameters ::=
parameters ::= { }
parameters ::= {*required* ... }
parameters ::= {*required* ... + *optional* ... }
parameters ::= { + *optional* ... }
parameters ::= {*required* ... + *optional* ... & *remaining* }
parameters ::= { & *remaining* }

Module

Base

Parameters

Name	Data Type	Qty	Description
name	literal	0-1	The name of the function. If not supplied then the name shall follow the pattern gn-<number>.
parameters	list	0-1	A list containing symbols, keywords, sigils, and keyword symbol associations.
expression	variant	1+	One or more expressions to be evaluated.

Results

Data Type	Description
generator	A function that returns a series.

Remarks

If the name is not supplied then the generator is automatically named (auto-named). If a parameter list is supplied then it shall bind the formal parameter symbols to any actual parameter expressions provided in the call to the generator. The first symbols in the parameter list are required. If a plus sign is provided, then those symbols following are optional. If an asterisk is provided, then keyword and values are expected. Keyword parameters (literal symbol pairs) may be provided as required or optional. If an ampersand is provided, then the symbol following is bound to a list of remaining actual parameter values. The entire parameter list may be omitted.

Example

```
> (generator primeNumbers
  (assume {?primes {}}
    (step ?i from 2 to infinity
      (if (none ?p in ?primes (divisible-p ?i ?p))
        (add ?primes ?i)
        (yield ?i)))))

.: primeNumbers

> (collect ?p in (primeNumbers)
  (if (> ?p 20) (break ?p) else ?p))

.: {2 3 5 7 11 13 17 19 23}

> (let ?series (series (primeNumbers)))

.: true

> (if (next ?series) (this ?series))

.: 2

> (if (next ?series) (this ?series))

.: 3

> (if (next ?series) (this ?series))

.: 5

> (generator {?interrupt}
  (yield 1)
  (yield 2)
  (if ?interrupt (done))
  (yield 3)
  (yield 4)
  (done))

.: gen-1

> (collect ?x in (gen-1 true) ?x)

.: {1 2}

> (collect ?x in (gen-1 false) ?x)

.: {1 2 3 4}

> (gen-1 true)

.: {...}
```

Related

[done](#), [is](#), [next](#), [reset](#), [this](#), [yield](#)

get

Retrieves a value using one or more keys.

Syntax

(**get** *container key ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
container	thing	1	A sequence or assortment.
key	variant	1+	A key or function.

Results

Data Type	Description
value	The value resulting from the retrieval.

Remarks

Consecutively applies the next key to each resultant value. Terminates when all keys are exhausted or when the function fails.

Example

```
> (get (new (relation Box :Length 24 :Width 12 :Height 9)) :Width ++ ++)
.: 14

> (relation Person :Name :Friend)

.: Person

> (assume {?person nil}
  (for ?name in {Jane John Sally Chuck Martha Shane Todd}
    (tie ?person (new Person :Name ?name :Friend ?person)))) 

.: Person_7

> (get Person_7 :Friend :Name)

.: Shane

> (get Person_7 :Friend :Friend :Name)

.: Martha
```

Related

@ *element, deq, enq, get, let, the, with*

given

Creates an anonymous function.

Syntax

(given { *parameter* ... } *expression* ...)

parameter ::= *required* ...
parameters ::= *required* ... + *optional* ...
parameters ::= + *optional* ...
parameters ::= *required* ... + *optional* ... & *remaining*
parameters ::= & *remaining*

Module

Base

Parameters

Name	Data Type	Qty	Description
parameters	list	1	A list containing zero or more parameters and sigils
expression	variant	0+	Expressions to be evaluated.

Results

Data Type	Description
anonym	Returns the anonym the expression represents.

Remarks

An anonym is an anonymous function. An anonym is equivalent to **lambda** in the Lisp programming language, and can be used in most places a function name is required. Anonyms cannot be recursive, since they are unnamed. Continuations may be taken within an anonym. Neither do anonyms use tags that can be reference by a **return**. If no parameters are specified, then each expression is executed in succession and the value of the last expression is returned. If parameters are specified, then arguments must be provided in the invocation. Anonyms are ephemeral because function definitions are not maintained for them.

Example

```
> ((given {?s} (tell user ($ ?s \n))) "Hello, world.")

Hello, world.
.: told

> (map {One Two Three Four Five}
  (given {?x} (tell user ($$ ?x "... \n)))

One...
Two...
Three...
Four...
Five...
.: told

> (filter (range 1 to 40) (given {?n} (and (even-p ?n) (divisible-p ?n 7))))
.: {14 28}
```

Related

[wait](#), [abort](#), [concurrent](#), [await](#), [complete](#), [done-p](#), [reclaim](#), [task](#), [use](#)

global

Creates global symbols.

Syntax

(global *assignment* ... **)**

assignment ::= *symbol* *value*

Module

Base

Parameters

Name	Data Type	Qty	Description
assignment	expression	1+	A symbol value pair.

Results

Data Type	Description
truth	Returns the value true .

Remarks

Creates global symbols.

Example

```
> (global ?START_OF_TASK 1)
.: true

> (global ?FIRST_NAME "Jane"
      ?LAST_NAME "Smith"
)
.: true
```

Related

<-- before tie, --> after tie, constant, dynamic, local, let, modular, put, suppose, swap, undeclare

go

Transfers control to a function.

Syntax

(**go** *function argument ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
function	function	1	A function.
argument	variant	0+	An argument to the function.

Results

Data Type	Description
variant	Returns the result.

Remarks

Transfers control to the specified function by unwinding the current function from the call graph then jumping to the specified function.

Example

```
> (relation Queue   :Items {} :Capacity 100
    !count (given {?me} (# (:Items ?me)))
    !full-p (given {?me} (>= (!count ?me) (:Capacity ?me)))

.: Queue

> (function produce {?q}
  (while (not (!full-p ?q))
    (repeat (random 1 to (- (:Capacity ?q) (!count ?q)))
      (enq ?q :Queue (new Item))))
    (go consume ?q))

.: produce

> (function consume {?q}
  (while (more-p (:Queue ?q))
    (repeat (random 1 to (# (:Queue ?q)))
      (deliver (pop (:Queue ?q))))
    (go produce ?q))

> (produce (new Queue))
```

Related

continuation, continue

grok

Evaluates expressions in a url or file.

Syntax

(**grok** *what*)

Module

Base

Parameters

Name	Data Type	Qty	Description
what	variant	1	A uniform resource locator or file resource.

Results

Data Type	Description
variant	Returns the last expression evaluated.

Remarks

This function opens the url or file, and evaluates each expression therein.

Example

```
> (grok (file name "Module1.pr"))
.: Module1
> (grok (url "file://MyCodeSite.com/Module2.pr"))
.: Module2
```

Related

eval, file, posit, url

group

Combines sublists by position or key.

Syntax

(group *list* **by** *key* ... **into** *symbol* *expression* ...))

Module

Base

Parameters

Name	Data Type	Qty	Description
list	list	1	A list containing sublists or tuples.
by	literal	1	The literal by .
keys	list	1	A list containing either slots, integer positions, or transform functions that return a value given an element of the list.
into	literal	1	The literal into .
symbol	symbol	1	A symbol storing each grouping.
expression	variant	0+	An expression to be evaluated.

Results

Data Type	Description
list	A list of the last expression.

Remarks

Each key is either a numeric position, slot or method name, or a transform function which when applied to a list element shall return a value. If **as** is not provided, then a list of the intermediate groupings is returned. If keyword **as** is provided, then the subsequent expressions shall have the grouping symbol available for evaluation and the final expression is collected into a list.

Example

```
> (group {{1 a b c}{2 b c a}{3 c a b}{4 a b c}{5 b c a}{6 c a b}} by {2 3} into ?g)
.: {{1 a b c}{4 a b c}}{{2 b c a}{5 b c a}}{{3 c a b}{6 c a b}}
> (group
  [[Fruit :Color red :Name cherry][Fruit :Color red :Name apple]
   [Fruit :Color red :Name tomato][Fruit :Color yellow :Name banana]]
  by {:Color} into ?g
  [R :Color (:Color (@ ?g)) :Count (# ?g)])
.: {[R :Color red :Count 3] [R :Color yellow :Count 1]}
```

Related

coalesce, collect, count, gather, given, separate, sort, with

halt

Terminates a cell or bion.

Syntax

(**halt** *compute*)

Module

IO

Parameters

Name	Data Type	Qty	Description
compute	compute	1	A cell or bion.

Results

Data Type	Description
literal	The literal halted .

Remarks

This function starts an asynchronous agent task that processes incomingc messages and performs a default job.

Example

```
> (let ?url (url scheme tcp port 5001))

.: true

> (function reply {?sender ?message} (tell ?sender "OK"))

.: reply

> (function job {& ?args} (tell user ($ 1)) (wait 0.5))

.: job

> (agent ?url reply job)

.: Agent-1

> (start Agent-1) (wait 3) (cancel Agent-1) (free Agent-1)

111111.: cancelled freed
```

Related

bion, cell, free, task

has

True if a key is present in an assortment.

Syntax

(**has** *assortment key*)

Module

Base

Parameters

Name	Data Type	Qty	Description
assortment	assortment	1	A sequence or assortment
key	variant	1	A key.

Results

Data Type	Description
truth	Returns true if the key is present. or false if the key is absent.

Remarks

None

Example

```
> (lexicon :A 1 :B 2 !m X_foo :C 3)
.: Lexicon-1

> (has Lexicon-1 :C)

.: true

> (has Lexicon-1 !m)

.: true

> (has Lexicon-1 !q)

.: false
```

Related

beyond, lacks, within

hash

Computes a hash code.

Syntax

(hash *value option ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value
option	expression	0+	A key value pair size number - a hash table size (default 1000) seed number - a prime number seed.

Results

Data Type	Description
integer	The hash value

Remarks

Returns a hash value between zero and the given size, based on the given prime number seed. The size and seed can be omitted.

Example

```
> (hash {a b c})  
. : 822826764062  
  
> (hash {a b c} size 100)  
. : 62  
  
> (hash {a b c} size 1000 prime 3)  
. : 186
```

Related

[array](#), [collection](#), [lexicon](#)

help

Describes a function.

Syntax

(**help** *function*)

Module

Base

Parameters

Name	Data Type	Qty	Description
function	literal	0-1	The name of a function.

Results

Data Type	Description
nil	Returns nil.

Remarks

Prints the function documentation and returns nil.

Example

```
> (help)

Enter your code followed by a blank line. Type (help), (copyright) or (license)
for information. Type (grok (file "file.pr")) to read a file. Type (bye) to exit.

.: nil

> (help help)

(intrinsic Base.help  {+ ?function} returns NIL ...)

  Returns documentation about a function. If no function is provided, general help
is displayed.

.: nil
```

Related

[about](#), [bye](#), [copyright](#), [license](#)

here

Adds symbols in parallel to the current environment.

Syntax

(**here** *assignment* ...)

assignment ::= *symbol* *value*

Module

Base

Parameters

Name	Data Type	Qty	Description
assignment	expression	1+	A symbol and value pair.

Results

Data Type	Description
truth	Returns true

Remarks

Concurrently creates symbols in the current environment. Each symbol shall replace any extant symbol with the same name in the current environment. Each symbol assignment occurs either in parallel with, or in isolation to, the other symbol assignments.

Example

```
> (assume ?start 1 ?end 100 ?range (range ?start to ?end))  
.: true  
  
> (undeclare {?start ?end ?range})  
.: undeclared  
  
> (here ?start 1 ?end 100 ?range (range ?start to ?end))  
.: [Failure :Name UnboundSymbol :Text "The symbol ?start is unbound"]  
  
> (do (here ?start 1 ?end 100)  
      (step ?i from ?start to ?end (do nothing)))  
.: nothing
```

Related

<-- before tie, --> after tie, assume, constant, dynamic, given, global, local, put

hyperlink

Creates a hyperlink.

Syntax

(**hyperlink** *option ...*)
(**hyperlink** *address*)

Module

IO

Parameters

Name	Data Type	Qty	Description
address	string	0-1	The url address.
option	expression	0+	A key value pair. One of user <i>credentials</i> -user name and password host <i>host</i> - host computer name (default is localhost) port <i>number</i> – a port number. (default is 2001) path <i>path</i> – a path query <i>query</i> – a query element fragment <i>fragment</i> – a fragment element

Results

Data Type	Description
service	A file resource

Remarks

Returns a hyperlink.

Example

```
> (function reply {?target ?request} (tell ?target "goodbye."))

.: reply

> (service (def ?service (hyperlink "http://localhost:4500/foxyy")) reply)

.: Service-1

> (ask ?service "hello")

.: "goodbye."

> (cancel Service-1) (free ?service) (free Service-1)

.: cancelled freed freed
```

Related

close, erase, path, pipe, read, socket, write

id

Returns a resource number.

Syntax

(id *resource* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
resource	resource	1	A resource.

Results

Data Type	Description
variant	The resource number or nil.

Remarks

None

Example

```
> (new (relation Q))

.: Q_1

> (id Q_1)

.: 1

> (id [Q ^ Q_2])

.: 2

> (id file-27)

.: 27

> (id foo)

.: nil
```

Related

thought, id, uid, unique

identical-p

True if all values occupies the same memory location.

Syntax

(identical-p *value value ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	value	2+	Values to be compared.

Results

Data Type	Description
truth	True if all values are identical

Remarks

Returns true if each value is identical to its successor from left to right, and false otherwise. All values must be of the same type, and must occupy the same address in memory. This function short circuits if false.

Example

```
> (identical-p a a a a)  
.: true  
  
> (identical-p a (clone a) a a)  
.: false  
  
> (identical-p "johnny" "ralph" "sam")  
.: false  
  
> (identical-p 3 3)  
.: true  
  
> (identical-p 3 (clone 3))  
.: false
```

Related

< less , <= less or equal, > greater, >= greater or equal, /= unequal, canonify, identity

identity

Returns the value itself.

Syntax

(identity *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	Any value

Results

Data Type	Description
variant	Returns the value.

Remarks

None.

Example

```
> (identity a)
.: a
> (identity {a b c})
.: {a b c}
> (identity (++ 0))
.: 1
```

Related

[canonify](#), [identical-p](#)

idle

Pauses for a specified interval.

Syntax

(idle duration)

Module

Base

Parameters

Name	Data Type	Qty	Description
duration	instant	1	The quantity of time to pause.

Results

Data Type	Description
literal	Returns ready

Remarks

None

Example

```
> (idle \@s10)
.: ready
```

Related

moment, seconds, tick

if

Branched conditional evaluation.

Syntax

(if condition expression ... or-clause ... else-clause)

or-clause ::= **or** condition expression ...

else-clause ::= **else** expression ...

Module

Base

Parameters

Name	Data Type	Qty	Description
condition	truth	1	A truth expression
expression	expression	1+	Any expression
or-clause	expression	0+	The literal or followed by a condition and zero or more expressions.
else-clause	expression	0-1	The literal else followed by one or more expressions

Results

Data Type	Description
variant	The last value of the executed clause or nil if no conditions were true and no else clause was provided.

Remarks

None

Example

```
> (global ?N 100)

.: true

> (if (> ?N 100) over
   or (< ?N 100) under
   else exactly)

.: exactly
```

Related

and, case,either, not, or, unless

imaginary

Converts a value to an imaginary number.

Syntax

(imaginary *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A number or the literal minimum or maximum .

Results

Data Type	Description
integer	An integer number.

Remarks

If the number cannot be converted to an imaginary number, the function fails. If the value is complex, then the imaginary portion is selected.

Example

```
> (imaginary {a b c})  
. : [Failure :Name ArgumentValue :Text "{a b c} is not a number."]  
  
> (imaginary "a b c")  
. : [Failure :Name ArgumentValue :Text "{a b c} is not a number."]  
  
> (imaginary 500)  
. : 500i  
  
> (imaginary 500.1)  
. : 500.1i  
  
> (imaginary "-23.4")  
. : -23.4i
```

Related

[complex](#), [integer](#), [long](#), [rational](#), [real](#)

in

True if a value is in a sequence.

Syntax

(**in** *value sequence option ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value.
sequence	sequence	1	A sequence.
option	expression	0-2	A key value pair. Any of depth <i>number</i> - Number or # (for any depth). Default is 1. transform <i>function</i> - A function to transform the element..

Results

Data Type	Description
truth	Returns true if the value is in the sequence, false otherwise.

Remarks

None.

Example

```
> (in d {a b c d e f g})  
.: true  
  
> (in "a" "cbazyx")  
.: true
```

Related

beyond, includes, excludes, has, out, within

includes

True if a value is in a sequence.

Syntax

(includes *sequence element option ...* **)**

Module

Base

Parameters

None

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.
element	variant	1	A value.
option	expression	0-2	A key value pair. Any of depth <i>number</i> - Number or # (for any depth). Default is 1. transform <i>function</i> - A function to transform the element.

Results

Data Type	Description
truth	True if the item is in the container.

Remarks

If value and sequence are strings, then a string search is performed. If sequence is a list and depth is greater than one, then subsequences shall be checked for the value. A depth of # implies search to any depth.

Example

```
> (includes {a b c d e f g} d)
.: true

> (includes "cbazyx" "w")
.: false

> (includes "cbazyx" 25 transform (given {?c} (++ (- (unicode ?c) (unicode "a")))))
.: true
```

Related

[excludes](#), [in](#), [out](#)

index

Creates an index on slots of a relation.

Syntax

(index *relation slot ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
relation	literal	1	A meron.
slot	literal	1+	The name of a slot in the relation

Results

Data Type	Description
literal	The name of the index

Remarks

Creates an index for the specified slots to expedite value retrieval.

Example

```
> (relation X :A :B :C)
.: X

> (index X :B)
.: X_Index_1

> (index X :A :B)
.: X_Index_2

> (new X :A 1 :B 2)
.: X_1

> (which X ^ as ?x :B 1 list ?x)
.: {X_1}
```

Related

[drop](#), [indices](#), [relation](#)

indices

Returns a list of indices for a relation.

Syntax

(indices *relation* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
relation	relation	1	A relation.

Results

Data Type	Description
list	A list of indices associated with the relation.

Remarks

None.

Example

```
> (relation X :A :B :C)
.: X
> (indices X)
.: {}
> (index X :B)
.: X_Index_1
> (index X :A :B)
.: X_Index_2
> (indices X)
.: {X_Index_1 X_Index_2}
> (drop (indices X))
.: 1
```

Related

[drop](#), [index](#), [relation](#)

infix

Creates a new sequence with interposed delimiters.

Syntax

(infix sequence delimiter)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.
delimiter	variant	1	A value.

Results

Data Type	Description
list	A list with delimiters between the elements

Remarks

A delimiter is placed between each element. If the sequence is a string, the delimiter shall be converted into a string. If the sequence has less than two elements, no changes are made.

Example

```
> (infix {a b c d} * )
.: {a * b * c * d}

> (infix "abcd" " ")
.: "a, b, c, d"

> (infix {} ",")
.: {}

> (infix "" ",")
.: ""
```

Related

\$ concatenate, split

inside

Creates an expression from a sequence or assortment.

Syntax

(inside value)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A sequence, assortment, or expression.

Results

Data Type	Description
expression	returns the contents of the value as an expression.

Remarks

If value is a sequence or assortment then the contents are returned as an expression, otherwise, an empty expression is returned.

Example

```
> (inside {the quick brown fox})
.: the quick brown fox

> (inside {})
.:

> (void-p (inside {}))
.: true

> (inside (lexicon 1 a 2 b 3 c 4 d))
.: 1 a 2 b 3 c 4 d

> (inside (collection 1 2 3 a b c))
.: 1 2 3 a b c
```

Related

& merge, && abridge, expression, is, list

insert

Creates a new sequence by inserting values.

Syntax

(insert *sequence position value ...* **)**

entry ::= value position

entry ::= 384value

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence
position	integer	1	The position to begin inserting the values.
value	variant	1+	A value.

Results

Data Type	Description
sequence	A new sequence.

Remarks

This function creates a new sequence. To modify a sequence use the **push** function.

Example

```
> (insert "abcdef" 1 g)
.: "gabcdef"
> (insert "abcdef" # g)
.: "abcdefg"
> (insert {a b c} 1 d e f)
.: {d e f a b c}
> (insert "abc" 1 d e f)
.: "defabc"
```

Related

size, add, cut, deq, enq, get, key, keys, push, put, values, zap

insort

Inserts a value into a sorted sequence.

Syntax

(insort *sequence* *value* *option ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence
value	value	1	A value
option	expression	0+	A key value pair where the key is comparer function - a function returning <, =, > unique yes no - Allows duplicate values. Default yes .

Results

Data Type	Description
sequence	The new sequence after insertion.

Remarks

Inserts the item in sorted order in the sequence. If the sequence is a list and first element is a number then the list is kept numerically sorted, otherwise it is alphabetically sorted.

Example

```
> (inserir {a b c d e x} q)
.: {a b c d e q x}

> (inserir "abcde" "z")
.: "abcdez"

> (function desc {?x ?y}
  (if (> ?x ?y) < or (= ?x ?y) = else >))

.: desc

> (inserir {108 79 33} 84 comparador desc)
.: {108 84 79 33}
```

Related

[insert](#)

instantiate

Creates an expression with premises in place of thoughts.

Syntax

(instantiate *expression* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
expression	variant	1	A SubThought or a list containing thoughts.

Results

Data Type	Description
list	A list containing premises

Remarks

Replaces thoughts with corresponding premises within the supplied expression.

Example

```
> (relation E :Value)
.: E
> (new E)
.: E_1
> (relation B :Slot)
.: B
> (new B)
.: B_1
> (instantiate {E_1 {:Foo {B_1 x}}})
.: {[E ^ E_1 :Value nil] {:Foo {[B ^ B_1 :Slot nil] x}}}
```

Related

^ thought, get, id, premise

integer

Converts a value to an integer.

Syntax

(integer *value* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A number value or the literal minimum or maximum

Results

Data Type	Description
integer	An integer number.

Remarks

If the value is **minimum** (or **maximum**) the minimum (or maximum) integer is returned; otherwise, if the value cannot be converted to an integer, the function fails. The fractional part of the number is truncated. An integer is a signed 64 bits number.

Example

```
> (integer {a b c})  
.: [Failure :Name ArgumentValue :Text "{a b c} is not a number."]  
  
> (integer "a b c")  
.: [Failure :Name ArgumentValue :Text "'a b c' is not a number."]  
  
> (integer 500.3)  
.: 500  
  
> (integer "23.4")  
.: 23
```

Related

ceiling, complex, floor, is, long, radix, rational, real, round, truncate, unsigned

interleave

Interleaves arguments into a new sequence.

Syntax

(intersection *sequence sequence ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	2+	A sequence

Results

Data Type	Description
sequence	The interleaved sequence.

Remarks

Returns a single sequence interleaving all sequences. If there are insufficient elements, NOTHING is supplied as the element. If the first element is not a sequence, then a list is returned. The sequence type shall be that of the first element.

Example

```
> (interleave {1 2 3} {4 5 6} {7 8 9} {10})  
.: {1 4 7 10 2 5 8 3 6 9}  
  
> (interleave [1 2 3] [4 5 6] [7 8 9] [10])  
.: [1 4 7 10 2 5 8 3 6 9]  
  
> (interleave |1 2 3| |4 5| |6| |7 8 9| |10|)  
.: |1 4 7 10 2 5 8 3 6 9|  
  
> (interleave "abc" "def" "ghi" "j")  
.: "adgjbehcfi"
```

Related

&& abridge, mid, insert, pop, push, swap, transfer

intersection

Creates a sequence of common elements.

Syntax

(intersection *sequence sequence ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	2+	A list or string

Results

Data Type	Description
sequence	A list of common items

Remarks

Returns the intersection of the provided sequences, i.e., the elements common to all sequences.

Example

```
> (intersection {1 2 3 4} {2 3 4 5})
.: {2 3 4}

> (intersection {2 3 4 5} {4 5 6 7})
.: {4 5}

> (intersection {1 2 3 4} {2 3 4 5} {3 4 5 6} {4 5 6 7})
.: {4}

> (intersection "abc" "bcd" "cde")
.: "c"
```

Related

[common](#), [difference](#), [union](#)

intersects-p

True if any elements intersect.

Syntax

(intersects-p *set1* *set2* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
set1	sequence	1	A sequence.
set2	sequence	1	A sequence

Results

Data Type	Description
truth	True if the sets have any elements in common.

Remarks

None.

Example

```
> (intersects-p {a b c d e f g} {a b x})  
. : true  
  
> (intersects-p {a b c d e f g} {a b d})  
. : true  
  
> (intersects-p "the quick brown" "ick bro")  
. : true  
  
> (intersects-p {a b c} {d e f})  
. : false  
  
> (intersects-p {1 2 3} {4 5 6})  
. : false
```

Related

[disjoint-p](#), [subset-p](#)

interval

Creates a time interval.

Syntax

(interval start finish)

Module

Base

Parameters

Name	Data Type	Qty	Description
start	time	0-1	A time value. (Default is neternity)
finish	time	0-1	A time value. (Default is eternity)

Results

Data Type	Description
interval	An interval.

Remarks

If no parameters are provided, start shall default to negative eternity (**neternity**), and finish will default to positive **eternity**. If only start is provided, finish shall default to positive **eternity**. If finish is less than start, the positions shall be swapped so that start is always less than or equal to finish.

Example

```
> (interval 2014-01-01 2015-12-31)
.: \@i{\@d2014-01-01T00:00:00.000 \@d2015-12-31T00:00:00.000}

> (interval \@m2015000000000000)
.: \@i{\@m2015000000000000 eternity}

> (interval \@t63573798191026000 neternity)
.: \@i{neternity \@t63573798191026000}

> (interval)
.: \@i{neternity eternity}

> (interval \@e600  \@e300)
.: \@i{\@e300  \@e600}
```

Related

date, epoch, moment, seconds, tick

into

Creates new thoughts based on existing thoughts.

Syntax

(into relation thoughts)

Module

Base

Parameters

Name	Data Type	Qty	Description
relation	relation	1	A relation .
thoughts	list	1	A list of records.

Results

Data Type	Description
literal	The name of the relation or structure.

Remarks

If the thoughts contain slots that are in the relation, the slot values are copied to new thoughts.

Example

```
> (relation X :A :B :C)
.: X

> (repeat 10
    (new X :A (random 1 to 100) :B (random 50 to 500) :C (random 0 to 1)))
.: X_10

> (into (relation Y uses {X}) (with X))
.: Y

> (which Y)
.: {Y_1 Y_2 Y_3 Y_4 Y_5 Y_6 Y_7 Y_8 Y_9 Y_10}
```

Related

knew, new

invoke

Invokes a call.

Syntax

(invoke *call environment*)

Module

Base

Parameters

Name	Data Type	Qty	Description
call	call	1	A call.
environment	environment	0-1	An environment (defaults to (scope))

Results

Data Type	Description
variant	A value returned by the call.

Remarks

Invokes the call using the provided (or the current) environment.

Example

```
> (relation A
  :Datum 0
  !incr (function {?me}
    (bind ?me :Datum ?n)
    (put ?me :Datum (++ n))))  

.: A  

> (new A)  

.: A_1  

> (invoke (call !incr A_1) (scope))  

.: 1  

> (invoke (call !incr A_1) (scope))  

.: 2  

> (invoke (call @ "hello"))  

.: "h"
```

Related

apply, call, closure, eval, function, macro, scope, supply

is

Applies the predicate to the value returning true or false..

Syntax

(is *value predicate*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value
predicate	literal	0-1	a unary function returning true or false.

Results

Data Type	Description
truth	True if the value is true, or if the applied unary predicate returns true.

Remarks

None.

Example

```
> (is true)
.: true

> (is false)
.: false

> (is 41 even-p)
.: false

> (is 9 (given {?n} (divisible-p ?n 3)))
.: true

> (is foo null-p)
.: false

> (is nil null-p)
.: true
```

Related

convert, datatype, known, the, type

junction

Creates a public function in a module with arguments evaluated in parallel.

Syntax

(junction scope name parameters expression ...)

parameters ::=
parameters ::= {}
parameters ::= {required ... }
parameters ::= {required ... + optional ... }
parameters ::= { + optional ... }
parameters ::= {required ... + optional ... & remaining }
parameters ::= { & remaining }

Module

Base

Parameters

Name	Data Type	Qty	Description
scope	environment	0-1	An environment. If not supplied then a new one is made.
name	literal	0-1	The name of the function. If not supplied then the name shall follow the pattern fn-<number> .
parameters	list	0-1	A list containing symbols, keywords, sigils, and keyword symbol associations.
expression	variant	1+	One or more expressions to be evaluated.

Results

Data Type	Description
literal	The name of the function

Remarks

Junctions are defined using the **junction** intrinsic function. A junction is merely a function that evaluates all its arguments in parallel. A parallel argument evaluation the name is supplied then the function is a user named function (also called an **exonym**), otherwise it is an automatically named function (called an **esonym**). If a parameter list is supplied then it shall bind the formal parameter symbols to any actual parameter expressions provided. The first symbols in the parameter list are required. If a plus sign is provided, then those symbols following the plus sign are optional. Each optional parameter may have a default value (specified with an equal sign and the value). If no default value is specified, the default value shall be **nil**. If an ampersand is provided, then the symbol following it is bound to a list of remaining (variadic) actual parameter values. Keyword parameters (literal symbol pairs) may be provided as required or optional. The entire parameter list may be omitted. The function shall be accessible from other modules by prefixing it with the module name in which it was defined.

Example

```
> (junction {?n} (+ 1 ?n))

.: fn-1

> (junction plusN {?n + ?i = 1} (+ ?n ?i))

.: plusN

> (junction (scope) . addAll {& ?nums} (apply + ?nums))

.: addAll

> (fn-1 100)

.: 101

> (plusN 100)

.: 101

> (junction tryParseNum (String ?s)
  (let ?convertible (convertible-p ?s number))
  {?convertible (if ?convertible (@ (take ?s))))}

> (tryParseNum "foo")

.: {false nil}

> (tryParseNum "123")

.: {true 123}

> (junction dont {{try ?what} + {at ?where = nil}}
  (apply (given {?s} (tell user ?s))
  ($ don't try ?what (unless (any ?where) "" ($ at ?where)))))

.: dont

> (dont try "skydiving into a volcano")

don't try skydiving into a volcano
.: told

> (dont try this at home)

don't try this at home
.: told
```

Related

arguments, call, extend, functions, macro, module, modules, parameters

key

Finds the key for a value in an assortment.

Syntax

(**key** *assortment value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
assortment	assortment	1	An assortment.
value	variant	1	A value

Results

Data Type	Description
variant	The key for the value.

Remarks

If a key does not exist for the value, the function fails. It is advised to test whether the value exists in the assortment by first using the **values** function.

Example

```
> (def ?s (lexicon a 1 b 2 c 3 d 4))
.: Lexicon-1

> (values ?s)
.: {1 2 3 4}

> (keys ?s)
.: {a b c d}

> (key ?s 4)
.: d

> (key ?s 5)
.: [Failure :Name NotFound "The value 5 was not found in the assortment."]
```

Related

@ *element*, position, values

keys

Returns a list of keys for an assortment.

Syntax

(keys *assortment*)

Module

Base

Parameters

Name	Data Type	Qty	Description
assortment	assortment	1	An assortment

Results

Data Type	Description
list	A list of values

Remarks

All keys from the assortment are returned in a list.

Example

```
> (def ?s (lexicon a 1 b 2 c 3 d 4))  
. : Lexicon-1  
> (values ?s)  
. : {1 2 3 4}  
> (keys ?s)  
. : {a b c d}  
> (key ?s 4)  
. : d  
> (key ?s 5)  
. : [Failure :Name NotFound :Text "The value 5 was not in the assortment."]
```

Related

[key](#), [values](#)

keywords

Returns the list of Premise keywords.

Syntax

(keywords)

Module

Base

Parameters

None.

Results

Data Type	Description
truth	True if the value is a keyword.

Remarks

None.

Example

```
> (keywords)
.: {eternity infinity neternity ninfinity unknown}
```

Related

is

knew

Finds or creates a thought.

Syntax

(**knew** *relation criterion ...*)

criterion ::= slot referent

criterion ::= method function

Module

Base

Parameters

Name	Data Type	Qty	Description
relation	relation	1	The name of the relation to find
criterion	expression	0+	A slot referent pair or method function pair.

Results

Data Type	Description
thought	A known or new thought.

Remarks

Looks for an existing thought that matches the criteria and returns the first match. If no thought matches the criteria, a new thought is created using the criteria.

Example

```
> (relation Pairs :A :B)  
.: Idea  
> (knew Pairs :A 1 :B 2)  
.: Pairs_1  
> (knew Pairs :A 1)  
.: Pairs_1  
> (knew Pairs :B 3)  
.: Pairs_2
```

Related

[new](#), [relation](#)

knowledge

Finds or creates a knowledge base.

Syntax

(knowledge *option ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
option	expression	0+	<p>Key value pair. Any of the following</p> <p>name <i>name</i> - A literal to identify the knowledge base.</p> <p><u>Options for constructing a local knowledge base</u></p> <p>path <i>string</i> - the local path (required if constructing).</p> <p>unit <i>literal</i> - either TB, GB, MB (default)</p> <p>size <i>real</i> - the initial knowledge base (default is 5).</p> <p>max <i>real</i> - maximum kb size (default is nil)</p> <p>log <i>real</i> - initial log size. (default is 2).</p> <p>growth <i>real</i> - Resize percentage (default is 10).</p> <p><u>Options for connecting to an existing knowledge base</u></p> <p>connect <i>string</i> - use the specified connection string.</p> <p>poolszie <i>integer</i> - maximum # of connections</p> <p>provider <i>literal</i> - either mssql, odbc, maria, pgsql</p> <p><u>Options for building the connection string from elements.</u></p> <p>driver <i>string</i> - the driver</p> <p>server <i>string</i> - server address</p> <p>version <i>number</i> - server version</p> <p>class <i>class</i> - class name of driver</p> <p>host <i>address</i> - host address</p> <p>port <i>port</i> - server port for database service</p> <p>instance <i>instance</i> - server instance name</p> <p>integratedSecurity <i>truth</i> - true or false</p> <p>database <i>name</i> - database name</p> <p>user <i>username</i> - user name</p> <p>password <i>password</i> - user password</p> <p>trusted <i>yesorno</i> - trusted connection yes or no.</p> <p>source <i>name</i> - data source name</p> <p>protocol <i>protocol</i> - database protocol</p> <p>subprotocol <i>subprotocol</i> - database sub protocol</p> <p>subname <i>subname</i> - sub name</p>

Results

Data Type	Description
literal	The name of the new knowledge base.

Remarks

If **path** is provided, then **name** is required. If **data** is provided then a knowledge base must already exist at the specified data url.

Example

```
> (knowledge provider mssql connect "Data Source=MYHOST\SERVER; Initial Catalog=MyKB; Integrated Security=SSPI;")

.: Knowledge-1

> (knowledge name Mathematics path "c:/premise/kb/" units MB size 2 max 10
   log 1 growth 10)

.: Mathematics
```

Related

attach, conceive, detach, each, eradicate, knew, knowing, new, relation, which, with

known

True if a SubThought pattern matches.

Syntax

(**known** *pattern* ... *option* ...)

pattern ::= [relation clause ...]
clause ::= slot referent
clause ::= slot **is** unary-predicate
clause ::= slot **not** referent
clause ::= slot binary-predicate referent
clause ::= slot n-ary-predicate referent-list
clause ::= method function

Module

Base

Parameters

Name	Data Type	Qty	Description
pattern	expression	0+	A relation clause pattern enclosed in square brackets.
option	expression	0-2	Key value pairs: limit number - maximum number of thoughts to match. scan number - maximum number of thoughts to search.

Results

Data Type	Description
truth	Returns whether any thoughts matched.

Remarks

Looks for existing thoughts matching the criteria.

Example

```
> (relation Pairs :A :B)
.: Pairs

> (new Pairs :A 1 :B 2) (new Pairs :A 3 :B 4) (new Pairs :A 5 :B 2)
.: Pairs_1 Pairs_2 Pairs_3

> (known [Pairs :B 2] limit 1)
.: true
```

Related

knew, new, relation, the, with

lacks

True if a key is absent from an assortment.

Syntax

(**lacks** *assortment* *key*)

Module

Base

Parameters

Name	Data Type	Qty	Description
assortment	assortment	1	An assortment.
key	variant	1	A key.

Results

Data Type	Description
truth	Returns true if the key is absent or false if the key is present.

Remarks

None

Example

```
> (lexicon :A 1 :B 2 !m X_foo :C 3)
.: Lexicon-1

> (lacks Lexicon-1 :C)
.: false

> (lacks Lexicon-1 !m)
.: false

> (lacks Lexicon-1 !q)
.: true
```

Related

beyond, has, within

last

Creates a subsequence of the last elements.

Syntax

(last sequence count)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A list or string
count	number	0-1	The number of elements to return. Default is 1.

Results

Data Type	Description
sequence	The selected sub sequence

Remarks

None

Example

```
> (last {a b c})  
. : {c}  
  
> (last {a b c d e f} 3)  
. : {d e f}  
  
> (last "abcde" 2)  
. : "de"
```

Related

but, rest, top

left

True if values are equal or the second value is nil.

Syntax

(left *first second* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
first	variant	1	A value to be compared.
second	variant	1	A value to be compared.

Results

Data Type	Description
truth	True if all values are the same or if second is nil

Remarks

Returns true if each value is the same or if the second value is **nil**, and false otherwise. Both values must be of the same type, and must be numbers, literals, or strings. Short circuits if false. Two items are equal if their representation is the same regardless of whether or not they occupy the same location in memory (viz. identical). Returns false if both values are false.

Example

```
> (left a a)
.: true

> (left "johnny" "ralph")
.: false

> (left 3 nil)
.: true

> (left nil 4)
.: false
```

Related

< less , <= less or equal, > greater, >= greater or equal, /= unequal, full, identical, right

let

Adds symbols to the current environment.

Syntax

(**let** *manner* *assignment* ...)

assignment ::= *symbol value*

assignment ::= {*symbol* ... } *list*

Module

Base

Parameters

Name	Data Type	Qty	Description
manner	literal	0-1	The manner in which the assignments are performed either the literal parallel or tandem (default if omitted)
assignment	expression	1+	A symbol and value pair.

Results

Data Type	Description
Truth	Returns true.

Remarks

Sequentially creates symbols in the current environment. Each symbol shall replace any extant symbol with the same name in the environment. If **parallel** is specified as the manner, the symbols are defined in parallel, otherwise the symbols are assigned in **tandem** (by default).

Example

```
> (let ?person DrWho)
.: true
> ?person
.: DrWho
> (let parallel ?x 1 ?y 2 ?z 3)
.: true
```

Related

<-- before tie, --> after tie, constant, dynamic, fix, global, local, set, tie

lexemes

Creates an uppercase string with spaces between words.

Syntax

(lexemes *string*)

Module

Base

Parameters

Name	Data Type	Qty	Description
string	string	1	A string to be converted

Results

Data Type	Description
string	A converted string.

Remarks

Converts a string to uppercase with a single space between alphanumeric words. Removes punctuation.

Example

```
> (lexemes "The quick brown fox!! ")  
. : "THE QUICK BROWN FOX"
```

Related

char, format, lexemes, like, lowercase, ngrams, split, trim, unlike, unicode, uppercase

lexicon

Creates a lexicon.

Syntax

(lexicon *association* ... **)**

association ::= *key value*

Module

Base

Parameters

Name	Data Type	Qty	Description
association	expression	0+	A key and a value.

Results

Data Type	Description
lexicon	The newly created lexicon.

Remarks

None.

Example

```
> (lexicon {a b c} "foo 123" bar "bar 456" baz (lexicon))
.: Lexicon-2

> (keys Lexicon-2)
.: {{a b c} bar baz}

> (values Lexicon-2)
.: {"foo 123" "bar 456" Lexicon-1}

> (@ Lexicon-2 {a b c})
.: "foo 123"

> (key Lexicon-2 Lexicon-1)
.: baz
```

Related

[lexicon](#)

lexicons

Creates a list of all lexicons.

Syntax

(lexicons)

Module

Base

Parameters

None.

Results

Data Type	Description
list	Returns a list of lexicons.

Remarks

None.

Example

```
> (lexicons)
.: {}

> (lexicon k1 v1 k2 v2)
.: Lexicon-1

> (lexicons)
.: {Lexicon-1}
```

Related

[lexicon](#)

license

Prints the software license.

Syntax

(license)

Module

Base

Parameters

None

Results

Data Type	Description
nil	nil

Remarks

None.

Example

```
> (license)

Premise Community Edition

Copyright (c) 2013-2020 Michael S. P. Miller. All Rights Reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of the
Community edition of the software and associated documentation files (the
"Software"), to deal in the Software without restriction, including without
limitation the rights to use, copy, modify, merge, publish, distribute, sublicense,
and/or sell copies of the Software, and to permit persons to whom the Software is
furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all
copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED,
INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A
PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT
HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION
OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE
SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

.: nil
```

Related

about, bye, copyright

like

Compares a pattern to a sequence.

Syntax

(**like** *sequence pattern*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A string or list of strings to be compared.
pattern	string	1	A regex pattern.

Results

Data Type	Description
variant	If sequence is a string, then a truth is returned. If sequence is a list, then a list of matches is returned

Remarks

If the sequence is a list, then this function creates a new list containing only those elements matching the pattern. If the sequence is a string, then this function returns true if the pattern matches the candidate, and false otherwise. Standard regular expression matching is used.

Example

```
> (like "abc" "bc")
.: true

> (like "abc" "[xy]")
.: false

> (like {"abc" "def" "xyz" "wxy"} "xy")
.: {"xyz" "wxy"}
```

Related

[unlike](#)

list

Creates a list.

Syntax

(list *value* ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	0+	Any value

Results

Data Type	Description
list	Returns a list containing the values.

Remarks

A list can also be created by simply enclosing the elements with curly braces, {}.

Example

```
> (list a b c {d})  
. : {a b c {d}}  
  
> (list "a b c")  
. : {"a b c"}  
  
> (list 500)  
. : {500}  
  
> (list foo)  
. : {foo}  
  
> {a b c {d}}  
. : {a b c {d}}  
  
> {"a b c"}  
. : {"a b c"}
```

Related

& merge, && abridge, inside, vector

literal

Creates a literal.

Syntax

(literal value)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A string or literal to be converted.

Results

Data Type	Description
literal	A literal.

Remarks

Only strings or literals can be converted to a literal. sequences, numbers and symbols cannot be converted to literals. This function fails if the value cannot be converted.

Example

```
> (literal abc)
.: abc

> (literal 500)
.: [Failure :Name ArgumentValue :Text "Cannot convert '500' to a literal."]

> (literal "500")
.: [Failure :Name ArgumentValue :Text "Cannot convert '500' to a literal."]

> (literal "foo")
.: foo

> (literal (symbol bar))
.: [Failure :Name ArgumentValue :Text "Cannot convert '?bar' to a literal."]
```

Related

is

local

Creates a task level scope.

Syntax

(local *assignments expression ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
assignments	list	1	A list of symbol value pairs
expression	variant	0+	An expression

Results

Data Type	Description
truth	Returns true.

Remarks

The new variables shall shadow any existing variables with the same name.

Example

```
> (function appendToFile {& ?messages}
  (local {?file (file name "myfile.out")})
  (try
    (seek ?file #)
    (for ?s in ?messages (write ?file ?s))
    (close ?file)
    appended)
  learn ?e
  (may (close ?file)) ; suppress further failure
  ?e)))
.: appendToFile
```

Related

-- before tie, --> after tie, constant, dynamic, given, global, only, set

location

Sets a symbol to the current location.

Syntax

(location *symbol*)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1	A symbol to contain the location.

Results

Data Type	Description
variant	The result value.

Remarks

This function saves the present program location in a symbol. A subsequent **resume** call shall reset the location to the one in the symbol for the program control to resume at the location.

Example

```
> (function makeSandwich {?where}
  (tell user "Made a sandwich.\n")
  (proceed ?where set ?sandwich made))

.: makeSandwich

> (function eatSandwich
  (tell user "Ate the sandwich.\n"))

.: eatSandwich

> (do
  (let ?sandwich none)
  (location ?kitchen)
  (if (= ?sandwich made)
    (eatSandwich)
    else
    (makeSandwich ?kitchen)))

Made a sandwich.
Ate the sandwich.
.: told
```

Related

[resume](#), [go](#)

log

Logarithm.

Syntax

(log number base)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
base	number	1	The base.

Results

Data Type	Description
number	The logarithm

Remarks

Returns the logarithm of the number for a base.

Example

```
> (log 100 10)
.: 2

> (log 27 3)
.: 3

> (log 22026.31763368418 (e))
.: 10
```

Related

**** exponentiation**

long

Converts a value to a long number.

Syntax

(long *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A number value or the literal minimum or maximum

Results

Data Type	Description
long	An long number.

Remarks

A long is a signed 128 bit number. If the value is **minimum** (or **maximum**) the minimum (or maximum) monadic is returned; otherwise, if the value cannot be converted to a monadic, the function fails. The fractional part of the number is truncated. The suffix **n** denotes a long number.

Example

```
> (long {a b c})  
.: [Failure :Name ArgumentValue :Text "{a b c} is not a number."]  
  
> (long "a b c")  
.: [Failure :Name ArgumentValue :Text "'a b c' is not a number."]  
  
> (long 500)  
.: 500n  
  
> (long 500.0)  
.: 500n  
  
> (long "23.4")  
.: 23n
```

Related

[big, integer](#)

loop

Repeatedly evaluates expressions.

Syntax

(loop *expression* ... *gate* **)**

gate ::= **repeat** *integer*

gate ::= **until** *truth*

gate ::= **while** *truth*

Module

Base

Parameters

Name	Data Type	Qty	Description
expression	variant	0+	Expressions to be evaluated.
gate	expression	1	the literal while or until followed by a truth expression, or the literal repeat followed by an integer.

Results

Data Type	Description
variant	Returns the value of the last executed expression before the gate.

Remarks

Each expression is executed in succession and the value of the last expression before the gate is returned. This function repeats the expression(s) according to the gate. If **until** is specified, the iteration fails when the condition becomes true. If **while** is specified, the iteration fails when the condition becomes false. If **repeat** and an integer value is specified as the gate, then the iteration repeats for the number of times in the integer value. The gate may be omitted to iterate only once.

Example

```
> (loop (--> ++ ?i) while (< ?i 10))
.: 10

> (loop (--> -- ?i) until (< ?i 1))
.: 0

> (loop (--> ++ ?i) repeat 10)
.: 10
```

Related

wait, abort,, await, complete, done-p, reclaim, use, for, iterate, loop, step, task, until, while

lowercase

Converts a string to lower case.

Syntax

(lowercase *string*)

Module

Base

Parameters

Name	Data Type	Qty	Description
string	string	1	A string

Results

Data Type	Description
string	The lower cased string

Remarks

None

Example

```
> (lowercase "The Quick BROWN fox")
.: "the quick brown fox"
```

Related

capitalize, uppercase

lowercase-p

Returns true if a string's first position is lower case.

Syntax

(**lowercase-p** *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value.

Results

Data Type	Description
truth	Returns true if the first position is lowercase.

Remarks

None

Example

```
> (lowercase-p "the quick brown fox")
.: true
> (lowercase-p "This and that")
.: false
```

Related

letter-p, lowercase-p, uppercase-p, whitespace-p

macro

Creates a macro.

Syntax

(macro *name* *parameters* *expression* ... **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
name	literal	1	A macro name
parameters	list	1	A parameter list
expression	variant	1+	Forms to be evaluated

Results

Data Type	Description
value	The last value in the list of frames

Remarks

A macro is a function whose parameters are unevaluated. To evaluate any of the parameters, the **eval** function must explicitly be called on that parameter.

Example

```
> (macro set2 {?value ?var1 ?var2}
    "puts value into two variables in parallel"
    (eval (` (set , ?var1 , ?value , ?var2 , ?value)))))

.: set2

> (let ?x1 nil ?x2 nil) ?x1 ?x2

.: true nil nil

(set2 (+ 2 2) ?x1 ?x2)

> ?x1 ?x2

.: 4 4
```

Related

[evaluate](#), [function](#), [' quote](#), [` expand](#)

macros

Creates a list of macros defined in a module.

Syntax

(macros *module*)

Module

Base

Parameters

Name	Data Type	Qty	Description
module	literal	0-1	A valid module name. Defaults to the current module.

Results

Data Type	Description
list	A list of macros defined in the module.

Remarks

None.

Example

```
> (macro set2 {?s1 ?s2 ?value}
    (eval (` (set , ?s1 , ?value , ?s2 , ?value))))  
.: set2  
> (macros)  
. : {set2}
```

Related

`expand, 'quote, eval, functions, is, macro

make

Creates a record by creating a relationship if it does not already exist.

Syntax

(**make** *prototype term ...*)

term ::= slot referent

term ::= method function

Module

Base

Parameters

Name	Data Type	Qty	Description
prototype	prototype	1	A relation or structure.
term	expression	0+	A slot and a referent, or method and function.

Results

Data Type	Description
identifier	The identifier of the premise

Remarks

If the prototype is a relation which has an !onNew method defined, the method shall be invoked once during SubThought creation, before the SubThought identifier is returned to the calling function. If the relationship is new, the referents and functions shall serve as defaults for the relationship.

Example

```
> (make Employee :Name "John Smith" :Salary 225000
    !onNew (function Employee_new {?me}
              (tell user ($ Emp - ($$ (:Name ?me),)
                           Pay - (:Salary ?me) \n \n)))))

Emp - John Smith, Pay - 225000
.: Employee_1
```

Related

nix, old, relation, seal, unseal

map

Applies a function to elements across sequences.

Syntax

(map sequence ... function)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1+	A sequence of values
function	variant	1	The name of the function to invoke

Results

Data Type	Description
sequence	The sequence resulting from applying the function to all sequences.

Remarks

Applies the argument to a list containing values and returns the results.

Example

```
> (map {1 2 3} {4 5 6} {7 8 9} +)
.: {12 15 18}

> (map {1 2 3} even-p)
.: {false true false}

> (map {10 20 30} {3 4 5} *)
.: {30 80 150}
```

Related

apply, collect, count, each, filter, fold, gather, group, merge, reduce , scale , separate, sort

max

Finds the maximum element.

Syntax

(max *value* ... **)**

Module

Math

Parameters

Name	Data Type	Qty	Description
value	variant	1+	A sequence, or an atomic value.

Results

Data Type	Description
variant	The largest element in the sequence.

Remarks

Returns the maximum element in a list or expression. If the list or expression is empty, it returns nil. If the only value is a list then all elements within the list are compared, otherwise, all subsequent values are compared.

Example

```
> (max {1 2 3 4 5})  
.: 5  
  
> (max {a b c d e})  
.: e  
  
> (max {})  
.: nil  
  
> (max 1 2 3 4 5)  
.: 5  
  
> (max {1 2 3} 4 {6 3 2})  
.: {6 4 4}
```

Related

[choose](#), [min](#)

maximum

Finds the maximum element.

Syntax

(**maximum** *symbol* ... *binding* *sequence* *expression* ...)

Module

Math

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	A symbol.
binding	literal	0-1	The literal in or per .
sequence	sequence	0-1	A sequence.
expression	expression	1+	any expression involving variables from the pattern(s)

Results

Data Type	Description
variant	The result of applying the max function to the expression for the indicated range.

Remarks

If the binding **in** is specified, each symbol is bound to successive elements of the sequence. If the binding **per** is specified, each element is expected to be a sequence, so that each symbol is bound to subelements of each subsequence. If there are insufficient elements to bind to the symbols then the function fails. The last expression shall be evaluated and the maximum function shall be applied to both that expression and any prior result. The final value is returned.

Example

```
> (maximum ?x in (range 1 to 10) ?x)
.: 10

> (maximum ?x in {1 2 3 4} (** ?x 2))
.: 16

> (maximum ?x ?y per {{a 1}{b 2}{c 3}} ?x)
.: c
```

Related

fold, minimum, product, summation

may

Evaluates an expression while suppressing failures.

Syntax

(**may** *expression*)

Module

Base

Parameters

Name	Data Type	Qty	Description
expression	variant	1	An expression to evaluate.

Results

Data Type	Description
list	Returns a list containing a truth success value, the result, and possible failure.

Remarks

If the expression fails, the result shall be nil.

Example

```
> (may (string x))
.: {true "x" nil}
> (may (integer x))
.: {false nil [Failure :Name TypeConversion :Text "Cannot convert x to Integer"]}
> (let {?success ?result ?error} (may ($ hello world)))
.: true
> ?success ?result ?error
.: true "hello world" nil
```

Related

assert, can, did, ensure, fail, finally, try

median

Finds the middle value of a sequence.

Syntax

(**median** *value* ...)

Module

Math

Parameters

Name	Data Type	Qty	Description
value	variant	1+	A number or list of numbers.

Results

Data Type	Description
number	The median value of all elements.

Remarks

Returns the median. If the list or expression is empty, it returns nil. If the only value is a list then all elements within the list are compared, otherwise, all subsequent values are compared.

Example

```
> (median {1 2 3 4 5})  
. : 3  
  
> (median {})  
. : nil  
  
> (median 1 2 3 4 5)  
. : 3  
  
> (median {1 2 3} 4 {6 3 2})  
. : {4 3 3}
```

Related

[avg](#), [max](#), [median](#), [min](#), [statistics](#), [sigma](#), [sum](#)

meets-p

True if an interval finishes when a second interval starts.

Syntax

(meets-p *interval₁* *interval₂* *tolerance*)

Module

Base

Parameters

Name	Data Type	Qty	Description
interval ₁	interval	1	An interval
interval ₂	interval	1	An interval
tolerance	instant	0-1	Amount of variation. (Defaults to zero ticks).

Results

Data Type	Description
truth	True if interval ₁ finishes when interval ₂ starts.

Remarks

None.

Example

```
> (meets-p  \@i{\@s1 \@s2}  \@i{\@s3 \@s4})  
.: false  
  
> (meets-p  \@i{\@s1 \@s5}  \@i{\@s5 \@s8})  
.: true  
  
> (meets-p  \@i{\@s1 \@s9}  \@i{\@s4 \@s6})  
.: false  
  
> (meets-p  \@i{\@s4 \@s6}  \@i{\@s6 \@s9})  
.: true  
  
> (meets-p  \@i{\@s5 \@s6}  \@i{\@s8 \@s9} \@s2)  
.: true
```

Related

before-p, during-p, finishes-p, overlaps-p, starts-p

meron

Returns the meronomic (i.e., proto) type of a value.

Syntax

(**meron** *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A structure, relation, or premise

Results

Data Type	Description
literal	The meronomic prototype of the relation

Remarks

None

Example

```
> (meron (relation A))
.: A

> (meron (new (structure B :Slot1 :Slot2)))
.: B

> (meron 100)
.: nil

> (meron foo)
.: nil

> (meron (new (relation C uses {A B})))
> C

> (meron [D :Foo 1 :Bar 2])
> D
```

Related

id, is, meronomy,, taxon, taxonomy

meron-p

True if the value is a meron or is of a specific meronomic type.

Syntax

(**meron-p** *value* *meron*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value.
meron	literal	0-1	The name of a meronomic type.

Results

Data Type	Description
truth	True if the value is a meron or is of a specific meronomic type..

Remarks

If the meron parameter is omitted, the function returns true if the value is a meron. Otherwise, the function returns true if the value is of the specified meronomic type. .

Example

```
> (meron-p 500)
.: false

> (relation A :S1 :S2 0) (relation B uses {A} :S3 100)
.: A B

> (meron-p (new A))
.: true

> (meron-p (new B) A)
.: true
```

Related

meron, meronomy, taxon, taxon-p, taxonomy

meronomy

Returns a list of meronomic (i.e., proto) types for a value.

Syntax

(**meronomy** *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value

Results

Data Type	Description
list	The meronomic types used

Remarks

The value must be a premise, prototype, or record , otherwise an empty list is returned

Example

```
> (meronomy 100)
.: {}

> (meronomy donut)
.: {}

> (relation C uses {(relation A) (relation B)})
.: C

> (meronomy (new C))
.: {C A B}

> (meronomy A)
.: {A}
```

Related

taxon,taxonomy, id, is, meron, relation, structure

method

Creates a function within a prototype.

Syntax

(method scope name parameters expression ...)

parameters ::=
parameters ::= {}
parameters ::= {required ... }
parameters ::= {required ... + optional ... }
parameters ::= { + optional ... }
parameters ::= {required ... + optional ... & remaining }
parameters ::= { & remaining }

Module

Base

Parameters

Name	Data Type	Qty	Description
scope	environment	0-1	An environment. If not supplied, a new one is made.
name	literal	0-1	The name of the function. If not supplied then the name shall follow the pattern fn-<number> .
parameters	list	0-1	A list containing symbols, keywords, sigils, and keyword symbol associations.
expression	variant	1+	One or more expressions to be evaluated.

Results

Data Type	Description
literal	The name of the function

Remarks

Methods are defined using the **method** intrinsic function. If the name is supplied then the method is a user named function (also called an **exonym**), otherwise it is an automatically named function (called an **esonym**). If a parameter list is supplied then it shall bind the formal parameter symbols to any actual parameter expressions provided. The first symbols in the parameter list are required. If a plus sign is provided, then those symbols following the plus sign are optional. Each optional parameter may have a default value (specified with an equal sign and the value). If no default value is specified, the default value shall be **nil**. If an ampersand is provided, then the symbol following it is bound to a list of remaining (variadic) actual parameter values. Keyword parameters (literal symbol pairs) may be provided as required or optional. The entire parameter list may be omitted. The function shall be accessible from other modules by prefixing it with the module name in which it was defined. A hidden variant parameter **?me** is supplied as the first parameter to the method function and is available within the method for reading. It may not be updated or changed in the scope of the method.

Example

```
> (relation Context_Items
  :Lexicon
  :Item )

.: Context_Item

> (relation MyLexicon
  :Name
  :Context {}
  !refreshContext
  (method {}
    (let ?me :Name ?lexicon :Context ?context)
    (with Context_Item :Lexicon = ?lexicon :Item as ?Item
      (out ?item ?context)
      do (zap Context_Item :Lexicon ?lexicon :Item ?item)
      (for ?item in ?context
        (knew Context_Item :Lexicon ?lexicon :Item ?item)))))

.: MyLexicon
```

```

> (structure IMonsterTask
  :Name
  !setInfo
  !setRoomTask
  :RoomTask
  !kill )

.:: IMonstertask

> (structure MonsterTask
  uses {IMonsterTask}

  :MonsterInfo (new MonsterInfo)

  !onActivate (method {truth ?cancelled}
    (put ?me :Id (!getPrimaryKey ?me))
    (registerTimer move nil (interval \@s150
\@s9000)))
  )

  !setInfo (method {MonsterInfo ?info}
    (put ?me :MonsterInfo ?info)
    (return done))

  !name (method {} (get ?me :MonsterInfo :Name))

  !setRoomTask (method {RoomTask ?room}
    (if (exists-p (:RoomTask ?me))
      (await (!exit (:RoomTask ?me))))
    (put ?me :RoomTask ?room)
    (!enter (:RoomTask (:MonsterInfo ?me)))))

  !move (method {}
    (if (exist-p (:RoomTask ?me))
      (let ?directions {north south west east}
        ?random (random 0 to 4)
        ?nextRoom (await (!exitTo (:RoomTask ?me)
          (@ ?directions ?random))))
      (if (null-p ?nextRoom) (return nil))
      (await (!exit (:RoomTask ?me) (:MonsterInfo ?me)))
      (await (!enter ?nextRoom (:MonsterInfo ?me)))
      (put ?me :RoomTask ?nextRoom)))

    !kill (method {RoomTask ?room}
      (if (exists-p (:RoomTask ?me))
        (return (on (/= (get ?me :RoomTask :PrimaryKey)
          (get ?room :PrimaryKey))
        (tell User ($ (!name (:MonsterInfo ?me)) snuck away.
          You were too slow!))
        (do (!exit (:RoomTask ?me))
          (tell User ($ (!name (:MonsterInfo ?me)) is dead.))))
        (return (tell User ($ (!name (:MonsterInfo ?me)) is already dead. \n
          You were too slow and someone else got to
          him.))))))

.:: MonsterTask

```

Related

[arguments](#), [call](#), [extend](#), [functions](#), [junction](#), [macro](#), [module](#), [modules](#), [parameters](#)

mid

Copies a subsequence of a sequence.

Syntax

(**mid** *sequence start stop skip*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	sequence
start	number	1	Starting position
stop	expression	1	One of to <i>finish</i> or go <i>count</i>
skip	expression	0-1	Key value pairs by <i>count</i> – skips a number of elements The expression by <i>count</i> default is 1.

Results

Data Type	Description
sequence	The sub-sequence

Remarks

The *end* value must be greater than the *start* value.

Example

```
> (mid {a b c d} 2 to 3)
.: {b c}

> (mid "abcdefg" 4 go 4)
.: "defg"

> (mid "abcdefg" 2 to 4)
.: "bcd"

> (mid "abcdefg" 2 go 3 by 2)
.: "bd"
```

Related

but, last, rest, top

min

Finds the minimum element.

Syntax

(**min** *value* ...)

Module

Math

Parameters

Name	Data Type	Qty	Description
value	variant	1+	An atom or list of atoms.

Results

Data Type	Description
variant	The smallest element in the sequence.

Remarks

Returns the minimum element in a list or expression. If the list or expression is empty, it returns nil. If the only value is a list then all elements within the list are compared, otherwise, all subsequent values are compared.

Example

```
> (min {1 2 3 4 5})  
.: 1  
  
> (min {a b c d e})  
.: a  
  
> (min {})  
.: nil  
  
> (min 1 2 3 4 5)  
.: 1  
  
> (min {1 2 3} 4 {6 3 2})  
.: {1 2 2}
```

Related

choose, max

minimum

Finds the minimum element.

Syntax

(**minimum** *symbol* ... *binding sequence expression* ...)

Module

Math

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	A symbol.
binding	literal	0-1	The literal in or per .
sequence	sequence	0-1	A sequence.
expression	expression	1+	any expression involving variables from the pattern(s)

Results

Data Type	Description
variant	The result of applying the plus function to the expression for the indicated range.

Remarks

If the binding **in** is specified, each symbol is bound to successive elements of the sequence. If the binding **per** is specified, each element is expected to be a sequence, so that each symbol is bound to subelements of each subsequence. If there are insufficient elements to bind to the symbols then the function fails. The last expression shall be evaluated and the minimum function shall be applied to both that expression and any prior result. The final value is returned.

Example

```
> (minimum ?x in (range 1 to 10) ?x)
.: 1

> (minimum ?x in {1 2 3 4} (** ?x 2))
.: 1

> (maximum ?x ?y per {{a 1}{b 2}{c 3}} ?x)
.: a
```

Related

[fold](#), [maximum](#), [minimum](#), [product](#)

missing

True if a value is absent from an assortment.

Syntax

(missing *assortment key*)

Module

Base

Parameters

Name	Data Type	Qty	Description
assortment	assortment	1	An assortment.
value	variant	1	A value.

Results

Data Type	Description
truth	Returns true if the value is absent or false if the value is present.

Remarks

None

Example

```
> (lexicon :A 1 :B 2 !m X_foo :C 3)
.: Lexicon-1

> (missing Lexicon-1 3)
.: false

> (missing Lexicon-1 X_foo)
.: false

> (missing Lexicon-1 elephant)
.: true
```

Related

beyond, has, within

mod

Finds the remainder after division.

Syntax

(mod *dividend modulus*)

Module

Base

Parameters

Name	Data Type	Qty	Description
dividend	variant	1	A number or list of numbers.
modulus	variant	1	A number or list of numbers.

Results

Data Type	Description
variant	the remainder after dividing dividend by divisor as a number or list of remainders.

Remarks

Returns the remainder of the dividend divided by the modulus. Both values must be numbers or lists. If each argument is a list, they must be the same length.

Example

```
> (mod 28 3)
.: 1

> (mod {6 8 9 2} 2)
.: {0 0 1 0}

> (mod 17 {5 6 3 4})
.: {2 5 2 1}

> (mod {12 45 8 17} {5 5 3 7})
.: {2 0 2 3}
```

Related

/ division, * multiplication

modular

Evaluates expressions within a module's scope.

Syntax

(modular *module expression ...* **)**

assignment ::= symbol value expression

Module

Base

Parameters

Name	Data Type	Qty	Description
module	Literal	1	A module name
expression	variant	1+	An expression

Results

Data Type	Description
truth	Returns the value true .

Remarks

Creates module level symbols.

Example

```
> (modular User (let ?START_OF_TASK 1))

.: true

> (modular Business
    (let ?FIRST_NAME Jane
        ?LAST_NAME Smith))

.: true
```

Related

-- before tie, --> after tie, constant, dynamic, local, put, suppose, swap, undefine, use

module

Creates a module.

Syntax

(module *name definition ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
name	literal	1	A module name
definition	expression	0+	A function, macro, or relation definition call

Results

Data Type	Description
literal	The name of the module.

Remarks

Shall create a new module or redefine an existing module. To add definitions to an existing module use the **extend** function. To prohibit new definitions in a module use the **wrap** function. Each module is global, this means that nested module definitions do not concatenate.

Example

```
> (module Algebra
    (function sum ?args (apply + ?args)))

.: Algebra

> (module Outer
    (module Inner
        (function Which {} One) ; the function shall be Inner.Which
    )
)
.: Outer

> (Inner.Which)

.: One
```

Related

dependencies, discard, extend, forgo, modules, require, grok, unwrap, use, wrap

modules

Creates a list of known modules.

Syntax

(modules)

Module

Base

Parameters

None.

Results

Data Type	Description
list	A list of all modules

Remarks

Returns the list of known modules.

Example

```
> (modules)
.: {Apex Base IO KB Math Tasks User}
```

Related

dependencies, discard, extend, forgo, module, require, grok, unwrap, use, wrap

moment

Creates a moment or returns the current moment.

Syntax

(moment *units secs mins hours days year* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
units	number	0-1	Units. Up to three digits for milliseconds.
secs	number	0-1	Two digits: e.g., (seconds / 60) * 100
min	number	0-1	Two digits: e.g., (minutes / 60) * 100
hour	number	0-1	Two digits: e.g., (hour / 24) * 100
days	number	0-1	Three digits e.g. (day of year / 365.25) x 1000
year	variant	0-1	Four digits for year (e.g. 2015, 2017, 2018, 2025)

Results

Data Type	Description
moment	The current moment in nano years

Remarks

If no arguments are supplied, moment returns the current time as a moment, otherwise it attempts to construct a moment from the supplied arguments.

Example

```
> (moment)
.: \@m2018270038501744

> (moment 3000)
.: \@m3000

> (moment 0 0 0 0 0 2020)
.: \@m2020000000000000

> (moment 0 0 0 (time hour part 18) (time days part 182) 2027)
.: \@m2027499030000000
```

Related

[date](#), [epoch](#), [tick](#)

more-p

True if a container contains more than zero elements.

Syntax

(more-p *sequence*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.

Results

Data Type	Description
truth	True if the container contains more than zero elements.

Remarks

None.

Example

```
> (more-p "not empty")
.: true

> (more-p (call pi))
.: true

> (more-p "")
.: false

> (more-p {})
.: false

> (more-p [A])
.: true

> (more-p (expression foo))
.: true
```

Related

[void-p](#)

morph

Applies functions in succession using the arguments.

Syntax

(**morph** *arguments functions*)

Module

Base

Parameters

Name	Data Type	Qty	Description
arguments	list	1	The intial arguments to the last function in the functions list.
functions	list	1	An ordered list of functions to be applied.

Results

Data Type	Description
value	The result of the application of the last function.

Remarks

If the arguments parameter is an empty list, the leftmost function is assumed to be niladic (requiring no arguments). The leftmost function is applied to the arguments parameter list, then the second from leftmost is applied to the result, and so on, until all functions are applied. The final result is returned. The opposite function is **compose**. The **scatter** function applies functions in parallel.

Example

```
> (morph {0} {++ ++ ++ (given {?n} (* ?n 2)))}
.: 6

> (morph {{the quick brown fox jumped over the lazy dogs}}
           {but rest but rest})
.: {brown fox jumped over the}

> (morph {2 3 4} {+ ++ ++ (given {?n} (* ?n 2)))}
.: 22
```

Related

apply, compose, map, scatter

most

True if the predicate is true for more than half of the elements in a sequence.

Syntax

(most *symbol* ... *binding sequence expression* ... *test*)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	An iteration variable
binding	literal	1	The literal in , per , or over .
sequence	sequence	1	A list or string
expression	expression	0+	An expression.
test	truth	1	A truth expression

Results

Data Type	Description
truth	True if more than half the elements satisfies the predicate

Remarks

If the binding **in** is specified, each symbol is bound to successive elements of the sequence. If the binding **per** is specified, each element is expected to be a sequence, so that each symbol is bound to sub-elements of each subsequence. If the binding **over** is specified, each symbol is bound to overlapping elements of the sequence. If there are insufficient elements to bind to the symbols then the function fails. The expressions and test are evaluated.

Example

```
> (most ?n in {1 2 3 4} (= (taxon ?n) number))
.: true

> (most ?m ?n per {{2 1} {3 4} {7 9}} (< ?m ?n))
.: true

> (most ?m ?n over {4 3 2 7} (divisible-p ?m ?n))
.: false
```

Related

every, few, nevery, none, some

move

Moves or renames one or more files.

Syntax

(move *source destination*)

Module

IO

Parameters

Name	Data Type	Qty	Description
source	url	1	The source url
destination	url	1	The destination url

Results

Data Type	Description
list	A possibly empty list of file path strings for each file moved.

Remarks

If the path is invalid, the function fails.

Example

```
> (move (url path "foo.txt") (url path "bar.txt"))
.: {"bar.txt"}
```

Related

[close](#), [mkdir](#), [file](#), [path](#), [write](#)

my

Returns the current cell resource.

Syntax

(my)

Module

Base

Parameters

None.

Results

Data Type	Description
cell	The cell resource for the performing functions.

Remarks

None.

Example

```
> (my)
.: Cell-0
> (get (my) :Self)
.: Task-0
```

Related

premise, self

nall

True if not all relevant knowledge satisfies all the premises.

Syntax

```
(nall premise ... )  
  
premises ::= premise  
premises ::= premise premises  
premises ::= premise premises  
premises ::= premise restriction ... premises  
restriction ::= (predicate value ...)  
premise ::= [category descriptor ... ]  
category ::= type  
category ::= list  
descriptor ::= slot binding  
descriptor ::= slot condition  
binding ::= as symbol  
binding ::= each symbol  
condition ::= slot = value  
condition ::= slot is unary-predicate  
condition ::= slot not value  
condition ::= slot binary-predicate value  
condition ::= slot n-ary-predicate value-list  
condition ::= (predicate value ...)
```

Module

Base

Parameters

Name	Data Type	Qty	Description
premise	variant	1+	A pattern, call, or truth value.

Results

Data Type	Description
truth	True if not all values return true.

Remarks

True if any value is nil. Terminates on the first nil value. If the value is an iterator, then a cursor is created over which the remaining values are tested until truth or falsity is determined.

Example

```
> (nall grapefruit nil apple)  
. : true  
  
> (nall nil nil)  
. : true  
  
> (nall nil)  
. : true  
  
> (nall foo)  
. : false
```

Related

[all](#), [any](#), [no](#)

nand

Negated logical conjunction.

Syntax

(nand *truth* *truth* ... **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	truth	2+	A truth value

Results

Data Type	Description
truth	True if any argument value is false

Remarks

Equivalent to (not (and truth ...)).

Example

```
> (nand true true true false)
.: true
> (nand true true true true)
.: false
```

Related

and, is, nor, not, or, xor

negative-p

True if a number is negative.

Syntax

(negative-p *number*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number

Results

Data Type	Description
truth	True if the number is less than zero.

Remarks

None.

Example

```
> (negative-p 500)
.: false
> (negative-p 0)
.: false
> (negative-p -25)
.: true
```

Related

even-p, odd-p, positive-p, zero-p

nevery

True if the predicate is false for any element in the sequence.

Syntax

(nevery symbol ... binding sequence expression ... test)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	An iteration variable
binding	literal	1	The literal in , per , or over .
sequence	sequence	1	A list or string
expression	expression	0+	An expression.
test	truth	1	A truth expression

Results

Data Type	Description
truth	True if any element does not satisfy the predicate

Remarks

If the binding **in** is specified, each symbol is bound to successive elements of the sequence. If the binding **per** is specified, each element is expected to be a sequence, so that each symbol is bound to sub-elements of each subsequence. If the binding **over** is specified, each symbol is bound to overlapping elements of the sequence. If there are insufficient elements to bind to the symbols then the function fails. The expressions and test are evaluated. If the sequence is empty the function fails.

Example

```
> (nevery ?n in {1 a 3 4} (= (taxon ?n) number))
.: true

> (nevery ?m ?n per {{1 2} {3 4}} (> ?m ?n))
.: true

> (nevery ?m ?n over {4 2 1} (divisible-p ?m ?n))
.: false
```

Related

every, few, most, none, some

new

Creates a record.

Syntax

(**new** *prototype term ...*)

term ::= slot referent

term ::= method function

Module

Base

Parameters

Name	Data Type	Qty	Description
prototype	prototype	1	A relation or structure.
term	expression	0+	A slot and a referent, or method and function.

Results

Data Type	Description
identifier	The identifier of the premise

Remarks

If the prototype is a relation which has an !onNew method defined, the method shall be invoked once during SubThought creation, before the SubThought identifier is returned to the calling function.

Example

```
> (relation Employee :Name :Salary
  !onNew  (function Employee_new {?me}
            (tell user ($ Emp - ($$ (:Name ?me) ,
                           Pay - (:Salary ?me) \n \n)))))

.: Employee

> (new Employee :Name "John Smith" :Salary 225000)

Emp - John Smith, Pay - 225000

.: Employee_1
```

Related

nix, old, relation, seal, unseal

next

Advances a series to the next element.

Syntax

(**next** *series*)

Module

Base

Parameters

Name	Data Type	Qty	Description
series	series	1	A series.

Results

Data Type	Description
truth	Returns true if the next item in the iteration can be accessed.

Remarks

None.

Example

```
> (function walk {?iterable}
  (let ?series (series ?iterable))
  (while (next ?series)
    (tell user ($ Found ($$ (this ?series) .) \n)))
  walked)

.: walk

> (walk {a b c})
Found a.
Found b.
Found c.
.: walked

> (walk (lexicon a 1 b 2 c 3))
Found {a 1}.
Found {b 2}.
Found {c 3}.
.: walked
```

Related

[reset](#), [series](#), [this](#)

ngrams

Creates a list of substrings.

Syntax

(ngrams *string* *length*)

Module

Base

Parameters

Name	Data Type	Qty	Description
string	string	1	A target string
length	integer	0-1	The length of substrings to find. (Default is 3.)

Results

Data Type	Description
list	A list of strings of the specified length

Remarks

Affixes spaces before and after the string, then divides the string into substrings of the specified length.

Example

```
> (ngrams "fox" 3)
.: {" f" " fo" "fox" "ox" "x" }
> (ngrams "fox")
.: {" f" " fo" "fox" "ox" "x" }
> (ngrams "fox" 5)
.: {" f" " fo" "fox" "fox" "fox" "ox" "x" }
```

Related

[lexemes](#), [split](#), [trim](#)

nix

Deletes a prototype.

Syntax

(**nix** *prototype ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
prototype	prototype	1+	A prototype or list of prototypes.

Results

Data Type	Description
expression	Returns the literal nixed and the quantity deleted.

Remarks

Undeclares a prototype. All thoughts of the relation must be reclaimed with the **old** function first, otherwise the function fails.

Example

```
> (new (relation Q))

.: Q_1

> (nix Q)

.: [Failure :Name InvalidOperation :Text "Cannot nix relations having thoughts."]

> (do (with Q ^ as ?q do (old ?q)) (nix Q))

.: nixed 1

> (is Q (given {?r} (more-p (meronomy ?r)))

.: false

> (new (relation P))

.: P_1

> (do (old (with P)) (nix P))

.: nixed 1
```

Related

structure, structures, old, relation, relations, seal, unseal

no

True if no relevant knowledge satisfies all of the premises.

Syntax

```
(no premise ... )  
premises ::= premise  
premises::= premise premise  
premises::= premise premises  
premises::= premise restriction ... premises  
restriction ::= (predicate value ...)  
premise ::= [category descriptor ... ]  
category ::= type  
category ::= list  
descriptor ::= slot binding  
descriptor ::= slot condition  
binding ::= as symbol  
binding ::= each symbol  
condition ::= slot = value  
condition ::= slot is unary-predicate  
condition ::= slot not value  
condition ::= slot binary-predicate value  
condition ::= slot n-ary-predicate value-list  
condition ::= (predicate value ...)
```

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1+	A pattern, call, or truth value.

Results

Data Type	Description
truth	True if all the values are nil.

Remarks

Equivalent to (not (any *premise* ...)). If the value is a pattern or a relationship, then a cursor is created over which the remaining values are tested until truth or falsity is determined. If the value is an iterator, then a cursor is created over which the remaining values are tested until truth or falsity is determined.

Example

```
> (relation Ts :)
... false
> (no nil nil)
... true
```

Related

[all](#), [any](#), [default](#), [null](#)

none

True if the predicate is false for all sequence elements.

Syntax

(**none** *symbol* ... *binding sequence expression* ... *test*)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	An iteration variable
binding	literal	1	The literal in , per , or over .
sequence	sequence	1	A list or string
expression	variant	0+	An expression.
test	truth	1	A truth expression

Results

Data Type	Description
truth	True if every element does not satisfy the predicate

Remarks

If the binding **in** is specified, each symbol is bound to successive elements of the sequence. If the binding **per** is specified, each element is expected to be a sequence, so that each symbol is bound to sub-elements of each subsequence. If the binding **over** is specified, each symbol is bound to overlapping elements of the sequence. If there are insufficient elements to bind to the symbols then the function fails. The expressions and test are evaluated. If the sequence is empty the function fails.

Example

```
> (none ?n in {1 2 3 4} (alphabetic-p ?n))  
.: true  
  
> (none ?m ?n per {{1 2} {3 4}} (< ?m ?n))  
.: true  
  
> (none ?m ?n over {4 2 1} (divisible-p ?m ?n))  
.: false
```

Related

every, few, most, nevery, some

nor

Negated logical disjunction.

Syntax

(**nor** *truth* *truth* ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
truth	truth	1+	A truth value

Results

Data Type	Description
truth	True if all argument values are false

Remarks

Equivalent to (not (or value value ...)).

Example

```
> (nor true true true false)
.: false
> (nor true true true true)
.: false
> (nor false false false false)
.: true
```

Related

and, nand, not, or, xor, xnor

not

True if the value is false, or if the applied unary predicate returns false.

Syntax

(not *value* *predicate*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value
predicate	literal	0-1	A unary predicate

Results

Data Type	Description
truth	True if value is false, or if the applied unary predicate returns false.

Remarks

None.

Example

```
> (not false)
.: true

> (not true)
.: false

> (not 3 even-p)
.: true

> (not 7 (given {?n} (divisible-p ?n 3)))
.: true

> (not foo null-p)
.: true

> (not nil null-p)
.: false
```

Related

convert, datatype, is, known, the, type

nothing

Returns nothing.

Syntax

(**nothing**)

Module

Base

Parameters

None.

Results

Data Type	Description
nothing	A nothing value.

Remarks

None.

Example

```
> (nothing)
.:
> {a (nothing) b (nothing) c}
.: {a b c}
```

Related

ceiling, complex, floor, is, long, radix, rational, real, round, truncate, unsigned

null-p

True if a value is nothing or nil.

Syntax

(null-p *value* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1+	A value

Results

Data Type	Description
truth	True if the values is nothing or nil.

Remarks

None.

Example

```
> (null-p yes)
.: false
> (null-p nil)
.: true
> (null-p (nothing))
.: true
```

Related

[exists-p](#)

odd-p

True if a number is odd.

Syntax

(odd-p *number*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number

Results

Data Type	Description
truth	True if the number is odd.

Remarks

Returns true if the number is not evenly divisible by two.

Example

```
> (odd-p 500)
.: false
> (odd-p 1)
.: true
> (odd-p -33)
.: true
```

Related

even-p, negative-p, positive-p, zero-p

old

Deletes a thought.

Syntax

(**old** *thought*)

Module

Base

Parameters

Name	Data Type	Qty	Description
thought	variant	1	A premise, thought, relation, or list of thoughts.

Results

Data Type	Description
expression	Returns the literal reaped and the number of thoughts deleted.

Remarks

Returns the number of thought identifiers deleted. If the relation has an **!onOld** method defined, then the method is invoked prior to the thought being deleted.

Example

```
> (relation Q)
.: Q

> (new Q)
.: Q_1

> (new Q)
.: Q_2

> (old Q_1)
.: 1

> (old Q)
.: 1

> (nix Q)
.: nixed
```

Related

[structure](#), [new](#), [nix](#), [relation](#)

omit

Creates a new sequence with values omitted.

Syntax

(omit *sequence* *value* ... **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.
value	variant	0+	A value.

Results

Data Type	Description
assortment	The modified assortment

Remarks

A new sequence is constructed. To modify the sequence use the **rip** function.

Example

```
> (omit {a b c d e f g} a b)
.: {c d e f g}

> (omit {a 1 nil b 2 c 3 nil nil d  nil 4} nil)
.: {a 1 b 2 c 3 d 4}
```

Related

[Insert](#), [pop](#), [push](#)

on

Branched conditional evaluation.

Syntax

(on *condition true-case false-case* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
condition	truth	1	A truth expression
true-case	variant	1	An expression to evaluate
false-case	variant	1	An expression to evaluate

Results

Data Type	Description
variant	The last value of the executed expression.

Remarks

Evaluates the condition and either the true case or the false case.

Example

```
> (on (> 101 100)  (tell user "yes")  (tell user "no"))
yes .: told

> (on (< 101 100)  (tell user "yes")  (tell user "no"))
no .: told
```

Related

and, case, if, not, or, unless

only

Creates a restricted scope.

Syntax

(only *symbols expression ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
symbols	list	1	A list of symbols from the enclosing scope
expression	variant	1+	An expression to be evaluated.

Results

Data Type	Description
value	Returns the last value.

Remarks

Creates a new environment shadowing the designated symbols in the encompassing environment and executes each of the expressions, one at a time, returning the result of the last expression. No free variables (i.e., variables not defined inside the scope or not in the variable list) are permitted within the scope. **only** is equivalent to an in-line anonymous function. Changes to the symbols shall not affect the enclosing scope.

Example

```
> (function sample {?b ?c}
  (let ?a 5)
  (tell user ($ given a+b= (+ ?a ?b) \n))
  (tell user ($ given a+b+c= (+ ?a ?b ?c) \n))
  (only {?a ?b}
    (tell user ($ only a+b= (+ ?a ?b) \n))
    (try (tell user ($ only a+b+c= (+ ?a ?b ?c) \n))
      learn ?f (tell user ($ "?c" is not in scope \n)))))

.: sample

> (sample 15 30)

given a+b= 20
given a+b+c= 50
only a+b= 20
?c is not in scope
.: told
```

Related

given, dynamic, local

open

Opens a file or data url.

Syntax

(**open** *url*)

Module

IO

Parameters

Name	Data Type	Qty	Description
url	url	1	A file or data url.

Results

Data Type	Description
url	The opened url.

Remarks

Opens an file.

Example

```
> (def ?file (file name "kwikfox.txt"))

.: File-1

> (open ?file)

.: File-1

> (let ?contents (read ?file #))

.: true

> ?contents

.: "The quick brown fox jumped over the lazy dogs."

> (close ?file)

.: closed
```

Related

[close](#), [data](#), [file](#)

or

Logical disjunction.

Syntax

(or *truth* *truth* ... **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
truth	truth	1+	A truth value

Results

Data Type	Description
truth	True if any argument value is true

Remarks

Short circuits evaluation upon reaching the first true argument.

Example

```
(or false true false false)  
. : true  
(or true true true true)  
: true  
(or false false false false)  
. : false
```

Related

and, is, nand, nor, not, xnor, xor

out

True if a value is absent from a sequence.

Syntax

(out *value sequence option ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value
sequence	sequence	1	A sequence.
option	expression	0-2	A key value pair. Any of depth <i>number</i> - Number or # (for any depth). Default is 1. transform <i>function</i> - A function to transform the element..

Results

Data Type	Description
truth	True if the value is not in the sequence.

Remarks

If value and sequence are strings, then a string search is performed.

Example

```
> (out x {a b c d e f g})  
.: true  
  
> (out "a" "cbazyx")  
.: false
```

Related

includes, excludes, in, occurrences, pick, position

overlaps-p

True if an interval finishes after a second interval starts.

Syntax

(overlaps-p *interval₁* *interval₂* *tolerance*)

Module

Base

Parameters

Name	Data Type	Qty	Description
interval ₁	interval	1	An interval
interval ₂	interval	1	An interval
tolerance	instant	0-1	Amount of variation. (Defaults to zero ticks).

Results

Data Type	Description
truth	True if interval ₁ finishes after interval ₂ starts.

Remarks

None.

Example

```
> (overlaps-p  \@i{\@s1 \@s2}  \@i{\@s3 \@s4})  
.: false  
  
> (overlaps-p  \@i{\@s1 \@s5}  \@i{\@s4 \@s8})  
.: true  
  
> (overlaps-p  \@i{\@s1 \@s9}  \@i{\@s4 \@s6})  
.: false  
  
> (overlaps-p  \@i{\@s4 \@s6}  \@i{\@s5 \@s9})  
.: true  
  
> (overlaps-p  \@i{\@s3 \@s4}  \@i{\@s5 \@s9 \@s2})  
.: true
```

Related

before-p, during-p, finishes-p, meets-p, starts-p

pad

Creates a new padded sequence.

Syntax

(pad sequence length value side)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A string or list
length	number	1	The length of the final sequence
value	variant	1	A value to insert into the sequence
side	literal	0-1	the literal left or right (default).

Results

Data Type	Description
sequence	Creates a new sequence

Remarks

If the sequence is a string, the value must also be a one position string. If the sequence is a list, the value may be any value. To modify a string destructively, use **resize**.

Example

```
> (pad {1 2 3} 10 0)
.: {1 2 3 0 0 0 0 0 0 0}

> (pad "123" 10 "0")
.: "1230000000"

> (pad "123" 10 "0" left)
.: "0000000123"

> (pad {1 2 3} 10 0 left)
.: {0 0 0 0 0 0 1 2 3}
```

Related

[fill](#) , [resize](#)

parameters

Returns a list of parameters for a function, call, or task.

Syntax

(parameters *what* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
what	variant	1	A function, task or call.

Results

Data Type	Description
list	A list of parameters to the function, task or call.

Remarks

Functions are defined using the **function** intrinsic function. If the name is supplied then the function is a user named function (also called an **exonym**), otherwise it is an automatically named function (called an **esonym**). If a parameter list is supplied then it shall bind the formal parameter symbols to any actual parameter expressions provided. The first symbols in the parameter list are required. If a plus sign is provided, then those symbols following the plus sign are optional. Each optional parameter may have a default value (specified with an equal sign and the value). If no default value is specified, the default value shall be **nil**. If an ampersand is provided, then the symbol following it is bound to a list of remaining (variadic) actual parameter values. Keyword parameters (literal symbol pairs) may be provided as required or optional. The entire parameter list may be omitted. The function shall be accessible from other modules by prefixing it with the module name in which it was defined.

Example

```
> (function {?n} (+ 1 ?n))

.: fn-1

> (function plusN {?n + ?i = 1} (+ ?n ?i))

.: plusN

> (function addAll {& ?nums} (apply + ?nums))

.: addAll

> (fn-1 100)

.: 101

> (plusN 100)

.: 101

> (function tryParseNum {?s}
  (let ?convertible (convertible-p ?s number))
  {?convertible (if ?convertible (@ (take ?s))))}

> (tryParseNum "foo")

.: {false nil}

> (tryParseNum "123")

.: {true 123}

> (function dont {{try ?what} + {at ?where = nil}}
  (apply (given {?s}(tell user ?s))
         ($ don't try ?what (unless (any ?where) "" ($ at ?where)))))

.: dont

> (dont try "skydiving into a volcano")

don't try skydiving into a volcano
.: told

> (dont try this at home)

don't try this at home
.: told
```

Related

arguments, call, function, task, parameters

partition

Creates a list of equivalence sets for a pivot element.

Syntax

(**partition** *sequence pivot comparer*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.
pivot	variant	1	An element in the list.
comparer	function	0-1	A comparison function.(Defaults to compare .)

Results

Data Type	Description
list	A list of sublists each containing elements partitioned by a predicate..

Remarks

If no comparer is provided, the function **compare** is used. The element argument is compared to each item in the sequence and three lists are returned, elements that are less, elements that are the same, and elements that are greater. If a comparer function is provided, it must return the literals <, =, > for elements that are less than, equal to, or greater than the pivot element.

Example

```
> (partition (3 5 2 0 5 8 9) 5)
.: {{3 2 0}{5 5}{8 9}}
> (partition "abcdefg" "e")
.: {{"a" "b" "c" "d"} {"e"} {"f" "g"}}
> ((function qksort {?list}
  (if (void-p ?list) {}
    else (let {?less ?same ?more} (partition ?list (pick ?list)))
      (& (qksort ?less) ?same (qksort ?more))))
  (3 5 2 7 5 6 0 8 9))
.: {0 2 3 5 5 6 7 8 9}
```

Related

categorize

path

Concatenates a folder and file name.

Syntax

(**path** *component* ...)

Module

IO

Parameters

Name	Data Type	Qty	Description
component	string	1	A folder, separator, or file name.

Results

Data Type	Description
string	Returns the concatenated folder and file as a string.

Remarks

Returns a properly formatted path combining the folder and file name. The folder may or may not contain a terminating directory separator. The file may or may not contain a leading directory separator.

Example

```
> (path "C:/projects/project1/" (separator) "plan.pdf")
.: "C:/projects/project1/plan.pdf"

> (path "C:/projects/project1/" (file name "plan.pdf"))
.: "C:/projects/project1/plan.pdf"

> (path "C:/projects/project1/" (separator) "plan" (separator file) "pdf")
.: "C:/projects/project1/plan.pdf"
```

Related

file, folder, separator, url

pattern

Creates a pattern containing the supplied expressions.

Syntax

(pattern *expression ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
expression	expression	1+	An expression.

Results

Data Type	Description
premise	A premise

Remarks

Returns an unevaluated pattern.

Example

```
> (pattern Prediction ^ as ?p :Hypothesis as ?h)
.: [Prediction ^ as ?p :Hypothesis as ?h]

> (pattern Hypothesis as ?h :Before as ?b :After as ?a (< ?b ?a))
.: [Hypothesis as ?h :Before as ?b :After as ?a (< ?b ?a)]

> (pattern {Solution_1 Solution_2} as ?s :Timeframe >= ?t)
.: [{Solution_1 Solution_2} as ?s :Timeframe >= ?t]
```

Related

thought, id, premise

pause

Pauses an agent.

Syntax

(**pause** *agent*)

Module

IO

Parameters

Name	Data Type	Qty	Description
agent	agent	1	An agent

Results

Data Type	Description
agent	The agent task.

Remarks

This function pauses an asynchronous agent task that processes incoming messages and performs a default job.

Example

```
> (let ?url (url scheme tcp port 5001))

.: true

> (function reply {?sender ?message} (tell ?sender "OK"))

.: reply

> (function job {& ?args} (tell user ($ 1)) (wait 0.5))

.: job

> (agent ?url reply job) (start Agent-1)

.: Agent-1 Agent-1

> (pause Agent-1) (wait 3) (start Agent-1) (wait 3) (cancel Agent-1) (free Agent-1)

111111..: cancelled freed
```

Related

ask, cancel, listen, pause, perform, start, tell

perform

Invokes a call.

Syntax

(**perform** *environment method instance expression ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
environment	environment	0-1	An environment (defaults to (scope))
method	method	1	The method to be invoked
instance	instance	1	A prototype instance
expression	variant	0+	Additional arguments

Results

Data Type	Description
variant	A value returned by the call.

Remarks

Invokes the method using the provided (or the current) environment.

Example

```
> (relation A
  :Datum 0
  !incr  (method {}
            (let ?me :Datum ?n)
            (put ?me :Datum (++ ?n))))  

.: A  

> (new A)  

.: A_1  

> (perform (scope) !incr A_1)  

.: 1  

> (perform !incr A_1)  

.: 2
```

Related

apply, call, closure, eval, function, macro, method, scope, supply

pi

Returns 3.141592653589793.

Syntax

(**pi**)

Module

Math

Parameters

None

Results

Data Type	Description
real	The value of pi, 3.141592653589793

Remarks

Returns the constant 3.141592653589793

Example

```
> (pi)  
. : 3.141592653589793
```

Related

e

pick

Creates a list of randomly selected elements.

Syntax

(**pick** *sequence quantity*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence of elements
quantity	integer	0-1	The number of items to select. Default is 1.

Results

Data Type	Description
sequence	A sequence containing the selected elements.

Remarks

Returns the specified quantity of randomly-chosen elements from the sequence. The quantity must be a number between 1 and the sequence size.

Example

```
> (function chunk (+ 7 (random -2 to +2)))
.: chunk

> (pick {a b c d e f g h i j k l m n o p q r s t u v w x y z} (chunk))
.: {k j z h q f}

> (pick "abcdefghijklmnopqrstuvwxyz" (chunk))
.: "cfilnsw"
```

Related

[random](#), [shuffle](#)

pipe

Creates a pipe.

Syntax

(**pipe** *option ...*)

Module

IO

Parameters

Name	Data Type	Qty	Description
option	expression	1+	A key value pair. One of host <i>host</i> - name of the host computer port <i>number</i> – a port number. path <i>name</i> - name of the pipe mode <i>mode</i> - either read , write , or readwrite (default). content type - either binary or text (default). address url - url string..

Results

Data Type	Description
io resource	A file resource

Remarks

Creates a pipe for reading or writing.

Example

```
> (let ?pipe (pipe address "pipe://localhost:4500/MyPipe"))

.: true

> (function reply {?target ?message} (tell ?target "goodbye."))
   .: reply

> (service ?pipe reply)
   .: Service-1

> (ask ?pipe "hello")

.: "goodbye."

> (cancel Service-1)  (free ?pipe)  (free Service-1)
   .: cancelled freed freed
```

Related

close, erase, path, read, service, socket, write

pop

Returns the element removed from a sequence.

Syntax

(pop sequence position)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	An assortment or sequence.
position	integer	0-1	A position. (defaults to 1)

Results

Data Type	Description
variant	The removed element

Remarks

If position is omitted the first element of the sequence shall be deleted. The sequences is modified.

Example

```
> (pop {a b c d})  
. : a  
  
> (pop {a b c d} 2)  
. : b  
  
> (pop {a b c d e f g} 7)  
. : g
```

Related

@ *element*, add,bind, cut, deq, enq, get, key, keys, put, #, values, zap

posit

Writes module expressions to a url.

Syntax

(posit *module url*)

Module

Base

Parameters

Name	Data Type	Qty	Description
module	module	1	A module.
url	url	0-1	A url.

Results

Data Type	Description
literal	Returns the literal posited if successful.

Remarks

This function writes all expression in the module to a file named "<module>.pr".

Example

```
> (posit Geometry (folder path "c:/projects/premise/"))

.: posited

> (posit MyModule (url path "//MyServer/Misc/"))

.: posited
```

Related

dependencies, discard, file, folder, forgo, module, modules, require, grok, use, url

position

Finds the position of an element or subsequence within a sequence.

Syntax

(**position** *sequence element option ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	The sequence to search
element	value	1	The item to be located
option	expression	0+	Key value pairs containing any of the following keys: from integer – the beginning position, (default is 1). to integer – a stop position, or # (default) for end of list go direction – forward (default) or backward .

Results

Data Type	Description
variant	The position of the item, or nil if not found.

Remarks

None

Example

```
> (position {a b c d e f g h} f)
.: 6

> (position {a b c d e f g h} {f g h})
.: 6

> (position {a b a} a go backward)
.: 3

> (position {a b a} a go backward from 2)
.: 1

> (position "abcdefg" "cde" from 4)
.: nil
```

Related

@ *element*, gather, in, occurs, pick

positions

Returns positions of an element in a sequence or position value pairs.

Syntax

(positions *sequence* *element* *option ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	The sequence to search
element	value	0	The item to be located
option	expression	0+	Key value pairs containing any of the following keys: from integer – the beginning position, (default is 1). to integer – a stop position, or # (default) for end of list go direction – forward (default) or backward .

Results

Data Type	Description
list	A possibly empty list containing the positions of the element.

Remarks

If element is omitted, the function returns a list containing position value pairs for the sequence.

Example

```
> (positions {a b c d} b)
.: {2}
> (positions {a b c d} x)
.: {}
> (positions {a b c b d b} x)
.: {2 4 6}
> (positions (tuple :X nil :Y nil :Z apple))
.: {{1 :X}{2 nil}{3 :Y}{4 nil}{5 :Z}{6 apple}}
> (positions "abcd")
.: {{1 "a"}{2 "b"}{3 "c"}{4 "d"}}
```

Related

bindings, definitions, entries, position

positive-p

True if a number is greater than zero.

Syntax

(**positive-p** *number*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number

Results

Data Type	Description
truth	True if the number is greater than zero

Remarks

None.

Example

```
> (positive-p 500)
.: true
> (positive-p 0)
.: false
> (positive-p -25)
.: false
```

Related

even-p, negative-p, odd-p, zero-p

premise

Creates a premise representation of a value.

Syntax

(premise *value* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A variant.

Results

Data Type	Description
premise	A premise

Remarks

None.

Example

```
> (premise 1)
.: [Integer :Value 1]
> (premise "The quick brown fox")
.: [String :Value "The quick brown fox" :Size 19]
> (relation Foo :Item)
.: Foo
> (premise (new Foo :Item bar))
.: [Foo ^ Foo_1 :Item bar]
```

Related

id, position, known, new, old, relation, structure, the, with

probability

Calculates the probability over a series.

Syntax

(**probability** *events A operation B*)

Module

Math

Parameters

Name	Data Type	Qty	Description
events	list	1	A list of elements representing events
A	expression	1	A key value pair. One of of event - a list element that predicate - a unary truth function.
operation	literal	0-1	An operation. One of { and , or , given }
B	expression	0-1	A key value pair. One of of event - a list element that predicate - a unary truth function.

Results

Data Type	Description
number	The probability of the supplied expression.

Remarks

Calculates the probability of A in a list, or a conditional probability if B is also provided. The operator may be one of {and, or, given}.

Example

```
> (probability {head tail head tail} of tail)
.: 0.5

> (probability {1 2 3 4 5 6} that even-p and that (given {?n} (< ?n 4)))
.: 0.166666666667

> (probability {1 2 3 4 5 6} that even-p given that (given {?n} (< ?n 4)))
.: 0.083333333333
```

Related

statistics

proceed

Transfers control to a location.

Syntax

(proceed *location* **set** *assignment*)

Module

Base

Parameters

Name	Data Type	Qty	Description
location	location	1	A location resource.
set	literal	0-1	The literal set .
assignment	expression	0+	Symbol value pairs for extant symbols at the location.

Results

Data Type	Description
truth	Returns true.

Remarks

Transfers control to the specified location; then sets the indicated symbols to new values. If the symbols are not defined at the location, an unbound symbol failure occurs.

Example

```
> (function factorial_hps {?n ?k}
  (let ?a 1)
  (location ?m)
  (if (<= ?n 0) (proceed ?k set ?r ?a)
    else (proceed ?m set ?n (* (<-- -- ?n) ?a)))))

.: factorial_hps

> (function factorial {?n}
  (let ?r nil)
  (location ?k)
  (if (any ?r) ?r
    else (factorial_hps ?n ?k)))))

.: factorial

> (factorial 5)

.: 120
```

Related

location, go

product

Multiplies an expression over a range of values.

Syntax

(**product** *symbol*... *binding* *sequence* *expression*...)

Module

Math

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	A symbol.
binding	literal	0-1	The literal in or per .
sequence	sequence	0-1	A sequence.
expression	variant	1+	any expression involving variables from the pattern(s)

Results

Data Type	Description
variant	The result of applying multiplication to the last expression for the indicated range.

Remarks

If the binding **in** is specified, each symbol is bound to successive elements of the sequence. If the binding **per** is specified, each element is expected to be a sequence, so that each symbol is bound to subelements of each subsequence. If there are insufficient elements to bind to the symbols then the function fails. The last expression shall be evaluated and the plus function shall be applied to both that expression and any prior result. The final value is returned.

Example

```
> (product ?x in (range 1 to 10) ?x)
.: 55

> (generator OneToTen {}
  (step ?i from 1 to 10 (yield ?i))
  (done))

.: OneToTen

> (product ?x in (OneToTen) ?x)
.: 55
```

Related

[fold](#), [summation](#)

punctuation-p

True if the first position of a string is punctuation.

Syntax

(**punctuation-p** *string*)

Module

Base

Parameters

Name	Data Type	Qty	Description
string	string	1	A value..

Results

Data Type	Description
truth	Returns true if the first position is punctuation.

Remarks

None

Example

```
> (punctuation-p " the quick brown fox ")
.: false

> (punctuation-p "This and that")
.: false

> (punctuation-p "400 years")
.: false

> (punctuation-p "....")
.: true
```

Related

alphanumeric-p, lowercase-p, uppercase-p, whitespace-p

push

Modifies a sequence by inserting a value.

Syntax

(push *sequence* *value* *position* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence
value	variant	1	The value to be inserted.
position	integer	0-1	The position to insert the value. (Default is 1.)

Results

Data Type	Description
sequence	The modified sequence.

Remarks

If position is omitted the value is prepended to the sequence. If # is used for the position, the value is appended to the sequence. Otherwise, the value is inserted at the indicated position. The sequence itself is modified.

Example

```
> (push {a b c} d)
.: {d a b c}

> (push {a b c} d 2)
.: {a d b c}

> (push "abcdef" g #)
.: "abcdefg"
```

Related

size, add, cut, deq, enq, get, insert, key, keys, put, values, zap

put

Modifies an assortment or sequence by updating values.

Syntax

(**put** *container entry ...*)

entry ::= key value

entry ::= position value

Module

Base

Parameters

Name	Data Type	Qty	Description
container	thing	1	An assortment or sequence.
entry	expression	1+	A key and value pair.

Results

Data Type	Description
thing	Returns the modified assortment or sequence.

Remarks

For assortments, the key(s) to be updated must be present, for sequences, the positions to update must be within the sequence, otherwise the function fails. Keys and positions are added via the **add** function. Positions may be also added using **append**. Use **copy** or **clone** to return a new container. A coordinate is a position list. A list of keys may be provided for an entry as well, in which case the keys are traversed and the value is placed at the last key. To create a new container use **replace**.

Example

```
> (let ?a (lexicon x 1 y 2 z 3) ?s {a b c d e})  
.: true  
> (entries (put ?a y 12 z 13))  
.: {{x 1}{y 12}{z 13}}  
> (put ?s 2 hello 3 goodbye)  
.: {a hello goodbye d e}
```

Related

add, cut, get, has, key, keys, lacks, let, values

qualified

Prepends a module to a function name.

Syntax

(qualified *module* *function*)

Module

Base

Parameters

Name	Data Type	Qty	Description
module	literal	0-1	A module literal.
function	literal	1	A function or macro literal.

Results

Data Type	Description
literal	The fully qualified literal with the module prepended to the function.

Remarks

Returns a fully qualified function literal. If omitted, the first function matching the literal is returned.

Example

```
> (module Math
    (function sum {& ?args} (apply + ?args)))

.: Math

> (qualified sum)

.: User.sum

> (qualified Math sum)

.: Math.sum

> (require Math)

.: Math

> (qualified sum)

.: Math.sum
```

Related

functions, modules, qualifier, unqualified

qualifiers

Creates a list of modules associated with an identifier.

Syntax

(qualifiers *identifier*)

Module

Base

Parameters

Name	Data Type	Qty	Description
identifier	identifier	1	An identifier

Results

Data Type	Description
list	The modules associated with the literal.

Remarks

Checks the function against known modules and returns the modules in which the function is defined.

Example

```
> (qualifiers sum)
.: {}

> (module Math
    (function sum ?args (apply + ?args)))
.: Math

> (use User)
.: User

> (require Math)
.: Math

> (qualifiers sum)
.: {Math}
```

Related

functions, modules, qualified, unqualified

quantify

Returns a quantifier for elements satisfying a test.

Syntax

(**quantify** *sequence predicate option ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence
predicate	function	1	A truth expression
option	expression	0+	A key value pair. One of as <i>format</i> - either the literal word (default) or percent .

Results

Data Type	Description
variant	Returns a percentage or the words none , few , half , most , all .

Remarks

None.

Example

```
> (quantify {1 2 3 -4 5 6 7 8 9 10} (given {?n} (< ?n 0)))  
.: few  
  
> (quantify {1 2 3 4 5 6 7 8 9 10} number-p as percent)  
.: 1.0  
  
> (quantify {1 2 3 4 5 6 7 8 9 10} odd-p)  
.: half  
  
> (quantify {1 2 3 4 5 6 7 8 9 10} negative-p)  
.: none  
  
> (quantify {1 2 3 5 6 7 8 9} odd-p)  
.: most
```

Related

coalesce, collect, exactly, filter, gather, quantity

quantity

Returns the number of elements satisfying a test.

Syntax

(quantity symbol ... binding sequence expression ... test)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	An iteration variable
binding	literal	1	The literal in , per .
sequence	sequence	1	A sequence (string or list)
expression	expression	0+	An expression.
test	truth	1	A truth expression

Results

Data Type	Description
number	Returns the number of elements satisfying the test.

Remarks

None.

Example

```
> (quantity ?n in {1 2 3 4 5 6 7 8 9 10}
   (is ?n (given {?x} (= (taxon ?x) number))))  

.: 10  

> (summation ?n in {1 2 3 4 5 6 7 8 9 10} (bracket (odd-p ?n)))  

.: 5  

> (quantity ?n in {1 2 3 4 5 6 7 8 9 10} (odd-p ?n))  

.: 5  

> (quantity ?n in {1 2 3 4 5 6 7 8 9 10} (negative-p ?n))  

.: 0
```

Related

coalesce, collect, exactly, filter, gather, quantify

radians

Converts degrees to radians.

Syntax

(radians *degrees*)

Module

Math

Parameters

Name	Data Type	Qty	Description
degrees	number	1	a number in degrees.

Results

Data Type	Description
number	Number of radians.

Remarks

For the conversion the degrees are multiplied by $\pi / 180$, or roughly 0.0174532922222222.

Example

```
> (radians 200)
.: 3.490658444444444
> (radians 120)
.: 2.0943950666666667
> (radians 45)
.: 0.7864815
```

Related

cosine, degrees, sine, tangent

radix

Converts a number to a base.

Syntax

(**radix** *number base*)

Module

Base

Parameters

Name	Data Type	Qty	Description
number	number	1	An integer or unsigned number to convert
base	integer	0-1	A number between 2 and 36. (default is 10)

Results

Data Type	Description
number	The number converted to the base as as an integer or long.

Remarks

None.

Example

```
> (radix 15 8)
.: #08r17

> (radix (unsigned 89975) 16)
.: #16r15F77

> (radix #x15F77)
.: #10r89975

> (radix #d10 10)
.: #10r10

> (radix (integer 2.003) 2)
.: #02r10
```

Related

complex, float, imaginary, integer, long, real, unsigned

random

Creates a random number.

Syntax

(random lower to upper precision)

Module

Math

Parameters

Name	Data Type	Qty	Description
lower	number	1	A lower bound
to	literal	1	The literal to
upper	number	1	An upper bound
precision	literal	0-1	Either integer (default), real or float

Results

Data Type	Description
number	A random number.

Remarks

If the precision is omitted the default precision is **integer**. If precision is omitted and the bounds are zero and one, then the default precision is **real**. If the precision is supplied, then it is used.

Example

```
> (random 0 to 1)
.: 0.325377881526947

> (random 0 to 1 float)
.: 0.8128264546394348216582

> (random 0 to 100)
.: 63

> (random 1000 to 2000 real)
.: 1194.230922829
```

Related

[pick](#), [shuffle](#)

range

Creates a list of numbers.

Syntax

(range first to last by increment)

Module

Math

Parameters

Name	Data Type	Qty	Description
first	number	1	The initial value of the variable
limit	literal	1	The literal to , above , below or go . (default is to).
last	number	1	The final value of the variable
by	literal	0-1	by
increment	number	0-1	The positive or negative increment for the variable

Results

Data Type	Description
list	A list containing the numbers in the range.

Remarks

If **to** is specified, the last number is included in the iteration. If **below** is specified the *last* value is excluded from the iteration. If **above** is specified the next number above the *last* value is included in the iteration. If **go** is specified, then the *last* value specifies the number of iterations.

Example

```
> (range 1 to 5)
.: {1 2 3 4 5}

> (range 1 to 10 by 2)
.: {1 3 5 7 9}

> > (range 100 go 5)
.: {100 101 102 103 104 105}
```

Related

[for](#), [step](#)

rational

Converts values to a rational number.

Syntax

(rational numerator denominator)

Module

Base

Parameters

Name	Data Type	Qty	Description
numerator	variant	1	An integer or the literal minimum or maximum .
denominator	variant	0-1	A non-zero integer.(Default is 1.)

Results

Data Type	Description
number	A rational number.

Remarks

All integers are rational numbers with a denominator of 1. If a non-zero denominator is supplied, it must be an integer. If a denominator is not supplied, then an attempt is made to convert the value to a rational number.

Example

```
> (rational {a b c})  
. : [Failure :Name ArgumentValue :Text "{a b c} is not number"]  
  
> (rational "a b c")  
. : [Failure :Name ArgumentValue :Text "'a b c' is not number"]  
  
> (rational 500)  
. : 500/1  
  
> (rational 500.0)  
. : 500/1  
  
> (rational "23.4")  
. : 234/10
```

Related

complex, float, imaginary, integer, is, real

read

Creates a string or stream.

Syntax

(read *file count bits*)

Module

IO

Parameters

Name	Data Type	Qty	Description
file	resource	1	An file, or pipe.
count	variant	0-1	The number of bytes to read, the literal all , or the literal line . (Default is all.)
bits	integer	0-1	If count is provided, then this represents the size of the character in bits. Either 7, 8, 16, or 32. (Default is 8.)

Results

Data Type	Description
variant	A string, stream, or the value nothing (if at end of file).

Remarks

If the literal **all** is provided for count, the entire file (or stream) is read. If **line** is provided, one line is read (up to the newline character). If count is omitted, then the entire file read.

Example

```
> (global ?File (file name "test.txt" seek 1 erase yes)) ; open at BOF
.: true
> (seek ?File 1)
.: File-1
> (read ?File all)
.: "Hello, world."
> (close ?File)
.: closed
```

Related

bytes, close, take, peek, peep, file, seek, write

ready-p

True if a task has completed.

Syntax

(ready-p task)

Module

Tasks

Parameters

Name	Data Type	Qty	Description
task	task	1	A task resource.

Results

Data Type	Description
truth	True if the task has completed

Remarks

Returns true if the task has completed, false otherwise.

Example

```
> (let ?task (concurrent (@ (concurrent (idle \@s100)))))

.: true

> (do (idle \@s20)
      (if (ready-p ?task)
          (free ?task)
          else
          running))

.: running
```

Related

[wait](#), [abort](#), [await](#), [busy-p](#), [cancel](#), [cancelled-p](#), [complete](#), [reclaim](#), [tarry](#), [task](#)

real

Converts a value to a real number.

Syntax

(real *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A number or the literal minimum or maximum .

Results

Data Type	Description
number	A real number.

Remarks

If the value cannot be converted to a real number, the function fails.

Example

```
> (real {a b c})  
. : [Failure :Name ArgumentValue :Text "{a b c} is not number"]  
  
> (real "a b c")  
. : [Failure :Name ArgumentValue :Text "'a b c' is not number"]  
  
> (real 500)  
. : 500.0  
  
> (real 500.0)  
. : 500.0  
  
> (real "23.4")  
. : 23.4
```

Related

complex, float, imaginary, integer, long, rational

reasoning

Resumes or pauses asynchronous rule execution.

Syntax

(**reasoning** *toggle*)

Module

Base

Parameters

Name	Data Type	Qty	Description
toggle	literal	0-1	The value on or off . Default is on if not supplied.

Results

Data Type	Description
truth	Returns true if rule execution is on.

Remarks

If *toggle* is provided, rule execution is resumed (for **on**) or paused (for **off**).

Example

```
> (relation Car :Age :Condition)
.: Car

> (rule
  when [Car :Age /= old :Condition = good]
  do   (tell user ($ ($$ \n that) is possible. \n)))
.: Rule-1

> (new Car :Age new :Condition good)
.: Car_1

> (reasoning)

.: true
that is possible.

> (reasoning off)

.: false
```

Related

is, rule, rules

reclaim

Performs garbage collection.

Syntax

(reclaim)

Module

Base

Parameters

None.

Results

Data Type	Description
literal	Returns the literal reclaimed when completed.

Remarks

None.

Example

```
> (reclaim)
.: reclaimed
```

Related

[free](#)

reduce

Converts a sequence into a value.

Syntax

(reduce *sequence function*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence
function	function	1	A function.

Results

Data Type	Description
value	The return value of the function applied to all the items in succession.

Remarks

Applies the binary function to each item of a list and returns the final value.

Example

```
(reduce {1 2 3 4 5} *)
.: 120

(reduce {1 2 3 4 5} +)
.: 15

(reduce {3 2 1} **)
.: 9
```

Related

[fold](#)

relation

Creates a relation.

Syntax

(relation *name inclusion ... definition ...* **)**

inclusion ::= uses {prototype ... }

definition ::= slot

definition ::= slot default-value

definition ::= method function

Module

Base

Parameters

Name	Data Type	Qty	Description
name	literal	1	The name of the relation
inclusion	expression	0+	A inclusion expression
definition	expression	0+	A slot definition expression

Results

Data Type	Description
literal	The name of the defined relation

Remarks

Relations are assortment prototypes that represent persistent relationships among one or more values. A relation is comprised of a name, attributes (collectively called slots) with optional default values, and methods. Relations are defined using the **relation** function. A SubThought is a relation record created using the **new** function. A relation must be defined before a SubThought can be formed. Any number of slots or methods can be specified, and default values may also be defined. A sealed relation cannot create new thoughts.

Example

```
> (relation Employee
  :Salary
  :Name
  :Supervisor
  :Reclaim    false
  !SalaryYTD  Employee_salaryYTD
)

.: Employee

> (new Employee :Name "Jane Dough" :Salary 2000000.00)
.: Employee_1
```

```
> (premise Employee_1)
. : [Employee ^ Employee_1 :Salary 2000000.0 :Name "Jane Dough" :Supervisor nil
     :Recalim false !SalaryYTD Employee_salaryYTD]
```

Related

[new](#), [nix](#), [old](#), [relation-p](#), [relations](#), [seal](#), [structure](#), [structures](#), [unseal](#)

relations

Returns a list of defined relations.

Syntax

(relations)

Module

Base

Parameters

None

Results

Data Type	Description
list	Returns a list of all defined relations.

Remarks

None

Example

```
> (relation Animal
  :Phylum :Class :Order :Family :Genus :Species :Color :Weight :Height
  )

.: Animal

> (relations)

.: {Animal}

> (nix Animal)

.: nixed

> (relations)

.: {}
```

Related

structures, structure, new, nix, old, relation,

release

Releases locks on critical sections.

Syntax

(**release** *locks*)

Module

Base

Parameters

Name	Data Type	Qty	Description
locks	list	1	A list of literals denoting critical section locks.

Results

Data Type	Description
literal	Returns the literal released if successful.

Remarks

Forces the release of critical section locks.

Example

```
> (function pp {+ ?a ?b ?c ?d}
  (critical {A B} (tell user ($ ?a ?b)))
  (critical {C D} (tell user ($ \s ?c ?d \n))))  
  
. : pp  
  
> (free      (complete (critical {A B C D} (idle \@s30)))
  (do (idle 5)
      (release {A B C D})
      (tarry   (complete
                  (pp the quick brown fox)
                  (pp jumped over lazy dogs)
                  (pp four score and seven)))))  
  
the quick jumped over brown fox
four score lazy dogs
and seven
.: freed
```

Related

[critical](#)

remove

Creates a new assortment by removing values.

Syntax

(**remove** *assortment* *value* ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
assortment	assortment	1	An assortment.
value	variant	1+	A value.

Results

Data Type	Description
assortment	The new assortment.

Remarks

To remove elements destructively use the **rip** function.

Example

```
> (entries (collection a b c d))
.: {{a a} {b b} {c c} {d d}}
> (entries (remove (lexicon a 1 b 2 c 3 d 4) 2 4))
.: {{a 1}{c 3}}
```

Related

[add](#), [combine](#), [cut](#), [rip](#)

repeat

Loops a specified number of times.

Syntax

(repeat count expression ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
count	variant	1	The number of iterations.
expression	expression	0+	A call to be evaluated.

Results

Data Type	Description
variant	returns the last expression on the last iteration.

Remarks

Repeats the expression(s) the specified number of times. An implicit counter from 0 to the designated count. Count may be an integer or long value.

Example

```
> (global ?i 0)
.: true
> (repeat 10 (--> ++ ?i))
.: 10
> (repeat 10 (--> -- ?i))
.: 0
> (repeat 1000 (--> ++ ?i))
.: 1000
> ?i
.: 1000
```

Related

do, for, loop, step, until, while

replace

Creates a new assortment or sequence by updating values.

Syntax

(replace *container entries option* **)**

entry ::= key value

entry ::= position value

Module

Base

Parameters

Name	Data Type	Qty	Description
container	thing	1	An assortment or sequence.
entries	variant	1+	A list of key value pairs or index value pairs, or a lexicon.
options	expression	0-1	

Results

Data Type	Description
thing	Returns the modified assortment or sequence.

Remarks

For assortments, the key(s) to be updated must be present, for sequences, the indices to update must be within the sequence, otherwise the function fails. Keys and positions are added via the **add** function. Positions may be also added using **append**. Use **copy** or **clone** to return a new container. A coordinate is a position list. A list of keys may be provided for an entry as well, in which case the keys are traversed and the value is placed at the last key.

Example

```
> (let ?a (lexicon x 1 y 2 z 3) ?s {a b c d e})  
. : true  
  
> (entries (replace ?a {{y 12}{z 13}}))  
. : {{x 1}{y 12}{z 13}}  
  
> (replace ?s {{2 hello}{3 goodbye}} by index)  
. : {a hello goodbye d e}
```

Related

add, cut, get, has, key, keys, lacks, let, values

require

Retrieves an absent module.

Syntax

(**require** *module* **as** *moniker* **from** *url* ... *options* ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
module	literal	1	The name of the required module
as	literal	0-1	The literal as .
moniker	literal	0-1	A literal.
from	literal	0-1	The literal from .
url	url	0+	URLs from which to retrieve the module.
options	expression	0+	Any of the following update choice where choice is yes or no .

Results

Data Type	Description
literal	The module

Remarks

Allows the current module to access functions in the specified module using a moniker. The **from** URLs shall be evaluated if the module is either not present or if the update option is **yes**. Grok is applied to the urls in succession until one url is available to be read. s

Example

```
> (mySum 1 2 3)
.: [Failure :Name NotFound :Text "The function mySum isn't found"]
> (require MyMath as m from (file "lib/mymath.pr"))
.: MyMath
> (mySum 1 2 3) (m.mySum 1 2 3)
.: 6 6
```

Related

dependencies, discard, extend, forgo, module, modules, run, use

reset

Resets a series for reuse.

Syntax

(reset *series*)

Module

Base

Parameters

Name	Data Type	Qty	Description
series	series	1	A series.

Results

Data Type	Description
series	Returns the series.

Remarks

After the series is reset, the **next** function must be used to move the series to the first element.

Example

```
> (global ?Series (series {a b c}))  
. : true  
  
> (while (next ?Series) (tell user ($$ (this ?Series) ,) ($)))  
a, b, c, . : told  
  
> (reset ?Series)  
. : Series-1  
  
> (this ?Series)  
. : [Failure :Name OutOfRange :Text "Must advance series to the first element."]  
  
> (next ?Series)  
. : true  
  
> (this ?Series)  
. : a
```

Related

[next](#), [series](#), [this](#)

resignal

Resignals a failure.

Syntax

(resignal *tuple*)

Module

Base

Parameters

Name	Data Type	Qty	Description
tuple	tuple	1	The tuple to be propagated.

Results

Data Type	Description
tuple	Failure information.

Remarks

This function resignals a failure. To create a failure use the **signal** function.

Example

```
> (if (void-p {}) (signal Failure :Name BadArg :Text "Argument was empty") else
success)

.: [Failure :Name BadArg :Text "Argument was empty"]

> (try
  (try
    (signal Failure :Name User :Text "A big problem")
  learn ?e
    (tell user ($ Caught ?e \n))
    (tell user ($ Rethrowing... \n))
    (resignal ?e))
  learn ?f
    (tell user ($ Caught ?f again. \n))
  done)

Caught [Failure :Name User :Text "A big problem"]
Rethrowing...
Caught [Failure :Name User :Text "A big problem"] again
.: done
```

Related

[assert](#), [ensure](#), [fail](#), [try](#)

resize

Modifies the length of a sequence.

Syntax

(resize *sequence length default*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.
length	integer	1	The length of the final sequence
default	variant	0-1	A value to fill the sequence (default is nil or space).

Results

Data Type	Description
list	Returns a the modified list.

Remarks

If the sequence is a string, the default value must be a single position string (space if unspecified). If the sequence is a list, the default value may be any value (**nil** if unspecified).

Example

```
> (let ?s (array 3 of 0))  
.: true  
  
> (fix ?s 1 1 2 2 3 3)  
.: {1 2 3}  
  
> (resize ?s 10 0)  
.: {1 2 3 0 0 0 0 0 0 0}  
  
> (resize ?s 2 0)  
.: {1 2}
```

Related

[array](#), [fill](#) , [pad](#)

rest

Creates a subsequence of all except the first elements.

Syntax

(**rest** *sequence* *skip*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A list or string
skip	number	0-1	The number of elements to skip. Default is 1

Results

Data Type	Description
sequence	The sequence without the skipped elements.

Remarks

None

Example

```
> (rest {a b c d e})  
. : {b c d e}  
  
> (rest "abcdefg")  
. : "bcdefg"  
  
> (rest "abcdefg" 2)  
. : "cdefg"  
  
> (rest {a b c d e} 3)  
. : {d e}  
  
> (rest {a b c d e} 5)  
. : {}
```

Related

but, last, top

retract

Eliminates rules.

Syntax

(retract *rules*)

Module

Base

Parameters

Name	Data Type	Qty	Description
rules	variant	1	A single rule resource or a list of rule resources.

Results

Data Type	Description
literal	The literal retracted

Remarks

None.

Example

```
> (relation Fact :Number)
  .: Fact

> (rule
    when [Fact :Number as ?n]
      (no [Fact ^ as ?f (= (:Number ?f) (++ ?n))]
      do  (knew Fact :Number (++ ?n)))

  .: Rule-1

> (rule CleanUp when [Fact ^ as ?fact] do (old ?fact))
  .: CleanUp

> (rules)
  .: {CleanUp Rule-1}

> (retract (rules))
  .:retracted

> (rules)
  .: {}
```

Related

wait, abort, await, task, complete, busy-p, ready,-p, reclaim

return

Terminates a function call.

Syntax

(**return** *value option ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	0-1	Any value to be returned. (Default is nil .)
option	expression	0-1	A key value pair. One of: from <i>function</i> - returns from a function on the call graph. unwind <i>count</i> - unwinds the call graph a number of times..

Results

Data Type	Description
variant	The returned value.

Remarks

Return exits from an encompassing function. If the value is not specified, **nil** is returned. When **return** is evaluated, the encompassing function immediately returns the value. If **from** is specified along with the name of a function, the first encompassing function having the same name is exited. If **unwind** is specified, then the call graph is unwound the indicated number of times.

Example

```
> (function foo
    (step ?item from 1 to 20
        (if (= ?item 10) (return found-it))
        not-found))

.: foo

> (foo)

.: found-it

> (function f1 {}
    (do (tell user ($ inside do. \n))
        (return 0))
    (tell user ($ within f1. \n)))

.: f1
```

```

> (function main
  (fn1)
  (tell user ($ within main. \n)))

.: main

> (main)

inside do.
within f1.
within main.
.: nil

> (function f1 {}
  (do (tell user ($ inside do. \n))
      (break 0))
  (tell user ($ within f1. \n)))

.: f1

> (main)

inside do.
within f1.
within main.
.: told

> (function f1 {}
  (do (tell user ($ inside do. \n))
      (break 0))
  (tell user ($ within f1. \n)))

.: f1

> (main)

inside do.
within f1.
within main.
.: told

> (function f1 {}
  (do (tell user ($ inside do. \n))
      (return 0 from f1))
  (tell user ($ within f1. \n)))

.: f1

> (main)

inside do.
within main.
.: told

```

```

> (function f1 {}
  (do (tell user ($ inside do. \n))
      (return 0 from f1))
  (tell user ($ within f1. \n)))

.: f1

> (main)

inside do.
within main.
.: told

> (function f1 {}
  (do (tell user ($ inside do. \n))
      (return 0 from f1))
  (tell user ($ within f1. \n)))

.: f1

> (main)

inside do.
within main.
.: told

> (function f1 {}
  (do (tell user ($ inside do. \n))
      (return 0 from main))
  (tell user ($ within f1. \n)))

.: f1

> (main)

inside do.
.: 0

> (let ?a (assume {?y "hello"})
  (if (< (@ ?name) "M") (return ($ Goodbye ?name) unwind 2)
      else (tell user ($ Hello ?name)))
  (ask user ($ What is your favorite color?))
  ($ You're nice))

.: true

> ?a

.: "You're nice"

```

Related

[continue](#), [do](#), [break](#), [fail](#), [function](#), [go](#), [location](#), [resume](#), [try](#)

reverse

Creates a reversed sequence.

Syntax

(reverse *sequence*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A list or string

Results

Data Type	Description
sequence	The reversed sequence

Remarks

None.

Example

```
> (reverse "abcde")
.: "edcba"
> (reverse {a b c d e})
.: {e d c b a}
> (reverse [A :B C :D E])
.: [E :D C :B A]
> (reverse (' (a b c d e)))
.: (e d c b a)
```

Related

but, first, last, pick, rest, mid, top

right

True if values are equal or the first value is nil.

Syntax

(right *first second* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
first	variant	1	A value to be compared.
second	variant	1	A value to be compared.

Results

Data Type	Description
truth	True if all values are the same or if second is nil

Remarks

Returns true if each value is the same or if the first value is **nil**, and false otherwise. Both values must be of the same type, and must be numbers, literals, or strings. Short circuits if false. Two items are equal if their representation is the same regardless of whether or not they occupy the same location in memory (viz. identical). Returns false if both values are false.

Example

```
> (right a a)
.: true

> (right "johnny" "ralph")
.: false

> (right nil 3)
.: true

> (right nil nil)
.: false
```

Related

< less , <= less or equal, > greater, >= greater or equal, /= unequal, full, identical, left

rip

Removes elements from assortments by value.

Syntax

(**rip** *assortment* *value* ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
assortment	assortment	1	An assortment.
value	variant	1+	A value.

Results

Data Type	Description
assortment	The modified assortment.

Remarks

Assortments are modified destructively. To delete nondestructively use the **omit** function.

Example

```
> (entries (collection a b c d))
.: {{a a} {b b} {c c} {d d}}
> (entries (rip (lexicon a 1 b 2 c 3 d 4) 2 4))
.: {{a 1}{c 3}}
```

Related

[cut](#), [omit](#)

round

Rounds a number to the nearest integer.

Syntax

(round *number*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A real number.

Results

Data Type	Description
number	The rounded integer

Remarks

If the number is zero, zero is returned. If the number is negative then if the tenths digit is five or less, it shall be rounded down towards negative infinity, otherwise it shall be rounded towards positive infinity. If the number is positive, then if the tenths digit is five or greater, it shall be rounded towards positive infinity, otherwise it shall be rounded towards negative infinity.

Example

```
> (round 0.5)
.: 1
> (round 0.4)
.: 0
> (round 0.49)
.: 0
> (round -0.5)
.: -1
> (round -0.4)
.: 0
```

Related

% modulus, ceiling, floor, truncate,

rule

Creates a rule.

Syntax

```
(rule name properties when premises option ... action ... )  
properties ::= { property ... }  
property ::= :Stage literal  
property ::= :Salience integer  
premises ::= premise  
premises ::= premise premise  
premises ::= premise premises  
premises ::= premise restriction ... premises  
restriction ::= (predicate value ...)  
premise ::= [ category descriptor ... ]  
category ::= type  
category ::= list  
descriptor ::= slot binding  
descriptor ::= slot condition  
binding ::= as symbol  
binding ::= each symbol  
condition ::= slot = value  
condition ::= slot is unary-predicate  
condition ::= slot not value  
condition ::= slot binary-predicate value  
condition ::= slot n-ary-predicate value-list  
condition ::= (predicate value ...)  
option ::= scan number  
option ::= limit number  
option ::= group slot ... by slot ... into symbol  
option ::= merge value ...  
option ::= sort ordering ...  
action ::= deem value1 else value2  
action ::= do expression ...  
action ::= give expression  
action ::= list value ...  
action ::= tally  
action ::= yield expression  
ordering ::= term comparator
```

Module

Base

Parameters

Name	Data Type	Qty	Description
name	literal	0-1	The name of the rule. If omitted, the rule is auto-named.
properties	list	0-1	A list containing any of the following properties: :Salience <i>integer</i> – indicates the rule priority :Stage <i>literal</i> – indicate the rule stage
with	literal	1	The literal with .
clauses / premises	expression	1+	Either one or more clauses, or, one or more premises
option	expression	0-2	Either scan, limit, group, merge, sort, or any combination.
action	literal	0-1	Either deem, do, give, list, tally, yield.
expression	expression	0+	An expression

Results

Data Type	Description
rule	Returns a rule.

Remarks

The rule macro creates a rule to monitor premises. The rule is run spontaneously when premises match the preconditions. There is no guarantee as to when or whether or not the rule shall execute. The rule may be cancelled and deleted using the **reclaim** command.

Note that a predicate is a truth function, **scan** tells the number of matches to attempt (default is **infinity**), and **limit** tells how many results to return (default is **infinity**). If the action is **deem**, then the subsequent value is returned if the final descriptor is matched, otherwise the **else** value is returned. If the action is **do**, then for each match the expressions are run, and for the last match, the last value of the last expression is returned, or **nil** is returned if all descriptors were false or had no matches. If the action is **give**, then the expression is immediately returned from the **with** call on the first match, akin to **return from with**. If the action is **yield**, then the expression is immediately returned from the **with** call, but may be resumed with a **next** function call. When all matches are completed, the **done** function is implicitly called to terminate the generator. If the action is **group**, followed by a list of slots and values from which the group is picked, then the literal **by** and a set of slots and values that determines the grouping inclusion, and finally the literal **into** followed by a symbol to which the group shall be bound on each iteration. If the action is either **list** (or **merge**), then a (merged) list is returned or an empty list if nothing matched. If the action is **sort** then the list of slots and comparators should follow. (Note that **list** is required if the sort action is selected.) If the action is **tally**, then the number of matched premises is returned, or zero if no matches.

Example

```
> (reasoning off)

.: false

> (relation Fact :All :Are)

.: Fact

> (rule ExcludedMiddle
    when [Fact :All as ?S :Are as ?M]
        [Fact :All = ?M :Are as ?P]
    do
        (knew Fact :All ?S :Are ?P))

.: ExcludedMiddle

> (new Fact :All people :Are mortal)

.: Fact_1

> (with Fact)

.: {Fact_1}

> (new Fact :All philosophers :Are people)

.: Fact_2

> (with Fact list @^)

.: {Fact_1 Fact_2}

> (reasoning on)

.: true

> (with Fact list @^)

.: {Fact_1 Fact_2 Fact_3}

> (get Fact_3)

.: [Fact ^ Fact_3 :All philosophers :Are mortal]

> (rules)

.: {ExcludedMiddle}

> (retract ExcludedMiddle)

.: retracted

> (rule {:Salience 100 :Stage 0}
    when [Fact :All as ?S :Are as ?M]
        [Fact :All = ?M :Are as ?P]
    do
        (knew Fact :All ?S :Are ?P))

.: Rule-1
```

```
> (rules)
.: {Rule-1}

> (retract (rules))
.: retracted

> (which Fact ^ as ?a :Are mortal list ?a)
.: {Fact_1 Fact_3}

> (which Fact :Are mortal)

.: {[Fact ^ Fact_1 :All people :Are mortal]
  [Fact ^ Fact_3 :All philosophers :Are mortal]} 
```

Related

reasoning, reclaim, rules, using, with

rules

Returns a list of rules defined in a module.

Syntax

(rules *module*)

Module

Base

Parameters

Name	Data Type	Qty	Description
module	literal	0-1	A module. If not provided defaults to the current module.

Results

Data Type	Description
list	A list of rules defined in the module.

Remarks

The module must be a literal in the list obtained by calling the (**modules**) function. If the module is not provided this function uses the current module (obtained via the (**use**) function).

Example

```
> (module Mine
    (rule foo {:Stage One :Salience 0} when [A ^ as ?a] list ?a))

.: Mine

> (rules Mine)

.: {foo}

> (use User)

.: User

> (rule hello when [A ^ as ?a] list ?a)

.: hello

> (rules)

.: {hello}
```

Related

function, module, modules, symbols

same

True if all values are equal or contain equal elements.

Syntax

(same *value* *value* ... **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	2+	A value to be compared.

Results

Data Type	Description
truth	True if all values are identical

Remarks

Returns true if each value is the equal to the next value from left to right, sequences are the same if they are equal length and contain the same elements regardless of order.

Example

```
> (same a a a)
.: true

> (same "johnny" "ralph" "sam")
.: false

> (same 3 3 3)
.: true

> (same {a b c} {c b a} {c a b})
.: true

> (same "abc" "cba" "cab")
.: true

> (same {"abc"} {"cba"} {"cab"})
.: false
```

Related

= *equal*, < *less* , <= *less or equal*, > *greater*, >= *greater or equal*, /= *unequal*, identical

scale

Applies a function to a list of numbers and scalar values.

Syntax

(scale *list scalar ... function*)

Module

Base

Parameters

Name	Data Type	Qty	Description
list	list	1	A list of numbers.
scalar	number	1+	A number.
function	function	1	The name of the function to invoke

Results

Data Type	Description
sequence	The resulting sequence.

Remarks

None.

Example

```
> (scale {1 2 3} 5 +)  
.: {6 7 8}  
> (scale {1 2 3} 5 10 *)  
.: {50 100 150}
```

Related

apply, collect, count, filter, gather, group, map, merge, reduce , separate, sort

scatter

Applies functions in parallel returning a list of results.

Syntax

(scatter arguments functions)

Module

Tasks

Parameters

Name	Data Type	Qty	Description
arguments	list	0-1	The intial arguments to each function.
functions	list	1	An unordered list of functions to be applied.

Results

Data Type	Description
list	Non nil results

Remarks

This function supplies the arguments to each function and returns a list of results from all the functions evaluated in parallel. Sequential forms of this function are **compose** and **morph**.

Example

```
> (scatter {5} {++ -- (given {?x} (* ?x 2)))}
..: {6 4 10}

> (scatter {{the quick brown fox jumped over the lazy dogs}}
           {but rest top last})
..: {{the quick brown fox jumped over the lazy }
   {quick brown fox jumped over the lazy dogs}
   {the} {dogs}}

> (scatter {2 3 4} {+ * -})
..: {9 24 -5}
```

Related

apply, concurrent, complete, compose, map, morph

scope

Finds an environment or gets the current environment.

Syntax

(**scope** *keyval* ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
keyval	expression	0-2	A key value pair where key is either: at <i>name</i> where name of an environment or module, of <i>what</i> where what is a symbol or function, to <i>offset</i> search until negative integer ancestors back, go <i>offset</i> jumps to negative integer ancestors back.

Results

Data Type	Description
variant	The environment or nil if not found.

Remarks

If no argument are provided, scope returns the current environment. If offset is provided, it indicates the number of ancestors to search backward. Kewords **of** and **to** are used together to locate a function or symbol, while **go** is used to pick a specific environment relative to a starting environment.

Example

```
> (function foo {}
  (let ?func (scope) ?symbol (symbol func))
  (assume {?inner (scope)}
    (tell user ($ function scope ?func \n))
    (tell user ($ inner scope ?inner \n)))
    (tell user ($ parent of inner scope (scope at ?inner go -1) \n)))
    (tell user ($ location of ?symbol (scope of ?symbol to -10) \n)))))

.: foo

> (foo)

function scope Environment-2
inner scope Environment-3
parent of inner scope Environment-2
location of ?func scope Environment-1
.: told
```

Related

do, function, given, global, invoke, local, modular

seal

Prohibits new records.

Syntax

(**seal** *prototype*)

Module

Base

Parameters

Name	Data Type	Qty	Description
prototype	literal	1	The name of a relation.

Results

Data Type	Description
literal	Returns sealed

Remarks

Calling the **new** function on a sealed relation shall fail. Sealed relations must be unsealed before the **new** function shall work again.

Example

```
> (relation Q)
.: Q

> (new Q)
.: Q_1

> (seal Q)
.: sealed

> (new Q)
.: [Failure :Name Permission :Text "Attempt to modify sealed relation Q"]

> (unseal Q)
.: unsealed

> (new Q)
.: Q_2
```

Related

[relation](#), [structure](#), [unseal](#)

secant

Calculates the secant of the number.

Syntax

(**secant** number geometry metrum)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
geometry	literal	0-1	One of: cir (cle), hyp (erbola). Default is circle.
metrum	literal	0-1	One of: degrees , radians . Default is radians.

Results

Data Type	Description
number	The secant of the number.

Remarks

None.

Example

```
> (secant 0.785398)
.: 1.41421333

> (secant cir 0.785398 radians)
.: 1.41421333

> (secant cir 75 degrees)
.: 3.863703305

> (secant hyp 10 degrees)
.: 0.98496007966

> (secant hyp 0.0872665 radians)
.: 0.9962043239686199
```

Related

acosecant, asecant, cosecant

seconds

Creates a seconds value or returns seconds since year zero.

Syntax

(seconds *seconds*)

Module

Base

Parameters

Name	Data Type	Qty	Description
seconds	variant	0-1	The number of seconds as an integer or time.

Results

Data Type	Description
second	The argument converted to seconds, or seconds since the year zero.

Remarks

If no argument is supplied, this function returns the current date and time since the year zero in seconds, otherwise it attempts to construct a second atom from the supplied argument.

Example

```
> (seconds)
.: \@s63698773193

> (seconds 546)
.: \@s546

> (if (< (seconds) eternity)
        (tell user ($ Now is less than the infinite future. \n)))
Now is less than the infinite future.
.: told

> (if (> (seconds) neternity)
        (tell user ($ Now is greater than the infinite past. \n)))
Now is greater than the infinite past.
.: told
```

Related

date, moment, paused, tick

securelink

Creates a secure link.

Syntax

```
(securelink option ... )  
(securelink address)
```

Module

IO

Parameters

Name	Data Type	Qty	Description
address	string	0-1	The url address.
option	expression	0+	A key value pair. One of user <i>credentials</i> -user name and password host <i>host</i> - host computer name (default is localhost) port <i>number</i> – a port number. (default is 2001) path <i>path</i> – a path query <i>query</i> – a query element fragment <i>fragment</i> – a fragment element

Results

Data Type	Description
service	A file resource

Remarks

Returns a secure link.

Example

```
> (function reply {?target ?request} (tell ?target "goodbye."))  
.: reply  
  
> (service (def ?service (securelink "https://localhost:4500/foxyy")) reply)  
.: Service-1  
  
> (ask ?service "hello")  
.: "goodbye."  
  
> (cancel Service-1) (free ?service) (free Service-1)  
.: cancelled freed freed
```

Related

close, erase, path, pipe, read, socket, write

seek

Repositions a file resource to a new read/write location.

Syntax

(seek *file position*)

Module

IO

Parameters

Name	Data Type	Qty	Description
file	file	1	An file resource.
position	variant	1	A byte position in the file, or 1 (beginning), or # (end).

Results

Data Type	Description
file	Returns the file resource.

Remarks

None.

Example

```
> (set ?file (file name "test.txt"))

.: File-1

> (read ?file #)

.: "Hello"

> (seek ?file 1)

.: File-1

> (write ?file "Goodbye")

.: File-1

> (close ?file)

.: closed
```

Related

[bytes](#), [close](#), [file](#), [read](#), [write](#)

self

Returns the currently executing task resource.

Syntax

(self)

Module

Tasks

Parameters

None.

Results

Data Type	Description
task	The task resource for the executing task.

Remarks

None.

Example

```
> (self)
.: task-0
> (concurrent (tell user ($ My task is (self) \n)))
My task is task-4
.: {task-4}
```

Related

wait, abort, concurrent, await, complete, reclaim, task, tasks

separator

Creates a separator string.

Syntax

(separator kind)

Module

IO

Parameters

Name	Data Type	Qty	Description
kind	literal	0-1	One of scheme , volume , folder (default), file , path , port , unhost , uncpath .

Results

Data Type	Description
string	A folder or volume separator character.

Remarks

None.

Example

```
> (separator)
.: "/"

> (separator path)
.: "/"

> (separator scheme)
.: "//"

> (separator volume)
.: ":/"

> (separator port)
.: ":""

> (separator file)
.: "."

```

Related

[file](#), [folder](#), [path](#), [url](#)

series

Creates a serial iterator.

Syntax

(series iterable)

Module

Base

Parameters

Name	Data Type	Qty	Description
iterable	variant	1	A sequence, assortment, or stream,.

Results

Data Type	Description
variant	returns the last expression.

Remarks

The iterable must be either a sequence, assortment, or stream..

Example

```
> (function walk {?iterable}
  (ensure {sequence assortment stream} ?iterable)
  (let ?series (series ?iterable))
  (map (infix (assume {?e nil ?result {}}
    (reset ?series)
    (while (next ?series)
      (set ?e (this ?series))
      (add ?result (do ($ ?e))))
    ?result)
    ",")
    (given {?x} (tell user ?x)))
  walked)

.: walk

> (walk {a b c})
a, b, c.: walked

> (walk (lexicon a 1 b 2 c 3))
{a 1}, {b 2}, {c 3}, .: walked
```

Related

next, reset, this

service

Creates a service.

Syntax

(service *url handler*)

Module

IO

Parameters

Name	Data Type	Qty	Description
url	url	1	A Universal Resource Locator..
handler	function	1	An message handler function.

Results

Data Type	Description
Service	The Service task.

Remarks

This function creates an asynchronous service task that processes messages. The handler function shall receive the sender's url, and an optional message string so that it may return a response.

Example

```
> (let ?url (url scheme tcp port 5001))
.: true

> (function reply {?sender ?message}
  (tell ?sender "OK"))

.: reply

> (start (service ?url reply))
.: Service-3

> (ask ?url "How are you?")
.: "OK"

> (free (cancel Service-3))
.: freed
```

Related

agent, ask, cancel, free, tell, start

set

Assigns symbols to values. .

Syntax

(**set** *manner* *assignment* ...)

assignment ::= *symbol value*

assignment ::= {*symbol* ... } *list*

Module

Base

Parameters

Name	Data Type	Qty	Description
manner	literal	0-1	The manner in which the assignments are performed either the literal parallel or tandem (default if omitted)
assignment	expression	1+	A symbol and value pair.

Results

Data Type	Description
Truth	Returns true.

Remarks

If a list of symbols is provided for an assignment, then the value must be a list with the corresponding number of elements. The symbol must have previously been defined otherwise a symbol not found failure shall occur. If **parallel** is specified as the manner, the symbols are defined in parallel, otherwise the symbols are assigned in **tandem** (by default).

Example

```
> (set ?person DrWho)
.: true
> ?person
.: DrWho
> (set parallel ?x 1 ?y 2 ?z 3)
.: true
```

Related

-- before tie , --> after tie, dynamic, global, let, local, modular, only, scope, tie

sever

Creates a new assortments by removing keys.

Syntax

(sever *assortment* *key* ... **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
assortment	assortment	1	An assortment.
key	variant	1+	A key.

Results

Data Type	Description
assortment	The new assortment.

Remarks

Assortments are modified destructively. To delete nondestructively use the **remove** function.

Example

```
> (entries (collection a b c d))
.: {{a a} {b b} {c c} {d d}}
> (entries (sever (lexicon a 1 b 2 c 3 d 4) b d))
.: {{a 1}{c 3}}
```

Related

[cut](#), [rip](#), [remove](#)

shuffle

Creates a reordered sequence.

Syntax

(shuffle sequence seed)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A list or string.
seed	number	0-1	A randomization seed.

Results

Data Type	Description
list	The list reordered.

Remarks

None..

Example

```
> (global ?Alphabet {a b c d e f g h i j k l m n o p q r s t u v w x y z})  
. : true  
  
> (shuffle ?Alphabet)  
. : {v z e g s y c b t h x o p I q a d r k l n u m j f w}  
  
> (shuffle ?Alphabet 123)  
. : {y g l r x b k u t a j q f c d i s h e m v p n z o w}  
  
> (shuffle ?Alphabet 123)  
. : {y g l r x b k u t a j q f c d i s h e m v p n z o w}  
  
> (shuffle "abcdefghijklmnopqrstuvwxyz" (tick))  
. : "pnitdvjbqyuxkfafazorecmwgslh"
```

Related

[pick](#), [random](#)

sigma

Calculates the sigma of a sequence.

Syntax

(sigma *list*)

Module

Math

Parameters

Name	Data Type	Qty	Description
list	list	1	A list.
of	literal	0-1	The literal of .
kind	literal	0-1	Either population or sample .

Results

Data Type	Description
number	The standard deviation

Remarks

Returns the amount of variation or dispersion of the list. Low deviation indicates the values are close to the mean while high deviation indicates values are more spread out.

Example

```
> (sigma {1 2 3 4} of population)
.: 1.118033988749895

> (sigma (map {{apple 1}{pear 2}{banana 3}{coconut 4}} (given {?e} (@ ?e 2)))
          of population)

.: 1.118033988749895

> (sigma (range 1000 to 3000000 by 10000) of sample)
.: 866020.5925188307

> (sigma (range 100 to 3000 by 100) of sample)
.: 865.544144839919
```

Related

probability, range, statistics

sign

Returns the sign of a number as a number, sigil, or word.

Syntax

(**sign** *number option ...*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A real number.
option	expression	0+	One of part <i>which</i> - where which is real (default)or imaginary format <i>output</i> - either number (default) , glyph or word .

Results

Data Type	Description
variant	Returns the literal + if the number is positive or zero, or the literal - otherwise.

Remarks

By default , this function returns the number 1 if positive, the number 0 if zero, or -1 if negative. If the format is glyph, then If the number is positive this function returns the literal +, if zero it returns nothing, otherwise it returns the literal -. When the **format** s word then it returns **positive** or **negative**, and nothing if zero.

Example

```
> (sign 500)
.: 1
> (sign 0 format number)
.: 0
> (sign -1000+32i part real format word)
.: negative
> (sign 500 format glyph)
.: +
```

Related

digit, digits, exponential, fractional, significand

signal

Creates and signals a failure.

Syntax

(**signal** *type term ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
type	literal	0-1	The name of the failure.if not provided, default is Failure .
Term	expression	0+	<p>Key value pairs</p> <p>:Name <i>name</i> - The failure name (default is User). :Text <i>text</i> - The failure text (default "Unexpected failure."). </p>

Results

Data Type	Description
tuple	A tuple indicating the failure information.

Remarks

If no arguments are supplied a generic failure is created and propagated. Use the **resignal** function to propagate a failure further up the call graph for another handler to address.

Example

```
> (try
  (try
    (signal Failure :Name User :Text "A big problem")
    learn ?e
    (tell user ($ Learned ?e \n))
    (tell user ($ Signaling... \n))
    (resignal ?e))
  learn ?f
  (tell user ($ Learned ?f again. \n))
  resume
  (tell user ($ Resuming \n))
  finally
  done)

Learned [Failure :Name User :Text "A big problem"]
Signaling...
Resuming [Failure :Name User :Text "A big problem"] again
.: done
```

Related

confirm, confute, ensure, escape, signal, try

significand

Calculates the modified significand as a number between 1 and 10, or zero.

Syntax

(significand *number kind*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number.
kind	literal	0-1	One of normed , scientific (default), or integer .

Results

Data Type	Description
number	A number between 1 and 10, or 0.0.

Remarks

The normed significand represents the number as a fraction (0.nnnn). The scientific significand represents the number as a decimal between 1.0 and 10.0 (n.nnnn). The integer significand represents the number as an integer (nnnn).

Example

```
> (significand 500.645 integer)
.: 500645
> (significand 0)
.: 0.0
> (significand -12345 normed)
.: 0.12345
> (significand -2302.023900 scientific)
.: 2.3020239
```

Related

digit, digits, exponential, fractional

sine

Calculates the sine of a number.

Syntax

(**sine** number geometry metrum)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
geometry	literal	0-1	One of: cir (cle), hyp (erbola). Default is circle.
metrum	literal	0-1	One of: degrees , radians . Default is radians.

Results

Data Type	Description
number	The sine of the number.

Remarks

None.

Example

```
> (sine 0.785398)
.: 0.7071066656

> (sine cir 0.785398 radians)
.: 0.7071066656

> (sine cir 45 degrees)
.: 0.7071067811

> (sine hyp 1.5708 radians)
.: 2.30130811905

> (sine hyp 90 degrees)
.: 2.30129890230
```

Related

asine, cosine

so

Creates a lexical scope.

Syntax

(**so** *bindings expression ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
bindings	list	0+	A list of symbol value pairs.
expression	variant	0+	An expression.

Results

Data Type	Description
variant	Returns the last expression.

Remarks

Any new variables declared shall shadow any prior variables with the same name. The **so** macro is a shortcut for (do (let ?s1 v1 ...) ...).

Example

```
> (so { ?file (file name "myfile.out") }
      (seek ?file #)
      (for ?s in ?message (write ?file ($ ?s)))
      (close ?file))

.: closed
```

Related

[do](#), [let](#), [scope](#)

socket

Creates a TCP socket.

Syntax

(socket *option ...*)

odule

IO

Parameters

Name	Data Type	Qty	Description
option	expression	0+	A key value pair. One of scheme <i>scheme</i> - either tcp (default) or udp user <i>username</i> - user name password <i>password</i> - password host <i>host</i> - host computer name (default is localhost) port <i>number</i> – a port number. (default is 2001) address <i>url</i> - the uniform resource locator as string

Results

Data Type	Description
io resource	A file resource

Remarks

Opens a port for reading or writing and returns a socket.

Example

```
> (function reply {?target ?request} (tell ?target "goodbye."))

.: reply

> (service (def ?socket (socket "http://localhost:4500/foxyy")) reply)

.: Service-1

> (ask ?socket "hello")

.: "goodbye."

> (cancel Service-1) (free ?socket) (free Service-1)

.: cancelled freed freed
```

Related

close, erase, path, pipe, read, service, write

some

True if the test is true for any element in the sequence.

Syntax

(some symbol ... binding sequence expression ... test)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	An iteration variable
binding	literal	1	The literal in , per , or over .
sequence	sequence	1	A list or string
expression	expression	0+	An expression.
test	truth	1	A truth expression

Results

Data Type	Description
truth	True if any element satisfies the predicate

Remarks

If the binding **in** is specified, each symbol is bound to successive elements of the sequence. If the binding **per** is specified, each element is expected to be a sequence, so that each symbol is bound to sub-elements of each subsequence. If the binding **over** is specified, each symbol is bound to overlapping elements of the sequence. If there are insufficient elements to bind to the symbols then the function fails. The expressions and test are evaluated. If the sequence is empty the function fails.

Example

```
> (some ?x in {a b c d} (= ?x c))  
.: true  
  
> (some ?m ?n per {{2 1} {3 4}} (< ?m ?n))  
.: true  
  
> (some ?m ?n over {4 3 2 7} (divisible-p ?m ?n))  
.: false
```

Related

every, few, nevery, none, most

sort

Creates a sorted sequence.

Syntax

(sort *sequence ordering option ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	The string or list to sort
ordering	variant	1	<p>an ordering is either:</p> <p>a direction, i.e. < (ascending) or > (descending) for a sequence of atoms, or</p> <p>an ordered list of slot direction pairs (e.g., { slot dir slot dir ...}) if the elements are premises or tuples, or</p> <p>an ordered list of position direction pairs (e.g., {position dir position dir ...}) if the elements are sequences.</p> <p>an ordered list of key direction pairs (e.g., {key dir key dir ...}) if the elements are assortments.</p>
option	expression	0+	A key value pair containing any of the following keys: comparator - a comparison function (uses the compare function if this key value pair is not supplied). transform - function to retrieve a value given an item key – a alist key (if sequence is a alist) index – a list index (if sequence is a list of lists) minval – a minimum value to consider in card sort maxval – a maximum value to consider in card sort limit – a number of items to return after sorting algorithm – value one of { tree , card } default is tree

Results

Data Type	Description
list	The sorted list

Remarks

The typical ordering is < for ascending and > for descending.

Example

```
> (sort {1 2 8 9 3 6 2} <)
.: {1 2 2 3 6 8 9}

> (sort {1 2 8 9 3 6 2} >)
.: {9 8 6 3 2 2 1}

> (Relation N :Value 0)
.: N

> (for ?value in (range 1 to 10) (new N :Value (random 1 to 100)))
.: 55

> (sort (with N :Value as ?v list ?v) <)
.: {4 27 38 41 55 68 83 94 97}

> (sort {{A 1}{C 3}{F 6}{B 2}{D 4}{E 5}} {2 >})
.: {{F 6}{E 5}{D 4}{C 3}{B 2}{A 1}}

> (sort {{Letter A Number 1}{Letter C Number 3}{Letter B Number 2}}
       {Letter >})
.: {{Letter C Number 3}{Letter B Number 2}{Letter A Number 1}}
```

Related

align, apply, best, count, gather, map

split

Creates a list of subsequences divided at a delimiter.

Syntax

(split sequence delimiter)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A list or a string.
delimiters	sequence	0-1	A sequence of delimiters.(Default is space character)

Results

Data Type	Description
list	A list of subsequences.

Remarks

Returns a list of sequences split at a delimiter. The delimiter is not included in the result.

Example

```
(split "the quick brown fox")
.: {"the" "quick" "brown" "fox"}

(split {the quick brown fox jumped over the lazy dogs} {the})
.: {{quick brown fox jumped over} {lazy dogs}}
```

Related

\$concatenate , capitalize, char, infix, lexemes, lowercase, ngrams, take, trim, unicode, uppercase

start

Starts an agent, cell, or task.

Syntax

(**start** *compute arugment ...*)

Module

IO

Parameters

Name	Data Type	Qty	Description
compute	compute	1	An agent, cell, or task.
argument	variant	0+	An argument to the compute

Results

Data Type	Description
compute	Returns the argument.

Remarks

This function starts an asynchronous agent task that processes incomingc messages and performs a default job.

Example

```
> (let ?url (url scheme tcp port 5001))  
.: true  
  
> (function reply {?sender ?message} (tell ?sender "OK"))  
.: reply  
  
> (function job {& ?args} (tell user ($ 1)) (wait 0.5))  
.: job  
  
> (agent ?url reply job)  
.: Agent-1  
  
> (start Agent-1) (wait 3) (cancel Agent-1) (free Agent-1)  
111111..: cancelled freed
```

Related

ask, cancel, listen, pause, perform, start, tell

starts-p

True if two intervals start together.

Syntax

(starts-p *interval₁* *interval₂* *tolerance*)

Module

Base

Parameters

Name	Data Type	Qty	Description
interval ₁	interval	1	An interval
interval ₂	interval	1	An interval
tolerance	instant	0-1	Amount of variation. (Defaults to zero ticks).

Results

Data Type	Description
truth	True if interval ₁ starts with interval ₂ .

Remarks

None.

Example

```
> (starts-p  \@i{\@s1 \@s2}  \@i{\@s3 \@s4})  
.: false  
  
> (starts-p  \@i{\@s1 \@s5}  \@i{\@s1 \@s8})  
.: true  
  
> (starts-p  \@i{\@s1 \@s9}  \@i{\@s4 \@s6})  
.: false  
  
> (starts-p  \@i{\@s4 \@s6}  \@i{\@s4 \@s9})  
.: true  
  
> (starts-p  \@i{\@s5 \@s9}  \@i{\@s3 \@s9} \@s2)  
.: true
```

Related

before-p, during-p, finishes-p, meets-p, overlaps-p

statistics

Finds the mean, median, sigma, and count of a list of numbers.

Syntax

(**statistics** *numbers*)

Module

Math

Parameters

Name	Data Type	Qty	Description
numbers	list	1	A list of numbers.

Results

Data Type	Description
list	Returns an association list containing the mean, median, sigma, min, max, and count.

Remarks

None.

Example

```
> (statistics (array (random 0 to 1000) each (random 0 to 10000)))
.: {mean 5601.26666 median 5701 sigma 3692.856193 min 43 max 9444 count 368}
> (statistics {6 3 1 1 5 1 0 5 5 0 2})
.: {mean 2.636363 median 2 sigma 2.1436047 min 0 max 6 count 11}
```

Related

[probability](#), [survey](#)

step

Loops a symbol over a numeric range to evaluate expressions.

Syntax

(**step** *symbol from i limit j by k expression ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1	An index variable to be incremented
from	literal	1	from
i	number	1	The initial value of the variable
limit	literal	1	The literal to , above , below or go . (default is to).
j	number	1	The final value of the variable
by	literal	0-1	by
k	number	0-1	The positive or negative increment for the variable
expression	expression	0+	The expression(s) to be evaluated

Results

Data Type	Description
value	The last expression on the last iteration of the loop

Remarks

If **to** is specified, the *j* value is included in the iteration. If **below** is specified the *j* value is excluded from the iteration. If **above** is specified the next number above the *j* value is included in the iteration. If **go** is specified, then the *j* value specifies the number of iterations.

Example

```
> (step ?n from 1 below 5 (tell user ($$ ?n , (\s))))
1, 2, 3, 4, .: nil

> (step ?i from 1 to 9 by 2 (tell user ($$(( ?i \s)))
1 3 5 7 9 .: told

> (step ?i from 100 go 5 (tell user ($$ ?i \s)))
100 101 102 103 104 .: told
```

Related

[do](#), [for](#), [loop](#), [repeat](#), [until](#), [while](#)

stream

Creates a stream.

Syntax

(stream *streamable*)

Module

IO

Parameters

Name	Data Type	Qty	Description
streamable	variant	0+	A file, pipe, string, or url..

Results

Data Type	Description
stream	A stream resource.

Remarks

A stream is a potentially infinite byte array containing serialized expressions. Serializations can be prepended to, appended to, or taken from the stream.

Example

```
> (function unstream {?s}
  (decode (trim (string ?s) cut "|") base16))

.: unstream

> (def ?s (stream "The quick brown fox jumped over the lazy dogs."))
.:
|540068006500200071007500690063006b002000620072006f0077006e00200066006f00780020006a
0075006d0070006500640020006f00760065007200200074006800650020006c0061007a00790020006
4006f00670073002e00| 

> (unstream ?s)
.:
"The quick brown fox jumped over the lazy dogs."
>
```

Related

append, takeable, take, peek, prepe, prepend, stream-p

string

Converts a value to a string.

Syntax

(string *value* ... **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	0+	A value.

Results

Data Type	Description
string	The converted value.

Remarks

None.

Example

```
> (string {a b c})
.: "{a b c}"

> (string "a b c" (\s) "d e f")
.: "\"a b c\"    \"d e f\""

> (string 500 50 5)
.: "500 50 5"

> (string [A :B :C])
.: "[A :B :C]"

> (string the quick "brown" fox)
.: "the quick \"brown\" fox"

> (string)
.: ""
```

Related

\$ concatenate, \$\$ elide, is

structure

Creates a structure.

Syntax

(**structure** *name inclusion ... definition ...*)

inclusion ::= uses { structure ... }

definition ::= slot

definition ::= slot default

definition ::= method function

Module

Base

Parameters

Name	Data Type	Qty	Description
name	literal	1	The name of the structure.
inclusion	expression	0+	The literal uses followed by a list of structure names.
definition	expression	0+	A slot definition or method definition expression

Results

Data Type	Description
literal	The name of the structure.

Remarks

Structures are assortment prototypes which represent ephemeral relationships among one or more values. A structure record is called an ephemerons and is comprised of a name, slots with optional default values, and methods. Like the name implies, ephemerons are immediate unpersisted objects. This stands in contrast to thoughts which are persisted in the object store. Both structure and relation definitions are persisted in the object store. Structure ephemerons are created using the **new** function. The **Failure** prototype is an example of a structure. A prototype is a relation or structure.

Example

```
> (structure Fault
  :What
  :When
  :Where
)

.: Fault

> (new Fault :What "An error" :When (moment) :Where "Over Here")

.: [Fault :What "An error" :When \@m20180561212150036 :Where "Over Here"]

> (structure Error
  uses {Fault}
  :Who )

.: Error

> (new Error :Who MyFunction :What "Punted." :When (moment) :Where "Here")

.: [Error :Who MyFunction :What "Punted." :When \@m20180561212489526 :Where "Here"]
```

Related

is, new, nix, relation, seal, structures, unseal

structures

Creates a list of all structures.

Syntax

(structures)

Module

Base

Parameters

None

Results

Data Type	Description
list	A list of all structures.

Remarks

None

Example

```
> (structure Foo :Bar :Baz)  
.: Foo  
> (structures)  
. : {Failure Foo}
```

Related

[new](#), [nix](#), [old](#), [relation](#), [relations](#), [seal](#), [structure](#), [unseal](#)

sub

Replaces a subsequence within a sequence.

Syntax

(**sub** *sequence entry ...*)

entry ::= start to end replacement

entry ::= start go length replacement

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	An assortment or sequence.
entry	expression	1+	A 4-tuple of the start position, either to position or go length, and the replacement sequence

Results

Data Type	Description
sequence	Returns the modified sequence.

Remarks

Each replacement is inserted into the sequence at the indicated positions. .

Example

```
> (sub {the quick red fox jumped} 2 to 4 {cute pink rabbit} )
.: {the cute pink rabbit jumped}

> (sub "abcdefghijkl" 4 go 3 "456")
.: "abc456ghijkl"

> (sub "the quick brown fox jumped" 11 go 5 "green" 17 to 19 "dog")
> "the quick green dog jumped"
.: (sub {the quick brown fox jumped} 2 to 4 {cute rabbit})
.: {the cute rabbit jumped}
```

Related

fix, put, replace, sub

subset

True if all elements in each subset are in the superset.

Syntax

(subset-p *subset superset* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
subset	sequence	1	A sequence
superset	sequence	1+	A sequence

Results

Data Type	Description
truth	True if all elements of the subset are in the superset.

Remarks

If superset and subset are strings and ordered is true, then a string search is performed.

Example

```
> (subset-p {a b x} {a b c d e f g})  
.: false  
  
> (subset-p {a b d} {a b c d e f g})  
.: true  
  
> (subset-p "ick bro" "the quick brown")  
.: true  
  
> (subset-p {g h i} {a b c d e f g})  
.: false  
  
> (subset-p {e f d} {a b c d e f g})  
.: true
```

Related

[disjoint-p](#), [intersects-p](#), [position](#), [in](#), [pick](#)

substitute

Modifies a sequence replacing subsequences.

Syntax

(substitute *sequence entries* **)**

entry ::= {{*start end replacement*} ... }

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	An assortment or sequence.
entry	expression	1	A list containing lists of triples: the start position, end position and replacement subsequence

Results

Data Type	Description
sequence	Returns the modified sequence.

Remarks

Each replacement is inserted into the sequence at the indicated positions..

Example

```
> (substitute {the quick red fox jumped} {{2 4 {cute pink rabbit}}})  
. : {the cute pink rabbit jumped}  
  
> (substitute "abcdefghijklm" {{4 7 "456"}})  
. : "abc456ghijklm"  
  
> (substitute "the quick brown fox jumped" {{11 16 "green"}{17 19 "dog"}})  
. : "the quick green dog jumped"  
  
> (substitute {the quick brown fox jumped} {{2 4 {cute rabbit}}})  
. : {the cute rabbit jumped}
```

Related

fix, put, replace, sub

subsumes-p

True if all elements in each subset are in the superset.

Syntax

(subsumes-p superset subset ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
superset	sequence	1	A list or string
subset	sequence	1+	A list or string

Results

Data Type	Description
truth	True if superset contains all elements of each subset.

Remarks

None

Example

```
> (subsumes-p {a b c d e f g} {a b x})  
.: false  
  
> (subsumes-p {a b c d e f g} {a b x} {a b d})  
.: true  
  
> (subsumes-p "the quick brown" "ick bro")  
.: true  
  
> (subsumes-p {a b c d e f g} {d e f} {g h i})  
.: false  
  
> (subsumes-p {a b c d e f g} {e f d})  
.: false
```

Related

disjoint-p, intersects-p, position, in, pick, subset-p

sum

Calculates the arithmetic sum.

Syntax

(sum *value* ...)

Module

Math

Parameters

Name	Data Type	Qty	Description
value	variant	1+	An atom or list of atoms.

Results

Data Type	Description
number	The arithmetic sum of all elements.

Remarks

Returns the arithmetic sum. If the list or expression is empty, it returns zero. If the only value is a list then all elements within the list are compared, otherwise, all subsequent values are compared.

Example

```
> (sum {1 2 3 4 5})  
. : 15  
  
> (sum {})  
. : 0  
  
> (sum 1 2 3 4 5)  
. : 15  
  
> (sum {1 2 3} 4 {6 3 2})  
. : {11 9 9}
```

Related

[avg](#), [max](#), [median](#), [min](#), [statistics](#), [sigma](#)

summation

Adds an expression over a range of values.

Syntax

(summation symbol ... binding sequence expression ...)

Module

Math

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1+	A symbol.
binding	literal	0-1	The literal in or per .
sequence	sequence	0-1	A sequence.
expression	expression	1+	any expression involving variables from the pattern(s)

Results

Data Type	Description
variant	The result of applying the plus function to the expression for the indicated range.

Remarks

If the binding **in** is specified, each symbol is bound to successive elements of the sequence. If the binding **per** is specified, each element is expected to be a sequence, so that each symbol is bound to subelements of each subsequence. If there are insufficient elements to bind to the symbols then the function fails. The last expression shall be evaluated and the plus function shall be applied to both that expression and any prior result. The final value is returned.

Example

```
> (summation ?x in (range 1 to 10) ?x)
.: 55

> (summation ?x in {1 2 3 4} (** ?x 2))
.: 25

> (summation ?n in {1 2 3} (+ ?n 5))
.: 21
```

Related

[fold](#), [maximum](#), [minimum](#), [product](#)

supply

Applies a function to an argument list.

Syntax

(*supply arguments function environment*)

Module

Base

Parameters

Name	Data Type	Qty	Description
arguments	list	1	A list containing actual parameters.
function	function	1	The name of a function to invoke
environment	environment	0-1	An environment.

Results

Data Type	Description
variant	The result from applying the function.

Remarks

Applies the function to the list using the supplied environment, or the current scope if no environment is provided. The function is applied to the entire list and the result is returned.

Example

```
> (supply {1 2 3} +)
.: 6
> (condvier {?x 9} (let ?env (scope)) (assume {?x 3} (supply {1 2 ?x} + ?env)))
.: 12
```

Related

apply, call, count, gather, map, reduce

suppose

Performs hypothetico-deductive reasoning.

Syntax

```
(suppose facts action goals by strategies via operators limit quantity  
gate condition within timeframe before timepoint options options)
```

Module

Base

Parameters

Name	Data Type	Qty	Description
<i>facts</i>	variant	1	a list of expressions, or the literal “known”
<i>action</i>	literal	1	one of prove , refute , solve , infer , speculate , explain
<i>goals</i>	list	1	a list of goal expression
<i>by</i>	literal	1	the literal “by”
<i>strategies</i>	list	1	a list of user defined search functions.
<i>via</i>	literal	0-1	the literal “via”
<i>operators</i>	list	0-1	a list of operators
<i>limit</i>	literal	0-1	the literal “limit”
<i>quantity</i>	number	0-1	the number of solutions/proofs to generate (default is 1)
<i>gate</i>	literal	0-1	one of while or until
<i>condition</i>	truth	0-1	an expression which follows while or until (default is true)
<i>within</i>	literal	0-1	the literal “within”
<i>timeframe</i>	number	0-1	a time duration (default is eternity)
before	literal	0-1	the literal “within”
<i>timepoint</i>	number	0-1	an exact time (default is now + 60 seconds)
<i>options</i>	literal	0-1	the literal “options”
<i>options</i>	lexicon	0-1	a lexicon or list.

Results

Data Type	Description
variant	Returns a solution or nil . If the action is solve , each solution is a list of operators. If the action is prove , each solution is a list of conclusion-operator pairs. If the action is refute , each solution is a list of conclusion-operator pairs. If the action is infer , a truth result tells if the goals are inferable from the facts If the action is speculate , each solution is a conclusion-operator-probability triple. If the action is appraise , each solution is a list of solution-cost pairs. If the action is explain , each solution is a list of reasons.

Remarks

Returns solutions (i.e. lists of operators) which transform the facts into the goals, or proofs (lists of operators as inference steps) showing the goals follow from the facts, or a truth indicating the goals are provable from the facts, by creating a monitor task and worker tasks which search for operator chains from facts to goals. The using function invokes all the supplied strategies (i.e. search functions) concurrently, canceling them if a condition dictates or a timeframe is passed. One or more result lists (up to the limit) is returned.

1. If the action is **solve**, each solution is a list of operators.
2. If the action is **prove**, each proof is a list of conclusion-operator pairs.
3. If the action is **refute**, each proof is a list of conclusion-operator pairs.
4. If the action is **infer**, a truth result determines if the goals are inferable from the facts.
5. If the action is **speculate**, each proof is a list of conclusion-operator-probability triples.
6. If the action is **explain**, each explanation lists the inferences linking goals to facts.

Each strategy (search function) needs to define keyword parameters which accept arguments from the using call. All the following keyword parameters are optional: **solve**, **prove**, **infer**, **via**, **within**, **options**. The strategy shall need to periodically check its own task identifier (by calling **(cancelled-p (self))**) to determine if the search task has been interrupted by the monitor task.

Example

```
> (structure Pegs
  :Left
  :Temp
  :Right
)

.: Pegs

> (function LeftToTemp {?state} ; a state is a list containing one Pegs structure.
  (let (@ ?state) :Left ?left :Temp ?temp :Right ?right)
  (if (and (more-p ?left) (or (void-p ?temp) (< (@ ?left) (@ ?temp))))
    {(new Pegs :Left (rest ?left) :Temp (& (@ ?left) ?temp) :Right ?right)}))

.: LeftToTemp

> (function LeftToRight {?state}
  (let (@ ?state) :Left ?left :Temp ?temp :Right ?right)
  (if (and (more-p ?left) (or (void-p ?right) (< (@ ?left) (@ ?right))))
    {(new Pegs :Left (rest ?left) :Temp ?temp :Right (& (@ ?left) ?right)}))

.: LeftToRight

> (function TempToRight {?state}
  (let (@ ?state) :Left ?left :Temp ?temp :Right ?right)
  (if (and (more-p ?temp) (or (void-p ?right) (< (@ ?temp) (@ ?right))))
    {(new Pegs :Left ?left :Temp (rest ?temp) :Right (& (@ ?left) ?right)}))

.: TempToRight
```

```

> (function TempToLeft {?state}
  (let (@ ?state) :Left ?left :Temp ?temp :Right ?right)
  (if (and (more-p ?temp) (or (void-p ?left) (< (@ ?temp) (@ ?left))))
    {(new Pegs :Left(& (@ ?temp) ?left) :Temp (rest ?temp) :Right ?right)}))

.: TempToLeft

> (function RightToTemp {?state}
  (let (@ ?state) :Left ?left :Temp ?temp :Right ?right)
  (if (and (more-p ?right) (or (void-p ?temp) (< (@ ?right) (@ ?temp))))
    {(new Pegs :Left ?left :Temp (& (@ ?right) ?temp) :Right (rest ?right))}))

.: RightToTemp

> (function RightToLeft {?state}
  (let (@ ?state) :Left ?left :Temp ?temp :Right ?right)
  (if (and (more-p ?right) (or (void-p ?left) (< (@ ?right) (@ ?left))))
    {(new Pegs :Left (& (@ ?right) ?left) :Temp ?temp :Right (rest ?right))}))

.: RightToLeft

> (relation Node
  :Parent
  :Operator
  :State
  :Children {}
  :Tried {}
  :Task)

.: Node

> (function depthFirstSearch {{facts ?facts}{solve ?goals}{using ?operators}
  & ?rest}

  (let ?root      (new Node :State ?facts)
    ?visited   {}
    ?useless   {}
    ?current   ?root
    ?stack     {}
    ?solution  nil)

  (repeat
    (let ?current :State ?state :Children ?children :Tried ?tried)

    (if (and (void-p ?tried)
              (void-p ?children))
        ;;; Expand current node.
        (for ?operator in ?operators
          (push ?children (new Node :Parent ?current :Operator ?operator
                                :Task (self))))
        (put ?current :Children ?children)

      or (more-p ?children)
        ;;; Expand a child
        (set ?child (pick ?children))
        (enq ?current :Tried ?child)
        (deq ?current :Children ?child)
        (assume {?state ((:Operator ?child) (:State ?current))}
          (put ?child :State ?state)
          (if (null-p ?state)
            (push ?useless ?child)
          or (= ?goals ?state)

```

```

        (set ?solution (map (rest ?stack) :Operator))
        or (in ?visited ?state transform :State)
            (push ?useless ?child)
        else
            (push ?stack ?current)
            (push ?visited ?child)
            (set ?current ?child)))
    else
        ;;; Backtrack
        (if (more-p ?stack)
            (set ?current (pop ?stack))))
until (or ?solution
        (void-p ?stack)
        (cancelled-p (self))))
(with [Node ^ ?n] (= (:Task ?n) (self)) do (old ?p)))
?solution
)

.: depthFirstSearch

> (function breadthFirstSearch{{facts ?facts}{solve ?goals}{using ?operators}
    & ?rest}

    (let ?root      (new Node :State ?facts)
        ?visited   {}
        ?useless   {}
        ?current   ?root
        ?solution  nil)

    (repeat
        (let ?current :State ?state :Children ?children :Tried ?tried)

        (if (and (void-p ?tried)
                  (void-p ?children))
            ;;; Expand current node.
            (for ?operator in ?operators
                (push ?children (new Node :Parent ?current :Operator ?operator)
                      :Task (self)))
            (put ?current :Children ?children)

        or (more-p ?children)
            ;;; Expand a child
            (set ?child (pick ?children))
            (enq ?current :Tried ?child)
            (deq ?current :Children ?child)
            (assume {?state ((:Operator ?child) (:State ?current)))}
                (put ?child :State ?state)
                (if (null-p ?state)
                    (push ?useless ?child)
                or (= ?goal ?state)
                    (set ?solution (only {?child}
                        (assume {?result {}}
                            (repeat (--> & ?result (:Operator ?child))
                                (set ?child (:Parent ?child))
                                until (null-p ?child))
                            (reverse (but ?result)))))))
            or (in ?visited ?state transform :State)
                (push ?useless ?child)
            else
                (push ?frontier ?child)))
        else
            ;;; Backtrack

```

```

(if (more-p ?frontier)
    (set ?current (pop ?frontier)))))

until (or ?solution
        (void-p ?frontier)
        (cancelled-p (self)))
(with Node ^ ?n (= (:Task ?n) (self)) do (old ?p))
?solution
)

.: breadthFirstSearch

> (function TowersOfHanoi {%
  % ?facts ?goals}
  (suppose {(new Pegs :Left (@ ?facts) :Temp (@ ?facts 2) :Right (@ ?facts 3))}%
  solve {(new Pegs :Left (@ ?goals) :Temp (@ ?goals 2) :Right (@ ?goals 3))}%
  by {depthFirstSearch breathFirstSearch}%
  via {LeftToTemp LeftToRight TempToLeft TempToRight RightToTemp
  RightToLeft})%
)

.: TowersOfHanoi

> (TowersOfHanoi facts {{1 2 3} {} {}} goals {{}}{}{1 2 3}{})

.: {{LeftToRight LeftToTemp RightToTemp LeftToLeft TempToLeft TempToRight
LeftToRight}{}}

> (TowersOfHanoi facts {{3}{1 2}{}{}} goals {{}}{}{1 2 3}{})

.: {{LeftToRight TempToLeft TempToRight LeftToRight}{}}

> (TowersOfHanoi facts {{1 2} {} {}} goals {{}}{}{1 2}{})

.: {{LeftToTemp LeftToRight TempToRight}{}}

```

Related

wait, abort, concurrent, await, cancelled-p, complete, rule, self, tarry, with

survey

Creates a list of referents or referent-count pairs.

Syntax

(survey format relation slot)

Module

Base

Parameters

Name	Data Type	Qty	Description
format	literal	1	One of values , counts .
relation	relation	1	A relation
slot	slot	1	The slot of interest

Results

Data Type	Description
list	An association list or list of all values contained in the slot.

Remarks

Returns a list values or an association list of counts (i.e., observations) for a relation slot

Example

```
> (relation Fruit :Color :Type)
.: Fruit

> (new Fruit :Color red :Type apple)  (new Fruit :Color red :Type cherry)
.: Fruit_1 Fruit_2

> (new Fruit :Color red :Type strawberry)
.: Fruit_3

> (survey values Fruit :Color)
.: {red red red}

> (survey counts Fruit :Type)
.: {{apple 1}{cherry 1}{strawberry 1}}
```

Related

probability, statistics

swap

Modifies a sequence by interchanging values.

Syntax

(**swap** *sequence substitution ...*)

substitution ::= prior-position later-position

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A list or a string.
substitution	expression	1+	A prior and later position pair. A position may be a number o a list of numbers..

Results

Data Type	Description
sequence	The modified sequence

Remarks

Destructively modifies the sequence. No changes occur if prior and later are the same. To create a new sequence use the **exchange** function.

Example

```
> (swap {A B C} 1 3)
.:{C B A}

> (swap "ABCD" 1 3)
.: 'CBAD'

> (swap {{1 2 3}{4 5 6}} {2 1} {1 3})
.: {{1 2 4}{3 5 7}}
```

Related

@ *element*, append, exchange, fix, push, pop

symbol

Creates a symbol.

Syntax

(symbol name)

Module

Base

Parameters

Name	Data Type	Qty	Description
name	variant	0-1	A string, literal or integer.
environment	environment	0-1	An environment (defaults to the current scope).

Results

Data Type	Description
symbol	A symbol

Remarks

The current environment is available via **scope**. If no arguments are supplied, then a new symbol is returned for the current context based on the value "s".

Example

```
> (symbol)
.: ?s-1

> (use User)

.: User

> (modular (symbol 500) nil (symbol) 350)

.: true

> (entries (scope (use)))
.: {{?500 nil} {?s-2 350}}
```

Related

<-- before tie, --> after tie, add, assign, assume, is, scope, set, tie

symbols

Lists the symbols in an environment.

Syntax

(**symbols** *scope option*)

Module

Base

Parameters

Name	Data Type	Qty	Description
scope	variant	0-1	A environment. or module.
opetion	expression	0-1	A key value pair, one of: ancestors truth - Search ancestors. (Default is false.)

Results

Data Type	Description
list	A list of symbols defined in the environment, and parent environments.

Remarks

If **ancestors** is true, then the symbols from parent environments are gathered recursively.

Example

```
> (let ?x 1 ?y 2 ?z 3) (scope)
.: true {?x ?y ?z}

> (module Mine
    (modular ?foo bar))

.: Mine

> (symbols (scope at Mine))

.: {?foo}

> (assume {?g 7 ?h 8 ?i 9}
    (assume {?d 4 ?e 5 ?f 6}
        (assume {?a 1 ?b 2 ?c 3}
            (symbols (scope) ancestors true)))))

.: {?a ?b ?c ?d ?e ?f ?g ?h ?i}
```

Related

environment, functions, module, modules, scope, symbol

take

Creates an expression from a readable sequence.

Syntax

(**take** *readable options ...*)

Module

IO

Parameters

Name	Data Type	Qty	Description
readable	variant	1	An file, stream, or string.
options	expression	0-2	A key value pair, one of: start position - Place to setart parrings. (Default is 1). limit quantity - Number of parses to make (Default is 1.)

Results

Data Type	Description
expression	The parsed expression and the next position to parse in the readable.

Remarks

Returns an expression containing a list of the extracted expression(s) according to SubThought Premise syntax, and the last parsed position in the readable. If limit is not supplied, the limit becomes one, the next expression is returned. If limit is greater than one then as many expressions are returned as can be extracted up to the limit. If # is provided as the limit, then all remaining expressions are returned. This function returns an empty expression if no expression could be extracted. It's recommended to test the argument prior to parsing using the **takeable** function.

Example

```
> (take (stream ""))
.: 0

> (take "hello world")
.: hello 7

> (take (stream "hello world" #) start 7)
.: world 12

> (take "{the quick brown fox} jumped over the lazy dogs" start 23 limit 3)
.: jumped over the 39
```

Related

append, peek, prepend, skip, stream, stream-p, takeable, whitespace-p

takeable

Calculates the number of expressions that can be read.

Syntax

(takeable *readable options ...*)

Module

IO

Parameters

Name	Data Type	Qty	Description
readable	variant	1	A stream, or file resource or a string containing zero or more expressions.
options	expression	0-2	A key value pair, one of: start position - Place to setart parrsing. (Default is 1). want quantity - Number of parses to make (Default is #.).

Results

Data Type	Description
number	Calculates the number of actual expression that can be taken. .

Remarks

If want is greater than one then as many expressions are tested for completeness as can be extracted up to the count. If # is provided, then all remaining expressions are tested for completeness. After testing, the resource shall be unchanged. Returns a number up to the number of desired expressions that can be successfully taken (because they are complete).

Example

```
> (global ?Stream (stream "The quick brown fox {jumped} "))

.: true

> (takeable ?Stream)

.: 4

> (takeable ?Stream #)

.: 4

> (takeable ?Stream 2)

.: 2
```

Related

[skip](#), [append](#), [take](#), [peek](#), [prepend](#), [stream](#), [stream-p](#)

tally

Returns the number of matches in the knowledge base.

Syntax

(tally pattern option)

Module

Base

Parameters

Name	Data Type	Qty	Description
pattern	pattern	1	A grounded premise
option	expression	0+	An option for retrieving the bindings. limit n - the number of results to return.

Results

Data Type	Description
list	A list of all symbol value pairs

Remarks

Returns an anonymous list generator containing lists of symbol value lists.

Example

```
> (relation Poll :Response)
  .: Poll

> (step ?i from 1 to 1000
  (new Poll :Response (on (> (random 0 to 1) 0) Yes No)))

.: Poll_1000

> (tally [Poll :Responses Yes])
  .: 672
```

Related

tally, using, with

tangent

Calculates the tangent.

Syntax

(**tangent** number geometry metrum)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number
geometry	literal	0-1	One of: cir (cle), hyp (erbola). Default is circle.
metrum	literal	0-1	One of: degrees , radians . Default is radians.

Results

Data Type	Description
number	The tangent of the number.

Remarks

None.

Example

```
> (tangent 5)
.: -3.38051500625

> (tangent 5 cir radians)
.: -3.38051500625

> (tangent 120 degrees)
.: 1.7320508075

> (tangent 45 hyp degrees)
.: 0.655794202632

> (tangent (pi) hyp radians)
.: 0
```

Related

acotangent, atangent, cotangent

tarry

Allows tasks to complete on their own.

Syntax

(tarry *tasks expression ...*))

Module

Tasks

Parameters

Name	Data Type	Qty	Description
tasks	variant	1	A task or list of task resources.
expression	variant	0+	An expression to evaluate after the tasks are completed.

Results

Data Type	Description
list	The task resources.

Remarks

This function allows tasks to complete in a non-blocking manner. It is equivalent to

```
(given {?tasks}
  (& ?tasks
    (concurrent (do (until (every ?t in ?tasks (ready-p ?t)) (idle \@m1))
  ready))))
```

Example

```
> (def ?tasks (tarry (concurrent (repeat 1000000 foo)
                                (repeat 2000000 bar)
                                (repeat 3000000 baz)))

.: {task-1 task-2 task-3 task-4}

> (map ?tasks ({?t} (await ?t \@s0)))

.: {foo bar baz done}

> (free (tarry (complete
                  (repeat 1000 foo)
                  (repeat 2000 bar)
                  (repeat 3000 baz)))))

.: freed
```

Related

wait, abort, concurrent, await, complete, do, done-p, free, task

task

Creates a list of tasks for deferred evaluation.

Syntax

(task *cell scope expression ...* **)**

Module

Tasks

Parameters

Name	Data Type	Qty	Description
cell	cell	0-1	A cell.
scope	environment	0-1	An environment. A child scope is created if not provided.
expression	expression	1+	Any expression to be evaluated.

Results

Data Type	Description
list	A list of task resources, one resource for each expression.

Remarks

The tasks need to be initiated with the **concurrent** or **complete** function.

Example

```
> (task (/ 1000 57) (** 4 20) (** 4 20))
.: {Task-1 Task-2 Task-3}

> (concurrent task-1)
.: {Task-1}

> (await task-1)
.: 17.54385964912281

> (concurrent task-2 task-3)

> (await task-2)
.: 1099511627776

> (await task-3)
.: 1099511627776

> (free {task-1 task-2 task-3})
.: nil
```

```
> (function main {}

  (let ?bion (bion) ?cell (cell ?bion))

  (start ?cell)

  (let ?task (task ?cell (scope) (given {string ?name} ($ Hello, ?name)))) 

  (tell user (await (start ?task "World")))

  (halt ?cell)
  (halt ?bion)

  (free ?cell)
  (free ?bion)
)

.: main

> (main)

Hello World
.: freed
```

Related

[wait](#), [abort](#), [concurrent](#), [await](#), [busy-p](#), [cancel](#), [cancelled-p](#), [complete](#), [critical](#), [do](#), [is](#), [ready-p](#), [reclaim](#) , [task](#)

tasks

Creates a list of all tasks.

Syntax

(tasks)

Module

Tasks

Parameters

None.

Results

Data Type	Description
list	Returns a list of task handles

Remarks

This list does not include the interpreter task. To obtain the interpreter task, use the **self** function.

Example

```
> (task (apply + {1 2 3}))  
. : {Task-1}  
  
> (complete (apply * {1 2 3}))  
. : {Task-2}  
  
> (tasks)  
. : {Task-2 Task-1}  
  
> (free (tasks))  
. : freed
```

Related

[wait](#), [abort](#), [concurrent](#), [await](#), [task](#), [await](#), [complete](#), [reclaim](#), [self](#), [task](#)

taxon

Returns the taxonomic (i.e., data) type of a value.

Syntax

(**taxon** *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value.

Results

Data Type	Description
literal	A taxonomic type name

Remarks

None

Example

```
> (taxon true)
.: truth
> (taxon nil)
.: nothing
> (taxon 12345)
.: number
> (taxon #)
.: literal
```

Related

convert, convertible, taxonomy, identity, is, meron, meronomy, relation, structure

taxon-p

True if the value is of the specific taxonomic type.

Syntax

(taxon-p *value* *taxon* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value.
taxon	literal	1	The name of a taxon.

Results

Data Type	Description
truth	True if the value is the taxon.

Remarks

None.

Example

```
> (taxon-p 500 literal)
.: false

> (taxon-p \@t300 time)
.: true

> (taxon-p "the quick brown fox" string)
.: true
```

Related

meron, meron-p, meronomy, taxon, taxonomy

taxonomy

Returns a list of taxonomic types for a value.

Syntax

(taxonomy *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value

Results

Data Type	Description
list	The taxonomic types used

Remarks

None

Example

```
> (taxonomy A)
.: {literal atom thing}
> (taxonomy 100)
.: {number atom thing}
> (taxonomy {a b c})
.: {list sequence thing}
> (taxonomy [A :B 1 :C 2])
.: {premise tuple sequence thing}
> (taxonomy \@t522)
.: {tick time atom thing}
```

Related

[taxon](#), [is](#), [id](#), [meron](#), [meronomy](#), [relation](#), [structure](#)

tell

Sends a message to a recipient.

Syntax

(**tell** *who message option ...*)

Module

IO

Parameters

Name	Data Type	Qty	Description
who	literal	1	A URL web resource or the literal user .
message	string	1	A message or command..
option	expression	0+	Key value pairs timeout <i>instant</i> – delay before terminating request, default <i>value</i> – value to return upon timeout,

Results

Data Type	Description
literal	Returns told if successful. If a default is provided then the default is returned in case of a timeout.

Remarks

If **user** is specified for who, then the output is displayed to the console.

Example

```
> (tell user "Hello World!\n")

Hello World
.: told

> (function reply {?url ?message}
  (tell ?url ($ received ?message)))

.: reply

> (service (url scheme tcp port 5950) reply)

.: Service-1

> (ask (url scheme tcp port 5950) "secret")

.: "received secret"

> (free Service-1)

.: freed

> (global ?Data (data source (get Settings-1 "/db/dsn")))
```

```
.: true
> ?Data

.: Data-1
> (open ?Data)
.: Data-1
> (tell ?Data "update product set price = price * 1.1025;")
.: told
> (close ?Data)
.: closed
```

Related

ask, listen,free

there

True if a file, folder, or url actually exists.

Syntax

(**there** *url*)

Module

IO

Parameters

Name	Data Type	Qty	Description
url	url	1	A url.

Results

Data Type	Description
truth	True if the url exists..

Remarks

This function checks whether or not the url exists.

Example

```
> (let ?url (ul path "quick.txt"))

.: true

> (if (there ?url)
    (let ?file (file url ?url seek 1 mode write erase yes))
    (write ?file "The quick brown fox")
    (close ?file))

.: closed
```

Related

[absent](#), [file](#), [folder](#), [url](#)

this

The current element of a series.

Syntax

(this series)

Module

Base

Parameters

Name	Data Type	Qty	Description
series	series	1	A series.

Results

Data Type	Description
variant	Returns the current value of the series.

Remarks

The **next** function is used to advance a series to the first through last elements of an iterable thing. If **this** is called immediately after the creation of the iterable, or immediately after a **reset** of the iterable, or before the first **next** is called, then an out of range failure shall occur since the series is pointing to an unknown item before the first element. If **this** is called after next returns false, an out of range failure shall also occur because the series is pointing after the last element.

Example

```
> (function walk {?iterable}
  (confirm (?iterable-p ?iterable) since
          "Argument to walk must be iterable")
  (let ?series (series ?iterable))
  (while (next ?series)
    (tell user ($$ (this ?series) ,)))
  walked)

.: walk

> (walk {a b c})
a, b, c.: walked

> (walk (lexicon a 1 b 2 c 3))
{a 1}, {b 2}, {c 3}, .: walked
```

Related

[next](#), [reset](#), [series](#)

thought

Finds an extant thought.

Syntax

(thought *relation id*)

Module

Base

Parameters

Name	Data Type	Qty	Description
relation	literal	1	A relation
id	number	1	An instance number

Results

Data Type	Description
thought	A thought.

Remarks

Returns an existing thought, otherwise signals a failure If the SubThought does not exist.

Example

```
> (relation E :Value)
.: E

> (new E :Value 100)
.: E_1

> (new E :Value 200)
.: E_2

> (thought E 1)
.: E_1

> (thought E 2)
.: E_2

> (thought E 3)
.: [Failure :Name NotFound :Text "Thought E_3 was referenced but not found."]
```

Related

^ SubThought *id*, *id*, is, premise

thunk

Creates a thunk in a module.

Syntax

(thunk expression ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
expression	variant	0+	Expressions to be evaluated.

Results

Data Type	Description
thunk	Returns the thunk containing the expressions.

Remarks

A thunk is a parameterless anonymous function. A thunk is equivalent to **lambda** expression without parameters in the Lisp programming language, and can be used in most places a function name is required. Anonyms cannot be recursive, since they are unnamed. Continuations may be taken within an anonym. Neither do anonyms use tags that can be reference by a **return**. Since no parameters are specified, each expression is executed in succession and the value of the last expression is returned. The thunk is ephemeral because function definitions are not maintained for them.

Example

```
> (thunk (tell user "Hello, world."))
.: (thunk (tell user "Hello, world."))
> (invoke (thunk (tell user "Hello, world.")))
Hello, world.
.: told
```

Related

[wait](#), [abort](#), [concurrent](#), [await](#), [complete](#), [done-p](#), [reclaim](#), [task](#), [use](#)

thunks

Returns a list of thunks defined in a module.

Syntax

(thunks *module*)

Module

Base

Parameters

Name	Data Type	Qty	Description
module	literal	0-1	A module. If not provided defaults to the current module.

Results

Data Type	Description
list or nil	A list of functions defined in the module.

Remarks

The module must be a literal in the list obtained by calling the (**modules**) function. If the module is not provided this function uses the current module (obtained via the (**use**) function).

Example

```
> (module Mine      (thunk bar))  
.: Mine  
  
> (thunks Mine)  
.: {thunk-1}  
  
> (use User)  
.: User  
  
> (thunk "hello world")  
.: thunk-2  
  
> (thunks)  
. : {thunk-2}
```

Related

function, module, modules, rule, rules, symbols

tick

Creates a tick or returns nanoseconds since year zero.

Syntax

(`tick` *nanoseconds*)

Module

Base

Parameters

Name	Data Type	Qty	Description
<code>nanoseconds</code>	number	0-1	A number of nanoseconds.

Results

Data Type	Description
<code>tick</code>	nanoseconds since the year zero.

Remarks

If no argument is supplied, this function returns the current date and time in nanoseconds, otherwise it attempts to construct a tick from the supplied argument.

Example

```
> (tick)
.: \@t63552721198807000

> (tick 5465464)
.: \@t5465464
```

Related

[date](#), [moment](#), [idle](#)

tie

Assigns symbols to values. .

Syntax

(tie *manner* *assignment* ...)

assignment ::= *symbol value*
assignment ::= {*symbol* ... } *list*

Module

Base

Parameters

Name	Data Type	Qty	Description
manner	literal	0-1	The manner in which the assignments are performed either the literal parallel or tandem (default if omitted)
assignment	expression	1+	A symbol and value pair.

Results

Data Type	Description
variant	Returns the last assigned value.

Remarks

If a list of symbols is provided for an assignment, then the value must be a list with the corresponding number of elements. The symbol must have previously been defined otherwise a symbol not found failure shall occur. Returns the value of the last assignment. If **parallel** is specified as the manner, the symbols are defined in parallel, otherwise the symbols are assigned in **tandem** (by default).

Example

```
> (tie ?person DrWho)
.: DrWho
> ?person
.: DrWho
> (tie parallel {?x ?y ?z} {1 2 3})
.: 3
```

Related

<-- before tie, --> after tie, assume, constant, dynamic, given, global, local, set

time

Performs time operations.

Syntax

(time unit operation value ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
unit	literal	1	one of { year , month , week , weekday , days , day , hour , minute , second , millisec , moment , microsec , nanosec , tick , zone , zmin }.
operation	literal	1	One of { + (addition), - (difference), of , in , part , ytd }
value	time	1+	A time value

Results

Data Type	Description
number	The operation performed on the time value(s).

Remarks

Returns the value of the operation in the specified units. If **+** is specified as the operation, the times are added together and the total is returned in the unit. If **-** is specified as the operation, the difference of the times are returned in the specified unit. If **of** is specified for the operation, then the specified unit is extracted for the specified time value. If **in** is specified for the operation, then the total time value is converted to the units. If **part** is specified for the operation, and if the time is converted to a moment segment (day part takes a number between 1 and 366, returning a number between 1 and 999; hour part takes a number between 0 and 23, returning a number between 0 and 99; minute part takes a number between 0 and 59, returning a number between 0 and 99; seconds part takes a number between 0 and 59, returning a number between 0 and 99). If **ytd** is specified then the units are computed for the year to date for the date specified as the time. Otherwise the part of the time value is returned.

(imExample

```
> (time seconds - \@s5 \@s10)
.: -5

> (time hour part 18)
.: 75

> (time seconds in \@s26226)
.: 26226

> (time day ytd 2014-04-09T14:24:19.488Z)
.: 9

> (time month of (tick))
.: 12

> (time month of (moment))
.: 12

> (time month of (date))
.: 12

> (@ {mon tue wed thu fri sat sun} (time weekday part (date 2019 8 31)))
.: sat
```

Related

[date](#), [epoch](#), [interval](#), [is](#), [moment](#), [second](#), [tick](#)

top

Creates a subsequence of the first elements.

Syntax

(top sequence count)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	The sequence to search
count	number	0-1	The number of elements.(Default is 1.)

Results

Data Type	Description
sequence	A sub sequence containing the desired quantity of elements

Remarks

None.

Example

```
> (top {a b c d e f g} 3)
.: {a b c}

> (top {a b c d e f g})
.: {a}
```

Related

@ *element*, but, last, rest

transfer

Transfers a value from one sequence to another.

Syntax

(transfer *source destination option ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
source	symbol	1	A symbol bound to a sequence
destination	symbol	1	A symbol bound to a sequence
option	expression	0+	A key value pair where the key is from position - The position in the source (defaults to 1) to position - The position in the destination (defaults to 1) unique prohibited (Boolean) - indicates if duplicate values are allowed. (Default is false.)

Results

Data Type	Description
value	Returns the value that was transferred.

Remarks

Modifies two sequences by removing a value from the source and adding a value to the destination.

Example

```
> (let ?x  {a b c d e f} ?y {})

.: true

> (transfer ?x ?y)

.: a

> (transfer ?x ?y unique true from 2 to 2)

.: c

> ?x ?y

.: {b d e f} {a c}
```

Related

but, exchange, last, pop, push, rest, reverse, swap, top

traverse

Loops through the coordinates of a sequence.

Syntax

(traverse symbol binding sequence limit dimensions expression ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1	A symbol holding the index or coordinates of the current element of the sequence.
binding	literal	1	One of the following: into - varies the inner (rightmost) coordinates first across - varies the outer (leftmost) coordinates first.
sequence	sequence	1	A possibly nested sequence.
limit	literal	1	the keyword literal limit
dimensions	list	1	if the keyword limit is supplied, then this is a list of indices indicating the maximum dimensions that shall be traversed.
expression	expression	0+	An expression to be evaluated.

Results

Data Type	Description
variant	This form returns the last expression.

Remarks

This function returns last expression of the last iteration. The function assumes that the entire sequence has a uniform number of elements in each dimension. On each iteration the symbol is updated with the coordinates of the current element of the sequence. The **into** binding provides depth first traversal, while the **across** binding provides breadth first traversal.

Example

```
> (traverse ?i across {{a b}{c d}{e f}{g h}{i j}} limit {5 2} (tell user ($$ ?i \s)))  
{1 1} {2 1} {3 1} {4 1} {5 1} {1 2} {2 2} {3 2} {4 2} {5 2} .: told  
> (traverse ?i into {{a b}{c d}{e f}{g h}{i j}} limit {5 2} (tell user ($$ ?i \s)))  
{1 1} {1 2} {2 1} {2 2} {3 1} {3 2} {4 1} {4 2} {5 1} {5 2} .: told
```

Related

add, includes, cut, for, item, items, keys, reclaim, values

trim

Creates a sequence without leading and trailing delimiters.

Syntax

(trim *sequence option ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	The target sequence
option	expression	0+	A key value pair: cut delimiters - a string or list containing the delimiters. on location - the literal left , right , or both (default).

Results

Data Type	Description
sequence	The modified sequence

Remarks

Removes delimiter characters from the front or rear of a sequence. If the location is **left**, then only the left portion is trimmed. If the location is **right**, then only the right portion of the string is trimmed. If the location is **both** or if the location is omitted, then both the left and right portion of the sequence is trimmed.

Example

```
> (trim " the quick brown fox   ")
.: "the quick brown fox"

> (trim " the_quick_brown_fox __" cut "__")
.: " the_quick_brown_fox   "

> (trim " the quick brown fox   " on left)
.: "the quick brown fox   "

> (trim {the quick brown fox} cut {the fox} on both)
.: {quick brown}
```

Related

[split](#)

truncate

Rounds a number towards zero.

Syntax

(truncate *number*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number.

Results

Data Type	Description
number	An integer

Remarks

None.

Example

```
> (truncate 10.5)
.: 10
> (truncate 10.4)
.: 10
> (truncate 10.49)
.: 10
> (truncate -10.5)
.: -10
> (truncate -10.4)
.: -10
> (truncate -10.49)
.: -10
```

Related

%, ceiling, floor, round,

try

Evaluates expressions and recovers from failures.

Syntax

(try expression ... learn symbol recovery ... resume resumption finally cleanup ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
expression	expression	1+	Expressions to do some processing
learn	literal	1	The literal learn
symbol	symbol	0-1	A failure cause variable
recovery	expression	0+	Expressions for failure recovery and learning
resume	literal	0-1	The literal resume
resumption	Expression	0+	Expressions to resume control flow.
finally	literal	0-1	The literal finally
cleanup	expression	0+	Expressions to do some clean up

Results

Data Type	Description
value	Returns last call in normal operation, or last failure call if a failure was thrown

Remarks

Try performs failure handling. The **fail** function shall return to the **learn** tag and bind the failure to the symbol. The **escape** function shall return to the **resume** tag. If failure is learned, it shall be returned.

Example

```
> (function main {& ?args}
  (tell user ($ \n Attempting dangerous operation... \n))
  (try
    (dangerousOperation)
    (tell user ($ \n Goodbye \n))
    learn ?cause
    (case (:Name ?cause)
      of ResourceFailure
        (tell user ($ Resource failure occurred \n))
      else
        (tell user ($ \n (:Text ?cause) \n)))
    (tell user ($ \n Goodbye \n))
    (resignal ?cause) ; rethrow failure
    resume
      (tell user ($ Whew, we dodged a bullet.)))
  )
.: main
```

```

> (main)

Attempting dangerous operation...

The function dangerousOperation was not found.

Goodbye
.: [Failure :Name User :Text "The function dangerousOperation was not found."]

> (assume {?file nil}
  (try
    (set ?file (file name "quick.txt" seek 1 mode read type text))
    (tell user ($ (read ?file) \n))
    learn ?e
    (resignal ?e)
    finally
      (close ?file)))

The quick brown fox jumped over the lazy dogs.
.: told

> ; implement a REPL.

  (forever
    (tell user ($ "\n=>" (try (eval (ask user "\n* ")) learn ?failure)))))

* HELLO WORLD

=> HELLO WORLD

*

```

Related

can, confirm, confute, did, ensure, escape, fail, may, signal

tuple

Creates a tuple.

Syntax

(tuple *value* ... **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	0+	Any value

Results

Data Type	Description
tuple	Returns a tuple containing the values.

Remarks

A tuple can also be created by simply enclosing the elements with square brackets, [].

Example

```
> (tuple a b c {d})  
. : [a b c {d}]  
  
> (tuple "a b c")  
. : ["a b c"]  
  
> (tuple 500)  
. : [500]  
  
> (tuple)  
. : []  
  
> [a b c {d}]  
. : [a b c {d}]  
  
> ["a b c"]  
. : ["a b c"]
```

Related

&, inside, list-p, sequence-p

uid

Creates a unique identifier.

Syntax

(uid)

Module

Base

Parameters

None

Results

Data Type	Description
uid	A new unique identifier.

Remarks

None.

Example

```
> (uid)
.: 90A836B0-63E8-4049-B411-908A6B30F69F
> (uid)
.: CE79CB00-F400-429A-BFC3-8F9801B7B017
```

Related

[id, unique](#)

unbound

Creates a list of free symbols in a function.

Syntax

(**unbound** *function*)

Module

Base

Parameters

Name	Data Type	Qty	Description
function	function	1	A function

Results

Data Type	Description
list	A list of symbols not declared in the parameter list (aka free variables).

Remarks

None.

Example

```
> (function foo {?x ?y + ?z}
  (bar ?x ?y)
  (baz ?z ?a))

.: foo

> (bound foo)

.: {?x ?y ?z}

> (unbound foo)

.: {?a}

> (bound (' (given {?s} (@ ?s ?p)))))

.: {?s}

> (unbound (' (given {?s} (@ ?s ?p)))))

.: {?p}
```

Related

[bound](#)

unbound-p

True if a symbol is unbound.

Syntax

(**unbound-p** *symbol*)

Module

Base

Parameters

Name	Data Type	Qty	Description
symbol	symbol	1	A symbol.

Results

Data Type	Description
bool	True if the symbol is unbound.

Remarks

None.

Example

```
> (let ?a 1 ?b 2)
.: true
> (unbound-p ?a)
.: false
> (unbound-p ?b)
.: false
> (unbound-p ?c)
.: true
```

Related

[unbound-p](#)

unicode

The Unicode of a string's first position.

Syntax

(unicode *string*)

Module

Base

Parameters

Name	Data Type	Qty	Description
string	string	1	input string

Results

Data Type	Description
number	The Unicode of the first position

Remarks

None

Example

```
(unicode "A")
.: 65
(Unicode "apple")
.: 97
```

Related

char, format, lexemes, lowercase, ngrams, split, trim, uppercase

union

Concatenates sequences removing duplicates.

Syntax

(**union** *sequence sequence ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	2+	input sequences

Results

Data Type	Description
sequence	A single de-duped sequence.

Remarks

None

Example

```
> (union {a b c} {b c d} {d e f})  
. : {a b c d e f}  
> (union "abc" "bcd" "def")  
. : "abcdef"
```

Related

[difference](#), [disjoint](#), [distinct](#), [intersection](#)

unique

Creates a unique literal based on a prefix.

Syntax

(unique *prefix*)

Module

Base

Parameters

Name	Data Type	Qty	Description
prefix	variant	0-1	A literal or string prefix for the id.

Results

Data Type	Description
literal	A new literal

Remarks

If prefix is not provided the default prefix "G" is used. Hyphens and underscores are removed from the prefix. This function increments a counter to generate a new literal.

Example

```
(unique)

.: G1

(unique)

.: G2

(unique "hello")

.: hello1

(unique My-Object)

.: MyObject1

(unique "my_Object_")

.: MyObject2

(unique "my-object-")

.: MyObject3
```

Related

[Id, uid](#)

unless

Branched conditional evaluation.

Syntax

(unless *condition* *false-case* *true-case* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
condition	truth	1	A truth expression
false-case	variant	1	An expression to evaluate
true-case	variant	1	An expression to evaluate

Results

Data Type	Description
variant	The last value of the executed expression.

Remarks

Evaluates the condition and either the true case or the false case.

Example

```
> (unless (> 101 100)  (tell user "no")  (tell user "yes"))

yes .: told

> (unless (< 101 100)  (tell user "no")  (tell user "yes"))

no .: told
```

Related

and, case, if, not, on, or

unlike

True if a pattern does not match a sequence.

Syntax

(unlike *sequence pattern*)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A string or list of strings to be compared.
pattern	string	1	A regex pattern.

Results

Data Type	Description
variant	If sequence is a string, then a truth is returned. If sequence is a list, then a list of non-matches is returned

Remarks

If the candidate argument is a list, then this function creates a new list containing only those elements not matching the pattern. If the candidate is a string, then this function returns true if the pattern does not match the candidate, and false otherwise. Standard RegEx matching is used.

Example

```
> (unlike "abc" "bc")
.: false

> (unlike "abc" "xy")
.: true

> (unlike {"abc" "bcd" "def" "ghi"} "bc")
.: {"def" "ghi"}
```

Related

[like](#)

unqualified

The function literal without the module prefix.

Syntax

(unqualified *function*)

Module

Base

Parameters

Name	Data Type	Qty	Description
function	function	1	A function literal

Results

Data Type	Description
literal	The function literal without a module

Remarks

None

Example

```
> (unqualified Math.sum)
.: sum
```

Related

[qualified](#), [qualifiers](#)

unseal

Permits new records for a prototype.

Syntax

(**unseal** *prototype*)

Module

Base

Parameters

Name	Data Type	Qty	Description
prototype	literal	1	The name of a prototype.

Results

Data Type	Description
literal	Returns unsealed

Remarks

Calling the **new** function on a sealed relation shall fail. Sealed relations must be unsealed before the **new** function shall work again.

Example

```
> (relation Q)
.: Q

> (new Q)
.: Q_1

> (seal Q)
.: sealed

> (new Q)
.: [Failure :Name Permission :Text "Attempt to modify sealed relation Q"]

> (unseal Q)
.: unsealed

> (new Q)
.: Q_2
```

Related

[new](#), [relation](#), [seal](#), [structure](#)

unsigned

Converts a value to an unsigned number.

Syntax

(unsigned *value* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A number value or the literal minimum or maximum

Results

Data Type	Description
integer	An integer number.

Remarks

If the value is **minimum** (or **maximum**) the minimum (or maximum) unsigned number is returned; otherwise, if the value cannot be converted to an unsigned number, the function fails. The fractional part of the number shall be truncated.

Example

```
> (unsigned {a b c})  
.: [Failure :Name ArgumentValue :Text "{a b c} is not a number."]  
  
> (unsigned "a b c")  
.: [Failure :Name ArgumentValue :Text "'a b c' is not a number."]  
  
> (unsigned 500.3)  
.: 500u  
  
> (unsigned "23.4")  
.: 23u  
  
> (unsigned (* 2 2))  
.: 4u
```

Related

ceiling, complex, floor, is, long, rational, real, round, truncate

until

Loops expressions until a condition is true.

Syntax

(until *condition expression ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
condition	truth	1	A truth expression
expression	expression	0+	An expression to be evaluated

Results

Data Type	Description
value	The last value of the last iteration

Remarks

None

Example

```
> (modular ?i 0)
.: true
> (until (>= ?i 10) (idle \@s1) (--> ++ ?i))
.: 10
```

Related

for, iterate, loop, repeat, step, while

unwrap

Permits modifications to a module.

Syntax

(unwrap *module*)

Module

Base

Parameters

Name	Data Type	Qty	Description
module	literal	1	A module

Results

Data Type	Description
literal	Returns unwrapped

Remarks

This function has no effect on already unwrapped modules.

Example

```
> (module Math
    (function sum ?args (apply + ?args)))

.: Math

> (wrap Math)

.: wrapped

> (extend Math
    (function prod ?args (apply * ?args)))

.: [Failure :Name Permission :Text "Can't modify a wrapped module"]

> (unwrap Math)

.: unwrapped

> (extend Math
    (function prod ?args (apply * ?args)))

.: Math
```

Related

[extend](#), [module](#), [wrap](#)

uppercase

Converts a string to uppercase.

Syntax

(uppercase *string*)

Module

Base

Parameters

Name	Data Type	Qty	Description
string	string	1	A value to convert

Results

Data Type	Description
string	The converted string

Remarks

None

Example

```
> (uppercase "the quick brown fox")
.: "THE QUICK BROWN FOX"
```

Related

capitalize, lexemes, lowercase

uppercase-p

True if a string's first position is upper case.

Syntax

(uppercase-p *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value.

Results

Data Type	Description
truth	Returns true if the value is a string and its first position is upper case.

Remarks

None

Example

```
> (uppercase-p "the quick brown fox")
.: false
> (uppercase-p "This and that")
.: true
```

Related

letter-p, lowercase-p

url

Creates a URL resource.

Syntax

(**url** *option ...*)

(**url** *address*)

Module

IO

Parameters

Name	Data Type	Qty	Description
address	string	0-1	The url address.
option	expression	0+	A key value pair. One of scheme <i>scheme</i> - the url scheme (e.g., file, http, https) user <i>user</i> - the name of the user password <i>password</i> - the password of the user host <i>host</i> - hostname or the literal ip for this ip address port <i>port</i> - port number or the literal new path <i>path</i> - file path query <i>query</i> - query key value pairs. fragment <i>fragment</i> - section specification.. address <i>url</i> - A full url address.

Results

Data Type	Description
url	A url resource.

Remarks

If no arguments are provided, then this function returns the universal resource locator for the SubThought Premise interpreter running on the current machine. If **new** is specified as the port, an unused port number is utilized.

Example

```
> (url scheme https host "www.youtube.com" path "watch" query "v=kqicbyONxO8")
.: Url-1
> (address Url-1)
.: "https://www.youtube.com/watch?v=kqicbyONxO8"
```

Related

address, ask, is, listen, tell

use

Creates a scope for knowledge based operations.

Syntax

(use *knowledge expression ...* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
knowledge	variant	1	A knowledge base or url to a knowledge base.
expression	variant	0+	An expression.

Results

Data Type	Description
variant	Returns the last expression.

Remarks

The use function creates a scope by attaching to the knowledge base, evaluating the expressions, then detaching from the knowledge base. The last expression is returned.

Example

```
> (use (knowledge url "file:///c:/premise/kb/defaultKb.mdb")
  (relation Fact :All :Are)
  (new Fact :All people :Are mortal)
  (new Fact :All philosophers :Are people)

  (with [Fact :All as ?x :Are as ?y]
    [Fact :All = ?y :Are as ?z]
    list (knew [Fact :All ?x :Are ?z])))

)
.: Fact_3

> (use
  (knowledge name Mathematics path "c:/premise/kb/" units MB size 2 max 10
  log 1 growth 10)

  (relation Circle :Radius)
  )

.: Circle
```

Related

attach, detach, each, get, knowledge, put, using, which, with

using

Accesses a scope.

Syntax

(using scope expression ...)

Module

Base

Parameters

Name	Data Type	Qty	Description
scope	variant	1	An environment or module name.
expression	variant	0+	An expression.

Results

Data Type	Description
variant	Returns the last expression.

Remarks

The use function creates a scope by attaching to the knowledge base, evaluating the expressions, then detaching from the knowledge base. The last expression is returned.

Example

```
> (using NoLogic  
    (relation Fact :All :Are)  
    (new Fact :All people :Are mortal)  
    (new Fact :All philosophers :Are people))  
  
(with [Fact :All as ?x :Are as ?y]  
      [Fact :All = ?y :Are as ?z]  
      list (knew [Fact :All ?x :Are ?z]))  
  
)  
.:. Fact_3  
  
> (using Mathematics  
    (relation Circle :Radius)  
    )  
  
.:. Circle
```

Related

attach, detach, each, get, knowledge, put, using, which, with

values

Creates a list of values for an assortment.

Syntax

(**values** *assortment*)

Module

Base

Parameters

Name	Data Type	Qty	Description
assortment	assortment	1	A environment, enumeration, or lexicon.

Results

Data Type	Description
list	A list of values

Remarks

For collections this function returns the same result as the **keys** function.

Example

```
> (global ?M nil)
.: true

> (set ?M (lexicon :X 1 !m noop :T nil A 2))
.: true

> (values ?M)
.: {1 noop nil 2}

> (filter (keys ?M) (given {?v} (term-p ?v)))
.: {:_ !m :T}

> (filter (values ?M) (given {?v} (not (term-p ?v))))
.: {1 noop nil 2}

> (values (collection the quick brown fox))
.: {the quick brown fox}
```

Related

@ *element*, add, bindings, cut, free, get, in, key, keys, size

vector

Creates a vector of atoms.

Syntax

(vector *atom* ... **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
atom	atom	0+	An atomic value such as a number, time, or literal.

Results

Data Type	Description
vector	Returns a vector containing the atoms.

Remarks

A vector is an immutable sequence of atoms. Vectors can also be created by simply enclosing the elements with vertical bars called pipes (|). Whenever vectors are manipulated, a new vector is created. Vectors cannot be embedded, and cannot contain sequences.

Example

```
> (vector a b c d)
.: |a b c d|
> (vector 500)
.: |500|
> (vector foo)
.: |foo|
> |a b c d|
.: |a b c d|
```

Related

& *merge*, && *abridge*, *inside*, *list*

version

Provides version information.

Syntax

(version)

Module

Base

Parameters

None

Results

Data Type	Description
nil	Returns nil

Remarks

Prints system and version information.

Example

```
> (version)
[Premise :Version 0.2.0 20180201.001 :OS Windows 10 :Edition Community]
.: nil
```

Related

bye, help, copyright

void-p

True if a container has zero elements.

Syntax

(void-p sequence)

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.

Results

Data Type	Description
truth	True if the sequence has zero items.

Remarks

True if the container has zero items.

Example

```
> (void-p "not empty")
.: false

> (void-p (expression))
.: true

> (void-p "")
.: true

> (void-p {})
.: true

> (void-p (call))
.: true

> (void-p [])
.: true
```

Related

[more-p](#)

wait

Waits for tasks to end.

Syntax

(wait *tasks* *timeout* **)**

Module

Tasks

Parameters

Name	Data Type	Qty	Description
tasks	list	1	A list of task resources
timeout	instant	0-1	The amount of time to wait for the task. The default is eternity which implies to wait indefinitely

Results

Data Type	Description
list	The task resources.

Remarks

The wait function waits for either the timeout duration or for the task to complete. This function allows tasks to complete in a blocking manner.

Example

```
> (def ?tasks (wait (concurrent (repeat 1000000 foo)
                                (repeat 2000000 bar)
                                (repeat 3000000 baz))
                         \@s10))

.: {task-1 task-2 task-3}

> (map ?tasks (given {?t} (await ?t \@s0)))

.: {foo bar baz}

> (free (wait (complete
                  (repeat 1000 foo)
                  (repeat 2000 bar)
                  (repeat 3000 baz)))))

.: freed
```

Related

wait, abort, concurrent, await, complete, do, done-p, free, task, tarry

which

Creates a list of thoughts for a pattern..

Syntax

(**which** *category criterion ... option ...*)

category ::= relation
category ::= list
criterion ::= slot binding
criterion ::= slot condition
criterion ::= slot condition
binding ::= as symbol
iteration ::= each symbol
condition ::= slot = value
condition ::= slot /= value
condition ::= is unary-predicate
condition ::= not unary-predicate
condition ::= binary-predicate value
condition ::= slot n-ary-predicate value-list
condition ::= (predicate value ...)
option ::= scan number
option ::= limit number
option ::= group slot ... by slot ... into symbol
option ::= merge value ...
option ::= sort ordering ...
ordering ::= term comparator
action ::= give expression
action ::= list value ...
action ::= tally

Module

Base

Parameters

Name	Data Type	Qty	Description
relation	variant	1	A relation name or list of thoughts.
criterion	expression	0+	A slot referent pair or method function pair.
option	expression	0-2	Either scan , limit , group , merge , sort , or any combination.

Results

Data Type	Description
list	Returns a list of premises matching the pattern.

Remarks

Looks for existing thoughts matching the criteria. If no symbols are specified, the relation name is used, e.g. the Employee shall use an **?Employee** symbol for each instance found. If the action is **give**, then the expression is immediately returned from the which call on the first match. If the action is either **list**, then a list containing each expression is returned or an empty list is returned if nothing matched. If the action is **tally**, then the number of matched premises is returned, or zero if no matches.

Example

```
(relation Car :Make :Model :Year)

(which Car :Make Toyota)

(which (which Car :Make Toyota) each ?thought
  [Dealer :Has (:Make ?tuple)]
  deem true)

> (relation Pairs :A :B) (new Pairs :A 1 :B 2) (new Pairs :A 3 :B 4)

..: Pairs Pairs_1 Pairs_2

> (which Pairs :B 2)

..: Iterator-1

> (relation Fact :All :Are)

..: Fact

> (new Fact :All people :Are mortal) (new Fact :All philosophers :Are people)

..: Fact_1 Fact_2

> (function ExcludedMiddle {}
  (with [Fact :All as ?s :Are as ?m]
    [Fact :All ?m :Are as ?p]
    (no [Fact :All ?s :Are ?p])
    list (premise (knew A :All ?s :Are ?p)))))

..: ExcludedMiddle

> (ExcludedMiddle)

..: {[Fact ^ Fact_3 :All philosophers :Are mortal]}

> (which Fact ^ as ?a :Are mortal)

..: Iterator-2

> (with Fact :Are mortal)

..: {[Fact ^ Fact_1 :All people :Are mortal]
  [Fact ^ Fact_3 :All philosophers :Are mortal]}

> (relation Fruit :Name :Size :Shape :Color)

..: Fruit
```

```

> (step ?i from 1 to (random 1 to 1000)
  (new Fruit :Size (pick {small medium large})
    :Shape (pick {ellipsoid spheroid bananoid}))
    :Color (pick {red orange yellow green})))

.: Fruit_387

> (with [Fruit ^ as ?f :Name as ?name :Size as ?size :Shape spheroid :Color orange]
  (null-p ?name)
  (in {small medium} ?size)
  deem Orange else Other)

.: Orange

> (with
  [Fruit as ?f]
  (let ?f :Size ?size :Shape ?shape :Color ?color)
  (in {small medium} ?size)
  (= ?shape bananoid)
  (= ?color yellow)
  deem true else false)

.: true

> (relation Customer :CustomerId :FirstName :LastName)

.: Employee

> (relation Order :OrderId :CustomerId :Quantity :Product)

.: Order

> (step ?i from 1 to (random 1 to 10)
  (let ?c (new Customer))
  (step ?j from 1 to (random 0 to 10)
    (new Order :CustomerId ?c)))

.: Order_347

> (with [Customer as ?c]
  [(with Order as ?o (= (:CustomerId ?o) (:CustomerId ?c))) each ?orders]
  tally)

.: 2

```

```

> (with
  [Customer as ?c :CustomerId ?x]
  [(with Order as :CustomerId ?y (= ?x ?y)) as ?orders]
  scan 30
  limit 5
  list
  [R :Customer ?c :Orders (# ?orders)])

.: {[R :Customer Customer_1 :Orders 3]
[R :Customer Customer_2 :Orders 7]
[R :Customer Customer_4 :Orders 4]
[R :Customer Customer_3 :Orders 9]}

> (relation Student
  :First
  :Last
  :StudentNo
  :Year
  :Tests {})

> (do
(new Student :First John :Last Jones :No 20 :Year 2 :Tests {100 56 87 86})
(new Student :First Lexie :Last Bates :No 16 :Year 3 :Tests {67 68 98 87})
(new Student :First Yong :Last Lee :No 17 :Year 1 :Tests {78 79 90 95})
(new Student :First Paul :Last Gates :No 14 :Year 4 :Tests {86 89 88 89})
(new Student :First Jenny :Last Luria :No 15 :Year 3 :Tests {99 98 97 99})
(new Student :First Phillipa :Last Sanchez :No 18 :Year 2 :Tests {85 87 89 97})
(new Student :First Patrice :Last Jones :No 13 :Year 1 :Tests {99 95 94 72})
(new Student :First Jesus :Last Castaneda :No 12 :Year 4 :Tests {98 89 95 94})
(new Student :First Charlie :Last Rose :No 11 :Year 2 :Tests {97 98 98 97})
(new Student :First Boris :Last Pushkin :No 19 :Year 3 :Tests {100 85 100 100})
(new Student :First Alex :Last Sartre :No 22 :Year 1 :Tests {85 97 86 95})
(new Student :First Elizabeth :Last Wilson :No 21 :Year 4 :Tests {100 100 85 95}))

.: Student_12

> (which Student ^ ?student
  (let ?exam 3 ?score 90)
  (> (@ (:Tests ?student) ?exam) ?score)
  list {:Name (:Last ?student) :Score (@ (:Tests ?student) ?exam)})}

.: {{:Name Bates :Score 98}{:Name Luria :Score 97}{:Name Parker :Score 94}
{:Name Castaneda :Score 95}{:Name Rose :Score 98}{:Name Pushkin :Score 100} }

> (which Student as ?s
  group ?s
  by :Year into ?g
  list ?g
  sort 1 <)

.: {{1 [Student :First Yong :Last Lee :No 17 :Year 1 :Tests {78 79 90 95}]
[Student :First Patrice :Last Jones :No 13 :Year 1 :Tests {99 95 94 72}]
[Student :First Alex :Last Sartre :No 22 :Year 1 :Tests {85 97 86 95}]}
{2 [Student :First John :Last Jones :No 20 :Year 2 :Tests {100 56 87 86}]
[Student :First Phillipa :Last Sanchez :No 18 :Year 2 :Tests {85 87 89 97}]
[Student :First Charlie :Last Rose :No 11 :Year 2 :Tests {97 98 98 97}]}
{3 [Student :First Lexie :Last Bates :No 16 :Year 3 :Tests {67 68 98 87}]
[Student :First Jenny :Last Luria :No 15] :Year 3 :Tests {99 98 97 99}]
[Student :First Boris :Last Pushkin :No 19 :Year 3 :Tests {100 85 100 100}]}
{4 [Student :First Paul :Last Gates :No 14 :Year 4 :Tests {86 89 88 89}]
[Student :First Jesus :Last Castaneda :No 12 :Year 4 :Tests {98 89 95 94}]
[Student :First Elizabeth :Last Wilson :No 021 :Year 4 :Tests {100 100 85 95})]}]}

```

```

> (which Student as ?s :Id ?id
  group ?id
  by (given {?s} (@ ($ (:Last ?s)) 1)) into ?g
  list ?g)

.: {{"B" 16} {"C" 12} {"G" 14} {"P" 19} {"R" 11} {"L" 17 15} {"W" 21} {"S" 18 22} {"J" 20
13} }

> (which Student as ?s :Tests ?t
  (let ?percentile (/ (avg ?t) 10))
  group ($ (:First ?s) (:Last ?s))
  by ?percentile into ?g
  list ?g
  sort 1 < )

.: {{8 "John Jones" "Lexie Bates" "Yong Lee" "Paul Gates" "Phillipa Sanchez"}
 {9 "Jenny Luria" "Patrice Jones" "Jesus Castaneda" "Charlie Rose" "Boris
Pushkin" "Alex Sartre" "Elizabeth Wilson"}}

> (with Student as ?s
  group [R :FirstLetter (@ ($ (:Last ?s)) 1)
         :Score (:Score ?s)]
  by (given {?s} (> (@ (:Tests ?s) 1) 85)))
  into ?g
  list ?g
  sort (given {?x} (:FirstLetter ?x)) <)

.: {{"C" [R :FirstLetter "C" :Score 98]} {"J" [R :FirstLetter "J" :Score 100]
[R :FirstLetter "J" :Score 99]} {"L" [R :FirstLetter "L" :Score 99]}
 {"G" [R :FirstLetter "G" :Score 86]} {"P" [R :FirstLetter "P" :Score 100]}
 {"R" [R :FirstLetter "R" :Score 97]} {"W" [R :FirstLetter "W" :Score 100]}}

```

Related

each, knew, known, new, relation, such, suppose, unless, using, with

while

Loops expressions while a condition is true.

Syntax

(while *condition* *expression* ... **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
condition	truth	1	A truth expression
expression	expression	0+	A call to be evaluated.

Results

Data Type	Description
value	The last value of the last iteration

Remarks

None

Example

```
> (modular ?i 0)
.: true

> (while (< ?i 1000)
    (--> ++ ?i))      ; assign ?i to the increment of ?i.

.: 1000
```

Related

for, iterate, loop, repeat, step, until

whitespace-p

True if the first position of a string is whitespace.

Syntax

(whitespace-p *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	1	A value.

Results

Data Type	Description
truth	True if the value is a string and the first position is whitespace.

Remarks

Whitespace is a space, newline, or tab.

Example

```
> (whitespace-p {a b c})  
. : false  
  
> (whitespace-p "a b c")  
. : false  
  
> (whitespace-p " a b c")  
. : true  
  
> (whitespace-p 450)  
. : false  
  
> (whitespace-p " foo")  
. : true  
  
> (whitespace-p "hello world")  
. : false
```

Related

[capitalized-p](#), [letter-p](#), [lowercase-p](#), [uppercase-p](#)

with

Matches patterns against the knowledge base.

Syntax

```
(with premises option ... action )  
premises ::= premise  
premises ::= premise premises  
premises ::= premise premises  
premises ::= premise restriction ... premises  
restriction ::= (predicate value ...)  
premise ::= [category descriptor ... ]  
category ::= type  
category ::= list  
descriptor ::= slot binding  
descriptor ::= slot condition  
binding ::= as symbol  
binding ::= each symbol  
condition ::= slot = value  
condition ::= slot /= value  
condition ::= slot is unary-predicate  
condition ::= slot not unary-predicate  
condition ::= slot binary-predicate value  
condition ::= slot n-ary-predicate value-list  
condition ::= (predicate value ...)  
option ::= scan number  
option ::= limit number  
option ::= group slot ... by slot ... into symbol  
option ::= merge value ...  
option ::= sort ordering ...  
action ::= deem value1 else value2  
action ::= do expression ...  
action ::= give expression  
action ::= list value ...  
action ::= tally  
action ::= yield expression  
ordering ::= term comparator
```

Module

Base

Parameters

Name	Data Type	Qty	Description
clauses / premises	expression	1+	Either one or more clauses, or, one or more premises
option	expression	0-2	Either scan , limit , group , merge , sort , or any combination.
action	literal	0-1	Either deem , do , give , list , tally , yield .
expression	expression	0+	An expression

Results

Data Type	Description
expression	if the action is deem , then either the success or failure value is returned; if the action is do then the last expression value on the last iteration or nil; If the action is list , then a list of premises or an empty list; if the action is tally , then the number of matches or zero, if the action is give , then the expression is returned.

Remarks

Note that a predicate is a truth function, **scan** tells the number of matches to attempt (default is **infinity**), and **limit** tells how many results to return (default is **infinity**). If the action is **deem**, then the subsequent value is returned if the final descriptor is matched, otherwise the **else** value is returned. If the action is **do**, then for each match the expressions are run, and for the last match, the last value of the last expression is returned, or nil is returned if all descriptors were false or had no matches. If the action is **give**, then the expression is immediately returned from the with call on the first match, akin to **return from with**. If the action is **yield**, then the expression is immediately returned from the with call, but may be resumed with a **next** function call. When all matches are completed, the **done** function is implicitly called to terminate the generator. If the action is **group**, followed by a list of slots and values from which the group is picked, then the literal **by** and a set of slots and values that determines the grouping inclusion , and finally the literal **into** followed by a symbol to which the group shall be bound on each iteration. If the action is either **list** (or **merge**), then a (merged) list is returned or an empty list if nothing matched. If the action is **sort** then the list of slots and comparators should follow. (Note that **list** is required if the sort action is selected.) If the action is **tally**, then the number of matched premises is returned, or zero if no matches.

Example

```
> (relation Fact :All :Are)

.: Fact

> (new Fact :All people :Are mortal) (new Fact :All philosophers :Are people)

.: Fact_1 Fact_2

> (function ExcludedMiddle {}
  (with [Fact :All as ?s :Are as ?m]
    [Fact :All = ?m :Are as ?p]
    (no [Fact :All = ?s :Are = ?p])
    list (premise (knew A :All ?s :Are ?p)))))

.: ExcludedMiddle

> (ExcludedMiddle)

.: {[Fact ^ Fact_3 :All philosophers :Are mortal]}

> (which Fact ^ as ?a :Are = mortal list ?a)

.: {Fact_1 Fact_3}

> (which Fact :Are mortal)

.: {[Fact ^ Fact_1 :All people :Are mortal]
  [Fact ^ Fact_3 :All philosophers :Are mortal]}

> (relation Fruit :Name :Size :Shape :Color)

.: Fruit

> (step ?i from 1 to (random 1 to 1000)
  (new Fruit :Size (pick {small medium large})
    :Shape (pick {ellipsoid spheroid bananoid}))
    :Color (pick {red orange yellow green})))

.: Fruit_387

> (with [Fruit ^ as ?f :Name as ?name :Size as ?size :Shape = spheroid
  :Color = orange]
  (null-p ?name)
  (in {small medium} ?size)
  deem Orange else Other)

.: Orange

> (with
  [Fruit as ?f]
  (let ?f :Size ?size :Shape ?shape :Color ?color)
  (in {small medium} ?size)
  (= ?shape bananoid)
  (= ?color yellow)
  deem true else false)

.: true
```

```

> (relation Customer :CustomerId :FirstName :LastName)

.: Employee

> (relation Order :OrderId :CustomerId :Quantity :Product)

.: Order

> (step ?i from 1 to (random 1 to 10)
  (let ?c (new Customer))
  (step ?j from 1 to (random 0 to 10)
    (new Order :CustomerId ?c)))

.: Order_347

> (with [Customer as ?c]
  [(which Order as ?o (= (:CustomerId ?o) (:CustomerId ?c))) each ?orders]
 tally)

.: 2

> (with
  [Customer as ?c :CustomerId ?x]
  [(with Order :CustomerId = ?x) as ?orders]
 scan 30
 limit 5
 list
  [R :Customer ?c :Orders (# ?orders)])

.: {[R :Customer Customer_1 :Orders 3]
[R :Customer Customer_2 :Orders 7]
[R :Customer Customer_4 :Orders 4]
[R :Customer Customer_3 :Orders 9]}

> (relation Student
  :First
  :Last
  :StudentNo
  :Year
  :Tests {})

> (do
(new Student :First John :Last Jones :No 20 :Year 2 :Tests {100 56 87 86})
(new Student :First Lexie :Last Bates :No 16 :Year 3 :Tests {67 68 98 87})
(new Student :First Yong :Last Lee :No 17 :Year 1 :Tests {78 79 90 95})
(new Student :First Paul :Last Gates :No 14 :Year 4 :Tests {86 89 88 89})
(new Student :First Jenny :Last Luria :No 15 :Year 3 :Tests {99 98 97 99})
(new Student :First Phillipa :Last Sanchez :No 18 :Year 2 :Tests {85 87 89 97})
(new Student :First Patrice :Last Jones :No 13 :Year 1 :Tests {99 95 94 72})
(new Student :First Jesus :Last Castaneda :No 12 :Year 4 :Tests {98 89 95 94})
(new Student :First Charlie :Last Rose :No 11 :Year 2 :Tests {97 98 98 97})
(new Student :First Boris :Last Pushkin :No 19 :Year 3 :Tests {100 85 100 100})
(new Student :First Alex :Last Sartre :No 22 :Year 1 :Tests {85 97 86 95})
(new Student :First Elizabeth :Last Wilson :No 21 :Year 4 :Tests {100 100 85 95}))

.: Student_12

```

```

> (with Student ^ ?student
  (let ?exam 3 ?score 90)
  (> (@ (:Tests ?student) ?exam) ?score)
  list {:Name (:Last ?student) :Score (@ (:Tests ?student) ?exam)})}

.: {{:Name Bates :Score 98}{:Name Luria :Score 97}{:Name Parker :Score 94}
{:Name Castaneda :Score 95}{:Name Rose :Score 98}{:Name Pushkin :Score 100}}


> (with [Student as ?s]
  group ?s
  by :Year into ?g
  list ?g
  sort 1 <)

.: {{1 [Student :First Yong :Last Lee :No 17 :Year 1 :Tests {78 79 90 95}]
[Student :First Patrice :Last Jones :No 13 :Year 1 :Tests {99 95 94 72}]
[Student :First Alex :Last Sartre :No 22 :Year 1 :Tests {85 97 86 95}]}
{2 [Student :First John :Last Jones :No 20 :Year 2 :Tests {100 56 87 86}]
[Student :First Phillipa :Last Sanchez :No 18 :Year 2 :Tests {85 87 89 97}]
[Student :First Charlie :Last Rose :No 11 :Year 2 :Tests {97 98 98 97}]}
{3 [Student :First Lexie :Last Bates :No 16 :Year 3 :Tests {67 68 98 87}]
[Student :First Jenny :Last Luria :No 15] :Year 3 :Tests {99 98 97 99}]
[Student :First Boris :Last Pushkin :No 19 :Year 3 :Tests {100 85 100 100}]}
{4 [Student :First Paul :Last Gates :No 14 :Year 4 :Tests {86 89 88 89}]
[Student :First Jesus :Last Castaneda :No 12 :Year 4 :Tests {98 89 95 94}]
[Student :First Elizabeth :Last Wilson :No 021 :Year 4 :Tests {100 100 85 95})]}]}}}

> (which Student as ?s :Id as ?id
  group ?id
  by (given {?s} (@ ($ (:Last ?s)) 1)) into ?g
  list ?g)

.: {{"B" 16} {"C" 12} {"G" 14} {"P" 19} {"R" 11} {"L" 17 15} {"W" 21} {"S" 18 22} {"J" 20
13} }

> (with [Student as ?s :Tests as ?t]
  (let ?percentile (/ (avg ?t) 10))
  group ($ (:First ?s) (:Last ?s))
  by ?percentile into ?g
  list ?g
  sort 1 < )

.: {{8 "John Jones" "Lexie Bates" "Yong Lee" "Paul Gates" "Phillipa Sanchez"}
{9 "Jenny Luria" "Patrice Jones" "Jesus Castaneda" "Charlie Rose" "Boris
Pushkin" "Alex Sartre" "Elizabeth Wilson"}}

> (with [Student as ?s]
  group [R :FirstLetter (@ ($ (:Last ?s)) 1)
  :Score (:Score ?s)]
  by (given {?s} (> (@ (:Tests ?s) 1) 85)))
  into ?g
  list ?g
  sort (given {?x} (:FirstLetter ?x)) <)

```

```
.: [{"C" [R :FirstLetter "C" :Score 98]},{"J" [R :FirstLetter "J" :Score 100]
[R :FirstLetter "J" :Score 99]}, {"L" [R :FirstLetter "L" :Score 99]}
{"G" [R :FirstLetter "G" :Score 86]}, {"P" [R :FirstLetter "P" :Score 100]}
 {"R" [R :FirstLetter "R" :Score 97]}, {"W" [R :FirstLetter "W" :Score 100]}]}
```

Related

each, which

within

True if a position is inside a sequence.

Syntax

(within *sequence position* **)**

Module

Base

Parameters

Name	Data Type	Qty	Description
sequence	sequence	1	A sequence.
position	variant	1+	A number or coordinate (i.e. a list of numbers).

Results

Data Type	Description
truth	Returns true if the position is in the sequence, false otherwise.

Remarks

None.

Example

```
> (within "not empty" 5)
.: true

> (within {not empty} 1)
.: true

> (within "" 1)
.: false

> (within {} 5)
.: false

> (within {{a b}{c d}{e f}} {3 2})
.: true

> (within {{a b}{c d}{e f}} {7 4})
.: false
```

Related

@ *element*, beyond, length, empty, more

wrap

Prohibits modifications to a module.

Syntax

(**wrap** *module*)

Module

Base

Parameters

Name	Data Type	Qty	Description
module	module	1	A module

Results

Data Type	Description
literal	The literal wrapped

Remarks

None

Example

```
> (module Math
    (function sum ?args (apply + ?args)))

.: Math

> (wrap Math)

.: wrapped

> (extend Math
    (function prod ?args (apply * ?args)))

.: [Failure :Name Permission :Text "Can't modify a wrapped module"]

> (unwrap Math)

.: unwrapped

> (extend Math
    (function prod ?args (apply * ?args)))

.: Math
```

Related

[unwrap](#)

write

Writes values to a writeable resource.

Syntax

(**write** *file value*)

Module

IO

Parameters

Name	Data Type	Qty	Description
file	resource	1	A file or pipe.
value	variant	1	A value to write
bits	integer	0-1	The size of the byte or character in bits. Either 7, 8, 16,o,r 32. (Default is 8.)

Results

Data Type	Description
resource	Returns the resource

Remarks

None.

Example

```
> (let ?file (file name "test.txt"))

.: true

> (read ?file)

.: "Hello"

> (seek ?file 1)

.: File-1

> (write ?file ($ Goodbye my friends.))

.: File-1

> (close ?file)

.: closed
```

Related

bytes, close, file, read, reposition, write

xnor

Logical equivalence.

Syntax

(**xnor** *truth* *truth*)

Module

Base

Parameters

Name	Data Type	Qty	Description
truth	truth	2	A truth value

Results

Data Type	Description
truth	True if the argument values are equal

Remarks

Implements logical equivalence as the result is true when both arguments are the same.

Example

```
> (xnor true false)  
.: false  
  
> (xnor false true)  
.: false  
  
> (xnor false false)  
.: true  
  
> (xnor true true)  
.: true
```

Related

and, nand, void, nor, not, or, is, xor

xor

Logical exclusive disjunction.

Syntax

(xor *truth* *truth*)

Module

Base

Parameters

Name	Data Type	Qty	Description
truth	truth	2	A truth value

Results

Data Type	Description
truth	True if the argument values are not equal

Remarks

None.

Example

```
> (xor true false)
.: true
> (xor false true)
.: true
> (xor false false)
.: false
> (xor true true)
.: false
```

Related

and, nand, void, nor, not, or, is, xnor

yield

Returns a result from a series generator.

Syntax

(yield *value*)

Module

Base

Parameters

Name	Data Type	Qty	Description
value	variant	0-1	Any value to be returned. Default is nil.

Results

Data Type	Description
variant	The returned value.

Remarks

Yield exits from an encompassing generator. If the value is not specified, **nil** is returned. When yield is executed the encompassing generator immediately returns the value. To termine use **done**.

Example

```
> (generator myGenerator {?interrupt}
  (yield 1)
  (yield 2)
  (if ?interrupt (done))
  (yield 3)
  (yield 4)
  (done))

.: myGenerator

> (collect ?x in (myGenerator true) ?x)

.: {1 2}

> (collect ?x in (myGenerator false) ?x)

.: {1 2 3 4}
```

Related

[done](#), [generator-p](#), [series](#)

zap

Updates associations and sequences with nil values.

Syntax

(**zap** *container place ...*)

Module

Base

Parameters

Name	Data Type	Qty	Description
container	variant	1	A sequence or assortment
place	variant	0+	A slot, key, or position.

Results

Data Type	Description
container	Returns the modified container.

Remarks

If no places are provided, then all keys, positions, or slots are set to **nil**.

Example

```
> (relation A :x 1 :y 2 :z 3)
.: a

> (get (new A))
.: [A ^ A_1 :x 1 :y 2 :z 3]

> (zap A_1 :y)
.: A_1

> (get A_1)
.: [A ^ A_1 :x 1 :y nil :z 3]

> (zap A_1)
.: A_1

> (get A_1)
.: [A ^ A_1 :x nil :y nil :z nil]
```

Related

let, new, nix

zero-p

True if a number is zero.

Syntax

(zero-p *number*)

Module

Math

Parameters

Name	Data Type	Qty	Description
number	number	1	A number

Results

Data Type	Description
truth	Returns true if the number is zero.

Remarks

None.

Example

```
> (zero-p 100)
.: false
> (zero-p 0)
.: true
> (zero-p -0)
.: true
> (zero-p -30)
: false
```

Related

even-p, negative-p, odd-p, positive-p

Bibliography

1. Chambers, C. 1992
The Design and Implementation of the SELF Compiler, an Optimizing Compiler for Object-Oriented Programming Languages
2. Forgy, Charles 1981
OPS5 User's Manual, Technical Report CMU-CS-81-135 (Carnegie Mellon University)
3. Krishnamurthi, Sriram 2017
Programming Languages: Application and Interpretation, Second Edition
4. Linker, Sheldon O. 2005
A knowledge base and question answering system based on loglan and english
5. Linker, Sheldon O., Miller, M. S. P. 2014
Association for the Advancement of Artificial Intelligence
Spring Symposium Series 2014 (AAAI SSS 14)
Implementing Selves with Safe Motivational Systems and Self-Improvement Invited Talk
"Premise: A Language for Cognitive Systems"
6. Miller, Michael S. P. 2013
The Construction of Reality in a Cognitive System
7. Miller, Michael S. P. 2018
Building Minds with Patterns, ISBN 978-0-692-54140-1
8. Queinnec, Christian 1994
Lisp in Small Pieces, Cambridge University Press, ISBN 0-521-54566-8
9. Steele Jr , Guy L. 1981
Common LISP: The Language, 2nd Ed., Digital Press, ISBN 978-1-55558-041-4.

Index

-- decrement	126	append	181
' quote	143	apply	182
- subtraction	127	arguments	183
# size	129	arity	185
\$ concatenate	130	array	186
\$\$ elide	131	asecant	187
% shell	132	asine	188
& merge	133	ask	189
&& abridge	134	atan	191
* multiplication	135	atom	27
** exponentiation	136	attach	192
/ division	137	Auto-named Functions	58
// nth root	138	average	193
// safe divide	139	avg	194
/~ dissimilarity	140	await	195
/= unequal	141	before-p	196
@ element	128	beginning	197
\n newline	156	best	198
\s space	157	beyond	200
^ thought id	158	big	29, 201
` expand	144	binary	28
~ similarity	142	bind	41, 202
+ addition	145	bindings	203
++ increment	146	bion	204
< less	148	bitwise	205
<- before tie	40, 147	bound	207
<= less or equal	149	bound-p	208
<== before put	150	bracket	209
= equal	151	break	70, 210
==> after put	152	busy-p	211
--> after tie	40, 154	but	212
> greater	153	bye	213
>= greater or equal	155	call	53, 214
abolish	159	can	215
abort	160	cancel	216
about	161	cancelled-p	217
abs	162	canonify	218
absent	163	capitalize	219
acosecant	164	case	64, 220
acosine	165	categorize	221
acotangent	166	cede	222
actual	167	ceiling	223
add	168	cell	224
address	169	channel	225
agent	170	char	227
alias	172	choose	228
align	173	clear	229
all	174	clip	230
alphabetic-p	176	clone	231
alphanumeric-p	177	close	232
and	178	closure	233
anonym	58	coalesce	235
Anonymous Functions	58	collect	237
any	179	collection	46, 239

combine	240
common	241
comparable-p	242
compare	243
complete	75, 244
complex	30, 245
Complex numbers	30
compose	246
conceive	247
concurrent	75, 248
configuration	47, 249
confirm	69, 250
confute	69, 251
constant	35, 252
contains	253
continuation	49
continue	70, 254
convertible-p	255
copy	256
copyright	257
correlate	258
cosecant	259
cosine	260
cotangent	261
count	262
critical	263
cut	264
data	49, 51, 265
data types	25
date	32, 267
decimal	29
Declarative Programming	24
declared-p	268
decode	269
def	39, 270
default	271
definitions	272
defunct	273
degrees	274
delete	275
dependencies	276
depends	278
deq	277
detach	279
did	281
difference	280
digit	282
digit-p	283
digits	284
dimensions	285
discard	286
disjoint-p	287
distinct	288
distribute	289
divide	290
divisible-p	292
do	293
done	294
drop	295
duplicate	296
during-p	297
dynamic	298
Dynamic Scope	37
e	299
each	300
encode	304
endoom	58
enq	305
ensure	73, 306
entries	307
enum	308
enumeration	47, 309
enumerations	310
environment	47, 311
ephemerons	47
epoch	312
eradicate	313
erase	314
escape	73, 315
eternity	33
eval	316
even-p	317
every	318
exactly	319
exchange	320
excludes	321
exists-p	322
exit	70
exit	323
exonym	53
exponential	324
expression	59, 325
extend	326
facility	327
few	329
file	50, 330
files	331
fill	332
filter	333
find	334
finishes-p	336
finishing	337
fix	39, 338
float	30, 339
floor	340
fold	341
folder	342
folders	343
for	66, 344
forever	345
forgo	346
format	347
fractional	348
free	349
full	350
function	351

Functional Programming	23
functions	354
gather	355
generator	356
get	358
given	359
global	361
Global Scope	36
go	74, 362
grok	363
group	364
halt	365
has	366
hash	367
help	368
here	369
hexadecimal	29
hexatrigesimal	29
hyperlink	370
id	371
identical-p	372
identifier	35
identity	44, 373
idle	374
if	64, 375
imaginary	30, 376
Imaginary numbers	30
Imperative Programming	22
impossible	34
in	377
includes	378
indefinite	34
index	379
indices	380
infinity	31
infix	381
insert	383
inside	382
insort	384
instance	61
instantiate	385
integer	28, 386
interleave	387
intersection	388
intersects-p	389
interval	32, 390
into	391
invoke	392
is	27, 393
junction	394
key	396
keys	397
keywords	52, 398
knew	399
knowledge	400
known	402
lacks	403
last	404
left	405
let	39, 406
lexemes	407
Lexical Scope	37
lexicon	48, 408
lexicons	409
license	410
like	411
list	59, 412
literal	42, 413
local	414
location	415
log	416
long	29, 417
long number	29
loop	66, 418
lowercase	419
lowercase-p	420
macro	421
macros	422
make	423
map	424
max	425
maximum	426
may	427
median	428
meets-p	429
meron	430
meronymy	432
meron-p	431
method	433
methods	45
mid	437
min	438
minimum	439
missing	440
mod	441
modular	442
module	443
Module Scope	36
modules	52, 444
moment	33, 445
more-p	446
morph	447
most	448
move	449
my	450
nall	451
nand	453
negative-p	454
neternity	33
nevery	455
new	456
next	457
ngrams	458
ninfinity	31
nix	459
no	460

none	462
nor	463
not	464
nothing	27, 465
null-p	466
number	28
octal	28
odd-p	467
old	468
omit	469
on	65, 470
only	471
open	472
or	473
out	474
overlaps-p	475
pad	476
parameters	54, 477
partition	479
path	480
pattern	62, 481
pause	482
perform	483
pi	484
pick	485
pipe	486
pop	487
posit	488
position	489
positions	490
positive-p	491
premise	492
probability	493
proceed	494
product	495
prototype	44
punctuation-p	496
push	497
put	498
qualified	499
qualifiers	500
quantify	501
quantity	502
radians	503
radix	28, 504
random	505
range	506
rational	30, 507
read	508
Read Evaluate Print Loop	22
ready-p	509
real	30, 510
Real numbers	30
reasoning	511
reclaim	512
reduce	513
references	36
relation	514
relations	516
relatum	43
release	517
remove	518
repeat	67, 519
replace	520
require	521
reset	522
resignal	523
resize	524
resource	46
rest	525
Restricted Scope	38
resume	72
retract	526
return	72, 527
reverse	530
right	531
rip	532
round	533
rule	534
rules	538
same	539
scale	540
scatter	76, 541
scope	542
seal	543
secant	544
seconds	32, 33, 545
securelink	546
seek	547
self	548
separator	549
sequence	53
series	550
service	551
set	41, 552
sever	553
shuffle	554
sigma	555
sign	556
signal	71, 557
significand	558
sine	559
so	560
socket	561
some	562
sort	563
split	565
start	566
starts-p	567
statistics	568
step	67, 569
stream	570
string	60, 571
structure	572
structures	42, 574
sub	575

subset-p	576
substitute.....	577
subsumes-p.....	578
sum	579
summation.....	580
supply	581
suppose.....	582
survey	587
swap.....	588
symbol	35, 589
Symbol Scoping.....	36
symbols.....	590
take	591
takeable	592
tally	593
tangent	594
tarry	595
task	50, 596
Task Scope	37
tasks.....	598
taxon.....	599
taxonomy.....	601
taxon-p.....	600
tell.....	602
there	604
thing.....	27
thing-p	27
this	605
thought.....	48, 606
thunk.....	607
thunks.....	609
tick	33, 610
tie	40, 611
time.....	32, 612
top	614
transfer	615
traverse.....	616
trim	617
truncate	618
try	65, 619
tuple.....	621
Tuples	61
uid	622
unbound	623
unbound-p.....	624
undefined	31
unicode.....	625
union	626
unique	627
unless	628
unlike.....	629
unqualified	630
unseal	631
unsigned.....	31, 632
until	68, 633
unwrap	634
uppercase	635
uppercase-p.....	636
url.....	637
use	638
User Defined Functions	53
User Defined Macros.....	59
values	639
variant	27
vector	640
vectors.....	60
version.....	641
void-p	642
wait	643
which	644
while	68, 649
whitespace-p	650
with	651
within	657
wrap	658
write	659
xnor	660
xor	661
yield	662
zap	663
zero-p	664

