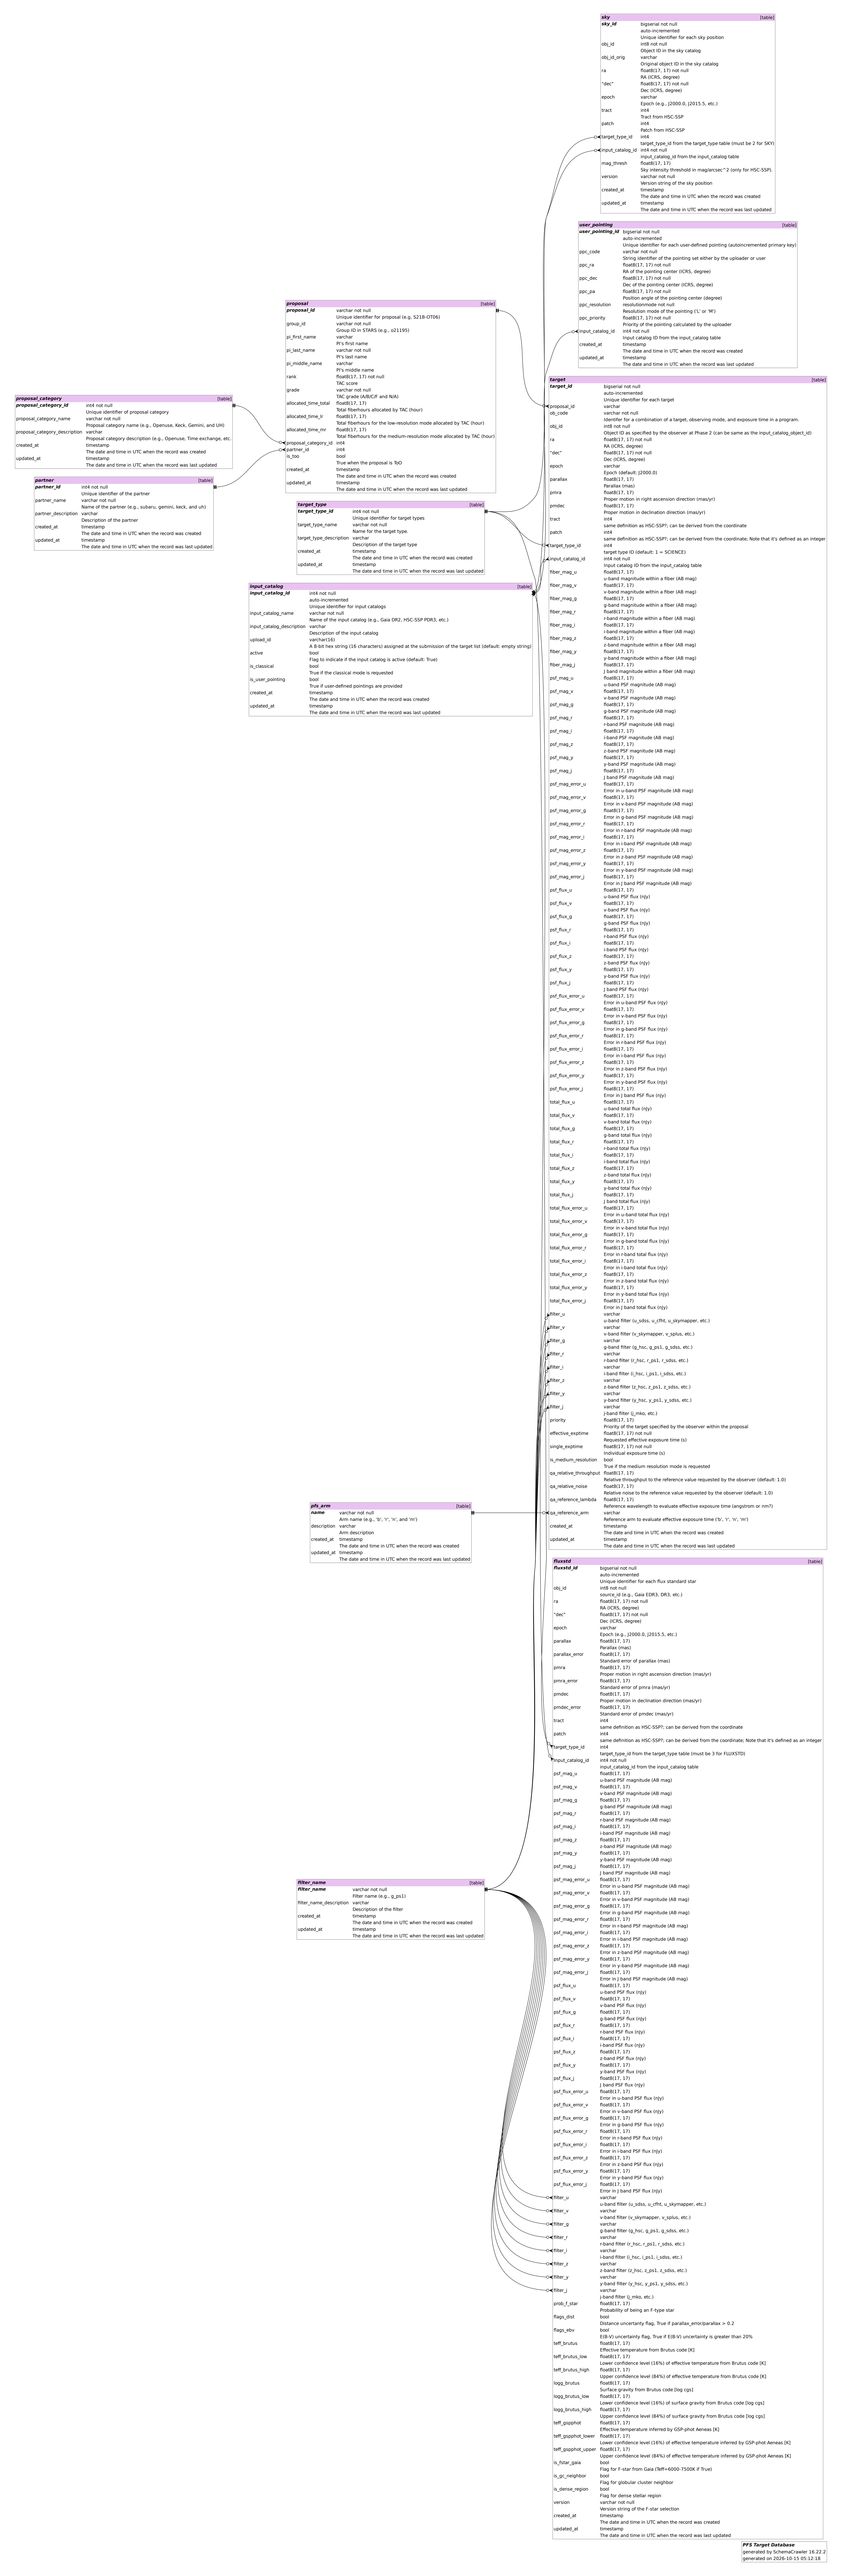
sky [Table]
sky_id bigserial not null
auto-incremented
Unique identifier for each sky position
obj_id int8 not null
Object ID in the sky catalog
obj_id_orig varchar
Original object ID in the sky catalog
ra float8(17, 17) not null
RA (ICRS, degree)
"dec" float8(17, 17) not null
Dec (ICRS, degree)
epoch varchar
Epoch (e.g., J2000.0, J2015.5, etc.)
tract int4
Tract from HSC-SSP
patch int4
Patch from HSC-SSP
target_type_id int4
target_type_id from the target_type table (must be 2 for SKY)
input_catalog_id int4 not null
input_catalog_id from the input_catalog table
mag_thresh float8(17, 17)
Sky intensity threshold in magarcsec^2 (only for HSC-SSP)
version varchar not null
Version string of the sky position
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
user_pointing [Table]
user_pointing_id bigserial not null
auto-incremented
Unique identifier for each user-defined pointing (autoincremented primary key)
ppc_code varchar not null
String identifier of the pointing set either by the uploader or user
ppc_ra float8(17, 17) not null
RA of the pointing center (ICRS, degree)
ppc_dec float8(17, 17) not null
Dec of the pointing center (ICRS, degree)
ppc_pa float8(17, 17) not null
Position angle of the pointing center (degree)
ppc_resolution resolutionmode not null
Resolution mode of the pointing ('L' or 'M')
ppc_priority float8(17, 17) not null
Priority of the pointing calculated by the uploader
input_catalog_id int4 not null
Input catalog ID from the input_catalog table
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
proposal [Table]
proposal_id varchar not null
Unique identifier for proposal (e.g., S21B-OT06)
group_id varchar not null
Group ID in STARS (e.g., o21105)
pi_first_name varchar
PI's first name
pi_last_name varchar not null
PI's last name
pi_middle_name varchar
PI's middle name
rank float8(17, 17) not null
TAC score
grade varchar not null
TAC grade (A/B/C/F and N/A)
allocated_time_total float8(17, 17)
Total fiberhours allocated by TAC (hour)
allocated_time_lr float8(17, 17)
Total fiberhours for the low-resolution mode allocated by TAC (hour)
allocated_time_mr float8(17, 17)
Total fiberhours for the medium-resolution mode allocated by TAC (hour)
proposal_category_id int4
partner_id int4
is_too bool
True when the proposal is ToO
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
proposal_category [Table]
proposal_category_id int4 not null
Unique identifier of proposal category
proposal_category_name varchar not null
Proposal category name (e.g., Openuse, Keck, Gemini, and UH)
proposal_category_description varchar
Proposal category description (e.g., Openuse, Time exchange, etc.
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
partner [Table]
partner_id int4 not null
Unique identifier of the partner
partner_name varchar not null
Name of the partner (e.g., subaru, gemini, keck, and uh)
partner_description varchar
Description of the partner
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
target_type [Table]
target_type_id int4 not null
Unique identifier for target types
target_type_name varchar not null
Name for the target type
target_type_description varchar
Description of the target type
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
target [Table]
target_id bigserial not null
auto-incremented
Unique identifier for each target
proposal_id varchar
obj_code varchar not null
Identifier for a combination of a target, observing mode, and exposure time in a program
obj_id int8 not null
Object ID as specified by the observer at Phase 2 (can be same as the input_catalog_object_id)
ra float8(17, 17) not null
RA (ICRS, degree)
"dec" float8(17, 17) not null
Dec (ICRS, degree)
epoch varchar
Epoch (default: J2000.0)
parallax float8(17, 17)
Parallax (mas)
pmra float8(17, 17)
Proper motion in right ascension direction (mas/yr)
pmdec float8(17, 17)
Proper motion in declination direction (mas/yr)
tract int4
same definition as HSC-SSP; can be derived from the coordinate
patch int4
same definition as HSC-SSP; can be derived from the coordinate; Note that it's defined as an integer
target_type_id int4
target type ID (default: 1 -> SCIENCE)
input_catalog_id int4 not null
Input catalog ID from the input_catalog table
fiber_mag_u float8(17, 17)
u-band magnitude within a fiber (AB mag)
fiber_mag_v float8(17, 17)
v-band magnitude within a fiber (AB mag)
fiber_mag_g float8(17, 17)
g-band magnitude within a fiber (AB mag)
fiber_mag_r float8(17, 17)
r-band magnitude within a fiber (AB mag)
fiber_mag_i float8(17, 17)
i-band magnitude within a fiber (AB mag)
fiber_mag_z float8(17, 17)
z-band magnitude within a fiber (AB mag)
fiber_mag_y float8(17, 17)
y-band magnitude within a fiber (AB mag)
fiber_mag_j float8(17, 17)
j-band magnitude within a fiber (AB mag)
psf_mag_u float8(17, 17)
u-band PSF magnitude (AB mag)
psf_mag_v float8(17, 17)
v-band PSF magnitude (AB mag)
psf_mag_g float8(17, 17)
g-band PSF magnitude (AB mag)
psf_mag_r float8(17, 17)
r-band PSF magnitude (AB mag)
psf_mag_i float8(17, 17)
i-band PSF magnitude (AB mag)
psf_mag_z float8(17, 17)
z-band PSF magnitude (AB mag)
psf_mag_y float8(17, 17)
y-band PSF magnitude (AB mag)
psf_mag_j float8(17, 17)
j-band PSF magnitude (AB mag)
psf_mag_error_u float8(17, 17)
Error in u-band PSF magnitude (AB mag)
psf_mag_error_v float8(17, 17)
Error in v-band PSF magnitude (AB mag)
psf_mag_error_g float8(17, 17)
Error in g-band PSF magnitude (AB mag)
psf_mag_error_r float8(17, 17)
Error in r-band PSF magnitude (AB mag)
psf_mag_error_i float8(17, 17)
Error in i-band PSF magnitude (AB mag)
psf_mag_error_z float8(17, 17)
Error in z-band PSF magnitude (AB mag)
psf_mag_error_y float8(17, 17)
Error in y-band PSF magnitude (AB mag)
psf_mag_error_j float8(17, 17)
Error in j-band PSF magnitude (AB mag)
psf_flux_u float8(17, 17)
u-band PSF flux (nJy)
psf_flux_v float8(17, 17)
v-band PSF flux (nJy)
psf_flux_g float8(17, 17)
g-band PSF flux (nJy)
psf_flux_r float8(17, 17)
r-band PSF flux (nJy)
psf_flux_i float8(17, 17)
i-band PSF flux (nJy)
psf_flux_z float8(17, 17)
z-band PSF flux (nJy)
psf_flux_y float8(17, 17)
y-band PSF flux (nJy)
psf_flux_j float8(17, 17)
j-band PSF flux (nJy)
psf_flux_error_u float8(17, 17)
Error in u-band PSF flux (nJy)
psf_flux_error_v float8(17, 17)
Error in v-band PSF flux (nJy)
psf_flux_error_g float8(17, 17)
Error in g-band PSF flux (nJy)
psf_flux_error_r float8(17, 17)
Error in r-band PSF flux (nJy)
psf_flux_error_i float8(17, 17)
Error in i-band PSF flux (nJy)
psf_flux_error_z float8(17, 17)
Error in z-band PSF flux (nJy)
psf_flux_error_y float8(17, 17)
Error in y-band PSF flux (nJy)
psf_flux_error_j float8(17, 17)
Error in j-band PSF flux (nJy)
total_flux_u float8(17, 17)
u-band total flux (nJy)
total_flux_v float8(17, 17)
v-band total flux (nJy)
total_flux_g float8(17, 17)
g-band total flux (nJy)
total_flux_r float8(17, 17)
r-band total flux (nJy)
total_flux_i float8(17, 17)
i-band total flux (nJy)
total_flux_z float8(17, 17)
z-band total flux (nJy)
total_flux_y float8(17, 17)
y-band total flux (nJy)
total_flux_j float8(17, 17)
j-band total flux (nJy)
total_flux_error_u float8(17, 17)
Error in u-band total flux (nJy)
total_flux_error_v float8(17, 17)
Error in v-band total flux (nJy)
total_flux_error_g float8(17, 17)
Error in g-band total flux (nJy)
total_flux_error_r float8(17, 17)
Error in r-band total flux (nJy)
total_flux_error_i float8(17, 17)
Error in i-band total flux (nJy)
total_flux_error_z float8(17, 17)
Error in z-band total flux (nJy)
total_flux_error_y float8(17, 17)
Error in y-band total flux (nJy)
total_flux_error_j float8(17, 17)
Error in j-band total flux (nJy)
filter_u varchar
u-band filter (u_sdss, u_cfht, u_skymapper, etc.)
filter_v varchar
v-band filter (v_skymapper, v_splus, etc.)
filter_g varchar
g-band filter (g_hsc, g_ps1, g_sdss, etc.)
filter_r varchar
r-band filter (r_hsc, r_ps1, r_sdss, etc.)
filter_i varchar
i-band filter (i_hsc, i_ps1, i_sdss, etc.)
filter_z varchar
z-band filter (z_hsc, z_ps1, z_sdss, etc.)
filter_y varchar
y-band filter (y_hsc, y_ps1, y_sdss, etc.)
filter_j varchar
j-band filter (j_nbs, etc.)
priority float8(17, 17)
Priority of the target specified by the observer within the proposal
effective_exptime float8(17, 17) not null
Requested effective exposure time (s)
single_exptime float8(17, 17) not null
Individual exposure time (s)
is_medium_resolution bool
True if the medium resolution mode is requested
spa_relative_throughput float8(17, 17)
Relative throughput to the reference value requested by the observer (default: 1.0)
spa_relative_noise float8(17, 17)
Relative noise to the reference value requested by the observer (default: 1.0)
spa_reference_lambda float8(17, 17)
Reference wavelength to evaluate effective exposure time (angstrom or nm?)
spa_reference_arm varchar
Reference arm to evaluate effective exposure time ('b', 'r', 'n', 'm')
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
input_catalog [Table]
input_catalog_id int4 not null
auto-incremented
Unique identifier for input catalogs
input_catalog_name varchar not null
Name of the input catalog (e.g., Gaia DR2, HSC-SSP PDR3, etc.)
input_catalog_description varchar
Description of the input catalog
upload_id varchar(16)
A 8-bit hex string (16 characters) assigned at the submission of the target list (default: empty string)
active bool
Flag to indicate if the input catalog is active (default: True)
is_classical bool
True if the classical mode is requested
is_user_pointing bool
True if user-defined pointings are provided
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
psf_flux_error_u float8(17, 17)
Error in u-band PSF flux (nJy)
psf_flux_error_v float8(17, 17)
Error in v-band PSF flux (nJy)
psf_flux_error_g float8(17, 17)
Error in g-band PSF flux (nJy)
psf_flux_error_r float8(17, 17)
Error in r-band PSF flux (nJy)
psf_flux_error_i float8(17, 17)
Error in i-band PSF flux (nJy)
psf_flux_error_z float8(17, 17)
Error in z-band PSF flux (nJy)
psf_flux_error_y float8(17, 17)
Error in y-band PSF flux (nJy)
psf_flux_error_j float8(17, 17)
Error in j-band PSF flux (nJy)
total_flux_u float8(17, 17)
u-band total flux (nJy)
total_flux_v float8(17, 17)
v-band total flux (nJy)
total_flux_g float8(17, 17)
g-band total flux (nJy)
total_flux_r float8(17, 17)
r-band total flux (nJy)
total_flux_i float8(17, 17)
i-band total flux (nJy)
total_flux_z float8(17, 17)
z-band total flux (nJy)
total_flux_y float8(17, 17)
y-band total flux (nJy)
total_flux_j float8(17, 17)
j-band total flux (nJy)
total_flux_error_u float8(17, 17)
Error in u-band total flux (nJy)
total_flux_error_v float8(17, 17)
Error in v-band total flux (nJy)
total_flux_error_g float8(17, 17)
Error in g-band total flux (nJy)
total_flux_error_r float8(17, 17)
Error in r-band total flux (nJy)
total_flux_error_i float8(17, 17)
Error in i-band total flux (nJy)
total_flux_error_z float8(17, 17)
Error in z-band total flux (nJy)
total_flux_error_y float8(17, 17)
Error in y-band total flux (nJy)
total_flux_error_j float8(17, 17)
Error in j-band total flux (nJy)
filter_u varchar
u-band filter (u_sdss, u_cfht, u_skymapper, etc.)
filter_v varchar
v-band filter (v_skymapper, v_splus, etc.)
filter_g varchar
g-band filter (g_hsc, g_ps1, g_sdss, etc.)
filter_r varchar
r-band filter (r_hsc, r_ps1, r_sdss, etc.)
filter_i varchar
i-band filter (i_hsc, i_ps1, i_sdss, etc.)
filter_z varchar
z-band filter (z_hsc, z_ps1, z_sdss, etc.)
filter_y varchar
y-band filter (y_hsc, y_ps1, y_sdss, etc.)
filter_j varchar
j-band filter (j_nbs, etc.)
priority float8(17, 17)
Priority of the target specified by the observer within the proposal
effective_exptime float8(17, 17) not null
Requested effective exposure time (s)
single_exptime float8(17, 17) not null
Individual exposure time (s)
is_medium_resolution bool
True if the medium resolution mode is requested
spa_relative_throughput float8(17, 17)
Relative throughput to the reference value requested by the observer (default: 1.0)
spa_relative_noise float8(17, 17)
Relative noise to the reference value requested by the observer (default: 1.0)
spa_relative_lambda float8(17, 17)
Reference wavelength to evaluate effective exposure time (angstrom or nm?)
spa_reference_arm varchar
Reference arm to evaluate effective exposure time ('b', 'r', 'n', 'm')
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
psf_mag_error_u float8(17, 17)
Error in u-band PSF magnitude (AB mag)
psf_mag_error_v float8(17, 17)
Error in v-band PSF magnitude (AB mag)
psf_mag_error_g float8(17, 17)
Error in g-band PSF magnitude (AB mag)
psf_mag_error_r float8(17, 17)
Error in r-band PSF magnitude (AB mag)
psf_mag_error_i float8(17, 17)
Error in i-band PSF magnitude (AB mag)
psf_mag_error_z float8(17, 17)
Error in z-band PSF magnitude (AB mag)
psf_mag_error_y float8(17, 17)
Error in y-band PSF magnitude (AB mag)
psf_mag_error_j float8(17, 17)
Error in j-band PSF magnitude (AB mag)
psf_flux_u float8(17, 17)
u-band PSF flux (nJy)
psf_flux_v float8(17, 17)
v-band PSF flux (nJy)
psf_flux_g float8(17, 17)
g-band PSF flux (nJy)
psf_flux_r float8(17, 17)
r-band PSF flux (nJy)
psf_flux_i float8(17, 17)
i-band PSF flux (nJy)
psf_flux_z float8(17, 17)
z-band PSF flux (nJy)
psf_flux_y float8(17, 17)
y-band PSF flux (nJy)
psf_flux_j float8(17, 17)
j-band PSF flux (nJy)
psf_flux_error_u float8(17, 17)
Error in u-band PSF flux (nJy)
psf_flux_error_v float8(17, 17)
Error in v-band PSF flux (nJy)
psf_flux_error_g float8(17, 17)
Error in g-band PSF flux (nJy)
psf_flux_error_r float8(17, 17)
Error in r-band PSF flux (nJy)
psf_flux_error_i float8(17, 17)
Error in i-band PSF flux (nJy)
psf_flux_error_z float8(17, 17)
Error in z-band PSF flux (nJy)
psf_flux_error_y float8(17, 17)
Error in y-band PSF flux (nJy)
psf_flux_error_j float8(17, 17)
Error in j-band PSF flux (nJy)
filter_u varchar
u-band filter (u_sdss, u_cfht, u_skymapper, etc.)
filter_v varchar
v-band filter (v_skymapper, v_splus, etc.)
filter_g varchar
g-band filter (g_hsc, g_ps1, g_sdss, etc.)
filter_r varchar
r-band filter (r_hsc, r_ps1, r_sdss, etc.)
filter_i varchar
i-band filter (i_hsc, i_ps1, i_sdss, etc.)
filter_z varchar
z-band filter (z_hsc, z_ps1, z_sdss, etc.)
filter_y varchar
y-band filter (y_hsc, y_ps1, y_sdss, etc.)
filter_j varchar
j-band filter (j_nbs, etc.)
prob_f_star float8(17, 17)
Probability of being an F-type star
flags_dist bool
Distance uncertainty flag, True if parallax_error/parallax > 0.2
flags_ebv bool
E(B-V) uncertainty flag, True if E(B-V) uncertainty is greater than 20%
teff_brutus float8(17, 17)
Effective temperature from Brutus code [K]
teff_brutus_low float8(17, 17)
Lower confidence level (16%) of effective temperature from Brutus code [K]
teff_brutus_high float8(17, 17)
Upper confidence level (84%) of effective temperature from Brutus code [K]
logg_brutus float8(17, 17)
Surface gravity from Brutus code [log cgs]
logg_brutus_low float8(17, 17)
Lower confidence level (16%) of surface gravity from Brutus code [log cgs]
logg_brutus_high float8(17, 17)
Upper confidence level (84%) of surface gravity from Brutus code [log cgs]
teff_gspphot float8(17, 17)
Effective temperature inferred by GSP-phot Aeneas [K]
teff_gspphot_lower float8(17, 17)
Lower confidence level (16%) of effective temperature inferred by GSP-phot Aeneas [K]
teff_gspphot_upper float8(17, 17)
Upper confidence level (84%) of effective temperature inferred by GSP-phot Aeneas [K]
is_fstar_gaia bool
Flag for F-star from Gaia (Teff=6000-7500K if True)
is_gc_neighbor bool
Flag for globular cluster neighbor
is_dense_region bool
Flag for dense stellar region
version varchar not null
Version string of the F-star selection
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
jdy_arm [Table]
name varchar not null
Arm name (e.g., 'b', 'r', 'n', and 'm')
description varchar
Arm description
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
fluxstd [Table]
fluxstd_id bigserial not null
auto-incremented
Unique identifier for each flux standard star
obj_id int8 not null
source_id (e.g., Gaia EDR3, DR3, etc.)
ra float8(17, 17) not null
RA (ICRS, degree)
"dec" float8(17, 17) not null
Dec (ICRS, degree)
epoch varchar
Epoch (e.g., J2000.0, J2015.5, etc.)
parallax float8(17, 17)
Parallax (mas)
parallax_error float8(17, 17)
Standard error of parallax (mas)
pmra float8(17, 17)
Proper motion in right ascension direction (mas/yr)
pmra_error float8(17, 17)
Standard error of pmra (mas/yr)
pmdec float8(17, 17)
Proper motion in declination direction (mas/yr)
pmdec_error float8(17, 17)
Standard error of pmdec (mas/yr)
tract int4
same definition as HSC-SSP; can be derived from the coordinate
patch int4
same definition as HSC-SSP; can be derived from the coordinate; Note that it's defined as an integer
target_type_id int4
target_type_id from the target_type table (must be 3 for FLUXSTD)
input_catalog_id int4 not null
input_catalog_id from the input_catalog table
psf_mag_u float8(17, 17)
u-band PSF magnitude (AB mag)
psf_mag_v float8(17, 17)
v-band PSF magnitude (AB mag)
psf_mag_g float8(17, 17)
g-band PSF magnitude (AB mag)
psf_mag_r float8(17, 17)
r-band PSF magnitude (AB mag)
psf_mag_i float8(17, 17)
i-band PSF magnitude (AB mag)
psf_mag_z float8(17, 17)
z-band PSF magnitude (AB mag)
psf_mag_y float8(17, 17)
y-band PSF magnitude (AB mag)
psf_mag_j float8(17, 17)
j-band PSF magnitude (AB mag)
psf_mag_error_u float8(17, 17)
Error in u-band PSF magnitude (AB mag)
psf_mag_error_v float8(17, 17)
Error in v-band PSF magnitude (AB mag)
psf_mag_error_g float8(17, 17)
Error in g-band PSF magnitude (AB mag)
psf_mag_error_r float8(17, 17)
Error in r-band PSF magnitude (AB mag)
psf_mag_error_i float8(17, 17)
Error in i-band PSF magnitude (AB mag)
psf_mag_error_z float8(17, 17)
Error in z-band PSF magnitude (AB mag)
psf_mag_error_y float8(17, 17)
Error in y-band PSF magnitude (AB mag)
psf_mag_error_j float8(17, 17)
Error in j-band PSF magnitude (AB mag)
psf_flux_u float8(17, 17)
u-band PSF flux (nJy)
psf_flux_v float8(17, 17)
v-band PSF flux (nJy)
psf_flux_g float8(17, 17)
g-band PSF flux (nJy)
psf_flux_r float8(17, 17)
r-band PSF flux (nJy)
psf_flux_i float8(17, 17)
i-band PSF flux (nJy)
psf_flux_z float8(17, 17)
z-band PSF flux (nJy)
psf_flux_y float8(17, 17)
y-band PSF flux (nJy)
psf_flux_j float8(17, 17)
j-band PSF flux (nJy)
psf_flux_error_u float8(17, 17)
Error in u-band PSF flux (nJy)
psf_flux_error_v float8(17, 17)
Error in v-band PSF flux (nJy)
psf_flux_error_g float8(17, 17)
Error in g-band PSF flux (nJy)
psf_flux_error_r float8(17, 17)
Error in r-band PSF flux (nJy)
psf_flux_error_i float8(17, 17)
Error in i-band PSF flux (nJy)
psf_flux_error_z float8(17, 17)
Error in z-band PSF flux (nJy)
psf_flux_error_y float8(17, 17)
Error in y-band PSF flux (nJy)
psf_flux_error_j float8(17, 17)
Error in j-band PSF flux (nJy)
filter_u varchar
u-band filter (u_sdss, u_cfht, u_skymapper, etc.)
filter_v varchar
v-band filter (v_skymapper, v_splus, etc.)
filter_g varchar
g-band filter (g_hsc, g_ps1, g_sdss, etc.)
filter_r varchar
r-band filter (r_hsc, r_ps1, r_sdss, etc.)
filter_i varchar
i-band filter (i_hsc, i_ps1, i_sdss, etc.)
filter_z varchar
z-band filter (z_hsc, z_ps1, z_sdss, etc.)
filter_y varchar
y-band filter (y_hsc, y_ps1, y_sdss, etc.)
filter_j varchar
j-band filter (j_nbs, etc.)
priority float8(17, 17)
Priority of the target specified by the observer within the proposal
effective_exptime float8(17, 17) not null
Requested effective exposure time (s)
single_exptime float8(17, 17) not null
Individual exposure time (s)
is_medium_resolution bool
True if the medium resolution mode is requested
spa_relative_throughput float8(17, 17)
Relative throughput to the reference value requested by the observer (default: 1.0)
spa_relative_noise float8(17, 17)
Relative noise to the reference value requested by the observer (default: 1.0)
spa_relative_lambda float8(17, 17)
Reference wavelength to evaluate effective exposure time (angstrom or nm?)
spa_reference_arm varchar
Reference arm to evaluate effective exposure time ('b', 'r', 'n', 'm')
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
filter_name [Table]
filter_name varchar not null
Filter name (e.g., g_ps1)
filter_name_description varchar
Description of the filter
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
PFS Target Database
generated by SchemaCrawler 16.22.2
generated on 2026-10-15 05:12:18