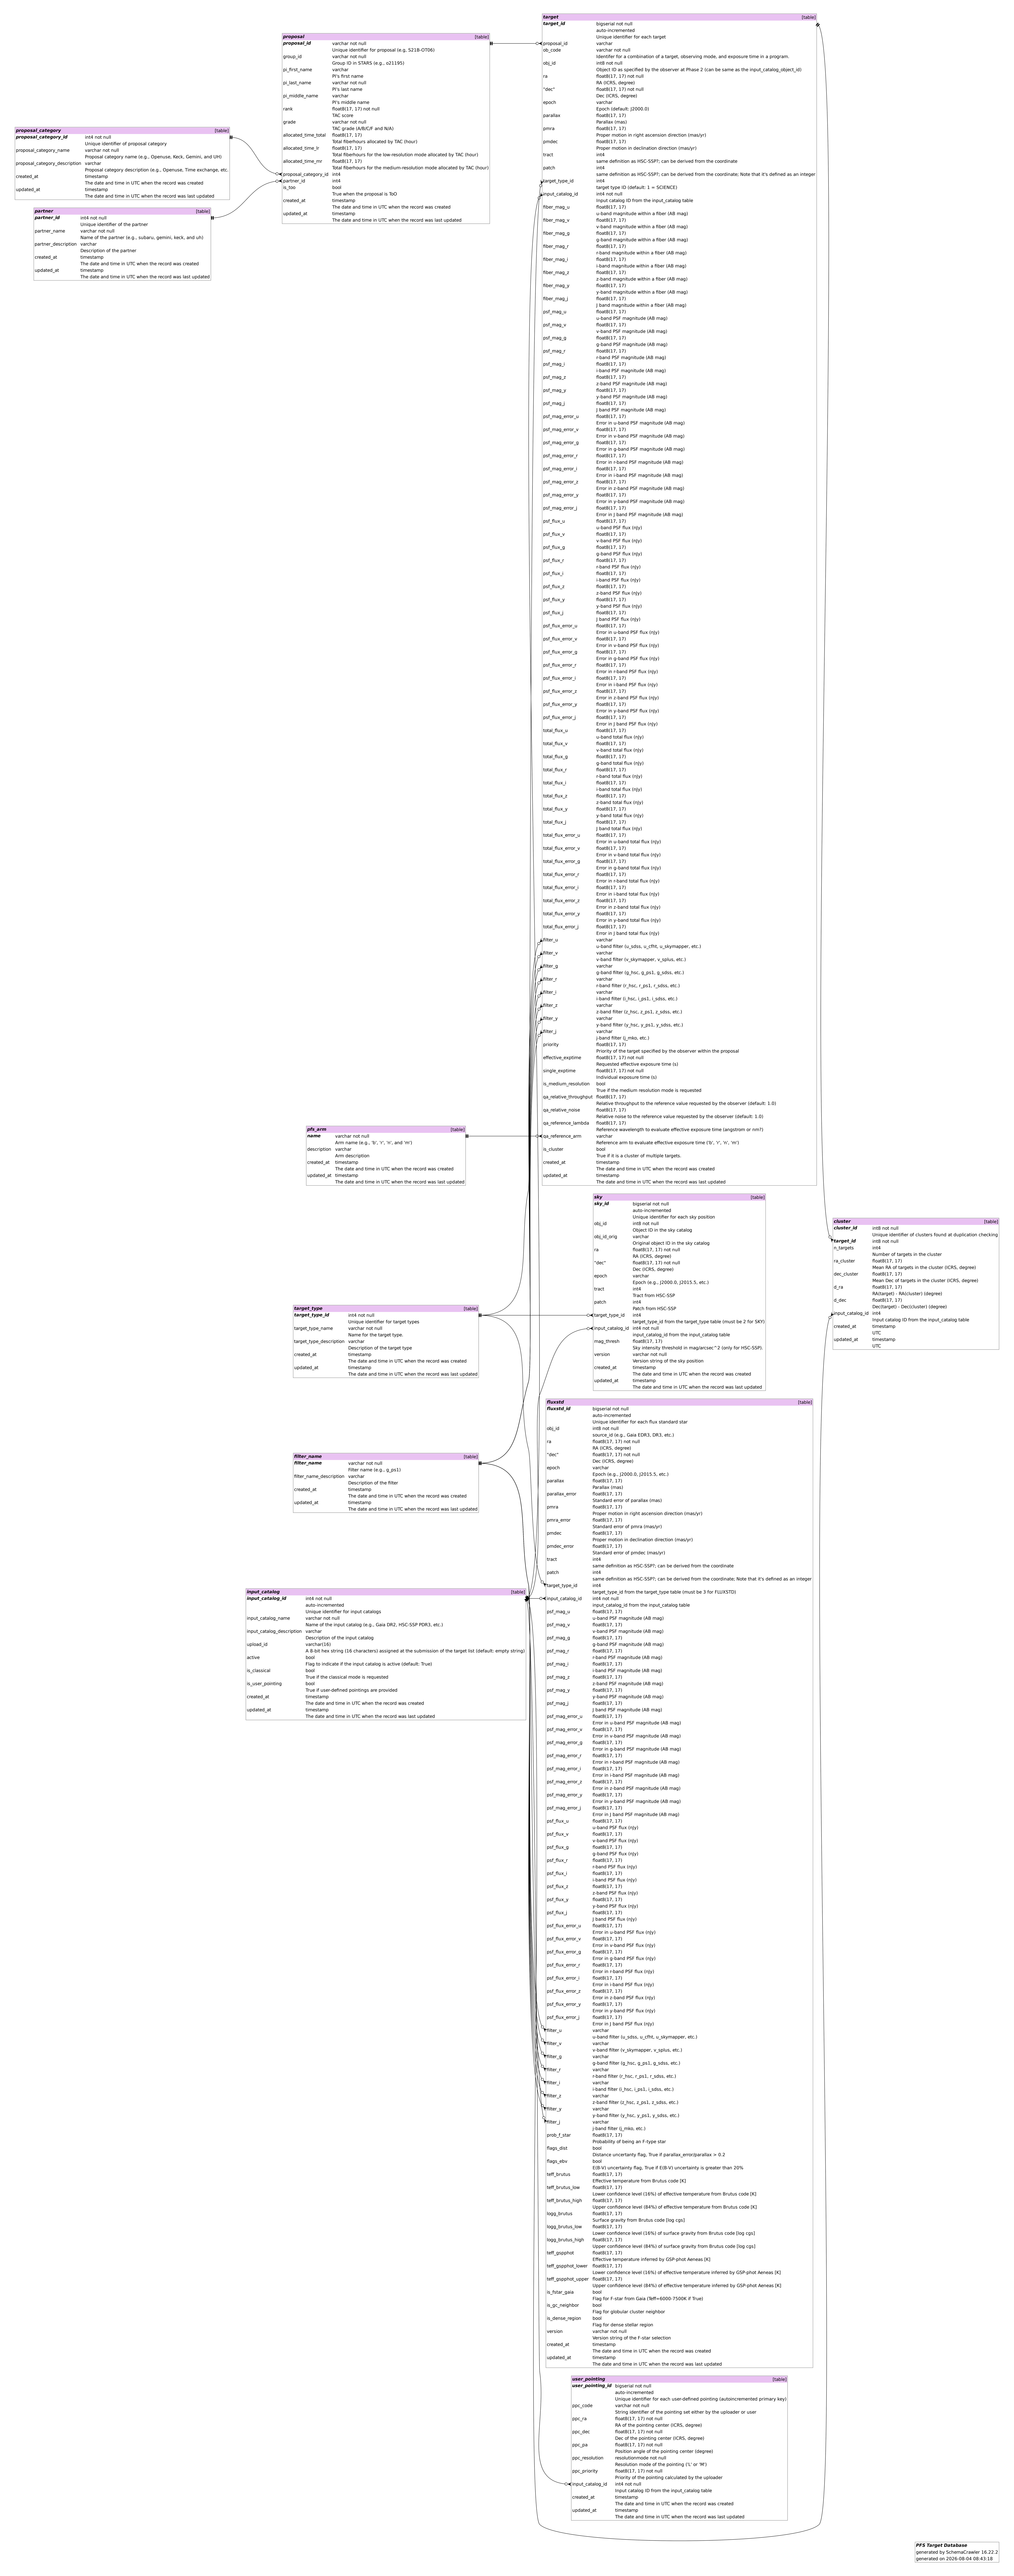
proposal [table]
proposal_id varchar not null
Unique identifier for proposal (e.g. S21B-0706)
group_id varchar not null
Group ID in SSMS (e.g., o21195)
pi_first_name varchar
PI's first name
pi_last_name varchar not null
PI's last name
pi_middle_name varchar
PI's middle name
rank float8[17, 17] not null
TAC score
grade varchar not null
TAC grade (A/B/C/F and N/A)
allocated_time_total float8[17, 17]
Total fiberhours allocated by TAC (hour)
allocated_time_h float8[17, 17]
Total fiberhours for the low-resolution mode allocated by TAC (hour)
allocated_time_mr float8[17, 17]
Total fiberhours for the medium-resolution mode allocated by TAC (hour)
proposal_category_id int4 not null
partner_id int4
is_too bool
True when the proposal is ToO
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
proposal_category [table]
proposal_category_id int4 not null
Unique identifier of proposal category
proposal_category_name varchar not null
Proposal category name (e.g., Openuse, Keck, Gemini, and UH)
proposal_category_description varchar
Proposal category description (e.g., Openuse, Time exchange, etc.
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
partner [table]
partner_id int4 not null
Unique identifier of the partner
partner_name varchar not null
Name of the partner (e.g., subaru, gemini, keck, and uh)
partner_description varchar
Description of the partner
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
target [table]
target_id bigserial not null
auto-incremented
Unique identifier for each target
proposal_id varchar
Identifier for a combination of a target, observing mode, and exposure time in a program.
obj_code varchar not null
Identifier for a combination of a target, observing mode, and exposure time in a program.
obj_id int8 not null
Object ID as specified by the observer at Phase 2 (can be same as the input_catalog_object_id)
ra float8[17, 17] not null
RA (ICRS, degree)
"dec" float8[17, 17] not null
Dec (ICRS, degree)
epoch varchar
Epoch (e.g., J2000.0)
parallax float8[17, 17]
Parallax (mas)
pmra float8[17, 17]
Proper motion in right ascension direction (mas/yr)
pmdec float8[17, 17]
Proper motion in declination direction (mas/yr)
tract int4
same definition as HSC-SSP?: can be derived from the coordinate
patch int4
same definition as HSC-SSP?: can be derived from the coordinate; Note that it's defined as an integer
target_type_id int4
target type ID (default: 1 == SCIENCE)
input_catalog_id int4 not null
Input catalog ID from the input_catalog table
fiber_mag_u float8[17, 17]
u-band magnitude within a fiber (AB mag)
fiber_mag_v float8[17, 17]
v-band magnitude within a fiber (AB mag)
fiber_mag_g float8[17, 17]
g-band magnitude within a fiber (AB mag)
fiber_mag_r float8[17, 17]
r-band magnitude within a fiber (AB mag)
fiber_mag_i float8[17, 17]
i-band magnitude within a fiber (AB mag)
fiber_mag_z float8[17, 17]
z-band magnitude within a fiber (AB mag)
fiber_mag_y float8[17, 17]
y-band magnitude within a fiber (AB mag)
fiber_mag_j float8[17, 17]
J band magnitude within a fiber (AB mag)
psf_mag_u float8[17, 17]
u-band PSF magnitude (AB mag)
psf_mag_v float8[17, 17]
v-band PSF magnitude (AB mag)
psf_mag_g float8[17, 17]
g-band PSF magnitude (AB mag)
psf_mag_r float8[17, 17]
r-band PSF magnitude (AB mag)
psf_mag_i float8[17, 17]
i-band PSF magnitude (AB mag)
psf_mag_z float8[17, 17]
z-band PSF magnitude (AB mag)
psf_mag_y float8[17, 17]
y-band PSF magnitude (AB mag)
psf_mag_j float8[17, 17]
J band PSF magnitude (AB mag)
psf_mag_error_u float8[17, 17]
Error in u-band PSF magnitude (AB mag)
psf_mag_error_v float8[17, 17]
Error in v-band PSF magnitude (AB mag)
psf_mag_error_g float8[17, 17]
Error in g-band PSF magnitude (AB mag)
psf_mag_error_r float8[17, 17]
Error in r-band PSF magnitude (AB mag)
psf_mag_error_i float8[17, 17]
Error in i-band PSF magnitude (AB mag)
psf_mag_error_z float8[17, 17]
Error in z-band PSF magnitude (AB mag)
psf_mag_error_y float8[17, 17]
Error in y-band PSF magnitude (AB mag)
psf_mag_error_j float8[17, 17]
Error in J band PSF magnitude (AB mag)
psf_flux_u float8[17, 17]
u-band PSF flux (nJy)
psf_flux_v float8[17, 17]
v-band PSF flux (nJy)
psf_flux_g float8[17, 17]
g-band PSF flux (nJy)
psf_flux_r float8[17, 17]
r-band PSF flux (nJy)
psf_flux_i float8[17, 17]
i-band PSF flux (nJy)
psf_flux_z float8[17, 17]
z-band PSF flux (nJy)
psf_flux_y float8[17, 17]
y-band PSF flux (nJy)
psf_flux_j float8[17, 17]
J band PSF flux (nJy)
psf_flux_error_u float8[17, 17]
Error in u-band PSF flux (nJy)
psf_flux_error_v float8[17, 17]
Error in v-band PSF flux (nJy)
psf_flux_error_g float8[17, 17]
Error in g-band PSF flux (nJy)
psf_flux_error_r float8[17, 17]
Error in r-band PSF flux (nJy)
psf_flux_error_i float8[17, 17]
Error in i-band PSF flux (nJy)
psf_flux_error_z float8[17, 17]
Error in z-band PSF flux (nJy)
psf_flux_error_y float8[17, 17]
Error in y-band PSF flux (nJy)
psf_flux_error_j float8[17, 17]
Error in J band PSF flux (nJy)
total_flux_u float8[17, 17]
u-band total flux (nJy)
total_flux_v float8[17, 17]
v-band total flux (nJy)
total_flux_g float8[17, 17]
g-band total flux (nJy)
total_flux_r float8[17, 17]
r-band total flux (nJy)
total_flux_i float8[17, 17]
i-band total flux (nJy)
total_flux_z float8[17, 17]
z-band total flux (nJy)
total_flux_y float8[17, 17]
y-band total flux (nJy)
total_flux_j float8[17, 17]
J band total flux (nJy)
total_flux_error_u float8[17, 17]
Error in u-band total flux (nJy)
total_flux_error_v float8[17, 17]
Error in v-band total flux (nJy)
total_flux_error_g float8[17, 17]
Error in g-band total flux (nJy)
total_flux_error_r float8[17, 17]
Error in r-band total flux (nJy)
total_flux_error_i float8[17, 17]
Error in i-band total flux (nJy)
total_flux_error_z float8[17, 17]
Error in z-band total flux (nJy)
total_flux_error_y float8[17, 17]
Error in y-band total flux (nJy)
total_flux_error_j float8[17, 17]
Error in J band total flux (nJy)
filter_u varchar
u-band filter (u_sdss, u_cfht, u_skymapper, etc.)
filter_v varchar
v-band filter (v_skymapper, v_subs, etc.)
filter_g varchar
g-band filter (g_hsc, g_ps1, g_sdss, etc.)
filter_r varchar
r-band filter (r_hsc, r_ps1, r_sdss, etc.)
filter_i varchar
i-band filter (i_hsc, i_ps1, i_sdss, etc.)
filter_z varchar
z-band filter (z_hsc, z_ps1, z_sdss, etc.)
filter_y varchar
y-band filter (y_hsc, y_ps1, y_sdss, etc.)
filter_j varchar
J band filter (j_mko, etc.)
priority float8[17, 17]
Priority of the target specified by the observer within the proposal
effective_exptime float8[17, 17] not null
Requested effective exposure time (s)
single_exptime float8[17, 17] not null
Individual exposure time (s)
is_medium_resolution bool
True if the medium resolution mode is requested
qa_relative_throughput float8[17, 17]
Relative throughput to the reference value requested by the observer (default: 1.0)
qa_relative_noise float8[17, 17]
Relative noise to the reference value requested by the observer (default: 1.0)
qa_reference_lambda float8[17, 17]
Reference wavelength to evaluate effective exposure time (angstrom or nm?)
qa_reference_arm varchar
Reference arm to evaluate effective exposure time ('b', 'r', 'm', 'nir')
is_cluster bool
True if it is a cluster of multiple targets.
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
pfs_arm [table]
name varchar not null
Arm name (e.g., 'b', 'r', 'm', and 'nir')
description varchar
Arm description
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
sky [table]
sky_id bigserial not null
auto-incremented
Unique identifier for each sky position
obj_id int8 not null
Unique identifier in the sky catalog
obj_id_org varchar
Original object ID in the sky catalog
ra float8[17, 17] not null
RA (ICRS, degree)
"dec" float8[17, 17] not null
Dec (ICRS, degree)
epoch varchar
Epoch (e.g., J2000.0, 2015.5, etc.)
tract int4
Tract from HSC-SSP
patch int4
Patch from HSC-SSP
input_catalog_id int4 not null
Input catalog ID from the input_catalog table
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
cluster [table]
cluster_id int8 not null
Unique identifier of clusters found at duplication checking
target_id int8 not null
n_targets int4
Number of targets in the cluster
ra_cluster float8[17, 17]
Mean RA of targets in the cluster (ICRS, degree)
dec_cluster float8[17, 17]
Mean DEC of targets in the cluster (ICRS, degree)
d_ra float8[17, 17]
RA(target) - RA(cluster) (degree)
d_dec float8[17, 17]
Dec(target) - Dec(cluster) (degree)
input_catalog_id int4
Input catalog ID from the input_catalog table
created_at timestamp
UTC
updated_at timestamp
UTC
target_type [table]
target_type_id int4 not null
Unique identifier for target types
target_type_name varchar not null
Name for the target type.
target_type_description varchar
Description of the target type
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
fluxstd [table]
fluxstd_id bigserial not null
auto-incremented
Unique identifier for each flux standard star
obj_id int8 not null
Object ID (e.g., Gaia EDR3, DR3, etc.)
ra float8[17, 17] not null
RA (ICRS, degree)
"dec" float8[17, 17] not null
Dec (ICRS, degree)
epoch varchar
Epoch (e.g., J2000.0, J2015.5, etc.)
parallax float8[17, 17]
Parallax (mas)
parallax_error float8[17, 17]
Standard error of parallax (mas)
pmra float8[17, 17]
Proper motion in right ascension direction (mas/yr)
pmra_error float8[17, 17]
Standard error of pmra (mas/yr)
pmdec float8[17, 17]
Proper motion in declination direction (mas/yr)
pmdec_error float8[17, 17]
Standard error of pmdec (mas/yr)
tract int4
same definition as HSC-SSP?: can be derived from the coordinate
patch int4
same definition as HSC-SSP?: can be derived from the coordinate; Note that it's defined as an integer
target_type_id int4
target_type_id from the target_type table (must be 3 for FLUXSTD)
input_catalog_id int4 not null
input_catalog_id from the input_catalog table
psf_mag_u float8[17, 17]
u-band PSF magnitude (AB mag)
psf_mag_v float8[17, 17]
v-band PSF magnitude (AB mag)
psf_mag_g float8[17, 17]
g-band PSF magnitude (AB mag)
psf_mag_r float8[17, 17]
r-band PSF magnitude (AB mag)
psf_mag_i float8[17, 17]
i-band PSF magnitude (AB mag)
psf_mag_z float8[17, 17]
z-band PSF magnitude (AB mag)
psf_mag_y float8[17, 17]
y-band PSF magnitude (AB mag)
psf_mag_j float8[17, 17]
J band PSF magnitude (AB mag)
psf_mag_error_u float8[17, 17]
Error in u-band PSF magnitude (AB mag)
psf_mag_error_v float8[17, 17]
Error in v-band PSF magnitude (AB mag)
psf_mag_error_g float8[17, 17]
Error in g-band PSF magnitude (AB mag)
psf_mag_error_r float8[17, 17]
Error in r-band PSF magnitude (AB mag)
psf_mag_error_i float8[17, 17]
Error in i-band PSF magnitude (AB mag)
psf_mag_error_z float8[17, 17]
Error in z-band PSF magnitude (AB mag)
psf_mag_error_y float8[17, 17]
Error in y-band PSF magnitude (AB mag)
psf_mag_error_j float8[17, 17]
Error in J band PSF magnitude (AB mag)
psf_flux_u float8[17, 17]
u-band PSF flux (nJy)
psf_flux_v float8[17, 17]
v-band PSF flux (nJy)
psf_flux_g float8[17, 17]
g-band PSF flux (nJy)
psf_flux_r float8[17, 17]
r-band PSF flux (nJy)
psf_flux_i float8[17, 17]
i-band PSF flux (nJy)
psf_flux_z float8[17, 17]
z-band PSF flux (nJy)
psf_flux_y float8[17, 17]
y-band PSF flux (nJy)
psf_flux_j float8[17, 17]
J band PSF flux (nJy)
psf_flux_error_u float8[17, 17]
Error in u-band PSF flux (nJy)
psf_flux_error_v float8[17, 17]
Error in v-band PSF flux (nJy)
psf_flux_error_g float8[17, 17]
Error in g-band PSF flux (nJy)
psf_flux_error_r float8[17, 17]
Error in r-band PSF flux (nJy)
psf_flux_error_i float8[17, 17]
Error in i-band PSF flux (nJy)
psf_flux_error_z float8[17, 17]
Error in z-band PSF flux (nJy)
psf_flux_error_y float8[17, 17]
Error in y-band PSF flux (nJy)
psf_flux_error_j float8[17, 17]
Error in J band PSF flux (nJy)
filter_u varchar
u-band filter (u_sdss, u_cfht, u_skymapper, etc.)
filter_v varchar
v-band filter (v_skymapper, v_subs, etc.)
filter_g varchar
g-band filter (g_hsc, g_ps1, g_sdss, etc.)
filter_r varchar
r-band filter (r_hsc, r_ps1, r_sdss, etc.)
filter_i varchar
i-band filter (i_hsc, i_ps1, i_sdss, etc.)
filter_z varchar
z-band filter (z_hsc, z_ps1, z_sdss, etc.)
filter_y varchar
y-band filter (y_hsc, y_ps1, y_sdss, etc.)
filter_j varchar
J band filter (j_mko, etc.)
prob_f_star float8[17, 17]
Probability of being an F-type star
flags_dist bool
Distance uncertainty flag. True if parallax_error/parallax > 0.2
flags_ebv bool
E(B-V) uncertainty flag. True if E(B-V) uncertainty is greater than 20%
teff_brutus float8[17, 17]
Effective temperature from Brutus code [K]
teff_brutus_low float8[17, 17]
Lower confidence level (16%) of effective temperature from Brutus code [K]
teff_brutus_high float8[17, 17]
Upper confidence level (84%) of effective temperature from Brutus code [K]
logg_brutus float8[17, 17]
Surface gravity from Brutus code [log cgs]
logg_brutus_low float8[17, 17]
Lower confidence level (16%) of surface gravity from Brutus code [log cgs]
logg_brutus_high float8[17, 17]
Upper confidence level (84%) of surface gravity from Brutus code [log cgs]
teff_gaiaphot float8[17, 17]
Effective temperature inferred by GSP-phot Aeneas [K]
teff_gaiaphot_lower float8[17, 17]
Lower confidence level (16%) of effective temperature inferred by GSP-phot Aeneas [K]
teff_gaiaphot_upper float8[17, 17]
Upper confidence level (84%) of effective temperature inferred by GSP-phot Aeneas [K]
is_fstar_gaia bool
Flag for F-star from Gaia (Teff=6000-7500K if True)
is_gc_neighbor bool
Flag for globular cluster neighbor
is_dense_region bool
Flag for dense stellar region
version varchar not null
Version string of the F-star selection
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
filter_name [table]
filter_n varchar not null
Filter name (e.g., g_ps1)
filter_name_description varchar
Description of the filter
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
input_catalog [table]
input_catalog_id int4 not null
auto-incremented
Unique identifier for input catalogs
input_catalog_name varchar not null
Name of the input catalog (e.g., Gaia DR2, HSC-SSP PDR3, etc.)
input_catalog_description varchar
Description of the input catalog
upload_id varchar(16)
A 8-bit hex string (16 characters) assigned at the submission of the target list (default: empty string)
active bool
Flag to indicate if the input catalog is active (default: True)
is_classical bool
True if the classical mode is requested
is_user_pointing bool
True if user-defined pointings are provided
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
user_pointing [table]
user_pointing_id bigserial not null
auto-incremented
Unique identifier for each user-defined pointing (autoincremented primary key)
poc_code varchar not null
String identifier of the pointing set either by the uploader or user
poc_ra float8[17, 17] not null
RA of the pointing center (ICRS, degree)
poc_dec float8[17, 17] not null
Dec of the pointing center (ICRS, degree)
poc_pa float8[17, 17] not null
Position angle of the pointing center (degree)
poc_resolution resolutionmode not null
Resolution mode of the pointing ('L' or 'M')
poc_priority int4 not null
Priority of the pointing calculated by the uploader
input_catalog_id int4 not null
Input catalog ID from the input_catalog table
created_at timestamp
The date and time in UTC when the record was created
updated_at timestamp
The date and time in UTC when the record was last updated
PFS Target Database
generated by SchemaCrawler 16.22.2
generated on 2026-08-04 08:43:18