

Transformation-based Learning for Semantic parsing

F. Jurčiček, F. Mairesse, M. Gašić, S. Keizer, B. Thomson, K. Yu, and S. Young

Engineering Department, Cambridge University, Trumpington Street, Cambridge, CB2 1PZ, UK

{fj228, farm2, mg436, sk561, brmt2, ky219, sjy}@eng.cam.ac.uk

Abstract

In this paper, we present a semantic parser that transforms initial naive semantic hypothesis into correct semantics by using an ordered list of rules. These rules are learnt automatically from a training corpus with no prior linguistic knowledge and no alignment between words and semantic concepts is needed. We show that TBL parser is competitive with respect to the state-of-the-art semantic parsers on the ATIS and TownInfo tasks.

Index Terms: spoken language understanding, semantics, natural language processing

1. Introduction

Semantic parsing is an important part of a spoken dialogue system [1]. The goal of semantic parsing is to map natural language to formal meaning representation - semantics. Such semantics can be either defined by a grammar, e.g. LR grammar for GeoQuery domain [2] or by frames and slots e.g. TownInfo domain [3]. In Table 1, it is shown as an example of the frame and slot semantics from the ATIS dataset. Each frame has a goal and set of slots. Each slot is composed of a slot name, e.g. "from.city", and slot value, e.g. "Washington". As dialogue managers commonly use semantics in the form of frames and slots [1, 3], our approach learns to map directly from natural language into frame and slot semantics.

A dialogue system needs a semantic parser which is accurate and robust, easy to build, and fast. First, a parser presented in this paper performs comparably to the state-of-the-art semantics parser and it can deal with ill formed utterances. Second, it does not need any handcrafted linguistic knowledge and it can learn from data which is not semantically annotated at the word-level. Finally, it learns a compact set of rules which results in a limited number of operations per semantic concept.

In our approach, we adapt transformation-based learning (TBL) [4] to the problem of semantic parsing. We attempt to find an ordered list of transformation rules to improve naive semantic annotation. In addition, we experiment with features extracted from dependency parse trees provided by RASP [5].

In the next section, we describe previous work on mapping natural language into formal meaning representation. Section 3 presents an example of TBL based semantic parsing, discusses templates for transformation rules, and describes the learning process. Section 4 compares TBL parser to the previously developed semantic parsers on the ATIS [6] and TownInfo [7] datasets. Finally, Section 5 concludes this work.

2. Related work

In Section 4, we compare performance of our method with the four existing systems that were evaluated on the same dataset we consider. First, Hidden Vector State model [8, 9] have

what are the lowest airfare from Washington DC to Boston

GOAL	=	airfare
airfare.type	=	lowest
from.city	=	Washington
from.state	=	DC
to.city	=	Boston

Table 1: Example of frame and slot semantics from ATIS [6] dataset.

been used to model an approximation of a pushdown automaton which has semantic concepts as non-terminal symbols. Consequently, a deterministic algorithm was used to recover slot values. Second, automatic induction of combinatory categorical grammar [10] have been used to map sentences to lambda-calculus. They show that their technique produces the state-of-the-art performance on the Air Travel Information (ATIS) dataset [6]. However, apart from using the lexical categories (city names, airport names, etc) readily available from the ATIS corpus, the method also needs considerable number of handcrafted entries in their initial lexicon. Third, Markov logic networks [11] have been used to extract slot values by applying ideas of a Markov network to first-order logic. In this approach, weights are attached to first-order clauses which represent relationship between slot names and their values. Such weighted clauses are used as templates for features of Markov networks. Finally, support vector machines [7] have been used to build a semantic trees by recursive calling classifiers to estimate probabilities of production rules using a linear kernel and word based features.

There has been also done a large amount of research into mapping natural language to semantics that is not directly comparable because it uses either different corpora or different meaning representation. Transformation techniques [2] have been used to sequentially rewrite an utterance into semantics. However, our approach differs in the way the semantics is constructed. Instead of rewriting an utterance, we transform an initial naive semantic hypothesis. As a result, we can use words in an utterance several times to trigger transformations of the semantics. This extends our ability to handle non-compositionality phenomena in spoken language. Support vector machines and tree kernels [12] have been used to integrate knowledge contained in the gold standard dependency trees to capture long-range relationship between words.

3. Transformation-based parsing

This section describes the transformation-based parser. First, we give an example of the parsing algorithm. Second, we detail locality constraints for transformation rules. Third, we describe templates used to generate rules for the inference pro-

cess. Fourth, we describe features capturing long-range dependencies. Finally, we detail the learning process.

3.1. Example of Parsing

The semantic parser transforms an initial naive semantic hypothesis into correct semantics by applying transformations from a list of rules. Each rule is composed of a trigger and a transformation and a trigger initiates transformation of a hypothesis. We demonstrate the parsing on an example. Think of the utterance: *“find all the flights between Toronto and San Diego that arrive on Saturday”*

First, the goal “flight” is used as the initial goal because it is the most common goal in the ATIS dataset and no slots are added in the semantics. As a result, the initial semantics is as follows:

GOAL = flight

Second, the rules whose triggers match the utterance and the hypothesis are sequentially applied. Generally, the rules add slots, delete slots, and substitute slots.

trigger	transformation
“between toronto and”	add slot “from.city=Toronto”
“and san diego”	add slot “to.city=San Diego”
“saturday”	add slot “departure.day=Saturday”

After applying the transformations, we obtain the following semantic hypothesis.

GOAL = flight
from.city = Toronto
to.city = San Diego
departure.day = Saturday

The trigger “and Sand Diego” is example of non-compositionality, in which the words in an utterance do not have a one-to-one correspondence with the slots in the semantics. The word “and” indicates that the city “San Diego” is slot value of the slot “to.city”.

As the date and time values are associated with the “departure*” slots most of the time in the ATIS dataset, the parser learns to associate them with the “departure.*” slots. The incorrect classification of the word “Saturday” is a result of such generalisation. However, TBL method learns to correct its errors. Therefore, the parser also applies the error correcting rules at later stage of parsing. For example, the following rule corrects the slot name of the slot value “Saturday”.

trigger	transformation
“arrive”	substitute slot from “departure.day=*” to “arrival.day=*”

In this case, we substitute the slot name with the correct name. The final semantic hypothesis is as follows.

GOAL = flight
from.city = Toronto
to.city = San Diego
arrival.day = Saturday

3.2. Locality constrains

So far we considered an utterance as a bag of words and no notion of locality was considered. For example, before we perform the substitution of the slot “departure.day” to “arrival.day”, we should test whether word “arrive” is in the vicinity of the slot. The reason is that we do not want to trigger the substitution of

the slot “from.city=Toronto” to “to.city=Toronto”. This is possible because the parser also learns the following rule.

trigger	transformation
“arrive”	substitute slot from “from.city=*” to “to.city=*”

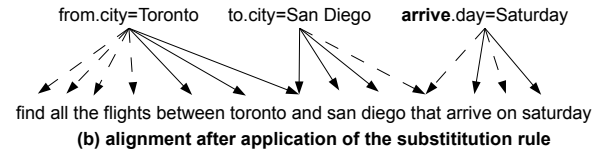
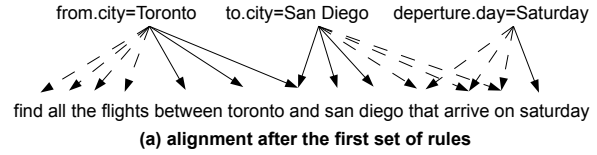


Figure 1: Alignment between the words and the slots in the example utterance.

One way to deal with this problem is to constrain triggers performing substitution to be activated only if they are in the vicinity of the slot’s lexical realisation. We track the words from the utterance, which were used in triggers. Every time we apply a transformation of a slot, we store links between the words which triggered the transformation and the target slot. Such links are called as direct alignment.

In Figure 1 (a), we see the alignment between the words and the slots in the example utterance after applying the first set of rules. The full lines denote direct alignment created by the add-transformations. The dashed lines denote derived alignment - alignment computed from the direct alignment. Because no rules were triggered by words “find all the flights” and “that arrive on” those words could not be aligned directly to any of the slots; therefore, we have to derive such alignment. To compute derived alignment, first we order the slots so that the slot aligned with the left-most word is the first and the ordering results in minimum instances of direct alignment crossing. Then, every unaligned word is aligned with the nearest left and the right slot. In Figure 1 (a), the phrase “find all the flights” can be aligned to the slot “from.city=Toronto” only. The phrase “that arrive on” can be aligned to two slots “to.city=San Diego” and “departure.day=Saturday”.

In Figure 1 (b), we see the alignment after applying the substitution from the example of parsing. We can see change in the alignment of the phrase “that arrive on”. First, the word “arrive” is aligned to the slot “arrival.day=Saturday”. Second, the word “on” must be aligned to the same slot as the word “arrive”, otherwise the derived alignment would cross the direct alignment. There is no change in the alignment of the word “that”.

3.3. Rule templates

In the previous sections, we presented several rules which add, substitute, or delete slots. These rules were selected by a learning algorithm from a large set of all potential rules. Such rules are generated from a set of templates for triggers and transformations.

A trigger questions an input utterance, an output semantics, or both. In our method, a trigger contains one or more conditions as follows: the utterance contains n-gram N, the ut-

terance contains skipping¹ bigram B, the goal equals to G, the semantics contains slot S. If a trigger contains more than one condition, then all conditions must be satisfied. In our method, we use uni-grams, bi-grams, and tri-grams and skipping bigram can skip up to tree words.

A transformation performs one of the following operations: substitutes a goal to G, adds a slot S, deletes a slot S, substitutes a slot S. A substitution transformation can substitute a whole slot, a slot name, or a slot value.

3.4. Improving disambiguation of long-range dependencies

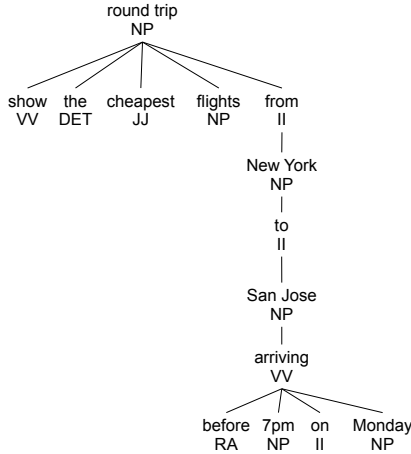


Figure 2: Dependency tree of the sentence "show the cheapest flights from New York to San Jose arriving before 7pm on Monday" generated by the RASP parser [5].

Besides simple n-grams and skipping bigrams more complex lexical features can be used. Kate [12] used gold standard word dependencies to capture long-range relationship between words. At its simplest, dependency trees are one of the most concise way to describe language syntax. Essentially, each word is viewed as the dependent of one other word, with the exception of a single word which that is the root of the sentence. Kate showed that word dependencies significantly improve semantic parsing because long-range dependencies from an utterance tend to be local in a dependency tree. For example, the words "arriving" and "Monday" are neighbours in the dependency tree but they are four words apart in the sentence (see Figure 2).

Instead of using gold standard word dependencies [12], we used dependencies provided by the RASP dependency parser [5]. First, some pre-processing had to be done so that the RASP parser was able accurately parse sentences with unknown named entities such as "New York". Secondly, we generated new n-gram features from dependency trees. We however note that RASP was used off-the-shelf and more accurate dependencies could be obtained by adapting the RASP parser to the ATIS and TownInfo domains.

3.5. Learning

The main idea of transformation-based learning is to learn an ordered list of rules which incrementally improve initially as-

¹In a skipping bigram, one or more words are skipped between two words. For example, ('arrive',*, 'Boston') is a skipping bigram which skips one word.

1. ASSIGN INITIAL SEMANTICS TO EACH UTTERANCE
2. REPEAT AS LONG AS THE NUMBER OF ERRORS ON THE TRAINING SET DECREASES
 - (A) GENERATE ALL RULES WHICH CORRECT AT LEAST ONE ERROR IN THE TRAINING SET
 - (B) MEASURE NUMBER OF CORRECTED ERRORS BY EACH RULE
 - (C) SELECT THE RULE WITH THE LARGEST NUMBER OF CORRECTED ERRORS
 - (D) APPLY THE SELECTED RULE TO THE CURRENT STATE OF THE TRAINING SET
 - (E) STOP IF THE NUMBER OF CORRECTED ERRORS IS SMALLER THAN THRESHOLD T.

Figure 3: Rule learning algorithm.

signed naive semantic hypothesis (see the algorithm in Figure 3). The initial assignment is made based on simple statistics - the most common goal is used as initial semantics. The learning is conducted in a greedy fashion and at each step TBL chooses the transformation rule that reduces the largest number of errors in our hypothesis. Number of errors includes number of goal substitutions, number of slot insertions, number of slot deletions, number of slot substitutions. The learning ends when no rule that improves the hypothesis beyond the pre-set threshold can be found.

As in the previous work [7, 8, 10, 11], we make use of database with lexical realisations of some slots, e.g. city and airport names. Since the number of possible slot values for each slot is usually very high, the use of such database results in more robust parser. In our method, we replace lexical realisations of slot values with category labels in the utterance, e.g. "i want to fly from CITY". Similarly, we replace slot values in the semantics.

4. Evaluation

In this section, we evaluate our parser on two distinct corpora, and compare our results with the state-of-the-art techniques and a handcrafted rule-based parser.

4.1. Datasets

In order to compare our results with previous work [7, 8, 10, 11], we apply our method to the Air Travel Information System dataset (ATIS) [6]. This dataset consists of user requests for flight information, for example "find flight from San Diego to Phoenix on Monday". We use 5012 utterances for training, and the DEC94 dataset as development data. As in previous work, we test our method on the 448 utterances of the NOV93 dataset, and the evaluation criteria is the F-measure of the number of reference slot/value pairs that appear in the output semantic (e.g., from.city = New York). He & Young detail the test data extraction process in [8].

Our second dataset consists of tourist information dialogues in a fictitious town (TownInfo). The dialogues were collected through user trials in which users searched for information about a specific venue by interacting with a dialogue system in a noisy background. These dialogues were previously used for training dialogue management strategies [1, 3]. For example, utterance "I would like a Chinese restaurant" is represented as

Parser	Prec	Rec	F
TownInfo dataset with transcribed utterances:			
TBL	96.05	94.66	95.35
STC	97.39	94.05	95.69
Phoenix	96.33	94.22	95.26
TownInfo dataset with ASR output:			
TBL	92.72	83.42	87.82
STC	94.03	83.73	88.58
Phoenix	90.28	79.49	84.54
ATIS dataset with transcribed utterances:			
TBL	96.37	95.12	95.74
PCCG	95.11	96.71	95.9
STC	96.73	92.37	94.50
HVS	-	-	90.3
MLN	-	-	92.99

Table 2: Slot/value precision (Prec), recall (Rec) and F-measure (F) for the ATIS and TownInfo datasets.

GOAL = inform
food = Chinese
type = restaurant

The TownInfo training, development, and test sets respectively contain 8396, 986 and 1023 transcribed utterances. The data includes the transcription of the top hypothesis of the ATK speech recogniser, which allows us to evaluate the robustness of our models to recognition errors (word error rate = 34.4%). We compare our model with STC parser [7] and the handcrafted Phoenix grammar [13] used in the trials [1, 3]. The Phoenix parser implements a partial matching algorithm that was designed for robust spoken language understanding.

For both corpora are available databases with lexical entries for slot values e.g. city names, airport names, etc.

4.2. Results

The results for both datasets are shown in Table 2. The model accuracy is measured in terms of precision, recall, and F-measure (harmonic mean of precision and recall) of the slot/value pairs. Both slot and the value must be correct to count as correct classification.

Results on the ATIS dataset show that our method with F-measure 95.74% is competitive with respect to Zettlemoyer & Collins’ PCCG model [10] (F-measure=95.9%). Note that PCCG model makes use of considerable large number of hand-crafted entries in their initial lexicon. In addition, our method outperforms STC, MLN and HVS parsers. Concerning the TownInfo dataset, Table 2 shows that TBL produces 87.87% F-measure, which represents a 3.28% improvement over the handcrafted Phoenix parser and it is competitive with respect to STC model on the TownInfo dataset - TBL’s performance is only 0.76% lower compared with the STC model.

Table 3 shows contrast between the full system and the system without features extracted from dependency trees and the system without using locality constrains. Experiments were carried out on the ATIS development dataset. The results show that if the dependency tree features are removed or the locality constraints are not used, the performance of our method degrades.

As is typical for TBL methods, the number of learnt rules is considerably low. There are 17 unique dialogue acts and 66 unique slots in the ATIS dataset and the total number of learnt rules is 372. This results in 4.5 rules per semantic concept on average. In the TownInfo dataset, we have 14 dialogue acts and

Parser	Prec	Rec	F
ATIS development dataset:			
Full TBL	93.95	93.70	93.82
Without loc. constrains	93.38	92.64	93.01
Without dep. tree features	92.78	92.04	92.41

Table 3: The ablation studies on the ATIS development dataset.

14 slots and the total number of learnt rules is 195. The average number of rules per semantic concept is 6.9.

5. Conclusion

This paper presents novel application of TBL for semantic parsing. Our method learns sequence of rules which transforms initial naive semantics into correct semantics. It significantly differs from the method presented by Kate et al [2] where they were rewriting utterance and replacing its words with semantic concepts. Our method was applied to two very different domains and it was shown that it performs competitive on both datasets with respect to the state-of-the-art semantic parsers. On the ATIS dataset, our method outperforms STC, MLN and HVS by 1.27%, 2.75%, and 5.44% respectively. We also show that our method outperforms the handcrafted Phoenix parser by 3.28% on ASR output on the TownInfo dataset.

6. References

- [1] J. Williams and S. Young., “Partially observable markov decision for spoken dialog systems,” *Computer Speech and Language*, vol. 21, no. 2, pp. 231–422, 2007.
- [2] R. Kate, Y. Wong, and R. Mooney, “Learning to transform natural to formal languages,” in *Proceedings of AAAI*, 2005.
- [3] B. Thomson, M. Gasic, S. Keizer, F. Mairesse, J. Schatzmann, K. Yu, and S. Young, “User study of the bayesian update of dialogue state approach to dialogue management,” in *Proceedings of Interspeech*, 2008.
- [4] E. Brill, “Transformation-based error-driven learning and natural language processing: A case study in part-of-speech tagging,” *Computational Linguistics*, vol. 21, no. 4, pp. 543–565, 1995.
- [5] E. Briscoe, J. Carroll, and R. Watson, “The second release of the rasp system,” in *Proceedings of COLING/ACL*, 2006.
- [6] D. Dahl, M. Bates, M. Brown, W. Fisher, K. Hunicke-Smith, D. Pallett, C. Pao, A. Rudnick, , and E. Shriberg, “Expanding the scope of the atis task: The atis-3 corpus,” in *Proceedings of the ARPA HLT Workshop*, 1994.
- [7] F. Mairesse, M. Gasic, F. Jurcicek, S. Keizer, B. Thomson, K. Yu, and S. Young, “Spoken language understanding from unaligned data using discriminative classification models,” in *Proceedings of ICASSP*, 2009.
- [8] Y. He and S. Young, “Semantic processing using the hidden vector state model,” *Computer Speech & Language*, vol. 19, no. 1, pp. 85–106, 2005.
- [9] F. Jurcicek, J. Svec, and L. Muller, “Extension of HVS semantic parser by allowing left-right branching,” in *Proceedings of ICASSP*, 2008.
- [10] L. Zettlemoyer and M. Collins, “Online learning of relaxed ccg grammars for parsing to logical form,” in *Proceedings of EMNLP-CoNLL*, 2005.
- [11] I. Meza-Ruiz, S. Riedel, and O. Lemon, “Spoken language understanding in dialogue systems, using a 2-layer markov logic network: improving semantic accuracy,” in *Proceedings of Londial*, 2008.
- [12] R. Kate, “A dependency-based word subsequence kernel,” in *Proceedings of EMNLP*, 2008.

- [13] W. Ward, "The phoenix system: Understanding spontaneous *Proceedings of ICASSP*, 1991.