



FIRST EDITION – CHAPTER 5 REV 1

Kevin Thomas
Copyright © 2022 My Techno Talent

Forward

I remember a time before the days of the internet where computers were simple yet elegant and beautiful in their design, logic and functionality.

I was a teenager in the 1980's when I got my first Commodore 64 for Christmas and the first thing I did was tear it out of the box and get it wired up to my console TV as the only thing I needed to see was that blinking console cursor on that blue background with the light blue border.

It was a blank slate. There were no libraries. There were no frameworks. If you wanted to develop something outside of the handful of games that you could get for it, you program it from scratch.

In addition to the C-64 there was a 300 baud modem with a 5.25" floppy disk which read DMBBS 4.8. I quickly read the small documentation that came with it and quickly took over the only phone line in the household.

I set up my BBS or bulletin board system, and called it THE ALLNIGHTER. I set it up and no one called obviously as no one knew it existed. I joined a local CUF group, computer user federation, where I met another DMBBS 4.8 user which helped me network my message boards to him.

At a given time of day my computer would call his and send my messages to his board and I would receive his messages from his board. It was computer networking before the internet and it was simply magic.

Over the next few months he taught me 6502 Assembler which was my first programming language that I ever learned. Every single instruction was given consideration of the hardware and a mastery over the computer was developed as we did literally everything from scratch on the bare metal of the hardware.

Today we live in an environment of large distributed systems where there are thousands of libraries and dozens of containers within pods in a large orchestrated Kubernetes cluster which defines an application.

Between the 1980's and current, the birth of higher-level languages has made it possible to develop in a timely manner even on the most sophisticated distributed systems.

As we work within a series of large cloud ecosystems, there exists a programming language called Golang, or Go for short, which allows for easy software development to take advantage of multiple cores within a modern CPU in addition to out-of-the-box currency and ease of scale for enterprise-level network and product design.

With every great technology there arises threat actors that exploit such power.

Go can be compiled easily for multiple operating systems producing a single binary. The speed and power of Go makes it an easy choice for modern Malware Developers.

There are literally thousands of books and videos on how to reverse engineer traditional C binaries but little on Go as it is so relatively new.

The aim of this book is to teach basic Go and step-by-step reverse engineer each simple binary to understand what is going on under the hood.

We will develop within the Windows architecture (Intel x64 CISC) as most malware targets this platform by orders of magnitude.

Let's begin...

Table Of Contents

Chapter 1:	Hello Distributed System World
Chapter 2:	Debugging Hello Distributed System World
Chapter 3:	Hacking Hello Distributed System World
Chapter 4:	Primitive Types
Chapter 5:	Debugging Primitive Types

Chapter 1: Hello Distributed System World

We begin our journey with developing a simple hello world program in Go on a Windows 64-bit OS.

We will then reverse engineer the binary in IDA Free.

Let's first download Go for Windows.

<https://go.dev/doc/install>

Let's download IDA Free.

<https://hex-rays.com/ida-free/#download>

Let's download Visual Studio Code which we will use as our integrated development environment.

<https://code.visualstudio.com/>

Once installed, let's add the Go extension within VS Code.

<https://marketplace.visualstudio.com/items?itemName=golang.go>

Let's create a new project and get started by following the below steps.

New File
main.go

Now let's populate our **main.go** file with the following.

```
package main

import "fmt"

func main() {
    fmt.Println("hello distributed system world")
}
```

Let's open up the terminal by click CTRL+SHIFT+` and type the following.

```
go mod init main
go mod tidy
go build
```

Let's run the binary!

```
.\main.exe
```

Output...

```
hello distributed system world
```

Congratulations! You just created your first hello world code in Go.
Time for cake!


We simply created a hello world style example to get us started.

In our next lesson we will debug this in IDA Free!


Chapter 2: Debugging Hello Distributed System World

Let's debug our app within IDA Free.


Open IDA Free and we see the load screen. We can keep all the defaults and simply click OK.

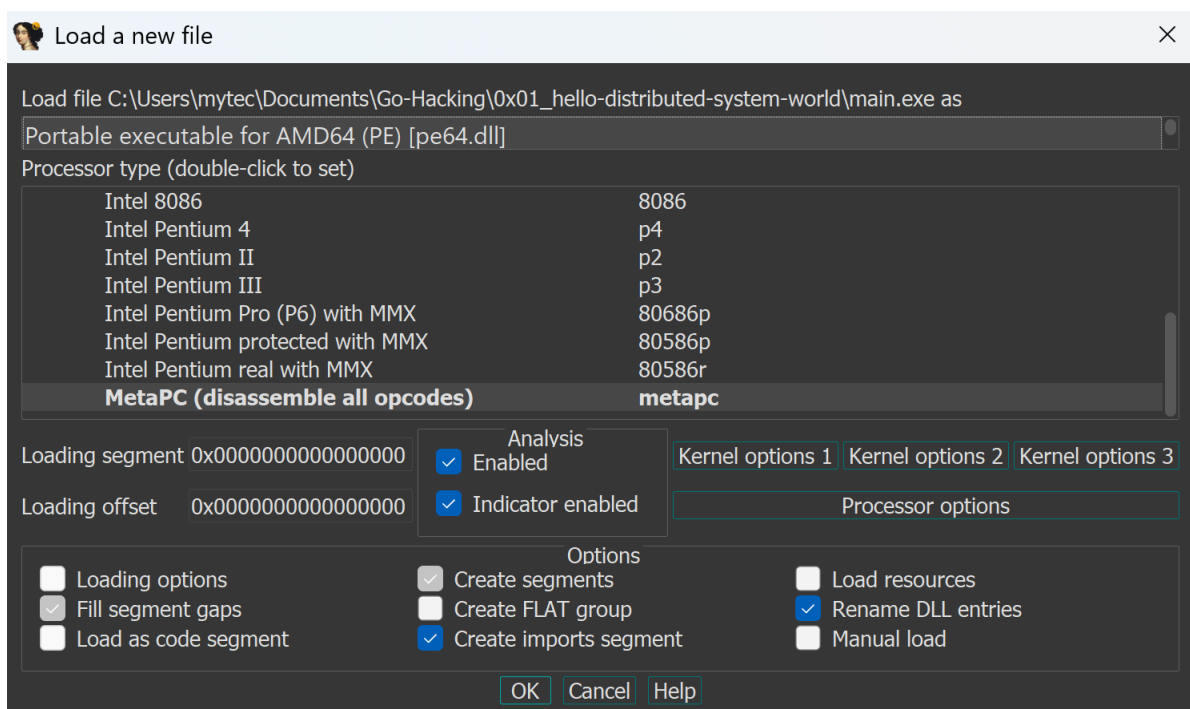

In Go at the assembler level we will need to search for the entry point of our app. This is the *main_main* function. You can use CTRL+F to search.

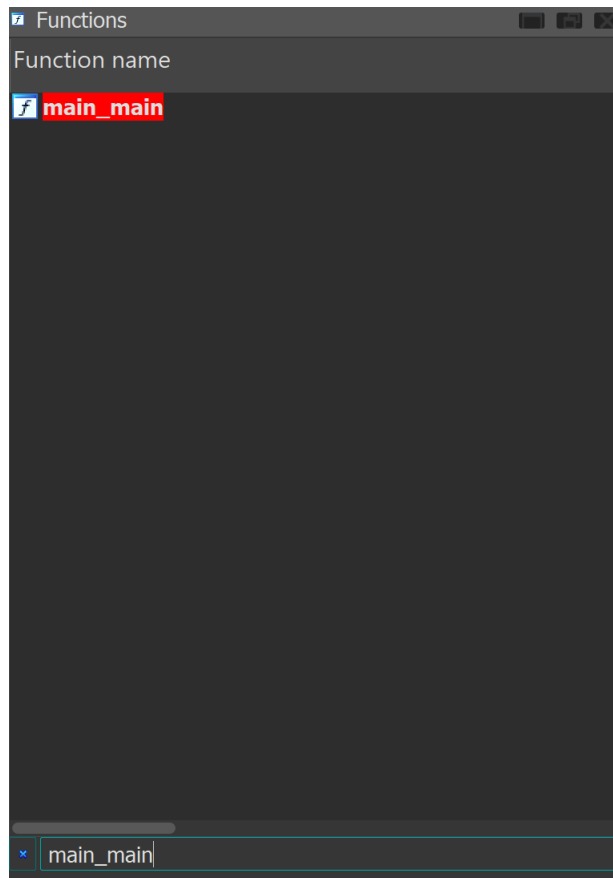

Now we can double-click on the *main_main* to launch the focus to this function and graph.

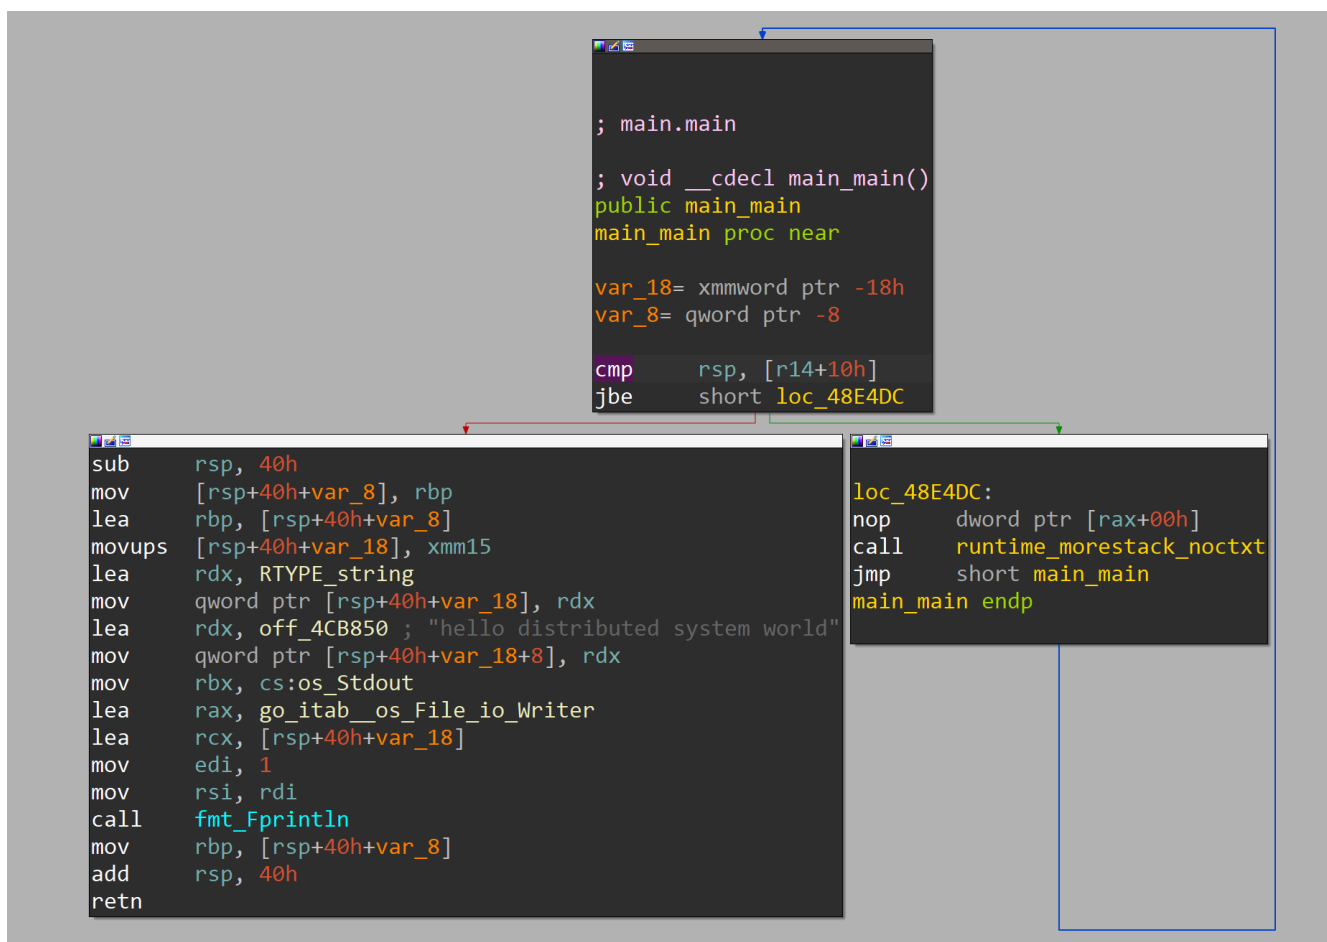

We can see in the bottom left box our *“hello distributed system world”* text.

If we double-click on *off_4CB850* it will take us to a new window where the string lives within the binary.

```

• .rdata:00000000004CB850 off_4CB850      dq offset aHelloDistribut
• .rdata:00000000004CB850                  ; DATA XREF: main_main+26↑to
• .rdata:00000000004CB850                  ; "hello distributed system world"
• .rdata:00000000004CB858                  db  1Eh

```

Here we see something very interesting. Unlike a C binary where the string is terminated by a null character, we see that there is the raw string in a large pool and a *1eh* value which represents the length of the string in hex.

If we double-click on the *“hello distributed system world”* text we will see the string pool within the binary.

```

• .rdata:00000000004ADCFD aFreedeferWithD_0 db 'freedefer with d._panic != nil'
.rdata:00000000004ADCFD ; DATA XREF: runtime_freedeferpanic+14↑to
• .rdata:00000000004ADD1B aHelloDistribut db 'hello distributed system world'
.rdata:00000000004ADD1B ; DATA XREF: .rdata:off_4CB850↓to
• .rdata:00000000004ADD39 aInappropriateI db 'inappropriate ioctl for device'
.rdata:00000000004ADD39 ; DATA XREF: .data:0000000000541690↓to
• .rdata:00000000004ADD57 aInvalidPointer db 'invalid pointer found on stack'
.rdata:00000000004ADD57 ; DATA XREF: runtime_adjustpointers+1BF↑to
• .rdata:00000000004ADD75 aNotetsleepWait db 'notetsleep - waitm out of sync'
.rdata:00000000004ADD75 ; DATA XREF: runtime_notetsleep_internal:loc_40A906↑to
• .rdata:00000000004ADD93 aProtocolWrongI db 'protocol wrong type for socket'
.rdata:00000000004ADD93 ; DATA XREF: .data:0000000000541740↓to
• .rdata:00000000004ADDB1 aReflectElemOfI_0 db 'reflect: Elem of invalid type '
.rdata:00000000004ADDB1 ; DATA XREF: reflect_ptr_rtype_Elem+112↑to
• .rdata:00000000004ADDCF aReflectLenOfNo db 'reflect: Len of non-array type'
.rdata:00000000004ADDCF ; DATA XREF: .rdata:off_4CB840↓to
• .rdata:00000000004ADDED aRunqputsLowQue db 'runqputslow: queue is not full'
.rdata:00000000004ADDED ; DATA XREF: runtime_runqputslow:loc_44353A↑to
• .rdata:00000000004ADE0B aRuntimeBadGInC db 'runtime: bad g in cgocallback',0Ah
.rdata:00000000004ADE0B ; DATA XREF: runtime_cgocallbackg+45↑to
• .rdata:00000000004ADE29 aRuntimeBadPoin db 'runtime: bad pointer in frame '
.rdata:00000000004ADE29 ; DATA XREF: runtime_adjustpointers+15F↑to
• .rdata:00000000004ADE47 aRuntimeFoundIn db 'runtime: found in object at *('
.rdata:00000000004ADE47 ; DATA XREF: runtime_badPointer+155↑to
• .rdata:00000000004ADE65 aRuntimeImpossi_0 db 'runtime: impossible type kind '
.rdata:00000000004ADE65 ; DATA XREF: runtime_typesEqual+C25↑to
• .rdata:00000000004ADE83 aSocketOperatio db 'socket operation on non-socket'
.rdata:00000000004ADE83 ; DATA XREF: .data:0000000000541670↓to

```

All of the strings are within this string pool which is a very different architectural design compared to other languages.

With this basic analysis we have a general idea of what is going on within this simple binary.

These lessons are designed to be short and digestible so that you can code and hack along.

In our next lesson we will learn how to hack this string and force the binary to print something else to the terminal of our choosing.

This will give us the first taste on hacking Go!

Chapter 3: Hacking Hello Distributed System World

Let's hack our app within IDA Free.

In our last lesson we saw our large string pool. Lets load up IDA and revisit that pool.

```
.rdata:00000000004ADCFD aFreedeferWithD_0 db 'freedefer with d._panic != nil'
.rdata:00000000004ADCFD ; DATA XREF: runtime_freedeferpanic+14f0
.rdata:00000000004ADD1B aHelloDistribut db 'hello distributed system world'
.rdata:00000000004ADD1B ; DATA XREF: .rdata:off_4CB850lo
.rdata:00000000004ADD39 aInappropriateI db 'inappropriate ioctl for device'
.rdata:00000000004ADD39 ; DATA XREF: .data:0000000000541690lo
.rdata:00000000004ADD57 aInvalidPointer db 'invalid pointer found on stack'
.rdata:00000000004ADD57 ; DATA XREF: runtime_adjustpointers+1BFf0
.rdata:00000000004ADD75 aNotetsleepWait db 'notetsleep - waitm out of sync'
.rdata:00000000004ADD75 ; DATA XREF: runtime_notetsleep_internal:loc_40A906f0
.rdata:00000000004ADD93 aProtocolWrongT db 'protocol wrong type for socket'
.rdata:00000000004ADD93 ; DATA XREF: .data:0000000000541740lo
.rdata:00000000004ADDB1 aReflectElemOfI_0 db 'reflect: Elem of invalid type '
.rdata:00000000004ADDB1 ; DATA XREF: reflect_ptr_rtype_Elem+112f0
```


Let's select *Windows* then *Hex View-1*.

00000004ADCE0	61 69 6C 65 64 20 74 6F	20 67 65 74 20 73 79 73	ailed.to.get.sys
00000004ADCF0	74 65 6D 20 70 61 67 65	20 73 69 7A 65 66 72 65	tem.page.sizefre
00000004ADD00	65 64 65 66 65 72 20 77	69 74 68 20 64 2E 5F 70	edefer.with.d._p
00000004ADD10	61 6E 69 63 20 21 3D 20	6E 69 6C 68 65 6C 6C 6F	anic.!=.nilhello
00000004ADD20	20 64 69 73 74 72 69 62	75 74 65 64 20 73 79 73	.distributed.sys
00000004ADD30	74 65 6D 20 77 6F 72 6C	64 69 6E 61 70 70 72 6F	tem.worldinappro
00000004ADD40	70 72 69 61 74 65 20 69	6F 63 74 6C 20 66 6F 72	priate.ioctl.for


Here we see our string's hex values. It is literally as simple as this as this will be a very short and rewarding chapter.

Select *Edit*, *Patch program* then *Change byte...*

We can use the Ascii Table at <https://www.asciitable.com/> to change our string from, *hello distributed system world* to *hacky distributed system world* by simply patching the bytes

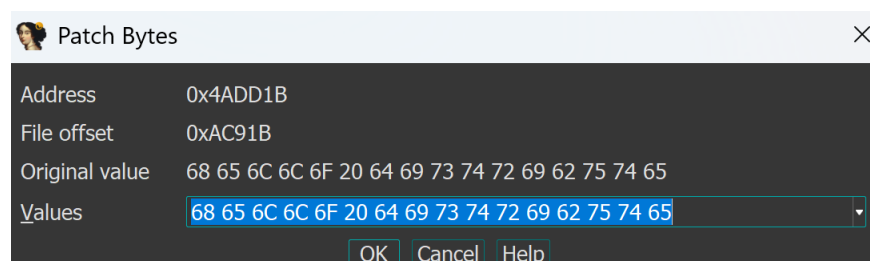


After we change hello to hacky we have the following.

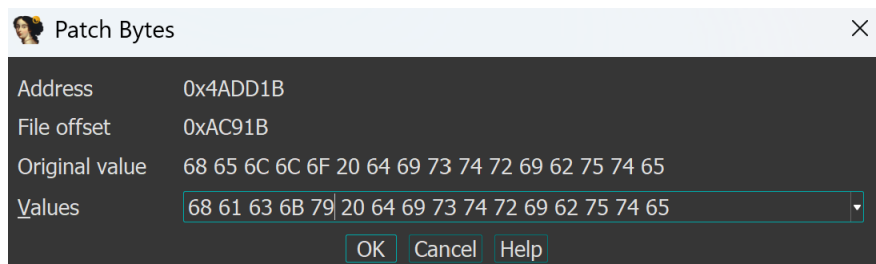

Now we observe the following change.

```
00000004ADD00 65 64 65 66 65 72 20 77 69 74 68 20 64 2E 5F 70 edefer·with·d._p
00000004ADD10 61 6E 69 63 20 21 3D 20 6E 69 6C 68 61 63 6B 79 anic·!=·nilhacky
00000004ADD20 20 64 69 73 74 72 69 62 75 74 65 64 20 73 79 73 ·distributed·sys
00000004ADD30 74 65 6D 20 77 6F 72 6C 64 69 6E 61 70 70 72 6F tem·worldinappro
00000004ADD40 70 72 69 61 74 65 20 69 6F 63 74 6C 20 66 6F 72 priate·ioctl·for
00000004ADD50 20 64 65 76 69 63 65 69 6E 76 61 6C 69 64 20 70 ·deviceinvalid·p
00000004ADD60 6F 69 6E 74 65 72 20 66 6F 75 6E 64 20 6F 6E 20 ointer·found·on·
00000004ADD70 73 74 61 63 6B 6E 6F 74 65 74 73 6C 65 65 70 20 stacknotetsleep·
```

Let's select *Edit, Patch program, Apply patches to input file...*

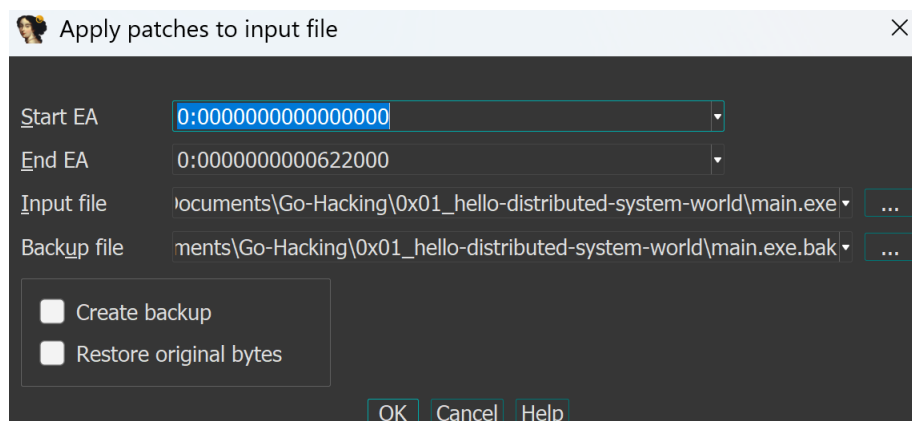

Now that we have successfully patched our program, let's re-run it.

Let's seek out *main_main* again in the function tree.

Function name
f fmt_ptr_fmt_fmtBs
f fmt_ptr_fmt_fmtSbx
f fmt_ptr_fmt_fmtQ
f fmt_ptr_fmt_fmtC
f fmt_ptr_fmt_fmtQc
f fmt_ptr_fmt_fmtFloat
f fmt_ptr_buffer_writeRune
f fmt_glob_func1
f fmt_newPrinter
f fmt_ptr_pp_free
f fmt_ptr_pp_Write
f fmt_Fprintln
f fmt_getField
f fmt_ptr_pp_unknownType
f fmt_ptr_pp_badVerb
f fmt_ptr_pp_fmtBool
f fmt_ptr_pp_fmt0x64
f fmt_ptr_pp_fmtInteger
f fmt_ptr_pp_fmtFloat
f fmt_ptr_pp_fmtComplex
f fmt_ptr_pp_fmtString
f fmt_ptr_pp_fmtBytes
f fmt_ptr_pp_fmtPointer
f fmt_ptr_pp_catchPanic
f fmt_ptr_pp_handleMethods
f fmt_ptr_pp_handleMethods_func4
f fmt_ptr_pp_handleMethods_func3
f fmt_ptr_pp_handleMethods_func2
f fmt_ptr_pp_handleMethods_func1
f fmt_ptr_pp_printArg
f fmt_ptr_pp_printValue
f fmt_ptr_pp_doPrintln
f fmt_init
f type_eq_fmt_fmt
f main_main

Here we can see our revised function.

```

.text:000000000048E480      cmp     rsp, [r14+10h]
.text:000000000048E484      jbe     short loc_48E4DC
.text:000000000048E486      sub     rsp, 40h
.text:000000000048E48A      mov     [rsp+40h+var_8], rbp
.text:000000000048E48F      lea     rbp, [rsp+40h+var_8]
.text:000000000048E494      movups  [rsp+40h+var_18], xmm15
.text:000000000048E49A      lea     rdx, RTYPE_string
.text:000000000048E4A1      mov     qword ptr [rsp+40h+var_18], rdx
.text:000000000048E4A6      lea     rdx, off_4CB850 ; "hacky distributed system world"
.text:000000000048E4AD      mov     qword ptr [rsp+40h+var_18+8], rdx
.text:000000000048E4B2      mov     rbx, cs:os_Stdout
.text:000000000048E4B9      lea     rax, go_itab__os_File_io_Writer
.text:000000000048E4C0      lea     rcx, [rsp+40h+var_18]
.text:000000000048E4C5      mov     edi, 1
.text:000000000048E4CA      mov     rsi, rdi
.text:000000000048E4CD      call    fmt_Fprintln
.text:000000000048E4D2      mov     rbp, [rsp+40h+var_8]
.text:000000000048E4D7      add     rsp, 40h
.text:000000000048E4DB      retn

.text:000000000048E4DC ; -----
.text:000000000048E4DC      loc_48E4DC:                                ; CODE XREF: main_main+4↑j
.text:000000000048E4DC      nop     dword ptr [rax+00h]
.text:000000000048E4E0      call    runtime_morestack_noctxt
.text:000000000048E4E5      jmp     short main_main
.text:000000000048E4E5      main_main      endp

```

Let's set a breakpoint by pressing F2 on the call to *fmt_Fprintln*.

```

.text:000000000048E480      cmp     rsp, [r14+10h]
.text:000000000048E484      jbe     short loc_48E4DC
.text:000000000048E486      sub     rsp, 40h
.text:000000000048E48A      mov     [rsp+40h+var_8], rbp
.text:000000000048E48F      lea     rbp, [rsp+40h+var_8]
.text:000000000048E494      movups  [rsp+40h+var_18], xmm15
.text:000000000048E49A      lea     rdx, RTYPE_string
.text:000000000048E4A1      mov     qword ptr [rsp+40h+var_18], rdx
.text:000000000048E4A6      lea     rdx, off_4CB850 ; "hacky distributed system world"
.text:000000000048E4AD      mov     qword ptr [rsp+40h+var_18+8], rdx
.text:000000000048E4B2      mov     rbx, cs:os_Stdout
.text:000000000048E4B9      lea     rax, go_itab__os_File_io_Writer
.text:000000000048E4C0      lea     rcx, [rsp+40h+var_18]
.text:000000000048E4C5      mov     edi, 1
.text:000000000048E4CA      mov     rsi, rdi
.text:000000000048E4CD      call    fmt_Fprintln
.text:000000000048E4D2      mov     rbp, [rsp+40h+var_8]
.text:000000000048E4D7      add     rsp, 40h
.text:000000000048E4DB      retn

.text:000000000048E4DC ; -----
.text:000000000048E4DC      loc_48E4DC:                                ; CODE XREF: main_main+4↑j
.text:000000000048E4DC      nop     dword ptr [rax+00h]
.text:000000000048E4E0      call    runtime_morestack_noctxt
.text:000000000048E4E5      jmp     short main_main
.text:000000000048E4E5      main_main      endp

```

Finally let's debug!

We hit our breakpoint.

```
.text:0000000000B7E4C5 mov     edi, 1
.text:0000000000B7E4CA mov     rsi, rdi
.text:0000000000B7E4CD call    fmt_Fprintln
.text:0000000000B7E4D2 mov     rbp, [rsp+40h+var_8]
.text:0000000000B7E4D7 add     rsp, 40h
```

Let's step over the call and watch what happens in the console window.

A screenshot of a Windows console window. The title bar shows the file path 'C:\Users\mytec\Documents\C' and standard window controls. The console output displays the text 'hacky distributed system world' on a single line.

Success!

In our next lesson we will begin to understand primitive types in Go.

Chapter 4: Primitive Types

Golang has three basic types which are *bool*, *numeric* and *string*.

Once a variable is declared it is automatically populated with a null value.

Let's create a new project and get started by following the below steps.

New File
main.go

Now let's populate our **main.go** file with the following.

```
package main

import "fmt"

func main() {
    b := true
    i := 42
    f := 3.14
    s := "42"

    fmt.Println("bool: ", b)
    fmt.Println("int: ", i)
    fmt.Println("float32: ", f)
    fmt.Println("string: ", s)
}
```

Let's open up the terminal by click CTRL+SHIFT+` and type the following.

```
go mod init main
go mod tidy
go build
Let's run the binary!
```

```
.\main.exe
```

Output...

```
bool:  true
int:  42
float32:  3.14
string:  42
```

We can clearly see the respective values and how Golang handles them. In our next lesson we will debug this simple program.

Chapter 5: Debugging Primitive Types


Let's debug our app within IDA Free.

Let's locate `main_main` and begin our analysis. In Chapter 2 we went step-by-step to accomplish this so please refer back if needed.

Let's set a breakpoint on the `lea` instruction.

```
text:00000000006DE480
text:00000000006DE480
text:00000000006DE480 ; main.main
text:00000000006DE480
text:00000000006DE480 ; void __cdecl main_main()
text:00000000006DE480 public main_main
text:00000000006DE480 main_main proc near
text:00000000006DE480
text:00000000006DE480 var_88= xmmword ptr -88h
text:00000000006DE480 var_78= xmmword ptr -78h
text:00000000006DE480 var_68= xmmword ptr -68h
text:00000000006DE480 var_58= xmmword ptr -58h
text:00000000006DE480 var_48= xmmword ptr -48h
text:00000000006DE480 var_38= xmmword ptr -38h
text:00000000006DE480 var_28= xmmword ptr -28h
text:00000000006DE480 var_18= xmmword ptr -18h
text:00000000006DE480 var_8= qword ptr -8
text:00000000006DE480
.text:00000000006DE480 lea     r12, [rsp+var_38+8]
text:00000000006DE485 cmp     r12, [r14+10h]
text:00000000006DE489 jbe     loc_6DE655
```

Before we get started I would sync the hex view with RIP as follows.

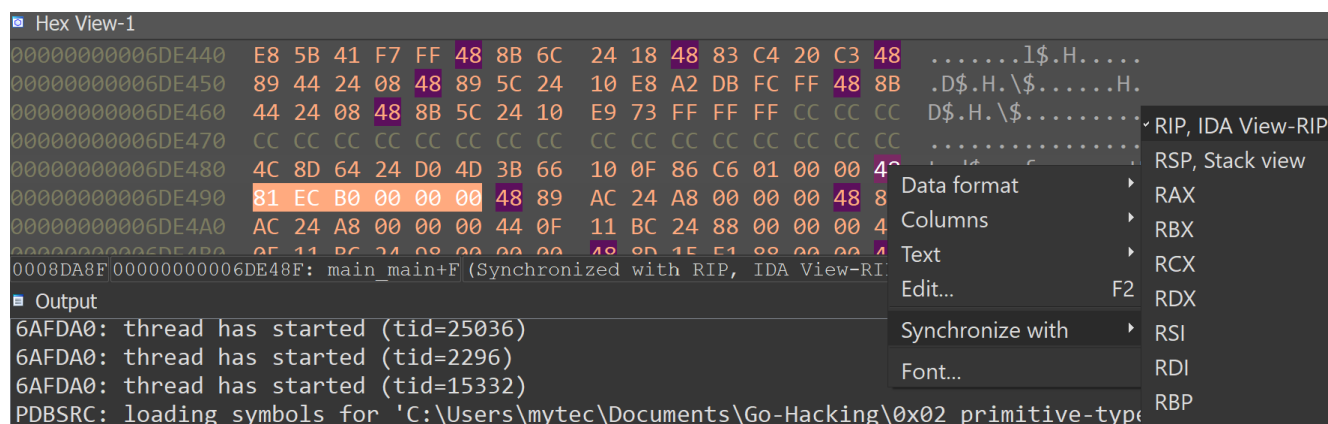

This way with each step we can see what is going on in the bin.

We step until the `lea` instruction highlighted below.

```
.text:00000000006DE48F sub    rsp, 0B0h
.text:00000000006DE496 mov     [rsp+0B0h+var_8], rbp
.text:00000000006DE49E lea     rbp, [rsp+0B0h+var_8]
.text:00000000006DE4A6 movups  [rsp+0B0h+var_28], xmm15
.text:00000000006DE4AF movups  [rsp+0B0h+var_18], xmm15
.text:00000000006DE4B8 lea     rdx, RTYPE_string
.text:00000000006DE4BF mov     qword ptr [rsp+0B0h+var_28], rdx
.text:00000000006DE4C7 lea     r8, off_71B8E8 ; "bool: "
.text:00000000006DE4CE mov     qword ptr [rsp+0B0h+var_28+8], r8
.text:00000000006DE4D6 lea     r8, RTYPE_bool
.text:00000000006DE4DD mov     qword ptr [rsp+0B0h+var_18], r8
```

Let's double-click on the `off_71B8E8` and see what it contains.

```
• .rdata:000000000071B8E8 off_71B8E8 dq offset aBool_2 ; DATA XREF: main_main+47fo
  .rdata:000000000071B8E8 ; "bool: "
• .rdata:000000000071B8F0 db      6
```

We can see there is a string reference here which is, `"bool: "`, which should seem familiar from our last lesson. We also see the `RTYPE_string` which indicates our type for the `"bool: "` and `RTYPE_bool` for the `true` which we will see shortly is a 1.

We also know how Golang handles string lengths. We can see the value of 6 which indicates the length of the string which as we have mentioned at length differs from other languages completely as there is not null terminated.

When we double-click on `aBool_2` we get taken to the string pool.

```
• .rdata:00000000006F82D1 aYezidi db 'Yezidi' ; DATA XREF: unicode_init+2F91fo
• .rdata:00000000006F82D7 aByte db '[]byte' ; DATA XREF: fmt_ptr_pp_printArg+38Efo
• .rdata:00000000006F82DD aBool_2 db 'bool: |' ; DATA XREF: .rdata:off_71B8E8fo
• .rdata:00000000006F82E3 aChan_1 db 'chan<- ' ; DATA XREF: reflect_chanDir_String:loc_6C2F8Ffo
• .rdata:00000000006F82E9 aEfence db 'efence' ; DATA XREF: .data:0000000000790668fo
• .rdata:00000000006F82EF aListen db 'listen' ; DATA XREF: syscall_init+47A7fo
• .rdata:00000000006F82F5 aObject db 'object' ; DATA XREF: runtime_badPointer+1AAfo
• .rdata:00000000006F82FB aPopcnt db 'popcnt' ; DATA XREF: internal_cpu_doinit+202fo
• .rdata:00000000006F82FB ; internal_cpu_doinit+220fo
• .rdata:00000000006F8301 aRdtscp db 'rdtscp' ; DATA XREF: internal_cpu_doinit+A7fo
• .rdata:00000000006F8307 aSelect db 'select' ; DATA XREF: .data:00000000007904F0fo
• .rdata:00000000006F830D aSocket db 'socket' ; DATA XREF: syscall_init+4959fo
• .rdata:00000000006F8313 aString_4 db 'string' ; DATA XREF: .data:0000000000790260fo
• .rdata:00000000006F8313 ; .data:0000000000790420fo
• .rdata:00000000006F8319 aStruct_1 db 'struct' ; DATA XREF: .data:0000000000790270fo
• .rdata:00000000006F8319 ; .data:0000000000790430fo
• .rdata:00000000006F831F aSweep_0 db 'sweep ' ; DATA XREF: runtime_markrootSpans+1E5fo
• .rdata:00000000006F8325 aSysmon db 'sysmon' ; DATA XREF: .data:0000000000790810fo
• .rdata:00000000006F832B aTimers_0 db 'timers' ; DATA XREF: .data:00000000007908D0fo
• .rdata:00000000006F8331 aUint16_1 db 'uint16' ; DATA XREF: .data:0000000000790170fo
```

We can see the strings are literally up against one another as this gives us deeper insight into Golang.

As mentioned we also drill down into the *true* or 1.

```
.text:00000000006DE4D6 lea     r8, RTYPE_bool
.text:00000000006DE4DD mov     qword ptr [rsp+0B0h+var_18], r8
.text:00000000006DE4E5 lea     r8, unk_786988
```

Then...

```
• .data:0000000000786988 unk_786988 db 1 ; DATA XREF: main_main+65↑o
```

As we continue to press F7 and single-step we will see the calls to the Golang *Stdout* file descriptor and the *io.Writer* interface which allows you to write data to a wide variety of output streams and in our case stdout.

Finally we call *Fprintln* to print our string into the terminal.

```
.text:00000000006DE4F4 mov     rbx, cs:os_Stdout
.text:00000000006DE4FB lea     rax, go_itab__os_File_io_Writer
.text:00000000006DE502 lea     rcx, [rsp+0B0h+var_28]
.text:00000000006DE50A mov     edi, 2
.text:00000000006DE50F mov     rsi, rdi
.text:00000000006DE512 call    fmt_Fprintln
```

Our result so far...

```
C:\Users\mytec\Documents\G x + v
bool: true
```

We see the *int* and as well.

```
.text:00000000006DE523 lea     rdx, RTYPE_string
.text:00000000006DE52A mov     qword ptr [rsp+0B0h+var_48], rdx
.text:00000000006DE52F lea     r8, off_71B8F8 ; "int: "
.text:00000000006DE536 mov     qword ptr [rsp+0B0h+var_48+8], r8
.text:00000000006DE53B mov     eax, 2Ah ; '*'
.text:00000000006DE540 call    runtime_convT64
.text:00000000006DE545 lea     rdx, RTYPE_int
.text:00000000006DE54C mov     qword ptr [rsp+0B0h+var_38], rdx
.text:00000000006DE551 mov     qword ptr [rsp+0B0h+var_38+8], rax
.text:00000000006DE559 mov     rbx, cs:os_Stdout
.text:00000000006DE560 lea     rax, go_itab__os_File_io_Writer
.text:00000000006DE567 lea     rcx, [rsp+0B0h+var_48]
.text:00000000006DE56C mov     edi, 2
.text:00000000006DE571 mov     rsi, rdi
.text:00000000006DE574 call    fmt_Fprintln
```

We see here the literal value of 0x2a is moved into EAX which is the lower half of RAX which of course is 42 decimal. We see a call to runtime_convT64 which if you step through it

```
text:00000000006DE53B mov     eax, 2Ah ; '*'
text:00000000006DE540 call    runtime_convT64
text:00000000006DE545 lea     rdx, RTYPE_int
```

After calling Fprintln...

```
C:\Users\mytec\Documents\G  X + v
bool: true
int: 42
```

Regarding the float we see a very large number being put into RAX.

```
text:00000000006DE585 lea     rdx, RTYPE_string
text:00000000006DE58C mov     qword ptr [rsp+0B0h+var_68], rdx
text:00000000006DE591 lea     r8, off_71B908 ; "float32: "
text:00000000006DE598 mov     qword ptr [rsp+0B0h+var_68+8], r8
text:00000000006DE59D mov     rax, 40091EB851EB851Fh
text:00000000006DE5A7 call    runtime_convT64
text:00000000006DE5AC lea     rdx, RTYPE_float64
text:00000000006DE5B3 mov     qword ptr [rsp+0B0h+var_58], rdx
text:00000000006DE5B8 mov     qword ptr [rsp+0B0h+var_58+8], rax
text:00000000006DE5BD mov     rbx, cs:os_Stdout
text:00000000006DE5C4 lea     rax, go_itab__os_File_io_Writer
text:00000000006DE5CB lea     rcx, [rsp+0B0h+var_68]
text:00000000006DE5D0 mov     edi, 2
text:00000000006DE5D5 mov     rsi, rdi
text:00000000006DE5D8 call    fmt_Fprintln
```

Digging into the call of runtime_convT64.

```
text:0000000000659D60 cmp     rsp, [r14+10h]
text:0000000000659D64 jbe     short loc_659D8D

text:0000000000659D66 sub     rsp, 20h
text:0000000000659D6A mov     [rsp+20h+var_8], rbp
text:0000000000659D6F lea     rbp, [rsp+20h+var_8]
text:0000000000659D74 cmp     rax, 100h
text:0000000000659D7A jnb     short loc_659D89

text:0000000000659D7C lea     rcx, runtime_staticuint64s
text:0000000000659D83 lea     rcx, [rcx+rax*8]
text:0000000000659D87 jmp     short loc_659D80

text:0000000000659D89 loc_659D89:
text:0000000000659D89 mov     [rsp+20h+arg_0], rax
text:0000000000659D8E mov     rbx, cs:runtime_uint64Type

text:0000000000659D8D loc_659D8D:
text:0000000000659D8D mov     [rsp+arg_0], rax
text:0000000000659D8D call    runtime_morestack_noctxt
text:0000000000659D8D mov     rax, [rsp+arg_0]
text:0000000000659D8D jmp     short runtime_convT64
text:0000000000659D8D runtime_convT64 endp
text:0000000000659D8D
```

```

.text:0000000000659D66 sub     rsp, 20h
.text:0000000000659D6A mov     [rsp+20h+var_8], rbp
.text:0000000000659D6F lea     rbp, [rsp+20h+var_8]
.text:0000000000659D74 cmp     rax, 100h
.text:0000000000659D7A jnb     short loc_659D89

.text:0000000000659D8D loc_659D8D:
.text:0000000000659D8D mov     [rsp+arg_0], rax
.text:0000000000659D8D call    runtime_morestack_noctxt
.text:0000000000659D92 mov     rax, [rsp+arg_0]
.text:0000000000659D9C jmp     short runtime_convT64
.text:0000000000659DCC runtime_convT64 endp
.text:0000000000659DCC

.text:0000000000659D7C lea     rcx, runtime_staticuint64s
.text:0000000000659D83 lea     rcx, [rcx+rax*8]
.text:0000000000659D87 jmp     short loc_659DB0

.text:0000000000659D89 loc_659D89:
.text:0000000000659D89 mov     [rsp+20h+arg_0], rax
.text:0000000000659D8E mov     rbx, cs:runtime_uint64Type
.text:0000000000659D95 mov     eax, 8
.text:0000000000659D9A xor     ecx, ecx
.text:0000000000659D9C nop     dword ptr [rax+00h]
.text:0000000000659DA0 call    runtime_mallocgc
.text:0000000000659DA5 mov     rdx, [rsp+20h+arg_0]

.text:0000000000659D7C lea     rcx, runtime_staticuint64s
.text:0000000000659D83 lea     rcx, [rcx+rax*8]
.text:0000000000659D87 jmp     short loc_659DB0

.text:0000000000659D89 loc_659D89:
.text:0000000000659D89 mov     [rsp+20h+arg_0], rax
.text:0000000000659D8E mov     rbx, cs:runtime_uint64Type
.text:0000000000659D95 mov     eax, 8
.text:0000000000659D9A xor     ecx, ecx
.text:0000000000659D9C nop     dword ptr [rax+00h]
.text:0000000000659DA0 call    runtime_mallocgc
.text:0000000000659DA5 mov     rdx, [rsp+20h+arg_0]
.text:0000000000659DAA mov     [rax], rdx
.text:0000000000659DAD mov     rcx, rax

.text:0000000000659DB0 loc_659DB0:
.text:0000000000659DB0 mov     rax, rcx
.text:0000000000659DB3 mov     rbp, [rsp+20h+var_8]
.text:0000000000659DB8 add     rsp, 20h
.text:0000000000659DBC retn

```

We see call to `runtime_morestack_noctxt` which allocates a new stack for a *goroutine* and a call to the garbage collector which is `runtime_mallocgc`.

As we continue we have to take a step back to the beginning of `main_main` where we see a number of `xmmwords`.

```

.text:00000000006DE480 ; main.main
.text:00000000006DE480 ; void __cdecl main_main()
.text:00000000006DE480 public main_main
.text:00000000006DE480 main_main proc near
.text:00000000006DE480
.text:00000000006DE480 var_88= xmmword ptr -88h
.text:00000000006DE480 var_78= xmmword ptr -78h
.text:00000000006DE480 var_68= xmmword ptr -68h
.text:00000000006DE480 var_58= xmmword ptr -58h
.text:00000000006DE480 var_48= xmmword ptr -48h
.text:00000000006DE480 var_38= xmmword ptr -38h
.text:00000000006DE480 var_28= xmmword ptr -28h
.text:00000000006DE480 var_18= xmmword ptr -18h
.text:00000000006DE480 var_8= qword ptr -8

```

The *xmmword* pointer is a directive that is used to specify the size and type of a memory operand as it indicates the operand is a 128-bit value that is stored in the SSE register or memory.

The *xmmword* pointer is used with other instructions that operate on a floating-point values using the SSE2 SIMD (Single Instruction, Multiple Data) instructions.

In our case it does not do any math on it as it simply handles the conversion of our 3.14 into a printable format.

Keep in mind we used other *xmmword* pointers for our integers as well as well as other numbers however *var_58* and *var_68* is used for our float.

```
.text:00000000006DE5AC lea     rdx, RTYPE_float64
.text:00000000006DE5B3 mov     qword ptr [rsp+0B0h+var_58], rdx
.text:00000000006DE5B8 mov     qword ptr [rsp+0B0h+var_58+8], rax
.text:00000000006DE5BD mov     rbx, cs:os_Stdout
.text:00000000006DE5C4 lea     rax, go_itab__os_File_io_Writer
.text:00000000006DE5CB lea     rcx, [rsp+0B0h+var_68]
.text:00000000006DE5D0 mov     edi, 2
.text:00000000006DE5D5 mov     rsi, rdi
.text:00000000006DE5D8 call    fmt_Fprintln
```

The review of the following within *RDX*, *RAX* and *RCX* create our float.

```
RAX000000000071BE18 ↪ .rdata:go_itab__os_File_io_Writer
RBX000000C00000A018 ↪ debug055:000000C00000A018
RCX000000C000117F10 ↪ debug061:000000C000117F10
RDX00000000006E62A0 ↪ .rdata:RTYPE_float64
RSI0000000000000002 ↪
RDI0000000000000002 ↪
```

The *debug055* and *debug061* refers to the name of code or data at that address.

RBX	debug055:000000C00000A018	db	0
•	debug055:000000C00000A019	db	45h
•	debug055:000000C00000A01A	db	0
•	debug055:000000C00000A01B	db	0
•	debug055:000000C00000A01C	db	0C0h
•	debug055:000000C00000A01D	db	0
•	debug055:000000C00000A01E	db	0
•	debug055:000000C00000A01F	db	0
•	debug055:000000C00000A020	db	80h
•	debug055:000000C00000A021	db	47h
•	debug055:000000C00000A022	db	0
•	debug055:000000C00000A023	db	0
•	debug055:000000C00000A024	db	0C0h
•	debug055:000000C00000A025	db	0
•	debug055:000000C00000A026	db	0
•	debug055:000000C00000A027	db	0
•	debug055:000000C00000A028	db	0A0h
•	debug055:000000C00000A029	db	0C3h
•	debug055:000000C00000A02A	db	78h

The rest of the *db* values simply hold 0.

```
RCX: debug061:000000C000117F10 db 0A0h
      debug061:000000C000117F11 db 6Dh ; m
      debug061:000000C000117F12 db 6Eh ; n
      debug061:000000C000117F13 db 0
      debug061:000000C000117F14 db 0
      debug061:000000C000117F15 db 0
      debug061:000000C000117F16 db 0
      debug061:000000C000117F17 db 0
      debug061:000000C000117F18 db 8
      debug061:000000C000117F19 db 0B9h
      debug061:000000C000117F1A db 71h ; q
      debug061:000000C000117F1B db 0
      debug061:000000C000117F1C db 0
      debug061:000000C000117F1D db 0
      debug061:000000C000117F1E db 0
      debug061:000000C000117F1F db 0
      debug061:000000C000117F20 db 0A0h
      debug061:000000C000117F21 db 62h ; b
      debug061:000000C000117F22 db 6Eh ; n
```

We see a similar situation with *RCX*.

```
C:\Users\mytec\Documents\G X + v
bool: true
int: 42
float32: 3.14
```

We see that the values have been converted to a printable format with the help of Golang *Stdout* file descriptor and the *io.Writer* interface which allows you to write data to a wide variety of output streams as we mentioned.

Finally we see the same behavior with our string. We have done this before in our last debug so we do not have to cover this again but as an exercise please step through the Assembler.

```
.text:00000000006DE5E9 lea     rdx, RTYPE_string
.text:00000000006DE5F0 mov     qword ptr [rsp+0B0h+var_88], rdx
.text:00000000006DE5F5 lea     r8, off_71B918 ; "string: "
.text:00000000006DE5FC mov     qword ptr [rsp+0B0h+var_88+8], r8
.text:00000000006DE601 lea     rax, a42 ; "42"
.text:00000000006DE608 mov     ebx, 2
.text:00000000006DE60D call    runtime_convTstring
.text:00000000006DE612 lea     rdx, RTYPE_string
.text:00000000006DE619 mov     qword ptr [rsp+0B0h+var_78], rdx
.text:00000000006DE61E mov     qword ptr [rsp+0B0h+var_78+8], rax
.text:00000000006DE623 mov     rbx, cs:os_Stdout
.text:00000000006DE62A lea     rax, go_itab__os_File_io_Writer
.text:00000000006DE631 lea     rcx, [rsp+0B0h+var_88]
.text:00000000006DE636 mov     edi, 2
.text:00000000006DE63B mov     rsi, rdi
.text:00000000006DE63E xchg    ax, ax
.text:00000000006DE640 call    fmt_Fprintln
```

A screenshot of a Go Playground terminal window. The window has a dark background and a light-colored title bar. The title bar shows the file path "C:\Users\mytec\Documents\G" followed by a close button (X) and a dropdown menu with a plus sign and a downward arrow. The terminal content displays the following text:

```
bool: true
int: 42
float32: 3.14
string: 42
```

This now gives you a good handle of how Golang handles its implementation under the hood.

In our next chapter we will hack some of these values.

