

ReactJS Hands-On - JSX (Office Space Rental App)

1. Objective

Create a React application named `officespacerentalapp` that uses JSX to create elements and attributes, an object and a list of objects, and inline CSS to colour the rent value based on its amount.

2. Prerequisites

Node.js, NPM, Visual Studio Code

3. Create the React Project

Command typed in the VS Code terminal:

```
npx create-react-app officespacerentalapp
```

4. App.js - JSX Elements, Object, List and Inline CSS

A heading element, an image with attributes, an office object, a list of office objects, and inline CSS that colours the rent red when it is 60000 or below and green when it is above 60000:

```
import React from 'react';
import officeImage from './office.jpg';

const office = {
  name: 'Prestige Business Park',
  rent: 55000,
  address: 'Bangalore, Karnataka'
};

const officeList = [
  { name: 'Prestige Business Park', rent: 55000, address: 'Bangalore, Karnataka' },
  { name: 'DLF Cyber City', rent: 75000, address: 'Gurugram, Haryana' },
  { name: 'Rajiv Gandhi Infotech Park', rent: 48000, address: 'Pune, Maharashtra' },
  { name: 'Salarpuria Sattva', rent: 62000, address: 'Bangalore, Karnataka' }
];

function App() {
  return (
    <div>
      <h1>Office Space Rental</h1>
      <img src={officeImage} alt="Office Space" width="300" />

      <h3>{office.name}</h3>
      <p>Rent: <span style={{ color: office.rent > 60000 ? 'green' : 'red' }}>
        {office.rent}</span></p>
      <p>Address: {office.address}</p>

      <hr />
      <h3>Available Office Spaces</h3>
      {officeList.map((item, index) => (
        <div key={index}>
```

```
    <h4>{item.name}</h4>
    <p>Rent: <span style={{ color: item.rent > 60000 ? 'green' : 'red' }}>
      {item.rent}</span></p>
    <p>Address: {item.address}</p>
    <hr />
  </div>
  )}
</div>
);
}

export default App;
```


5. Run the Application

Command typed in the terminal, inside the officespacerentalapp folder:

```
npm start
```

6. Output - localhost:3000

Browser output after opening localhost:3000. Rent is shown in red for values 60000 and below, and in green for values above 60000:

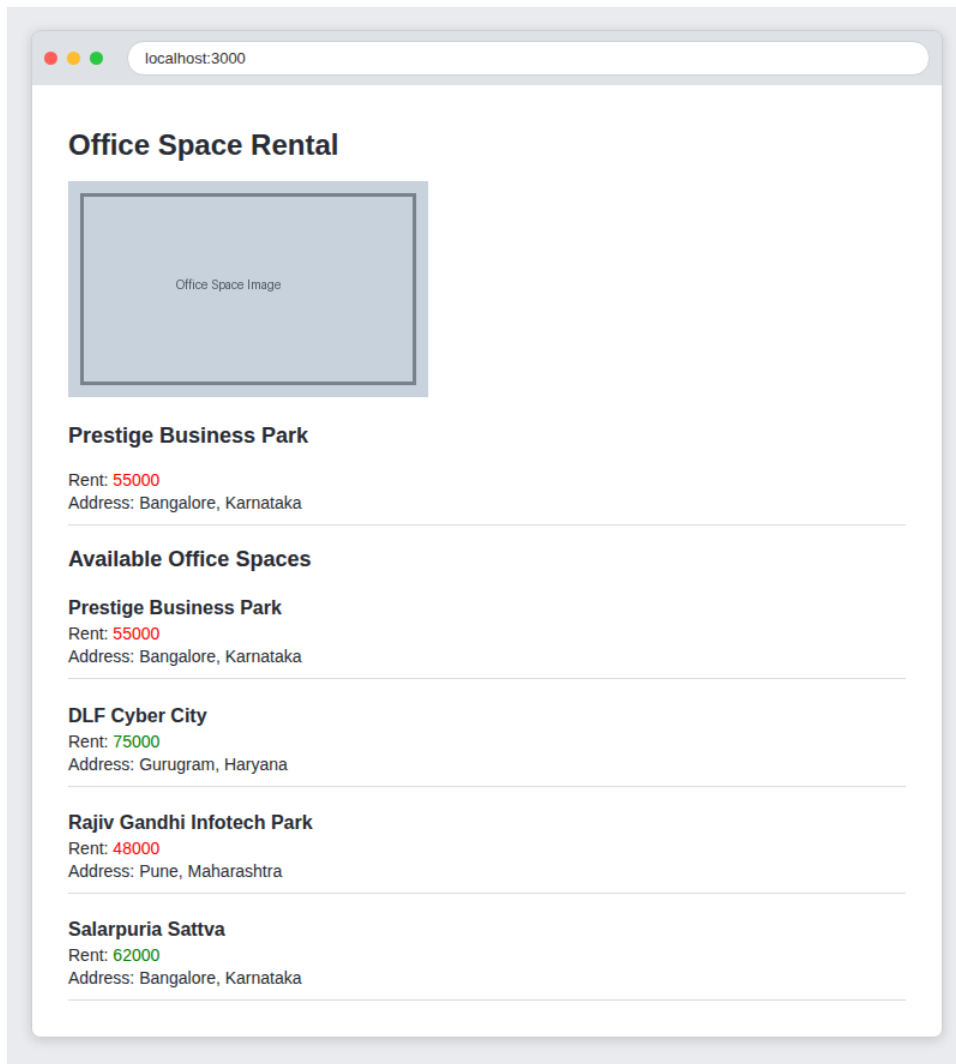

7. Observation

The heading and image are created as plain JSX elements with attributes (src, alt, width). The office object and officeList array show how JavaScript expressions and data structures can be embedded directly in JSX using curly braces. The list is rendered by looping through officeList with map(). Inline CSS is applied through the style attribute with a JavaScript object, and the colour of each rent value changes based on the condition `rent > 60000`.