



**Name – Aditya**

**Reg no 19BIT0139**


Xampp server

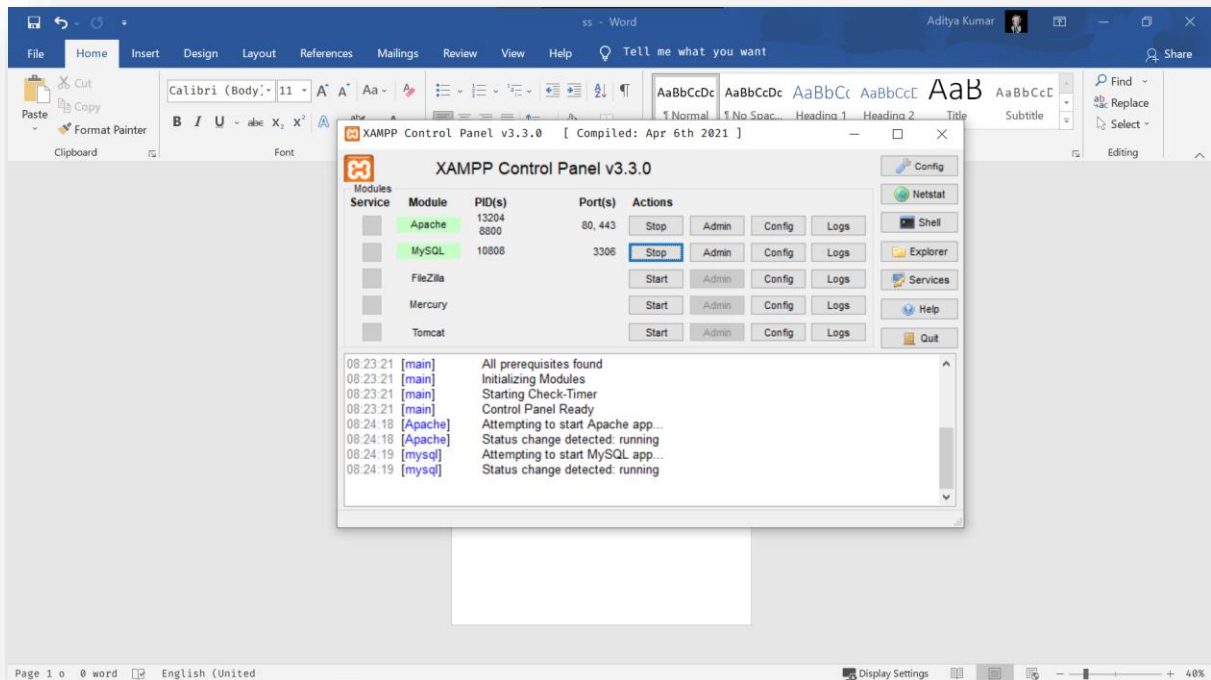


aditya0139 DB created

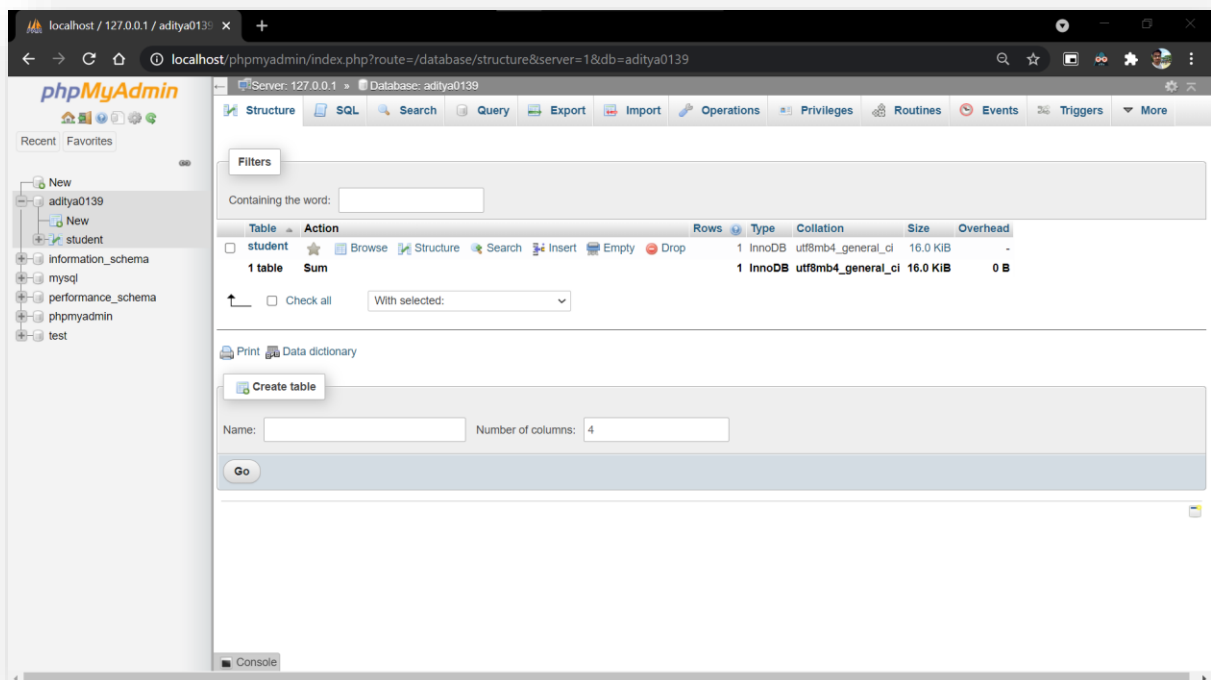

Student table with attributes: name password reg country and marks created

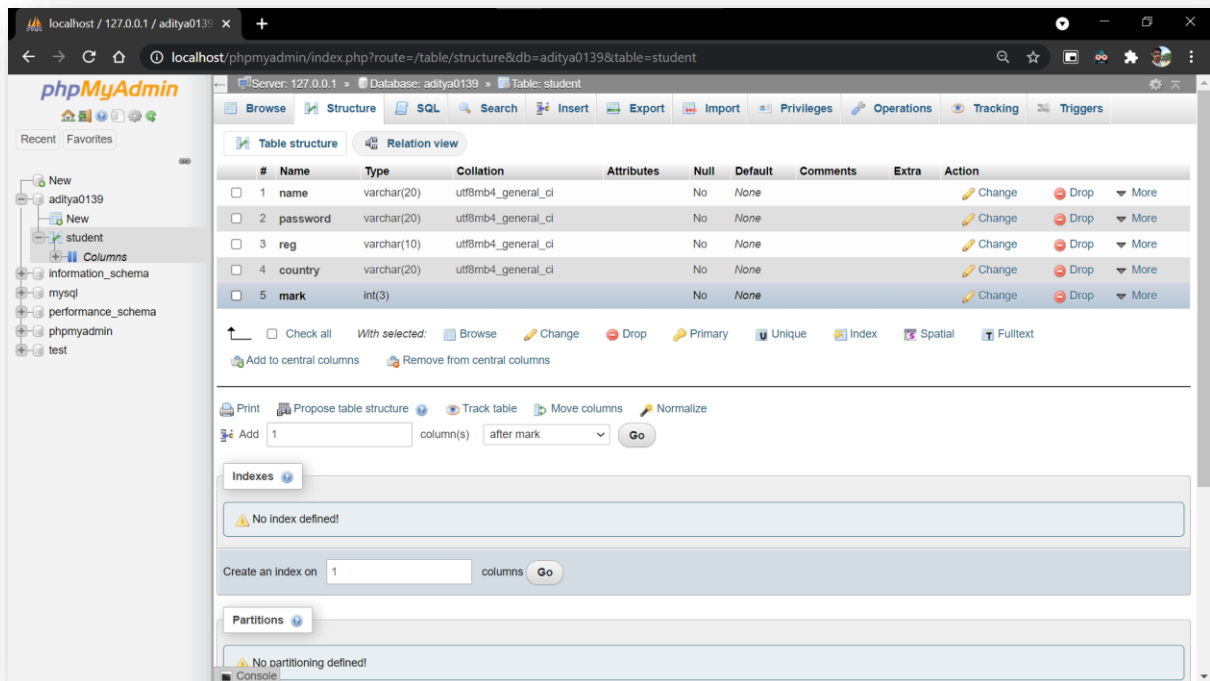

INSERT command

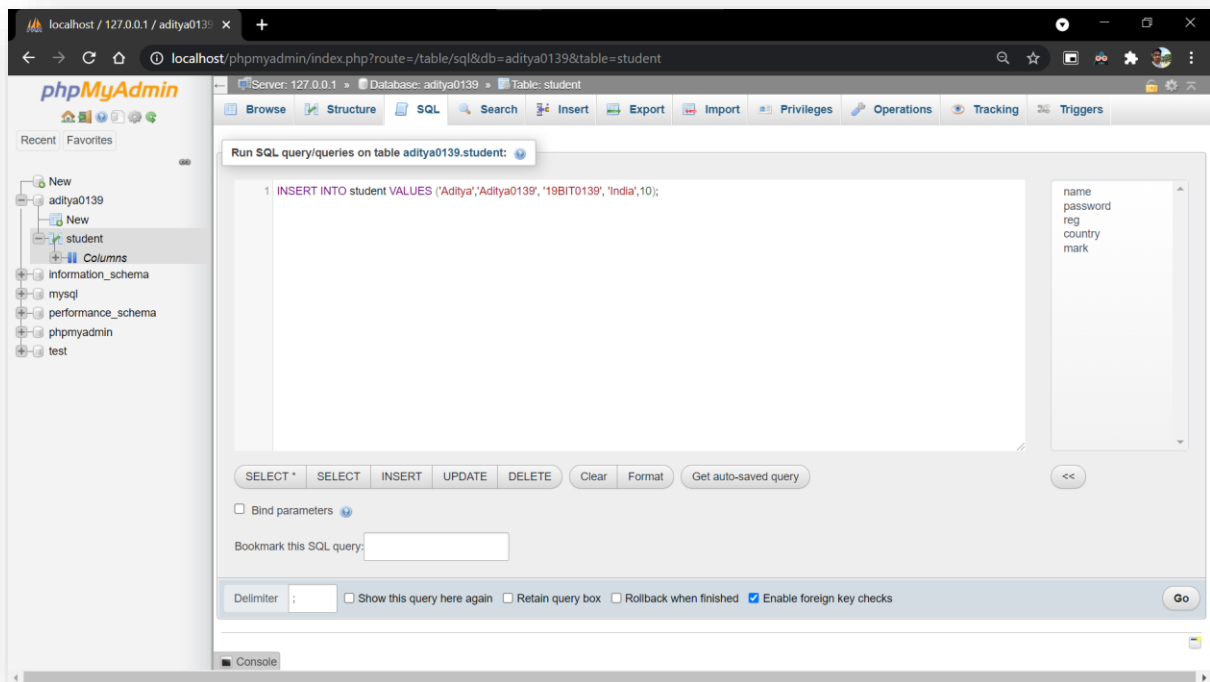

Showing rows 0 - 0 (1 total, Query took 0.0013 seconds.)

`SELECT * FROM 'student'`

☐ Profiling [\[ Edit Inline \]](#) [\[ Edit \]](#) [\[ Explain SQL \]](#) [\[ Create PHP code \]](#) [\[ Refresh \]](#)

☐ Show all | Number of rows: 25 | Filter rows: Search this table

+ Options

name	password	reg	country	mark
Aditya	Aditya0139	19BIT0139	India	10

☐ Show all | Number of rows: 25 | Filter rows: Search this table

Query results operations

localhost / 127.0.0.1 / aditya0139

localhost/phpmyadmin/index.php?route=/table/sql&db=aditya0139&table=student

Server: 127.0.0.1 » Database: aditya0139 » Table: student

Browse Structure SQL Search Insert Export Import Privileges Operations Tracking Triggers

Run SQL query/queries on table aditya0139.student:

```
1 INSERT INTO student VALUES('Jerry','jerry0213','19BIT0012','USA',10);
```

name  
password  
reg  
country  
mark

☐ Bind parameters ⓘ

Bookmark this SQL query:

Delimiter : ☐ Show this query here again ☐ Retain query box ☐ Rollback when finished ☒ Enable foreign key checks

Console

Showing rows 0 - 1 (2 total, Query took 0.0017 seconds.)

`SELECT * FROM 'student'`

☐ Profiling [\[ Edit Inline \]](#) [\[ Edit \]](#) [\[ Explain SQL \]](#) [\[ Create PHP code \]](#) [\[ Refresh \]](#)


☐ Show all | Number of rows: 25 | Filter rows: Search this table

+ Options

name	password	reg	country	mark
Aditya	Aditya0139	19BIT0139	India	10
Jerry	jerry0213	19BIT0012	USA	10

☐ Show all | Number of rows: 25 | Filter rows: Search this table


## SELECT command with country parameter

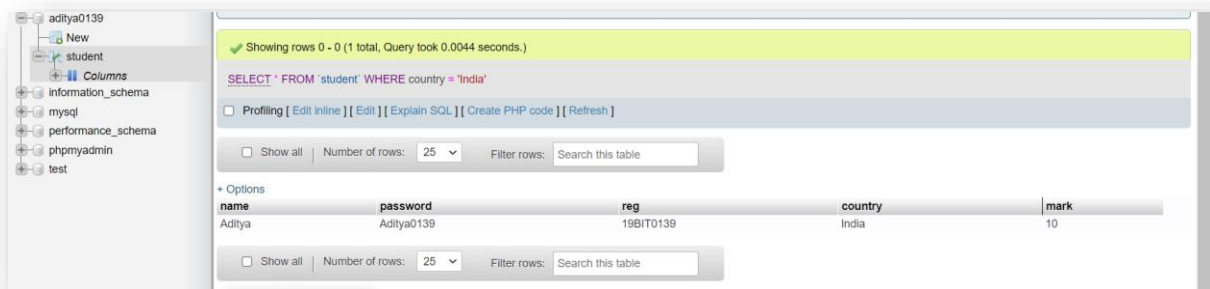

The screenshot shows the phpMyAdmin interface with the 'student' table selected. The SQL query entered is `SELECT * FROM 'student' WHERE country = 'India'`. The results show one row for Aditya.


name	password	reg	country	mark
Aditya	Aditya0139	19BIT0139	India	10

## SELECT command with marks parameter

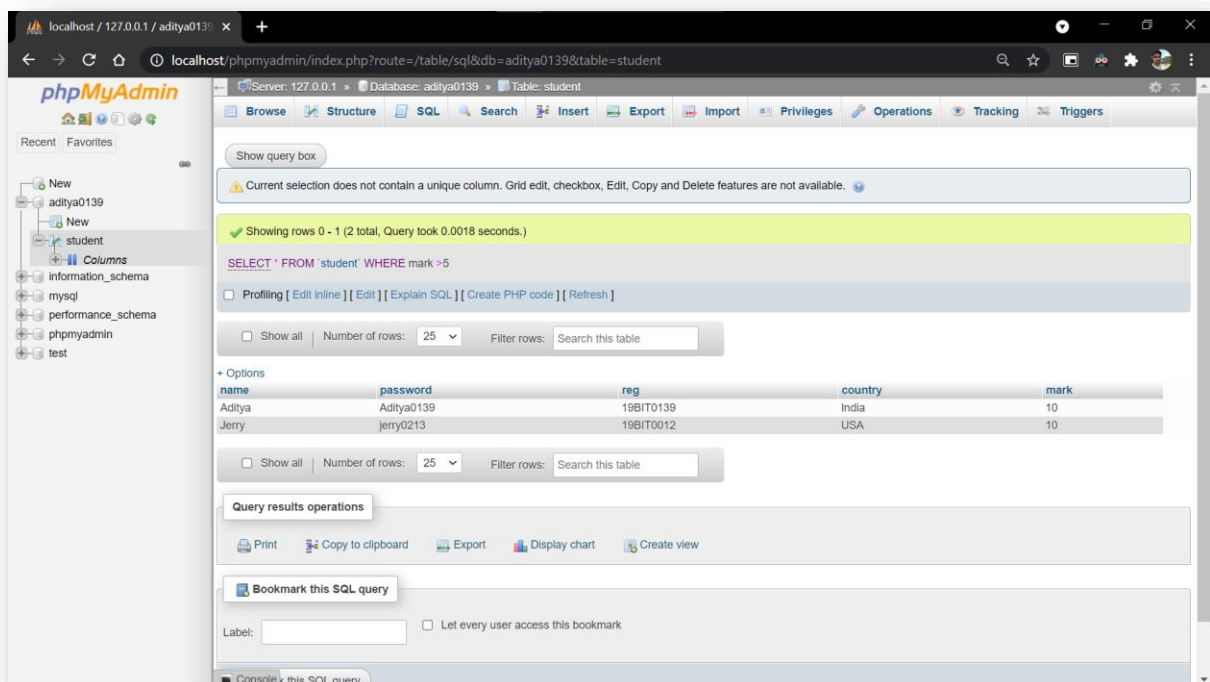

The screenshot shows the phpMyAdmin interface with the 'student' table selected. The SQL query entered is `SELECT * FROM 'student' WHERE mark > 5`. The results show two rows: Aditya and Jerry.


name	password	reg	country	mark
Aditya	Aditya0139	19BIT0139	India	10
Jerry	jerry0213	19BIT0012	USA	10

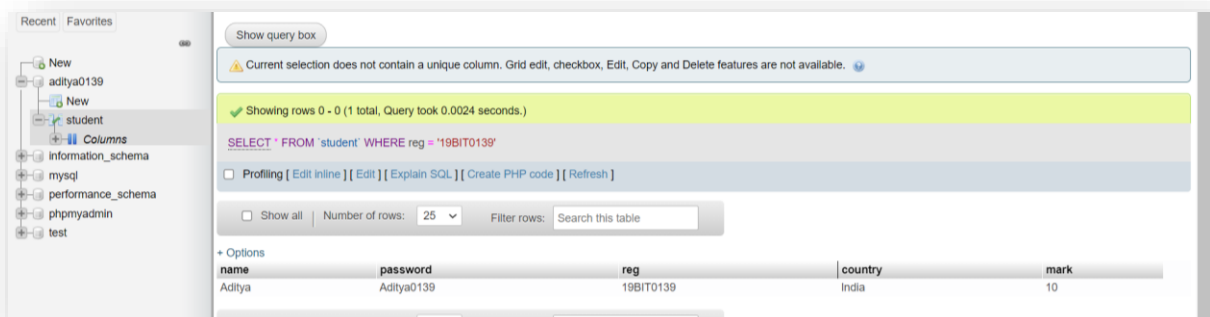

The screenshot shows the phpMyAdmin interface with the 'student' table selected. The SQL query entered is `SELECT * FROM 'student' WHERE reg = '19BIT0139'`. The results show one row for Aditya.

name	password	reg	country	mark
Aditya	Aditya0139	19BIT0139	India	10


## UPDATE command

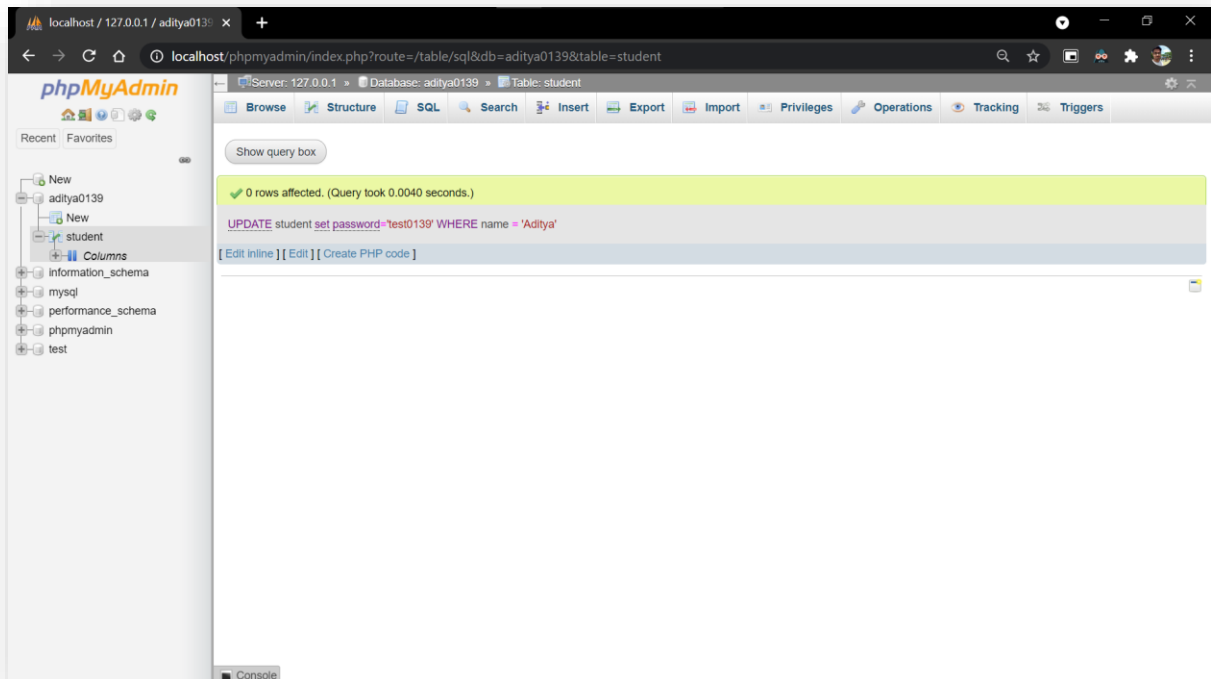

+ Options				
name	password	reg	country	mark
Aditya	test0139	19BIT0139	India	10
Jerry	jerry0213	19BIT0012	USA	10

☐ Show all | Number of rows: 25 | Filter rows: Search this table

## DELETE command

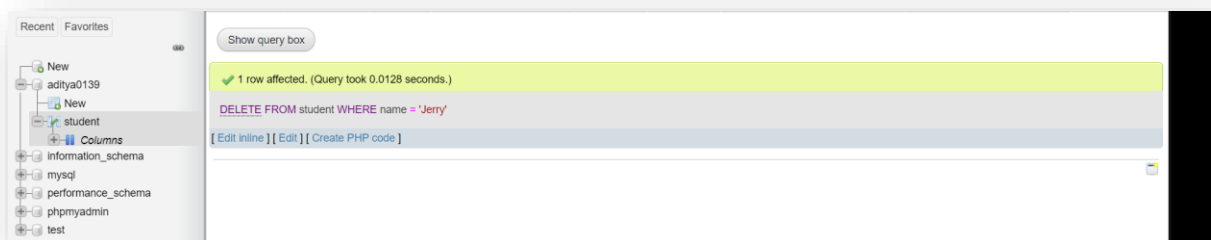

✓ Showing rows 0 - 0 (1 total, Query took 0.0015 seconds.)

`SELECT * FROM 'student'`

☐ Profiling [\[ Edit inline \]](#) [\[ Edit \]](#) [\[ Explain SQL \]](#) [\[ Create PHP code \]](#) [\[ Refresh \]](#)

☐ Show all | Number of rows: 25 | Filter rows:

+ Options

name	password	reg	country	mark
Aditya	test0139	19BIT0139	India	10

☐ Show all | Number of rows: 25 | Filter rows:

Query results operations

[Print](#) [Copy to clipboard](#) [Export](#) [Display chart](#) [Create view](#)