

Implementation Guide | PUBLIC
Document Version: 2023.3 – 2026-06-17

Application Help

© 2026 SAP SE or an SAP affiliate company. All rights reserved.

Content

1 Welcome. . . . 11

2 Before You Start. . . . 12

2.1 About This Document. . . . 12

2.2 Target Audience. . . . 13

2.3 What's New in This Document. . . . 13

2.4 Additional Information. . . . 15

2.5 Document Abbreviations. . . . 15

3 Overview. . . . 18

3.1 Presentation. . . . 18

3.2 Technical System Landscape. . . . 23

4 Features. . . . 24

4.1 Pricing Definition. . . . 25

4.2 Product Modeling. . . . 25

4.3 Order Management. . . . 26

Enterprise Credit Pooling. . . . 26

4.4 Account and Balance Management (ABM). . . . 26

4.5 Allowance Management. . . . 27

Allowance Modeling. . . . 27

Allowance Usage Modeling. . . . 29

Limitation. . . . 29

4.6 Chargeable Items Acquisition. . . . 30

4.7 Online Charging. . . . 31

4.8 Batch Charging. . . . 34

4.9 Deferred Charging. . . . 35

4.10 Manual Capturing. . . . 35

4.11 Data Files Bulk Loading. . . . 36

4.12 Billable Items Immediate Loading. . . . 37

4.13 Chargeable Items Rerating. . . . 39

Rerating Operations Driven by the BART Server System. . . . 40

Rerating Operations Driven by SAP Convergent Invoicing. . . . 40

4.14 Prepaid Accounts Refilling. . . . 41

4.15 Tax Calculation. . . . 42

Preconfigured EU VAT Rules. . . . 43

4.16 Charged Items Aggregation. . . . 44

4.17 Real-Time Credit Control. . . . 50

4.18 Spending Status Monitoring. 51
Feature Configuration. 52
Integration with a Policy or Monitoring System. 53
Spending Status Reporting. 53
Functions and Mechanism Details. 53
Limitations. 54
4.19 Catalog Transport. 54
Transport Destinations. 55
Transport Requests. 55
4.20 Provider Contract Transfer. 59
Overview. 59
Customer Data. 62
Operational Status of a Provider Contract. 62
Export and Import Operations. 62
4.21 High Availability. 63
Hardware High Availability. 63
Software High Availability. 63
4.22 High Volume Management. 72
Routing Mechanisms. 72
Caching Policies. 77
Batch Rating Group Management. 84
4.23 System and Data Auditing. 86
Master Data and User Operation Auditing. 87
Product Usage Measurement. 109
4.24 Data Purging. 112
Allowances Purge. 113
Change Lists Purge. 114
4.25 Enhanced Logging and Tracing Framework. 114
Logging. 115
Tracing. 119
Output Formats. 124
Output Destinations. 127
Configuration. 127
SAP Passport Handling. 128
4.26 Logging and Tracing Framework of Diameter Server. 135
Output Format. 135
Configuration. 136
4.27 User Management, Authentication, and Authorizations. 136
User Session Management. 136
4.28 Dual Database. 138
4.29 Table Rollover for Rating Sessions. 138

4.30 License Management. . . . 139
Temporary SAP License. . . . 139
Permanent SAP License. . . . 140
SAP License Auditing. . . . 140

5 Architecture. . . . 141
5.1 Synthetic Overview. . . . 141
5.2 Servers, Databases, and Tools. . . . 145
Core Server. . . . 145
Cockpit System. . . . 161
BART Server. . . . 162
Diameter Server. . . . 165
Import/Export Connector. . . . 171
Databases. . . . 171

6 Transactional Data. . . . 180
6.1 Chargeable Item. . . . 180
6.2 Charged Item. . . . 180
6.3 Billable Item. . . . 181
6.4 Consumption Item. . . . 181
6.5 Refill Item (Input Data). . . . 182
6.6 Refill Record (Output Data). . . . 182
6.7 BART Server Transactional Data. . . . 182
CDR (Consumption Detail Record). . . . 182
6.8 Diameter Server Transactional Data. . . . 185
CCR (Credit Control Request). . . . 186
CCA (Credit Control Answer). . . . 187

7 Master Data. . . . 189
7.1 Product. . . . 191
7.2 Service Provider. . . . 191
7.3 Master Data for the Service Provider. . . . 192
Catalog. . . . 192
Chargeable Item Class. . . . 193
Charged Item Class (for Output Data). . . . 193
Billable Item Class. . . . 194
Consumption Item Class. . . . 195
Charge. . . . 195
Counter. . . . 197
Price Plan. . . . 200
Charging Plan. . . . 210
Offer. . . . 211

Aggregation Policy. . . . 211
Charge Plan and Rate Plan. . . . 212
Pricing Function. . . . 216
Customized Charge. . . . 221
Refill Item Class. . . . 225
Refill Record Class. . . . 225
Refill Logic. . . . 226
Refill Plan. . . . 226
Customized Refill Logic. . . . 229
Monitoring Plan. . . . 230
Allowance Event. . . . 232
Allowance Event Class. . . . 233
Allowance Logic. . . . 233
Customized Allowance Logic. . . . 235
Allowance Plan. . . . 235
Allowance Interface. . . . 236
7.4 Master Data for the Subscribers. . . . 237
Access. . . . 238
Subscriber Account. . . . 238
Business Data Tables. . . . 244
Subscription. . . . 244
Provider Contract. . . . 245
Contract Item. . . . 249
Allowances. . . . 250

8 Technical Data. . . . 254
8.1 User. . . . 254
8.2 Change List. . . . 254

9 Processes and Functions. . . . 256
9.1 Activation Process. . . . 256
Process Description. . . . 257
External Triggering of the Activation Process. . . . 259
Internal Triggering of the Activation Process. . . . 259
Bulk Execution of the Activation Process. . . . 259
Activation Process and Dependent Charges. . . . 260
Transactions Generated by the Activation Process. . . . 261
9.2 Product Modeling Process. . . . 262
Process Description. . . . 262
Data Distribution. . . . 263
Cached Structures Refreshing. . . . 263
Process Limitations. . . . 264

Stateless Mode. . . . 264
9.3 Data Files Bulk Loading Process. . . . 264
Process Overview. . . . 264
Lock/Unlock Policy. . . . 265
Bulk Loading Mechanism. . . . 266
Configuration Parameters. . . . 270
9.4 Order Management Process. . . . 270
Process Description. . . . 271
Provisioning of Subscriber Account. . . . 271
Provisioning of Provider Contracts. . . . 271
Provisioning of Subscriptions. . . . 273
Provisioning of Accesses. . . . 273
9.5 Prepaid Accounts Refilling Process. . . . 274
Process Overview. . . . 275
External Events. . . . 275
Internal Events. . . . 276
Process Execution. . . . 276
9.6 Chargeable Items Rerating Process. . . . 278
Process Overview. . . . 278
Process Limitations. . . . 279
Execution Modes. . . . 280
9.7 Chargeable Items Charging Process. . . . 286
Process Overview. . . . 286
Process Functions. . . . 292
Execution Modes. . . . 303
9.8 Chargeable Items Acquisition Process. . . . 337
Process Overview. . . . 337
Execution Modes. . . . 337
9.9 Chargeable Items Consolidation Process. . . . 339
Process Description. . . . 340
Consolidation Operations. . . . 340
9.10 Tax Calculation Process. . . . 340
Process Overview. . . . 341
Process Execution. . . . 346
Process Functions. . . . 352
Process Limitations. . . . 370
9.11 Credit Control Messages Conversion Process. . . . 372
Process Description. . . . 372
AVP Dictionary. . . . 373
Service Dictionary. . . . 374
CCRs Mapping. . . . 379

CCAs Mapping. . . . 379
Process Limitations. . . . 383

10 Procedures. . . . 384
10.1 Deploying SAP CC. . . . 384
Securing SAP CC. . . . 384
Starting SAP CC. . . . 385
10.2 Managing and Maintaining SAP CC. . . . 385
Synchronizing BIT Class, BIT type and Subprocess. . . . 385
Synchronizing Chargeable Item Classes and Consumption Item Classes. . . . 390
Synchronizing or Replicating Currencies. . . . 393
10.3 Monitoring SAP CC. . . . 394
10.4 Auditing SAP CC. . . . 394
10.5 Troubleshooting SAP CC. . . . 394
10.6 Upgrading SAP CC. . . . 395

11 References. . . . 396
11.1 Output Data. . . . 396
Account Code (String). . . . 403
Account Event Date (Date/Time). . . . 405
Account Type Code (Number). . . . 406
Account Type Is Prepaid (Boolean). . . . 407
Account Type Name (String). . . . 407
Allowance Context (String). . . . 408
Allowance Event Class Name (String). . . . 408
Allowance Share Identifier (String). . . . 409
Allowance Unique Identifier (String). . . . 409
Allowance Validity End Date (Date/Time). . . . 409
Allowance Validity Start Date (Date/Time). . . . 409
Amount (Excl.Tax) (Number). . . . 410
Base Amount (Number). . . . 410
Base Rated Amount (Number). . . . 411
Charge Activation Cancellation Date (Date/Time). . . . 411
Charge Activation Code (String). . . . 411
Charge Activation Effective Date (Date/Time). . . . 412
Charge Date (Date/Time). . . . 412
Charge Reference (String). . . . 412
Charge Reference Name (String). . . . 413
Charge Type Code (Number). . . . 413
Charge Type Name (String). . . . 414
Chargeable Item Class Name (String). . . . 414
Chargeable Item Unique Identifier (String). . . . 415

Chargeable Item Unique Identifier Type (String). 415
Chargeable Item Package Code (String). 415
Chargeable Items Are Exported (Boolean). 416
Charged Amount Is a Credit (boolean). 416
Charged Amount Is a Debit (boolean). 416
Charged Item Identifier (number). 416
Charged Item Identifier (String). 416
Charged Item Set Identifier or Refill Record Set Identifier (number). 417
Charged Item Set identifier (String). 417
Charged Item or Refill Record Set identifier (String). 417
Charged Item Set Identifier Type (String) or Refill Record Set ID Type (String). 418
Charged Tax Code (String). 418
Charged Tax Status Code (String). 418
Charged Transaction Is a Prepaid Debit (boolean). 419
Charged Transaction Is a Prepaid Refill (boolean). 419
Charging Component Name (String). 419
Contract Identifier (String). 420
Contract Item External Identifier (String). 420
Contract Item Identifier (String). 421
Contract Type (String). 421
Currency (String). 421
End of Rating Recurring Period (date and time). 422
End of Rating Reference Recurring Period (date and time). 422
Event Date (date and time). 423
Event Processing Date (date and time). 424
Excluding Last Day of the Rating Recurring Period (date and time). 425
External Account Code (string). 426
External Account Name (string). 426
External System Code (string). 426
First Dispatch Code (string). 427
Including Last Day of the Rating Recurring Period (date and time). 427
ISO Currency (string). 427
Name of Rate Component Used (string). 428
Offer Code (string). 428
Overrun From (string). 428
Overrun To (string). 429
Prepaid Account Name (string). 429
Prepaid Balance Amount (number). 429
Prerating Reservation Identifier (number). 429
Price Plan Name (string). 430
Produced by a Master Charge Component (number). 430

Produced by an Allowance (Boolean). 430
Produced by an Allowance (String). 431
Rated Amount (number). 432
Rated Amount is Prorated (boolean). 432
Rated Amount is Refunded (boolean). 432
Rated Tax Amount (number). 433
Rated Tax Code (string). 433
Rated Tax Status Code (string). 433
Rated Tax Status Identifier (number). 433
Rated Total Amount (Number). 433
Rating Activation Date. 433
Rating Consumption Date (Date/Time). 434
Rating Event Origin (String). 434
Refill Amount (number). 434
Refill Currency (string). 435
Refill Date (Date/Time). 435
Refill ISO Currency (string). 435
Second Dispatch Code (string). 435
Sender Job Identifier (number). 435
Service Identifier (String). 436
Service Provider Country Code (string). 436
Service Provider Name (string). 436
Session Rating reservation Identifier (string). 437
Start of Rating Recurring Period (date and time). 437
Start of Rating Reference Recurring Period (date and time). 437
Subscriber Account Code (String). 438
Subscriber Account Reference (String). 438
Subscriber Consumes Service (Client) (boolean). 438
Subscriber Provides Service (Partner) (boolean). 439
Subscription Code (String). 439
Subscription Commitment Expiration Date. 439
Subscription Resumption Date. 440
Subscription Suspension Date. 440
Tax Code (String). 441
Tax Amount (number). 441
Tax Determination Type (String). 441
Tax Is Included in Total Amount (boolean). 441
Tax Status Code (String). 442
Tax Status Identifier (number). 442
Third Dispatch Code (string). 442
Threshold Amount (number). 442

Total Amount (Incl. Tax) (number). 443
Triggering Contract Identifier (String). 443
Triggering Contract Item External Identifier (String). 444
Unrounded Rated Amount (Number). 444
US Transaction Business Class (string). 445
US Transaction Call Duration (number). 445
US Transaction County Exempt (number). 445
US Transaction Customer Type (string). 445
US Transaction Facilities-Based Flag (string). 445
US Transaction Federal Exempt (number). 445
US Transaction Franchise Flag (string). 446
US Transaction Incorporated Code (string). 446
US Transaction Lifeline Flag (number). 446
US Transaction Line Count (number). 446
US Transaction Local Exempt (number). 446
US Transaction Location Count (number). 446
US Transaction Origin (string). 446
US Transaction Origin Flag (string). 447
US Transaction Regulated Flag (string). 447
US Transaction Resale Flag (string). 447
US Transaction Service Address (string). 447
US Transaction Service Address Flag (string). 447
US Transaction Service Class (string). 447
US Transaction Service Type (string). 447
US Transaction State Exempt (number). 447
US Transaction Tax Data (string). 447
US Transaction Taxation Date (Date/Time). 448
US Transaction Telecom Type (string). 448
US Transaction Termination (string). 448
US Transaction Termination Flag (string). 448
US Transaction Type (string). 448
User Service Identifier (String). 448
VAT Business Entity (boolean). 449
VAT Place of Taxation (string). 449
VAT Transaction Gross Price Flag (boolean). 449
VAT Transaction Rate Code (string). 450
VAT Transaction Raw Rate (Number). 450
VAT Transaction Raw Rate ID (string). 450

1 Welcome

Giving you the best user experience is our priority. Therefore, we do our best to provide you with the clearest and the most complete documentation possible.

For this purpose, feel free to leave additional feedback by using the dedicated feature on the Help Portal. Please write some details about your suggestion. Based on SAP user feedbacks, we improve your documentation and deliver Frequently Asked Questions (FAQs) about all aspects of working with SAP Convergent Charging efficiently. We complete these solutions with our best time-saving and task-completion tips and tricks.

You can also visit our page Community Questions and Answers for SAP Convergent Charging.

2 Before You Start

About This Document [page 12]

Target Audience [page 13]

What's New in This Document [page 13]

Additional Information [page 15]

Document Abbreviations [page 15]

2.1 About This Document

> → Remember
>
> The commands used in this guide have been tested in the different scenarios with the dedicated tools. However, using these tools is not mandatory: other tools are available according to your preferences. In this case, the commands may differ.

This **Application Help** documentation describes the functional and technical aspects of SAP Convergent Charging 2023 including descriptions of:

- The provided functional modules
- The implemented processes assigned to the functional modules
- The global architecture of the component

The *SAP CC Application Help* contains the following main sections:

- Overview [page 18]
  This section provides a description of SAP CC, including a list of provided features or technical mechanisms, and a synthetic schema containing the different technical components which may play a role during the execution of the features.
- Features [page 24]
  This section contains the description of the different features provided by SAP CC.
- Architecture [page 141]
  This section provides an overview of the global architecture of SAP CC, with a description of the different technical components, including their provided tools used to configure, start, stop and manage them.
- Master Data [page 189]
  This section presents in a very synthetic way the main concepts managed by SAP CC.
- Processes and Functions [page 256]
  This section describes the different business processes and/or functions implemented into the SAP CC, including their possible execution modes.

- Procedures [page 384]
  This section describes different procedures related to SAP CC, from deployment recommendations to troubleshooting possibilities.

2.2 Target Audience

This guide is intended for the following audiences:

- Solution and Technology Consultants
- Project Team Member (Implementation, Integration)
- Application and System Administrators
- Operation Team Expert
- Support Specialist (SAP SE, Local Support Team)

> **Note**
>
> - Target audience should have a previous understanding and/or experience of client/server technologies in order to take benefit of this document
> - This document is not included as part of the Installation and Maintenance Guide, Security Guide, Administration Guide or Installation, Maintenance and Upgrade Guide. Such guides are only relevant for a certain phase of the software life cycle, whereas the Application Help provides information that is relevant for all life cycle phases

2.3 What's New in This Document

What's New in 2023 FPS 3?

The version SAP CC 2023 FPS 3 of this SAP product documentation and user assistance contains the following changes:

- Architecture [page 141]:
  - New system named Cockpit System [page 161]
- Master Data for the Service Provider [page 192]:
  - New pricing components (number matching and number split-based addition) available in the SAP CC Cockpit user interface. See Pricing Function [page 216]

What's New in 2023 FPS 2?

The version SAP CC 2023 FPS 2 of this SAP product documentation and user assistance contains the following changes:

- Processes and Functions [page 256]:
  - High precision feature for decimal numbers: see Precision and Rounding Modes [page 288]
- Architecture [page 141]:
  - New apps named:
    - Manage User Accounts
    - Display Subscriber Accounts
    - Display Contracts

    in the Cockpit user interface: see Synthetic Overview [page 141].
- Master Data [page 189]:
  - Master Data for the Service Provider [page 192]:
    - New pricing components (proration and time slot-based addition) available in the SAP CC Cockpit user interface. See Pricing Function [page 216]
  - Master Data for the Subscribers [page 237]:
    - Allowances [page 250]
      - New section Immediate Availability of Shared Allowances [page 253]

What's New in 2023 FPS 1?

The version SAP CC 2023 FPS 1 of this SAP product documentation and user assistance contains the following changes:

- Architecture [page 141]:
  - New app named Manage Permissions in the Cockpit user interface as a new SAP CC tool: see Synthetic Overview [page 141]

What's New in 2023 (in FPS 0)?

SAP Convergent Charging 2023 is a new major release of your SAP software product.

The version SAP CC 2023 FPS 0 of this SAP product documentation and user assistance contains the following changes:

- Architecture [page 141]:
  - New app named Manage Pricing Functions in the Cockpit user interface as a new SAP CC tool: see Synthetic Overview [page 141]
- Master Data [page 189]:
  - Pricing Function [page 216] (new pricing element that can be called from a charge in its rate plan or from another pricing function)

- The software correction related to UDP is reflected in this SAP product document and user assistance. Sections Synthesis [page 158], Dispatcher [page 148] and Securing SAP CC [page 384] are modified accordingly.

Related Information

What's New in Support Package Stack 4

2.4 Additional Information

For more information about specific topics, see the quick links as shown in the table below:

Content	Quick Link
How to configure SAP CC for CTS+	SAP Note 2156128
Related SAP Notes	support.sap.com/notes
Related release notes	https://support.sap.com/en/my-support/knowledge-base.html
SAP Solution Manager	http://support.sap.com/solutionmanager
Dedicated database for session-based charging data	SAP Note 2189251
Security guides	SAP CC 2023 Security Guide

2.5 Document Abbreviations

Abbreviation	Meaning
3GPP	3rd Generation Partnership Project
AAA	Authentication, Authorization, and Accounting
AVP	Attribute-Value Pair
API	Application Programming Interface
BART	Batch Acquisition and Rating Toolset
BIT	Billable Item
BSS	Business Support System
CCA	Credit Control Answer

Abbreviation	Meaning
CCR	Credit Control Request
CDR	Call Detail Record (Telecommunications industry), or more generally Consumption Detail Record
CI	Chargeable Item
CIF	Charging output Integration Framework
CIT	Charged Item
CRM	Customer Relationship Management
CSR	Customer Sale Representative
CSV	Comma Separated Value
CTS	Change and Transport System
DSR	Distributed Statistics Record
ECUR	Event Charging with Unit Reservation
GLAS	SAP Global License Auditing Service
GUI	Graphical User Interface
HA	High Availability
HCI	HTTP Communication Interface
HTTP	HyperText Transfer Protocol
HTTPS	HyperText Transfer Protocol Secured
IEC	Import/Export Connector
IEC (Diameter)	Immediate Event Charging
IMSI	International Mobile Subscriber Identity
ISDN	Integrated Services Digital Network
LRU	Least Recently Used
MMS	Multimedia Messaging Service
MSISDN	Mobile Station ISDN Number
OCS	Online Charging System
OFCS	Offline Charging System
OSS	Operational Support System
QoS	Quality of Service
RAC	Real Application Cluster
RDBMS	Relational Database Management System
RIF	Rerating Integration Framework
RRL	Reservation Renewal Listener
SLD	System Landscape Directory
SCP	Service Control Point

Abbreviation	Meaning
SCUR	Session Charging with Unit Reservation
SMD	SAP Manager Diagnostic
SSL	Secure Socket Layer
SSRL	Spending Status Report Listener
TAF	Transparent Application Failover
TIF	Transaction Integration Framework
TLS	Transport Layer Security
TV	Tag;Value
URL	Uniform Resource Locator
USID	User Service Identifier
UTI	User Technical Identifier
VAT	Value Added Tax
VSA	Vendor Specific Attribute
XML	eXtended Markup Language

3 Overview

Presentation [page 18]

Technical System Landscape [page 23]

3.1 Presentation

SAP Convergent Charging 2023 is a modular SAP software product written entirely in Java. It is designed for the rating (dynamic pricing) and charging of the subscription- and usage-based services that a service provider company want to monetize.

Its modular architecture makes it easy to integrate and adapt in an existing environment and system landscape. SAP Convergent Charging provides open APIs to connect to:

- Any customer management or provisioning software (CRM[1] systems, self-care, and so on)
- Usage event producers (mediation, soft switches, SCP[2], and so on)
- Financial systems (legacy billing systems, invoicing systems, ERP[3] systems, general ledger systems)
- Data warehouse systems
- And so on

SAP Convergent Charging 2023 provides multiple technical and functional features, which have been designed to fit the common business scenarios. It provides the following main functional features, whose availability or behavior depends on the implemented scenario that suits your business and technical requirements:

- Product modeling, used to create the master data related to the service provider, which are required when building your business environment
- Order management, which gives the possibility to create the master data related to end customers who consumme the service
- Allowance management, which gives the possibility to manage the service add-ons for your charge plans and refill plans by modeling allowances and their associated usage
- Chargeable items acquisition, which gives the possibility to collect incoming events before executing further charging operations
- Online charging, which consists in charging in real time the incoming events (with possible credit-control checking), determining the target accounts which must be charged, and then generate data files (aka item files) containing all the data required by third-party systems for billing and invoicing purposes (possibly aggregated when using the *Charged Items Aggregation* feature)
- Batch charging, which consists in rating at a deferred time the incoming events (related to postpaid accounts only, and thus without any possible credit-control checking), using a single or a batch mode

[1] Customer Relationship Management
[2] Service Control Point
[3] Enterprise Resource Planning

- Deferred charging, which consists in charging chargeable items which have previously been acquired and charged (using a blank mode) and which are sent again by SAP Convergent Invoicing for final billing purposes
- Manual capturing, which consists in charging a single chargeable item created and sent by SAP Convergent Invoicing
- Recharging, which gives the possibility to cancel previous charging operations and perform new ones on sets of chargeable items (which may have been previously billed) related to:
    - Subscriptions or provider contracts when recharging operations are initiated by the BART Server component
    - Provider contracts only when recharging operations are initiated by third-party systems such as SAP CRM or SAP Convergent Invoicing, which only deal with master data related to the SAP CC 2023 model
- Real-time credit-control, which gives the possibility to interact in real time with a subscriber account to notify users and/or monitor its prepaid (or credit-limit) balance to ensure that a usage can be charged
- Prepaid accounts refilling, which gives the possibility to credit an account from a CRM application using manual or automatic (recurring or event-based) refill operations
- Taxes calculation, which gives the possibility to compute tax data on every incoming event according to the configured invoicing tax systems: EU VAT and/or U.S. Telco taxes (Avalara AvaTax for Communications (AFC)) or flat tax system
- Business notifications and business monitoring (spending status, account alerts) to manage in real time the service consumption
- Immediate loading of billable items and their corresponding consumption items into SAP Convergent Invoicing for real-time billing purposes
- Data files bulk loading, which gives the possibility to transfer the content of the generated data files (aka item files) from SAP CC to a third-party system, for various purposes such as billing, invoicing, reporting, business analytics, and so on
    - In an integrated *SAP Solution* scenario, charged items (resp. chargeable items) are converted into billable items (resp. consumption items) and loaded into SAP Convergent Invoicing in its system or cloud.


In addition, SAP CC provides the following main technical features:

- Transport of catalog data from an SAP CC system to one or several other SAP CC systems
- Transfer of provider contracts from an SAP CC system to another SAP CC system
- High availability, which relies on an architecture made up with multiple technical components dedicated to specific operations and whose deployment strategy avoids any service interruption
- High volume management, which ensures the scalability of SAP CC in case of increasing traffic or operations performed on large quantities of data (such as batch operations)
- System and data auditing, which provides detailed information related to the SAP CC product usage measurement and to the tracking of master data (and related user operations) modifications
- Data purging and archiving, which is used to remove from the back-end database some obsolete data, and thus ensure the global performance of the system
- Alerts and notifications framework, which is used for both business and administration purposes and gives the possibility to generate messages related to a usage of a marketable service or product
- User sessions management, which is used to control and/or monitor the connections to the Core Tool, BART Tool, and Cockpit user interfaces

- User isolation, which gives the possibility to specify whether service users must be isolated from individual users, or not, and thus control which kind of user can access user interfaces and/or execute HCI or Web Services operations
- Enhanced error framework, which concerns the implementation phase and gives the possibility to inform developers about the possible malfunctioning operations
- Enhanced logging and tracing frameworks, which ease both monitoring and troubleshooting operations by providing:
  - A complete reference of messages related to the execution of a given operation
  - Error files dedicated to the management of errors when dealing with data files generated by raters and then bulk loaded into third-party systems by bulkloader instances
- Thread dump mechanism, which gives the possibility to generate dump files that contain information about the execution context of the different threads that are executed by the instances of the Core Server system, and that can be used for troubleshooting operations
- Enhanced integration interfaces, which provides different mechanisms such as web services, Java APIs or data files dedicated to the integration with third-party systems

All these features give you the possibility to ease your business and ensure its availability in case of increasing managed volumes. They have been implemented throughout the following technical components:

- Core Server, which represents the rating engine of the SAP CC software product
- BART Server, a rating injector dedicated to batch rating and charging operations
- Core Database and BART Database, which are used to store all the data related to your business
- Other optional component: Import/Export Connector, used to consolidate and schedule data transfers between SAP CC and third-party systems

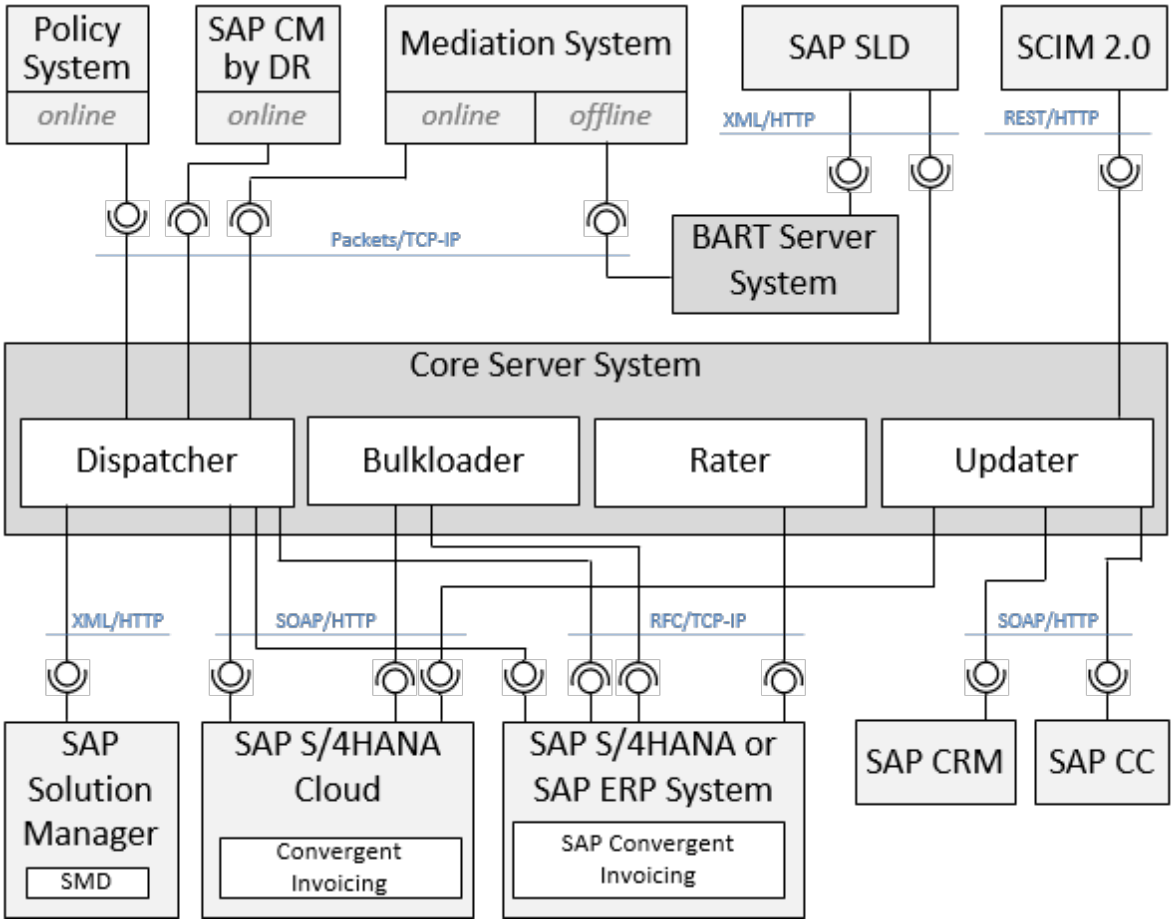

The following table provides a list of dependencies between the functional features and the concerned technical components:

Feature	Core Server	BART Server	Import/ Export Connector	Mediation System	CRM System	Billing System	CTS System
Product Modeling [page 25]	■				■	■	
Order Management [page 26]	■				■		
Allowance Management [page 27]	■				■	■	
Chargeable Items Acquisition [page 30]	■	□	□	□			

Feature	Core Server	BART Server	Import/ Export Connector	Mediation System	CRM System	Billing System	CTS System
Online Charging [page 31]	■			■			
Batch Charging [page 34]	■	□	□	□			
Deferred Charging [page 35]	■					○	
Manual Capturing [page 35]	■					○	
Data Files Bulk Loading [page 36]	■					○	
Billable Items Immediate Loading [page 37]	■					○	
Chargeable Items Rerating [page 39]	■	□				□	
Prepaid Accounts Refilling [page 41]	■			□	□	□	
EU VAT Taxes Calculation [page 43]	■						
U.S. Telco Taxes Calculation [page 42]	■						
Charged Items Aggregation [page 44]	■					□	
Catalog Transport [page 54]	■					□	□

■ Mandatory

○ Mandatory in an SAP system landscape based on an integrated *SAP Solution* scenario with help.sap.com/brim

☐ Optional

3.2 Technical System Landscape

The implementation of SAP Convergent Charging requires some mandatory components whose deployment depends on your business scenario.

For further information about the components availability and requirements, refer to the SAP CC 2023 Administration and Operation Guide and SAP CC 2023 Getting Started Guide documentations.

4 Features

Pricing Definition [page 25]

Product Modeling [page 25]

Order Management [page 26]

Account and Balance Management (ABM) [page 26]

Allowance Management [page 27]

Chargeable Items Acquisition [page 30]

Online Charging [page 31]

Batch Charging [page 34]

Deferred Charging [page 35]

Manual Capturing [page 35]

Data Files Bulk Loading [page 36]

Billable Items Immediate Loading [page 37]

Chargeable Items Rerating [page 39]

Prepaid Accounts Refilling [page 41]

Tax Calculation [page 42]

Charged Items Aggregation [page 44]

Real-Time Credit Control [page 50]

Spending Status Monitoring [page 51]

Catalog Transport [page 54]

Provider Contract Transfer [page 59]

High Availability [page 63]

High Volume Management [page 72]

System and Data Auditing [page 86]

Data Purging [page 112]

Enhanced Logging and Tracing Framework [page 114]

Logging and Tracing Framework of Diameter Server [page 135]

User Management, Authentication, and Authorizations [page 136]

Dual Database [page 138]

Table Rollover for Rating Sessions [page 138]

License Management [page 139]

4.1 Pricing Definition

SAP Convergent Charging enables you to configure the pricing definition for your services.

With SAP Convergent Charging, you can implement a wide range of pricing models, including subscription-based and usage-based pricing. SAP Convergent Charging supports recurring, one-time, and usage charges, and is suitable for B2C, B2B, and partner business models. You can apply these pricing models across multiple industries, such as telecommunications, postal services, and high-tech sectors.

Pricing models are managed using charge plans and price tables, enabling flexibility to compute prices for any kind of services and products. These pricing models are combined into a subscription product in Subscription Order Management (SOM) or Sales and Order Management (SOM).

It is configured and managed with the Core Tool user interface as unique, central tool for pricing specialists.

> → Recommendation
>
> As of release 2020, pricing models can be managed using rate plans and price tables. A rate plan is a simplified charge plan. It is configured and managed with the Cockpit web application.

> ⓘ Note
>
> A former data model (DM) based on offers and subscriptions is available for implementing and configuring a large variety of pricing models.

Related Information

Charge Plan and Rate Plan [page 212]

4.2 Product Modeling

The Product Modeling feature gives the possibility to design all the master data related to Service Provider, in order to build your business.

For technical information about this feature, refer to both Product Modeling Process [page 262] and Order Management Process [page 270] sections.

4.3 Order Management

The Order Management feature gives the possibility to design all the master data related to end customers, in order to manage your subscribers and link this information to your business model.

For technical information about this feature, refer to both Product Modeling Process [page 262] and Order Management Process [page 270] sections.

Enterprise Credit Pooling [page 26]

4.3.1 Enterprise Credit Pooling

Enterprise Credit Pooling represents the ability to share counters (used to materialize minutes, SMSs, other credits) between multiple provider contracts in order to implement pooling plans designed for corporate subscriber accounts. For small business company, you can configure this model in SAP CC by sharing a pool of counters with provider contracts relating to the same subscriber account.

For more information, refer to the adequate section [page 245] afterwards in this documentation.

4.4 Account and Balance Management (ABM)

> → Remember
>
> In an integrated *SAP Solution* with SAP S/4HANA Cloud Public Edition, this feature is not available.

> → Recommendation
>
> As of release 5.0, SAP Convergent Charging (SAP CC) provides you with the *Allowance Management* feature to model time-limited service allowances.
>
> This allowance management feature is available with the newer data model (DM) based on charge plans and allowance plans in pricing catalogs and provider contracts for the end customers. Discover this feature and its concepts. See Allowance Management [page 27].

The *Account and Balance Management (ABM)* feature adds **account-based and credit control capabilities** to SAP Convergent Charging in your SAP system landscape and:

- Holds subscriber accounts in postpaid, prepaid, and hybrid prepaid/postpaid environments.
- Controls the addition or deduction of monetary or non-monetary amounts from accounts.
- Manages the multiaccount (or multibalance) assignments.
- Performs credit reservation on accounts.
- Manages counters applicable for accounts.

The benefits of the account balance management are the following:

- Offer a single platform to manage balances for all subscribers, independent of their payment method.
- Support subscriber groups with sets of interrelated prepaid/postpaid balances, for example, for families or corporate customers.
- Enable flexible configuration of spending caps, allowances, credit limits, and service-specific wallets.
- Manage dynamic charging where the balances to be charged are determined per business transaction at runtime.
- Ensure real-time online operations with high performance and high availability.

See:

- Online Charging [page 31]
- Batch Charging [page 34]
- Real-Time Credit Control [page 50]
- Prepaid Accounts Refilling [page 41]

4.5 Allowance Management

The *Allowance Management* feature gives the possibility to manage the service add-ons of your charge plans, rate plans and refill plans by modeling allowances and their associated usage.

Allowances enables implementing pricing models in which the use of a product or the consumption of a service is limited in time and/or in quantity.

The Allowance Management feature gives the possibility to:

- Represent a right or a rule to consume one or several services within a period of time
- Dynamically add some consumption rights to your charge plans or rate plans
- Report any allowance event by generating a transaction and its associated charged item according to a relevant mapping

  Allowance Modeling [page 27]

  Allowance Usage Modeling [page 29]

  Limitation [page 29]

4.5.1 Allowance Modeling

To implement allowances [page 250] as part of provider contracts [page 245] for your subscribers and end customers, you can model your business with SAP Convergent Charging.

Allowance Managed by Core Tool

To build your business, it is necessary to model allowances by creating the following master data:

- Allowance Interface [page 236], which contains the list of counters and parameters available for every allowance
- Allowance event classes [page 232], which describe the allowances usage and their associated data
- Allowance Logic [page 233], which describe the calculation algorithm of the allowance events
- Allowance plans [page 235], which are used to reference and customize your allowance logic

For each allowance logic, it is also necessary to describe the information which must be reported by:

- Selecting the charged item class to use
- Defining the mapping for the selected charged item class
- Referencing an aggregation policy

Allowance Managed by Cockpit

As of SAP CC 2021 FPS 1, to implement pricing models in which the use of a product or the consumption of a service is limited in time and/or in quantity, you can use your SAP Convergent Charging Cockpit user interface and the configuration of allowance plans from allowance plan templates [page 28].

To build your business, it is necessary to use the app Manage Allowance Plans to configure both the allowance event classes and allowance plans. It is not necessary to create allowance logic objects as they are embedded and preconfigured in allowance plan templates. The Cockpit user interface hides this level to simplify the user experience, but allowance logic objects are created.

4.5.1.1 Allowance Plan Templates

An allowance plan template is a prepackaged and business-oriented set of consistent pricing elements used to create an allowance plan quickly from Cockpit and that can be configured in a pricing catalog to implement a common business case.

An allowance plan template includes an allowance plan along with a set of mapping table classes, range table classes, and allowance event classes.

Allowance Plan Template	Template Description
Prepaid Service Allowance	The allowance plan template *Prepaid Service Allowance* enables you to implement prepaid service allowances: A prepaid service allowance allows an end customer to buy a quantity of service in advance and to consume it afterward.
Prepaid Service Allowance with Notifications	The allowance plan template *Prepaid Service Allowance with Notifications* enables you to implement prepaid service allowances: A prepaid service allowance allows an end customer to buy a quantity of service in advance and to consume it afterward. Notifications are sent to end customers to inform them about the level of spending. A range table is required to define the notification thresholds.
Spending Limit	The allowance plan template *Spending Limit* enables you to implement spending limits: A spending limit is used to limit the consumption (monetary, volume, duration) of a service or a product by an end customer.

Allowance Plan Template	Template Description
Spending Limit with Notifications	The allowance plan template *Spending Limit with Notifications* enables you to implement spending limits: A spending limit is used to limit the consumption (monetary, volume, duration) of a service or a product by an end customer. Notifications are sent to end customers to inform them about the level of depletion. A range table is required to define the notification thresholds.

→ Tip

For more advanced implementation scenarios, you use the Core Tool user interface.

4.5.2 Allowance Usage Modeling

To model the usage of allowances, it is necessary to describe the interaction between allowances and charging or refilling logic (which corresponds to the life cycle of allowances) through algorithms. You configure the algorithms in the Price Plan, in the Refill Logic, or in the Allowance Logic master data and describe the following interactions:

- The creation of the allowance, which is based on a specified Allowance Plan
- The sending of the allowance events, which is based on a specified Allowance Event Class

→ Remember

In Cockpit, the logic is embedded in the allowance plan templates. You don't have to configure them. The app copies the logic when an SAP CC user configures a new allowance plan from a template.

ⓘ Note

- Allowance Usage Modeling is based on specific allowance logic components and is therefore part of the Product Modeling Feature (for more information on allowance logic components, see the SAP Convergent Charging Logic Components Reference documentation)
- Allowances can be used within a subscriber account or can be used and shared accross subscriber accounts (shared allowances)

4.5.3 Limitation


The Allowance Management feature is not compatible with the online stateless rating operations of the Chargeable Items Charging Process [page 286] business process.

4.6 Chargeable Items Acquisition

The *Chargeable Items Acquisition* feature gives the possibility to collect the incoming events synchronously sent by the IEC or by a third-party client application such as a mediation system (step 1) preliminary to further operations such as deferred charging, recharging, reporting, business analytics, and so on.

Acquisition operations themselves are performed by two components of SAP CC:

- The BART Server, using a synchronous execution mode and consisting in:
  - Consolidating each received chargeable item with complementary information retrieved from the Core Server
  - Validating these consolidated chargeable items
  - Recording these chargeable items into the BART Database (step 2)
- The Core Server, using an asynchronous execution mode and consisting in:
  - Enriching each chargeable item with additional guiding information in order to execute the required charging operation (step 2)
  - Validating these enriched chargeable items and bulk writing them in data files (step 3), which will later on be taken into account by the Data Files Bulk Loading process (steps 4 and 5) to be recorded in SAP CI

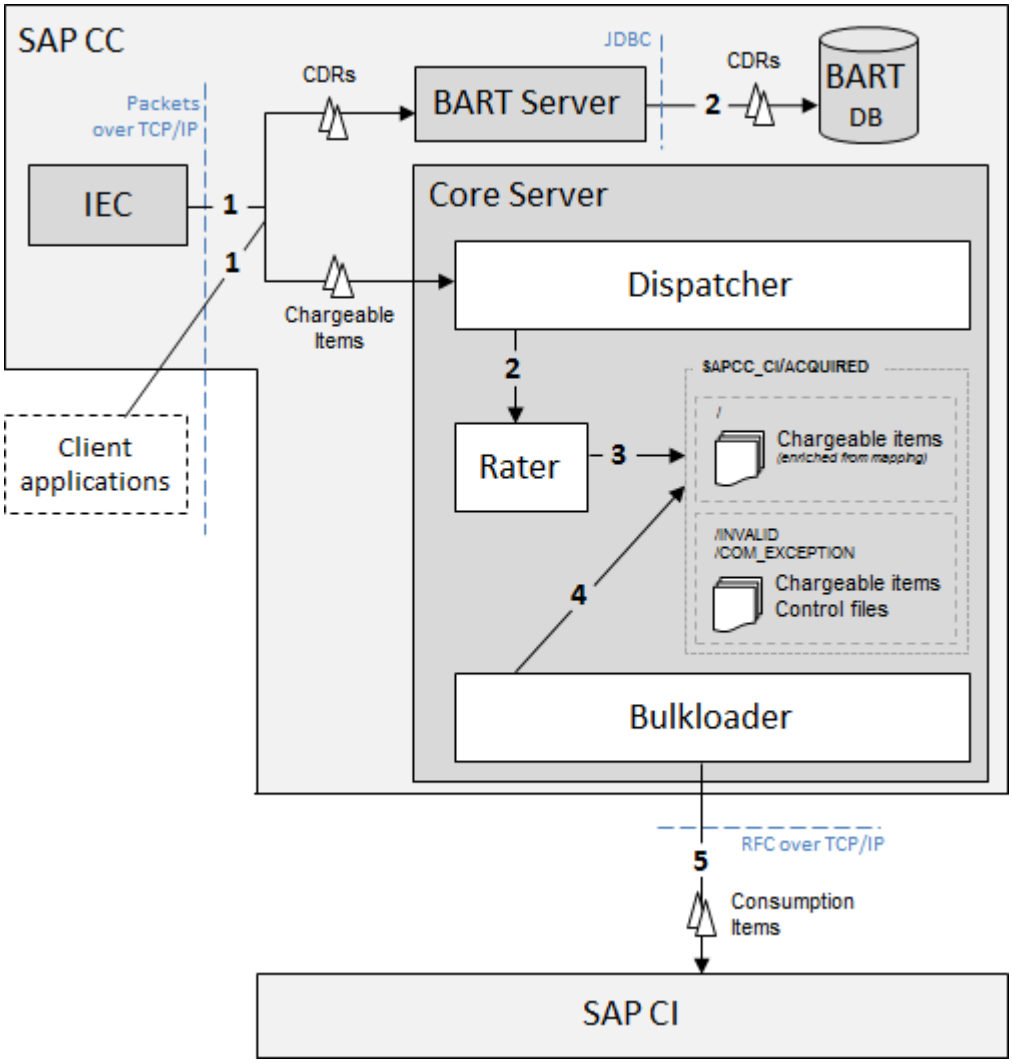

For technical information about this feature, refer to the Chargeable Items Acquisition Process sections related to both BART Server and Core Server components, and to the Chargeable Items Consolidation Process [page 339] section.

4.7 Online Charging

The *Online Charging* feature gives the possibility to process incoming chargeable items sent by the IEC or by a third-party client application such as a mediation system (step 1) in a connected mode (also called “online” mode). This feature represents the central feature of SAP Convergent Charging and consists in:

- Activating (aka triggering) the contracted charge that is associated to the external event (with a propagation to its possible dependent charges), in order to generate internal events
- Generating rating contexts to gather all the data which is necessary to perform the further steps
- Executing the price plans (step 2) in order to compute the amounts (prices or fees, credits in counters, and so on) related to the different events located in the rating context


- Executing the charging plans (step 2) in order to update the determined balances with the computed amounts and calculate taxes
- Generating data files (step 3) containing all the information (charged items and possibly chargeable items) which might be necessary for billing and invoicing purposes, and handled by the Data Files Bulk Loading Process [page 264] (steps 4 and 5)

> **Note**
>
> As of SAP CC 2020 FPS 2: In an integrated *SAP Solution* scenario, immediate loading (alternative step 6) of billable items (and their corresponding consumption items) into SAP Convergent Invoicing is possible after step 2 for immediate billing purpose.
>
> In this situation, the data files generations (step 3) and the scheduled bulk loading of output items (steps 4 and 5) are skipped.
>
> See: Billable Items Immediate Loading [page 37]

The Online Charging feature gives the possibility to execute in real time the following operations:

- **Event-based charging operations**, which concern customer services characterized by a single event (such as SMS or MMS) which is sent before or after the service delivery. According to the needs, these charging operations can be executed in a single or batch mode, with possible credit-control and credit reservation features
- **Session-based charging operations**, which concern customer services characterized by a succession of single events and delivered over a given period, considered as a session of service consumption (such as phone calls, IPTV watching session, data download/upload, and so on) where the charged units are continuously consumed. This succession of single events represents a sequence of chargeable items which are charged, reserved or released in the related charging session. As these single events are associated to their order of arrival, session-based charging operations cannot be executed in batch mode
- **Spending status monitoring**, which gives the possibility to implement policy control based on information related to service usage, in order to take policy decisions accordingly

> **Note**
>
> To instantaneously adapt the service delivery and enhance the customer experience of the service provider, the session-based execution mode:
>
> - Enables advanced credit control and reservation management (including reservation renewals) features
> - Gives the possibility to execute session-based charging operations related to multiple customer services
> - Supports refilling operations during the sessions

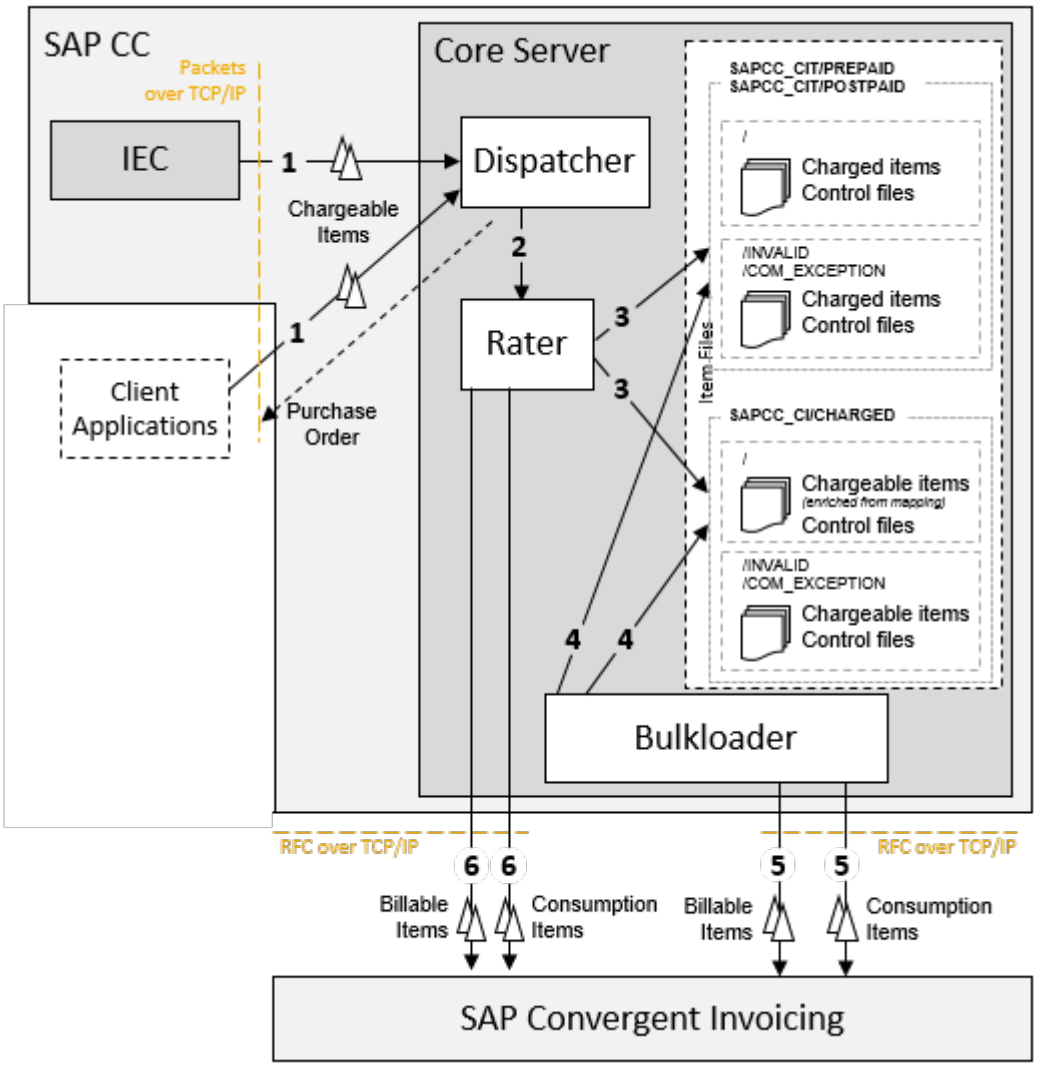

→ Remember

For functional and technical information about this feature, refer to the Chargeable Items Charging Process [page 286] section.

Related Information


Billable Items Immediate Loading [page 37]
Data Files Bulk Loading [page 36]

4.8 Batch Charging

The *Batch Charging* feature is similar to the *Online Charging* feature, except the fact that it works in a disconnected mode (also called "offline" mode). This batch mode:

- Does not give the possibility to perform credit-control verifications
- Only gives the possibility to use postpaid accounts for your business, as prepaid accounts only work within connected systems

> ⓘ Note
>
> To increase the performance of batch charging operations, it is also possible to use the BART Server system, which gives the possibility to charge the offline events using a batch mode.

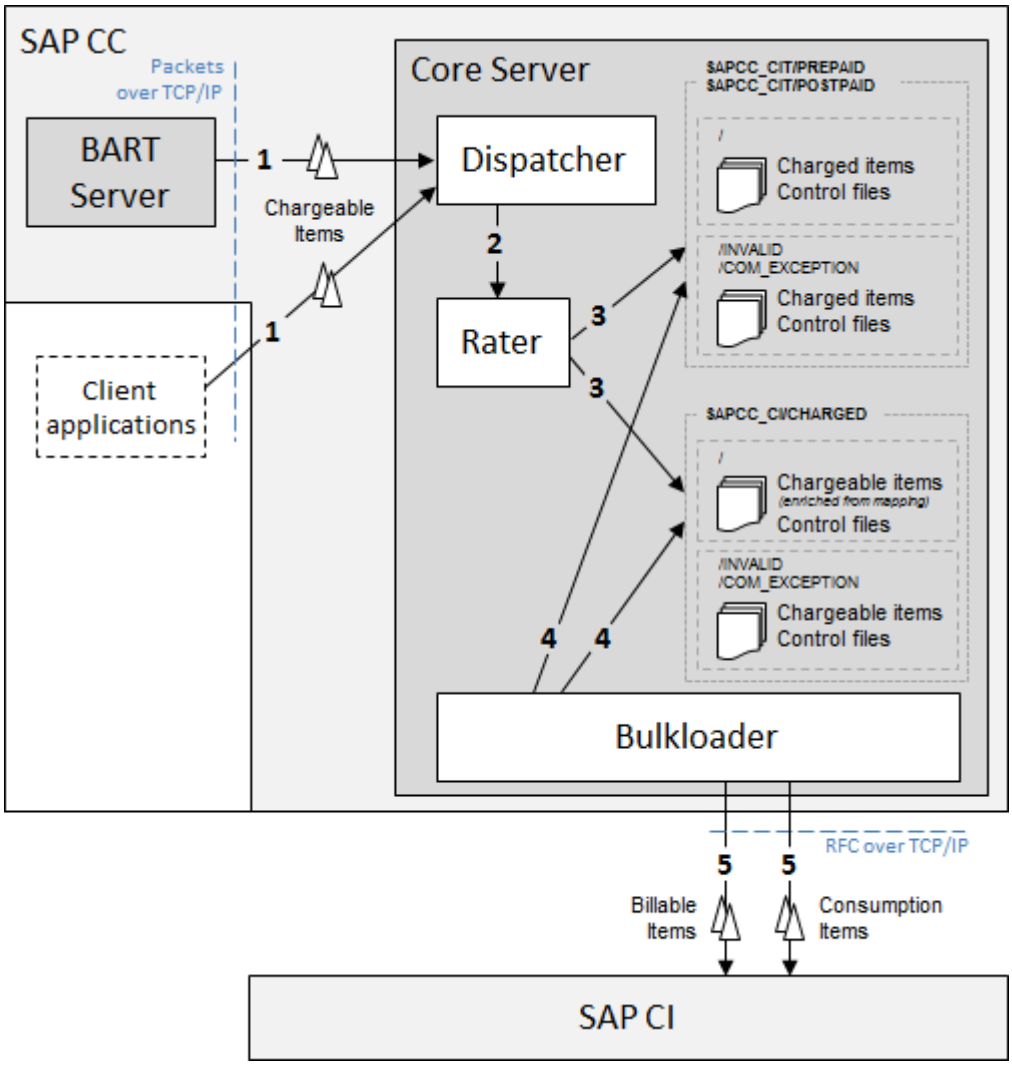


For technical information about this feature, refer to the Chargeable Items Charging Process [page 286] section.

4.9 Deferred Charging

Some business configurations can lead to the acquisition of chargeable items (step 1) which voluntarily do not contain any information related to consumption prices (for example when the price depends on a consumption volume which is computed at the end of each month).

When such a situation occurs, the acquired chargeable items must not be rejected and must be taken into account by the rating engine using a blank mode (step 2). They are flagged as uncharged chargeable items (step 3) and sent to SAP Convergent Invoicing (step 4), which:

- Records these uncharged chargeable items as "unrated" consumption items (step 5)
- Enriches at a deferred time these items with price information required for charging purposes
- Re-injects at a deferred time (step 6) these chargeable items in SAP CC for final charging purposes (steps 7 to 10), using a dedicated web service

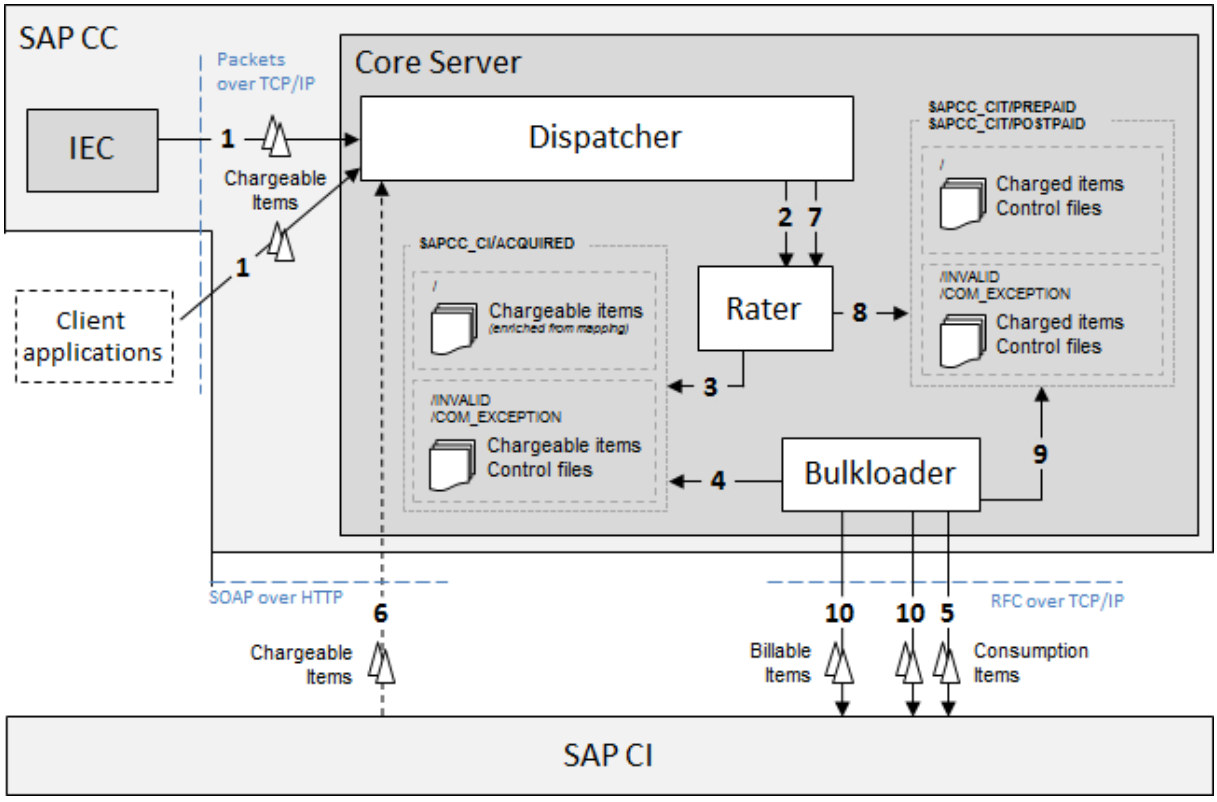


For technical information about this feature, refer to the description of the Chargeable Items Acquisition [page 337] feature and to the Chargeable Items Charging Process [page 286] section.

4.10 Manual Capturing

In an integrated *SAP Solution* scenario, SAP Convergent Invoicing might sometimes need to correct a specific balance (in case of detected error, customer dispute and so on).

When such a situation occurs, SAP Convergent Invoicing needs to create a single chargeable item and to send it to SAP Convergent Charging (SAP CC) (see step 1) for charging (steps 2 and 3) and bulk loading (steps 4 and 5) purposes.

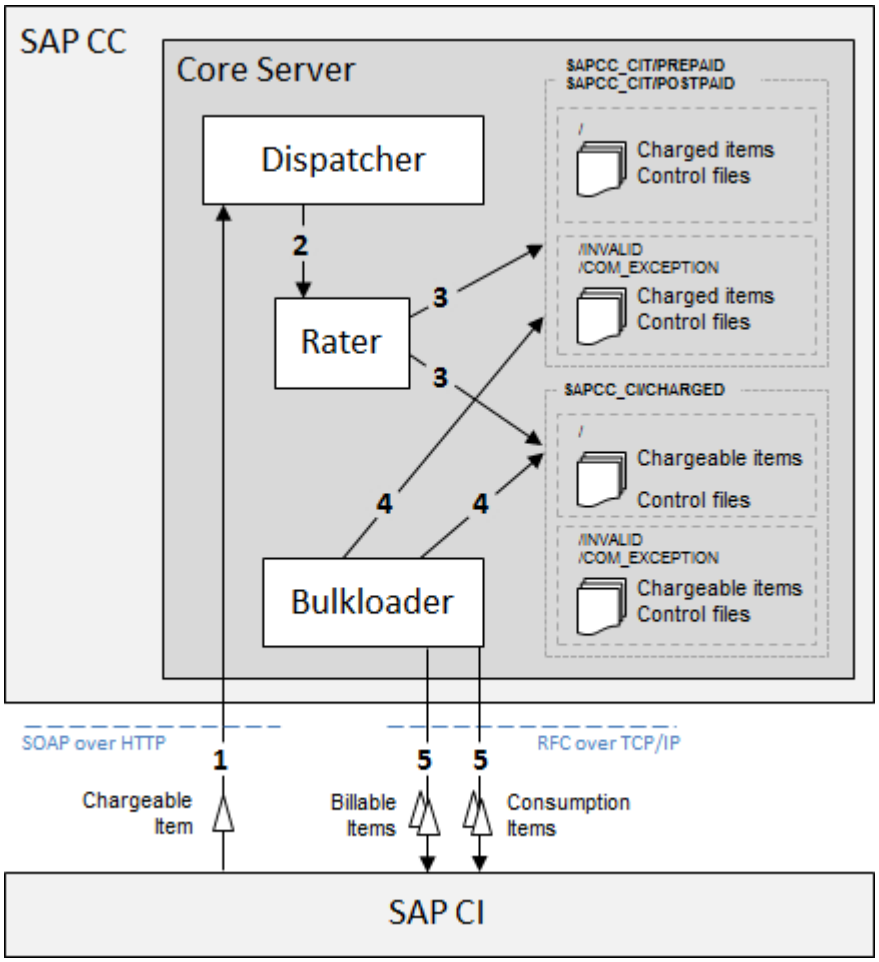

4.11 Data Files Bulk Loading

The *Data Files Bulk Loading* feature gives the possibility to convert and transfer the content of data files (aka item files) generated by SAP Convergent Charging to third-party systems such as billing systems, invoicing systems, revenue recognition systems, monitoring systems, and so on.

In an integrated *SAP Solution* scenario, SAP CC can handle:

- Charged items, converted into billable items when sent to SAP Convergent Invoicing
- Refill records, converted into billable items when sent to SAP Convergent Invoicing
- Chargeable items, converted into consumption items used by SAP Convergent Invoicing
- Business notifications about prepaid accounts, such as amount or expiration alerts, and expected by third-party systems such as SAP ERP or SAP CRM

In the Core Server system, these bulk loading operations are performed by the bulkloader instances, which periodically scan specific folders located on the file system, and containing the different data files generated during business operations such as charging, activation, refilling, recharging, and so on.

For technical information about this feature, refer to the Data Files Bulk Loading Process [page 264] section.

4.12 Billable Items Immediate Loading

> ⚠ Caution
>
> The use of billable items immediate loading has a significant impact on rating performance. This feature should only be implemented if required for immediate billing purposes and as a complement but not as replacement of the standard bulk loading of billable items.

In an integrated *SAP Solution* scenario, SAP Convergent Charging can immediately load billable items and their corresponding consumption items into SAP Convergent Invoicing when processing a particular charging operation request.

In the Core Server system, these loading operations are performed by the rater instances in real time. They connect to the relevant SAP Convergent Invoicing components in their SAP systems by using the *RFC/JCo* technical interface and the customer management areas' definitions. The rater instances send the billable items (and their corresponding consumption items) and ensure the data synchronization between SAP CC and SAP Convergent Invoicing by managing the cancellation (rollback or reversal) of billable items when an error occurs.

This feature also replaces the Data Files Bulk Loading feature in the context of the received charging request.

> ⓘ Note
>
> - The immediate loading is applicable to:
>   - Low volume of single charging operation requests or requests in bundle mode received from SAP Convergent Invoicing or a client application via the *Web Services* technical interface:
>   - Charging of a single chargeable item
>   - Charging of a set of chargeable items relating to the same provider contract
>   - Charging operation requests received from the app Process a Chargeable Item in the SAP Convergent Charging Cockpit user interface
> - The operation request triggers the processing of these usage events and existing recurring events and one-shot events.
> - To trigger the immediate loading of billable items, the request must include the `itemImmediatelyLoaded` XML element. SAP Convergent Invoicing or a client application must mark the relevant charging operation requests.

SAP CC treats the charging operation requests in real time. These operations must represent a low percentage of your business traffic. The intensive use or systematic use of the immediate loading of billable items strongly impacts rating performance. The operations in mass mode are not possible.

→ Remember

If the immediate loading of billable items is triggered, then both the generations of item files and the scheduled bulk loading processes are skipped.

See also: Online Charging [page 31]

Availability

Depending on your implementation scenario, you can implement the immediate loading and the immediate billing features to suit your business requirements for manual operations.

As of SAP CC 2020 FPS 2, this feature is available in an integrated *SAP Solution* scenario with specific versions of SAP Convergent Invoicing that implement:

- The initial calls to the SAP CC Web Services changed operations (single charging or bundle charging)
- The handling of RFC calls from SAP CC that are dedicated to the immediate loading of billable items and corresponding consumption items
- The immediate billing of these items

ⓘ Note

Refer to the integration guides for your SAP solution. Use the SAP Note 3048461 to implement the changes in your integrated SAP system landscape.

The immediate loading of billable items is possible:

- In an SAP Convergent Invoicing component in its SAP S/4HANA system
- In the app Process a Chargeable Item of the deployed SAP Convergent Charging Cockpit user interfaces
- From the *Web Services (WS)* technical interface as implementation and integration activity in your SAP system landscape. The following service operations are enhanced:
  - `Charge a Chargeable Item`
  - `Charge a Set of Chargeable Items in Bundle Mode` (several charging operations that relate to the same provider contract)

See also: the app Process a Chargeable Item in Cockpit

→ Remember

This feature is delivered as of SAP CC 2020 FPS 2. It is based on the *RFC/JCo* technical interface and is therefore not available with SAP S/4HANA Cloud Public Edition.

The feature is not available for the recharging operations of the Web Services.

Keep in mind that this enhancement is not possible with the service operations in mass mode.

Related Information

Immediate Loading of Billable Items [page 295]
Process a Chargeable Item

4.13 Chargeable Items Rerating

The Chargeable Items Rerating feature gives the possibility to cancel previous charging operations and perform new ones on identified sets of chargeable items (which may have previously been billed). This feature is mainly used to correct errors such as:

- Incorrect or missing data in the incoming events
- Charging logic errors, which lead to incorrect computation operations during the charging process
- Failure during the execution of operations such as data conversion or bulk loading
- And so on

The billing system is able to cancel the original business transactions and to take into account the new business transactions (billable items in SAP Convergent Invoicing, charged items in other billing systems).

The execution of the Chargeable Items Rerating process depends on the elements which are concerned by the rerating operation:

- When the set of chargeable items to rerate contains elements referring to offline subscriptions, the rerating operations can only be driven by the BART Server system of SAP Convergent Charging.
- When only provider contracts are concerned, the rerating operation can be driven by:
  - SAP CC BART Server system
  - SAP Convergent Invoicing with the consumption item management function enabled (in the SAP S/4HANA or SAP ERP/FI-CA system)
  - A third-party application or system that implements the dedicated Web service of SAP CC and which gives the possibility to perform the different steps which are necessary to rerate a set of chargeable items

> **Note**
>
> - This Web service contains operations which have been implemented to fit an integrated *SAP Solution* scenario with the SAP ERP/FI-CA component of the SAP Business Suite, but it is also possible to use them in conjunction with another third-party system.
> - A procedure is available to migrate the execution of the rerating operations from the BART Server system to SAP Convergent Invoicing in the SAP ERP system or in the SAP S/4HANA system.

For technical information about this feature, refer to the Chargeable Items Rerating Process [page 278] section.

Rerating Operations Driven by the BART Server System [page 40]

Rerating Operations Driven by SAP Convergent Invoicing [page 40]


4.13.1 Rerating Operations Driven by the BART Server System

In an integrated *SAP Solution* scenario, the SAP system landscape includes the following components:

- SAP CC BART Server, which is responsible for the batch acquisition and manages the rerating operations
- SAP CC Core Server, which initiates the recharging operations related to the corrected chargeable items
- SAP Convergent Invoicing, which manages the invoicing and billing operations

Rerating operations are initiated by the Core Tool user interface (step 1), and driven by the updater which is responsible for:

- Opening rerating sessions (step 2) within the BART Server system
- Preparing the rerating operations (step 3), in order to close data files and thus trigger the related bulk loading operations
- Starting the opened rerating sessions (step 4), within which the BART Server performs the rerating operations (steps 5 to 8)

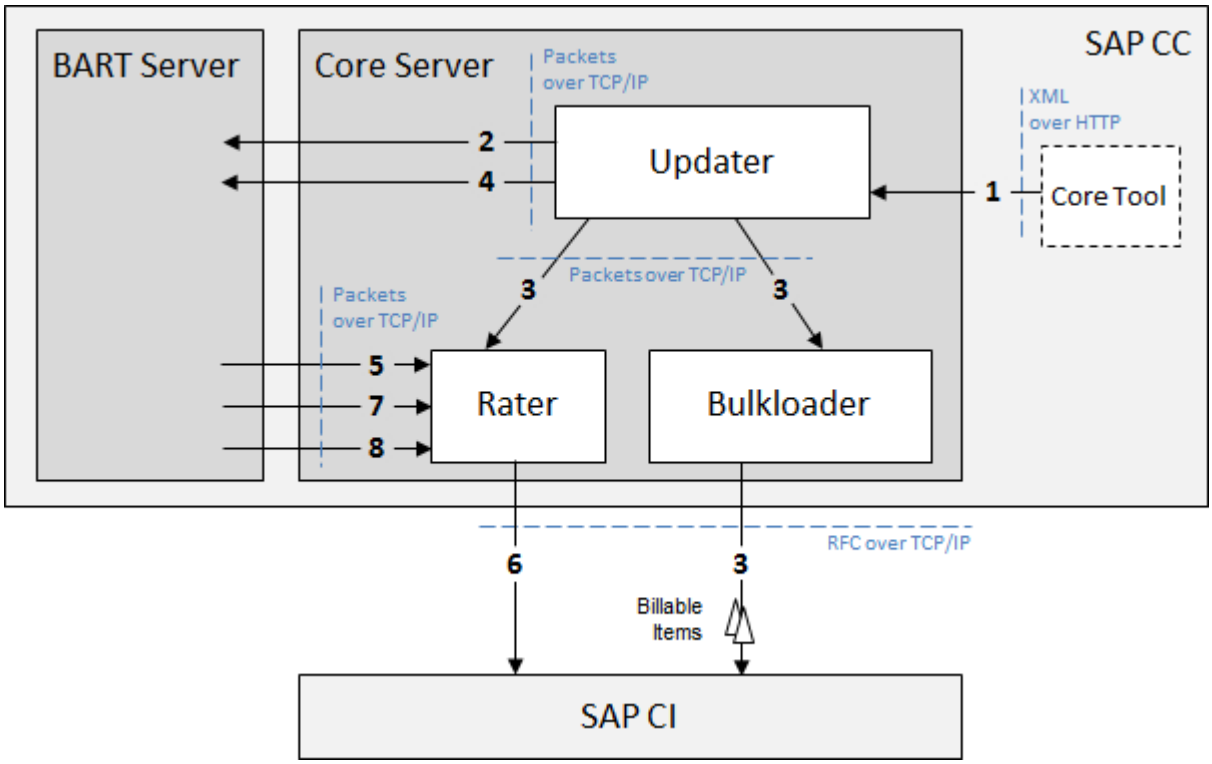


4.13.2 Rerating Operations Driven by SAP Convergent Invoicing

In an integrated *SAP Solution* scenario, the system landscape includes the following components:

- SAP Convergent Invoicing, which is responsible for the final batch acquisition (data storage), for the management of the rerating operations and for the management of the invoicing and billing operations
- SAP CC Core Server, which is responsible for the initial batch acquisition (batch acquisition, consolidation) and for the execution of the recharging operations related to the corrected chargeable items

Rerating operations are initiated by the Core Tool user interface (step 1), within rerating sessions opened by the updater (step 2) within SAP Convergent Invoicing which performs the following operations:

- Locking the dependent charging contracts (step 3)
- Closing the data files and thus triggering the related bulk loading operations (step 4) within SAP CC
- Retrieving the possible restoration points (step 5) from SAP CC
- Checking the billable items (BITs) reversibility (step 6)
- Restoring the state of charging contracts (step 7) within SAP CC
- Reversing the BITs (step 8)
- Executing the new (batch) charging operations (step 9) within SAP CC
- Unlocking the recharged charging contracts (step 10) within SAP CC

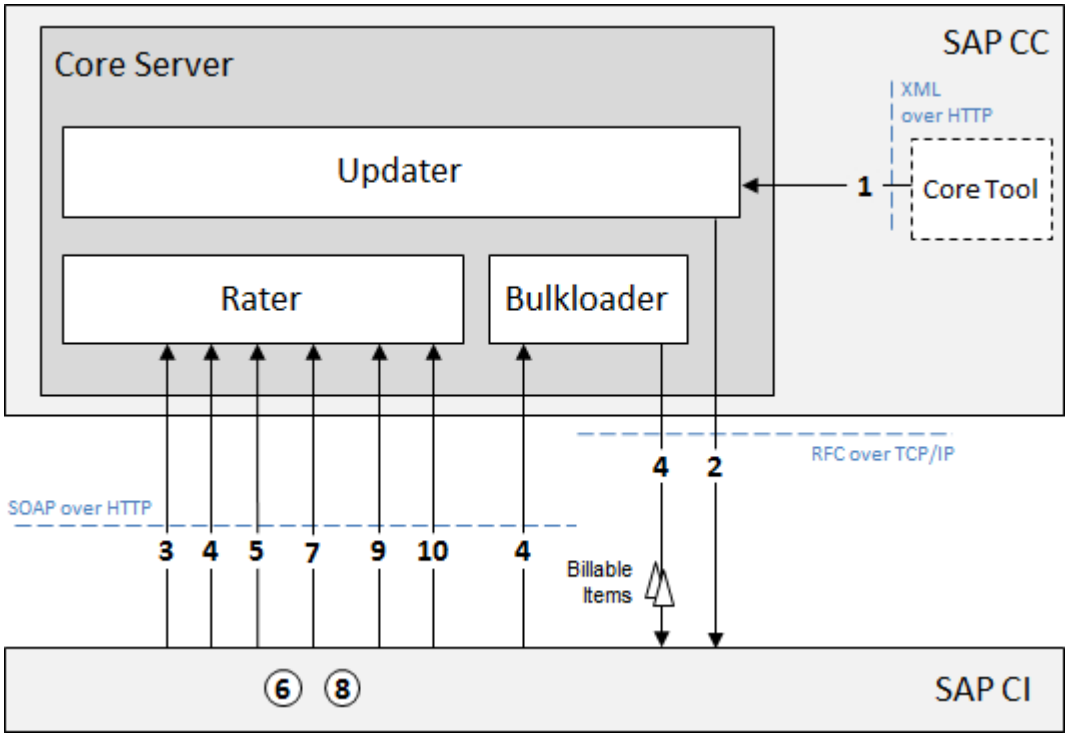

4.14 Prepaid Accounts Refilling

Also known as a *top-up process* in the SAP Telecommunications industry, the *Prepaid Accounts Refilling* feature gives the possibility to credit the prepaid accounts of the end customers for a chargeable service or bundle. To refill their prepaid accounts because their balances are getting low, end customers use points of services POS) such as ATMs, call centers, or website, which all transfer credits from a refill card, a bank account, or a prepaid account to SAP Convergent Charging (SAP CC) in order to purchase goods and/or services.

Considering credits as monetary amounts (which may include a quantity of services, such as number of SMS, a quantity of data, and so on), SAP CC thus gives the possibility to use a given credit to refill a prepaid account:

- **Automatically**: SAP CC can automatically execute a refilling operation for a given end customer to top up a prepaid account, according to periodicity or when the prepaid account balance goes below a threshold defined by the end customer.
- **Manually**: When an end customer requests a manual refill, the system (or application) that manages it (for example, a Voucher Management System) interacts with SAP CC and sends a refill request which includes some properties used to define the refilling operation (such as the origin of the operation, the associated gift, and so on).

For functional information about this feature, refer to the Prepaid Accounts Refilling Process [page 274] section.

> → Tip
>
> Consider a modern alternative by implementing the allowance management feature [page 27].

4.15 Tax Calculation

SAP Convergent Charging (SAP CC) gives the possibility to calculate taxes by using:

- The **flat tax system**
- The **"Value Added Tax" (VAT) tax system**, which is internally used by the rater instances to compute taxes for countries located into the European Union (EU) for example
- The **US Telecommunications taxes**, which are used by the taxer instances when computing taxes for U.S. countries and based on the *Avalara AvaTax for Communications (AFC)* system or engine. This software solution was known as *EZtax* or *BillSoft EZTax* that were the former brand names. See the official product documentation.

Whatever the used tax system is, the tax calculation operations consist in:

- Calculating tax data from an updated rating context that contains tax settings of a given charge which is customized in a charge plan (or in an offer) and tax settings of the related subscriber account that holds an account to be charged.
- Applying this tax data on charged transactions to:
  - Debit prepaid balances with the total amount including taxes
  - Enrich charged transactions with computed tax data to be taken into account by an external billing and invoicing system in order to calculate the final tax

The tax data is available in the charged items generated by SAP Convergent Charging (SAP CC). In an integrated *SAP Solution* scenario with SAP S/4HANA or SAP ERP/FI-CA (component of SAP Business Suite), SAP CC converts the relevant tax data into billable items (BITs) and transfers these items to the relevant connected systems.

For technical information about this feature, refer to the Tax Calculation Process [page 340] section.

Preconfigured EU VAT Rules [page 43]

4.15.1 Preconfigured EU VAT Rules

SAP Convergent Charging supports the following preconfigured VAT rules to configure the tax calculation:

The following preconfigured VAT rules are provided:

- EU VAT 2010 general rule for services
- EU VAT 2010 digital services
- EU VAT 2010 radio TV and telecommunication services
- EU VAT 2015 digital services
- EU VAT 2015 radio TV and telecommunication services

Preconfigured EU VAT Rule	Service Provider Zone	Place of Taxation (B2B Services: Customer is a Company)	Place of Taxation (B2C Services: Customer is a Parivate Individual)
EU VAT 2010 general rule for services	European Union	Customer's place of establishment	Service provider's place of establishment
		The supply of services between businesses (B2B services) is taxed at the customer's place of establishment.	Services supplied to private individuals (B2C services) are taxed at the service provider's place of establishment (service supplier).
	Third country	Customer's place of establishment	Service provider's place of establishment
EU VAT 2010 digital services	European Union	Customer's place of establishment	Service provider's place of establishment
		The EU VAT 2010 general rule for services applies	The EU VAT 2010 general rule for services applies
	Third country	Customer's place of establishment	Customer's place of residence
		The EU VAT 2010 general rule for services applies	Electronically supplied services, provided by suppliers established in a third country to non-taxable persons established in the European Union, must be taxed at the place where the private customer resides.
EU VAT 2010 radio TV and telecommunication services	European Union	Customer's place of establishment	Service provider's place of establishment
		The EU VAT 2010 general rule for services applies	The EU VAT 2010 general rule for services applies

Preconfigured EU VAT Rule	Service Provider Zone	Place of Taxation (B2B Services: Customer is a Company)	Place of Taxation (B2C Services: Customer is a Parivate Individual)
	Third country	Customer's place of establishment The EU VAT 2010 general rule for services applies	Place of effective service consumption Radio and television broadcasting services and telecommunications services, supplied by suppliers established in a third country to non-taxable customers in the European Union, are taxable at the place where the private customer effectively uses and enjoys the service.
EU VAT 2015 digital services	Any country	Customer's place of establishment	Customer's place of residence Radio and television broadcasting services and telecommunications services, supplied by suppliers established inside or outside EU to non-taxable customers in the EU, are taxable at the place where the private customer resides.
EU VAT 2015 radio TV and telecommunication services	Any country	Customer's place of establishment	Customer's place of residence Electronically supplied services, provided by suppliers established inside or outside EU to non-taxable persons established in the EU, must be taxed at the place where the private customer resides.

4.16 Charged Items Aggregation

The Charged Items Aggregation feature gives the possibility to merge multiple charged items into a single one (considered as a pending charged item), according to defined aggregation policies. These aggregation policies define some aggregation rules and reporting conditions which must be applied to charged items during charging operations, in order to determine whether 2 charged items must be aggregated or not, and decide

whether a pending charged item must be reported or not. For further information about the aggregation policy master data, refer to the Aggregation Policy [page 211] description located in the Master Data for the Service Provider section.

Note

- The Charged Items Aggregation feature is only available and relevant for charging operations executed in a session-based mode, and only concerns charged items related to consumed service usage (i.e. related to the same customized charge or allowance logic).
- When using allowances, charged items related to different allowances cannot be aggregated

To aggregate charged items, it is necessary to:

- Create and configure an aggregation policy
- Associate this aggregation policy (and optionally define a reporting scope) to the customized charges of the concerned charge plans or allowance plans


Example

The following schema illustrates an overview of an aggregation of 2 charged items relating to the same consumed service and considering the use of:

- A charged item class named “SampleCITC”, used to generate charged items containing 5 fields, from chargeable items containing 9 properties
- An aggregation policy based on the “SampleCITC” charged item class, defining aggregation rules for each field declared in the charged item class, but no specific aggregation period

Each chargeable item is processed and generates a charged item, according to the concerned charged item class. Then, the different rules defined in the aggregation policy are applied to the fields of these 2 charged items, in order to merge the charged items into a pending charged item, kept in the session for further aggregation operations.

Please note that the 2nd rule of the defined aggregation policy is associated to a threshold. But as the sum of the B fields of the charged items #1 and #2 does not exceed this threshold, the pending charged item does not need to be reported in the third-party billing system, and may thus be aggregated to further charged items.

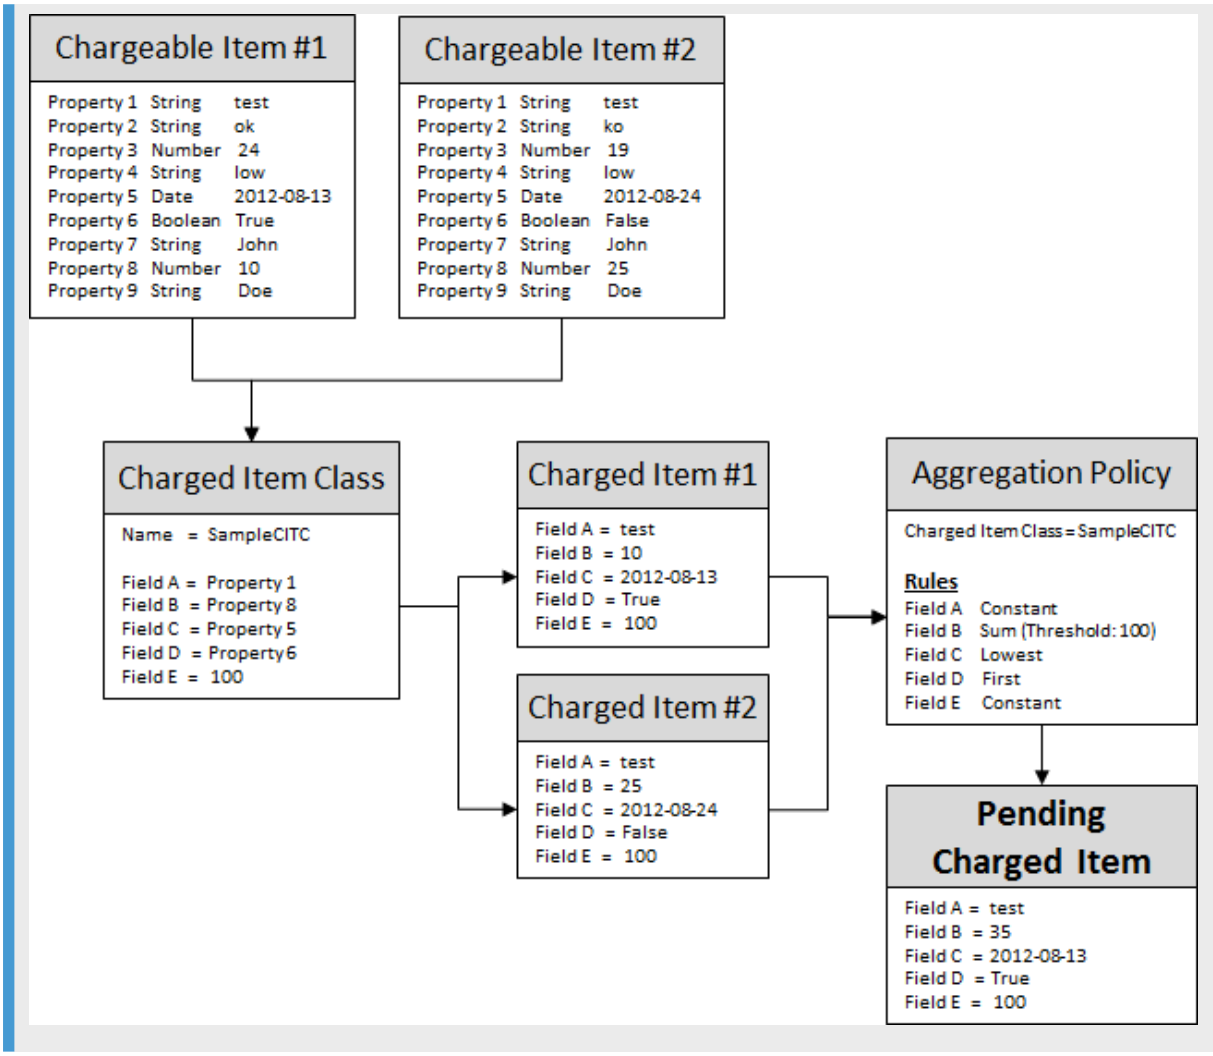

Each aggregation rule relates to a property of the charged item class, and gives the possibility to compute the value of this property in the aggregated charged item, using the following functions:

- *Constant*: 2 charged items whose concerned property have the same value can be aggregated (keeping this constant value); otherwise, the pending charged item must be reported. This function is the default available function.
- *First*: The aggregated value corresponds to the not-null value of the first charged item
- *Last*: The aggregated value corresponds to the not-null value of the last charged item
- *Lowest*: The aggregated value corresponds to the lowest value of the pending and the current charged items. The null value is considered as positive infinity, except for Date properties where the null value is not taken into account
- *Greatest*: The aggregated value corresponds to the highest value of the pending and the current charged items. The null value is considered as negative infinity, except for Date properties where the null value is not taken into account.
- *Sum*: The aggregated value corresponds to the sum of the values of the pending and the current charged items. The null value is considered as 0.

Note

- Each property of a charged item class is associated to a given type. The availability of the above described functions depends on the type of the properties:

Property Type	Constant	First	Last	Lowest	Greatest	Sum
`String`	■	■	■			
`Number`	■	■	■	■	■	■
`Date`	■	■	■	■	■	
`Boolean`	■	■	■			

- A threshold can be specified for each function associated to a Number property (except the Constant function). This threshold represents the value which leads to the reporting of the pending charged item every time it is exceeded
- Pending charged item(s) can also be reported in situations like:
  - A given property is associated to the Constant function, but the charged item to aggregate and the pending charged item have different values for this property
  - The charged item to aggregate and the pending charged item do not concern the same account type (and thus the same output channel). When such a situation occurs, the pending charged item is reported, and the charged item to aggregate becomes the pending one
  - The charged item to aggregate and the pending charged item thus do not have the same version of the aggregation policy due to modifications performed in parallel

Caution

The charged items classes contain properties which are fundamental regarding billing purposes (service identifier, account identifier, amount to be paid, and so on). The configuration of aggregation is not restricted, which means that it is possible to use any available function for any available property of the charged item class. It is thus highly important to pay attention when defining the aggregation rules of an aggregation policy, because some configurations can lead to inconsistencies regarding the global charging policy defined in price plans and/or charging plans. For example:

- Using a function different than `Constant` for the property associated to the account identifier leads to an aggregation of charged items related to different accounts, and thus prevents the dispatching of consumptions (and related amounts) between these different accounts
- Using a function different than `Sum` for the property associated to the amount to be paid prevents retrieving the sum of consumed service
- The amount (or tax amount) to be paid relating to an aggregated charged item can be different from the amount to be paid (or tax amount) resulting from the sum of every aggregated charged item, when a rounding mode is used in the pricing logic

The aggregation period represents the time during which the charged items used for confirmation purpose can be aggregated. The beginning of this period corresponds to the date of the first charged item used for reservation purpose. The end of this period depends on the activity of the related session:

- If a pending charged item has been reported due to an aggregation rule or due to session operation such as update or stop operations, then a new aggregation period is started using the date of the last charged item used for reservation purpose

- If no reporting is performed during the number of hours defining the maximum aggregation period, then the next charged item used for confirmation purpose will automatically report the pending charged item(s) and start a new aggregation period


Note

The pending charged item(s) can also be automatically reported by the scheduler in charge of cleaning the ended sessions (due to session failure or "ttl" expiration for example). For further information about this scheduler, please refer to the Session Cleaning [page 303] operation of the Chargeable Items Charging Process [page 286].

Example

The following example illustrates the behavior of the Charged Items Aggregation feature during a session which is:


- Started at 00:00 with a first reservation of usage quota
- Updated at 01:05 with a chargeable item used to confirm the first reservation and reserve a second usage quota, converted into a charged item considered as the pending charged item
- Updated at 01:38 with a chargeable item used to confirm the second reservation and reserve a third usage quota, and converted into a charged item which is aggregated with the pending charged item (1) as the aggregation period is not ended
- Updated at 02:16 with a chargeable item used to confirm the third reservation and reserve a fourth usage quota, and converted into a charged item. This third session update occurs after the end of the aggregation period, which means that the pending charged item is ready to be reported. This reporting can either be done by the scheduler during the (2) extra time or by the update operation itself.

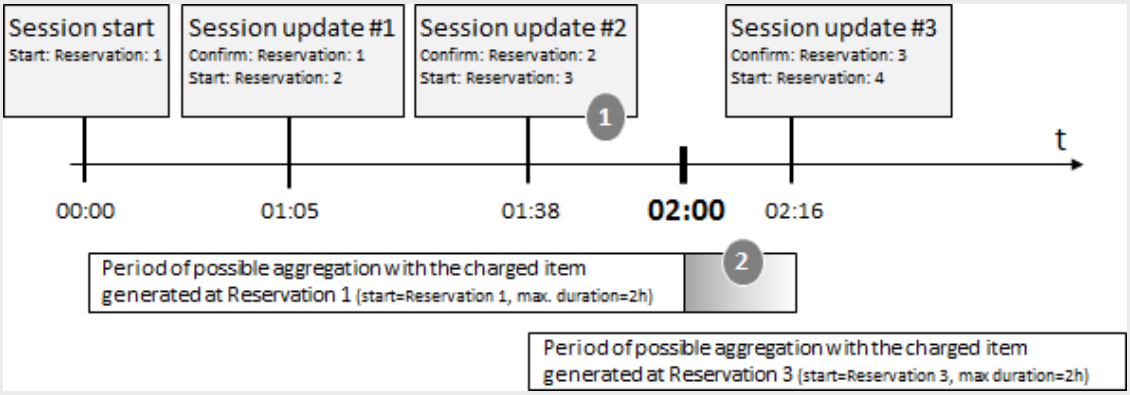

The following example illustrates the behavior of the Charged Items Aggregation feature during a session which is:

- Started at 00:00 with a first reservation of usage quota which represents the start of the period during which charged items can be aggregated
- Updated at 02:06 with a chargeable item used to confirm the first reservation and reserve a second usage quota, and converted into a charged item. As this session update arrives after the end of the aggregation period, it means that:
  - The charged item related to the first reservation is reported
  - The charged item related to the second reservation must be considered as the pending charged item, whose time corresponds to the start time of a new aggregation period (2)

- Updated at 03:28 with a chargeable item used to confirm the second reservation and reserve a third usage quota, and converted into a charged item which is aggregated with the pending charged item (1) as the aggregation period is not ended

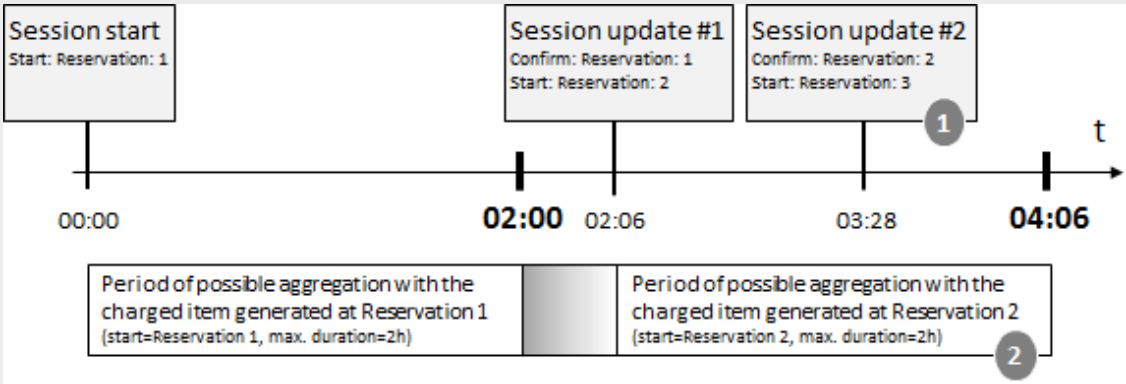

A reporting scope can be configured within customized charges relating to master charges. This reporting scope specifies which charged items must be reported when a reporting condition is fulfilled:

- When using the “Charged Item” reporting scope, a reporting condition fulfilled for a charged item triggers the reporting of the related charged item only
- When using the “Session” reporting scope, a reporting condition fulfilled for a charged item triggers the reporting of all the charged items of the session

When a reporting condition is fulfilled for a charged item (either from a master charge, a dependent charge or an allowance), the “Session” reporting scope has the following behavior:


- If a constant aggregation rule is violated for a given charged item, all the pending charged items of the session are reported, and the new charged items related to the current charging operation are stored in the session.
- If a threshold is reached for a number value of a given charged item, all the pending items are aggregated with the new charged items related to the current charging operation, and then reported
- If the maximum aggregation period is reached for a given charged item, all the pending charged items are reported, and the new charged items related to the current charging operation are stored in the session (except if these charged items are themselves expired, which leads to their reporting)

✤ Example


Considering the following elements:

- A master charge MC
- A dependent charge DC triggered by MC
- 4 different charged items named A, B, C and D, each charged item containing a number property named “pty”:
  - A and B relating to MC
  - C and D relating to DC

The following schema illustrates the aggregation of the B and D charged items when using an aggregation rule for the “pty” property based on the “Constant” function:

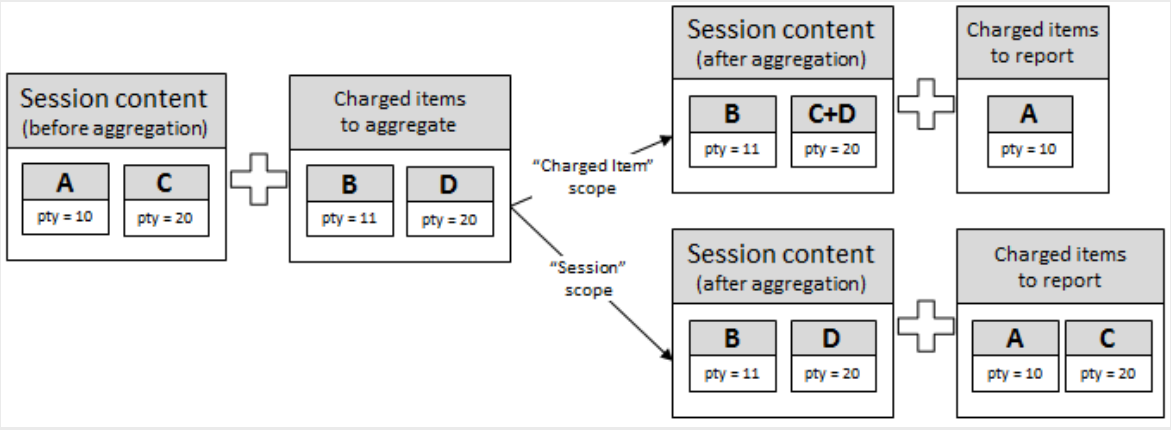

The following schema illustrates the aggregation of the B and D charged items when using an aggregation rule for the "pty" property based on the "Sum" function and a 30 threshold:

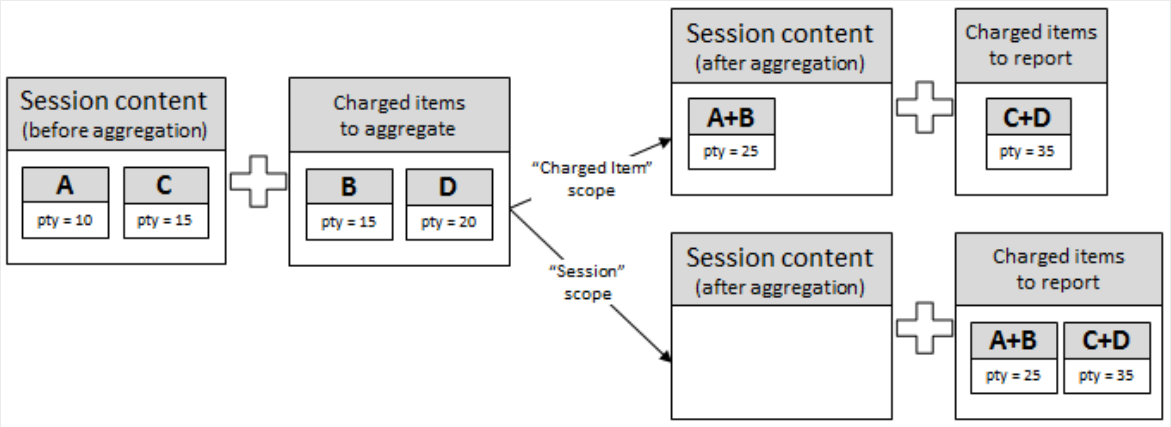

4.17 Real-Time Credit Control

Credit control is a mechanism which directly interacts in real time with an account and controls or monitors the charges related to a service usage. It globally consists in:

- Checking whether credit is available
- Reserving credit
- Deducting credit from an end-customer account when service is completed
- Refunding reserved credit that is not used

SAP Convergent Charging (SAP CC) provides several real-time credit-control mechanisms which give the possibility to:

- Control customer services and manage prepaid balances in real time by checking the balances before delivering the concerned services to the end customer
- Notify the end customer when a balance threshold is reached
- Terminate the service session when the balance is depleted

See:

- Online Charging [page 31]
- Credit Control Based on Diameter Server
- Spending Status Monitoring [page 51]

> **Note**
>
> - SAP CC also provides a credit limit management feature, which gives the possibility to limit the usage of one or more services within a given period of time. When a defined limit is reached, the service is no longer accessible until the beginning of the next period. These credit limits are managed the same way as for prepaid balances, which means that SAP CC provides credit control for these limits.
> - SAP CC does not manage customer postpaid balances internally, but gives you the possibility to refer to external postpaid balances stored in a third-party billing system. During charging operations, SAP CC generates charged items or refill records, and then forwards them to a billing system, such as SAP Convergent Invoicing where the customer invoice is created and managed.

4.18 Spending Status Monitoring

SAP Convergent Charging 2023 provides a Spending Status Monitoring feature which enables a downstream system (policy, monitoring) to make real-time policy decisions based on customized information reported by the SAP CC system. This business information relates to both customer service usage made by an end customer and predefined spending thresholds. SAP CC converts and filters some counter values of provider contracts as form of spending statuses, and manages the reporting of these text indicators when they change.

In an online environment, you implement this feature to benefit from customer experience and predictive policy:

- The policy system manages the end customer monitoring and selects the monitored spending statuses
- The CRM[4] or provisioning system takes into account some monitoring settings in pricing catalogs of a service provider to model commercial products and to manage provider contracts that include individual monitoring settings
- The downstream system and the SAP CC system must share the meaning of the defined spending statuses and their possible label values event there is no configuration synchronization
- The downstream system and the CRM or provisioning system must share some identification mechanisms for the end customers to be monitored

The Spending Status Monitoring feature takes part into the following processes:

- Activation
- Chargeable Items Charging Process [page 286] (online, best-effort and session-based execution modes)
- Prepaid Accounts Refilling Process [page 274]

> **Example**
>
> For Telecommunications industry, you implement this function in your system landscape to provide a Sy reference point (in 3GPP[5] architecture), which:

[4] Customer Relationship Management

- Is located between the Policy and Charging Rules Function (PCRF) and the Online Charging System (OCS), to give the possibility to transfer subscriber spending information from the OCS to the PCRF. Status change of policy counters defined in OCS helps PCRF in making policy decisions based on these reported spending limits
- Supports the following functions to manage spending limit reports:
  - Request of policy counter status reporting from PCRF to OCS
  - Notification of policy counter status change from OCS to PCRF
  - Cancelation of policy counter status reporting from PCRF to OCS

Feature Configuration [page 52]

Integration with a Policy or Monitoring System [page 53]

Spending Status Reporting [page 53]

Functions and Mechanism Details [page 53]

Limitations [page 54]

4.18.1 Feature Configuration

The configuration of the Spending Status Monitoring feature is flexible and is available both in the pricing catalog of a service provider and in its provider contracts (customer master data):

- The Spending Status Monitoring feature adds monitoring plans in the pricing catalog which are associated to charge plans (or refill plans) and combined in a CRM[6] application or provisioning system when modeling commercial products. The monitoring plans include different settings for the generation of spending statuses by identifying monitored counters in provider contracts, associated spending thresholds or limits (as form of particular range tables), and the identifiers of the spending statuses
- The monitoring configuration is finally set in the provider contracts. One or several contract items activate a monitoring plan and define the necessary technical data (end customer identification). The technical data knowledge must be shared between the CRM system and the policy system

> **Note**
>
> When SAP CC 2023 is connected to SAP CRM 7.0 EhP3 (SAP enhancement package 3 for SAP CRM 7.0), SAP CRM cannot manage monitoring plan classes. You must enable a switch in SAP CC so that SAP CRM can combine monitoring plans as charge plans when modeling commercial products. For further information, refer to the SAP CC 2023 Administration and Operation Guide documentation.

[5] 3rd Generation Partnership Project
[6] Customer Relationship Management

4.18.2 Integration with a Policy or Monitoring System

The policy system registers to the SAP CC system and manages the required monitoring sessions for the end customers. It selects the reported spending statuses and takes policy decisions. It shares knowledge with the SAP CC system about the possible spending statuses and their labels.

> ⓘ Note
>
> For further information about development information related to the communication between the SAP CC system and your policy or monitoring system (or another connector application) , refer to the SAP CC 2023 Administration and Operation Guide and SAP Convergent Charging Java Specifications documentations.

4.18.3 Spending Status Reporting

SAP CC gives end customers the possibility to monitor and manage related spending status reports when relevant changes are detected. These reports are sent by SAP CC to the connected and registered policy or monitoring system in real time.

> ⓘ Note
>
> Non-acknowledged reports are automatically resent by SAP CC.

4.18.4 Functions and Mechanism Details

To track changes, SAP Convergent Charging executes the following operations when receiving one of the available operation requests (listed above):

- For a provider contract which has been selected during online charging or refilling operations, the SAP CC system identifies if monitoring sessions have been requested by the policy system
- In the provider contract, the SAP CC system considers all the contract items which activate a monitoring plan. The system uses this monitoring plan to determine the list of all spending statuses to monitor and report
- The SAP CC system retrieves the label of each selected spending status in order to detect changes after the processing of the business operation. To retrieve the correct label, the system uses the dedicated range table identified in the monitoring plan and maps the counter value to the ranges that represent the spending thresholds. The output value of the range table represents the label of the corresponding spending status before the processing of the business operation which triggered the detection change function. If this execution of the range table leads to no output value, the system considers that the spending status is not defined at this time
- The SAP CC system executes the business operation (charging, refilling, activation)
- The SAP CC system computes again the label of the relevant spending statuses and thus detects the possible change. Changed statuses are grouped together.

- For each identified active monitoring which is concerned by a status change, the SAP CC system generates and sends a new spending status report to the downstream system via the Packets over TCP/IP[7] communication channel

> **Note**
>
> - The batch charging operations do not influence the spending status reporting. SAP CC does not take into account some counter changes relating to batch charging operations available via the Packets over TCP/IP or the Web Services communication channels
> - SAP CC does not consider the potential changes relating to the "Change charging contract state" operation of the "Contract State Management" Web service. This operation is not part of the online charging services. It is dedicated to initial mass provisioning or customer data migration

4.18.5 Limitations

- The Spending Status Monitoring feature is not compatible with the stateless operations of the Chargeable Items Charging Process [page 286] executed in online mode
- The Spending Status Monitoring feature does not support the Enterprise Credit Pooling [page 26] feature (which consists in sharing a pool of counters between a parent provider contract and its linked provider contracts)

4.19 Catalog Transport

The *Catalog Transport* feature gives the possibility to transport data of a given pricing catalog from a source SAP Convergent Charging system to one or several target SAP CC systems (as destinations). The data to be transported is included in a dedicated change List [page 254], which can be sent to the configured transport destinations through transport requests:

- Handled by the source SAP CC system:
  - An SAP CC system administrator or pricing specialist runs a transport request using the Core Tool user interface.
  - A dedicated system scheduler executes the configured transport requests from the SAP CC users.
- Handled by an integrated SAP CTS system (in SAP Solution Manager) working in conjunction with a dedicated SAP CC CTS+ plugin

  Transport Destinations [page 55]

  Transport Requests [page 55]

[7] Transmission Control Protocol/Internet Protocol

Related Information

Change List [page 254]

4.19.1 Transport Destinations

A transport destination corresponds to a target SAP CC system to which "change lists" containing some master data can be transported.

> **Note**
>
> Every transport destination must be configured:
>
> - Either in every “source” SAP CC system
> - Or in the SAP CTS system
>
> For further information about the configuration of the list of transport destinations within a SAP CC system, refer to the Managing Transport Destinations section of the SAP CC 2023 Administration and Operation Guide documentation.
>
> For further information about the installation and deployment with an SAP CTS system, refer to the Integrating SAP CC with SAP CTS+ section of the SAP CC 2023 Installation and Maintenance Guide documentation.

Related Information

Managing Transport Destinations

4.19.2 Transport Requests

Transport Requests Handled by the SAP CC System [page 55]

Transport Requests Handled by the SAP CTS System [page 58]

4.19.2.1 Transport Requests Handled by the SAP CC System

SAP CC transport requests represent a structure which contains one change list and one reference of a transport destination on which the change list must be applied. These transport requests are created only when a user schedules or executes a given change list, for each concerned transport destination. Then, these transport requests are taken into account by a dedicated scheduler in charge of executing them:

- Immediately if the SAP CC user decided to "execute" the change list containing the consistent master data
- At a deferred time if the user decided to "schedule" the execution of the change list

> ⚠ Caution
>
> When the scheduler takes a transport request into account, it retrieves from the system all the information related to the concerned transport destination, and adds this information to the transport request.
> Due to the gap between the creation of the transport request and its execution by the scheduler, **the information related to the transport destinations might have changed** (parallel modification or deletion, for example).

Whatever the execution mode is, transport requests have a status which can change upon its lifecycle:

- **Created**, which represents the initial status informing that the transport request has been created but not yet taken into account by the dedicated scheduler in charge of executing it
- **Executed**, which means that the transport request has been taken into account by the scheduler (successfully or not)

> ⓘ Note
>
> - For further information about the scheduler in charge of executing transport requests, refer to the SAP CC 2023 Administration and Operation Guide and SAP CC 2023 System Parameter Reference documentations
> - It is only possible to unschedule transport requests which have not yet been taken into account by the scheduler. When a transport request is unscheduled, it is deleted from the system
> - When considered as "executed", a transport request cannot be scheduled or executed again. It is only possible to create a new transport request (which can be similar to the executed one)
> - As users can execute or schedule a given change list multiple times on a given transport destination, more than 1 transport request can refer to a given transport destination
> - When multiple transport requests must be executed, the scheduler orders these transport requests as follows:
>   - The associated change lists are retrieved, and ordered by their creation date. Transport requests associated to the oldest change lists are executed first
>   - Within a given change list, the transport requests are ordered by their creation date
> - To ensure a successful execution of a transport request, you must check that the configuration of the remote system(s) is the same as the configuration of the "source" system(s). This includes the following data
>   - Currencies (in both SAP CC and SAP CI)
>   - Public holidays (in SAP CC)
>   - Default charged item mapping (in SAP CC)
>   - Default chargeable item mapping (in SAP CC)
>   - The maximum allocation memory for the Updater instances (in SAP CC)
>   - Billable Item Classes (in SAP CI)
>   - Consumption Item Classes (in SAP CI)

> ⚠ Caution
>
> When a transport request is applied on a target SAP CC system, the cached structures of its rating instances are automatically refreshed to immediately take into account the new version of the transported objects.
>
> As a consequence, it is highly recommended to be careful when transporting master data that are not managed chronologically.

Process Details

The execution of a transport request is performed by the active updater instance in the source SAP CC system, and consists in the following operations:

- Computing the list of master data to transport, according to the content of the change list
- Converting this list of master data into compressed binary data
- Updating the status of the currently concerned destination from "Created" to "In Progress"
- Retrieving the instance map of the target SAP CC system in order to get the address of its active updater instance

  > ⓘ Note
  >
  > If an error occurs while retrieving the instance map of the remote SAP CC system, the status of the transport destination is set to "Authentication Failure" or "Communication Failure", according to the situation.

- A "changeListApply" operation is performed on the "transport" Web service hosted by the active updater of the remote SAP CC system. The request contains the compressed binary data, and is sent asynchronously to give the "source" updater the possibility to manage the following transport destination without waiting for the answer of the remote updater

  > ⓘ Note
  >
  > If an error occurs while sending the request to the updater of the remote SAP CC system, the status of the transport destination is set to "Authentication Failure" or "Communication Failure", according to the situation.

In the target SAP CC system, the active updater instance recevies the WS operation request ("changeListApply" operation) and execute the following operations:

- Retrieving the list of master data to handle, from the provided compressed binary data

  > ⓘ Note
  >
  > Depending on its size, it might be necessary to uncompress the received binary data in the temporary folder of the operating system of the remote SAP CC system. It is highly recommended to size this folder in order to ensure that the binary data can be correctly uncompressed.

- Creating catalog entries for each retrieved master data, if necessary
- Importing all the retrieved master data, including their full chronologies

- Refreshing the cached structures of the rater instance(s), to make the modifications immediately available
- Returning a response to the "source" updater, to inform about the status of the operation, which can either be successful or failed

> **Note**
>
> By default, responses are returned asynchronously. When communications between the SAP CC systems are secured, these response are synchronously returned.

When receiving the response, the "source" updater instance changes the status of the corresponding transport destination related to the transport request. If a successful response is received, the status of the destination is set to `Successful`. Otherwise, this status is set to `Failed`, with an additional failure message, an error stack and a failure category which can be one of the following:

- `Authentication Failure`, which can concern failures such as invalid password, wrong login, and so on
- `Communication Failure`, which can be due for example to a network issue preventing the connection to the remote SAP CC system
- `Invalid`, which means that a master data included in the change list is invalid and cannot be applied on the destination
- `Incompatible Configuration`, which means that the configuration of the remote SAP CC system is not compatible with a master data included in the change list
- `Illegal State` or `Temporary Illegal State`, which mean that the change has not been applied because of the state of the remote SAP CC system

Related Information

Managing the Transport Requests

4.19.2.2 Transport Requests Handled by the SAP CTS System

The SAP CTS[8] system (in SAP Solution Manager) provides an ABAP Web Dynapro application named **Transport Organizer Web UI**, which gives the possibility to:

- Define and configure a landscape containing the different SAP CC systems considered as transport destinations
- Manage transport requests, from creation to sending and monitoring

Each transport request created within the *Transport Organizer Web UI* user interface includes an SAP CC file which has been exported from the “source” SAP CC and which contains the change list to transport.

For further information about the management of transport requests within the Transport Organizer Web UI, refer to the “How to configure SAP CC CTS+ plugin” documentation: Configuring the HTTP Connection.

[8] Change and Transport System

Related Information

Exporting a Change List and Included Data

4.20 Provider Contract Transfer

The *Provider Contract Transfer* feature enables you to:

- Transfer provider contracts from one SAP CC system to another one
- Transfer the counter values and the allowances from a source provider contract to a target one

> **Note**
>
> In an integrated *SAP Solution* scenario with SAP ERP and SAP CRM, SAP CRM drives the contract transfer. Refer to the Integration Guide for Offer-to-Cash Based on BRIM Using SAP ERP for more information on this topic.

Overview [page 59]

Customer Data [page 62]

Operational Status of a Provider Contract [page 62]


Export and Import Operations [page 62]

4.20.1 Overview

SAP CC Web Services are enhanced to export and import customer data and to lock provider contracts during the transfer.

4.20.1.1 Migration to a New SAP CC System

By combining the new operations [page 62], you can easily move a provider contract or a subscriber account from one SAP CC system to another one.

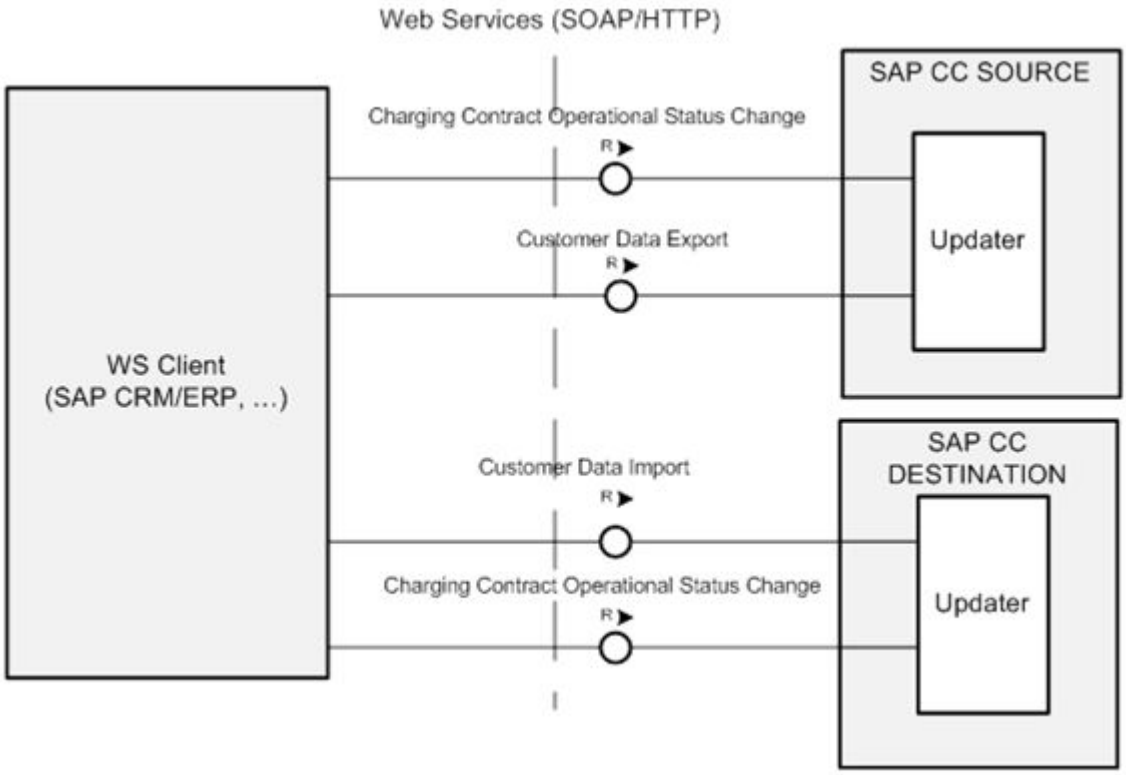

> **Note**
>
> Before transferring provider contracts, make sure that the configuration of the destination system is the same as the configuration of the source. See SAP CC 2023 Web Services Documentation (SOAP) documentation for details on the prerequisites to be fulfilled for Contract Transfer.

4.20.1.2 Transfer from a source provider contract to a target one

You can also transfer the state including the counter values and the allowances of a provider contract [page 245] into another new one.

Before transferring provider contract states, make sure that:

- The source contract state is up to date according to the transfer date
- The statuses [page 62] of both the source contract and the taret contract are set to `locked` before calling the transfer operation
- The subscriber account [page 238] holding the target contract has all the requested data (external/prepaid accounts, mapping/range tables...)

> **Note**
>
> See SAP CC 2023 Web Services Documentation (SOAP) for details on the prerequisites to be fulfilled for contract transfer.

> **Note**
>
> This contract state transfer is a provisioning operation, and as such, it is ignored by the rerating process.

Allowance Transfer

Contract items [page 249] corresponding to the allowances [page 250] of the source provider contract must be present in the target contract.

Allowance Transfer Rules

- The allowances to be transferred are the ones which are not expired
- The shared allowances are ignored by the operation

An account assignment for these allowances is applied and could differ from the one defined in the source provider contract. The account assignment depends on the ones of the parent contract item of the allowance in the target provider contract.

If the contract item implements a unique account assignment, then the allowance uses the same account assignment. Otherwise, an error occurs, and the operation fails.

Contract Item Matching and Counter Transfer

The contract item matching is exclusively based on the pair (*contract item ID, Plan ID*).

When a contract item is found, the counter values [page 252] from the source item are transferred into the target one:

- For the common counters, the target values are replaced by the source counter values
- Other counters are ignored if they are not present in the target contract item
- Target counters that are not referenced in the source contract item remain

Counter Transfer Rules

- **Pooled Counter** transfer is not supported
- **Shared Counter** transfer is supported only if the source and target provider contract define same sharing policy and namespace for counters to be transferred
- **Internal Counter** transfer is supported if the source and the target counter name is identical

> **→ Remember**
>
> - Linked contracts cannot be transferred
> - Root contracts using pooled counters cannot be transferred

4.20.2 Customer Data

Customer data include:


- Subscriber accounts, their prepaid and external accounts and the subscriber mapping and range tables
- Provider contracts, the contract states and the allowances

4.20.3 Operational Status of a Provider Contract

Provider contracts are enhanced with an operational status which enables to lock them during the transfer. The available values for the operational status are listed below:

- `Active` : The provider contract is fully operational.
- `Locked` : The provider contract is temporarily locked. SAP CC processes are not available for this contract.
- `Closed`: The provider contract is deactivated.

The following figure shows the available values for the operational status and how they link together:

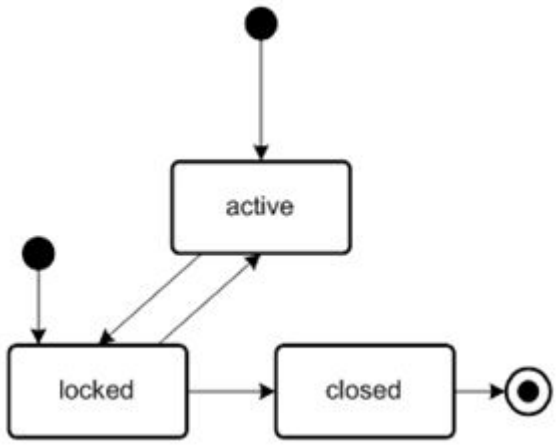

4.20.4 Export and Import Operations

SAP Convergent Charging Web Services are enhanced with the following service operations:

- Customer Data Export: To export customer data from an SAP CC system to another
- Customer Data Import: To import customer data into an SAP CC system from another
- Charging Contract Operational Status Change: To lock a contract before transferring it from an SAP CC system to another one or to unlock a contract imported into the SAP CC destination system
- Charging Contract State Transfer: To transfer the counters and allowances of a charging contract.

> **Note**
>
> The new WS[9] operations can be audited in Core Tool.

> **Note**
>
> You can rerate or recharge provider contracts only from a date later than the date when they were imported into the SAP CC destination system.

For more information about the Contract Transfer feature, refer to the SAP CC 2023 Web Services Documentation (SOAP).

4.21 High Availability

The concept of high availability (HA) in SAP Convergent Charging is based on the redundancy of hardware, SAP CC instances, and database (for a high HA level like 4x9 or 5x9, the redundancy must consider an active/active architecture).

According to the needs, it is then possible to implement a strategy which avoids any service interruption in case of element failure (databases, instances in the SAP CC system, platforms, and so on).

Hardware High Availability [page 63]

Software High Availability [page 63]

4.21.1 Hardware High Availability

To support high availaibility (HA), all software components of SAP Convergent Charging shall rely on redundant hardware (host, virtual machine, network, storage, and so on), then a balanced spread of software components on hardware is necessary to reach HA rates.

As far as the hardware configuration is concerned, the High Availability (HA) feature mostly depends on the deployed system landscape (hosts specifications and repartition, RDBMS[10] version and strategy, and so on). For further information about these configurations, refer to the:

- SAP CC 2023 Installation and Maintenance Guide documentation

4.21.2 Software High Availability

As far as the software configuration is concerned, the High Availability (HA) feature depends on the number and type of deployed instances that forms the SAP Convergent Charging (SAP CC) system:

- All deployed dispatcher instances are contacted by client applications using a transparent round-robin mode.

9 Web Services
10 Relational Database Management System

If a "secondary" dispatcher instance fails, another one will be automatically contacted. If the "primary" dispatcher instance fails, the first available "secondary" dispatcher instance becomes the primary one. As a consequence, all the incoming requests are handled.

- If the "active" updater instance fails, client applications contact the first available "backup" updater instance (automatically started by the primary dispatcher instance)
- All deployed rater and guider instances are contacted according to a partition identifier.
  If such a system instance fails, the primary dispatcher instance reorganizes its partition map among the other system instances, and contacts the newly concerned one.
- All deployed taxer instances are contacted using a transparent round-robin mode.
  If a taxer fails, the next available one is contacted.
- No HA is provided for the bulkloader instances.
  If a bulkloader instance (assigned to a given rater instance) fails, bulk loading operations will not be performed until the failed instance is restarted.

In the SAP Convergent Charging system, the "primary" dispatcher instance orchestrates the high availability (HA) of the system.

The levels of redundancy of each type of deployed instances composing the SAP CC system, determine the level of HA and global performance of the system.

This feature allows you to design and implement your high-availability strategy.

Heartbeat [page 64]

Databases Active-Active High Availability [page 65]

Databases Active-Passive High Availability [page 66]

Apache Tomcat Servers Active-Passive High Availability [page 67]

SAP CC Cockpit Systems Active-Passive High Availability [page 69]

Disaster Recovery [page 71]

4.21.2.1 Heartbeat

The heartbeat mechanism gives the possibility to check if connections with a given instance are down or alive. A heartbeat message is sent on the messages over TCP/IP[11] communication channel, without any expected response but only with an acknowledgement with a configurable timeout (set by default to 2 seconds). After 3 attempts without any response, the timeout is considered as expired and the concerned instance is then considered as down. The heartbeat mechanism continues (in background) to try to open a connection with the down instance.

> **Note**
>
> A dedicated API named `FoundLostRatingListener` and located in the `com….cnd.message` package can be used to be informed when a connection is down.

[11] Transmission Control Protocol/Internet Protocol

4.21.2.2 Databases Active-Active High Availability

The Core Database of SAP CC has been designed to take benefit of the Oracle RAC[12] (with partitioning option) and DB2 pureScale mechanisms which increase the global scalability of the solution by giving the possibility to:


- Run multiple database instances on multiple nodes
- Share a single physical database between multiple database nodes
- Control and manage the same data and initialization files whatever the running database node is
- Have dedicated or shared resources (individual log files, shared data files, and so on) for each database node
- Simultaneously execute transactions on a single database from different server instances

When SAP CC data are partitioned, each rater or guider manages a set of business objects which is isolated into a dedicated database instance. Connecting each rater or guider to a dedicated database instance gives the possibility to:

- Subdivide the interactions between the running server instances and thus provide load balancing and failover features (using an optimized mechanism mentioned afterwards)
- Ensure that database resources are isolated and dedicated to a given server instance


An optimized failover mechanism has been implemented in SAP CC to handle failures of the databases instances. This mechanism relies on the following technical parts:

- A proprietary mechanism which reallocates the partitions handled by a failed database instance to the other running ones
- Pools of database connections (handled by raters and guiders for each running database instance), which gives the possibility to immediately switch the connections from a failed database instance to an alive one
- A proprietary heartbeat mechanism, which gives the possibility to check whether a database instance is still alive or not, without any impact on the global performance of the solution

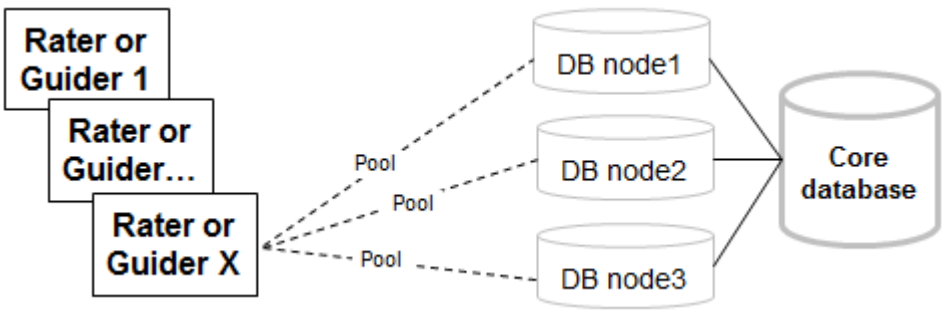

In case of database instance failure, the SAP CC system automatically switches the connections to another database instance in order to guarantee the global charging service, even if only one database instance is alive. Note that some incoming events might be lost in case of failover, depending of the database state when the failure occurs (the commit might be totally, partially or not validated). It is thus highly recommended to re-emit the failed or timed-out events when a database instance failure occurs.

[12] Real Application Cluster

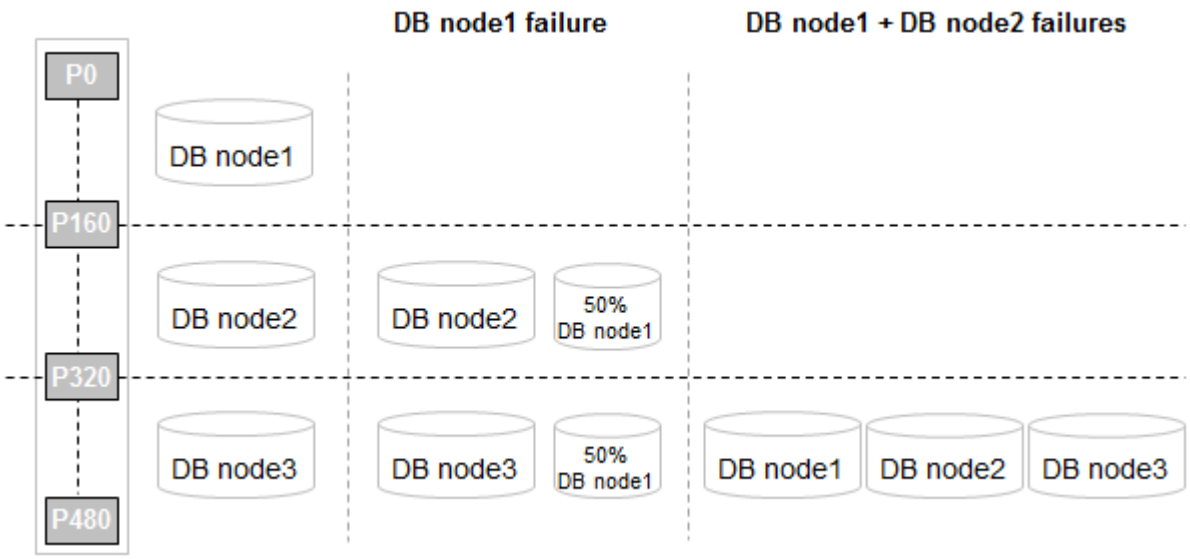


Note

- A maximum number of 12 database nodes can be managed and allocated to the deployed raters and guiders. As the number of deployed raters must be a divider of 480 and the number of deployed guiders must be a divider of 240, this distribution can be uniform or uneven. To get a uniform allocation between raters and guiders, 2, 3, 4, 5, 6, 8, 10 or 12 database nodes must be configured. Using another configuration leads to an uneven allocation
- When the partitioning mechanisms are not implemented, refer to the description of the active-passive high availability located afterwards

4.21.2.3 Databases Active-Passive High Availability


The active-passive high availability mode implemented in SAP CC relies on the following elements:

- A single-instance database considered as the primary database
- Another single-instance database considered as the secondary database

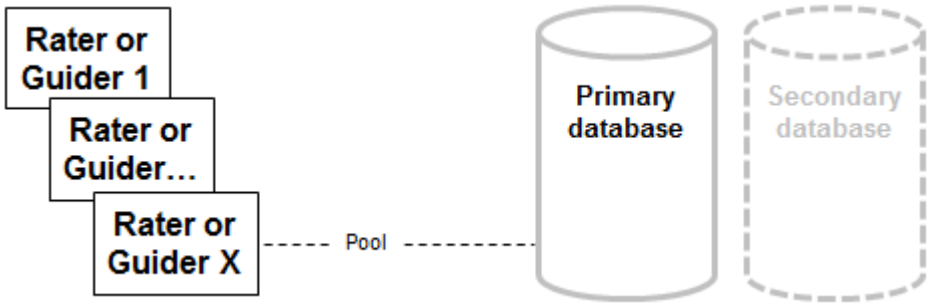

All the running services are associated to the primary database. In case of failure of this primary database, all resources are taken back by the secondary database, which makes them available again. Every server

instance of the SAP CC system which was connected to the primary database automatically reconnects to the secondary database, in order to ensure the availability of the charging operations.

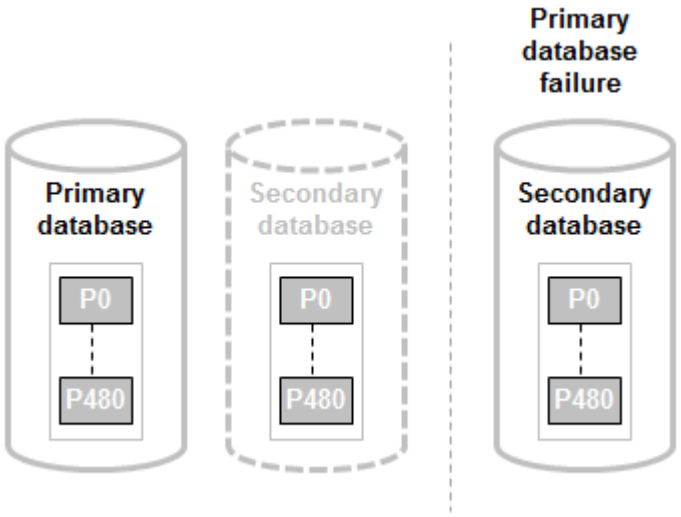

SAP CC supports this active-passive high availability mode for the following RDBMS[13]:

- SAP HANA, using storage and system replication
- SAP ASE, using the symmetric companion's mode
- Oracle RAC[14] with or without partitioning option
- Microsoft SQL[15] Server, using an external clustering software
- IBM DB2, using the HADR (High Availability Disaster Recovery) feature

4.21.2.4 Apache Tomcat Servers Active-Passive High Availability

As of SAP CC 2022 FPS 0, SAP CC Cockpit supports a high-availability (HA) setup in an active-passive mode and failover mechanism.


Two Apache Tomcat Server systems are configured in active-passive failover to ensure the high availability (HA) of the deployed Cockpit web application of SAP Convergent Charging. This feature relies on the following elements:

- A first active Apache Tomcat Server system considered as the **primary Tomcat server**.
- A second passive Apache Tomcat Server system considered as the **secondary Tomcat server**.
- An Apache HTTP Server system considered as the **load balancer**. The Apache Tomcat Connector is plugged in to this server.


The HA concept is:

[13] Relational Database Management System
[14] Real Application Cluster
[15] Structured Query Language


1. At runtime, the Cockpit application is configured as follows:

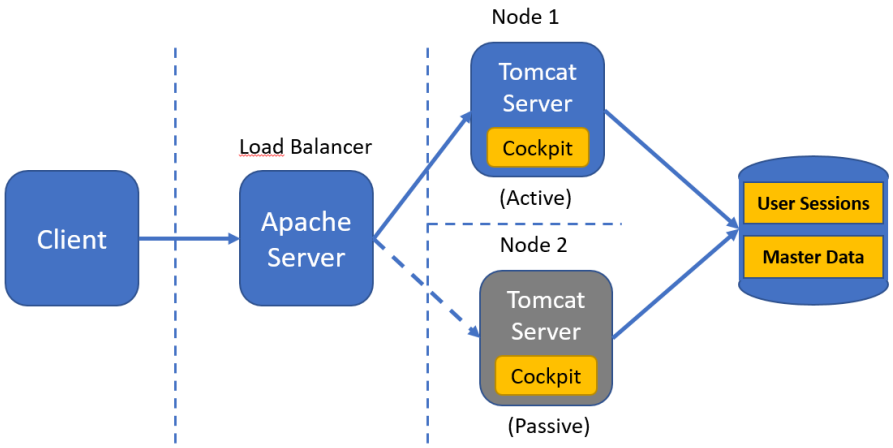

2. If the primary Tomcat server crashes, the secondary Tomcat server becomes active, and the load balancer redirects all the requests to this secondary Tomcat server:

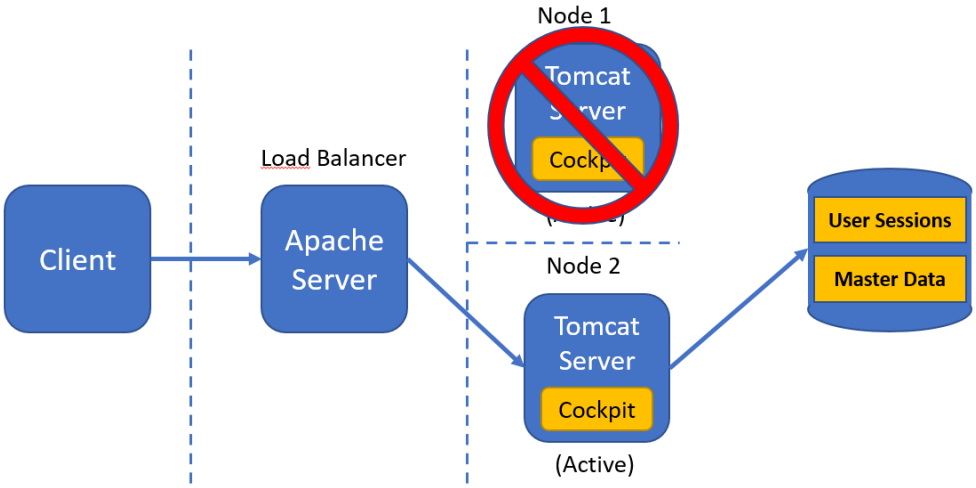

3. When the primary Tomcat server restarts, the configuration is back to its initial state as described in step one:

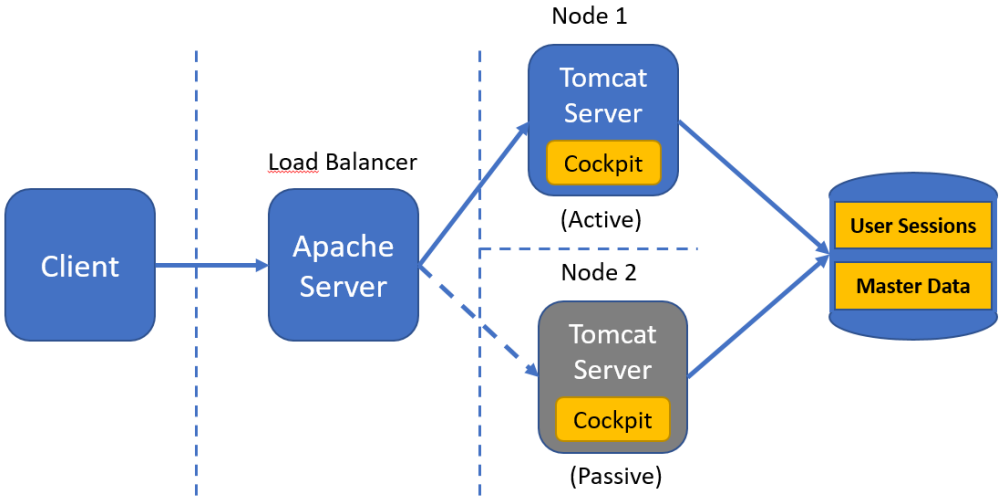

Refer to the Implementing High-Availability (HA) Setup for SAP CC Cockpit with Two Apache Tomcat Server Systems section of the SAP CC 2023 Installation and Maintenance Guide documentation to enable this feature.

4.21.2.5 SAP CC Cockpit Systems Active-Passive High Availability


As of SAP CC 2023 FPS 3, SAP CC Cockpit is available as an SAP system and supports a high-availability (HA) setup in an active-passive mode and failover mechanism.

Two Cockpit systems are installed on separate hosts and are configured in active-passive failover to ensure the high availability (HA) of the deployed Cockpit web application of SAP Convergent Charging. This feature relies on the following elements:


- A first active instance of the Cockpit system considered as the **primary server**.
- A second passive instance of the Cockpit system considered as the **secondary server**.
- An Apache HTTP Server system considered as the **load balancer**. The Apache Tomcat Connector is plugged in to this server.

The HA concept is:


1. At runtime, the Cockpit system is configured as follows:

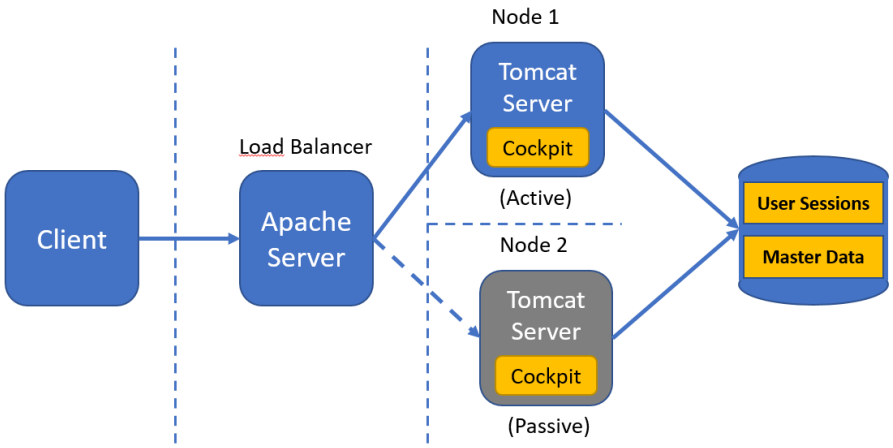

2. If the primary Cockpit system crashes, the secondary Cockpit system becomes active, and the load balancer redirects all the requests to this secondary Cockpit system:

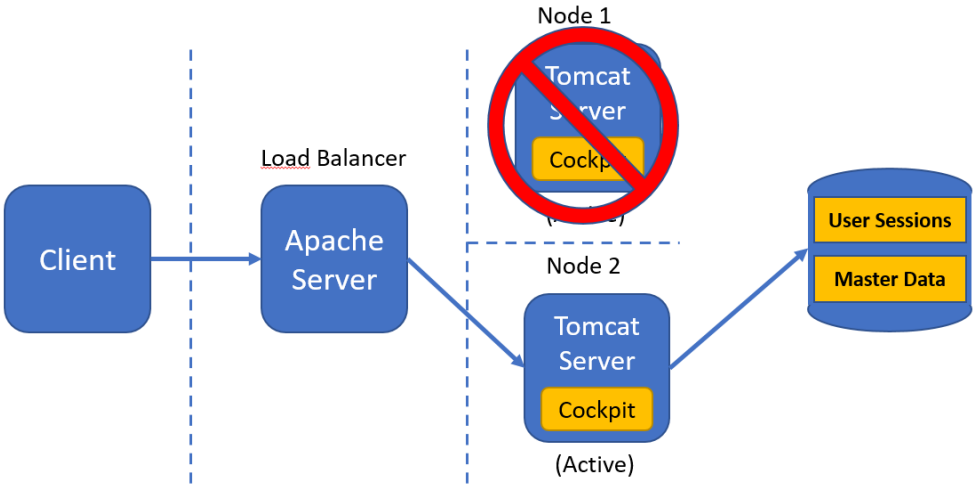

3. When the primary Cockpit system restarts, the configuration is back to its initial state as described in step one:

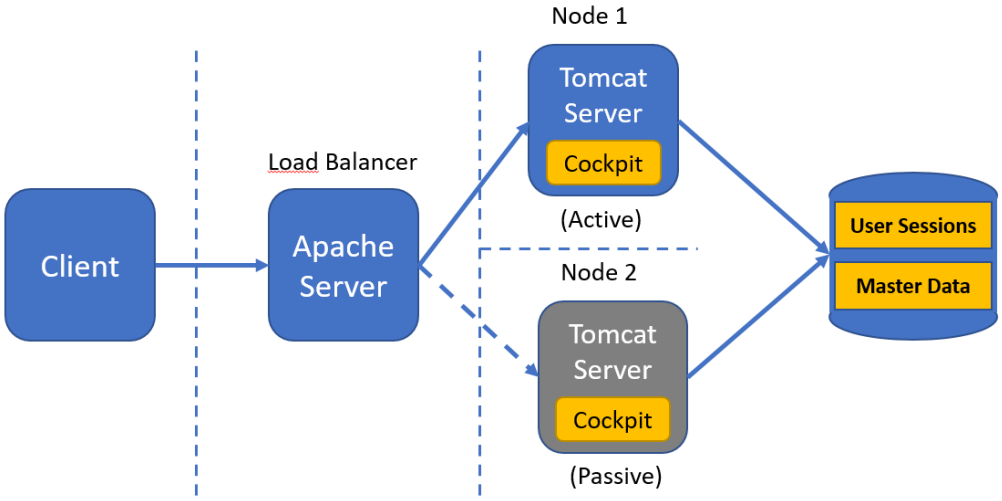

Refer to the Implementing High-Availability (HA) Setup for SAP CC Cockpit with Two Installations section of the SAP CC 2023 Installation and Maintenance Guide documentation to enable this feature.

4.21.2.6 Disaster Recovery

The architecture of SAP Convergent Charging (SAP CC) has been designed to take benefit of the *Oracle Dataguard* mechanism which gives the possibility to ship and apply data to some remote locations in case of situations considered as disasters. When such a situation occurs, it is necessary to transport the data from the exposed location to another safe location.

> **Note**
>
> If the Dual Database [page 138] feature is implemented in your SAP system landscape, SAP CC uses an Oracle database that is dedicated to the storage of the data related to the charging sessions. As such data cannot be recovered in case of failure, the associated redo logs generated by SAP CC during the rating/charging operations are excluded from the scope of the Oracle Dataguard mechanism. Most of the implementation scenarios exclude the session database. Check if your business requires the Session Database.

Doing this data separation with Oracle Dataguard, the disaster recovery capabilities of SAP Convergent Charging remain, even in case of a huge solicitation.

4.22 High Volume Management

SAP Convergent Charging implements a high volume management feature which concerns:

- The ability to handle intensive incoming traffic of incoming events without impacting the global performance, thanks to routing and caching mechanisms applied on the different instances of the Core Server system
- The possibility to store huge volumes of data, thanks to database optimizations such as data partitioning, connections pooling, and so on
- The ability to perform operations which concern large quantities of elements, such as batch charging operations, recharging operations, and so on

Routing Mechanisms [page 72]

Caching Policies [page 77]

Batch Rating Group Management [page 84]

4.22.1 Routing Mechanisms

The architecture of SAP CC relies on a set of server instances (dispatchers, updaters, raters, and so on) which communicate together and share technical and functional information related to the overall business.

To optimize and speed up the dialog between the different initialized server instances, partitioning, round-robin and multicast routing internal mechanisms have been implemented.

Partitioning Routing [page 72]

Round-Robin Routing [page 76]

Multicast Routing [page 76]

4.22.1.1 Partitioning Routing

The partitioning routing mechanism consists in sending a message to a specific rater according to a partition identifier. The relationship between raters and partition identifiers is named “Partition Map”, and is handled by dispatchers using a cached structure. This cached structure contains a list of partitions identifiers:

- Synchronized within all the running dispatchers
- Used to guide incoming requests to the adequate partition holder

> **Note**
>
> The partition identifier is determined by the contacted dispatcher according to the user and service identifiers provided within the incoming request.

Partitions Repartition [page 73]

Partitions Mapping Reorganization [page 75]

4.22.1.1.1 Partitions Repartition

SAP Convergent Charging has been designed to handle up to 500 million of subscribers, which represents large amount of associated data. To ensure good performances of the solution, data are partitioned through 480 partitions for rater instances, and 240 partitions for guider instances. These partitions are distributed by the primary dispatcher server instance according to the following algorithm that depends on the number of running raters and guiders.

Considering:

- P as the number of partitions to distribute
  - P = 240 in the case of partition distribution among guider instances
  - P = 480 in the case of partition distribution among rater instances
- I as the total number of available instances

You can use the following formula: $\mathbf{P = (P_1 \times I_1) + (P_2 \times I_2)}$

Where each value depends on the distribution of the P partitions:

- **Even distribution** (i.e. P is divisible by I)
  $P_2 = 0 = I_2$
  $P_1 = (P / I_1)$ with $I_1 = I$
- **Uneven distribution** (i.e. P is not divisible by I)
  $P_1 = \text{Floor}\ (P / I)$
  $P_2 = P_1 + 1$
  $I_2 = P - (P_1 \times I)$
  $I_1 = I - I_2$

Example

- **Even distribution**: Considering P=240 partitions to distribute among I=15 guider instances:
  - P_1 is divisible by 15
  - $P_1 = 240 / 15 = 16$

  Which leads to the following repartition: (15 guiders X 16 partitions).
- **Uneven distribution**: Considering P=480 partitions to distribute among I=19 rater instances:
  - P is not divisible by 19
  - $P_1 = \text{Floor}\ (480 / 19) = 25$
  - $P_2 = 25 + 1 = 26$
  - $I_2 = 480 - (25 \times 19) = 5$
  - $I_1 = 19 - 5 = 14$

  Which leads to the following repartition: (14 raters X 25 partitions) + (5 raters X 26 partitions).
- For information purpose, the following table contains the partitions repartition for a landscape containing up to 20 raters or guiders:

	Repartition of 480 Partitions for raters		Repartition of 240 partitions for guiders	
Nb of Instances	Nb of raters	Partition per rater	Nb of guiders	Partition per guider
1	1	480	1	120
2	2	240	2	120
3	3	160	3	80
4	4	120	4	60
5	5	96	5	48
6	6	80	6	40
7	3	68	5	34
	4	69	2	35
8	8	60	8	30
9	6	53	3	26
	3	54	6	27
10	10	48	10	24
11	4	43	2	21
	7	44	9	22
12	12	40	12	20
13	1	36	7	18
	12	37	6	19
14	10	34	12	17
15	4	35	2	18
	15	32	15	16
16	16	30	16	15
17	13	28	15	14
	4	29	2	15
18	6	26	12	13
	12	27	6	14
19	14	25	7	12
	5	26	12	13
20	20	24	20	12

4.22.1.1.2 Partitions Mapping Reorganization

When a rater or a guider instance is added to or removed from the list of running SAP CC system instances, the primary dispatcher must reorganize the Partition Map by reallocating the list of partitions among the available instances in order to distribute the overall workload.

The reorganization of the instance map depends on the instance status:

- When an instance stops (or fails), all its handled database partitions are reassigned to the other instances of the same type. The PCN (Partition Change Number) of each reassigned partition is increased to inform the instances about the change.
- When a new instance starts, the primary dispatcher assigns to this new instance a set of partitions, whose PCN is the lowest one to ensure that:
  - These assigned partitions correspond to the coldest ones.
  - A restarting instance recovers its previously allocated partitions.

The primary dispatcher instance can distribute partitions according to the following execution modes:

- **Normal** mode, which consists in assigning (or reassigning) **a whole set of partitions** to an instance
- **Smart** mode, which consists in assigning (or reassigning) **progressively** the set of partitions to an instance by:
  - First assigning to the instance an initial subset of the computed set of partitions to distribute
  - Assigning the other partitions as time goes by, until the whole set of partitions initially computed has been distributed

For further information, refer to the description of the Partitions Distribution and Warm-Up Settings group in the SAP CC 2023 System Parameter Reference documentation.

As of SAP Convergent Charging 5.0 SP 4, a new feature named "System Maintenance Mode" has been introduced to optimize these partitions distribution operations performed by the primary dispatcher instance. This feature gives the possibility to switch your Core Server system to a specific running mode within which raters and guiders can be switched to a standby mode, taking into consideration the fact that:

- Every running rater or guider can be switched to a standby mode
- Every starting rater or guider starts in a standby mode
- Every standby rater or guider:
  - Is alive but does not perform any business operation
  - Does not handle any partition but is available for receiving partitions from the primary dispatcher
  - Can be manually resumed by the administrator
  - Is automatically resumed when the Core Server system exits the maintenance mode
  - Is automatically resumed when another instance stops (and receives the partitions previously handled by this stopped instance)
  - Is not automatically resumed in case of another instance failure (which means that the remaining started instances will handle the partitions previously handled by the crashed instance)
- Every stopping rater or guider preferably transfers its partitions to a standby instance, which is automatically resumed (except when the number of stopped instances exceeds the number of available standby instances, in which case the regular smart warm-up mechanism applies)

Therefore, restarting operations of raters and guiders that are performed using standby instances thus:

- Optimize the usage of the available network resources, by decreasing:
  - The number of transferred partitions
  - The solicitation of the databases

  Which both decrease the probability of latency peaks
- Decrease the duration of warm-up operations of the cached structures handled by these instances in case of partitions redistribution.

For further information, refer to the Managing the System Maintenance Mode and Putting a System Instance on Standby and Resuming it to the Started Status sections of the Cockpit user interface documentation.

Whatever the situation is, every reassigned partition leads to the reset of the cached structures containing the data of this partition. When the cache warm-up mechanism is enabled, every reassigned partition must thus be warmed by the targeted instance, which impacts the global performance of SAP Convergent Charging.

To control these warm-up operations, you can use:

- The smart distribution mode, which gives the possibility to control the overall impact of warm-up operations on the overall landscape, that can in addition be optimized using standby instances.
- The Network Data Transfer (NDT) mechanism, which gives the possibility to transfer the cached structures directly from one instance to another using the network, and thus to decrease the solicitation of the Core Database and Session Database.

4.22.1.2 Round-Robin Routing

The internal round-robin routing mechanism consists in forwarding messages to a given concerned instance in a cyclic mode:

- The first message is sent to the first available instance
- The second message is sent to the next available instance
- And so on

Once all the available server instances have been invoked, the first one is re-invoked, and so on.

When a given instance is not reachable, this routing mode gives the possibility to re-emit a request towards another instance, and thus also contribute to the high availability feature.

4.22.1.3 Multicast Routing

The multicast routing mechanism consists in forwarding messages to multiple instances simultaneously. This mechanism is provided by the primary dispatcher which is connected to all the server instances (as all instances must register with it on startup).

4.22.2 Caching Policies

As described in the description of the different instances [page 145], most of the available instances handle data structures stored in memory and managed as cached structures. The most-used cached structures concern:

- Accesses related to the end customers
- Charging sessions (and associated histories)
- Pricing catalog master data (offers, charge plans, refill plans, monitoring plans, allowance plans, translation tables, tier tables, mapping tables and classes, pricing macros, and so on) related to the service provider
- Provisioning master data (provider contracts, subscriptions, subscriber accounts, subscriber mapping tables and allowances and shared allowances) related to the end customers
- Taxation data (business data)

To improve the global performance of SAP CC, these cached structures are stored in memory. Some of these structures can be configured to fit specific needs, while some others are automatically sized and loaded (partially or completely) according to the available resources.

> **Note**
>
> Depending on the available resources, auto-sized cache may not have enough memory to handle all the required data. Such a situation does not avoid the startup of the services instances, but decreases the global performance of SAP CC (as information must thus be recovered from databases instead of memory). For further information about cache sizing rules and dependencies between the concerned configuration parameters, refer to the SAP CC 2023 Administration and Operation Guide and SAP CC 2023 System Parameter Reference documentations.

Configurable Caches [page 77]

Auto-Sized Caches [page 80]

Cache Warm-Up [page 81]

Network Data Transfer [page 82]

Synthesis [page 82]

4.22.2.1 Configurable Caches

Some caches used by the different server instances can be configured to fit specific needs and tune the global performance of SAP CC.

Accesses Cache [page 78]

Provisioning Cache [page 78]

Charging Session Cache [page 79]

Shared Allowance Cache [page 79]

4.22.2.1.1 Accesses Cache

Accesses data are used to determine routing data required to transfer incoming requests to the adequate server instance. To give the possibility to manage an unlimited number of accesses, these data have been partitioned using a hash function applied on the user service identifier property.

Most of the time, all the accesses are not used and keeping all of them in memory is thus superfluous. To reduce memory consumption and improve performances, the list of accesses is henceforth managed using a LRU[16] policy. This LRU mechanism gives the possibility to:

- Place at the beginning of the list the last recently used access
- Remove (from the tail of the list) the oldest used accesses when the cached structure is full and needs free space in order to add a newly used access
- Avoid access creation failure

> ⓘ Note
>
> Peaks of latency may occur in the following situations:
>
> - When an incoming request concerns an access which is not in the cache
> - When the cache is too small and thus needs to be frequently reorganized
> - When a new guider registers, as this registration implies a cache reorganization

4.22.2.1.2 Provisioning Cache

The provisioning cache can be configured through different parameters. These parameters are:

- `SUBSCRIPTION_CACHE_INSTANCES`, which defines the maximum number of caches used by each concerned instance. This value is automatically computed on startup to start the appropriate number of instances regarding the managed data
- `SUBSCRIPTION_CACHE_SIZE`, which defines the memory allocated to store the cached objects (provider contracts, subscriptions, counters and subscriber accounts). It is recommended to set a size which is big enough to contain all the managed data. Otherwise, concerned instances have to retrieve data from the database which leads to latencies

> ⓘ Note
>
> - To reduce memory consumption and improve performances, the provisioning cache is managed using a LRU[17] policy described above
> - The provisioning cache managed by updaters does not contain counters

[16] Least Recently Used
[17] Least Recently Used

4.22.2.1.3 Charging Session Cache

This cache structure contains:

- The data for all the charging sessions created during the execution of the Chargeable Items Charging Process [page 286] performed in session-based mode, for all the subscriber accounts managed by a given rater
- The history of the charging sessions

The charging sessions cache is also replicated and synchronized in the database by a background mechanism which ensures high availability for session-based charging services:

- This backup copy is used in case of a general crash of a rater: the other running raters can retrieve its managed data in order to avoid any service failure
- This backup copy is used in case of a start of a new rater: this rater retrieves the data related to the active charging sessions associated to the subscriber accounts it has to manage

> **Note**
>
> To reduce memory consumption and improve performances, the charging session cache is managed using a LRU[18] policy described above

The use of this structure can be configured through different parameters. These parameters are:

- `SESSION_MEMORY_INSTANCES`, which defines the maximum number of caches which can be used by each instance. This value is automatically computed on startup to start the appropriate number of instances regarding the managed data
- `SESSION_MEMORY_SIZE`, which defines the memory allocated to each instance to store the cached objects. It is recommended to set a size which is big enough to contain all the charging sessions to manage. Otherwise, concerned instances have to retrieve data from the database which leads to latencies

4.22.2.1.4 Shared Allowance Cache

This cache structure contains:

- The shared allowances (that represent allowances shared between subscriber accounts)
- The distributed counters (that correspond to persistent counters of shared allowances)

> **Note**
>
> To reduce memory consumption and improve performances, the shared allowances cache is managed using a LRU[19] policy described above

The use of this structure can be configured through the following system parameters. For further information, refer to the description of the Allowance Management Process group available in the SAP CC 2023 System Parameter Reference documentation:

[18] Least Recently Used
[19] Least Recently Used

- SHARED_ALLOWANCE_CACHE_REFRESH_SCHEDULER_ENABLED
- SHARED_ALLOWANCE_CACHE_REFRESH_SCHEDULER_RECURRENCE
- SHARED_ALLOWANCE_CACHE_REFRESH_SCHEDULER_LAST_TRIGGER
- SHARED_ALLOWANCE_CACHE_INSTANCES
- SHARED_ALLOWANCE_CACHE_SIZE
- SHARED_ALLOWANCE_OBJECT_AVERAGE_SIZE
- SHARED_ALLOWANCE_CACHE_FREE_MEMORY
- SHARED_ALLOWANCE_CACHE_STATUS
- DISTRIBUTED_COUNTER_RESERVATION_POOL_SIZE
- DISTRIBUTED_COUNTER_RESERVATION_MAX_BATCH_SIZE
- DISTRIBUTED_COUNTER_RESERVATION_QUEUE_POLICY_HASH_KEY_SIZE
- DISTRIBUTED_COUNTER_RESERVATION_QUEUE_POLICY_LEVELS
- DISTRIBUTED_COUNTER_CLEANUP_POOL_SIZE
- DISTRIBUTED_COUNTER_CLEANUP_MAX_BATCH_SIZE
- DISTRIBUTED_COUNTER_CLEANUP_QUEUE_POLICY_HASH_KEY_SIZE
- DISTRIBUTED_COUNTER_CLEANUP_QUEUE_POLICY_LEVELS
- DISTRIBUTED_COUNTER_CHECK_POOL_SIZE
- DISTRIBUTED_COUNTER_EMPTY_CHECK_INTERVAL
- DISTRIBUTED_COUNTER_EMPTY_CHECK_MAX_THROUGHPUT

4.22.2.2 Auto-Sized Caches

Some cached structures of SAP CC are automatically sized according to the available resources.

Catalog Cache [page 80]

Taxation Data Cache [page 81]

4.22.2.2.1 Catalog Cache

Also called offer-level cache, the catalog cache contains objects such as:

- Master data
  - Offers
  - Charge Plans
  - Charges
  - Refill Plans
  - Refill Logic Objects
  - Allowance Plans
  - Allowance Logic Objects
  - Monitoring Plans

    - Pricing Macros
    - Translation Tables
    - Tier Tables
    - Mapping Tables
    - Range Tables
    - And so on
- Business data
    - Public Holidays

As these objects correspond to business master data, the corresponded cached structures are entirely loaded on startup, in the first position in the cache loading list.

> **Note**
>
> The catalog cache works with a flip-flap mechanism: when an updater modifies an object, a multicast notification is sent to the running raters. Concerned raters then update a copy of the managed catalog cache, until a flip-flap is performed (which consists in overwriting the managed cache with the updated copy). This mechanism can be manually or automatically performed.

4.22.2.2.2 Taxation Data Cache

As some instances need to quickly access to taxation data (such as VAT taxes and VAT rules), a cached structure is implemented to store this business data in memory. This structure is entirely loaded on startup, and is thus not configurable.

4.22.2.3 Cache Warm-Up

To avoid latency and increase the reactivity of the Core Server, a warm-up mechanism has been implemented for the cached structures handled by raters and guiders. This mechanism consists in:

- Retrieving all the data related to vendors and clients, either from database or directly from another instance (depending whether the Network Data Transfer mechanism is enabled or not)
- Loading this data into the related cached structures handled by the concerned instances

The cache warm-up mechanism uses an intelligent loading strategy which ensures that the cached structures only contain the last versions of the master data (whatever the operation which could impact a master data is). A dedicated parameter named `CACHE_WARMUP_THREAD_COUNT` gives the possibility to:

- Deactivate the mechanism, for business or technical reasons such as backward compatibility, limited available memory, moderated business, and so on
- Activate the mechanism and associate a number of dedicated threads in order to tune the performance of the mechanism's execution (warm-up speed, cached structures availability, database stress, and so on)

Admin+ contains a command named `start_cache_warmup` that gives the possibility to start and/or restart the cache warm-up mechanism on a given running instance (for example after operations such as data migration, mass provisioning, and so on, which lead to lots of invalidations of the cached data).

> **Note**
>
> For further information about the `CACHE_WARMUP_THREAD_COUNT` parameter and the `start_cache_warmup` command, refer to theSAP CC 2023 Administration and Operation Guide and SAP CC 2023 System Parameter Reference documentations.

4.22.2.4 Network Data Transfer

The Network Data Transfer mechanism gives the possibility to transfer high volume of data between instances within your SAP Convergent Charging landscape.

This mechanism positively impacts the performance of your SAP CC landscape by:

- Transferring cached data over the network directly between instances, which decreases the overall solicitation of the Core Database andSession Database during warm-up operations
- Decreasing the duration of warm-up operations of the cached structures handled by raters and guiders, thanks to a better usage of network resources in case of partitions redistribution

The Network Data Transfer mechanism relies on 2 different types of messages (requests and responses) used by both raters and guiders:

- **Class1 messages**, that correspond to data transfer requests and responses performed during priority operations such as real time operations, administrations queries during data transfer operations, and so on
- **Class2 messages**, that correspond to data transfer requests and responses performed during non-priority operations such as data transfer operations in a context of cache warm-up operations

For optimization purpose, it is also possible to control the behavior of these messages during data transfer operations by configuring:

- The resources allocated to raters and guiders when processing Class1 or Class2 messages (number of threads, size of queues)
- The bandwidth allocated to raters and guiders when dealing with Class2 messages, to avoid interfering with real time services like stateful charging
- The size of the Class2 messages, to avoid overloading the network

For further information about the configuration of the Network Data Transfer mechanism, refer to the Modifying the Network Data Transfer (NDT) Mechanism section of the SAP CC 2023 Administration Guide documentation.

4.22.2.5 Synthesis

The following table shows the managed structures according to the different instances:

Data Structure	dispatcher	rater	guider	updater	taxer	bulkloader
Technical structures						
Custom audit filters	■	■	■	■	■	■
SAP CC users	■	■		■		
Partitions	■					
Accesses			■			
Charging Sessions		■				
Taxation Data		■		■	■	
Batch Rating Group				■		
Exportable Item Mapping		■		■		■
Provisioning Data Structure						
Provider Contracts		■	■	■		
Allowances		■		■		
Subscriptions		■	■	■		
Subscriber Accounts		■		■		
Counters		■		■		
Subscriber Mapping Tables and Subscriber Range Tables		■	■	■		
Catalog Data Structure						
Offers		■		■		■
Charges Refill Logic Objects Allowance Logic Objects		■		■		
Charge Plans Refill Plans Allowance Plans Monitoring Plans		■		■		

Data Structure	dispatcher	rater	guider	updater	taxer	bulkloader
Chargeable Item Classes and Packages		■		■		■
Refill Item Classes		■		■		
Allowance Event Classes		■		■		
Allowance Interface		■		■		
Translation Tables, Mapping Tables and Classes		■		■		
Tier Tables, Range Tables and Classes		■		■		
Pricing Macros		■		■		
Charged Item Classes Refill Record Classes Aggregation Policies		■		■		■
Public Holidays		■		■		

4.22.3 Batch Rating Group Management

Some operations such as batch charging or recharging operations can concern large quantities of elements. To ease the execution and increase the performance of such operations, it is possible to group the concerned data according to batch rating groups.

These batch rating groups:

- Must first be defined into the system, using the `groupadd`, `groupdel`, `grouplist` and `groupmod` commands of Admin+
- Can be assigned to provider contracts or offline subscriptions, at creation time
- Are linked to the CDRs[20] during the execution of the Chargeable Items Acquisition Process [page 337] performed by the BART Server, to group the CDR for business or technical purposes (such as database partitioning for better performances during batch charging operations)

The assignment of batch rating group is different whether it concerns subscriptions or provider contracts:

[20] Call Detail Record (Telecommunications industry), or more generally Consumption Detail Record

- To assign a batch rating group to an offline subscription, it is just necessary to select one of the existing batch rating group, at creation or modification time
- The assignment of batch rating groups for provider contracts can only be performed at creation time, when provider contracts are replicated from SAP CRM (which does not manage technical information such as batch rating groups). The BATCH_RATING_GROUP_ASSIGNMENT_POLICY_CLASS configuration parameter gives the possibility to define the rules which must be applied in order to assign batch rating groups to the replicated provider contracts. A default implementation of the assignment policy is provided, and balances the provider contracts on the defined batch rating groups. It is possible to adapt this behavior to specific needs and thus implement specific rules, but requires specific developments as described in the example afterwards

Note

- It is possible to update the batch rating group of a given offline subscription, but it is highly not recommended to do such a modification, as it can change the expected behavior of further batch operations
- For further information about the commands of Admin+ dedicated to batch rating groups management, refer to the SAP CC 2023 Administration and Operation Guide documentation

Example

Considering two existing batch rating groups named “Group 1” and “Group 2”, respectively defined with the “1” and “2” identifiers, a customer wants to allocate the provider contracts whose identifiers end with “0”, “2”, “4”, “6”, “8” to the “Group 1” batch rating group, and the other provider contracts to the “Group 2” batch rating group. To implement such an assignment policy rule, it is necessary to:

- Create a specific java class which implements the `IContractBatchRatingGroupAssignmentPolicy` interface and overrides the `getBatchratingGroupAssignment` (...) method, for example:

```
package sap.cc.integration.batchratinggroup;
import com.highdeal.batchgroup.BatchRatingGroupIdentifier;
import com.highdeal.batchgroup.BatchRatingGroupIdentifierException;
import com.highdeal.batchgroup.IBatchRatingGroupsAccessor;
import
com.highdeal.batchgroup.contract.IContractBatchRatingGroupAssignmentPolicy;
import com.highdeal.contract.hci.ChargingContractRevisionModel;
public class BatchRatingGroupImpl implements
IContractBatchRatingGroupAssignmentPolicy {
    public BatchRatingGroupIdentifier getBatchRatingGroupAssignment(
        ChargingContractRevisionModel arg0, IBatchRatingGroupsAccessor
arg1)
        throws BatchRatingGroupIdentifierException {
      if (  arg0.getId().endsWith("0") || arg0.getId().endsWith("2") ||
          arg0.getId().endsWith("4") || arg0.getId().endsWith("6") ||
          arg0.getId().endsWith("8") )
      return arg1.getBatchRatinggroupById((short) 1);
      else
      return arg1.getBatchRatinggroupById((short) 2);
    }
}
```

- Create a JAR file containing this single class, and insert this JAR into the folder which contains the JAR files which must be copied to the instance local folder at startup (such as the `\usr\sap\XXX\SYS\exe\uc\XXXX\CC_CORE_SERVER\jars` folder)
- Modify the value of the BATCH_RATING_GROUP_ASSIGNMENT_POLICY_CLASS parameter in order to use your own implementation (using the `<package_name>.<class_name>` format)

- Use the Config Tool to update the system configuration and thus take into account this new assignment policy
- Add the created `JAR` file to the classpath of the updater, described in its associated `jstart.config` file
- Restart the system

4.23 System and Data Auditing

SAP Convergent Charging provides the System and Data Auditing feature to fulfill your business and technical requirements relating to the system audit and control aspects and to implement your security policy in the system landscape.

SAP CC delivers the following fundamental features:

- Master data and user operation auditing
- Product usage measurement

To fulfill specific auditing and control requirements, you can implement the following technical features and functions in the SAP CC Core Server system:

Technical Feature	Core Server	Core Tool or Cockpit
Master Data Auditing		
Recording of object change logs	■	
Inspecting of object change logs (data object changes)		○
Recording of object snapshots	■	
Inspecting of object snapshots (data detailed changes)		○
User Operations Auditing		
Recording of requested user operations	■	
Inspecting of audited user operations		○
Product Usage Measurement		
Product Usage Metrics	■	○
GLAS[21] Files		○
Customer Usage in SAP Solution Manager	■	

■ Automated Functions ○ Manual Tasks with Tools

Master Data and User Operation Auditing [page 87]

Product Usage Measurement [page 109]

[21] SAP Global License Auditing Service


4.23.1 Master Data and User Operation Auditing

To manage the auditing and control levels in your SAP system landscape, SAP Convergent Charging (SAP CC) provides the Master Data and User Operation Auditing feature to track the modifications of master data in the back-end database from an end-to-end perspective. The SAP CC Core Server system automatically audits:

- Modifications of master data
- SAP CC users and user operations that are responsible for these modifications

SAP CC stores the following audit information into the Core Database:

- **Object change logs**, which correspond to recordings of modifications performed on data objects
- **Object snapshots**, which correspond to copies of a data object before and after the modifications
- **Audited user operations**, which correspond to recordings of successful executions of requested user operations or recordings of failed operations



This fine-grained auditing mode provides you and your SAP Support Team with an efficient supportability tool to audit and analyze data modifications and user operations executed within your system.

SAP CC gives the possibility to audit the following data objects:

- Pricing catalog data (pricing macros, charges, charge plans, range tables, and so on) that relates to the service providers and the service pricing configurations
- Customer master data (subscriber accounts, provider contracts, subscriptions, accesses, subscriber range tables, and so on) that relates to the service subscribers
- Business and custom data (currencies, public holidays, chargeable item mapping, and so on) configured in the complete system and shared by all the pricing catalogs and customer master data
- Technical data (SAP CC users and user accounts, custom audit filters, and so on)

The auditable user operations are a customized selection of user operations requested via the Web Services (WS) and HCI[22] technical interfaces, that modify the system state or the persistent configuration data.

Only SAP CC users granted the "Administrator" or “Remote Support” role can inspect the audited user operations, object change logs, and object snapshots. For more information about these roles and associated authorizations, refer to the SAP CC 2023 Security Guide documentation.

→ Recommendation

By default, this end-to-end auditing is enabled. SAP recommends that you plan to implement and customize the following technical features:

- Recording of object change logs
- Recording of object snapshots
- Recording of user operations

Auditing functions can lead to the creation of large quantities of data stored in the back-end database that can significantly impact the performance and storage capacity of the database. SAP recommends that you:

[22] HTTP Communication Interface

- Optimize your implementation by defining the auditable objects and operations, the dababase sizing and to reserve space accordingly
- Plan to archive and purge audit data recordings from the database regularly

Recording of Object Change Logs [page 88]

Recording of Object Snapshots [page 90]

Recording of User Operations [page 93]

Functions and Mechanism Details [page 108]

Feature Implementation [page 108]

4.23.1.1 Recording of Object Change Logs

SAP Convergent Charging (SAP CC) gives the possibility to log the modifications on persistent configuration data (master data, business/custom data). It supports data creation, modification, and deletion requested via the Web Services (WS) and HCI[23] technical interfaces and via the SAP CC Core Tool, Admin+, and Setup Tool user interfaces.

The SAP CC Core Server system automatically audits the modified data objects by recording an object change log into the Core Database within a reserved space.

The SAP CC Cockpit and the SAP CC Core Tool user interfaces give the possibility to view and inspect the object change logs in audit recordings. Only an SAP CC user granted the "Administration" or "Remote Support" role can access such information.

ⓘ Note

For security reasons, this technical feature is always enabled, which means that you cannot deactivate the feature and its associated functions.

⚠ Caution

The auditing functions can lead to the creation of large quantities of audit data recordings stored in the `OBJECT_CHANGE_LOG` table of the Core Database.

To run your system optimally, SAP recommends that you manage the data volume of audited information by:

- Sizing or resizing the database by considering the `OBJECT_CHANGE_DATA` reserved space
- Regularly planning archiving and purging operations for out-of-date object change logs from audited data recordings, using the `purge_object_change_logs` command of the SAP CC Admin+ user interface

For further information, refer to the SAP CC 2023 Administration and Operation Guide, SAP CC 2023 Administration Guide, SAP CC 2023 Primary Help for Cockpit, and Admin+ documentation of SAP Convergent Charging.

Audited Information [page 89]

[23] HTTP Communication Interface

Auditable Data Objects [page 90]

4.23.1.1.1 Audited Information

The following table contains the list of possible audited information:

Audited Information	Description
Identification	The necessary identifiers of the concerned audited data object (possibly a multi-part identifier)
Date and time	The date/time when the data object has been modified
Object type	The type of concerned data objects (user, currency, charge plan, range table, chargeable item class, and so on)
Treatment	The type of performed action (creation, modification, or deletion)
Supportability tool	The technical and unique reference of the object change log stored in the Core Database, that may help your support specialist. This object unique ID (OID) is automatically determined by SAP CC.
Change message (as of version 2021 FPS 1)	The comprehensive message that gives the reason for the change of an object.

Associated to the recording of user operations and object snapshots, the object change logs provide additional audit information such as:

Audited Information	Description	Prerequisites
User operation	The reference of the audited user operation. **Note** This important information can identify the SAP CC user who or that requested the SAP system to process the operation.	The recording of user operation is enabled in the SAP CC Core Server system.
Data object values (in snapshots)	The references of the copies of the data object before and after the modifications of the object. **Note** This important information gives the possibility to analyze the details of the object modification.	The recording of object snapshots is enabled in the SAP CC system.

→ Remember

Logs for charging operations initiated from the app Process a Chargeable Item of the SAP CC Cockpit user interface are not auditable.

4.23.1.1.2 Auditable Data Objects

The following table contains the list of data which support the auditing function:

Business and Custom Data	Pricing Catalog Data		Customer Master Data	Technical Data
Allowance Interface Counter Names Dictionary	Pricing Macro	Chargeable Item Package	Subscriber Account	User
Currencies	Translation Table	Charged Item Class	Subscription	Audit (Custom filters)
ISO 4217 Currencies	Tier Table	Aggregation Policy	Provider Contract	
Public Holidays	Mapping Table Class	Refill Item Class	Access	
Exportable Item Mapping	Mapping Table	Refill Record Class	Subscriber Mapping Table	
	Range Table Class	Refill Logic	Subscriber Range Table	
	Range Table	Refill Plan		
	Offer	Allowance Plan		
	Charge	Allowance Logic		
	Charge Plan	Allowance Event Class		
	Chargeable Item Class	Monitoring Plan		

4.23.1.2 Recording of Object Snapshots

SAP Convergent Charging (SAP CC) gives the possibility to enrich audits with detailed information about the modifications performed on the audited data objects.

The SAP CC Core Server system audits a customized selection of modified data objects by recording object copies respectively before and after each modification. The SAP CC system stores these object snapshots within the Core Database in a reserved space. You can fine configure the categories of data objects that can be audited to object snapshots. SAP CC defines some useful audit domains that facilitate the system configuration.

The SAP CC Cockpit and the SAP CC Core Tool user interfaces give the possibility to view and inspect the object snapshots in audit recordings. Only an SAP CC user granted the "Administration" or "Remote Support" role can view this information.

> ⚠ Caution
>
> The auditing functions can lead to the creation of large quantities of audit data recordings stored in the `OBJECT_SNAPSHOT` table of the Core Database, which may significantly impact the performance of the complete SAP CC landscape.
>
> To run your system optimally, SAP recommends that you manage the data volume of audited information by:

- Defining the audit domains that fit your technical and business requirements
- Sizing or resizing the database by considering the `OBJECT_CHANGE_DATA` reserved space
- Regularly planning archiving and purging operations for out-of-date snapshots and object change logs from audited data recordings, using the `purge_object_change_logs` command of the SAP CC Admin+ user interface

For further information, refer to the SAP CC 2023 Administration and Operation Guide, SAP CC 2023 Administration Guide, SAP CC 2023 Primary Help for Cockpit, and Admin+ documentation.

Audit Domains and Associated Data Types [page 91]

4.23.1.2.1 Audit Domains and Associated Data Types

When you select an audit domain, SAP Convergent Charging (SAP CC) only records the corresponding object snapshots every time an object is created, modified, or deleted by an SAP CC user.

The recording of object snapshots can be customized by defining the audit domains that satisfy your business and technical requirements (security, audit level, or database storage and performance).

The following table contains the list of available audit domains:

Audit Domain	Audited Data Type
CATALOG	Data objects in pricing catalogs (in Master Data) extended with business and custom data such as the currencies or the counter name dictionary
CATALOG_TABLE_DATA	Business data tables in pricing catalogs (mapping tables, range tables, tier tables, and translation tables)
CUSTOMER	Customer master data (in Master Data) such as provider contracts, subscriber accounts, or accesses
CUSTOMER_TABLE_DATA	Business data tables in customer master data: subscriber mapping tables and subscriber range tables
TECHNICAL	Technical configuration data such as the SAP CC users or the custom audit filters

Audited Data Types	Audit Domains				
	CATALOG	CATALOG_TABLE_DATA	CUSTOMER	CUSTOMER_TABLE_DATA	TECHNICAL
Master Data					
Pricing Catalog Data					
Aggregation Policy	■				
Allowance Event Class	■				
Allowance Logic	■				
Allowance Plan	■				

Audited Data Types	Audit Domains				
	CATALOG	CATALOG_TABLE_DATA	CUSTOMER	CUSTOMER_TABLE_DATA	TECHNICAL
Charge	■				
Charge Plan	■				
Chargeable Item Class	■				
Chargeable Item Package	■				
Charged Item Class	■				
Mapping Table		■			
Mapping Table Class	■				
Monitoring Plan	■				
Offer	■				
Pricing Macro	■				
Range Table		■			
Range Table Class	■				
Refill Item Class	■				
Refill Logic	■				
Refill Plan	■				
Refill Record Class	■				
Tier Table		■			
Translation Table		■			
Customer Master Data					
Access			■		
Provider Contract			■		
Subscriber Account			■		
Subscriber Mapping Table				■	
Subscriber Range Table				■	
Subscription			■		
Business Data and Custom Data					
Allowance Interface	○				

Audited Data Types	Audit Domains				
	CATALOG	CATALOG_TABLE_DATA	CUSTOMER	CUSTOMER_TABLE_DATA	TECHNICAL
Counter Names Disctionary	○				
Currencies	○				
Exportable Item Mapping	○				
ISO 4217 Currencies	○				
Public Holidays	○				
Technical Data					
User					□
Audit (Custom Filter)					□

■ Master Data ○ Business and Custom Data □ Technical Data

4.23.1.3 Recording of User Operations

SAP Convergent Charging (SAP CC) gives the possibility to track the user operations requested by the SAP CC users (individual users and service users), whatever the used user interface or technical interface (Web Services, REST APIs, or HCI) is.

The SAP CC Core Server system audits all the requested operations by recording their execution and result (success, failure) automatically within the Core Database system.

The SAP CC Cockpit and the SAP CC Core Tool user interfaces give the possibility to view and inspect the audited operations and to continue your investigations. You can also view the related object change log when the audited operation modified the data object (creation, modification, deletion). Only an SAP CC user granted the "Administration" or "Remote Support" role can view this information.

You can audit:

- The successful operations that modified the persistent configuration data in the Core Database
- The successful operations that modified state of the SAP CC Core Server system
- All the failed operations

For security reason, you can audit the successful search operations that retrieve lists of audited user operations.

You cannot audit charging and refilling operations even if they modify the customer master data. Refer to the audit information specified in the SAP CC 2023 Web Services Documentation (SOAP). In case of bulk operations, refer to the Functions and Mechanism Details [page 108] section afterwards.

→ Remember

The failure during the auditing of a successful user operation leads to the cancellation of the original user operation. The SAP CC system traces this issue.

⚠ Caution

The auditing functions can lead to the creation of large quantities of audit data recordings stored in the `USER_OPERATION` table of the Core Database.

To run your system optimally, SAP recommends that you manage the data volume of audited information by:

- Defining the operation audit domains that fit your technical and business requirements
- Sizing or resizing the database
- Regularly planning archiving and purging operations for out-of-date snapshots and object change logs from audited data recordings, using the `purge_user operations` command of the SAP CC Admin+ user interface

For further information, refer to the SAP CC 2023 Administration and Operation Guide, SAP CC 2023 Administration Guide, SAP CC 2023 Primary Help for Cockpit, and Admin+ documentation.

Audited Information [page 94]

Operation Audit Domains [page 107]

4.23.1.3.1 Audited Information

This technical feature gives the possibility to create some audits to get information such as:

- The comprehensive name of the user operation
- The SAP CC individual user (resp. service user) who (resp. that) requested the user operation that is added to the audit recording
- The date/time when the operation has been executed
- The operand of the processed user operation, that can be an identifier, a reference, or an annotation characterizing the user operation or the data object impacted by the operation.
  For example, it can be the name or identifier of a data object or the technical name of a system parameter.

Auditable Operations

→ Tip

Click the header of a column to sort content.

Technical Operation Name	Operation Name
BillableItemsCreateConfirmation	DEPRECATED. Confirm Creation of Billable Items (Web Services)
CurrencyMasterDataReplicationBundle	DEPRECATED. Replicate Currencies (Web Services)
activateAll	Activate All Subscriptions
authenticateUser	Authenticate User
changeListApply	Apply Change List
chargePlanClassDescriptionFind	Find Charge Plan Class Description (Web Services)
chargePlanClassFind	Find Charge Plan Class (Web Services)
chargePlansExportAsL	Export Charge Plans as L (Web Services)
chargePlansExportAsLMass	Export Charge Plans as L in Mass Mode (Web Services)
chargedItemLoad	Load Charged Items (Web Services)
chargingContractActivate	Activate All Provider Contracts
chargingContractAllowanceFind	Find Provider Contract Allowance (Web Services)
chargingContractBulkActivate	Activate Provider Contracts in Bulk (Web Services)
chargingContractCancel	Cancel Provider Contract (Web Services)
chargingContractCancelFromIds	Cancel Provider Contract from Identifiers (Web Services)
chargingContractChange	Change Provider Contract (Web Services)
chargingContractCreate	Create Provider Contract (Web Services)
chargingContractExpiredAllowance-Cancel	Cancel Provider Contract Expired Allowance (Web Services)
chargingContractFind	Find Provider Contract (Web Services)
chargingContractMaintain	Maintain Provider Contract (Web Services)
chargingContractMaintainBundle	Maintain Provider Contract in Bundle Mode (Web Services)
chargingContractMaintainMass	Maintain Provider Contract in Mass Mode (Web Services)
chargingContractOperationalStatu-sChange	Change Provider Contract Operational Status (Web Services)
chargingContractRestorationPointFind	Find Provider Contract Restoration Point (Web Services)
chargingContractStateChange	Change Provider Contract State (Web Services)
chargingContractStateChangeBundle	Change Provider Contract State in Bundle Mode (Web Services)
chargingContractStateChangeMass	Change Provider Contract State in Mass Mode (Web Services)
chargingContractStateRead	Read Provider Contract State (Web Services)
chargingContractStateTransfer	Transfer Provider Contract State (Web Services)
chargingSessionCancel	Cancel Charging Session (Web Services)
chargingSessionFind	Find Charging Session (Web Services)
checkCatalogObjectChangeId	Check Catalog Object Change Identifier
cleanupAll	Clean Up All Subscriptions or Provider Contracts

Technical Operation Name	Operation Name
clearPrepaidAccount	Clear Prepaid Account
createAccess	Create Access
createAllowanceEventClass	Create Allowance Event Class
createAllowanceLogic	Create Allowance Logic
createAllowancePlan	Create Allowance Plan
createAudit	Create Audit
createBatchRatingGroup	Create Batch Rating Group
createCatalog	Create Catalog
createChangeList	Create Change List
createChangeListFromObjectReferences	Create Change List from Object References
createChargeComponent	Create Charge
createChargePlan	Create Charge Plan
createChargeableItemClass	Create Chargeable Item Class
createChargeableItemMapping	Create Consumption Item Mapping
createChargedItemAggregationPolicy	Create Charged Item Aggregation Policy
createChargedItemClass	Create Charged Item Class
createChargingContract	Create Provider Contract
createExportableItemMapping	Create Billable Item Mapping
createMappingTable	Create Mapping Table
createMappingTableClass	Create Mapping Table Class
createMappingTableRow	Create Mapping Table Row
createMonitoringPlan	Create Monitoring Plan
createOffer	Create Offer
createPricingMacro	Create Pricing Macro
createProduct	Create Chargeable Item Package
createRangeTable	Create Range Table
createRangeTableClass	Create Range Table Class
createRefillItemClass	Create Refill Item Class
createRefillLogic	Create Refill Logic
createRefillPlan	Create Refill Plan
createRefillRecordClass	Create Refill Record Class
createSpendingStatusDescription	Create Spending Status Description
createSubscriberAccount	Create Subscriber Account
createSubscriberMappingTable	Create Subscriber Mapping Table

Technical Operation Name	Operation Name
createSubscriberMappingTableRow	Create Subscriber Mapping Table Row
createSubscriberRangeTable	Create Subscriber Range Table
createSubscription	Create Subscription
createTierTable	Create Tier Table
createTranslationTable	Create Translation Table
createTransportRequest	Create Transport Request
createUser	Create User
customerDataExport	Export Customer Data (Web Services)
customerDataImport	Import Customer Data (Web Services)
deleteAccess	Delete Access
deleteAccessBulk	Delete Access Bulk
deleteAllowanceEventClass	Delete Allowance Event Class
deleteAllowanceLogic	Delete Allowance Logic
deleteAllowancePlan	Delete Allowance Plan
deleteAllowancePlanManagedByCockpit	Delete Allowance Plan Managed by Cockpit
deleteAudit	Delete Audit
deleteBatchRatingGroup	Delete Batch Rating Group
deleteCatalog	Delete Catalog
deleteCatalogFromOwner	Delete Catalog from Owner
deleteChangeList	Delete Change List
deleteChargeComponent	Delete Charge
deleteChargePlan	Delete Charge Plan
deleteChargeableItemClass	Delete Chargeable Item Class
deleteChargeableItemMapping	Delete Consumption Item Mapping
deleteChargedItemAggregationPolicy	Delete Charged Item Aggregation Policy
deleteChargedItemClass	Delete Charged Item Class
deleteChargingContract	Delete Provider Contract
deleteExportableItemMapping	Delete Billable Item Mapping
deleteFileToBulkLoad	Delete File to Bulkload
deleteMappingTable	Delete Mapping Table
deleteMappingTableClass	Delete Mapping Table Class
deleteMappingTableRow	Delete Mapping Table Row
deleteMetric	Delete Metric
deleteMonitoringPlan	Delete Monitoring Plan

Technical Operation Name	Operation Name
deleteObjectChangeLog	Delete Object Change Log
deleteOffer	Delete Offer
deletePricingMacro	Delete Pricing Macro
deleteProduct	Delete Chargeable Item Package
deleteRangeTable	Delete Range Table
deleteRangeTableClass	Delete Range Table Class
deleteRangeTableRangeSet	Delete Range Set for Range Table
deleteRefillItemClass	Delete Refill Item Class
deleteRefillLogic	Delete Refill Logic
deleteRefillPlan	Delete Refill Plan
deleteRefillRecordClass	Delete Refill Record Class
deleteSpendingStatusDescription	Delete Spending Status Description
deleteSubscriberAccount	Delete Subscriber Account
deleteSubscriberMappingTable	Delete Subscriber Mapping Table
deleteSubscriberMappingTableRow	Delete Subscriber Mapping Table Row
deleteSubscriberRangeTable	Delete Subscriber Range Table
deleteSubscription	Delete Subscription
deleteSubscriptionBulk	Delete Subscriptions Bulk
deleteTierTable	Delete Tier Table
deleteTranslationTable	Delete Translation Table
deleteTransportRequest	Delete Transport Request
deleteUser	Delete User
deleteUserOperationFromAudit	Delete User Operations from Audit
deleteUserOperationFromFilters	Delete User Operations from Filters
deleteUserSession	Delete User Session
disconnectClient	Disconnect Client
disconnectUser	Disconnect User
executeTransportRequest	Execute Transport Request
export	Export Catalog Objects (Error Only)
exportCurrencies	Export Currencies (Error Only)
exportMappingTableRowsAsCSV	Export Mapping Table Rows as CSV (Error Only)
exportPublicHolidays	Export Public Holidays (Error Only)
exportSubscriberData	Export Subscriber Data
exportSubscriberMappingTableRows-AsCSV	Export Subscriber Mapping Table Rows as CSV (Error Only)

Technical Operation Name	Operation Name
externalAccountCancel	Cancel External Account (Web Services)
externalAccountMaintain	Maintain External Account (Web Services)
externalAccountMaintainBundle	Maintain External Account in Bundle Mode (Web Services)
externalAccountMaintainMass	Maintain External Account in Mass Mode (Web Services)
externalAccountRead	Read External Account (Web Services)
fetchClientStatistics	Fetch Client Statistics
fireExpirationAlerts	Fire Expiration Alert
flag	Flag
getCatalogObjectChangeId	Get Catalog Object Change Identifier
getCurrentReratingSessionStatus	Get Current Rerating Session Status
getCustomerManagementAreaList	Get Customer Management Area List
getFilesToBulkLoad	Get Files to Bulkload
getInstanceMap	Get Instance Map
getJCoDestinationList	Get Destination List
getLogTraces	Get System Log Traces (Error Only)
getObjectSnapshotById	Get Object Snapshot By Identifier (Web Service)
getParameterValue	Get System Parameter Value (Error Only)
getParameters	Get System Parameter Names (Error Only)
getStatus	Get System Status (Error Only)
getSubAccountSubscriptionCodes	Get Subscriber Account Subscription Codes
getSystemStatus	Get System Status
getThreadDump	Get Thread Dump
getUserOperationLogRecords	Get User Operation Log Records (Web Service)
import	Import Catalog Objects
importCurrencies	Import Currencies
importPublicHolidays	Import Public Holidays
importSubscriberData	Import Subscriber Data
jobStatusRead	Read Job Status (Web Services)
listClients	List Clients
maintainCustomerManagementAreaL-ist	Maintain Customer Management Areas
maintainMappingTable	Maintain Mapping Table
maintainMappingTableRow	Maintain Mapping Table Row
maintainRangeTableRangeSet	Maintain Range Set for Range Table
maintainSubscriberMappingTableRow	Maintain Subscriber Mapping Table Row

Technical Operation Name	Operation Name
manualCharging	Manual Triggering of the Usage Charge
mappingTableCancel	Cancel Mapping Table (Web Services)
mappingTableClassFind	Find Mapping Table Class (Web Services)
mappingTableCreate	Create Mapping Table (Web Services)
mappingTableFind	Find Mapping Table (Web Services)
mappingTableMaintain	Maintain Mapping Table (Web Services)
mappingTableRowCancel	Cancel Mapping Table Row (Web Services)
mappingTableRowCancelBundle	Cancel Subscriber Mapping Table Row in Bundle Mode (Web Services)
mappingTableRowChange	Change Mapping Table Row (Web Services)
mappingTableRowCreate	Create Mapping Table Row (Web Services)
mappingTableRowMaintain	Maintain Mapping Table Row (Web Services)
mappingTableRowMaintainBundle	Maintain Subscriber Mapping Table Row in Bundle Mode (Web Services)
modifyAccess	Modify Access
modifyAllowanceEventClass	Modify Allowance Event Class
modifyAllowanceInterface	Modify Allowance Interface
modifyAllowanceLogic	Modify Allowance Logic
modifyAllowancePlan	Modify Allowance Plan
modifyAudit	Modify Audit
modifyBatchRatingGroup	Modify Batch Rating Group
modifyCatalog	Modify Catalog
modifyChargeComponent	Modify Charge
modifyChargePlan	Modify Charge Plan
modifyChargeableItemClass	Modify Chargeable Item Class
modifyChargeableItemMapping	Modify Consumption Item Mapping
modifyChargedItemAggregationPolicy	Modify Charged Item Aggregation Policy
modifyChargedItemClass	Modify Charged Item Class
modifyChargingContract	Modify Provider Contract
modifyCounterNamesDictionary	Modify Counter Names Dictionary
modifyExportableItemMapping	Modify Billable Item Mapping
modifyMappingTableClass	Modify Mapping Table Class
modifyMappingTableRow	Modify Mapping Table Row
modifyMonitoringPlan	Modify Monitoring Plan
modifyOffer	Modify Offer
modifyPassword	Modify Password

Technical Operation Name	Operation Name
modifyPricingMacro	Modify Pricing Macro
modifyProduct	Modify Chargeable Item Package
modifyRangeTable	Modify Range Table
modifyRangeTableClass	Modify Range Table Class
modifyRefillItemClass	Modify Refill Item Class
modifyRefillLogic	Modify Refill Logic
modifyRefillPlan	Modify Refill Plan
modifyRefillRecordClass	Modify Refill Record Class
modifySpendingStatusDescription	Modify Spending Status Description
modifySubscriberAccount	Modify Subscriber Account
modifySubscriberMappingTableRow	Modify Subscriber Mapping Table Row
modifySubscriberRangeTable	Modify Subscriber Range Table
modifySubscription	Modify Subscription
modifySubscriptionBulk	Modify Subscriptions Bulk
modifyTierTable	Modify Tier Table
modifyTranslationTable	Modify Translation Table
modifyUser	Modify User
monitoringPlanClassDescriptionFind	Find Monitoring Plan Class Description (Web Services)
monitoringPlanClassFind	Find Monitoring Plan Class (Web Services)
ping	Ping System (Error Only)
prepaidAccountCancel	Cancel Prepaid Account (Web Services)
prepaidAccountFindFromUserTechnicalIdentifier	Find Prepaid Account from User Technical Identifier (Web Services)
prepaidAccountMaintain	Maintain Prepaid Account (Web Services)
prepaidAccountMaintainBundle	Maintain Prepaid Account in Bundle Mode (Web Services)
prepaidAccountMaintainMass	Maintain Prepaid Account in Mass Mode (Web Services)
prepaidAccountRead	Read Prepaid Account (Web Services)
prepaidAccountRefill	Refill Prepaid Account (Web Services)
prepaidAccountStateChange	Change Prepaid Account State (Web Services)
prepaidAccountStateChangeBundle	Change Prepaid Account State in Bundle Mode (Web Services)
prepaidAccountStateChangeMass	Change Prepaid Account State in Mass Mode (Web Services)
purgeAllowances	Purge Expired Allowances
purgeChangeLists	Purge Transported Change Lists
purgeFileMetadata	Purge File Metadata
purgeIdempotencyStorage	Remove Old Idempotency Records

Technical Operation Name	Operation Name
purgeJobRecord	Purge Job Records
rangeTableCancel	Cancel Range Table (Web Services)
rangeTableClassFind	Find Range Table Class (Web Services)
rangeTableFind	Find Range Table (Web Services)
rangeTableMaintain	Maintain Range Table (Web Services)
rangeTableRangeSetCancel	Cancel Range Set for Range Table (Web Services)
rangeTableRangeSetMaintain	Maintain Range Set for Range Table (Web Services)
ratingSessionStart	Launch Rating Session (Web Services)
rechargingProcessPrepare	Prepare Recharging Process (Web Services)
rechargingProcessPrepareStatusRead	Prepare Recharging Process Status Read (Web Services)
refillPlanClassDescriptionFind	Find Refill Plan Class Description (Web Services)
refillPlanClassFind	Find Refill Plan Class (Web Services)
refillPrepaidAccount	Refill Prepaid Account
refreshRatingInstances	Switch Offer Caches
refreshSharedAllowanceCache	Refresh Shared Allowance Cache
refreshTaxCache	Switch Tax Cache
refreshTransServTypeList	Update Taxer Transaction/Service Type List
refreshVatRulesCache	Refresh VAT Rules Cache
rerateBulk	Rerating Operation
resetCaches	Reset Caches
resetCreditLimitBalance	Reset Credit Limit Balance
resetParameterValue	Reset System Parameter
scimUserChange	Change User (Web Services)
scimUserCreate	Create User (Web Services)
scimUserDelete	Delete User (Web Services)
scimUserFind	Find User (Web Services)
searchAccess	Search Access (Error Only)
searchAccessFromSubscription	Search Access from Subscription (Error Only)
searchAllBatchRatingGroups	Search All Batch Rating Groups (Error Only)
searchAllowanceEventClass	Search Allowance Event Class (Error Only)
searchAllowanceInterface	Search Allowance Interface (Error Only)
searchAllowanceLogic	Search Allowance Logic (Error Only)
searchAllowancePlan	Search Allowance Plan (Error Only)
searchAllowances	Search Allowances (Error Only)

Technical Operation Name	Operation Name
searchAudits	Search Audits
searchAvailableTaxAreaList	Search Available Tax Area List (Error Only)
searchAvailableTransServTypeList	Search Available Trans Serv Type List (Error Only)
searchCatalog	Search Catalog (Error Only)
searchChangeList	Search Change List (Error Only)
searchChangeListObjectSnapshot	Search Change List Object Snapshot (Error Only)
searchChargeComponent	Search Charges (Error Only)
searchChargeComponentByPricingMacro	Search Charges by Pricing Macro (Error Only)
searchChargeComponentByTierTable	Search Charges by Tier Table (Error Only)
searchChargeComponentByTranslationTable	Search Charges by Translation Table (Error Only)
searchChargePlan	Search Charge Plan (Error Only)
searchChargePlanClass	Search Charge Plan Class (Error Only)
searchChargeableItemClass	Search Chargeable Item Class (Error Only)
searchChargeableItemMapping	Search Consumption Item Mapping (Error Only)
searchChargedItemAggregationPolicy	Search Charged Item Aggregation Policy (Error Only)
searchChargedItemClass	Search Charged Item Class (Error Only)
searchChargingContract	Search Provider Contract (Error Only)
searchChargingContractOperationalStatus	Search Provider Contract Operational Status (Error Only)
searchCode	Search Object Codes (Error Only)
searchCounterNamesDictionary	Search Counter Names Dictionary (Error Only)
searchExportableItemMapping	Search Billable Item Mapping (Error Only)
searchExportableItemTemplate	Search Exportable Item Template (Error Only)
searchExportableItemTemplateNames	Search Exportable Item Template Names (Error Only)
searchMappingTable	Search Mapping Table (Error Only)
searchMappingTableChanges	Search Mapping Table Modifications (Error Only)
searchMappingTableClass	Search Mapping Table Class (Error Only)
searchMappingTableRow	Search Mapping Table Row (Error Only)
searchMetric	Search Metric (Error Only)
searchMonitoringPlan	Search Monitoring Plan (Error Only)
searchObjectChangeLog	Search Object Change Log (Error Only)
searchObjectDependencies	Search Object Dependencies (Error Only)
searchObjectSnapshot	Search Object Snapshot (Error Only)

Technical Operation Name	Operation Name
searchOffer	Search Offer (Error Only)
searchOfferByChargeComponent	Search Offers by Charge (Error Only)
searchPricingMacro	Search Pricing Macro (Error Only)
searchPricingMacroByPricingMacro	Search Pricing Macros by Pricing Macro (Error Only)
searchPricingMacroByTierTable	Search Pricing Macros by Tier Table (Error Only)
searchPricingMacroByTranslationTable	Search Pricing Macros by Translation Table (Error Only)
searchProduct	Search Chargeable Item Package (Error Only)
searchRangeTable	Search Range Table (Error Only)
searchRangeTableClass	Search Range Table Class (Error Only)
searchRefillItemClass	Search Refill Item Class (Error Only)
searchRefillLogic	Search Refill Logic (Error Only)
searchRefillLogicByPricingMacro	Search Refill Logic by Pricing Macro (Error Only)
searchRefillLogicByTierTable	Search Refill Logic by Tier Table (Error Only)
searchRefillLogicByTranslationTable	Search Refill Logic by Translation Table (Error Only)
searchRefillPlan	Search Refill Plan (Error Only)
searchRefillPlanClass	Search Refill Plan Class (Error Only)
searchRefillRecordClass	Search Refill Record Class (Error Only)
searchReratingInfosFromChargingContract	Search Rerating Infos from Provider Contract (Error Only)
searchSpendingStatusDescription	Search Spending Status Description (Error Only)
searchSubscriberAccount	Search Subscriber Accounts (Error Only)
searchSubscriberMappingTable	Search Subscriber Mapping Table (Error Only)
searchSubscriberRangeTable	Search Subscriber Range Table (Error Only)
searchSubscription	Search Subscriptions (Error Only)
searchSubscriptionFromAccess	Search Subscriptions from Access (Error Only)
searchTierTable	Search Tier Tables (Error Only)
searchTranslationRows	Search Translation Table Rows (Error Only)
searchTranslationTable	Search Translation Tables (Error Only)
searchTransportDestinationDescription	Search Transport Destination Description (Error Only)
searchTransportRequest	Search Transport Request (Error Only)
searchUser	Search User (Error Only)
searchUserOperation	Search User Operation (Error Only)
searchUserOperationFromAudits	Search User Operations from Audit
searchUserOperationFromFilters	Search User Operations from Filters
searchUserSession	Search User Session

Technical Operation Name	Operation Name
searchVatRules	Search VAT Rules (Error Only)
sequence	Sequence
serverShutdown	Stop System
setMaintenanceMode	Set Maintenance Mode
setParameterValue	Set System Parameter
setStandbyStatus	Set Standby Status
sqlConnectionAdmin	Administrate SQL Connection
sqlConnectionsRefresh	Refresh All SQL Connections
startCacheWarmup	Start Cache Warm-up
startTraceSession	Start Trace Session (Error Only)
stopActivation	Stop Activation of All Subscriptions
stopChargingContractActivation	Stop Activation of All Provider Contracts
stopCleanup	Stop all Subscriptions or Provider Contracts Cleanup
stopPurgeAllowances	Stop Purge of expired Allowances
stopReratingSession	Stop Rerating Session
storeMetric	Store Metric
subscriberAccountCancel	Cancel Subscriber Account (Web Services)
subscriberAccountFind	Find Subscriber Account (Web Services)
subscriberAccountMaintain	Maintain Subscriber Account (Web Services)
subscriberAccountMaintainBundle	Maintain Subscriber Account in Bundle Mode (Web Services)
subscriberAccountMaintainMass	Maintain Subscriber Account in Mass Mode (Web Services)
subscriberAccountRead	Read Subscriber Account (Web Services)
subscriberAccountReadFully	Read Subscriber Account Fully (Web Services)
subscriberMappingTableCancel	Cancel Subscriber Mapping Table (Web Services)
subscriberMappingTableCreate	Create Subscriber Mapping Table (Web Services)
subscriberMappingTableFind	Find Subscriber Mapping Table (Web Services)
subscriberMappingTableMaintain	Maintain Subscriber Mapping Table (Web Services)
subscriberMappingTableRowCancel	Cancel Subscriber Mapping Table Row (Web Services)
subscriberMappingTableRowMaintain	Maintain Subscriber Mapping Table Row (Web Services)
subscriberRangeTableCancel	Cancel Subscriber Range Table (Web Services)
subscriberRangeTableFind	Find Subscriber Range Table (Web Services)
subscriberRangeTableMaintain	Maintain Subscriber Range Table (Web Services)
subscriptionBulkActivate	Activate Subscriptions in Bulk (Web Services)
switchDBFileDirectories	Switch DB File Directories

Technical Operation Name	Operation Name
synchronizeAllCatalogsForCharging	Synchronize All Catalogs For Charging (Web Services)
synchronizeExternalCurrencies	Synchronize External Currencies
translate	Translation Table Use
unlockChargingContract	Unlock Provider Contract
unlockSubscription	Unlock Subscription
validateToken	Validate Token

Data Object Types

> → Tip
>
> Click the header of a column to sort content.

Technical Object Type	Object Type
ISO4217Currencies	ISO 4217 Currencies
access	Access
allowanceEventClass	Allowance Event Class
allowanceInterface	Allowance Interface
allowanceLogic	Allowance Logic
allowancePlan	Allowance Plan
audit	Audit
chargeComponent	Charge
chargePlan	Charge Plan
chargeableItemClass	Chargeable Item Class
chargeableItemMapping	Consumption Item Mapping
chargedItemAggregationPolicy	Aggregation Policy (Charged Item)
chargedItemClass	Charged Item Class
chargedItemMapping	Billable Item Mapping
chargingContract	Provider Contract
counterNamesDictionary	Counter Dictionary
currencies	Currencies
customerManagementAreaList	Customer Management Areas
mappingTable	Mapping Table
mappingTableClass	Mapping Table Class

Technical Object Type	Object Type
monitoringPlan	Monitoring Plan
offer	Offer
pricingMacro	Pricing Macro
product	Chargeable Item Package
publicHolidays	Public Holidays
rangeTable	Range Table
rangeTableClass	Range Table Class
refillItemClass	Refill Item Class
refillLogic	Refill Logic
refillPlan	Refill Plan
refillRecordClass	Refill Record Class
refillRecordMapping	Billable Item Mapping (Refill)
spendingStatusDescription	Spending Status Description
subscriberAccount	Subscriber Account
subscriberMappingTable	Subscriber Mapping Table
subscriberRangeTable	Subscriber Range Table
subscription	Subscription
tierTable	Tier Table
translationTable	Translation Table
user	User

4.23.1.3.2 Operation Audit Domains

The following table contains the list of possible operation audit domains that you can use to fine configure the audit of successful user operations. The selected domains define a set of auditable user operations for which SAP Convergent Charging (SAP CC) creates audit data recordings within the Core Database.

Operation Audit Domain	Typical Audited Operations
CATALOG	User operations that modify data objects in: • Pricing catalogs (associated to the customer services to monetize) • Business and custom data such as currencies, public holidays, billable item mapping objects, or counter name dictionary
CUSTOMER	User operations that modify data objects in customer master data such as subscriber accounts, provider contracts, or subscriber mapping/range tables
TECHNICAL	User operations that modify technical data such as SAP CC users or custom audit filters

Operation Audit Domain	Typical Audited Operations
ADMINISTRATION	Technical or business operations for administrating or configuring the SAP CC system such as system parameters modifications or activation process triggering

4.23.1.4 Functions and Mechanism Details

Auditing of Bulk Operations [page 108]

Auditing of Bundle and Mass Operations [page 108]

4.23.1.4.1 Auditing of Bulk Operations

SAP CC gives the possibility to audit bulk operations as a single operation, using a unique audit recording in the audited user operations. All the configuration data modified by this bulk operation is audited and refers to the same audited operation. For example, you can audit bulk operations such as rerating in bulk or subscription modification in bulk.

Note that the Web Services technical interface provides two particular modes for bulk processing: the “bundle” and “mass” modes. Both modes of user operations group multiple single operations for processing, and the associated auditing mechanism is different. Refer afterwards for details about such processing.

4.23.1.4.2 Auditing of Bundle and Mass Operations

When a bundle or a mass operation is audited, each single operation is audited and the corresponding audit data recordings is stored in the Core Database. There is no recording that relates to the bundle or mass operation itself.

> ⓘ Note
>
> When a bundle operation is audited, the failure of the auditing of a successful single operation leads to the cancellation of this single operation but also to the cancellation of the bundle operation including all its single user operations.

4.23.1.5 Feature Implementation

The Master Data and User Operation Auditing feature can lead to the creation of large quantities of data stored in the back-end database that can significantly impact the performance and storage capacity of the whole SAP CC Core Server system.

As an IT consultant, you translate business needs into requirements and determine if these technical and business requirements involve this feature. You consider required security, audit and control level, database storage and performance. You may re-consider the sizing of the Core Database.

For further information about the system configuration and important recommendations, refer to the SAP CC 2023 Administration and Operation Guide and the SAP CC 2023 System Parameter Reference documentation, particularly the following system parameters:

Technical Feature	Function Enablement	Audit Domains
Master Data Auditing		
Recording of Object Change Logs	Always enabled	
Recording of Object Snapshots	AUDIT_OBJECT_ACTIVATION	AUDIT_OBJECT_DOMAIN
User Operation Auditing		
Recording of User Operations	AUDIT_ACTIVATION	AUDIT_DOMAIN

> **Note**
>
> SAP recommends that you perform purge operations manually and regularly in order to optimally maintain and run your SAP CC landscape. For further information about these technical operations, refer to the SAP CC 2023 Administration Guide and Admin+ documentations.

4.23.2 Product Usage Measurement

The Product Usage Measurement feature gives the possibility to audit the product usage of SAP Convergent Charging implemented in your system landscape. The SAP product usage includes the measurements of all your productive Core Server systems.

SAP Convergent Charging is part of different SAP System Measurement programs. You use these programs to verify your system usage and to plan some license extension.

The following table contains the principle measurements and statistics:

Area	Product Usage Measure
Business Operations	
Accounting Operations (Convergent Charging)	The volume of transactional data charged by SAP CC (outp-out data items): • Total number of prepaid account operations generated by the system • Total number of postpaid account operations generated by the system
Business Configuration	

Area	Product Usage Measure
Configured Master Data (in High Volume)	The volume of configuration data managed by the SAP CC system: • Total number of subscriber accounts available in the system

The SAP CC Core Server system measures automatically this product usage information when it charges the end customers for their service usages and when it configures the subscriber accounts in customer master data.

SAP Convergent Charging delivers 3 technical features to manage the audit and control of your business solution:

- Usage Metric Recording and Reporting
- GLAS[24] File Reporting
- Customer Usage Measurement in SAP Solution Manager

Product Usage Metrics [page 110]

GLAS Files [page 111]

Customer Usage Measurement [page 112]

4.23.2.1 Product Usage Metrics

SAP Convergent Charging provides a technical feature that gives the possibility to audit the product usage of the SAP CC software product and systems implemented in your system landscape, which represents the base of all the other product measurement features.

The Core Server system daily records the following usage metrics:

- Daily number of subscriber accounts in the system (creation, deletion)
- Daily number of charged items or charged transactions (accounting operations) processed by the system
- Daily number of prepaid transactions (accounting operations) processed by the system in a prepaid payment environement
- Daily number of postpaid transactions (accounting operations) processed by the system in a postpaid payment environement

This technical feature includes the following functions:

- In the Core Server system, the updater instance collects and consolidates the usage metrics daily
- SAP CC stores an audit data recording into the Core Database
- The Core Tool and the Cockpit user interfaces give the possibility to view and report this product usage information

Implementation: Configuration [page 111]

More Information [page 111]

[24] SAP Global License Auditing Service

4.23.2.1.1 Implementation: Configuration

The implementation represents a basic system configuration. For further information about the internal scheduler function and the METRIC_RECORDING_SCHEDULER_ENABLED system parameter, refer to the SAP CC 2023 Administration and Operation Guide documentation.

4.23.2.1.2 More Information

For further information about the procedure to view metrics, refer to the Cockpit or to the Core Tool help documentation. Refer to the SAP CC 2023 Administration Guide documentation for user assistance about the management and auditing of an SAP CC system.

4.23.2.2 GLAS Files

SAP Convergent Charging supports the SAP GLAS[25] technology to provide the SAP Global License Auditing Services (GLAS) team with license auditing reports as XML files. When required, you can report product usage information associated to an SAP CC system manually.

The Cockpit and the Core Tool user interfaces give the possibility for IT administrators to create a GLAS file that is taken into account by the SAP Global License Auditing Services team.

For a year, this file contains product usage statistics and event dates such as:

- Peak number of prepaid transactions per day
- Peak number of postpaid transactions per day
- Peak number of transactions per day
- Peak number of subscriber accounts available in master data

More Information [page 111]

4.23.2.2.1 More Information

For further information about the procedure to generate a license auditing file, refer to the Cockpit or to the Core Tool online help documentation. Refer to the SAP CC 2023 Administration and Operation Guide documentation for user assistance about the management and auditing of an SAP CC system.

[25] SAP Global License Auditing Service

4.23.2.3 Customer Usage Measurement

SAP Convergent Charging provides SAP Solution Manager with information about product usage of the system landscape. In the SAP CC Core Server system, the updater instance communicates the usage measurement of the installed SAP CC software product to the requester SAP Diagnostics Agent (SAP SMD Agent). The updater instance replies product usage information and statistics based on the usage metrics recorded in the Core Database:

SAP Customer Usage Measure	Technical Reference
Total number of prepaid account operations processed by the system	ISCC_PREPAID_CHARGED_ITEM
Total number of postpaid account operations processed by the system	ISCC_POSTPAID_CHARGED_ITEM
Total number of subscriber accounts in the system	ISCC_SUBSCRIBER_ACCOUNT

> **Note**
>
> - The Customer Usage Measurement feature is not available if HTTP communications with the updater instances are secured
> - This technical feature requires that the recording of product usage metrics is enabled in SAP CC
> - Refer to the product documentation and user assistance of SAP Solution Manager for more information about the available and necessary technical operations

Implementation: Configuration [page 112]

4.23.2.3.1 Implementation: Configuration

The implementation represents a basic system configuration in both SAP CC and SAP Solution Manager. For further information about the related configuration, refer to the SAP CC 2023 Administration and Operation Guide documentation.

4.24 Data Purging

As described above, SAP Convergent Charging implements a high volume management feature which gives the possibility to store large quantities of data relating to a running SAP CC system.

To ensure the global performance of the system and avoid latencies due to these large quantities of data, some technical mechanisms have been implemented to give the possibility to remove obsolete and/or useless data. These mechanisms concern the following data stored in the back-end databases:

- Audit data recordings, which relate to the auditing features

- Idempotency data, which concern the execution of Web Services operations
- Rerating sessions data, which concern BART rerating sessions which did not closed properly
- Allowances data, which concern the expired allowances which have exceeded a given retention period
- Change lists data, which concern the change lists successfully transported to a remote SAP CC system

Allowances Purge [page 113]

Change Lists Purge [page 114]

4.24.1 Allowances Purge

To reduce the memory footprint of the Allowances Management feature, SAP CC gives the possibility to purge data related to expired allowances, which means allowances whose validity end date (shifted by the retention period) is anterior or equals to the date of the purge operation. Please note that for business purposes, it is possible to configure a retention period during which expired allowances are excluded from the scope of purge operations.


This purge mechanism can be executed:

- Automatically using a dedicated scheduler
- Manually using a dedicated command of the Admin+ user interface

For further information about the execution of this purge mechanism, refer to the SAP CC 2023 Administration and Operation Guide and Admin+ documentations.

Example

Considering the following A1, A2 and A3 allowances, and a retention period RP:

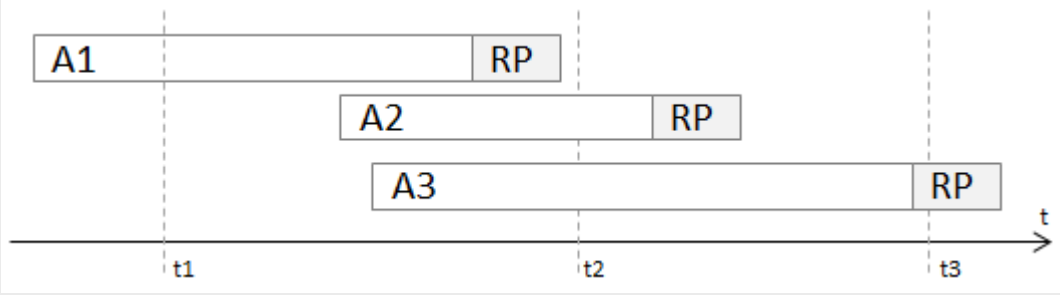

At t1 time, the purge operation cannot take any allowance into account. At t2 time, the A1 allowance is expired and can thus be purged. At t3 time, the A1 and A2 allowances are expired and can thus be purged, but not the A3 allowance because of the retention period which is not ended.

→ Recommendation

Purge operations are executed by the Rater instances. It is thus highly recommended to execute these operations when the system is less solicited, in order to limit the impact on the performance of the charging operations. The following 2 parameters are dedicated to purge operations and give the possibility to control the raters' solicitation:

- `ALLOWANCES_PURGE_RETENTION_PERIOD`, which corresponds to the number of days until which allowances whose validity end date is exceeded are kept into the back-end database and cannot be

deleted by allowances purge operations. The longer this retention period is, the more allowances are concerned by purge operations, and thus the more the raters are solicited

- `ALLOWANCES_PURGE_THREAD_COUNT`, which gives the possibility to specify the number of threads that the raters can use when performing allowances purge operations

For further information about these parameters, refer to the SAP CC 2023 System Parameter Reference documentation.

⚠ Caution

It is not possible to undo a purge operation related to expired allowances.

4.24.2 Change Lists Purge

To reduce the memory footprint of the Catalog Transport feature, SAP CC gives the possibility to purge data related to transported change lists, which means change lists whose associated transport requests have an "executed" status. This purge mechanism can be manually executed using the dedicated `purge_change_lists` command of the Admin+ user interface.

For further information about the execution of this purge mechanism, refer to the Admin+ documentation.

4.25 Enhanced Logging and Tracing Framework

Logging and tracing are integral features of SAP Convergent Charging for extended supportability. Logging and tracing is essential to analyze problems inside or between systems and applications. Every SAP CC system or graphical user interface records event information or error in:

- Log messages, used to permanently record the events and status of a system in order to be able to determine corrective or preventive actions by IT administrators and operation teams
- Trace messages, used to analyze a given system in detail from a support specialist standpoint (as an exceptional procedure for troubleshooting or debugging purposes)

To facilitate information requirements for different levels of troubleshooting, log messages are recorded by categories and trace messages by technical component locations and tracing domains.

You can define the levels of these generated logs and traces using thresholds based on the severity levels of these messages. It is also possible to configure several destinations of these records in order to view and analyze them or to send them to a particular monitoring system such as SAP Solution Manager. The following table summarizes these default settings:

Data	Default Destination	Console	Severity Threshold	File Rotation
Logs	Rotating files: Fileset #1	Disabled for logs	INFO	Enabled

Data	Default Destination	Console	Severity Threshold	File Rotation
Traces	Rotating files: Fileset #2	Disabled for traces	ERROR	Enabled

> **Note**
>
> - By default, the logging and tracing functions are disabled in the graphical user interfaces of SAP CC.
> - The Cockpit application deployed on a Tomcat Server only generates trace messages.

For further configuration information, refer to the SAP CC 2023 System Parameter Reference documentation and to the SAP CC 2023 Administration and Operation Guide documentation.

Logging [page 115]

Tracing [page 119]

Output Formats [page 124]

Output Destinations [page 127]

Configuration [page 127]

SAP Passport Handling [page 128]

4.25.1 Logging

Logging is a process which consists in creating and storing permanent records related to events, which can be reviewed, printed, and analyzed by administrators. Each log is unique and identified by a message identifier dedicated to the SAP CC software (see “IS-CC” component). A complete reference of log messages details the logs, explains the possible reasons, and provides possible troubleshooting actions for an IT administrator and the operation team. The following table summarizes these messages:

Typical Log	Description	Action	Log Severity
Error messages	An error log message is generated when the processing of a function cannot proceed and a corrective action thus needs to be taken by an administrator. The log describes the problem, the possible impact and suggests resolutions actions.	Corrective	• Fatal • Error

Typical Log	Description	Action	Log Severity
Event notifications	If there are occasions in the software or hardware components, which carry probably important information for the addresses (administrators, support specialists), but which do not need immediate (or possibly none at all) corrective action, this is called "event notification". The log describes the issue, the possible impact and suggests resolutions actions.	Preventive	• Warning • Info
Status recording	An informational log is generated to describe the status of the system, its subcomponents and the processing functions: • Startup and shutdown of software component or system • Information about the progress of an operation request, a function or a process	N/A	• Info
Context information	A second log is generated in conjunction with another log message to provide additional information.	N/A	• Info

Log records provide the following common information:

- A short descriptive message
- A timestamp of the event
- The source of the record
- The log controller
- A severity, specifying the importance of the record
- The host, system and instance names
- The server process

Log Severities, Thresholds, and Filtering [page 117]

Categories [page 118]

4.25.1.1 Log Severities, Thresholds, and Filtering

An important part of any log message is its own severity. It denotes the level of importance or relevance of a certain message. Logs can be restricted to certain severity levels, that is, only log event of a defined severity is generated and collected. The increasing order of the severity levels are:

Log Severity	Description	Follow-Up Activity and Troubleshooting	Examples
Info (lowest severity)	Informational text, mostly to record an event or a status change of the SAP Convergent Charging system or of a processing function. It must help to understand the normal operation or can provide further information for later reviews, audits or investigations.	No follow-up activity is needed.	• Event notifications • Status recording • Context information
Warning	The SAP CC system or a subcomponent can recover from anormaly, and fulfill the desired task, but needs later follow-up activity by a system administrator or an SAP CC administrator to avoid erroneous terminations in the future.	Follow-up activity to take into account the anomaly and to determine the appropriate timeframe to perform preventive actions.	• Event notifications
Error	The SAP Convergent Charging system or a subcomponent can recover from error, but cannot complete the desired task due to the error. The SAP system or the software application is still usable, but corrective actions need to be performed.	**Immediate** follow-up activity to determine the resolution and the corrective actions needed to be performed to avoid another erroneous termination in the future.	• Error messages
Fatal (highest severity	The SAP Convergent Charging system or a subcomponent cannot recover from error, and the severe situation causes fatal termination. The SAP system or the software application is not usable anymore and cannot be started without corrective actions by experts.	**Immediate** follow-up activity to analyze the logs and traces in order to determine further investigations before being able to identify the correction actions to be performed.	• Error messages

Two log severity thresholds define this filtering, depending on two log categories (application or system). The increasing order of the severity threshold levels are:

Log Severity Threshold	Description	Follow-Up Activity and Troubleshooting	Generated Logs for This Threshold
Info **(default and recommended)**	The SAP CC Core Server system generates all the possible log messages for the IT administrators or IT consultants. It is the highest possible threshold.	This log severity threshold is recommended for a productive SAP CC system in your system landscape. It enables all the technical operations with your system: log monitoring, error troubleshooting, root cause analysis.	• Info • Warning • Error • Fatal
Warning	The SAP CC system generates only the log messages associated to warnings and errors (including fatal).	This log severity threshold is not recommended as a lot of valuable logs are not recorded (event notification, status recording, context information).	• Warning • Error • Fatal
Error	The SAP CC system generates only the log messages associated to errors (including fatal).	This log severity threshold is not recommended.	• Error • Fatal
Fatal	The SAP CC system generates only the log messages associated to fatal errors.	This log severity threshold is not recommended.	• Fatal

> **Note**
>
> The severity level threshold can be either modified immediately during runtime , or deferred after a restart of the concerned instances. For further information, refer to the “Modifying the logging and tracing policy” procedure available in the SAP CC 2023 Administration Guide documentation.

4.25.1.2 Categories

SAP Convergent Charging (SAP CC) defines the following categories of logs to ease troubleshooting operations and identify the audience:

Log Category	Description	Audience	Subcategory
Applications	This category contains messages related to application operation tasks	Application administrator	• Archiving • Backup • Configuration • Failover • Infrastructure • Resources • Security
System	This category contains messages related to system operation tasks.	SAP CC system administrator	• System changes • System configuration • System database • Enterprise services • Network • Security • Server • User interface

The textual pattern "/Category/Subcategory" forms the **source name**. For example, `/System/Security` or `/Applications/Security`.

> ⓘ Note
>
> You can configure SAP CC to split the logs between two different destinations, one for the application administrators and another one for the system administrators.

4.25.2 Tracing

Tracing is a process which consists in writing advanced or internal information about an operation into an output file. Trace records provide the following information dedicated to support specialists:

- A detailed sequence of statements which describe the events of an operation as they are executed by an instance in the SAP CC system
- Diagnosing of an abnormal condition

> → Remember
>
> The trace generation impacts the global performances of the SAP CC systems and may lead to business errors (charging operations not replied on time, peaks of latencies and response times, throughput decrease).

As trace messages are used by support specialists for understanding the program execution path and the internal status of the application, the following types of trace messages can be distinguished:

Typical Trace	Description	Action	Trace Severity
Program flow information	Information about which part (subroutine/method) of the program is executed and what control flow action is performed (method entered or exited, normally or via exception)	Advanced troubleshooting: • Problem determination • Problem location	Path
Program context information	• Information about the semantically execution step • Important return codes of calls (like accesses to external resources, resource bundles, processing engines, or libraries)	Advanced troubleshooting: • Problem determination • Problem location	Info
Program context information related to an error	• Results of condition checks (assertions). If there are critical conditions which need to be satisfied in specific places of the code (otherwise the processing has to be terminated), a trace message describing the failed condition must be issued. • Technical information in application termination conditions. Normally, as part of the error handling, an exception is created. A notification on this event is written as a log message. If it is necessary to write additional technical context information (like variable values, etc.), this is written as a trace with the ERROR severity.	Advanced troubleshooting: • Problem determination • Problem location	Error

Trace Severities, Threshold, and Filtering [page 121]

Tracing Domains [page 123]

Performance Traces [page 123]

Targeted Tracing [page 124]

4.25.2.1 Trace Severities, Threshold, and Filtering

An important part of any trace message is its severity. It denotes the level of importance or relevance of a certain message. Traces can be restricted to certain severity levels, that is, only data of a defined severity is generated and collected. A severity level threshold defines this restriction. The increasing order of the severity levels is:

Trace Severity	Description	Audience
DEBUG (lowest severity)	Information for debugging purpose only valuable for support specialist to analyze the internal status of a program that composes the SAP system. **This trace severity is reserved for internal use only and should not be used for production landscapes.**	Support specialist
PATH	Information for tracing the execution flow inside the system or a subcomponent (entering and leaving methods, looping and branching operations) to understand the processing. This mode is very important for tracing operations when troubleshooting an SAP system.	Support specialist (level 3)
INFO	Extra information for announcing what has been performed by an SAP system or a subcomponent to better understand and trace the business logic, e.g. business document numbers, status changes, and so on.	Support specialist
WARNING	The application can recover from an anomaly and fulfill the required task, but needs attention from a developer or operator.	Support specialist
ERROR	Uncorrectable error conditions in program execution or technical context information. The SAP system can recover from an error, but it cannot fulfill the required task due to this error. The SAP system may handle an exception and provide related information.	Administrator or Support specialist
FATAL (highest severity)	The application cannot recover from an error, and the situation causes fatal termination.	Administrator or Support specialist

A trace severity threshold defines this filtering. The increasing order of the severity threshold levels are:

Trace Severity Threshold	Description	Scope	Generated Traces for This Threshold
DEBUG	SAP CC generates all the possible trace messages for the support specialist of SAP lab experts. It is the highest threshold level.	This highest severity threshold for debugging purpose by SAP labs, with extensive and low level information	• Debug • Path • Info • Warning • Error • Fatal
PATH	The SAP CC system generates all the trace messages, except the debug traces that are dedicated to SAP labs or L3 support specialists.	For tracing the execution flow in the system (or Java Virtual Machine environment), e.g. used in the context of entering and leaving a method, looping, and branching operations	• Path • Info • Warning • Error • Fatal
INFO	The SAP CC system generates: • Trace messages associated to warnings and errors (incl. fatal) • Informational text, mostly for echoing what has been performed		• Info • Warning • Error • Fatal
WARNING	The SAP CC system generates only the trace messages associated to warnings and errors (incl. fatal).	This severity threshold is interesting for a test, quality assurance, or pre-production SAP CC system during the implementation phase of the integration project or during the operation phase. SAP CC application can recover from anomaly, and fulfill the desired task, but need attention from developer/IT integrator/IT administrator/operations team/support specialist.	• Warning • Error • Fatal
ERROR **(default and recommended)**	The SAP CC system generates only the trace messages associated to errors (incl. fatal). It is the default and recommended threshold in a productive SAP CC system in your system landscape.	This trace severity threshold is recommended for a productive SAP CC system.	• Error • Fatal

Trace Severity Threshold	Description	Scope	Generated Traces for This Threshold
FATAL	The SAP CCsystem generates only the trace messages associated to fatal errors. SAP CC application cannot recover from error, and the severe situation causes fatal termination.	This trace severity threshold is not recommended. The SAP CC system generates only fatal error traces.	• Fatal

> **Note**
>
> The severity level threshold can be either modified immediately during runtime or deferred after a restart of the concerned instances. For further information, refer to the "Modifying the logging and tracing policy" procedure available in the SAP CC 2023 Administration Guide documentation.

4.25.2.2 Tracing Domains

For support specialists, SAP Convergent Charging defines some tracing domains which can be used to filter or extend the recorded trace messages.

For further information and recommendation about these domains, refer to the description of the `LS_TRC_DOMAIN` parameter available in the SAP CC 2023 System Parameter Reference documentation.

> **Example**
>
> You might need that your SAP CC Core Server system (or a given SAP CC instance) generates additional trace messages belonging to the SQL[26] or JCO[27] tracing domains.

4.25.2.3 Performance Traces

SAP Convergent Charging can generate performance traces to facilitate the troubleshooting of isolated performance issues. These performance traces represent specific trace messages that are recorded in the standard trace files of the SAP CC Core Server system. Collected information includes the execution path and processing time relating to a particular process step.

These trace messages:

- Belong to the PERF tracing domain
- Provide your SAP Support Team with new tracing tools that can be used to troubleshoot performance issues relating to isolated symptoms. For further information, refer to the SAP CC 2023 Administration Guide documentation

[26] Structured Query Language
[27] Java Connector

4.25.2.4 Targeted Tracing

The Core Server system can activate and adjust the log and trace generation, automatically and temporarily. This targeted tracing only concerns the log and trace events relating to the processing of a particular operation request including all the subsequent activities.

By default, each instance of the Core Server system manages the following local elevations of severity thresholds:

- The log severity thresholds increase to INFO that is the default and highest level (recommended in a productive system)
- The trace severity threshold increases to WARNING. Depending on the configuration, it can increase to INFO, PATH, or DEBUG (highest level)

This feature is supported by the following operations:

Technical Interface	Availability	Description	Use
Web Services	All operations	SAP CC receives a custom SAP Passport from an interfaced system. The included trace flags configure the behavior of SAP CC (threshold levels, tracing domains).	End-to-end or process tracing
Message TCP and Web Services	• Immediate charging • Blank charging • Session-based charging	During a tracing session, SAP CC equips a selected charging operation with a predefined passport.	Process tracing

Targeted tracing provides your SAP Support Team with new tracing tools that can be used to troubleshoot performance issues relating to isolated symptoms. For further information, refer to the SAP CC 2023 Administration and Operation Guide documentation, or to the SAP Passport Handling section afterwards.

> → Remember
>
> The targeted tracing triggers the trace generation. This may thus impact the global performances of your SAP CC landscape and may lead to business errors (timeouts during charging operations, peaks of latencies and response times, throughput decrease, and so on). Such business errors relate to the operations in the scope of the active targeted tracing but also to all other business operations in progress.

4.25.3 Output Formats

Each output destination uses a format for both logs and traces:

- List (default format for the logs of SAP CC)
- Trace
- XML
- Highdeal (for compatibility reasons)

> **Note**
>
> In SAP CC 2023, you cannot change the format of the logs of the BART Server system.

List Format [page 125]

Trace Format [page 125]

XML Format [page 126]

4.25.3.1 List Format

The *list* **format** (aka SAP List) is a standard human readable format which can be parsed and which is used by SAP Log Viewer. The values of each element are written into files using a hash separator (#). SAP CC does not fill in each value and several hashes may be grouped in a record.

> **Example**
>
> In the system, a dispatcher instance records the following log message in the `dispatcher#1_ldf1.0.log` file when starting:
>
> ```
> #2.0#2013 02 20 08:55:48:015#+0100#Info#/Applications/
> Common#com.sap.SCC.core_server.000000#IS-
> CC##C0000A48C82A0000000000002AF6A882####<system>#######Thread[main,5,main]#Pla
> in##Starting an instance for SAP Convergent Charging 4.0 (Technical Version
> Number: 4.5.0.0)#
> …
> #2.0#2013 02 20 08:55:56:928#+0100#Info#/Applications/
> Common#com.sap.SCC.core_server.000026#IS-
> CC##C0000A48C82A00000000000A2AF6A882####<system>#######Thread[main,5,main]#Pla
> in##Master Dispatcher Internal Service started and available at the address:
> 10.68.24.42:2100#
> ```
>
> This message relates to the `com.sap.SCC.core_server.000000` unique message identifier. See com.sap.SCC.core_server.000000.
>
> For further information about this message, refer to the SAP CC 2023 Log Message Reference and Error Troubleshooting documentation.

4.25.3.2 Trace Format

The *trace* **format** is a human readable text format with a simplified structure suitable for troubleshooting operations:

```
<Timestamp in a readable format> - <Location on behalf of which the message has
been created> [<Thread that has emitted the message>] - <Severity of the message> -
[Log code in CC 3.0] - <Message short text>
```

The content of such messages is a selection of the main information items which are relevant for troubleshooting operations.

→ Tip

You can use the trace format for the recorded logs.

Example

Example of a log message:

In the system, a dispatcher instance records the following log message in the `dispatcher#1_ldf1.0.log` file:

```
2013-02-20 08:55:48.015 - [10.68.24.42]dispatcher#1 - INFORM -
[LAUNCHER_STARTING] - Starting an instance for SAP Convergent Charging 4.0
(Technical Version Number: 4.5.0.0)
```

This message relates to the `com.sap.SCC.core_server.000000` unique message identifier. For further information about this message, refer to the SAP CC 2023 Log Message Reference and Error Troubleshooting documentation.

Example

Example of a trace message:

In the system, an updater records the following trace message in the `updater#1_LDF2.0.log` file:

```
Mar 2, 2013 12:03:30 AM
com.highdeal.pnr.hci.server.SearchExportableItemTemplateOpImpl [Thread[http-
srv-3,5,main]]  Warning: Unable to search exportable item template: SAP CC
Server cannot connect to SAP CI system
```

Where:

- **Date/Time** is: Mar 2, 2013 12:03:30 AM
- **Path** is: com.highdeal.pnr.hci.server.SearchExportableItemTemplateOpImpl [Thread[http-srv-3,5,main]]
- **Severity** and **Message** are: Warning : Unable to search exportable item template: SAP CC Server cannot connect to SAP CI system

4.25.3.3 XML Format

This format is an XML-based format suitable for file transfer to be further processed in other applications.

Consult the SAP documentation about this *SAP XML* format. Note that the specifications of the XML elements depend on the type of message (log or trace). For example, the <source> XML element contains the "log category/subcategory" for a log message. It contains the for a trace message.

Example

Example of an XML-based log message:

```
<record>
```

```
    <id>C0000A48C82A00000000000000E90E23</id>
    <time>1361875299235</time>
    <source>/Applications/Common</source>
    <application></application>
    <location></location>
    <user>system</user>
    <session></session>
    <transaction></transaction>
    <dsr-component></dsr-component>
    <dsr-user></dsr-user>
    <dsr-transaction></dsr-transaction>
    <thread>Thread[main,5,main]</thread>
    <severity>Info</severity>
    <relatives>
        <relative></relative>
    </relatives>
    <msg-type>Java</msg-type>
    <msg-code>com.sap.SCC.core_server.000000</msg-code>
    <msg-clear>Starting an instance for {0} (Technical Version Number: {1})</
msg-clear>
    <args>
        <arg>SAP Convergent Charging 4.0</arg>
        <arg>4.5.0.0</arg>
        <arg>LAUNCHER_STARTING</arg>
    </args>
</record>
```

4.25.4 Output Destinations

SAP CC manages two main output destinations for logs and traces:

- The console, which can be used to print logs and traces
- Rotating files, which represent the default output destination
  SAP CC gives the possibility to define a logging policy where you can configure up to 5 output channels and define the content of each channel (number of files, maximum size, file naming and location, output format). Every channel is represented by a fileset, and a rotation occurs when the maximum file size is reached.

→ Tip

To facilitate the visualization, analysis, and persistency, the log messages and trace messages can be copied into third-party systems or services.

See Log Collecting and Forwarding

4.25.5 Configuration

The logging and tracing policy of SAP CC relies on multiple configuration parameters which give the possibility to adapt the logged content to specific and/or temporary needs.

Depending on your system or application, you configure the logging and tracing functions by setting up the:

- System parameters of the SAP CC system (Core Server)
- Configuration files (BART Server, Diameter Server, Import/Export Connector, Cockpit)
- Launch scripts

For further information about the customizing activities and configuration settings of SAP CC, refer to the SAP Convergent Charging product documentation and user assistance. Consult the technical guides. For example, see Logging and Tracing in the Configuring the Core Server System section.

> **Note**
>
> You can mix both logs and traces to the same destination for development landscapes to facilitate the troubleshooting operations (Core Server only).

4.25.6 SAP Passport Handling

SAP Convergent Charging supports the SAP Passport technology in order to provide your SAP Support Team with advanced tracing features and supportability tools that can be used for operations such as:

- End-to-end tracing
- Process tracing and business process tracing

The SAP Passport concept relies on a byte array structure which is included into the concerned requests and gives the possibility to:

- Improve and clarify the logged information
- Trace system activities in a distributed environment, in order to ease support and maintenance operations
- Determine the overall time and resource consumption, for statistical analysis purposes or performance optimization

> **Note**
>
> SAP CC does not handle the SAP Passport technology to support the Single Sign-On (SSO) concept. Consult the SAP CC 2023 Security Guide documentation for more information about SAP user administration and authentication.

Supported SAP Passports and Available Trace Flags [page 128]

SAP Passport and End-to-End Tracing [page 132]

SAP Passport and Business Process Tracing [page 133]

4.25.6.1 Supported SAP Passports and Available Trace Flags

SAP Passports are made up with different properties, whose values are encoded using a byte array structure. SAP CC supports both the 2 and 3 versions of the SAP Passports, which contain the following properties:

Property	Version 2	Version 3	Description
Eye catcher 1	■	■	Hard coded value used to determine the beginning of the passport
Version	■	■	Version of the SAP Passport. Versions 2 and 3 are supported by SAP CC.
Length	■	■	Length of the byte array structure
Trace flag	■	■	Trace flags represented as a byte, each bit of this byte being a trace flag that can trigger additional traces. SAP CC uses the trace flag to activate and adjust the targeted tracing, as described in the next table. Each trace flag causes additional trace output in the generated trace messages.
Initial system or component ID	■	■	System and component name. For a J2EE system DSR component, the format is: `<host><SID><clusterId>`. This field is generated by the system which initiates the request and is not be modified during the propagation of the SAP Passport
Initial service type	■	■	Integer value that corresponds to the type of the request (HTTP, RFC). This field is generated by the system which initiates the request and is not be modified during the propagation of the SAP Passport.
Initial user ID	■	■	User name. This field is generated by the system which initiates the request and should not be modified during the propagation of the SAP Passport.
Initial action	■	■	String representation of the executed action

Property	Version 2	Version 3	Description
Initial action type	■	■	Integer value which represents the type of the executed action. This is only relevant for HTTP actions and the possible types are: • Web container • Web service • EJB
Previous system or component ID	■	■	Name of the system (or component) where the request came from. The format is the same as the one used for the 'component name' property. The ID of the previous system (or previous component) is always set with a system or component's own ID before the passport is sent. This means that the direct predecessor can be identified when the passport is received.
Transaction ID/GUID	■	■	Unique identifier of the request
Connection ID		■	
Connection counter		■	
Eye catcher 2	■	■	Hard coded value used to determine the end of the passport

Note

The SAP Passport includes a trace flag property that defines the relevant trace flags. The SAP CC system uses this information to activate and adjust the targeted tracing. Customizing these trace flags enables you to configure the levels and categories of generated logs and traces.

The following table describes the behavior of SAP CC regarding value of the bit mask:

Bit	Trace Flag	Tracing Elevation
0	SQL Trace	Targeted domain: SQL When this bit is set, the traces with SQL domain are recorded by the SAP CC system.

Bit	Trace Flag	Tracing Elevation
1	Buffer Trace	Not used by SAP CC
2	Enqueue Trace	Not used by SAP CC
3	RFC Trace	Targeted domain: JCO[28]
4	Auth. Trace	Not used by SAP CC
5	C function Trace	Targeted domains: all the domains different from the tracing domains that are already associated to one of the following trace flag: SQL, JCO, DATA, PERF, HCI[29], and WS[30] When this bit is set, all the tracing domains that have no dedicated bit are recorded by the SAP CC system.
6	User Trace	Not used by SAP CC
7	ABAP Trace	Targeted domains: DATA
8	ABAP Condens. 1	Severity threshold elevation for traces: PATH If bit 9 is set, the threshold elevation for traces becomes DEBUG. If the trace severity threshold is higher before the targeted tracing, then it remains unchanged.
9	ABAP Condens. 2	Severity threshold elevation for traces: INFO If bit 8 is set, the threshold elevation for traces becomes DEBUG. If the trace severity threshold is higher before the targeted tracing, then it remains unchanged.
10	SAT	Targeted domains: PERF
11	WebService	Targeted domains: WS, WSBUS and HCI

Example

The following code represents an SAP Passport:

2A54482A0300E6890A43656E7472616C20546F6F6C2F4368617267652020202020202020202020202020000A61646D696E20202020202020202020202020202020202020202020202020202020202020202020202020202020

[28] Java Connector
[29] HTTP Communication Interface
[30] Web Services

20202020202020202020202020202020202020202020202020202020202020202020202020000320202020202020202020202020202020202020202020202020202020202020303030303031353243303634343332364133354341323545464136434535314231303000001BA4B4A05711C3B82FB4586015C2D6D7A40BBB3A04A8DF67D7012F06EB969AEF900000001000000E22A54482A

This SAP Passport can be decoded to retrieve the following properties:

Property	Value
Version	3
Length	
Trace flag	2697 Trace severity elevation to INFO for the logs and traces of the following domains: SQL, JCO, HCI, and WS
Initial system or component ID	Central Tool/Charge
Initial service type	10
Initial user ID	admin
Initial action	
Initial action type	3
Previous system or component ID	
Transaction ID/GUID	00000152C0644326A35CA25EFA6CE51B
Client number	100
Root context ID	BA4B4A05711C3B82FB4586015C2D6D7A
Connection ID	40BBB3A04A8DF67D7012F06EB969AEF9
Connection counter	1

4.25.6.2 SAP Passport and End-to-End Tracing

In a multi-system landscape, a request can be propagated to different systems. When such a situation occurs, it can be necessary to identify error or trace messages and associate them to a particular operation request that was taken into account by the different concerned systems.

To provide such an end-to-end tracing feature, SAP Convergent Charging handles SAP Passports via the Web Services technical interface. All the available service operations support an SAP Passport.

Depending on the trace flag information that is available in the received passport, the SAP CC system activates or adjusts both the log and trace recording automatically and temporarily. This targeted tracing only concerns the log and trace events that relate to the processing of the flagged request including all the subsequent activities. The end-to-end tracing can trigger the process tracing. This combination enables the support specialists to consider particular treatments in the SAP CC system but also in third-party systems (database, provisioning, CRM[31]).

The SAP CC system does not modify the received trace flags.

Each instance of the SAP CC system can perform the default and custom targeted tracing function:

Targeted Tracing	Log Severity Thresholds	Trace Severity Threshold	Generated Traces
Default	The log severity thresholds increase to INFO that is the default and highest level. This level is recommended in a productive system.	The trace severity threshold increases to WARNING locally, except the traces that have a tracing domain defined.	Depends on received custom SAP Passports
Configuration and Customizing	N/A	In your front-end systems or test system, you can configure the transmitted SAP Passport to increase the trace severity threshold locally to: • WARNING • INFO • PATH • DEBUG (highest level)	In your front-end systems or test system, you can configure the transmitted SAP Passport to generate the trace messages that relate to the following tracing domains: • SQL domain • JCo[32] domain • HCI[33] and WS[34] domains • PERF domain • DATA domain • All other domains defined in SAP CC

> **Note**
>
> - SAP CC manages the propagation of a passport between all the relevant instances of a SAP CC system
> - SAP CC does not manage the propogation of a passport to asynchronous and induced requests to external systems
> - For communications made upon the SOAP[35] over HTTP communication channel, the SAP Passports are included in the header of the HTTP messages, using a "SAP-PASSPORT" property. For further information about the communications channels, refer to the SAP CC 2023 Security Guide documentation and to the SAP CC 2023 Web Services Documentation (SOAP)
> - Consider the prerequisites and limitations of the targeted tracing function by referring to the notes about this function in the Enhanced Logging and Tracing Framework [page 114] section

4.25.6.3 SAP Passport and Business Process Tracing

If isolated irregularities occur during SAP CC operations, it might be necessary to identify the execution error or execution path available in trace messages, and associate them to a particular operation request leading to

31 Customer Relationship Management
32 Java Connector
33 HTTP Communication Interface
34 Web Services
35 Simple Object Access Protocol

a performance issue. This operation is associated to a provider contract (or a subscription) that contains the charging logic (pricing, allowance) and end-customer business data to analyze. To be complete, the analysis must concern the end-customer business data that is configured in the subscriber account associated to the contract.

To provide such a process tracing feature, SAP Convergent Charging can generate custom SAP Passports automatically and equip the next received charging operation request that relates to the selected subscriber account. The service operation can be executed using the Message TCP and the Web Services technical interfaces.

This function is supported by the following operations:

	Message TCP			Web Services
Service Operation	**Online Charging Service**	**Batch Charging Service**	**Stateless Rating Service**	**Charging Service**
Event-Based Charging				
Immediate charging	■	□	□	□
Single charging	□	■	□	■
Blank charging	■	■	□	■
Batch charging	□	○	□	○
Immediate rating	□	□	○	□
Session-Based Charging				
Start, stop, and update operations	■	□	□	□

■ Yes ○ No □ N/A

In Admin+, you can arm the targeted tracing function for the next incoming charging operation request that relates to a specified subscriber account. The SAP CC instance responsible for the specified subscriber account activates or adjusts the recording of both log and trace, automatically and temporarily. It generates all the trace messages belonging to the following tracing domains:

- DATA
- PERF (performance traces)

✤ Example

By default, the configured targeted tracing records the trace messages that belong to the DATA domain. You can capture the rating context information during a charging operation.

→ Remember

- This targeted tracing only concerns the log and trace events that relate to the processing of the flagged request including all the induced activities. The SAP Passport is active for the thread that processes the request until the request ends and is thus also used for other processing activities in the same thread, such as the other requests without any timeout configured in the stateful service client implemented in your mediation system or client application
- The recording of traces impacts the global performances of the SAP CC system and may lead to business errors (charging operations not replied on time, response time increase, throughput

decrease). These business errors relate both to the operations in the scope of the active targeted tracing but also to all other business operations in progress

- Consider the prerequisites and limitations of the targeted tracing function by referring to the notes about this function in the Enhanced Logging and Tracing Framework [page 114] section

4.26 Logging and Tracing Framework of Diameter Server

⚠ Caution

From SAP Convergent Charging SP 4, there is no further planned enhancements to the Diameter Server component. For further information, refer to SAP Note 2792189.

The Diameter Server uses the Java default logging framework associated to dedicated configuration parameters. The Diameter Server generates multiple rotating log files.

Output Format [page 135]

Configuration [page 136]

4.26.1 Output Format

The output format is a human readable text format with a simplified structure suitable for troubleshooting operations:

```
<Timestamp in a readable format> <Location on behalf of which the message has been created> <Thread that has emitted the message> <Severity of the message>: <Message short text>
```

The content of such messages is a selection of the main information items which are relevant for troubleshooting operations.

Example

The unique instance of a Diameter Server system records the following log messages:

```
23 mai 2013 14:29:50 com.highdeal.diameter.server.Launcher main
INFO: Starting SAP Convergent Charging 3.0 Diameter 4.4.11.0.
23 mai 2013 14:29:50 com.highdeal.diameter.server.Launcher main
INFO: SAP SE or an SAP affiliate company 1.6.0_43 platform on Windows 7 6.1
amd64.
23 mai 2013 14:29:51 com.highdeal.diameter.server.Launcher main
INFO: Charging stack started with host: <[10.31.104.59]> and port: <[2000]>.
23 mai 2013 14:29:52
com.traffix.openblox.core.utils.logging.SimpleLoggingHandler doLog
CONFIG:  Initiating Configuration from
D:\usr\sap\D31\CAD11\config\serverConfig.xml
23 mai 2013 14:29:52
com.traffix.openblox.core.utils.logging.SimpleLoggingHandler doLog
CONFIG: SETTING_ROOT_LOGGER_LEVEL INFO
```

```
23 mai 2013 14:29:52
com.traffix.openblox.core.utils.logging.SimpleLoggingHandler doLog
INFO: LOADING_STANDARD Ro 3GPP TS 32.299 V11.1.0
23 mai 2013 14:29:52 com.highdeal.diameter.server.Launcher main
INFO: SAP Convergent Charging 3.0 Diameter 4.4.11.0 started.
```

4.26.2 Configuration

For further information about the customizing activities and configuration settings related to the `logging.properties` file, refer to the SAP Convergent Charging [page 15] documentation.

4.27 User Management, Authentication, and Authorizations

Refer to the following sections of the SAP CC 2023 Security Guide:

- User Management and Authentication
- OAuth 2.0 Authentication Protocol
- SAML 2.0 Authentication Protocol and Single Sign-On (SSO) Environments
- Authorizations

4.27.1 User Session Management

In Desktop Applications [page 136]

In Web Application [page 137]

4.27.1.1 In Desktop Applications

For security reasons, SAP Convergent Charging provides a technical feature which enables you to monitor and control the use of the Core Tool and BART Tool user interfaces. This User Session Management feature gives the possibility to:

- Control the number of user sessions that can be opened in parallel on a given user interface for a given user
- Specify a maximum duration for interactions between the user interfaces and the servers they are connected to
- Specify a maximum duration for inactivity periods (which corresponds to periods where no interaction occurs between the user interfaces and the servers they are connected to)

- Display the list of opened user sessions, using the `search_user_session` command of Admin+
- Remotely terminate a given user session, using the `delete_user_session` command of Admin+

> **Note**
>
> - The User Session Management feature relies on a framework which can be implemented for a homemade user interface connected to the Core Server system
> - For further information about the configuration of this feature, refer to the SAP CC 2023 Administration and Operation Guide and SAP CC 2023 System Parameter Reference documentations
> - For further information about the commands available for listing and deleting user sessions, refer to the Working with Admin+ section of the SAP Convergent Charging User Interfaces documentation

4.27.1.1.1 User Session Lifecycle

Maintained by the Core Server, every user session:

- Starts when a human user logs on the Core Tool or the BART Tool user interfaces
- Is considered as active as long as the duration between two server/user interface interactions is shorter than the duration configured in the `USER_SESSION_VALIDITY_PERIOD` parameter
- Ends:
  - Automatically if the human user closes the user interface
  - Automatically if the user session remains inactive for a period which is longer than the configured validity period
  - Automatically when the communication with the server (that the user interface is connected to) fails, e.g. in case of updater failure or restart
  - Manually when the administrator remotely terminates it

> **Note**
>
> If a user session ends while a human user is still connected to the user interface, a notification is sent to the user to inform that a re-authentication is necessary, in order to start a new user session.

4.27.1.2 In Web Application

For security reasons, SAP Convergent Charging provides a technical feature which enables you to control the use of the Cockpit user interface. This User Session Management feature gives the possibility to:

- Lock user sessions manually or automatically after an inactive period. When this period is reached, the SAP user must log on again to continue
- End the working sessions automatically after an inactive period. All unsaved modifications are lost
- Alert power users about the session expiration and potential risks

Note

- The User Session Management feature for the Cockpit web application relies on another framework that is not the framework used for the desktop applications (Core Tool, BART Tool). As a consequence, you cannot monitor the use in Admin+
- For more information about the configuration of this feature, refer to the SAP CC 2023 Administration and Operation Guide documentation.
- For further information about the commands available for listing and deleting user sessions, refer to the Working with Admin+ section of the SAP Convergent Charging User Interfaces documentation

4.28 Dual Database

The Dual Database feature is a feature that only concerns:

- A business that implements the session-based execution mode for charging operations
- A business that handles a huge traffic, and that requires disaster and recovery (DR) capabilities
- A landscape that contains the Oracle RDBMS[36]

The Dual Database feature has been implemented to face a limitation regarding the amount of redo logs that are generated by SAP CC during session-based charging operations. Indeed, in case of a huge solicitation, SAP CC generates a lot of redo logs in the Core Database, that are taken into account by the Oracle Dataguard mechanism in charge of shipping and applying these data to standby databases located on remote locations and thus ensure disaster and recovery capabilities.

When this number of redo logs becomes too important, Oracle Dataguard cannot ship (and thus apply) these logs to the remote location, which prevents the disaster and recovery capabilities of SAP CC.

In addition, considering that:

- No network equipment is able to continue sessions in case of disaster, the shipping of data related to charging sessions becomes unnecessary
- It is not possible to configure Oracle databases to ship only a given a part of the generated redo logs

The Dual Database feature has been designed to split the data into the following two databases:

- The Core Database, that is the only database working with Oracle Dataguard
- The new Session Database, whose content is excluded from the scope of the DR capabilities of SAP CC

4.29 Table Rollover for Rating Sessions

As described in the description of the Dual Database [page 138] feature, the Session Database is an optional database that contains the different data related to the business objects handled by SAP CC during

[36] Relational Database Management System

the session-based charging operations. During such operations, different kind of events occur, each event impacting the database table that is used to store the different information related to the rating session.

Whatever the impact is (new record, update of an existing record, or record removal), the quantity of modifications performed on this database table may lead to its fragmentation, that decreases performances as time goes by.

To reduce this fragmentation, SAP Convergent Charging provides a rollover mechanism that gives the possibility to store the new created charging sessions among a set of tables instead of a single one. Enabling this rollover mechanism leads to the switching of the charging sessions data among up to 4 destination tables, according to a defined period of time. When this period is over, the destination table changes and the previously used destination starts to empty according to the end of the pending sessions that are associated to this destination table.

This mechanism relies on the following 2 system parameters, that you can configure to fit specific needs:

- RATING_SESSION_TABLE_ROLLOVER_COUNT, used to specify the number of rating session tables that can be used as destinations
- RATING_SESSION_TABLE_ROLLOVER_PERIOD, that defines the validity period (in days) of the table that is currently used as destination

For more information about the configuration/fine-tuning of this rollover mechanism, refer to the section Fine-Tuning the Table Rollover Policy in the SAP CC 2023 Administration and Operation Guide.

4.30 License Management

SAP Convergent Charging provides a License Management feature to support the following technical functions:

- Temporary SAP licenses
- Permanent SAP licenses
- SAP license auditing

Temporary SAP License [page 139]

Permanent SAP License [page 140]

SAP License Auditing [page 140]

4.30.1 Temporary SAP License

You must install a permanent SAP license. When you install your SAP Convergent Charging landscape, a temporary license is automatically installed.

4.30.2 Permanent SAP License

Before the temporary license expires, you must apply for a permanent license key from SAP. For further information, and according to your deployment scenarion, refer to the:

- Installing a Permanent License procedure available in the SAP CC 2023 Installation and Maintenance Guide documentation

For additional information about SAP license keys and how to obtain them, see https://support.sap.com/licensekey .

4.30.3 SAP License Auditing

SAP Convergent Charging provides some tools to facilitate the SAP license audit as an SAP System Measurement. The SAP CC system measurement is based on usage metrics that are recorded daily. Only the yearly peak values are incorporated in the licensing information.

SAP Global License Auditing Services supports all SAP customers in fulfilling their contractual duty to carry out system measurements.

Deployment Scenario	SAP Program Measurement	Measurement ID and Engine
Scenarios with SAP Solutions (S4/HANA, SAP Busines Suite)	Engine Measurement	Measurement ID: “0590” Engine:SAP Convergent Charging
Standalone scenario	Self-Declaration Product Measurement	

To create your Self-Declaration Product Measurement:

- For each productive Core Server system, your prepare some GLAS[37] reports with the Core Tool and Cockpit user interfaces
- You verify that the measured values are compliant with the system sizing and the estimated data growth and traffic load increase
- Ensure that you have adequate licensing for your installation and plan some extension
- When you are ready to share the auditing results, send the report file to your SAP license auditor or consider the self-declaration on SAP Support Portal

In this documentation, refer to the Product Usage Measurement [page 109] section in the System and Data Auditing [page 86] chapter for more information about the concepts about the product usage metrics, the administrative tools, and the GLAS file format. For additional information about SAP System Measurement, see https://support.sap.com/en/my-support/systems-installations/system-measurement/system-measurement-information.html.

[37] SAP Global License Auditing Service

5 Architecture

Synthetic Overview [page 141]

Servers, Databases, and Tools [page 145]

5.1 Synthetic Overview

The two following schemas provide a synthetic view of the SAP Convergent Charging architecture and its specialized SAP system landscape. The first schema only focuses on SAP CC, whereas the second schema includes the different interactions with other systems or applications such as:


- Customer management or provisioning systems (CRM, self-care)
- Metered data systems (mediation, SCP, soft switches) for pricing and charging operation requests and consumption events.
- Financial systems (legacy billing, invoicing, revenue recognition, ERPs, General Ledgers)
- Data warehouse systems
- Several integrated *SAP Solution* scenarios with variants are pre-interfaced and orchestrated.
  - SAP S/4HANA Cloud Public Edition (cloud systems) and its Convergent Invoicing component in case of an integrated *SAP Solution* scenario based on SAP Business Suite 4 SAP HANA Cloud Public Edition
  - SAP S/4HANA systems and its Convergent Invoicing component in case of an integrated *SAP Solution* scenario based on SAP Business Suite 4 SAP HANA
  - SAP CRM systems and SAP ERP systems with SAP Convergent Invoicing (in SAP ERP), in case of an integrated *SAP Solution* scenario based on SAP ERP
  - SAP CRM systems and SAP ERP/FI-CA systems with SAP Convergent Invoicing in case of an integrated *SAP Solution* scenario based on SAP Business Suite

  Refer to the integration guides.


SAP CC Architecture and Its SAP System Landscape

SAP Convergent Charging (SAP CC) is a multisystem and multihost SAP software product that uses multiple database systems.

As of SAP CC 2023 FPS 3, the following graph summarizes the deployed SAP CC systems (Core Server, Cockpit), their database systems, the deployed SAP CC web applications (Cockpit), and the other SAP CC user interfaces:

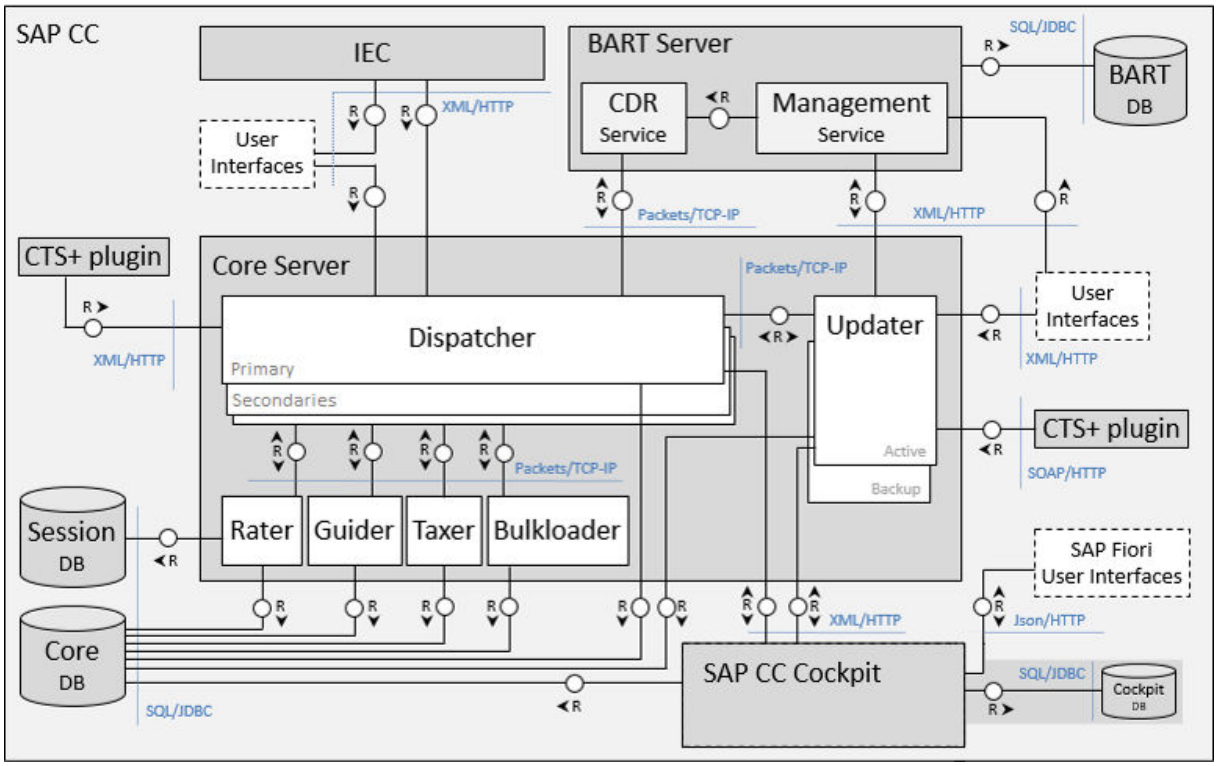

If your SAP CC system landscape includes a Java Web Server system such as Apache Tomcat Server that runs the SAP CC Cockpit webapp, the following schema shows these interactions:

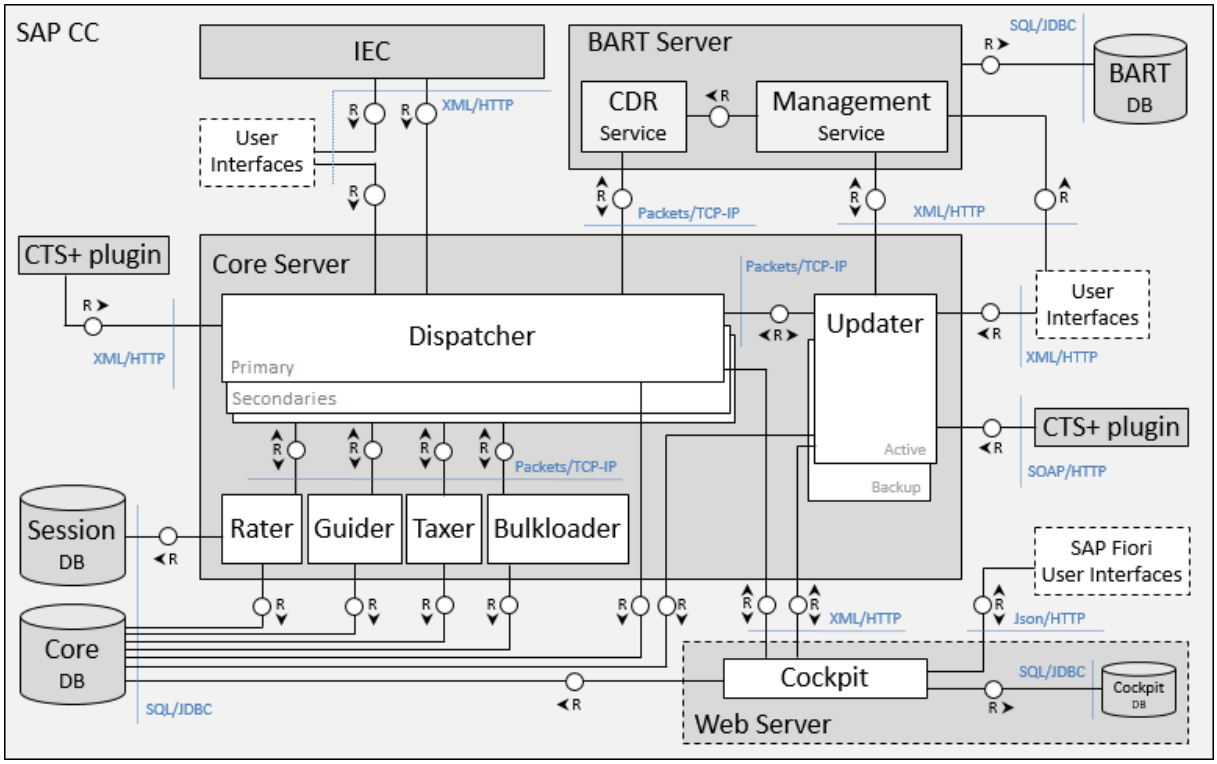


The graph displays the technical interfaces of SAP CC and corresponding communication channels.

> **Note**
>
> SAP CC BART Server is an optional component. SAP CC Cockpit is a required component as of release 2022.

SAP CC Architecture Including External Elements

The following graph shows an example of a typical SAP CC system landscape that includes the deployed SAP CC systems (Core Server, BART Server), typical SAP systems (S/HANA, ERP, CRM) for business operations, and SAP system for technical operations (SAP SMD, SAP SLD, SAP Solution Manager, and CA Introscope).

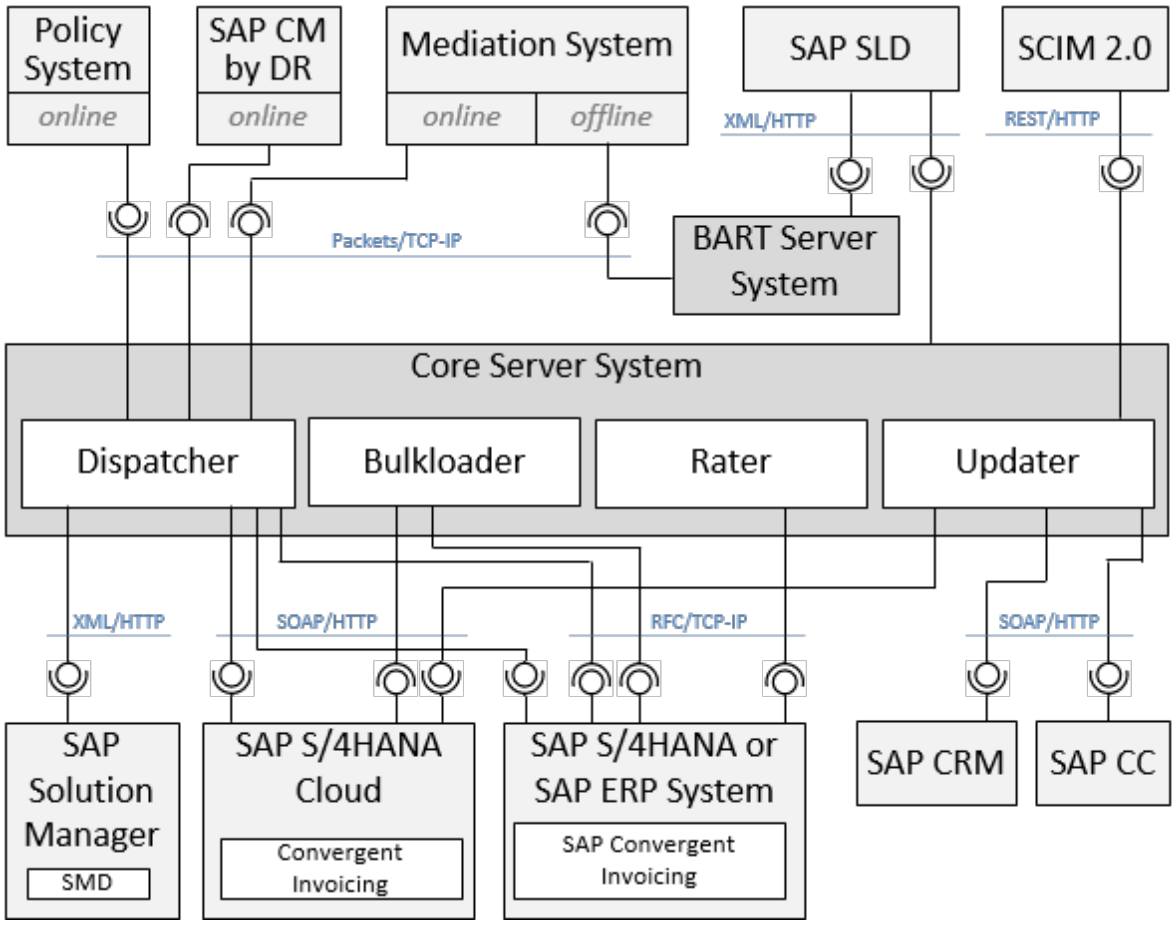

SAP CC Tools

SAP Convergent Charging contains elements and objects that can be administered and managed through user-oriented tools considered as client applications in the above schema. According to the needs, these tools can be:

- Console applications, mainly used for configuration and administration of the system and data

- Desktop applications, dedicated to business purposes and providing user-friendly graphical interfaces
- Web applications in a central and modern launchpad

The table below shows the list of provided tools, which are detailed in the documentation of the concerned components:

Tool	Core Server System	Cockpit System	BART Server System	Import/Export Connector
Console applications				
Setup Tool	■			
Config Tool	■			
Admin+	■			
HTTP Client	■			
BART+			■	
BART Setup Tool			■	
Desktop applications				
Core Tool	■			
BART Tool			■	
CAT Tool				■
Web applications				
Cockpit	■			
Analyze Item Files	■			
Display Contracts As of 2023 FPS 2	■			
Display Subscriber Accounts As of 2023 FPS 2	■			
Display System Status	■			
Display Usage Metrics	■			
Manage Allowance Plans	■			
Manage Chargeable Item Classes	■			
Manage Charged Item Classes	■			
Manage Mapping Tables	■			
Manage Mapping Table Classes	■			
Manage Permissions As of 2023 FPS 1	■			

Tool	Core Server System	Cockpit System	BART Server System	Import/Export Connector
Manage Pricing Functions As of 2023 FPS 0	■			
Manage Range Tables	■			
Manage Range Table Classes	■			
Manage Rate Plans	■			
Manage SAP CC System Parameters	■			
Manage User Accounts As of 2023 FPS 2	■			
Process a Chargeable Item	■			

5.2 Servers, Databases, and Tools

Core Server [page 145]

Cockpit System [page 161]

BART Server [page 162]

Diameter Server [page 165]

Import/Export Connector [page 171]

Databases [page 171]

5.2.1 Core Server

Made up with two functional modules (*Rating Core* and *Balance Management*), the Core Server system represents the rating engine of SAP Convergent Charging (SAP CC). This SAP system is in charge of:

- Defining the pricing, charging, and refilling algorithms and structures (grouped by pricing catalogs associated to a service provider and relevant for the pricing of marketable services or products)
- Dynamically computing prices which correspond to services' consumptions (taking into account the associated taxation requirements). It is also called rating.
- Determining the accounts to charge for the consumptions/usages according to some defined charging configurations

The Core Server system implements the following general processes:

- *Chargeable Items Charging*, which is used to:

    - Rate external and internal events
    - Charge subscriber accounts' balances which are related to prepaid accounts or postpaid accounts
- *Session-Based Charging*, which represents an execution mode of the Chargeable Items Charging process with additional features such as credit-control, credit reservation, reservation cancellation, reservation renewal, or aggregation
- *Prepaid Account Refilling*, which is used to refill balances related to prepaid accounts
- *Activation*, which gives the possibility to generate internal events when an external event is received
- *Product Modeling*, which is used to manage offers or charge plans and associated business objects
- *Order Management*, which is used to manage subscriptions, provider contracts and accesses
- *Tax Calculation*, which is used to compute real-time EU VAT and US Telco taxes

See: Processes and Functions [page 256]

The Core Server system is delivered with a set of user interface applications which give the possibility to:

- Administer its behavior (from installation to configuration and operating steps)
- Manage the handled master data

The Core Server system provides you with business/technical APIs and different technical interfaces to:

- Interface your system or application with this SAP CC system
- Implement your business or technical requirements

Main technical interfaces are:

- SOAP Web Services (WS)
- Message TCP/IP
- HCI (HTTP Communication Interface)

Instances [page 146]

Tools [page 153]

Synthesis [page 158]


5.2.1.1 Instances

The architecture of the Core Server system [page 145] of SAP Convergent Charging relies on a modular architecture that is built upon a set of **specialized instances** acting as business services. This multi-instance and multihost SAP system is composed of the following types of instances:

- Dispatcher instances [page 148] are used to distribute the clients' requests to the adequate instance in the Core Server system.
- Guider instances [page 149] are dedicated to guiding operation requests for convergent charging services.
- Rater instances [page 150] perform the charging, recharging, and refilling operations (and compute VAT taxes).
- (Data-) Updater instances [page 151] are used to manage master data and business objects and provide up-to-date information to other instances.
- Taxer instances [page 152] are dedicated to real-time calculation of United States Telco taxes.
- Bulkloader instances [page 150] are used to bulkload high volume of charged items, refill record, and other output items from data files (aka item files) into SAP Convergent Invoicing in its SAP system.

Once deployed in an SAP system landscape, these running instances form the Core Server system. Deployment and sizing rules define the distribution of instances for optimal processing, performance, failover, and high-availability setups.

> **Note**
>
> The deployed instances of the Core Server system communicate together through the Packets over TCP/IP[38] communication channel, which used to transport proprietary messages.
>
> For further information about this communication channel, refer to the SAP CC 2023 Security Guide documentation.

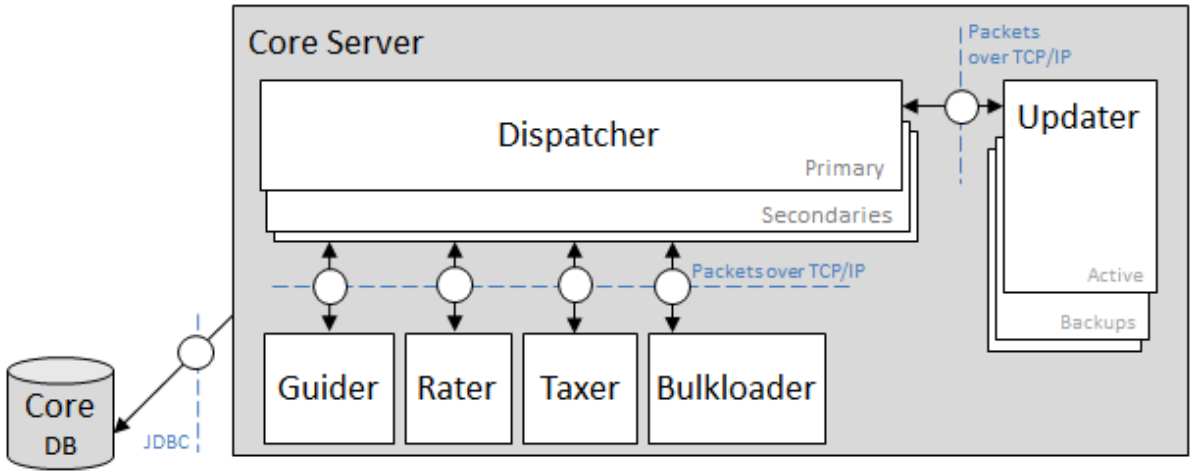

Deployment Rules

- **Dispatcher** and **guider** instances should be co-located on the same physical host. All deployed dispatcher instances are running, but one of them is considered as the *primary dispatcher*. The other dispatchers are considered as secondary instances.
- **Rater** instances should be deployed on dedicated physical hosts. The more rater instances are installed, the less number of partitions are assigned to each rater, which reduces impacts in case of rater failure. As a consequence, a higher number of small-size raters is preferable to a smaller number of large-size rater instances.
- **Updater** instances can be deployed on dedicated physical hosts, or co-located on the same physical host as another instance. All deployed updaters are started, but only one of them is nominated by the primary dispatcher as active (ACTIVE state). The other updaters are considered as backups (WAITING state).
- **Bulkloader** instances can be deployed on dedicated physical hosts, or co-located on the same physical host as the rater they are working with (due to constraints related to shared file system).

[38] Transmission Control Protocol/Internet Protocol

5.2.1.1.1 Dispatcher

The dispatcher is a **public** instance in charge of distributing all incoming requests to the other adequate instances, and thus represents the central point of the Core Server system. This instance can:

- Communicate with other instances using the Packets over TCP/IP[39] communication channel
- Communicate with the SAP CTS plugin using the XML[40] over HTTP[41] communication channel
- Be contacted by client applications (such as the Core Tool user interface) using the XML over HTTP, SOAP[42] over HTTP or Packets over TCP/IP communication channels

As dispatcher instances have been implemented to handle and route all incoming requests, they are the only instances who know the up-to-date content of the dynamic instance map and thus the list of running instances. As a consequence, all the other starting instances have to contact any available dispatcher. If the contacted dispatcher instance is a secondary dispatcher, the request is automatically rerouted to the primary one which is in charge of updating and reorganizing this dynamic instance map.

Primary/Secondary dispatchers

As described above, the static instance map contains a list of dispatchers which are all deployed, started and coexisting in the running environment. All these dispatchers know the list and state of each other running dispatcher (described in the dynamic instance map), and handle the incoming requests. One of these dispatchers is considered as the "primary" dispatcher, and all the other running dispatchers are then considered as "secondary" dispatchers.

> ⓘ Note
>
> - Distinction between primary and secondary modes is made on startup according to the defined list of dispatchers. The primary dispatcher corresponds to the first element of this list whose startup succeeded. In case of startup or running failure:
>   - The primary mode is transferred to the first available secondary dispatcher
>   - The failed dispatcher is retrograded to the last position in the list
> - Incoming administration requests are only handled by the primary dispatcher instance. If an administration request is sent to a secondary dispatcher instance, an implicit redirection to the primary dispatcher instance is performed

Managed Caches

Due to the fact that dispatcher instances provide traffic handling mechanisms, they need to maintain in memory:

39 Transmission Control Protocol/Internet Protocol
40 eXtended Markup Language
41 HyperText Transfer Protocol
42 Simple Object Access Protocol

- An up-to-date list of users, for authentication purposes
- The partition mapping in order to guide a request to the adequate guider and rater

Reservation Renewal Listener (RRL) Map

To provide the reservation renewal mechanism during session-based charging operations, the dispatchers manage a map of client applications or systems which previously registered a listener (RRL) for reservation renewal purpose. Automatic re-registrations give the possibility to automatically update this map in case of dispatcher failure or modification of the instance map.

Spending Status Report Listener (SSRL) Map

To provide a spending status reporting mechanism during online charging and refilling operations, the dispatchers manage a map of client applications or systems which previously registered a listener (SSRL) for spending status monitoring purpose. Automatic re-registrations give the possibility to automatically update this map in case of dispatcher failure or modification of the instance map.

5.2.1.1.2 Guider

A **guider** is an instance contacted only by the dispatchers to get routing information related to a given access. guider instances cannot be contacted by a client application, and are thus considered as **private** instances, used for internal operations only.

Guider instances have been implemented to:

- Collect on startup all the required information about accesses.
- Build a service dictionary and a memory map containing subscriptions and users identifiers.

Managed Caches

Because guider instances mostly provide routing mechanisms, they need to maintain an up-to-date list of existing accesses. This cached structure is stored in memory, and uses a LRU[43] mechanism in order to reduce memory consumption.

> **Note**
>
> For further information about the accesses cache and its associated LRU mechanism, refer to the adequate section in this documentation [page 77].

[43] Least Recently Used

5.2.1.1.3 Rater

A *rater* is an instance dedicated to the available charging, recharging, and refilling operations. raters cannot be directly contacted by a client application and are thus considered as **private** instances. These instances are used to handle all the requests coming from the master rater.

According to the incoming requests, raters can be considered as:

- **Stateful** raters, when performing operations which alter the content of databases (statefull charging services)
- **Stateless** raters, when performing operations which do not modify databases (stateless rating services)

The raters are also responsible of managing the send and resend of spending status reports.

Managed Caches

To ensure data consistency and improve the global performance of SAP CC, raters handle multiple data structures using cache mechanisms. These cached structure are stored in memory and mostly concern the following business objects:

- Catalog data (offers, charge plans, charges, translation tables, tier tables, mapping tables, range tables, pricing macros, and so on)
- Provisioning data (contracts and associated allowances, subscriptions, subscriber accounts, subscriber mapping tables, subscriber range tables, and so on)
- Taxation data, for tax computation purposes
- Charging sessions and associated histories
- Shared allowances and distributed counters

> ⓘ Note
>
> For further information about the cached structures, refer to the adequate section [page 77] in this documentation.

5.2.1.1.4 Bulkloader

Charging operations performed by rater instances lead to the resulting generation of item files (aka data files) containing different information related to business transactions (charged items or refill records, already-charged chargeable items, acquired-only chargeable items). A bulkloader is an asynchronous **private** instance used to:

- Load the content in these item files (aka data files).
- Convert the loaded charged items or refill records into billable items according to rules defined in the billable item mapping objects.
- Convert the loaded already-charged chargeable items and acquired-only chargeable items into consumption items according to rules defined in the consumption item mapping objects.

- Transfer the converted data to SAP Convergent Invoicing for invoicing and billing purposes.

To improve the global performance of these import operations, bulkloader instances are periodically triggered and use a bulk execution mode.

> **Note**
>
> - No redundancy mechanism has been implemented for bulkloader instances in the system.
> - To ensure performances and avoid latency, it is recommended to deploy one bulkloader instance per rater instance.
> - Bulkloader instances are only able to manage charged item or refill record data files produced by rater instances.
>
> They are only deployed when SAP CC is configured to work in conjunction with SAP Convergent Invoicing in an integrated *SAP Solution* scenario.
>
> For further information about bulk loading operations, refer to the description of the Data Files Bulk Loading [page 36] feature in this documentation.

Managed Caches

To improve performance during bulk loading operations, bulkloader instances handle multiple data structures using cache mechanisms. These cached structures are stored in memory and concern the following business objects:

- Chargeable item classes, charged item classes and refill record classes, which contain the different properties of the defined chargeable items, charged items or refill records
- Consumption item mappings, which corresponds to mapping data between chargeable item classes and consumption item classes
- Billable item mappings, which corresponds to mapping data between charged item classes or refill record classes and billable item classes defined in SAP Convergent Invoicing

5.2.1.1.5 Updater

An updater is a **public** instance dedicated to the provisioning operations used to manage customers' data. This instance can:

- Interact with client applications (such as the Core Tool user interface) using the XML[44] over HTTP[45] communication channel.
- Communicate with the SAP CTS plugin using the SOAP[46] over HTTP communication channel.
- Communicate with the other instances through dispatcher instances.
- Communicate with the updater instances from other SAP CC systems using the SOAP over HTTP communication channel in the context of the *Catalog Transport* feature.

[44] eXtended Markup Language
[45] HyperText Transfer Protocol
[46] Simple Object Access Protocol

- Communicate with external systems in order to provision individual users in SAP CC using REST[47] over HTTP communication channel.

Active/Backup Updater Instances

Like dispatchers, multiple updaters can be configured in the static instance map. The difference with dispatchers concerns the number of running instances: only one updater can be started at a given time. This running updater is then considered as the "active" updater, and all the other non-running updaters are then considered as "backup" updater instances. If the active updater fails, client applications have to contact one of the backup updaters.

> **Note**
>
> - All declared updaters are pre-started in order to inform the primary dispatcher that they exist and can thus be used in case of failure of the active updater.
>   If you use the `list` command of the Admin+ user interface, the backup updaters will be displayed as `waiting`.
> - Distinction between active and backup modes is made by the primary dispatcher. The active updater corresponds to the first element which contacted the primary dispatcher. If the active updater fails, the primary dispatcher chooses an element among the list of available backup updaters and starts it.

Managed Caches

To ensure data consistency and improve the global performance of SAP CC, updaters handle multiple data structures using cache mechanisms. These cached structures are stored in memory and concern the following business objects:

- Catalog data (offers, charge plans, charges, translation tables, tier tables, mapping tables, range tables, pricing macros, and so on)
- Provisioning data (contracts (without allowances), subscriptions (without counters), subscriber accounts, subscriber mapping tables, and subscriber range tables)
- Taxation data (to set up charge plans and provider contracts, offers and subscriptions)

> **Note**
>
> For further information about the cached structures, refer to the adequate section [page 77] in this documentation.

5.2.1.1.6 Taxer

A taxer instance is a **private** instance dedicated to real-time US Telecommunications taxes calculation. As taxer instances are only used to perform calculations, they do not impact any persistent data, and are thus

[47] REpresentational State Transfer

considered as stateless instances. They encapsulate the taxation features provided by the Avalara AvaTax for Communications (AFC) engine and required the by rater instances for taxes computation purposes.

> **Note**
>
> - As rater instances handle VAT taxes computations, **taxer instances are only required when US Telecommunications taxes are used** for the business.
>   As a consequence, taxer instances are considered as optional instances in an SAP CC Core Server system.
> - Taxer instances take a tax information as input and can output up to 15 tax amounts per transaction according to the applied taxation rules.
> - Taxer instances cannot be directly contacted by a client application. All taxation requests thus come from the dispatcher instance [page 148].
> - To ensure better performances, multiple taxer instances can be deployed to implement load balancing capabilities. As a consequence, communication with these deployed taxer instances is then performed using a round-robin mode.

Processes and Functions

Tax Calculation Process [page 340]

- US Telco Tax (Avalara AvaTax for Communications (AFC) Tax System) [page 364]

Managed Caches

As taxer instances only represent an encapsulation of the Avalara AvaTax for Communications (AFC) tax system, no specific data structures are cached.

5.2.1.2 Tools

The following list provides some detailed information related to the tool applications for the Core Server system:

Core Tool [page 154]

Setup Tool [page 155]

Config Tool [page 156]

Cockpit [page 156]

Admin+ [page 157]

HTTP Client [page 158]

5.2.1.2.1 Core Tool

Core Tool is a desktop application written entirely in Java. The graphical user interface (GUI) of this application simplifies the management of a large number of processes or operations available in SAP Convergent Charging (SAP CC) such as:

- New services and pricing structures implementation and customization
- Agreement management (provider contracts, subscriptions)
- Dynamic pricing and promotional launching
- Real-time customized offers and charge plans management
- Pricing and provisioning auditing


For more information about Core Tool, refer to its dedicated SAP Convergent Charging Online Help documentation.

The Core Tool application implements a technical mechanism named *Concurrent Edition Management*, that is used to prevent concurrent modifications on catalog objects. Relying on the User Session Management [page 136] feature, this mechanism:

- Introduces a new "Display mode", which corresponds to a read-only mode, and avoids users performing modifications on an object
- Introduces a new "Edit mode":
  - That SAP users must activate in order to modify an object
  - That cannot be used twice for a given object by forbidding: a user who tries to modify an object that is already opened for modifications in another user session cannot activate the “Edit mode” (and is automatically warned about the situation regarding the concurrent user and associated session)
  - That cannot be automatically re-activated after a user session expiration, in order to deal with possible parallel modifications

> **Note**
>
> If an object has been modified while a user session has expired, the user who tries to modify this object is notified about the concurrent performed modifications, and is proposed to:
>
> - Overwrite the last changes with his/her modifications
> - Cancel the operation, in order to save his/her modifications in a file for later corrections

The following schema summarizes the possible interactions between the 2 introduced modes:

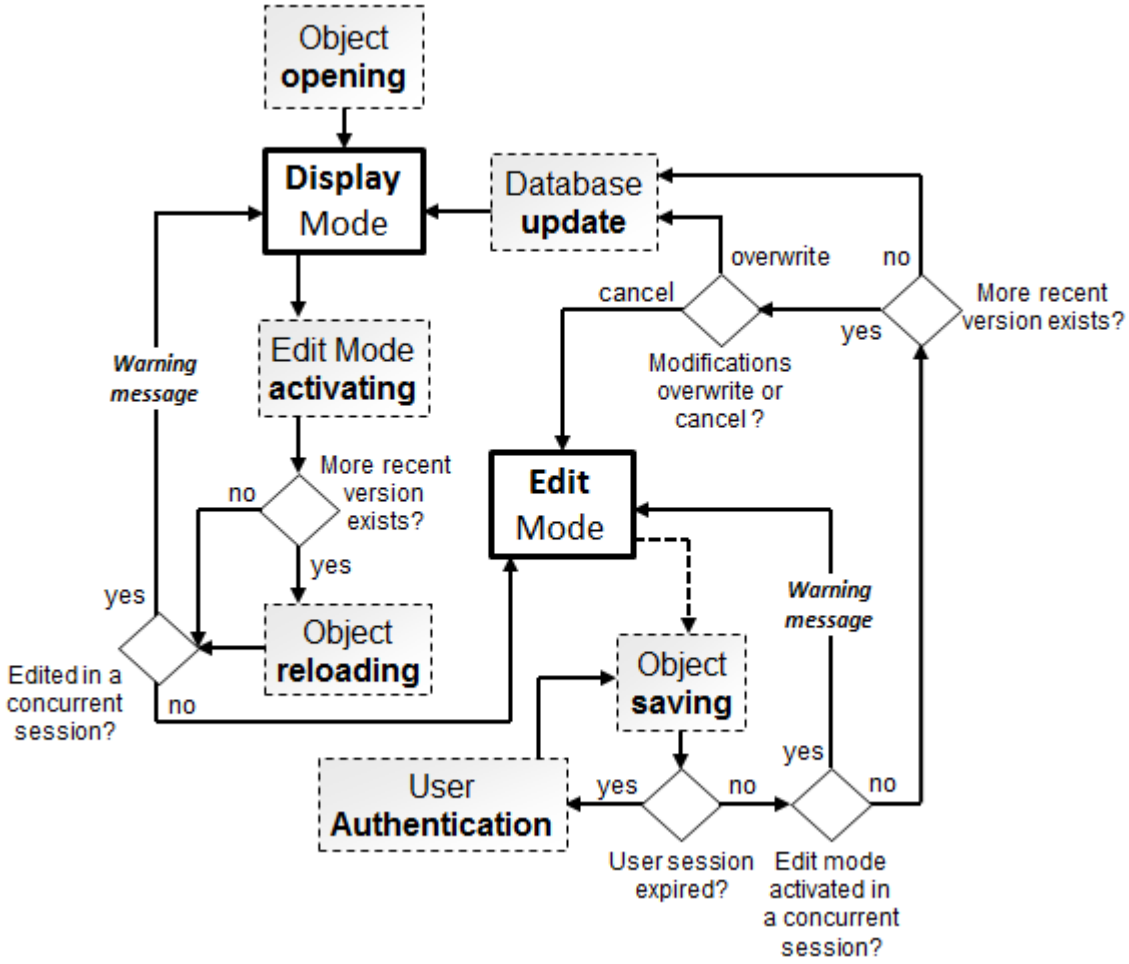

⚠ Caution

- The import operation of Core Tool overwrites any object, even if this object is opened by someone else in “Edit mode”.
- The “Concurrent Edition Management” mechanism is only relevant for modifications performed by human users within Core Tool. As a consequence, this mechanism does not concern modifications performed by technical users via XML over HTTP (HCI[48]) or SOAP[49] over HTTP (Web Services) communications channels (e.g. SAP CRM which modifies mapping tables using Web Services)

5.2.1.2.2 Setup Tool

Setup Tool is a command-line application dedicated to the management of the Core Server system and its system instances. For system administrators and application administrators, the Setup Tool user interface gives the possibility to manage:

[48] HTTP Communication Interface
[49] Simple Object Access Protocol

- The licenses for all deployed instances
- The security settings required to secure communication channels (such as key pairs for encryption mechanisms)
- The notification policy
- The CIF[50] configuration for bulkloaderinstances and rater instances
- The RIF[51] configuration for rater instances
- The configuration related to the SAP ERP reference system for the updater instances
- The VAT[52] taxation policies (VAT rate, VAT rules, country tax policies)
- The Avalara AvaTax for Communications (AFC) transaction/service types
- The list of transport destinations used for catalog transport purposes

> ⓘ Note
>
> For further information about the Setup Tool user interface and associated commands, refer to the SAP CC 2023 Administration and Operation Guide and SAP Convergent Charging User Interfaces documents.

5.2.1.2.3 Config Tool

Config Tool/ is a command-line application dedicated to the configuration of the Core Server system and its instances. It gives the possibility to:

- Export the persistent values of all the configuration parameters of the Core Server, which may be useful to transport a complex configuration of Core Tool from one landscape to another.
- Import (and thus update) some configuration parameters into the Core Database.

Note that the import operation performs modifications on the Core Database which are not immediately taken into account by some instances. As a consequence, it might be necessary to restart such instances. If you want to change the value of a single parameter or if you want to temporary apply your modifications, you can use Cockpit or the `set` command of Admin+ described below.

> ⓘ Note
>
> For further information about the Config Tool and associated commands, refer to theSAP CC 2023 Administration and Operation Guide and SAP Convergent Charging User Interfaces documentations.

5.2.1.2.4 Cockpit

Cockpit is a web application that gives the possibility for power users (pricing specialists and billing specialists for rating) and IT administrators (system, application, user) to configure pricing data and manage the Core Server system.

50 Charging output Integration Framework
51 Rerating Integration Framework
52 Value Added Tax

SAP Convergent Charging Cockpit provides administrators and power users with a graphical user interface to:

- Have a central place to administer SAP Convergent Charging with apps from your browser
- Configure and maintain the pricing data and configuration for the end-customer services
- View customer data (subscriber accounts, contracts) and process a manual rating or simulation
- Manage the persistent values and runtime values of the system parameters in the connected Core Server system
- Filter and visualize the recorded metadata related to the data files generated by SAP CC during the execution of the different processes
- Manage the user accounts, roles, and permissions

Cockpit represents a launchpad that contains apps based on SAP Fiori, the new user experience (UX) for SAP software that applies modern design principles.

For more information and user assistance about the Cockpit front-end application and its apps, refer to the SAP CC 2023 Primary Help for Cockpit documentation.

The back end application that composes SAP CC Cockpit manages the communications with:

- The Cockpit Database (for data persistent storage)
- The Core Server system
- The Core Database

It is deployed and runs as a webapp in a Java Web Server system such as Apache Tomcat Server.

> → Remember
>
> SAP Convergent Charging Cockpit is a required user interface of SAP Convergent Charging.

> ⓘ Note
>
> As of version 2023 FPS 3, a new installation scenario is possible: it is deployed as a complete SAP system. See Cockpit System [page 161].

5.2.1.2.5 Admin+

Admin+ is a console application dedicated to the management of the Core Server. It gives the possibility to establish a connection with a specific instance and modify both its running configuration and its configuration parameters. Through commands execution taking XML messages into account, this application performs operations such as:

- Listing running instances
- Getting or setting the values of instances' parameters
- Managing batch rating groups
- Updating the log levels of instances
- Modifying messages output (console/file)
- Displaying service time statistics for one or multiple SAP CC charging client(s), used for monitoring and/or troubleshooting purposes

> **Note**
>
> For further information about Admin+ and associated commands, refer to the SAP CC 2023 Administration and Operation Guide and SAP Convergent Charging User Interfaces documentations.

5.2.1.2.6 HTTP Client

HTTP Client is a console application used to send XML[53] requests to the Core Server. These requests correspond to XML fragments accepted by available APIs[54], and thus give the possibility to interact with a large number of business objects. This application behaves as a simple messages sender, and no control is made on sent messages and performed actions.

> **Note**
>
> For further information about the Setup Tool and associated commands, refer to theSAP CC 2023 Administration and Operation Guide and SAP Convergent Charging User Interfaces documentations.

> **Caution**
>
> No control is made on XML sent messages. Considering that some operations can lead to database changes and thus impact data integrity, it is highly recommended to use this application carefully.

5.2.1.3 Synthesis

The following table summarizes the communications with or between the different instances in a running Core Server system of SAP CC:

System Instances	XML[55] over HTTP[56]	SOAP[57] over HTTP	REST[58] over HTTP	Packets over TCP/IP[59]	RFC[60] over TCP/IP
Dispatcher [page 148]	■	■		○	■
Guider [page 149]				□	
Rater [page 150]				□	■ as of SAP CC 2020 FPS 2

53 eXtended Markup Language
54 Application Programming Interface
55 eXtended Markup Language
56 HyperText Transfer Protocol
57 Simple Object Access Protocol
58 REpresentational State Transfer
59 Transmission Control Protocol/Internet Protocol
60 Remote Function Call

System Instances	XML[55] over HTTP[56]	SOAP[57] over HTTP	REST[58] over HTTP	Packets over TCP/IP[59]	RFC[60] over TCP/IP
Updater [page 151]	■	■	■	□	
Taxer [page 152]				□	
Bulkloader [page 150]		■		□	■

■ Communications with client applications or systems

□ Communications with other instances inside the Core Server system

Example

- Updater instances can be contacted by client applications using the XML over HTTP communication channel, and by other instances using the Packets over TCP/IP communication channel
- Bulkloader instances can only be contacted by other server instances using the Packets over TCP/IP communication channel

All these specialized instances have been specifically designed to ensure the stability and performance of the global platform during pricing, charging, and refilling operations. Furthermore, this architecture simplifies the scalability of SAP CC by giving the possibility to:

- Update deployed elements and/or upgrade them without any manual intervention
- Hot modify configuration parameters
- Add or remove instances without any downtime

The different instances in the Core Server system are considered as:

- **Public**, when they can directly be contacted by an external system such as a client application.
- **Private**, when they can only be contacted through another instance.

All the information related to these instances is stored in a structure named *instance map*. According to the type of concerned server instances, this instance map can be:

- A **static structure**, retrieved from the `INSTANCE_MAP` table of the Core Database and containing preconfigured information related to dispatchers and updaters
- A **dynamic structure**, handled in memory by dispatchers, and representing a version of the static structure enriched with information related to all started instances (guiders, raters, taxers and bulkloaders)

When an SAP CC system starts, the SAP startup framework performs the following technical operations:

- All the instances declared during the installation procedure are launched
- The starting instances analyze the `boot.config` file to get required information:
  - Core Database connection information, used by dispatcher instances
  - System identifier plus dispatchers boot list or system identifier + UDP information (with possibly the dispatcher instances list in case of discovery failure), used by updater instances

55 eXtended Markup Language
56 HyperText Transfer Protocol
57 Simple Object Access Protocol
58 REpresentational State Transfer
59 Transmission Control Protocol/Internet Protocol
60 Remote Function Call

    - System identifier plus UDP information, used by guiders, raters, taxers and bulkloader instances
- Dispatcher instances connect to the Core Database system in order to retrieve the static instance map and thus initialize their dynamic instance map which will be enriched by the *primary* dispatcher instance during the registration of the other instances
- Updater, guider, rater, taxer, and bulkloader instances try to connect to a dispatcher instance using the discovery information:
    - If no dispatcher instance can be discovered until a timeout occurs, the SAP startup framework restarts the concerned instances until a dispatcher instance can be contacted.
    - If a dispatcher instance is discovered, the starting instances registers on it and becomes up and running.

> **Note**
>
> The `boot.config` file contains the following parameters:
>
> - `SQLHELPER_JDBC_URI`, which corresponds to the valid URL of the Core Database
> - `SQLHELPER_LOGIN`, which corresponds to the login used to connect to the Core Database
> - `SQLHELPER_PASSWORD`, which corresponds to the password used to connect to the Core Database
> - `SYSTEM_ID`, which corresponds to the identifier of the system where the instances must be deployed
> - `DISCOVERY_MULTICAST_ADDRESS`, which corresponds to the IP address (IPv4 or IPv6) used for the UDP discovery mechanism
> - `DISCOVERY_PORT`, which corresponds to the port used for discovery purposes
> - `BOOT_DISPATCHER_LIST`
>
> The static instance map contains the following properties, which are associated to a given instance identifier:
>
> - `HCISecure`, `HCIHost` and `HCIPort`, used for communications based on the XML over HTTP communication channel, and corresponding respectively to:
>   - The secure mode
>   - The hostname or IP address (IPv4 or IPv6) of the concerned instance
>   - The port of the instance
> - `WsSecure`, `WsHost` and `WsPort`, used for communications based on the SOAP over HTTP and the REST over HTTP communication channels, and corresponding respectively to:
>   - The secure mode
>   - The hostname or IP address (IPv4 or IPv6) of the instance
>   - The port of the instance
> - `ExternalSecure`, `ExternalHost` and `ExternalPort`, **used by external client applications** for communications based on the Packets over TCP/IP communication channel, and corresponding respectively to:
>   - The secure mode
>   - The hostname or IP address (IPv4 or IPv6) of the dispatcher instance
>   - The port of the dispatcher instance
> - `ExternalSecure`, `ExternalHost` and `ExternalPort`, **used by the other instances** for internal communications based on the Packets over TCP/IP communication channel, and corresponding respectively to:
>   - The secure mode
>   - The hostname or IP address (IPv4 or IPv6) of the dispatcher instance

- The port of the dispatcher instance

The following table shows the availability of these properties according to the specified instance:

Property	dispatcher	updater
HCISecure	■	■
HCIHost	■	■
HCIPort	■	■
WsSecure	■	■
WsHost	■	■
WsPort	■	■
ExternalSecure	■	
ExternalHost	■	
ExternalPort	■	
InternalSecure	■	
InternalHost	■	
InternalPort	■	

The content of this static instance map is loaded into the Core Database. As a consequence, the Core Database must be updated when the static instance map is modified.

5.2.2 Cockpit System

The *Cockpit system* is a central system dedicated to the configuration and administration. This SAP system is made up with a frontend (user interface) and a backend:

- The frontend is the web application in a web browser. The web application consumes the backend system via JSON/HTTP.
- The backend is the back-end system that provides the business and technical features and processing.

Cockpit is a web application that gives the possibility for power users (pricing specialists and billing specialists for rating) and IT administrators (system, application, user) to configure pricing data and manage the Core Server system.

SAP Convergent Charging Cockpit provides administrators and power users with a graphical user interface to:

- Have a central place to administer SAP Convergent Charging with apps from your browser
- Configure and maintain the pricing data and configuration for the end-customer services
- View customer data (subscriber accounts, contracts) and process a manual rating or simulation
- Manage the persistent values and runtime values of the system parameters in the connected Core Server system
- Filter and visualize the recorded metadata related to the data files generated by SAP CC during the execution of the different processes

- Manage the user accounts, roles, and permissions

Cockpit represents a launchpad that contains apps based on SAP Fiori, the new user experience (UX) for SAP software that applies modern design principles.

For more information and user assistance about the Cockpit front-end application and its apps, refer to the SAP CC 2023 Primary Help for Cockpit documentation.

The architecture of the Cockpit system is based on the standard 3-tier architecture and relies on a service.

- HTTP service, used to serve the Cockpit web application to the individual SAP CC users in their web browsers.

The SAP CC Cockpit system manages the communications with:

- The Cockpit Database (for data persistent storage)
- The Core Server system
- The Core Database
- The web browsers for the individual users

The communication inside and/or with the Cockpit system relies on 4 different communication channels:

- XML over HTTP, used to transport proprietary XML messages (named "HCI[61] envelopes")
- JSON/HTTP
- HTTP
- SQL/JDBC

These protocols and their associated transported data are similar to those used by the Core Server system. For further information about these protocols, refer to the Core Server system protocols.

Refer to the security and installation guides for more information.

Related Information

Cockpit Database [page 172]

5.2.3 BART Server

> → Remember
>
> In an integrated *SAP Solution* scenario and as of SAP Convergent Charging 4.0, **the BART Server component is replaced with SAP Convergent Invoicing and its** *Consumption Item Management* **feature**. SAP Convergent Invoicing is already part of your SAP system landscape. A transition guide is available and enables planning the transition.
>
> See: SAP CC 2023 Transition Guide

[61] HTTP Communication Interface

The *BART Server system* is an injector dedicated to **batch** usage charging operations. This SAP system is in charge of the following key processes:

- Chargeable Items Acquisition, which defines the way to load incoming CDRs[62] into a dedicated database. According to the defined policies, duplicate CDRs can be detected and managed (e.g. rejected, marked as corrected later, and so on)
- Chargeable Items Consolidation, which is used to retrieve additional information from the Core Database in order to enrich the incoming CDRs
- Batch execution of the Chargeable Items Charging process, which consists in charging a set of CDRs, subscription per subscription
- Chargeable Items Rerating, which gives the possibility to charge again a set of CDRs when errors such as human error occurred in the rating engine (e.g. customers who subscribed to an erroneous charge plan or offer)

The BART Server system is delivered with a set of desktop and console applications which give the possibility to:

- Administer its behavior
- Manage the business administration operations (acquisition, batch rating and charging)


The following topics provides some detailed information related to these applications:

- BART Tool [page 164]
- BART Setup Tool [page 165]
- BART+ [page 165]

The architecture of the BART Server is based on the standard 3-tier architecture and relies on 2 different services:

- A CDR service, used to:
  - Acquire CDRs from client applications or mediation systems (such as the IEC[63])
  - Perform operations such as consolidation, duplicate detection, and so on
  - Communicate with the Core Server system to perform batch charging operations
- A management service, used to handle XML messages sent by client applications (including BART Tool) to perform operations on charging sessions (such as session start, stop, and so on) or execute configuration and administration operations

62 Call Detail Record (Telecommunications industry), or more generally Consumption Detail Record
63 Import/Export Connector

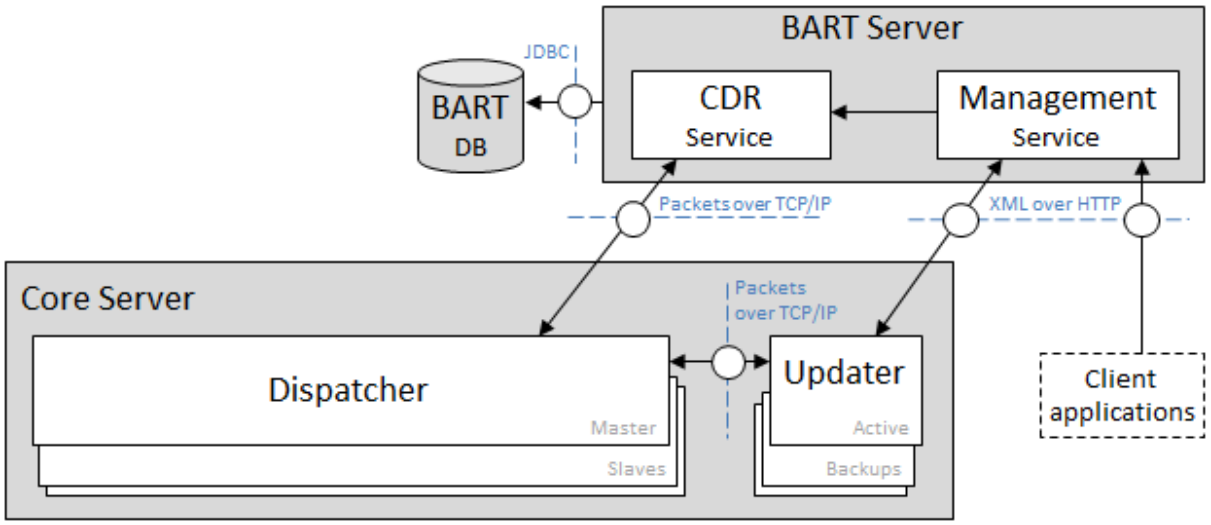

> **Note**
>
> The BART Server does not behave as a mediation module, but can be configured to work in conjunction with the IEC in order to acquire CDRs coming from various sources.

The communication inside and/or with the BART Server relies on 2 different communication channels:

- XML[64] over HTTP, used to transport proprietary XML messages (named "HCI[65] envelopes")
- Packets over TCP/IP[66], used to transport proprietary TCP packets

These protocols and their associated transported data are similar to those used by the Core Server. For further information about these protocols, refer above.

See Also

Processes and Functions [page 256]

5.2.3.1 BART Tool

BART Tool is a desktop application dedicated to the BART Server supervision. Written entirely in Java and respecting the look & feel of the Core Tool user interface, this application provides graphical interfaces used to monitor the BART Server and ease some operations such as:

- Acquisition and charging sessions management
- CDRs[67] and CDR groups management

64 eXtended Markup Language
65 HTTP Communication Interface
66 Transmission Control Protocol/Internet Protocol
67 Call Detail Record (Telecommunications industry), or more generally Consumption Detail Record

- Jobs administration

5.2.3.2 BART Setup Tool

Like the Core Server, a BART Setup Tool is also available for the BART Server. This command-line tool has been introduced in the SAP CC 5.0 release, and only gives the possibility to manage the security settings related to communication channels securing.

> **Note**
>
> For further information about the BART Setup Tool and associated commands, refer to the SAP CC 2023 Administration and Operation Guide and SAP Convergent Charging User Interfaces documentations.

5.2.3.3 BART+

BART+ is a console application dedicated to the management of the BART Server. It works the same way as Admin+ and performs operations such as:

- Getting or setting the values of some parameters used by the BART Server
- Updating the level of log messages generated by the BART Server
- Monitoring acquisition sessions
- Intercepting messages and redirecting them to a specified file
- Pinging the server

> **Note**
>
> For further information about the BART Setup Tool and associated commands, refer to the SAP CC 2023 Administration and Operation Guide and SAP Convergent Charging User Interfaces documentations.

5.2.4 Diameter Server

> **Caution**
>
> From SAP Convergent Charging 5.0 SP 4, there is no further planned enhancements to the Diameter Server component. For further information, refer to SAP Note 2792189.

The Diameter Server component represents a message translator which is used to convert credit-control messages coming from a Diameter client application into charging messages that the Core Server is able to handle. It behaves as an online mediation system:

- Providing credit-control capabilities to:

    - Control services and manage prepaid balances in real-time
    - Notify customers when balance thresholds are reached
    - Terminate a service session when a balance is depleted
    - CCA[68] enrichment with attributes specific to a given network element (VSA)
    - Diameter security mechanisms like TLS[69] or IPSec
    - Multiple services credit-control in a single session
- Unable to handle the following features:
    - Tariff-Time-Change mechanism, used to charge a service differently according to time
    - Dynamic peer discovery mechanism
    - Re-authentication or re-authorization requests, used to check whether the user is still engaging the service, and if not, to remove the pending session to avoid further charging command codes
    - Session termination requests initiated by the Diameter Server (such as Abort-Session-Request), used to close a pending session
    - Relay, Proxy, Redirect Translation of Diameter messages


The Diameter Server respects the following specifications:

- RFC 3588, which describes the Diameter base protocol
- RFC 4006, which describes Diameter credit-control applications
- 3GPP[70] TS 32.299, which describes Diameter online charging applications (Ro interfaces)

Example

The following schema describes a SCUR[71] call flow between a SCP[72], the Diameter Server component, and SAP CC:

68 Credit Control Answer
69 Transport Layer Security
70 3rd Generation Partnership Project
71 Session Charging with Unit Reservation
72 Service Control Point

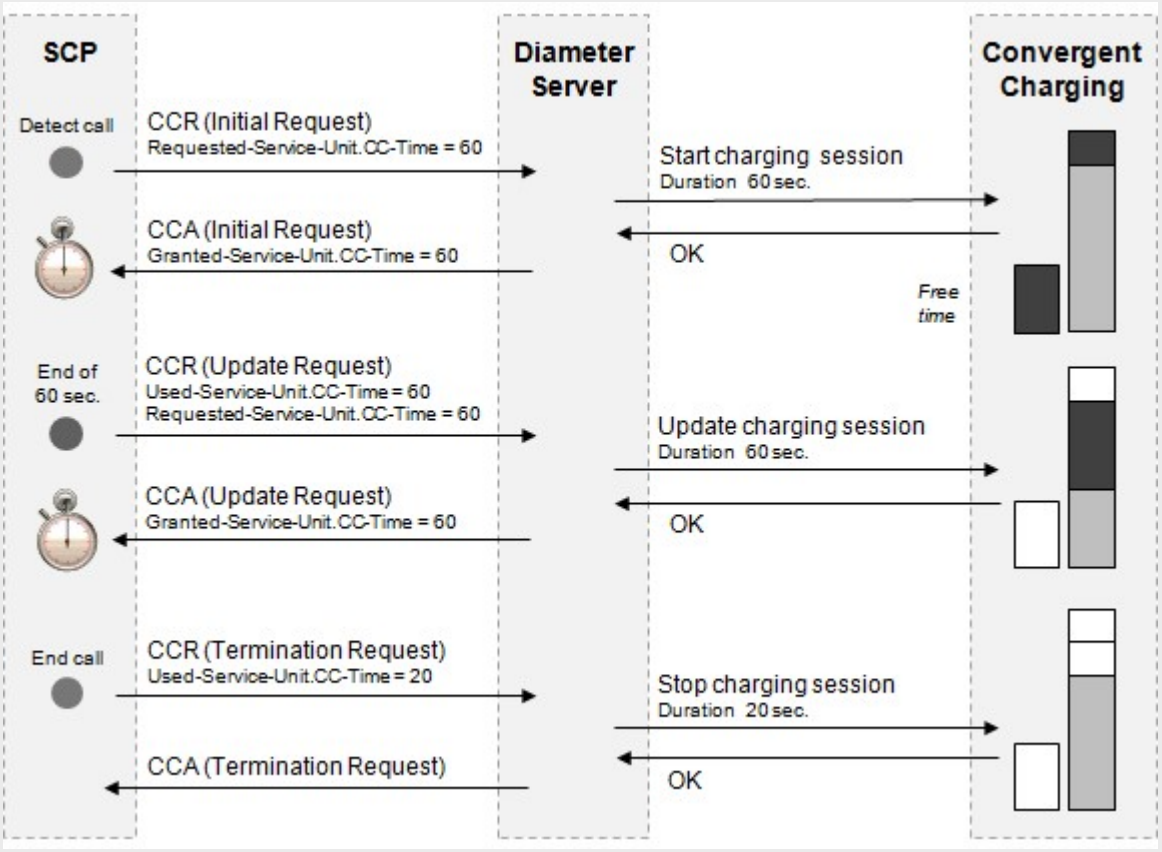

Example

Message Flow Use Cases

Use case 1: Voice call with re-authorization and low credit

Description	SCP		Diameter Server
Call detected	CCR (Initial Request) Requested-Service-Unit.CC-Time = 60	→	
Enough credit to allocate 60s		←	CCA (Initial Request) Granted-Service-Unit.CC-Time = 60
End of quota. Re-authorization request	CCR (Update Request) Used-Service-Unit.CC-Time = 60 Requested-Service-Unit.CC-Time = 60	→	

Description	SCP		Diameter Server
Enough credit to allocate 15s		←	CCA (Update Request) Granted-Service-Unit.CC-Time = 15 Final-Unit-Action = TERMINATE
End of last quota	CCR (Termination Request) Used-Service-Unit.CC-Time = 15	→	
Call ended		←	CCA (Termination Request)

Use case 2: Voice call with no credit

Description	SCP		Diameter Server
Call detected	CCR (Initial Request) Requested-Service-Unit.CC-Time = 60	→	
Not enough credit. Call rejected		←	CCA (Initial Request) Result-Code = DIAMETER_CREDIT_LIMIT_REACHED

Use case 3: Non-connected voice call

Description	SCP		Diameter Server
Call detected	CCR (Initial Request) Requested-Service-Unit.CC-Time = 60	→	
Enough credit to allocate 60s		←	CCA (Initial Request) Granted-Service-Unit.CC-Time = 60
Non connected	CCR (Termination Request) Used-Service-Unit.CC-Time = 0	→	
Reservation cancelled		←	CCA (Termination Request)

Use case 4: Disconnected voice call

Description	SCP		Diameter Server
Call detected	CCR (Initial Request) Requested-Service-Unit.CC-Time = 60	→	

Description	SCP		Diameter Server
Enough credit to allocate 60s		←	CCA (Initial Request) Granted-Service-Unit.CC-Time = 60
... Call disconnected...			
Non connected	CCR (Termination Request) Used-Service-Unit.CC-Time = 0	→	
Reservation cancelled		←	CCA (Termination Request)

Use case 5: SMS without reservation

Description	SCP		Diameter Server
SMS sending	CCR (Event Request, Direct Debiting) Requested-Service-Unit.CC-Time = 60	→	
Enough credit to send the SMS. SMS delivered		←	CCA (Event Request) Granted-Service-Unit.CC-Service-Specific-Units=1

Use case 6: SMS with reservation

Description	SCP		Diameter Server
SMS sending	CCR (Initial Request) Requested-Service-Unit.CC-Service-Specific-Units=1	→	
Enough credit		←	CCA (Initial Request) Granted-Service-Unit.CC-Service-Specific-Units=1
SMS delivery	CCR (Termination Request) Used-Service-Unit. CC-Service-Specific-Units=0	→	
SMS delivered		←	CCA (Termination Request)

The architecture of the Diameter Server is built upon the following set of elements:


- **Diameter Stack**, which is provided by the Traffix Systems company and implements the Diameter base protocol (RFC 3588/3588bis standards, part of the RFC 4006 dedicated to Diameter Credit Control Applications)

- **Charging Stack**, which handles connections with the Core Server in order to send charging requests and receive the related answers
- **Service Dictionary**, which gives the possibility to store all the descriptions (including the AVP[73] mapping) of each managed service
- **AVP Dictionary**, which gives the possibility to store the AVP descriptions related to specific vendor network elements
- **CCR[74] Handler**, which:
  - Receives CCRs coming from the SCP[75] through the Diameter Stack
  - Translates these CCRs to charging requests using the AVP mapping described in the Service Dictionary
  - Sends these charging requests to the Core Server through the Charging Stack
- **Charging Answers Handler**, which:
  - Receives charging answers coming from the Core Server
  - Translates these charging answers them to CCA[76]
  - Sends these CCS to the SCP through the Diameter Stack

The communication inside and/or with the Diameter Server relies on 2 different communication channels:

- Diameter, used for credit-control purposes
- Packets over TCP/IP[77], used to transport proprietary packets and communicate with the Core Server

For further information about the Packets over TCP/IP communication channel, refer to the SAP CC 2023 Security Guide documentation. For further information about the Diameter protocol, consult the RFC 3588 and RFC 4006 specifications.

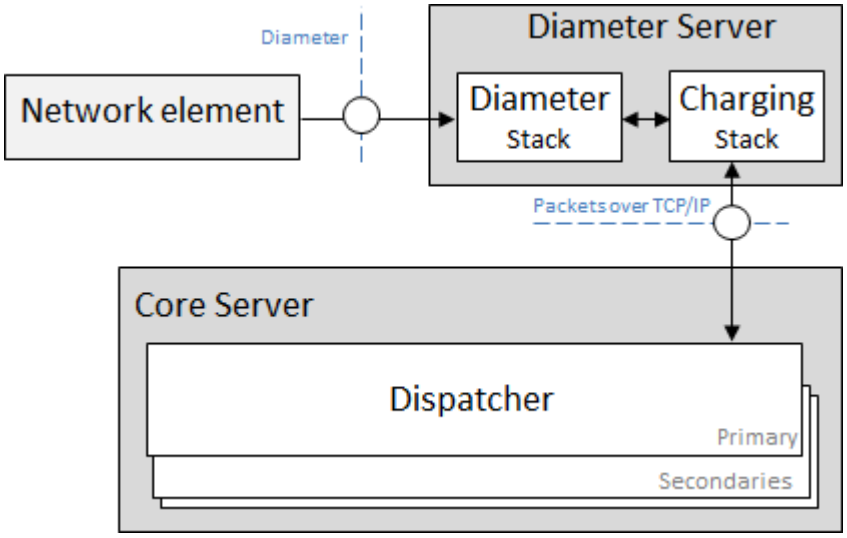

73 Attribute-Value Pair
74 Credit Control Request
75 Service Control Point
76 Credit Control Answer
77 Transmission Control Protocol/Internet Protocol

5.2.5 Import/Export Connector

> ⚠ Caution
>
> Do not implement a **remote** Import/Export Connector (IEC) application in a **production** SAP system landscape.

> → Remember
>
> SAP SE recommends that you implement a mediation system or a policy system to integrate the SAP CC software component as online charging system (OCS) or offline charging system (OFCS).
>
> For example, SAP Convergent Mediation by DigitalRoute allows you to implement convergent mediation or convergent policy business scenarios.

The Import/Export Connector application is an optional component used to connect SAP CC to external systems such as back office, legacy applications, and so on.

This component is delivered with a desktop application named CAT Tool which gives the possibility to interact with the Core Server system and access to its usage data records. The different data transfers are described into scenarios which represent a sequence of basic actions such as:

- Importing/exporting data from/to a file or data container
- Modifying data
- Executing a given Java class

This desktop application provides a set of components which give the possibility to fulfill the different actions which are necessary to perform data transfers.

> → Tip
>
> For further information about CAT Tool, see CAT Tool.

5.2.6 Databases

SAP Convergent Charging deals with different databases used by the different deployed components. All these databases contain data handled by specific processes and functions whose performances require configuration and tuning.

Core Database [page 172]

Session Database [page 172]

Cockpit Database [page 172]

BART Database [page 173]

IEC Database [page 173]

Database technologies [page 173]

Database editions [page 173]

Database partitioning [page 174]

5.2.6.1 Core Database

The Core Database contains the different data related to the business objects handled by the Core Server, such as price plan elements, subscriptions, offers, accesses, and so on. To ensure performances, the rating engine needs to perform a huge number of connections and transactions (with low latency) to this database. As a consequence, it is highly recommended to configure the Core Database as an On-Line Transaction Processing (OLTP) database in order to execute real-time processes.

5.2.6.2 Session Database

The Session Database contains the different pieces of data related to the business objects handled by SAP CC Core Server during session-based charging operations.

5.2.6.3 Cockpit Database

The **Cockpit Database** is a persistent database that is used by SAP CC Cockpit to:

- Store user settings (launchpad configuration and preferences, variants, and so on)
- Store drafts for objects created in the different apps (mapping table classes, mapping tables, and so on)
- Act as a SQL cached structure that decreases the solicitation of the Core Database, by storing temporary data used throughout the apps

> ⓘ Note
>
> As of SAP CC 2022 FPS 0, the Cockpit Database is stored in a **new and dedicated RDBMS to implement** in the SAP CC system landscapes. It replaces the H2 embedded database. Plan this preliminary implementation (database software vendor, initial sizing, RDBMS installation, and preparations) and take into account the administration and technical operations in case of:
>
> - An initial installation
> - An upgrade project from replaced release 2021
>   - This IT change requires a **transition** from an H2 embedded database to the new RDBMS to select and implement. Additionally, the configuration of the Cockpit application must be changed.
>   - Consider also the migration of some existing persistent data stored in the Cockpit Database 2021 previously managed in H2 databases.

5.2.6.4 BART Database

The BART Database contains the different data related to the business objects handled by the BART Server, such as CDRs[78], CDRs status, charging sessions, and so on.

5.2.6.5 IEC Database

The CAT Tool provides a component named "Export to Database Action" which gives the possibility to export the created chargeable items to the IEC Database for futures actions (using a complementary import component).

5.2.6.6 Database technologies

SAP Convergent Charging supports the following database technology:

- SAP HANA
- SAP ASE (aka Sybase ASE)
- Oracle
- Microsoft SQL Server
- IBM DB2

Refer to the PAM information for more detailed information about the supported versions of RDBMS[79].

> **Note**
>
> SAP ASE databases do not store String values ending with trailing spaces. If you migrate or transport some master data to an SAP ASE database system, consider this information.

5.2.6.7 Database editions

The default edition of the Oracle and Microsoft SQL Server RDBMS[80] is named "Standard Edition", and is suited for small and medium sized businesses. According to the needs, this edition may be inadequate because of limitations related to hardware platforms, such as:

- Limited number of CPUs[81]
- Unavailable clustering features

78 Call Detail Record (Telecommunications industry), or more generally Consumption Detail Record
79 Relational Database Management System
80 Relational Database Management System
81 Central Processing Unit

- Memories size (influencing simultaneous connections capabilities)
- Hard disks architecture and performances

> ⚠ Caution
>
> The standard edition of the Microsoft SQL Server RDBMS is not supported by SAP CC 2023.

Another edition named “Enterprise Edition” represents the advanced edition of Oracle and Microsoft SQL Server RDBMS, suited for larger businesses looking for advanced database features such as:

- Replication for distributed systems
- Failover mechanisms to ensure robustness
- Advanced queuing mechanisms
- Transportable tablespaces management (Oracle only)
- Improved querying mechanisms
- Parallelized operations such as index management, backup/recovery
- Data partitioning to improve performances
- Advanced mirroring features improving HA[82] mechanism

5.2.6.8 Database partitioning

All databases handled by SAP CC require specific configuration according to the business operations which need to be performed on contained data. To ensure performances and stability towards concurrent accesses, databases data have been partitioned in order to isolate them during operations executions. Two partitioning methods have been implemented according to the performances needs:

- **Business partitioning**, based on the association of table records and partition identifiers. This method ensures that server instances associated to a given group of partitions can only execute operations concerning data associated to these partitions
- **Storage partitioning** (made up with sub partitions), based on data regrouping according to criteria such as recording date. This method ensures performances on operations dealing with tables containing huge quantities of business objects

> ⓘ Note
>
> IBM DB2 databases only support the business partitioning concept.

Partitioning Availability [page 175]

Business Partitioning [page 175]

Storage Partitioning [page 176]

[82] High Availability

5.2.6.8.1 Partitioning Availability

The following table shows the availability of the partitioning methods according to the RDBMS[83] edition:

	Business Partitioning		Storage Partitioning	
	Core Database		Core Database	
RDBMS	Session Database	BART Database	Session Database	BART Database
SAP ASE				
Enterprise edition (with partitioning license)	■			■
Oracle				
Standard edition				
Enterprise edition	■			■
MS SQL Server				
Enterprise edition	■			■
IBM DB2				
Enterprise edition	■			

5.2.6.8.2 Business Partitioning

Business partitioning only concerns the Core Database, and consists in partitioning data according to a business partition identifier. This kind of partitioning is used to group and isolate data to handle concurrent accesses and guarantee performances (for example during search operations which operate within large data scopes).

The Business Partitioning implemented for Oracle databases is based on a `PARTITION_ID` column of some Core Database's tables. This partition identifier belongs to the following ranges:

-]0, 480[for data managed by Raters, using 12 groups of 40 possible values
-]0,240[for data managed by Guiders, using 12 groups of 20 possible values

This partition identifier is implemented into various database tables according to the following pattern:

```
CREATE TABLE XXX (
…
PARTITION_ID DECIMAL(4) NOT NULL,
) PARTITION BY RANGE(PARTITION_ID) (
   PARTITION ACM_P_ONE VALUES LESS THAN (20),
   PARTITION ACM_P_TWO VALUES LESS THAN (40),
   …
   PARTITION ACM_P_ELEVEN VALUES LESS THAN (220),
```

[83] Relational Database Management System

```
   PARTITION ACM_P_TWELVE VALUES LESS THAN (240)
);
```

In most cases, the business partitioning is combined with a local indexation (each index is local to the partition). All the tables' related indexes are declared as `LOCAL INDEX`.

The Business Partitioning implemented for MS SQL Server databases is similar to the Oracle implementation. The difference with the Oracle implementation concerns the partition identifier which only belongs to the]0, 480[range using 12 groups of 40 possible values.

5.2.6.8.3 Storage Partitioning


Storage partitioning concerns the CDR[84] table of the BART Database, because of the huge volumes of stored data. This kind of partitioning has been designed to improve performances of operations which handle high quantities of data, for example purge and/or archive operations (a `DROP PARTITION` command is far more efficient than a bulk `DELETE` command based on a date range) which deal with no more used data.

The Storage partitioning implemented for Oracle databases (also called "Composite partitioning") uses the **Range** partitioning method, in conjunction with "subpartitions" created using a **List** partitioning method. All these managed partitions are stored in the same tablespace/filegroup and every tablespace/filegroup is independent.

> ⓘ Note
>
> - The **Range** partitioning method is based on temporal intervals whereas the **List** partitioning method is based on a finite list of values
> - The default **Range** partitioning method is based on daily intervals, with a default 40 days configuration extendable up to 70 days at installation time
> - The default List partitioning method splits these 40 partitions into 100 subpartitions, which gives the possibility to manage a total of maximum **100 x 70 = 7000** partitions
> - If the Chargeable Items Recharging feature is enabled, the configuration of the CDRs keeping days must be equal to the retention period used for recharging operations
> - For further information about the sizing rules which are available for the BART Database, refer to the SAP Convergent Charging [page 15] documentation


The **Range** partitioning concerns the `CONSUMPTION_DATE` field and the **List** partitioning concerns the `BGRP_OID` field which is the batch group identifier allocated at subscription creation time and belongs to the range [-1, 99] (-1 meaning "no batch rating group defined"). The following schema introduces an example of list partioning:

[84] Call Detail Record (Telecommunications industry), or more generally Consumption Detail Record

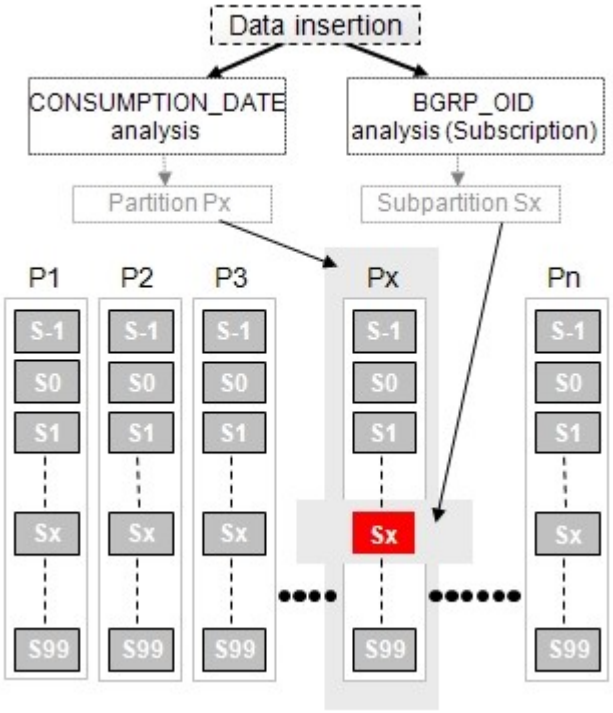

> **Note**
>
> All subpartitions S-1...S99 of a given partition are located into one or more Oracle tablespaces (which represent logical storage elements). Every tablespace is physically recorded into a data file stored inside a directory of the file system.


The following schema gives an idea on the database storage associated to this Storage partitioning. This schema represents a snapshot of the database storage at the 11th of March 2007 with 70 transactions keeping days:

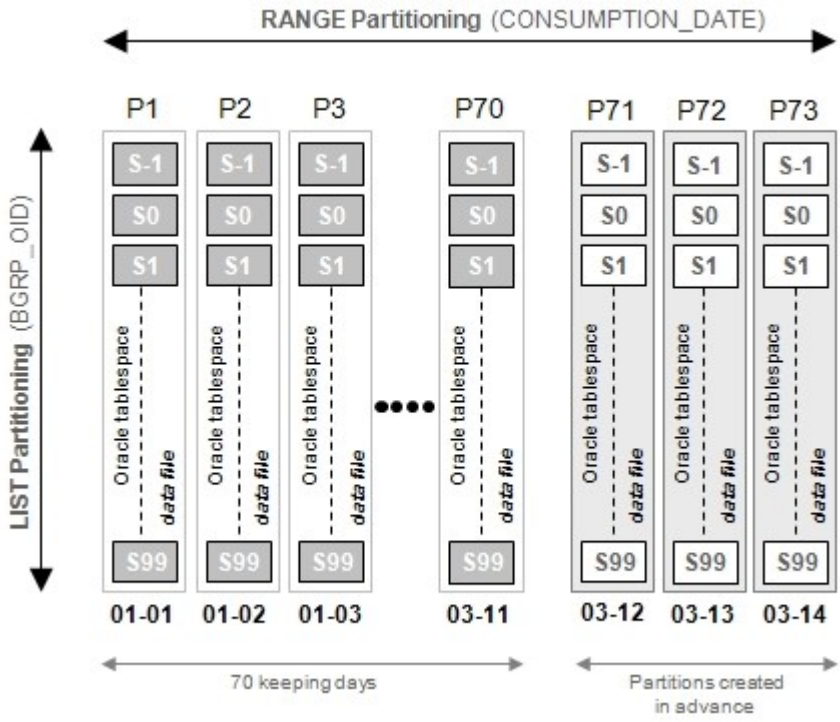

The Storage partitioning implemented under Microsoft SQL Server database is slightly different from the Oracle implementation, because **the maximum number of managed partitions is limited to 1000**. As a consequence, Microsoft SQL Server only implements the **Range** Partitioning for the CDR table of the BART Database.

> ⓘ Note
>
> - The **Range** partitioning method is based on temporal intervals
> - The default **Range** partitioning method is based on daily intervals, with a default 40 days configuration extendable up to 70 days at installation time. This configuration thus gives the possibility to manage a maximum total of **70** partitions
> - If the Chargeable Items Recharging feature is enabled, the configuration of the CDRs keeping days must be equal to the retention period for rerating
> - For further information about the sizing rules which are available for the BART Database, refer to the SAP Convergent Charging [page 15] documentation

The following schema describes the partitioning implemented on Microsoft SQL Server databases:

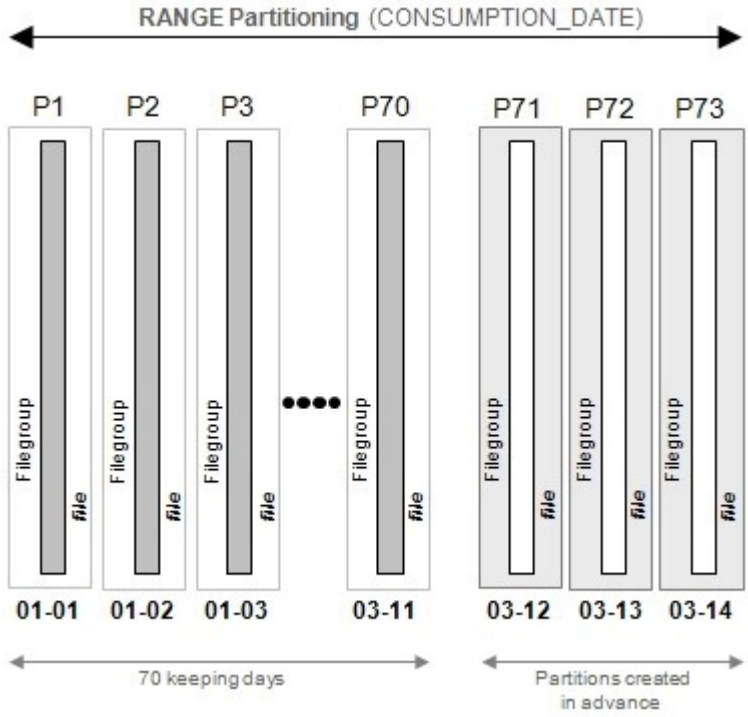

6 Transactional Data

Chargeable Item [page 180]

Charged Item [page 180]

Billable Item [page 181]

Consumption Item [page 181]

Refill Item (Input Data) [page 182]

Refill Record (Output Data) [page 182]

BART Server Transactional Data [page 182]

Diameter Server Transactional Data [page 185]

6.1 Chargeable Item

A chargeable item has a structure defined by a chargeable item class. A chargeable item consists of properties of 2 types: default and custom.

- Default properties are mandatory properties used to guide the chargeable item towards the right provider contract and rate plan
- Custom properties are the ones defined by the pricing specialist to report consumption data

Default and custom properties are used in the rate plan (or the charge plan) to rate the chargeable item.

Related Information

Charged Item [page 180]

6.2 Charged Item

A **charged item** is the persistent result of a chargeable item [page 180] that has been charged by the SAP Convergent Charging system. The incoming chargeable item represents the service consumption and the outgoing charged item represents the resulting transactional data for remaining invoicing and business accounting operations. This output data contains custom information such as:

- The charging date/time
- The identifier of the charged account, which references an account managed internally into SAP CC or externally into a third-party billing system such as the SAP ERP/FI-CA component of the SAP Business Suite
- The charged amount, with or without generated tax data (according to the performing of the tax calculation process)
- Custom information from the business processing
- Custom information from the downstream mediation systems
- Custom information from the upstream systems (billing, invoicing, accounting)

The format is a multifield structure. Its content is highly customizable in the service pricing catalogs.

Charged items are generated by the rating engine at the end of the Chargeable Items Charging [page 286] and the Prepaid Accounts Refilling [page 274]processes. The generation of charged items is performed according to specific configurations set up in the charges or allowance logic objects inserted into an offer, a charge plan, or an allowance plan.

6.3 Billable Item

In an integrated *SAP Solution* scenario, a **billable item** represents a data record received by SAP ERP/FI-CA component of the SAP Business Suite for billing and invoicing purposes. SAP CC can convert its generated transactional data (charged items and refill records) into billable items and send these records to SAP Convergent Invoicing in the SAP ERP/FI-CA or SAP S/4HANA system.

See also: Consumption Item [page 181]

Related Information

Charged Item [page 180]
Refill Record (Output Data) [page 182]

6.4 Consumption Item

In an integrated *SAP Solution* scenario, a **consumption item** represents the converted version of a chargeable item, which is sent to SAP Convergent Invoicing for deferred charging and recharging purposes. The creation of consumption items by SAP CC relies on the same concepts and architecture as the creation of billable items, and the transfer from SAP CC to SAP Convergent Invoicing is also performed asynchronously by bulkloader instances in the SAP CC system.

See also: Billable Item [page 181]

Related Information

Chargeable Item [page 180]
Deferred Charging [page 35]

6.5 Refill Item (Input Data)

Refill items correspond to **input** information processed by SAP CC when receiving a refill request. A refill item contains the following information:

- The different properties which are used to define a type of refill
- The identifiers of a customer, which are used to credit a prepaid account

6.6 Refill Record (Output Data)

Refill records represent **output** information generated by SAP CC when processing a refill request. For example, a refill record can contain some catalog data, the origin of the refill, some properties of the refill, some computed properties, and some prepaid account information.

6.7 BART Server Transactional Data

CDR (Consumption Detail Record) [page 182]

6.7.1 CDR (Consumption Detail Record)

A Consumption Detail Record corresponds to a computer record produced by a telecommunication system containing details of a service usage. These records:

- Represent a superset of the chargeable item related to the incoming record
- Are managed by the BART Server, from acquisition to rating steps
- Are stored in the CDR table of the BART Database, which contains all the fields and properties of the incoming record

> **Note**
>
> The “Consumption” term represents the generalization of the “Call” term which is more restrictive as only used in case of phone exchanges.

6.7.1.1 CDR Fields

The CDR[85] table of the BART Database contains the following fields:

Property	Description
OID	Unique identifier of the CDR
BGRP_OID	Unique batch group identifier, which is used during the following processes: • Chargeable Items Consolidation Process [page 339] • Chargeable Items Charging Process [page 286] (batch execution mode)
NAME	Name of the CDR which must refer to a chargeable item defined in the Core Database
USER_ID	The association of these fields refer to an access defined in the Core Server
SERVICE_ID	
SUBSCRIPTION_ID	Identifier of a subscription defined in the Core database and used during the following processes: • Chargeable Items Consolidation Process [page 339] • Chargeable Items Charging Process [page 286] (batch execution mode)
PARTITION_ID	Identifier of the database partition in which this CDR is stored
CHARGE_ID	Identifier of a charge component defined in the Core Server
CONSUMPTION_DATE	The consumption date of this CDR

[85] Call Detail Record (Telecommunications industry), or more generally Consumption Detail Record

Property	Description
STATUS	The status of this CDR, which can be: • NEW: The CDR is newly acquired • RATED: The CDR is successfully charged • ERROR: An error occurred during the CDR charging operation • DUPLICATED: The CDR is a duplicate of another existing CDR • IGNORED: The CDR has been ignored during a charging session • TO BE RERATED: The CDR is selected to be rerated for the next subscription • NO PROVISIONING: The CDR must be consolidated again before being charged. The CDR has already been consolidated but the consolidation failed because the CDR does not contain any subscription identifier • ONLINE SUBSCRIPTION: The CDR has been consolidated but is not valid because it refers to an online subscription
ACQUISITION_DATE	Date of the CDR acquisition process execution
ACQUISITION_ID	Identifier of the acquisition session which relates to this CDR
RATING_DATE	Date when this CDR has been sent to the Core Server for charging purposes
RATING_ID	Identifier of the acquisition session which relates to this CDR
ERROR_CODE	Error code returned by the Core Server during a charging operation
ERROR_DESCRIPTION	Explicit message related to the above error code
SOURCE	The source of the CDR, provided during the Chargeable Items Acquisition process [page 337]
MAGIC_NUMBER	Property encoded in MD5 format and used to check the CDR uniqueness in the database
PROPERTIES	TV[86] formatted string containing the properties of the related CDR.
SNAPSHOT_ID	Identifier of the counter snapshot related to the last subscription rerating [page 278] operation

6.7.1.2 CDR Properties

A CDR[87] contains several properties stored in the PROPERTIES column of the CDR table using a TV[88] format. Each property of a CDR is made up with the following attributes:

[86] Tag;Value
[87] Call Detail Record (Telecommunications industry), or more generally Consumption Detail Record

- Name, which corresponds to the name of the property
- Type, which corresponds to the type of the property's value (string, number or date)
- Value

The `PROPERTIES` column of the CDR table has a limited size (set by default to 4000 characters) which thus limits the number of concatenated properties and values. To increase this number, a `PROPERTIES` table has been implemented to store all existing properties. This table thus represents a CDR properties' dictionary which gives the possibility to use properties' identifiers instead if real full names:

Property	Description
`OID`	Unique identifier of the CDR's property, used as the tag part of a TV string
`NAME`	Name of the CDR's property
`TYPE`	Type of the CDR's property: • 0 for string values • 1 for number values • 2 for date values

Example

Considering the following CDR:

```
1;JOHNSON;2;EDISON;3;777-554-2221;4;2008-01-03 11:55:26
```

The following values can be extracted:

- `JOHNSON`, value of property 1
- `EDISON`, value of property 2
- `777-554-2221`, value of property 3
- `2008-01-03 11:55:26`, value of property 4

6.8 Diameter Server Transactional Data

Caution

As of SAP Convergent Charging 5.0 SP 4, there is no further planned enhancements to the Diameter Server component. For further information, refer to SAP Note 2792189.

CCR (Credit Control Request) [page 186]

CCA (Credit Control Answer) [page 187]

88 Tag;Value

6.8.1 CCR (Credit Control Request)

> ⚠ Caution
>
> As of SAP Convergent Charging 5.0 SP 4, there is no further planned enhancements to the Diameter Server component. For further information, refer to SAP Note 2792189.

Credit-control requests (CCRs) are sent by a Diameter client application (or system) to request credit authorization for a given service. CCRs have the following format:

```
<Credit-Control-Request> ::=
    < Diameter Header: 272, REQ, PXY >
        < Session-Id >
           { Origin-Host }
           { Origin-Realm }
           { Destination-Realm }
           { Auth-Application-Id }
           { Service-Context-Id }
           { CC-Request-Type }
           { CC-Request-Number }
           [ Destination-Host ]
           [ User-Name ]
           [ Origin-State-Id ]
           [ Event-Timestamp ]
          *[ Subscription-Id ]
           [ Service-Identifier ]
           [ Termination-Cause ]
           [ Requested-Service-Unit ]
           [ Requested-Action ]
          *[ Used-Service-Unit ]
           [ Multiple-Services-Indicator ]
          *[ Multiple-Services-Credit-Control ]
          *[ Service-Parameter-Info ]
           [ User-Equipment-Info ]
          *[ Proxy-Info ]
          *[ Route-Record ]
           [ Service-Information ]
          *[ AVP ]
With the following substructures:
Multiple-Services-Credit-Control ::= < AVP Header: 456 >
           [ Requested-Service-Unit ]
          *[ Used-Service-Unit ]
          *[ Service-Identifier ]
           [ Rating-Group ]
          *[ AVP ]
```

> ⓘ Note
>
> - The "*" sign refers to multiplicity.
> - Bolded AVPs[89] in the above sample codes correspond to AVPs which are partially or not supported, whereas a highlighted "*" sign only means that multiplicity is not supported:
>   - The `Requested-Action` AVP does not support refund actions
>   - Multiple occurrences of the `Used-Service-Unit` AVP are not supported because the Core Server is only able to handle one property to inverse during reservation operations
> - When `Multiple-Services-Credit-Control` is used in the CCR instead of `Requested-Service-Unit` and `Used-Service-Unit`, its AVPs are moved to the CCR command level

[89] Attribute-Value Pair

6.8.2 CCA (Credit Control Answer)

> ⚠ Caution
>
> As of SAP Convergent Charging 5.0 SP 4, there is no further planned enhancements to the Diameter Server component. For further information, refer to SAP Note 2792189.

Credit-control answers (CCAs) are sent by the Diameter Server system to a client application or system that previously requested credit authorization for a given service. CCAs have the following format:

```
<Credit-Control-Answer> ::=
    < Diameter Header: 272, PXY >
        < Session-Id >
           { Result-Code }
           { Origin-Host }
           { Origin-Realm }
           { Auth-Application-Id }
           { CC-Request-Type }
           { CC-Request-Number }
           [ CC-Session-Failover ]
           [ Granted-Service-Unit ]
          *[ Multiple-Services-Credit-Control ]
           [ Cost-Information ]
           [ Final-Unit-Indication ]
           [ Credit-Control-Failure-Handling ]
           [ Direct-Debiting-Failure-Handling ]
           [ Validity-Time ]
          *[ Redirect-Host ]
           [ Redirect-Host-Usage ]
           [ Redirect-Max-Cache-Time ]
          *[ Proxy-Info ]
          *[ Route-Record ]
          *[ Failed-AVP ]
           [ Service-Information ]
          *[ AVP ]
With the following substructures:
Cost-Information ::= < AVP Header: 423 >
           { Unit-Value }
           { Currency-Code }
           [ Cost-Unit ]
Multiple-Services-Credit-Control ::= < AVP Header: 456 >
           [ Granted-Service-Unit ]
          *[ Service-Identifier ]
           [ Rating-Group ]
          *[ G-S-U-Pool-Reference ]
           [ Validity-Time ]
           [ Result-Code ]
           [ Final-Unit-Indication ]
          *[ AVP ]
Granted-Service-Unit ::= < AVP Header: 431 >
           [ Tariff-Time-Change ]
           [ CC-Time ]
           [ CC-Total-Octets ]
           [ CC-Input-Octets ]
           [ CC-Output-Octets ]
           [ CC-Service-Specific-Units ]
          *[ AVP ]
Final-Unit-Indication ::= < AVP Header: 430 >
           { Final-Unit-Action }
          *[ Restriction-Filter-Rule ]
          *[ Filter-Id ]
           [ Redirect-Server ]
```

Note

- The "*" sign refers to multiplicity.
- Bolded AVPs[90] in the above sample codes correspond to AVPs which are partially or not supported, whereas a highlighted "*" sign only means that multiplicity is not supported:
  - The `Cost-Information` AVP is not provided in case of free charging because the Core Server does not return any amount when a free price plan component is used (a flat price plan component with a 0 amount must be used in such a situation).
  - The `Cost-Unit` AVP is not supported because the Core Server does not store any human readable description of a price plan.
  - The `Credit-Control-Failure-Handling` and `Direct-Debiting-Failure-Handling` AVPs are not supported because they have to be configured on the SCP[91] side.
  - The `Final-Unit-Indication` AVP is partially supported because the Core Server does not support redirection or access restriction.
  - The `Final-Unit-Action` AVP only supports the TERMINATE action.
- When `Multiple-Services-Credit-Control` is not used in the CCR, AVPs of `Granted-Service-Unit`, `Final-Unit-Indication` and `Validity-Time` are moved to the CCA command level.

[90] Attribute-Value Pair
[91] Service Control Point

7 Master Data

SAP Convergent Charging (SAP CC) deals with different sets of master data (aka SAP Master Data) related to:

- Service providers, which consist in charging and refilling data structures required for building the business logic used by the rating engine
- Subscribers, which consist in data structures required to apply the service provider's business logic to the accounts and allowances of a subscriber

> **Note**
>
> Input and output transactional data, which represent the data structures that users or external systems can deal with

The availability of this master data depends on the implementation of SAP CC, which specifies a working set of objects that must be used when configuring a pricing catalog:

- **Charge Plans/Provider Contracts only**: This data model (DM) has been specifically designed for SAP CC 3.0 and higher releases, to fit an integrated scenario with the SAP ERP/FI-CA component of the SAP Business Suite. This model ensures that all the used master data will be compatible with the SAP ERP systems
- **Offers/Subscriptions**: This model was been designed for the implementations of SAP CC which have been migrated from the 2.0 to the 3.0 release. It behaves like the "Provider Contracts only" model, but also gives the possibility to continue using old master data such as subscriptions, charges (in their previous versions), and offers

The following table lists this master data and shows their availability according to the configured data model:

Master Data	Offers/Subscriptions	Charge Plans/Provider Contracts
Core Server		
Master Data for a Service Provider		
Catalog (Pricing)	■	■
Chargeable item class	■	■
Charged item class	■	■
Billable item class		■
Consumption item class		■
Charge[92]	■	■
Counter	■	■
Price plan	■	■
Charging plan	■	■

[92] The content of the charges varies according to the model. SAP CC 3.0 charges are not exactly the same as the SAP CC 2.0 ones

Master Data	Offers/Subscriptions	Charge Plans/Provider Contracts
Offer	■	
Aggregation policy		■
Charge plan		■
Customized charge	■	■
Refill item class		■
Refill record class		■
Refill logic		■
Refill plan		■
Customized refill logic		■
Monitoring plan		■
Allowance event		■
Allowance logic		■
Customized allowance logic		■
Allowance plan		■
Allowance interface		■
Allowance definition table and allowance definition table class		■
Pricing elements for the decision trees		
Mapping table (and its class)		■
Price table		■
Range table (and its class)		■
Tier table	■	(■)
Translation table	■	(■)
Pricing macro	■	■
Master Data for the End Customers		
Subscriber account	■	■
Subscriber mapping table		■
Subscriber range table		■
Subscription	■	
Provider contract		■
Contract item		■
Access	■	■
Allowance		■

Product [page 191]

Service Provider [page 191]

Master Data for the Service Provider [page 192]

Master Data for the Subscribers [page 237]

7.1 Product

Modeled within a CRM[93] application or another provisioning system, a product represents a set of chargeable services that end customers can purchase and consume. Every product is made up with a set of master data which:

- Describes and structures a service
- Is transmitted to the rating engine for charging purposes

This master data is extended by SAP CC (in terms of pricing information) in order to dynamically compute price amounts related to the usage of a service or related to subscription fees. This information is stored in a pricing catalog owned by the service provider company.

7.2 Service Provider

A service provider is a legal entity that offers commercial products (such as mobile phone, telephone call and Internet access) to business partners. It represents an actor who has long term business agreements with these business partners.

In SAP Convergent Charging, a service provider is set up as a set of pricing elements which enable charging customer services. Master data for a single service provider can be configured with several marketable services. For each marketable service, it is necessary to:

- Set up master data such as chargeable item classes and charges
- Combine these master data in charge plans or in offers

The business partners are represented in SAP CC by a subscriber account and by a provider contract or a subscription.

> **Note**
>
> The configuration of the master data for the service provider highly depends on the integration of SAP CC with:
>
> - A mediation system, which sends to SAP CC the different usage data which must be charged
> - A billing system, which will receive the charged items generated by SAP CC in order to produce invoices in a financial system
>
> Very good skills about the implementation of these two interfaces are prerequisites for the pricing operations of marketable services in SAP CC.

93 Customer Relationship Management

7.3 Master Data for the Service Provider

Catalog [page 192]

Chargeable Item Class [page 193]

Charged Item Class (for Output Data) [page 193]

Billable Item Class [page 194]

Consumption Item Class [page 195]

Charge [page 195]

Counter [page 197]

Price Plan [page 200]

Charging Plan [page 210]

Offer [page 211]

Aggregation Policy [page 211]

Charge Plan and Rate Plan [page 212]

Pricing Function [page 216]

Customized Charge [page 221]

Refill Item Class [page 225]

Refill Record Class [page 225]

Refill Logic [page 226]

Refill Plan [page 226]

Customized Refill Logic [page 229]

Monitoring Plan [page 230]

Allowance Event [page 232]

Allowance Event Class [page 233]

Allowance Logic [page 233]

Customized Allowance Logic [page 235]

Allowance Plan [page 235]

Allowance Interface [page 236]

7.3.1 Catalog

A catalog represents a container object which is used to group all the pricing elements related to one or several marketable services of a service provider. For organization and security reasons:

- An SAP user can be restricted to a given catalog
- Several catalogs can be used to restrict the configurations of master data related to a subset of services

> ⓘ Note
>
> - When SAP CC is integrated with the SAP ERP/FI-CA component of the SAP Business Suite, only one pricing catalog for a service provider can be configured when managing recurrent fees with price tables
> - Users' visibility and management of master data depends whether they are associated to a given catalog or not: an SAP user which is associated to a catalog can only access to the master data contained in this catalog

7.3.2 Chargeable Item Class

A chargeable item class is a master data for the service pricing configuration. It contains a list of properties that characterize each usage event used inside price plans and/or charging plans for charging purposes. These properties can be:

- Default properties, used to provide basic information about the consumption of the service, and whose definition cannot be modified: consumption date and time, identifiers for the service consumer (end customer) and for the consumed service to monetize.
- Custom properties (aka user-defined properties), designed and configured by the SAP CC pricing specialist according to their needs.

A chargeable item class thus represents the description of the chargeable items which have the same structure.

7.3.2.1 Chargeable Item Package

A chargeable item package is a set of chargeable item classes, which gives the possibility to apply a charge on multiple chargeable items at the same time.

7.3.3 Charged Item Class (for Output Data)

A charged item class represents a list of field descriptions which gives the possibility to transform a charged transaction into a charged item and thus configure the generation of charged items sent to a third-party billing system. These field descriptions can be created from scratch or from predefined classes, and can be redefined at the offer, charge plan or allowance plan levels in order to fit specific needs (through charged item mapping described below).

> ✤ Example
>
> The pricing specialist designs and configures the following charged item class:

Name: **`Output Data`**

The basic class defines the following custom data fields:

Custom Output Field	Generation Setting
`Amount`	Total Amount (Incl. Tax) (number) [page 443]
`Service Consumption Date/Time`	Charge Date (Date/Time) [page 412]
`Contract`	Contract Identifier (String) [page 420]
`Account`	Account Code (String) [page 403]
`Custom 1`	*Undefined*
`Custom 2`	*(Empty)*

> ⓘ Note
>
> The last field specifies that the corresponding generated charged items include this empty field.

7.3.3.1 Charged Item Mapping

When configuring offers, charge plans or allowance plans, users can redefine the values of the different properties of the associated charged item class. This redefinition is done through the charged item mapping part of offers, charge plans or allowance plans, by specifying a value or choosing another property of the charging context.

7.3.4 Billable Item Class

A billable item class corresponds to the same concept as charged item classes (or refill record classes) but only refer to SAP Convergent Invoicing. They only describe the different properties of a billable item.

7.3.4.1 Billable Item Mapping

To ensure that the generated charged items will be correctly recorded into SAP Convergent Invoicing, the charged item classes (or refill record classes) can be mapped onto billable item classes. This mapping gives the possibility to transform a property into another one which can have a different name and/or a different format expected by in the targeted system.

7.3.5 Consumption Item Class

Consumption item classes are similar to billable item classes and are also defined in SAP Convergent Invoicing. SAP CC loads the different properties of a mediation system which are configured in the consumption item classes of SAP CI. In SAP CC, each consumption item class is replicated as a chargeable item class. For more information on consumption item classes, refer to the documentation of SAP Convergent Invoicing.

7.3.5.1 Consumption Item Mapping


The chargeable item classes are mapped onto consumption item classes to ensure that the chargeable items generated by SAP CC will be correctly recorded into SAP CI. This mapping may thus transform a property into another one which can have a different name or a different format expected by the targeted system.

The consumption item mapping is changed to support the account split feature for both charging and acquisition processes. Therefore, the charging plan has to be executed at acquisition time to generate the right values (especially the GPART code) used in the consumption item mapping.

> ⚠ Restriction
>
> The counter values available in the charging plan executed at acquisition time may not be up-to-date as the activation process is not executed beforehand.

7.3.6 Charge

A charge represents a cost and a charging pattern linked to one or several customer services. The cost is described in a calculation algorithm and configured in the price plan within the charge, while the charging pattern is described in the charging plan.

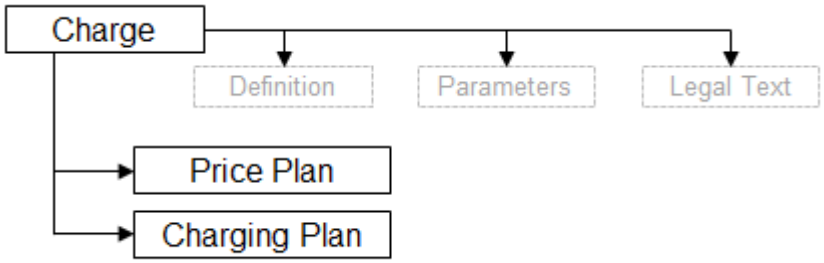

Relationships between charges, chargeable item classes, charging plans and price plans are the following:

- Charges always contain a unique price plan and a unique charging plan
- A price plan describes cost calculations or other customer service related costs to be charged. These cost calculation may use properties coming from incoming chargeable items whose chargeable item classes may differ

- A charging plan describes the charging patterns which relate to the cost defined in the price plan. These charging patterns may use properties coming from chargeable items whose chargeable item classes may differ
- Several chronological versions of a price plan or a charging plan can coexist in the rating context (each version taking into account changes in product costs)
- To increase offer flexibility, a charge can be applied on different chargeable item classes

7.3.6.1 Master and Dependent Charges

Every charge is associated to a type which is determined during the charge creation and cannot be modified later. Every charge can be:

- A **master** charge: This kind of charge is not synchronized with other charges. It is independent of other charges combined in a charge plan or in an offer and thus has its own trigger and calculation modes. It represents neither an associated cost (such as commission, sponsorship) nor a derived cost (such as a discount on a basic price).
- A **dependent** charge: This kind of charge is synchronized with another charge and uses its own trigger and/or calculation modes. A dependent charge may depend on another dependent charge. These links are then translated into a series of descending dependencies. Dependent charges are arranged according to their priority in the charge plan or in the offer. They are also assigned to a role (commission, third-party billed commission, sponsorship, discount) depending on the business requirements to model.

> **Note**
>
> In an integrated *SAP Solution* scenario with the SAP CRM and the SAP ERP/FI-CA components of SAP Business Suite, if you need to manage payments to a business partner, SAP SE or an SAP affiliate company recommends that you only configure appropriate master charges in SAP CC with the *Revenue Sharing and Partner Settlement* function enabled into the SAP ERP/FI-CA component.
>
> Refer to the Integration Guide for Offer-to-Cash Based on BRIM Using SAP ERP for more information about partner settlement, customer billable item classes, and partner billable item classes. See at help.sap.com/brim.

7.3.6.2 Combination of Charges

A charge is a reusable object which must be combined and customized in another business objects:

- In a charge plan for charging operations based on provider contracts
- In an offer for charging operations based on subscriptions

> **Note**
>
> - The 2023 release of SAP CC provides two variants of the “Convergent Charging” business scenario. According to your integration scenario, you will use its global charging services based on:
>   - Provider contracts (typical integration with an external CRM system)

- Subscriptions (integration with various and heterogeneous external provisioning systems)
- In an integrated *SAP Solution* scenario with the SAP CRM and the SAP ERP/FI-CA components of SAP Business Suite, the convergent charging services are based on provider contracts

7.3.7 Counter

A counter is a variable mostly declared and defined in a charge, in a refill logic or in an allowance logic. Each counter has a name and an initial value. A counter is used to introduce a numerical property when modeling a decision tree (price plan, pricing macro, charging plan or refill logic).

All the necessary counters are finally created and stored in the business agreements (provider contract, subscription) between the service provider and its customers. A counter is used every time SAP CC performs charging and refilling operations at runtime and executes the calculation algorithms configured in the decision trees.

> ⓘ Note
>
> An unlimited number of counters can be theoretically declared, but a huge number of counters can lead to decreasing performances.

7.3.7.1 Persistent and Transient Counters

Persistent counters are created, initialized and stored in the business agreement (provider contract, subscription). They are modified during charging and refilling operations. SAP CC permanently stores these values in database.

Transient counters are created during charging and refilling operations. They are only **temporary** stored in the memory of the system until the end of the calculation process.

> ⓘ Note
>
> A transient counter can only be declared in a price plan of a charge or in an allowance logic.

7.3.7.2 Counter Redefinition

The initial value of a counter can be redefined during the modeling of:

- A charge plan
- A refill plan
- An allowance plan
- An offer

This redefinition is also available at the creation of a subscription for a customer during the Order Management process.

> **Note**
>
> It is not possible to redefine the initial value of a counter when creating a provider contract. The external CRM[94] or provisioning system is not supposed to redefine the initial values of such visible counters. By default, shared counters are initialized with a zero value.

7.3.7.3 Counter Sharing

SAP CC gives the possibility to share the values of different counters created inside the business agreements. Shared counters must be specifically declared at the charge plan, refill plan or offer levels:

Sharing Level	Description	Configurations of Master Data for Service Provider
Subscriber Account	A counter can be shared between multiple provider contracts belonging to the same subscriber account	Configurations are necessary: • A parent contract shares a counter with linked provider contracts.
Provider Contract	A counter can be shared between multiples charges and refill logic included in different contract items	Configurations are necessary: • In the charge plan: a counter must be declared and set as visible by external systems • In the charges customized in this charge plan: a counter of each charge must be linked to the counter previously declared in the charge plan • In the refill plan: a counter must be declared • In the refill logic customized in this refill plan: a counter must be linked to the counter previously declared in the refill plan The final configuration is necessary in the CRM[95] or external provisioning system (see section about the provider contract for details).

94 Customer Relationship Management
95 Customer Relationship Management

Sharing Level	Description	Configurations of Master Data for Service Provider
Contract Item	A counter is shared between all the charges activated in a contract item referencing a charge plan	Configurations are necessary: • In the charge plan: a counter must be declared • In the charges customized in this charge plan: a counter of each charge must be linked to the counter previously declared in the charge plan
Subscription	A counter is shared between all the charges activated in the subscription	Configurations are necessary: • In the offer: a counter must be declared • In the charges customized in this offer: a counter of each charge must be linked to the counter previously declared in the offer
Sub-subscription	A counter is shared between all the charges activated in the sub-subscription	Configurations are necessary: • In the suboffer: a counter must be declared • In the charges customized in this suboffer: a counter of each charge must be linked to the counter previously declared in the suboffer

7.3.7.4 Counter Creation in a Provider Contract

Persistent counters are not created during the creation of the provider contract. Each counter is automatically created when it is needed by SAP CC to perform a business process (charging, refilling or activation):

- For a usage charging: the system creates automatically and only the counters which are:
  - Declared in a charge
  - Needed during the execution of a usage rate included in the price plan
- For a usage refill: the system creates automatically and only the counters which are:
  - Declared in a refill logic
  - Needed during the execution of a usage refill included in this refill logic
- For the external or internal triggering of the activation process: the system creates the counters which are needed for the management of recurring rates or refills.

> **Note**
>
> A provider contract may miss some counters because they have not been required by the system.


7.3.7.5 Counter Creation in a Subscription

Persistent counters must be created during the creation of a subscription. They must be created at the appropriate location in the structured subscription (root, sub-element). Each element of the subscription which is supposed to use this shared counter must refer to it.

> **Note**
>
> - Counters values can be initialized, set, defined and redefined at different levels:
>   - In the charge
>   - In the charge plan, in the refill plan or in the offer
>   - In the provider contract or in the subscription
> - In a charge plan, the visibility of counters can be restricted to SAP CC when a counter has no meaning in the external CRM[96] or provisioning system. Counters that are exposed must be first declared in a counter dictionary that is available and shared by all the SAP users and catalogs
> - Counters can be shared between the charges added to a charge plan or to an offer
> - Counters can be shared between the charges assigned and activated in a provider contract

7.3.8 Price Plan

A price plan is a set of instructions used to compute the cost of a charge. It is graphically represented in the Core Tool user interface by a tree called "decision tree". The price plan is an essential concept of SAP CC. It represents the basic structure for charges and pricing macros business objects.

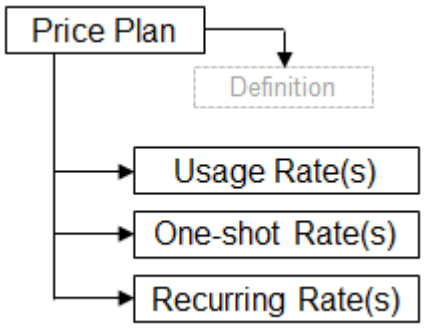

7.3.8.1 Price Plan Components

Price plans are made up with different components used as calculation tools for the creation of price plans or pricing macros. A combination of these components makes up a decision tree which is required to compute the cost of a charge.

[96] Customer Relationship Management

Available components are:

- Rates
- Comparisons
- Operators
- Splitters
- Functions

7.3.8.2 Counters

A price plan includes the declaration of the necessary counters. The persistent counters will be created in the provider contract or subscription related to each customer.

7.3.8.3 Parameters

A parameter is a variable which is defined in a charge or in a refill logic. Each parameter has a name, a type and a default value. A parameter introduces a new numerical, date or string type property to the rating context, and gives the possibility to:

- Retrieve this new property using the calculation system
- Redefine the parameter for each service provider as part of their offer or charge plan
- Redefine the parameter for each customer as part of his business agreement (at provider contract or subscription level) with a service provider

> **Note**
>
> - The value of a parameter is initialized in a charge or in a refill logic object
> - The value of a parameter can be redefined by an SAP User at the following levels:
>   - In a charge plan, a rate plan or in a refill plan
>   - In an offer
> - The value of a parameter can be redefined by an external provisioning or CRM[97] system at the following levels:
>   - In a provider contract
>   - In a subscription
> - Some particular types of parameters are predefined and can be used when modeling a charge plan, a rate plan or a refill plan. The parameters that are visible from the external provisioning or CRM system can have the following types and formats:
>   - Mapping table identifier (string)
>   - Mapping table key (string)
>   - Range table identifier (string)
>   - Invoice text (string)

[97] Customer Relationship Management

7.3.8.4 Pricing Macros

A pricing macro is a tool which gives the possibility for users to optimize the creation and modification of price plans. A pricing macro is a small reusable element capable of retaining and applying a calculation formula. A price plan including common calculation formulas can thus be easily managed and maintained by using pricing macros.

7.3.8.5 Translation Tables

In order to develop and simplify complex price plans, users sometimes need to create properties that do not exist in the rating context.

A translation table is a tool dedicated to this kind of price plans. It gives the possibility to generate new properties based on existing properties and, at the same time, search within a table for corresponding output values.

> ⓘ Note
>
> It is not possible to override a translation table in a charge plan, in a refill plan or in a provider contract.

7.3.8.6 Tier Tables

In order to model complex price plans, users sometimes need to implement tiered tariffs. To ease such implementations, a new price plan component has been introduced to manage tier tables. This component gives the possibility to define different output values for different ranges of a numeric input property.

> Example

	Output range		
Input range	**Value #1**	**Value #2**	**Value #3**
x ≤ 60	1	2	
60 < x ≤ 120	2	3	A
120 < x ≤ 200	4	4	AV
200 < x	6	5	GH

> ⓘ Note
>
> - Tier tables are handled in chronology (each row of a table can be modified, which leads to a new version of the table)
> - To compute the output value of a numeric output column, 4 different modes have been implemented:

- Single, non-linear
- Single, linear
- Cumulative, non-linear
- Cumulative, linear

- Tier tables can be used in a price plan or in a charging plan
- Tier tables can be overridden in offer conditions, charge conditions and charge activations of subscriptions using a specific tier table whose definition thus has a higher priority
- It is not possible to override a tier table in a charge plan, in a refill plan or in a provider contract

7.3.8.7 Mapping Tables and Mapping Table Classes

A mapping table is a table of correspondence for mapping an input set of values to an output set of values defined for different periods of time. According to a reference date, SAP CC selects the right output set during charging or refilling operations.

Mapping tables can be used in a price plan, in a charging plan and in a decision tree of a refill logic. Input values of a mapping table can be strings and currencies, whereas output values can be strings and numbers.

A mapping table class is a master data which defines a common structure (input and output value sets) for several mapping tables and subscriber mapping tables.

ⓘ Note

- To model flexible price plans and refill logic, the selection of the mapping table which must be used at runtime for a charging or refilling operation can be customized by using a dedicated parameter. This parameter gives the possibility to select one table from all the tables having the same class.
- No redefinition or no exception is possible
- For a particular input set (also named input key), two sets of output values cannot exist for the same time slot
- Different sets of output values can be set up for time periods that overlap. The final output set will be selected by applying the following rules:
  - Rule 1: when more than one period can be identified for a given input and a reference date, the period whose start time is the closest to considered time is selected
  - Rule 2: if two periods have the same start time, the shortest one is selected first
- In an integrated scenario with the SAP ERP/FI-CA component of the SAP Business Suite, a default mapping table class is provided to manage recurring fees. The relevant mapping tables are automatically created by the SAP CRM system when releasing a commercial product (see Price Table documentation below).
- Subscriber mapping tables are mapping tables which are assigned to a subscriber account. In that case, they do not belong to any catalog and cannot be used by several customers. They can be reused in all or some of the provider contracts belonging to the subscriber account. You can also configure the customer master data so that each provider contract has its own subscriber mapping table.
- In an integrated *SAP Solution* scenario with SAP SOM (SAP Subscription Order Management) in Convergent Invoicing, an agreement table is a particular mapping table or a particular range table stored in SAP CC that allows sharing data between several subscriber accounts.

→ Remember

Agreement tables are part of customer master data. For technical and performance reasons, you are able to manage them like mapping or range tables.

- To create an agreement table, use the procedures for creating a mapping table or a range table.
- To search for an existing agreement table, use the procedures for finding a mapping table or a range table and by filtering the `Agreement ID` information.

7.3.8.8 Price Table

A price table is a particular mapping table that is created and maintained by the SAP CRM system. It is thus only available in an integrated scenario with the SAP ERP/FI-CA component of the SAP Business Suite.

A price table gives the possibility to:

- Manage prices and price conditions for a commercial product, directly and transparently from SAP CRM
- Reuse these prices when modeling charges with recurrent fees in SAP CC

A price table is defined by a set of 2 inputs (price key, currency) and one output number (price).

ⓘ Note

- A price table corresponds to a particular mapping table class which is provided by default. It must be added to a unique catalog of a given service provider by using the Core Tool user interface. This object must not be modified. No mapping table based on this class must be created (create your own class)
- Do not use a price table in a usage rate or in a one-shot rate for a price plan
- Do not create, modify or delete a mapping table based on a price table

7.3.8.9 Range Tables and Range Table Classes

A range table is a table of business data used to map ranges of positive numbers to a set of output string or number values which can represent prices, unit prices, or other credits. Some combinatorial rules can be applied to output values in order to compute final values and supplementary values. Intelligent pricing logic is associated in order to compute values by designing basic or complex algorithms.

Using a range table is recommended to design and configure a pricing logic which includes tiered pricing. In addition, a range table allows to define different prices for the same product or service that apply at different times.

A range table class is a master data which defines a common structure (input and output value sets) that can be used for several range tables and subscriber range tables.

ⓘ Note

- To model a flexible pricing logic (in price plans and refill logic), the selection of the range table which must be used at runtime for a charging or refilling operation can be customized by using a dedicated

parameter. This parameter gives the possibility to select one table from all the tables having the same class

- No redefinition or no exception is possible
- A particular range table named “Subscriber range table” has been designed to materialize range tables which are assigned to a subscriber account. These particular range tables do not belong to any catalog and cannot be used by several customers. They can be reused in all or some of the provider contracts belonging to the subscriber account. You can also configure the customer master data so that each provider contract has its own subscriber range table
- In an integrated *SAP Solution* scenario with SAP SOM (SAP Subscription Order Management) in Convergent Invoicing, an agreement table is a particular mapping table or a particular range table stored in SAP CC that allows sharing data between several subscriber accounts.

  → Remember

  Agreement tables are part of customer master data. For technical and performance reasons, you are able to manage them like mapping or range tables.

  - To create an agreement table, use the procedures for creating a mapping table or a range table.
  - To search for an existing agreement table, use the procedures for finding a mapping table or a range table and by filtering the `Agreement ID` information.

7.3.8.9.1 Industry Examples for Range Tables and Classes

Usage-Based Pricing Examples

Example	Range Lower Bounds	Range Upper Bounds	Last Upper Bound	Multidimensional Pricing or Ranking (Input Columns)	Computation Mode (Output Columns)
e-Mobility - Pricing for Electric Vehicles (EV) Charging Stations [page 206]	Exclusive	Inclusive	+Infinite	Yes, one pricing dimension	No
Tiered Pricing for Data Storage or Video Streaming [page 207]	Inclusive	Exclusive	+Infinite	Yes, one pricing dimension	Cumulative, linear

Example	Range Lower Bounds	Range Upper Bounds	Last Upper Bound	Multidimensional Pricing or Ranking (Input Columns)	Computation Mode (Output Columns)
Pricing for National and International Shipping [page 209]	Exclusive	Inclusive	Bounded (Inclusive)	Yes, two pricing dimensions based on: • Service types (letter, parcel) • Shipment categories or destination zones	No

7.3.8.9.1.1 e-Mobility - Pricing for Electric Vehicles (EV) Charging Stations

Example

A charging station company provides its end customers with a large network of electric recharging points for their electric vehicles (EVs). The business model is based on the charging time, the type of electric plug, and a fee for parking time once the vehicle is fully charged.

As the SAP CC pricing specialist for this company, you translate this pricing policy to SAP Convergent Charging concepts and capabilities. You decide to implement range tables.

You design and configure the following range table class:

- Class Options:
  - Range upper bounds: inclusive - In SAP CC, the range lower bounds are then exclusive.
  - Last range: unbounded - The last bound is +Infinite (+∞).
- Input Column:
  - **`Plug Type for EV Charging`** (string)
- Output Columns:
  - **`Price per Minute for EV Charging`** (number, no computation mode)
  - **`Price per Minute for Service Immobilization`** (number, no computation mode)

The SAP CC pricing specialist configures the following range table:

INPUT COLUMN (1)	RANGE	OUTPUT COLUMNS (2)

Plug Type for EV Charging	Recharging Duration (in min)	Price per Minute for EV Charging	Price per Minute for Service Immobilization
Type: string		Type: number Computation mode: none	Type: number Computation mode: none
"CHADEMO"	]0 (*), +∞[	0.3	0.3
"COMBO_CCS"	]0 (*), +∞[	0.3	0.3
"T2"	]0 (*), 4]	0.01	0.1
"T2"	]4, 8]	0.02	0.1
"T2"	]8, 15]	0.04	0.1
"T2"	]15, 30]	0.06	0.1
"T2"	]30, 55]	0.2	0.3
"T2"	]55, +∞[	0.3	0.3

Note

(*): In SAP Convergent Charging, when the range upper bounds are inclusive, then the lower bounds are exclusive. You must pay attention to the value 0 and translate the marketing policy by configuring a logic component *Range Table Introducer*. In this example, if the charging time is 0 mn, the cost is free of charge.

See: Range Table Introducer (Comparator)

7.3.8.9.1.2 Tiered Pricing for Data Storage or Video Streaming

Example

A company sells data storage solutions. It offers a storage option for the data redundancy across data stores.

The marketing team decides to use the tiered pricing model to attract a wider audience of end customers. It can boost sales.

As the SAP CC pricing specialist for this company, you translate this pricing policy to SAP Convergent Charging concepts and capabilities. You decide to implement range tables.

You design and configure the following range table class:

- Class Options:
  - Range upper bounds: exclusive
    - In SAP CC, the range lower bounds are then inclusive.

- Last range: unbounded - The last bound is +Infinite (+∞).

- Input Column:
  - **`Redundancy`** (locally redundant or geographically redundant)
- Output Columns:
  - **`Label for the Range`** (string)
  - **`Price per GygaByte`** (number / computation mode is *Cumulative, Linear*)

The SAP CC pricing specialist configures the following range table:

INPUT COLUMN (1)	RANGE	OUTPUT COLUMNS (2)	
Redundancy	**Storage Volume (in GB)**	**Label for the Range**	**Monthly Price per Gyga-Byte**
Type: string		Type: string	Type: number Computation mode: cumulative, linear
"GEOGRAPHICAL"	[0, 1 [	"Storage Level: 0-1 TB"	0.061
"GEOGRAPHICAL"	[1, 50 [	"Storage Level: 1-50 TB"	0.051
"GEOGRAPHICAL"	[50, 500 [	"Storage Level: 50-500 TB"	0.045
"GEOGRAPHICAL"	[500, 1,000 [	"Storage Level: 500-1,000 TB"	0.042
"GEOGRAPHICAL"	[1,000, 5,000 [	"Storage Level: 1,000-5,000 TB"	0.039
"GEOGRAPHICAL"	[5,000, 9,000 [	"Storage Level: 5,000-9,000 TB"	0.036
"GEOGRAPHICAL"	[9,000, +∞ [	"Storage Level: > 9,000 TB"	0.033
"LOCAL"	[0, 1 [	"Storage Level: 0-1 TB"	0.045
"LOCAL"	[1, 50 [	"Storage Level: 1-50 TB"	0.042
"LOCAL"	[50, 500 [	"Storage Level: 50-500 TB"	0.039
"LOCAL"	[500, 1,000 [	"Storage Level: 500-1,000 TB"	0.036
"LOCAL"	[1,000, 5,000 [	"Storage Level: 1,000-5,000 TB"	0.029
"LOCAL"	[5,000, 9,000 [	"Storage Level: 5,000-9,000 TB"	0.024
"LOCAL"	[9,000, +∞ [	"Storage Level: > 9,000 TB"	0.019

7.3.8.9.1.3 Pricing for National and International Shipping

Example

A company sells postal services. The business model is based on the format of the letters and parcels, the weight (in grams), and shipping options. The marketing team defines some different pricing and discounting rules. For letters, the shipping options are economy, green, and priority mail. For parcel posts, the shipping options are the destination zones (national or international zone).

As the SAP CC pricing specialist for this company, you translate this pricing policy to SAP Convergent Charging concepts and capabilities. You decide to implement range tables with two input columns for multidimensional pricing.

You design and configure the following range table class:

- Class Options:
  - Range upper bounds: inclusive
  - Last range: bounded
- Input Columns:
  - **`Format`** (letter or parcel)
  - **`Shipment Class`** (economy/green/priority for letters and national/zoneA/zoneB/zoneC for parcels)
- Output Columns:
  - **`Number of Stamps`** (number / no computation mode)
  - **`Total Price`** (number / no computation mode)

The SAP CC pricing specialist configures the following range table:


INPUT COLUMNS (2)		RANGE	OUTPUT COLUMNS (2)	
Format	**Shipment**	**Weight (in g)**	**Total Stamps**	**Total Price**
"letter"	"economy"	] 0, 20]	1	0.8
"letter"	"economy"	] 20 , 100]	2	1.72
"letter"	"economy"	] 100 , 250]	4	3.44
"letter"	"green"	] 0 , 20]	1	0.88
"letter"	"green"	] 20 , 100]	2	1.76
"letter"	"green"	] 100 , 250]	4	3.52
"letter"	"green"	] 250 , 500]	6	5.28
"letter"	"green"	] 500 , 3,000]	8	7.04
"letter"	"priority"	] 0 , 100]	2	2.1
"letter"	"priority"	] 100 , 250]	4	4.2
"letter"	"priority"	] 250 , 500]	6	6.3
"letter"	"priority"	] 500 , 3,000]	8	8.4
"parcel"	"national"	] 0 , 250]	0	4.95

INPUT COLUMNS (2)		RANGE	OUTPUT COLUMNS (2)	
Format	**Shipment**	**Weight (in g)**	**Total Stamps**	**Total Price**
"parcel"	"national"	] 250 , 500]	0	6.25
"parcel"	"national"	] 500 , 750]	0	7.1
"parcel"	"national"	] 750 , 1,000]	0	7.8
"parcel"	"zoneA"	] 0 , 500]	0	12.3
"parcel"	"zoneA"	] 500 , 1,000]	0	15.2
"parcel"	"zoneA"	] 5,000 , 10,000]	0	36.3
"parcel"	"zoneA"	] 10,000 , 20,000]	0	60.3
"parcel"	"zoneA"	] 20,000 , 30,000]	0	60.3
"parcel"	"zoneB"	] 0 , 500]	0	16.65
"parcel"	"zoneB"	] 500 , 1,000]	0	19.9
"parcel"	"zoneB"	] 5,000 , 10,000]	0	46.25
"parcel"	"zoneB"	] 10,000 , 20,000]	0	72.15
"parcel"	"zoneC"	] 0 , 500]	0	24.35
"parcel"	"zoneC"	] 500 , 1,000]	0	27.1
"parcel"	"zoneC"	] 10,000 , 20,000]	0	164.6

7.3.9 Charging Plan

A charging plan is a set of instructions used to determine the subscriber account(s) which must be charged with the amount computed during the execution of a price plan.

> ⓘ Note
>
> In case of charging operations based on subscriptions, a charging plan can also be used to refill the balance of a prepaid account.

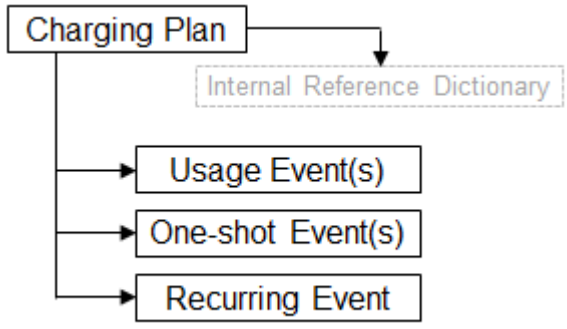

7.3.9.1 Charging Plan Components


Charging plans are made up with different components used as triggering tools for account charging purposes. Like price plan components, the combination of charging plan components make up a decision tree which is used to associate usage costs and subscriber accounts by using information of the subscriptions (see charging mapping) or provider contracts (see account assignments).

Available components are:

- Charging
- References
- Comparisons
- Operators

7.3.10 Offer

An offer is an object which describes the way to sell one or more customer services. It corresponds to templates of charging agreement conditions (such as usage and/or recurring fees) and a validity period during which customers can subscribe to. Each condition is represented by a specific charge called charge condition.

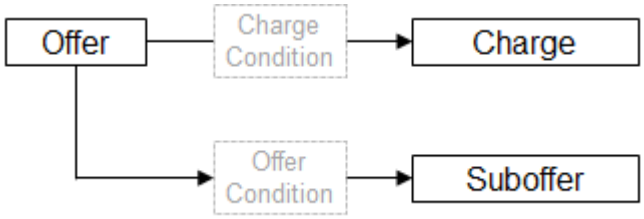

Two different types of offer are implemented:

- Simple offers
- Complex offers, used to describe offers such as packages, options, business-to-business offers, and so on


> ⓘ Note
>
> An offer always contains at least one pricing condition (charge) or another offer (called suboffer and redefining the charging conditions of the parent offer through an “offer condition”).

7.3.11 Aggregation Policy

An aggregation policy is a master data which gives the possibility to merge multiple charged items into a single one, during charging operations performed in a session-based execution mode only.

An aggregation policy refers to a charged item class, in order to determine the charged items that must be aggregated. It is also made up with the following information:

- A set of aggregation rules, which are associated to the different properties of the selected charged item class
- An aggregation period, which gives the possibility to schedule an automatic reporting of the pending charged item(s), in case of session inactivity for example

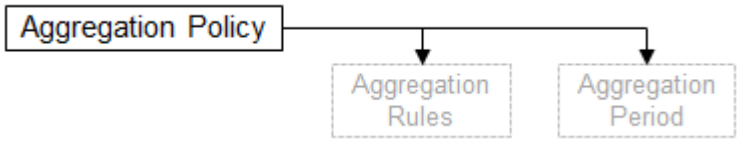

> ⓘ Note
>
> - Aggregation policies can be assigned to customized charges of charge plans, when configuring the generation of charged items resulting from charging operations. As a charge plan can contain multiple customized charges (related to master or dependent charges) which can be associated to aggregation policies, multiple pending charged items can coexist in the same session
> - The Charged Items Aggregation feature only concerns charged items related to Usage events, as the other events are triggered externally during the execution of the Activation process
> - Aggregation policies are not handled in chronology


7.3.12 Charge Plan and Rate Plan

Charge Plan

A *charge plan* is a piece of master data that models the way to charge the access and the consumption of a subscription- and usage-based service by a given end customer (subscriber of the service or other agreed service consumers). A charge plan from a service pricing catalog must be bundled in a commercial product in an interfaced CRM[98] system, SAP S/4HANA for Customer Management 2.0, or SAP CRM.

The charge plan is the key element of the new data model (DM) introduced in SAP CC release 3.0.

A charge plan includes redefined and customized charges and redefined counters and parameters. It also includes the declarations of the elements that are expected in the provider contract for each contracted charge plan (account assignments, user technical identifiers, counters, and parameters).

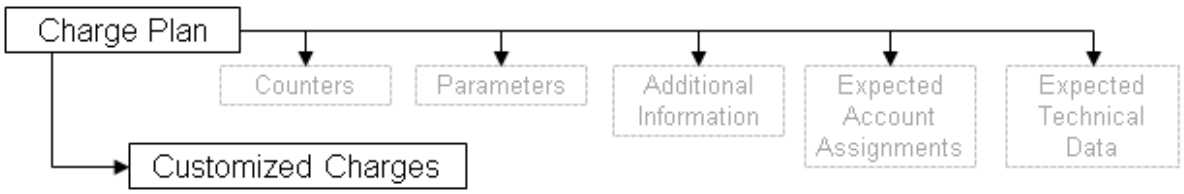

[98] Customer Relationship Management

Rate Plan

A *rate plan* is a charge plan [page 212] managed by the SAP CC Cockpit application as of major release 2020. The main difference is that charges used by a rate plan are defined for a unique rate plan and cannot be used by another rate plan.

Rate plans are a subset of charge plans and, therefore, using limitations apply compared to charge plans.

> **Note**
>
> The *Prepaid Account Management* feature is not available in case of convergent charging services based on rate plans.

> **Caution**
>
> Rate plans are identified with the attribute `managedByCockpit` set to `true`. Changing manually the value of this attribute can lead to inconsistencies or errors.

Combination of Charge Plans [page 213]

Charges and Dependencies [page 214]

Counters and Parameters [page 214]

User Technical Identifiers [page 215]

Expected Account Assignments [page 215]

Versions [page 215]

Lifecycle [page 215]

Counter Name Dictionary [page 216]

7.3.12.1 Combination of Charge Plans

Once created in the SAP CC system, the charge plans are combined in an external CRM[99] system (or other provisioning system) to model commercial products or offers for a service provider. To sell these products, long terms business agreements are signed by end customers. This leads to the creation of a provider contract that can be distributed to connected systems: its charging view includes activation data of charge plans and refill plan (on SAP CC side).

> **Note**
>
> In an integrated *SAP Solution* scenario with the SAP CRM system, a refill plan is assigned to a commercial product from the Interaction Center.

[99] Customer Relationship Management

7.3.12.2 Charges and Dependencies

A charge plan is made up with several configured and customized charges. Inside a charge plan, a dependent charge must be linked with either another dependent charge or a master charge to be synchronized with.

7.3.12.3 Counters and Parameters

A charge plan can include some declarations of counters and parameters in order to:

- Share counters or parameters between the customized charges inserted into the charge plan
- Redefine the initial value of some counters or parameters present in a customized charge inserted into the charge plan, or the rate plan

> ⓘ Note
>
> In an integrated scenario with the SAP ERP/FI-CA component of the SAP Business Suite, a parameter named `SAP_BILL_CYCLE_DATE` can be used to correlate or synchronize the recurrent fees or refills with the billing cycles.

SAP CC gives the possibility to share a counter at provider contract level. The visibility level of the concerned counter must be set to “external” in the charge plan (the parameter is always "external" in a rate plan) in order to let the external CRM[100] or provisioning system manage this share.

> ⓘ Note
>
> - This sharing function must be implemented in the integration of your CRM or provisioning system by using the technical interfaces of SAP CC 2023 and the appropriate configuration of your charge plans, or rate plans
> - This sharing function can be customized in order to use namespaces to restrict the sharing in the provider contracts
> - In an integrated scenario with the SAP CRM system, the combination of charge plans or rate plans is directly possible from the Interaction Center

SAP CC provides a visibility function in order to let the external CRM or provisioning system redefine the value of parameters. A charge plan or a rate plan must include the parameters which are visible by these systems.

> ⓘ Note
>
> The “internal” visibility is used to share counters or parameters between the different charges inserted and customized in a charge plan or a rate plan.

[100] Customer Relationship Management

7.3.12.4 User Technical Identifiers

A charge plan includes the declaration of the user technical identifiers that will be expected in the activation of this charge plan (see contract item). A User Technical Identifier (UTI) corresponds to a value which identifies a customer for several marketable services. For example an e-mail address, a phone number, the IMSI or the MSISDN can be used as a UTI for several customer services such as SMS, MMS, voice calls or data transfers.

> ⓘ Note
>
> For each charge inserted into a charge plan and including a price plan with a usage rate, it is necessary to attribute the service identifiers to these UTIs.

7.3.12.5 Expected Account Assignments

A charge plan includes the declaration of the account assignments that will be expected in the activation of this charge plan (see contract item). This declaration is used by the external CRM[101] or provisioning system to require the necessary accounts when creating a provider contract during a sales order.

An account assignment is an attribution of a prepaid or external postpaid account to a contract item of a provider contract. It is used during the charging and refilling operations to determine the account(s) which must be credited or debited.

Each contract item includes all the mandatory account assignments as originally declared in the activated charge plans.

7.3.12.6 Versions

Different versions of a charge plan can coexist in the system for different periods of time.

7.3.12.7 Lifecycle

A lifecycle management function based on a status is available for a charge plan in order to restrict its use once it is set to the “released” status.

[101] Customer Relationship Management

7.3.12.8 Counter Name Dictionary

A list of counter names and descriptions is available and mandatory in case of counters declared in a charge plan or a refill plan and that will be visible in an external CRM[102] or provisioning system. This dictionary is unique and configured for all the SAP users and for all the service pricing catalogs in the SAP CC system.

7.3.13 Pricing Function

A *pricing function* is a pricing macro [page 202] managed by the SAP CC Cockpit application as of major release 2023.

A dedicated app allows the pricing specialist to configure this pricing element in the pricing catalog.

A **pricing function** is a pricing element that defines some reusable pricing logic to be executed. A pricing function can be called from a charge of a rate plan or from another pricing function. A pricing function is defined by:

- Its pricing tree that includes the reusable pricing logic to be executed
- Its input properties as input data for the pricing logic
- Counters that can be updated by the execution of the pricing tree
- Its output properties that can be updated during the execution

At the end of the execution, an amount is computed and output properties are generated. As a result of the pricing function call, associated coutners are updated and this data is returned to the pricing tree that called the pricing function in the form of new properties (one for the computed amount and some others for the computed output properties).

See also: Important Concepts, Pricing Tree, and Pricing Components

> ⚠ Caution
>
> Pricing functions are identified with the attribute `managedByCockpit` set to `true`. Changing manually the value of this attribute can lead to inconsistencies or errors.

Available Pricing Components



[102] Customer Relationship Management

The function component dynamically computes and returns a calculated amount from properties in the pricing context.

Icon	Name	Definition	SAP CC Version Availability
	Flat Amount	The flat amount component computes and returns an amount based on a constant value or an amount from the pricing context properties.	2023 FPS 0
	Error	The error component is a particular function that provides the ability to not compute any amounts and to return a configurable exception at runtime.	2023 FPS 0 (*)



The comparator component compares properties or data of the same type and provide the ability to set up some different logic that depends on the comparison results. The comparator component can compare the properties of input properties, counters, or properties previously computed by another pricing component.

Name	Definition	SAP CC Version Availability
Date/Time Comparison	The date comparison component is a pricing component that compares a date property to a given constant or to a date property of the pricing context.	2023 FPS 0 (*)
Date Matching	The date matching component is a pricing component that checks if a specific part of a date property matches a given constant or the same specific part of another date property of the pricing context.	2023 FPS 0 (*)
Mapping Table Lookup	The mapping table lookup component is a pricing component that provides the ability to look up data in mapping tables, compare some data values (in input columns) to pricing context data, and set up some pricing logic based on the comparisons results.	2023 FPS 0 (*)
Number Comparison	The number comparator is a pricing component that compares a number property to a given constant or another number property of the pricing context.	2023 FPS 0 (*)
Number Matching	The number matching component is a pricing component that checks if a numerical property matches either a given value or a given interval of values.	2023 FPS 3
Range Table Lookup	The range table lookup component is a pricing component that provides the ability to look up data in range tables and compare these data values (ranges, input columns) to values of the pricing context.	2023 FPS 0 (*)
String Comparison	The string comparator is a pricing component that compares a string property to a given constant or another string property of the pricing context.	2023 FPS 0 (*)
String Prefix Matching	The string prefix matching component is a pricing component that compares a string property to specified prefixes of type string.	2023 FPS 0 (*)
Time Slot Comparison	The time slot comparison component is a pricing component that compares a date/time property to a given recurring time slot.	2023 FPS 0



The operator component changes the pricing context by adding or modifying context properties.

Icon	Name	Definition	SAP CC Version Availability
	Arithmetic Computation	The arithmetic computation component is an operator that carries out an arithmetical operation between two numerical values or properties and returns the result in a new property.	2023 FPS 0 (*)
	Counter Update	The counter update component is an operator used to update the value of a counter in a pricing tree.	2023 FPS 0 (*)
	Date/Time Shift	The date/time shift component is an operator that shifts a date/time property by adding or subtracting a time value.	2023 FPS 0 (*)
	Notification Triggering	The notification triggering component is an operator used to create notifications returned as part of the rating process result.	2023 FPS 0 (*)
	Output Property Update	The output property update component is an operator used to update the value of an output property during the execution of a pricing function.	2023 FPS 0
	Pricing Function Call	The pricing function call component is an operator used to call a pricing function.	2023 FPS 0
	Property Introduction	The property introduction component is used to create new properties or to modify existing properties of a pricing tree.	2023 FPS 0 (*)
	Property Type Conversion	The property type conversion component is an operator used to convert, transform, or extract data at runtime.	2023 FPS 0 (*)
	Proration	The proration component is an operator used to prorate a number property based on a configured proration period.	2023 FPS 2
	Rule-Based Property Introduction	The rule-based property introduction component is used to create a new property based on assigment rules.	2023 FPS 0 (*)
	String Concatenation	The string concatenation component is used to concatenate two or more string properties or character strings.	2023 FPS 0 (*)
	Time Duration Calculation	The time duration calculation component is an operator that calculates the period of time between two date/time properties.	2023 FPS 0 (*)

Icon	Name	Definition	SAP CC Version Availability
	Time Duration Conversion	The time duration conversion component is an operator that converts a time duration property from a unit of time to another.	2023 FPS 0 (*)



The aggregator component executes the logic defined in its branches in sequence and computes the aggregation of the results.

Name	Definition	SAP CC Version Availability
Addition	The addition component is an aggregator that adds up multiple amounts in sequence and computes the total amount.	2023 FPS 0 (*)
Number Split-Based Addition	The number split-based addition component is an aggregator that adds up two amounts computed by splitting a numerical property into an upper part and a lower part according to a limit value and applying some different pricing logic to both parts.	2023 FPS 3
Time-Slot-Based Addition	The time slot-based addition component is an aggregator that adds up multiple amounts in sequence and computes the total amount by splitting a given period over a recurring time slot and applying some different pricing logic when the split subperiods are in or out of the slot.	2023 FPS 2

Business Configuration

Creating or Copying a Pricing Function

Related Information


Pricing Specialist's Journey

7.3.14 Customized Charge

A customized charge was a reusable charge inserted in a charge plan when configuring the pricing for your chargeable services or products. A customized charge is technically named "charge plan item". A charge plan item includes the characteristics of the added charge and some possible customizations such as:

- The redefinitions of some persistent counters
- The redefinitions of some parameters
- The configuration of the tax relating to the use of the chargeable service or product
- The configuration of the generation of the output charged items in data files
- The configuration of the details included in the response of the operation execution
- The mapping between the charging references (of the related charge) and the expected account assignments (of the charge plan)
- The configuration of the service identifiers

> **Note**
>
> A customized charge inserted into a charge plan is technically called a “charge plan item”. For further information about charge plan items, refer to the SAP CC 2023 Web Services Documentation (SOAP) documentation.

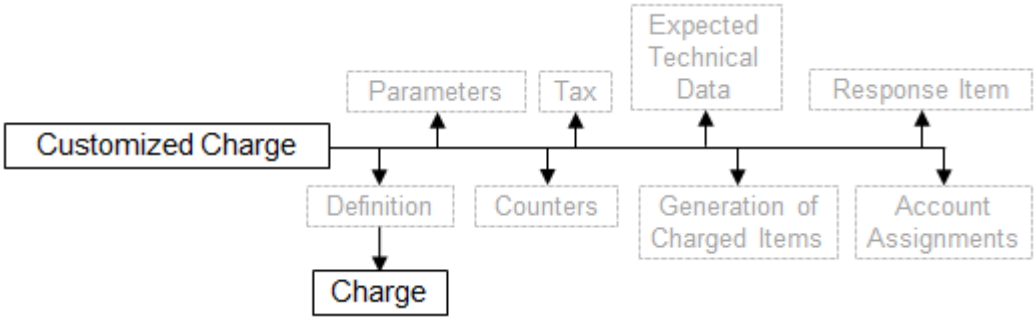

Counters [page 221]

Parameters [page 222]

Tax Settings [page 222]

Configuration of the Generation of Charged Items [page 224]

Configuration of the Generation of Response Items [page 224]

Charging Reference Mapping [page 225]

Service ID Declaration [page 225]

7.3.14.1 Counters

The initial values of persistent counters can be redefined by linking these counters to new counters declared in a charge plan.

7.3.14.2 Parameters

The value of each parameter originally set up in a reusable charge can be redefined if necessary in the customized charge.

It is also possible to associate a parameter to a new parameter declared in the charge plan in order to let the external CRM[103] system redefine the value of the parameter when creating a provider contract for a customer of the service provider.

7.3.14.3 Tax Settings

By default, a customized charge inherits from the tax settings defined in the reusable charge. Nevertheless, it is possible to override these tax settings by defining some specific tax settings to a customized charge.

The following invoicing tax systems are supported:

- EU Value Added Tax (EU VAT), which gives the possibility to specify a unique tax level and a VAT rule
- Flat Tax, which gives the possibility to specify a specific tax rate value
- US Telecommunication Tax, which uses the Avalara AvaTax for Communications (AFC) third-party tax system

[103] Customer Relationship Management

System	Description
EU VAT	Price plans output amounts which are technically named “Base Amount” and which correspond to net amounts by default. Referring to price plans, the customized charges give the possibility to override this default configuration and specify if a “Base Amount” must be a net or gross amount. Using the VAT system consists in specifying a given tax level, which can be: • A predefined tax level such as normal, reduced, super reduced, and so on • A level coming from a property of the rating context The tax rate associated to a given tax level may vary between countries (e.g. "normal" level in France corresponds to 19,6%, but corresponds to 19% in Germany). It is thus necessary to customize SAP CC with all the tax rates and country codes that are necessary to represent the tax information for the end customers of a service provider. The correspondence between countries, tax levels and associated tax rates is defined in a dedicated file named `VATRate.txt`. The content of this file is recorded in both database and memory for performance reasons. **Example** The following text represents the “normal” tax rate for France: `/FR/0; France VAT; 0.196; 01/05/01; 0` **Caution** • When a customized charge is configured to handle "net" amounts, all the amounts handled by the associated price plan are assumed to be net amounts. Otherwise, taxes are computed twice. • When a customized charge is configured to handle "gross" amounts, all the amounts handled by the associated price plan are assumed to be gross amounts. Otherwise, no tax can be computed. A VAT rule can be selected to support the 2010 EU VAT Invoicing Directive to determine the places of taxation according to the business requirements. Two main use cases are B2B and B2C commercial exchanges.

System	Description
Flat Tax	Price plans output amounts which are technically named "Base Amount" and correspond to net amounts by default. Referring to price plans, the customized charges give the possibility to override this default configuration and specify if a "Base Amount" must be a net or gross amount. Using the flat tax system consists in specifying a given flat tax rate value, which can be: • A constant value • A value coming from a property of the rating context
US Telecommunication Tax	The U.S. Telco Tax system is built upon the Avalara AvaTax for Communications (AFC) third-party tax system, which must be acquired separately to SAP CC. This system requires a large number of parameters which are specific to U.S. Telco taxes, such as: • The origin of a call • The destination of a call • The type of service which must be charged • The type of customer (B2B/B2C) • And so on For further information about the U.S. Telco Tax system, refer to the documentation of the Avalara AvaTax for Communications (AFC) third-party tax system in order to correctly set-up your charge according to your business.

7.3.14.4 Configuration of the Generation of Charged Items

A customized charge includes the configuration of the generation of the charged items resulting from charging operations. These output records can include various details computed by SAP CC when performing charging operations at runtime.

In case of charging operations performed in session-based execution mode, it is also possible to specify an aggregation policy in order to aggregate the charged items before outputting them, as well as a reporting scope to configure which charged items are reported when a reporting condition from an aggregation policy is fulfilled.

7.3.14.5 Configuration of the Generation of Response Items

A customized charge includes the configuration of the details included in the response of the operation execution. The returned transaction details include a filtered list of properties computed during the execution of a price plan. If no response item is configured, all computed transaction details are returned.

In case of charging operations performed by the REST charging APIs, a response item must be configured, otherwise nothing is returned.

7.3.14.6 Charging Reference Mapping

Each charging reference declared and used in the charge of the customized charge must be mapped to one of the expected account assignment declared in the charge plan.

7.3.14.7 Service ID Declaration

A customized charge must include the technical identifiers of the customer services that can be charged by SAP Convergent Charging for their usage. Each identifier must be associated to a UTI declared in the charge plan.

> ⓘ Note
>
> - These technical identifiers are named Service IDs and must be present in the chargeable items received by SAP CC from the mediation system as transactional data
> - These declarations are not relevant if the customized charge only includes recurrent or one-shot rates in its price plan

7.3.15 Refill Item Class

A refill item class is an assembly of characteristics that can be associated to a refill item. Refill item classes must be configured in order to model the refill logic for usage refills. The algorithms can be based on the properties declared in the class.

7.3.16 Refill Record Class

A refill record class is an assembly of characteristics that can be associated to a refill record. Refill record classes can be optionally configured and reused when customizing the refill logic inserted in a refill plan.

> ⓘ Note
>
> - Taxes do not apply to refill record classes
> - In an integrated scenario with the SAP ERP/FI-CA component of the SAP Business Suite, the configuration of the refill record classes is simplified and automated by creating the billable item mapping

7.3.17 Refill Logic

A refill logic is a reusable object which defines the calculation algorithms for different credits (money, units, and so on) of a refill operation. It can model an algorithm for manual refills, automated periodic refills, one-shot refills and account event refills.

Every refill logic is customized within a refill plan.

7.3.17.1 Components

The refill logic includes some decision trees that consist of a set of instructions based on refill components which are similar to the components of a price plan.

Available components are:

- Refills
- Functions
- Comparators
- Splitters
- Operators

The refill logic can include pricing macros to share and reuse parts of instructions.

7.3.17.1.1 Persistent Counters

The refill logic includes the declaration of the necessary counters. The persistent counters will be created in the provider contract of each customer.

7.3.17.1.2 Parameters

The refill logic can include some parameters. The default value can be redefined in a refill plan or in a contract item referencing this refill plan.

7.3.18 Refill Plan

A refill plan defines generic terms of refilling used to credit the prepaid account of a customer. Refill plans are necessary if you want to provide the end customers with refill services in addition to the marketable services.

A refill plan contains a refill logic and some configurations.

7.3.18.1 Combination

Once released in the system, a refill plan can be bundled with some charge plans in a CRM[104] system or an external provisioning system in order to model commercial products and offers. Then it is activated in the provider contract of the customer when he subscribes to these products.

> **Note**
>
> - Taxes do not apply to refill plans
> - In an integrated scenario with the SAP CRM system, a refill plan is assigned to a product from the Interaction Center

7.3.18.2 Counters and Parameters

A refill plan can include:

- Some parameters used to redefine the default value of some parameters present in the customized refill logic
- Some declarations of counters in order to redefine the initial values of some counters present in the customized refill logic

> **Note**
>
> In an integrated scenario with the SAP ERP/FI-CA component of the SAP Business Suite, a parameter named `SAP_BILL_CYCLE_DATE` can be used to correlate or synchronize the recurrent refills with the billing cycles.

7.3.18.3 Counter Sharing at Provider Contract Level

SAP CC provides gives the possibility to share a counter at provider contract level for all the charges and the refill logic available in the different contract items. The external CRM[105] or provisioning system can manage the share.

- This function must be implemented in the integration of your CRM or provisioning system by using the technical interfaces of SAP CC 2023 and the appropriate configuration of your charge plans and a refill plan
- This function can be customized by using namespaces to restrict the sharing in the provider contracts

[104] Customer Relationship Management
[105] Customer Relationship Management

7.3.18.4 Parameter Redefinition at Provider Contract Level

The default value of the parameters defined in a refill plan can be redefined by the external CRM[106] or provisioning system when creating a provider contract and adding a contract item referencing this refill plan.

7.3.18.5 User Technical Identifiers

A refill plan optionally includes the declaration of the user technical identifiers that will be expected in the activation of this refill plan (see contract item). A User Technical Identifier (UTI) is a single key that identifies a customer for several marketable services and for different refill services. For example an e-mail address, a phone number, the IMSI or the MSISDN can be used as a UTI for several customer services (SMS, MMS, voice, data).

> **Note**
>
> The configuration of the User Technical Identifiers depends on the integration of SAP CC with external systems that can deal with refill requests.

7.3.18.6 Expected Account Assignment

A refill plan includes the declaration of a unique account assignment that is expected in the **activation** of this refill plan in a provider contract. This declaration is used by the external CRM[107] or provisioning system to get the necessary prepaid account when creating a provider contract during a sales order.

7.3.18.7 Versions

Different versions of a refill plan can coexist in the system for different periods of time.

7.3.18.8 Lifecycle

A lifecycle management function based on a status is available for a refill plan in order to restrict its use once it is set to the “released” status.

106 Customer Relationship Management
107 Customer Relationship Management

7.3.18.9 Counter Name Dictionary

A list of counter names and descriptions is available and mandatory in case of counters declared in a charge plan or a refill plan and that will be visible in an external CRM[108] or provisioning system.

This dictionary is available for all the SAP Users and for all the catalogs in the system.

7.3.19 Customized Refill Logic

The customized refill logic is a reusable refill logic object inserted in a refill plan when modeling the pricing of customer services that features refilling functions for prepaid accounts. The refill plan item includes the characteristics of this refill logic and some possible customizations such as the:

- Redefinitions of some persistent counters
- Redefinitions of some parameters
- Configuration of the generation of the refill records (generated by SAP CC)
- Attribution of the charging reference with the **expected** account assignment
- Configuration of the service identifiers

> ⓘ Note
>
> A customized refill logic inserted in a refill plan is technically named refill plan item. For further information about refill plan items, refer to the SAP CC 2023 Web Services Documentation (SOAP) documentation.

7.3.19.1 Counters

The initial values of persistent counters can be redefined by linking these counters to new ones declared in a refill plan.

7.3.19.2 Parameters

The value of each parameter originally set up in a reusable refill logic object can be redefined in the customized refill logic added to a refill plan. It is also possible to associate a parameter to a new parameter declared in the refill plan in order to let the external CRM[109] system redefine the value of the parameter when creating a provider contract for a customer of the service provider.

[108] Customer Relationship Management
[109] Customer Relationship Management

7.3.19.3 Configuration of the Generation of the Refill Records

The customized refill logic includes the configuration of the generation of data (refill record) resulting from the refilling function and that must be taken into account by an external billing system. These output records can include various details calculated by SAP CC when performing the refilling function at runtime.

7.3.19.4 Charging Reference Attributions

The unique charging reference declared and used in the refill logic must be associated with the account assignment expectation declared in the refill plan.

7.3.19.5 Service ID Declaration

The customized refill logic must include the technical identifiers of the refill services which can be used by SAP CC to identify the service which is supposed to handle the refill requests. Each of these technical identifiers must be associated with a UTI declared in the charge plan in order to identify the concerned prepaid account.

> ⓘ Note
>
> - These technical identifiers are named Service IDs and must be present in the chargeable items received by SAP CC from the mediation system as transactional data
> - These declarations are not relevant if the customized charge includes only recurrent or one-shot rates in its price plan

7.3.20 Monitoring Plan

A monitoring plan defines the generation of spending statuses that you may want to monitor in a connected policy system (or monitoring system) during charging and refilling operations relating to an end customer. The plan defines a list of spending status identifiers reported by SAP CC. For each declared spending status, the plan defines the monitored source (counter in contracts) and some logic settings for defining some label values for the reported spending status and the spending thresholds that relate to these spending status labels.

The monitoring plans are then combined and assigned to commercial products in a CRM[110] or provisioning system and finally activated in the provider contract of an end customer of the service provider.

The monitoring plan consists of:

- One or more configurations of target spending statuses to be generated and reported by the SAP CC system

[110] Customer Relationship Management

- A set of parameters to configure the monitoring plan; the default value is the name of a range table.
- A release status which can be open, released, or obsolete

> **Note**
>
> - You create monitoring plans only when SAP CC is connected to a policy control system and when the spending status monitoring function is implemented in your system landscape.
> - SAP CC manages monitoring plans to configure the spending status monitoring feature in master data. When SAP CC is connected to SAP CRM, you must enable a switch in SAP CC so that SAP CRM can consider the monitoring plans as charge plans.

7.3.20.1 Spending Threshold Settings

You configure the logic to convert the values of a counter (in a contract) to a label reported in a spending status by setting up a range table dedicated to this function. You configure a range table for each spending status that you want to monitor in the policy system.

- You need to configure particular range tables that are defined by a unique output column as type of string. The upper bounds of ranges define the spending thresholds (or spending limits) applicable to the corresponding counter values.
- When a counter value is out of these ranges, the SAP CC system considers that the spending status label is unknown.
- You must set up the relevant range table class in the pricing catalog of the service provider. You can set the range upper bounds to Inclusive or Exclusive depending on the business requirements. If the last range upper bound is limited the SAP CC system considers the spending status.

7.3.20.2 Versions

Different versions of a monitoring plan can coexist in the system for different periods of time.

7.3.20.3 Lifecycle

A lifecycle management function based on a release status is available for a monitoring plan to restrict its use between different statuses.

7.3.20.4 Counter Name Dictionary

A list of counter names and descriptions is available and mandatory in case of counters declared in a monitoring plan or a refill plan and that will be visible in an external CRM[111] or provisioning system. This dictionary is available for all the SAP Users and for all the catalogs in the system.

7.3.20.5 Spending Status Descriptions

A list of possible spending statuses and their label description is available the SAP CC system. This configuration must be known in the downstream system.

7.3.21 Allowance Event

The allowance event is a technical transactional data record which contains the list of properties (and their associated values) required to use allowances.

In the decision trees of allowance logic objects, refill logic objects or price plans, an allowance event corresponds to a message which is sent to a configured set of allowances of the same provider contract, informing for example, that a quantity of service is consumed.

Processing an allowance event may consist in:

- Modifying the allowance itself (e.g. counters and/or validity period)
- Updating the allowance event if necessary

> **Example**
>
> A message is sent to a set of allowances of a provider contract.
>
> - One of these allowances extends its validity period
> - Another allowance debits a quantity of service by modifying the allowance event

> **Note**
>
> - The allowance that sends an event does not receive it
> - Allowances cannot react to an event by sending a new event

For more information on how to send an allowance event, read the chapter about the Allowance Event Sender (Operator) component, available in the SAP Convergent Charging Logic Components Reference documentation. For more information about how to configure an allowance for listening to a given allowance event, read the chapter about the Allowance Logic and the Allowance Plan, available in the SAP Convergent Charging Core Tool Online Help documentation.

[111] Customer Relationship Management

7.3.22 Allowance Event Class

An allowance event class contains a list of property descriptions which define the type of a given Allowance Event. Each property description defines the name and the type of a property.

> ⓘ Note
>
> The name of the allowance event class defines the type of the event (e.g. an allowance event class named **`ALLOWANCE_DEBIT`** defines the event associated to the debit of an allowance).

7.3.23 Allowance Logic

An allowance logic object:

- Defines the rules and conditions of use of an allowance
- Can model an algorithm for several event-based services, one-shot, and recurrent allowance events
- Is shareable, or not

> ⓘ Note
>
> The allowance logic can be of two types:
>
> - **Shareable**: This type of allowance logic gives the possibility to create shared allowances from shareable allowance plans. Such configuration implies some restrictions regarding the use of logic components (for further information, refer to the SAP Convergent Charging Logic Components Reference documentation). This allowance logic can also be used to create allowances that are non-shared
> - **Not shareable**: This allowance logic is only used to create allowances that are accessed within a subscriber account
>
> The calculation algorithms can use properties relating to allowance events described in different allowance event classes. An allowance plan gives the possibility to customize any allowance logic object.

> ⚠ Restriction
>
> If you choose to create **shareable allowance logics**, you must know that a few components are forbidden within them as inconsistencies in the validity period of shared allowances may occur:
>
> - Recurring Trigger
> - One-Shot Trigger
> - Allowance Event Sender (Operator)
> - Allowance Property Introducer (Operator)
> - Allowance Validity Period Updater (Operator)
> - Create Allowance Operator

7.3.23.1 Components

An allowance logic object can use the following components:

- Functions
- Comparators
- Operators

> **Note**
>
> An allowance logic object can also include pricing macros to share and reuse parts of instructions.

7.3.23.2 Persistent Counters

An allowance logic object includes the declaration of all the necessary persistent counters. You can create persistent counters in the allowances of a provider contract.

> **Note**
>
> - The allowance logic uses a set of persistent counters that are stored in the database for modeling allowances. In the case of shared allowances, these persistent counters are considered as distributed counters, that can be split in two categories:
>   - Distributed Decrement Counter: such a counter can be used to model a credit bucket for example. It is initialized with a positive value and only the decrement operation is available on it. Furthermore, its value cannot be less than zero and no consistent read is allowed on it
>   - Distributed Increment Counter: such a counter can be used to model a meter for example. It can be initialized with any positive value and only the increment operation is available on it. A consistent read operation is allowed via the increment operation only
>
>   For more information about the Decrement Counter Operator and the Increment Counter Operator components, refer to the SAP Convergent Charging Logic Components Reference documentation.
> - If the shareable allowance logic is used by allowances that are not shared, persistent counters are created and defined in the same way as in charge or refill plans. For example, if these counters are instantiated only for a subscriber account, they are visible and used by the provider contracts that belong to this subscriber account.

7.3.23.3 Transient Counters

An allowance logic object includes the declaration of all the necessary transient counters.

7.3.23.4 Parameters

An allowance logic object can include some parameters. You can redefine any default value defined in a customized allowance logic object referencing this allowance logic. See below for further information about customized allowance logic objects.

7.3.24 Customized Allowance Logic

A customized allowance logic object is a reusable allowance logic inserted in an allowance plan for configuring the pricing for your chargeable services or products. A customized allowance logic object is technically named "allowance plan item".

An allowance plan item includes the characteristics of the allowance logic and can be customized to:

- Redefine persistent counters
- Redefine parameters
- Configure the generation of charged items (output data generated by the SAP CC system)

7.3.25 Allowance Plan

An allowance plan is a master data which models the behavior of an allowance at the time of its creation, activation, usage, and expiration.

In Core Tool, the allowance plan can be of two types:

- **Shareable**: This type of allowance plan is used to create allowances that are shared between subscriber accounts. However, such allowance plan also gives the possibility to create allowances that are not shared. This allowance plan only consists of shareable allowance logic objects
- **Not shareable**: This allowance plan is only used to create allowances that are accessed within a subscriber account. This allowance plan consists of allowance logic objects that are shareable or not shareable

> ⚠ Caution
>
> As of version 2021 release FPS 1 of SAP Convergent Charging, Allowance Plans can be managed either by Core Tool or by Cockpit. Allowance Plans managed by Cockpit are identified with the attribute `managedByCockpit` set to `true`.
>
> Changing manually the value of this attribute or using the wrong application to manage allowance plans can lead to inconsistencies or errors.

7.3.25.1 Lifecycle

During its life cycle, an allowance plan has one of the following statuses:

- **Open**: This status is automatically assigned to the allowance plan at creation time. This status:
  - Gives the possibility to modify the allowance plan
  - Does not allow creating an allowance using the Create Allowance component in a charge plan, in a refill plan, and in an allowance plan. A Create Allowance component must reference a released allowance plan for creating an allowance.
- **Released**: This status only gives the possibility to make few changes to the allowance plan. It also gives the possibility to create an allowance using the Create Allowance component, which stores the newly created allowance in the provider contract of the customer

7.3.25.2 Versions

Different versions of an allowance plan can coexist in the system for different periods of time.

7.3.26 Allowance Interface

An allowance interface lists and describes the common parameters and counters used by all the allowances. It gives the possibility to extend the default set of properties of allowances including information such as the unique identifier, the activation date (Validity Start Date) or the expiration date (Validity End Date).

> ⓘ Note
>
> The persistent counters that are defined in the allowance interface cannot be read and are not visible if they are implemented by shared allowances.

> Example
>
> You can add parameters or counters to the Allowance Interface to:
>
> - Sort allowances in the allowance event sender operator component
> - Compute properties in the allowance property introducer operator component

A Change List is a master data which is only relevant when implementing the Catalog Transport feature. This master data contains a set of versions of other master data which must be transported together to a remote SAP CC system.

A change list is a master data including master data such as:

- Offer
- Pricing Macro
- Translation Table

- Tier Table
- Mapping Table Class
- Mapping Table
- Range Table Class
- Range Table
- Chargeable Item Class
- Charged Item Class
- Charged Item Aggregation Policy
- Charge
- Charge Plan
- Refill Item Class
- Refill Record Class
- Refill Logic
- Refill Plan
- Allowance Event Class
- Allowance Logic
- Allowance Plan
- Monitoring Plan

> **Note**
>
> A change list contains all the versions of the objects. Any change to these versions after creating the change list has no impact on its content.

A change list can also include dependent objects such as:

- Billable Item Mapping
- Consumption Item Mapping
- Allowance Interface
- Counter Name Dictionary
- Refill Record Mapping
- Spending Status Description

> **Note**
>
> Dependent objects can be included in a change list automatically. For example, adding a charge plan to a change list may include the charges, the mapping tables, the range tables, and the other objects directly and indirectly referenced by this charge plan.

7.4 Master Data for the Subscribers

Access [page 238]

Subscriber Account [page 238]

Business Data Tables [page 244]

Subscription [page 244]

Provider Contract [page 245]

Contract Item [page 249]

Allowances [page 250]

7.4.1 Access

An access corresponds to a technical key under which an end customer consumes a chargeable service that is monetized with SAP Convergent Charging. This identifier gives SAP CC the possibility to identify the related charges required for rating and charging purposes according to a reference date.

For a subscription containing one or more charges, you can create multiple accesses for each master charge. Creating more than one access for the same customer allows this customer to use a service under different identities.

For a provider contract, SAP CC automatically creates and maintains all the necessary accesses that are relevant for each contract item of the provider contract.

> **Note**
>
> An access is technically linked to a charge through an accessible charge, and thus represents a unique way to access to a given charge activation for a certain period of time.

7.4.2 Subscriber Account

Before consuming services related to commercial products and offers they subscribed to, end customers must be associated to accounts. These accounts are named *subscriber accounts* in SAP Convergent Charging and are used to charge the service use (consumptions, periodical and one-off fees). They are made up of different information such as:

- One or more prepaid accounts [page 239] stored in SAP CC
- A list of external accounts [page 240] that reference postpaid accounts stored outside SAP CC
- One or more credit-limit balances, which extends the flexibility of balances management
- Tax settings [page 241] (tax system, taxation mode, and so on) available for each prepaid account or postpaid account of the subscriber account
- Additional information

> **Note**
>
> - Like any other account balance, balances of prepaid and external accounts are debited every time end customers consume a service and can be credited through refill operations
> - The balances which must be impacted is determined through the charging plan which represents the association between a charge (calculated through a price plan) and an account balance

- Credit-limit balances are not available in case of convergent charging services based on provider contracts
- In a system landscape containing several SAP ERP/FI-CA systems, each subscriber account includes information about the customer management area it belongs to. In this area, an SAP ERP system and an SAP CRM are responsible for:
  - A subset of the master data
  - The related transactional data (billable items and consumption items)
  - The possible notifications (empty prepaid balances, expired prepaid accounts)

Prepaid Account (and Balance) [page 239]

External Account [page 240]

Credit-Limit Balance [page 240]

Tax Settings [page 241]

Alerts and Notifications [page 242]

Customer Management Area (CMA) [page 243]

7.4.2.1 Prepaid Account (and Balance)

A *prepaid account* is an account that composes a subscriber account for a service subscriber. It is managed and stored in SAP Convergent Charging (SAP CC). Each prepaid account contains a balance (an amount associated with a currency) that can be debited or credited.

A prepaid balance is a balance dedicated to prepaid services' consumption. It represents a pre-defined available amount of money customers can use. This balance is checked every time an end customer consumes a service, in order to accept or deny the request. The “Balance Management” functional module provides mechanisms to update this kind of balance and send notifications to end customers.

An “Empty Limit” property has been implemented to represent the theoretical threshold under which no service consumption is allowed by SAP CC. When this limit is reached, end customers must credit their prepaid account in order to increase the related balance.

ⓘ Note

To increase the flexibility of prepaid balances management, additional functions are available:

- **Overspending**, which gives the possibility for an end customer to consume services even if the empty limit is reached.
- **Overrun**, which gives the possibility to distribute the excess consumption among multiples accounts. When overrun is enabled, a consumption event can be totally or partially charged to a prepaid balance or an external balance, limiting the rejection of consumption. Note that this mechanism is not available in case of convergent charging services based on provider contracts.

→ Remember

If the service pricing configuration is based on rate plans configured in SAP CC Cockpit, then the prepaid accounts are not available in the account assignments. The system cannot select this type of account.

The *Prepaid Account Management* feature is not available in case of convergent charging services based on rate plans.

7.4.2.2 External Account

An external account represents a link to a postpaid account managed by a third-party billing system (outside SAP CC) such as SAP Convergent Invoicing in the SAP ERP/FI-CA or SAP S/4HANA system.

External accounts are declared in the subscriber accounts for the contracting service provider and its subscribers.

SAP CC manages two types of external accounts:

- **Payable**: An *account payable* is an account by which a service provider owes a partner money (and sends settlement reports to the partner).
- **Receivable**: An *account receivable* is an account by which a client owes a service provider money (and receives invoices from the service provider).

SAP CC verifies the compatibility between account types and business transactions in real time.

> ⓘ Note
>
> The holder of this account can be subject to pay the tax according to the tax settings configured in SAP CC. You can define the taxation policy to be applied to an external account.

7.4.2.3 Credit-Limit Balance

Credit-limit balances give the possibility to refine the way services must be consumed. They behave as virtual balances associated to services to monetize and represent consumption limits that end customers cannot exceed.

> ⁂ Example
>
> An end customer subscribes to a USD 25 prepaid offer containing phone calls and SMS, but wants to limit this SMS service to USD 10. To implement this specific requirement, a credit-limit balance (attached to the subscriber account for this end customer) is set to USD 10 and associated to the SMS service.

> ⓘ Note
>
> The credit-limit balance management function is not available in case of convergent charging services based on provider contracts.
>
> It is available with the former data model (DM) based on offers and subscriptions in master data.

7.4.2.4 Tax Settings

A subscriber account contains tax settings which is shared with all its related accounts (prepaid and external postpaid).

By default a new subscriber account is assumed to use the EU VAT system, and the service provider is assumed to pay the tax amount to the tax authority.

Nevertheless, it is possible to set up these tax settings by defining the following specific options:

Tax Settings	Description
Tax system	The following invoicing tax systems are supported: • None, which gives the possibility to deactivate the tax calculation process for the related account • Both VAT and Flat Tax, which gives the possibility to specify a unique tax level and VAT rule in the tax settings of the customized charges • US Telco Tax, which uses the Avalara AvaTax for Communications (AFC) third-party solution **Note** For further information about the tax systems, refer to the definition of the customized charge [page 221] master data located in the Master Data for the Service Provider [page 192] section of this documentation.
Taxation mode	The taxation mode gives the possibility to specify who is supposed to pay the computed tax amounts to the tax authority. The following taxation modes are supported: • **Service Provider Subject to Pay**, which must be used when the service provider pays the tax amounts to the tax authority • **Account Holder Subject to Pay**, which must be used when the customer pays the tax amounts to the tax authority • **Account Holder Exempted**, which must be used when the customer is granted with a tax exemption. Note that even if they are not applied on the "Base Amount" property of the price plans, tax amounts are computed for reporting purposes • **None**, which gives the possibility to disable the tax calculation process. Note that this option also avoids any reporting related to tax

Tax Settings	Description
Tax specific settings	The tax specific settings depend on the selected tax system, and correspond to specific information that may or must be filled to compute the tax amounts. When the Value Added Tax system is selected, a taxation location named Tax Zone must be specified. This option can be used to specify: • That no tax applies to the accounts (prepaid and postpaid) of the subscriber account • That the VAT rule specified in the charge customized in a charge plan applies if any. If no rule is specified in this charge, no tax applies to the accounts (prepaid and postpaid) of the subscriber account • The ISO 3166 country code of the taxation place of the holders of prepaid or external postpaid accounts in the subscriber account. This location gives the possibility to determine in which country the tax amounts are computed and thus to retrieve a list of possible tax levels and associated rates When the U.S. Telco Tax system is selected, the following information can be set: • **Origination**, which correspond to the origin of the event (address, geographical code, and so on) • **Termination**, which corresponds to the destination of the event (address, geographical code, and so on) • **Service Address**, which corresponds to the location of the service provider (address, geographical code, and so on) • **Customer Type**, which gives the possibility to specify if the customer is a private customer or a business customer • **Incorporated Code**, which gives the possibility to specify if the customer lives inside or outside of an incorporated area (which corresponds to a geographical zone) • **Resale Flag**, which gives the possibility to specify if the customer is a seller or a reseller **Note** The U.S. Telco Tax specific settings are optional as they can be also set in the charge customized in an offer or in a charge plan. If this information is defined in the subscriber account, it overrides the information of the customized charge.

7.4.2.5 Alerts and Notifications

Account balances can be connected to a multicast notification mechanism to inform another system (including end customers) that the available amount of a balance has reached (or exceeded) a personalized specific threshold. To inform end customers, these notifications can be sent in real time (for example, when end customers are making phone calls).

7.4.2.6 Customer Management Area (CMA)

> **Note**
>
> This section is relevant only if you use SAP Convergent Charging in an integrated *SAP Solution* scenario based on SAP ERP.
>
> In this situation, the SAP system landscape includes one or more SAP ERP/FI-CA systems and one or more SAP CRM systems.

In an environment with multiple ERP and CRM systems, a customer management area (CMA) is an area composed with a single system or a couple of systems that manages the master data and transactiona data. This implementation scenario defines logical system pairs that include an SAP ERP/FI-CA system and an SAP CRM system. A pair identifies the SAP systems connected to an SAP CC system and that are responsible for the master data management and that are involved in the following business processes:

- Transactional data about service usage (billable items, consumption items)
- Customer master data provisioning and maintenance (subscriber accounts [page 238]), which is the business partner management function in an integrated *SAP Solution* scenario
- ABM notifications about prepaid accounts [page 239] (balance amount alerts, expiration alerts), which is the business agreement management function in an integrated *SAP Solution* scenario

In SAP Convergent Charging, a **customer management area (CMA)** is declared with:

- A unique area name in SAP CC whose name includes the SAP system ID (SID) of the SAP ERP/FI-CA system in the area in combination with the client number of the *SAP Client* that stores the corresponding master data and configurations.
- A JCo destination of the SAP ERP/FI-CA system (resp. SAP S/4HANA system) that belongs to this area that manages master data stored in SAP CC
- A JCo destination of the SAP CRM system that belongs to this area and that receives ABM notifications

> **Note**
>
> When your SAP system landscape includes one or more SAP CRM systems, each customer management area must include the necessary information relating to an SAP CRM system.

In an integrated *SAP Solution* scenario, each area defines the SAP ERP system that is responsible for creating and maintaining the subscriber accounts in the master data stored in the SAP CC system as part of the business partner management function in the system landscape. This information is stored in the subscriber accounts by each SAP ERP system.

> **Note**
>
> - These settings are part of the business data [page 189] configured in the complete SAP CC system. It is not included in the pricing catalog [page 192] of a service provider.
> - The application administrator is responsible for these settings.

Default Area

One of the customer management areas is the default area. The SAP CC system considers this **default CMA** when performing the business processes that relate to a subscriber account without any customer management area.

7.4.3 Business Data Tables

Subscriber Mapping Tables [page 244]

Subscriber Range Tables [page 244]

7.4.3.1 Subscriber Mapping Tables

A subscriber account may contain subscriber mapping tables. Subscriber mapping tables are mapping tables which are attached to a subscriber account. Contrary to mapping tables, they do not belong to any catalog. Subscriber mapping tables contain subscriber specific data and can be used in the provider contracts related to the subscriber account they are attached to.

> ⓘ Note
>
> The subscriber mapping tables are not available in the subscriptions.

7.4.3.2 Subscriber Range Tables


A subscriber range table is a range table assigned to a subscriber account to be shared by all or some of the provider contracts related to this subscriber account.

The subscriber range tables are recommended to design and configure the pricing logic that includes tiered pricing that must be based on customer data.

> ⓘ Note
>
> The subscriber range tables are not available when using subscriptions.

7.4.4 Subscription

Subscriptions correspond to charging agreement conditions subscribed by customers and taking into account their specific needs. It thus represents the customized version of a given offer.

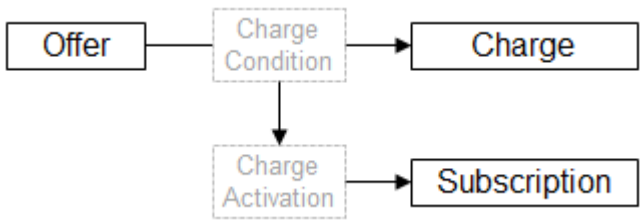

Like their associated offers, subscriptions are multi-level in terms of organization. However, a subscription does not necessary subscribe to all charges belonging to the offer. Only the mandatory charges are subscribed. For the other ones, users select the charge they want to subscribe to. When a charge condition is subscribed from the offer, a charge activation is technically created inside the subscription.

Three different types of subscriptions are implemented:

- **Online** subscriptions, which are charged in real-time mode and which are not compatible with the Chargeable Items Recharging process
- **Offline** subscriptions, which are always charged in a batch mode and which generate counter snapshots required for rerating purposes
- **Hybrid** subscriptions, which are charged in a batch or real-time mode according to the consumed service, which are unable to generate counter snapshots, and which are not compatible with the Chargeable Items Rerating process

Process	Online	Hybrid	Offline
Chargeable Items Charging (real-time execution mode)	■	■	
Chargeable Items Charging (batch execution mode)		■	■
Chargeable Items Rerating			■

7.4.5 Provider Contract

A provider contract corresponds to pricing and charging agreement conditions approved by a service subscriber (aka subscriber) with a service provider and taking into account some specific conditions. In SAP Convergent Charging (SAP CC), a provider contract refers and relates to a unique subscriber account, and contains all the elements which are necessary to process the charging and refilling operations for a subscription- and usage-based service.

Provider contracts are created by an external Customer Relationship Management (CRM) application or a provisioning system when capturing sales orders, product subscriptions, or contract signatures.

The SAP CC system charges these provider contracts for the usage (service consumptions) and other fees by also taking into account the existing allowances.

> ⓘ Note
>
> In an integrated *SAP Solution* scenario with the SAP CRM or SAP ERP/FI-CA components of the SAP Business Suite, a provider contract is a cross-component master data. Each system (SAP CRM, SAP CC, and SAP ERP) manages its specific part of a provider contract, and exchanges the other parts with the other components. Some replication and distribution mechanisms are available to manage these business objects.
>
> Refer to the **integration guide** that is implemented in your SAP CC system landscape. There are several scenarios and various scenario variants.

> **Note**
>
> In an integrated *SAP Solution* scenario with SAP S/4HANA, a provider contract is a cross-component master data.
>
> SAP Subscription Order Management (SAP SOM) in SAP Convergent Invoicing manages the data creation, replication, and distribution into SAP CC and other SAP components.
>
> Refer to the **integration guide** that is implemented in your SAP CC system landscape. There are several scenarios and various scenario variants.

> **Note**
>
> To manage scalability when processing numerous provider contracts, the Account Split concept separates them into individual subscriber accounts. Shared allowances enable counter sharing between these accounts.

See Also

Chargeable Items Charging Process [page 286]

Activation Process [page 256]

- Contract Item and Allowance [page 246]
- Activated Plan (Charge Plans and a Refill Plan) [page 247]
- Shared Counter [page 247]
- Versions [page 248]

Related Information

Service Provider [page 191]
Subscriber Account [page 238]

7.4.5.1 Contract Item and Allowance

A provider contract is composed of provider contract items and allowances:

- A **contract item** represents the subscription of a charge plan or a refill plan that is configured in the pricing catalog for the subscription- and usage-based service or product monetized by a service provider company.
  Each contract item corresponds to an activation of a charge plan or a refill plan originally set in SAP CC and which is part of the master data for the service provider.

- **Allowances** allow the service subscriber (and some agreed end customers) to consume subscription- and usage-based services for a limited time and/or quantity.
  Allowances are part of a provider contract and are used to model a spending limit, a credit bucket, or a promotion.

Related Information

Contract Item [page 249]
Allowances [page 250]

7.4.5.2 Activated Plan (Charge Plans and a Refill Plan)

When modeling the commercial product, the external CRM[112] or provisioning system is responsible for the consistency between subscriber accounts, provider contracts and the combinations of activated plans. A given provider contract can activate multiple charge plans (or multiple times the same charge plan), but **can only activate a unique refill plan**. Moreover, all the activated refill plans related to a given subscriber account must assign a different prepaid account (a prepaid account cannot be assigned in more than one activated refill plans related to a given subscriber account).

7.4.5.3 Shared Counter


A provider contract can include some counters which can be shared between multiple contract items for charging operations. These contract items have the same namespace.

To model enterprise credit pooling, the counter share can be extended between multiple provider contracts belonging to the same subscriber account. A parent contract shares some counters with some linked provider contracts.

> ✤ Example
>
> Enterprise Credit Pooling
>
> A small company wants to share some pooled minutes with its employees to lower the cost of the phone bill.
>
> To implement this pricing model in SAP Convergent Charging, you must configure a parent provider contract that shares a counter to linked contracts. The parent contract activates a charge plan responsible for crediting this counter. The linked contracts activate charge plans that debit this counter.

[112] Customer Relationship Management

> **Note**
>
> The initial value of a shared counter is 0. This value can be customized if a particular charge plan activated in a contract item includes a charge with a one-shot rate which sets up the initial value of the shared counter at the creation of the contract item.

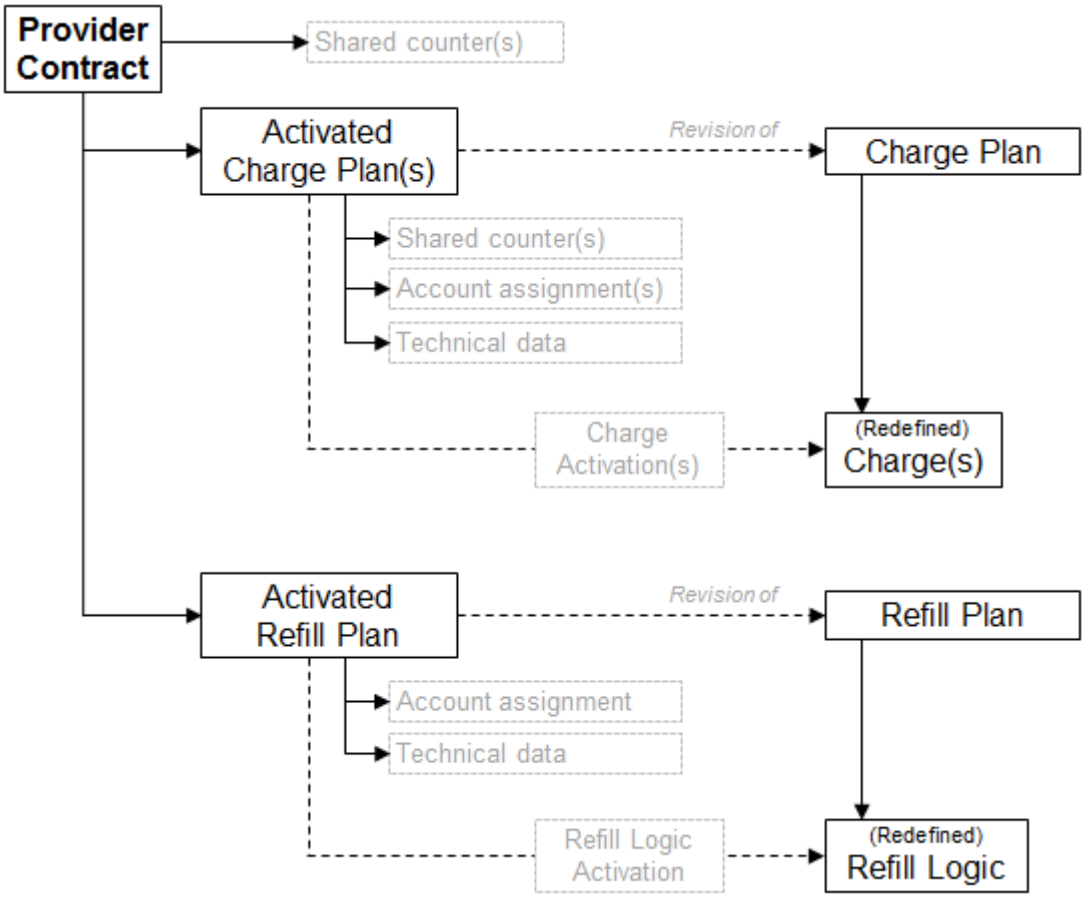

7.4.5.4 Versions

SAP Convergent Charging (SAP CC) can manage different versions of a provider contract. The structure of a provider contract can change (e.g. new/removed elements), but the content of the elements it contains can also change. A revision thus represents the version of the provider contract defined for certain period of time.

These periods of time are not defined at the provider contract level, but they are defined at a sublevel: each element of the contract (activations of charge plans or of a refill plan) can be defined for a time slot. This includes the account assignment data, technical data, shared counters, and parameters.

7.4.6 Contract Item

A contract item is the representation of the business agreement restricted to the part of the commercial product that references a charge plan, a refill plan, or a monitoring plan defined in the pricing catalog. It refers to this plan that has been activated by the CRM[113] or another external provisioning system when creating or maintaining the provider contract. A contract item includes the necessary counters or refers to some counters shared between multiple contract items in the provider contract or in linked provider contracts.

A contract item also includes the account assignments and the necessary technical data.

If a charge plan has been activated several times, the provider contract includes a contract item for each activation.

Charge Activation [page 249]

Counter and Counter Sharing [page 249]

Account assignment [page 249]

Technical Data and User Technical Identifiers [page 250]

7.4.6.1 Charge Activation

A contract item includes a charge activation for each customized charge declared in the corresponding activated charge plan. Each charge activation includes the persistent counters declared at charge level.

7.4.6.2 Counter and Counter Sharing

Each contract item includes its persistent counters. The counter can be shared with other contract items in the provider contract or with other contract items in linked contracts. Several counter namespaces are possible to restrict the counter sharing.

Each contract item refers to the counters shared by the other contract items with the same namespace.

7.4.6.3 Account assignment

An account assignment is an attribution of a prepaid or an external postpaid account to an element of the provider contract. It is used during charging and refilling operations to determine the account(s) to be credited or debited.

Each contract item of a provider contract includes all the mandatory account assignments as originally declared in the activated charge plan.

[113] Customer Relationship Management

7.4.6.4 Technical Data and User Technical Identifiers

Each contract item includes User Technical Identifiers (UTI) which are used by mediation systems as technical identifiers for the customers of the marketable services. These identifiers are reused by SAP CC to assign service consumption information with the real consumers. The same User Technical Identifier can be used for different services (ex.: a mobile phone number is used for SMS and MMS technical identifications).

> **Note**
>
> - If the same charge plan in the pricing catalog is activated several contract items, the USID must be different in the technical data.
> - If a provider contract includes several contract items activating different monitoring plans, the original monitoring plans must not include the generation settings for the same spending statuses.

SAP CC creates and manages automatically the necessary accesses for:

- All the marketable services declared in the different charges of an activated charge plan
- All the user technical identifiers
- All the contract items of the providers contracts

7.4.7 Allowances

Part of a provider contract, an allowance allows subscribers and agreed end customers to consume subscription- and usage-based services for a limited time and/or quantity.

An allowance for a chargeable service or product:

- Gives the possibility for an end customer to consume one or several services in a limited quantity or time.
- Can be used to model a credit bucket (e.g. 3GB of GPRS data, within a 30 days validity period).
- Is linked to an allowance plan at creation time. This plan defines the behavior of the allowance and includes some logic that is executed by the system.

When necessary, the SAP CC system credits or debits the existing allowances when executing the core processes: Chargeable Items Charging Process [page 286] and Activation Process [page 256].

> **Note**
>
> The validity period [page 251] of an allowance ranges from its start date/time to its end date/time.

Charge Activation [page 251]

Account Assignment [page 251]

Currency [page 251]

Allowance Validity Period [page 251]

Counters [page 252]

Parameters [page 252]

Sharing Allowances Between Provider Contracts Within a Subscriber Account [page 252]

Sharing Allowances Between Provider Contracts from Different Subscriber Accounts [page 252]

Immediate Availability of Shared Allowances [page 253]

7.4.7.1 Charge Activation

An allowance includes the charge activation for each customized allowance logic object declared in the corresponding activated allowance plan. Every charge activation includes the persistent counters declared at allowance logic level.

7.4.7.2 Account Assignment

An allowance relates to one of the accounts of the subscriber account relating to the associated provider contract. When an allowance is created, this account is assigned to an allowance according to the following rules:

- If the allowance is created inside a refill logic, the account corresponds to the prepaid account to be refilled
- If the allowance is created inside a charge, the account corresponds to the prepaid account or external account computed by the charging plan of this charge
- If the allowance is created in the allowance logic, the account is the account of the parent allowance (the first allowance that was created in the related charge plan or in the related refill plan)

7.4.7.3 Currency

The currency of an allowance is defined at allowance creation time. This currency is inherited from the refill logic or the charge that has created this allowance.

7.4.7.4 Allowance Validity Period

The validity period of an allowance corresponds to the period of time during which the allowance can be debited by the Chargeable Items Charging Process [page 286] or activated by the Activation Process [page 256]. It is also used to define the time at which the allowance:

- Can be informed about internal events (through allowance events)
- Can be purged by the allowances purge technical mechanism

7.4.7.5 Counters

Each allowance includes its own persistent counters. Refer to Allowance Logic [page 233] for more information about counters in shared allowances.

7.4.7.6 Parameters

Each allowance includes its own parameters.

7.4.7.7 Sharing Allowances Between Provider Contracts Within a Subscriber Account

The following rules must be taken into account when sharing allowances:

- An allowance is linked to a provider contract, which can be itself linked to a parent provider contract.
- A provider contract can access the allowances of its parent provider contract, but a parent provider contract cannot access the allowances of other provider contracts.

7.4.7.8 Sharing Allowances Between Provider Contracts from Different Subscriber Accounts

In SAP CC environment, it is possible to share allowances between provider contracts that belong to different subscriber accounts.

From a charge plan or a refill plan that is activated and referenced by a provider contract (called "contributor"), the pricing specialist can configure the creation of shared allowances that can be used from provider contracts that belong to other subscriber accounts. To share allowances, the provider contract that creates the allowances specifies a unique identifier named **allowance share ID** at the creation of the shared allowances. Some other provider contracts belonging to different subscriber accounts can use these shared allowances just by referencing this unique allowance share ID. For more information about the Create Allowance Operator component, refer to the SAP Convergent Charging Logic Components Reference documentation.

Several shares are possible.

Several contributor contracts are possible and can create shared allowances that are set with the same allowance share ID or with another allowance share ID.

> **Note**
>
> - When configuring a Create Allowance Operator component, the SAP CC pricing specialist specifies if the relating allowances are shared or not.

- The allowance plan of a shared allowance must be shareable.
  Its allowance logic must contain an Event-Based Trigger component that specifies the use of the relating shared allowances.

To build up a pack of shared allowances, one or several provider contracts can create several shared allowances under the same allowance share ID. To use these shared allowances, the other provider contracts (as beneficiaries of a share) must activate a charge plan (or refill plan) that contain one ore more Allowance Event Sender (Operator) components that are configured to send an allowance event to shared allowances set with this allowance share ID. Therefore, only the Event-Based Trigger components of these shared allowances are activated and the logic is executed by the SAP CC system.

→ Remember

Rerating is not possible with shared allowances.

ⓘ Note

In an integrated *SAP Solution* scenario with SAP SOM (SAP Subscription Order Management) in Convergent Invoicing, a **sharing group** is a group of provider contracts that can share some resources such as shared allowances. Several contributor contracts are possible. The sharing group must be assigned during subscription order creation or master agreement definition if shared allowances are in use. Every contributor contract must contain a contract item with an activated charge plan or a refill plan that is configured to create shared allowances.

This concept is only available in an integrated *SAP Solution* scenario based on SAP S/4HANA. Refer to its documentation.

These sharing groups are not visible in SAP CC.

Rerating is not possible.

SAP CC cannot check that a provider contract using a shared allowance is part of the sharing group defined in SAP Subscription Order Management (SAP SOM). This control is not possible.

7.4.7.9 Immediate Availability of Shared Allowances

The *Immediate Availability of Shared Allowances* feature consists in making shared allowances available as soon as they are created for receiving and processing allowance events.

Once enabled through the activation of the SHARED_ALLOWANCE_IMMEDIATE_AVAILABILITY_ENABLED system parameter, every shared allowance is available at creation time.

8 Technical Data

User [page 254]

Change List [page 254]

8.1 User

 An **SAP CC user** in SAP Convergent Charging (SAP CC) is:

- A **person**, an *individual user* who works with the user interfaces delivered with the SAP Convergent Charging software product.
- A **machine**, a *service user* that connects to and communicates with the SAP Convergent Charging systems through different technical interfaces.

SAP Convergent Charging manages the security for the SAP CC systems and gradually controls the accesses for the individual users and service users.

Related Information

User Management, Authentication, and Authorizations [page 136]

8.2 Change List

A **change list** is a "container" including some master data that the SAP CC user selects in order to transport data between systems. The selectable data is:

- Offer
- Pricing macro
- Translation table
- Tier table
- Mapping table class
- Mapping table
- Range table class
- Range table

- Chargeable item class
- Charged item class
- Charged item aggregation policy
- Charge
- Charge plan
- Refill item class
- Refill record class
- Refill logic
- Refill plan
- Allowance event class
- Allowance logic
- Allowance plan
- Monitoring plan

> **Note**
>
> A change list contains all the versions of the data objects. Any change to these versions after creating the change list has no impact on its content.

A change list can also include dependent objects such as:

- Billable Item Mapping
- Consumption Item Mapping
- Allowance Interface
- Counter Name Dictionary
- Refill Record Mapping
- Spending Status Description

> **Note**
>
> Dependent objects are included only if the user ticks the corresponding checkbox when creating the change list.

9 Processes and Functions

The following table provides a list of dependencies between the available processes and the concerned technical components:

Process	Core Server	BART Server	Diameter Server	SAP CRM	SAP ERP/FI-CA
Chargeable Items Acquisition	■	■			
Chargeable Items Consolidation		■			
Activation	■				
Product Modeling	■				○
Order Management	■			○	
Data Files Bulk Loading	■				
Guiding	■				
Prepaid Accounts Refilling	■				
Chargeable Items Rerating	■	■			○
Tax Calculation	■				
Chargeable Items Charging			□		
Credit Control Messages Conversion			■		

■ Mandatory ○ Mandatory in an SAP ERP/FI-CA integrated landscape □ Optional

9.1 Activation Process

Process Description [page 257]

External Triggering of the Activation Process [page 259]

Internal Triggering of the Activation Process [page 259]

Bulk Execution of the Activation Process [page 259]

Activation Process and Dependent Charges [page 260]

Transactions Generated by the Activation Process [page 261]

9.1.1 Process Description

The **Activation process** consists in generating internal events to trigger the recurring and one-shot events corresponding to a given date/time. The generation of these events depends on the next activation date/time. These generated internal events do not contain any property except the date/time which is used as a reference date/time to decide if a recurring or one-shot event must be computed or not to update the counters in provider contracts and subscriptions. For each event, a new charging or refilling operation is triggered.

This business process is a core process of SAP Convergent Charging (SAP CC) with the Chargeable Items Charging Process [page 286].

> **Note**
>
> - According to business requirements, it can be necessary to perform activation operations in the future. To limit the number of activation operations and thus avoid performance latencies, it is possible to define a period of time during which activation operations relating to a given incoming request can be performed. If an incoming request leads to activation operations that are posterior to the defined period, the system refuses the incoming request.
> For further information, consult the description of the `PERIOD_LIMIT_ACTIVATION` parameter in the SAP CC 2023 System Parameter Reference documentation.
> - The next activation date is computed for each activation charge in contracts. It is the closest date between the date of the next recurring event and the end date for this activation charge. The end date is the closest end date among the objects related to the activation charge (contract item, charge plan including parameters and account assignments, charge plan item, charge component).

For one-shot events, different subtypes of internal events can be generated by the system:

	Signification		
One-Shot Event Subtype	**Subscription Charging (Former Data Model)**	**Provider Contract Charging**	**Allowance (Use)**
CREATION	Not Applicable	Not Applicable	The Event Date/Time of the allowance creation has been reached.
ACTIVATION	The effective date/time of the subscription has been reached.	The start date/time of the first period of an element of the provider contract has been reached.	The Validity Start Date/Time of the allowance has been reached.
EXPIRATION	Not Applicable	Not Applicable	The Validity End Date/Time of the allowance has been reached.
SUSPENSION	The suspension date/time of the subscription has been reached.	An end date/time of a valid period of an element of the provider contract has been reached.	Not Applicable

One-Shot Event Subtype	Signification		
	Subscription Charging (Former Data Model)	Provider Contract Charging	Allowance (Use)
RESUMPTION	The resumption date/time of the subscription has been reached.	A start date/time of a valid period of an element of the provider contract has been reached.	Not Applicable
CANCELLATION	The commitment date/time of the subscription has been reached and the subscription is cancelled.	Not Applicable	Not Applicable
EARLY_CANCELLATION	The subscription has been cancelled before its commitment date/time.	Not Applicable	Not Applicable

It is possible to design price plans to model one-off fees according to these types of events.

> **Note**
>
> - When an element is added to a provider contract, the related one-shot fees are not immediately computed by default. They are only computed when the customer service is used for the very first time or when a recurring fee is applied
> - When an end customer creates or cancels a subscription, the related one-shot fees are not immediately computed by default. They are only computed when the customer service is used for the very first time or when a recurring fee is applied
> - It is possible to force these computations by triggering the *Activation* process from the Admin+ user interface or another frontend external system

For recurring fees, only the reference date is used to apply or not the fee. The recurring fees can also be applied in a prorated mode according to the life cycle of the subscription or the provider contract. This is done to reimburse the period where service no use has occurred, and/or charge only the used period.

9.1.1.1 Activation and Allowances

When a provider contract is activated, all its allowances are also activated. The SAP Convergent Charging (SAP CC) system first processes the allowances.

9.1.1.2 Activation and Linked Contracts

When the activation relates to a provider contract linked to a parent contract, both its recurring and one-shot events of its parent contract are triggered. The SAP Convergent Charging (SAP CC) system processes first the parent contract.

9.1.2 External Triggering of the Activation Process

The *Activation* process can be manually or automatically triggered:

- **Manual triggering**: To ensure that all recurring and one-shot fees have been triggered on a given subscription or provider contract at a given date (for example before invoicing a customer), the SAP power users can specify a code and a reference date to use
- **API triggering**: SAP CC provides some technical interfaces (Web Services, HCI[114]) which give the possibility to trigger the *Activation* process. According to your business requirement, you can implement a manual triggering, a periodic triggering or another triggering mechanism. For further information about these technical interfaces, refer to their technical documentation:
  - Web Services: Consider the Business Process Management process component and included service operations relating the *Activation* operations
  - HCI: Consider the Active operations available in the `admin.hci` and `cnd.message` Java packages

9.1.3 Internal Triggering of the Activation Process

The Activation process can be directly triggered by SAP CC:

- **Automatic triggering**: Each time a chargeable item is received, the Chargeable Items Charging process automatically:
  - Activates the current charge activation using the consumption date of the chargeable item as the reference date
  - Rates this incoming chargeable item
- **Periodic triggering**: SAP CC provides a default scheduler which gives the possibility for the updater to trigger the *Activation* process. This default scheduler is not synchronized with events of an external system, such as a billing cycle. As a consequence, if you want to synchronize the *Activation* process with your billing cycle, you must use the provided APIs[115] to implement your own scheduler, as described above. For further information about the configuration of the scheduler provided by default, consult the description of the ACTIVATION_SCHEDULER_ENABLED parameter in the SAP CC 2023 System Parameter Reference documentation

9.1.4 Bulk Execution of the Activation Process

The *Activation* process can be performed in a bulk mode through a scheduler which wakes up at a given reference date. When a bulk Activation operation is performed, all recurring and one-shot fees from the previous action to this reference date are activated.


[114] HTTP Communication Interface
[115] Application Programming Interface

> **Note**
>
> The updater uses multiple parameters (such as a recurrence). For further information about these parameters, refer to the “Updater” section of the SAP CC 2023 System Parameter Reference documentation.

9.1.5 Activation Process and Dependent Charges

If a master charge activated in a subscription or in a provider contract includes some recurring and/or one-shot rates in its price plans, the Activation process is automatically propagated to its dependent activated charges.

> **Example**
>
> Considering a subscription S with a master charge MC which contains 2 recurring “Rates” price plan components MR1 and MR2. Considering that MC is combined to dependent charges DC1 and DC2 which themselves contain some recurring “Rates” price plan components DC1R1 and DC2R1:

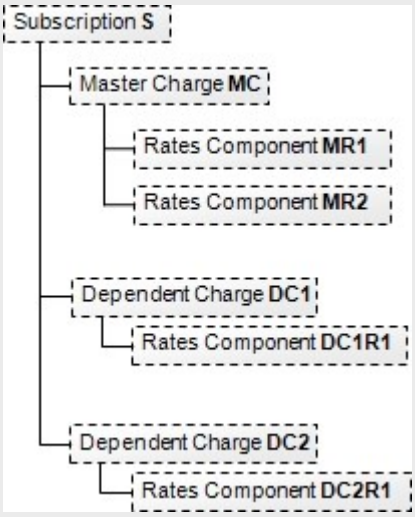

When MR1 and MR2 are activated with a reference date D, the following propagation to all dependent charges occurs:

1. **MC**: MR1 is activated. If D implies to trigger the recurring fee, an amount is calculated and stored in the rating context. Otherwise, no propagation is performed
2. **DC1**: The dependent charge receives the rating context and DC1R1 recurring fee is applied (D is not taken into account to trigger DC1R1 – however, D can be used and tested into DC1R1). A transaction is generated if DC1 is concerned.
3. **DC2**: The dependent charge receives the rating context and DC2R1 is applied in the same way than for DC1. A transaction is generated if DC2 is concerned.
4. **MC**: MR2 is activated. If D implies to trigger the recurring fee, an amount is calculated and stored in the rating context. Otherwise, no propagation is performed
5. **DC1**: The dependent charge receives again the rating context and DC1R1 recurring fee is applied again (D is not taken into account to trigger DC1R1 – however, D can be used and tested into DC1R1). A transaction is generated if DC1 is concerned.
6. **DC2**: The dependent charge receives again the rating context and DC2R1 is applied in same way than for DC1. A transaction is generated if DC2 is concerned.
7. All generated transactions are returned

> **Note**
>
> The number of generated transactions depends on the merging policy. If the **merge mode** is activated, a single transaction is generated, with an amount adjusted after each step.

> **Note**
>
> Only recurring and/or one-shot rates price plan components belonging to dependent charges can be addressed.

9.1.6 Transactions Generated by the Activation Process

The transactions generated by the *Activation* process follow the same life cycle than the transactions generated during the execution of the Chargeable Items Charging [page 286] process. These transactions are physically recorded into several files during the Data Files Generation [page 297] function. The bulkloaders then load the content of these files into the adequate database.

> **Note**
>
> If a generated transaction corresponds to a recurring or one-shot fee related to a prepaid account with an insufficient balance, this balance is forced and thus becomes negative.

9.2 Product Modeling Process

Process Description [page 262]

Data Distribution [page 263]

Cached Structures Refreshing [page 263]

Process Limitations [page 264]

Stateless Mode [page 264]

9.2.1 Process Description

For functional information about this feature, refer to the description of the Product Modeling [page 25] feature.

The Product Modeling process is a vendor process which consists in defining, building and managing charges, charge plans and offers with their associated business objects. This process includes the maintenance of this data in the system.

Different main master data objects are necessary according to the business services (online or batch charging, online rating) activated in SAP CC:

Business Service	Stateful Charging (online/ batch)	Stateful Charging (online/ batch)	Online Rating (stateless)
Master Data	**based on Provider contracts**	**based on Subscriptions**	
Main Master Data Objects			
Charges (Master)	■	■	■
Charges (Dependent)	■	■	
Charge Plans	■		
Offers		■	
Other Business Objects			
Pricing Macros	■	■	■
Translation Tables		■	■
Tier Tables		■	■
Mapping Tables and Classes	■		■
Price Tables and Class	■		

This process is performed by the updater, but is mainly implemented through the Core Tool user interface which:

- Eases the management of catalogs' life cycle

- Gives vendors the possibility to:
  - Define the (optional) relationships between his partners and himself (through dependent charges)
  - Assemble previous items in order to define the offers and the suboffer(s) which can be proposed to customers

The updater is responsible for validating the catalog data and for managing their persistent storage in back-end database. It ensures the global consistency of all the master data objects used in the system.

> **Note**
>
> - In case of charging operations related to provider contracts, the Product Modeling process includes a step for assembling the charge plans in commercial products or offers. This step is performed by an external CRM or provisioning system. In the SAP Business Suite, SAP CC is directly interfaced with the SAP CRM system and an SAP user can assign some charge plans to a product or product bundle
> - In case of charging operations related to subscriptions, the Catalog Building process may include a step for assembling the charges in offers outside from SAP CC. This operation is usually performed through the Core Tool user interface, but can also be performed by an external CRM or provisioning system interconnected with SAP CC using some provided Java and XML APIs[116] (see the CreateOfferOp operation API)

9.2.2 Data Distribution

In the SAP Business Suite, the SAP CRM system retrieves the released charge plans and refill plans from SAP CC.

9.2.3 Cached Structures Refreshing

The raters use catalog data objects for the rating and charging functions. Their data cached structures are periodically refreshed in order to have synchronized data. For further information about the refreshing possibilities, consult the `REFRESH_SCHEDULER_ENABLED` parameter description in the SAP CC 2023 System Parameter Reference documentation.

> **Note**
>
> - For test or implementation purposes, it is possible to force the resynchronization of the raters directly from the Core Tool or Admin+ user interfaces. For further information about this feature, consult the Refreshing rating instances topic of the SAP Convergent Charging Core Tool Online Help documentation
> - If the creation of the offers is managed in an external provisioning system, you can implement the `RefreshRatingInstancesOp` operation API[117]

[116] Application Programming Interface
[117] Application Programming Interface

9.2.4 Process Limitations

- Some APIs[118] are provided to create, modify, search and delete offers and associated business objects. The provided modification APIs are not "incremental" APIs, which means that users must specify the complete modified model instead of specifying only the modification to apply
- Contrary to offer parameters, translation tables and price plans, offers themselves are not managed chronologically. Performed modifications are thus immediately available and taken into account by other processes dealing with modified offers

9.2.5 Stateless Mode

- The Product Modeling process can be executed in a stateless mode, which is similar to the stateful mode, except the fact that no dependent charge can be specified and addressed. Only master charges are be taken into account (and thus charged)
- As the charging function is not performed by the system, it is not possible to design a price plan with logic components (like operators or comparators) that use some properties based on information related to prepaid accounts (balance, empty limit threshold)

9.3 Data Files Bulk Loading Process

Process Overview [page 264]

Lock/Unlock Policy [page 265]

Bulk Loading Mechanism [page 266]

Configuration Parameters [page 270]


9.3.1 Process Overview

> → Remember
>
> For functional information and concepts about this process, refer to the description of the Data Files Bulk Loading [page 36] feature.

The *Data Files Bulk Loading* **process** is used to load in a bulk execution mode the content of different data files into a third-party billing system or another downstream system. Bulk loading operations are performed by several bulkloader instances, which work in conjunction with rater instances in charge of generating these data files. The default behavior of the bulkloader instances consists in:

[118] Application Programming Interface

- **Analyzing** the content of the data files generated by the Chargeable Items Charging Process [page 286]
- **Converting** each element of each data file into an adequate item expected by the third-party billing system (such as billable items or consumption items when working in conjunction with Simple Object Access Protocol)
- **Sending** these converted items to the third-party billing system using the adequate communication channel (such as RFC[119] over TCP/IP[120] or SOAP[121] over HTTP[122] communication channels when working in conjunction with SAP Convergent Invoicing)

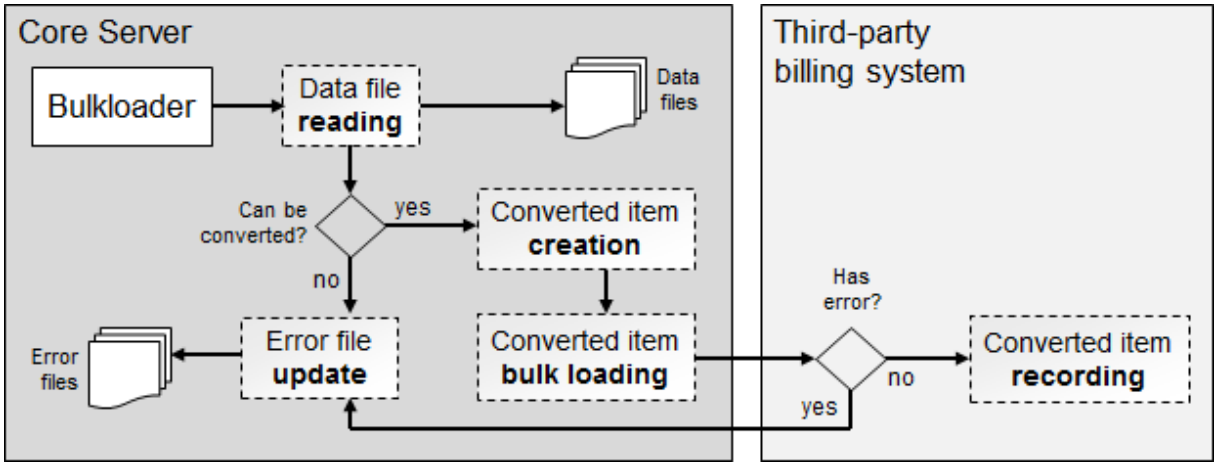

> **Note**
>
> - In an integrated *SAP Solution* scenario, the default configuration of the Data Files Bulk Loading process:
>   - Is dedicated to the use of SAP Convergent Invoicing as a third-party billing system
>   - Defines 2 reading channels that can be used by the bulkloaders to handle data files containing charged items. As a consequence, the Data Files Bulk Loading process can be considered as a parallelized process able to simultaneously handle multiple data files
> - Every bulkloader instance handles the data files generated by a rater which has the same instance number. For further information about instance numbers, refer to the SAP Convergent Charging Installation Guide documentation. For further information about the RFC over TCP/IP and SOAP over HTTP communication channels, refer to the SAP CC 2023 Security Guide SAP Convergent Charging Security Guide documentation

9.3.2 Lock/Unlock Policy

The Data Files Bulk Loading process manages objects (directories and folders) shared with the Data Files Generation [page 297] of the Chargeable Items Charging Process [page 286]. To manage these concurrent accesses, a lock/unlock policy has been implemented. This policy relies on the data files' states and their associated filename extension:

119 Remote Function Call
120 Transmission Control Protocol/Internet Protocol
121 Simple Object Access Protocol
122 HyperText Transfer Protocol

- `ZIP`, `GZ` or `CSV` for files currently in use by raters for writing purposes
- `arc.zip`, `arc.gz` or `arc.csv` for released files which are thus available for bulk loading operations
- `arc.zip.bXX`, `arc.gz.bXX` or `arc.csv.bXX` for data files in process by a given bulkloader, where "XX" corresponds to the instance number of the bulkloader (explained as 2 digits)
- `rem.zip`, `rem.gz` or `rem.csv` for files which are considered as archived and thus excluded from bulk loading operations. This additional `rem` extension is set when the `removeFile` attribute of the bulkloaders' configuration is set to `false`

Running bulkloaders continually scan the repositories defined in the configuration files, and handle all available released files. Every handled charged items data file is renamed by the concerned bulkloader to prevent concurrent accesses, which ensures that its content can then be safely taken into account for bulk loading purposes.

9.3.3 Bulk Loading Mechanism

Every time they handle a data file, the bulkloader instances perform the following operations:

- The file is renamed to avoid concurrent accesses
- The header of the file is analyzed to retrieve the following information:
  - The version of the data file
  - The class name, which is used to determine the structure of the contained data
  - The line numbering flag which indicates whether the file is generated with line numbering or not
- The class name is analyzed to:
  - Verify the existence of this class in order to avoid loading obsolete data in the third-party billing system
  - Check the adequacy with the header of the file, and thus verify that no information is missing before loading data in the third-party billing system

Once these prerequisites have been checked, the bulkloader reads every line of the data file, which corresponds to properties of an element (charged item, refill record or chargeable item) which must be:

- Converted using an adequate defined mapping
- Bulk loaded to the third-party billing system as a converted element

To ensure that all the elements of a data file are taken into account, the bulkloaders re-use the control files generated during the Data Files Generation [page 297] function. Due to the naming convention, every control file is associated to a configured reading channel which is thus able to handle its content. Control files contain the following information:

- The encoded identifier of the last item correctly written into the related data file. This identifier is a 4-byte long value which is updated by the related writing channel after each successful writing operation
- The encoded identifier of the last data file's row correctly sent to the third-party billing system. This identifier is a 4-bytes long value which is updated by a reading channel after each successful loading operation
- Error information (Java error class name and exception message), when some errors occur during reading operations

When any error occurs:

- The erroneous data file is renamed with the suffixed `.err` extension
- Detailed information about the error is written into the control file for troubleshooting purposes

When a data file has been successfully and entirely loaded into the third-party system, the control file is automatically deleted by the bulkloader (unless the `removeFile` option is enabled in the CIF configuration).

In addition to control files, dedicated error files are also created by the bulkloaders to:

- Provide detailed information about the errors which can occur during the conversion of the source items:
  - The charged item mapping is not correctly configured (for instance, an item field is initialized with a wrong property)
  - The billable item mapping is not well configured (for instance, the item field X is mapped onto the billable item field Y but X and Y do not have the same semantics)
  - The charge which leads to the generation of the item does not provide any value for mandatory fields or provides invalid values (for instance, negative number for strictly positive number type field)
- Provide detailed information about the errors which can occur when the converted items are sent to the third-party billing system. In an integrated scenario with the SAP ERP/FI-CA component of the SAP Business Suite, another validation is performed by SAP CI, which can also fail due to specific constraints defined on SAP CI side
- Give administrators the possibility to perform related corrections, which is really important as such items represent effective consumptions which:
  - Have been authorized for customers
  - Must be as soon as possible loaded into the third-party billing system for money recovery purposes

The bulkloaders can write error files using 2 different formats:

- Version 1, which only contains the original version of the rejected items
- Version 2, which contains the original version of the rejected items, and some messages describing the reasons why these items have been rejected

> **Note**
>
> - Version 2 is enabled by default for new fresh installations. During an upgrade of a SAP Convergent Charging system, this version is not updated, to ensure backward compatibility and preserve the potential already running integration with external systems dealing with error files
> - It is recommended to upgrade the version of the error files, except if these files need to be managed by an external system which does not support comments within CSV files. To modify the version of the error files, refer to the SAP CC 2023 Administration and Operation Guide documentation

9.3.3.1 Version 1 error files

The filenames of the version 1 error files are made up with the following information, each element separated by a underscore (_) sign:

- CIT[123] class name
- Writing channel identifier (3 digits number)

[123] Charged Item

- File rolling policy (3 characters string such as “HOU” for hourly rolling policy)
- Writing channel index (2 digits number)
- Timestamp using the yyyyMMddTHHmmssSSS format (e.g. 20141101T123456789)

The version 1 error files contain:

- One and only one header block containing the names and types of the fields which are contained in the error file
- One or several items, written using a CSV format

To figure out the reason why the items have been considered as erroneous, the bulkloader log files must be analyzed.

9.3.3.2 Version 2 error files

The filenames of the version 2 error files are made up with the following information, each element separated by a underscore (_) sign:

- If the `fileSequenceId` attribute is empty or missing:
  - CIT[124] class name
  - Writing channel identifier (3 digits number)
  - File rolling policy (3 characters string such as “HOU” for hourly rolling policy)
  - Writing channel index (2 digits number)
  - Timestamp using the yyyyMMddTHHmmssSSS format (e.g. 20141101T123456789)
- If the `fileSequenceId` attribute is not empty:
  - SAP system identifier (3 alphanumeric characters string)
  - CIT class name
  - Writing channel identifier (3 digits number)
  - File rolling policy (3 characters string such as “HOU” for hourly rolling policy)
  - Writing channel index (2 digits number)
  - Timestamp using the yyyyMMddTHHmmssSSS format (e.g. 20141101T123456789)
  - Sequence number (6-digit number from 000000 to 999999)

The version 2 error files contain:

- One and only one header block containing:
  - The version of the error file
  - The name of the corresponding class
  - The names and types of the fields contained in the file
- One or several rejected item blocks, each block containing:
  - Messages informing about the reasons why the items have been considered as erroneous. These messages are stored in the file as comments (i.e. lines starting by the '#' character), and concern all the items written before the next block or before the end of the file
  - One or several items, written using a CSV format

[124] Charged Item


Note

In an integrated scenario with the SAP ERP/FI-CA component of the SAP Business Suite, the content of the version 2 error files depends on the context of the error:

- When SAP CI rejects more than one converted item during a single function call, the rejected item block contains multiple items. When such a situation occurs:
  - The original versions of the rejected items are stored in the same block
  - The format of the written messages corresponds to the concatenation of the message id, message type (info: I or error: E), message number and the text of the message

  #### Example


  Considering 2 billable items BIT2 and BIT4, rejected by SAP CI due to reasons Reason1 and Reason2, then the error file will contain the following rejected item block:

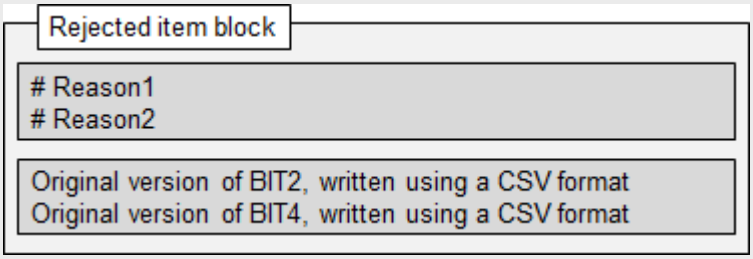
- When SAP CI rejects one converted item during a single function call because this item contains errors, the rejected item block contains all the items which relate to the same set of charged items (or refill records), even if they do not contain any error.

  #### Example

  Considering 3 billable items BIT2, BIT3 and BIT4, BIT2 rejected by SAP CI due to Reason1 and BIT3 relating to the same set of charged items (or refill records) as BIT2, then the error file will contain the following rejected item block:

- If the item validation is disabled on raters side, erroneous items are stored in the data files, among the valid ones. These items are rejected by bulkloaders during the conversion step. When such a situation occurs, the rejected item block only contains one message and one item:

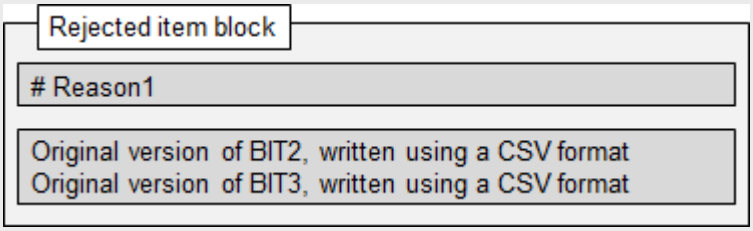9.3.4 Configuration Parameters

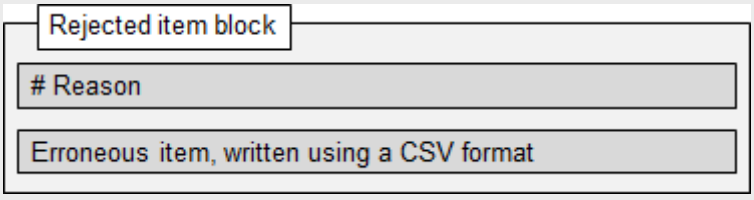The bulkloaders can be configured to fit specific needs. This configuration relies on 2 different kinds of parameters:

- Static parameters, whose name is entirely defined in the Java source code
- Dynamic parameters, whose name depends on a prefix specified in the bulkloaders' configuration file named `cif.bulkloader.config.xml`. This prefix corresponds to the `adminParameterPrefixName` attribute of the `bulkReader` element.

> **Example**
>
> Considering the following Bulkloader configuration file:
>
> ```
> <bulkReader adminParameterPrefixName="POSTPAID_CIT_READER" bufferSize="1000"
> … >
> …
> </bulkReader>
> ```
>
> According to the content of the SAP CC 2023 System Parameter Reference documentation, the following dynamic parameters are automatically created:
>
> - `POSTPAID_CIT_READER_ROOT_PATH`
> - `POSTPAID_CIT_READER_CI_BUFFER_SIZE`
> - `POSTPAID_CIT_READER_CHANNEL_COUNT`
> - `POSTPAID_CIT_READER_REMOVE_FILE`
> - And so on

Admin+ gives the possibility to list all the existing parameters, including static and dynamic parameters related to bulkloaders. To adapt the behavior of a given bulkloader to specific needs, some of these parameters can be hot-modified using Admin+.

> **Note**
>
> For further information about the configuration of Bulkloaders and the associated parameters, refer to the SAP CC 2023 Administration and Operation Guide and SAP CC 2023 System Parameter Reference documentations.

9.4 Order Management Process

Process Description [page 271]

Provisioning of Subscriber Account [page 271]

Provisioning of Provider Contracts [page 271]

Provisioning of Subscriptions [page 273]

Provisioning of Accesses [page 273]

9.4.1 Process Description

For functional information about this feature, refer to the description of the Order Management [page 26] feature.

The Order Management process is made up with 3 distinct functions:

- A CSR[125] business partner provisioning function, used to manage the subscriber accounts of customers (including their life cycle)
- A CSR commercial provisioning function, used to manage subscriptions or provider contracts (including their life cycle) associated to the customers
- An OSS[126]/BSS[127] technical provisioning function, used to manage the provisioning of accesses in order to connect technical resources located in the OSS to SAP CC

> **Note**
>
> Due to the fact that the Order Management process modifies accesses information, it thus works in conjunction with the internal function named "guiding function", in charge of maintaining an up-to-date cached structure containing accesses data.

9.4.2 Provisioning of Subscriber Account

The Subscriber Account Provisioning function is a CSR[128] function. It consists in managing the customer's subscriber accounts from an external CRM[129] or provisioning system into SAP Convergent Charging. Integration between SAP CC and this system must thus be implemented.

> **Note**
>
> In an integrated scenario with the SAP CRM, the Subscriber Account Provisioning function is periodically performed by the SAP CRM system which is responsible of the global consistency of all the master data.

9.4.3 Provisioning of Provider Contracts

The Provider Contracts Provisioning function is a CSR[130] function. It consists in managing the customer's provider contracts from an external CRM[131] or provisioning system into SAP CC. Multiple actions can be performed on a provider contract during its life cycle:

125 Customer Sale Representative
126 Operational Support System
127 Business Support System
128 Customer Sale Representative
129 Customer Relationship Management
130 Customer Sale Representative
131 Customer Relationship Management

- Creation
- Modification

When a customer (or business partner) subscribes to a vendor's commercial product or offer, this process instantiates a provider contract by:

- Creating a provider contract in the CRM system
- Replicating the relevant data in SAP CC
- Validating the received data
- Creating the necessary activation charges
- Creating the necessary counters
- Creating and updating the necessary accesses (see the Access Provisioning function described below)

> **Note**
>
> In an integrated SAP Solution scenario with the SAP CRM and the SAP ERP/FI-CA components of SAP Business Suite, this process is launched when a sale person has sold a product bundle to a business partner. He creates a provider order and a provider contract. If the activated product includes some assigned charge plans, the SAP CRM system will create the necessary charging data in SAP CC.

The updater is responsible for validating the provider contract data and for managing their persistent storage in the database. It ensures the global consistency of all the master data objects used in the system.

The Provider Contract Provisioning function is made up with two different steps:

- A CRM or provisioning system creates or maintains a provider contract by using the Web Services of SAP CC
- The Core Server validates and completes this customer master data:
  - It validates the data
  - It assigns a batch rating group to the provider contract: if the contract is linked to a parent contract (to share a pool of counters), it has the same batch rating group; otherwise it performs the batch rating group assignment function that can be customized
  - It creates or maintains automatically the necessary charge activations for setting up the charging functions. It creates in the provider contract the relevant counters and launches eventually an activation process (see the Activation Process [page 256])

> **Note**
>
> - An activation charge is created for each charge in the activated charge plan whatever the type of rates that are defined in the price plan of the charge
> - The provider contracts and their contract items are not directly managed chronologically, but multiple versions can however successively exist for different periods of time
> - A provider contract revision is used to manage the structure of a provider contract. Several contract item revisions are used to group together the contract item parameters, account assignments and user technical identifiers. As a consequence, if the contract revision or a contract item revision is modified at a given date, a new version of this revision is automatically created. According to a given date, the system is then able to retrieve the right provider contract revision and its contract item revisions which correspond finally to a unique version of the contract that has been ordered in the CRM or provisioning system

9.4.4 Provisioning of Subscriptions

The Subscription Provisioning function is a CSR[132] process. It consists in managing the customer's subscriptions. Multiple actions can be performed on a subscription during its life cycle:

- Creation
- Modification
- Resumption
- Suspension
- Deletion

When a customer subscribes to a vendor's offer, this process instantiates a subscription by:

- Recording the parameters related to the offer
- Creating the customer balances and/or counters according to the chosen offer and associated options

> ⓘ Note
>
> - It is possible to postpone the counter instantiation to the first future charging operation. To implement this mechanism, the subscription model (used as argument at creation time) can be provided without any counter. Adequate counters are then automatically instantiated according to overload rules specified in the offer. As this behavior can lead to a latency peak during the first charging operation, **we highly recommend to instantiate counters at the subscription creation time**
> - Subscriptions are not directly managed chronologically, but multiple versions can however exist through the subscription contexts. A subscription context is an object which groups together the subscription parameters and the translation table exceptions. As a consequence, if the subscription context is modified at a given date, a new version of this context is automatically created. According to a given date, the system is then able to retrieve the right subscription context which corresponds to a unique version

9.4.5 Provisioning of Accesses

The Access Provisioning function gives the possibility to manage accesses which are used to interface SAP CC with an external OSS[133].

The Access Provisioning function is managed by:

- The external CRM[134] or provisioning system if the access is dedicated to subscriptions
- The Core Server if the access is dedicated to provider contracts

132 Customer Sale Representative
133 Operational Support System
134 Customer Relationship Management

Provisioning	Function Description
Accesses dedicated to subscriptions	Giving the possibility to define and/or associate an access to a subscription in order to reach the adequate price plan and charging plan, the Access Provisioning process is: • **Mandatory** if the offer contains some usage fees, as accesses represents the only way to associate an incoming chargeable item to the right subscription • **Optional** if the offer only contains recurring and one-shot fees, as the Activation process can be used to charge the consumed usage
Accesses dedicated to provider contracts	For each contract item, SAP CC creates an access for each User Technical Identifier (UTI) and each Service Identifier declared in the related **activated** charge plan or refill plan.

An SAP User can manually perform this process for test or training purposes by using the Core Tool user interface with accesses dedicated to a subscription.

> **Note**
>
> - A mediation system can be introduced between the OSS[135] and the BSS[136] when the OSS brings into play multiple systems
> - SAP CC implements an optional mechanism which gives the possibility to manage accesses according to defined time periods (continuous or not), and thus assign different accesses on the same subscription for a given customer. When this chronology mechanism is unused, an unlimited time period is assigned to the access
> - An access can refer to both subscriptions and provider contracts
> - Accesses are also created for the contract items which activate a refill plan. The same mechanism is performed by SAP CC

9.5 Prepaid Accounts Refilling Process

Process Overview [page 275]

External Events [page 275]

Internal Events [page 276]

Process Execution [page 276]

[135] Operational Support System
[136] Business Support System

9.5.1 Process Overview

For functional information about this feature, refer to the description of the Prepaid Accounts Refilling [page 41] feature.

Every subscriber account contains a prepaid balance which is used for prepaid transactions and whose value can be decreased by the Usage Rating and Subscriber Charging process. The Prepaid Accounts Refilling process is a process which impacts the prepaid balances and/or counters by increasing their values, and which can also create and/or use allowances.

This process can be triggered by both external and internal events. It uses refill trees to compute complex refilling operations which can lead to the generation of data files named "refill records" and containing transactions.

9.5.2 External Events


External events are named "Refill Items" and contain information related to the way a prepaid account balance must be refilled. These external events can correspond to:

- Refill operations, which increase the balances of prepaid accounts
- Negative refill operations, which are used to:
  - Cancel a previous refill operation
  - Transfer an amount from one prepaid account to another
  - Decrease the balances of prepaid accounts

> ⚠ Caution
>
> As described in the "Subscriber account" master data [page 189] section of this guide, prepaid balances are connected to a multicast notification mechanism used to send alerts when a threshold has been reached.
>
> Negative refills are considered as forced debits which can decrease a prepaid balance under its "Empty Limit" property, and thus:
>
> - Trigger an amount alert if such an alert has been associated to the prepaid balance
> - Automatically trigger a refill operation (if such a behavior has been defined in the refill logic) to refill the prepaid balance and avoid any service cut off
>
> If an automatic refill operation fails for any reason (system failure, insufficient money on the bank account, and so on), the system cancels it using a negative refill operation. This negative refill operation decreases the prepaid balance, which thus goes back to a value which is:
>
> - Similar to the value before the automatic refill operation if no service has been consumed during this period of time
> - Inferior to the value before the automatic refill operation if a service has been consumed during this period of time. Precautions should be taken to avoid such a situation, as it may lead to a loss of money
>
> To avoid any infinite loop which would decrease the global performance of the solution, no automatic refill operation is triggered if the "Empty Limit" property of a prepaid balance is reached because of a negative refill. This ensures that amount alerts will not be sent multiple times.

Note

The identifier of the prepaid account which must be refilled must be provided to the “prepaidAccountRefill” operation of the “Refill Management” web service. When this identifier is not known, a previous call to the “prepaidAccountFindFromUserTechnicalIdentifier” operation must be performed in order to retrieve this prepaid account identifier.

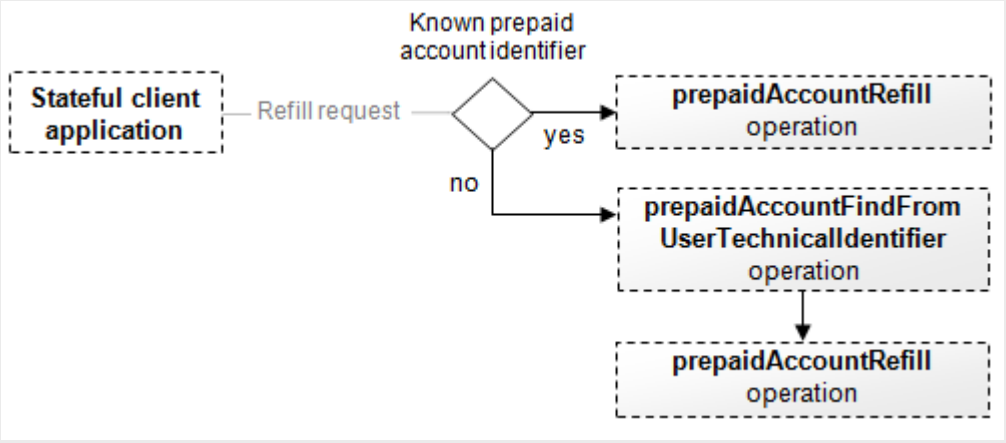

9.5.3 Internal Events

Internal events correspond to recurring and one-shot refills which are auto-generated during the execution of the refilling process. This auto-generation can be due to:

- The activation process, which triggers the recurring refills at a given date
- A modification of the provider contract’s state (such as its suspension, resumption, and so on), which triggers the related one-shot refills
- An event which occurs on a given account (such as a prepaid balance falling under a threshold)

Example

- A recurring refill can be used to periodically refill the balance of a prepaid account
- A one-shot refill can be used to refill the balance of a prepaid account when the provider contract is activated (welcome refill)
- An account event refill can be used to automatically refill the balance of a prepaid account in case this balance falls under a given threshold (after a service consumption)


9.5.4 Process Execution

Refill requests are sent by client application to the Updater using the "Refill Management" web service. This web service contains the following operations:

- “PrepaidAccountRefill”, which gives the possibility to refill the balance of a given prepaid account according to a provided refill item
- “PrepaidAccountFindFromUserTechnicalIdentifier”, which gives the possibility to identify a prepaid account from a UTI and return the information which are necessary to refill its balance

The “PrepaidAccountFindFromUserTechnicalIdentifier” operation is used by client applications such asSAP CRM in order to retrieve the list of prepaid accounts related to a provided User Technical Identifier (optionally completed with a Service Identifier).

Example

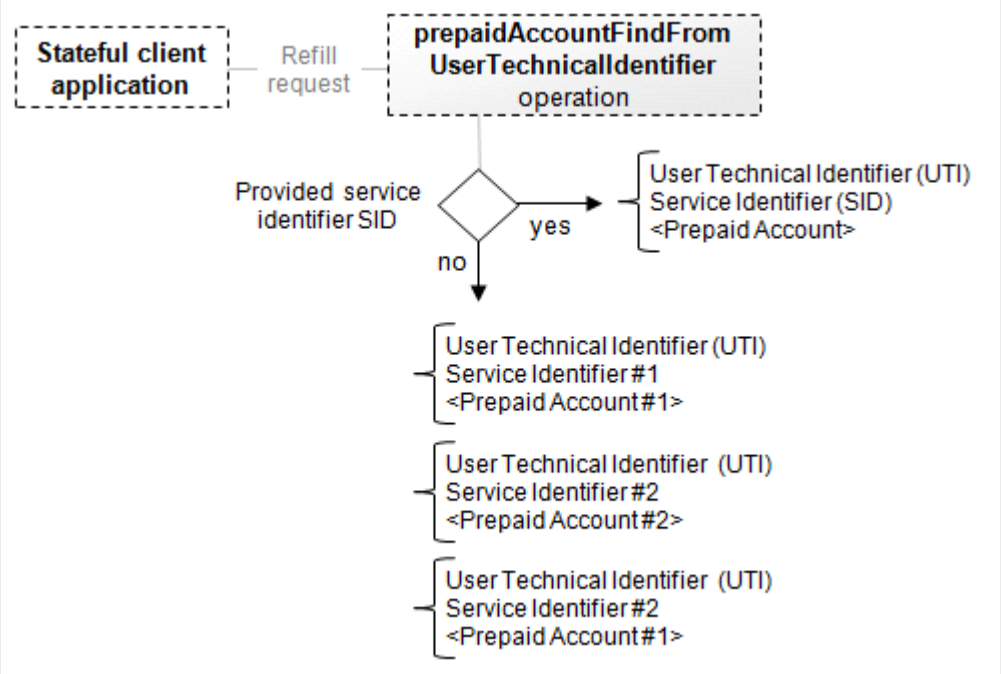

Note

- When specified together, the User Technical Identifier and Service Identifier couple represents an access which refers to a given prepaid account. Contrary to accesses created in the charging part of the solution, refill accesses are transparent for users and only used internally
- In an integrated landscape, it is highly recommended to configure the identifier of the service used to refill prepaid accounts. When specified in the configuration, client applications using the "PrepaidAccountFindFromUserTechnicalIdentifier" operation can thus immediately determine the prepaid account to use, whatever the number of returned items is.

The "PrepaidAccountRefill" operation is used by client applications such as the SAP CRM to perform refilling operations on prepaid accounts. This operation requires information such as:

- The identifier of the concerned subscriber account
- The identifier of the prepaid account whose balance must be refilled
- The amount of the refill
- The refill item, which contains all the properties of the external event

Every request received by the updater leads to a guiding operation in order to determine the concerned rater. The updater then transfers the request to the rater, which performs the following operations:

1. **Refill activation**, used to generate the recurring and/or one-shot events associated to the refill item. When internal events are generated, they are suggested to the refill logic in order to create the corresponding transactions
2. **Refill logic execution**, applied on the refill item in order to:
   - Generate the corresponding transaction
   - Create and use allowances when necessary
3. **Creation of allowances**, and execution of the related one-shot trigger if such a component exists in the allowance logic
4. **Data files generation**, which gives the possibility to:
   - Record the generated transactions as "refill records" into data files and containing information such as:
     - The catalog data (such as the code of the applied refill plan)
     - The origin of the refill (one-time, periodic, voucher, and so on)
     - The properties of the refill item
     - The computed properties (such as the added credit per service)
     - The information related to the prepaid account (balance, state, and so on)
   - Generate charged items data files according to the configuration of allowances

When the refilling operation is completed, the “PrepaidAccountRefill” operation returns the status of the execution to the client application, possibly associated to an error message in case of any failure.

> **Note**
>
> - For more information about the activation process, refer to the description of the Activation Process [page 256]
> - For more information about the generated data files, refer to the Data Files Generation [page 297] function of the Chargeable Items Charging Process [page 286] section located afterwards

9.6 Chargeable Items Rerating Process

Process Overview [page 278]

Process Limitations [page 279]

Execution Modes [page 280]

9.6.1 Process Overview

For functional information about this feature, refer to the description of the Chargeable Items Rerating [page 39] feature.

A running SAP Convergent Charging (SAP CC) system can face following situations such as:

- Missing or erroneous incoming chargeable items
- Incorrect configuration of the Chargeable Items Charging Process [page 286], which can lead to situations such as:
  - Incorrect access, subscription or provider contract
  - Errors in an offer, in a translation table, in a pricing macro or in a charge plan
  - And so on

When such problems occur, the *Chargeable Items Rerating* process gives the possibility to rate again a set of chargeable items related to postpaid accounts which have previously been charged and in order to:

- Correct potential errors and faults by reprocessing the original events
- Restore data consistency

This process:

- Operates from rerating data files, which are generated by the "Rerate File processor" (which may require some additional developments in order to fit specific needs of a third-party billing system) during the Data Files Generation function of the Chargeable Items Charging Process [page 286]
- Implies an adequate configuration of the data file processors used during the Data Files Generation [page 297] function of the Chargeable Items Charging process, as the third-party billing system must be able to cancel billing data before executing operations
- Can be driven by either the SAP CC BART Server system or SAP Convergent Invoicing:

> → Remember
>
> In an integrated *SAP Solution* scenario, SAP Convergent Invoicing is available in:
> - The running SAP S/4HANA system
> - The running SAP ERP/FI-CA system
>
> Several scenarios and scenario variants are possible.

9.6.2 Process Limitations

- The Chargeable Items Rerating process should not be triggered if a billing cycle is running on the billing system side
- Rerating operations can only be performed on:
  - All provider contracts which are not concerned by online charging operations and do not refer to prepaid accounts
  - Offline subscriptions (due to incompatibility with the online and batch modes of the Chargeable Items Charging process)
- Rerating operations are not compliant with shared allowances in the following contexts:
  - If a charge plan or a refill plan has created (or can create) shared allowances. All operations related to the provider contracts that use this plan are rejected
  - If a plan has created (or can create) allowances that are configured to send events to shared allowances through an Allowance Event Sender Operator: all operations related to the provider contracts that use this plan are rejected

9.6.3 Execution Modes

Rerating Driven by the BART Server System [page 280]

Rerating Driven by SAP Convergent Invoicing [page 285]

9.6.3.1 Rerating Driven by the BART Server System

The Core Tool user interface gives users the possibility to trigger rerating operations which are executed by the BART Server system with the Core Server system in background.

The Chargeable Items Rerating process handles multiple subscriptions and provider contracts at the same time. As a consequence, this process is considered as a bulk process which performs the following operations:

- **Rerating session opening**: performed by updaters, this operation:
  - Checks the configuration of SAP CC to ensure that rerating is enabled
  - Checks that no Activation operations are running
  - Checks the availability of counter snapshots
  - Retrieves the number of subscriptions and provider contracts concerned by the rerating operation (for computation and information purposes)
  - Locks the system to avoid parallel concurrent rerating sessions
- **Subscription and provider contracts selection**: performed by updaters, this operation:
  - Builds the list of subscriptions and provider contracts concerned by the rerating operation. It includes consistent collections of provider contracts when a contract is linked to a parent contract. The parent contract and all its linked contracts belongs to a collection
  - Stores this list in the `RERATING_SESSION_ORDER` table of the BART Database
  - Locks the charged item data files and synchronizes the bulkloaders in order to bulk load all billable items which could be reversed in the further operations
- **Rerating session starting**: initiated by raters and performed by the BART Server system, this operation groups the list of subscriptions and provider contracts concerned by the rerating operation by batch rating groups and:
  - Loops on each batch rating group in order to restore every subscriptions or provider contracts, element per element and sorted by consumption date. This restoration operation is performed in multiple steps:
    1. The subscription or provider contract is locked
    2. All the counters' values of the locked element are restored according to saved snapshots
    3. The element's state is updated both in memory and in database
    4. A call is sent to SAP CI in SAP ERP/FI-CA to check the reversibility of the billable items associated to the subscription or provider contract for a given restoration date
    5. If SAP CI can reverse the billable items related to the element using the provided restoration date, they are asynchronously reversed. Otherwise, SAP CI is able to provide another valid restoration date for this element (named fromDate) which can be used during the next rerating operation performed on this element. If such a situation occurs, the rerating operation related to this subscription or provider contract is cancelled. The element is then unlocked to authorize further rerating operations, and its state is updated accordingly.

> **Note**
>
> - The billable items reversibility check is an SAP CI operation, which is thus only available when SAP CC is integrated with it in an SAP Solution scenario. SAP CC uses the `FKK_BIX_BIT_REVERSE_CHECK_CC` JCo function.
> - Billable items cannot be reversed if they have already been billed and if the configuration of SAP CI does not allow to reverse billable items which have already been billed
> - When a billable item is considered as reversible, SAP CI:
>   - Removes it if this billable item has not been previously billed
>   - Creates a new billable item in the next billing cycle in order to compensate the original one if the original billable item has already been billed
> - In a system landscape with several SAP CC systems, SAP ERP/FI-CA selects the relevant ERP[137] system by using the customer management area information that is set in the subscriber account relating to the locked provider contract.

  - Rerates all subscriptions or provider contracts of every batch rating group
- **Rerating session stopping**: performed by the BART Server system, this operation:
  - Loops on each subscription or provider contract concerned by the rerating operation to unlock it
  - Unlocks the system to authorize further rerating sessions

> **Note**
>
> - The Chargeable Items Rerating process is only meaningful in an **batch** rating mode. A reference date is required in order to retrieve a list of CDRs[138] to rerate.
> - The Chargeable Items Rerating process can be interrupted at any time by power users. When such a situation occurs, every begun batch rating group is finished before stopping the running rerating operation.
> - A dedicated command gives the possibility to retrieve the status of a running rerating operation. It gives the possibility to evaluate the advancement of the operation, with information such as the number of already rerated elements.

9.6.3.1.1 Counter Snapshot Management

The Counter Snapshots mechanism is based on consumption date provided to the Chargeable Items Charging process. This mechanism assumes that CDRs[139] are rated subscription per subscription (or provider contract per provider contract) ordered by increasing consumption date. Each subscription or provider contract maintains its own snapshot state, but snapshot policy is defined globally for all subscriptions and provider contracts. The snapshot default policy is to backup counters each day at midnight, which implies that the first item whose consumption date is after midnight triggers the Counter Snapshots mechanism.

[137] Enterprise Resource Planning
[138] Call Detail Record (Telecommunications industry), or more generally Consumption Detail Record
[139] Call Detail Record (Telecommunications industry), or more generally Consumption Detail Record

Note

- Daily counter snapshots are saved, whatever the consumption frequency. If a single consumption occurs during a whole month, all previous daily snapshots are recorded. This behavior gives the possibility to start a rerating operation to any anterior date
- The Activation Process [page 256] also triggers the Counter Snapshot mechanism


Example

A third-party billing system performs an invoicing operation on a set of subscriptions and provider contracts grouped according to different batch rating groups in order to:

- Split these subscriptions and provider contracts in 2 different periods
- Balance the global Usage Rating operation

The rating of the entire previous month is done:

- From 01 to 15 of each month for the first group
- From 15 to 31 of each month for the second group

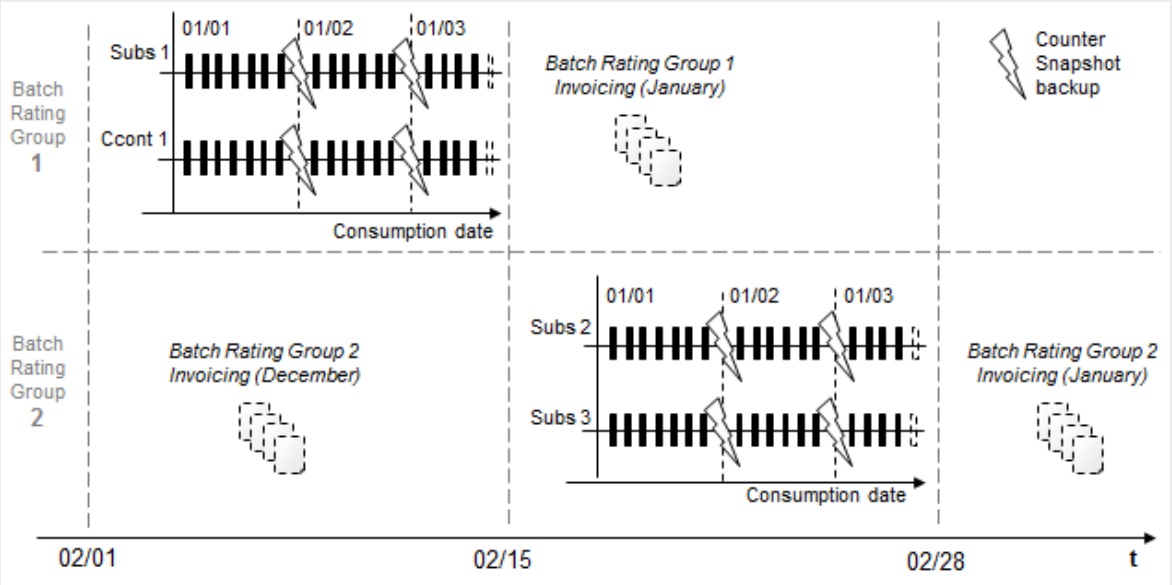

Explanation:

An error is detected in generated invoices generated between 02/15 and 02/28, due to a modification of an offer performed on 01/15. It is possible to rerate some subscriptions in both rating groups from the 01/15 snapshot, which limits the number of CDRs to rerate to a half month only. CDRs whose consumption date is greater than 01/15 are thus selected by the BART Server, even if they were rated after 01/02 (as the rating date is not taken into account for CDR selection).

To implement the Counter Snapshots mechanism, a counter named “next_snapshot_date” is added to each subscription and provider contract. This counter is used by the Activation process to trigger the Counter Snapshots mechanism (the Activation process is itself called by the Events Pricing operation before its execution).

> **Note**
>
> - If the event date overlaps several snapshot times and thus introduces latency, the Counter Snapshots mechanism may create multiple snapshots
> - A `COUNTER_SNAPSHOT` table is used to store the different snapshots. The `COUNTER_SNAPSHOT_COUNT` parameter gives the possibility to configure the number of snapshots to store for each subscription and provider contract. For further information about this parameter, refer to the SAP CC 2023 System Parameter Reference documentation

9.6.3.1.2 Snapshots Backup

Counter snapshots are stored in the provisioning cache managed by raters, using a proprietary format. These snapshots contain information such as:

- Last activation dates
- Next activation dates
- Next snapshot date
- Validity end dates of allowances
- Counters described in charge activations, provider contracts, provider contract items and allowances

9.6.3.1.3 Snapshots Restore


The Counter Restore operation is an operation which takes into account a given date (which does not necessary correspond to a snapshot backup date) to retrieve a list of counter snapshots which must be restored. Each retrieved snapshot is then analyzed in order to:

- Restore the adequate values of:
  - Counters related to subscriptions, provider contracts and allowances
  - Validity end dates of allowances
- Delete allowances created after the given date

> **Note**
>
> As subscriptions and provider contracts content can evolve as time goes by, it is necessary to compare the snapshots with their associated subscriptions or provider contracts in order to delete counter(s) or create new one(s). For example, if a snapshot concerns a subscription which has 6 defined counters, but only 4 stored counter values, the 2 additional counters of the subscription must be deleted to match the snapshot counters number. If a snapshot concerns a subscription which has 6 defined counters, but 7 stored counter values, the additional counter of the snapshot is automatically created to match the number of counters associated to the subscription.
>
> As allowances can evolve as time goes by, it is also necessary to compare the counter snapshots with the allowances related to their associated provider contracts, in order to restore the validity end dates of allowances or to delete allowances. For example:

- If a snapshot concerns a provider contract containing an allowance whose current validity end date is different from the one stored in the snapshot, the validity end date of the allowance must be modified to match the date stored in the counter snapshot
- If a snapshot concerns a provider contract containing an allowance which was not present when the snapshot was created, the allowance must be deleted to match the content of the snapshot.

As the snapshots storage capacity depends on the configuration, it is only possible to restore limited snapshot backup dates. If the reference date is anterior to this limit, Java exceptions are thrown to indicate that the subscription or provider contract cannot be restored. The example below explains that only 12 snapshots can be stored, and that rerating is thus only possible on 12 past days (J snapshot is replaced by J+12 one on day 13, and so on):

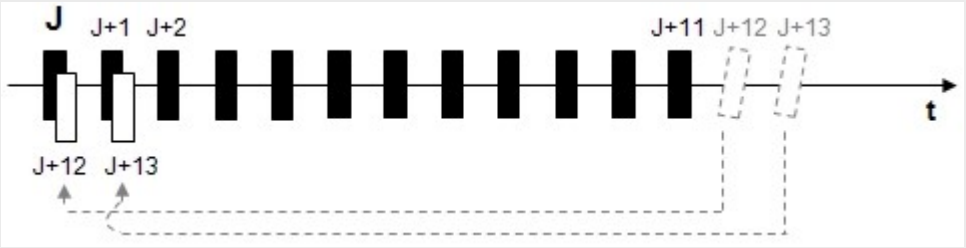

9.6.3.1.4 Subscriptions and Provider Contracts Lock/ Unlock

All along the execution of the Chargeable Items Rerating process, locks are set and unset on handled elements such as subscriber account, subscriptions, transactions, and so on. These locks are set to avoid concurrent accesses from parallel operations such as charging operations.

When a parallel operation tries to lock an element which is already locked, a Java exception named `CannotLockObjectException` is thrown in order to indicate that:

- The subscription or provider contract is already locked
- No CDRs'[140] state can be updated, except if a specific CDR error state is used to update all the CDRs of this charging session
- The charging session related to the subscription or provider contract must be stopped

In case of execution or server failure, a subscription or provider contract can be definitively locked, and thus require a manual operation to unlock it. Dedicated APIs[141] named `unlockSubscriptionOp` and `UnlockChargingContractOp` are available to unlock a locked element (or a set of elements related to a given charging session) and thus gives the possibility to perform subsequent charging operations.

> ⓘ Note
>
> When previous rerating operation(s) failed, the unlocked subscriptions or provider contracts have inconsistent states.

[140] Call Detail Record (Telecommunications industry), or more generally Consumption Detail Record
[141] Application Programming Interface

9.6.3.1.5 Process Limitations

- Modifying a counter of a subscription using the `modifySubscriptionOp` API[142] is not recommended, because this modification is performed immediately, not recorded in counter snapshots, and thus not available for rerating operations
- On the one hand, batch charging operations store batch charging sessions and associated CDRs in the BART Database before sending data to the third-party billing system. On the other hand, online charging operations lead to the creation of charged item data files which are directly loaded in the third-party billing system by bulkloaders, and thus not stored in the BART Database. Rerating operations require to cancel billable items which may come from both online and batch charging operations. As no incoming event related to an online charging operation is stored in the BART Database, it is thus not possible to perform rerating operations on provider contracts concerned by online charging operations

9.6.3.2 Rerating Driven by SAP Convergent Invoicing

The Core Tool user interface gives users the possibility to initialize rerating operations which are executed by SAP Convergent Invoicing (SAP CI). Every rerating operation takes into account a list of provider contracts which must be rerated. When the operation is successfully completed, a message inform that the provider contracts have been sent to SAP ERP/FI-CA or SAP S/4HANA; otherwise, a message warns the SAP user that an error has occurred during the communication with the server system. For further information about the behavior of rerating operations, refer to the SAP CC 2023 Primary Help for Core Tool documentation.

During rerating operations, SAP CC uses the following communication channels:

- XML[143] over HTTP[144], to initialize the rerating process via the Core Tool user interface
- SOAP[145] over HTTP, when receiving requests from SAP Convergent Invoicing
- RFC[146] over TCP/IP[147], to initialize a rerating session

> **Note**
>
> For further information about these communication channels, refer to the SAP CC 2023 Security Guide documentation.

A rerating operation performed by SAP Convergent Invoicing is made up with the following steps (refer to the schema in the Chargeable Items Rerating [page 39] section to get an overview of this execution):

1. Using the Core Tool user interface, a user initializes a rerating operation by creating a list of provider contracts which must be sent to SAP Convergent Invoicing in relevant SAP ERP/FI-CA or SAP S/4HANA systems for rerating purpose
2. The updater sends a rerating request to each involved SAP Convergent Invoicing

142 Application Programming Interface
143 eXtended Markup Language
144 HyperText Transfer Protocol
145 Simple Object Access Protocol
146 Remote Function Call
147 Transmission Control Protocol/Internet Protocol

3. Each SAP Convergent Invoicing requests SAP CC to search for all the provider contracts which must be recharged together. If no error occurs, SAP CC returns a message containing the identifier of all the provider contracts related to the specified provider contract
4. SAP Convergent Invoicing asks SAP CC to lock the collection of provider contracts in order to prevent any use of these provider contracts by other business processes
5. SAP Convergent Invoicing requests SAP CC to prepare the asynchronous execution of the rerating process. The raters release the in-use data files and the bulkloaders process them. During this step, SAP Convergent Invoicing regularly polls SAP CC which returns a message containing the status of the preparation (running, success, or in error)
6. SAP Convergent Invoicing then requests SAP CC in order to find the restoration points of the provider contracts (state of each provider contract at the specified date). SAP CC returns a message containing the restoration points: identifier of the provider contract, range of charged transaction sets, and so on. The charged transaction sets give SAP Convergent Invoicing the possibility to determine the consumption items which must be recharged
7. SAP Convergent Invoicing then requests SAP CC to restore the state of the collection of provider contracts at a specified date. The values of the different counters of these provider contracts are set to the values they had at that date. SAP CC returns a message containing the result of the restoration
8. SAP Convergent Invoicing then requests SAP CC to recharge the set of chargeable items related to the collection of provider contracts. SAP CC returns a message containing the result of the recharging operation
9. SAP Convergent Invoicing finally requests SAP CC to unlock the collection of provider contracts which has been previously locked for the recharging operation. SAP CC returns a message containing the result of this operation

> ⓘ Note
>
> Refer to the SAP Convergent Invoicing documentation and user assistance for more information about this process.

9.7 Chargeable Items Charging Process

Process Overview [page 286]

Process Functions [page 292]

Execution Modes [page 303]

9.7.1 Process Overview

> → Remember
>
> For functional information and concepts about this core process, refer to the description of the features Online Charging [page 31], Batch Charging [page 34], Deferred Charging [page 35], Manual Capturing [page 35], and Billable Items Immediate Loading [page 37].

SAP Convergent Charging manages two different types of events:

- **External events** (named *chargeable items*) that aggregate information corresponding to the way end customers consumed services to charge for the usage
- **Internal events** that represent auto-generated events such as recurring events, contract events (creation, suspension, and so on), account events (threshold overtaking) or allowance events

The **Chargeable Items Charging process** is a business process dedicated to the charging of these external and internal events. It handles these events within 7 main functions [page 292]:

- **Rating Contexts Generation**, which gives the possibility to retrieve all the information which is necessary to charge both internal and external events
- **Events Pricing**, which gives the possibility to execute the defined price plans in order to calculate the different amounts (prices, taxes, and so on) related to the concerned events and allowances
- **Events Charging**, which gives the possibility to execute the defined charging plans in order to:
  - Retrieve the list of accounts with their associated balances
  - Charge these balances with the amounts calculated during execution of the previous function
- **Allowance Creation**, which gives the possibility to create allowances and execute the one-shot trigger components declared in the concerned allowance logic objects (and which relate to a creation event)
- **Data Files Generation**, which gives the possibility to create different data files (aka item files) containing all the information required by a third-party billing system for further actions such as billing operations, rerating operations, dispute management, and so on

  Alternately and as of version 2020 FPS 2, the **Immediate Loading of Billable Items** function gives the possibility to skip the item file generations and to send billable items to SAP Convergent Invoicing immediately. See also: Billable Items Immediate Loading [page 37]
- **Immediate Threshold Refilling**, which gives the possibility to trigger immediate refills potentially defined into refill plans and related to the concerned accounts

All over the execution of the Chargeable Items Charging process, the different events are technically materialized by transactions which contain information such as:

- **Rated transactions**, generated at the end of the price plans execution
- **Charged transactions**, created during the execution of the charging plans (for each account balance with must be charged) – A rated transaction can be split in several charged transactions
- **Charged and taxed transactions**, which represent:
  - The charged transactions enriched with the tax data calculated during the execution of both price plans and charging plans and applied on the price amounts computed during the execution of the price plans
  - The final data which are used by the data files generation function for persistency purposes

The rated transactions can be returned in the response of the operation execution. For optimization and performance purposes, the content of these business transactions can be filtered at charge plan item level, using the Response Charged Item mapping.

> **Note**
>
> The details filtering technical mechanism is only available:
>
> - When using the online, batch, best-effort, inverse, blank, and session-based execution modes
> - For operations relating to provider contracts, executed in stateful mode

> ⚠ Caution
>
> The details filtering technical mechanism is not available for charging operations performed via the *Web Services* technical interface and its channels (see Web Services).

9.7.1.1 Precision and Rounding Modes

During the execution of the process, the precision and rounding mode used by SAP Convergent Charging during calculation operations can be configured to fit specific needs. This configuration concerns amounts (prices or fees), counters, transactions, transaction details, and taxes, and can be configured differently for each type of these business objects.

Precision

Standard Precision

To suit your business requirements, the precision can be configured according to two different modes:

- A **manual** configuration which gives the possibility to specify a 0-to-6-digit decimal scale (possible values are 0, 1, 2, 3, 4, 5, or 6)
- An **automatic** configuration according to the currency precision (value: -1 or -2)

High Precision

Standard precision for decimal numbers may not be enough for some businesses. The high precision feature allows to support up to 16 decimal places but requires a database change.

High precision feature can be activated:

- At installation time as of release 2023 FPS 2.
- When upgrading to release 2023 FPS 2 or higher: refer to SAP Note 3471570.

> ⓘ Note
>
> Depending on the implemented scenario, you check the capability of Subscription Order Management and Convergent Invoicing components to support high precision numbers. If the number precision is lower than the one supported by SAP Convergent Charging, numbers shared with those components lose precision and this may cause some data inconsistencies.

See also the system parameters to configure:

- COUNTER_PRECISION
- TAX_PRECISION
- TRANSACTION_DETAIL_PRECISION
- TRANSACTION_PRECISION
- SQL_DECIMAL_SCALE

- SQLHELPER_DECIMAL_SCALE_VALIDATION

Rounding

The rounding policy can be configured according to three different modes:

- **TRUNCATE**: Rounding mode to round towards zero. This mode never increments the digit prior to a discarded fraction (i.e., truncates).
  This rounding mode never increases the magnitude of the calculated value (e.g. 0.9 gives 0.0).
- **RAISE**: Rounding mode to round away from zero). This mode always increments the digit prior to a nonzero discarded fraction.
  This rounding mode never decreases the magnitude of the calculated value (e.g. 0.1 give 1.0).
- **NEAREST**: Rounding mode to round towards "nearest neighbor".
  When both neighbors are equidistant, the RAISE mode is applied (e.g. 0.5 give 1.0, 0.4 give 0.0).

See also the system parameters to configure:

- COUNTER_ROUNDING_MODE
- TAX_ROUNDING_MODE
- TRANSACTION_ROUNDING_MODE

9.7.1.2 Batch Charging Policy

The Chargeable Items Charging process can be launched specifying a rating mode which gives the possibility to tune the behavior of the process. This rating mode depends on multiple parameters such as:

- A number of CDRs[148]
- A CDRs rating order
- A number of concerned subscription identifiers
- A CDRs retrieval mode
- And so on

8 different rating modes are implemented, and are grouped upon 3 implicit selection modes:

- **Day** mode, which is suitable for rating groups containing a small or a huge number of chargeable items, whatever the number of related subscriptions. **Day mode** corresponds to the **recommended setting** for all implementations. All other modes should be disregarded unless instructed otherwise by SAP for a specific use case
- **Subscription** mode, which is suitable for rating groups containing a small number of chargeable items related to a huge number of subscription identifiers
- **Windowed subscription** mode, which is suitable for rating groups containing a huge number of chargeable items related to a small number of subscription identifiers

148 Call Detail Record (Telecommunications industry), or more generally Consumption Detail Record

Note

- The **subscription** and **windowed subscription** selection modes are slower than the **day** selection mode. Their use is deprecated and is thus not recommended to ensure global performances
- The charging policy only concerns the asynchronous and batch execution modes of the Chargeable Items Charging process

9.7.1.2.1 Subscription Mode

The **subscription** selection mode is used to retrieve all the chargeable items which are associated to a given batch rating group. These retrieved chargeable items are then grouped by subscription or provider contract identifiers, and transmitted to the Core Server in different threads:

- Sequentially, subscription or provider contract per subscription or provider contract
- In ascending order, using their consumption date

This selection mode is associated to the following rating modes:

Rating Mode	Description
Selection by subscription and stop on first fail	In case of error during the charging of a chargeable item related to a subscription or provider contract, the BART Server stops the associated thread in order to avoid submitting the chargeable items whose consumption date is later than the consumption date of the erroneous chargeable item. The BART Server then sends the chargeable items relating to the other threads (i.e. the other subscription or provider contract identifiers)
Selection by subscription and rate all	All the chargeable items are processed even if an error occurs while a chargeable item relating to a subscription or provider contract is being charged. The BART Server then sends all the chargeable items relating to the same and the other threads
Selection by subscription and simulate	This mode is the same as the First Fail mode except the fact that the BART Server tries to charge the batch rating group without committing to the Core Server

9.7.1.2.2 Windowed Subscription Mode

The **windowed subscription** selection mode is used to retrieve all the chargeable items which are associated to a given subscription or provider contract identifier, in multiple times. The BART Server then performs the same operations as for the subscription mode.

This selection mode is associated to the following rating modes:

Rating Mode	Description
Windowed selection and stop on first fail	In case of error during the charging of a chargeable item related to a subscription or provider contract, the BART Server stops the associated thread in order to avoid submitting the chargeable items whose consumption date is later than the consumption date of the erroneous chargeable item. The BART Server then sends the chargeable items relating to the other threads (i.e. the other subscription or provider contract identifiers)
Windowed selection and rate all	All the chargeable items are processed even if an error occurs while a chargeable item relating to a subscription or provider contract is being charged. The BART Server then sends all the chargeable items relating to the same and the other threads
Windowed selection and simulate	This mode is the same as the First Fail mode except the fact that the BART Server tries to charge the batch rating group without committing to the Core Server

9.7.1.2.3 Day Mode

The **day** selection mode is used to process all the chargeable items, whatever the subscription or provider contract they are associated to. These retrieved chargeable items are grouped by consumption date, which requires fewer resources than the previous selection modes.

This selection mode is associated to the following rating modes:

Rating Mode	Description
Selection by day and stop on first fail	In case of error during the charging of a chargeable item related to a subscription or provider contract, the BART Server filters the associated chargeable items (i.e. related to the same subscription or provider contract identifier) in order to avoid submitting the chargeable items whose consumption date is later than the consumption date of the erroneous chargeable item. The BART Server then sends the chargeable items relating to the other subscription or provider contract identifiers
Selection by day and rate all	All the chargeable items are processed even if an error occurs. The BART Server then sends all the chargeable items

9.7.1.3 Configuration Parameters

The raters use several parameters located in a `XML` configuration file containing parameters related to SAP CC. For further information about these parameters, refer to the "Rater" section of the SAP CC 2023 System Parameter Reference documentation.

9.7.2 Process Functions

Rating Contexts Generation [page 292]

Events Pricing [page 293]

Events Charging [page 293]

Allowance Creation [page 295]

Immediate Loading of Billable Items [page 295]

Data Files Generation [page 297]

Immediate Threshold Refilling [page 303]

9.7.2.1 Rating Contexts Generation

The incoming external events contain the following consumption details:

- A service identifier, which represent the technical identifier of the consumed service
- A user service identifier (USID), which is a unique technical key representing an end customer within the marketable service
- A consumption date, used for comparisons with access chronology (an access referencing different activated charges of a subscription or a provider contract item at a different periods)

These properties are submitted to the internal “guiding” function, which gives the possibility to retrieve multiple information such as:


- The activation charge related to the event, and thus the associated subscription or provider contract
- The subscriber account

This information is then used by the dispatcher instances to route the charging operation request to the adequate rater instance responsible for pricing (rating) and charging the external event for a service/product usage.

In this rater instance:

1. The first step performed by the SAP CC system instance consists in executing the Activation [page 256] process (step 1) to ensure that all recurring and/or one-shot internal events related to the external event have been triggered.
2. Then, according to the result of this Activation process execution, some internal events may be generated (step 2).
3. Finally, all the handled events are materialized by rating contexts containing all the information necessary for rating purposes (step 3).


> **Note**
>
> One or more rating contexts can be built according to the defined charges. The initial master charge is used as an entry point to build the rating context(s) associated to the dependent charge(s).

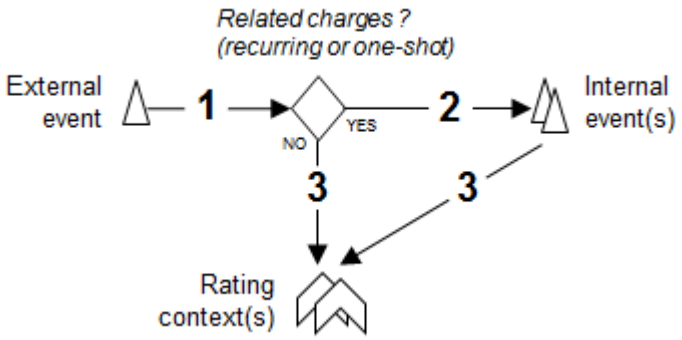

9.7.2.2 Events Pricing

Once all the rating contexts have been created and updated, the rater instance executes the different price plans that are associated to the events (step 4) in order to:

- Calculate all the adequate rated amounts (prices and so on), using the concerned allowances when necessary.
- Create the corresponding transactions, which are then considered as rated transactions, and their associated tax information.

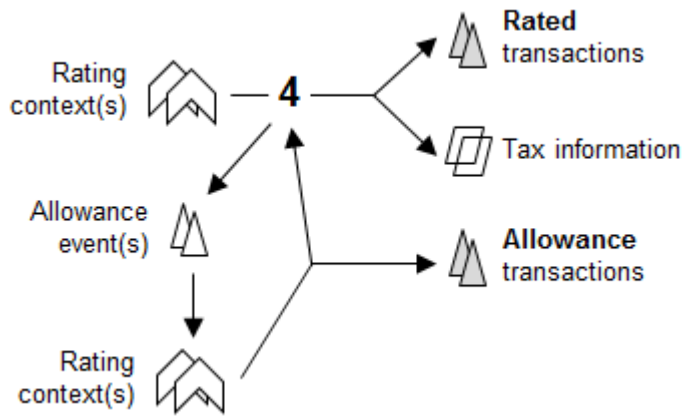

> ⓘ Note
>
> Allowance events are sent during the calculation algorithm of the charge, when executing the price plan interacting with the allowances. The allowance events, which are updated by the allowances, are available for further processing operations.


9.7.2.3 Events Charging

Once all the **rated transactions have been created**, the rater instance retrieves the tax settings set in the already-identified subscriber account and updates the tax information (step 5) determined during the

execution of the price plans accordingly. This updated tax information is then used to calculate the adequate tax data (step 6).

Once the taxes have been computed, the rater instance executes the charging plan related to the concerned charges (step 7) in order to identify all the concerned subscriber account balances (which may include linked account balances in case of overrun), which can refer to both prepaid balances (managed by SAP CC) and external balances (managed by external systems). Every rated transaction **is split in charged transactions** relating to each identified balance (step 8). Each charged transaction contains a base amount so that the sum of the base amounts of all the charged transactions referring to the same rated transaction, is equal to the rated amount. Each charged transaction is assigned to a unique balance either in SAP CC (prepaid balance, credit limit balance) or in an external system (external balance declaration for postpaid accounts).

The computed taxes are then adjusted and applied (or not) on these charged transactions (step 9), which thus become **taxed & charged transactions**, ready for persistency and external loading purposes.

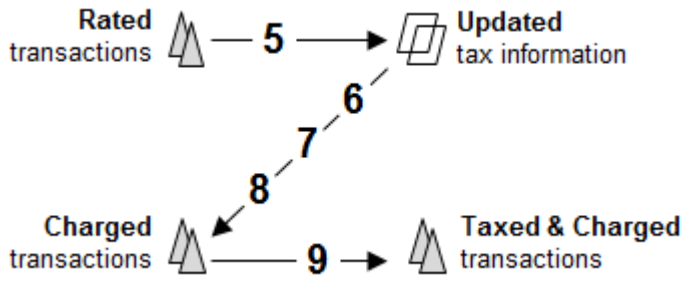

These **account balances are then updated** (step 10) by the rater instance in order to take into consideration the consumption of the service.

This modification:

- Is immediately performed inside SAP CC if the taxed & charged transaction refers to a prepaid balance or a credit limit balance
- Depends on the interfaced third-party billing system if the taxed & charged transaction has been assigned to an external balance declared in the previously identified subscriber account:
  - No modification is performed on the account balance if no third-party billing system is deployed.
  - A dedicated function is executed if a third-party billing system is interfaced in order to take the taxed & charged transaction into account. See Data Files Generation [page 297].

> **Note**
>
> In an integrated *SAP Solution* scenario, the billing system is:
> - Convergent Invoicing (in S/4HANA)
> - SAP Convergent Invoicing (in SAP ERP)
> - Convergent Invoicing (in S/4HANA Cloud Public Edition)
>
> To be able to generate and send valid billable items to one of these applications, SAP CC must first convert the taxed & charged transactions into charged items (postpaid, prepaid). By default, these items are temporarily stored in item files and then loaded in bulk mode by the bulkloader instances.
>
> See the Data Files Generation [page 297] function and the Data Files Bulk Loading Process [page 264] (core process).

As of SAP CC 2020 FPS 2 and once enabled, the immediate loading of billable items can be triggered by a charging operation request received via the *Web Services* technical interface. The rater instances are responsible for connecting to SAP Convergent Invoicing, converting the charged items into billable items (and their corresponding consumption items) and sending these output items to the relevant SAP Convergent Invoicing in its SAP system. See Immediate Loading of Billable Items [page 295].

Refer to the feature description for more information about the availability and implementation.

9.7.2.4 Allowance Creation

As allowances are associated to provider contracts, the Allowance Creation function is executed after the Events Charging function (which is used to retrieve the information related to the account, and thus to the provider contract). This function consists in creating the allowance that has been provisioned during the calculation algorithm, which implicitly executes the one-shot trigger components declared in the concerned allowance logic objects (and which relate to a creation event).

9.7.2.5 Immediate Loading of Billable Items

⚠ Caution

The use of billable items immediate loading has a significant impact on rating performance. This feature should only be implemented if required for immediate billing purposes and as a complement but not as replacement of the standard bulk loading of billable items.

In an integrated *SAP Solution* with SAP Convergent Invoicing in its SAP system, the Immediate Loading of Billable Items function consists in converting transactional data resulting from the charging process into billable items with their corresponding consumption items and immediately sending these output items to SAP Convergent Invoicing for immediate billing and invoicing purposes in real time. This processing skips both the Data Files Generation [page 297] function and the scheduled bulk loading process (see Data Files Bulk Loading Process [page 264]). SAP Convergent Charging (SAP CC) ensures the data synchronization between both systems.

→ Remember

As of SAP CC 2020 FPS 2, this function is available for a limited list of charging operations in SAP Convergent Charging. It requires an integrated SAP system landscape with specific versions of the deployed SAP S/4HANA systems that support the *Billable Items Immediate Loading* feature. Refer to the integration guides and the SAP Note 3048461.

From a rated transaction (see Events Pricing [page 293]), one or several taxed & charged transactions have been computed and assigned to the account balances defined in the identified subscriber account (see Events Charging [page 293]).

The immediate loading of billable items is available with the following service operations provided by the *Web Services* technical interface of SAP Convergent Charging:

- Charge a chargeable item
- Charge a set of chargeable items in bundle mode - These chargeable items relate to the same provider contract.

By default, the function is not enabled in SAP CC. The WS operation request must include the `itemImmediatelyLoaded` XML element to trigger the execution of the function at the end of the charging process. Refer to the Web Services documentation.

The immediate loading of billable items is also available with the app Process a Chargeable Item in the SAP Convergent Charging Cockpit user interface.

When your integrated SAP system landscape implements the features, SAP Convergent Invoicing sends these WS operations to SAP CC with this triggering flag when immediate billing is required.

Once triggered, the immediate loading of billable items applies to all billable items and consumption items generated by the execution of the charging operation request for the identified subscriber account and the identified provider contract:

- One-shot rates and recurring rates from subscribed charges and allowances used in the operation
- Usage rates from master and dependent charges used in the operation
- Event rates from allowances and shared allowances used in the operation

> **Note**
>
> SAP CC requests the execution of stateful function call sequences with JCo by using JCo contexts. The same connection is used for all remote function calls (RFCs) between invoking the sequence start and the sequence end. This is typically used for multistep logical units of work (LUWs), in which several function module calls are executed in a row and are committed afterwards.
>
> In case an error occurs during the communications, SAP CC takes care of this and explicitly and systematically calls all the necessary rollback functions. Note that the remote system will process an automatic rollback if the explicit calls to commit or rollback failed.

In the SAP CC system, the rater instance that is responsible for the processing of this charging operation request:

- Manages the communications with the relevant SAP Convergent Invoicing.
- Handles the direct transfers and commits the changes in SAP Convergent Invoicing.
- And manages the error handling by rolling back or reversing the sent items.

By default, if an error occurs, the rater instance calls the rollback function in order to cancel the loading in SAP Convergent Invoicing and ensures the data synchronization.

For each charging operation (single operation or single operation in a bundle mode), the rater instance:

- Determines the JCo destination to use.
- Starts a stateful function call sequence if no JCo stateful sequence is already started for the JCo destination.
- Prepares the billable items and sends them by calling the appropriate function modules `/1FE/<name of billable item class>_BIT_CREATE_API`. There is one function call per billable item class.

  Each billable item has the raw status so it can be reversed in rare cases (see the note about `FKK_BIX_BIT_REVERSE_CC`).

Note that every RFC call contains an additional IT_ADD_PARAMS parameter: the rater instance specifies the parameter `CCBITCRMOD` set to 1. It must be defined in the remote SAP system with SAP Convergent Invoicing because it enables billable items to be created in the raw status.

- Prepares the consumption item (only one) and sends it by calling the relevant function module `/1FC/<name of consumption item class>_CIT_CREATE_PROXY`.

At the end, if no errors occurred, the rater instance:

- Calls the RFC function module `BAPI_TRANSACTION_COMMIT` to confirm the item loading in SAP Convergent Invoicing.
- Ends the JCo stateful sequence.

If an error occurs at any point before the commit in the SAP CC Core Database system, the rater instance:

- Calls the RFC function module `BAPI_TRANSACTION_ROLLBACK` to cancel the item loading in SAP Convergent Invoicing.
- Ends the JCo stateful sequence.
- Rolls back the transaction in the SAP CC Core Database system.

> **Note**
>
> In rare cases, a rater instance must call the FKK_BIX_BIT_REVERSE_CC function module in order to reverse billable items that were successfully committed in SAP Convergent Invoicing but relating transaction commit finally failed in the SAP CC Core Database system.
>
> In the target SAP Convergent Invoicing component, a manual reversal may be necessary by a pricing administrator.
>
> See the log message com.sap.SCC.core_server.000739.

Related Information

Billable Items Immediate Loading [page 37]

9.7.2.6 Data Files Generation


The Data Files Generation function of the Chargeable Items Charging process consists in validating the taxed & charged transactions and recording them as output items into dedicated transactional data files to give the possibility to a third-party system (billing, revenue recognition) to exploit this information.

SAP Convergent Charging manages different file formats:

- Output item files:
  - Charged item files
  - Refill record files
  - Chargeable item files
- Rerate files

- Transaction files (deprecated)
- Data files (deprecated)

In an integrated *SAP Solution* scenario,

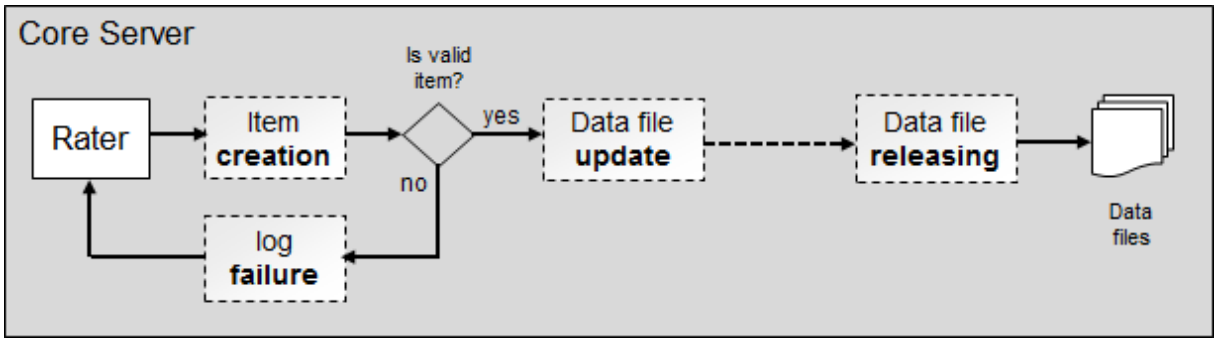

By default, the raters try to validate each item by using the associated billable item mapping. When an item is considered as invalid, the corresponding charging request is rejected and the targeted data file is not updated. An error message is written in a log file, to inform about the reason of the validation failure, which can be due to the following main reasons:

- The value of an item field is incorrect regarding the mapped billable item field, because:
  - The String type value has too many characters
  - The String type value is not a value of the String type enumeration like Currencies, Sub Processes or BIT Types
  - The Number type value has too many digits
  - The Number type value has too many decimal places
  - The Number type value is negative but only a positive value is expected
- A mandatory billable item field is mapped to an item field that is not set
- The value of the BIT[149] Type field is not assigned to the given Sub Process
- It is not possible to convert a decimal number into an Amount type field because there is no currency defined in the system with enough decimal places

Every item considered as valid regarding the used mapping is recorded in the targeted data file (aka item file) for further bulk loading operations. This persistency mechanism is managed through a dedicated framework which gives the possibility to implement:

- A **Charged Item File**, a **Refill Record File**, or a **Chargeable Item File** processors, which give the possibility to create data files whose content corresponds to taxed & charged transactions transcribed into charged items , refill records or chargeable items (using mappings defined at offer, charge plan, refill plan, or allowance plan levels)
- A **Rerate File** processor, which gives the possibility to create data files whose content can be used by a third-party system for rerating purposes
- A deprecated **Transaction File** processor (TFP), which creates a single file whose content can be customized
- A deprecated **Data File** processor, which creates multiple data files which contain different data related to transactions

[149] Billable Item

→ Tip

The TRANSAC_PROC_CLASS parameter gives the possibility to switch between these processors. For further information about this parameter, refer to the SAP CC 2023 System Parameter Reference and SAP CC 2023 Administration and Operation Guide documentations.

9.7.2.6.1 Charged Item File, Refill Record File or Chargeable Item File Processors

All these processors are dedicated to output data coming from a charging context and intended to be loaded into a third party billing system or another system. They implement a common output framework named Customizing the Charging Output Integration Framework (CIF) to output:

- Chargeable items, during the execution of the Chargeable Items Acquisition [page 337] and Chargeable Items Charging [page 286] processes
- Charged items, during the execution of the Chargeable Items Charging [page 286] and Prepaid Accounts Refilling [page 274] processes
- Refill records, during the execution of the Prepaid Accounts Refilling [page 274] process

These processors enable to:

- Filter charged items, chargeable items, or refill records depending on the value of an item field or depending on the class of an item
- Record these data into files with the same CSV format.

You can configure these processors to meet specific needs and tune the writing policy parameters such as:

- The writing location
- The number of writing channels
- The file rolling policy
- The file compression (using the RFC 1951 specifications)
- The activation of the automatic cleaning mechanism which is used to remove:
  - The uncommitted items from data files
  - The associated control file

ⓘ Note

- When the file compression is enabled, the data file may not contain all the items in case of instance failure
- When the automatic cleaning mechanism is enabled, if an error occurs during the cleaning operation then the data file is set in error by adding the `.cleanErr` extension to its filename

The raters can generate data files using 2 different formats:

- Version 1 [page 300], which only contains the items
- Version 2 [page 301], which is available from SAP CC 4.0 SP07 and contains additional information

Whatever the version is, the content of the data files respect the following rules:

- All files use the same data separator: “,” (comma)
- If the line numbering flag is set to true, the first field of each line corresponds to the line number
- Every line contains the properties of a charged item (or refill record)
- Every line is terminated by the “\n” line break command
- Details containing commas are surrounded with double-quotes
- Details containing line-breaks are surrounded with double-quotes
- Double-quotes located inside details are escaped by a double-quote
- Dates and times are formatted using ISO 8601 format
- Numbers are formatted using the default Java BigDecimal.toString() method
- Strings are not formatted

> **Note**
>
> - For further information about the configuration of the processors, refer to the SAP CC 2023 Administration and Operation Guide documentation
> - Either Charged Item File or Refill Record File processors **must be used** when offers are created within the SAP CC 2.0 release. In case of SAP CC 1.0 and 2.0 mixed offers, this processor automatically implements the Transaction File processor to handle the SAP CC 1.0 offers
> - These processors behaves as data interceptors, and are thus able to filter, replace or validate data before sending them into data files. These features are not provided in the default provided processors, and thus require specific developments
> - These processors generate a control file for each generated data file. A control file contains the encoded identifier of the last element written in the associated data file, which gives the possibility to follow and track the writing operations performed by the rater server instances. For further information about control files, consult the section related to the Data Files Bulk Loading Process [page 264]

9.7.2.6.1.1 Version 1 Data Files

The filenames of the version 1 data files are made up with the following information, each element separated by a underscore (_) sign:

- CIT[150] class name
- Writing channel identifier (3 digits number)
- File rolling policy (3 characters string such as “HOU” for hourly rolling policy)
- Writing channel index (2 digits number)
- Timestamp using the yyyyMMddTHHmmssSSS format (e.g. 20141101T123456789)

The version 1 data files contain:

- One and only one header block containing the names and types of the fields which are contained in the data file
- One or several items, written using a CSV format

[150] Charged Item

9.7.2.6.1.2 Version 2 Data Files

The filenames of the version 2 data files are made up with the following information, each element separated by a underscore (_) sign:

- If the `fileSequenceId` attribute is empty or missing:
  - CIT[151] class name
  - Writing channel identifier (3 digits number)
  - File rolling policy (3 characters string such as “HOU” for hourly rolling policy)
  - Writing channel index (2 digits number)
  - Timestamp using the yyyyMMddTHHmmssSSS format (20141101T123456789 for example)
- If the `fileSequenceId` attribute is not empty:
  - SAP system identifier (3 alphanumeric characters string)
  - CIT class name
  - Writing channel identifier (3 digits number)
  - File rolling policy (3 characters string such as “HOU” for hourly rolling policy)
  - Writing channel index (2 digits number)
  - Timestamp using the yyyyMMddTHHmmssSSS format (20141101T123456789 for example)
  - The sequence number is a 6-digit one (range 000000-999999)

The version 2 data files contain:

- One and only one header block containing:
  - The version of the data file
  - The name of the corresponding class
  - The names and types of the fields contained in the file
- One or several items, written using a CSV format

> **Note**
>
> - Version 2 is enabled by default for new fresh installations. During an upgrade of a SAP Convergent Charging system, this version is not updated, to ensure backward compatibility and preserve the potential already running integration with external systems dealing with data files
> - To modify the version of the data files, refer to the SAP CC 2023 Administration and Operation Guide documentation

9.7.2.6.2 Rerate File Processor

The Rerate File processor represents an implementation of the TIF[152] used for rerating purposes. It gives the possibility to record data files which:

- All have a CSV[153] format

[151] Charged Item
[152] Transaction Integration Framework

- All have the same content which is used to build rerating commands on given subscriptions

Like the Charged Item File processor, the Rerate File processor can be configured to fit specific needs and tune the writing policy parameters such as:

- The writing location
- The number of writing channels
- The file rolling policy
- The file compression (using the RFC 1951 specifications)

The generated files respect the following rules:

- The filename is made up with the following information separated by a underscore sign (_):
  - The "RERATE" string
  - Writing channel identifier (3 digits number)
  - File rolling policy (3 digits string such as "HOU" for hourly rolling policy)
  - Writing channel index (2 digits number)
  - Timestamp using the yyyyMMddTHHmmssSSS format (20100501T145723256 for example)
- All files use the same data separator: "," (comma)
- The first line acts as a header and contains the list of properties, using a **name:type** format (SUAC_CODE:string, FROM_DATE:date, and so on). This line is terminated by the "\n" line break command. The following properties are written in each generated data file:
  - `SUAC_CODE`, a string which corresponds to the subscriber account code
  - `SUB_CODE`, a string which corresponds to the subscription code
  - `FROM_DATE`, a date which corresponds to the rerating date provided in the rerating screen of the Core Tool user interface
  - `FROM_CITS_ID`, a number which represents the lower bound of the list of charged item sets concerned by a deletion operation
  - `TO_CITS_ID`, a number which represents the upper bound of the list of charged item sets concerned by a deletion operation
- Every line contains the values of each property used to build a rerating command, and ends with the "\n" (line break) command
- Details containing commas are surrounded with double-quotes
- Details containing line-breaks are surrounded with double-quotes
- Double-quotes located inside details are escaped by a double-quote
- Dates and times are formatted using ISO 8601 format
- Numbers are formatted using the default Java BigDecimal.toString() method
- Strings are not formatted

When handled by a third-party billing system, these data files give the possibility to identify exhaustive lists of charged items which must be impacted in case of rerating operations (deletion, deactivation, and so on according to the needs).

> **Note**
>
> - For further information about the configuration of the Rerate File processor, refer to the SAP CC 2023 Administration and Operation Guide documentation

153 Comma Separated Value

- When rerating operations must be performed, it is possible to use both Data File and Rerate File processors. As the use of the Data File processor is deprecated, **it is highly recommended to use the Rerate File processor**

9.7.2.6.3 Transaction File and Data File Processors

The use of Transaction File and Data File processors is deprecated. To ensure compatibility with offers created through previous versions of SAP CC, it is still possible to use them. For further information about these processors, refer to older documentation available on the SAP Help Portal: https://help.sap.com

9.7.2.7 Immediate Threshold Refilling

The Immediate Threshold Refilling function is the last executed function of the Chargeable Items Charging process. It consists in re-analyzing the processed charges in order to determine whether they are associated to a refill plan or not. If a refill plan exists and contains some account event refills, the Rater determines whether it has some immediate refills to trigger or not. To do so, it compares the amount of the prepaid account balances to the defined thresholds, and immediately triggers all the refilling operations which match the condition.

ⓘ Note

- Immediate threshold refills correspond to refilling operations:
  - Related to prepaid account balances only
  - Defined into a refill plan using the Account Event Refill rate component. As refill plans refer to provider contracts, these refilling operations are thus not available when using subscriptions
- To avoid any latency during a real-time charging operation, immediate threshold refills are performed after the Data Files Generation function, in a different database transaction

9.7.3 Execution Modes

Online [page 304]

Batch [page 307]

Inverse [page 308]

Best-Effort [page 309]

Blank [page 310]

Session-Based [page 310]

9.7.3.1 Online

The Chargeable Items Charging process can be executed by the raters in an online mode. This execution mode is used to process in a real-time each incoming external event one after the other, and can be considered as stateful or stateless, according to data persistency considerations.

The default execution mode corresponds to the stateful one, when SAP CC is connected with third-party applications such as a mediation system, a credit-control system, and so on.

When the stateless mode is used, the rating engine can be considered as a simple computing unit, which implies particularities and restrictions such as:

- The processed external events must only relate to a master charge (retrieved with a provided charge code)
- A predefined rating context must be provided to the charging operation to specify information about counters, parameters, and translation/tier tables (but without any information related to offer or charge plan)
- No customer master data is stored, which implies that the client application is responsible for the storage of counters and input data
- No data files are generated at the end of the charging operation
- Taxes cannot be managed
- Detailed information related to transactions are not filtered
- Only charges referring to subscriptions can be processed

> ⓘ Note
>
> Offers or charge plans information provided in the specified rating context may contain dependencies between the associated charges. These possible dependent charges cannot be managed when using the stateless mode, as only a single master charge is provided to the charging operation.

9.7.3.1.1 External and Internal Events

When using the stateful mode, the received **external** events (chargeable items) lead to the production of **internal** recurring or one-shot events. When using the stateless mode, these internal events become external ones, whose activation leads to a modification of the initially provided stateless rating context.

> ⓘ Note
>
> Managed types of events are:
>
> - Usage
> - Activation
> - Suspension
> - Resumption
> - Cancelation[154]

[154] not available for convergent charging services based on provider contracts

- Early Cancelation[155]

9.7.3.1.2 Stateless Rating Context

Stateless rating operations require the following information:


- The identification code of a master charge configured in SAP CC, which is mandatory as used to retrieve the related pricing logic
- A stateless rating context, which is mandatory and contains information related to the rating operation and to the customer master data
- A creation date, which is mandatory and corresponds to the subscription date
- The last rating date, which is optional and automatically set to the creation date when not provided. When provided, this date must be greater than the creation date

The first step of a stateless rating operation consists in analyzing the provided consumption information in order to trigger the Activation process. The provided creation date is then analyzed to determine:

- The adequate version of the price plan to use for pricing purposes (which corresponds to an element of the price plan chronology)
- A period which potentially contains a list of usage, recurring and one-shot events which may be triggered, and which may differ according to the triggering type of event:
  - At the beginning of a period
  - At the end of a period

Example

Considering the following timeline:

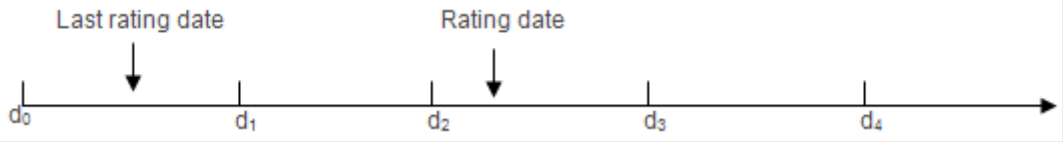

If an event is associated to the d1 date, the computed period can be:

- (d1-d0) if the event must be triggered at the end of a period
- (d1-d2) if the event must be triggered at the beginning of a period

According to the type of rated event, the following events can be generated:

[155] not available for convergent charging services based on provider contracts


Event Type	Triggered Element
Usage	• One-shot rates (CREATION subtype) are triggered if the last rating date is null • Recurring rates are triggered between the last rating date (or the creation date if the last rating date is null) and the rating date • Usage rate is computed
Activation	• One-shot rates (CREATION subtype) are triggered if the last rating date is null • Recurring rates are triggered between the last rating date (or the creation date if the last rating date is null) and the rating date
Suspension	• One-shot rates (CREATION subtype) are triggered if the last rating date is null • Recurring rates are triggered between the last rating date (or the creation date if the last rating date is null) and the rating date • One-shot rates (SUSPENSION subtype) are triggered at the rating date
Resumption	• Recurring rates charged at the beginning of the period are charged once at the rating date (prorated if necessary) • One-shot rates (RESUMPTION subtype) are triggered at the rating date
Cancelation	• One-shot rates (CREATION subtype) are triggered if the last rating date is null • Recurring rates are triggered between the last rating date (or the creation date if the last rating date is null) and the rating date • One-shot rates (CANCELLATION subtype) are triggered at the rating date
Early Cancelation	• One-shot rates (CREATION subtype) are triggered if the last rating date is null • Recurring rates are triggered between the last rating date (or the creation date if the last rating date is null) and the rating date • One-shot rates (EARLY CANCELLATION subtype) are triggered at the rating date

The second step of a stateless rating operation consists in applying every adequate price plan on each event. The content of the stateless rating context is then analyzed to get the values of counters, parameters, and translation tables.

> **Note**
>
> If the rating context contains objects whose values are not initialized, the default values defined in the charge component are used.

According to the type of concerned event, the state of the stateless rating context is implicitly modified to a new state which corresponds to a virtual state, as described below:

Event Type	Dates Meaning	State Transition	
Usage	Rating date = date of the usage	Before	Active or New
		After	Active
Activation	Rating date = date of the activation	Before	Active or New
		After	Active
Suspension	Rating date = date of the suspension	Before	Active or New
		After	Suspended
Resumption	Rating date = date of the resumption Last rating date = suspension date	Before	Suspended
		After	Active
Cancelation	Rating date = date of the cancellation	Before	Active or New
		After	End
Early Cancelation	Rating date = date of the cancellation	Before	Actice or New
		After	End

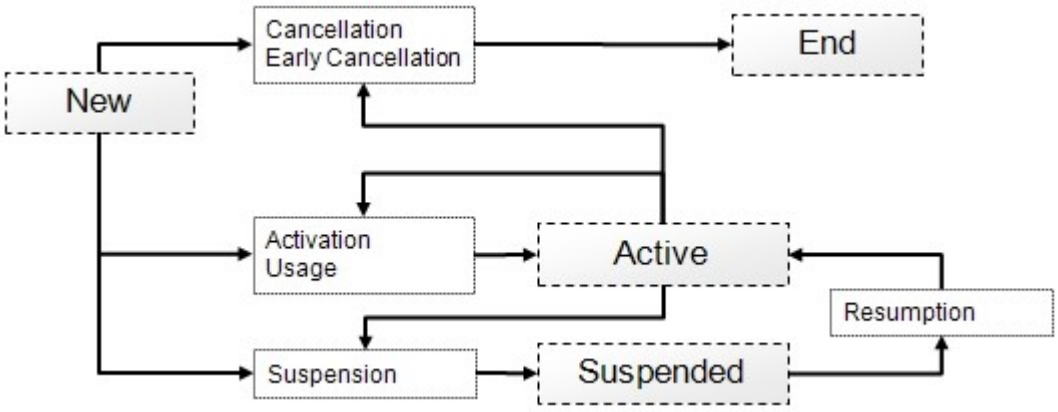

9.7.3.2 Batch

> ⚠ Restriction
>
> Batch charging is not compatible with session-based [page 310] charging.

When your business does not require real-time execution and credit-control operations, it is possible to execute the Chargeable Items Charging process in a batch mode.

This execution mode can either deal with single external events or with a list of external events, but due to its disconnected characteristic, this execution mode is generally associated to batch charging operations which can be performed:

- Directly by the Core Server system, taking into account a list of external events provided by a client application. This corresponds to the online stateful mode, except the fact that:
  - A sorted list of external events is provided for charging purposes, instead of a single event
  - The provided list of external events only contains events relating to the same subscription or provider contract (the operation fails if an event relates to another subscription or provider contract than the other events). To avoid such a failure, a "subscriptionID" argument can be specified to limit the processing scope of the operation
  - The operation can be launched using a rating mode which modifies the behavior of the process execution, in terms of chargeable items retrieval and order, failure management, and so on. For further information about this rating mode parameter, refer below
- By the BART Server system (for better performances), which deals with batch charging sessions:
  - Stored in its associated BART Database for tracking (and possibly rerating) purposes
  - Associated to a given batch rating group identifier, used to group a set of chargeable items and related to one or more subscriptions or provider contracts
  - Launched using a rating mode which modifies the behavior of the process execution, in terms of chargeable items retrieval and order, failure management, and so on. For further information about this rating mode parameter, refer below

> ⓘ Note
>
> - The chargeable items which are stored in the BART Database both concern prepaid and external accounts, but only chargeable items referring to external accounts are taken into account in case of subsequent rerating operations
> - Grouping chargeable items on a batch rating group identifier implies that these chargeable items can be taken into account in an order which can be different from their consumption date. As a consequence, only subscriptions referring to external balances can be rated in this batch mode, in order to ensure data integrity in case of subsequent rerating operations (as prepaid balances could be incorrectly computed and thus rejected, which would lead to data inconsistency)

The disconnected characteristic of the batch execution mode gives the possibility to safely interrupt a charging operation, for example in case of peak period.

9.7.3.3 Inverse

The Chargeable Items Charging process can be executed in an "inverse" mode. This mode is used to convert a sum of money (i.e. the balance of a prepaid account) into a possible usage quota according to a given price plan and an existing stateful context (containing counter values, parameters, and so on).

This process is based on a dichotomy algorithm which is mixed with an "ax+b" approach in order to converge towards the solution rapidly. To ensure performances, a maximum of 500 iterations is allowed for the dichotomy algorithm. If the concerned price plan is not able to converge in less than 500 iterations, an error is returned.

Example

"How long can Mr. BAR call Tahiti with $5, in the limit of 60 minutes, after having subscribed the FOO call offer?"

The answer to this question depends on the subscribed offer and depends on the Mr. BAR potential counter values:

- If the offer includes, for example, a 1 hour free call balance per month, the answer will also depend on this current balance value
- If the FOO offer is based on a model with 50 cents/min and 1 hour free calls per month and if the balance current value is set to 15 minutes, the customer will be able to call Tahiti during 10 + 15 (free) minutes

The chargeable item which is sent to an "inversed" charging operation must contain a value for the property to inverse. This value represents the maximum quota that can be returned for the property to inverse, and must be valid regarding the defined precision. This value is supposed to be between 0 and the specified maximum quota.

This execution mode can manage the precision related to the service unit (quota). Most of the time, this precision is related to a discrete quantity and may be set, for example to 1 (but a different value is allowed).

Note

When the price plan depends on the property to inverse, the "inversed" charging operation can return a value which does not correspond to the exact limit, and can thus fail when really charged.

9.7.3.4 Best-Effort

The Chargeable Items Charging process can be executed in a "best-effort" mode, which is used to charge an account with the maximum quantity of available service. This execution mode is made up with 2 successive steps:

- An initial "inversed" charging operation, which is used to determine the maximum quota of service available for charging purpose
- An immediate charging operation, which directly debits the determined quota of service (even if the service is not delivered)

Note

The session-based execution mode also contains a "best-effort" mechanism, which concerns the reservation of service quotas. Do not confuse best-effort charging operations and best-effort reservations made during session-based charging operations. For further information about the best-effort reservation mechanism, refer afterwards.

9.7.3.5 Blank

The Chargeable Items Charging process can be executed in a “blank” mode, which guarantees that the databases stay unmodified after the execution of the related charging operation. Using this mode, users can communicate with SAP CC to perform charging operations for advice of charge purposes.

9.7.3.6 Session-Based

Related Information

Process Description [page 310]
Transient Counters [page 311]
Session History [page 312]
Mono Service Sessions [page 312]
Multiservice Sessions [page 321]
Reservation Renewal [page 330]
Process Limitations [page 331]
Use Cases [page 332]

9.7.3.6.1 Process Description

> ⚠ Restriction
>
> Session-based charging is not compatible with offline charging.

A charging session (such as phone call or video streaming) is considered as a succession of simple events, split into quotas of customer service which must be charged, and occurring during a limited period. SAP CC gives the possibility to manage operations relating to:

- Mono service sessions, where each session concerns a single customer service
- Multiservice sessions, where a given session can refer to multiple customer services (each consumed service referring to a given mono service session)

The session-based execution mode of the Chargeable Items Charging process is similar to the Online (stateful) execution mode, with additional features such as:

- History mechanisms used to record usage quotas and potentially associated counters reserved at session start and/or session update times
- Session update operations, which represent intermediate interim rates used to partially or completely confirm previous reserved elements and make new reservations of usage quotas when necessary

- Session stop rate, which represents a final rate used to partially or completely validate the previously reserved service usage quotas
- Best-effort reservation mechanism, which gives the possibility to compute and reserve a maximum quota of service in case of standard reservation failure. This mechanism always concerns a unique service unit (as only one property can be inversed), and is activated when specifying the “propertyToInverse” argument at session start time
- Charged Items Aggregation, which gives the possibility to apply specific rules on the different properties of the charged items in order to merge these charged items and only keep a pending one in a session
- (Optional) reservation renewal mechanism, which gives the possibility for a client application to reserve again a quota of service in a charging session which is inactive due to insufficient credit

> **Note**
>
> - SAP CC supports partial confirmation of credit reservations. The configuration of the price plans executed during the session-based charging operations must ensure that the prices computed for a complete confirmation are greater or equal to the prices computed for a partial confirmation
> - As of SAP CC 5.0 SP 3, it is possible to control the maximum number of charging sessions that can be started for every subscriber account. For further information, refer to the Limiting the Number of Charging Sessions section of the SAP CC 2023 Administration Guide documentation

The session-based execution mode supports credit-control and quota reservation in real-time. When credit-control is not implemented, charging a session is equivalent to charging the event generated at the end of this session. Quota reservations are grouped for each provider contract or subscription into a charging session history, based on a charging session per session. A quota reservation includes at least the last consolidated chargeable item and its related reserved counter(s). For a given multiservice session, the session context contains:

- The accumulated amounts corresponding to the sums of the amounts to confirm computed by the mono service sessions. There is one amount per currency
- A reservation renewal listener (RRL) identifier (optional)
- Some information dedicated to the notification listener in the registered client application or system

9.7.3.6.2 Transient Counters

As described in the Master Data section of this documentation, transient counters represent temporary counters associated to a charge component or to an allowance logic. These counters are not visible and cannot be redefined in offers, charge plans or allowance plans containing the related charge or allowance logic (but they can be shared between a master charge and its dependent charges). Transient counters also give the possibility to use stepped price plans where consumption cost may vary according to the total consumption.

The session-based execution mode uses transient counters to aggregate all the confirmed service usage quotas. They are both saved into the database and stored in memory as cached data (in the session rating cache). The life cycle of transient counters is linked to a charging session, as they are created when the corresponding charging operation starts. More precisely, the transient counters of the master charge are created first and then propagated to the dependent charges. If some transient counters expected by the dependent charge do not match the provided ones (name correspondence), they are created. When the session-based charging operation is stopped, its associated transient counters are deleted.

Transient and permanent counters are both declared and described using the same price plan component which gives the possibility to specify:

- The name of the counter, which must be unique within a given price plan
- A description, which describes the role of the counter
- The default value of the counter, which is used at creation time

> ⓘ Note
>
> - Transient counters have an additional option which gives the possibility to enable or disable their update during the reservation operations. When this option is disabled for a given transient counter, its value is not updated during the reservation operation, which thus corresponds to a behavior similar to persistent counters
> - When configured, a transient counter can be used within all the rate components of a price plan whatever their type in the reusable charge (one-shot, recurring or usage)
> - When the declaration of transient counters is the same for a master charge and its dependent charge, the value of this counter is shared at runtime

Transient counters are owned by only one session and cannot be shared with other sessions. Transient counters life cycle is thus linked to the session which owns them:

- At session start time, transient counters are created (with their specified default value) and stored in both memory (in the session cache) and database
- At session update time, values of transient counters are modified and updated. If a transient counter is impacted by a reservation operation, this impact is only visible at the next confirmation (contrary to persistent counters which are immediately updated)
- At session stop time (either during confirmation or cancellation operations), transient counters are deleted from the session

9.7.3.6.3 Session History

The sessions related to a provider contract item or to a subscription are grouped into a **session history**. The life cycle of this history depends on the life cycle of its related contract item or subscription:

- When a related contract item or a subscription is deleted, the related session history is also deleted. Pending sessions are thus lost and future update and stop operations related to these sessions will fail.
- A contract item or a subscription can be modified by removing a charge activation. All the sessions managed through a deleted charge activation are removed and related counter reservations are cancelled.
- All the sessions managed through a deleted access are removed and related counter reservations are cancelled

9.7.3.6.4 Mono Service Sessions

The following table lists the different operations which can be performed on a mono service session:

Operation	Description
Start	When a mono service session starts, the rating engine is called with the following information: • A unique external session identifier • A service identifier and a user service identifier (USID), which together define an access • A start date, which is combined with the above access to retrieve the adequate subscription or provider contract item • A chargeable item, which includes the requested quota of service per property and is used for reservation purposes • A rating result type, which is used to filter the transactions returned at the end of the operation. Possible values for the rating result type are: • Usage transactions • Usage, recurring and one-shot transactions • Master usage transactions • No transaction • A time to live, which defines the session expiration time • A default resolution, which determines the behavior of the session at expiration time Then, the rating engine: • Charges the provided chargeable item • Performs the adequate quota reservations if required and/or necessary • Creates a session, keeping the original chargeable item used for reservation purpose • Creates a chargeable item by comparing: • The reservation chargeable item stored in the session • The provided chargeable item potentially empty, partially or completely filled **Note** • This reservation chargeable item is rated and concerned counters are reserved: • Systematically for persistent counters • Potentially for transient counters according to their configuration (see above for explanation about transient counters update during reservation) • The previously created rating result is enhanced and contains:

Operation	Description
	• Optional transactions used to reserve quota for the current reservation • An amount to reserve. The amount to reserve is the sum of the amounts contained in the above-mentioned transactions to reserve.

Operation	Description
Update	When a mono service session is updated, the rating engine is called with the following information: • The unique identifier of the session, which corresponds to the one provided at start time • A service identifier and a user service identifier (USID), which together define an access • An update date, which must correspond to the start date in order to match the correct access chronology • A rating result type, which is used to filter the transactions returned at the end of the operation. Possible *values for the rating result type are: • Usage transactions • Usage, recurring and one-shot transactions • Master usage transactions • No transaction returned • An optional chargeable item, which includes the used quota of service per property and which is used for **confirmation** purposes. When this chargeable item is not provided, the system automatically confirms the previously reserved quota of service. • An optional chargeable item, which is used for reservation purposes. When this chargeable item is not provided, the system automatically reserves the same quota of service than the one specified in the previous reservation. This chargeable item includes: • The requested quota of service per property • A list of updated properties (for example the QoS during a video conference) First of all, the rating engine retrieves the concerned session and charges again the reservation chargeable item stored in this session. A rating result is then created and contains: • Optional transactions[156] used to **cancel** the previous reservation operation which impacted the related account balance • An amount to cancel. The amount to cancel is the sum of the amounts contained in the above-mentioned transactions to cancel Secondly, the rating engine creates a consolidated chargeable item by comparing: • The reservation chargeable item stored in the session

[156] The generation of the transactions to cancel is deactivated by default for performance reasons, but can be activated using the `TRANSACTIONS_TO_CANCEL_IN_RESULT_ENABLED` parameter. The generation of the transactions to cancel must be activated if balances are handled by an external system. If the generation of the transactions to cancel is deactivated, the amount to cancel is not computed. For further information about the `TRANSACTIONS_TO_CANCEL_IN_RESULT_ENABLED` parameter, refer to the SAP CC 2023 System Parameter Reference documentation.

Operation	Description
	• The confirmation chargeable item potentially provided (or automatically re-created) **Note** • The consolidated chargeable item is rated and previously reserved counters are updated in both database and memory • The previously created rating result is enhanced and contains: • Optional transactions used to **confirm** the previous reservation operation which impacted the related account balance • An amount to confirm. The amount to confirm is the sum of the amounts contained in the above-mentioned transactions to confirm • The transactions stemmed from this rating result are sent to the TIF[157] and written into the adequate data files Thirdly, the rating engine creates a consolidated chargeable item by comparing: • The reservation chargeable item stored in the session • The provided chargeable item potentially empty, partially or completely filled **Note** • This new reservation chargeable item is rated and concerned counters are reserved: • Systematically for persistent counters • Potentially for transient counters according to their configuration (see above for explanation about transient counters update during reservation) • The previously created rating result is enhanced and contains: • An amount to reserve • Optional transactions used to reserve quota for the current reservation Finally, the rating engine updates the session with this new consolidated reservation chargeable item considered as the new reference for the next session update operation.

[157] Transaction Integration Framework

Operation	Description
Stop	When a mono service session is stopped, the rating engine is called with the following information: • The unique identifier of the session, which corresponds to the one provided on session start and thus on session update times • A service identifier and a user service identifier (USID), which together define an access • A rating result type, which is used to filter the transactions returned at the end of the operation. Possible values for the rating result type are: • Usage transactions • Usage, recurring and one-shot transactions • Master usage transactions • No transaction returned • A default resolution, which determines the session resolution at expiration time (confirmation, cancellation, and so on) • An optional chargeable item, which includes the requested quota of service per property and which is used for **confirmation** purposes. When this chargeable item is not provided, the system automatically confirms the previously reserved quota of service. First of all, the rating engine retrieves the concerned session and rates again the reservation chargeable item stored in this session. A rating result is created and contains: • An amount to cancel • Optional transactions[158] used to cancel the previous reservation operation which previously impacted the related account balance Secondly, the rating engine creates a consolidated chargeable item by comparing: • The reservation chargeable item stored in this session • The confirmation chargeable item potentially provided

[158] The generation of the transactions to cancel is deactivated by default for performance reasons, but can be activated using the `TRANSACTIONS_TO_CANCEL_IN_RESULT_ENABLED` parameter. The generation of the transactions to cancel must be activated if balances are handled by an external system. If the generation of the transactions to cancel is deactivated, the amount to cancel is not computed. For further information about the `TRANSACTIONS_TO_CANCEL_IN_RESULT_ENABLED` parameter, refer to the SAP CC 2023 System Parameter Reference documentation.

Operation	Description
	Note • The consolidated chargeable item is rated and previously reserved counters are updated into both database and memory • The previously created rating result is enhanced and contains: • An amount to confirm • Optional transactions used to **confirm** the previous reservation operation which previously impacted the related account balance • The transactions stemmed from this rating result are written into adequate data files Finally, the session is deleted and the session identifier becomes available for next sessions. If the "resolution" argument is set to CANCELLED: • The counter reservations coming from the last reservation (from session start or session update) are cancelled • The created rating result may be empty
Cleanup	In case of service failure such as equipment failure, a session stop operation can be lost. When such a situation occurs, unclosed pending sessions can exist and thus require a specific action in order to clean those pending sessions. An automatic cleaning policy can be configured session per session according to the "ttl" (time to live) argument provided at session start. **Note** To clean a session, it is also possible to confirm or cancel the last counter reservations using the `defaultResolution` argument provided at session start. This session cleaning function is both triggered: • At the beginning of the start, update and stop operations, on targeted subscriber account • Periodically during the cleaning operation of the deprecated Prerating and Postrating process, on all subscriber accounts (when this process is scheduled)

> **Note**
>
> The reservation renewal mechanism is not available with mono service sessions. For further information about this mechanism, refer afterwards.

9.7.3.6.4.1 Chargeable Item Consolidation

Considering a chargeable item including user properties which can be used by rating components, for example:

```
Name: call
Property: event (the session event described as a string)
Property: QoS (the quality of service described as a string)
Property: duration (the call duration described as a number)
```

It is necessary to consolidate the chargeable item during the update and stop operations, in order to create a complete consolidated chargeable item. This operation is performed thanks to the comparison between:

- The properties defined in the reservation chargeable item
- The properties defined in the confirmation chargeable item

If some properties are not present in the confirmation chargeable item or when it is not provided due to its optional characteristic, they are added to the consolidated one.

> **Note**
>
> This consolidation operation is also required to create a complete new reservation chargeable item at session update time. It is then saved into the session and available for next update operations.

> **Example**
>
> The following example illustrates the consolidation operation performed on a chargeable item described above. In this example, the QoS property is only provided at session start time:

			Provided	Saved	Consolidated
Start		→	Reservation: call(event = 'start', QoS = 'good', duration = 3)		call(event = 'start', QoS = 'good', duration = 3)
OK		←		call(event = 'start', QoS = "good", duration = 3)	
Update	**Stop**	→	Confirmation: call(duration = 2)		call(event = 'start', QoS = 'good', duration = 2)
	OK	←			

			Provided	Saved	Consolidated
	Start	→	Reservation: call(event = 'update', duration=4)		call(event = 'update', QoS = 'good', duration = 4)
	OK	←		call(event = 'update', QoS = 'good', duration = 4)	
	Stop	→	Confirmation: call(duration = 1)		call(event = 'update, QoS = 'good', duration = 1)
	OK	←			
Update	**Start**	→	Reservation: call()		call(event = 'update', QoS = 'good', duration = 4)
	OK	←		call(event = 'update', QoS = 'good', duration = 4)	
Stop (3 min used)		→	Confirmation: call(event = 'stop', duration = 3)		call(event = 'stop', QoS = 'good', duration = 3)
End		←		Deleted from cache	

At session update time, a first consolidation is made before rating the confirmation chargeable item. A second consolidation is also made to save a complete reservation chargeable item into the session.

9.7.3.6.4.2 Immediate Threshold Refilling

The immediate threshold refilling operation is performed at the end of the update, stop and cleaning operations of every mono service session. For further information about immediate threshold refilling, refer above.

9.7.3.6.4.3 Charged Items Aggregation

When a mono service session deals with charged items concerned by an aggregation policy, the behavior of the start, update and stop operations is modified as follows in order to handle the aggregation of these charged items:

- If the aggregation policy deals with an aggregation period, the time of the **start** operation is used as the initial start time of this aggregation period
- Every **update** operation refers to a chargeable item which is used for confirmation purpose. This chargeable item is processed and the generated charged item is aggregated with a pending charged item (which can correspond either to the previously aggregated one or to a null element when the update operation corresponds to the first update one)
- The behavior of the **stop** operation depends on the resolution of the session:
  - A stop operation used to cancel the session does not perform any confirmation operation, and thus only leads to the reporting of the pending charged item(s) into the external billing system
  - A stop operation referring to a chargeable item which is used for confirmation purpose can be considered as an update followed by a cancel. This means that the chargeable item used for confirmation purpose is processed and leads to the generation of a charged item, aggregated with a pending charged item, and then automatically reported into the external billing system

9.7.3.6.5 Multiservice Sessions

A multiservice session can be started, updated or stopped. Then, business sub-operations can be performed inside a multiservice session. The following table lists the different sub-operations which can be performed during a multiservice session depending on whether the session starts, is updated or stops.

A multiservice session can include several sequences of quota reservations. Each sequence is represented by a charging session.

Operation	Description
Start	Reserve
Update	Reserve
	Confirm and Reserve
	Confirm
	Cancel
Stop	Confirm
	Cancel

The following table lists the different operations which can be performed on a multiservice session:

Operation	Description
Start	Starting a multiservice session consists in: • Creating the multiservice session • Creating at least one charging session (using a Reserve operation) **Note** A charging session refers to one service but a service can be referred to by several charging sessions. A multiservice session needs the following information to be created: • A unique external session identifier • An SAP CC access, made up with a customer service identifier (SID) and a user service identifier (USID) related to the end customer. The SID must be configured in the charges customized in the charge plans and offers of the service provider. In case of multiservice, this identifier is the same for all the services • A start date, which is combined with the above access to retrieve the adequate subscription or provider contract item Optionally, a multiservice session includes: • The identifier of a reservation renewal listener (to enable the reservation renewal mechanism) • External data embedded in the renew reservation notifications which is sent to the listeners in the registered client application (or system) **Note** A reservation renewal listener must initially be registered. This customized listener is implemented in the client application or system. This can be the charging client application or another client application in charge of handling the renew reservation notifications. Then, you can define several charging sessions using multiple Reserve operations.

Operation	Description
Update	To update a multiservice session, a client application must provide the following information: • The unique identifier of the session, which corresponds to the one provided at start time • A service identifier (SID) and a user service identifier (USID), which together define an access • An update date, which must correspond to the start date in order to match the correct access chronology Then, you can create a new charging session or modify existing charging sessions using the Reserve, Confirm, Confirm and Reserve, or Cancel operations, which gives you the possibility to: • Create one charging session per Reserve operation • Confirm and extend a reservation of an existing charging session with the Confirm and Reserve operation • Confirm a reservation and stop the related charging session with the Confirm and Reserve operation • Cancel the last reservation of an existing charging session and stop the charging session
Stop	Stopping a multiservice session consists in: • Confirming or cancelling reservations of existing charging sessions • Deleting the multiservice session • Cleaning the remaining charging sessions (using the default resolution)

The following table precisely describes the sub-operations which can be performed when starting, updating, or stopping a multiservice session:

Business Operation	Followed On By	Description
Reserve	Confirm and Reserve Confirm Cancel	Creates a charging session and reserves a given number of service units. The Reserve operation is called with the following information: • The identifier of the reservation, also used to identify the related charging session (the pair (reservation ID, multiservice session ID) identifies the charging session) • A chargeable item, which includes the requested quota of service per property and is used for reservation • A default resolution, which determines the behavior of the charging session at expiration time • A time-to-live (TTL), which defines the expiration time of the charging session • The name of a property of the chargeable item to be inversed and which used by the best-effort reservation mechanism The SAP CC system: • Simulates the charging operation of the provided chargeable item • Performs the adequate quota reservations (or best-effort reservations if service units are not sufficient) • Creates a charging session, keeping the original chargeable item used for reservation purpose • Returns a rating result which can be used to impact the related account balance **Note** • When the system performs best-effort reservation, the reservation is partially granted. The charging session is then eligible to the reservation renewal mechanism which will notify the registered listeners when new reservations can be performed due to balance re-credit

Business Operation	Followed On By	Description
		• When the system performs a reservation which is fully granted, the sending of renew reservation notifications for this charging session is deactivated

Business Operation	Followed On By	Description
Confirm and Reserve	Confirm and Reserve Confirm Cancel	Gives the number of service units which were consumed and reserves other service units. Note that the number of consumed units can be different from the number of units initially reserved. The Confirm and Reserve operation is called with the following information: • The identifier of the reservation identifier, also used to identify the related charging session • An optional chargeable item used for confirmation purpose, which is based on the chargeable item previously used for reservation. If the chargeable item was not modified (compared to reservation) or if it is not present, the reservation is fully confirmed. If the chargeable item related to this reservation was modified, the confirmation is partial • A chargeable item, which includes the requested quota of service per property and is used for reservation purposes • A time-to-live (TTL), which defines the expiration time of the charging session First of all, SAP CC retrieves the concerned charging session and definitively charges the reservation chargeable item stored in this session. A rating result is then created and contains: • Optional transactions[159] used to **cancel** the previous reservation operation which impacted the related account balance • An amount to cancel. The amount to cancel is the sum of the amounts contained in the above-mentioned transactions to cancel

[159] The generation of the transactions to cancel is deactivated by default for performance reasons, but can be activated using the `TRANSACTIONS_TO_CANCEL_IN_RESULT_ENABLED` parameter. The generation of the transactions to cancel must be activated if balances are handled by an external system. If the generation of the transactions to cancel is deactivated, the amount to cancel is not computed. For further information about the `TRANSACTIONS_TO_CANCEL_IN_RESULT_ENABLED` parameter, refer to the SAP CC 2023 System Parameter Reference documentation.

Business Operation	Followed On By	Description
		Secondly, SAP CC creates a consolidated chargeable item by comparing: • The reservation chargeable item stored in the charging session • The confirmation chargeable item potentially provided (or automatically re-created) **Note** • The consolidated chargeable item is rated and previously reserved counters are updated in both database and memory • The previously created rating result is enhanced and contains: • Optional transactions used to **confirm** the previous reservation operation which impacted the related account balance • An amount to confirm. The amount to confirm is the sum of the amounts contained in the above-mentioned transactions to confirm • The transactions stemmed from this rating result are sent to the TIF[160] and written into the adequate data files Thirdly, SAP CC creates a new reservation chargeable item by consolidating: • The reservation chargeable item stored in the session (coming from the previous reservation) • The reservation chargeable item provided in the Confirm and Reserve operation potentially empty, partially or completely filled

[160] Transaction Integration Framework

Business Operation	Followed On By	Description
		Note • This new reservation chargeable item is rated and concerned counters are reserved • Systematically for persistent counters • Potentially for transient counters according to their configuration (see above for explanation about transient counters update during reservation) • The previously created rating result is enhanced and contains: • Optional transactions used to reserve quota for the current reservation • An amount to reserve. The amount to reserve is the sum of the amounts contained in the above-mentioned transactions to reserve Finally, SAP CC updates the charging session with this new consolidated reservation chargeable item considered as the new reference for the next operation (Confirm, Confirm and Reserve, or Cancel).

Business Operation	Followed On By	Description
Confirm		Gives the number of service units which were really consumed and cancels the related charging session. The Confirm operation is called with the following information: • The identifier of the reservation identifier also used to identify the related charging session • An optional chargeable item used for confirmation, based on the chargeable item previously used for reservation. If the chargeable item was not modified (compared to reservation) or if it is not present, the reservation is fully confirmed. If the chargeable item related to this reservation was modified, the confirmation is partial. First of all, SAP CC retrieves the concerned charging session and charges again the reservation chargeable item stored in this session. A rating result is then created and contains: • Optional transactions[161] used to **cancel** the previous reservation operation which impacted the related account balance • An amount to cancel. The amount to cancel is the sum of the amounts contained in the above-mentioned transactions to cancel Secondly, SAP CC creates a consolidated chargeable item by comparing: • The reservation chargeable item stored in the session

[161] The generation of the transactions to cancel is deactivated by default for performance reasons, but can be activated using the `TRANSACTIONS_TO_CANCEL_IN_RESULT_ENABLED` parameter. The generation of the transactions to cancel must be activated if balances are handled by an external system. If the generation of the transactions to cancel is deactivated, the amount to cancel is not computed. For further information about the `TRANSACTIONS_TO_CANCEL_IN_RESULT_ENABLED` parameter, refer to the SAP CC 2023 System Parameter Reference documentation.

Business Operation	Followed On By	Description
		• The confirmation chargeable item potentially provided (or automatically re-created) **Note** • The consolidated chargeable item is rated and previously reserved counters are updated in both database and memory • The previously created rating result is enhanced and contains: • The transactions stemmed from this rating result are sent to the TIF and written into the adequate data files Thirdly, SAP CC removes the charging session and the identifier of the last reservation becomes available for other reservations.
Cancel		Cancels the last reservation and removes the related charging session. The Cancel operation is called with the identifier of the reservation which is also used to identify the related charging session SAP CC: • Retrieves the concerned charging session and cancels counter reservations related to the last reservation • Returns an empty rating result • Removes the charging session and makes the identifier of the last reservation available for other reservations

9.7.3.6.6 Reservation Renewal

The Reservation Renewal mechanism is an optional mechanism of multiservice sessions which gives the possibility for a client application or system to reserve again a quota of service in a given charging session which is inactive due to insufficient credit. This mechanism relies on listeners which are implemented in the

client applications or systems, and which listen to specific notifications (renewal reservation notifications) sent by the raters of the SAP CC system. These notifications are sent to the registered listener when:

- A charging session has been partially granted (final units)
- An event occurred in SAP CC which may release service units (monetary balance or counters)

The Reservation Renewal mechanism informs a registered client application or system that it should renew its current credit reservations because the context of an end customer has changed during a charging session, due to an event which may have released service credits (monetary balance or counters), for example:

- A refill request on one of the customer's prepaid accounts in the subscriber account relating to the end customer
- A parallel charging session which confirms a reservation using values different from the reservation request
- A parallel charging session which is cancelled either by the client application or when a reservation is reaching its "time-to-live" (TTL)

The Reservation Renewal feature is optional and available when a reservation is partially granted during a charging session. The requested credit cannot be fully reserved and final units are reserved.

> ### Example
>
> When implementing credit-control features, the renew reservation notifications can be used to implement the management of re-authorization requests (RAR) and re-authorization answers (RAA) defined by the RFC 4006.

9.7.3.6.6.1 Registered Client Application

A charging client application performing session-based charging operations and using multiservice sessions can implement the reservation renewal mechanism, using a customized reservation renewal listener which must be registered to SAP CC in order to receive and handle the renew reservation notifications.

9.7.3.6.6.2 Notification Send and Resend

SAP Convergent Charging sends renewal reservation notifications to the registered client applications or systems. In case of notification failure, SAP CC regularly resends the renew reservation notifications to the registered client applications (or systems) according to the system settings (attempts, intervals).

9.7.3.6.7 Process Limitations

The configuration of price plans dedicated to session-based charging operations must comply with the following limitations:

- The rate components which are used within price plans to compute usage rates must ensure an **increasing** computed amount. Rate components which lead to decreasing amounts are forbidden and lead to inconsistency (particularly during the reservation operation)
- As usage rates can depend on counter values, the set or reset counter operations must not be applied on counters which are used during session-based charging operations. This limitation ensures a positive balance for the related prepaid accounts. For further information about the counter operator component, refer to the SAP Convergent Charging Logic Components Reference documentation

Example

		Database State	Current State	Reservation
Session **Start** (int. call)	→	Counter: 6 min.	Counter: 6 min.	
Session OK (3 min. granted)	← $0	Unchanged	Counter: 3 min.	Counter -3
Reset to 30 min	→	Counter: 30 min.	Unchanged	
Session **Stop** (2 min used)	→	Unchanged	Counter: 33 min.	
Session **End**	← $0	Counter: 28 min.	Counter: 28 min.	

9.7.3.6.8 Use Cases

The following use cases illustrate the session-based charging process and particularly the reservation mechanism.

Use case 1

Single session with a 3 minutes reservation quota on a prepaid account which has 4 available minutes of communication. The following price plan is used:

- $ 0.40 / minute for international calls
- $ 0.20 / minute for national calls

Session Operation		Cost	Database	Memory	Reservations
Start (int. call)	→		C=4	C=4	

Session Operation		Cost	Database	Memory	Reservations
OK (3 min. granted)	←	$0	*Unchanged*	C=1	C-3
Stop (2½ min used)	→		*Unchanged*	C=4	
End	←	$0	C=1.5	C=1.5	

C: Counter of available minutes

- Session **Start**: Database and memory counters correspond to the 4 minutes available for international or national calls. 3 minutes are reserved and the memory counter value is thus set to 4-3=1. As this value is positive, no specific cost is computed yet
- Session **Stop**: The previous reservation is cancelled, which thus modifies the memory counter value and sets it back to 1-(-3)=4. The 2½ consumed minutes are decreased from the database and memory counters, which gives 1½ minute of communication available for future sessions

Use case 2

Two sessions with a 3 minutes reservation quota on a prepaid account which has 4 available minutes of communication. The following price plan is used:

- $ 0.40 / minute for international calls
- $ 0.20 / minute for national calls

Session Operation		Cost	Database	Memory	Reservations
S1 Start (int. call)	→		C=4	C=4	
S1 OK (3 min. granted)	←	$0	*Unchanged*	C=1	C-3
S2 Start (nat. call)	→		*Unchanged*	*Unchanged*	
S2 OK (3 min. granted)	←	$0.4	*Unchanged*	C=0	C-1 (...C-3)
S2 Stop (2 min used)	→		*Unchanged*	C=1	C-3
S2 End	←	$0.2	C=3	C=0	
S1 Stop (2½ min used)	→		*Unchanged*	C=3	
S1 End	←	$0	C=0.5	C=0.5	

Sx: Session X, C: Counter of available minutes

- Session1 **Start**: Database and memory counters correspond to the 4 minutes available for international or national calls. 3 minutes are reserved and the memory counter value is thus set to 4-3=1. As this value is positive, no specific cost is computed yet
- Session2 **Start**: 3 minutes should be reserved but the memory counter indicates that only 1 minute is still available. This minute is thus reserved, and decreased from the memory counter whose value is thus set to 1-1=0. The 2 other required minutes are rated and correspond to a $0.4 consumption price

- Session2 **Stop**: The previous reservation (of 1 minute) is cancelled, which thus modifies the memory counter value and sets it back to 0-(-1)=1. 1 minute of the 2 consumed minutes is rated (and corresponds to a $0.2 consumption price), and the other consumed minute is decreased from the database and memory counters, which are respectively updated to 3 and 0 minutes available for future sessions
- Session1 **Stop**: The previous reservation (of 3 minutes) is cancelled, which thus modifies the memory counter value and sets it back to 0-(-3)=3. The 2½ consumed minutes are decreased from the database and memory counters, which gives ½ minute of communication available for future sessions. As this value is positive, no additional cost is computed

> ⓘ Note
>
> When session2 ends, the memory counter value is set to 0 available minutes. This means that no new reservation can be done for this session.

Use case 3

Two sessions with a 6 minutes reservation quota on a prepaid account which has 20 available minutes of communication. The following price plan is used:

- $ 0.40 / minute for international calls
- $ 0.20 / minute for national calls

Session Operation		Cost	Database	Memory	Reservations
S1 Start (int. call)	→		C=20	C=20	
S1 OK (6 min. granted)	←	$0	*Unchanged*	C=14	C-6
S2 Start (nat. call)	→		*Unchanged*	*Unchanged*	
S2 OK (6 min. granted)	←	$0	*Unchanged*	C=8	C-6 (...C-6)
S2 Stop (2 min used)	→		*Unchanged*	C=14	C-6
S2 End	←	$0	C=18	C=12	
S1 Stop (2½ min used)	→		*Unchanged*	C=18	
S1 End	←	$0	C=15.5	C=15.5	

Sx: Session X , C: Counter of available minutes

- Session1 **Start**: Database and memory counters correspond to the 20 minutes available for international or national calls. 6 minutes are reserved and the memory counter value is thus set to 20-6=14. As this value is positive, no specific cost is computed
- Session2 **Start**: The memory counter indicates that 14 minutes are potentially available, and that 6 minutes can thus be reserved for this national call. The memory counter is updated to 14-6=8. As this value is positive, no specific cost is computed
- Session2 **Stop**: The previous reservation (of 6 minutes) is cancelled, which thus modifies the memory counter value and sets it back to 8-(-6)=14. The 2 consumed minutes are decreased from the database and

memory counters, which are respectively updated to 20-2=18 and 24-2=12 minutes available for future sessions. As this value is positive, no additional cost is computed

- Session1 **Stop**: The previous reservation (of 6 minutes) is cancelled, which thus modifies the memory counter value and sets it back to 12-(-6)=18. The 2½ consumed minutes are decreased from the database and memory counters, which gives 15½ minutes of communication available for future sessions. As this value is positive, no additional cost is computed

Use case 4

Single session (dealing with session update) with a 6 minutes reservation quota on a prepaid account which has 30 available minutes of communication. The following price plan is used:

- $ 0.40 / minute for international calls
- $ 0.20 / minute for national calls

Session Operation		Cost	Database	Memory	Reservations
Start (int. call)	→		C=30	C=30	
OK (6 min. granted)	←	$0	*Unchanged*	C=24	C-6
Update (2 min used)	→		*Unchanged*	C=30	
OK (6 min. granted)	←	$0	C=28	C=22	C-6
Stop (2 min used)	→		*Unchanged*	C=28	
End	←	$0	C=26	C=26	

C: Counter of available minutes

- Session **Start**: Database and memory counters correspond to the 30 minutes available for international or national calls. 6 minutes are reserved and the memory counter value is thus set to 30-6=24. As this value is positive, no specific cost is computed
- Session **Update**: The previous Reservation (of 6 minutes) is cancelled, which thus modifies the memory counter value and sets it back to 24-(-6)=30. The database counter is decreased from the 2 consumed minutes, and the memory counters is decreased from the 2 consumed minutes and the new Reservation (of 6 minutes). These counters are thus respectively updated to 30-2=28 and 30-2-6=22 minutes available for future sessions
- Session **Stop**: The previous reservation (of 6 minutes) is cancelled, which thus modifies the memory counter value and sets it back to 22-(-6)=28. The 2 consumed minutes are decreased from the database and memory counters, which gives 26 minute of communication available for future sessions. As this value is positive, no additional cost is computed

> ⓘ Note
>
> The behavior during the session update operation is equivalent to a session stop operation followed by a session start operation.

Use case 5

Single session (dealing with session update) with a 6 minutes reservation quota on a prepaid account which has 1 available minute of communication and a $2.8 initial balance. The following price plan is used:

- $ 0.40 / minute for international calls
- $ 0.20 / minute for national calls

Session Operation			Cost	Database	Memory	Reservations
Start (int. call)		→		C=1	C=1	
				b=2.8	b=2.8	
OK (6 min. granted)		←	$2	*Unchanged*	C=0	C-1
				Unchanged	b=0.8	b-2
Update	**Stop** (2 min used)	→		*Unchanged*	C=1	
				Unchanged	b=2.8	
	OK	←	$0.4	C=0	C=0	
				b=2.4	b=2.4	
	Start (6 min required)	→		*Unchanged*	*Unchanged*	
				Unchanged	*Unchanged*	
	OK	←	$2.4	*Unchanged*	*Unchanged*	b-2.4
				Unchanged	b=0	
Start (2 min used)		→		*Unchanged*	*Unchanged*	
				Unchanged	b=2.4	
End		←	$0.8	C=0	C=0	
				b=1.6	b=1.6	

C: Counter of available minutes, b: Balance of the prepaid account

- Session **Start**: Database and memory counters correspond to the 1 minute available for international or national calls. 6 minutes should be reserved but the memory counter indicates that only 1 minute is still available. This minute is thus reserved, and decreased from the memory counter whose value is thus set to 1-1=0. The 5 other required minutes are rated and correspond to a $2 consumption price. These $2 are reserved, and the balance stored in memory is updated to 2.8-2=0.8
- Session **Update**: As explained above, a session update is equivalent to a session stop followed by a session start.
  - **Stop** operation: Previous counter (1 minute) and balance ($2) reservations stored in memory are cancelled, which respectively sets back their values to 0-(-1)=1 and 0.8-(-2)=2.8. Then, the 2 consumed minutes are decreased from counter and balance values (database and memory values), which are thus respectively updated to 1-1=0 and 2.8-0.4=2.4. A $0.4 cost corresponding to 1 minute of international call is returned
  - **Start** operation: A 6 minutes reservation must be performed, but the memory counter indicates that 0 minute is available. These 6 minutes are thus rated and the memory balance is decreased from $2.4, and is thus set to 2.4-2.4=0. A $2.4 cost corresponding to 1 minute of international call is returned

- Session **Stop**: The previous $2.4 Reservation is cancelled, the memory counter is thus set back to 0-(-2.4)=2.4. The 2 extra consumed minutes corresponding to a $0.8 cost are decreased from the database and memory balances, which finally give 0 minute of communication available for future sessions and a $1.6 final balance.

> **Note**
>
> When the available prepaid balance is not sufficient to make the reservation of N minutes, an inverse rating operation is performed to compute the maximum number of minutes which can be reserved. This new value prevails over the defined reservation.

9.8 Chargeable Items Acquisition Process

Process Overview [page 337]

Execution Modes [page 337]

9.8.1 Process Overview

The **Chargeable Items Acquisition process** is used to record incoming chargeable items produced by a client application or system (such as the Import/Export Connector, a mediation system and so on) into a data storage such as the BART Database or a third-party system such as SAP Convergent Invoicing in the SAP ERP/FI-CA system or SAP S/4HANA system.

SAP CC gives the possibility to acquire chargeable items:

- Using the BART Server system in a synchronous mode
- Using the Core Server system in an asynchronous mode

For functional information about this feature, refer to the description of the Chargeable Items Acquisition [page 30] feature.

9.8.2 Execution Modes

Acquisition using the Core Server [page 338]

9.8.2.1 Acquisition using the Core Server

The Core Server system acquires chargeable items from the Import/Export Connector or client applications when the Core Server is configured to work in conjunction with SAP CI (with the consumption item management function enabled). This process uses the following communication channels:

- Packets over TCP/IP[162], to acquire the incoming chargeable items
- RFC[163] over TCP/IP, to send consumptions items to SAP CI

During the acquisition process, the Core Server system:

- Determines the list of provider contracts which are associated to the chargeable items
- Enriches the chargeable items with additional information
- Validates these enriched chargeable items
- Converts these enriched chargeable items into consumption and sends them to SAP CI for billing purposes (refer to the schema in the Chargeable Items Acquisition [page 30] section of this documentation)

An acquisition operation performed by the Core Server system is made up with the following steps (refer to the schema in the Chargeable Items Acquisition [page 30] section to get an overview of this execution):

1. A mediation system sends a list of chargeable Items to the Core Server which acquires each chargeable item with access information and consumption date
2. The dispatcher associates each chargeable item to the relating charging contract or subscription. The dispatcher then sends acquisition requests to the raters which build a charged transaction set for each chargeable item. The context of each charged transaction set is filled with the appropriate data, i.e. subscriber account identifier, contract identifier, and so on
3. The rater processes the charged transaction sets by using the Chargeable Item File processor in order to:
   - Convert these charged transaction sets into chargeable items (refer to the description of the Chargeable Items Charging Process [page 286] for further information about this processor)
   - Check and validate that the chargeable items match the related consumption item mapping
   - Write the chargeable items in CSV[164] data files
4. The bulkloader asynchronously reads the CSV data files and converts every loaded chargeable item into a consumption item
5. The bulkloader finally sends these consumption items to SAP CI

> ⚠ Caution
>
> The mediation system must not send chargeable items with empty string properties. Any specific string like “UNDEF” can be used instead of empty strings.


> ⓘ Note
>
> - A user granted with the administrator role can export the configuration file of the CIF[165] from the Core Database in order to modify it (refer to Bulk Loading Mechanism and Error Management [page 266] section for further information)
> - The Chargeable Item File Processor executes the following operations to convert charged transaction sets into chargeable items:

[162] Transmission Control Protocol/Internet Protocol
[163] Remote Function Call
[164] Comma Separated Value
[165] Charging output Integration Framework

- It retrieves the chargeable item class of the input chargeable item
- It retrieves the default chargeable item mapping which must be used to export chargeable items (using the “CC” external system code)
- It retrieves each property of the input chargeable item, adds it to the output chargeable item, and prefixes it with the “user.” string
- For each field of the chargeable item mapping, it adds a property (whose name corresponds to the name of the mapping field) to the output chargeable item

Example

The following schema illustrates the use of a default chargeable item mapping, which gives the possibility to update the properties of a chargeable item (coming from the charging context) with specific default properties:

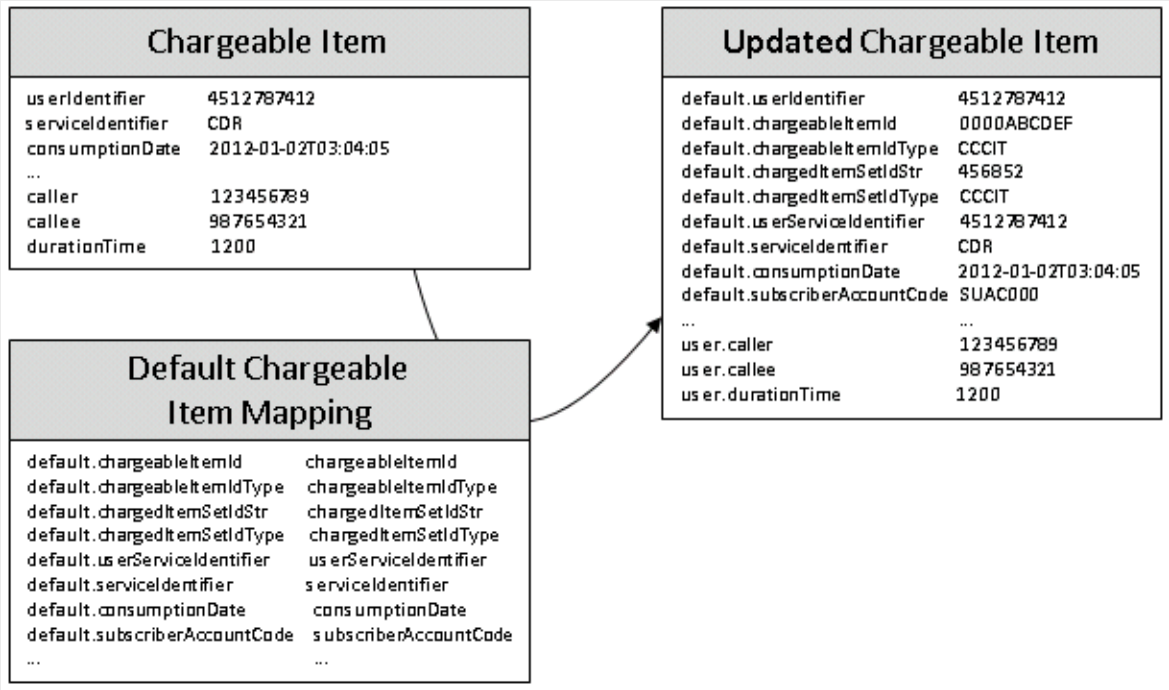

9.9 Chargeable Items Consolidation Process

Process Description [page 340]

Consolidation Operations [page 340]

9.9.1 Process Description

The Chargeable Items Consolidation process is used to retrieve complementary information related to the acquired chargeable items. This process represents an internal step of the Chargeable Items Acquisition process described above, and can be automatically or manually (through bulk operations) executed.

This section details the execution mode based on BART Server.

9.9.2 Consolidation Operations

To rate the acquired CDRs[166], the BART Server system needs to interact with the BART Server system in order to retrieve the following additional information for each CDR:

- The identifier of the related provider contract or subscription
- The batch rating group of provider contract or subscription

This additional information is stored into the BART Database for persistency purpose. It is also stored into a temporary consolidation cache:

- Handled by the BART Server in order to guarantee performances
- Associated to a given acquisition session and thus deleted at the end of the related session

> ⓘ Note
>
> - The “from” date and “to” date properties are also stored in this cache to determine a validity period for the cached data
> - These cached data represent about 100-150 bytes per cached access (depending on the length of user and service identifiers plus the lengths of access chronology)
> - The BART Server cannot consolidate all the types of subscriptions. It can only consolidate CDRs related to **hybrid** and **offline** subscriptions. In case of consolidation failure, the status of the consolidated CDR is updated in the BART Database with the following values:
>   - `NO_PROVISIONING`, to inform that the CDR has not been consolidated
>   - `ONLINE_SUBSCRIPTION`, to inform that the CDR refers to an online subscription

9.10 Tax Calculation Process

Process Overview [page 341]

Process Execution [page 346]

Process Functions [page 352]

Process Limitations [page 370]

[166] Call Detail Record (Telecommunications industry), or more generally Consumption Detail Record

9.10.1 Process Overview

For functional information about this feature of SAP Convergent Charging (SAP CC), refer to the description of the Tax Calculation [page 42] feature.

The *Tax Calculation* process groups two distinct functions:


- Preliminary tax computing, which concerns rated transactions
- Tax adjusting and applying, which concerns charged transactions

The overall result is tax data recorded in all "charged & taxed" transactions specifying the total amount which must be debited on a customer account (postpaid or prepaid):

- SAP Convergent Charging (SAP CC) debits the balance of the identified prepaid account with the total amount including taxes.
- An external billing and invoicing system consolidates tax data relating to different charging operations in order to calculate the final tax.

> → Remember
>
> In an integrated *SAP Solution* scenario with the SAP ERP/FI-CA component of the SAP S/4HANA, SAP CC generates and posts valid billable items (BITs) with tax data.

The following schema provides an overview of the process execution:

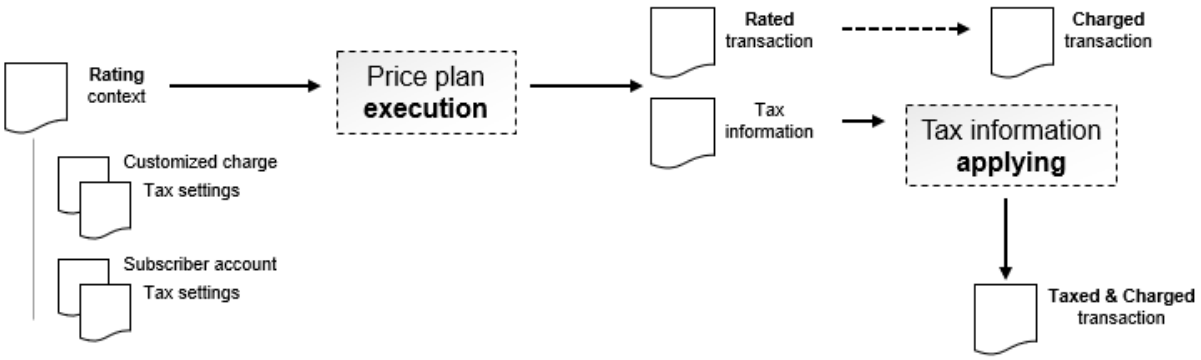

Inputs [page 341]

Generated Tax Data [page 342]

9.10.1.1 Inputs

Input	Description
Content of a rated transaction	• Consumption date • Price plan amount computed by SAP CC
Analyzed Event	Taxation data configured for a tax system

Input	Description
Master Data (End Customer)	• Tax settings of the customer or account holder as set in the subscriber account • Pricing settings that identify a customized charge in the pricing catalog of the service provider
Master Data (Pricing Catalog)	Tax settings for the customer service and for the service provider as set in the charges customized in the charge plan (or in the offer subscribed to) . These customized charges specify a price plan and a charging plan that are executed by SAP CC

9.10.1.2 Generated Tax Data

In Rated Transactions [page 342]

In Charged and Taxed Transactions [page 342]

In Billable Items [page 344]

Tax Code [page 345]

9.10.1.2.1 In Rated Transactions

The rated transaction includes:

- A rated tax amount, which corresponds to the tax amount computed by the tax computing function in SAP Convergent Charging
- A rated amount, which corresponds to the price amount computed by the execution of the price plan and before computing the tax. When the tax system is EU VAT or flat tax, this amount may be net or gross depending on the tax configuration in the charge plan (or in the offer)
- A rated total amount, which corresponds to the total price amount of the transaction, and which always includes the tax

9.10.1.2.2 In Charged and Taxed Transactions

The "charged & taxed" transactions are converted to charged items and billable items. They include:

- Tax data
  - Amount (Excl. Tax)
  - Tax Amount
  - Total Amount (Incl. Tax)
  - Tax Code
  - Tax Status

- Tax data details

Output Data	Technical ID	Description
Amount (Excluding Tax)	`amount`	The net amount computed by SAP CC, which can be: • The base amount calculated during the execution of the price plan • The base amount less the tax
Tax Amount	`taxAmount`	The amount of tax calculated during the execution of the price plan and which is applied to one or several charged transactions
Total Amount (Including Tax)	`totalAmount`	The computed gross amount which is debited from the balance of the prepaid accounts, and which can be: • The base amount calculated during the execution of the price plan • The base amount less the tax
Tax Code	`taxCode`	The tax code of a charged transaction (or charged item) assigned to a prepaid account or external postpaid account. The format depends on the invoicing tax system applied during the tax calculation: • `NO_TAX` • `/<COUNTRY_CODE>/<VAT_RATE_LEVEL>#<TIMESTAMP>` • `/RAW/<FLAT_TAX_RATE_ID>` • `Avalara AvaTax for Communications (AFC)ED` **Note** For further information about tax codes, please refer afterwards.

Output Data	Technical ID	Description
Tax Status	`taxStatusCode`	The tax status corresponds to the final execution status of the tax calculation process. It specifies if the calculated tax amount has been applied to the total amount or not, using the following possible values. • `NO_TAX`, used to indicate that no tax was applied. • `FOR_INFO`, used to indicate that the computed tax data is provided for information purpose. • `APPLIED`, used to indicate that the tax was applied. • `TAX_EXEMPTED`, used in case of tax exemption. • `BUYER_SUBJECT_TO_PAY`, used to indicate that the buyer is in charge of reversing the tax to the tax authority. When the tax is not applied to the total amount, the tax status indicates the reasons for the following situations: • Tax amount is calculated for information purpose (EU VAT). • Customer is subjected to pay the tax in his country. • Customer is exempted to pay the tax.

> **Note**
>
> For a complete list of generated fields related to tax calculation, refer to the SAP CC 2023 Administration and Operation Guide documentation.

9.10.1.2.3 In Billable Items

In an integrated *SAP Solution* scenario, SAP CC generates valid billable items (BITs).

Tax Data Computed by SAP CC	Technical ID	Fields in sent BITs[167] (Property in Charged Items)
Base Amount SAP CC generates this output data with the amount calculated during the execution of the price plan. This amount can be net or gross depending on the configuration of the charge customized in a charge plan (or in an offer)	`baseAmount`	`BIT_AMOUNT` Price amount computed by SAP CC
VAT Transaction Gross Price Flag	`taxVatGrossPriceFlag`	`TAX_INCLUDED` SAP ERP/FI-CA determines if the computed price (`BIT_AMOUNT`) is net or gross.

[167] Billable Item

Tax Data Computed by SAP CC	Technical ID	Fields in sent BITs[167] (Property in Charged Items)
Tax Determination Type SAP CC generates this output data depending on the tax system used during the tax calculation process. Possible values are: • "01": VAT or Flat • "04": US Telco Taxes (Avalara AvaTax for Communications (AFC))	`taxDetType`	`TAX_DET_TYPE` SAP ERP/FI-CA expects 01 for VAT and 04 for Avalara AvaTax for Communications (AFC).
SAP CC does not generate this output data. You must set up the generation of charged items in the relevant charge plan or in the relevant charged item class	`N/A`	`EXT_TAX_DATE`
VAT Transaction Rate Code	`taxVatRateCode`	`EXT_TAX_ID` SAP ERP/FI-CA receives the determined Tax Information as external tax code (EXT_TAX_ID) to be mapped in posting area 8123.
VAT Place of Taxation	`taxVatTaxationPlace`	`TAX_COUNTRY`

> **Note**
>
> SAP CC generates the `EXT_TAX_ID` and `TAX_COUNTRY` fields depending on the VAT rules selected in the charges customized in a charge plan activated in a provider contract.

9.10.1.2.4 Tax Code

The format of the tax code depends on the invoicing tax system which is finally used during the tax computation.

[167] Billable Item

Tax System	Syntax and Description
Value Added Tax (VAT) System	Syntax: `/<Country_Code>/<VAT_Rate_Level>#<Timestamp>` Where: • `Country_Code` is the ISO 3166 country code (2-digit) • `VAT_Rate_Level` is a value between 0 and 5 • `Timestamp` corresponds to the number of days between January 1st, 1970 and the validity start date of the tax rate value **Example** The rate value for the normal tax rate level is 0.196 since 05/01/01. A charged item can include the following tax code: `/FR/0#11443`
Flat Tax System	Syntax: `/RAW/<Rate_Identifier>` Where `Rate_Identifier` corresponds to the identifier of the flat tax rate set in the charge customized in a charge plan (or in an offer)
EZtax System for US Telecommunications taxes (Avalara AvaTax for Communications (AFC))	Syntax: `EZTAXED`
Special	Syntax: `NO_TAX` The following reasons explain this output value: • No tax can be set in VAT rate level of the charge customized in a charge plan. • No tax can be set in the charge customized in a charge plan. • No tax can be set in the subscriber account. • No tax can be set by SAP CC when a configuration is erroneous: The charge plans and subscriber accounts are not compliant with For more information, refer to the detailed functions in this section.

Note

You can use the tax code to determine the invoicing tax system used by the SAP CC system to compute the tax data.

9.10.2 Process Execution

Tax Computing [page 347]

Tax Adjusting and Applying [page 349]

Taxation Modes [page 349]

9.10.2.1 Tax Computing

This function starts when SAP Convergent Charging (SAP CC) has dynamically determined the price amount of the processed event during the execution of a price plan. The different rating contexts updated by the Raters contain all the tax information both related to the subscriber account (customer master data) and to the customized charge (pricing catalog master data) associated to the analyzed events.

During the execution of price plans, the Raters create rated transactions and their associated tax information. This tax information contains all the following data which are required by the tax systems to compute the adequate taxes and rated transaction amounts:

- Tax settings of the customer or account holder as set in the subscriber account
- Tax settings for the customer service and for the service provider as set in the charges customized in the charge plan (or the offer)
- Taxation data configured for a tax system

The tax computing function takes into account the fact that the prices defined in the price plan of the customized charge are net or gross:

Prices	Computation Description	Important Note
Net	• SAP CC considers that the price amount determined by the execution of the price plan does not include the tax. • The rated amount is the price amount determined during the execution of the price plan. • SAP CC computes the tax, and then computes the total rated amount.	
Gross	• SAP CC considers that the price amount determined by the execution of the price plan does not include the tax. • The total rated amount is the price amount determined during the execution of the price plan. • SAP CC computes the tax, and then computes the rated amount.	Not compliant with the following taxation modes: • Account holder subject to pay • Account holder exempted

> **Note**
>
> When the Avalara AvaTax for Communications (AFC) tax system is selected in a charge customized in a charge plan (or in an offer), SAP CC considers that the prices defined in the price plan of this charge is net. The tax is calculated and added to the total rated amount.

SAP CC computes the rated tax amount depending on the tax system:

Tax System	Net Prices	Gross Prices
EU VAT, Flat	Tax Rate * Price Plan Amount The tax amount is computed by multiplying a tax rate by price amount determined during the execution of the price plan. SAP CC determines the value of this tax rate depending on the tax system and on the master data.	Tax Rate * Price Plan Amount / (1 + Tax Rate) The tax amount is computed using the above formula.
US Telco (Avalara AvaTax for Communications (AFC))	Global Tax Amount The tax amount is retrieved from the Avalara AvaTax for Communications (AFC) system.	N/A

SAP CC computes the remaining tax data with the following algorithms:

Computed Tax Data	Net Prices	Gross Prices
Rated Amount (Before Tax Computing)	Price Plan Amount The rated amount is the price amount determined during the execution of the price plan.	Price Plan Amount The rated amount is the sum of the tax amount and the price amount determined during the execution of the price plan. Note that SAP CC does not compute this data by removing the tax amount to the price amount determined during the execution of the price plan (Price Plan Amount – Rated Tax Amount).
Total Rated Amount (Including Tax)	Rated Amount + Rated Tax Amount The total rated amount is the sum of the tax amount and the price amount determined during the execution of the price plan.	Price Plan Amount The total rated amount is the price amount determined during the execution of the price plan.

> **Note**
>
> The total rated amount always includes the tax.

9.10.2.2 Tax Adjusting and Applying

This function starts when SAP CC has split a rated transaction into one or several charged transactions during the execution of the charging plan. The rated amount in the rated transaction is also split into these charged transactions as a base amount. The sum of the base amounts is equal to rated amount. Each charged transaction is assigned to an account (prepaid or external) in the subscriber account previously identified.

The computed taxes are then adjusted. SAP CC determines who is subject to pay the tax and the corresponding tax policy.

Adjusted Tax Data in Charged Transactions	Tax System	Net Prices	Gross Prices
Tax Amount	EU VAT, Flat	Base Amount * Tax Rate SAP CC computes the tax amount by multiplying the tax rate by the base amount. The tax rate is determined during the preliminary tax computing.	Base Amount * Tax Rate / (1 + Tax Rate) SAP CC computes the tax amount using the above formula.
	U.S. Telco (Avalara AvaTax for Communications (AFC))	Base Amount * Rated Tax Amount / Total Rated Amount	N/A

Then, SAP CC sets up the amounts (including tax and excluding tax) of the charged transaction.

Adjusted Tax Data in Charged Transactions	Net Prices	Gross Prices
Amount (Including Tax)	Base Amount	Base Amount - Tax Amount
Total Amount (Excluding Tax)	Base Amount + Tax Amount	Base Amount

> **Note**
>
> When a rated transaction is split to only one charged transaction, the base amount is equal to the rated amount.

Finally, SAP CC applies (or not) the tax on these charged transactions, which thus become taxed & charged transactions, ready for persistency purposes. It uses the taxation mode configured in the subscriber account to decide how to apply the tax.

9.10.2.3 Taxation Modes

The following table contains the different possible taxation modes:

Taxation Mode	Tax Adjusting	Tax Applying	
		Postpaid Environment	Prepaid Environment
Service Provider Subject to Pay	Tax is adjusted and added to the total amount	Adjusted tax is not applied	Adjusted tax is applied
Account Holder Subject to Pay	Tax is adjusted but not applied. The account holder must pay the tax to the tax authority of his residence.	Adjusted tax is not applied	(*) Not applicable
Account Holder Exempted	Tax is adjusted but not applied	Adjusted tax is not applied	(*) Not applicable
None	Tax is not computed	No tax	No tax

(*) Not applicable: SAP CC considers that both the Account Holder Subject to Pay and the Account Holder Exempted taxation modes are not possible in a prepaid environment. The system does not compute the tax and terminates the processing.

9.10.2.3.1 Service Provider Subject to Pay

When the taxation mode is set to "Service Provider Subject to Pay", tax is adjusted and added to the total amount. The applying of this adjusted tax depends on the account type:

- For postpaid accounts, adjusted tax is not applied, which means that an external system must thus manage or consolidate the tax data
- For prepaid accounts, adjusted tax is applied

SAP CC generates the following fields in charged transactions and charged items:

Generated Tax Data	Postpaid Charged Transaction	Prepaid Charged Transaction
Amount	Adjusted Rated Amount	Adjusted Rated Amount
Tax Amount	Adjusted Tax Amount	Adjusted Tax Amount
Total Amount	Adjusted Rated Amount + Adjusted Tax Amount	Adjusted Rated Amount + Adjusted Tax Amount
Tax Code	(*)	(*)
Tax Status	`FOR_INFO`	`APPLIED`

(*) Depends on the tax system configured to compute the tax.

9.10.2.3.2 Account Holder Subject to Pay

When the taxation mode is set to “Account Holder Subject to Pay”, the account holder must pay the tax to the tax authority of his residence. The applying and adjusting of this tax depends on the account type:

- For postpaid accounts, tax is adjusted but not applied, as the account holder must not pay the tax to the service provider but directly to its taxing authority
- For prepaid accounts, tax adjusting and applying is not available. As a consequence, do not use the value computed by the system. It is subject to change

Generated Tax Data	Postpaid Charged Transaction	Prepaid Charged Transaction
Amount	Adjusted Rated Amount	Adjusted Rated Amount
Tax Amount	Adjusted Tax Amount	0
Total Amount	Adjusted Rated Amount	Adjusted Rated Amount
Tax Code	(*)	NO_TAX
Tax Status	BUYER_SUBJECT_TO_PAY (Account Holder Subject to Pay)	No tax (degraded function)

(*) Depends on the tax system configured to compute the tax.

9.10.2.3.3 Account Holder Exempted

When the taxation mode is set to “Account Holder Subject to Pay”, the account holder does not pay the tax. The applying and adjusting of this tax depends on the account type:

- For postpaid accounts, tax is adjusted but not applied
- For prepaid accounts, tax adjusting and applying is not available.

Generated Tax Data	Postpaid Charged Transaction	Prepaid Charged Transaction
Amount	Adjusted Rated Amount	Adjusted Rated Amount
Tax Amount	Adjusted Tax Amount	0
Total Amount	Adjusted Rated Amount	Adjusted Rated Amount
Tax Code	(*)	NO_TAX
Tax Status	TAX_EXEMPTED (Account Holder Exempted)	No tax (degraded function)

(*) Depends on the tax system configured to compute the tax.

9.10.2.3.4 No Taxation

When the taxation mode is set to “No Taxation”, no tax is computed.

Generated Tax Data	Postpaid Charged Transaction	Prepaid Charged Transaction
Amount	Adjusted Rated Amount	Adjusted Rated Amount
Tax Amount	0	0
Total Amount	Adjusted Rated Amount	Adjusted Rated Amount
Tax Code	NO_TAX	NO_TAX
Tax Status	No tax	No tax

(*) Depends on the tax system configured to compute the tax.

9.10.3 Process Functions

EU VAT with EU VAT Rules [page 352]

EU VAT without VAT Rules [page 357]

Flat Tax [page 361]

US Telco Tax (Avalara AvaTax for Communications (AFC) Tax System) [page 364]

No Tax System [page 369]

9.10.3.1 EU VAT with EU VAT Rules

SAP CC uses the EU VAT system depending on the tax settings in the subscriber account or in the customized charge. When these setting are not compliant with this tax system and settings configured in the customized charge, SAP CC does not calculate the tax.

No tax is managed when:

- EU VAT is not selected in the subscriber account
- No VAT rule is specified in the customized charge

9.10.3.1.1 Inputs

To compute and adjust value added taxes (VAT), SAP CC needs the following information:

- Information coming from the analyzed event, containing the consumption date

- Information coming from the rating operation (dynamic pricing), containing the price plan amount previously rated by SAP CC
- Information configured in the customized charge, which contains the following data:
  - A flag which defines if the base amount generated during the execution of the price plan are assumed to be net amounts or gross amounts
  - A tax rate level (normal, reduced, super reduced, zero tax, and so on)
  - A VAT rule, which determine the entity that must pay the tax amount and thus impact the tax amounts
  - The country of the service provider (ISO 3166 country code)
- Tax information, which is configured in the subscriber account and contains the following data:
  - The country of the customer
  - The business category (B2B, B2C)
  - The tax system and zone information
  - The taxation mode, which determines the entity that must reverse or not the tax to the tax authority and thus impact the tax amounts according to the following rules:

Taxation Mode	Impact
Service Provider Subject to Pay	Tax is calculated and added to the net amount
Account Holder Subject to Pay	Tax is calculated but not applied. The account holder must pay the tax to the tax authority of his residence
Account Holder Exempted	Tax is calculated but not applied
None	Tax is not calculated

9.10.3.1.2 Tax Computing

To compute the tax data, SAP CC first computes the value of the tax rate:

- SAP CC determines the taxation place (country) defined by the VAT rule for the business category (B2B, B2C):

Business Category	Possible Taxation Places
B2B Services: The customer, holding the subscriber account, is a company	• The customer's place of establishment (default value) • The service provider's place of establishment • A specific place provided by a property in the rating context (e.g. the consumption place, the delivery place)

Business Category	Possible Taxation Places
B2C Services: The customer, holding the subscriber account, is a private individual	• The customer's place of residence • The service provider's place of establishment (default value) • A specific place provided by a property in the rating context (e.g. the consumption place, the delivery place)

- If the VAT rule cannot apply, the default B2B/B2C taxation places set in the VAT rule is applied according to the business category (B2B or B2C). SAP CC selects the country of this place and its country tax policy.
- SAP CC retrieves the country tax policy for the selected country, and determines the value of the tax rate according to the tax level, selected country tax policy, and consumption date.

> **Note**
>
> For more information about the preconfigured VAT rules and the associated customizing activities, refer to the Features [page 42] section.

Then, the raters compute the tax data included in the rated transactions:

Computed Tax Data in a Rated Transaction	Net Prices	Gross Prices
Tax Rate	SAP CC computes the tax rate value according to: • The tax rate level and the consumption date • The country tax policy identified by the VAT rule	
Rated Tax Amount	Calculates the tax amount based on the price amount computed during the execution of the price plan, and the tax rate: Tax Rate * Price Plan Amount	Tax Rate * Price Plan Amount / (1 + Tax Rate)
Rated Amount (Before Tax Computing)	Price Plan Amount	Price Plan Amount
Total Rated Amount (Including Tax)	Rated Amount + Rated Tax Amount	Price Plan Amount

9.10.3.1.3 Tax Adjusting and Applying

This function starts when SAP CC has split a rated transaction into one or several charged transactions during the execution of the charging plan. The rated amount in the rated transaction is also split into these charged transactions as a base amount. The sum of the base amounts equals the rated amount. Each charged transaction is assigned to an account (prepaid or external) in the subscriber account previously identified.

The tax rate of the rated transaction is computed.

SAP CC adjusts the computed taxes. It determines the tax amount in the charged transaction depending on the base amount and the tax rate value:

Adjusted Tax Data in Charged Transactions	Net Prices	Gross Prices
Tax Amount	Base Amount * Tax Rate	Base Amount * Tax Rate / (1 + Tax Rate)

Finally, SAP CC applies (or not) the tax on these charged transactions, which thus become taxed & charged transactions, ready for persistency purposes. It uses the taxation mode configured in the subscriber account to decide how to apply the tax. Depending on the taxation mode configured in the selected subscriber account, SAP CC generates the following tax data:

- When the taxation mode is set to "Service Provider Subject to Pay", the tax is adjusted and added or removed to the base amount in order to determine the price amount (excluding tax) and the total price amount (including tax):
  - For postpaid accounts, tax is adjusted but not applied. SAP CC provides tax data for information to an external system that must manage or consolidate the tax data
  - For prepaid accounts, tax is both adjusted and applied

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	Net	Gross	Net	Gross
Amount (Excluding Tax)	Base Amount	Base Amount - Tax Amount	Base Amount	Base Amount - Tax Amount
Tax Amount	Base Amount * Tax Rate	Base Amount * Tax Rate / (1 + Tax Rate)	Base Amount * Tax Rate	Base Amount * Tax Rate / (1 + Tax Rate)
Total Amount (Including Tax)	Base Amount + Tax Amount	Base Amount	Base Amount + Tax Amount	Base Amount
Tax Code	/<COUNTRY_CODE>/<VAT_RATE_LEVEL>#<TIMESTAMP>			
Tax Status	FOR_INFO		APPLIED	

- When the taxation mode is set to "Account Holder Subject to Pay", the holder of the postpaid account must pay the tax to the tax authority of his residence. The tax is not applied.
  - For postpaid accounts, tax is adjusted but not applied, as the account holder must not pay the tax to the service provider but directly to his tax authority
  - For prepaid accounts, tax is not available. Do not use the value computed by the system. It is subject to change

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	Net	Gross	Net	Gross
Amount (Excluding Tax)	Base Amount	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available in prepaid environment Do not use the value computed by the system. It is subject to change	Not available in prepaid environment Do not use the value computed by the system. It is subject to change

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	**Net**	**Gross**	**Net**	**Gross**
Tax Amount	Base Amount * Tax Rate The account holder must pay this tax amount to the tax authority of his residence	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Total Amount (Including Tax)	Base Amount The account holder must not pay the tax to the service provider	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Tax Code	/<COUNTRY_CODE>/<VAT_RATE_LEVEL>#<TIMESTAMP>			
Tax Status[168]	BUYER_SUBJECT_TO_PAY		NO_TAX	

- When the taxation mode is set to "Account Holder Exempted", the holder of the external (postpaid) account must not pay the tax. The tax is not applied.
  - For postpaid accounts, tax is adjusted but not applied, as the account holder must not pay the tax.
  - For prepaid accounts, tax is not available. Do not use the value computed by the system. It is subject to change

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	**Net**	**Gross**	**Net**	**Gross**
Amount (Excluding Tax)	Base Amount	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Tax Amount	Base Amount * Tax Rate The account holder must not pay this tax amount to the tax authority of his residence	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Total Amount (Including Tax)	Base Amount The account holder must not pay the tax to the service provider	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Tax Code	/<COUNTRY_CODE>/<VAT_RATE_LEVEL>#<TIMESTAMP>			

[168] In case of error due to unsupported configuration in the master data, the tax status is equal to NO_TAX.

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	**Net**	**Gross**	**Net**	**Gross**
Tax Status[169]	TAX_EXEMPTED		NO_TAX	

At the end of the calculation function, the computed taxes are applied on the charged transactions. These taxed & charged transactions are then returned to the calling rater which can continue its own charging operations.

9.10.3.2 EU VAT without VAT Rules

SAP CC uses the EU VAT system depending on the tax settings in the subscriber account. When these setting are not compliant with this tax system and with the settings configured in the customized charge, SAP CC does not calculate the tax. Refer to the no tax function in the Process Functions [page 352] section.

9.10.3.2.1 Inputs

To compute and adjust value added taxes (VAT) without VAT rules, SAP CC needs the following information:

- Information coming from the analyzed event, containing the consumption date
- Information coming from the rating operation (dynamic pricing), containing the price plan amount previously rated by SAP CC
- Information configured in the customized charge, which contains the following data:
  - A flag which defines if the base amount generated by executing the price plan are assumed to be net amounts or gross amounts
  - A tax rate level (normal, reduced, super reduced, zero tax, and so on)
- Tax information, which is configured in the subscriber account and contains the following data:
  - A tax code, which corresponds to the ISO 3166 country code of the tax authority (FR, DE, GB, and so on)
  - A taxation mode, which determines the entity that must pay the tax amount and thus impact the amounts according to the following rules:

Taxation Mode	Impact
Service Provider Subject to Pay	Tax is calculated and added to the net amount
Account Holder Subject to Pay	Tax is calculated but not applied. The account holder must pay the tax to the tax authority of his residence

[169] In case of error due to unsupported configuration in the master data, the tax status is equal to NO_TAX.

Taxation Mode	Impact
Account Holder Exempted	Tax is calculated but not applied
None	Tax is not calculated

9.10.3.2.2 Tax Computing

To compute the tax data, SAP CC must compute the value of the tax rate:

- The SAP CC system retrieves the country tax policy for the selected country of the tax authority.
- The SAP CC system determines the value of the tax rate according to the tax level, the selected country tax policy, and the consumption date.

Then, the rater computes the tax data included in the rated transactions:

Computed Tax Data in a Rated Transaction	Net Prices	Gross Prices
Tax Rate	SAP CC computes the tax rate value according to: • The tax rate level and the consumption date • The country tax policy configured in the subscriber account	
Rated Tax Amount	Calculates the tax amount based on the price amount computed during the execution of the price plan, and the tax rate: Tax Rate * Price Plan Amount	Tax Rate * Price Plan Amount / (1 + Tax Rate)
Rated Amount (Before Tax Computing)	Price Plan Amount	Price Plan Amount
Total Rated Amount (Including Tax)	Rated Amount + Rated Tax Amount	Price Plan Amount

9.10.3.2.3 Tax Adjusting and Applying

This function starts when SAP CC has split a rated transaction into one or several charged transactions during the execution of the charging plan. The rated amount in the rated transaction is also split into these charged transactions as a base amount. The sum of the base amounts is equal to rated amount. Each charged transaction is assigned to an account (prepaid or external) in the subscriber account previously identified.

The tax rate of the rated transaction is computed.

The computed taxes are then adjusted. SAP CC determines who is subject to pay the tax and the corresponding tax policy. SAP CC determines the tax amount in the charged transaction depending on the base amount and the tax rate value:

Adjusted Tax Data in Charged Transactions	Net Prices	Gross Prices
Tax Amount	Base Amount * Tax Rate	Base Amount * Tax Rate / (1 + Tax Rate)

Finally SAP CC applies (or not) the tax on these charged transactions, which thus become taxed & charged transactions, ready for persistency purposes. It uses the taxation mode configured in the subscriber account to decide how to apply the tax. Depending on the taxation mode configured in the selected subscriber account,SAP CC generates the following tax data:

- When the taxation mode is set to "Service Provider Subject to Pay", the tax is adjusted and added or removed to the base amount in order to determine the price amount (excluding tax) and the total price amount (including tax):
  - For postpaid accounts, tax is adjusted but not applied. SAP CC provides tax data for information to an external system that must manage or consolidate the tax data
  - For prepaid accounts, tax is both adjusted and applied

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	**Net**	**Gross**	**Net**	**Gross**
Amount (Excluding Tax)	Base Amount	Base Amount - Tax Amount	Base Amount	Base Amount - Tax Amount
Tax Amount	Base Amount * Tax Rate	Base Amount * Tax Rate / (1 + Tax Rate)	Base Amount * Tax Rate	Base Amount * Tax Rate / (1 + Tax Rate)
Total Amount (Including Tax)	Base Amount + Tax Amount	Base Amount	Base Amount + Tax Amount	Base Amount
Tax Code	`/<COUNTRY_CODE>/<VAT_RATE_LEVEL>#<TIMESTAMP>`			
Tax Status	`FOR_INFO`		`APPLIED`	

- When the taxation mode is set to "Account Holder Subject to Pay", the holder of the postpaid account must pay the tax to the tax authority of his residence. The tax is not applied.
  - For postpaid accounts, tax is adjusted but not applied, as the account holder must not pay the tax to the service provider but directly to his tax authority
  - For prepaid accounts, tax is not available. Do not use the value computed by the system. It is subject to change

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	**Net**	**Gross**	**Net**	**Gross**
Amount (Excluding Tax)	Base Amount	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available in prepaid environment Do not use the value computed by the system. It is subject to change	Not available in prepaid environment Do not use the value computed by the system. It is subject to change
Tax Amount	Base Amount * Tax Rate The account holder must pay this tax amount to the tax authority of his residence	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Total Amount (Including Tax)	Base Amount The account holder must not pay the tax to the service provider	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Tax Code	/<COUNTRY_CODE>/<VAT_RATE_LEVEL>#<TIMESTAMP>			
Tax Status[170]	BUYER_SUBJECT_TO_PAY		NO_TAX	

- When the taxation mode is set to “Account Holder Exempted”, the holder of the external (postpaid) account must not pay the tax. The tax is not applied.
  - For postpaid accounts, tax is adjusted but not applied, as the account holder must not pay the tax.
  - For prepaid accounts, tax is not available. Do not use the value computed by the system. It is subject to change

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	**Net**	**Gross**	**Net**	**Gross**
Amount (Excluding Tax)	Base Amount	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Tax Amount	Base Amount * Tax Rate The account holder must not pay this tax amount to the tax authority of his residence	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change

[170] In case of error due to unsupported configuration in the master data, the tax status is equal to NO_TAX.

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	**Net**	**Gross**	**Net**	**Gross**
Total Amount (Including Tax)	Base Amount The account holder must not pay the tax to the service provider	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Tax Code	/<COUNTRY_CODE>/<VAT_RATE_LEVEL>#<TIMESTAMP>			
Tax Status[171]	TAX_EXEMPTED		NO_TAX	

At the end of the calculation function, the computed taxes are applied on the charged transactions. These taxed & charged transactions are then returned to the calling rater which can continue its own charging operations.

9.10.3.3 Flat Tax

Inputs [page 361]

Tax Computing [page 362]

Tax Adjusting and Applying [page 362]

9.10.3.3.1 Inputs

To compute and adjust flat taxes, SAP CC needs the following information:

- Information coming from the rating operation (dynamic pricing), containing the price plan amount previously rated by SAP CC
- Information configured in the customized charge, which contains the following data:
  - A flag, used to define if the base amounts generated during the execution of the price plan are assumed to be net amounts or gross amounts
  - A value of flat tax rate (expressed as a percentage)
- Tax information, which is configured in the subscriber account and contains the following data:
  - A tax code, which corresponds to the ISO 3166 country code of the tax authority (FR, DE, GB, and so on)
  - A taxation mode, which determines the entity that must pay the tax amount and thus impact the amounts

[171] In case of error due to unsupported configuration in the master data, the tax status is equal to NO_TAX.

9.10.3.3.2 Tax Computing

The rater computes the following tax data included in the rated transactions:

Computed Tax Data in a Rated Transaction	Net Prices	Gross Prices
Rated Tax Amount	Calculates the tax amount based on the price amount computed during the execution of the price plan, and the tax rate: Tax Rate * Price Plan Amount	Tax Rate * Price Plan Amount / (1 + Tax Rate)
Rated Amount (Before Tax Computing)	Price Plan Amount	Price Plan Amount
Total Rated Amount (Including Tax)	Rated Amount + Rated Tax Amount	Price Plan Amount

9.10.3.3.3 Tax Adjusting and Applying

This function starts when the SAP CC system has split a rated transaction to one or several charged transactions during the execution of the charging plan. The rated amount in the rated transaction is also split to these charged transactions as a base amount. The sum of the base amounts is equal to rated amount. Each charged transaction is assigned to an account (prepaid or external) in the subscriber account previously identified.

SAP CC uses the flat tax rate of the rated transaction is used to adjust the computed taxes are then adjusted. The SAP CC system determines who is subject to pay the tax and the corresponding tax policy.

The SAP CC system determines the tax amount in the charged transaction depending on the base amount and the value of the flat tax rate:

Adjusted Tax Data in Charged Transactions	Net Prices	Gross Prices
Tax Amount	Base Amount * Tax Rate	Base Amount * Tax Rate / (1 + Tax Rate)

Finally, SAP CC applies (or not) the tax on these charged transactions, which thus become taxed & charged transactions, ready for persistency purposes. It uses the taxation mode configured in the subscriber account to decide how to apply the tax. Depending on the taxation mode configured in the selected subscriber account, SAP Convergent Charging generates the following tax data:

- When the taxation mode is set to "Service Provider Subject to Pay", the tax is adjusted and added or removed to the base amount in order to determine the price amount (excluding tax) and the total price amount (including tax):

- For postpaid accounts, tax is both adjusted and applied. SAP CC provides tax data for information to an external system that must manage or consolidate the tax data
- For prepaid accounts, tax is both adjusted and applied

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	**Net**	**Gross**	**Net**	**Gross**
Amount (Excluding Tax)	Base Amount	Base Amount - Tax Amount	Base Amount	Base Amount - Tax Amount
Tax Amount	Base Amount * Flat Tax Rate	Base Amount * Flat Tax Rate / (1 + Flat Tax Rate)	Base Amount * Flat Tax Rate	Base Amount * Flat Tax Rate / (1 + Flat Tax Rate)
Total Amount (Including Tax)	Base Amount + Tax Amount	Base Amount	Base Amount + Tax Amount	Base Amount
Tax Code	/RAW/<LABEL_IN_CUSTOMIZED_CHARGE>			
Tax Status	APPLIED			

- When the taxation mode is set to “Account Holder Subject to Pay”, the holder of the postpaid account must pay the tax to the tax authority of his residence. The tax is not applied.
  - For postpaid accounts, tax is adjusted but not applied, as the account holder must not pay the tax to the service provider but directly to his tax authority
  - For prepaid accounts, tax is not available. Do not use the value computed by the system. It is subject to change

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	**Net**	**Gross**	**Net**	**Gross**
Amount (Excluding Tax)	Base Amount	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available in prepaid environment Do not use the value computed by the system. It is subject to change	Not available in prepaid environment Do not use the value computed by the system. It is subject to change
Tax Amount	Base Amount * Flat Tax Rate The account holder must pay this tax amount to the tax authority of his residence	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Total Amount (Including Tax)	Base Amount The account holder must not pay the tax to the service provider	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Tax Code	/RAW/<LABEL_IN_CUSTOMIZED_CHARGE>			
Tax Status[172]	NO_TAX			

- When the taxation mode is set to “Account Holder Exempted”, the holder of the external (postpaid) account must not pay the tax. The tax is not applied.
  - For postpaid accounts, tax is adjusted but not applied, as the account holder must not pay the tax.
  - For prepaid accounts, tax is not available. Do not use the value computed by the system. It is subject to change

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	**Net**	**Gross**	**Net**	**Gross**
Amount (Excluding Tax)	Base Amount	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Tax Amount	Base Amount * Flat Tax Rate The account holder must not pay this tax amount to the tax authority of his residence	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Total Amount (Including Tax)	Base Amount The account holder must not pay the tax to the service provider	Not available for gross price plan Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Tax Code	`/RAW/<LABEL_IN_CUSTOMIZED_CHARGE>`			
Tax Status[173]	`TAX_EXEMPTED`		`NO_TAX`	

At the end of the calculation function, the computed taxes are applied on the charged transactions. These taxed & charged transactions are then returned to the calling rater which can continue its own charging operations.

9.10.3.4 US Telco Tax (Avalara AvaTax for Communications (AFC) Tax System)

Inputs [page 365]

Tax Computing [page 366]

Tax Adjusting and Applying [page 367]

[172] In case of error due to unsupported configuration in the master data, the tax status is equal to `NO_TAX`.

[173] In case of error due to unsupported configuration in the master data, the tax status is equal to `NO_TAX`.

9.10.3.4.1 Inputs

By default, SAP Convergent Charging (SAP CC) uses the Avalara AvaTax for Communications (AFC) tax system to calculate taxes related to the US Telecommunications taxes. This tax system is installed in the SAP CC system landscape. Taxer instances can delegate tax calculation operations to this tax system.

To compute and adjust US Telco taxes, SAP CC needs the following information:

- Information coming from the **analyzed event**, containing the consumption date/time
- Information coming from the **rating operation (dynamic pricing)**, containing the price plan amount previously rated by SAP CC
- Tax information configured in the **customized charge** in the charge plan and containing the following data:

Information	Avalara AvaTax for Communications (AFC) Property
Taxing jurisdiction information	The correct jurisdiction to the transaction for obtaining and returning the correct tax to the billing system: • Origination • Termination • Service address
Customer information (subscriber)	• Customer type • Incorporated city area • Exemption • Service class and business class • Lifeline
Company information (service provider)	• Reseller • Facilities based • Franchise
Transaction information	• Number of lines • Number of locations • Client resale • Telecommunication type • Call duration • Transaction service type

See also: Customized Charge [page 221] and Tax Settings [page 222]

- Tax information configured in the subscriber account and containing the following data:

Information	Avalara AvaTax for Communications (AFC) Property
Taxing jurisdiction information	The correct jurisdiction to the transaction for obtaining and returning the correct tax to the billing system: • Origination • Termination • Service address

Information	Avalara AvaTax for Communications (AFC) Property
Customer information (subscriber)	• Customer type • Incorporated city area
Transaction information	• Client resale

See also: Subscriber Account [page 238] and Tax Settings [page 241]

> **Note**
>
> - For further information about the Avalara AvaTax for Communications (AFC) tax system, refer to its official product documentation.
> - For further information about these Avalara AvaTax for Communications (AFC) properties, refer to the SAP Convergent Charging Core Tool Online Help documentation.
> - The tax journal can be updated:
>   - Before returning taxed & charged transactions to the rater instance, which might lead to gaps with reality if the third-party billing system decides to exclude some elements of the invoicing process.
>   - After returning the taxed & charged transactions to the rater instance, when a confirmation is received from the third-party billing system. This delayed update ensures that all the elements included in the invoicing process are mentioned in the tax journal.

9.10.3.4.2 Tax Computing

The rater instance computes the following tax data included in the rated transactions:

Computed Tax Data in a Rated Transaction	Net Prices
Rated Tax Amount	Global Tax Amount The tax amount is retrieved from the Avalara AvaTax for Communications (AFC) tax system.
Rated Amount (Before Tax Computing)	Price Plan Amount The rated amount is the price amount determined during the execution of the price plan.
Total Rated Amount (Including Tax)	Rated Amount + Rated Tax Amount The total rated amount is the sum of the tax amount and the price amount determined during the execution of the price plan.

9.10.3.4.3 Tax Adjusting and Applying

SAP Convergent Charging (SAP CC) adjusts the computed tax amount of the original rated transaction to a prorated tax amount depending on the "global amount/charged amount" ratio.

> **Note**
>
> The tax amount is not re-calculated for each charged transaction. Each amount of tax associated to a charged transaction is prorated depending on the "global amount/charged amount" ratio.

SAP CC applies the computed taxes on the charged transactions. It determines the tax amount in the charged transaction depending on the base amount and the tax rate value:

Adjusted Tax Data in Charged Transactions	Net Prices
Tax Amount	Base Amount * Rated Tax Amount / Total Rated Amount

These taxed & charged transactions are then returned to the calling rater instance that can continue its own rating operations.

> **Note**
>
> The overrun mechanism can produce as many charged transactions as concerned/impacted accounts which must be charged, but the tax amount is calculated on the global transaction. This guarantees that the tax authority collects the correct tax amount, no matter if this amount is split or not.

Depending on the taxation mode configured in the selected subscriber account, SAP CC generates the following tax data:

- When the taxation mode is set to "Service Provider Subject to Pay", the tax is adjusted and added or removed to the base amount in order to determine the price amount (excluding tax) and the total price amount (including tax):
  - For postpaid accounts, tax is both adjusted and applied. SAP CC provides tax data for information to an external system which must manage or consolidate the tax data.
  - For prepaid accounts, tax is both adjusted and applied.

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	**Net**	**Gross**	**Net**	**Gross**
Amount (Excluding Tax)	Base Amount	Not available Do not use the value computed by the system. It is subject to change.	Base Amount	Not available Do not use the value computed by the system. It is subject to change.
Tax Amount	Base Amount * Rated Tax Amount / Total Rated Amount	Not available Do not use the value computed by the system. It is subject to change.	Base Amount * Rated Tax Amount / Total Rated Amount	Not available Do not use the value computed by the system. It is subject to change.

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	**Net**	**Gross**	**Net**	**Gross**
Total Amount (Including Tax)	Base Amount + Tax Amount	Not available Do not use the value computed by the system. It is subject to change.	Base Amount + Tax Amount	Not available Do not use the value computed by the system. It is subject to change.
Tax Code	EZTAXED			
Tax Status	APPLIED	N/A	APPLIED	N/A

- When the taxation mode is set to “Account Holder Subject to Pay”, the holder of the postpaid account must pay the tax to the tax authority of his residence. The tax is not applied.
  - For postpaid accounts, tax is adjusted but not applied, as the account holder must not pay the tax to the service provider but directly to his tax authority.
  - For prepaid accounts, tax is not available. Do not use the value computed by the system. It is subject to change.

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	**Net**	**Gross**	**Net**	**Gross**
Amount (Excluding Tax)	Base Amount	Not available Do not use the value computed by the system. It is subject to change.	Not available Do not use the value computed by the system. It is subject to change.	Not available Do not use the value computed by the system. It is subject to change.
Tax Amount	Base Amount * Rated Tax Amount / Total Rated Amount The account holder must pay this tax amount to the tax authority of his residence	Not available Do not use the value computed by the system. It is subject to change.	Not available Do not use the value computed by the system. It is subject to change.	Not available Do not use the value computed by the system. It is subject to change.
Total Amount (Including Tax)	Base Amount The account holder must not pay the tax to the service provider	Not available Do not use the value computed by the system. It is subject to change.	Not available Do not use the value computed by the system. It is subject to change.	Not available Do not use the value computed by the system. It is subject to change.
Tax Code	EZTAXED			
Tax Status[174]	BUYER_SUBJECT_TO_PAY		Not available or NO_TAX	

- When the taxation mode is set to "Account Holder Exempted", the holder of the external (postpaid) account must not pay the tax. The tax is not applied.
  - For postpaid accounts, tax is adjusted but not applied, as the account holder must not pay the tax.
  - For prepaid accounts, tax is not available. Do not use the value computed by the system. It is subject to change.

[174] In case of error due to unsupported configuration in the master data, the tax status is equal to NO_TAX.

	Postpaid Charged Transaction		Prepaid Charged Transaction	
Generated Tax Data	**Net**	**Gross**	**Net**	**Gross**
Amount (Excluding Tax)	Base Amount	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Tax Amount	Base Amount * Rated Tax Amount / Total Rated Amount The account holder must not pay this tax amount to the tax authority of his residence	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Total Amount (Including Tax)	Base Amount The account holder must not pay the tax to the service provider	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change	Not available Do not use the value computed by the system. It is subject to change
Tax Code	EZTAXED			
Tax Status[175]	TAX_EXEMPTED		Not available or NO_TAX	

9.10.3.5 No Tax System

If tax is not enabled neither in the subscriber account nor in the customized charge, SAP CC does not compute any tax data:

- Tax is disabled in customized charges
- EU VAT system is configured in the customized charge but the tax rate level is set to no tax
- EU VAT system is selected in the subscriber account but the taxation mode is set to none
- EU VAT system is selected in the subscriber account with a taxation mode but the tax zone is set to none

> **Note**
>
> Degraded mode: When the tax calculation is not possible, SAP CC does no compute tax data. The tax settings in the charge plan are not compliant with the settings in the subscriber account.

9.10.3.5.1 Tax Computing

Tax is not computed. SAP CC generates the following data:

[175] In case of error due to unsupported configuration in the master data, the tax status is equal to NO_TAX.

Computed Tax Data in a Rated Transaction	Net Prices	Gross Prices
Rated Tax Amount	0	0
Rated Amount (Before Tax Computing)	Price Plan Amount	Price Plan Amount
Total Rated Amount (Including Tax)	Price Plan Amount	Price Plan Amount

9.10.3.5.2 Tax Adjusting and Applying

Tax is not computed. SAP CC generates the following data:

Tax Data in Charged Transactions	Postpaid Charged Transaction		Prepaid Charged Transaction	
	Net	Gross	Net	Gross
Amount (Excluding Tax)	Base Amount			
Tax Amount	0			
Total Amount (Including Tax)	Base Amount			
Tax Code	NO_TAX			
Tax Status	No tax for the transaction: NO_TAX			

9.10.4 Process Limitations

Overrun with U.S. Telco Taxes (only relevant for the SAP CC 2.0 and SAP CC 3.0 model) [page 371]

Session-Based Charging Process with U.S. Telco Taxes [page 371]

Operations on External References (only Relevant for the Subscriptions Data Model) [page 371]

Commissions or Sponsorship (only relevant for the SAP CC 2.0 and SAP CC 3.0 model) [page 371]

9.10.4.1 Overrun with U.S. Telco Taxes (only relevant for the SAP CC 2.0 and SAP CC 3.0 model)

- The overrun mechanism can produce as many charged transactions as concerned/impacted accounts which must be charged, but the tax amount is calculated on the global transaction. This guarantees that the tax authority collects the correct tax amount, no matter if this amount is split or not.
- The tax amount is not re-calculated for each charged transaction. Each amount of tax associated to a charged transaction is prorated depending on the "global amount/charged amount" ratio.
- The tax amounts calculated by the U.S. Telco Taxes tax system can be nonlinear (e.g. function of a quantity, a duration, and so on). As a consequence, each tax amount can be wrong in terms of tax reporting if these amounts are considered individually, but the total amount of tax is correct.

9.10.4.2 Session-Based Charging Process with U.S. Telco Taxes

- The session-based charging process creates multiple charged transactions which are individually taxed
- The session-based charging process does not create any global transaction at the end of a charging session
- The tax amounts calculated by the U.S. Telco Taxes tax system can be nonlinear (e.g. function of a quantity, a duration, and so on). When such a situation occurs, each tax amount associated to the transactions generated during a charging session might not be correct. The sum of these tax amounts might be slightly different from the tax which would have been associated to a global transaction

9.10.4.3 Operations on External References (only Relevant for the Subscriptions Data Model)

All operations related to external references do not calculate any tax as the SAP Convergent Charging solution does not have access to the required tax information.

9.10.4.4 Commissions or Sponsorship (only relevant for the SAP CC 2.0 and SAP CC 3.0 model)

In case of commissioning or sponsorship, it is recommended to use an external reference in the charging plan of the dependent charge instead of an internal reference to an external account. As a consequence and due to the above explanation, no tax are computed in commissioning or sponsorship situations.

9.11 Credit Control Messages Conversion Process

> ⚠ Caution
>
> From SAP Convergent Charging 5.0 SP 4, there is no further planned enhancements to the Diameter Server software component. For further information, refer to SAP Note 2792189.

Process Description [page 372]

AVP Dictionary [page 373]

Service Dictionary [page 374]

CCRs Mapping [page 379]

CCAs Mapping [page 379]

Process Limitations [page 383]

9.11.1 Process Description

> → Remember
>
> From SAP Convergent Charging 5.0 SP 4, there is no further planned enhancements to the Diameter Server software component. For further information, refer to SAP Note 2792189.

The Credit Control Conversion process is used to make the conversion between credit control messages (CCR[176]s and CCA[177]s) and SAP CC charging messages. This conversion both concerns:

- The *CC-Request-Type* and *Requested-Action* AVP[178]s of the credit control request, which are used to determine the SAP CC charging operation to perform
- The list of AVPs included into the credit control request or response and which correspond or must be mapped to the properties of an SAP CC charging message. These AVPs:
  - May be declared into an AVP Dictionary
  - Accessible through a given AVP Path, a CSV[179] list of AVP codes. When this path contains codes which refer to multiple occurrences, square brackets ([]) are used to point to the adequate node.

    > ✤ Example
    >
    > **440[0],442**: This AVP path gives the possibility to access to the unique child (Service-Parameter-Value , code: 442) of the first occurrence of the Service-Parameter-Info AVP (code: 440).

176 Credit Control Request
177 Credit Control Answer
178 Attribute-Value Pair
179 Comma Separated Value

Related Information

CCR (Credit Control Request) [page 186]
Credit Control Based on Diameter Server

9.11.2 AVP Dictionary

The AVP[180] Dictionary contains the descriptions of the AVPs used in CCR[181]s and CCA[182]s, which can be:

- Old standard AVPs
- Vendor-specific AVPs

These AVPs are not natively recognized by the Diameter Stack provided by the Traffix Systems company, and must thus be defined and described to be used during CCRs and CCAs mapping operations.

The AVP Dictionary is based on the following XSD fragments:

```
<xs:element name="avpDictionary">
    <xs:complexType>
        <xs:attribute name="version" type="xs:string" use="required"/>
        <xs:attribute name="date" type="xs:dateTime"/>
        <xs:sequence>
            <xs:element ref="avpDesc" minOccurs="0" maxOccurs="1"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
```

With the following substructures:

```
<xs:element name="avpDesc">
    <xs:complexType>
        <xs:attribute name="name" type="xs:string"/>
        <xs:attribute name="code" type="xs:integer" use="required"/>
        <xs:attribute name="type" type="AvpType" use="required"/>
        <xs:attribute name="vendorId" type="xs:long" use="required"/>
    </xs:complexType>
</xs:element>
<xs:simpleType name="AvpType">
    <xs:restriction base="xs:string">
        <xs:enumeration value="DiameterURI"/>
        <xs:enumeration value="DiameterIdentity"/>
        <xs:enumeration value="Address"/>
        <xs:enumeration value="UTF8String"/>
        <xs:enumeration value="OctetString"/>
        <xs:enumeration value="Unsigned32"/>
        <xs:enumeration value="Unsigned64"/>
        <xs:enumeration value="Time"/>
        <xs:enumeration value="Integer32"/>
        <xs:enumeration value="Integer64"/>
        <xs:enumeration value="Float32"/>
        <xs:enumeration value="Float64"/>
        <xs:enumeration value="Enumerated"/>
        <xs:enumeration value="Grouped"/>
    </xs:restriction>
```

180 Attribute-Value Pair
181 Credit Control Request
182 Credit Control Answer

```
</xs:simpleType>
```

Example

The following code represents an AVP dictionary containing both standard AVPs (the "10415" identifier corresponds to a 3GPP[183] AVP) and vendor-specific AVPs (the "11" identifier only concerns the Hewlett Packard company):

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- Specific AVP Dictionary for Diameter server -->
<avpDictionary version="1.0" date="2008-01-01T00:00:00">
    <avpDesc name="Service-Information" code="873" type="Grouped"
vendorId="10415"/>
    <avpDesc name="Service-Generic-Information" code="1256" type="Grouped"
vendorId="10415"/>
    <avpDesc name="Deny-Reason" code="10027" type="Enumerated" vendorId="11"/>
    <avpDesc name="Play-Announcement-Id" code="10045" type="Unsigned32"
vendorId="11"/>
    <avpDesc name="Subscriber-Profile" code="10008" type="Grouped"
vendorId="11"/>
    <avpDesc name="Subscriber-Language" code="10009" type="UTF8String"
vendorId="11"/>
</avpDictionary>
```

9.11.3 Service Dictionary

The mapping between the AVP[184]s and the attributes of the charging message is declared into a XML[185] structure managed by the Diameter Server. This structure is named Service Dictionary and gives the possibility to register multiple services with different mappings. This dictionary is based on service keys which must correspond to the service identifier provided in the CCR[186].

Note

The AVP used to define the service key must be included in all CCRs sent to the Diameter Server. If this AVP is not provided, a CCA[187] with the DIAMETER_UNABLE_TO_COMPLY error is returned.

Caution

From SAP Convergent Charging SP 4, there is no further planned enhancements to the Diameter Server component. For further information, refer to SAP Note 2792189.

The Service Dictionary is based on the following XSD fragments:

```
<xs:element name="serviceDictionary" type="cs:serviceDictionary" />
<xs:complexType name="serviceDictionary">
    <xs:sequence>
        <xs:element ref="cs:serviceKeyDesc" minOccurs="1" maxOccurs="1" />
```

183 3rd Generation Partnership Project
184 Attribute-Value Pair
185 eXtended Markup Language
186 Credit Control Request
187 Credit Control Answer

```
        <xs:element ref="cs:abstractServiceDesc" minOccurs="1"
maxOccurs="unbounded" />
    </xs:sequence>
    <xs:attribute name="version" type="xs:string" use="required" />
    <xs:attribute name="date" type="xs:dateTime" use="required" />
</xs:complexType>
```

With the following substructures:

```
<xs:element name="serviceKeyDesc" type="cs:serviceKeyDescription"
substitutionGroup="cs:abstractServiceKeyDesc" />
<xs:element name="abstractServiceKeyDesc" type="cs:serviceKeyDescription" />
<xs:complexType name="serviceKeyDescription">
    <xs:sequence>
        <xs:element ref="cs:keyDesc" minOccurs="1" maxOccurs="unbounded" />
    </xs:sequence>
</xs:complexType>
<xs:element name="keyDesc" type="cs:keyDescription" />
<xs:complexType name="keyDescription">
    <xs:attribute name="name" type="xs:string" use="required" />
    <xs:attribute name="avpPath" type="cs:AvpPath" use="required" />
</xs:complexType>
```

Example

Considering an implementation where the Call-Type AVP is used as a service key:

```
<serviceKeyDesc>
    <keyDesc name="Call-Type" avpPath="873,901,943"/>
</serviceKeyDesc>
```

This AVP identifies the type of the service and its direction. It is nested in the specific CS-Information AVP (code: 901) part of the Service-Information AVP (code: 873), and can take the following values:

- MO_voice
- MT_voice
- MT_voice_forwarded_to_number
- MT_voice_forwarded_to_voicemail
- MO_fax
- MT_fax
- MO_SMS
- MT_SMS
- MO_GPRS
- MT_GPRS
- MO_data
- MT_data
- Three_way_call
- Conference_call
- MF_voice_regular
- MF_fax
- MF_GPRS
- MF_data
- MO_USSD

Once the service has been identified, the Service Dictionary is then parsed to retrieve the associated request and response mappings. These mappings are located in the Service Description which is based on the following XSD fragments:

```
<xs:element name="serviceDesc" type="cs:requestServiceDescription"
substitutionGroup="cs:abstractServiceDesc" />
<xs:complexType name="requestServiceDescription">
    <xs:complexContent>
        <xs:extension base="cs:serviceDescription">
            <xs:sequence>
                <xs:element ref="cs:requestMappingDesc" minOccurs="1"
maxOccurs="1" />
                <xs:element ref="cs:answerMappingDesc" minOccurs="0"
maxOccurs="1" />
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
```

With the following substructures:

```
<xs:element name="abstractServiceDesc" type="cs:serviceDescription" />
<xs:complexType name="serviceDescription" abstract="true">
    <xs:sequence>
        <xs:element ref="cs:serviceKey" minOccurs="1" maxOccurs="1" />
    </xs:sequence>
    <xs:attribute name="reservationTTL" type="xs:long" use="required" />
    <xs:attribute name="reservationExpirationResolution"
type="cs:ReservationExpirationResolution" use="required" />
</xs:complexType>
<xs:element name="requestMappingDesc" type="cs:requestMappingDescription"
substitutionGroup="cs:abstractMappingDesc" />
<xs:complexType name="requestMappingDescription">
    <xs:complexContent>
        <xs:extension base="cs:mappingDescription">
            <xs:sequence>
                <xs:element ref="cs:serviceUserIdDesc" minOccurs="1"
maxOccurs="1" />
                <xs:element ref="cs:serviceIdDesc" minOccurs="1" maxOccurs="1" />
                <xs:choice>
                    <xs:sequence>
                        <xs:element ref="cs:eventNameDesc" minOccurs="1"
maxOccurs="1" />
                        <xs:element ref="cs:unitPropertyDesc" minOccurs="1"
maxOccurs="1" />
                        <xs:element ref="cs:infoPropertyDesc" minOccurs="0"
maxOccurs="unbounded" />
                    </xs:sequence>
                    <xs:element ref="cs:msccServiceKeyDesc" minOccurs="1"
maxOccurs="1" />
                </xs:choice>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="answerMappingDesc" type="cs:answerMappingDescription" />
<xs:complexType name="answerMappingDescription">
    <xs:attribute name="className" type="xs:string" use="required" />
</xs:complexType>
```

Note

Every substructure of the Service Description described above is made up with dedicated substructures and thus represents a more complex structure. For further information about Diameter service dictionaries, refer to the Diameter RFC[188] specifications.

And with the following substructures in case of multiservice sessions:

```
<xs:element name="msccServiceDesc" type="cs:msccServiceDescription"
substitutionGroup="cs:abstractServiceDesc" />
<xs:complexType name="msccServiceDescription">
    <xs:complexContent>
        <xs:extension base="cs:serviceDescription">
            <xs:sequence>
                <xs:element ref="cs:msccMappingDesc" minOccurs="1"
maxOccurs="1" />
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="msccMappingDesc" type="cs:msccMappingDescription"
substitutionGroup="cs:abstractMappingDesc" />
<xs:complexType name="msccMappingDescription">
    <xs:complexContent>
        <xs:extension base="cs:mappingDescription">
            <xs:sequence>
                <xs:element ref="cs:eventNameDesc" minOccurs="1" maxOccurs="1" />
                <xs:element ref="cs:unitPropertyDesc" minOccurs="1"
maxOccurs="1" />
                <xs:element ref="cs:infoPropertyDesc" minOccurs="0"
maxOccurs="unbounded" />
                <xs:element ref="cs:reservationIdDesc" minOccurs="1"
maxOccurs="1" />
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
```

Example

Example 1: Voice service with the following used AVPs:

- Call-Type (as service key)
- Subscription-Id data
- Calling-Party-Address
- Called-Party-Address
- CC-Time

```
<serviceDesc reservationTTL="300" reservationExpirationResolution="cancelled">
    <serviceKey>
        <key name="Call-Type" value="MO_voice"/>
    </serviceKey>
    <requestMappingDesc>
        <serviceUserIdDesc type="END_USER_IMSI"/>
        <serviceIdDesc defaultId="voice"/>
        <eventNameDesc defaultName="MO_voice"/>
        <unitPropertyDesc name="call_time" avpName="CC-Time"
requestedQuota="60"/>
        <infoPropertyDesc name="calling_number" avpPath="873,876,831"/>
        <infoPropertyDesc name="called_number" avpPath="873,876,832"/>
```

188 Remote Function Call

```
    </requestMappingDesc>
</serviceDesc>
```

Example 2: SMS service with the following used AVPs:

- Call-Type (as service key)
- Subscription-Id data
- CC-Input-Octets

```
<serviceDesc reservationTTL="300" reservationExpirationResolution="cancelled">
    <serviceKey>
        <key name="Call-Type" value="MO_SMS"/>
    </serviceKey>
    <requestMappingDesc>
        <serviceUserIdDesc type=" END_USER_E164"/>
        <serviceIdDesc defaultId="SMS"/>
        <eventNameDesc defaultName="MO_SMS"/>
        <unitPropertyDesc name="size" avpName="CC-Input-Octets"/>
    </requestMappingDesc>
</serviceDesc>
```

Example 3: Call service with the following used AVPs:

- Call-Type (as service key)
- Rating-Group and Call-Type (as MSCC service key)
- CC-Time
- ReservationId: AVP 432 for each MSCC

```
<serviceDesc reservationTTL="300" reservationExpirationResolution="cancelled">
    <serviceKey>
        <key name="Call-Type" value="CALL" />
    </serviceKey>
    <requestMappingDesc>
        <serviceUserIdDesc type="END_USER_IMSI" />
        <serviceIdDesc defaultId="CALL" />
        <msccServiceKeyDesc>
            <keyDesc name="Rating-Group" avpPath="456[*],432" />
            <keyDesc name="Call-Type" avpPath="942,943" />
        </msccServiceKeyDesc>
    </requestMappingDesc>
</serviceDesc>
<msccServiceDesc reservationTTL="300"
reservationExpirationResolution="cancelled">
    <serviceKey>
        <key name="Rating-Group" value="0" />
        <key name="Call-Type" value="CALL" />
    </serviceKey>
    <msccMappingDesc>
        <eventNameDesc defaultName="Voice" />
        <unitPropertyDesc name="duration" avpName="CC-Time"
requestedQuota="60" />
        <reservationIdDesc avpPath="456[*],432" />
    </msccMappingDesc>
</msccServiceDesc>
```

9.11.4 CCRs Mapping

Each incoming CCR[189] must be analyzed in order to build a charging message which can be handled by the Core Server.

The first step of this operation consists in analyzing the incoming CC-Request-Type and Requested-Action AVP[190]s of the CCR in order to determine the corresponding charging operation. The following table shows the different charging operations which can be performed:

CC-Request-Type	Requested-Action	Charging operation
EVENT_REQUEST	DIRECT_DEBITING	Chargeable Items Charging
EVENT_REQUEST	CHECK_BALANCE	Chargeable Items Charging (blank mode)
EVENT_REQUEST	PRICE_ENQUIRY	Events Pricing of Chargeable Items Charging (blank mode)
INITIAL_REQUEST	N/A	Start of Chargeable Items Charging (session-based mode)
UPDATE_RE-QUEST	N/A	Update of Chargeable Items Charging (session-based mode)
TTERMINA-TION_REQUEST	N/A	Stop of Chargeable Items Charging (session-based mode)

Once the charging operation has been determined, some other AVPs of the CCR are analyzed in order to build the adequate properties of the charging message. These AVPs can be:

- Diameter standard AVPs (coming from RFC 4006 and 3GPP)
- Vendor specific AVPs (also named VSA)

9.11.5 CCAs Mapping

According to the result of the charging operation, two different types of answers can be generated by the Diameter Server to the client application who previously requested credit authorization:

- Successful CCA[191]s
- Erroneous CCAs

> **Note**
>
> These CCAs can contain both Diameter standard AVPs and Vendor-specific AVPs.

189 Credit Control Request
190 Attribute-Value Pair
191 Credit Control Answer

9.11.5.1 Successful CCAs

Successful CCA[192]s contain AVP[193]s such as:

- **Result-Code**, set to DIAMETER_SUCCESS
- **CC-Request-Type**, which corresponds to the value provided in the CCR[194]
- **CC-Request-Number**, which corresponds to the value provided in the CCR
- **Granted-Service-Unit** in **Multiple-Services-Credit-Control**, which corresponds to the value provided in the CCR
- **Cost-Information**, which is the amount computed by the Core Server
- **Validity-Time**, which corresponds to the reservation time to live
- **CC-Session-Failover**, which corresponds to the failover mode retrieved from the configuration of the Diameter Server

9.11.5.2 Erroneous CCAs

When an error occurs during a charging operation, the Result-Code AVP[195] of the returned CCA[196] is set to a code which gives the possibility to identify the error. The following table shows the possible error codes, with their related descriptions:

Charging exception	Description and returned error codes
CommunicationFailureException	A network issue occurred. • DIAMETER_UNABLE_TO_COMPLY
IllegalArgumentException	An argument of the charging operation is invalid. • DIAMETER_UNABLE_TO_COMPLY
ServerFailureException	The Core Server cannot handle the charging message. • DIAMETER_TOO_BUSY: The message queue is full or a timeout occurred on the server side • DIAMETER_UNABLE_TO_COMPLY: Any other server reason
InvalidItemException	The usage event cannot be rated. • DIAMETER_RATING_FAILED

192 Credit Control Answer
193 Attribute-Value Pair
194 Credit Control Request
195 Attribute-Value Pair
196 Credit Control Answer

Charging exception	Description and returned error codes
ForbiddenChargeException	The charging operation is not allowed. • DIAMETER_CREDIT_LIMIT_REACHED: The account balance cannot be charged • DIAMETER_USER_UNKNOWN: The related access or subscription cannot be found • DIAMETER_END_USER_SERVICE_DENIED: Authorizations are missing or related account is closed or locked or blocked • DIAMETER_UNABLE_TO_COMPLY: Any other reason
TransactionClearingException	The Core Server cannot clear at least one of the generated transactions. • DIAMETER_UNABLE_TO_COMPLY
StartRateException	The Core Server cannot create the required charging session. • DIAMETER_OUT_OF_SPACE: Not enough available space • DIAMETER_UNABLE_TO_COMPLY: Any other reason
UpdateRateException	The Core Server cannot update the related charging session. • DIAMETER_UNKNOWN_SESSION_ID: Unable to find the session • DIAMETER_OUT_OF_SPACE: Not enough available space • DIAMETER_UNABLE_TO_COMPLY: Any other reason
StopRateException	The Core Server cannot stop the related charging session. • DIAMETER_UNKNOWN_SESSION_ID: Unable to find the session • DIAMETER_OUT_OF_SPACE: Not enough available space • DIAMETER_UNABLE_TO_COMPLY: Any other reason

> **Note**
>
> When charging operations are managed through sessions, every error automatically implies the deletion of the associated session.

9.11.5.3 Custom AVPs in CCAs

As described above, it is possible to include additional AVP[197]s (vendor-specific or not) in the CCA[198]s. To map a property to an AVP of the CCA, it is necessary to:

- Update the "answerMappingDesc" section of the AVP dictionary in order to specify a the name of a Java class used to add vendor-specific attributes to the CCA
- Create this Java class, which must implement the "AnswerMapping" provided Java interface

> **Example**
>
> The following code illustrates the management of a vendor-specific AVP named "Deny-Reason". This VSA is used to provide the reason why a service is denied to a given subscriber (which is associated to the DIAMETER_END_USER_SERVICE_DENIED error). This VSA can be set to the following values:

197 Attribute-Value Pair
198 Credit Control Answer

- SUBSCRIBER_INACTIVE (0)
- ORIGIN_PROHIBITED (1)
- DESTINATION_PROHIBITED (2)
- SUBSCRIBER_NOT_PREPAID (3)

When the service is denied, SAP CC returns a java exception named "ForbiddenChargeException" containing a reason which must be mapped to an attribute of the CCA. This mapping is performed in the "onEndUserServiceDenied" method provided by the "AnswerMapping" Java interface:

```
                        public void
onEndUserServiceDeniedError(RoAnswerContext roAnswerContext,
                        OperationFailureException chargingException) {

                        // handle Deny-Reason AVP
                        ForbiddenChargeException fce =
(ForbiddenChargeException) chargingException;
                        int denyReason = 2;
                        switch (fce.getError()) {
                        case ForbiddenChargeException.NOT_AUTHORIZED: // no
access component
                        String message = fce.getMessage();
                        if (message.indexOf(ORIGIN_PROHIBITED) > -1) {
                        denyReason = 1;
                        } else if (message.indexOf(DESTINATION_PROHIBITED) >
-1) {
                        denyReason = 2;
                        }
                        break;
                        case ForbiddenChargeException.ACCOUNT_BLOCKED:
                        case ForbiddenChargeException.ACCOUNT_LOCKED:
                        case ForbiddenChargeException.ACCOUNT_CLOSED:
                        denyReason = 0;
                        break;
                        }

                        // add Service-Information (873)
                        GroupedVSAvp gavp =
VSAvpFactory.getInstance().createGroupedVSAvp(873);
                        AvpList currentList =
roAnswerContext.getCommandLevelAvpList().addGroupedVSAvp(gavp);

                        // add Service-Generic-Information (1256)
                        gavp =
VSAvpFactory.getInstance().createGroupedVSAvp(1256);
                        AvpList sgi = currentList.addGroupedVSAvp(gavp);

                        // add Deny-Reason (10027) enumerated
                        VSAvp avp =
VSAvpFactory.getInstance().createVSAvp(10027,new BigDecimal(denyReason));
                        sgi.addVSAvp(avp);
                        }
```

9.11.6 Process Limitations

> ⚠ Caution
>
> From SAP Convergent Charging 5.0 SP 4, there is no further planned enhancements to the Diameter Server component. For further information, refer to SAP Note 2792189.

The SAP CC Diameter Server system does not support:

- The Re-Authorization Request (RAR) messages. It cannot handle the renewal reservation notifications managed by the SAP CC Core Server system.
- The Sy command messages: Spending-Limit-Request (SLR) and Spending-Status-Notification-Request (SNR). It cannot handle the spending status reports managed by the SAP CC Core Server system.

10 Procedures

Deploying SAP CC [page 384]
Managing and Maintaining SAP CC [page 385]
Monitoring SAP CC [page 394]
Auditing SAP CC [page 394]
Troubleshooting SAP CC [page 394]
Upgrading SAP CC [page 395]

10.1 Deploying SAP CC

Securing SAP CC [page 384]
Starting SAP CC [page 385]

10.1.1 Securing SAP CC

As described in the Security Guide documentation, the communication between the deployed technical components of SAP CC relies on the following protocols:

- **HTTP**[199]
  - Used to transport REST[200] requests (Web Services technical interface)
  - Used to transport SOAP[201] messages (Web Services technical interface)
  - Used to transport proprietary XML[202] messages (Http Communication Interface)
  - Used by the SMD[203] system when executing the CCDBProviderWS web service
  - Used to send payload data to the SLD[204] system (which might be itself secured)
- **TCP/IP**[205]
  - Used to transport proprietary TCP packets
  - Used to transport RFC[206] calls when communicating with SAP CI

199 HyperText Transfer Protocol
200 REpresentational State Transfer
201 Simple Object Access Protocol
202 eXtended Markup Language
203 SAP Manager Diagnostic
204 System Landscape Directory
205 Transmission Control Protocol/Internet Protocol

- **JDBC**[207], used to communicate with running RDBMS[208]

According to the needs, it is possible to configure your landscape in order to secure the different communications with SAP CC. For further information, refer to the Securing an SAP CC System Landscape dedicated section available in the SAP CC 2023 Installation and Maintenance Guide documentation.

10.1.2 Starting SAP CC

To start the Core Server instances, refer to the Starting and Stopping the Server Systems procedure available in the SAP CC 2023 Installation and Maintenance Guide documentation.

10.2 Managing and Maintaining SAP CC

Synchronizing BIT Class, BIT type and Subprocess [page 385]

Synchronizing Chargeable Item Classes and Consumption Item Classes [page 390]

Synchronizing or Replicating Currencies [page 393]

10.2.1 Synchronizing BIT Class, BIT type and Subprocess

Mechanism Description [page 385]

Mapping Between CIT Classes and BIT Classes [page 386]

Example [page 388]

Mechanism Limitations [page 389]

10.2.1.1 Mechanism Description

The Chargeable Items Charging process uses CIT[209] classes to transform transactions into charged items. When SAP CC is configured to work in conjunction with an SAP ERP/FI-CA system, a mapping between the SAP ERP's BIT[210] classes and the SAP CC's CIT classes must be defined in order to be able to generate and

206 Remote Function Call
207 Java Database Connectivity
208 Relational Database Management System
209 Charged Item
210 Billable Item

send billable items to the SAP ERP systems. This mapping is used by the Chargeable Items Charging process to enrich the charged items' data.


According to the configuration of the charged item file processor, a validation of these enriched data might be performed, to ensure that:

- The values of the charged item properties respect the adequate format, size, and so on
- Some properties coming from the BIT mapping are correctly filled, such as:
  - The *SUBPROCESS* property, which contains the name of the SAP ERP's subprocess to be associated to the billable item
  - The *BITTYPE* property, which contains the type of SAP ERP's billable item to create

When this validation succeeds, the charged item file processor writes these enriched data into the dedicated data files. The BIT class, BIT type and subprocess synchronization mechanism gives the possibility to refresh the content of the BIT classes used into the defined BIT mappings. This ensures that no modifications have been performed on BIT classes in the SAP ERP system, which could lead to the creation of incorrect charged items rejected by the validation operation.

> ⓘ Note
>
> The default configuration of SAP CC executes a validation of the enriched charged items' data during the transaction persistency operation of the Chargeable Items Charging process. This default configuration gives the possibility to roll back the erroneous transactions before recording non-billable elements into the charged items data files. It is possible to modify this configuration to:
>
> - Remove the validation in the transaction persistency operation, which is not recommended due to the possible erroneous elements stored into the charged items data files
> - Execute the validation during the bulk loading operations, which could decrease the global loading performances and is thus not recommended
> - Execute a double validation both in the transaction persistency and in the bulk loading operations, which neither necessary nor useful
> - Remove any validation, which would increase the global performances but lead to heavy corrective actions in case of errors returned by the SAP ERP system

10.2.1.2 Mapping Between CIT Classes and BIT Classes

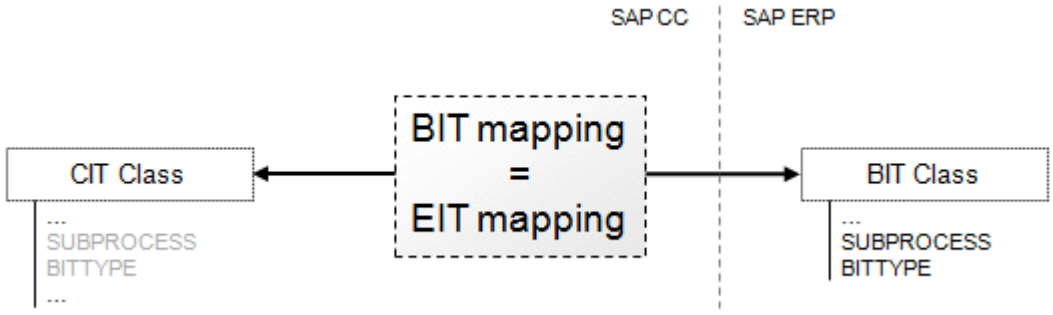

The mapping between CIT[211] classes and BIT[212] classes is called:

- Billable Item Mapping for users working with the Core Tool user interface
- Exportable Item Mapping for users working with the API[213]s

This mapping is defined into an XML[214] file which contains the list of properties belonging to the BIT class, and all the additional information related to these properties, such as:

- The name of the CIT class property which is mapped with each property
- The expected format of each property (type, length, and so on)
- The mandatory or optional aspect of each property
- The list of authorized values

Example

```
<exportableItemMapping externalSystemCode="CI" citcCode="SCC1" code="SCC1">
   ...
   <exportableItemMappingField name="SRCTAID"
citcFieldName="SRCTAID">

        <additionalInformation name="type" value="C"
type="string"/>

        <additionalInformation name="maxLength" value="22"
type="string"/>

        <additionalInformation name="decimalLength" value="0"
type="string"/>

        <additionalInformation name="isMandatory" value="false"
type="string"/>

   </exportableItemMappingField>
   <exportableItemMappingField name="SUBPROCESS"
citcFieldName="SUBPROCESS">

        <additionalInformation name="type" value="C"
type="string"/>

        <additionalInformation name="maxLength" value="4"
type="string"/>

        <additionalInformation name="decimalLength" value="0"
type="string"/>

        <additionalInformation name="isMandatory" value="false"
type="string"/>

        <additionalInformation name="list" value="1000"
type="string"/>

        <additionalInformation name="list" value="200" type="string"/>
        <additionalInformation name="list" value="2000"
type="string"/>

   </
exportableItemMappingField>
```

211 Charged Item
212 Billable Item
213 Application Programming Interface
214 eXtended Markup Language

```
   <exportableItemMappingField name="BITTYPE"
citcFieldName="BITTYPE">

        <additionalInformation name="type" value="C"
type="string"/>

        <additionalInformation name="maxLength" value="4"
type="string"/>

        <additionalInformation name="decimalLength" value="0"
type="string"/>

        <additionalInformation name="isMandatory" value="false"
type="string"/>

        <additionalInformation name="list" value="1000-1000"
type="string"/>

        <additionalInformation name="list" value="1000-CITY"
type="string"/>

        <additionalInformation name="list" value="200 3CITY"
type="string"/>

        <additionalInformation name="list" value="2000-1000"
type="string"/>

   </exportableItemMappingField>
   <exportableItemMappingField name="APPLK"
citcFieldName="APPLK">

        <additionalInformation name="type" value="C"
type="string"/>

        <additionalInformation name="maxLength" value="1"
type="string"/>

        <additionalInformation name="decimalLength" value="0"
type="string"/>


        <additionalInformation name="isMandatory" value="false"
type="string"/>

   </exportableItemMappingField>
   ...
<exportableItemMapping>
```

The CIT class which is associated to this mapping contains a superset of the BIT class properties, and all these CIT class properties can be associated and filled with information of the transactions. The only exception concerns the *SUBPROCESS* and *BITTYPE* properties of the CIT class, which can also be valued with one of the related "list" additional information defined in the mapping. To avoid errors during the validation operation, users must thus ensure that the values of the *SUBPROCESS* and *BITTYPE* properties of the CIT class always refer to an existing value of the related BIT class.

10.2.1.3 Example

The following schema describes the possible evolution of a BIT[215] mapping in case of modification of the original BIT class on the SAP ERP side:

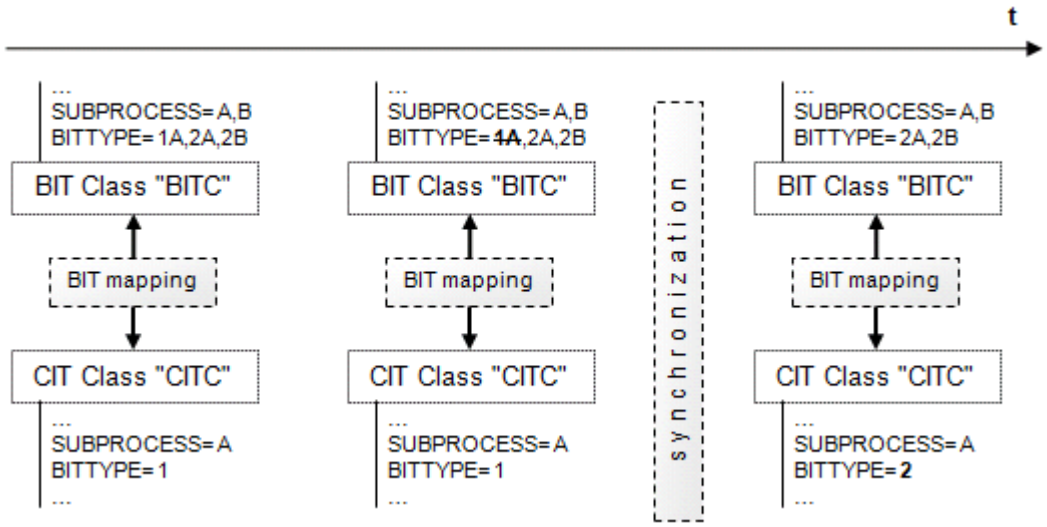

All the above billable item mappings link a "BITC" BIT class to a "CITC" CIT[216] class.

The initial CITC maps:

- Its *SUBPROCESS* property to the "A" value, which is listed in the possible values of BITC
- Its *BITTYPE* property to the "1" value, which corresponds to a possible *BITTYPE* value of BITC

If the SAP ERP system modifies BITC and removes one of the possible *BITTYPE* values, then the billable item mapping possibly becomes erroneous and might lead to the generation of incorrect charged item data files or to validation errors. A manual synchronization operation gives the possibility to refresh BITC properties, and update CITC properties in order to generate correct charged items.

> **Note**
>
> - As the *BITTYPE* and *SUBPROCESS* values can be set at charge item or charge plan item level (during charged item mapping), it might also be necessary to check these elements. For further information about this feature, consult the SAP CC 2023 Administration and Operation Guide documentation
> - A java ExportableItemMappingException exception is returned in case of erroneous during creation or modification of CIT classes or charged item mapping
> - A java BillableItemFieldSetterException exception is returned in case of erroneous validation operation

10.2.1.4 Mechanism Limitations

- The BIT[217] class, BIT type and subprocess synchronization mechanism is only available when SAP CC works in conjunction with the SAP ERP system
- The BIT class refreshing operation available in the BIT mapping can only be manually performed through the Core Tool user interface

215 Billable Item
216 Charged Item
217 Billable Item

10.2.2 Synchronizing Chargeable Item Classes and Consumption Item Classes

This section describes how to:

- Create a consumption item mapping into SAP CC
- Synchronize chargeable items classes and consumption item classes with SAP CI


Mechanism Description [page 390]

Managing Consumption Item Classes [page 390]

Creating Consumption Item Mappings [page 391]

10.2.2.1 Mechanism Description

The following schema shows the relationships between SAP Convergent Charging and the SAP ERP/FI-CA component of the SAP Business Suite, when creating the consumption item mappings, from consumption item classes retrieved from the SAP ERP reference system:

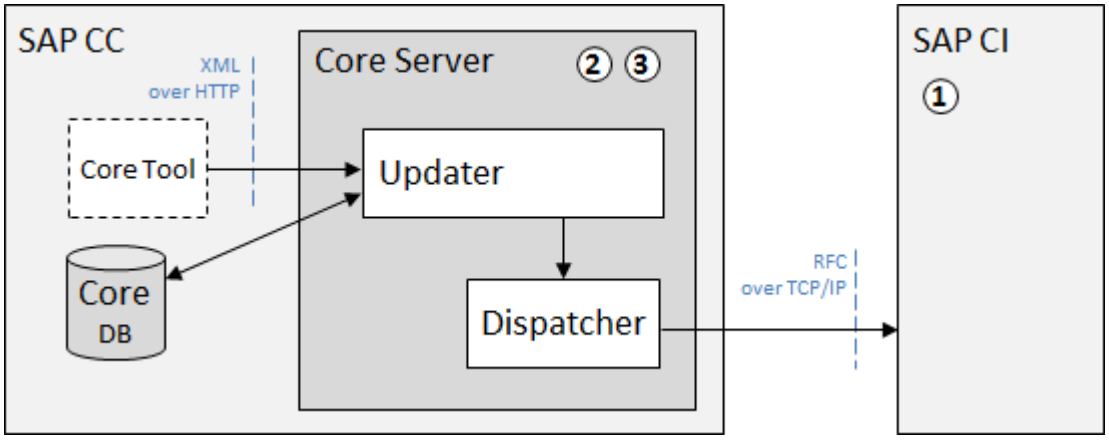


- SAP CI defines and creates the consumption item classes (1)
- SAP CC queries SAP CI in order to retrieve these consumption item classes (2) and create (3):
  - A consumption item mapping per retrieved consumption item class, required by the bulkloaders during bulk loading operations when converting chargeable items into consumption items
  - A chargeable item class associated to the consumption item mapping and required by the raters during charging operations when generating data files containing chargeable items

10.2.2.2 Managing Consumption Item Classes

Consumption item classes are created by SAP CI. They basically represent chargeable item classes, enriched with additional specific fields which relate to properties of a mediation system communicating with SAP

CC. This specific information relating to SAP CC can be defined into dedicated structures named customs mappings. Each consumption item class defined in SAP CI is replicated in SAP CC as a unique chargeable item class. For more information about consumption item classes, refer to the dedicated documentation of SAP CI.

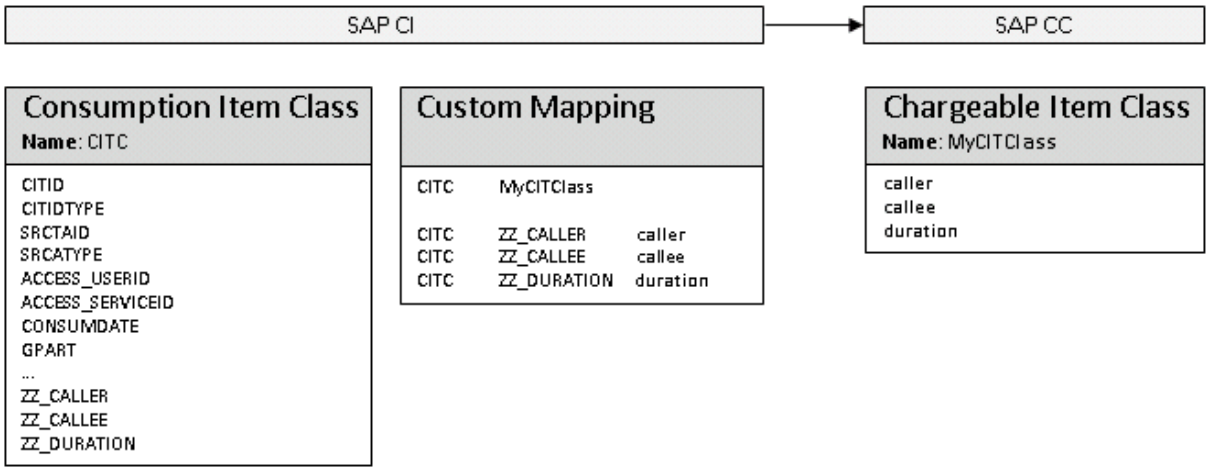


10.2.2.3 Creating Consumption Item Mappings


To create consumption item mappings and thus synchronize consumption items classes with chargeable items classes, the following operations are performed:

1. The Core Tool user interface retrieves the structure of a consumption item class from SAP CI
2. An initial check is performed to ensure that the consumption item mapping to create does not already exist in the Core Database:
   - If the consumption item mapping to create already exists, it means that a chargeable item class is already mapped onto the retrieved consumption item class. No creation is thus performed
   - If the consumption item mapping does not exist, it is created
3. The consumption item mapping is then generated according to:
   - The default consumption item mapping configured in SAP CC, which defines the standard fields of the consumption item classes
   - The list of fields of the retrieved consumption item class, to ensure that no field is missing during future creations of consumption items
4. The updated consumption item mapping is then validated by the Core Tool user interface
5. (Optional step) If the chargeable item class related to the retrieved consumption item class does not exist, SAP CC creates the adequate chargeable item class and saves it into the Core Database
6. The Core Tool user interface saves the consumption item mapping into the Core Database

> ### Example
>
> Considering a chargeable item associated to the "MyChargeableItemClass" described above, the following schema describes the use of a default chargeable item mapping, which gives the possibility to update the properties of this chargeable item (coming from a charging context) with specific default properties. The resulting chargeable item corresponds to the one which is written in data files by the Rater instance at the end of a charging operation.

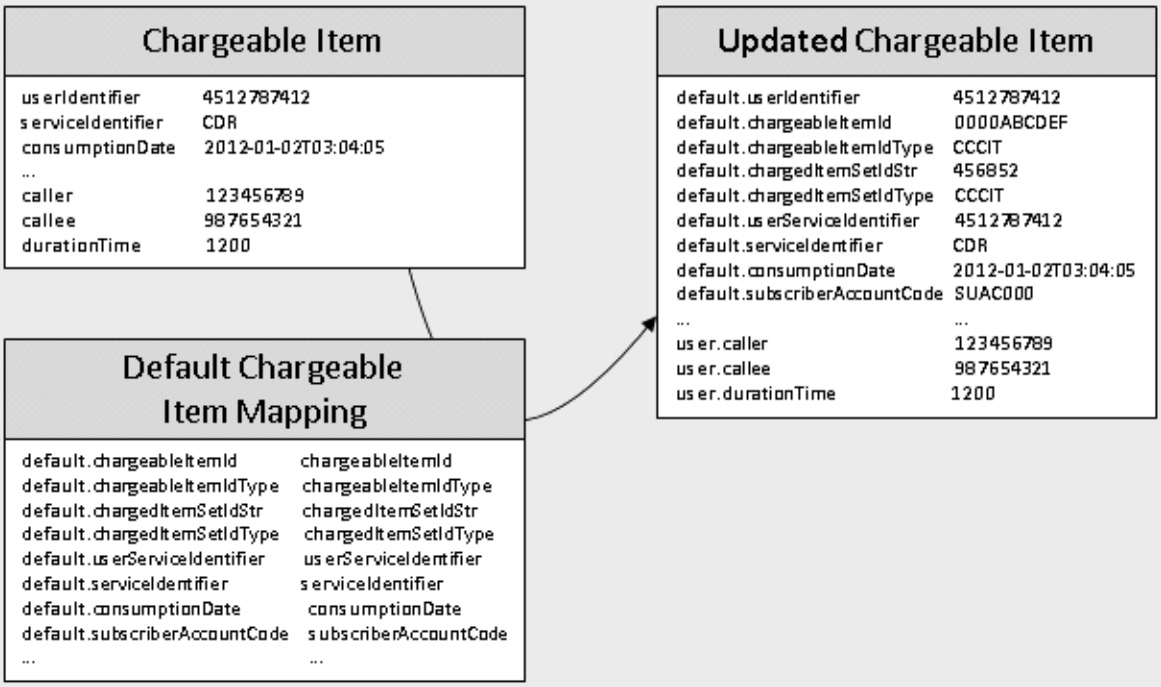

The updated chargeable item is then taken into account by the bulkloader server instance, which uses the name of the chargeable item class (part of the name of the data file containing the chargeable item to convert) to retrieve the associated consumption item mapping. Using this consumption item mapping, the bulkloader finally creates the corresponding consumption item to send to SAP CI.

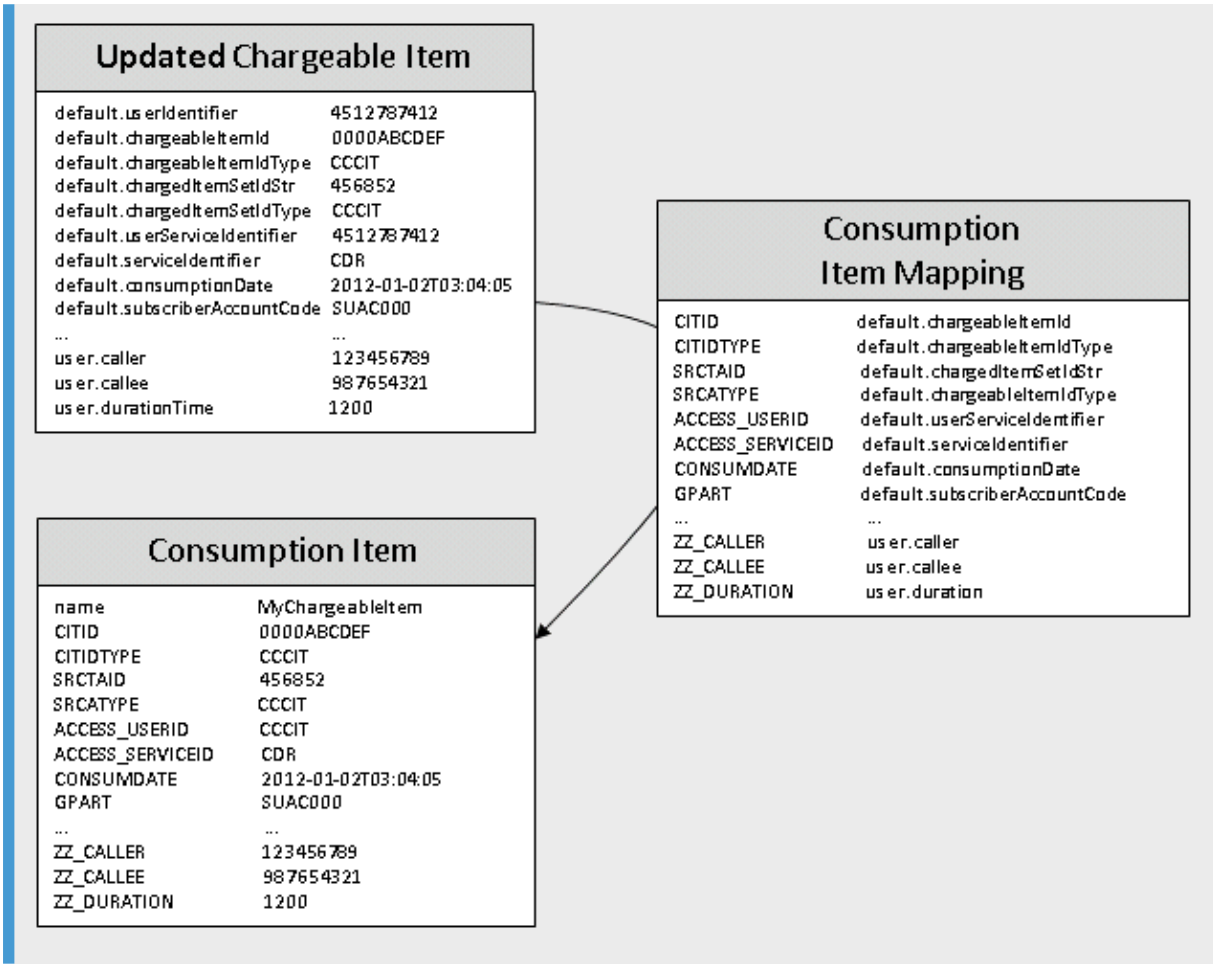

10.2.3 Synchronizing or Replicating Currencies

Some processes or functions (such as chargeable items charging, recharging, and so on) need to compute amounts which are associated to:

- ISO[218] currencies, that must be imported every time a modification is performed on a standard currency
- SAP currencies, that are only used in an installation scenario integrated with SAP Convergent Invoicing, where the currency compatibility needs to be guaranteed during BIT[219]/CIT[220] loading operations. To guarantee the compatibility of these SAP currencies:
  - A currencies synchronization mechanism is available in SAP CC in case of an installation scenario integrated with SAP S/4HANA
  - A "Currencies Replication" Web Service is available in SAP CC in case of an installation scenario integrated with SAP S/4HANA Cloud Public Edition

For further information about the currencies import and synchronization procedures, consult:

218 International Standards Organization
219 Billable Item
220 Charged Item

- The "Tools/Currencies" section of the SAP CC 2023 Administration and Operation Guide documentation
- The SAP CC 2023 Administration Guide and SAP CC 2023 Administration and Operation Guide documentations

For further information about the currencies replication procedure, refer to the SAP CC 2023 Administration Guide documentation.

10.3 Monitoring SAP CC

The execution of the SAP CC processes and functions can be monitored using the following elements:

- A logging and tracing framework, which produces enhanced messages supporting SAP passports for end-to-end tracing purposes. For further details about this framework, refer to the SAP Passport Handling [page 128] section of this guide
- Dedicated Wily Introscope probes, which provide technical information such as execution performances, system environment, and so on
- Dedicated sensors, which provide service time statistics related to the operations executed by the charging clients. For further details about the available sensors and the retrieved information, refer to the description of the "fetch_client_statistics" command available in the SAP CC 2023 Primary Help for Admin+ documentation

For further information about the available monitoring procedures, consult the "Monitoring SAP CC" section of the SAP CC 2023 Administration and Operation Guide documentation.

10.4 Auditing SAP CC

To audit an SAP CC Core Server system and its persistent data in your system landscape, refer to the procedures and recommendations that are available in the SAP CC product documentation and user assistance:

- SAP CC 2023 Administration Guide documentation for technical operations and tasks
- SAP CC 2023 Administration and Operation Guide documentation for the available procedures

10.5 Troubleshooting SAP CC

When a problem occurs during the execution of a process or function of SAP CC, it is possible to get information about the nature and/or origin of the problem, using:

- The messages provided in the console or in the graphical user interface, which contain information that can be useful to solve the problem and prevent such a situation. For further information about logging and tracing capabilities, refer to the Enhanced Logging and Tracing Framework [page 114] section of this guide

- The information provided by the provided monitoring mechanisms, which may inform about the behavior of the different deployed components. For further information about these information, refer to the Monitoring SAP CC [page 394] section of this guide
- The information available in the thread dump files, which provides details about the execution context of the different threads that are executed by the instances of the Core Server system. For further information about these information, refer to the description of the "Troubleshooting (Advanced): Thread Dump Generation" group available in the SAP CC 2023 System Parameter Reference documentation

For global information about the troubleshooting procedures, consult the "Troubleshooting" section of the SAP CC 2023 Administration Guide documentation.

10.6 Upgrading SAP CC

To upgrade an SAP Convergent Charging system landscape from a replaced 2022 release to a 2023 release, consult the:

- SAP CC 2023 Installation and Maintenance Guide documentation

11 References

Output Data [page 396]

11.1 Output Data

Account Code (String) [page 403]
Identifier (code or name) of the assigned and charged account (prepaid, external/postpaid) in the identified subscriber account

Account Event Date (Date/Time) [page 405]
Date and time when a refill was automatically triggered because the prepaid balance of the assigned prepaid account (in the identified subscriber account) goes under a specified threshold amount.

Account Type Code (Number) [page 406]
Numerical code (0 or 1) for the account type of the assigned and charged account (prepaid, external/postpaid) in the identified subscriber account

Account Type Is Prepaid (Boolean) [page 407]
Boolean information used to indicate that the account charged by SAP CC is a prepaid account in its subscriber account.

Account Type Name (String) [page 407]
Labeled type ("prepaid" or "external") for the assigned and charged account in its subscriber account.

Allowance Context (String) [page 408]
Labeled type ("C" or "U") of event performed on the allowance and that generated the charged item

Allowance Event Class Name (String) [page 408]
Identifier of the allowance event class for the allowance event that the system sent to an allowance

Allowance Share Identifier (String) [page 409]
Unique identifier used by the SAP CC system to group and access shared allowances.

Allowance Unique Identifier (String) [page 409]
Unique identifier of the allowance in customer master data

Allowance Validity End Date (Date/Time) [page 409]
End date and time of the validity period of the allowance in its provider contract (in customer master data).

Allowance Validity Start Date (Date/Time) [page 409]
Start date and time of the validity period of the allowance in its provider contract (in customer master data)

Amount (Excl.Tax) (Number) [page 410]
Amount of the charged item computed by SAP CC during the charging operation, without any tax amount.

Base Amount (Number) [page 410]
: Base Amount Reference amount of the charged transaction used by SAP CC to compute the tax amount and generate the final amounts (amount excluding tax, total amount including tax)

Base Rated Amount (Number) [page 411]
: Reference amount, computed by SAP Convergent Charging during the execution of a price plan of a master charge, and used by SAP CC during the execution of the price plan of a dependent charge (when exists).

Charge Activation Cancellation Date (Date/Time) [page 411]
: Date and time of the cancellation of a contracted charge in a contract item (provider contract) or in a subscription (former Data Model)

Charge Activation Code (String) [page 411]
: Identifier (code or name) of the charge that was subscribed to by the subscriber as part of a business agreement and added to a provider contract item or a subscription

Charge Activation Effective Date (Date/Time) [page 412]
: Creation date and time of the subscription, only available for one-shot rates containing an activation event.

Charge Date (Date/Time) [page 412]
: Date and time of the charging operation or refilling operation

Charge Reference (String) [page 412]
: In case the charging operation was based on an external reference, this property corresponds to the identifier of this external reference component in the executed charging plan.

Charge Reference Name (String) [page 413]
: In case the charging operation was based on an external reference, this property corresponds to the name value of this external reference, set in the charging plan of the activated charge.

Charge Type Code (Number) [page 413]
: Numerical code (0, 1, ... 4) for the charge type

Charge Type Name (String) [page 414]
: Labeled type ("internalCharge", "externalCharge", or some other values) of the charge triggered by SAP CC.

Chargeable Item Class Name (String) [page 414]
: Identifier of the class of the chargeable item that was charged by SAP Convergent Charging, only available for usage charging operations

Chargeable Item Unique Identifier (String) [page 415]
: Unique identifier of the received chargeable item that represents the consumption of a service or the use of a product by an end customer.

Chargeable Item Unique Identifier Type (String) [page 415]
: Type of the unique identifier for the chargeable item

Chargeable Item Package Code (String) [page 415]

Chargeable Items Are Exported (Boolean) [page 416]
: Boolean information used to indicate that the generation of a charged item leads to the supplementary generation of the corresponding chargeable item (input data previously received or acquired).

Charged Amount Is a Credit (boolean) [page 416]
: Boolean information used to indicate whether the amount of the charged transaction is a credit amount, or not.

Charged Amount Is a Debit (boolean) [page 416]
Boolean information used to indicate whether the amount of the charged transaction is a debit amount, or not.

Charged Item Identifier (number) [page 416]
Numerical identifier of a charged item

Charged Item Identifier (String) [page 416]
Identifier of a charged item

Charged Item Set Identifier or Refill Record Set Identifier (number) [page 417]
Numerical identifier of a set of charged items or of a set of refill records that are generated by SAP Convergent Charging during the processing of a business operation.

Charged Item Set identifier (String) [page 417]
Identifier of the charged item set.

Charged Item or Refill Record Set identifier (String) [page 417]

Charged Item Set Identifier Type (String) or Refill Record Set ID Type (String) [page 418]
Type of the identifiers used for identifying a charged item set (or a refill record set) that is generated by SAP CC.

Charged Tax Code (String) [page 418]
Alias. See the "Tax Code" property.

Charged Tax Status Code (String) [page 418]
Deprecated: Consider the "Tax Status Code" property.

Charged Transaction Is a Prepaid Debit (boolean) [page 419]
Boolean information used to indicate that the charged transaction results from the charging process with a selected prepaid account.

Charged Transaction Is a Prepaid Refill (boolean) [page 419]
Boolean information used to indicate that the charged transaction results from the processing of a refilling operation request.

Charging Component Name (String) [page 419]
Identifier (name) of the charging component in its charging plan

Contract Identifier (String) [page 420]
Identifier of the provider contract (or of the charging contract) that belongs to the identified subscriber account

Contract Item External Identifier (String) [page 420]
External identifier set by an external system or by SAP CRM in case of integrated SAP Solution scenario. This field is retrieved from the external code set in a contract item stored in SAP CC

Contract Item Identifier (String) [page 421]
Identifier of the contract item in its provider contract in customer master data

Contract Type (String) [page 421]
Labeled type ("P" or "S") of data which generated the charged item

Currency (String) [page 421]
ISO 4217 three-letter currency code of the charged transaction

End of Rating Recurring Period (date and time) [page 422]
End date and time of the period related to a recurring rate, which can be different from the "End of Rating Reference Recurring Period" property that is used when the recurring rate is prorated

End of Rating Reference Recurring Period (date and time) [page 422]
End date and time of the reference period related to a recurring charge

Event Date (date and time) [page 423]
Date and time of the rated event, which equals to the consumption date/time of a usage rate or to the triggering date/time of the recurring rates or one-shot rates.

Event Processing Date (date and time) [page 424]
Date and time when the event, which generated the charged item, was processed by SAP Convergent Charging.

Excluding Last Day of the Rating Recurring Period (date and time) [page 425]
Excluding last day of the rating recurring period

External Account Code (string) [page 426]
Identifier in an external system of the postpaid account to be charged by SAP Convergent Charging. It is set in the external account settings of the identified subscriber account.

External Account Name (string) [page 426]
Identifier (name) of the external account assigned by SAP CC in the identified subscriber account. This external account references a postpaid account managed in an external system (billing or accounting).

External System Code (string) [page 426]
Identifier of the external system (billing, accounting) that manages the account to be charged (in case of postpaid account), that is set in the external account settings of the identified subscriber account

First Dispatch Code (string) [page 427]
Dispatch code #1, which corresponds to the name of the property chosen as the first criteria when filtering external account transactions

Including Last Day of the Rating Recurring Period (date and time) [page 427]
Including last day of the rating recurring period

ISO Currency (string) [page 427]

Name of Rate Component Used (string) [page 428]
Name of the rate component that is executed and is used as the transaction label.

Offer Code (string) [page 428]
Identifier (code or name) of the offer that is subscribed to from the pricing catalog of the chargeable service or product. This offer is concerned by the charging operation request.

Overrun From (string) [page 428]
Identifier of the prepaid account that called the overrun.

Overrun To (string) [page 429]
Identifier of the prepaid account from which the overrun is called.

Prepaid Account Name (string) [page 429]
Identifier (name) of the prepaid account

Prepaid Balance Amount (number) [page 429]
Amount of the balance of the prepaid account that is assigned during the processing of the business operation request (charging, refilling).

Prerating Reservation Identifier (number) [page 429]
Deprecated. Numerical identifier of the reservation for the prerating process Note: The prerating function is deprecated.

Price Plan Name (string) [page 430]

Identifier of the price plan (in a charge) that was executed by SAP Convergent Charging to compute a price dynamically.

Produced by a Master Charge Component (number) [page 430]
Numerical information used to indicate the type of charge that contains the price plan executed during the charging operation.

Produced by an Allowance (Boolean) [page 430]
Boolean information used to indicate whether the charged item was generated by the processing of an allowance, or not

Produced by an Allowance (String) [page 431]
Information used to indicate whether the charged item was generated by the processing of an allowance, or not

Rated Amount (number) [page 432]
Amount of the rated transaction, before tax computation.

Rated Amount is Prorated (boolean) [page 432]
Boolean information used to indicate whether the amount is prorated, or not

Rated Amount is Refunded (boolean) [page 432]
Boolean information used to indicate whether the amount concerns a refund, or not

Rated Tax Amount (number) [page 433]
Deprecated. Use the "Base Amount" property instead.

Rated Tax Code (string) [page 433]
Code of the tax

Rated Tax Status Code (string) [page 433]
Deprecated. Use the "Tax Status Code" property.

Rated Tax Status Identifier (number) [page 433]
Deprecated. Use the "Tax Status Identifier" property.

Rated Total Amount (Number) [page 433]
Deprecated. Use the "Rated Amount" property instead.

Rating Activation Date [page 433]
Date and time when the recurring charge has been triggered during a charging operation

Rating Consumption Date (Date/Time) [page 434]
Date and time of the service consumption or product use and represented by a chargeable item related to a usage-based charging operation for this usage event

Rating Event Origin (String) [page 434]
Labeled type ("U", "R", or "O") of the charged event.

Refill Amount (number) [page 434]

Refill Currency (string) [page 435]

Refill Date (Date/Time) [page 435]

Refill ISO Currency (string) [page 435]

Second Dispatch Code (string) [page 435]
Dispatch code #2, which corresponds to the name of the property chosen as the second criteria when filtering external account transactions

Sender Job Identifier (number) [page 435]

Identifier of the sender that sent a job of charging operations to SAP CC

Service Identifier (String) [page 436]
Technical identifier for the chargeable service or product to be monetized and charged by SAP Convergent Charging and that is consumed by end customers of the contracting service provider

Service Provider Country Code (string) [page 436]

Service Provider Name (string) [page 436]
Identifier of the service provider company that monetizes the chargeable service or product by configuring a pricing catalog with pricing elements and charge plans (or offers) to be subscribed to

Session Rating reservation Identifier (string) [page 437]
Identifier of the charging session reservation

Start of Rating Recurring Period (date and time) [page 437]
Start date and time of the period related to a recurring rate component in an executed price plan, which can be different from the "Start of Rating Reference Recurring Period" used when a recurring charge is prorated.

Start of Rating Reference Recurring Period (date and time) [page 437]
Start date and time of the reference period related to a recurring rate

Subscriber Account Code (String) [page 438]
Identifier (code or name) of the subscriber account in customer master data

Subscriber Account Reference (String) [page 438]

Subscriber Consumes Service (Client) (boolean) [page 438]
Boolean information used to indicates that the subscriber and the contracting service provider have a client relationship.

Subscriber Provides Service (Partner) (boolean) [page 439]
Boolean information used to indicates that the subscriber and the contracting service provider have a partner relationship.

Subscription Code (String) [page 439]
Identifier (code or name) of the subscription in customer master data that was identified by the system during the business operation

Subscription Commitment Expiration Date [page 439]
Commitment expiration date and time of the subscription

Subscription Resumption Date [page 440]
Resumption date and time of the subscription

Subscription Suspension Date [page 440]
Suspension date and time of the subscription

Tax Code (String) [page 441]
String representation of the tax code of a charged transaction (or charged item) assigned to a prepaid or external (postpaid) account.

Tax Amount (number) [page 441]

Tax Determination Type (String) [page 441]

Tax Is Included in Total Amount (boolean) [page 441]
Boolean information used to indicate whether the tax amount is included in the total amount, or not. This property is set to `TRUE` when the tax status is set to "APPLIED" or "FOR_INFO".

Tax Status Code (String) [page 442]
: The string code of the tax status. The tax status is the final execution status of the tax calculation process.

Tax Status Identifier (number) [page 442]

Third Dispatch Code (string) [page 442]
: Dispatch code #3 that corresponds to the name of the property chosen as the third criteria when filtering External Account transactions.

Threshold Amount (number) [page 442]
: Amount under which an immediate refill is triggered when the balance of the assigned prepaid account goes under this threshold.

Total Amount (Incl. Tax) (number) [page 443]
: Total amount of the charged transaction, tax included. This amount is used by SAP CC to debit the balance of the assigned prepaid account or charge the assigned external (postpaid) account.

Triggering Contract Identifier (String) [page 443]
: Identifier of the provider contract that triggered the generation of the charged item by an allowance.

Triggering Contract Item External Identifier (String) [page 444]
: External identifier of the provider contract item that sends an event to the allowance generating the billable items through an Event-Based Trigger component

Unrounded Rated Amount (Number) [page 444]
: Amount computed by the charges having up to 6 decimal places before being rounded according to the TRANSACTION_PRECISION parameter. This field is required for the tax framework but may not be used in the charged item mapping.

US Transaction Business Class (string) [page 445]

US Transaction Call Duration (number) [page 445]

US Transaction County Exempt (number) [page 445]

US Transaction Customer Type (string) [page 445]

US Transaction Facilities-Based Flag (string) [page 445]

US Transaction Federal Exempt (number) [page 445]

US Transaction Franchise Flag (string) [page 446]

US Transaction Incorporated Code (string) [page 446]

US Transaction Lifeline Flag (number) [page 446]

US Transaction Line Count (number) [page 446]

US Transaction Local Exempt (number) [page 446]

US Transaction Location Count (number) [page 446]

US Transaction Origin (string) [page 446]

US Transaction Origin Flag (string) [page 447]

US Transaction Regulated Flag (string) [page 447]

US Transaction Resale Flag (string) [page 447]

US Transaction Service Address (string) [page 447]

US Transaction Service Address Flag (string) [page 447]

US Transaction Service Class (string) [page 447]

US Transaction Service Type (string) [page 447]

US Transaction State Exempt (number) [page 447]

US Transaction Tax Data (string) [page 447]

US Transaction Taxation Date (Date/Time) [page 448]

US Transaction Telecom Type (string) [page 448]

US Transaction Termination (string) [page 448]

US Transaction Termination Flag (string) [page 448]

US Transaction Type (string) [page 448]

User Service Identifier (String) [page 448]
Technical identifier of the end customer related to the usage of the consumed service or used product

VAT Business Entity (boolean) [page 449]
Boolean information used to indicate the business category (B2B or B2C) of the subscriber account relating to the charged account (prepaid or external postpaid).

VAT Place of Taxation (string) [page 449]
B2B or B2C place of taxation

VAT Transaction Gross Price Flag (boolean) [page 449]
Boolean information used to indicate whether prices computed by SAP CC during the execution of a price plan are net or gross.

VAT Transaction Rate Code (string) [page 450]
Code of the VAT rate level that is configured in the charge plan item (or in an offer) when the selected tax system is EU Value-Added Tax (VAT).

VAT Transaction Raw Rate (Number) [page 450]
Amount of the applied flat tax rate configured in the processed charge plan item (aka customized charge in a charge plan) or in an offer. Note that this property is only available when the customized charge is configured to use the "Flat" tax system.

VAT Transaction Raw Rate ID (string) [page 450]
Identifier of the flat tax rate as configured in the charge plan item (aka charge customized in a charge plan) or in an offer. Note that this property is only available when the customized charge is configured to use the "Flat" tax system.

11.1.1 Account Code (String)

Identifier (code or name) of the assigned and charged account (prepaid, external/postpaid) in the identified subscriber account

> → Tip
>
> In Convergent Charging Cockpit: Identifier of the account in the subscriber account identified for the business operation. The system assigned this account for beeing debited or credited. In Cockpit, the prepaid account management functions are not available.

Customer Master Data > Subscriber Account > Prepaid Account

Customer Master Data > Subscriber Account > External Account (Postpaid Environment)

Account Code

`accountCode`

Type: String

Equivalent Properties

- Prepaid Account Name (string) [page 429]
- External Account Name (string) [page 426]

Summary

Account Code is the identifier (aka identification name or code) of the account (prepaid or external/postpaid) in a contracting subscriber account that is charged for the consumption of the chargeable service or the use of the product to monetize:

- Service usage (consumption) charges
- Recurring (periodic) fees
- One-shot (one-off) fees

At runtime, the SAP Convergent Charging system dynamically computes the prices (aka fees) and automatically determines the account balances and possibly splits the amounts. It assigns the accounts to be debited or credited in real time (prepaid environment) or later on in a second step (postpaid environment, reports, and settlements).

Level 1: charged item class

See Also

- Account Code (String) [page 403]
- Account Type Code (Number) [page 406]
- Account Type Is Prepaid (Boolean) [page 407]
- Account Type Name (String) [page 407]

Related Information

Subscriber Account [page 238]

In Core Tool
Subscriber Accounts

11.1.2 Account Event Date (Date/Time)

Date and time when a refill was automatically triggered because the prepaid balance of the assigned prepaid account (in the identified subscriber account) goes under a specified threshold amount.

> → Tip
>
> In Convergent Charging Cockpit: In Cockpit, the prepaid account management functions are not available.

Environment: prepaid

Aka: *Account Event Date/Time* or *Account-Event-Based Refill - Date/Time*

Label in user interface: *Account Event Date*

Prepaid Account Management > Refilling > (Automated) Refill Based on Account Events > Event Date/Time

`accountEventDate`

Type: Date/Time

Summary

Account Event Date/Time is the date and time for an account event.

Associated Property

Threshold Amount (number) [page 442]

Related Information

Account Event Refill

11.1.3 Account Type Code (Number)

Numerical code (0 or 1) for the account type of the assigned and charged account (prepaid, external/postpaid) in the identified subscriber account

> → Tip
>
> In Convergent Charging Cockpit: Always 1 (In Cockpit, the prepaid account management functions are not available.)

Aka: *Account Type Code*

`accountTypeCode`

Number

Account Type Code is a numerical code for the type of the account that was charged for the service consumption or product use:

- Service consumption/usage charges
- Periodic/recurring fees
- On-off/one-shot fees

Possible values are:

- **`0`**: Prepaid (balance) account. See Prepaid Account (and Balance) [page 239].
- **`1`**: External (postpaid) account. See External Account [page 240].

Equivalent Property

Account Type Name (String) [page 407]

Similar Property

Account Type Is Prepaid (Boolean) [page 407]

Related Information

Account Code (String) [page 403]

11.1.4 Account Type Is Prepaid (Boolean)

Boolean information used to indicate that the account charged by SAP CC is a prepaid account in its subscriber account.

> → Tip
>
> In Convergent Charging Cockpit: FALSE (In Cockpit, the prepaid account management functions are not available.)

Environment: prepaid

Aka: *Account Type Is Prepaid* or *Assigned Account Is Prepaid*

Account Type Is Prepaid

`isPrepaid`

Boolean

Account Type Is Prepaid indicates that the assigned and charged account is a prepaid account stored in SAP Convergent Charging as part of a subscriber account in customer master data.

Possible values are:

- TRUE: It is a prepaid account.
- FALSE:

See also: Account Type Name (String) [page 407]

Related Information

Account Code (String) [page 403]

11.1.5 Account Type Name (String)

Labeled type ("prepaid" or "external") for the assigned and charged account in its subscriber account.

Account Type Name

`accountTypeName`

String

Account Type Name is the labeled type of the account that was charged for the service consumption or product use. Possible values are:

- **`"prepaid"`**: Prepaid Account (and Balance) [page 239]
- **`"external"`**: External Account [page 240]

See also: Account Type Code (Number) [page 406]

Level 1: charged item class

Related Information

Account Code (String) [page 403]

11.1.6 Allowance Context (String)

Labeled type ("C" or "U") of event performed on the allowance and that generated the charged item

Allowance Context

`allowanceContext`

String

Allowance Context is the labeled type of the event performed on the allowance and that generated the charged item.

Possible values are:

- **`"C"`**: When the event corresponds to a *One-Shot Trigger* logic component performed on an allowance creation event.
- **`"U"`**: Otherwise

Related Information

One-Shot Trigger

11.1.7 Allowance Event Class Name (String)

Identifier of the allowance event class for the allowance event that the system sent to an allowance

Allowance Event Class Name: The name of the allowance event class

`allowanceEventClassName`

String

Allowance Event Class Name represents the class name for the allowance event that was "sent" (by the system) to an allowance in a provider contract.

Related Information

Allowance Event Class [page 233]

11.1.8 Allowance Share Identifier (String)

Unique identifier used by the SAP CC system to group and access shared allowances.

Allowance Share Identifier: The "share ID" of an allowance

Customer Master Data > Provider Contract > Allowance > Shared Allowances

`allowanceShareId`

String

Allowance Share Identifier (aka allowance share ID) is the unique identifier that is used by the SAP Convergent Charging system to group and access shared allowances.

11.1.9 Allowance Unique Identifier (String)

Unique identifier of the allowance in customer master data

Allowance Unique Identifier

Customer Master Data > Provider Contract > Allowance

`allowanceUniqueId`

String

11.1.10 Allowance Validity End Date (Date/Time)

End date and time of the validity period of the allowance in its provider contract (in customer master data).

Allowance Validity End Date/Time

`allowanceEndDate`

Date/Time

11.1.11 Allowance Validity Start Date (Date/Time)

Start date and time of the validity period of the allowance in its provider contract (in customer master data)

Allowance Validity Start Date/Time

`allowanceStartDate`

Date/Time

11.1.12 Amount (Excl.Tax) (Number)

Amount of the charged item computed by SAP CC during the charging operation, without any tax amount.

Aka: Amount (Excl. Tax)

`amount`

Number

Amount (Excluding Tax) is the amount of the charged transaction and of the charged item generated by the SAP CC system during the charging process. This amount does never include tax.

> → Remember
>
> This amount equals to the **base amount** when the charge customized in a charge plan item (or in an offer) is configured to deal with a net amount.

11.1.13 Base Amount (Number)

Base Amount Reference amount of the charged transaction used by SAP CC to compute the tax amount and generate the final amounts (amount excluding tax, total amount including tax)

Base Amount

`baseAmount`

Number

Base Amount is the reference amount of the charged transaction that is considered by the SAP CC system to adjust the tax amount and generate the final amounts (amount excluding tax, total amount including tax). This amount can be net or gross depending on the configuration of the charge customized in a charge plan (or in an offer) that has been triggered during the charging process. Consider the *VAT Transaction Gross Price Flag* and the *Tax Is Included* fields to be able to manage tax in an external system.

> → Remember
>
> When there was no overrun during the charging process, the base amount is equal to the *Rated Amount*.

See here:

- VAT Transaction Gross Price Flag (boolean) [page 449]
- Tax Is Included in Total Amount (boolean) [page 441]
- Amount (Excl.Tax) (Number) [page 410]
- Total Amount (Incl. Tax)
- Rated Amount (number) [page 432]
- Currency (String) [page 421]

11.1.14 Base Rated Amount (Number)

Reference amount, computed by SAP Convergent Charging during the execution of a price plan of a master charge, and used by SAP CC during the execution of the price plan of a dependent charge (when exists).

Base Rated Amount

`ratedBaseAmount`

Number

Base Rated Amount is the reference amount used by the SAP CC system when it executes the price plan of a dependent charge. The system previously computes this amount by executing the price plan of the master charge the dependent charge relates to.

Availability: This field is only present in the charged items or transactions when the rated transaction relates to the execution of the price plan of a dependent charge.

See also:

- Rated Amount (number) [page 432]

11.1.15 Charge Activation Cancellation Date (Date/Time)

Date and time of the cancellation of a contracted charge in a contract item (provider contract) or in a subscription (former Data Model)

Charge Activation - Cancellation Date/Time

`chargeActivationCancellationDate`

Charge Activation Cancellation Date/Time is the date and time for the cancellation of a contracted charge in its provider contract item or subscription.

11.1.16 Charge Activation Code (String)

Identifier (code or name) of the charge that was subscribed to by the subscriber as part of a business agreement and added to a provider contract item or a subscription

Charge Activation Code

`chargeCode`

String

Charge Activation Code is the identifier of a contracted charge in a provider contract item or in a subscription. This charge can be triggered on when its provider contract item (or subscription) is identified by the system for a debit or a credit.

→ Remember

`Charge Activation` and `ChargeActivation` are technical terms. They can be viewed in logs, exceptions, or XML files during the implementation phase or the operation phase. These terms represent the subscribed charges or contracted charges in a subscription or in a contract item of a provider contract.

Customer Master Data > Provider Contract > Contract Item > Contracted Charge

Customer Master Data > Subscription > Contracted Charge

11.1.17 Charge Activation Effective Date (Date/Time)

Creation date and time of the subscription, only available for one-shot rates containing an activation event.

Charge Activation - Effective Date/Time

`chargeActivationEffectiveDate`

11.1.18 Charge Date (Date/Time)

Date and time of the charging operation or refilling operation

Aka: Charge Date/Time

`date`

Date/Time

Charge Date/Time is the date and time information when a relating event was charged (usage, recurring, or one-shot) or refilled by the SAP CC system. The event is an external incoming event such as a chargeable item to rate and charge or is an internal event such as a recurring or one-shot event.

ⓘ Note

It is the date and time when the system processed the event. In a prepaid environment, the corresponding operation may be a refill (top up) operation.

11.1.19 Charge Reference (String)

In case the charging operation was based on an external reference, this property corresponds to the identifier of this external reference component in the executed charging plan.

→ Remember

Availability: Former data model (DM) based on offers/subscriptions

Charge Reference

`chargeReference`

String

Rating & Charging Services > Charging (Execution of a Charging Plan) > With a Subscription >

Related Information

External Reference

11.1.20 Charge Reference Name (String)

In case the charging operation was based on an external reference, this property corresponds to the name value of this external reference, set in the charging plan of the activated charge.

> → Remember
>
> Availability: Former data model (DM) based on offers/subscriptions

Charge Reference Name

`chargeReferenceName`

String

Related Information

External Reference

11.1.21 Charge Type Code (Number)

Numerical code (0, 1, ... 4) for the charge type

Charge Type Code

`chargeTypeCode`

Number

Charge Type Code is a numerical code for the type of the "charge" that was processed.

Possible values are:

- **`0`**: Closing
- **`1`**: Refill charge
- **`2`**: Internal charge

- **3**: External charge
- **4**: Not charged

11.1.22 Charge Type Name (String)

Labeled type ("internalCharge", "externalCharge", or some other values) of the charge triggered by SAP CC.

Charge Type Name

`chargeTypeName`

String

Possible values are:

- **`"closing"`**
- **`"refillCharge"`**
- **`"internalCharge"`**
- **`"externalCharge"`**
- **`"notCharged"`**

11.1.23 Chargeable Item Class Name (String)

Identifier of the class of the chargeable item that was charged by SAP Convergent Charging, only available for usage charging operations

Availability: only available for usage-based charging operations

Chargeable Item Class Name

`chargeableItemClassName`

String

Chargeable Item Class Name is the identifier of the class of the chargeable item that was sent to the SAP CC system for beeing charged. This chargeable item relates to the consumption of a chargeable service or the use of a product to monetize with SAP Convergent Charging.

Related Information

Chargeable Item Class [page 193]
Chargeable Item [page 180]

11.1.24 Chargeable Item Unique Identifier (String)

Unique identifier of the received chargeable item that represents the consumption of a service or the use of a product by an end customer.

Chargeable Item Unique ID

`chargeableItemId`

String

Chargeable Item Unique Identifier is the unique ID of the received chargeable item (usage event) that represents the consumption of a service or the use of a product by an end customer. A downstream system, such as a mediation system, sends this data to the SAP CC system in order to be charged for this service/product usage (dynamically priced, corresponding amounts charged).

Previously known as: *Chargeable Item Identifier*

- User Service Identifier (String) [page 448]
- Service Identifier (String) [page 436]
- Chargeable Item Unique Identifier (String) [page 415]
- Chargeable Item Unique Identifier Type (String) [page 415]
- Chargeable Item Class Name (String) [page 414]

11.1.25 Chargeable Item Unique Identifier Type (String)

Type of the unique identifier for the chargeable item

Chargeable Item ID Type

`chargeableItemIdType`

String

Previously known as: "Chargeable Item Identifier Type"

In an integrated *SAP Solution* scenario, it is a constant value: `CCCIT`.

See also the CHARGEABLE_ITEM_UNIQUE_IDENTIFIER_TYPE system parameter.

Related Information

CHARGEABLE_ITEM_UNIQUE_IDENTIFIER_TYPE

11.1.26 Chargeable Item Package Code (String)

Chargeable Item Package Code

`chargeableItemPackageCode`

String

Chargeable Item Package Code is deprecated.

11.1.27 Chargeable Items Are Exported (Boolean)

Boolean information used to indicate that the generation of a charged item leads to the supplementary generation of the corresponding chargeable item (input data previously received or acquired).

Chargeable Items Are Exported

`isChargeableItemExported`

Boolean

Chargeable Items Are Exported indicates if the business operation (charging, activation, refilling) that generated the charged item was also configured to generate a chargeable item as output data. The system outputs both data records for downstream systems or applications such as SAP Convergent Invoicing.

11.1.28 Charged Amount Is a Credit (boolean)

Boolean information used to indicate whether the amount of the charged transaction is a credit amount, or not.

`isCredit`

11.1.29 Charged Amount Is a Debit (boolean)

Boolean information used to indicate whether the amount of the charged transaction is a debit amount, or not.

`isDebit`

11.1.30 Charged Item Identifier (number)

Numerical identifier of a charged item

11.1.31 Charged Item Identifier (String)

Identifier of a charged item

Charged Item Identifier

`chargedItemIdStr`

String

11.1.32 Charged Item Set Identifier or Refill Record Set Identifier (number)

Numerical identifier of a set of charged items or of a set of refill records that are generated by SAP Convergent Charging during the processing of a business operation.

Aka: Charged Item Set ID or Refill Record Set ID

`itemSetId`

The identifier of a set of charged items or of a set of refill records generated by the SAP CC system.

> **Note**
>
> A charged item set consists of a charged item coming from a master charge and possibly from charged items coming from dependent charges.

11.1.33 Charged Item Set identifier (String)

Identifier of the charged item set.

Charged Item Set ID

See also: Charged Item Set identifier (String) [page 417]

`chargedItemSetIdStr`

String

11.1.34 Charged Item or Refill Record Set identifier (String)

Charged Item Set ID or Refill Record Set ID

`itemSetIdStr`

String

Charged Item Set ID or Refill Record Set ID is the identifier of the charged item set (or the refill record set) that was generated by the SAP CC system.

11.1.35 Charged Item Set Identifier Type (String) or Refill Record Set ID Type (String)

Type of the identifiers used for identifying a charged item set (or a refill record set) that is generated by SAP CC.

Charged Item Set ID Type

`itemSetIdType` `chargedItemSetIdType`

String

In an integrated *SAP Solution* scenario, it is a constant value: `CCCIT`.

See also the CHARGED_ITEM_SET_UNIQUE_IDENTIFIER_TYPE system parameter.

Related Information

CHARGED_ITEM_SET_UNIQUE_IDENTIFIER_TYPE

11.1.36 Charged Tax Code (String)

Alias. See the "Tax Code" property.

See: Tax Code (String) [page 441]

Charged Tax Code

`chargedTaxCode`

String

11.1.37 Charged Tax Status Code (String)

Deprecated: Consider the "Tax Status Code" property.

Charged Tax Status Code

`chargedTaxStatusCode`

String

See: Tax Status Code (String) [page 442]

11.1.38 Charged Transaction Is a Prepaid Debit (boolean)

Boolean information used to indicate that the charged transaction results from the charging process with a selected prepaid account.

This field indicates that the charged transaction results from the charging process with a selected prepaid account. This business transaction relates to the use of a customer service (usage, recurring, or one-shot). The charged account is a prepaid account of the subscriber account.

> **Note**
>
> The SAP CC system converts this charged transaction to a charged item.

Availability: This field is only relevant to the configuration of the generation of charged items.

See also: • Charged Transaction is a Prepaid Refill • Account Type is Prepaid

`isPrepaidUsage`

11.1.39 Charged Transaction Is a Prepaid Refill (boolean)

Boolean information used to indicate that the charged transaction results from the processing of a refilling operation request.

This field indicates that the charged transaction results from the refilling process. This business transaction is a refill on a prepaid account.

> **Note**
>
> The SAP CC system converts this charged transaction into a refill record.

Availability: This field is only relevant to the configuration of the generation of refill records.

See also:

- Charged Transaction is a Prepaid Refill
- Account Type is Prepaid

`isPrepaidRefill`

11.1.40 Charging Component Name (String)

Identifier (name) of the charging component in its charging plan

Charging Component Name

`chargingComponentName`

String

Similar: Name of Rate Component Used (string) [page 428]

Charging Component Name is the identifier (name) of the charging component in its charging plan.

Related Information

Charging Components

11.1.41 Contract Identifier (String)

Identifier of the provider contract (or of the charging contract) that belongs to the identified subscriber account

Aka: Contract ID or Provider Contract ID

`contractId`

String

Contract Identifier is the identifier of the provider contract. The value depends on the context:

- In a charge plan, it is the identifier of the provider contract which contains a subscribed charge that generates the charged item when processing the pricing logic.
- In an allowance plan, it is the identifier of the provider contract owning the allowance which is triggered generated the charged item.

See Also

Triggering Contract Identifier (String) [page 443]

Related Information

Provider Contract [page 245]

11.1.42 Contract Item External Identifier (String)

External identifier set by an external system or by SAP CRM in case of integrated SAP Solution scenario. This field is retrieved from the external code set in a contract item stored in SAP CC

Contract Item External Identifier, Contract Item External ID

`contractItemExternalId`

String

Contract Item External Identifier is set by an external system or by SAP CRM in case of integrated *SAP Solution* scenario. This field is retrieved from the *External Code* set in a contract item of a provider contract stored in SAP CC.

It identifies the contract item in the customer master data of an external system.

See: Provider Contract > Charge Plan: Definition

Related Information

Provider Contract > Charge Plan: Definition

11.1.43 Contract Item Identifier (String)

Identifier of the contract item in its provider contract in customer master data

Contract Item Identifier

`contractItemId`

String

Contract Item Identifier is the ID of a contract item in its belonging provider contract (in customer master data).

See also: Contract Identifier (String) [page 420]

11.1.44 Contract Type (String)

Labeled type ("P" or "S") of data which generated the charged item

Contract Type

`contractType`

String

Contract Type is the labeled type of data which generated the charged item.

Possible values are:

- "P" for provider contracts
- "S" for subscriptions

11.1.45 Currency (String)

ISO 4217 three-letter currency code of the charged transaction

Currency

`currency`

String

Currency is the currency setting that the system uses to compute prices, fees, or tax amounts. It is an ISO 4217 three-letter currency code.

Associated Property

ISO Currency (string) [page 427]

Similar Property

Refill Currency (string) [page 435]

11.1.46 End of Rating Recurring Period (date and time)

End date and time of the period related to a recurring rate, which can be different from the "End of Rating Reference Recurring Period" property that is used when the recurring rate is prorated

See: Start of Rating Recurring Period (date and time) [page 437]

`recurringStop`

Associated Property

Start of Rating Recurring Period (date and time) [page 437]

11.1.47 End of Rating Reference Recurring Period (date and time)

End date and time of the reference period related to a recurring charge

See: Start of Rating Reference Recurring Period (date and time) [page 437]

`recurringStopRef`

11.1.48 Event Date (date and time)

Date and time of the rated event, which equals to the consumption date/time of a usage rate or to the triggering date/time of the recurring rates or one-shot rates.

Event Date/Time is the date and time information of the rated event:

- Consumption date/time (in case of a usage rate)
- Trigerring date/time (in case of a recurring rate or one-shot rate)

It is not the date and time when the SAP system processes the event.

`eventDate`

In Cockpit:

Default Property	In a Usage Charge	In a Recurring Charge	In a One-Time Charge
Charge Effective Date	The creation date/time of the contract item (in its provider contract) that subscribes to a rate plan containing this usage charge.	The creation date/time of the contract item (in its provider contract) that subscribes to a rate plan containing this recurring charge.	The creation date/time of the contract item (in its provider contract) that subscribes to a rate plan containing this one-time charge.
Consumption Date	The date and time of the consumption of the chargeable service (or the use of the product) represented by an usage event	N/A	N/A

Default Property	In a Usage Charge	In a Recurring Charge	In a One-Time Charge
Event Date	N/A	The trigerring date and time for the recurring event as scheduled by the system. **Example** For example, if your recurring event occurs every first day of the month at midnight sharp, the next event date/time will be "February 1 2021, 00:00 AM". But if a contract is cancelled today at 3:00 PM, the event date/time for its cancellation one-time event will be "January 21 2021, 3:30 PM". This stays true even if your SAP CC system processes these events at another time or day: only the scheduled date/time is taken into account, not the current one.	The date and time of the contract lifecycle event for which the contract event was specified in the settings of the one-time charge.

Related Information

Recurring Rate
One-Shot Rate

11.1.49 Event Processing Date (date and time)

Date and time when the event, which generated the charged item, was processed by SAP Convergent Charging.

Aka: *Event Processing Date/Time*

`eventProcessingDate`

Event Processing Date/Time is the date and time information when the SAP Convergent Charging (SAP CC) system processes the event that leads to the generation of a charged item in its item set.

Example

Processing of:

- A chargeable item that relates to a usage event (service consumption or product use)
- An allowance

This information is not available in order to configure some pricing logic in a price plan.

In an integrated SAP Solution, *Event Processing Date/Time* is used by the system to fill in the billable items sent to SAP Convergent Invoicing:

- `RATINGDATE` field
- `CARatingDate` field

Related Information

Charged Item Identifier (number) [page 416]
Charged Item Set Identifier or Refill Record Set Identifier (number) [page 417]

11.1.50 Excluding Last Day of the Rating Recurring Period (date and time)

Excluding last day of the rating recurring period

`excludedRecurringPeriodStopDate`

> ⓘ Note
>
> In SAP CC, the system considers a period as a time interval of type [first day; last day[.
>
> The last day of a validity period is used to compute the cancellation one-time fee or the recurring stop fee. The rating of the usage item is authorized between the first date of the validity period and one second before the last day. Therefore, a period always includes the start date and excludes the end date by default.
>
> - The `Excluding Last Day` property is the end date of the validity period
> - The `Including Last Day` property is the end date of the usage rating period. This is the `Excluding Last Day` minus 1 second

Related Information

Including Last Day of the Rating Recurring Period (date and time) [page 427]

11.1.51 External Account Code (string)

Identifier in an external system of the postpaid account to be charged by SAP Convergent Charging. It is set in the external account settings of the identified subscriber account.

See also: External Account Name (string) [page 426]

`externalAccountCode`

Related Information

Prepaid Account: Definition
External Account: Definition

11.1.52 External Account Name (string)

Identifier (name) of the external account assigned by SAP CC in the identified subscriber account. This external account references a postpaid account managed in an external system (billing or accounting).

`externalAccountName`

See also: External Account Code (string) [page 426]

Related Information

Prepaid Account: Definition

11.1.53 External System Code (string)

Identifier of the external system (billing, accounting) that manages the account to be charged (in case of postpaid account), that is set in the external account settings of the identified subscriber account

`externalSystemCode`

Related Information

External Account: Definition

11.1.54 First Dispatch Code (string)

Dispatch code #1, which corresponds to the name of the property chosen as the first criteria when filtering external account transactions

`dispatchCode1`

Code number 1

Dispatch code # 1, which is the name of the property chosen as the first criteria when filtering External Account transactions.

Seel also:

- Second Dispatch Code (string) [page 435]
- Third Dispatch Code (string) [page 442]

11.1.55 Including Last Day of the Rating Recurring Period (date and time)

Including last day of the rating recurring period

`includedRecurringPeriodStopDate`

> ⓘ Note
>
> In SAP CC, the system considers a period as a time interval of type [first day; last day[.
>
> The last day of a validity period is used to compute the cancellation one-time fee or the recurring stop fee. The rating of the usage item is authorized between the first date of the validity period and one second before the last day. Therefore, a period always includes the start date and excludes the end date by default.
>
> - The `Excluding Last Day` property is the end date of the validity period
> - The `Including Last Day` property is the end date of the usage rating period. This is the `Excluding Last Day` minus 1 second

Related Information

Excluding Last Day of the Rating Recurring Period (date and time) [page 425]

11.1.56 ISO Currency (string)

Associated Property

Currency (String) [page 421]

11.1.57 Name of Rate Component Used (string)

Name of the rate component that is executed and is used as the transaction label.

`rateComponentName`

See also: Price Plan Name (string) [page 430]

Similar: Charging Component Name (String) [page 419]

11.1.58 Offer Code (string)

Identifier (code or name) of the offer that is subscribed to from the pricing catalog of the chargeable service or product. This offer is concerned by the charging operation request.

Old Data Model

`offerCode`

Related Information

Offer [page 211]
Subscription [page 244]

11.1.59 Overrun From (string)

Identifier of the prepaid account that called the overrun.

`overrunFrom`

Identifier of the prepaid account that called the overrun. It is empty for the first overrun.

> **Note**
>
> It is only available in the context of prepaid account overrun.

11.1.60 Overrun To (string)

Identifier of the prepaid account from which the overrun is called.

`overrunTo`

Identifier of the prepaid account from which the overrun is called. It is empty for the last overrun.

> **Note**
>
> It is only available in the context related to the prepaid account overrun.

11.1.61 Prepaid Account Name (string)

Identifier (name) of the prepaid account

Prepaid Account Name

`prepaidAccountName`

11.1.62 Prepaid Balance Amount (number)

Amount of the balance of the prepaid account that is assigned during the processing of the business operation request (charging, refilling).

The current amount of the balance of the prepaid account selected during the charging process.

See also: Currency (String) [page 421]

`prepaidBalanceAmount`

11.1.63 Prerating Reservation Identifier (number)

Deprecated. Numerical identifier of the reservation for the prerating process Note: The prerating function is deprecated.

It is the identifier of the reservation for a prerating operation.

> **Caution**
>
> The prerating function is deprecated.

`reservationId`

11.1.64 Price Plan Name (string)

Identifier of the price plan (in a charge) that was executed by SAP Convergent Charging to compute a price dynamically.

Price Plan Name

`pricePlanName`

See also: Name of Rate Component Used (string) [page 428]

Related Information

Price Plans

11.1.65 Produced by a Master Charge Component (number)

Numerical information used to indicate the type of charge that contains the price plan executed during the charging operation.

Possible values are:

- 1: Master charge
- 0: Depending charge

For historical reason, it is not a boolean.

`isMaster`

It is the type of the charge customized in a charge plan (or in an offer) that includes the price plan executed during a charging operation.

11.1.66 Produced by an Allowance (Boolean)

Boolean information used to indicate whether the charged item was generated by the processing of an allowance, or not

Produced by an Allowance

`isAllowance`

Boolean

Produced by an Allowance indicates that the system has processed an allowance in the identified provider contract.

Possible values are:

- `TRUE`: This value indicates the processing of an allowance.
- `FALSE`: This value indicates the processing of a charge.

At runtime, the SAP CC system determines the relevant values.

In an integrated *SAP Solution* scenario, SAP CC automatically converts the generated charged items into billable items (BITs) and replaces `TRUE` with `"X"` and `FALSE` with a blank space. **This default property is useful when the billable item class that structures the sent billable items, specifies an `ALLOWANCE` field of boolean type (data element type C with field type X).**

> ### Example
>
> You can use this property to define or redefine the way of computing the `ALLOWANCE` field. The system generates a boolean field in a charged item and then converts it to a 1-character field in the billable item that is sent to SAP Convergent Invoicing.

Related Information

Allowance Unique Identifier (String) [page 409]

11.1.67 Produced by an Allowance (String)

Information used to indicate whether the charged item was generated by the processing of an allowance, or not

Produced by an Allowance

`isAllowanceStr`

String

Produced by an Allowance indicates that the system has processed an allowance in the identified provider contract.

Possible values are:

- `"X"`: This value indicates the processing of an allowance.
- `" "`: This value (a blank space) indicates the processing of a charge.

At runtime, the SAP CC system determines the relevant values.

In an integrated *SAP Solution* scenario, SAP CC converts the charged items into billable items.

> ### → Tip
>
> This default property is useful when the billable item class that structures the sent billable items, specifies an `ALLOWANCE` field of type string (data element type C with field type C).

> ### Example
>
> As of SAP CC 2022 FPS 2, you can use this default property to define the way of computing the `ALLOWANCE` field. The system generates a string field in a charged item and then converts it to a 1-character field

in the billable item that is sent to SAP Convergent Invoicing. Note that you can configure some logic that redefines the value of the ALLOWANCE field in the billable items. For example, in a contract-based integration scenario with *SOM (Subscription Order Management)* and revenue recognition via *Revenue Accounting*, SAP Convergent Charging must indicate not only whether a billable item related to an allowance or not, but whether it was a creation ("C") or a usage ("U").

Availability

Version 2022 FPS 2

11.1.68 Rated Amount (number)

Amount of the rated transaction, before tax computation.

Amount of the rated transaction, before tax computation. This raw amount is computed by SAP CC when executing the price plan of a charge customized in a charge plan (or in an offer), and equals to the "Base Amount" property when no overrun exists.

> ⓘ Note
>
> Do not use this property to set up the generation of charged transactions or charged items.

See Price Plan Name (string) [page 430]

`ratedAmount`

11.1.69 Rated Amount is Prorated (boolean)

Boolean information used to indicate whether the amount is prorated, or not

Rated Amount Is Prorated

Rated Amount Is Prorated

`isProrated`

11.1.70 Rated Amount is Refunded (boolean)

Boolean information used to indicate whether the amount concerns a refund, or not

Rated Amount Is Refunded

`isRefund`

11.1.71 Rated Tax Amount (number)

Deprecated. Use the "Base Amount" property instead.

See: Base Amount (Number) [page 410]

11.1.72 Rated Tax Code (string)

Code of the tax

11.1.73 Rated Tax Status Code (string)

Deprecated. Use the "Tax Status Code" property.

DEPRECATED. See now: Tax Status Code (String) [page 442]

11.1.74 Rated Tax Status Identifier (number)

Deprecated. Use the "Tax Status Identifier" property.

DEPRECATED. See now: Tax Status Identifier (number) [page 442]

11.1.75 Rated Total Amount (Number)

Deprecated. Use the "Rated Amount" property instead.

DEPRECATED. See now: Rated Amount (number) [page 432]

11.1.76 Rating Activation Date

Date and time when the recurring charge has been triggered during a charging operation

Rating Activation Date/Time

Rating Activation Date/Time

`activationDate`

11.1.77 Rating Consumption Date (Date/Time)

Date and time of the service consumption or product use and represented by a chargeable item related to a usage-based charging operation for this usage event

Aka: *Rating - Consumption Date/Time*

In Cockpit: *Consumption Date* (aka *Consumption Date/Time*)

`consumptionDate`

Date/Time

See also:

- Service Identifier (String) [page 436]
- User Service Identifier (String) [page 448]

s

Related Information

Usage Rate

11.1.78 Rating Event Origin (String)

Labeled type ("U", "R", or "O") of the charged event.

Rating Event Origin is the type of the charged event.

Possible values are:

- **`"U"`** (Usage): The event corresponds to the usage of the consumed service, that is configured within usage rates or refills in the pricing logic.
- **`"R"`** (Recurring): The event corresponds to a periodic fee, that is configured within recurring rates or refills in the pricing logic.
- **`"O"`** (One-shot): The event corresponds to a one-off fee, that is configured within one-shot rates or refills in the pricing logic.

`origin`

String

11.1.79 Refill Amount (number)

Refill Amount

`refillAmount`

11.1.80 Refill Currency (string)

11.1.81 Refill Date (Date/Time)

Aka: Refill Date/Time

`refillDate`

Date/Time

11.1.82 Refill ISO Currency (string)

11.1.83 Second Dispatch Code (string)

Dispatch code #2, which corresponds to the name of the property chosen as the second criteria when filtering external account transactions

`dispatchCode2`

More Information

First Dispatch Code (string) [page 427]

Related Information

First Dispatch Code (string) [page 427]

11.1.84 Sender Job Identifier (number)

Identifier of the sender that sent a job of charging operations to SAP CC

`senderJobId`

Sender Job Identifier is the identifier of the sender that sent a job of charging operations to SAP Convergent Charging.

For example, job identifiers are used in case of mass charging operations when SAP Convergent Invoicing sends one or more jobs of charging operations to SAP CC.

11.1.85 Service Identifier (String)

Technical identifier for the chargeable service or product to be monetized and charged by SAP Convergent Charging and that is consumed by end customers of the contracting service provider

Aka: *Service ID* or *Product Identifier*

`serviceIdentifier`

String

Service ID is the technical identifier for the chargeable service (or product) to be monetized and charged by the SAP Convergent Charging (SAP CC) system and that is consumed by end customers of the contracting service provider. The service consumer or the product user is an end customer or the service (or product) subscriber.

It is a technical identifier that is used by SAP CC. This ID must be specified in the incoming chargeable items (input data) representing the usage events (service consumption or product use). It depends on the implementation scenario and business requirements.

It enables pricing specialists to implement usage-based pricing models for the service or product they want to monetize.

See also:

- User Service Identifier (String) [page 448]
- Rating Consumption Date (Date/Time) [page 434]

11.1.86 Service Provider Country Code (string)

Service Provider Country Code

`taxVatSupplierCountryCode`

11.1.87 Service Provider Name (string)

Identifier of the service provider company that monetizes the chargeable service or product by configuring a pricing catalog with pricing elements and charge plans (or offers) to be subscribed to

Service Provider Name

`serviceProvider`

The identifier of the service provider of the subscriber account.

> **Note**
>
> This identifier is the name of the pricing catalog of the contracting service provider.

11.1.88 Session Rating reservation Identifier (string)

Identifier of the charging session reservation

Aka: *Session Rating Reservation Identifier* or *Session Rating Reservation ID*

`sessionId`

11.1.89 Start of Rating Recurring Period (date and time)

Start date and time of the period related to a recurring rate component in an executed price plan, which can be different from the "Start of Rating Reference Recurring Period" used when a recurring charge is prorated.

See: End of Rating Recurring Period (date and time) [page 422]

Aka: Start Date/Time of the Rating Recurring Period Rating Recurring Period - Start Date/Time

`recurringStart`

Associated Property

End of Rating Recurring Period (date and time) [page 422]

11.1.90 Start of Rating Reference Recurring Period (date and time)

Start date and time of the reference period related to a recurring rate

See: End of Rating Reference Recurring Period (date and time) [page 422]

See also: Start of Rating Recurring Period (date and time) [page 437]

`recurringStartRef`

Associated Property

End of Rating Reference Recurring Period (date and time) [page 422]

11.1.91 Subscriber Account Code (String)

Identifier (code or name) of the subscriber account in customer master data

`subscriberAccountCode`

Related Information

In Core Tool
Subscriber Accounts

11.1.92 Subscriber Account Reference (String)

`subscriberAccountReference`

11.1.93 Subscriber Consumes Service (Client) (boolean)

Boolean information used to indicates that the subscriber and the contracting service provider have a client relationship.

`isClient`

This property includes information about the relationship between the subscriber and the contracting service provider for its customer service. The SAP CC system can set the following values:

- `TRUE`: If the business transaction relates to a "client" relationship: The subscriber of a charge plan (or an offer) consumes the customer service related to the charge resulting in the generation of the charged transaction.
- `FALSE`: Otherwise

SAP CC can manage different types of relationship between the contract service provider and its subscribers:

- **Client**: The subscriber of the charge plan consumes the service related to the charge, resulting in the generation of a client business transaction (or charged item).
- **Partner**: The subscriber of the charge plan provides the service related to the charge, resulting in the generation of a partner business transaction (or charged item).

Related Information

Customized Charge: Definition

11.1.94 Subscriber Provides Service (Partner) (boolean)

Boolean information used to indicates that the subscriber and the contracting service provider have a partner relationship.

`isPartner`

This property includes information about the relationship between the identified subscriber and the service provider of the customer service. The SAP CC system can set the following values:

- TRUE: If the business transaction relates to a "partner" relationship: The subscriber of a charge plan (or an offer is a partner of the contracting service provider and provides the service related to the charge resulting in the generation of the charged transaction.
- FALSE: Otherwise

See also: Subscriber Consumes Service (Client) (boolean) [page 438]

11.1.95 Subscription Code (String)

Identifier (code or name) of the subscription in customer master data that was identified by the system during the business operation

`subscriptionCode`

See Also

- Subscription Code (String) [page 439]
- Subscription Commitment Expiration Date [page 439]
- Subscription Suspension Date [page 440]
- Subscription Resumption Date [page 440]

Customer Master Data > Subscription

Related Information

Subscription [page 244]

11.1.96 Subscription Commitment Expiration Date

Commitment expiration date and time of the subscription

Subscription - Commitment Expiration Date/Time

`subscriptionCommitmentExpirationDate`

See Also

- Subscription Code (String) [page 439]
- Subscription Commitment Expiration Date [page 439]
- Subscription Suspension Date [page 440]
- Subscription Resumption Date [page 440]

Customer Master Data > Subscription > Commitment Expiration Date/Time

11.1.97 Subscription Resumption Date

Resumption date and time of the subscription

Subscription - Resumption Date/Time

`subscriptionResumptionDate`

See Also

- Subscription Code (String) [page 439]
- Subscription Commitment Expiration Date [page 439]
- Subscription Suspension Date [page 440]
- Subscription Resumption Date [page 440]

Customer Master Data > Subscription > Resumption Date/Time

11.1.98 Subscription Suspension Date

Suspension date and time of the subscription

Subscription - Suspension Date/Time

`subscriptionSuspensionDate`

See Also

- Subscription Code (String) [page 439]

- Subscription Commitment Expiration Date [page 439]
- Subscription Suspension Date [page 440]
- Subscription Resumption Date [page 440]

Customer Master Data > Subscription > Suspension Date/Time

11.1.99 Tax Code (String)

String representation of the tax code of a charged transaction (or charged item) assigned to a prepaid or external (postpaid) account.

`taxCode`

11.1.100 Tax Amount (number)

`taxAmount`

The amount of tax applied and adjusted to a charged transaction Consider the Currency field to know the currency related to this amount. Consult the SAP CC Application Help about the tax calculation process for more information on tax computation and tax applying.

See also: Base Amount Currency Total Amount (Incl. Tax)

11.1.101 Tax Determination Type (String)

`taxDetType`

11.1.102 Tax Is Included in Total Amount (boolean)

Boolean information used to indicate whether the tax amount is included in the total amount, or not. This property is set to `TRUE` when the tax status is set to "APPLIED" or "FOR_INFO".

`isTaxIncluded`

Tax Is Included in Total Amount is a boolean information used to indicate whether the tax amount is included in the total amount, or not. This property is set to `TRUE` when the tax status is set to "APPLIED" or "FOR_INFO".

The SAP CC system can set the following values:

- `TRUE`: if the tax status is APPLIED or FOR_INFO
- `FALSE`: otherwise

See also the description of the Tax Status Code (String) [page 442] property.

11.1.103 Tax Status Code (String)

The string code of the tax status. The tax status is the final execution status of the tax calculation process.

11.1.104 Tax Status Identifier (number)

`taxStatusId`

11.1.105 Third Dispatch Code (string)

Dispatch code #3 that corresponds to the name of the property chosen as the third criteria when filtering External Account transactions.

`dispatchCode3`

More Information

First Dispatch Code (string) [page 427]

Related Information

First Dispatch Code (string) [page 427]

11.1.106 Threshold Amount (number)

Amount under which an immediate refill is triggered when the balance of the assigned prepaid account goes under this threshold.

Environment: prepaid

Prepaid Account Management > Refilling > Refill Based on Account Events > Triggering Threshold

`thresholdAmount`

Associated Property

Account Event Date (Date/Time) [page 405]

Related Information

Account Event Refill

11.1.107 Total Amount (Incl. Tax) (number)

Total amount of the charged transaction, tax included. This amount is used by SAP CC to debit the balance of the assigned prepaid account or charge the assigned external (postpaid) account.

`totalAmount`

> **Note**
>
> The total amount equals to the base amount when the charge plan item (or charge customized in an offer) is configured to gross.

Related Information

Base Amount (Number) [page 410]
Currency (String) [page 421]
Amount (Excl.Tax) (Number) [page 410]

11.1.108 Triggering Contract Identifier (String)

Identifier of the provider contract that triggered the generation of the charged item by an allowance.

Triggering Contract ID

Allowance Management

`triggeringContractId`

The identifier of the provider contract which triggered the generation of the charged item by an allowance.

- For a one-shot trigger or a recurring trigger, it is the identifier of the provider contract that owns the allowance.
- For an event-based trigger, it is the identifier of the provider contract that sends an event to the allowance.

See Also

Contract Identifier (String) [page 420]

11.1.109 Triggering Contract Item External Identifier (String)

External identifier of the provider contract item that sends an event to the allowance generating the billable items through an Event-Based Trigger component

Triggering Contract Item External ID

`triggeringContractItemExternalId`

Triggering Contract Item External Identifier is the external identifier:

- Of the provider contract item that sends an event to the allowance generating the billable items through an Event-Based Trigger component
- Or of the parent provider contract item of the allowance.

See Also

Contract Item External Identifier

Related Information

Contract Item External Identifier (String) [page 420]

11.1.110 Unrounded Rated Amount (Number)

Amount computed by the charges having up to 6 decimal places before being rounded according to the TRANSACTION_PRECISION parameter. This field is required for the tax framework but may not be used in the charged item mapping.

`ratedUnroundedAmount`

The amount computed by the charges having up to 6 decimal places before being rounded according to the TRANSACTION_PRECISION parameter.

> **Note**
>
> This field is required for the tax framework but may not be used in the charged item mapping.

See also: Precision and Rounding Modes [page 288] and TRANSACTION_PRECISION

Related Information

Precision and Rounding Modes [page 288]

11.1.111 US Transaction Business Class (string)

US Transaction Business Class

`taxUsBusinessClass`

11.1.112 US Transaction Call Duration (number)

`taxUsCallDuration`

11.1.113 US Transaction County Exempt (number)

`taxUsCountyExempt`

11.1.114 US Transaction Customer Type (string)

`taxUsCustomerType`

11.1.115 US Transaction Facilities-Based Flag (string)

US Transaction Facilities-Based Flag

`taxUsFacilitiesBasedFlag`

11.1.116 US Transaction Federal Exempt (number)

`taxUsFederalExempt`

11.1.117 US Transaction Franchise Flag (string)

11.1.118 US Transaction Incorporated Code (string)

US Transaction Incorporated Code

`taxUsIncorporatedCode`

11.1.119 US Transaction Lifeline Flag (number)

11.1.120 US Transaction Line Count (number)

`taxUsLineCount`

11.1.121 US Transaction Local Exempt (number)

`taxUsLocalExempt`

> **Note**
>
> In some versions of SAP CC, the *US Transaction County Exempt* text is incorrectly displayed by the Core Tool user interface.

11.1.122 US Transaction Location Count (number)

`taxUsLocationCount`

11.1.123 US Transaction Origin (string)

11.1.124 US Transaction Origin Flag (string)

11.1.125 US Transaction Regulated Flag (string)

11.1.126 US Transaction Resale Flag (string)

11.1.127 US Transaction Service Address (string)

11.1.128 US Transaction Service Address Flag (string)

11.1.129 US Transaction Service Class (string)

11.1.130 US Transaction Service Type (string)

11.1.131 US Transaction State Exempt (number)

`taxUsStateExempt`

11.1.132 US Transaction Tax Data (string)

11.1.133 US Transaction Taxation Date (Date/Time)

`taxUsTaxationDate`

11.1.134 US Transaction Telecom Type (string)

11.1.135 US Transaction Termination (string)

11.1.136 US Transaction Termination Flag (string)

11.1.137 US Transaction Type (string)

11.1.138 User Service Identifier (String)

Technical identifier of the end customer related to the usage of the consumed service or used product

Aka: *User Service ID* or *USID*

In Cockpit: *User Identifier* (aka *User ID*)

`userServiceIdentifier`

Type: String

Technical ID of the service consumer or product user. This ID is required by SAP CC to process the business operation request (usage-based charging).

See also:

- Service Identifier (String) [page 436]
- Rating Consumption Date (Date/Time) [page 434]

In *SAP Telecommunications* industry, it is the USID that uniquely identifies a user (service consumer) within the consumed service.

Related Information

Access [page 238]
Technical Data and User Technical Identifiers [page 250]

11.1.139 VAT Business Entity (boolean)

Boolean information used to indicate the business category (B2B or B2C) of the subscriber account relating to the charged account (prepaid or external postpaid).

`taxVatBusinessEntity`

Possible values are:

- TRUE: the business category is B2B
- FALSE: the business category is B2C

You can test these values in your pricing logic.

11.1.140 VAT Place of Taxation (string)

B2B or B2C place of taxation

`taxVatTaxationPlace`

11.1.141 VAT Transaction Gross Price Flag (boolean)

Boolean information used to indicate whether prices computed by SAP CC during the execution of a price plan are net or gross.

`taxVatGrossPriceFlag`

Boolean information used to inform whether prices computed during the execution of a price plan are net or gross.

Possible values are:

- TRUE: for gross prices
- FALSE: for net prices

11.1.142 VAT Transaction Rate Code (string)

Code of the VAT rate level that is configured in the charge plan item (or in an offer) when the selected tax system is EU Value-Added Tax (VAT).

`taxVatRateCode`

Availability: only available when the charge plan item is configured to use the "European Union Value-Added Tax (EU VAT)" tax system

Code of the VAT rate level that is configured in the charge plan item (or in an offer) when the selected tax system is EU Value-Added Tax (VAT).

Possible values of rate levels are:

- **`"0"`**: Normal
- "1": Intermediary
- "2": Reduced
- "3": Super reduced
- "4": Zero
- "5": Special
- **`"-1"`**: No tax

11.1.143 VAT Transaction Raw Rate (Number)

Amount of the applied flat tax rate configured in the processed charge plan item (aka customized charge in a charge plan) or in an offer. Note that this property is only available when the customized charge is configured to use the "Flat" tax system.

Availability: only available when the charge plan item is configured to use the "Flat" tax system

Tax Management > Tax System > Flat Tax System > (Applied) Flat Tax Rate

`taxVatRawRate`

11.1.144 VAT Transaction Raw Rate ID (string)

Identifier of the flat tax rate as configured in the charge plan item (aka charge customized in a charge plan) or in an offer. Note that this property is only available when the customized charge is configured to use the "Flat" tax system.

Availability: only available when the charge plan item is configured to use the "Flat" tax system

Tax Management > Tax System > Flat Tax System > (Applied) Flat Tax Rate

String

`taxVatRawRateId`

Important Disclaimers and Legal Information

Hyperlinks

Some links are classified by an icon and/or a mouseover text. These links provide additional information.
About the icons:

- Links with the icon : You are entering a Web site that is not hosted by SAP. By using such links, you agree (unless expressly stated otherwise in your agreements with SAP) to this:
  - The content of the linked-to site is not SAP documentation. You may not infer any product claims against SAP based on this information.
  - SAP does not agree or disagree with the content on the linked-to site, nor does SAP warrant the availability and correctness. SAP shall not be liable for any damages caused by the use of such content unless damages have been caused by SAP's gross negligence or willful misconduct.
- Links with the icon : You are leaving the documentation for that particular SAP product or service and are entering an SAP-hosted Web site. By using such links, you agree that (unless expressly stated otherwise in your agreements with SAP) you may not infer any product claims against SAP based on this information.

Videos Hosted on External Platforms

Some videos may point to third-party video hosting platforms. SAP cannot guarantee the future availability of videos stored on these platforms. Furthermore, any advertisements or other content hosted on these platforms (for example, suggested videos or by navigating to other videos hosted on the same site), are not within the control or responsibility of SAP.

Beta and Other Experimental Features

Experimental features are not part of the officially delivered scope that SAP guarantees for future releases. This means that experimental features may be changed by SAP at any time for any reason without notice. Experimental features are not for productive use. You may not demonstrate, test, examine, evaluate or otherwise use the experimental features in a live operating environment or with data that has not been sufficiently backed up.
The purpose of experimental features is to get feedback early on, allowing customers and partners to influence the future product accordingly. By providing your feedback (e.g. in the SAP Community), you accept that intellectual property rights of the contributions or derivative works shall remain the exclusive property of SAP.

Example Code

Any software coding and/or code snippets are examples. They are not for productive use. The example code is only intended to better explain and visualize the syntax and phrasing rules. SAP does not warrant the correctness and completeness of the example code. SAP shall not be liable for errors or damages caused by the use of example code unless damages have been caused by SAP's gross negligence or willful misconduct.

Bias-Free Language

SAP supports a culture of diversity and inclusion. Whenever possible, we use unbiased language in our documentation to refer to people of all cultures, ethnicities, genders, and abilities.

www.sap.com/contactsap

© 2026 SAP SE or an SAP affiliate company. All rights reserved.

No part of this publication may be reproduced or transmitted in any form or for any purpose without the express permission of SAP SE or an SAP affiliate company. The information contained herein may be changed without prior notice.

Some software products marketed by SAP SE and its distributors contain proprietary software components of other software vendors. National product specifications may vary.

These materials are provided by SAP SE or an SAP affiliate company for informational purposes only, without representation or warranty of any kind, and SAP or its affiliated companies shall not be liable for errors or omissions with respect to the materials. The only warranties for SAP or SAP affiliate company products and services are those that are set forth in the express warranty statements accompanying such products and services, if any. Nothing herein should be construed as constituting an additional warranty.

SAP and other SAP products and services mentioned herein as well as their respective logos are trademarks or registered trademarks of SAP SE (or an SAP affiliate company) in Germany and other countries. All other product and service names mentioned are the trademarks of their respective companies.

Please see https://www.sap.com/about/legal/trademark.html for additional trademark information and notices.