

Indentation : It is one of the most important feature in Python. It indicates the block of code.

```
In [1]: if 10>5:
        print("Greater")
```

Greater

```
In [3]: if 10>5:
        print("Greater")
```

```
Cell In[3], line 2
    print("Greater")
    ^
```

IndentationError: expected an indented block after 'if' statement on line 1


Conditional Statement :- It is used to check the flow of control according to the given condition.

- Single/Simple if
- if-else
- Nested if
- if-elif-else

If Statement	The if statement is used to test a specific condition. If the condition is true, a block of code (if-block) will be executed.
If - else Statement	The if-else statement is similar to if statement except the fact that, it also provides the block of the code for the false case of the condition to be checked. If the condition provided in the if statement is false, then the else statement will be executed.
Nested if Statement	Nested if statements enable us to use if ? else statement inside an outer if statement.

if statement : The if statement is used to test a particular condition and if the condition is true, it executes a block of code known as if-block.

Syntax: if expression:
 statement
 statement

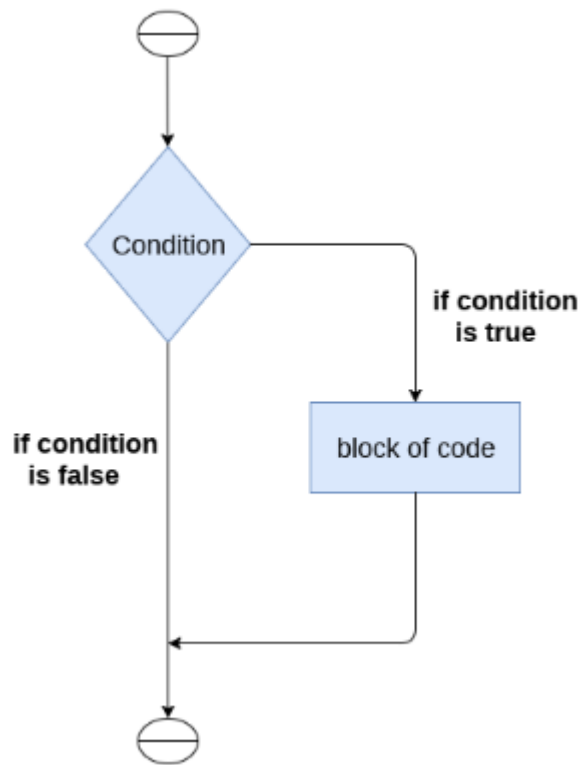

```
In [7]: n = int(input("Enter a number : "))  
  
if n>10:  
    print("Greater")
```

Greater

```
In [9]: n = int(input("Enter a number : "))  
  
if n>10:  
    print("Greater")
```

```
In [ ]:
```

if-else statement : If the condition is true, then the if-block is executed. Otherwise, the else-block is executed.


Syntax:

if condition:

 #block of statements

else:

 #another block of statements (else-block)

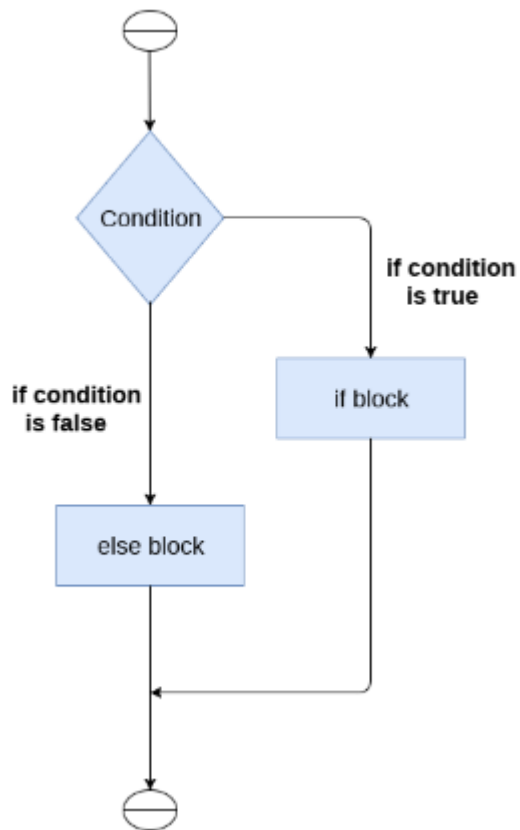

```

In [15]: n = int(input("Enter a number : "))

if n%2==0:
    print("Even")
else:
    print("Odd")

```

Odd

```

In [23]: age = int(input("Enter your age : "))

if age>=18 and age<=100:
    print("Yes you can vote")
else:
    print("Chote bacche ho ghar bhago 🤔🤔")

```

Chote bacche ho ghar bhago 🤔🤔

In []:

Nested if : to check more than one condition at a time.

Syntax:

```


if condition:
    # block of statements

    if condition:
        # block of statements

    else:
        # block of statements
else:

```

block of statements

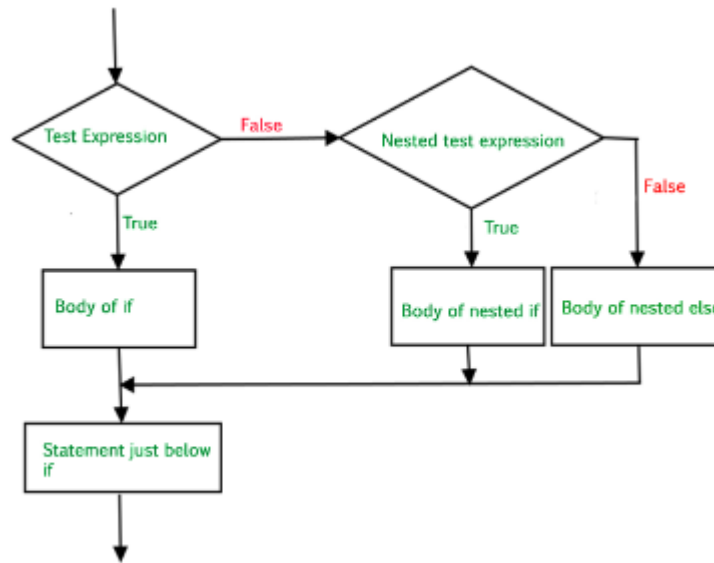

```

In [31]: n = int(input("Enter a num : "))

if n%2==0:
    if n>0:
        print("Even and Positive")
    else:
        print("Even and Negative")
else:
    if n>0:
        print("Odd and Positive")
    else:
        print("Odd and Negative")

```

Odd and Negative

```

In [43]: helmet = input('Beta do u have helmet 🛑 (y/n) : ')

if helmet=='y':
    print("Thik hai u can go but give 5000/- 💰")
else:
    doc = input('Beta doc hai tumhare paas 📄 (y/n) : ')
    if doc=='y':
        print('Chalo goooo but give 10,000/- 🇮🇳💰')
    else:
        print('Beta tu gadi chodke paidal jaaa... 🚲 🏍️')

```

Beta tu gadi chodke paidal jaaa... 🚲 🏍️

In []:

if-elif-else: The elif statement enables us to check multiple conditions and execute the specific block of statements depending upon the true condition among them. We can have any number of elif statements in our program depending upon our need.


Syntax:

```
if expression 1:
    # block of statements
```

```
elif expression 2:
    # block of statements
```

```
elif expression 3:
    # block of statements
```

```
else:
    # block of statements
```

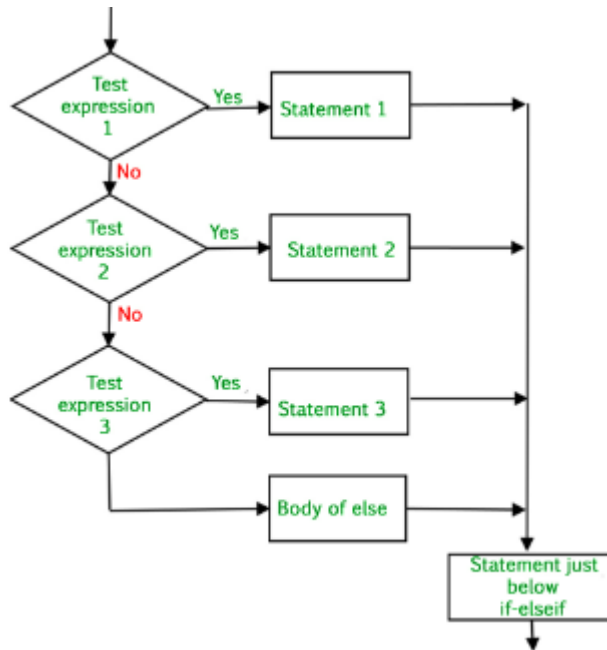

```
In [49]: n = int(input("Enter a number : "))

if n>0:
    print("Positive")
elif n<0:
    print("Negative")
else:
    print("Zero")
```

Zero

In []:

In []:

Q. Wapp to check whether the entered character is vowel or consonant.

In []:

pywhatkit

```
In [54]: #to install pywhatkit
!pip3 install pywhatkit
```

```
Requirement already satisfied: pywhatkit in c:\users\urmil\anaconda3\lib\site-packages (5.4)
Requirement already satisfied: Pillow in c:\users\urmil\anaconda3\lib\site-packages (from pywhatkit) (10.3.0)
Requirement already satisfied: pyautogui in c:\users\urmil\anaconda3\lib\site-packages (from pywhatkit) (0.9.54)
Requirement already satisfied: requests in c:\users\urmil\anaconda3\lib\site-packages (from pywhatkit) (2.32.2)
Requirement already satisfied: wikipedia in c:\users\urmil\anaconda3\lib\site-packages (from pywhatkit) (1.4.0)
Requirement already satisfied: Flask in c:\users\urmil\anaconda3\lib\site-packages (from pywhatkit) (3.0.3)
Requirement already satisfied: Werkzeug>=3.0.0 in c:\users\urmil\anaconda3\lib\site-packages (from Flask->pywhatkit) (3.0.3)
Requirement already satisfied: Jinja2>=3.1.2 in c:\users\urmil\anaconda3\lib\site-packages (from Flask->pywhatkit) (3.1.4)
Requirement already satisfied: itsdangerous>=2.1.2 in c:\users\urmil\anaconda3\lib\site-packages (from Flask->pywhatkit) (2.2.0)
Requirement already satisfied: click>=8.1.3 in c:\users\urmil\anaconda3\lib\site-packages (from Flask->pywhatkit) (8.1.7)
Requirement already satisfied: blinker>=1.6.2 in c:\users\urmil\anaconda3\lib\site-packages (from Flask->pywhatkit) (1.6.2)
Requirement already satisfied: pymsgbox in c:\users\urmil\anaconda3\lib\site-packages (from pyautogui->pywhatkit) (1.0.9)
Requirement already satisfied: pytweneing>=1.0.4 in c:\users\urmil\anaconda3\lib\site-packages (from pyautogui->pywhatkit) (1.2.0)
Requirement already satisfied: pycreeze>=0.1.21 in c:\users\urmil\anaconda3\lib\site-packages (from pyautogui->pywhatkit) (1.0.1)
Requirement already satisfied: pygetwindow>=0.0.5 in c:\users\urmil\anaconda3\lib\site-packages (from pyautogui->pywhatkit) (0.0.9)
Requirement already satisfied: mouseinfo in c:\users\urmil\anaconda3\lib\site-packages (from pyautogui->pywhatkit) (0.1.3)
Requirement already satisfied: charset-normalizer<4,>=2 in c:\users\urmil\anaconda3\lib\site-packages (from requests->pywhatkit) (2.0.4)
Requirement already satisfied: idna<4,>=2.5 in c:\users\urmil\anaconda3\lib\site-packages (from requests->pywhatkit) (3.7)
Requirement already satisfied: urllib3<3,>=1.21.1 in c:\users\urmil\anaconda3\lib\site-packages (from requests->pywhatkit) (2.2.2)
Requirement already satisfied: certifi>=2017.4.17 in c:\users\urmil\anaconda3\lib\site-packages (from requests->pywhatkit) (2025.4.26)
Requirement already satisfied: beautifulsoup4 in c:\users\urmil\anaconda3\lib\site-packages (from wikipedia->pywhatkit) (4.12.3)
Requirement already satisfied: colorama in c:\users\urmil\anaconda3\lib\site-packages (from click>=8.1.3->Flask->pywhatkit) (0.4.6)
Requirement already satisfied: MarkupSafe>=2.0 in c:\users\urmil\anaconda3\lib\site-packages (from Jinja2>=3.1.2->Flask->pywhatkit) (2.1.3)
Requirement already satisfied: pyrect in c:\users\urmil\anaconda3\lib\site-packages (from pygetwindow>=0.0.5->pyautogui->pywhatkit) (0.2.0)
Requirement already satisfied: soupsieve>1.2 in c:\users\urmil\anaconda3\lib\site-packages (from beautifulsoup4->wikipedia->pywhatkit) (2.5)
Requirement already satisfied: pyperclip in c:\users\urmil\anaconda3\lib\site-packages (from mouseinfo->pyautogui->pywhatkit) (1.9.0)
```

```
In [56]: #to import pywhatkit
import pywhatkit as kit
```

```
In [60]: #to search on YouTube
kit.playonyt("Tom and Jerry")
```

```
Out[60]: 'https://www.youtube.com/watch?v=t0Q2otsqC4I\\u0026pp=ygUNVG9tIGFuZCBKZXJyeQ%3D%3D'
```

```
In [62]: #to search on browser
kit.search("Manali")
```

```
In [66]: #to get short information about anything
kit.info("What is Anaconda")
```

Anaconda is an open source data science and artificial intelligence distribution platform for Python and R programming languages. Developed by Anaconda, Inc., an American company founded in 2012, the platform is used to develop and manage data science and AI projects. In 2024, Anaconda Inc.

```
In [ ]:
```

Loop: Something that repeats continuously.

While Loop

Python while loop is used to run a block code until a certain condition is met.

The syntax of while loop is:

```
    initialization
while condition:
    #body of while
    increment/decrement
```

1. A while loop evaluates the condition
2. If the condition evaluates to True, the code inside the while loop is executed.
3. condition is evaluated again.
4. This process continues until the condition is False.
5. When condition evaluates to False, the loop stops.