

<https://public.tableau.com/app/learn/sample-data>

ADF+Databricks is used as tools to pull data from source.

Source: Github, Datalake (files) pulled by[Db using Autoloader]

Raw Zone: same file

Transformation tool: DB pyspark, Workflows, Activity[Dynamic parameterized notebook (foreach, IFELSE condition)] vs static(opposite)

Delta live table, can push in Synapse/DW in DB.

Reporting: connect to PowerBI

Project overview:


From Github below data will be in lake pulled from DB

Data: show_id, type, director,cast, country, date_added, release_year,rating,duration, listed_in, description

Incremental Data is handled.

Lookup table:

Director, show_id; Listed_in,show_id; Country_show_id; Cast, show_id

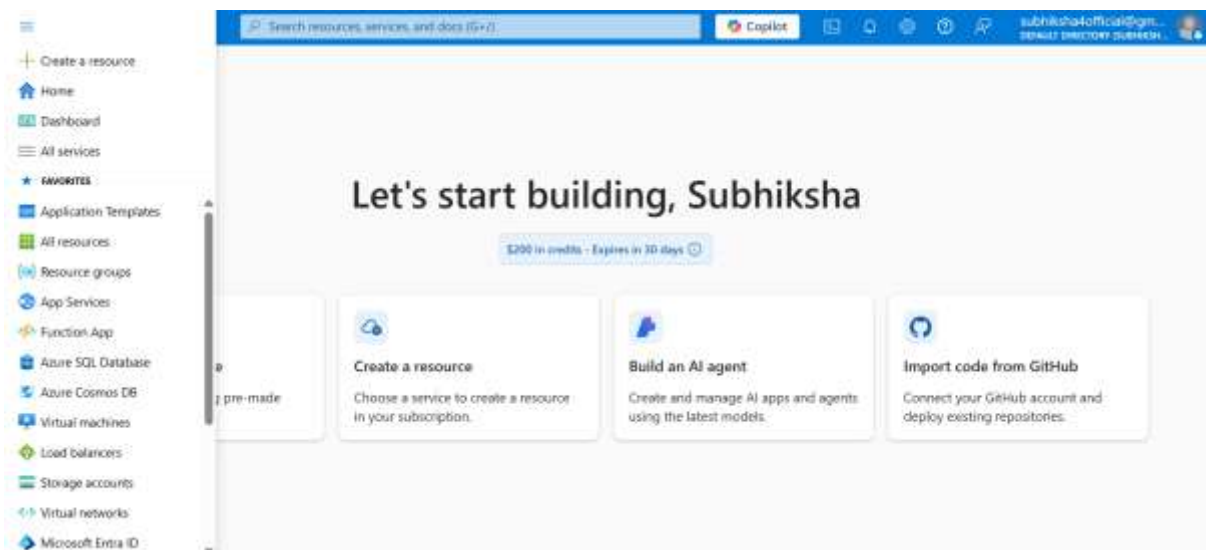

Resource group: Folder of [ADF, AzureDatabrick, synapse analytics, Deltalake]

Hierarchy:


{Tenant(organization): {Subscription: {Resource group:[Resources]}}

Microsoft Entra ID: Admin Area to monitor user (services, managed entities, external user)


Monitor: monitors resources, Alerts

Cost Management + Billing : To provide alert if \$cost target is reached.


In searchbar search for Resource group

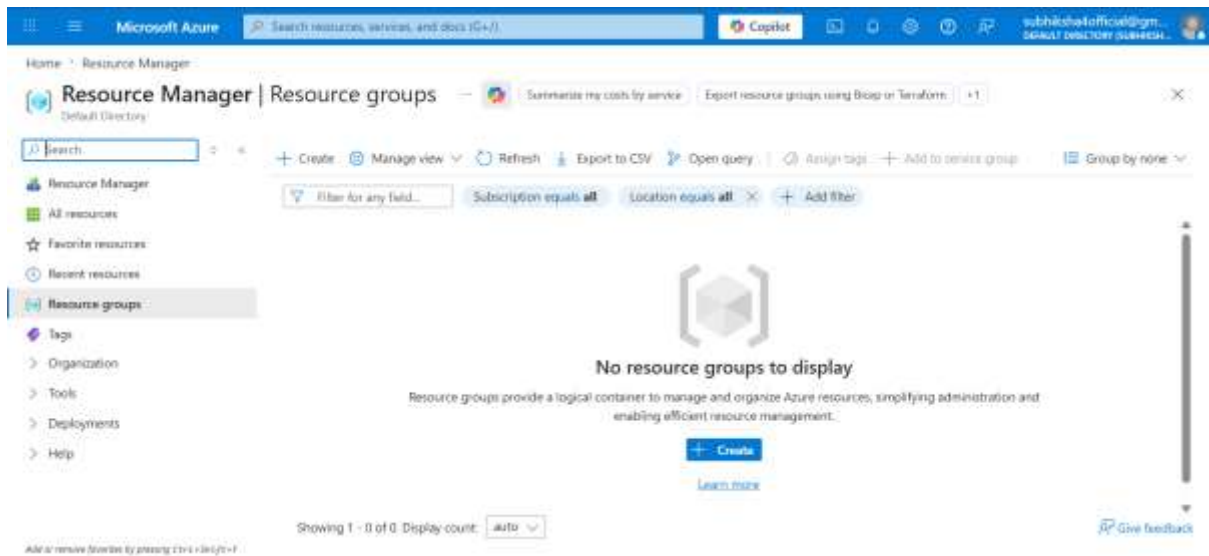

Click +Create

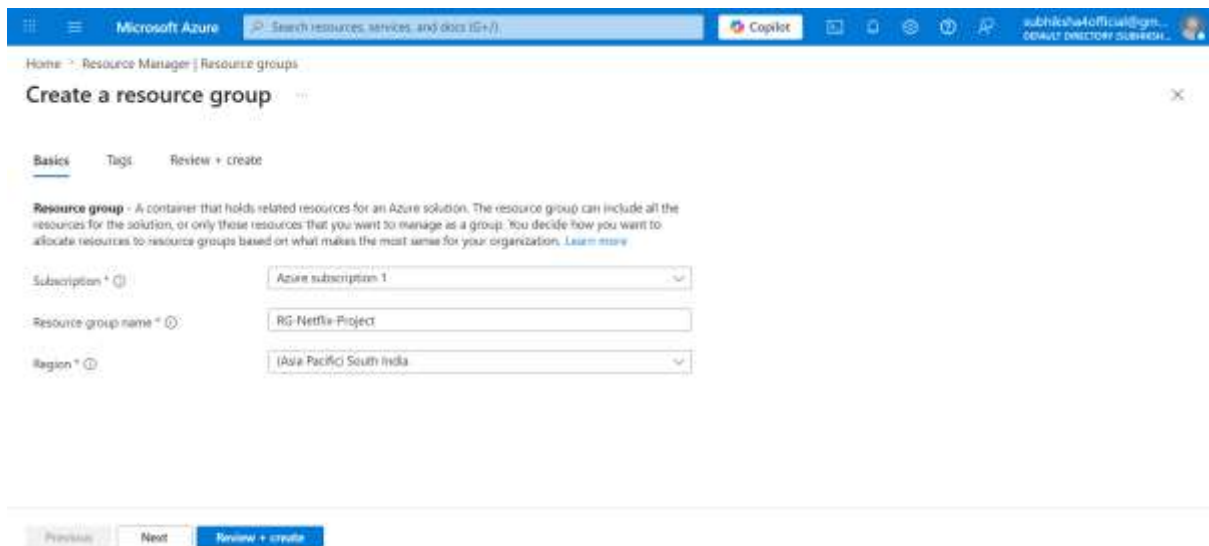

Review+create

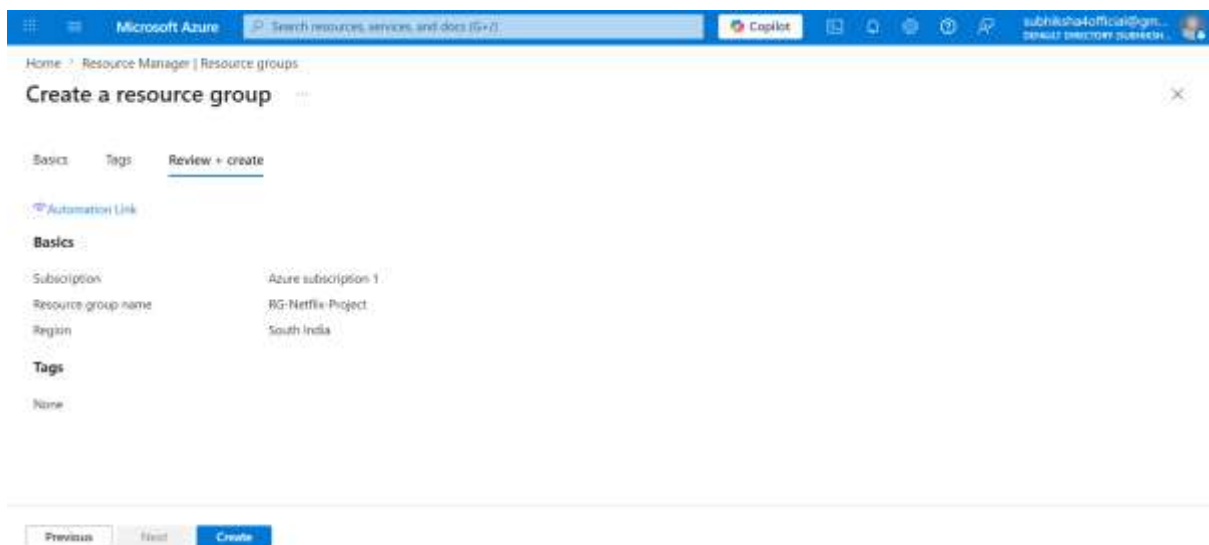

Microsoft Azure | Search resources, services, and docs (G+)

Home > Resource Manager

Resource Manager | Resource groups

Default Directory

Search

+ Create Manage view Refresh Export to CSV Open query Assign tags

Filter for any field... Subscription equals all Location equals all Add filter

No resource groups to display

Resource groups provide a logical container to manage and organize Azure resources, simplifying administration and enabling efficient resource management.

+ Create

Search more

Showing 1 - 0 of 0. Display count: auto

Add or remove favorites by pressing Ctrl+Shift+F

Resource group created

Creating resource group 'RG-Netflix-Project' in subscription 'Azure subscription 1' succeeded.

Go to resource gr... Pin to dashbo...

Resource group created

Creating resource group 'RG-Netflix-Project' in subscription 'Azure subscription 1' succeeded.

Go to resource gr... Pin to dashbo...

Give feedback

Resource group is created, Resources need to be created

Microsoft Azure | Search resources, services, and docs (G+)

Home > Resource Manager

Resource Manager | Resource groups

Default Directory

Search

+ Create Manage view Refresh Export to CSV Open query Assign tags Add to service group Group by none

Create new resource group

Subscription equals all Location equals all Add filter

No resource groups to display

Resource groups provide a logical container to manage and organize Azure resources, simplifying administration and enabling efficient resource management.

+ Create

Search more

Showing 1 - 0 of 0. Display count: auto

<https://portal.azure.com/#blade/HubsExtension/ResourcesGroupCreateNewFlow>

Give feedback

Microsoft Azure | Search resources, services, and docs (G+)

Home > Resource Manager

Resource Manager | Resource groups

Default Directory

Search

+ Create Manage view Refresh Export to CSV Open query Assign tags Add to service group Group by none

Filter for any field... Subscription equals all Location equals all Add filter



	Name	Subscription	Location
☐	RG-Netflix-Project	Azure subscription 1	South India

Showing 1 - 1 of 1. Display count: auto

Add or remove favorites by pressing Ctrl+Shift+F

Give feedback

Click RG-Netflix-Project

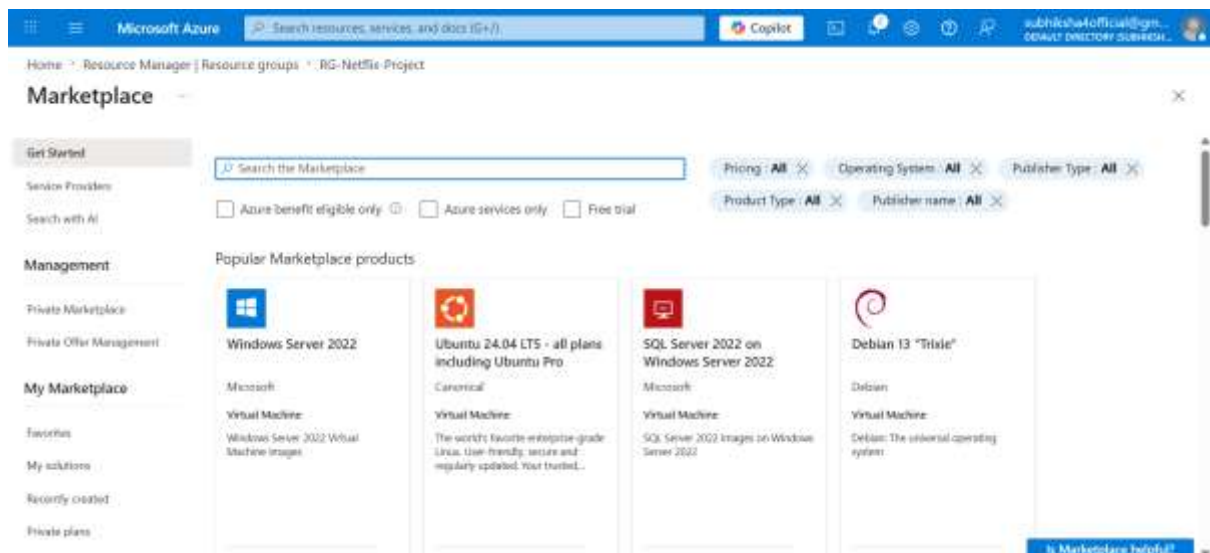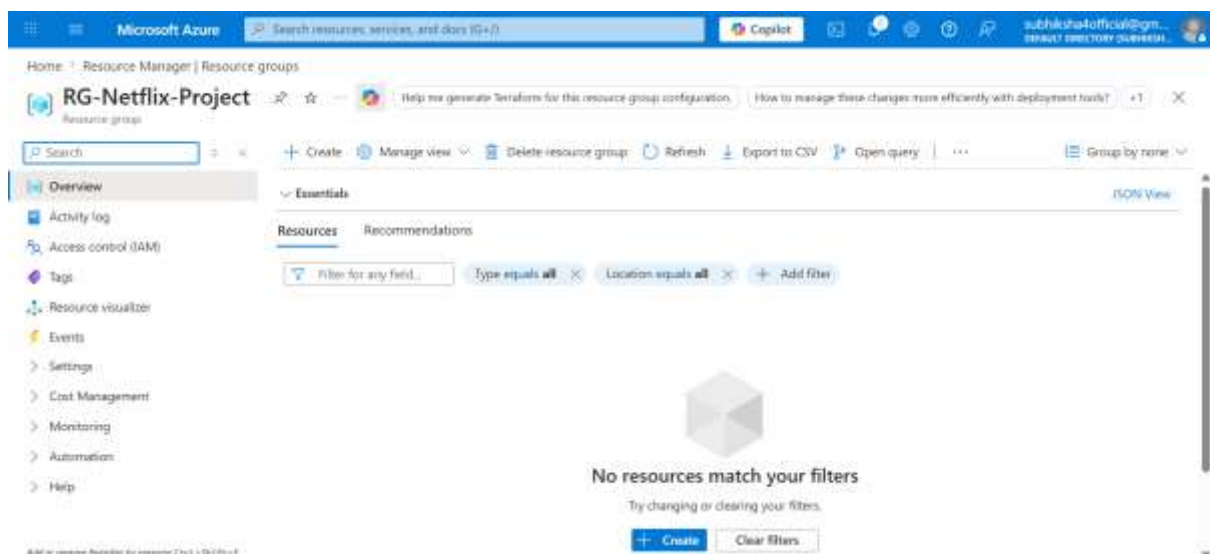

+Create -> Marketplace is shown (a centralized hub where you can find, select, and integrate different services, resources, or templates.) Search for Storage account

1. Delta lake creation

Home

Marketplace

Get Started

Service Providers

Search with AI

Management

Private Marketplace

Private Offer Management

My Marketplace

Favorites

My solutions

Recently created

Create plans

storage account

Pricing: All X Operating System: All X Publisher Type: All X Product Type: All X Publisher name: All X

☐ Azure benefit eligible only ☐ Azure services only ☐ Free trial

New! Get AI-generated suggestions for 'storage account' [View suggestions](#)

Showing 1 to 20 of 200 results for 'storage account'. [Clear search](#)

Tile view

Storage account Microsoft Azure Service Use files, blobs, queues, files, and Data Lake Gen 2 for reliable, economical cloud storage.	Storage Account Using ARM DEGISTORM LTD. Azure Application storage-account-arm	Storage Account Using ARM VERTICLOUD LTD. Azure Application storage-account-arm	Storage task - Azure Storage Actions Microsoft Azure Service Perform common operations on millions of objects based on logical conditions using object properties.
---	---	--	---

[Is Marketplace helpful?](#)

Home > Marketplace

Storage account

Microsoft

Storage account [Add to favorites](#)

Microsoft | Azure Service

★ 4.2 (1885 ratings)

[Azure benefit eligible](#)

Subscription: [Azure subscription 1](#) Plan: [Storage account](#) [Create](#)

[Overview](#) [Plans](#) [Usage Information + Support](#) [Ratings + Reviews](#)

Microsoft Azure provides scalable, durable cloud storage, backup, and recovery solutions for any data, big or small. It works with the infrastructure you already have to cost-effectively enhance your existing applications and business continuity strategy, and provide the storage required by your cloud applications, including unstructured text or binary data such as video, audio, and images.

[Give feedback](#)

Click create

Storage account name: netflixprojectdlsuhik

Home > Marketplace > Storage account

Create a storage account

Subscription: [Azure subscription 1](#)

Resource group: [RG-Netflix-Project](#) [Create new](#)

Instance details

Storage account name: [netflixprojectdlsuhik](#)

Region: [\(Asia Pacific\) South India](#) [Deploy to an Azure extended zone](#)

Preferred storage type: [Choose preferred storage type](#)

Performance: [Standard: Recommended for most scenarios \(general-purpose v2 account\)](#)

[Previous](#) [Next](#) [Review + create](#)

[Give feedback](#)

Redundancy – LRS(Locally-redundant storage) cheapest one. Creates replica of data on the same data center

; grs is expensive because creates replica of data in different geography in different region of different zone

Microsoft Azure

Home > Marketplace > Storage account

Create a storage account

Instance details

Storage account name *

Region *
Deploy to an Azure Extended Zone

Preferred storage type

Performance *

Redundancy *

Locally-redundant storage (LRS):
Lowest-cost option with basic protection against server rack and drive failures.
Recommended for non-critical scenarios.

Geo-redundant storage (GRS):
Intermediate option with failover capabilities in a secondary region.
Recommended for backup scenarios.

Locally-redundant storage (LRS):
Lowest-cost option with basic protection against server rack and drive failures.
Recommended for non-critical scenarios.

Standard

Premium

Block Blob

Page Blob

File Share

Previous Next **Review + create** [Give feedback](#)

Clicked LRS

Microsoft Azure

Home > Marketplace > Storage account

Create a storage account

the Azure portal [Link](#)

Minimum TLS version

Permitted scope for copy operations

Hierarchical Namespace

Hierarchical namespace, complemented by Data Lake Storage Gen2 endpoint, enables file and directory semantics, accelerates big data analytics workloads, and enables access control lists (ACLs). [Learn more >](#)

Enable hierarchical namespace ☒

Access protocols

Blob and Data Lake Gen2 endpoints are provisioned by default. [Learn more >](#)

Enable SFTP ☐

Enable network file system v3 ☐

Previous Next **Review + create** [Give feedback](#)

Enabled Hierarchical namespace. (This enables as Data lake) else becomes as blob storage (there will be a difficulty in creating folders)

“What is Blob Storage? In Azure, standard blob storage is essentially a flat object storage system. When you create an Azure Storage Account without enabling the "hierarchical namespace" feature, you get basic blob storage. While it holds data just fine, you will face difficulties managing and organizing folders efficiently because it lacks a true, scalable directory structure

Why Data Lake? When you are building a modern big data project, a Data Lake is vastly superior for several critical reasons:

- **True Folder Hierarchies:** By simply enabling the "hierarchical namespace" setting during deployment, Azure upgrades standard blob storage into a true Data Lake (ADLS Gen2). This

allows you to **seamlessly create and use hierarchical folders**, which is absolutely essential for organizing our data into structured layers like Raw, Bronze, Silver, and Gold.

- **Ultimate Flexibility:** A Data Lake is way more flexible than a traditional Data Warehouse. It allows you to **store not only structured data, but also semi-structured and completely unstructured data**. You can dump database tables, JSON files, logs, images, and videos all into the exact same storage.
- **Advanced Analytics & Machine Learning:** Because of its ability to store mixed data types in massive volumes, a Data Lake is the perfect foundation if our business wants to unlock **Advanced Analytics or Machine Learning**, rather than just sticking to standard reporting.
- **Seamless Integration:** A Data Lake acts as the dedicated, centralized storage location that integrates perfectly with powerful distributed compute engines like Azure Databrick”

The screenshot shows the 'Create a storage account' wizard in the Microsoft Azure portal. The 'Basics' tab is selected. The form includes the following fields and options:

- the Azure portal**: (Link icon)
- Minimum TLS version**: Version 1.2 (dropdown menu)
- Permitted scope for copy operations**: From any storage account (dropdown menu)
- Hierarchical Namespace**:
 - Description: Hierarchical namespace, complemented by Data Lake Storage Gen2 endpoint, enables file and directory semantics, accelerates big data analytics workloads, and enables access control lists (ACLs). [Learn more](#)
 - Enable hierarchical namespace**: ☒
- Access protocols**:
 - Description: Blob and Data Lake Gen2 endpoints are provisioned by default. [Learn more](#)
 - Enable SFTP**: ☐
 - Enable network file system v3**: ☐

At the bottom, there are buttons for 'Previous', 'Next', and 'Review + create'. A 'Give feedback' link is also present.



Review+create

The screenshot shows the 'Review + create' step of the 'Create a storage account' wizard. The 'Review + create' tab is selected. The form displays the following configuration details:


- Basics**:
 - Subscription**: Azure subscription 1
 - Resource group**: RG-Netfix-Project
 - Location**: South India
 - Storage account name**: netfixprojectsubhik
 - Preferred storage type**: Standard
 - Performance**: Standard
 - Replication**: Locally-redundant storage (LRS)
- Advanced**: (Section header, no details visible)

At the bottom, there are buttons for 'Previous', 'Next', and 'Create'. A 'Give feedback' link is also present.


create

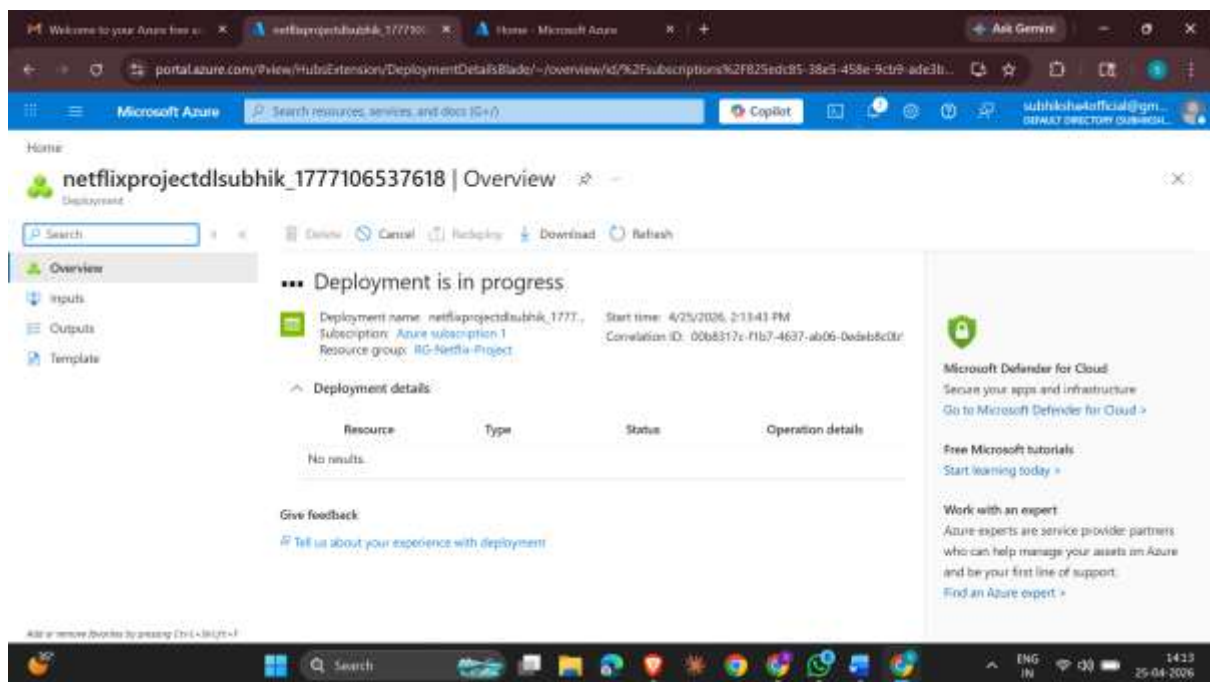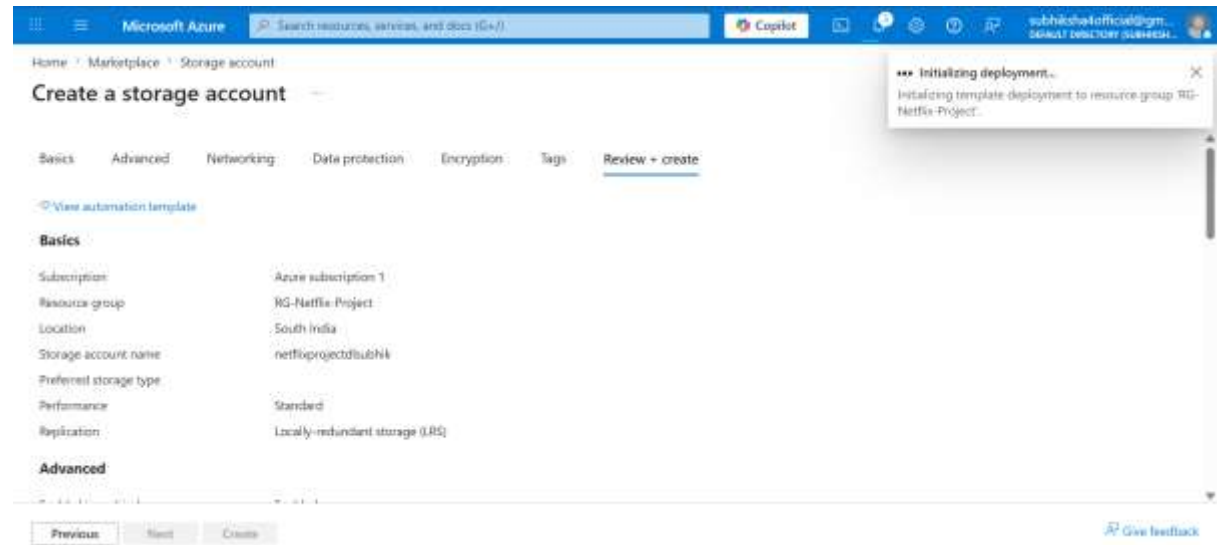


Deploying in datalake

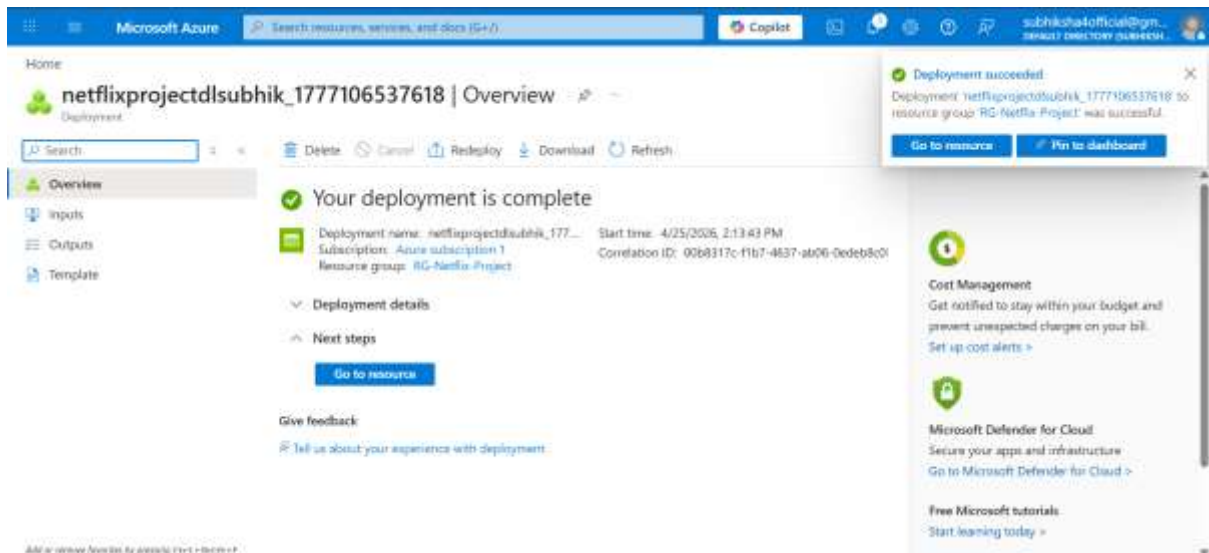

Click go to resource

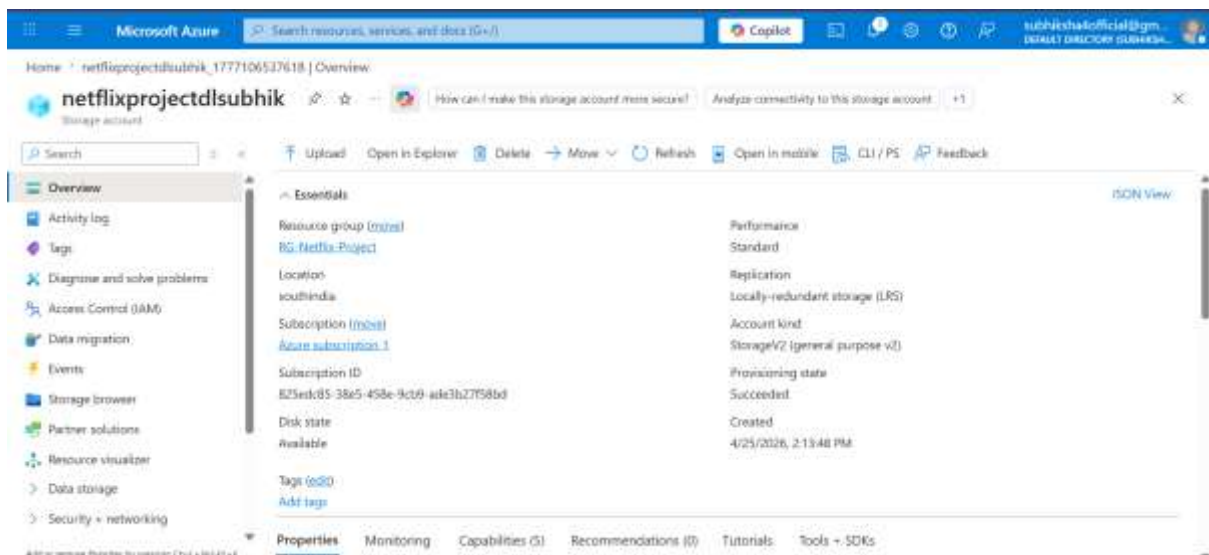

This page represents delta lake

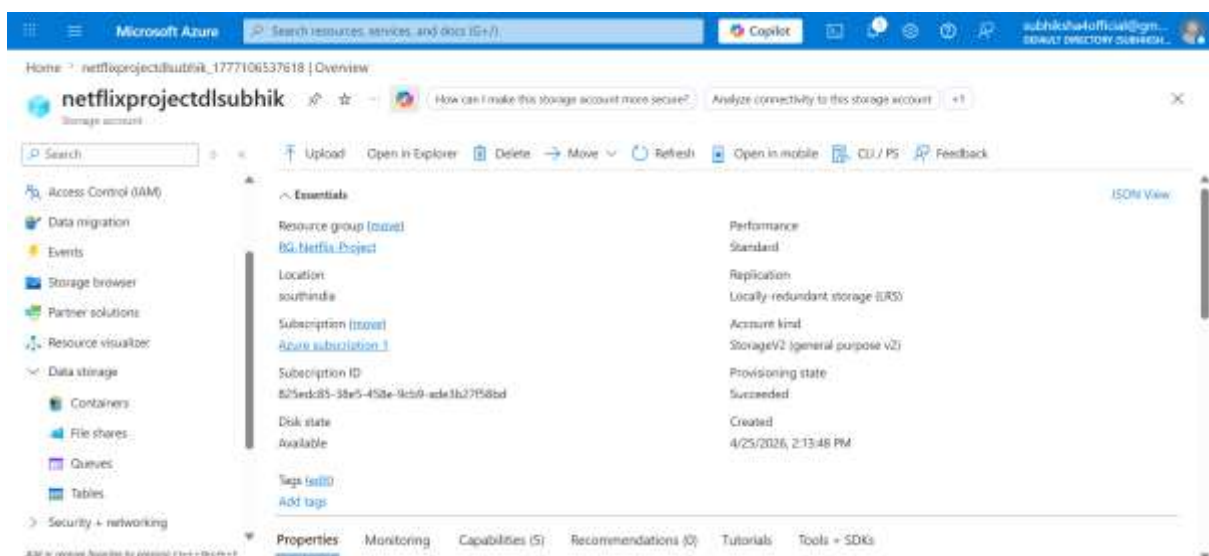

Data Storage: (Containers is used)

4 type of **Data Storage** is available: containers(data lake), file share(acts as sharepoint), queues(streaming data holds msg in queues), tables (semi structure data key value pair (JSON))

'''


In Azure, a **container** is a top-level storage compartment within an Azure Storage Account that acts as a master directory to hold our data files and folders.

It is fundamentally related to a **Data Lake** in the following ways:

- **Logical Separation of Layers:** When a storage account is upgraded to an Azure Data Lake Storage Gen2 (by enabling a hierarchical namespace), containers are used to physically separate the different stages of the data lifecycle. In a modern Medallion Architecture, you create dedicated containers to act as the different zones of our data lake, specifically the raw, bronze, silver, and gold containers.
- **Access Control and Security Boundary:** Containers serve as the top-level boundary for granting permissions to other services. For example, when you connect Azure Databricks to our Data Lake using Unity Catalog, you create secure "external locations" that map directly to the container level. Providing access at the container level allows the compute engine to hierarchically pull and read any data residing within that specific container.


In short, if the Data Lake is our entire storage warehouse, containers are the primary, isolated sections inside it used to strictly organize and secure our data as it moves from raw files to business-ready reports.

'''

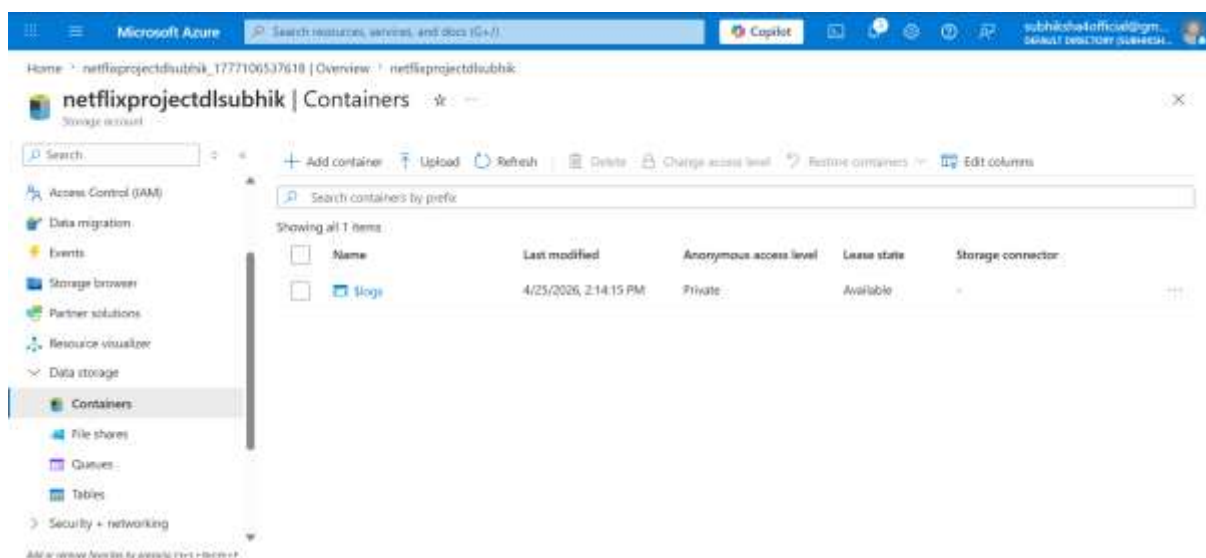


Create 4 containers Bronze, Silver, Gold, Data pulled incrementally for Databricks

+Add container 'raw'

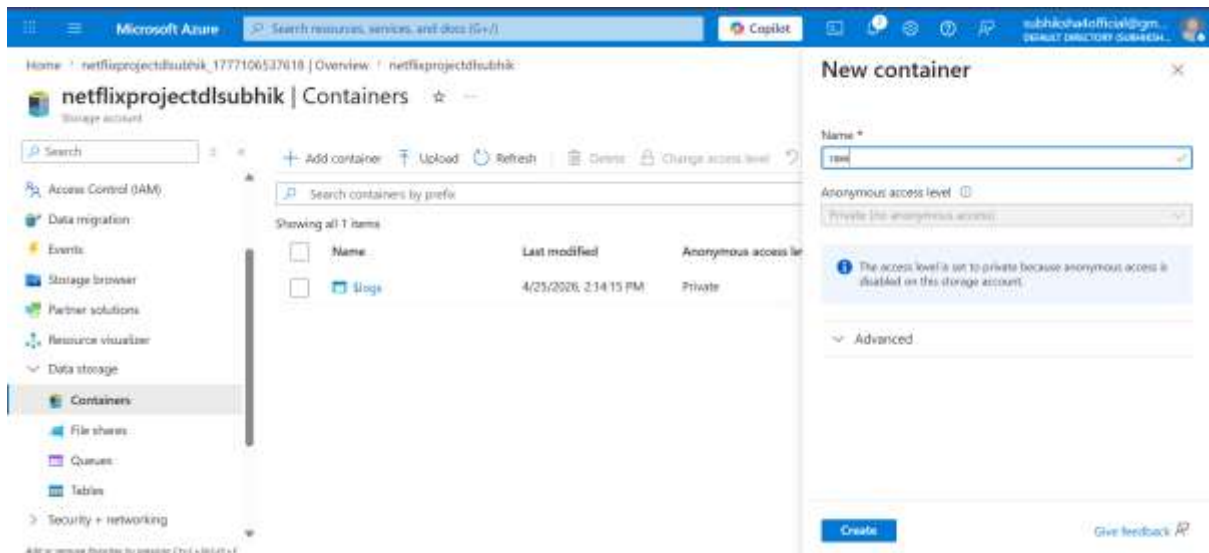


Raw, bronze, silver, gold created

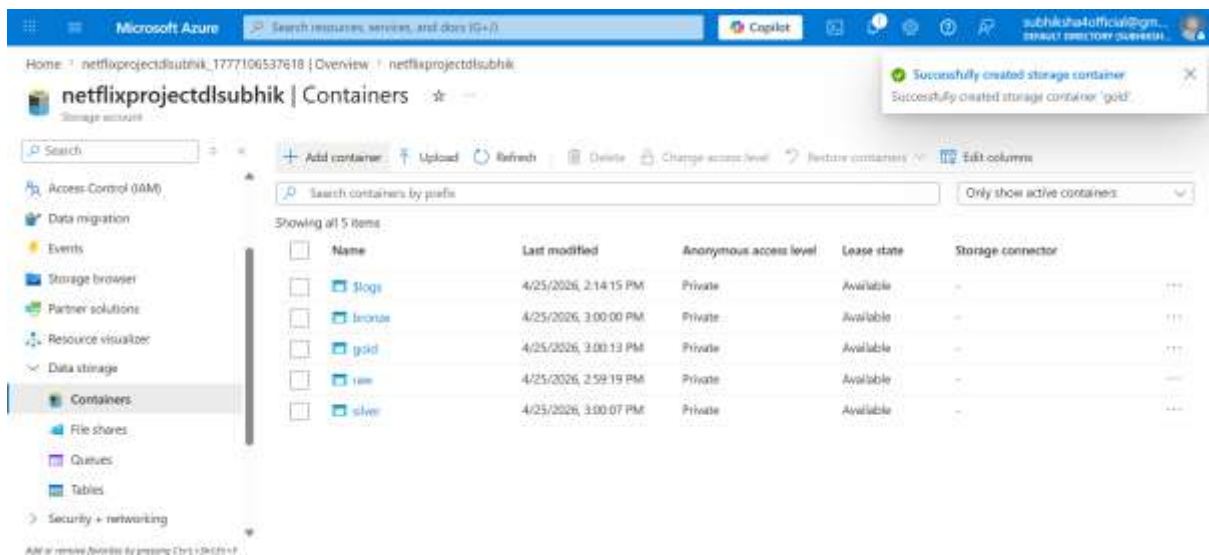

Delta lake created.



Redirect to Home ->

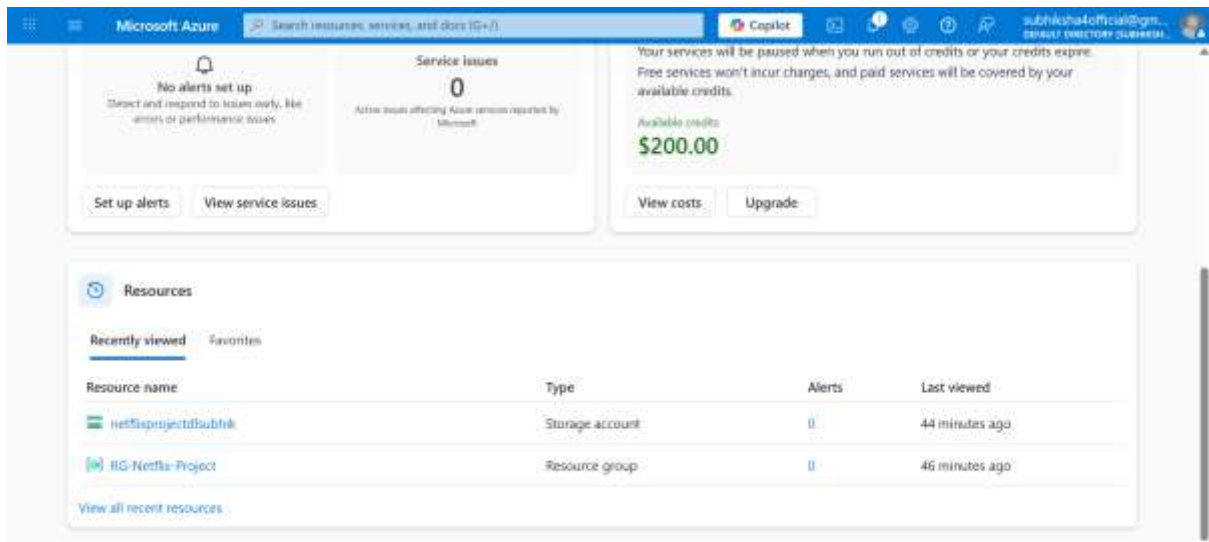

Click Resourcegroup to create ADF

2. ADF CREATION

Search for Data factory

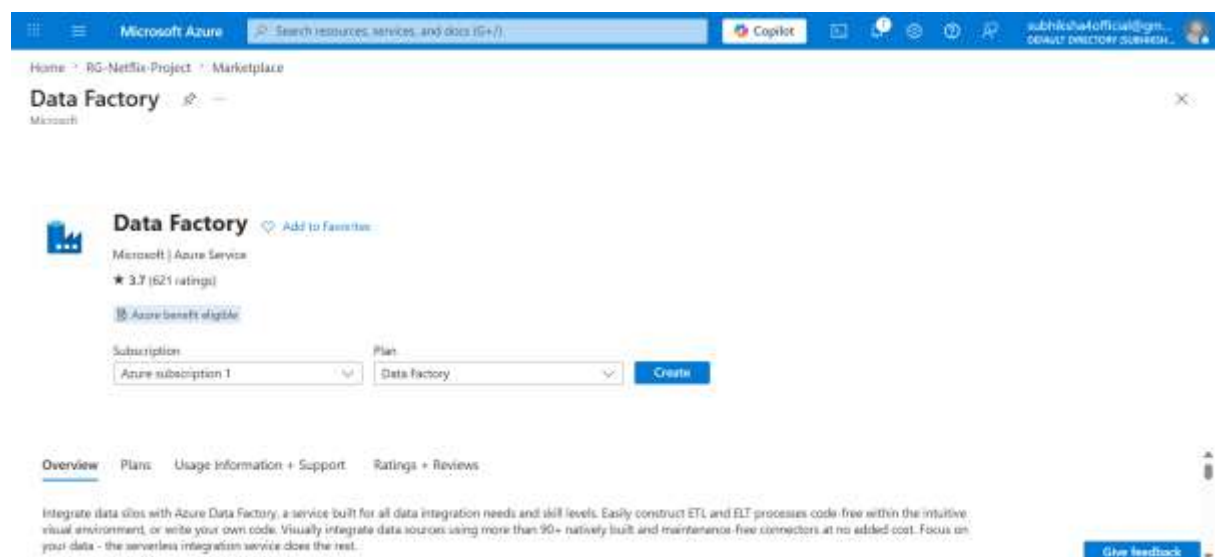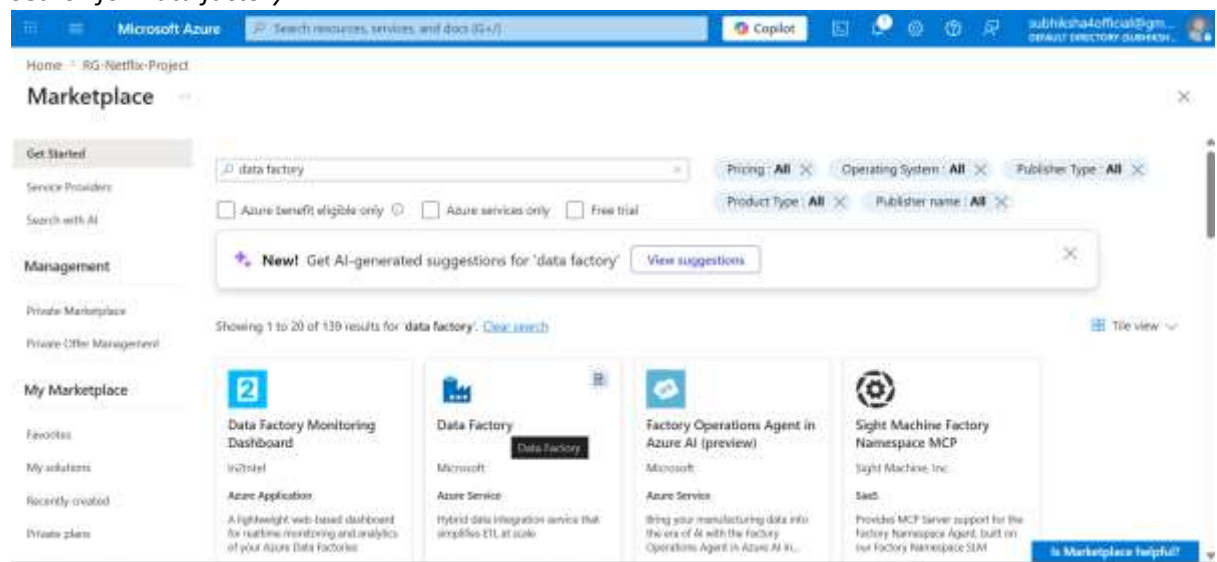

Microsoft Azure

Search resources, services, and docs (G+/I)

Copilot

subhiksha4official@gm...
DEFAULT DIRECTORY SUBHAKSH...

Home > RG-Netflix-Project > Marketplace > Data Factory

Create Data Factory

BasicsGit configurationNetworkingAdvancedTagsReview + create

Project details
Select the subscription to manage deployed resources and costs. Use resource group like folders to organize and manage all your resources.

Subscription * ⓘ

Azure subscription 1

Resource group * ⓘ

RG-Netflix-Project

Create new

Instance details

Name * ⓘ

adf-netflix-subhiksha

Region * ⓘ

(Asia Pacific) Central India

Version * ⓘ

V2

Previous

Next

Review + create

Give feedback

Microsoft Azure

Search resources, services, and docs (G+/I)

Copilot

subhiksha4official@gm...
DEFAULT DIRECTORY SUBHAKSH...

Home > RG-Netflix-Project > Marketplace > Data Factory

Create Data Factory

BasicsGit configurationNetworkingAdvancedTagsReview + create

 [View automation template](#)

Basics

Subscription

Azure subscription 1

Resource group

RG-Netflix-Project

Name

adf-netflix-subhiksha

Region

Central India

Version

V2

Networking

Connect via

Public endpoint

Previous

Next

Create

Give feedback

Microsoft Azure | Search resources, services, and docs (G+/I)

Home

Microsoft.DataFactory-20260425150603 | Overview

Deployment

Search

Delete Cancel Redeploy Download Refresh

Overview

Inputs

Outputs

Template

Your deployment is complete

Deployment name: Microsoft.DataFactory-20260425150603 Start time: 4/25/2026, 3:12:46 PM
Subscription: Azure subscription 1 Correlation ID: 509a16da-3ac0-4b68-9a3e-a81...

Deployment details

Next steps

[Go to resource](#)

Give feedback

[Tell us about your experience with deployment](#)

Cost management

Get notified to stay within your budget and prevent unexpected charges on your bill.
[Set up cost alerts >](#)

Microsoft Defender for Cloud

Secure your apps and infrastructure.
[Go to Microsoft Defender for Cloud >](#)

Free Microsoft tutorials

[Start learning today >](#)

Work with an expert

Add a resource location by pressing Ctrl+I or Ctrl+P

Microsoft Azure | Search resources, services, and docs (G+/I)

Home

RG-Netflix-Project

Resource group

Export resource groups using Bicep or Terraform

How to manage changes with deployment tool? +1

Search

Create Manage view Delete resource group Refresh Export to CSV Open query

Group by none

Overview

Activity log

Access control (IAM)

Tags

Resource visualizer

Events

Settings

Cost Management

Monitoring

Automation

Help

Essentials

Resources Recommendations

Filter for any field... Type equals all Location equals all Add filter

Name	Type	Location
adf-netflix-subhiksha	Data factory (V2)	Central India
netflixprojectdbsubhik	Storage account	South India

Add a resource location by pressing Ctrl+I or Ctrl+P

Both resource created

Going back to containers (inside storage account)

Microsoft Azure | Search resources, services, and docs (G+/I)

Home

Microsoft.DataFactory-20260425150603 | Overview

RG-Netflix-Project

netflixprojectdbsubhik

Storage account

Containers

Search

Add container Upload Refresh Delete Change access level Restore containers Edit columns

Search containers by prefix

Only show active containers


Showing all 5 items

Name	Last modified	Anonymous access level	Lease state	Storage connector
blogs	4/25/2026, 2:14:15 PM	Private	Available	---
logos	4/25/2026, 3:00:00 PM	Private	Available	---
gold	4/25/2026, 3:00:13 PM	Private	Available	---
raw	4/25/2026, 2:59:19 PM	Private	Available	---
silver	4/25/2026, 3:00:07 PM	Private	Available	---


Add a resource location by pressing Ctrl+I or Ctrl+P

Bronze : Ingest Data from Github using API (Tool used is ADF)


Redirect to ADF scroll to see Launch studio

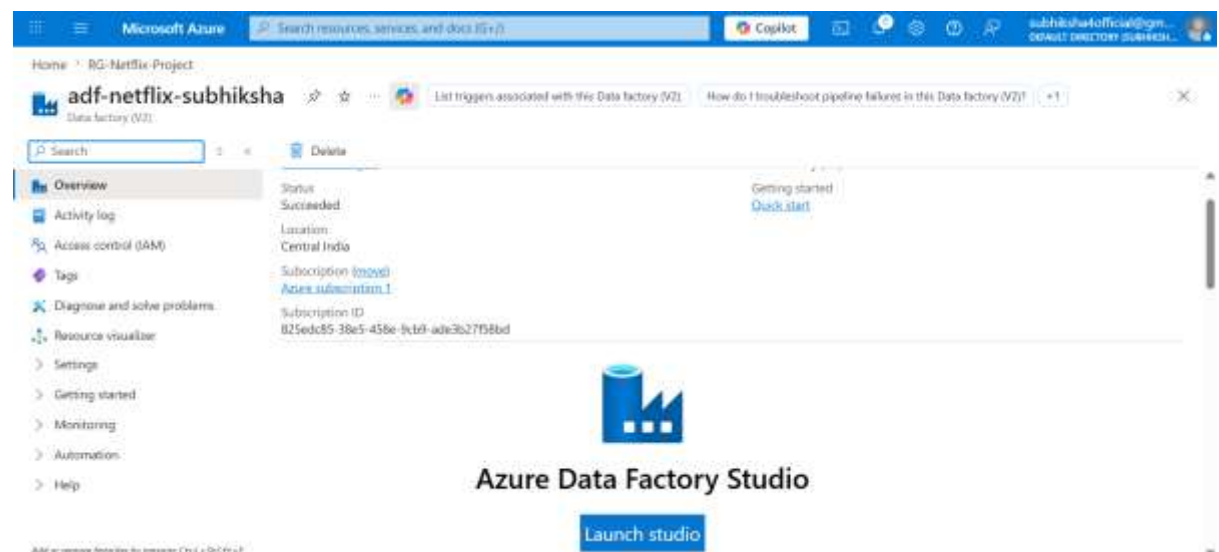

Opens in new tab

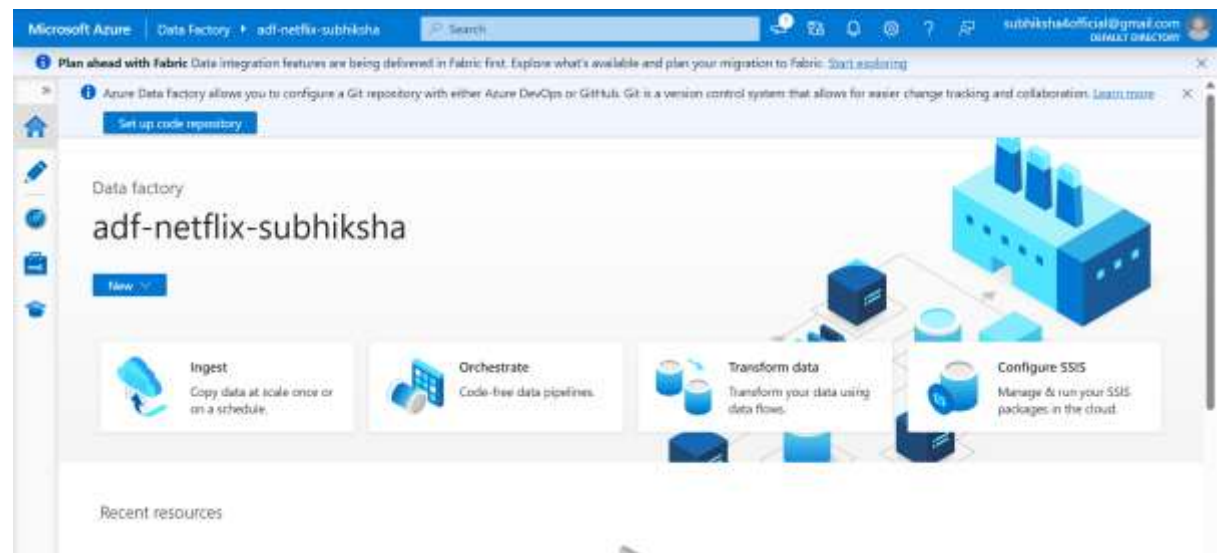

In left there is Home, Author(pencil), Monitor(FA),

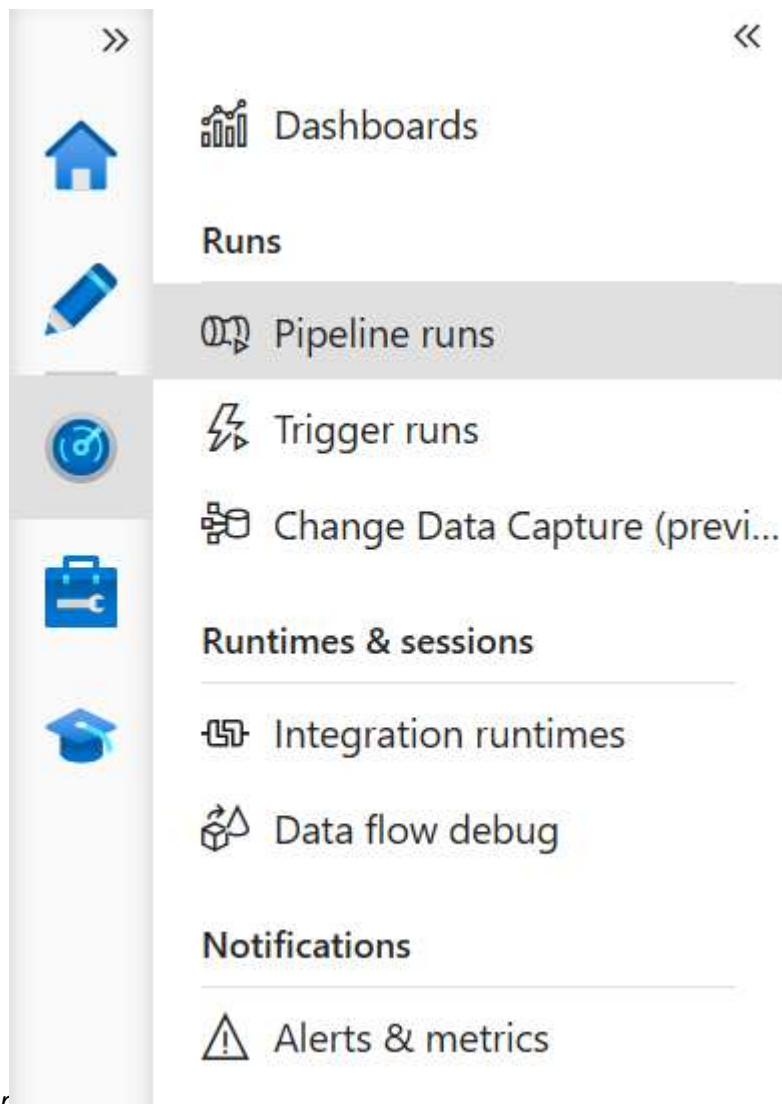


monitor


pulls data(example SQL) to data lake directly.

CDC is something that

Integration runtime compute used to ingest the data to do transformation

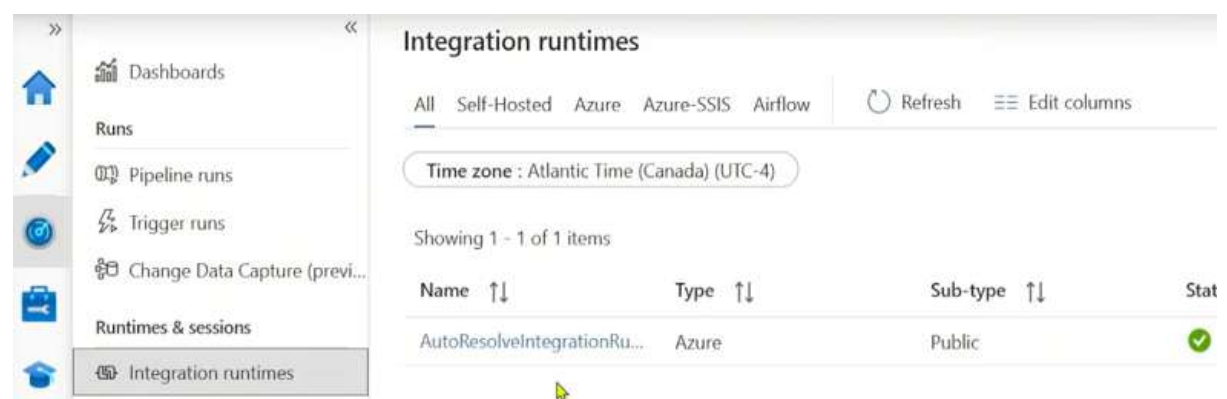

All is by default, self-hosted is (on prem; SQL), Azure ssis is lift and shift the ETL workflow, Airflow jobs, Alert metrics is used for notifications

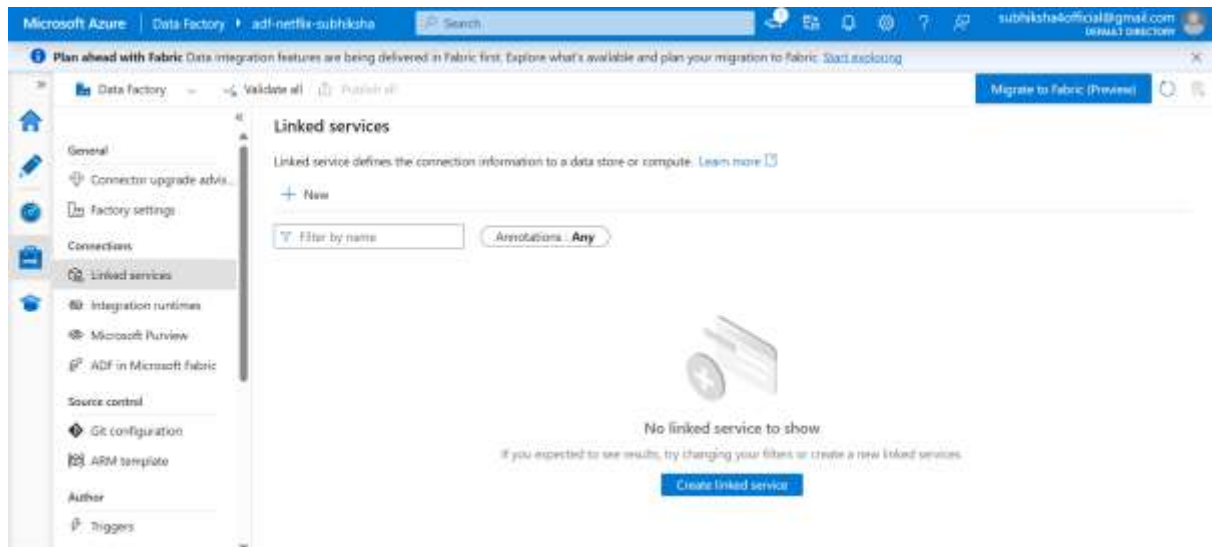

Manage :

Linked services: connection between source, destination

Microsoft Purview is data governance tool


2 linked services(connection) to be created. One for Github source data and Other for Datalake.
ADF serves as the orchestration tool moving the data from point A to point B

Connector is same as API in Azure.

RestAPI, HTTP connections are available.

HTTP connection is used because data will be taken from URL/API. There is no Key. (Response will be the data) key:response(json format).

If data is pulled using Get method then use RestAPI. In that case web activity is used.

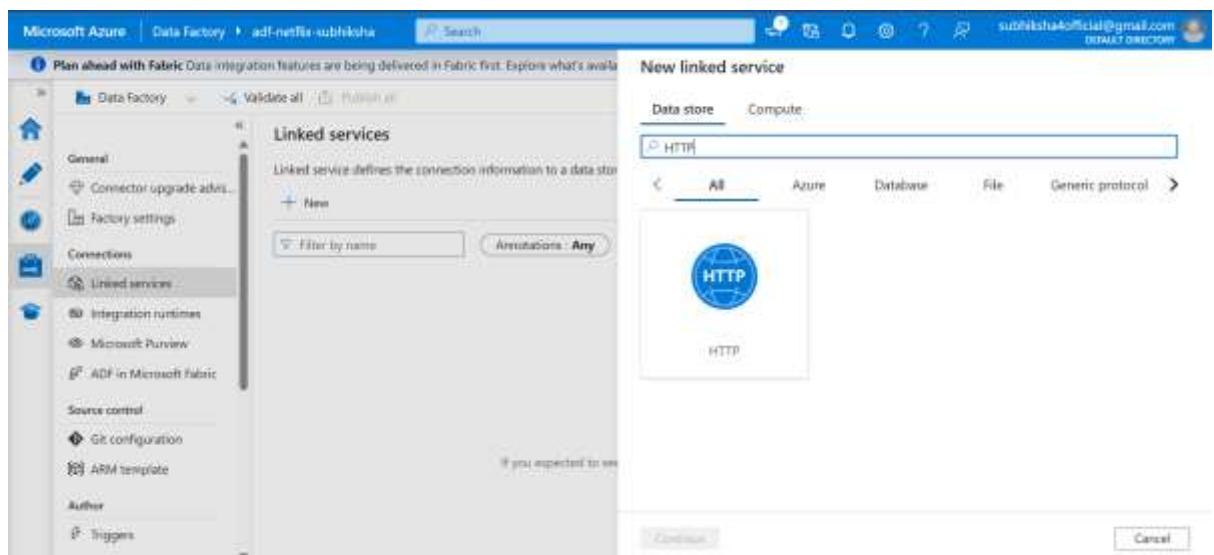


'''


- **The GitHub Connection (Source):** You need an HTTP linked service to connect directly to the GitHub REST API. This provides ADF with the exact web URLs required to dynamically fetch the raw lookup CSV files, such as the Directors, Cast, and Categories tables.

- **The Data Lake Connection (Destination):** You need an Azure Data Lake Storage Gen2 connection to instruct ADF exactly where to write or dump the data it just pulled. This connection securely points to our storage account so ADF can drop the files into our bronze container

'''

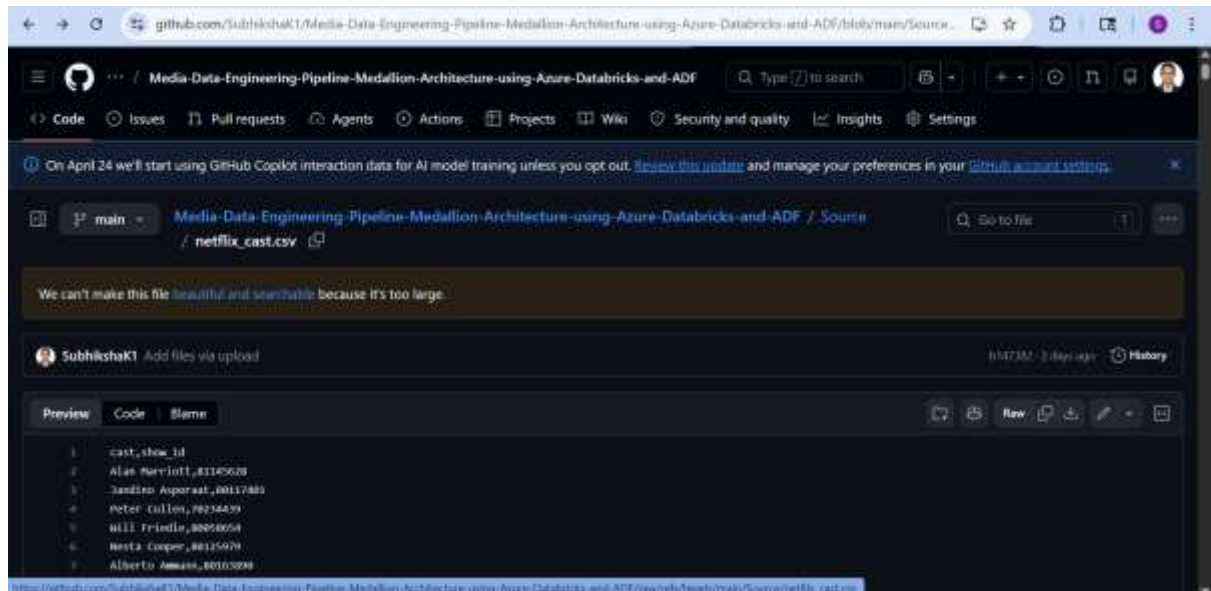


Click raw

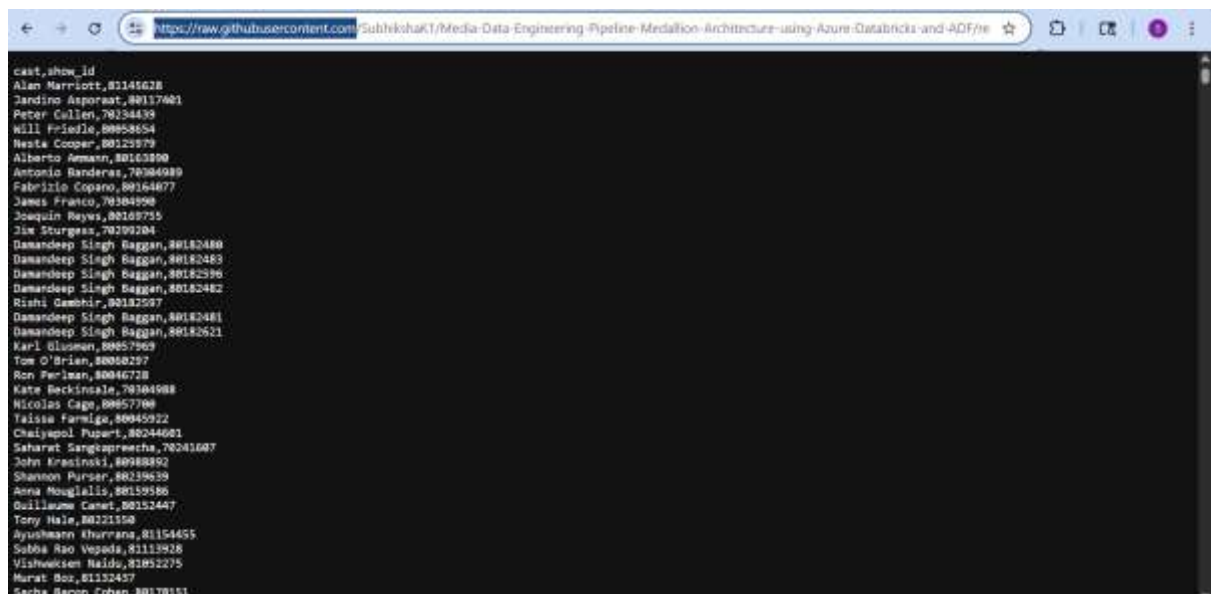

Till .com/ its base url. Others are relative URL


Name github_con

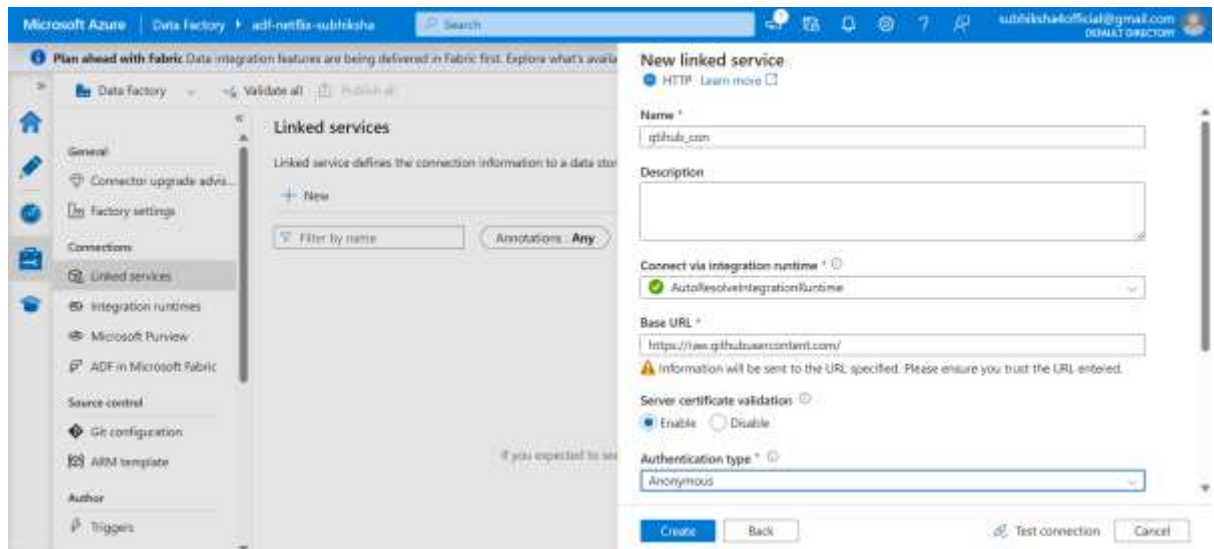


Authentication type: anonymous; Click test connection

“**Anonymous** simply tells Azure that no special credentials, API keys, or Personal Access Tokens are required to fetch the data. ADF can just hit the public "Raw" URL of the GitHub file and pull the data directly!”


”

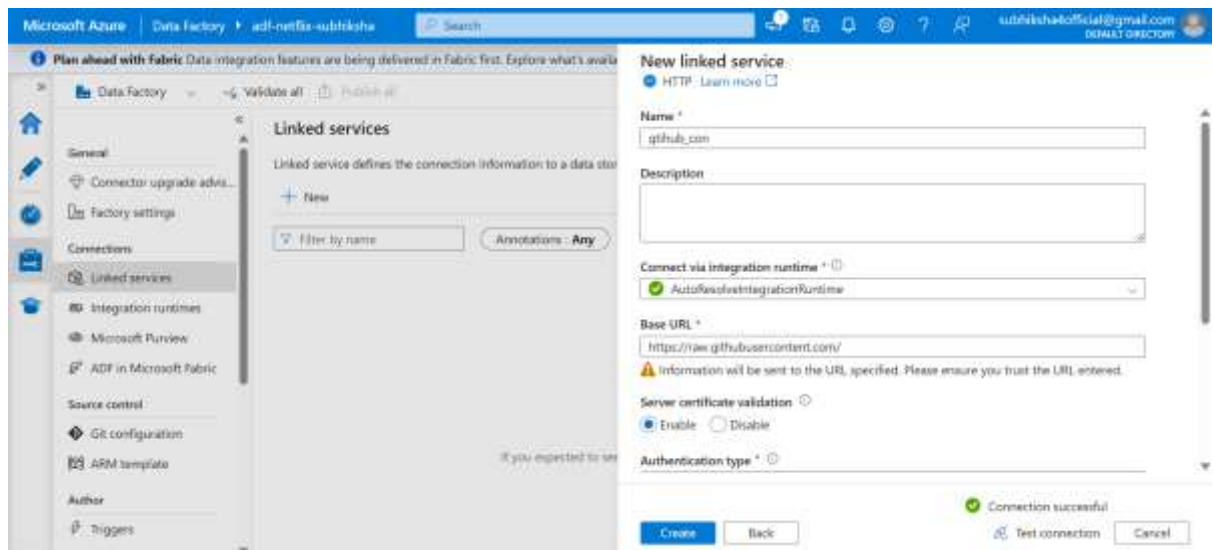

Click +new -> Azure Datalake storage

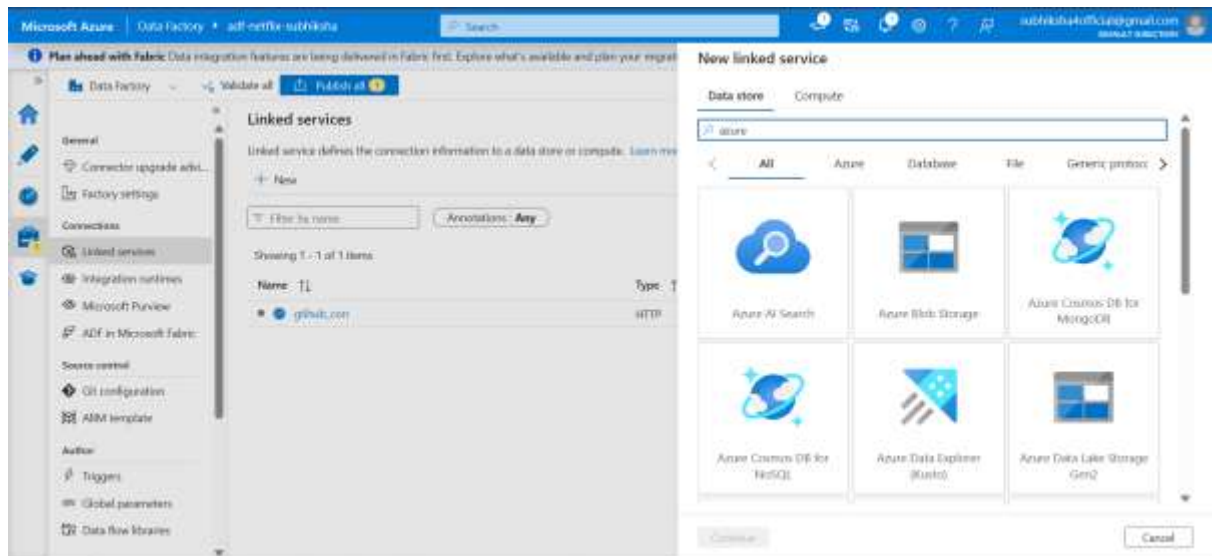

Name: *datalake_con*

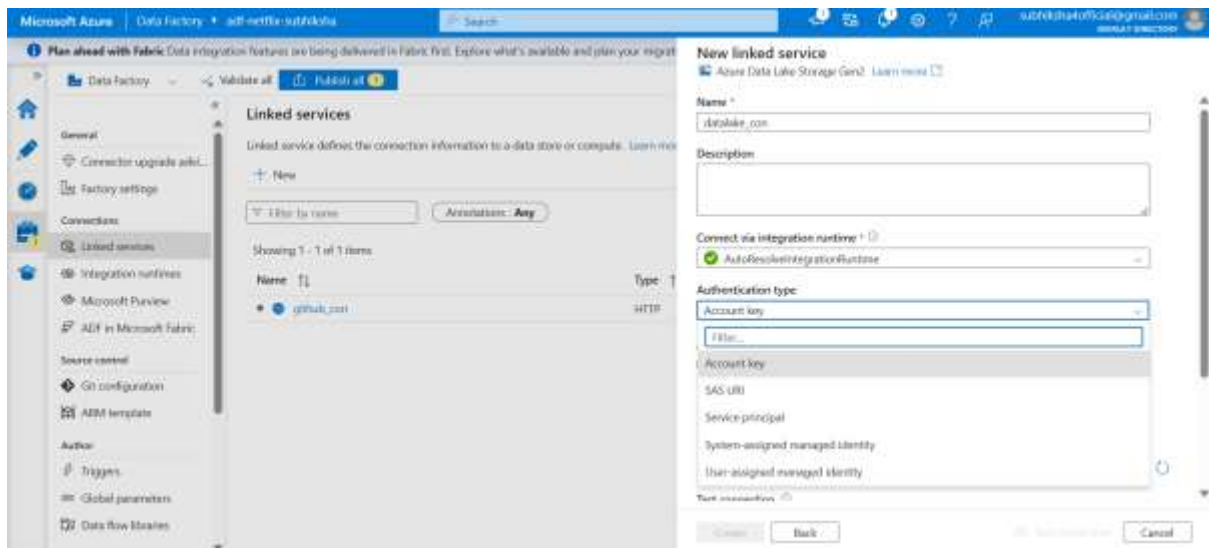


'''


both the Azure Data Factory (ADF) and the Azure Data Lake Storage account were created inside the exact same **Resource Group**, we "do not need to worry about any kind of authentication" setup for the sake of the project. Using the Account Key is the simplest, most frictionless way to connect resources quickly in a tutorial environment because Azure automatically fetches the key behind the scenes for you.

Using a Managed Identity requires extra configuration steps. You would have to go to the storage account's Access Control (IAM) and manually assign a specific role (like *Storage Blob Data Contributor*) to the Azure Data Factory. Because the goal at this stage of the was to quickly connect two resources residing in the same Resource Group


'''

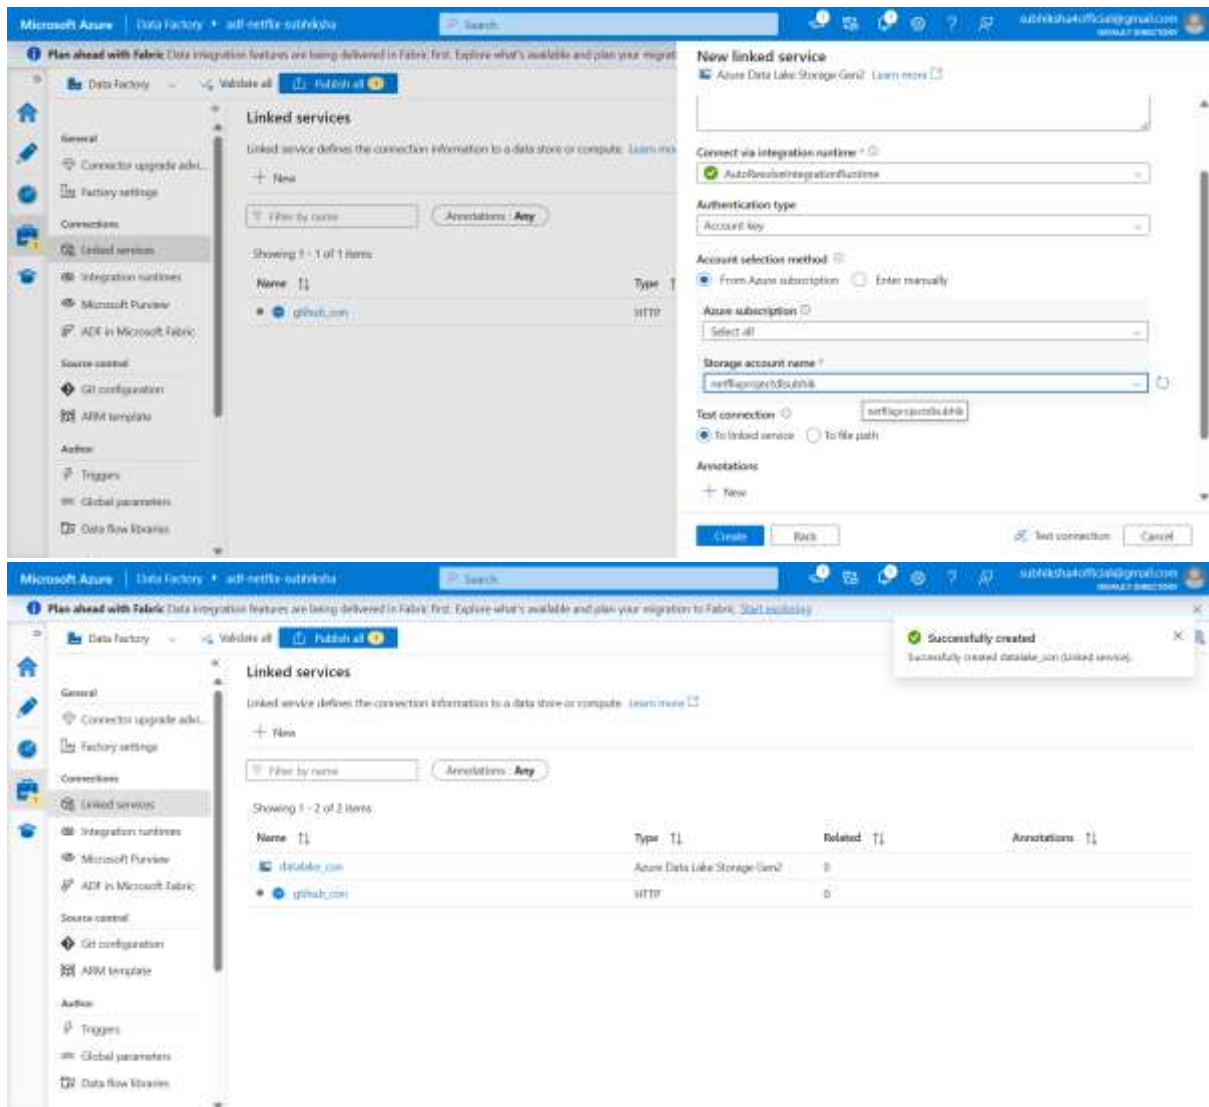


In Author tab: Data flow (transformation can be done using low code, no code) Azure runs spark in ADF; it uses opensource and provide a mangement layer, UI

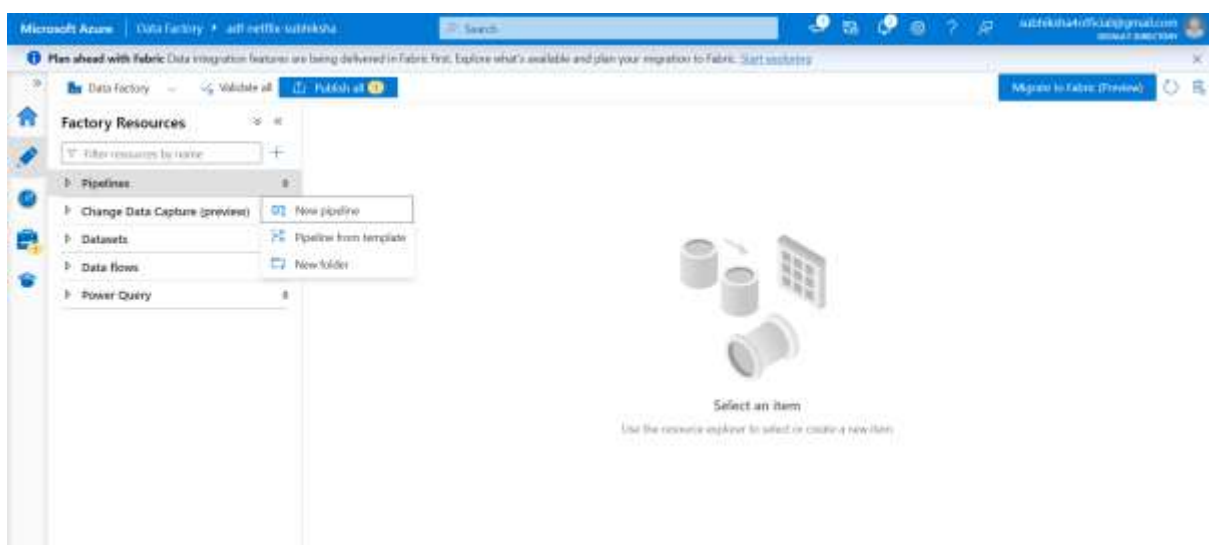

Click Author > Pipelines> New Pipeline

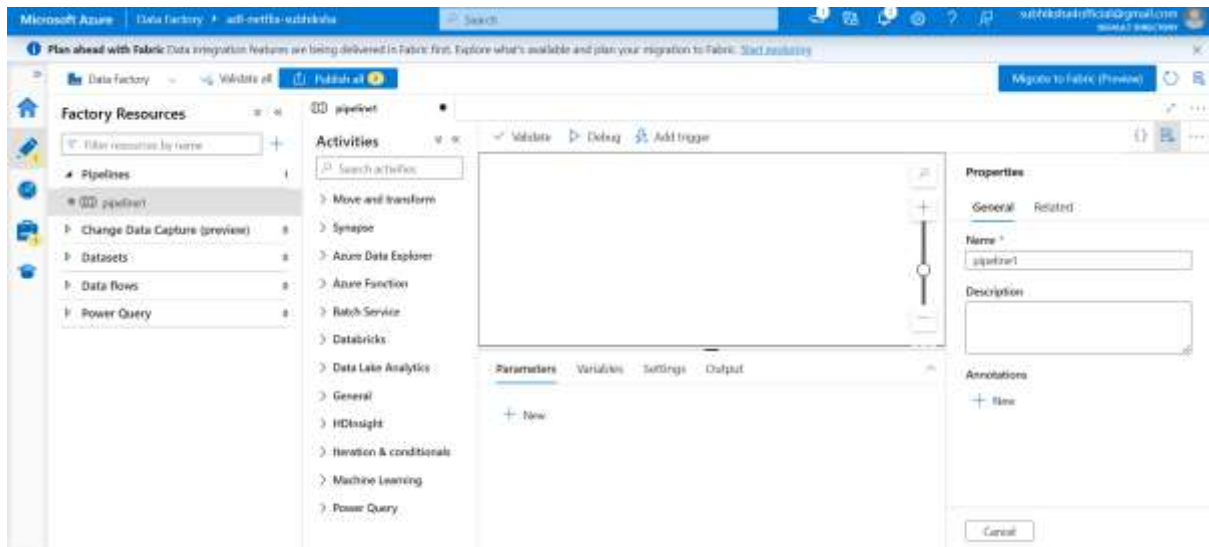


Canvas used to build pipelines, The activities mentioned in the left are categories of activity

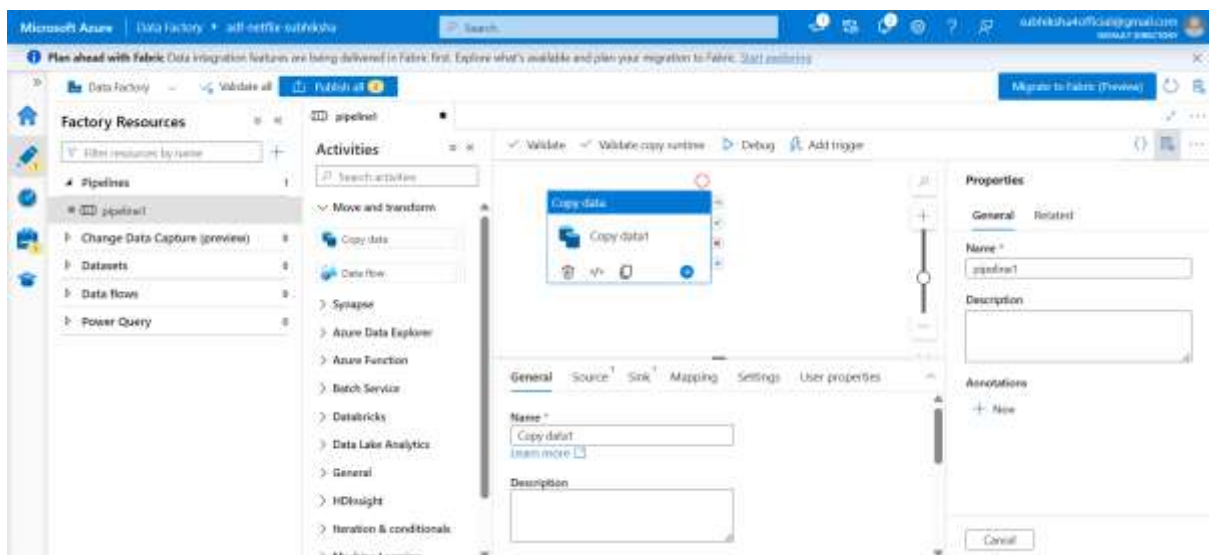

Under Move and Transform; Drag Copy Data

The name should have space. Copy Github Data

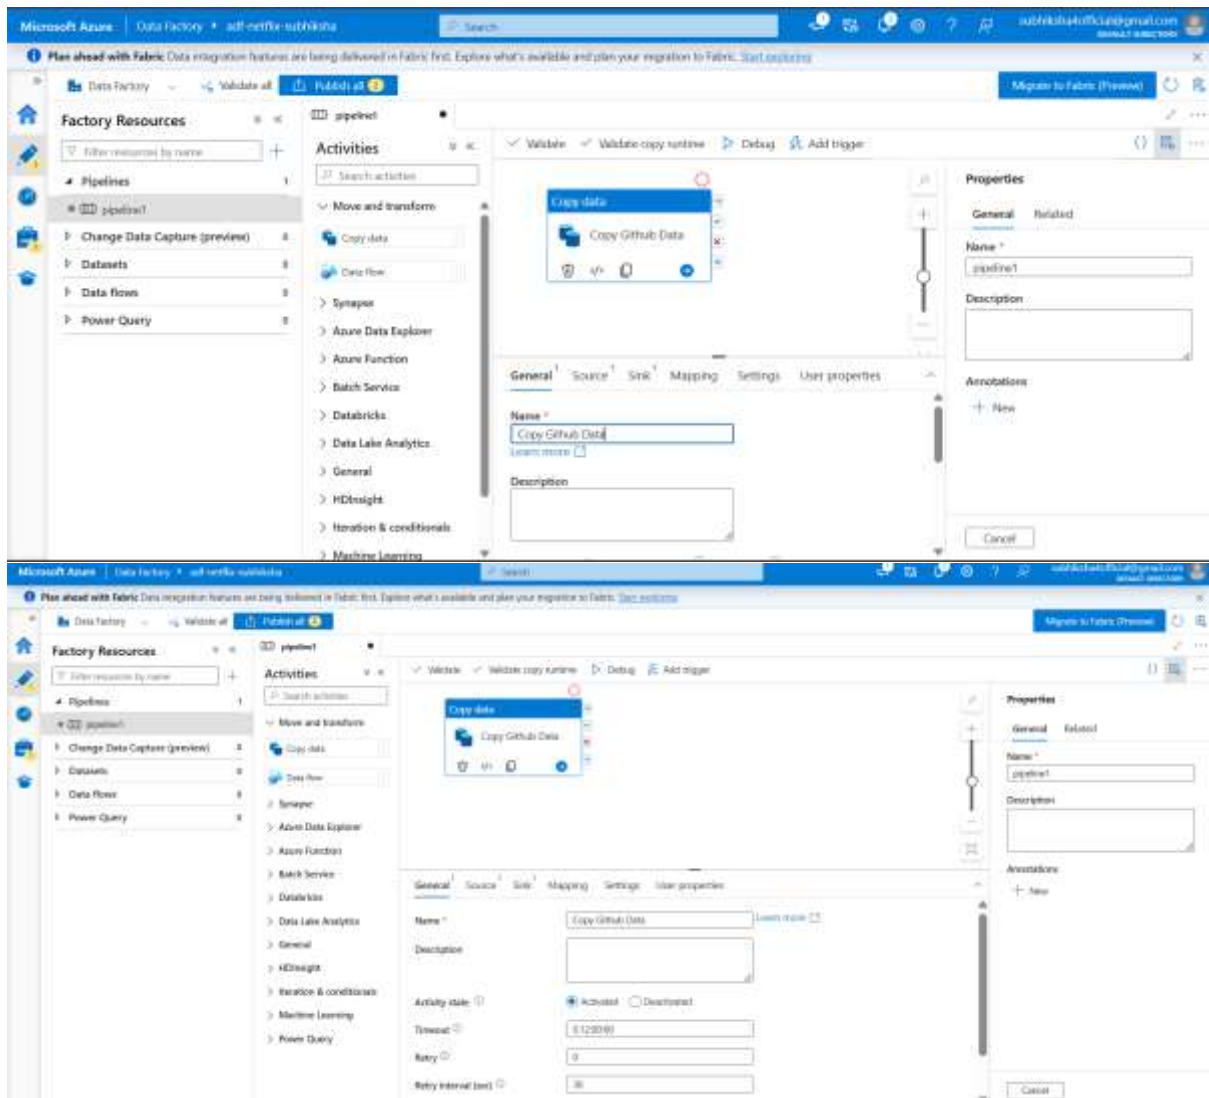


Timeout is if data is not copied within 12hr this helps to throw an error.


Retry: number (How many times to be done).

Retry_interval: interval between how many times to do


3. Parameterized dataset to be created

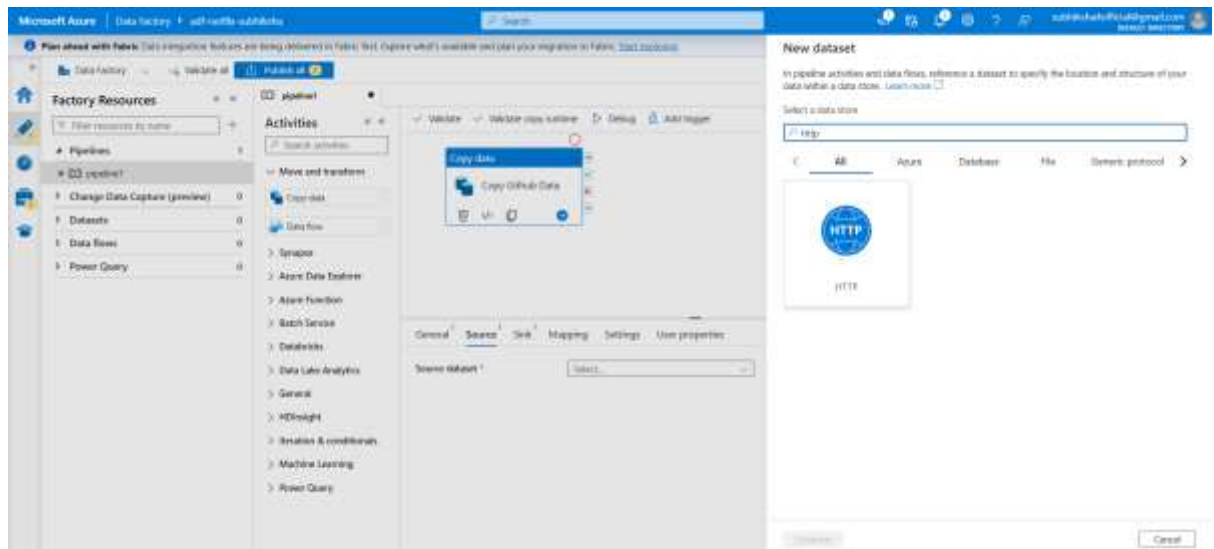

Since source is from Github, HTTP connection is used,

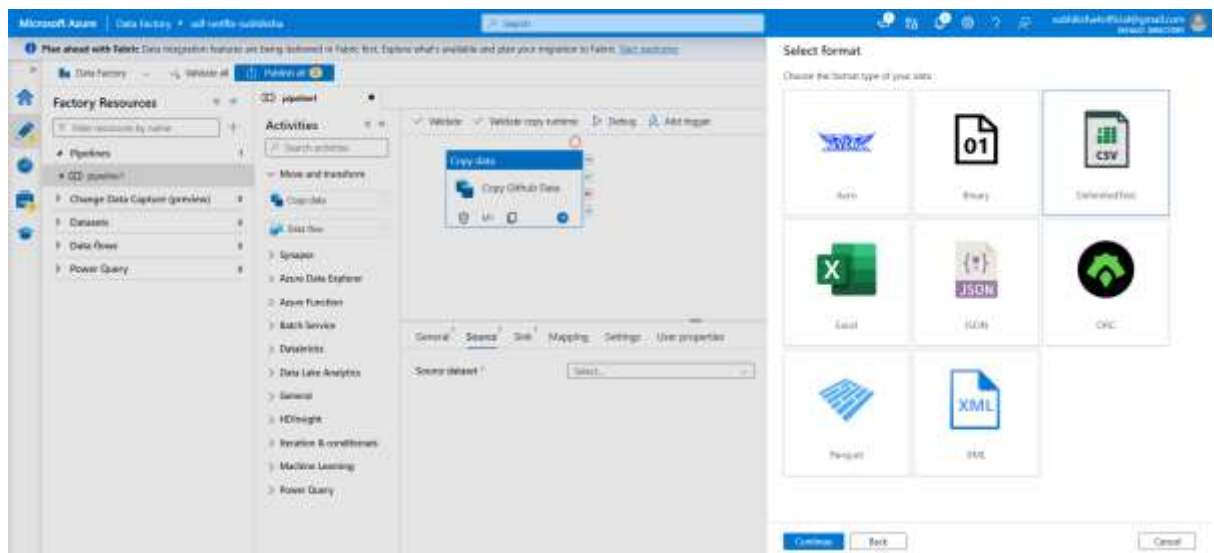


File format csv

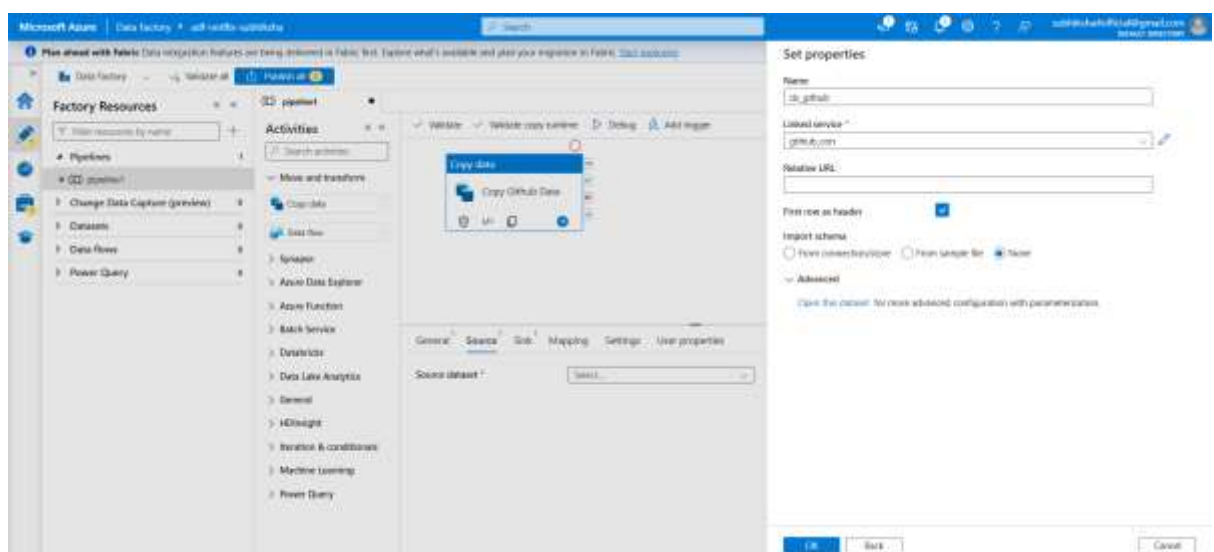

Name: ds_github


For Dynamic pipeline in advanced click open dataset

Click parameters tab

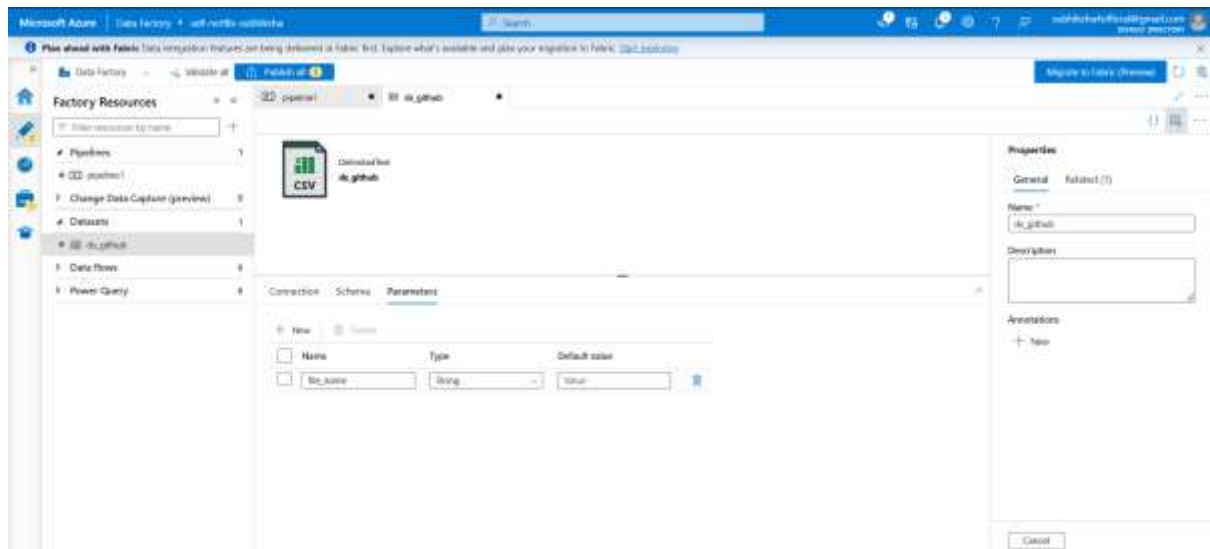


Name: file_name


Go back to connection tab; Relative url add dynamic content

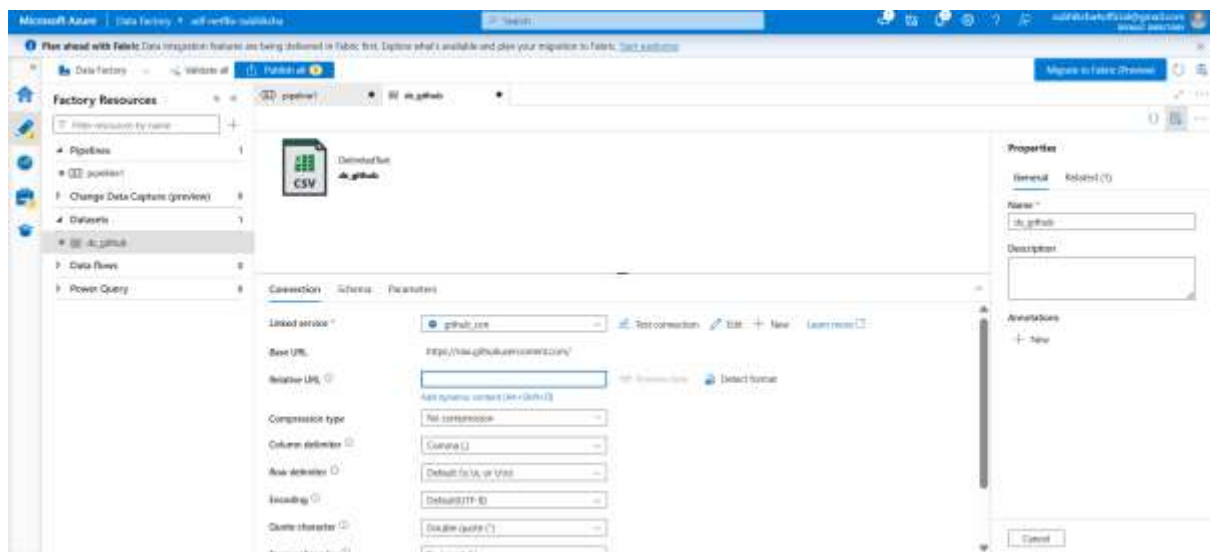

Paste the relative url of github in the dynamic content replace the filename with the parameter created

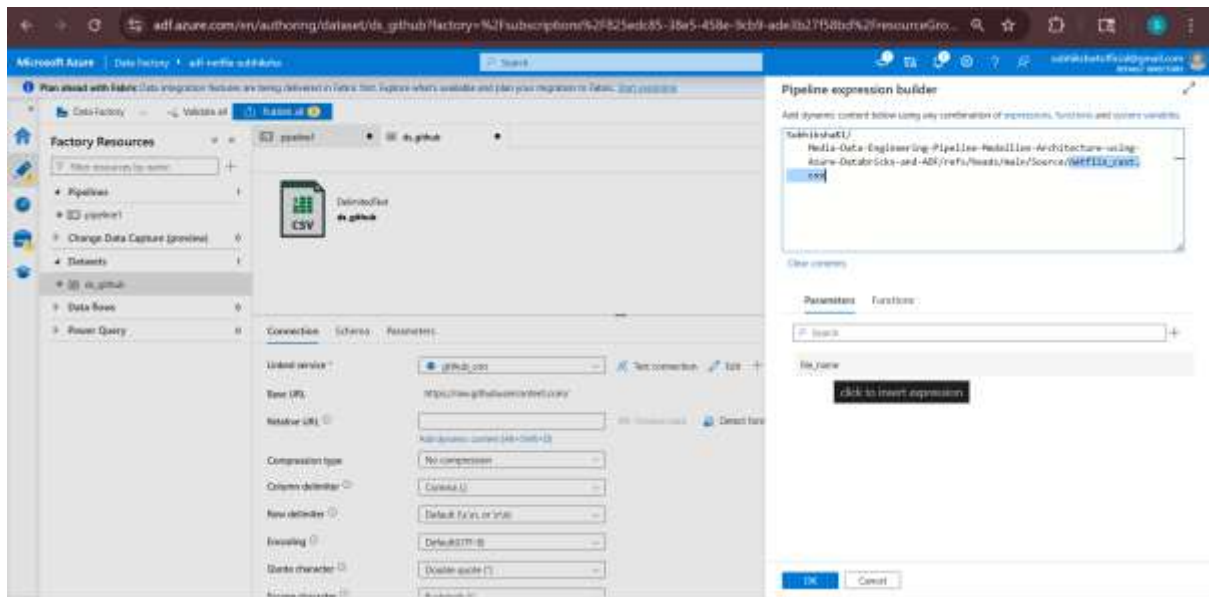


SubhikshaK1/Media-Data-Engineering-Pipeline-Medallion-Architecture-using-Azure-Databricks-and-ADF/refs/heads/main/Source/@{dataset().file_name}

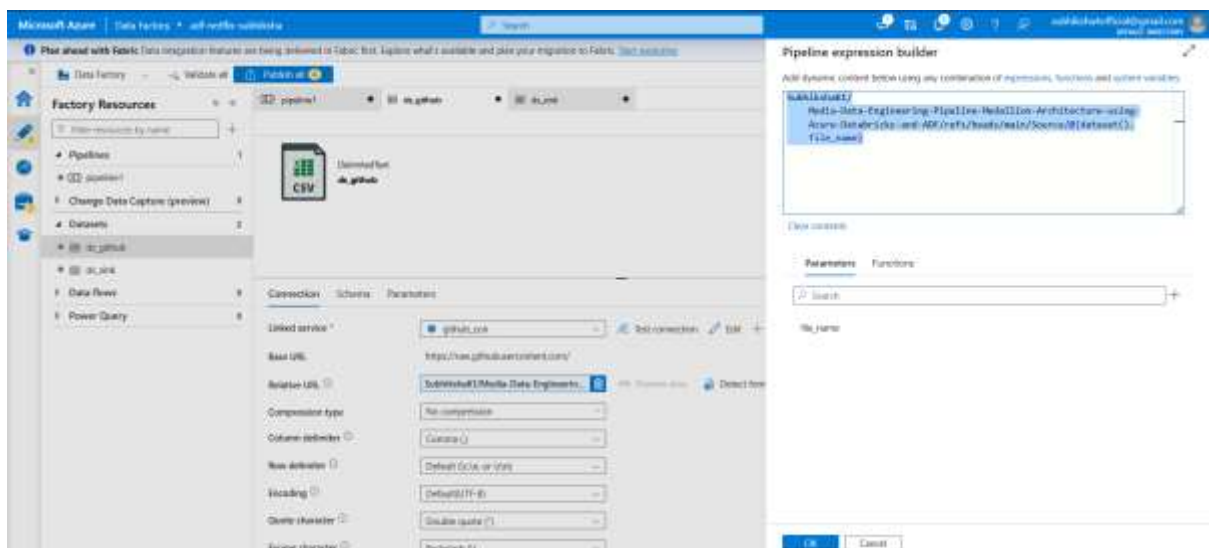


Click Ok


To get the 4 github files using for loop we use Sink (File_name parameter name created, the values passed through loop)

Get back to Pipelines tab, Click on sink tab

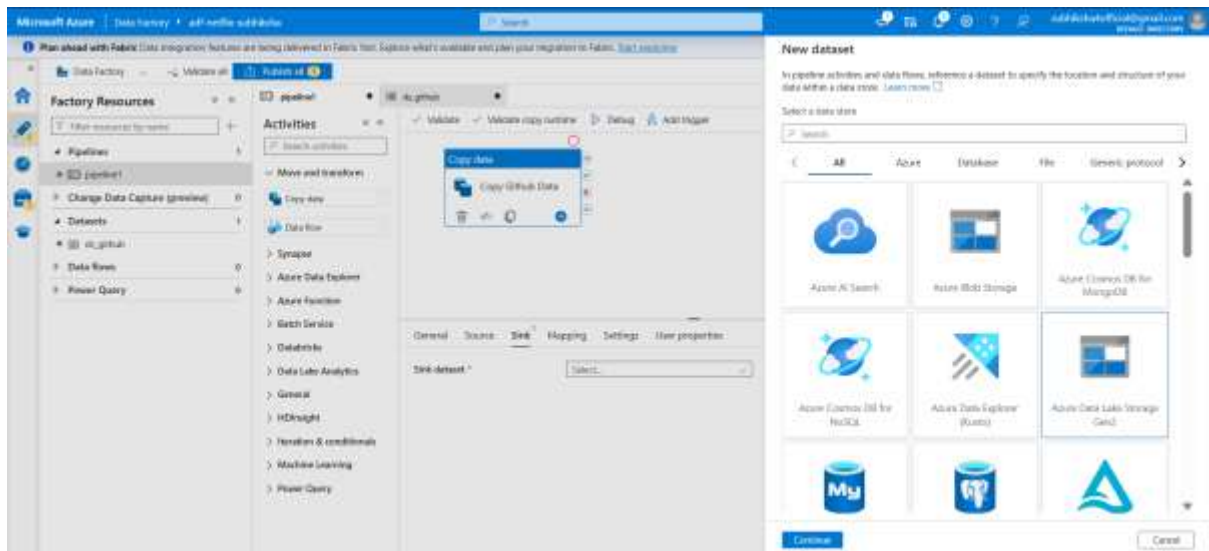


Destination is ADLS


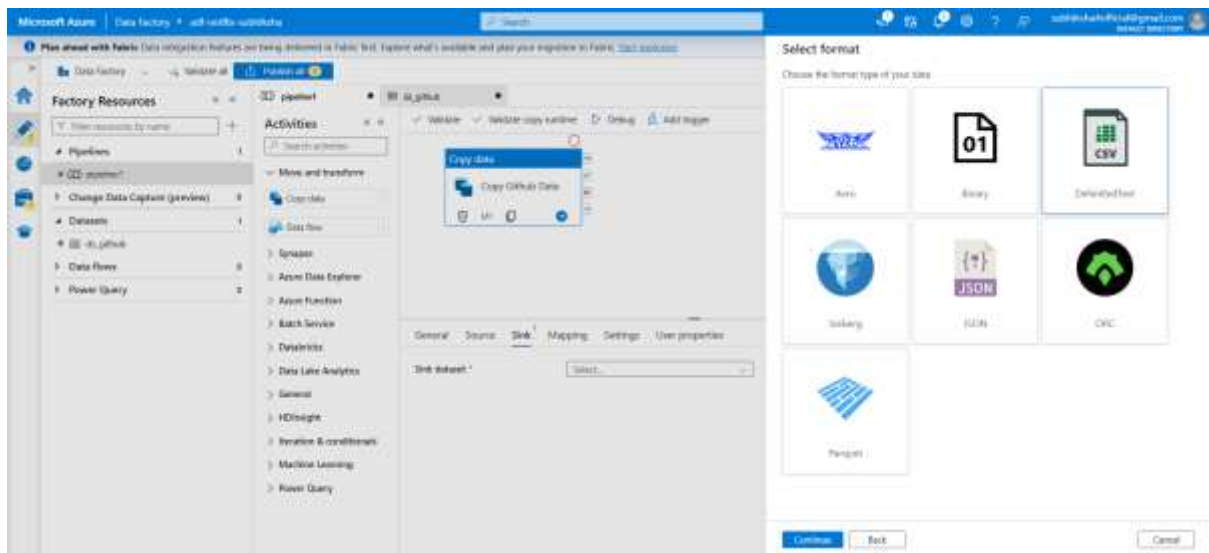


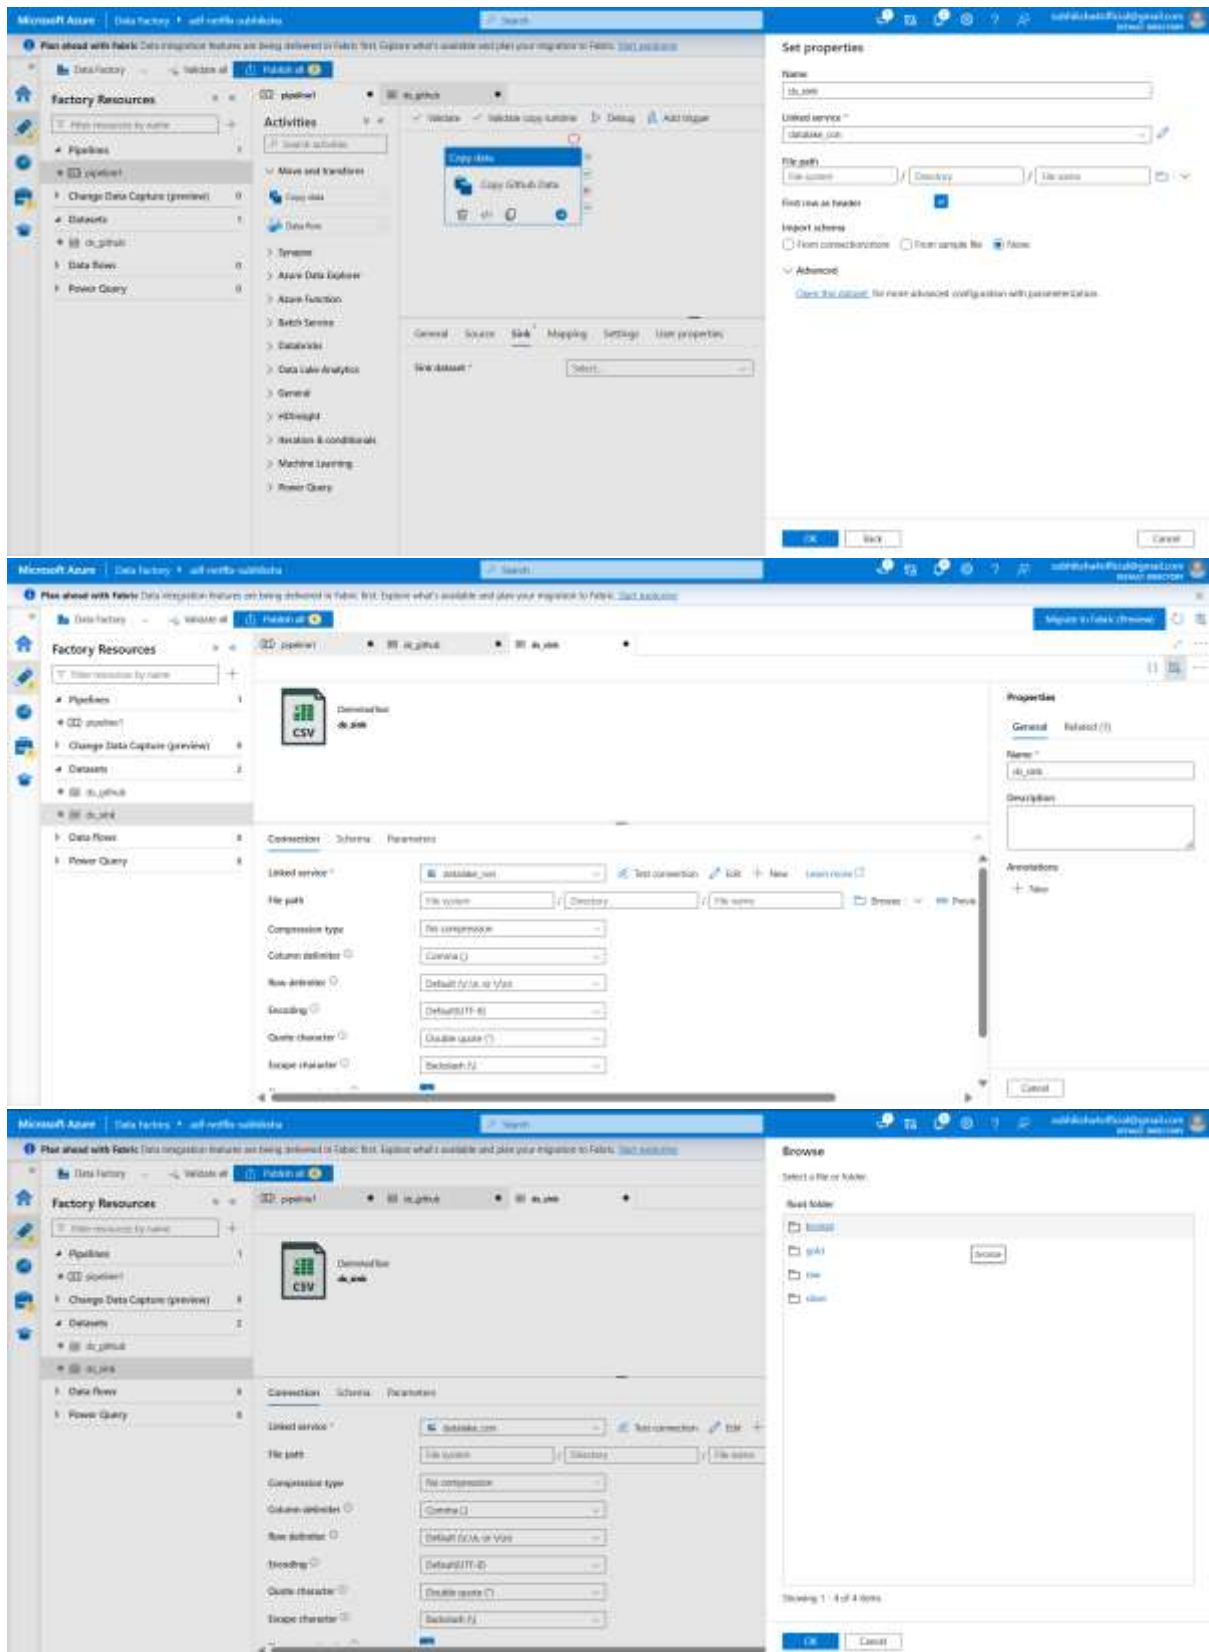


In file path : bronze is selected through browser; directory is given using parameter

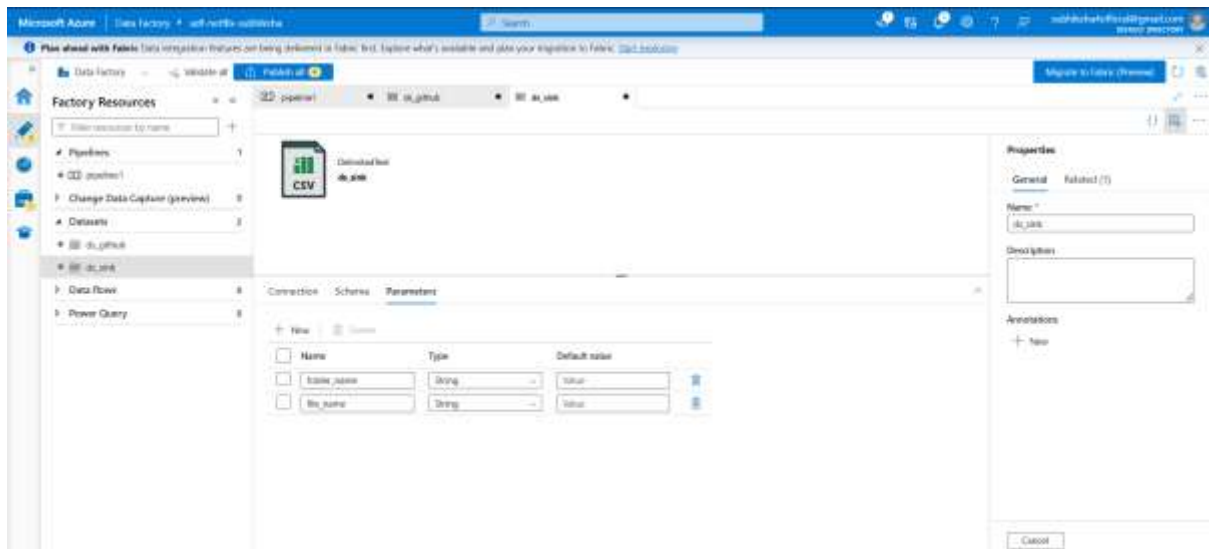

For directory foldername parameter is given; similarly for filename

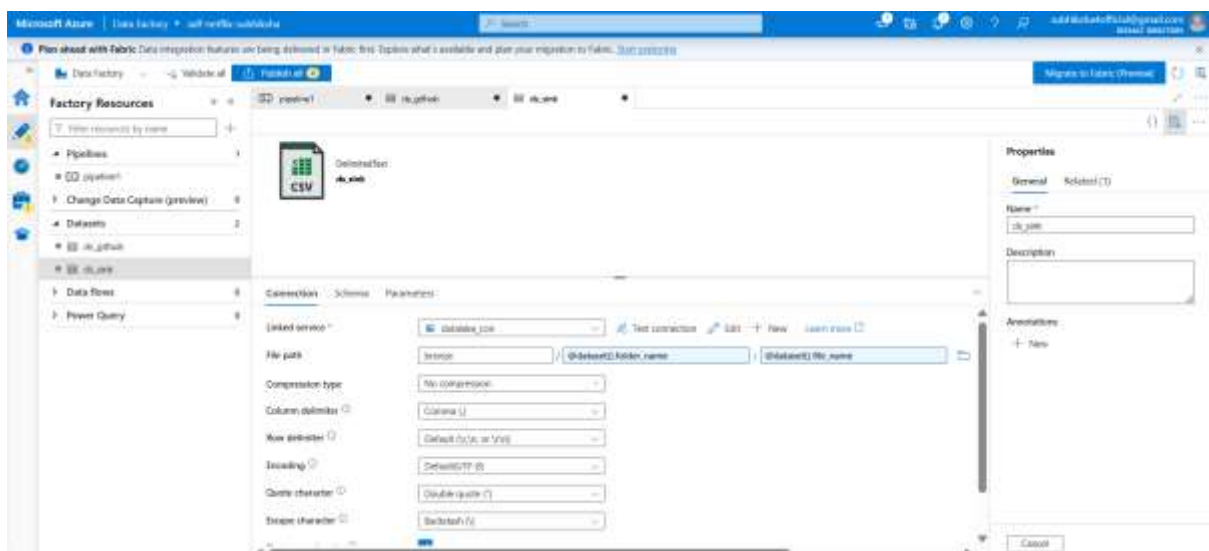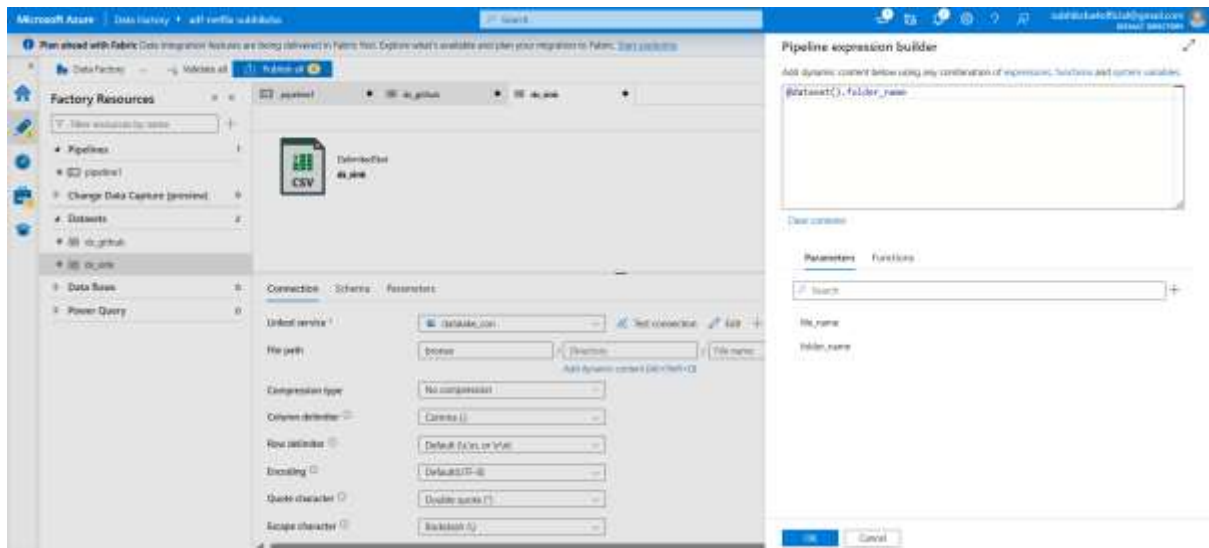


Go to Pipeline1 tab, Drag and drop for_each

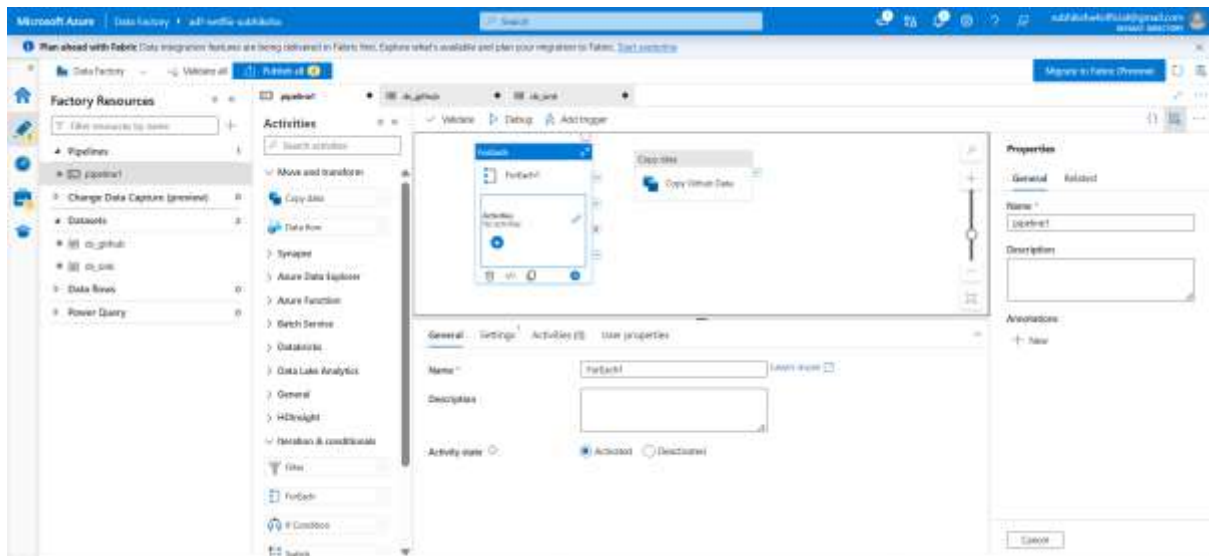


Creation of array in pipeline level to loop the files

```
[
  {
    "folder_name": "netflix_cast",
    "file_name": "netflix_cast.csv"
  },
  {
    "folder_name": "netflix_category",
    "file_name": "netflix_category.csv"
  },
  {
    "folder_name": "netflix_countries",
    "file_name": "netflix_countries.csv"
  },
  {
    "folder_name": "netflix_directors",
    "file_name": "netflix_directors.csv"
  }
]
```

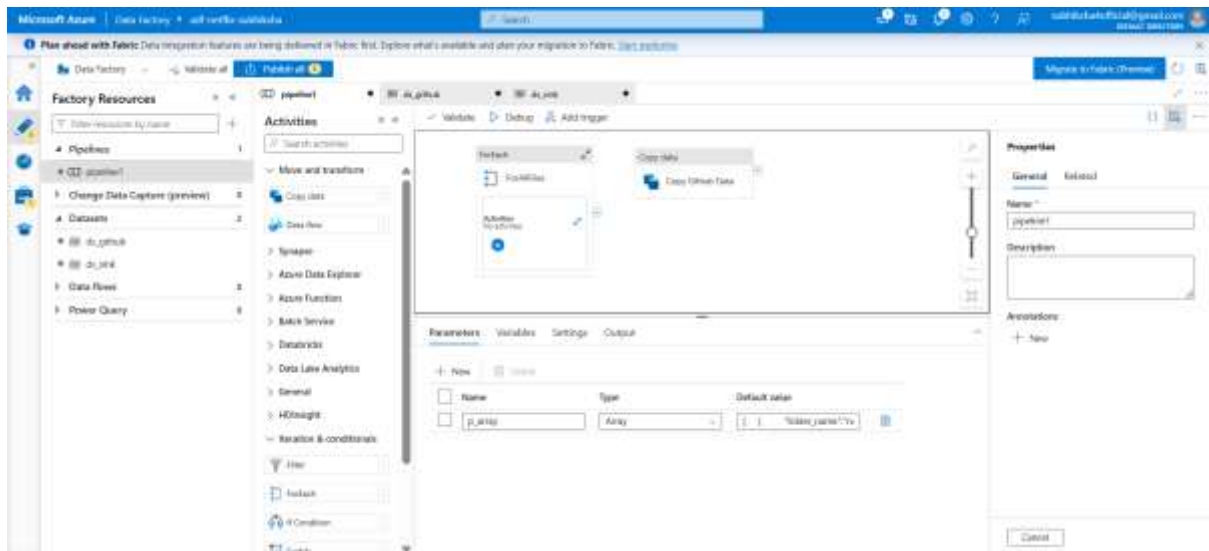


In default values it is pasted

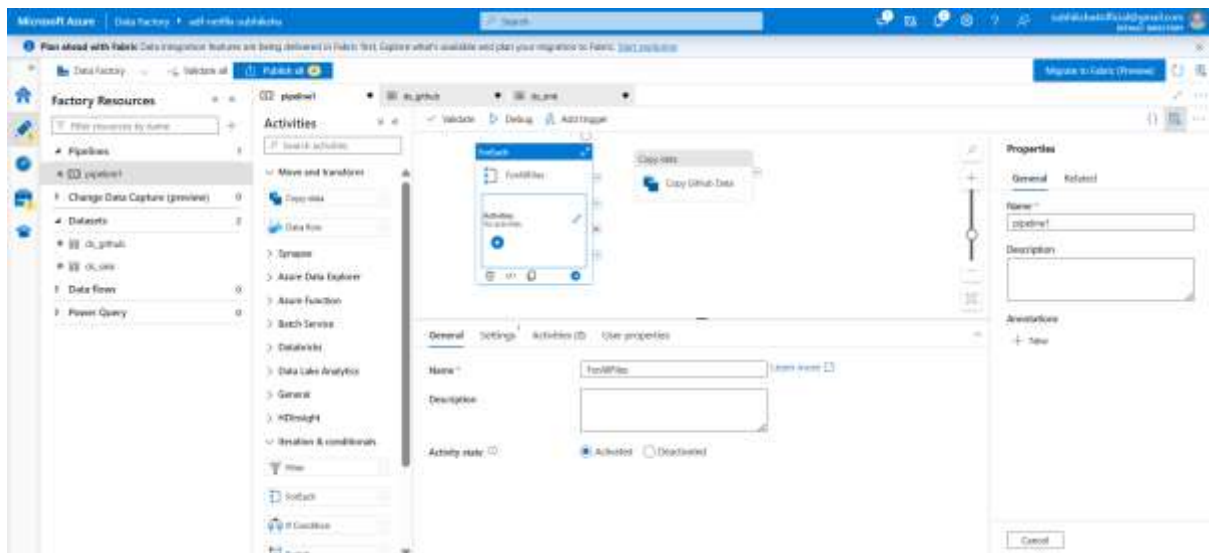

Name: ForAllFiles

Settings tab

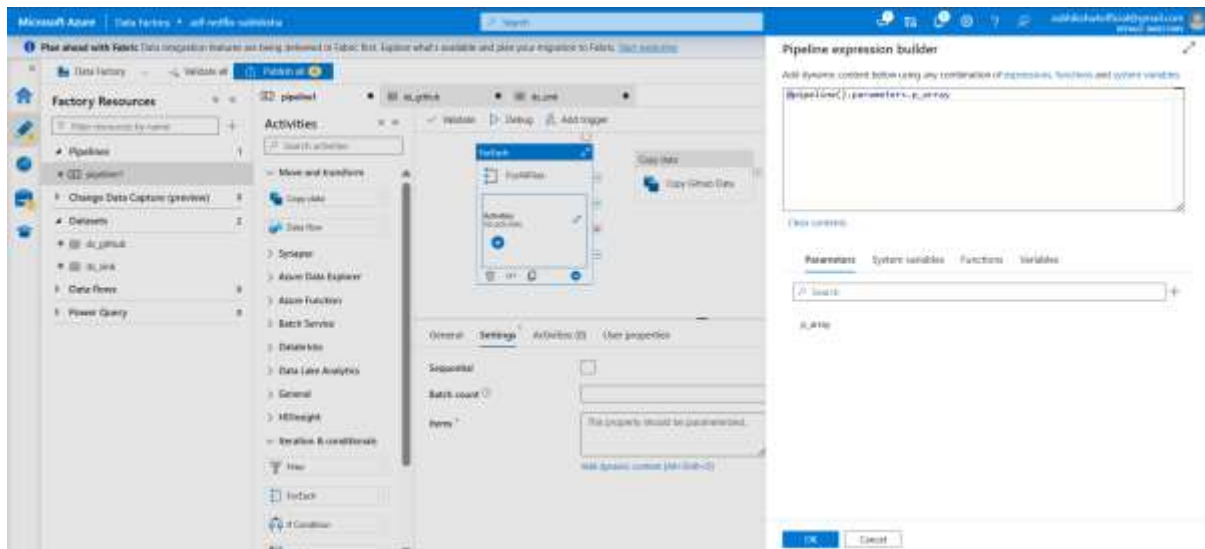


Not using sequential, parallel is used

'''


- **Driving the ForEach Loop:** The array acts as the direct input list for a **ForEach activity** in ADF. Instead of creating four separate "Copy Data" activities for the four different lookup files (Cast, Categories, Countries, Directors), you create just one Copy Data activity inside a ForEach loop.
- **Dynamic Source Extraction:** During each iteration of the loop, ADF reads the array's current item. It grabs the `file_name` value (e.g., `netflix_cast.csv`) and dynamically inserts it into the GitHub REST API URL to fetch that specific file.
- **Dynamic Sink Destination:** It then grabs both the `folder_name` and `file_name` from the array to tell Azure Data Lake Storage Gen2 exactly where to drop the file (e.g., creating a folder named `netflix_cast` and saving the file as `netflix_cast.csv` inside the bronze container).
- **Avoiding External Dependencies:** While you could theoretically store this list in an external JSON file in our storage, creating it as an array parameter directly inside the ADF pipeline is a better practice. It prevents you from having to migrate and manage extra configuration files when you deploy our pipeline across different environments (like moving from Dev to Prod)

By leaving the "Sequential" box unchecked, ADF pulls all four lookup files from the GitHub API at the exact same time instead of waiting for one file's copy activity to finish before starting the next. Because these files are completely independent and do not rely on each other to be completed first, there is no need to force them to run sequentially.


'''

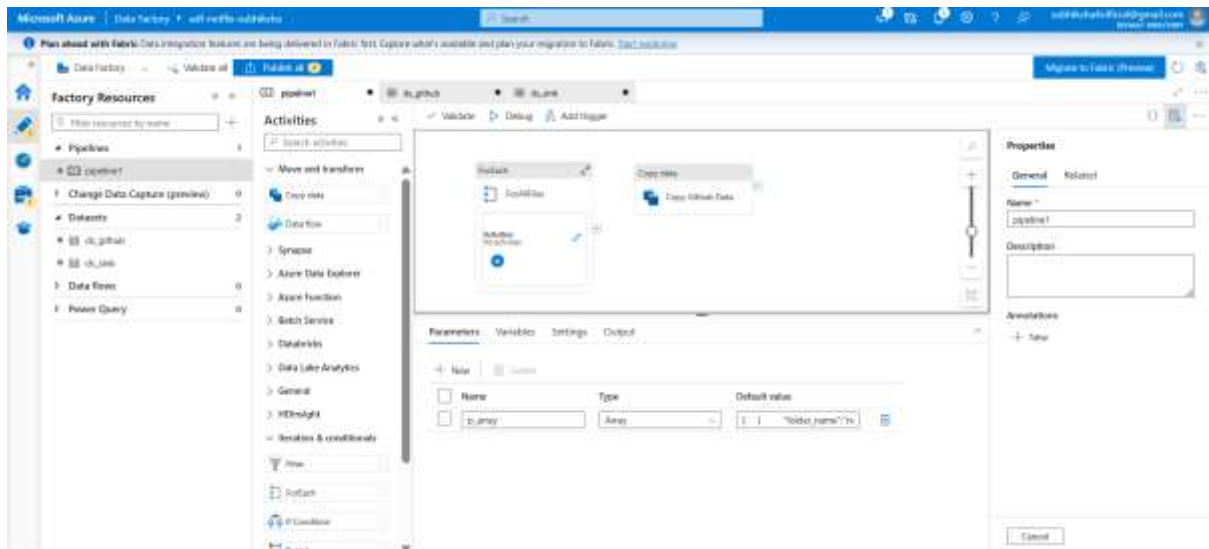

Ctrl+x cut the Copy data element and put inside ForEach

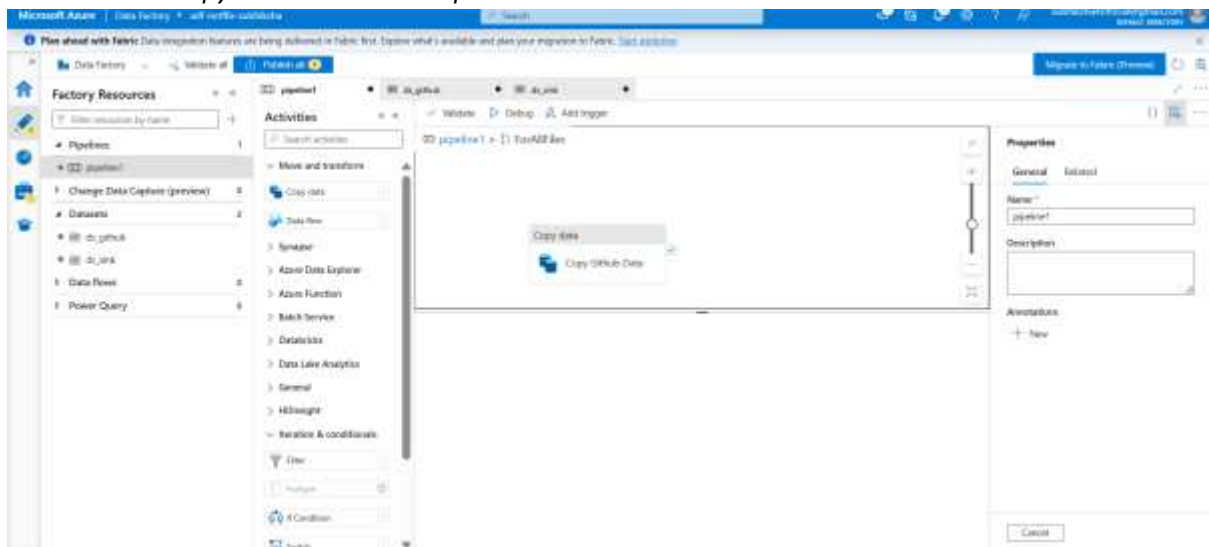

Source tab:

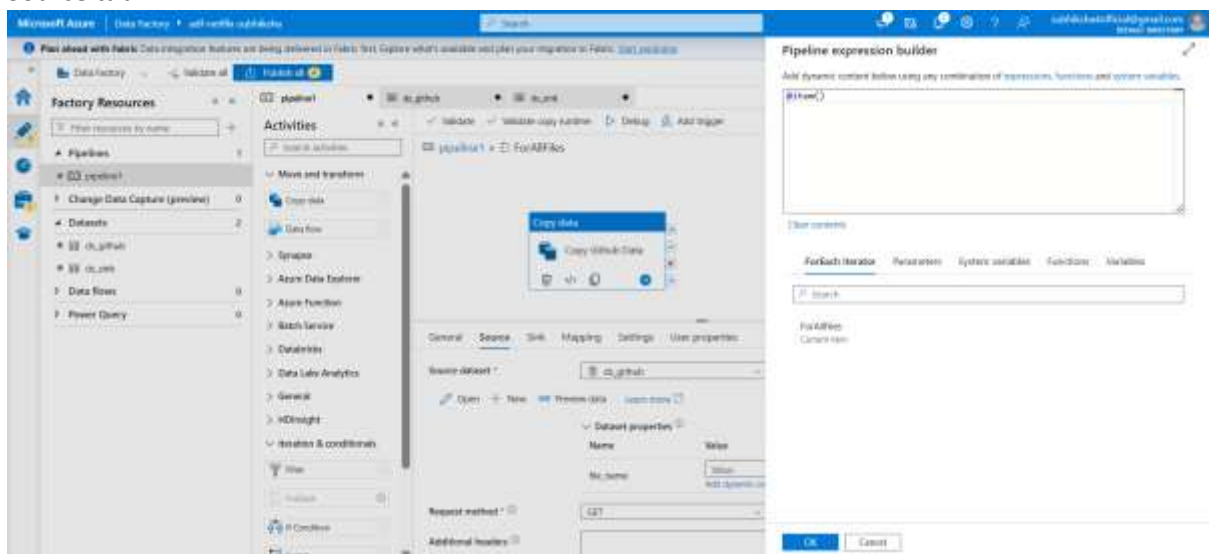


This act as


for i in parameters:

return i

```
{"folder_name":"netflix_cast","file_name":"netflix_cast.csv"}
```

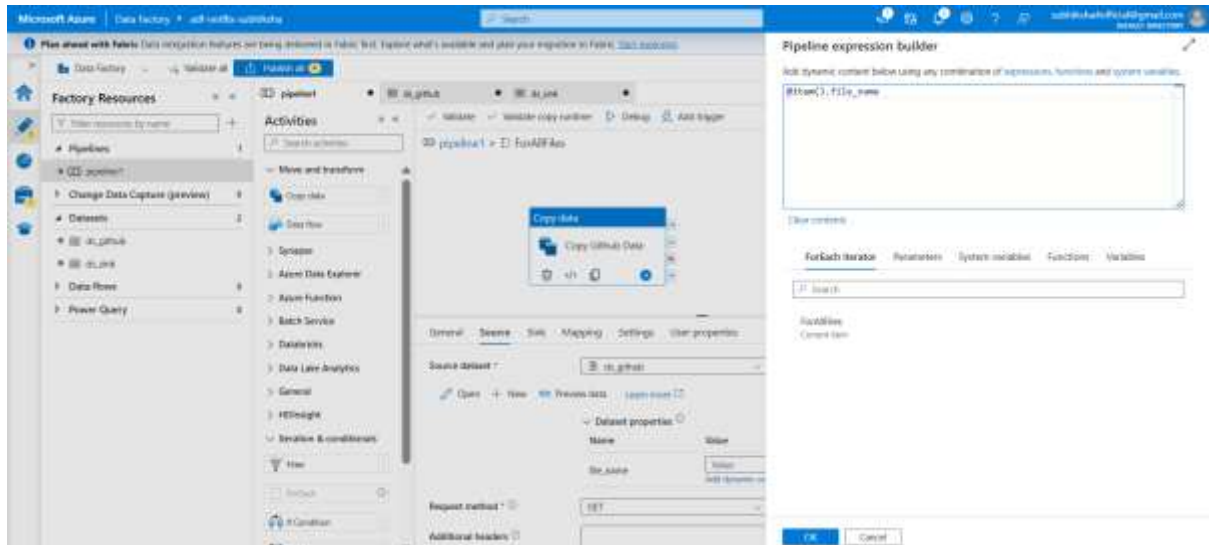


.Filename

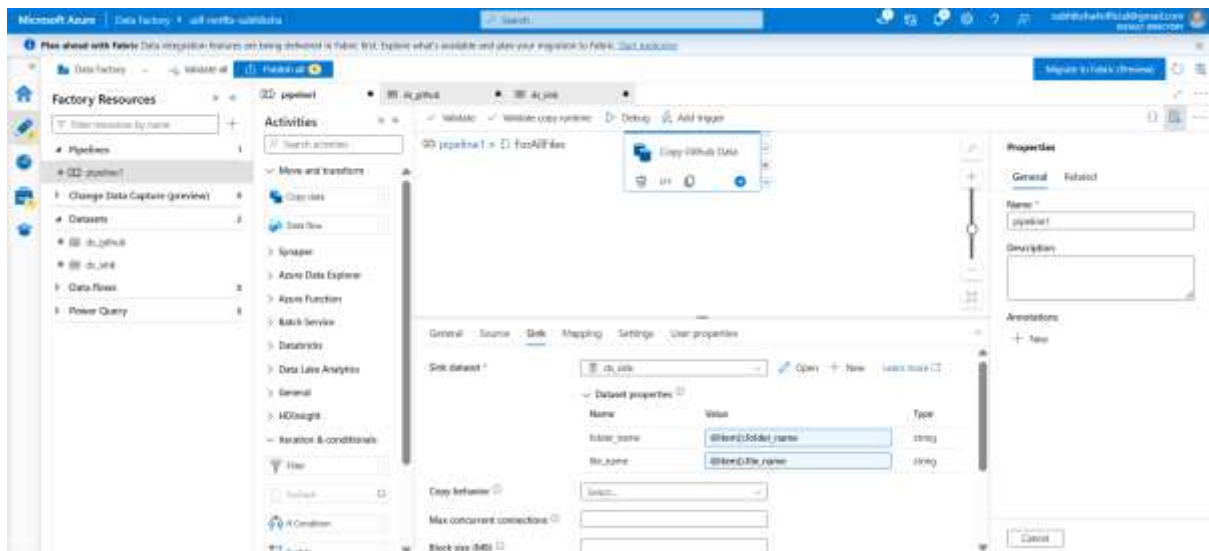


Run this pipeline only if we have titles file available in raw folder.


Use Validation from activities>validation

This is done before for each and copying

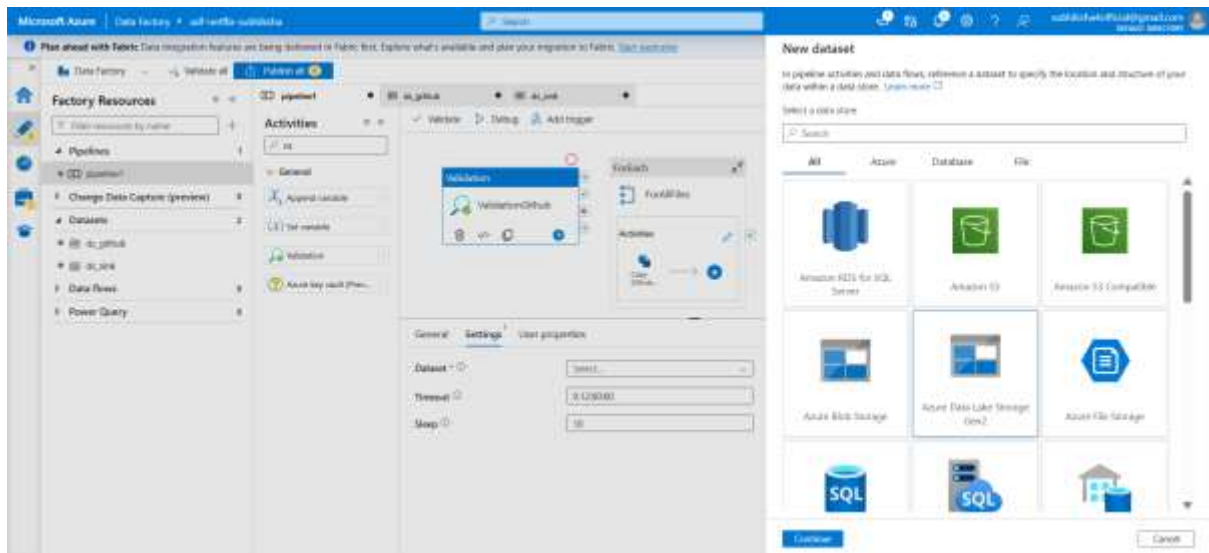


Settings ADLS

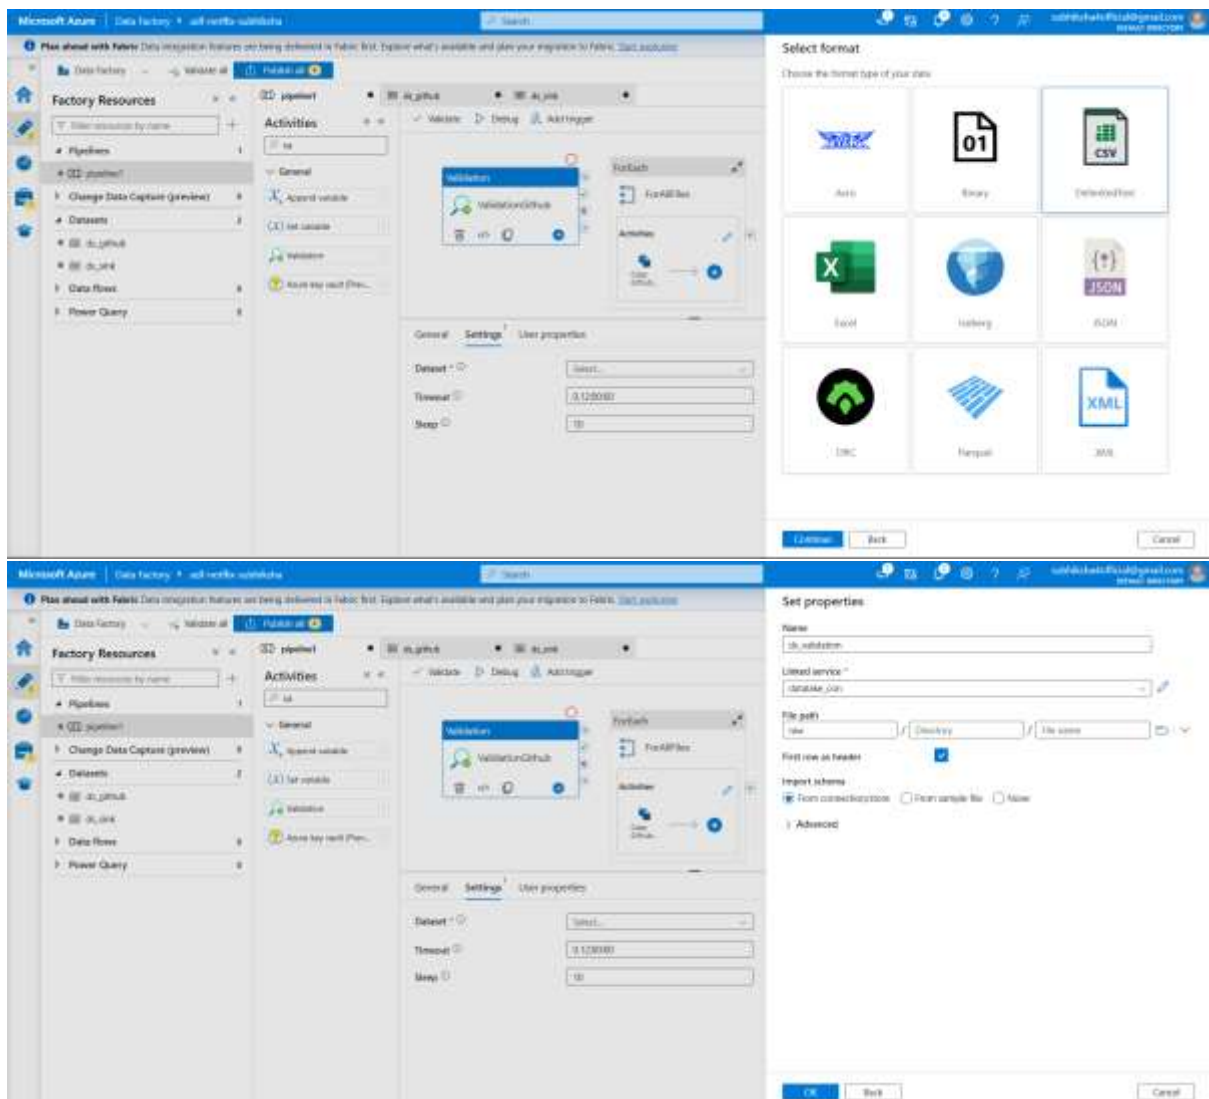


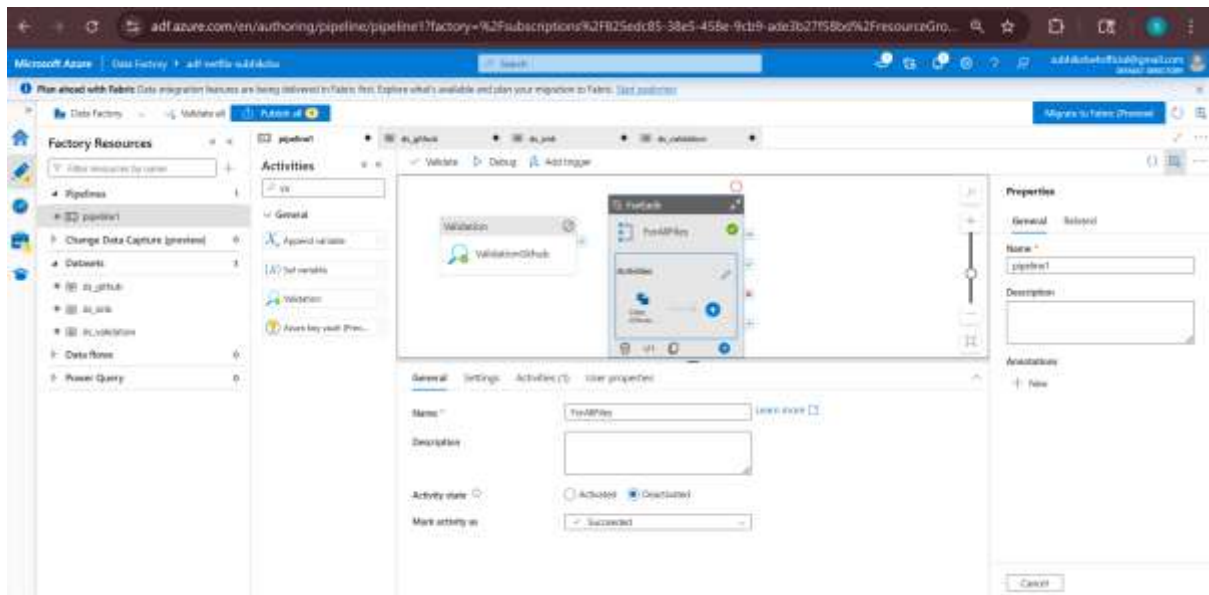


Foreach deactivated to debug the validation

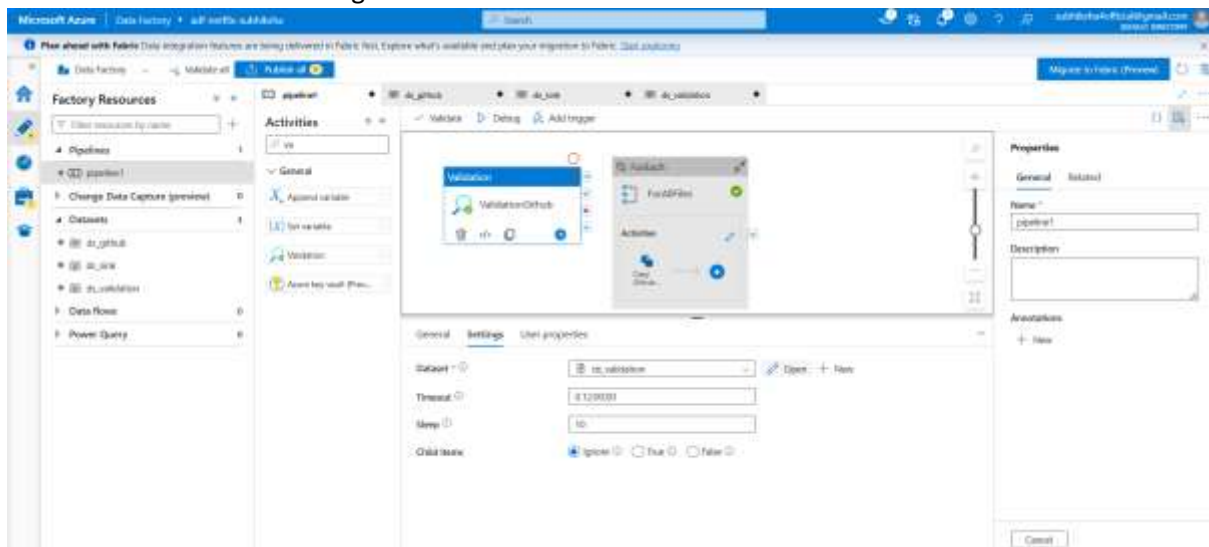


Click open

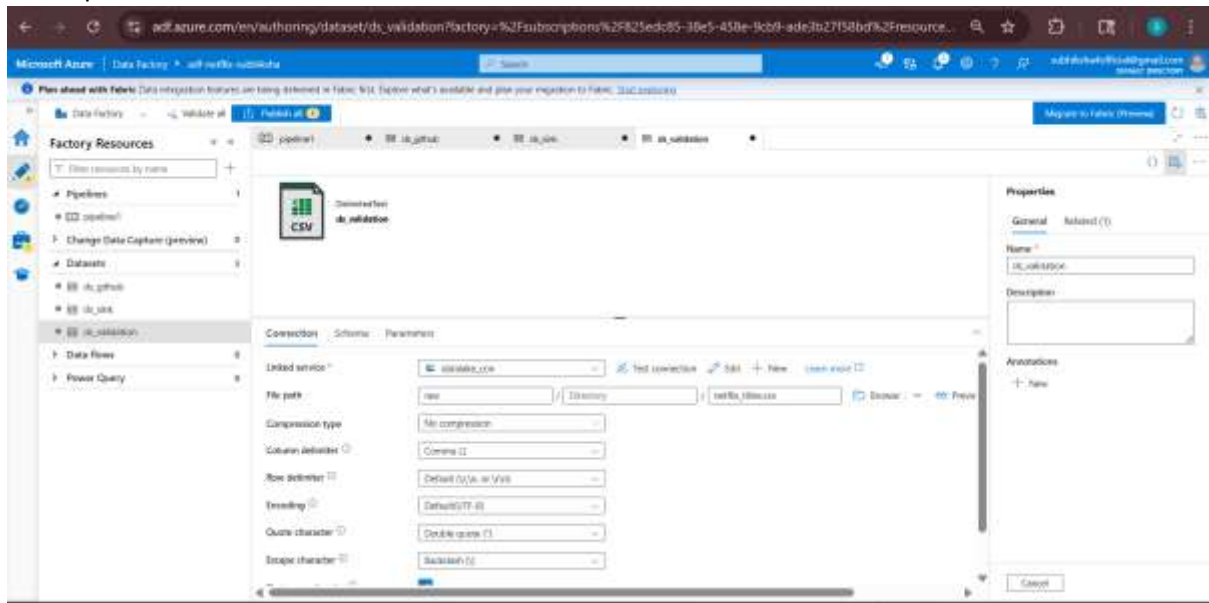


Titles.csv file added redirect to pipeline1

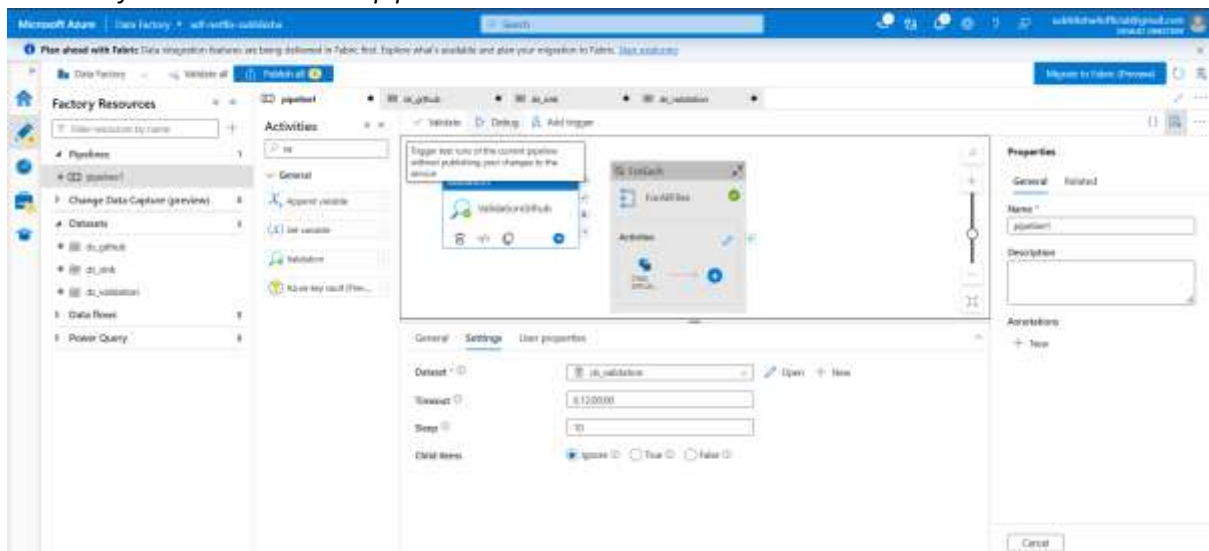


Click validation-> debug

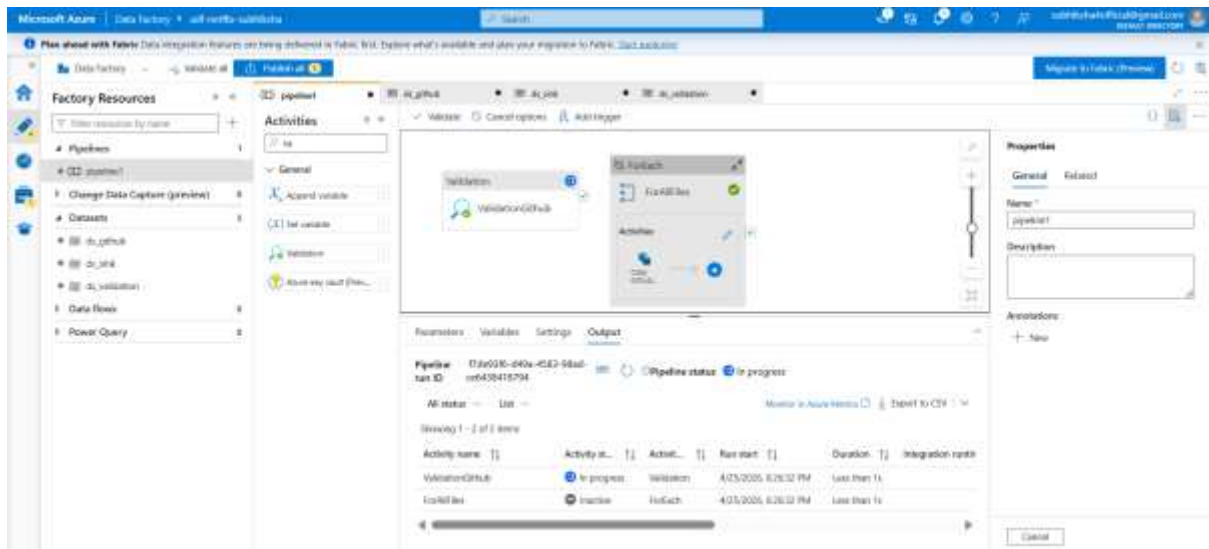

If the file existed it will show success else shows In progress click cancel option. Cancel

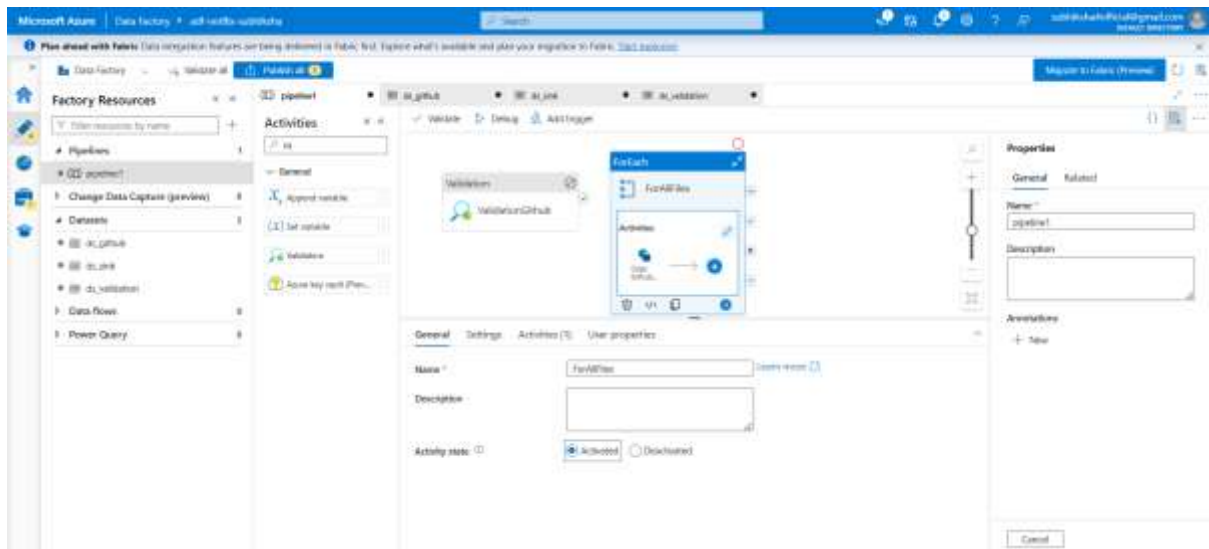



Change foreach to activated

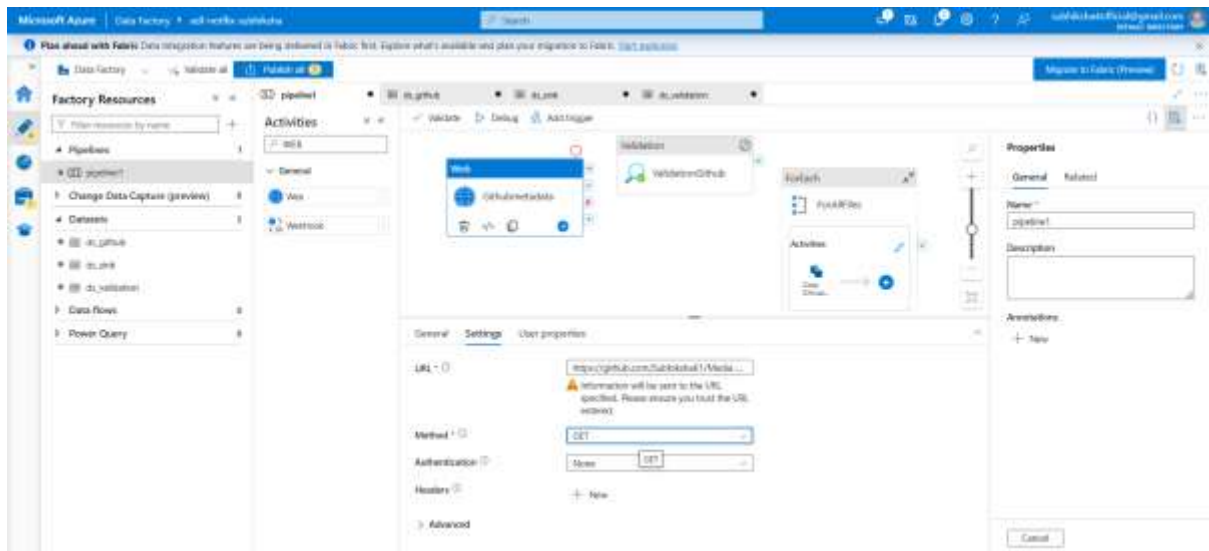

From activities web component is used URL of github is placed for netflixtitles.csv file, GET method, <https://github.com/SubhikshaK1/Media-Data-Engineering-Pipeline-Medallion-Architecture-using-Azure-Databricks-and-ADF/tree/main/Source>


Deactivate Validation and for each to debug the web component

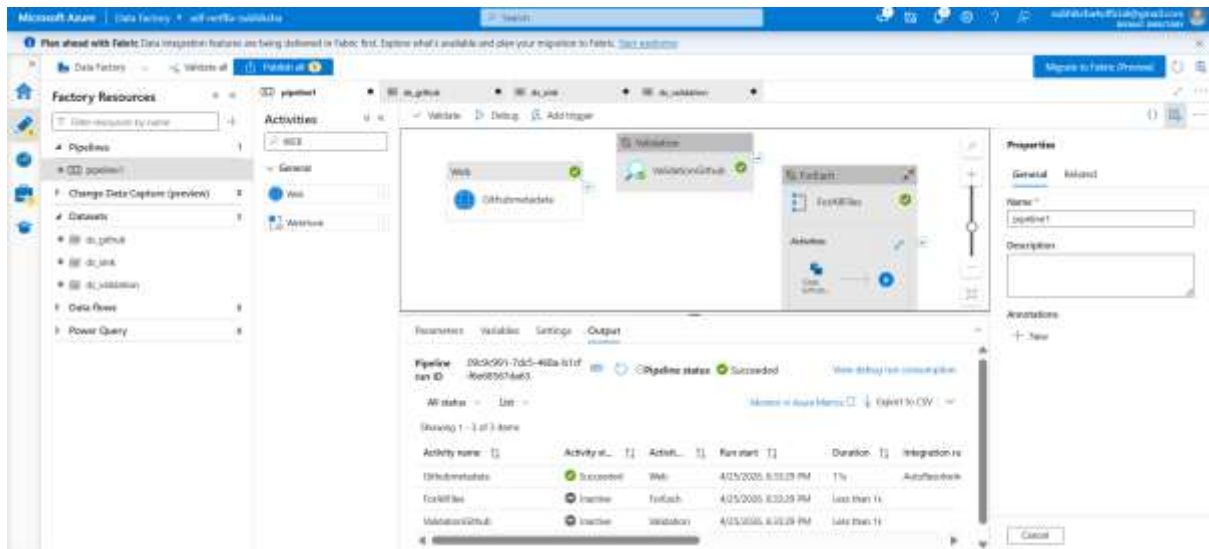

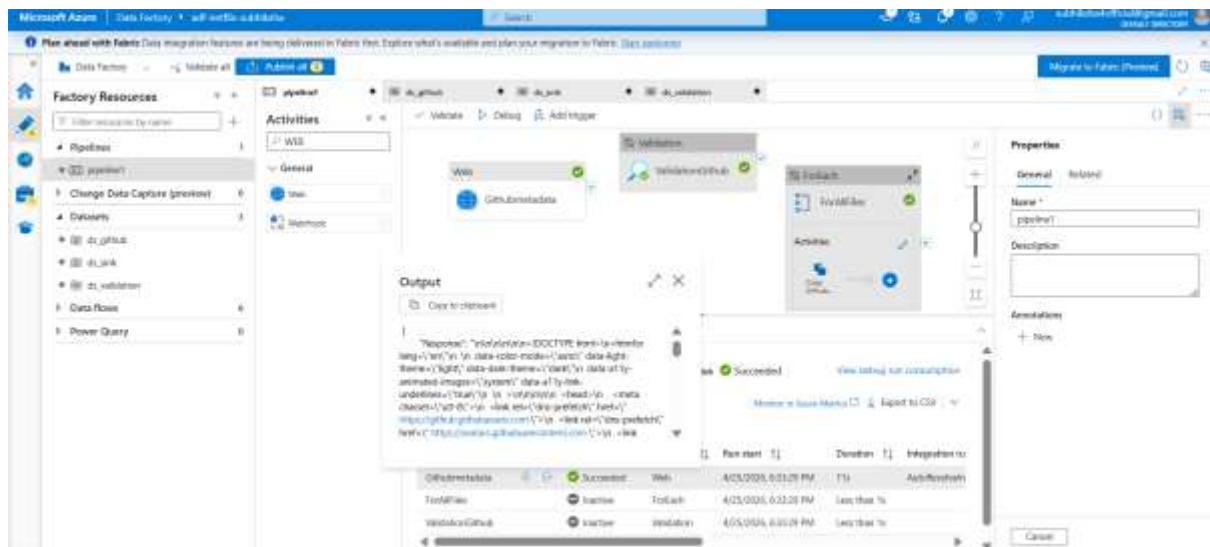



Githubmetadata ->] is input; [-> is output

Store the Response in variable

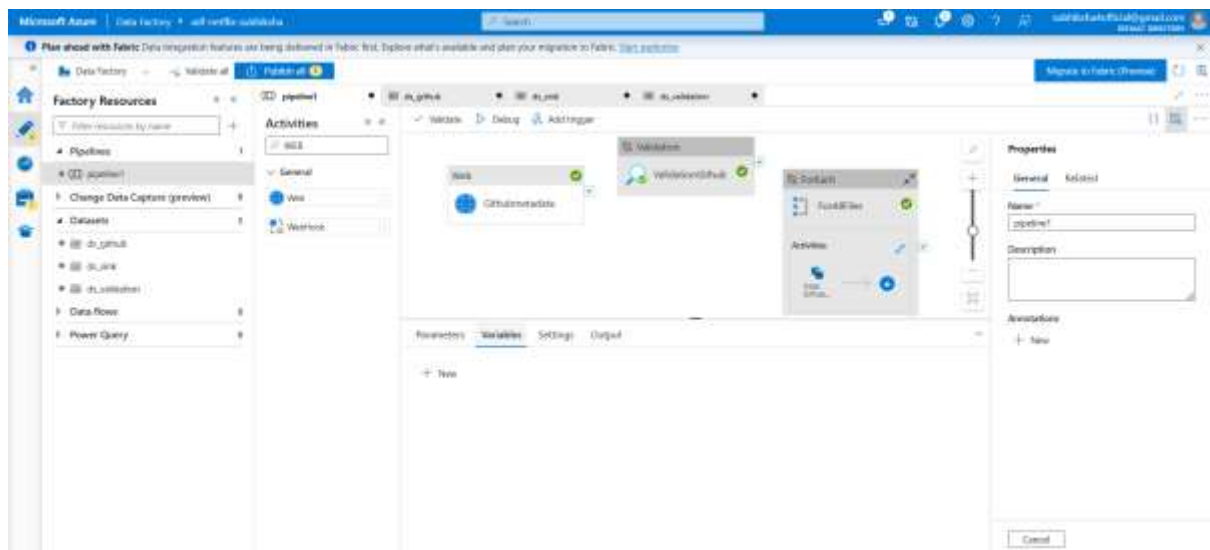


Click variable tab

Name GithubMetadata

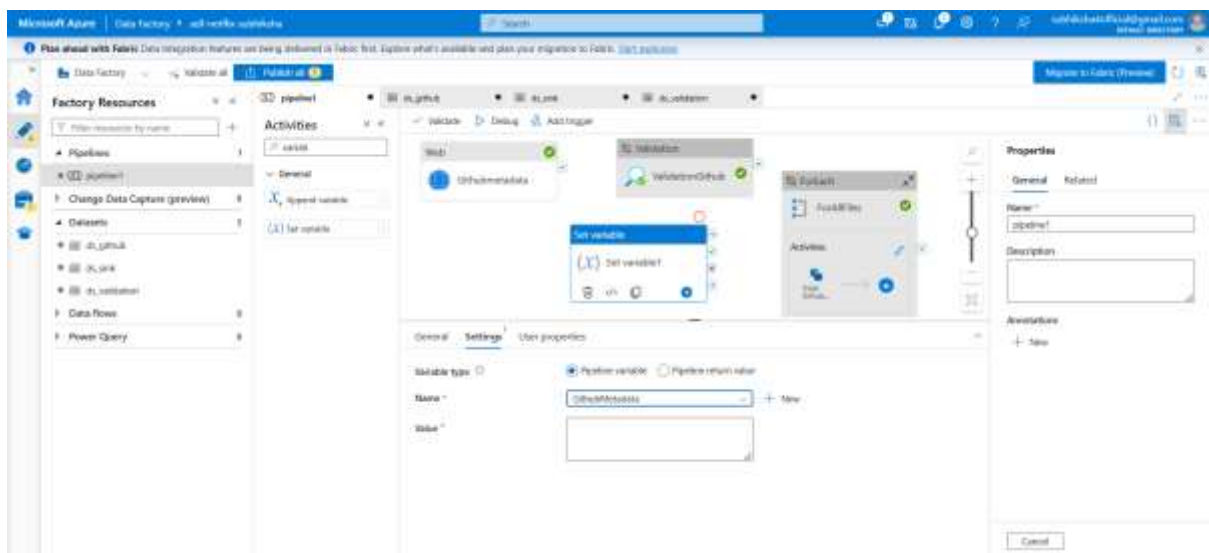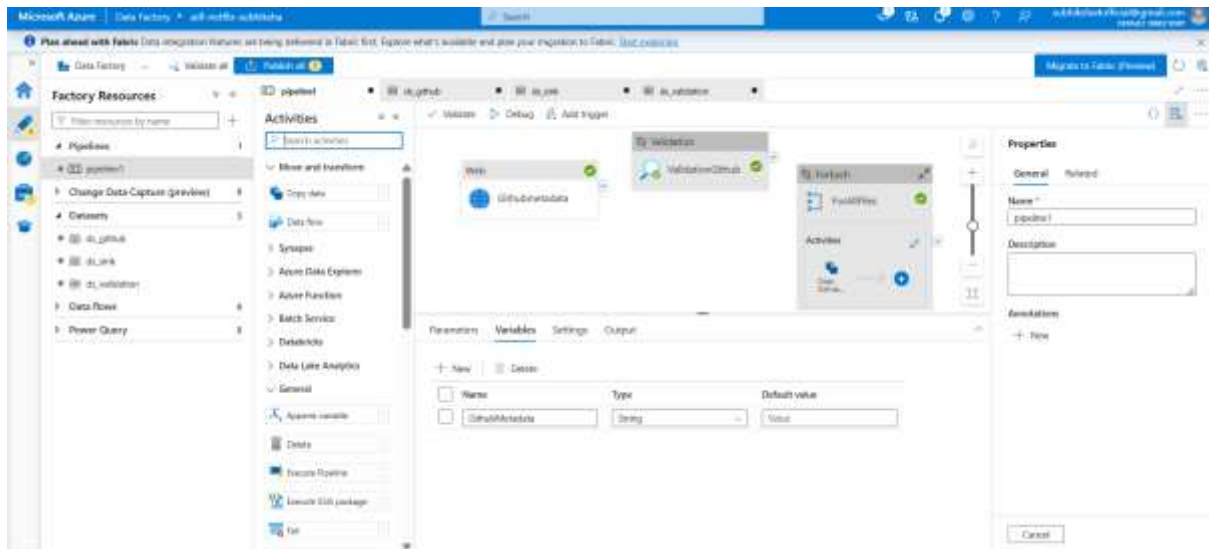

Take set variable > select the name

Master data : [netflix_titles.csv](#) is added manually

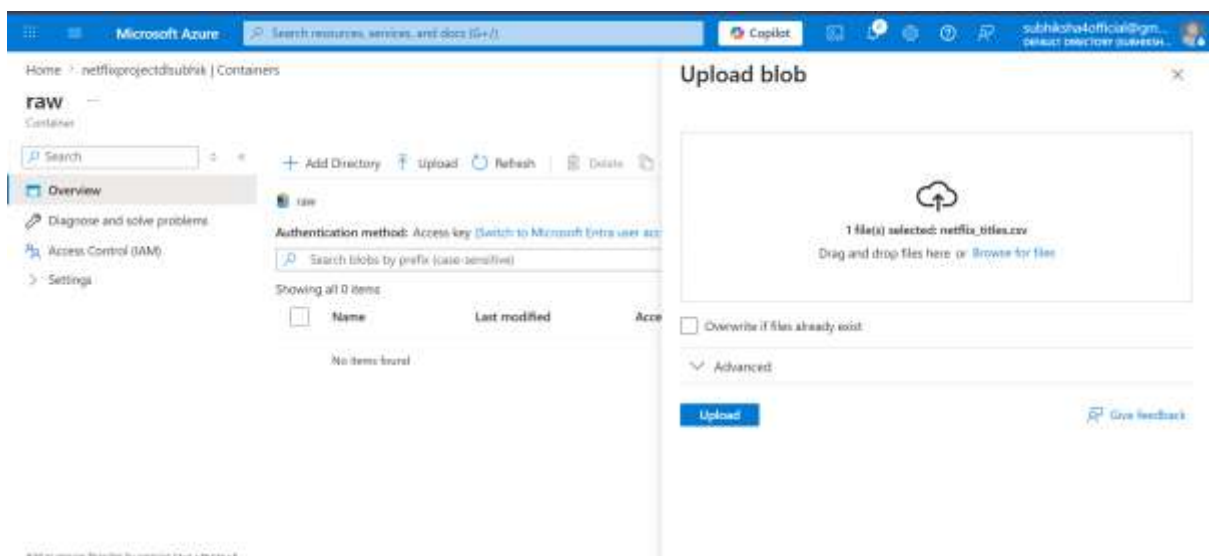

This is done in ADLS page raw>file

Microsoft Azure | Data Factory | self-writhe-walidatiba

Plan ahead with Fabric Data integration features are being delivered in Fabric first. Explore what's available and plan your migration to Fabric. [Start exploring](#)

Factory Resources

- Pipelines
- Change Data Capture (preview)
- Datasets
- du.github
- du.link
- du.validation
- Data flows
- Power Query

Activities

- General
- Append variable
- Get variable

Web

Get variable

Validation

ValidationGitHub

Activity

Parameters

Variables

Settings

Output

Pipeline run ID: k17786-733a-4d2b-a523-08a7f7f6e2a3 Pipeline status: Succeeded

All status: List

Showing 1 - 8 of 8 items

Activity name	Activity st.	Activ...	Run start	Duration	Integration runtime	User prop...
Copy GitHub Data	Succeeded	Copy data	4/25/2025, 1:14:21 PM	15s	AutoResolveIntegrationRuntime (South India)	
Copy GitHub Data	Succeeded	Copy data	4/25/2025, 1:14:31 PM	17s	AutoResolveIntegrationRuntime (South India)	
Copy GitHub Data	Succeeded	Copy data	4/25/2025, 1:14:31 PM	15s	AutoResolveIntegrationRuntime (South India)	
Copy GitHub Data	Succeeded	Copy data	4/25/2025, 1:14:31 PM	15s	AutoResolveIntegrationRuntime (South India)	
FetchAllRe	Succeeded	FetchAll	4/25/2025, 1:14:38 PM	15s		
ValidationGitHub	Succeeded	Validation	4/25/2025, 1:14:31 PM	1s		
Get variable1	Succeeded	Get variable	4/25/2025, 1:14:38 PM	Less than 1s		
GitHubMetadata	Succeeded	Web	4/25/2025, 1:14:28 PM	7s	AutoResolveIntegrationRuntime (Central India)	

Microsoft Azure | Data Factory | self-writhe-walidatiba

Plan ahead with Fabric Data integration features are being delivered in Fabric first. Explore what's available and plan your migration to Fabric. [Start exploring](#)

Factory Resources

- Pipelines
- Change Data Capture (preview)
- Datasets
- du.github
- du.link
- du.validation
- Data flows
- Power Query

Activities

- General
- Append variable
- Get variable

Web

Get variable

Validation

ValidationGitHub

Activity

Parameters

Variables

Settings

Output

Pipeline run ID: k17786-733a-4d2b-a523-08a7f7f6e2a3 Pipeline status: Succeeded

All status: List

Showing 1 - 8 of 8 items

Activity name	Activity st.	Activ...	Run start	Duration	Integration runtime	User prop...
Copy GitHub Data	Succeeded	Copy data	4/25/2025, 1:14:21 PM	15s	AutoResolveIntegrationRuntime (South India)	
Copy GitHub Data	Succeeded	Copy data	4/25/2025, 1:14:31 PM	17s	AutoResolveIntegrationRuntime (South India)	
Copy GitHub Data	Succeeded	Copy data	4/25/2025, 1:14:31 PM	15s	AutoResolveIntegrationRuntime (South India)	
Copy GitHub Data	Succeeded	Copy data	4/25/2025, 1:14:31 PM	15s	AutoResolveIntegrationRuntime (South India)	
FetchAllRe	Succeeded	FetchAll	4/25/2025, 1:14:38 PM	15s		
ValidationGitHub	Succeeded	Validation	4/25/2025, 1:14:31 PM	1s		
Get variable1	Succeeded	Get variable	4/25/2025, 1:14:38 PM	Less than 1s		

Publish act as save

Going to monitor tab> debug (pipeline runs)

Microsoft Azure | Data Factory | self-writhe-walidatiba

Plan ahead with Fabric Data integration features are being delivered in Fabric first. Explore what's available and plan your migration to Fabric. [Start exploring](#)

Factory Resources

- Pipelines
- Change Data Capture (preview)
- Datasets
- du.github
- du.link
- du.validation
- Data flows
- Power Query

Activities

- General
- Append variable
- Get variable

Web

Get variable

Validation

ValidationGitHub

Activity

Parameters

Variables

Settings

Output

Pipeline run ID: k17786-733a-4d2b-a523-08a7f7f6e2a3 Pipeline status: Succeeded

All status: List

Showing 1 - 8 of 8 items

Activity name	Activity st.	Activ...	Run start	Duration	Status	Triggered by	Run ID	Parameters
Copy GitHub Data	Succeeded	Copy data	4/25/2025, 1:14:21 PM	15s	Succeeded	Manual trigger	k17786-733a-4d2b-a523-08a7f7f6e2a3	
Copy GitHub Data	Succeeded	Copy data	4/25/2025, 1:14:31 PM	17s	Cancelled	Manual trigger	5a77786-51ba-4340-a685-...	
Copy GitHub Data	Succeeded	Copy data	4/25/2025, 1:14:31 PM	15s	Succeeded	Manual trigger	08a2e91-7a25-408a-81c4-...	
Copy GitHub Data	Succeeded	Copy data	4/25/2025, 1:14:31 PM	15s	Cancelled	Manual trigger	0a2e91-7a25-408a-81c4-...	
Copy GitHub Data	Succeeded	Copy data	4/25/2025, 1:14:31 PM	15s	Cancelled	Manual trigger	162003M-1f14-4944-wc17-...	
Copy GitHub Data	Succeeded	Copy data	4/25/2025, 1:14:31 PM	15s	Succeeded	Manual trigger	2854006-wc4-4051-6302-...	

For notification of failures logic apps can be used but in monitor tab alter option is also available to get a mail notification

4. Resource Group: Create Databricks resource

The first screenshot shows the 'RG-Netflix-Project' resource group in the Microsoft Azure portal. The 'Resources' tab is active, displaying a table of resources:

Name	Type	Location
adf-netflix-subzhi	Data factory (V2)	Central India
netflixprojectsubzhi	Storage account	South India

The second screenshot shows the 'Marketplace' search results for 'databricks'. The search results show 1 to 20 of 106 results. The 'Azure Databricks' offering is highlighted.

The third screenshot shows the 'Create an Azure Databricks workspace' wizard. The 'Basics' tab is active, showing the following details:

- Subscription: Azure subscription 1
- Resource group: Create new
- Workspace name: netflix-adb-subzhi
- Region: Central India
- Pricing tier: Trial (Premium - 14-Days Free DBUs)

The 'Review + create' button is visible at the bottom of the wizard.

Microsoft Azure Search resources, services, and docs (G+T) Copilot subhishatofficial@pm... (SUBMIT DIRECTORY SUBMISSION)

Home > Marketplace > Azure Databricks

Create an Azure Databricks workspace

Pricing Tier Trial (Premium - 14-Days Free DBUs)

Workspace type

- ☐ Serverless
No setup required. Uses Databricks-managed default storage and serverless compute. Connect to your cloud storage at any time. [Learn more](#)
- ☒ Hybrid
Requires access to compute and storage in your Azure account. Supports custom compute.

Serverless compute is not available for the Trial tier

Managed Resource Group name RG_managed_netflix

[Review + create](#) [< Previous](#) [Next : Networking >](#)

This is Managed resource group because it's a control pane. Databricks put all the VM, All managed data

Goto resource-> launch workspace->

Microsoft Azure Search resources, services, and docs (G+T) Copilot subhishatofficial@pm... (SUBMIT DIRECTORY SUBMISSION)

Home > RG-Netflix-Project_netflix-adb-subhi | Overview

netflix-adb-subhi Azure Databricks Service

[List access control settings for this Azure Databricks Service.](#) [Show me the cluster details for this Azure Databricks Service.](#)

[Delete](#)

- Overview**
- Activity log
- Access control (IAM)
- Tags
- Diagnose and solve problems
- Resource visualizer
- Settings
- Automation
- Help

Location Central India [URL](#)
[https://adb-74026191051029022.azuredatabricks.net](#)
 Pricing Tier [Trial \(Premium - 14-Days Free DBUs\) \(Click to change\)](#)
 Enable No Public IP Yes

Subscription [Azure subscriptions_1](#)
 Subscription ID B25edc85-38e5-458e-9cb9-ade3b27f58bd
 Tags [\(edit\)](#)
[Add tags](#)

[Launch Workspace](#)
[Upgrade to Premium](#)

Add or remove Databricks by pressing Ctrl+Shift+F

Microsoft Azure | Search resources, services, and docs (G+J) | Copilot | subhikshakofficial@gmail.com | subhikshakofficial@gmail.com

Home > Resource Manager | Resource groups > RG-Netflix-Project > Marketplace

Access Connector for Azure Databricks

Microsoft | Azure Service

★ 4.7 (232 ratings)

Subscription: Azure subscription 1 | Plan: Access Connector for Azure Databricks | Create

Overview | Plans | Usage Information + Support | Ratings + Reviews

Unity Catalog provides unified governance for all data and AI assets in your Lakehouse.

Unity Catalog can be configured to use an Azure managed identity to access storage containers on behalf of Unity Catalog users. Managed identities provide an identity for applications to use when they connect to resources that support Microsoft Entra ID authentication. You can use managed identities in Unity Catalog to support two primary use cases:

[Give feedback](#)

Microsoft Azure | Search resources, services, and docs (G+J) | Copilot | subhikshakofficial@gmail.com | subhikshakofficial@gmail.com

Home > Resource Manager | Resource groups > RG-Netflix-Project > Marketplace > Access Connector for Azure Databricks

Create an Access Connector for Azure Databricks

Basics | Tags | Managed Identity | **Review + create**

[View automation template](#)

Basics

Subscription	Azure subscription 1
Resource group	RG-Netflix-Project
Name	access_netflix
Region	East US

Managed Identity

Identity type	None
---------------	------

[Previous](#) | [Next](#) | [Create](#) | [Give feedback](#)

Microsoft Azure | Search resources, services, and docs (G+J) | Copilot | subhikshakofficial@gmail.com | subhikshakofficial@gmail.com

Home > AccessConnectorCreate-20260425221215 | Overview > RG-Netflix-Project > netflixprojectdlsbhik

netflixprojectdlsbhik | Access Control (IAM)

Storage account

| [Add](#) | [Download role assignments](#) | [Full columns](#) | [Refresh](#) | [Delete](#) | [Feedback](#)

Overview | Activity log | Tags | Diagnose and solve problems | **Access Control (IAM)** | Data migration | Events | Storage browser | Partner solutions | Resource visualizer | Data storage | Containers

Check access | Role assignments | Roles | Deny assignments

My access
View my level of access to this resource.
[View my access](#)

Check access
Review the level of access a user, group, service principal, or managed identity has to this resource. [Learn more](#)

[Check access](#)

Grant access to this resource

Grant access to resources by assigning a role. [Learn more](#)

View access to this resource


View the role assignments that grant access to this and other resources. [Learn more](#)

View deny assignments

View the role assignments that have been denied access to specific actions at this scope. [Learn more](#)

Add or remove favorites by pressing Ctrl + Shift + F

Redirect to resource group access storage account

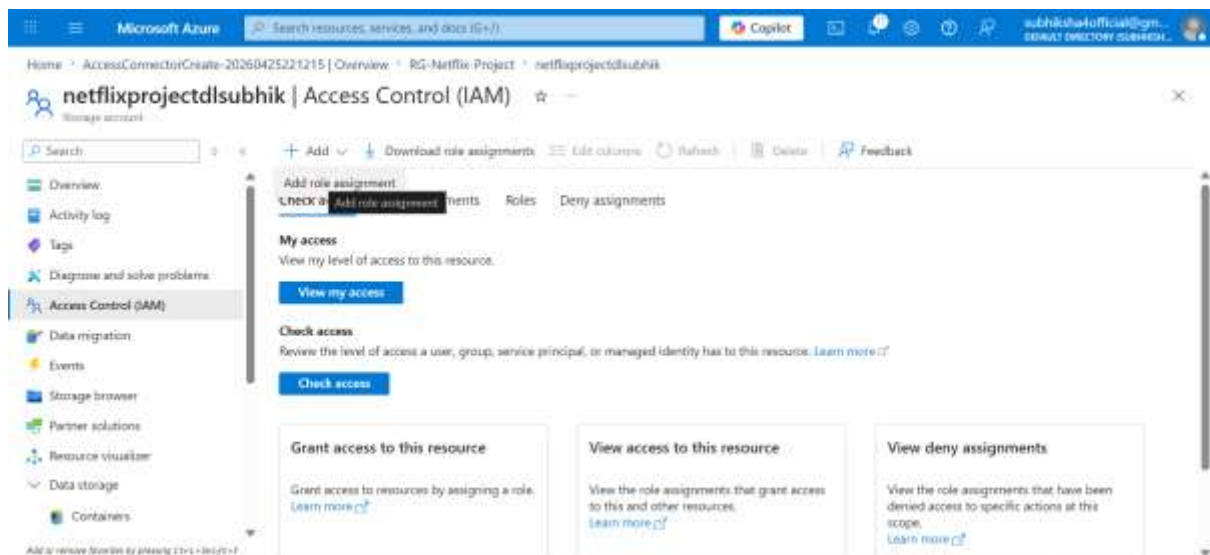

Addrole assignmnet

Microsoft Azure

Search resources, services, and docs (G+/I)

Copilot

subhikshaofficial@gmail.com
DEFAULT DIRECTORY SUBHICHA...

Home > AccessConnectorCreate-20260425221215 | Overview > RG-Netfix-Project > netfixprojectdsubbik | Access Control (IAM)

Add role assignment

RoleMembersConditionsReview + assign

A role definition is a collection of permissions. You can use the built-in roles or you can create your own custom roles. [Learn more](#)

Copilot can help pick a role

Job function rolesPrivileged administrator roles

Grant access to Azure resources based on job function, such as the ability to create virtual machines.

Type: AllCategory: All

Name ↑	Description ↑	Type ↑	Category ↑	Details
Storage Blob Data Contributor	Allows for read, write and delete access to Azure Storage blob containers and data	BuiltInRole	Storage	View

Showing 1 - 1 of 1 results

Review + assignPreviousNextFeedback

Microsoft Azure

Search resources, services, and docs (G+/I)

Copilot

subhikshaofficial@gmail.com
DEFAULT DIRECTORY SUBHICHA...

Home > AccessConnectorCreate-20260425221215 | Overview > RG-Netfix-Project > netfixprojectdsubbik

Add role assignment

RoleMembersConditionsReview + assign

Selected roleStorage Blob Data Contributor

Assign access to☒ User, group, or service principal☐ Managed identity

Members

Name	Object ID	Type
No members selected		

DescriptionOptional

Review + assignPreviousNext

Select members

Subhiksha K(Guest)
subhiksha4official_gmail.com#EXT#@subhiksha4officialgmail.onmicrosoft.com

Selected members:
No members selected. Search for and add one or more members you want to assign to the role for this resource.
[Learn more about RBAC](#)

SelectClose

Microsoft Azure

Search resources, services, and docs (G+/I)

Copilot

subhikshaofficial@gmail.com
DEFAULT DIRECTORY SUBHICHA...

Home > AccessConnectorCreate-20260425221215 | Overview > RG-Netfix-Project > netfixprojectdsubbik

Add role assignment

RoleMembersConditionsReview + assign

Selected roleStorage Blob Data Contributor

Assign access to☐ User, group, or service principal☒ Managed identity

Members

Name	Object ID	Type
No members selected		

DescriptionOptional

Review + assignPreviousNext

Select managed identities

Some results might be hidden due to your ABAC condition.

Subscription *
Azure subscription 1

Managed identity
Access Connector for Azure Databricks (2)

access_netfix
/subscriptions/825edcd1-58e5-458e-9cb9-ade1b27f58bd/resourceGroups/RG-Net-unity-catalog-access-connectors
 access_netfix
/subscriptions/825edcd1-58e5-458e-9cb9-ade1b27f58bd/resourceGroups/RG_ma...

Selected members:
No members selected. Search for and add one or more members you want to assign to the role for this resource.
[Learn more about RBAC](#)

SelectCloseFeedback

Microsoft Azure Search resources, services, and docs (G+)

Home > AccessConnectorCreate-20260425221215 | Overview > RG-Netflix-Project > netflixprojectidsutvik | Access Control (IAM)

Add role assignment

Selected role Storage Blob Data Contributor

Assign access to ☐ User, group, or service principal ☒ Managed identity

Members [+ Select members](#)

Name	Object ID	Type
access_netflix	d134c5d5-3b3d-4fab-9c35-3d3b640144...	Access Connector for Azure Databricks

Description

[Review + assign](#) [Previous](#) [Next](#) [Feedback](#)

Microsoft Azure Search resources, services, and docs (G+)

Home > AccessConnectorCreate-20260425221215 | Overview

RG-Netflix-Project

Resource group

[Search](#) [+ Create](#) [Manage view](#) [Delete resource group](#) [Refresh](#) [Export to CSV](#) [Open query](#) [Group by none](#)

Overview [Activity log](#) [Access control \(IAM\)](#) [Tags](#) [Resource visualizer](#) [Events](#) [Settings](#) [Cost Management](#) [Monitoring](#) [Automation](#) [Help](#)

Essentials [JSON View](#)

Resources **Recommendations**

Filter for any field... [Type equals all](#) [Location equals all](#) [+ Add filter](#)

	Name	Type	Location
☐	access_netflix	Access Connector for Azure Data...	East US
☐	adf-netflix-subriksia	Data factory (V2)	Central India
☐	netflix-adb-subri	Azure Databricks Service	Central India
☐	netflixprojectidsutvik	Storage account	South India

Copy resource ID: /subscriptions/825edc85-38e5-458e-9cb9-ade3b27f58bd/resourceGroups/RG-Netflix-Project/providers/Microsoft.Databricks/accessConnectors/access_netflix

Microsoft Azure Search resources, services, and docs (B+)

Home > AccessConnectorCreate-20260425221215 | Overview > RG-Netflix-Project

access_netflix

Access Connector for Azure Databricks

Search Refresh Delete

Overview

- Activity log
- Access control (IAM)
- Tags
- Resource visualizer
- Settings
- Automation
- Help

Essentials

Resource group (read) [RG-Netflix-Project](#)

Location: East US

Subscription (readonly) [Azure subscription 1](#)

Subscription ID: 825ed65-38e5-458e-9cb9-ade3b27758bd

Tags (edit) [Add tags](#)

State: Succeeded

Resource ID: /subscriptions/825ed65-38e5-458e-9cb9-ade3b27758bd/resourceGroups/...

JSON View

All or none (available by pressing Ctrl+Enter+P)

Microsoft Azure databricks Search data, notebooks, recent, and more... CTRL + P netflix-adb-subh

SQL

- SQL Editor
- Queries
- Dashboards
- Genie spaces
- Alerts
- Query History
- SQL Warehouses

Data Engineering

- Job Runs
- Data Ingestion

AI/ML

- Playground
- Experiments
- Features
- Models
- Serving

Catalog

Serverless Starter Warehouse Serverless

Type to search...

For you: All

- My organization
 - netflix_adb_subh
 - system
- Data Shares featured
 - samples

Suggested Favorites Recents

Name	Reason for suggestion
sales_customers samples.bakehouse	Quick start with samples data
media_gold_tvshow_chuckled samples.bakehouse	Quick start with samples data
sales_transactions samples.bakehouse	Quick start with samples data
media_customer_reviews samples.bakehouse	Quick start with samples data
sales_transactions samples.bakehouse	Quick start with samples data
sales_suppliers samples.bakehouse	Quick start with samples data

Add data

- Ingest via partner
- Upload to volume
- Create a catalog
- Create an external location
- Create a volume
- Create a credential
- Create a connection

Table

adb-7401619105102902.2.azure.databricks.net/explore/locations/create?m=7401619105102902

Microsoft Azure databricks Search data, notebooks, recent, and more... CTRL + P netflix-adb-subh

Create a new external location

An external location allows you to access your data stored in cloud storage (e.g. Azure Data Lake Storage). You will need the cloud storage path and a paired credential (e.g. managed identity) which gives access to that path. [Learn more](#)

External location name*
netflix_unity_metastore

Storage type*
Azure Data Lake Storage

URL*
Enter the bucket path that you want to use as the external location. Note: This must be an ADLS Gen2 storage account with a hierarchical namespace.
abfs://metastore@netflixprojectdfsuhk.dfs.core.window.net/

Storage credential* [Learn more](#)
Provide a storage credential capable of accessing the URL.
netflix_adb_subh (Managed Identity)

Connector ID: /subscriptions/825ed65-38e5-458e-9cb9-ade3b27758bd/resourceGroups/RG_managed_netflix/providers/...

User Assigned Managed Identity ID:

Microsoft Azure

databricks

Search data, notebooks, recent, and more... CTRL + P

netflix-adb-subhi

5

New

Workspace

Recents

Catalog

Jobs & Pipelines

Compute

Marketplace

SQL

SQL Editor

Queries

Dashboards

Genie spaces

Alerts

Query History

SQL Warehouses

Data Engineering

Runs

Data Ingestion

Catalog Explorer > External Locations >

netflix_unity_metastore

Test connection

Overview Permissions Browse Workspaces

Description [Edit](#)

abfss://metastore@netflixprojectdlsbhik.dfs.core.windows.net/

Credential	netflix_unity_metastore_azuremanagedidentity_1777139399142
URL	abfss://metastore@netflixprojectdlsbhik.dfs.core.windows.net/
Limit to read-only use	Disabled
Enable file events	Enabled
Resource group	RG-Netflix-Project
Subscription ID	825edc85-38e5-458e-9cb9-ade3b27f58bd

About this external location

Owner subhiksha4official@gmail.com [Edit](#)

Fallback mode:

Microsoft Azure

databricks

Search data, notebooks, recent, and more... CTRL + P

netflix-adb-subhi

5

New

Workspace

Recents

Catalog

Jobs & Pipelines

Compute

Marketplace

SQL

SQL Editor

Queries

Dashboards

Genie spaces

Alerts

Query History

SQL Warehouses

Data Engineering

Runs

Data Ingestion

Test connection

Location Type: Directory

Success

- Read

Success

- List

Success

- Write

Success

- Delete

Success

- Path Exists

Success

- Hierarchical Namespace Enabled


Failed

- File Events Read


File Events Read Failed

Provisioning has failed. Failed to provision file events resources during queue create operation. Please ensure the IAM roles Storage Account Contributor, Storage Blob Data Contributor, EventGrid EventSubscription Contributor, Storage Queue Data Contributor are correctly assigned to your managed identity (or service principal, if used). Original error from the cloud provider: If you are using a StorageSharedKeyCredential, and the server returned an error message that says 'Signature did not match', you can compare the string to sign with the one generated by the SDK. To log the string to sign, pass in the context key value pair 'Azure-Storage-Log-String-To-Sign': true to the appropriate method call. If you are using a SAS token, and the server returned an error message that says 'Signature did not match', you can compare the string to sign with the one generated by the SDK. To log the string to sign, pass in the context key value pair 'Azure-Storage-Log-String-To-Sign':

Done

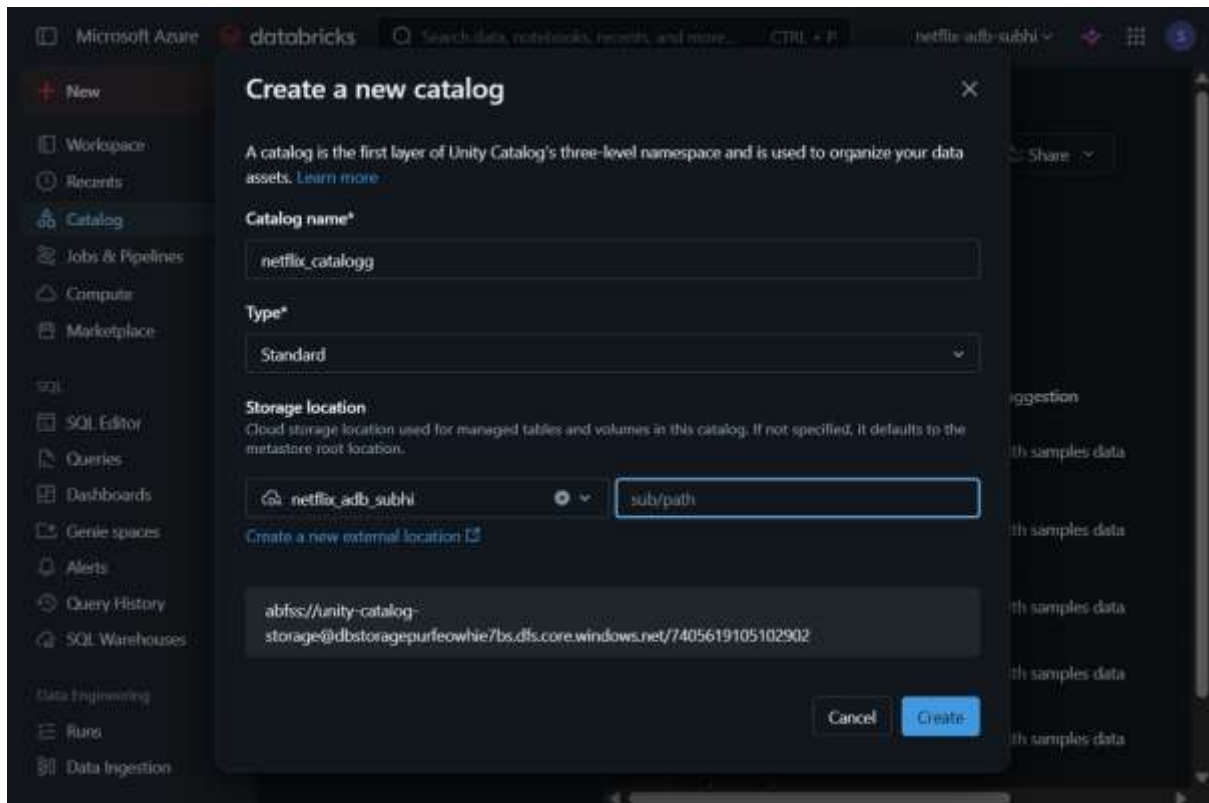

Settings>

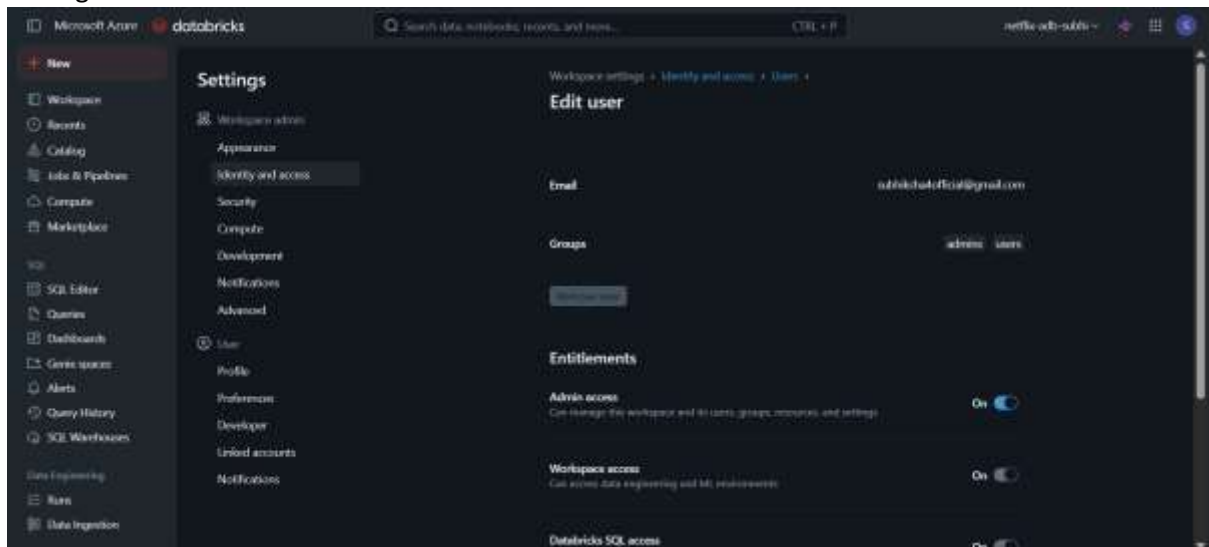

Bronze, silver, gold, raw external location created

Microsoft Azure databricks

Search data, notebooks, recent, and more...

CTRL + P

netflix-adb-subhi

New

Workspace

Recents

Catalog

Jobs & Pipelines

Compute

Marketplace

SQL

SQL Editor

Queries

Dashboards

Genie spaces

Alerts

Query History

SQL Warehouses

Data Engineering

Runs

Data Ingestion

External Locations

Create a new external location

An external location allows you to access your data stored in cloud storage (e.g. Azure Data Lake Storage). You will need the cloud storage path and a paired credential (e.g. managed identity) which gives access to that path [Learn more](#)

External location name*

silver_ext

Storage type*

Azure Data Lake Storage

URL*

Enter the bucket path that you want to use as the external location. Note: This must be an ADLS Gen2 storage account with a hierarchical namespace

abfss://silver@netflixprojectdlsbuhik.dfs.core.windows.net

Storage credential* [Learn more](#)

Provide a storage credential capable of accessing the URL

netflix_unity_metastore_azuremanagedidentity_1777139399142 (Managed identity)

Connector Id: /subscriptions/825edc85-38e5-458e-9cb9-ade3b27f58bd/resourceGroups/RG-Netflix-Project/providers/M...

User Assigned Managed Identity Id:

Comment

abfss://bronze@netflixprojectdlsbuhik.dfs.core.windows.net

Microsoft Azure databricks

Search data, notebooks, recent, and more...

CTRL + P

netflix-adb-subhi

New

Workspace

Recents

Catalog

Jobs & Pipelines

Compute

Marketplace

SQL

SQL Editor

Queries

Dashboards

Genie spaces

Alerts

Query History

SQL Warehouses

Data Engineering

Runs

Data Ingestion

External Locations

Create a new external location

An external location allows you to access your data stored in cloud storage (e.g. Azure Data Lake Storage). You will need the cloud storage path and a paired credential (e.g. managed identity) which gives access to that path [Learn more](#)

External location name*

gold_ext

Storage type*

Azure Data Lake Storage

URL*

Enter the bucket path that you want to use as the external location. Note: This must be an ADLS Gen2 storage account with a hierarchical namespace

abfss://gold@netflixprojectdlsbuhik.dfs.core.windows.net


Storage credential* [Learn more](#)

Provide a storage credential capable of accessing the URL

netflix_unity_metastore_azuremanagedidentity_1777139399142 (Managed identity)

Connector Id: /subscriptions/825edc85-38e5-458e-9cb9-ade3b27f58bd/resourceGroups/RG-Netflix-Project/providers/M...

User Assigned Managed Identity Id:

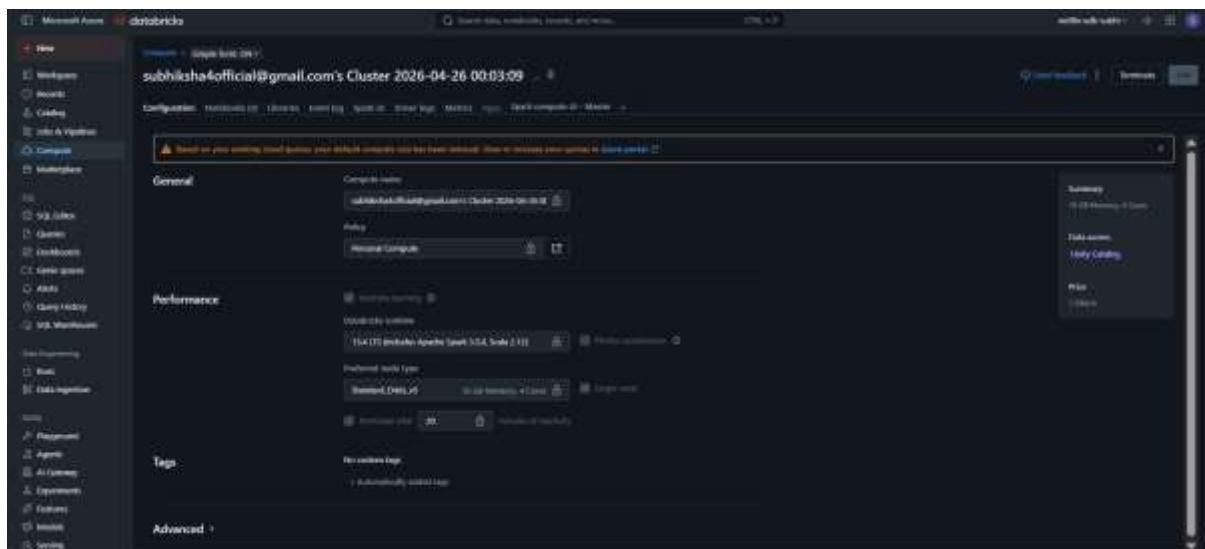

Compute not created

Databricks

Autoloader: [(API)Directory listing, File notifications(storage events)]

ADLS -> Dbrks -> adls(target)

F1

F2(diff schema)

Inferschema store in schema location write in databricks but won't update in autoloader, [create checkpoint location (which file to read?)Rocksdb read file only once]

If schema differs(Datatype differs) Schema evolution [Query breaks] -> infer schema write in schema loc -> when writing into datalake it matches cache schema with adls and updates 'cache' then throw an error 'unknown field exception'.

1.autoloader

CREATE SCHEMA netflix_catalog.net_schema;

""In Databricks: Autoloader (Bronze Layer Incremental Loading): [(API) Directory listing, File notifications (storage events)] ADLS (Raw container) -> Databricks (an lambdas cluster) -> ADLS (Target: Bronze container) F1: Netflix titles.csv F2: Any dynamically arriving new CSV files.

Autoloader Concepts: Autoloader uses directory listing APIs to detect new files. It infers the schema and stores it in the schema location. It reads the file and writes the streaming data into the Databricks Delta format target. It also creates a checkpoint location containing a rocksDB folder, which holds the information of exactly which files have already been read to guarantee exactly-once processing.

Schema Evolution: If the schema differs (e.g., a new column arrives), autoloader writes the new schema into the schema location. However, at the time of writing to the data lake, it attempts to match the previously cached schema inside the Autoloader. When it detects a mismatch, the stream stops and throws an Unknown Field Exception. It then updates the cached schema on the next rerun. Unmapped columns may also be stored in a dynamically created _rescued_data column""

In Databricks File name '1 autoloader'

```
CREATE SCHEMA NETFLIX_CATALOG.NET_SCHEMA;

CHECKPOINT_LOCATION =
"ABFSS://SILVER@NETFLIXPROJECTDSUBHIK.DFS.CORE.WINDOWS.NET/CHECKPOINT"

DF = SPARK.READSTREAM.FORMAT("CLOUDFILES") \

.OPTION("CLOUDFILES.FORMAT", "CSV") \

.OPTION("CLOUDFILES.SCHEMALOCATION", CHECKPOINT_LOCATION + "/SCHEMAS") \

.LOAD("ABFSS://RAW@NETFLIXPROJECTDL.DFS.CORE.WINDOWS.NET/")

DF.WRITESTREAM.OPTION("CHECKPOINTLOCATION", CHECKPOINT_LOCATION) \

.TRIGGER(PROCESSINGTIME="10 SECONDS") \

.START("ABFSS://BRONZE@ NETFLIXPROJECTDLSUBHIK.DFS.CORE.WINDOWS.NET/NETFLIX_TITLES")
```

abfss://bronze@netflixprojectdlsbuhik.dfs.core.windows.net

- **CREATE SCHEMA:** This SQL command establishes a specific schema (database) underneath the Unity Catalog netflix_catalog to securely manage the tables.
- **spark.readStream.format("cloudFiles"):** This uses the PySpark streaming API to constantly monitor the source folder. By specifying "cloudFiles" as the format, you tell Databricks to use the Autoloader engine instead of standard file reading.
- **cloudFiles.schemaLocation:** This configuration tells Autoloader where to save the schema it automatically infers from the incoming CSV files.
- **writeStream & checkpointLocation:** The writeStream command writes the data to the bronze layer. The checkpointLocation is crucial because it generates a hidden rocksDB folder that remembers exactly which files have already been processed, guaranteeing an exactly-once architecture so data is not duplicated.
- **trigger(processingTime="10 seconds"):** This keeps the query running continuously, pulling in batches of new files every 10 seconds. This is explicitly used instead of availableNow, which would only bulk-load the data and then shut down.

In Databricks: Silver Layer Mapping Tables & Output Modes:

ADLS (Bronze container) -> Databricks -> ADLS (Target: Silver container) F1: Lookup Tables (Netflix directors, Netflix cast, Netflix countries, Netflix category). Output Modes (when writing to Delta format):

- **append:** Silently adds new data files to the existing location.
- **overwrite:** Violently kicks out existing data and replaces it completely with the new data.
- **error:** Throws an error/complains if a file already exists in the location.

- ignore: Does nothing and skips the execution if a file already exists. Parameterization: Instead of hardcoding paths, parameterize the notebook dynamically using dbutils.widgets so it can be fed through a workflow. In Databricks File name '2 silver'.


```
dbutils.widgets.text("Source folder", "Netflix directors")
```


```
dbutils.widgets.text("Target folder", "Netflix directors")
```

```
var_source_folder = dbutils.widgets.get("Source folder")
```


```
var_target_folder = dbutils.widgets.get("Target folder")
```


```
DF.write.format("delta").mode("overwrite").save(f"abfss://silver@netflixprojectdl.../{var_target_folder}")
```

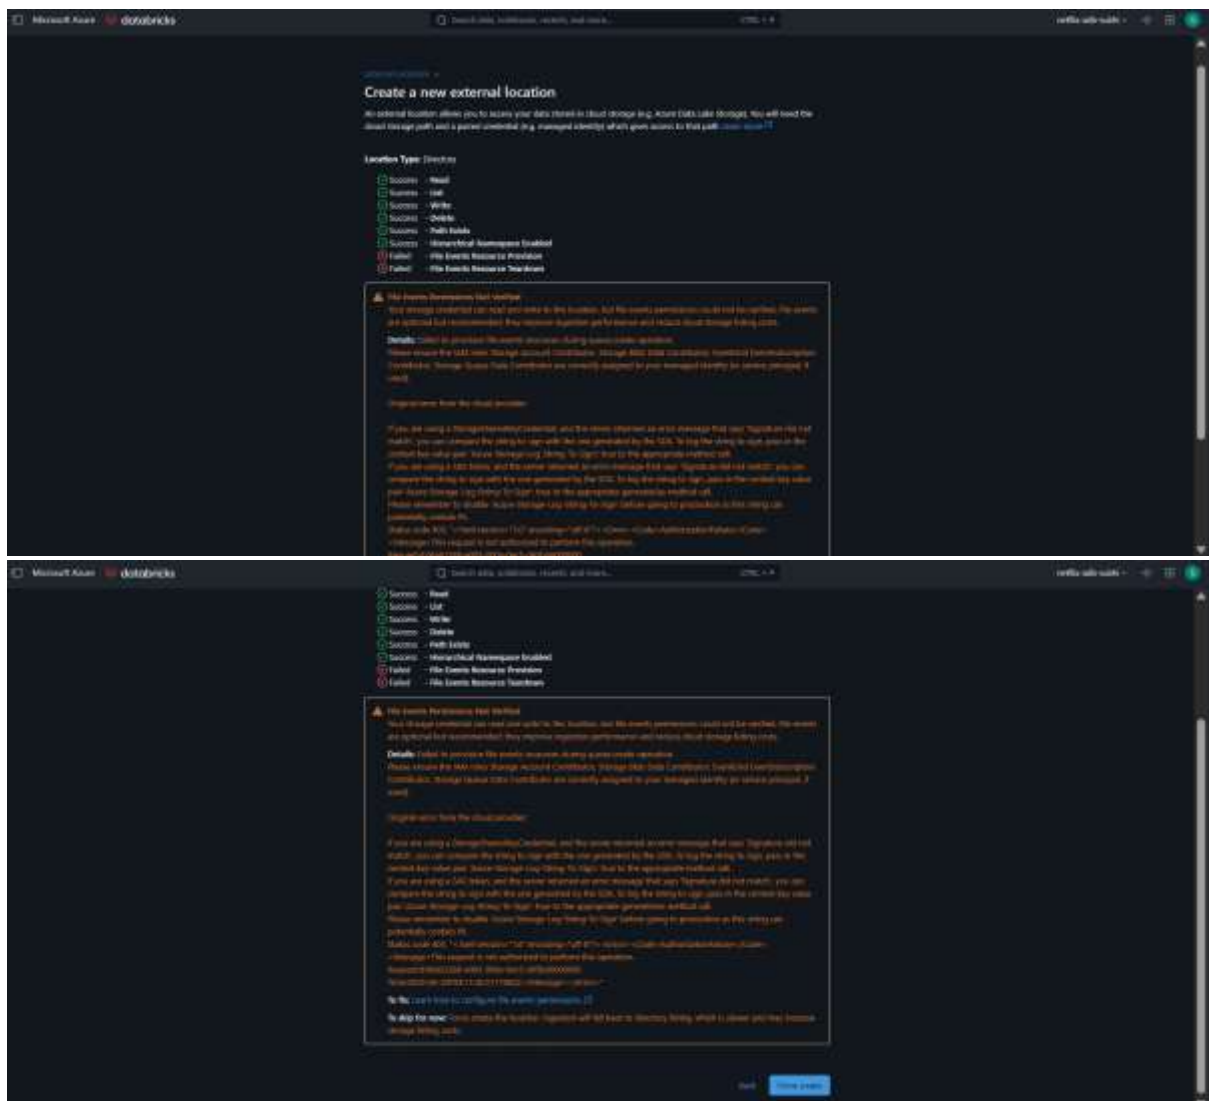

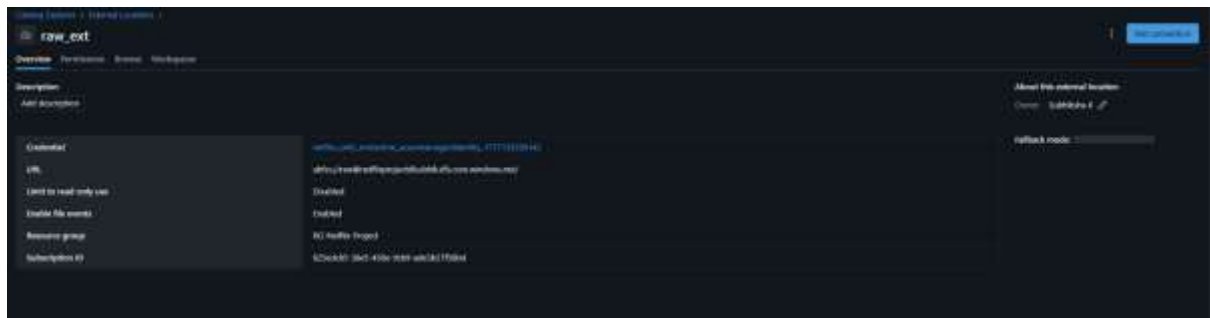


abfss://raw@netflixprojectdlsbuhik.dfs.core.windows.net/

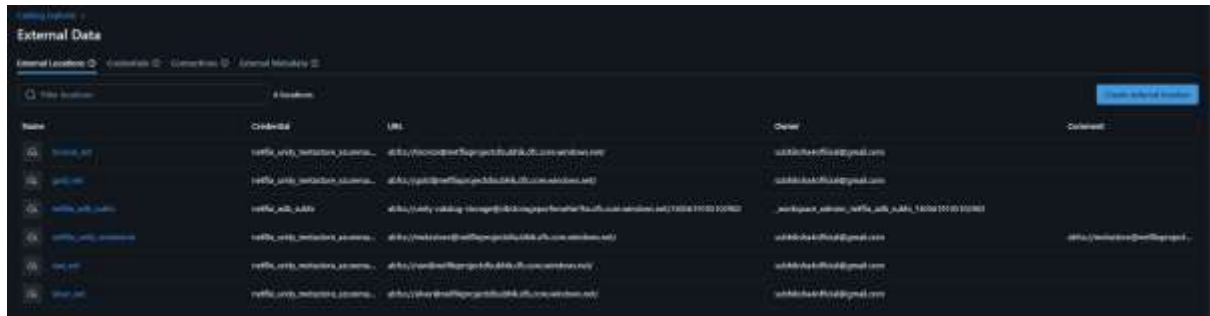

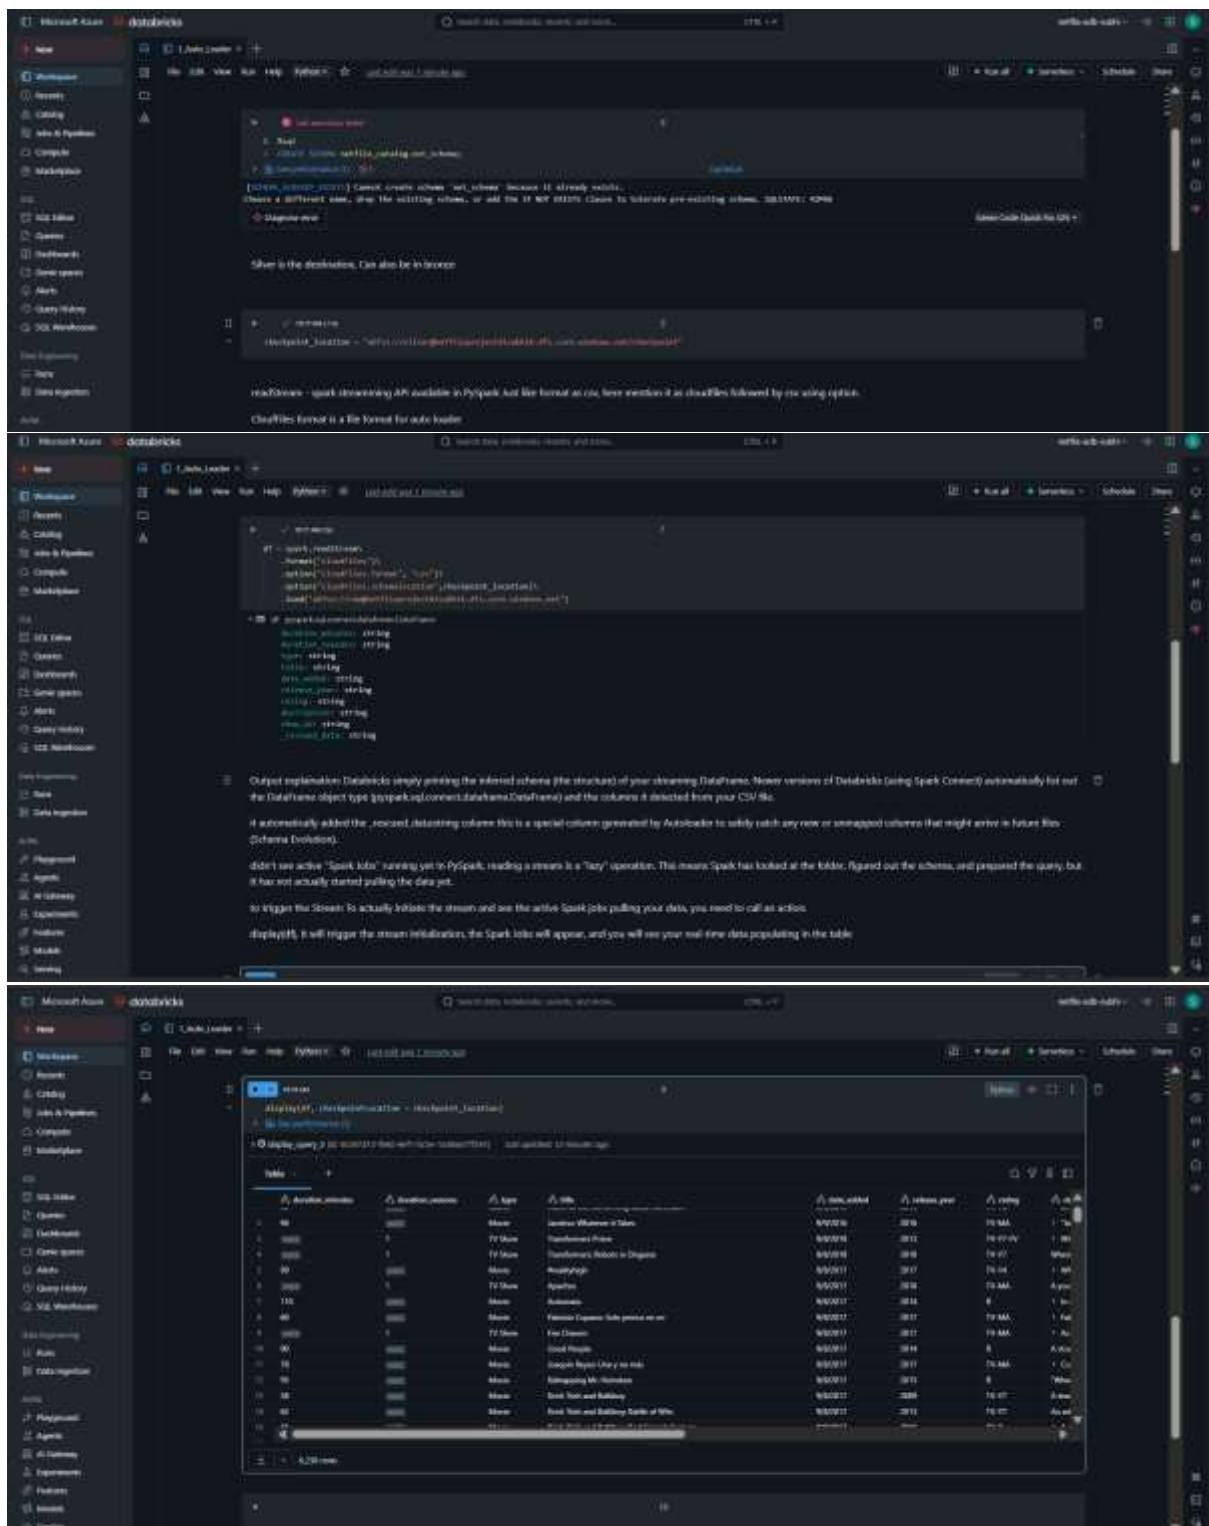

Creating Personal cluster

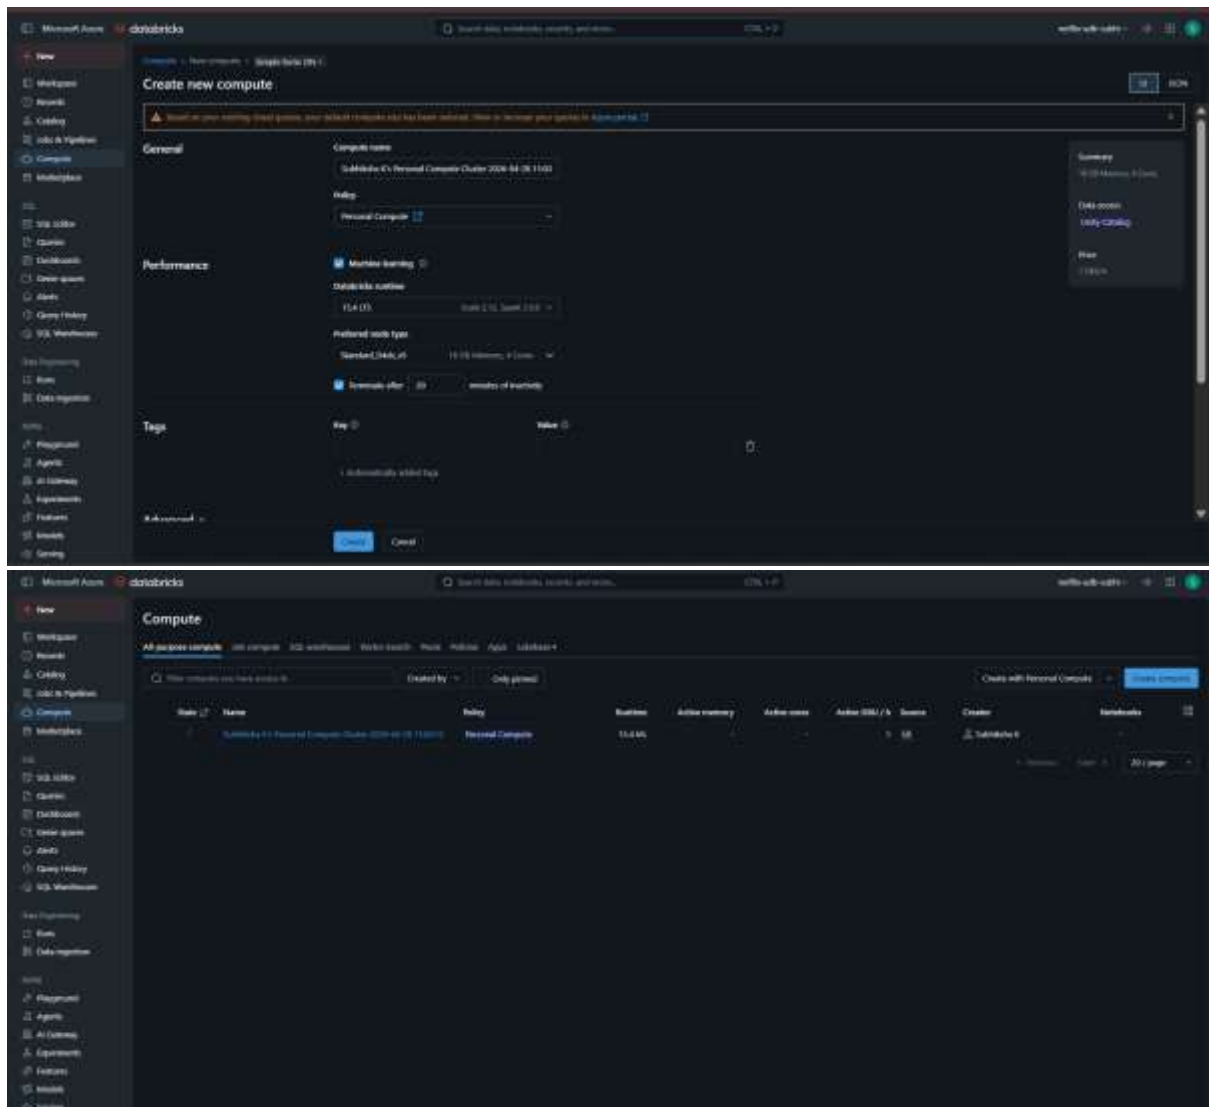

To enhance our understanding of how this works behind the scenes, the checkpoint folder (which holds the hidden rocksDB tracking data and the inferred schemas) acts purely as Autoloader's internal "memory". It dictates exactly which files have been processed to guarantee an exactly-once read.

Because this folder is simply administrative state-tracking data and does not hold our actual queried CSV data, **Databricks does not care which container it sits in**. As long as the provided path is valid and the Databricks access connector has the permissions to write to that ADLS container, the engine will run successfully. The creator ultimately picked silver simply as a personal organizational preference for his pipeline


```
streamlog 100
# write the streaming data directly to browser
df.writeStream(
  .options("checkpointLocation", checkpoint_location) \
  .trigger(processingTime="10 seconds") \
  .start("akka://streamlog@100project040404.dfs.cern.ch/monitor/setting11a_0111a")
)

+ [1] Spark Job
+ [1] Spark Job
+ [1] Spark Job

+ [1] Spark Job
+ [1] Spark Job
+ [1] Spark Job

+ [1] Spark Job
+ [1] Spark Job
+ [1] Spark Job

+ [1] Spark Job
+ [1] Spark Job
+ [1] Spark Job
```



```
streamlog 11
# write the streaming data directly to browser
df.writeStream(
  .options("checkpointLocation", checkpoint_location) \
  .trigger(processingTime="10 seconds") \
  .start("akka://streamlog@100project040404.dfs.cern.ch/monitor/setting11a_0111a")
)

+ [1] Spark Job
+ [1] Spark Job
+ [1] Spark Job

+ [1] Spark Job
+ [1] Spark Job
+ [1] Spark Job

+ [1] Spark Job
+ [1] Spark Job
+ [1] Spark Job
```

To avoid long bill interup is given

```
streamlog 11
# write the streaming data directly to browser
df.writeStream(
  .options("checkpointLocation", checkpoint_location) \
  .trigger(processingTime="10 seconds") \
  .start("akka://streamlog@100project040404.dfs.cern.ch/monitor/setting11a_0111a")
)

+ [1] Spark Job
+ [1] Spark Job
+ [1] Spark Job

+ [1] Spark Job
+ [1] Spark Job
+ [1] Spark Job

+ [1] Spark Job
+ [1] Spark Job
+ [1] Spark Job
```

Redirect to datalake ->

The screenshot shows the Microsoft Azure portal interface. The top navigation bar includes the 'Microsoft Azure' logo, an 'Upgrade' button, a search bar, and a user profile. The left sidebar contains a navigation menu with options like 'Diagnose and solve problems', 'Access Control (IAM)', 'Data migration', 'Events', 'Storage browser', 'Partner solutions', 'Resource visualizer', 'Data storage', 'Containers' (selected), 'File shares', 'Queues', and 'Tables'. The main content area displays the 'Containers' view for the storage account 'netflixprojectdlsuhik'. It includes a search bar, a list of containers, and a table of container details.


Name	Last modified	Anonymous access level	Lease state	Storage connector
blogs	4/25/2026, 2:14:15 PM	Private	Available	---
bronze	4/25/2026, 3:00:00 PM	Private	Available	---
gold	4/25/2026, 3:00:13 PM	Private	Available	---
metastore	4/25/2026, 10:45:28 PM	Private	Available	---
raw	4/25/2026, 2:58:19 PM	Private	Available	---
silver	4/25/2026, 3:00:07 PM	Private	Available	---

Bronze


The screenshot shows the Microsoft Azure portal interface, specifically the 'Overview' view for a container named 'bronze'. The top navigation bar is the same as the previous screenshot. The left sidebar shows the 'Overview' view selected. The main content area displays the 'Overview' view for the container 'bronze'. It includes a search bar, a list of blobs, and a table of blob details.




Name	Last modified	Access tier	Blob type	Size	Lease state
netflix_cast	4/25/2026, 7:14:46 PM				---
netflix_category	4/25/2026, 7:14:45 PM				---
netflix_countries	4/25/2026, 7:14:45 PM				---
netflix_directors	4/25/2026, 7:14:44 PM				---
netflix_titles	4/28/2026, 11:19:12 AM				---

Open netflix titles

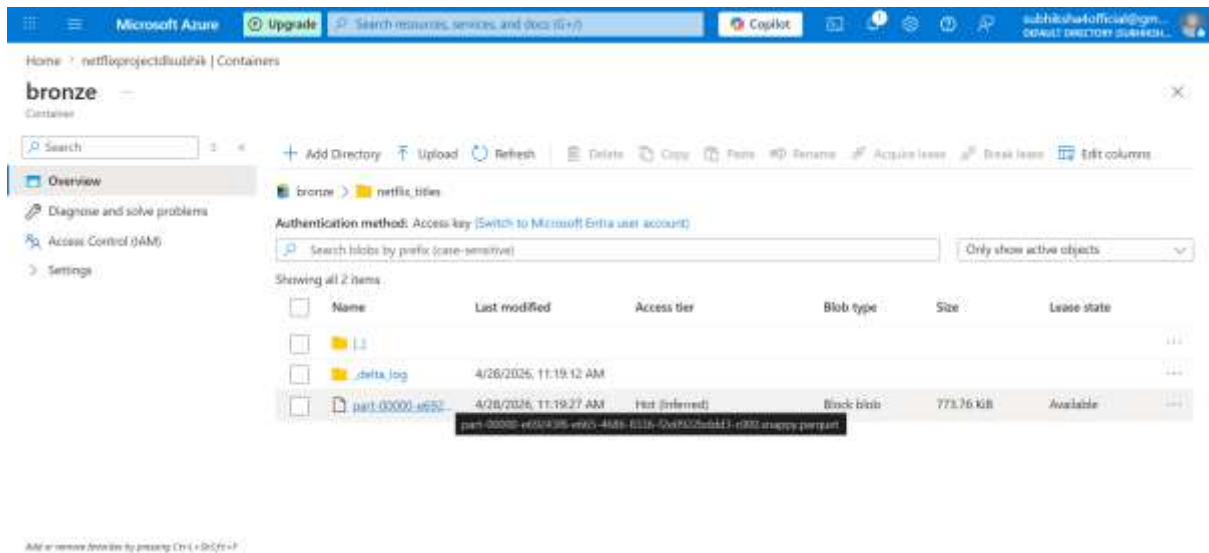

The file is in parquet format as we didn't mention the data format it wrote in delta format

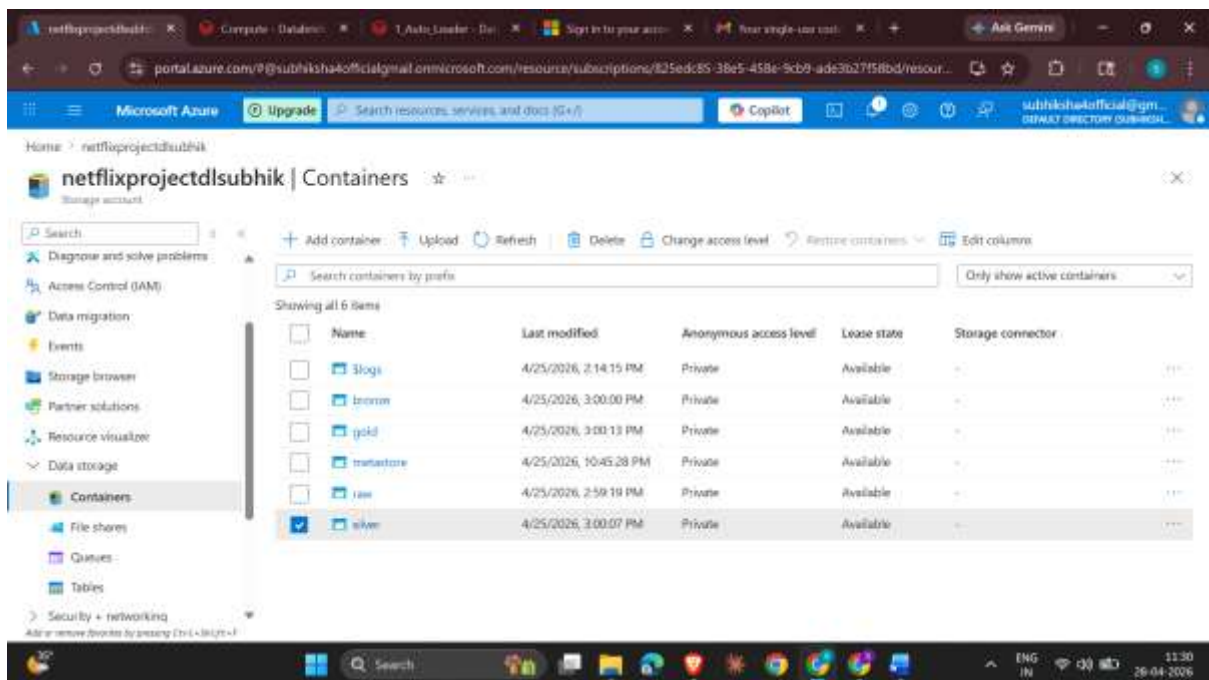

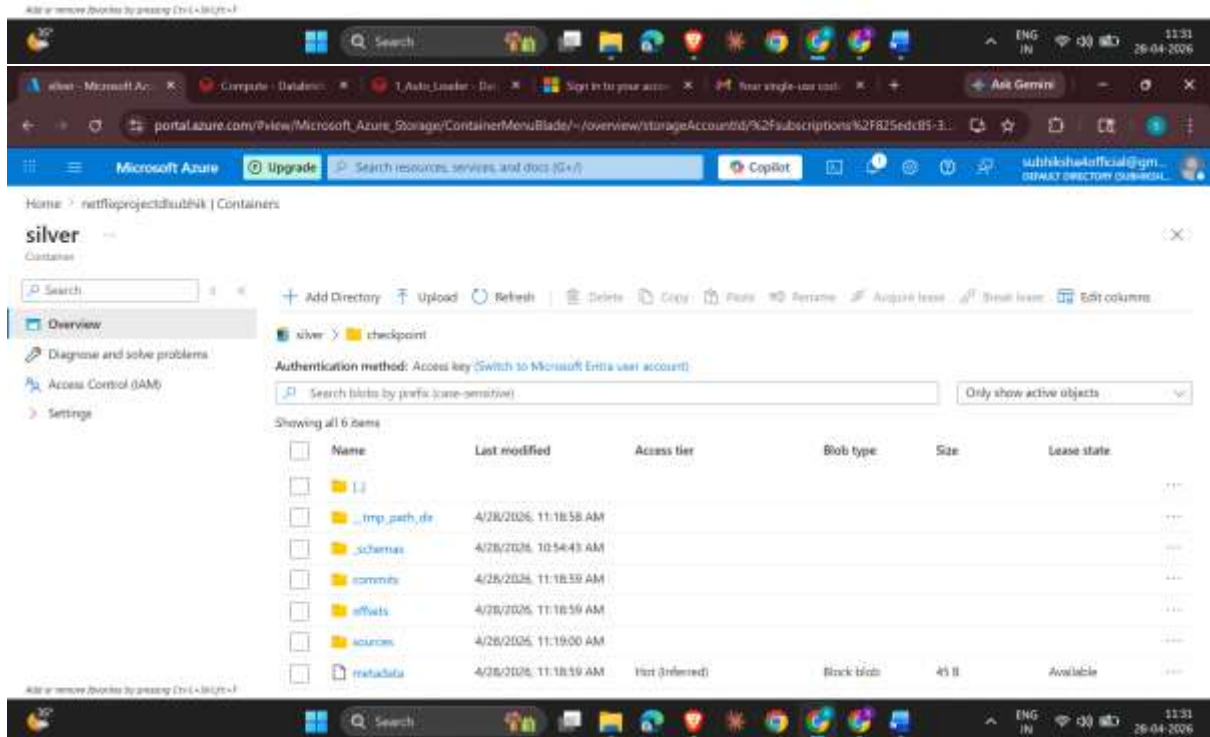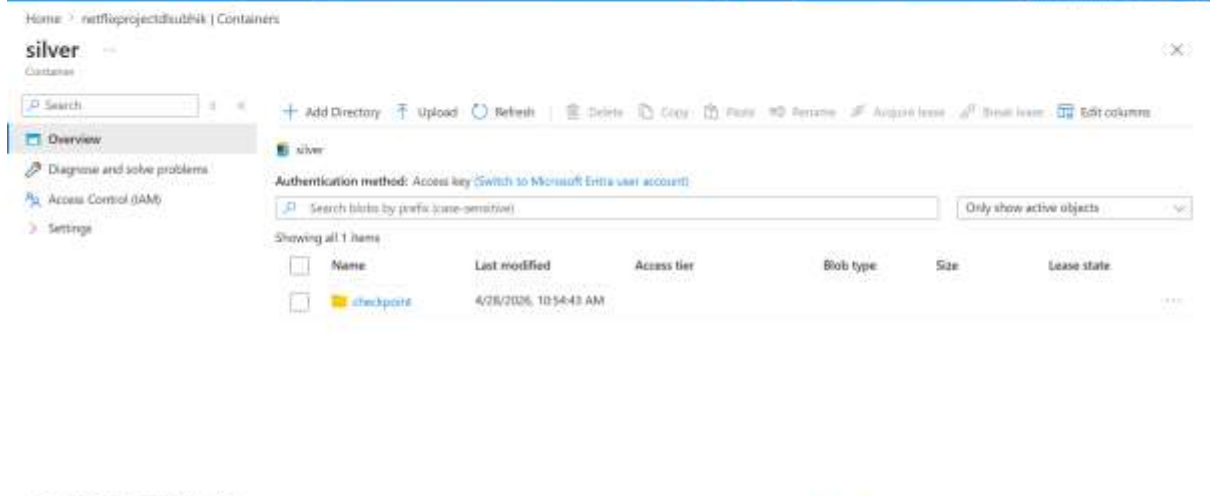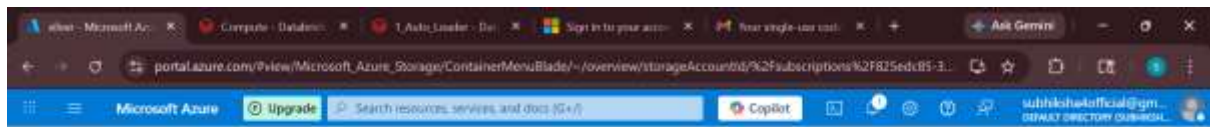

Microsoft Azure Upgrade Search resources, services, and docs (G+O) Copilot subhishaofficial@pm... DEFAULT DIRECTORY SUBNETS

Home > netflaprosjectdsutbhk | Containers

silver Containers

Search

+ Add Directory Upload Refresh Delete Copy Paste Rename Acquire lease Break lease Edit columns

silver > checkpoint > sources

Authentication method: Access key (Switch to Microsoft Entra user account)

Search blobs by prefix (case-sensitive)

Only show active objects

Showing all 1 items

Name	Last modified	Access tier	Blob type	Size	Lease state
0	4/28/2025, 11:19:00 AM				

Add or remove directory by pressing Ctrl + Shift + P

CLICK 0

Home > netflaprosjectdsutbhk | Containers

silver Containers

Search

+ Add Directory Upload Refresh Delete Copy Paste Rename Acquire lease Break lease Edit columns

silver > checkpoint > sources > 0

Authentication method: Access key (Switch to Microsoft Entra user account)

Search blobs by prefix (case-sensitive)

Only show active objects

Showing all 3 items

Name	Last modified	Access tier	Blob type	Size	Lease state
0					
__mp_swt_dir	4/28/2025, 11:19:01 AM				
rocksdb	4/28/2025, 11:19:00 AM				
metadata	4/28/2025, 11:19:01 AM	Hot (Inferred)	Block blob	133 B	Available

Add or remove directory by pressing Ctrl + Shift + P

Rocksdb responsible for from which file it needs to pull next

All logs, contained by API's

Microsoft Azure

Upgrade

Search resources, services, and docs (G+Q)

Copilot

subhishatofficial@gmail.com

SEARCH DIRECTORY SUBHISHAT

Home > netflixprojectdsutbhk | Containers

silver

Container

Search

+ Add Directory

Upload

Refresh

Delete

Copy

Paste

Rename

Acquire lease

Break lease

Edit columns

Overview

Diagnose and solve problems

Access Control (IAM)

Settings

silver > checkpoint > sources > 0 > rootzib

Authentication method: Access key (Switch to Microsoft Entra user account)

Search blobs by prefix (case-sensitive)

Only show active objects

Showing all 5 items

	Name	Last modified	Access tier	Blob type	Size	Lease state
☐	.					...
☐	...					...
☐	...	4/28/2025, 11:19:10 AM				...
☐	...	4/28/2025, 11:19:00 AM				...
☐	...	4/28/2025, 11:19:10 AM				...
☐	...	4/28/2025, 11:19:00 AM	Hot (Inferred)	Block blob	160 B	Available
☐	...	4/28/2025, 11:19:10 AM	Hot (Inferred)	Block blob	3.54 KiB	Available

Add or remove favorites by pressing Ctrl+Shift+F

Microsoft Azure

Upgrade

Search resources, services, and docs (G+Q)

Copilot

subhishatofficial@gmail.com

SEARCH DIRECTORY SUBHISHAT

Home > netflixprojectdsutbhk | Containers

silver

Container

Search

+ Add Directory

Upload

Refresh

Delete

Copy

Paste

Rename

Acquire lease

Break lease

Edit columns

Overview

Diagnose and solve problems

Access Control (IAM)

Settings

silver > checkpoint

Authentication method: Access key (Switch to Microsoft Entra user account)

Search blobs by prefix (case-sensitive)

Only show active objects

Showing all 6 items

	Name	Last modified	Access tier	Blob type	Size	Lease state
☐	.					...
☐	...	4/28/2025, 11:18:58 AM				...
☒	...	4/28/2025, 10:54:43 AM				...
☐	...	4/28/2025, 11:18:59 AM				...
☐	...	4/28/2025, 11:18:59 AM				...
☐	...	4/28/2025, 11:19:00 AM				...
☐	...	4/28/2025, 11:18:59 AM	Hot (Inferred)	Block blob	45 B	Available

Add or remove favorites by pressing Ctrl+Shift+F

Microsoft Azure

Upgrade

Search resources, services, and docs (G+Q)

Copilot

subhishatofficial@gmail.com

SEARCH DIRECTORY SUBHISHAT

Home > netflixprojectdsutbhk | Containers

silver

Container

Search

+ Add Directory

Upload

Refresh

Delete

Copy

Paste

Rename

Acquire lease

Break lease

Edit columns

Overview

Diagnose and solve problems

Access Control (IAM)

Settings

silver > checkpoint > _schemas

Authentication method: Access key (Switch to Microsoft Entra user account)

Search blobs by prefix (case-sensitive)


Only show active objects

Showing all 2 items

	Name	Last modified	Access tier	Blob type	Size	Lease state
☐	.					...
☐	...	4/28/2025, 10:54:44 AM				...
☐	...	4/28/2025, 10:54:44 AM	Hot (Inferred)	Block blob	836 B	Available

Add or remove favorites by pressing Ctrl+Shift+F


In edit

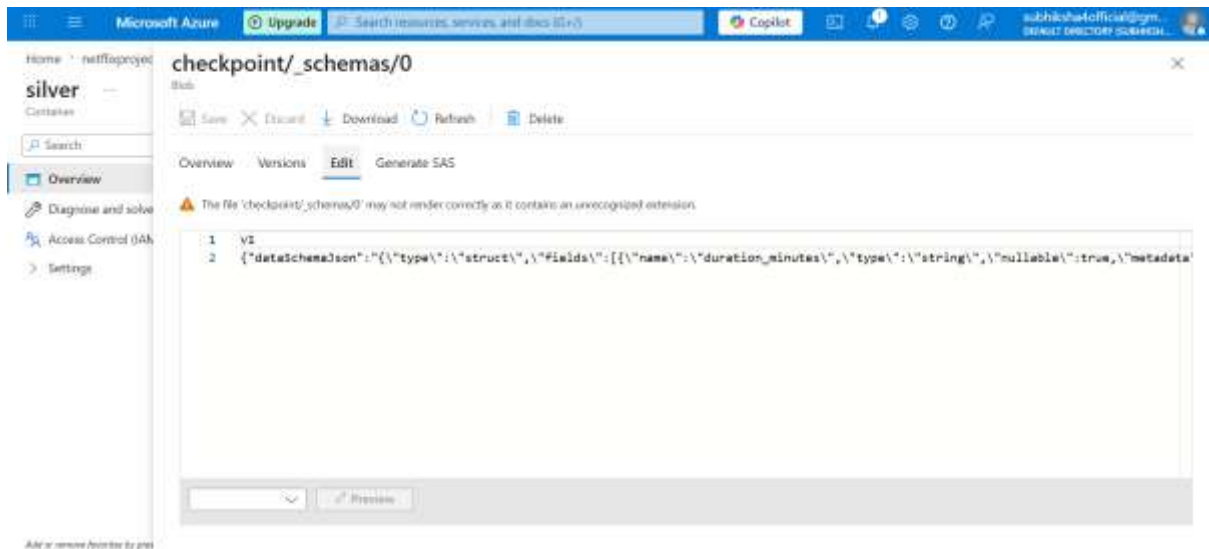

v1

```
{
  "dataSchemaJson": "{\n  \"type\": \"struct\",\n  \"fields\": [\n    {\n      \"name\": \"duration_minutes\",\n      \"type\": \"string\",\n      \"nullable\": true,\n      \"metadata\": {}\n    },\n    {\n      \"name\": \"duration_seasons\",\n      \"type\": \"string\",\n      \"nullable\": true,\n      \"metadata\": {}\n    },\n    {\n      \"name\": \"type\",\n      \"type\": \"string\",\n      \"nullable\": true,\n      \"metadata\": {}\n    },\n    {\n      \"name\": \"title\",\n      \"type\": \"string\",\n      \"nullable\": true,\n      \"metadata\": {}\n    },\n    {\n      \"name\": \"date_added\",\n      \"type\": \"string\",\n      \"nullable\": true,\n      \"metadata\": {}\n    },\n    {\n      \"name\": \"release_year\",\n      \"type\": \"integer\",\n      \"nullable\": true,\n      \"metadata\": {}\n    },\n    {\n      \"name\": \"rating\",\n      \"type\": \"string\",\n      \"nullable\": true,\n      \"metadata\": {}\n    },\n    {\n      \"name\": \"description\",\n      \"type\": \"string\",\n      \"nullable\": true,\n      \"metadata\": {}\n    },\n    {\n      \"name\": \"show_id\",\n      \"type\": \"string\",\n      \"nullable\": true,\n      \"metadata\": {}\n    }\n  ]\n}\",\n  \"partitionSchemaJson\": \"{\\n\\\"type\\\":\\\"struct\\\",\\n\\\"fields\\\":\\\"[\\\"duration_minutes\\\",\\\"duration_seasons\\\",\\\"type\\\",\\\"title\\\",\\\"date_added\\\",\\\"release_year\\\",\\\"rating\\\",\\\"description\\\",\\\"show_id\\\"]\\\"}\\\"\"}
```

If new file comes it creates another file 1 with 0 schema and new column it adds in end of files. Autoloader handles this. Creating an external Deltalake/table Not the managed.

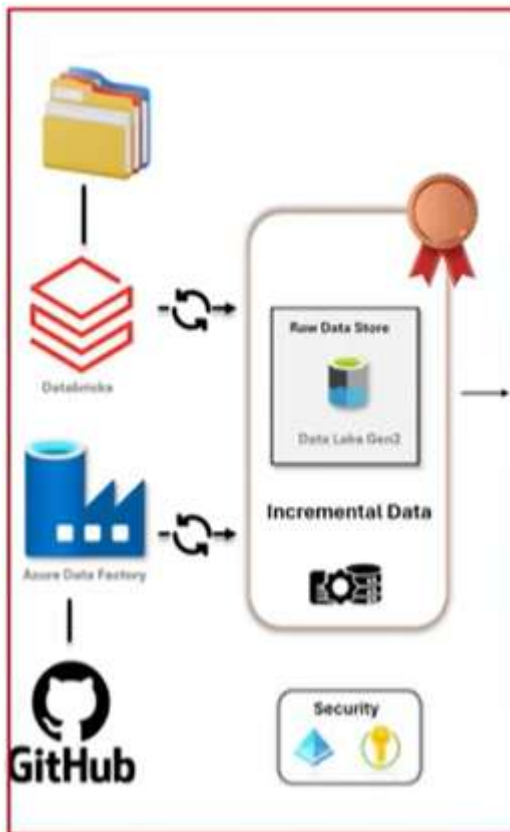

Done.

Silver:

%md

total two files for silver



2. is for mapping files,

4. titles master file

```
Microsoft Azure Databricks
Search data, notebooks, recent files, and more...
File Edit View Run Help PySpark 1.0.0 10/20/2023 10:00:00 AM
total two files for silver 2. is for mapping files, 4. titles master file

1. List all files
def spark_read_folders(path):
    """Read folders from a path"""
    spark = SparkSession.builder.getOrCreate()
    df = spark.read.text(path)
    df.createOrReplaceTempView('files')
    return df

# List all files
files = spark_read_folders('/mnt/databricks-warehouse/10/20/2023 10:00:00 AM')
files.show(10)
```

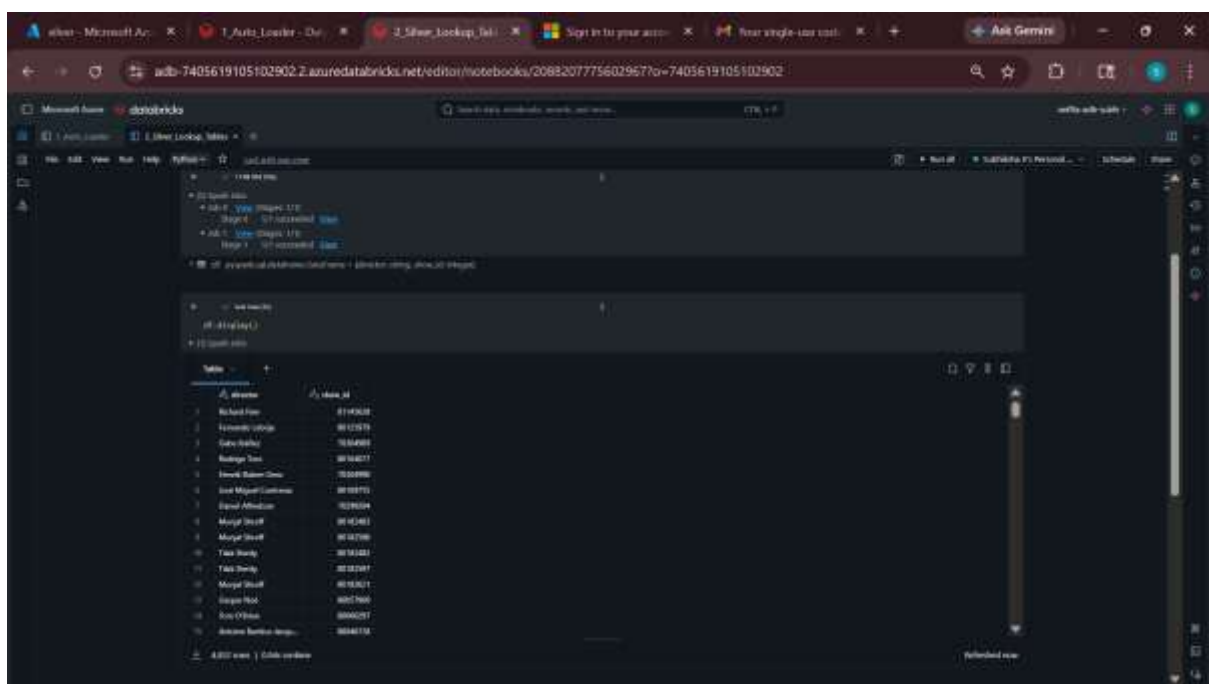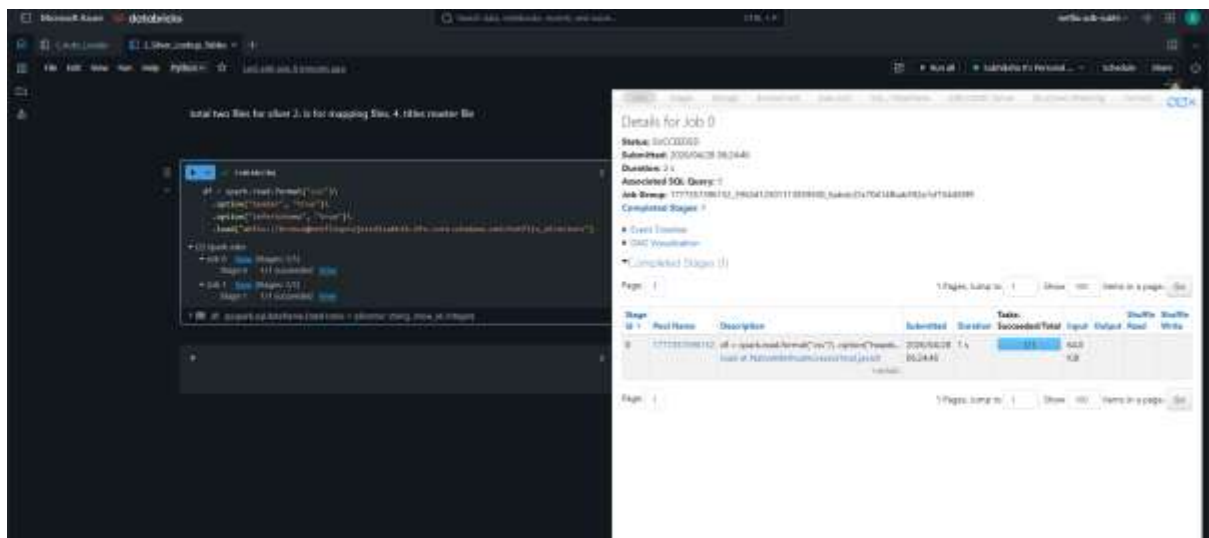


Output modes:

Append


Overwrite

Error

Ignore

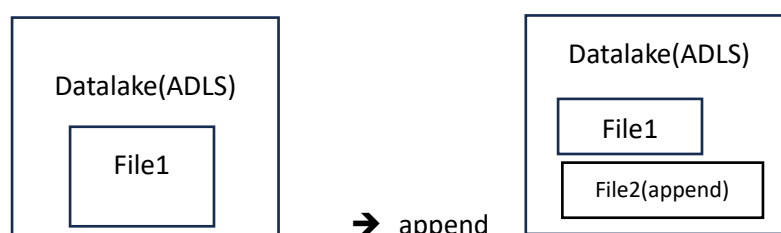

If Overwrite (violent)

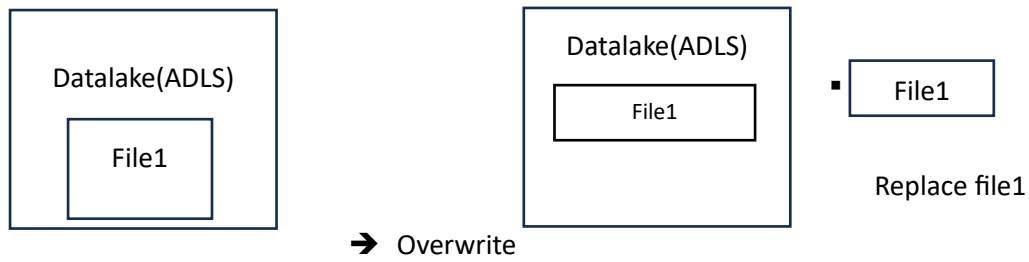

Error J throws an error if a file exist

Ignore -> Do nothing

```
df.write.format("delta")\
    .mode("append")\
    .option("path", "abfss://silver@netflixprojectdlsuhik.dfs.core.windows.net/\
netflix_directors")\
    .save()
```

▼ (6) Spark Jobs

- ▼ Job 3 [View](#) (Stages: 1/1)
 - Stage 3 1/1 succeeded [View](#)
- ▼ Job 4 [View](#) (Stages: 1/1)
 - Stage 4 1/1 succeeded [View](#)
- ▼ Job 5 [View](#) (Stages: 1/1)
 - Stage 5 4/4 succeeded [View](#)
- ▼ Job 6 [View](#) (Stages: 1/1, 1 skipped)
 - Stage 6 0/4 succeeded [View](#) skipped
 - Stage 7 1/1 succeeded [View](#)
- ▼ Job 7 [View](#) (Stages: 1/1, 1 skipped)
 - Stage 8 0/4 succeeded [View](#) skipped
 - Stage 9 1/1 succeeded [View](#)
- ▼ Job 8 [View](#) (Stages: 1/1, 2 skipped)
 - Stage 10 0/4 succeeded [View](#) skipped
 - Stage 11 0/1 succeeded [View](#) skipped
 - Stage 12 1/1 succeeded [View](#)

Microsoft Azure databricks

Search data, notebooks, recents, and more... CTRL + P

netflix-adb-subhi

1_Auto_Loader

2_Silver_Lookup_Tables

+

Python

☆

Last edit was now

sourcefolder

targetfolder

netflix_directors

netflix_directors

total two files for silver 2. is for mapping files, 4. titles master file

Parameters

Just now (<1s)

3

```
dbutils.widgets.text("sourcefolder","netflix_directors")
dbutils.widgets.text("targetfolder","netflix_directors")
```

When new file created this takes the name from ##Variables to store the user input value

5

Python

var_src_folder = dbutils.widgets.get("sourcefolder")
var_trg_folder = dbutils.widgets.get("targetfolder")

Microsoft Azure

databricks

Search data, notebooks, recents, and more... CTRL + P

netflix-adb-subhi

1_Auto_Loader

2_Silver_Lookup_Tables

+

Python

☆

Last edit was now

sourcefolder

targetfolder

netflix_directors

netflix_directors

total two files for silver 2. is for mapping files, 4. titles master file

Parameters

▶

✓ 1 minute ago (<1s)

3

```
dbutils.widgets.text("sourcefolder","netflix_directors")
dbutils.widgets.text("targetfolder","netflix_directors")
```

When new file created this takes the name from ##Variables to store the user input value

▶

✓ Just now (<1s)

5

```
var_src_folder = dbutils.widgets.get("sourcefolder")
var_trg_folder = dbutils.widgets.get("targetfolder")
```

▶

✓ Just now (<1s)

6

```
print(var_src_folder)
```

netflix_directors

Microsoft Azure

 databricks

Search data, notebooks, recent, and more... CTRL + P

netflix-adb-subhi

1_Auto_Loader

2_Silver_Lookup_Tables

+

Python

☆

Last edit was now



sourcefolder

targetfolder

netflix_directors

netflix_directors

 ✓ 3 minutes ago (<1s) 5

 ✓ 3 minutes ago (<1s) 6

 ✓ 11:49 AM (18s) 7

```
# df = spark.read.format("csv")\
#   .option("header", "true")\
#   .option("inferSchema", "true")\
#   .load("abfss://bronze@netflixprojectdlsbhik.dfs.core.windows.net/netflix_directors")
```

▶ (2) Spark Jobs

> df: pyspark.sql.dataframe.DataFrame = [director: string, show_id: integer]

Update parameter variables

 ▶ ✓ Just now (2s) 9 Python    

```
df = spark.read.format("csv")\
  .option("header", "true")\
  .option("inferSchema", "true")\
  .load(f"abfss://bronze@netflixprojectdlsbhik.dfs.core.windows.net/{var_src_folder}")
```

▶ (2) Spark Jobs

> df: pyspark.sql.dataframe.DataFrame = [director: string, show_id: integer]

Microsoft Azure databricks Search data, notebooks, recents, and more... CTRL + P netflix-adb-subhi

1_Auto_Loader 2_Silver_Lookup_Tables

Python Last edit was now

sourcefolder targetfolder

netflix_directors netflix_directors

```
# df.write.format("delta")\
# .....mode("append")\
# .....option("path","abfss://silver@netflixprojectdlsbhik.dfs.core.windows.net/
netflix_directors")\
# .....save()
```

12:17 PM (22s) 11

(6) Spark Jobs

Since we have 3 more files we can use parameter created on cell 1

Target file write using parameter

```
df.write.format("delta")\
  .mode("append")\
  .option("path",f"abfss://silver@netflixprojectdlsbhik.dfs.core.windows.net/
{var_trg_folder}")\
  .save()
```

Just now (5s) 14

(6) Spark Jobs

15 Python

To validate write command checking in ADLS> silver container>{var_trg_folder}

Microsoft Azure Upgrade Search resources, services, and docs (G+J) Copilot subhishadofficial@gmail.com

Home > netflixprojectdsutbtk | Containers

silver

Containers

Search

+ Add Directory Upload Refresh Delete Copy Paste Rename Acquire lease Break lease Edit columns

Overview Diagnose and solve problems Access Control (IAM) Settings

Authentication method: Access key (Switch to Microsoft Entra user account)

Search blobs by prefix (case-sensitive)

Only show active objects

Showing all 2 items

☐	Name	Last modified	Access tier	Blob type	Size	Lease state
☐	checkpoint	4/28/2025, 10:54:43 AM				...
☐	netflix_directors	4/28/2025, 12:17:06 PM				...

Microsoft Azure Upgrade Search resources, services, and docs (G+J) Copilot subhishadofficial@gmail.com

Home > netflixprojectdsutbtk | Containers

silver

Containers

Search

+ Add Directory Upload Refresh Delete Copy Paste Rename Acquire lease Break lease Edit columns

Overview Diagnose and solve problems Access Control (IAM) Settings

Authentication method: Access key (Switch to Microsoft Entra user account)

Search blobs by prefix (case-sensitive)

Only show active objects

Showing all 2 items

☐	Name	Last modified	Access tier	Blob type	Size	Lease state
☐	checkpoint	4/28/2025, 10:54:43 AM				...
☒	netflix_directors	4/28/2025, 12:17:06 PM				...

I am deleting as I am going to create workflow

Microsoft Azure Upgrade Search resources, services, and docs (G+J) Copilot subhishadofficial@gmail.com

Home > netflixprojectdsutbtk | Containers

silver

Containers

Search

+ Add Directory Upload Refresh Delete Copy Paste Rename Acquire lease Break lease Edit columns

Overview Diagnose and solve problems Access Control (IAM) Settings

Authentication method: Access key (Switch to Microsoft Entra user account)

Search blobs by prefix (case-sensitive)

Only show active objects

Showing all 1 items

☐	Name	Last modified	Access tier	Blob type	Size	Lease state
☐	checkpoint	4/28/2025, 10:54:43 AM				...

Successfully deleted blobs and directories
Successfully deleted 1 blobs and directories

Alt+Z: Invoke Notebook by pressing Ctrl+Shift+F

Lookup Notebook

Store array like done in ADF

Can be created using Databrick activity in ADF and pass parameter `dbutils.jobs.taskValues`

make sure output of notebook can be used in main notebook

Task = activity in workflow

Main Notebook


<https://docs.databricks.com/aws/en/jobs/task-values>

The screenshot shows a Databricks notebook interface with the title "Array parameter". The notebook is written in Python and contains two code blocks. The first code block defines a list of dictionaries, each representing a folder mapping with "sourcefolder" and "targetfolder" keys. The second code block uses `dbutils.jobs.taskValues.set` to store this list as a task value named "param_array".



```
param_files = [
    {
        "sourcefolder": "netflix_directors",
        "targetfolder": "netflix_directors"
    },
    {
        "sourcefolder": "netflix_cast",
        "targetfolder": "netflix_cast"
    },
    {
        "sourcefolder": "netflix_category",
        "targetfolder": "netflix_category"
    },
    {
        "sourcefolder": "netflix_countries",
        "targetfolder": "netflix_countries"
    }
]
```

Job Utility to return ARRAY

```
dbutils.jobs.taskValues.set(key = "param_array", value = param_files)
```

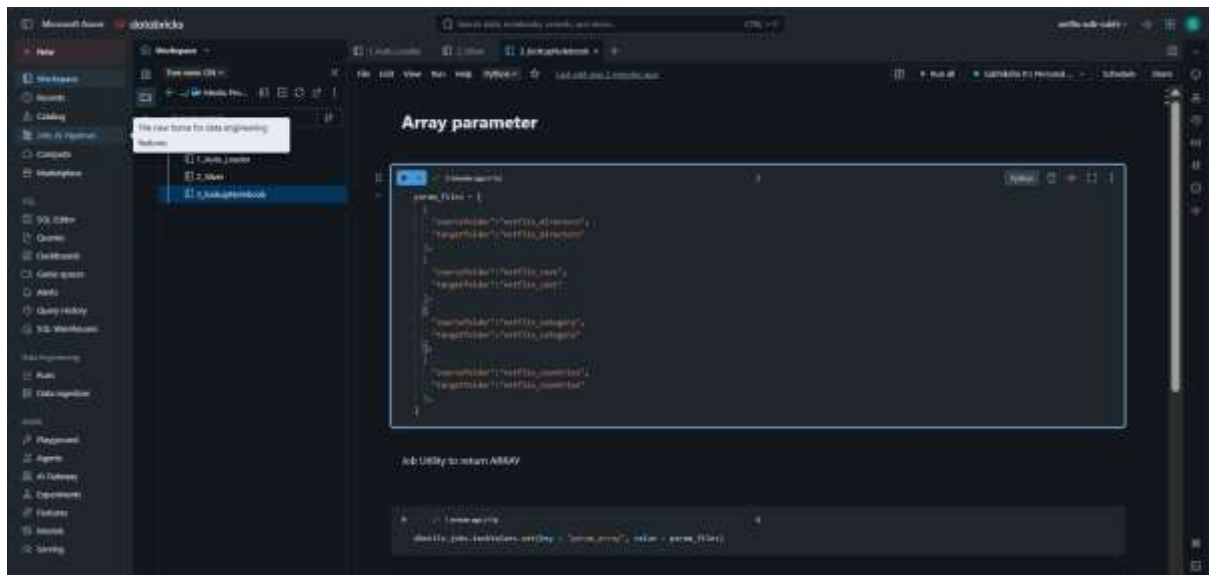

Going to workflow (Jobs & Pipelines)

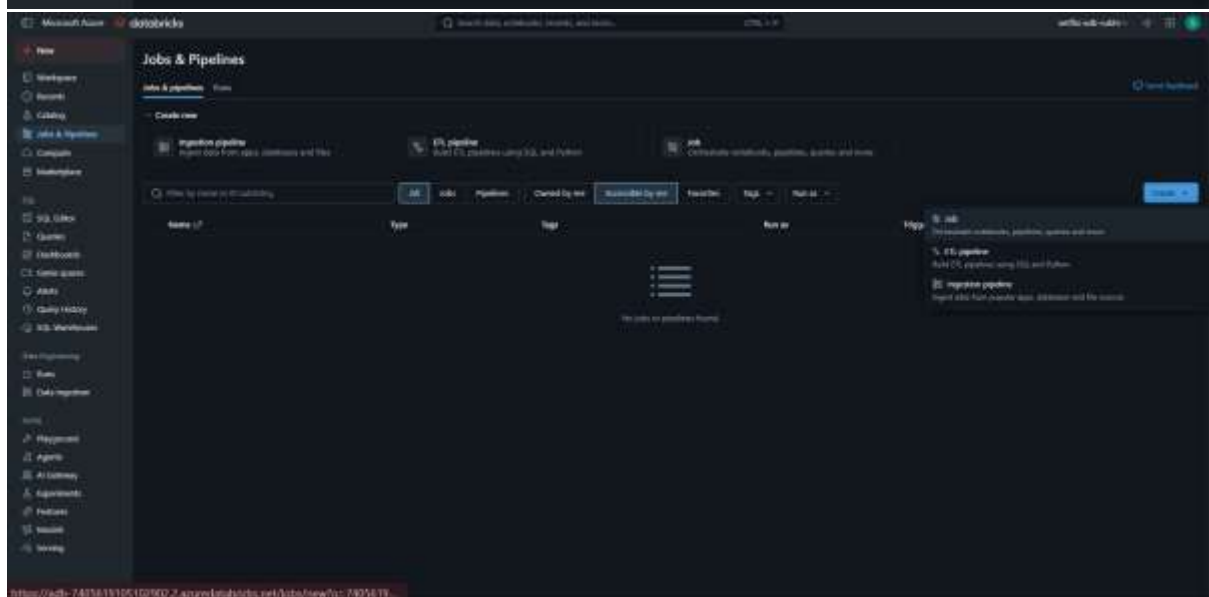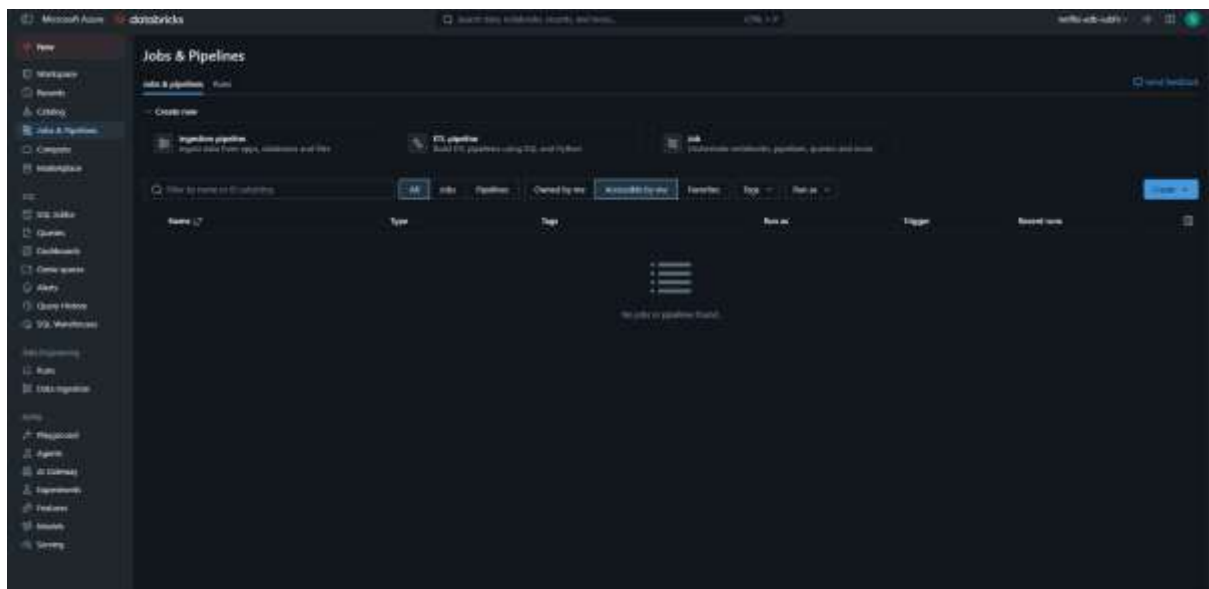

<https://databricks.com/learn/tutorial/jobs/creating-jobs>

This acts as Databricks Data Factory/ ETL tools

Microsoft Azure databricks

Search data, notebooks, recent, and more... CTRL + P

netflix-adb-subh

New

Workspace

Recents

Catalog

Jobs & Pipelines

Compute

Marketplace

SQL

SQL Editor

Queries

Dashboards

Genie spaces

Alerts

Query History

SQL Warehouses

Data Engineering

Runs

Data Ingestion

AI/ML

Playground

Agents

AI Gateway

Experiments

Features

Models

Serving

Jobs & Pipelines

New Job Apr 28, 2026, 12:53 PM ☆ Send feedback

Run now

RunsTasks

Lookup_locations

Unspecified path

Task name*

Lookup_locations

Type*

Notebook

Source*

Workspace

Path*


Select Notebook



Compute*


ServerlessAutoscaling


Cancel



Create task

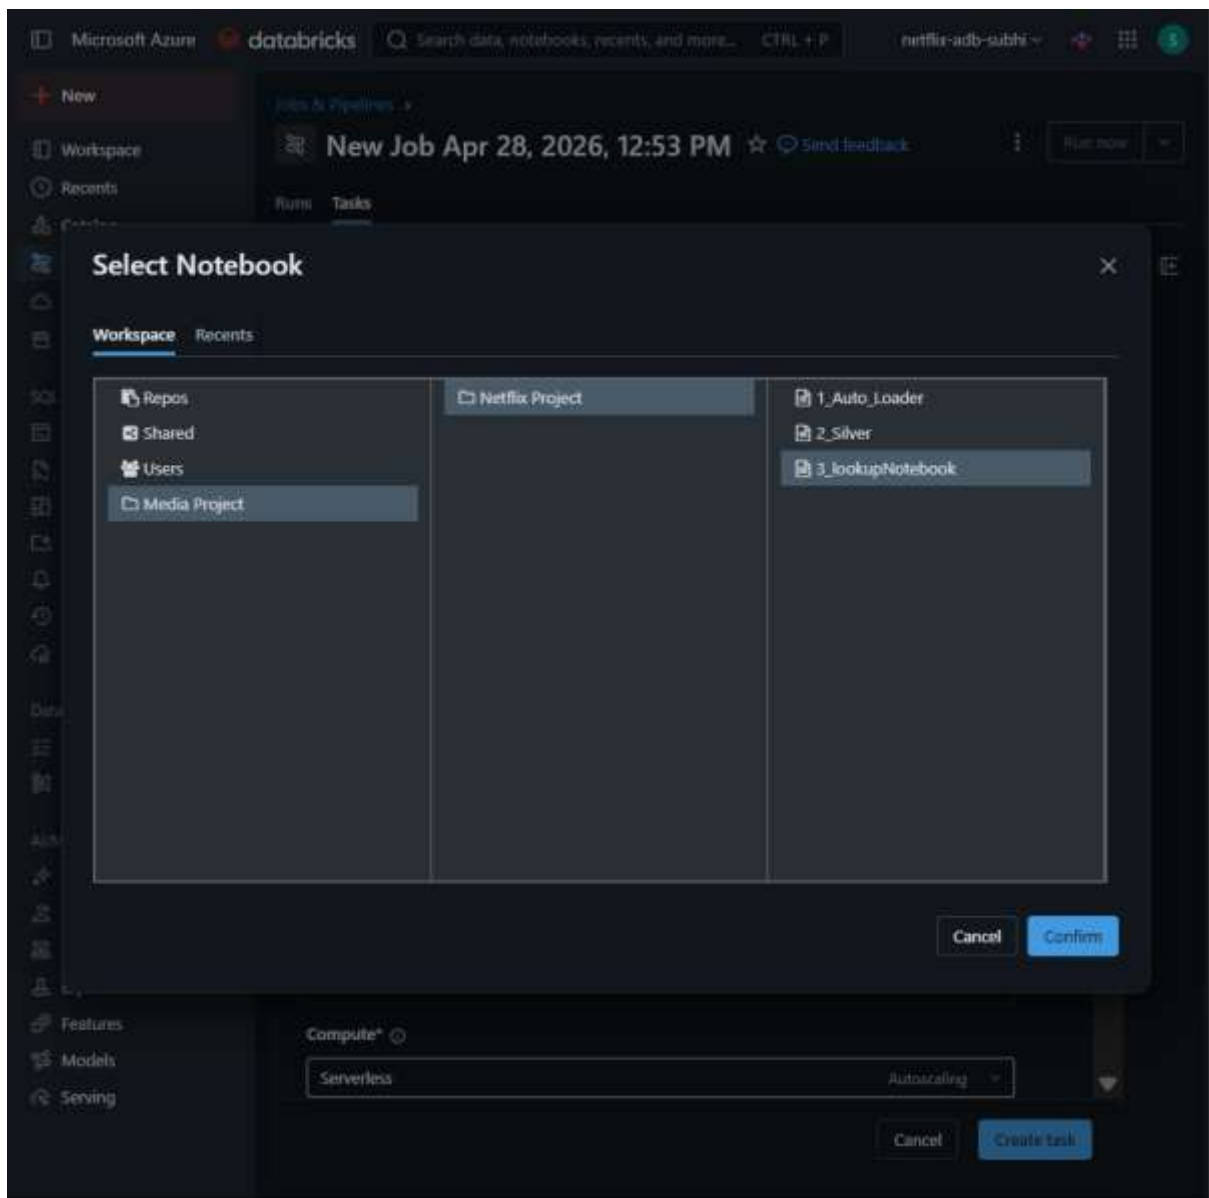

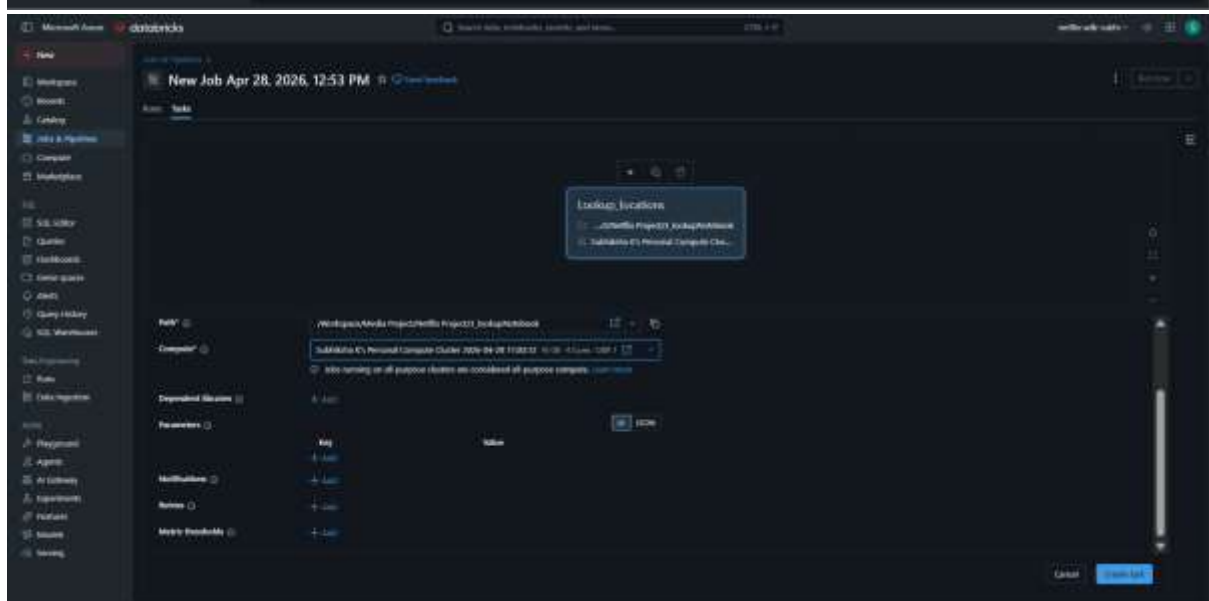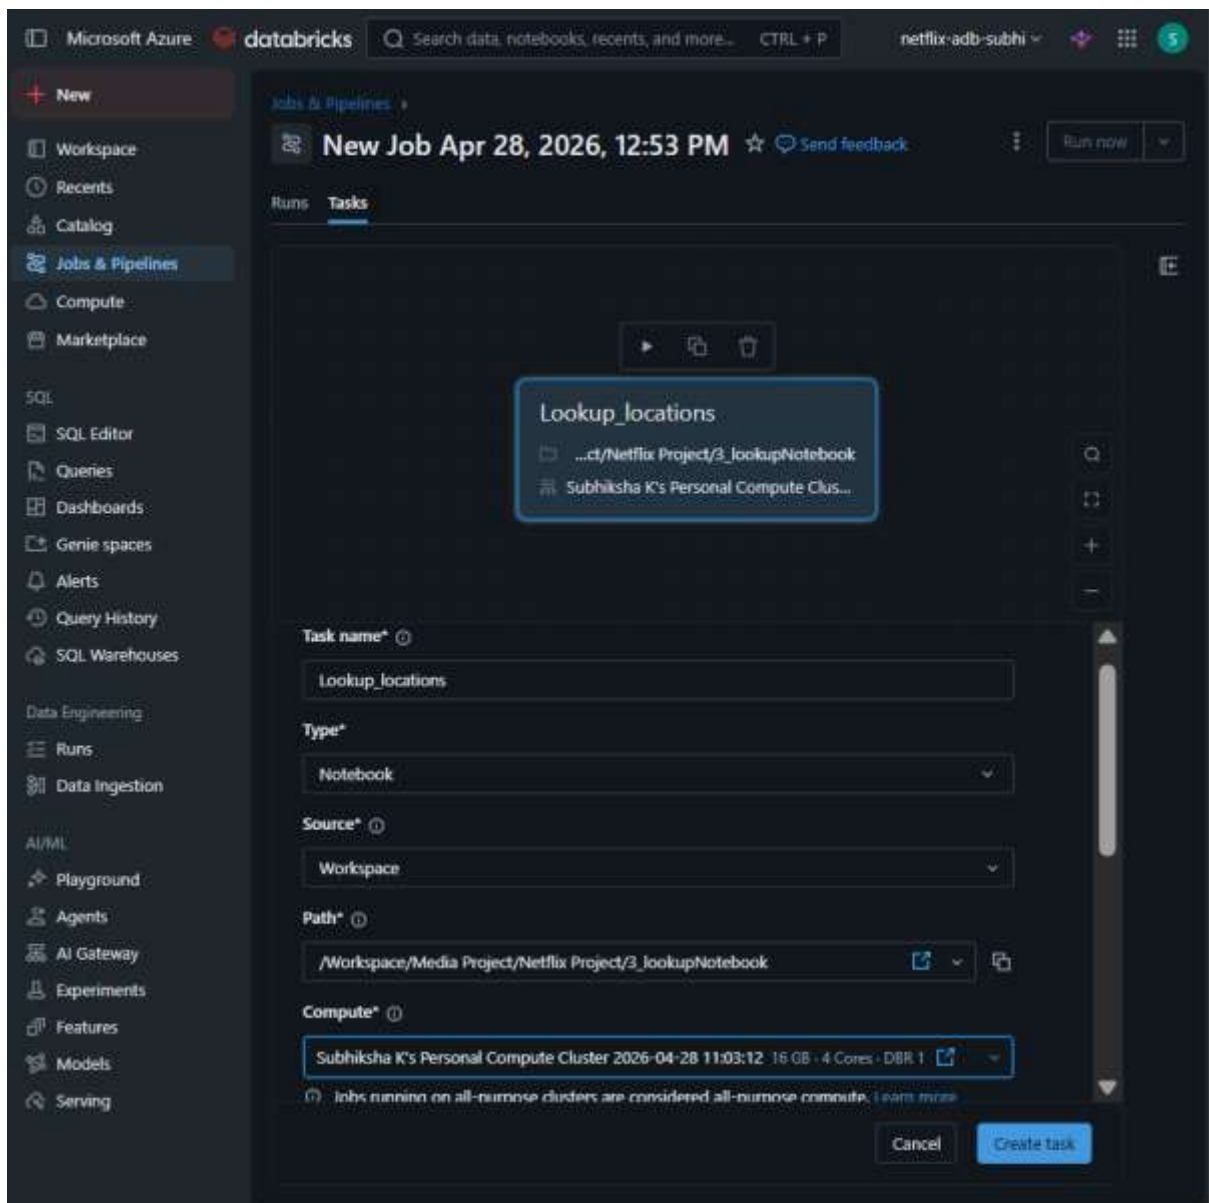

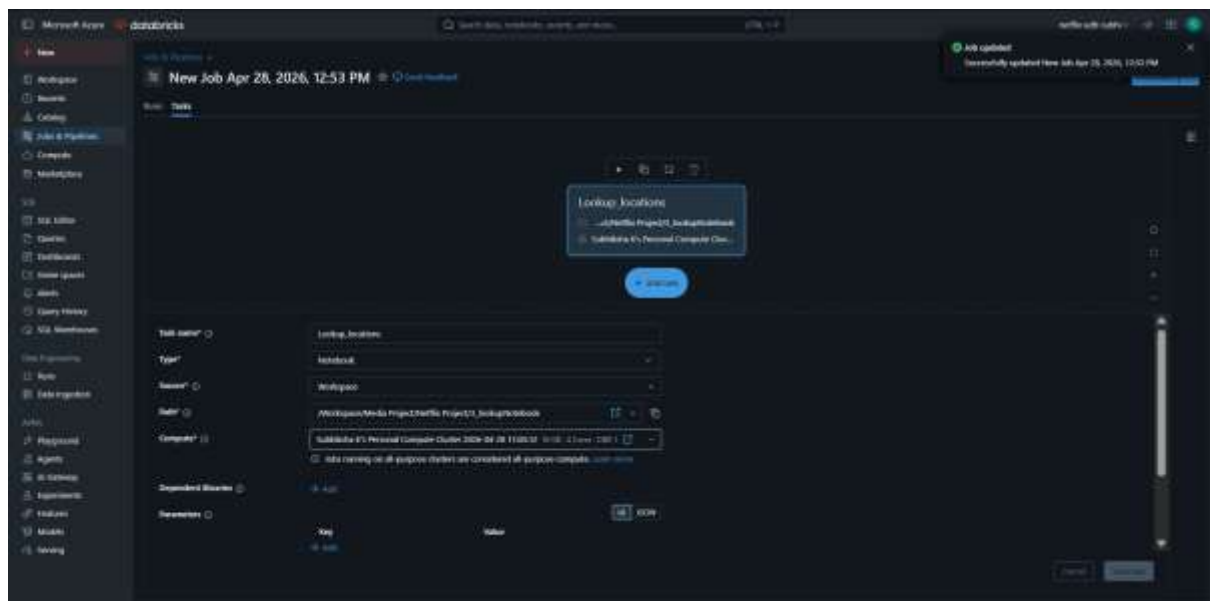

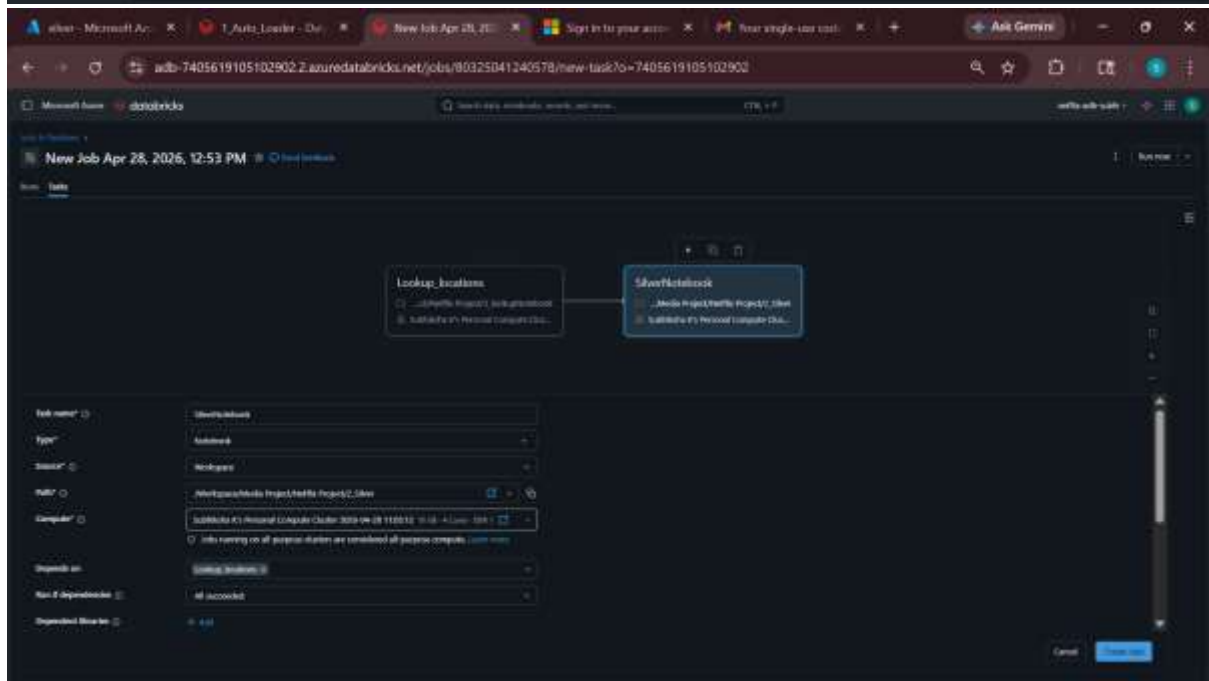


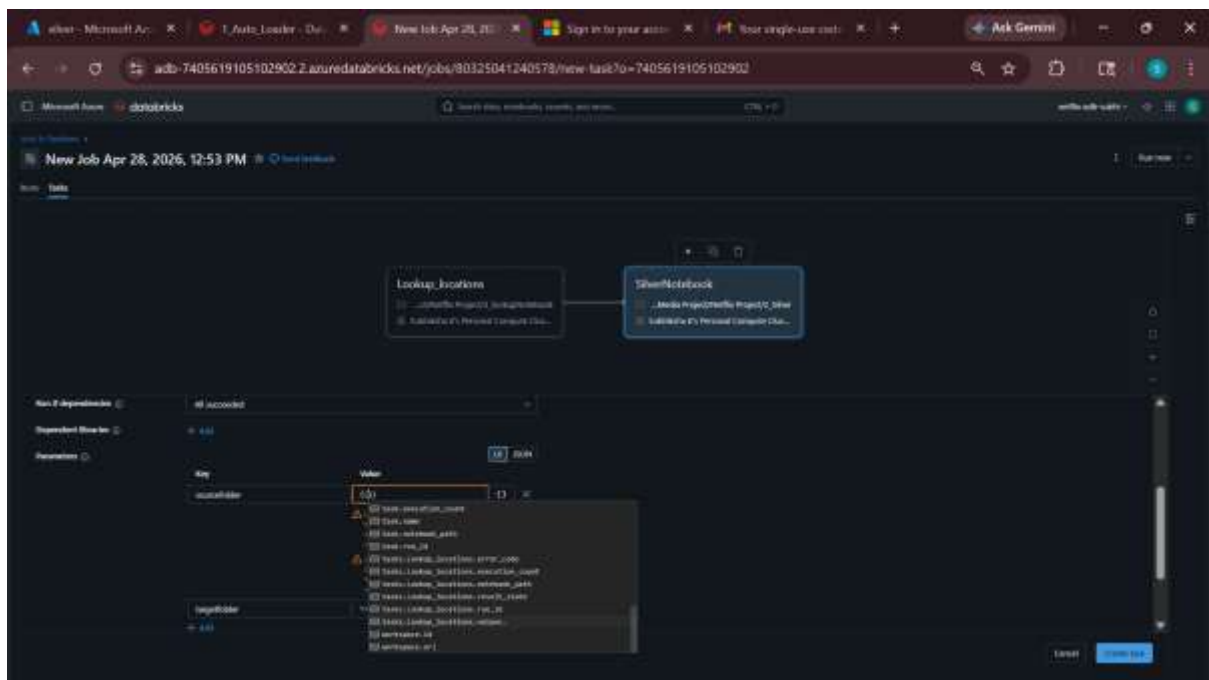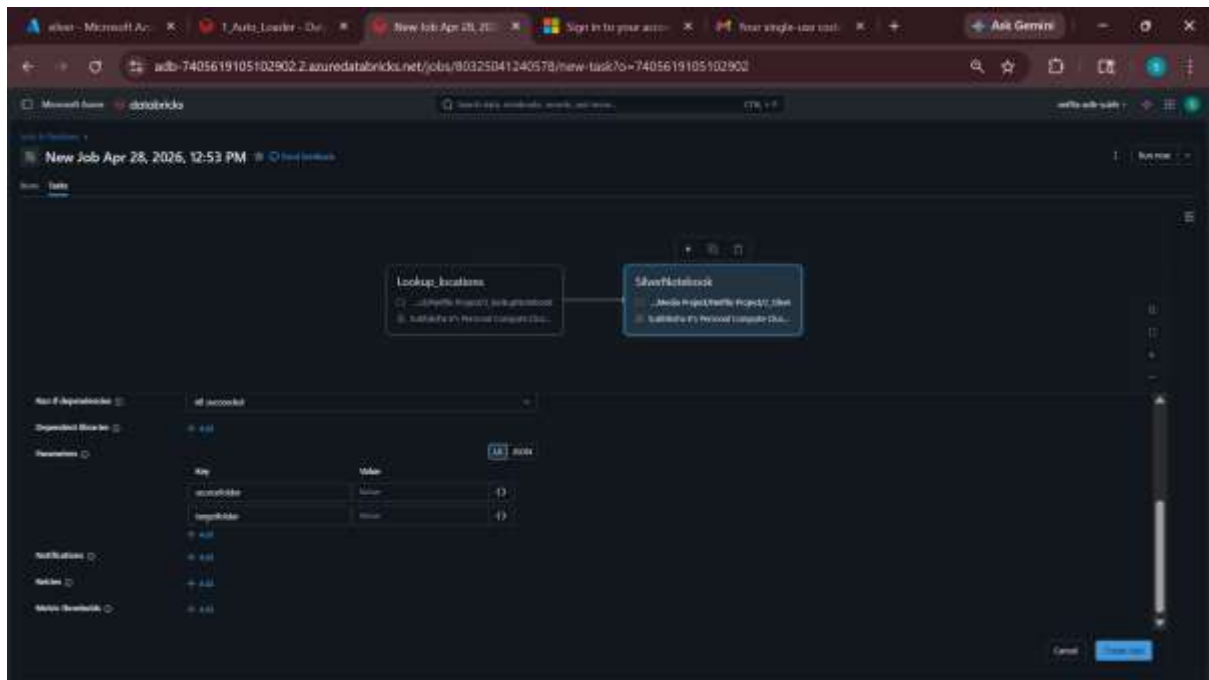


`{{tasks.Lookup_locations.values.param_array}}`

But as we want to pass array in the textbox of sourcefolder, It won't iterate and take values.



So we need for each

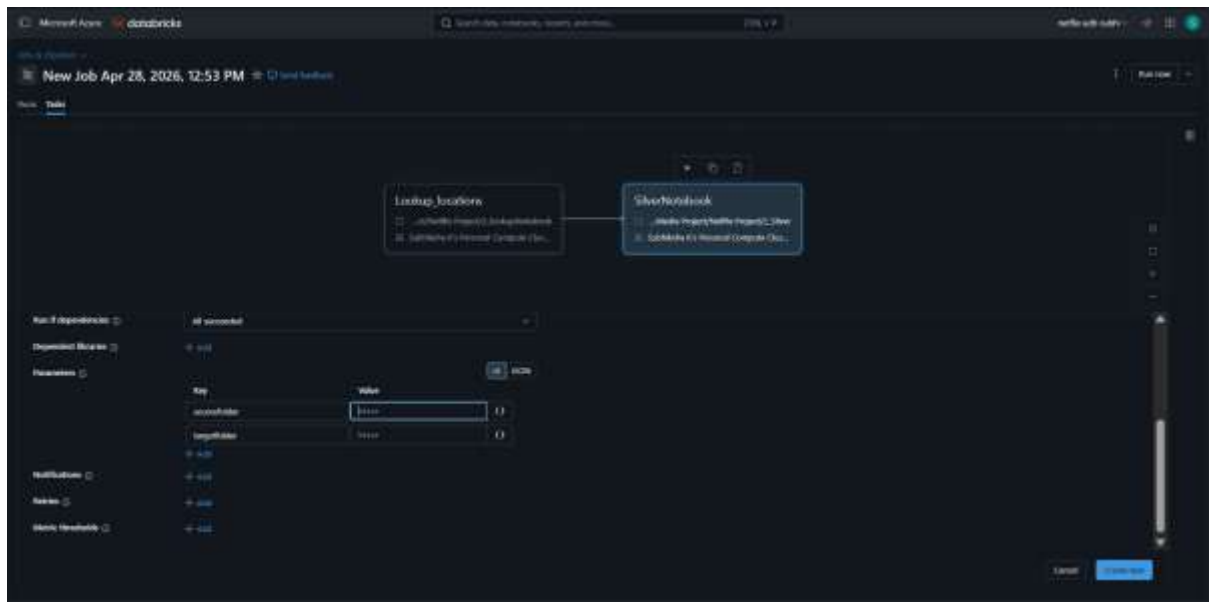


Leaving it empty creating a task

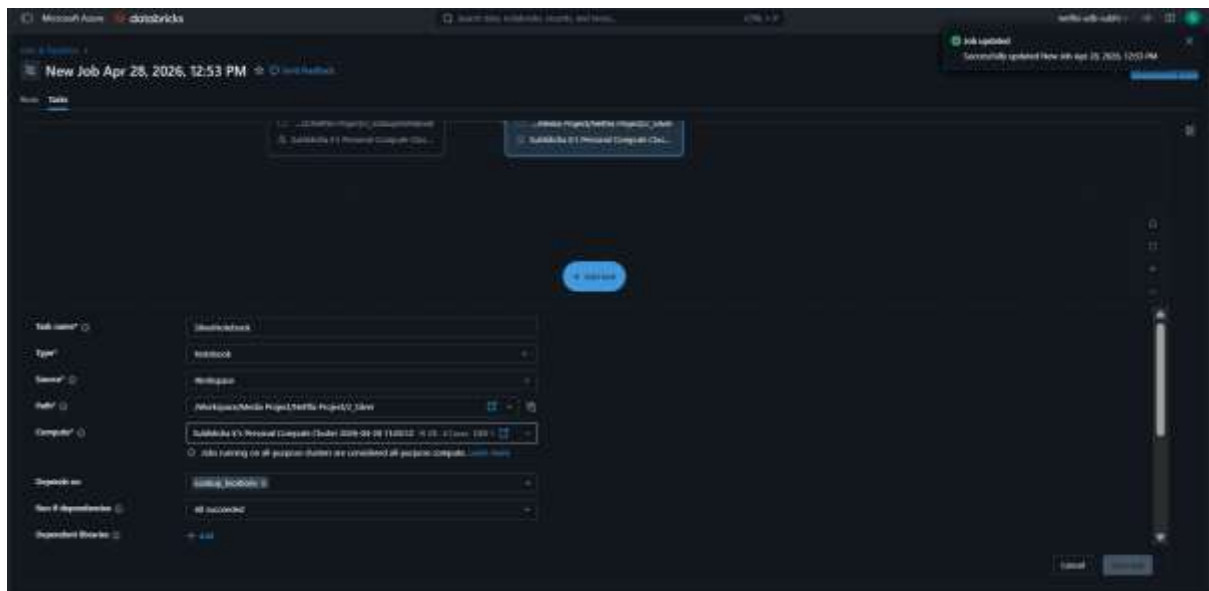

To manually run we can click run now on top right corner

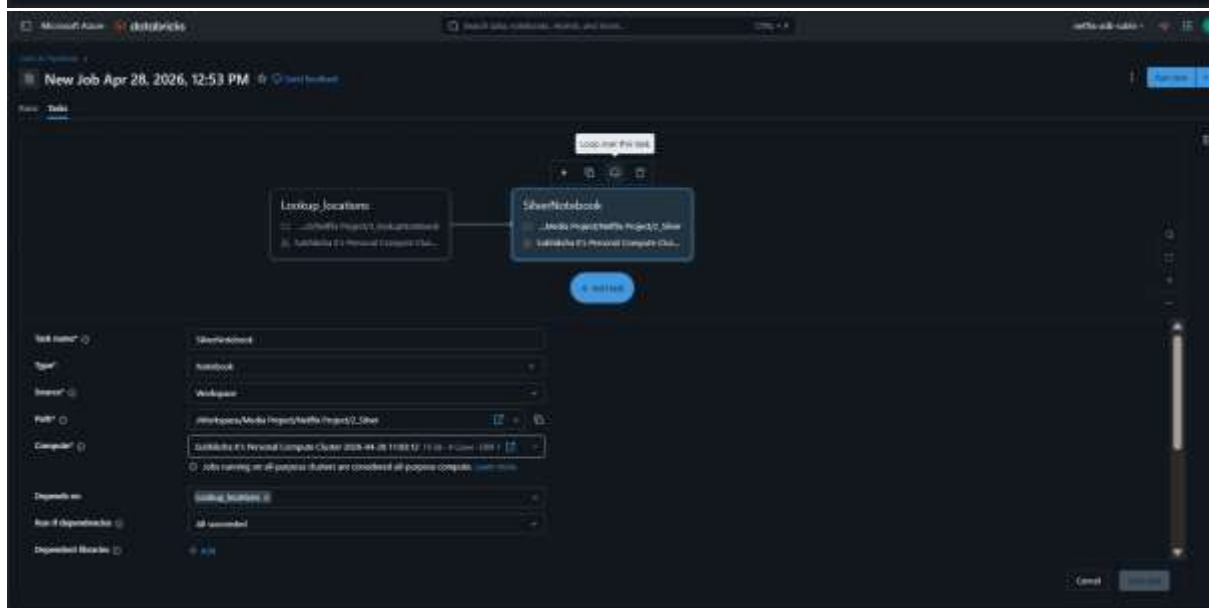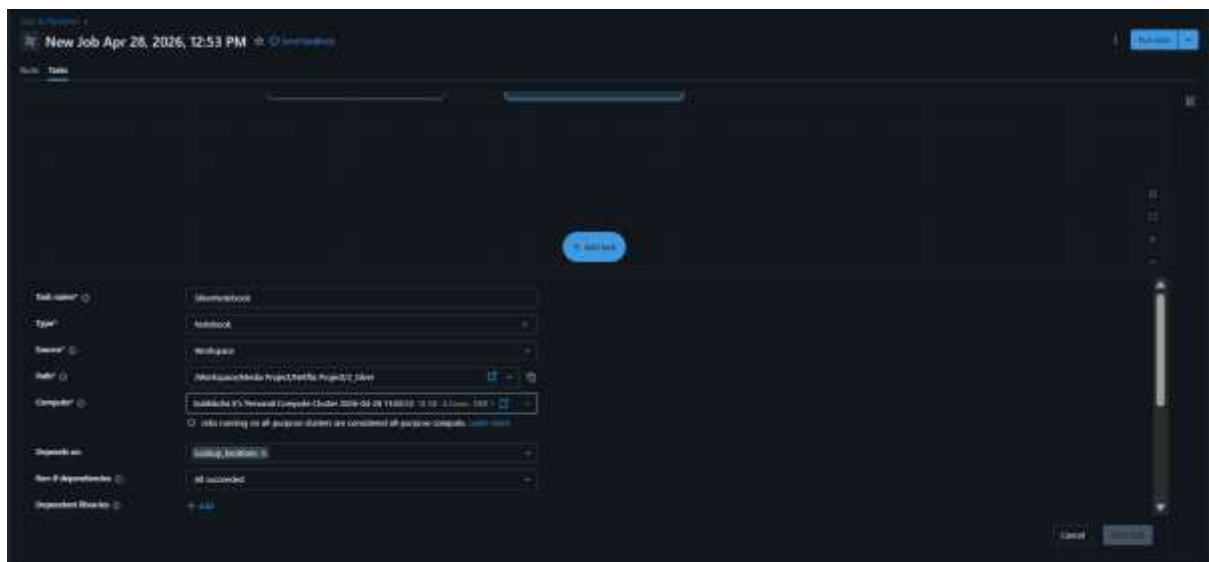

Click loop over this task

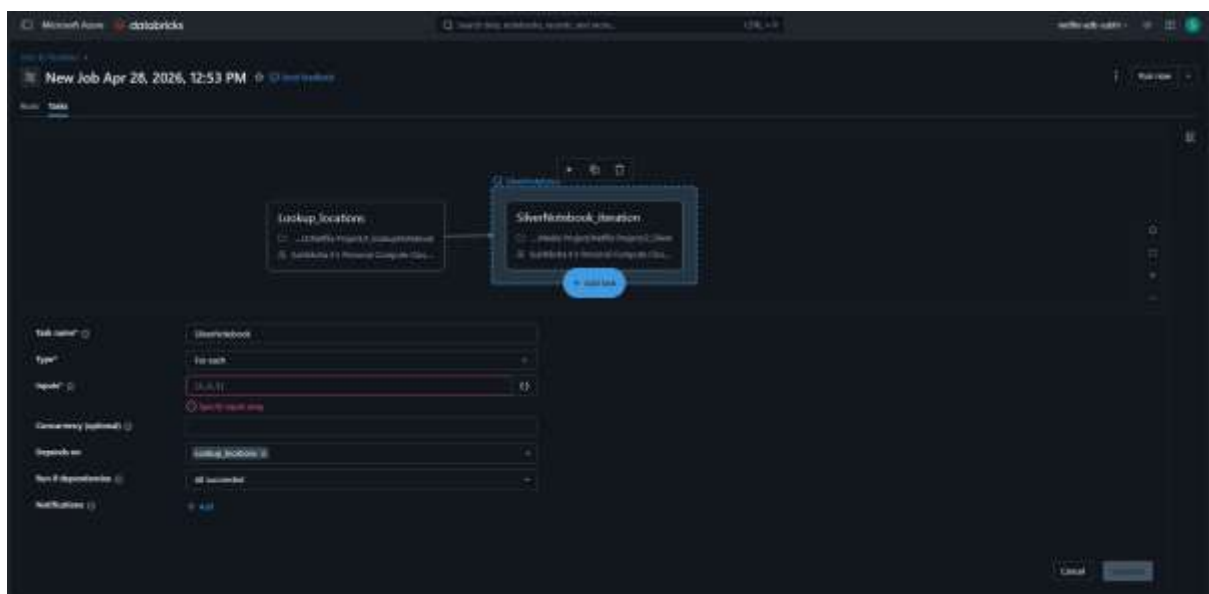

Making it dynamic using {} and .param_array

The screenshot shows the Databricks Jobs interface. At the top, it says "New Job Apr 28, 2026, 12:53 PM". Below this, there's a "Lookup_locations" job and a "SilverHubsbook_iteration" job. The "SilverHubsbook_iteration" job is highlighted with a blue box and a blue arrow pointing to it. Below the jobs, there's a configuration panel for the "SilverHubsbook" job. The configuration includes:

- Job name: SilverHubsbook
- Type: For each
- Input: {{Lookup_locations.SilverHubsbook.param_array}}
- Concurrency: parallel
- Dependency: Lookup_locations
- Run if dependencies: all succeeded
- Notifications: Add

At the bottom right, there are "Cancel" and "Save" buttons.

Click the inner activity

This screenshot is identical to the one above, showing the Databricks Jobs interface with the "SilverHubsbook_iteration" job highlighted. The configuration panel for the "SilverHubsbook" job is visible, showing the same settings as in the previous image.

Microsoft Azure | databricks | New Job Apr 28, 2026, 12:53 PM

adb-7405619105102902.2.azuredatabricks.net/jobs/89325041240578/tasks/SilverNotebookJob-7405619105102902

Search data, notebooks, words, and more... | 17% v1.0 | with auto save |

Jobs & Notebooks | New Job Apr 28, 2026, 12:53 PM | Run Now

Run | Tasks

Task name: SilverNotebook_Jobtask

Type: Notebook

Source: Workspace

Path: Workspace/Hello Project/Hello Project/2_Glue

Cluster: Submit a new Databricks cluster. 3074 PM (8 11:55:12) 100% 10A 10 min. ago

Info: Running on all purpose clusters are considered all purpose compute. Learn more

Dependencies: + Add

Parameters: Key Value

Cancel | Submit

Microsoft Azure | databricks | New Job Apr 28, 2026, 12:53 PM

adb-7405619105102902.2.azuredatabricks.net/jobs/89325041240578/tasks/SilverNotebookJob-7405619105102902

Search data, notebooks, words, and more... | 17% v1.0 | with auto save |

Jobs & Notebooks | New Job Apr 28, 2026, 12:53 PM | Run Now

Run | Tasks

Task name: SilverNotebook_Jobtask

Type: Notebook

Source: Workspace

Path: Workspace/Hello Project/Hello Project/2_Glue

Cluster: Submit a new Databricks cluster. 3074 PM (8 11:55:12) 100% 10A 10 min. ago

Info: Running on all purpose clusters are considered all purpose compute. Learn more

Dependencies: + Add


Parameters: Key Value

Reference log file: When running a task, create a log file you need to reference the next data for each iteration. You can do this by adding a parameter that uses the \$prevLogFile.


Additional info: + Add

Notes: + Add


Cancel | Submit

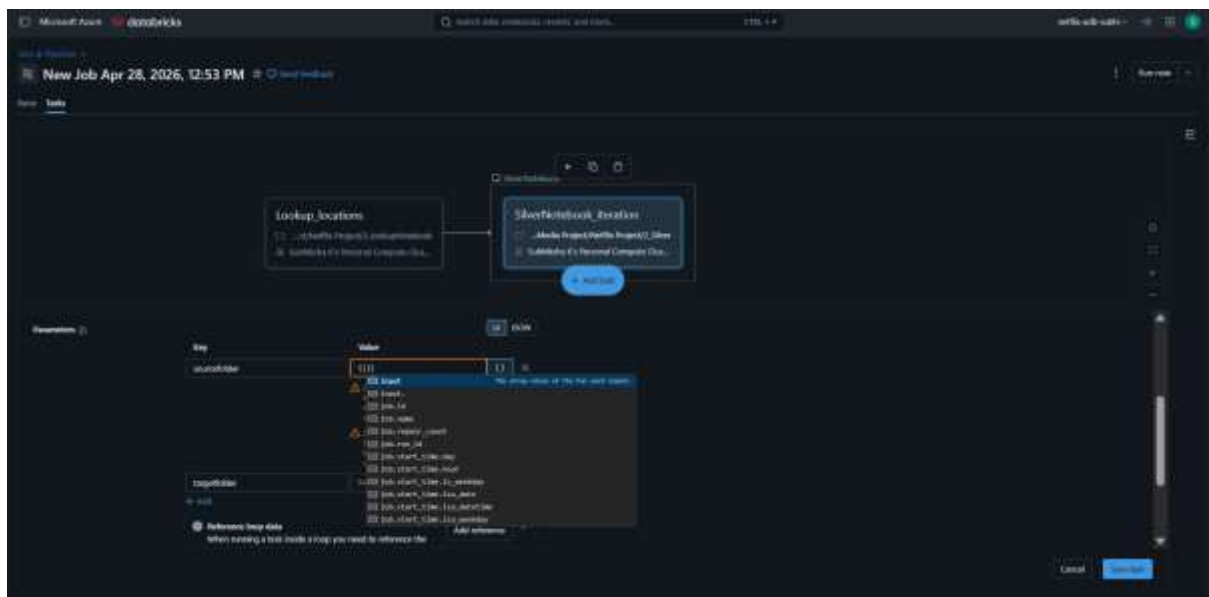


input.key_name

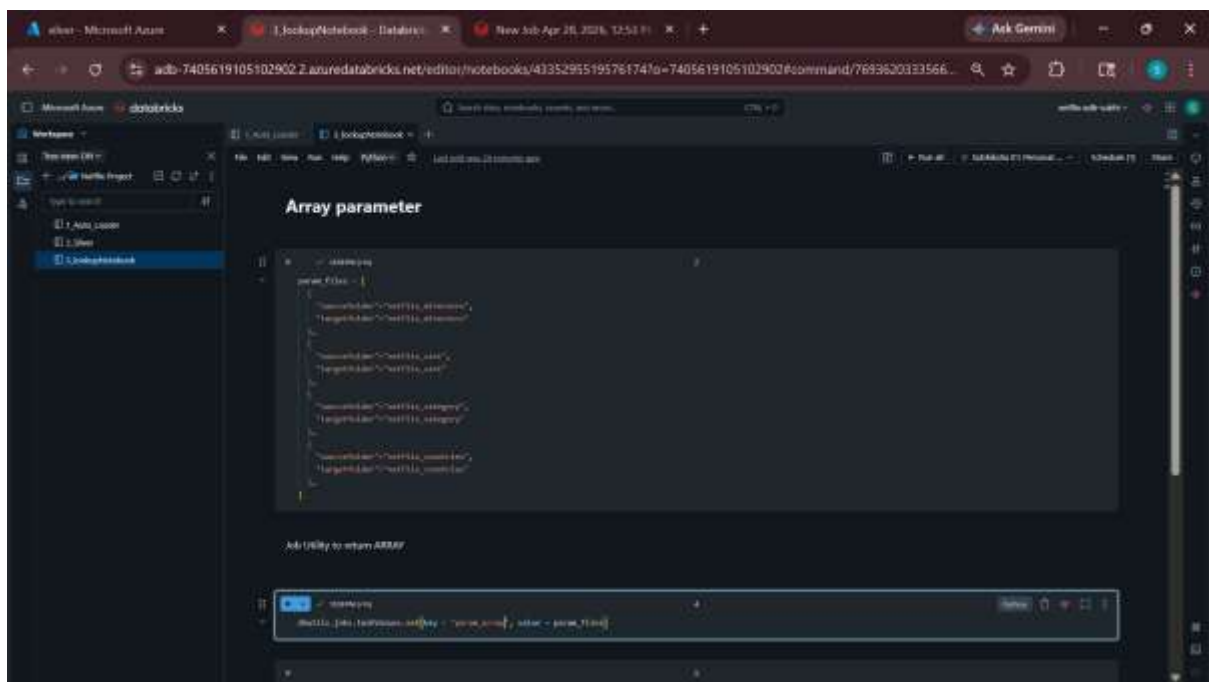

The key name is sourcefolder


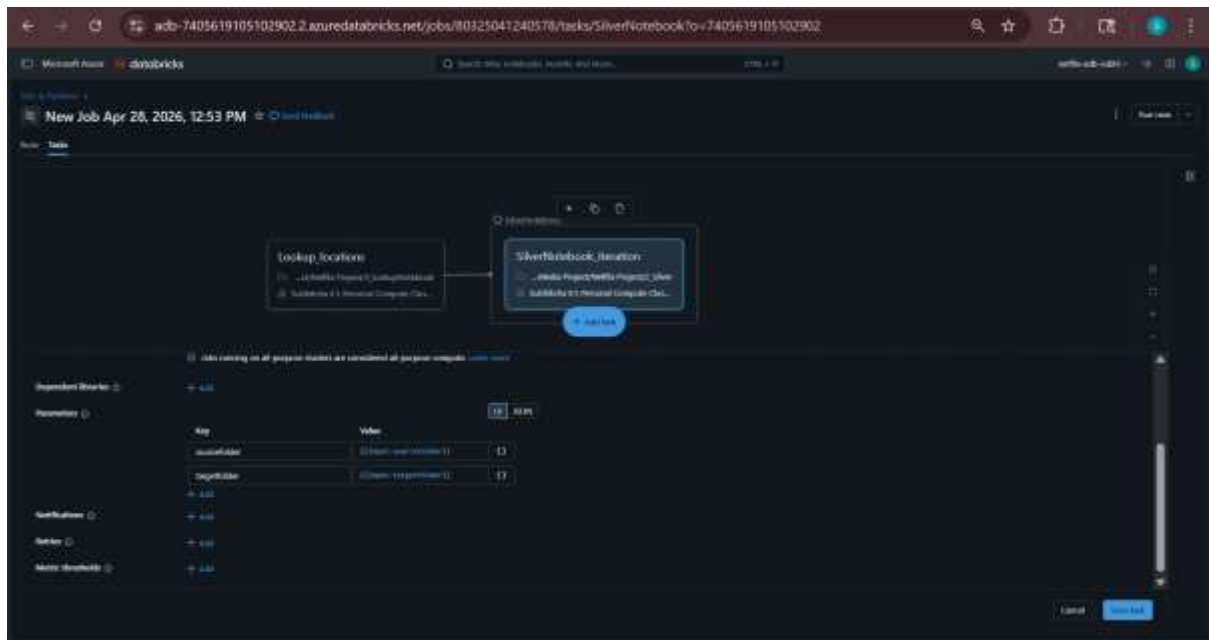


Click save task

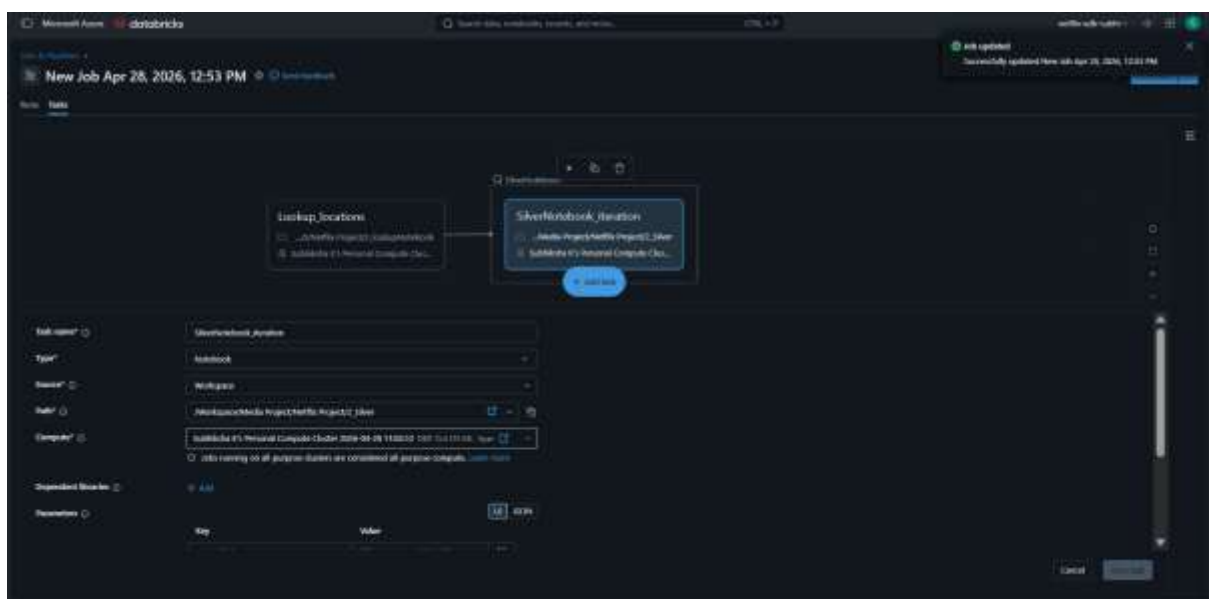


Pipeline done.


To test click run now

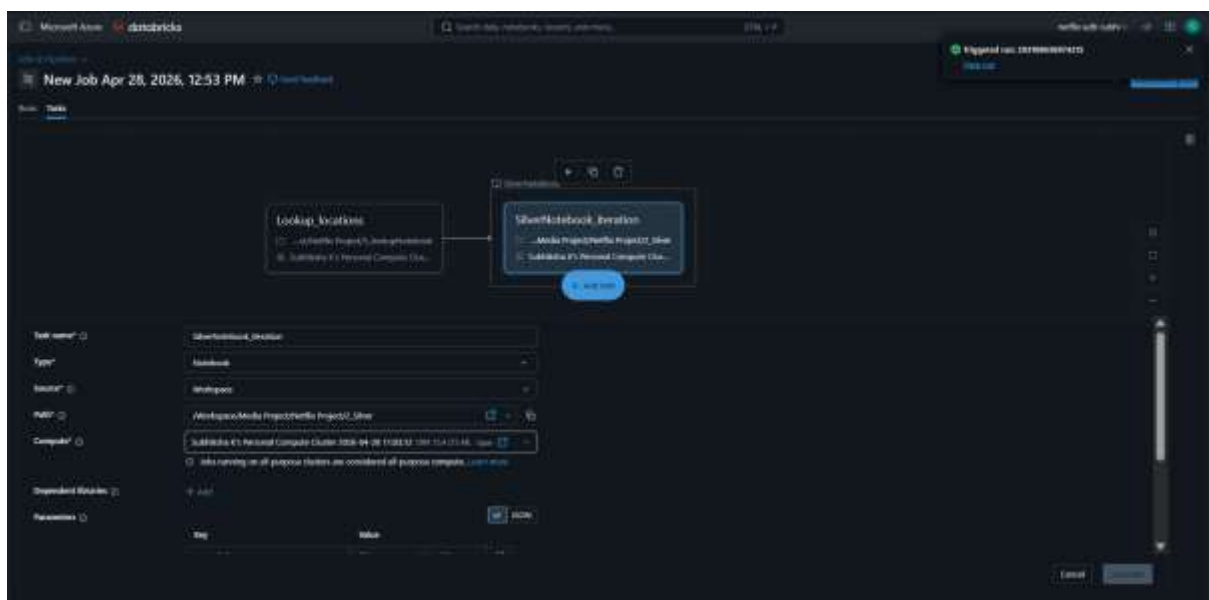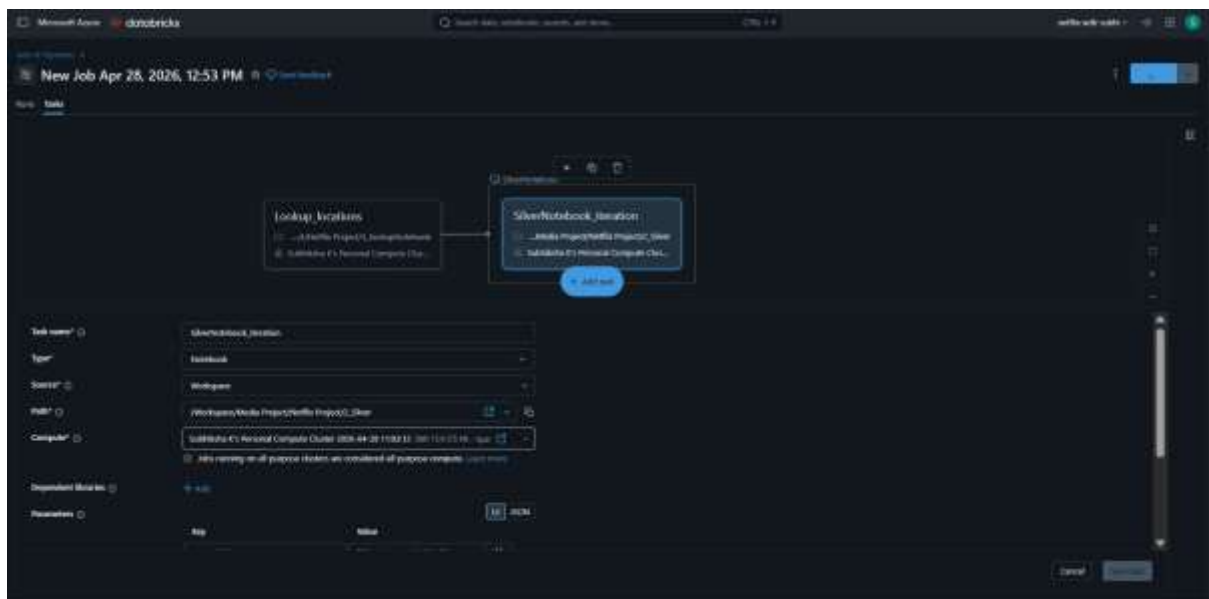

Click view_run to see

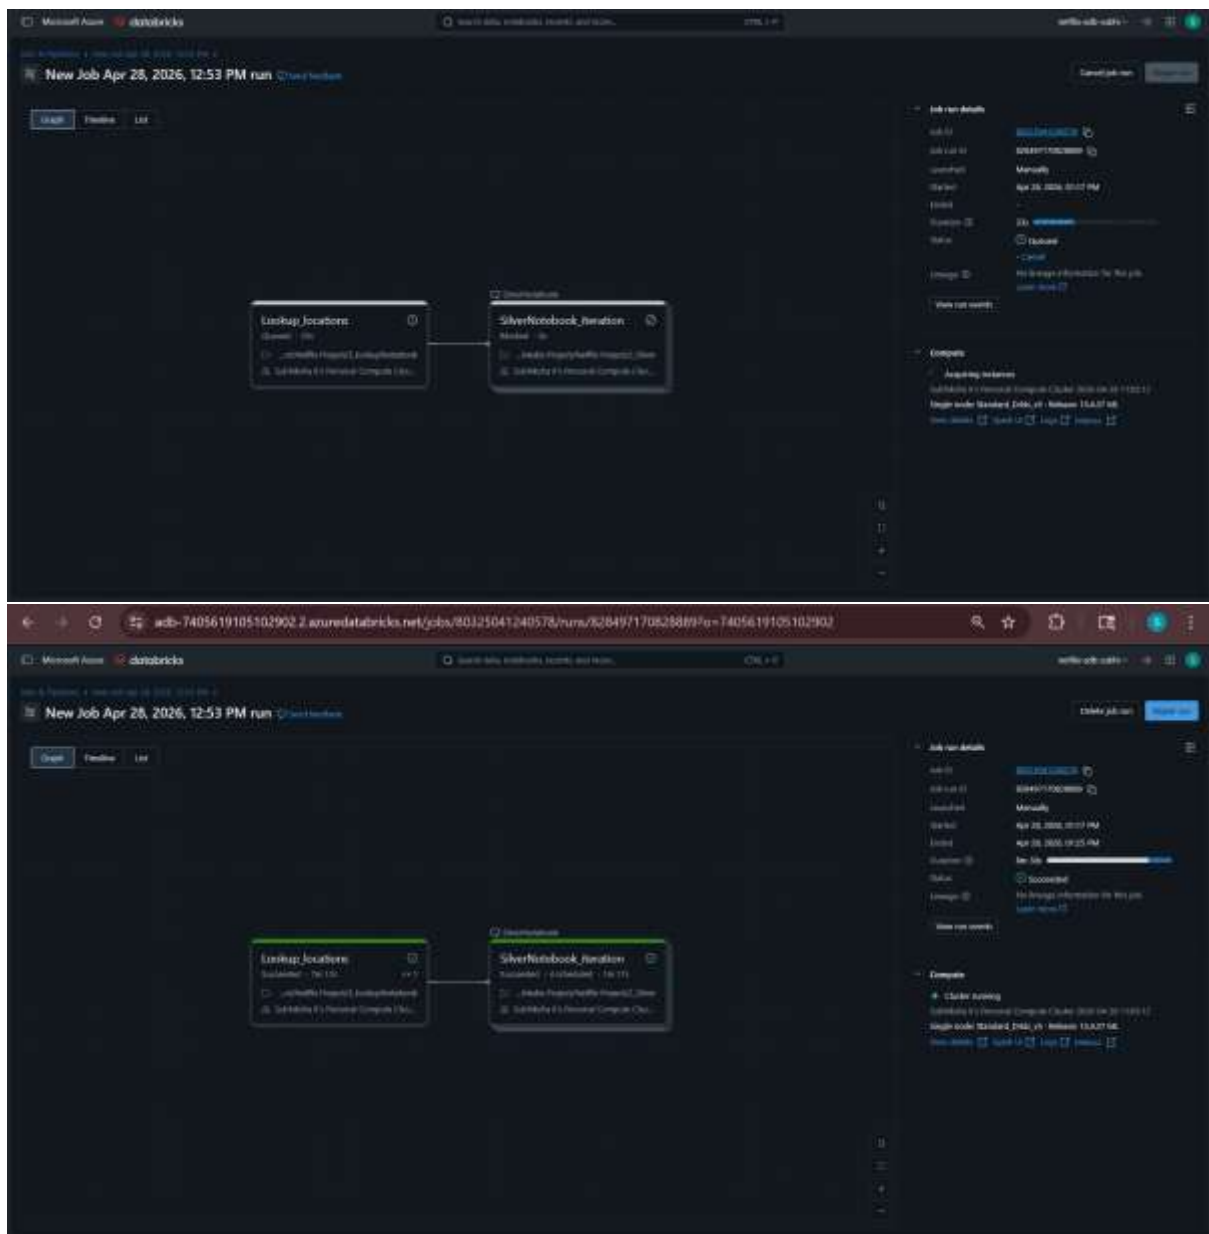

Validate this in ADLS> silver container>

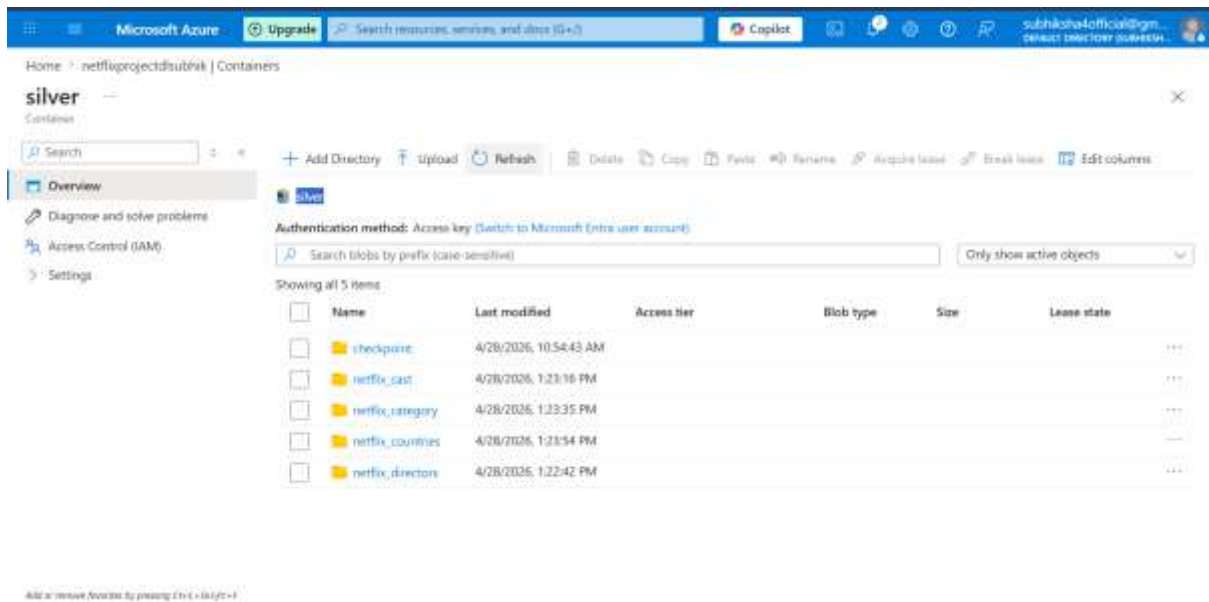


Recap:

2_silver notebook created (spark read and write) parameterized using dbutils with widgets, stored the value in variables using `.get(key)`


To provide it dynamically in workflow, 3_lookup notebook was created using array with dict, utils created using `.jobs.taskValues.set` to pass key, value

Went to workflow.

A simple notebook `lookup_locations` was created to return `param_array`, another notebook (task) that was dependent with `lookup_locations` to was created for loop created the parameter without the value as we want iterated value using for loop so we looped it. In Inputs* we gave dynamic reference `{task.lookup_locations.values.myarray}` was there we changed to our array 'param_array' which holds [dictionary of source and target folder]. To access the dictionary items in ADF its `@items[key_name]`, here its input which act as iteration for I in range: ... 'i' is used here as input `{"src":"val", "target":"val"}` to access each from inside used `input.sourcefolder`, `input.targetfolder`

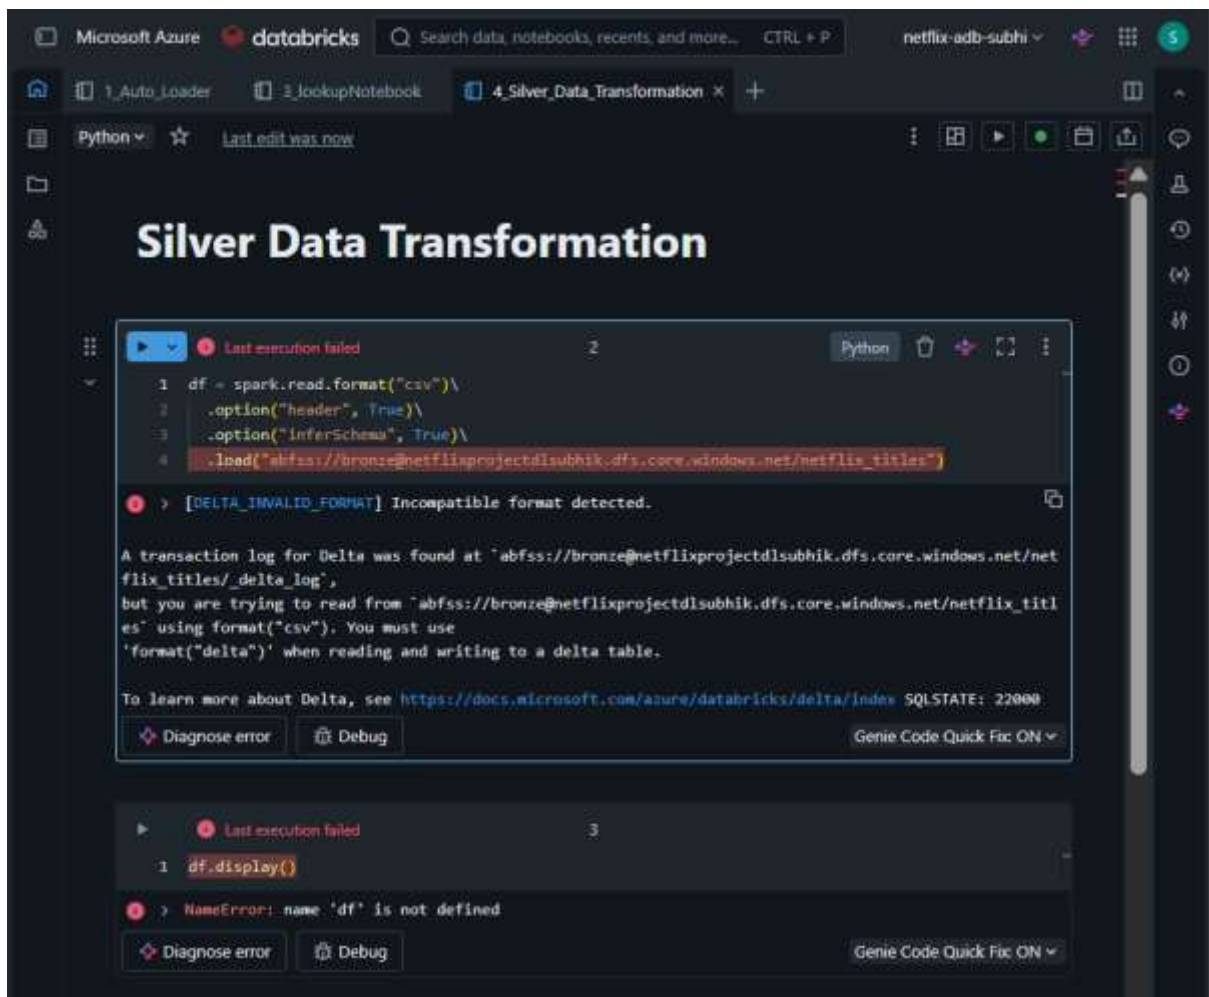

Our file is in delta format

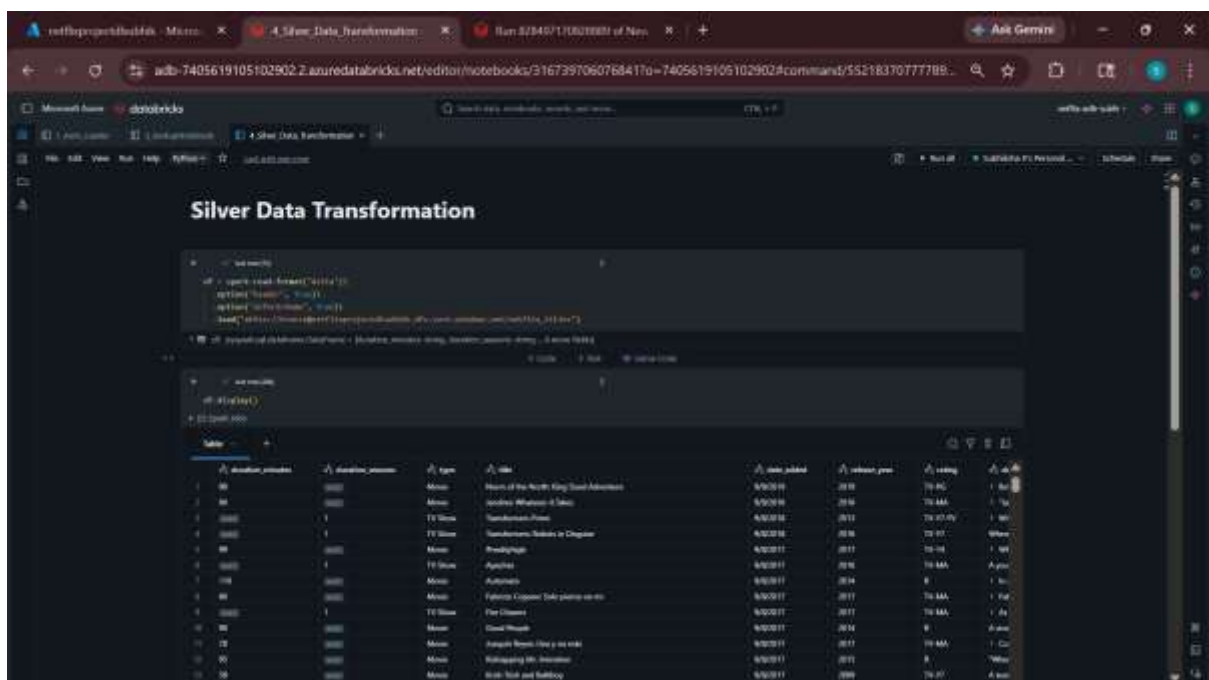

Removing nulls by replacing it to 0 (withColumn) - used to create a new column or modify the existing column. We need library `org.apache.spark.sql.functions` (`df` = `df.fillna()` - applies it all place where it is null
`df = df.fillna(0, col = column name)` - 0 value can be applied to different column
`df = df.fillna(value, bycol)` - different value for different key

```
df = df.withColumn("description", df("description").replace(0, ""))
```

df: spark.sql.DataFrame <description string, duration integer, type string, title string, release_year integer, rating float, > 10 rows total

```
df = df.fillna(0)
```

df: spark.sql.DataFrame <description string, duration integer, type string, title string, release_year integer, rating float, > 10 rows total

	description	duration	type	title	release_year	rating
0		1	TV Show	Architect's Dream Big Bang	2019	10.00
1	55	1	Movie	Article 15	2019	10.00
2	140	1	Movie	Care of Cell Block Nine	2019	10.00
3	170	1	Movie	On Paperwork's Edge	2019	10.00
4	140	1	Movie	60 Miles From Zero	2019	10.00
5	8	1	TV Show	The Day	2019	10.00
6	80	1	Movie	Half and Half	2019	10.00
7	140	1	Movie	88	2019	10.00
8	70	1	Movie	Hard Sell	2019	10.00
9	100	1	Movie	House 101	2019	10.00
10	10	1	Movie	American Factory: A Collaboration with the Obama	2019	10.00
11	100	1	Movie	ARM	2019	10.00
12	140	1	Movie	Angels in the Ground	2019	10.00
13	140	1	Movie	100% Pure Love	2019	10.00

Change datatype to int `df = df.withColumn(column name, transformation)`
 we can give multiple transformation in single part using `functionname()`

```
df = df.withColumn("description", cast(df("description").replace(0, "") as IntegerType))
```

df: spark.sql.DataFrame <description integer, duration integer, type string, title string, release_year integer, rating float, > 10 rows total

To check whether datatype modified

```
df = df.schema
```

```

-- description: integer (nullable = true)
-- duration: integer (nullable = true)
-- type: string (nullable = true)
-- title: string (nullable = true)
-- release_year: integer (nullable = true)
-- rating: float (nullable = true)
-- description: string (nullable = true)
-- release_year: integer (nullable = true)
-- title: string (nullable = true)

```

Microsoft Azure databricks Search data, notebooks, recent, and more... CTRL + P netflix-adb-subhi

1_Auto Loader 3_lookupNotebook 4_Silver_Data_Transformation

Python Last edit was now

From titles column only the data before colon(:) to be taken using string function split and index value we are accessing the first value before colon

```
df = df.withColumn("shorttitle", split(col('title'), ':')[0])
df.display()
```

(1) Spark Jobs

df: pyspark.sql.dataframe.DataFrame = (duration_minutes: integer, duration_seasons: integer ... 9 more fields)

	duration_minutes	duration_seasons	type	title
1	90		1 Movie	Norm of the North: King Sized Adventure
2	94		1 Movie	Jandino: Whatever it Takes
3	0		1 TV Show	Transformers Prime
4	0		1 TV Show	Transformers: Robots in Disguise
5	99		1 Movie	#realityhigh
6	0		1 TV Show	Apaches
7	110		1 Movie	Automata
8	60		1 Movie	Fabrizio Copano: Solo pienso en mi
9	0		1 TV Show	Fire Chasers
10	90		1 Movie	Good People
11	78		1 Movie	Joaquin Reyes: Una y no más
12	95		1 Movie	Kidnapping Mr. Heineken
13	58		1 Movie	Krish Trish and Baltiboy
14	62		1 Movie	Krish Trish and Baltiboy: Battle of Wits

6,236 rows | 0.99s runtime Refreshed now

14 Python

Shorttitles is created

Microsoft Azure

databricks

Search data, notebooks, recent, and more... CTRL + P

netflix-adb-subhi

1_Auto Loader

3_lookupNotebook

4_Silver_Data_Transformation

Python

Last edit was 2 minutes ago

From titles column only the data before colon(:) to be taken using string function split and index value we are accessing the first value before colon

2 minutes ago (1s)

13

Python

```
df = df.withColumn("shorttitle",split(col('title'),':')[0])
df.display()
```

(1) Spark Jobs

df: pyspark.sql.dataframe.DataFrame = [duration_minutes: integer, duration_seasons: integer ... 9 more fields]

Table

+

Search

Filter

Columns

Table

	rw_id	_rescued_data	shorttitle
1	28	null	Norm of the North
2	01	null	Jandino
3	39	null	Transformers Prime
4	54	null	Transformers
5	79	null	#realityhigh
6	90	null	Apaches
7	89	null	Automata
8	77	null	Fabrizio Copano
9	02	null	Fire Chasers
10	90	null	Good People
11	55	null	Joaquin Reyes
12	luctors make the largest ransom demand in histor...	null	Kidnapping Mr. Heineken
13	80	null	Krish Trish and Baltiboy
14	83	null	Krish Trish and Baltiboy
15			

6,236 rows | 0.99s runtime

Refreshed 1 minute ago

14

Python

Rank data for the duration, minutes

```

1 # Create spark rdd
2 rdd = spark.read.json('...')
3 rdd = rdd.repartition(10)
4 rdd.write.json('...')
5 # Display
6 rdd.show()
7 # Save to Delta
8 rdd.write.format('delta').save()
9 # Load from Delta
10 deltaTable = spark.read.format('delta').load('...')
11 deltaTable.show()

```

	value_id	current_date	description	type_tag	duration_ranking
1	80000002	2022	Book Mirror	1	1
2	80000018	2022	Temper	1	2
3	80000046	2022	Lupin	1	3
4	80000055	2022	Julius Miller	1	4
5	80000076	2022	The Soldier	1	5
6	80000198	2022	The Gospel of Luke	1	6
7	80002118	2022	What's Your Favorite?	1	7
8	80004084	2022	The Lord of the Rings	1	8
9	80004181	2022	Doctor Zhivago	1	9
10	80004336	2022	Baywatch: Deeply 4 Hour	1	10

duration, minutes


```


1 # Create spark rdd
2 rdd = spark.read.json('...')
3 rdd = rdd.repartition(10)
4 rdd.write.json('...')
5 # Display
6 rdd.show()
7 # Save to Delta
8 rdd.write.format('delta').save()
9 # Load from Delta
10 deltaTable = spark.read.format('delta').load('...')
11 deltaTable.show()

```

	duration, minutes	duration_ranking
20	180	18
21	186	18
22	180	18
23	185	20
24	180	21
25	175	22
26	175	23
27	178	23
28	177	24
29	177	24
30	177	24
31	176	25

Dense rank so same column same number

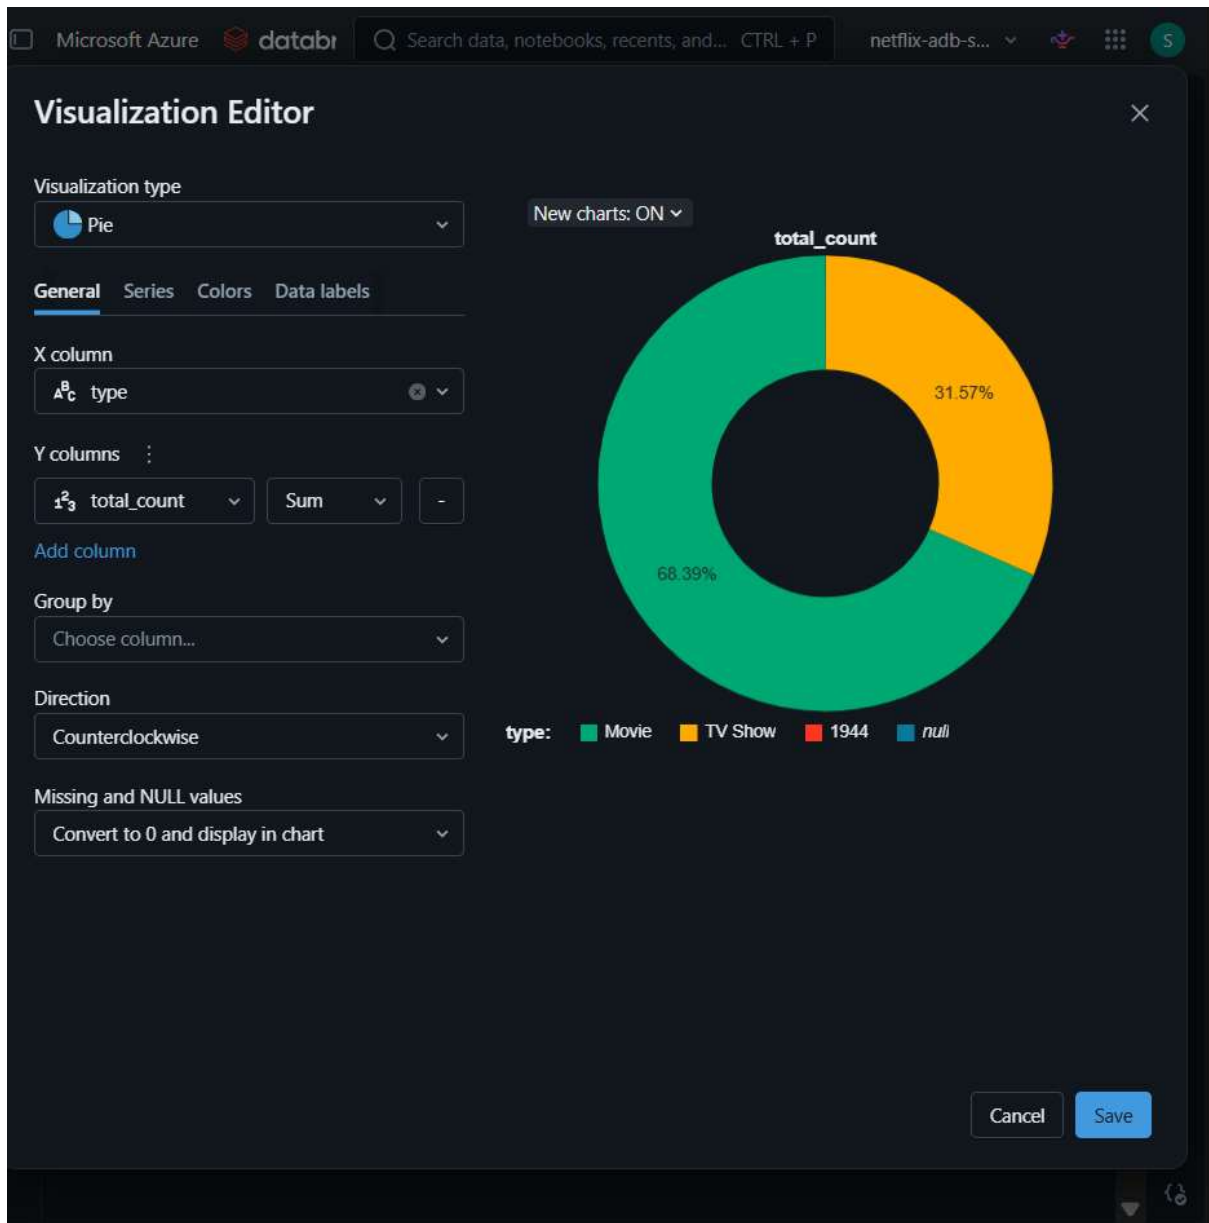

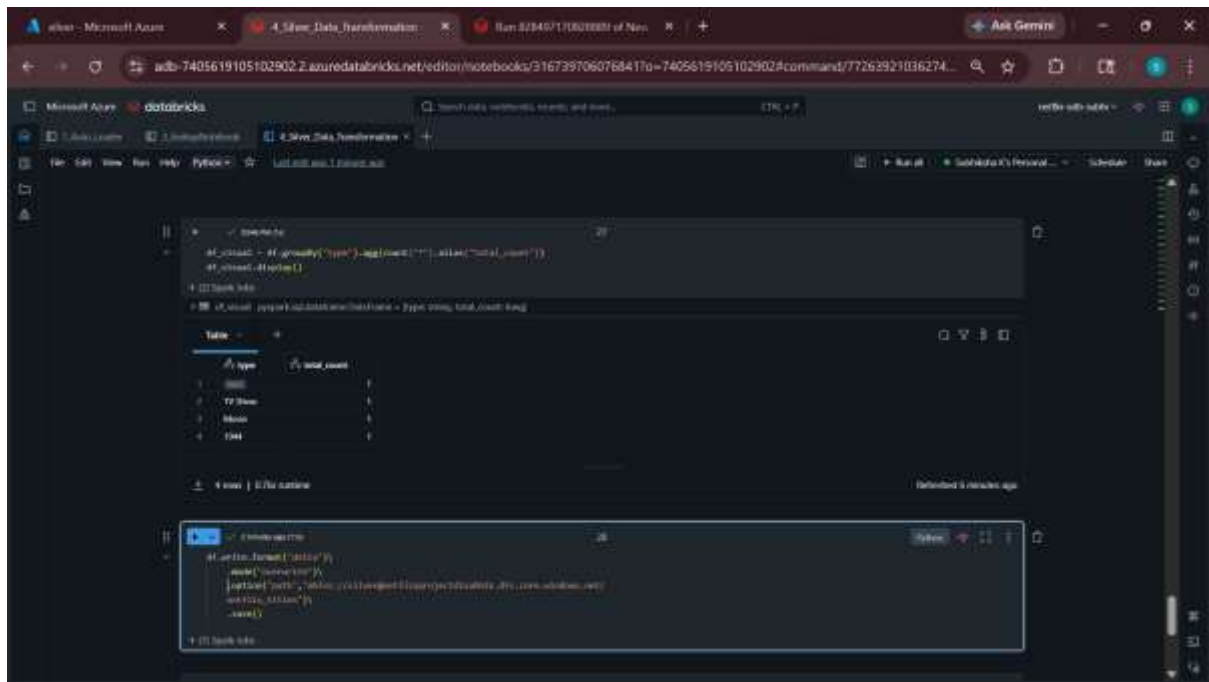

To check this go to ADLS> silver container>Netflix_titles

Search resources, services, and docs (G+/)

Copilot

Home > netflixprojectdlsabhik | Containers

silver

Container

×

>> Service menu

+ Add Directory

↑ Upload

↻ Refresh

🗑 Delete

📄 Copy

📄 Paste

⋮

 silver



Authentication method: Access key ([Switch to Microsoft Entra user account](#))


🔍 Search blobs by prefix (case-sensitive)

Only show active objects ▾

Showing all 6 items

☐	Name	Last modified	Access tier	Blob type
☐	 checkpoint	4/28/2026, 10:54:43 AM		
☐	 netflix_cast	4/28/2026, 1:23:16 PM		
☐	 netflix_cate...	4/28/2026, 1:23:35 PM		
☐	 netflix_cou...	4/28/2026, 1:23:54 PM		
☐	 netflix_direc...	4/28/2026, 1:22:42 PM		
☐	 netflix_titles	4/28/2026, 3:51:12 PM		

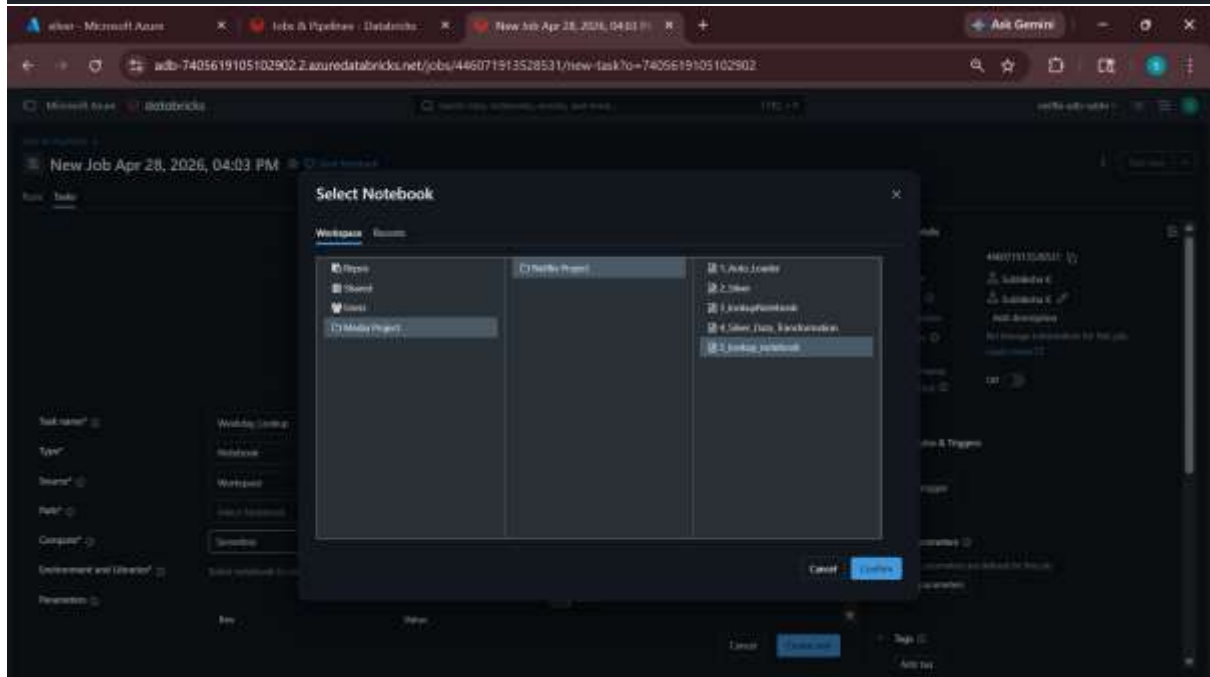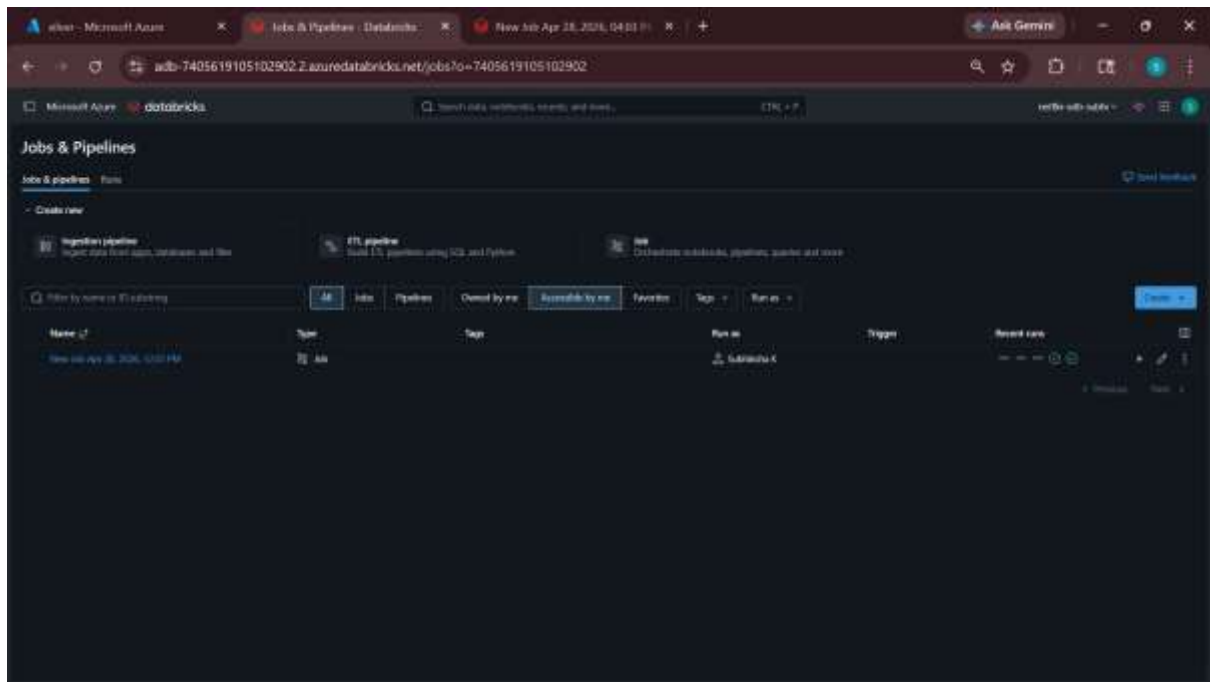

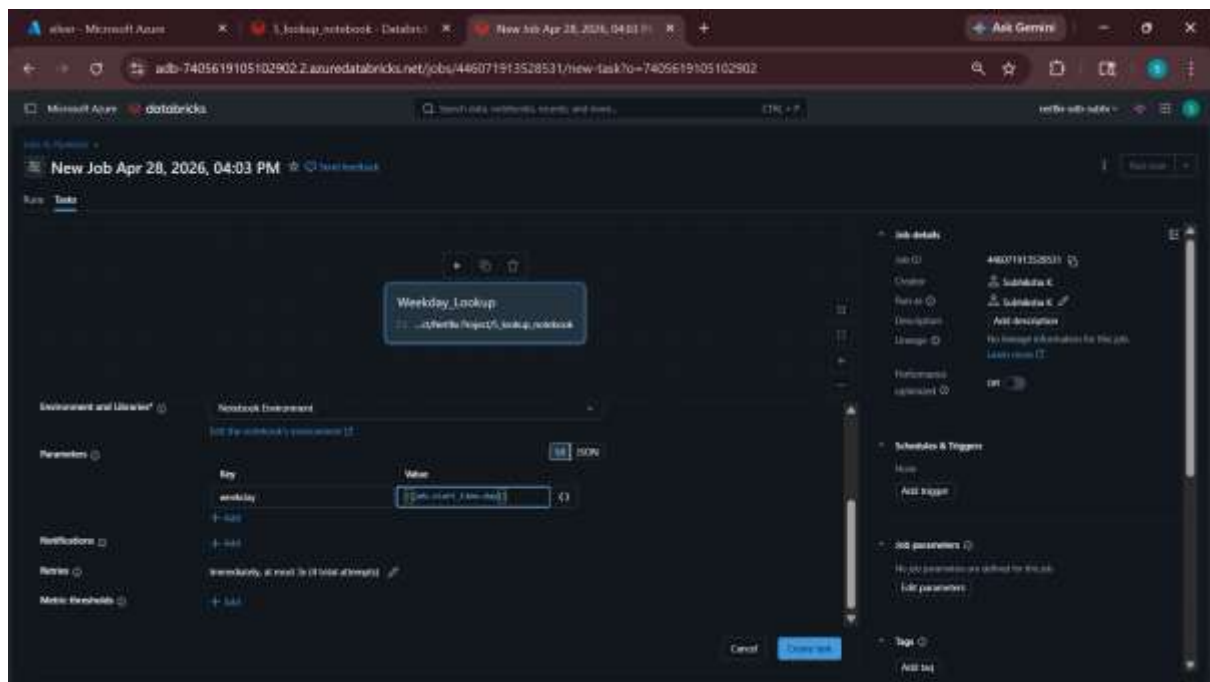

Create task, add task

Microsoft Azure | New Job Apr 28, 2026, 04:03 PM | Run 42062953552129 of New | Ask Gemini

adb-7405619105102902.2.azuredatabricks.net/jobs/446071913528531/tasks/SilverMasterData?o=7405619105102902

Microsoft Azure | databricks

Task: **New Job Apr 28, 2026, 04:03 PM** | Next Notebook

Task name: **SilverMasterData**

Type: **Notebook**

Source: **Workspace**

Path: **/Workspace/Notebook/Project/Notebook/SilverMasterData**

Cluster: **SilverMasterData Cluster (2026-04-28 13:02:12) DB 13.1.0.16 / 100%**

Dependencies: **Weekday_Lookup**

Run if dependencies: **All succeeded**

Job details:

- Job ID: 446071913528531
- Cluster: SilverMasterData
- Run as: SilverMasterData
- Description: No description is available for this job.
- Usage: Last run: 07/07/2026
- Performance: Improved
- On: On

Schedule & Triggers:

- None
- Add trigger

Job parameters:

- No job parameters are defined for this job.
- Edit parameters

Compute:

- Cluster SilverMasterData

Microsoft Azure | New Job Apr 28, 2026, 04:03 PM | Run 42062953552129 of New | Ask Gemini

adb-7405619105102902.2.azuredatabricks.net/jobs/446071913528531/tasks/Weekday_Lookup?o=7405619105102902

Microsoft Azure | databricks

Task: **New Job Apr 28, 2026, 04:03 PM** | Next Notebook

Task name: **Weekday_Lookup**

Type: **Notebook**

Source: **Workspace**

Path: **/Workspace/Notebook/Project/Notebook/Weekday_Lookup**

Cluster: **SilverMasterData Cluster (2026-04-28 13:02:12) DB 13.1.0.16 / 100%**

Dependencies: **Weekday_Lookup**

Run if dependencies: **All succeeded**

Job details:

- Job ID: 446071913528531
- Cluster: SilverMasterData
- Run as: SilverMasterData
- Description: No description is available for this job.
- Usage: Last run: 07/07/2026
- Performance: Improved
- On: On

Schedule & Triggers:

- None
- Add trigger

Job parameters:

- No job parameters are defined for this job.
- Edit parameters

Compute:

- Cluster SilverMasterData

Weekday_Lookup

Task ID: 446071913528531

Task name: **Weekday_Lookup**

Type: **Notebook**

Source: **Workspace**

Path: **/Workspace/Notebook/Project/Notebook/Weekday_Lookup**

Cluster: **SilverMasterData Cluster (2026-04-28 13:02:12) DB 13.1.0.16 / 100%**

Dependencies: **Weekday_Lookup**

Run if dependencies: **All succeeded**

Job details:

- Job ID: 446071913528531
- Cluster: SilverMasterData
- Run as: SilverMasterData
- Description: No description is available for this job.
- Usage: Last run: 07/07/2026
- Performance: Improved
- On: On

Schedule & Triggers:

- None
- Add trigger

Job parameters:

- No job parameters are defined for this job.
- Edit parameters

Compute:

- Cluster SilverMasterData

Microsoft Azure | New Job Apr 28, 2026, 04:03 PM | Run 42062953852120 of New | Ask Gemini

adb-7405619105102902.2.azuredatabricks.net/jobs/446071913528531/tasks/SilverMasterData?o=7405619105102902

Microsoft Azure | databricks

Jobs & Clusters

New Job Apr 28, 2026, 04:03 PM

Run | **Task**

Task name

Type

Source

Path

Cluster

Depends on

Run if dependencies

Job details

- Job ID: 446071913528531
- Cluster: SilverMasterData
- Run as: SilverMasterData
- Description: No description is available for this job.
- Usage: Last run 17
- Performance: Improved
- On: ☒

Schedule & Triggers

- None
- Add trigger

Job parameters

- No job parameters are defined for this job.
- Edit parameters

Compute

- Cluster terminated

Microsoft Azure | New Job Apr 28, 2026, 04:03 PM | Run 42062953852120 of New | Ask Gemini

adb-7405619105102902.2.azuredatabricks.net/jobs/446071913528531/tasks/FalseNotebook?o=7405619105102902

Microsoft Azure | databricks

Jobs & Clusters

New Job Apr 28, 2026, 04:03 PM

Run | **Task**

Task name

Type

Source

Path

Cluster

Depends on

Run if dependencies

Job details

- Job ID: 446071913528531
- Cluster: SilverMasterData
- Run as: SilverMasterData
- Description: No description is available for this job.
- Usage: Last run 17
- Performance: Improved
- On: ☒

Schedule & Triggers

- None
- Add trigger

Job parameters

- No job parameters are defined for this job.
- Edit parameters

Compute

- Cluster terminated

Microsoft Azure | databricks

adb-7405619105102902.2.azuredatabricks.net/jobs/446071913528531/tasks/FalseNotebook?o=7405619105102902

Microsoft Azure | databricks

Search data, notebooks, clusters, and more...

CTN + P

verBn with table

Triggered run in performance-optimized mode
4800415267796

New Job Apr 28, 2026, 04:03 PM

Task

Task name: FalseNotebook

Type: Notebook

Source: Workspace

Path: /Workspace/Notebooks/FalseNotebook

Computer: Serverless

Depends on: WeeklyLookup

Run if dependencies: All succeeded

Job details

Job ID: 446071913528531

Cluster: Submitter's

Run as: Submitter's

Description: No message is available for this job.

Usage: Last run: CT

Performance-optimized: On

Schedule & Triggers

None

Add trigger

Job parameters

No job parameters are defined for this job.

Job parameters

Compute

Cluster terminated

Cancel

Microsoft Azure | databricks

adb-7405619105102902.2.azuredatabricks.net/jobs/446071913528531/runs/6333943392109527?o=7405619105102902

Microsoft Azure | databricks

Search data, notebooks, clusters, and more...

CTN + P

verBn with table

New Job Apr 28, 2026, 04:03 PM run

Graph Timeline List

WeeklyLookup

Weekly

FalseNotebook

FalseNotebook

Job details

Job ID: 446071913528531

Run ID: 6333943392109527

Launched: Manually

Started: Apr 28, 2026, 04:03 PM

Ended: Apr 28, 2026, 04:04 PM

Duration: 1h

Status: Succeeded

Usage: No message is available for this job.

View logs

Compute

Cluster running

Submitter's Personal Compute Cluster 3028-04-28-11-03-10


Single node: Standard_Linux_v3 - Release: TS-3.17 MB

View details


The screenshot shows a Databricks job run titled "New Job Apr 28, 2026, 04:03 PM run". The job is a workflow with three tasks: "WeekdayLookup", "IFWeekDay", and "SilverMarketData". The "WeekdayLookup" task is completed. The "IFWeekDay" task is currently running, indicated by a green progress bar. The "SilverMarketData" task is not yet started. The job is running on a cluster named "Substrate E's Permitted Compute Cluster 2026-04-28-11:03:12".


The screenshot shows a Databricks job run titled "FalseNotebook run". The job is a workflow with one task, "get". The "get" task is completed, and its output is displayed as "28". The job is running on a cluster named "Substrate E's Permitted Compute Cluster 2026-04-28-11:03:12".

Today is 28 so we got 28

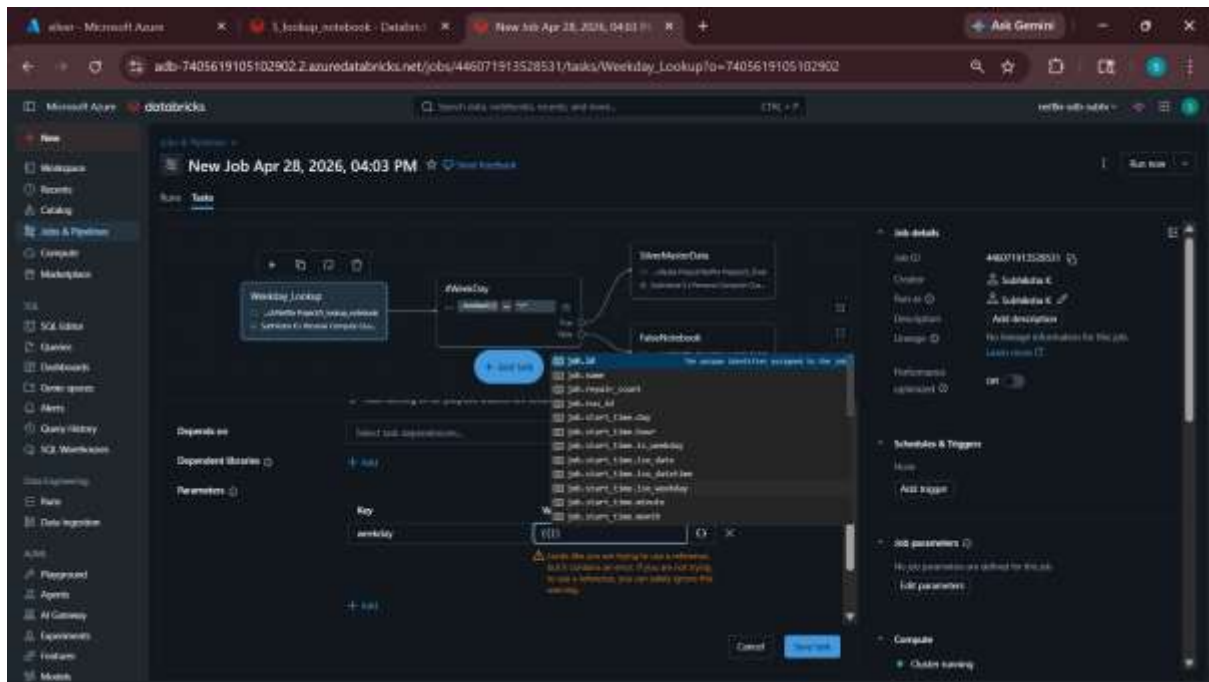


I want week day (1 to 7)

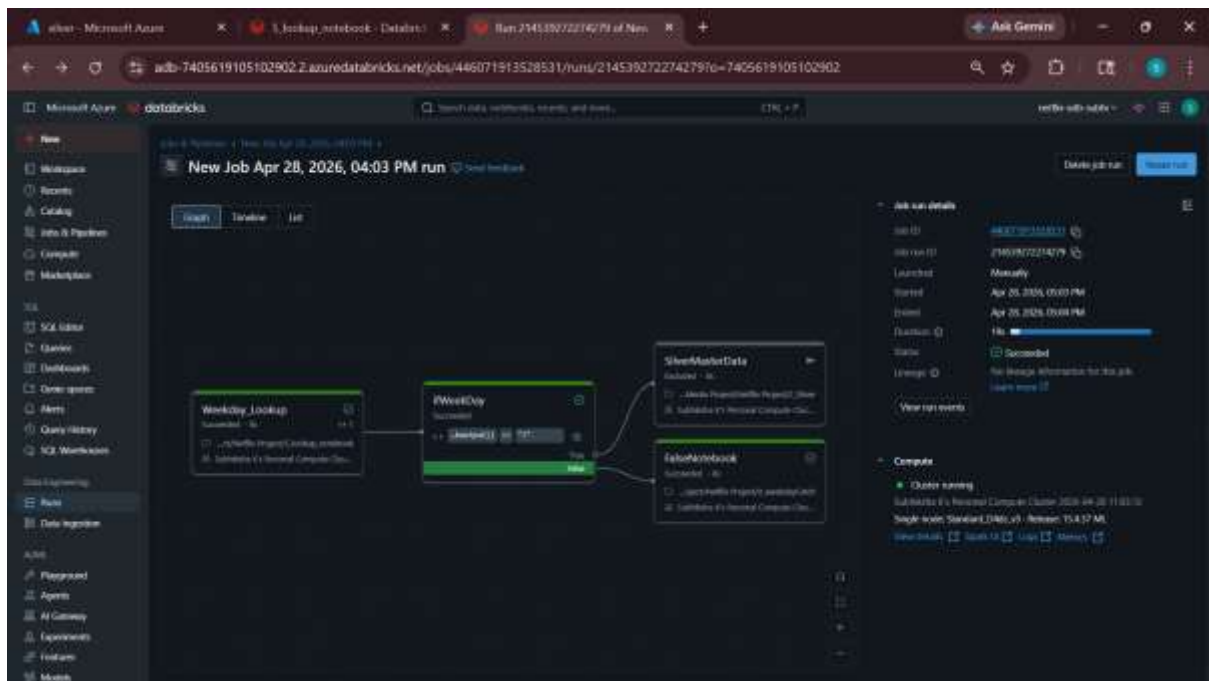

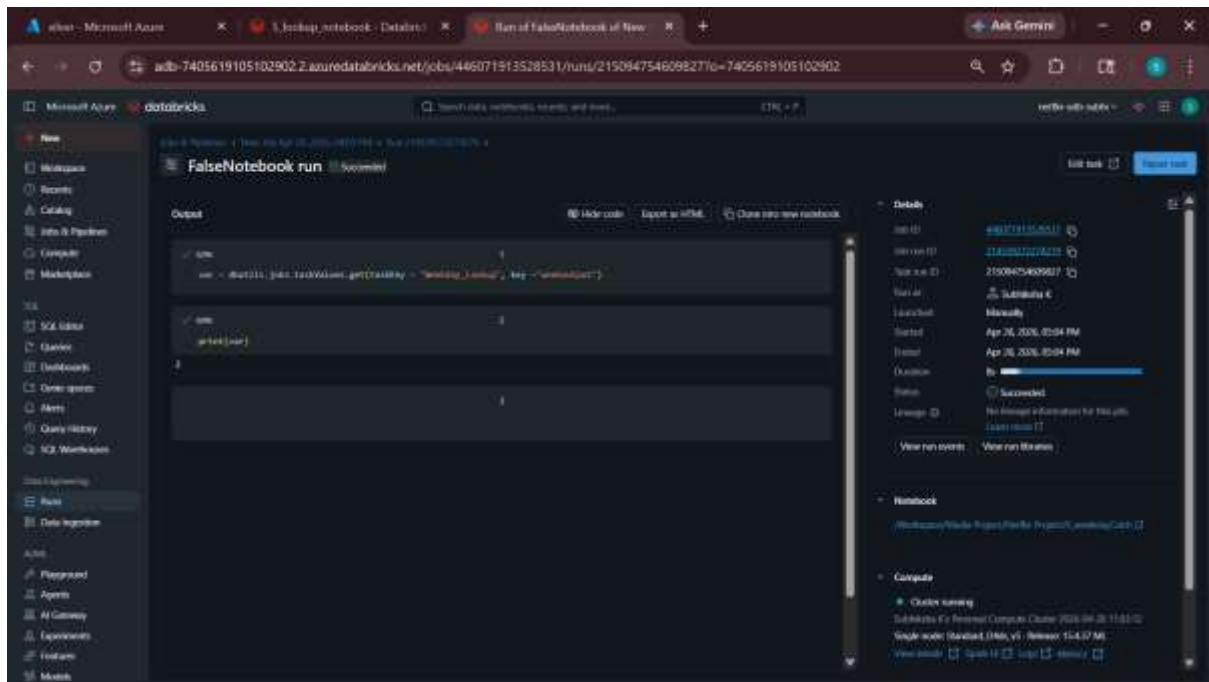

DLT is ETL pipeline

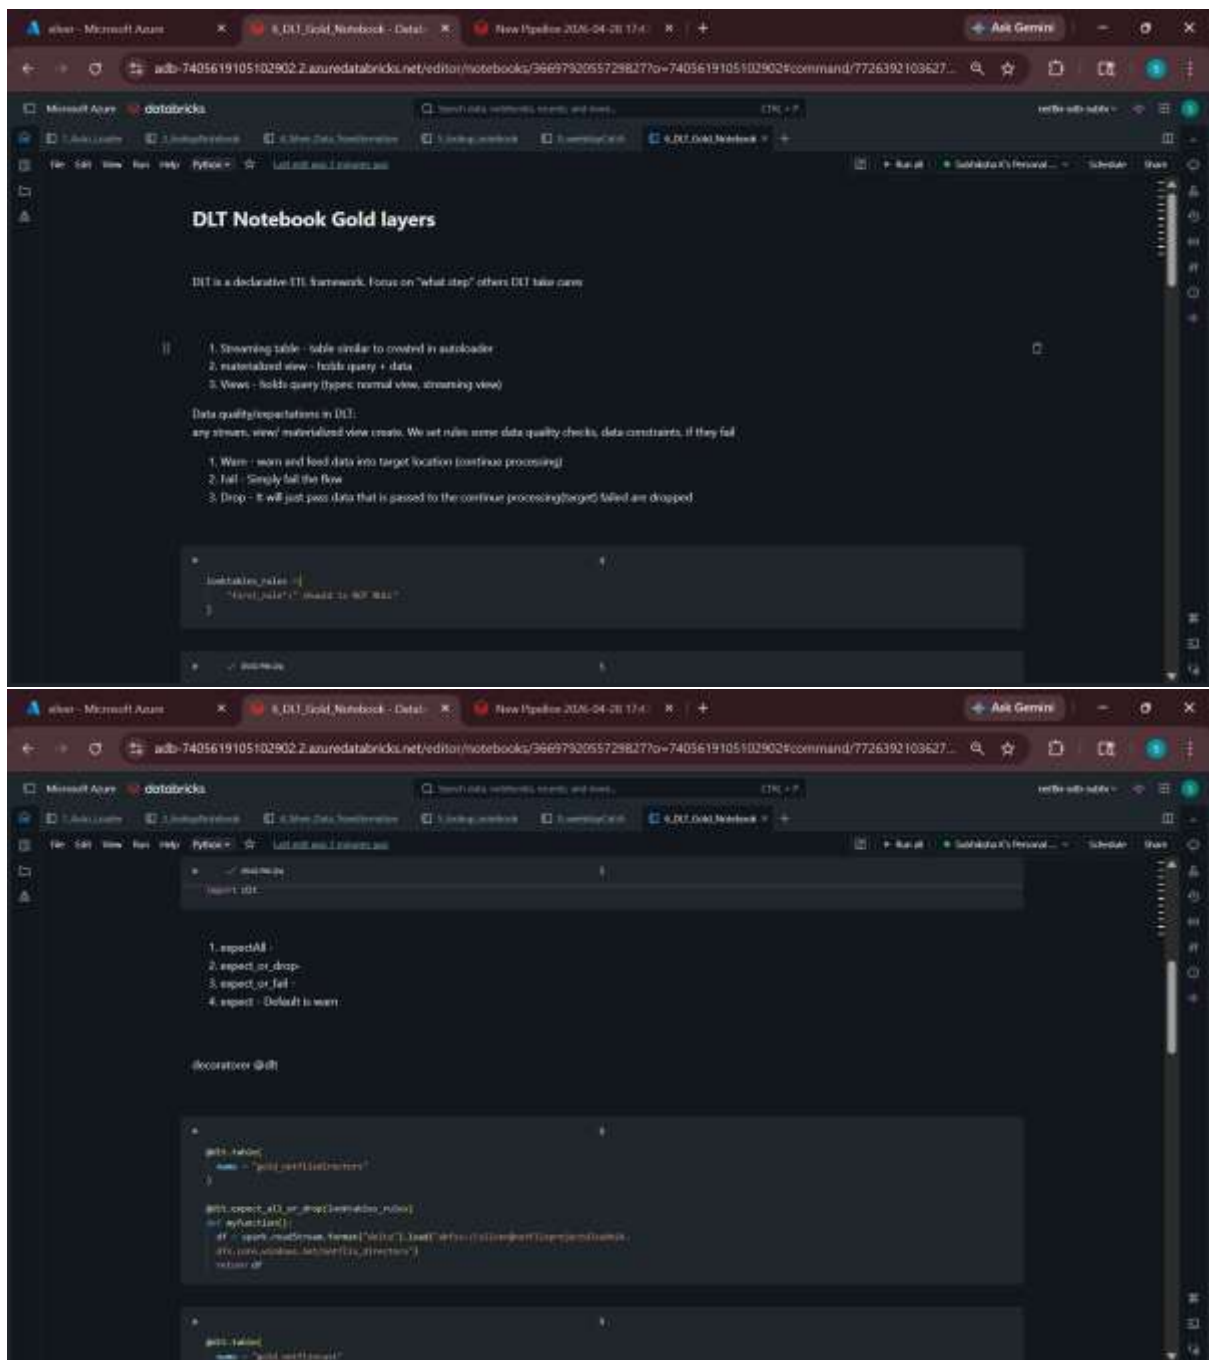

@dlt.table: A decorator that tells Databricks to create a managed table in our catalog.

@dlt.expect_all_or_drop: This is our "filter." It references the looktables_rules. If a row fails the rule (e.g., show_id is missing), DLT drops that specific row so our Gold layer stays clean.

spark.readStream: This enables Streaming. It means if you add one new director to the Silver layer, DLT will only process that one new row rather than re-scanning the whole dataset.

df: A temporary DataFrame variable that holds the data while it moves from our Azure Data Lake (Silver) into the DLT pipeline.


```
17
@dlt.view
def gold_transform_netflixitles():
    df = spark.readStream.table("LIVE.gold_stg_netflixitles")
    df = df.withColumn("newflag", lit(1))
    return df

18
masterdata_rules = {
    "first_rule": "newflag is NOT NULL",
    "second_rule": "show_id is NOT NULL"
}

19
@dlt.table
def gold_netflixitles_final():
    @dlt.expect_all_or_drop(masterdata_rules)
    df = spark.readStream.table("LIVE.gold_transform_netflixitles")
    return df
```

Phase 3: The Staging & Transformation Layer

This is where you start adding new business value to the raw data.



1. **gold_stg_netflixitles:**
 - **Why:** It acts as a "Staging" table. It simply grabs the raw titles from Silver without any changes yet.
2. **gold_transform_netflixitles:**
 - **@dlt.view:** Unlike a **@dlt.table**, a **View** does not store data on disk. It's a temporary logic step. This saves you storage costs and is faster for intermediate steps.
 - **withColumn("newflag", lit(1)):** You are adding a brand-new column called newflag and filling every row with the value 1. This is a placeholder for business logic (e.g., marking these as "Processed").
3. **masterdata_rules:**
 - **Variable:** {"first_rule": "newflag is NOT NULL", "second_rule": "show_id is NOT NULL"}
 - **Why:** You are expanding our rules. Now you are verifying both the original ID and the new column you just created.

LIVE. prefix? When you use `spark.readStream.table("LIVE.gold_stg_netflixitles")`, the word **LIVE** tells DLT to look for that table *inside* the current running pipeline, not in the external catalog.


Phase 4: Final Gold Layer (The Master Table)

This is the "Final Product" that a business user would see.

- **gold_netflixitles_final:** This table reads from the **View** we made in the previous step. It applies the `masterdata_rules` to ensure that by the time the data reaches this "Final" table, it is 100% accurate and follows all business rules.

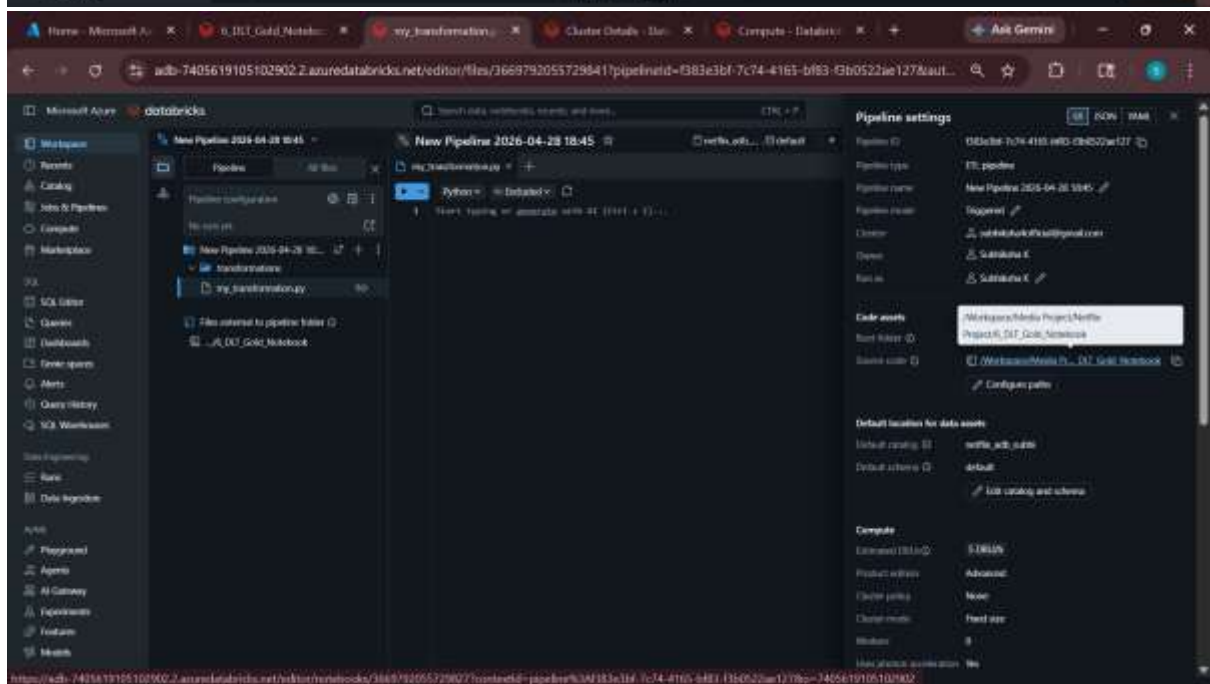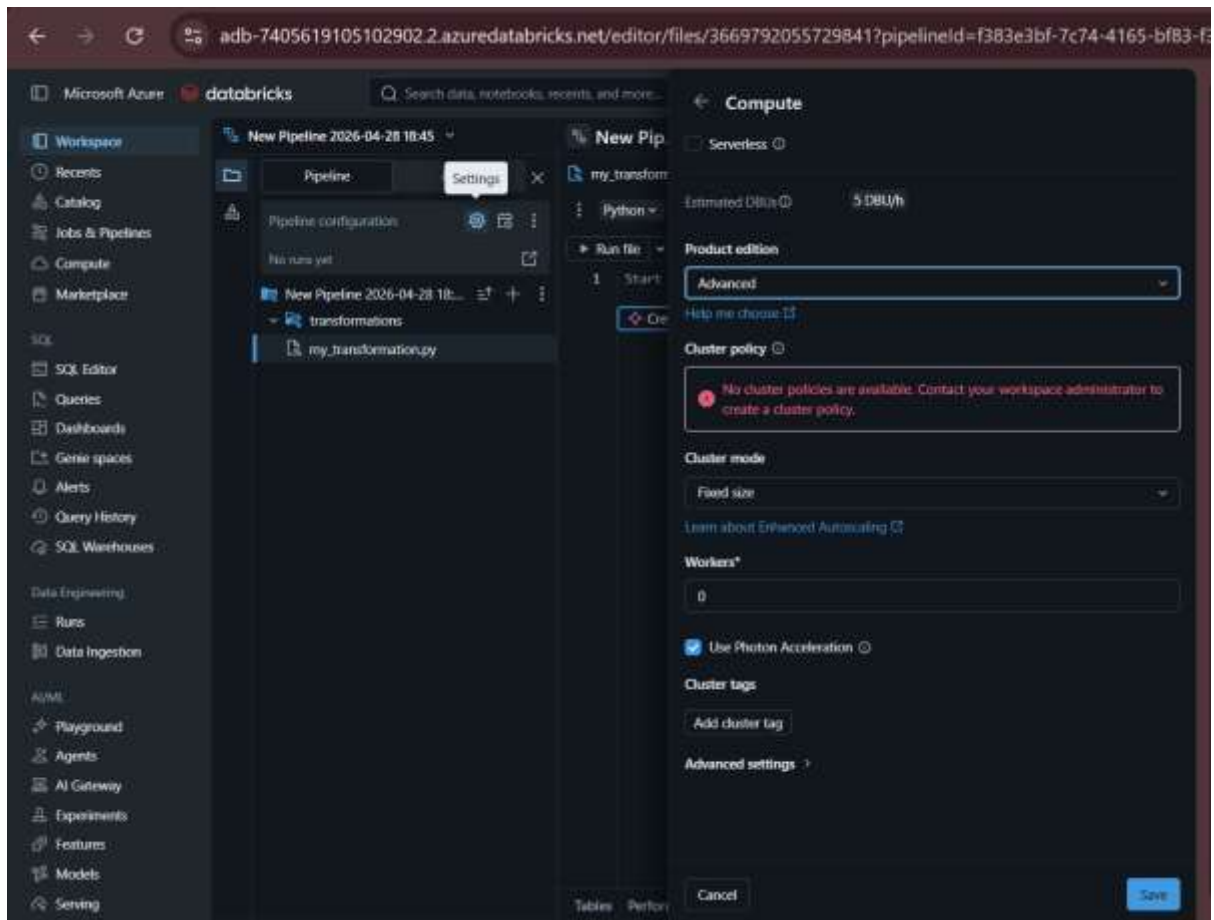

<https://adb-74056191051029022.azuredatabricks.net/editor/files/3669792055729841?pipelineId=f383e3bf-7c74-4165-bf83-f3b0522ae127&aut...>

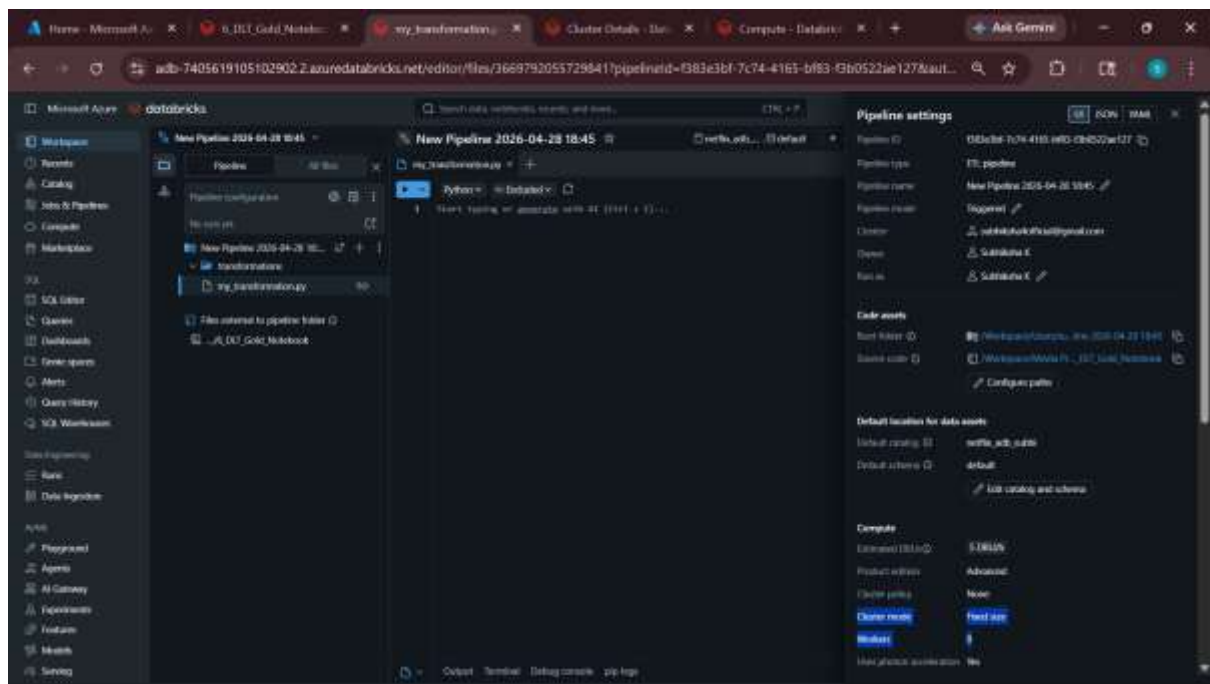

Microsoft Azure databricks Search data, notebooks, recent, and more... CTRL + P netflix-adb-subbi

New

- Workspace
- Recents
- Catalog
- Jobs & Pipelines
- Compute
- Marketplace
- SQL
- SQL Editor
- Queries
- Dashboards
- Genie spaces
- Alerts
- Query History
- SQL Warehouses
- Data Engineering
- Runs
- Data Ingestion
- AI/ML
- Playground
- Agents
- AI Gateway
- Experiments
- Features
- Models

Compute

All-purpose compute Job compute SQL warehouses Vector Search Pools Policies Apps Lakebase

Filter compute... Created by Only pinned Create with Personal Compute Create computer

State	Runtime	Active	Active c...	Active ...	Source	Creator	Notebo...
Inactivity: The cluster was automatically terminated after 20 minutes of inactivity.	15.4 ML	-	-	-	UI	Subhiksha I	-

Previous Next 20 / page

Home - Microsoft A... 6_Bit_Gold_Notebo... my_transformations... Cluster Outline - Dat... Compute - Databricks... Ask Gemini

adb-74056191051029022.azuredatabricks.net/editor/files/3669792053729841/pipelineid-9383e3bf-7c74-4161-bf83-9b0522ae127&aut...

Microsoft Azure databricks Search data, notebooks, recent, and more... CTRL + P netflix-adb-subbi

New

- Workspace
- Recents
- Catalog
- Jobs & Pipelines
- Compute
- Marketplace
- SQL
- SQL Editor
- Queries
- Dashboards
- Genie spaces
- Alerts
- Query History
- SQL Warehouses
- Data Engineering
- Runs
- Data Ingestion
- AI/ML
- Playground
- Agents
- AI Gateway
- Experiments
- Features
- Models


New Pipeline 2026-04-28 18:45



Python - Debuted - last edited 2026-04-28 18:45

Run all files configured as pipeline, update code and update all datasets

File selected to pipeline folder: 6 _Bit_Gold_Notebook

Output Terminal Debug console log logs

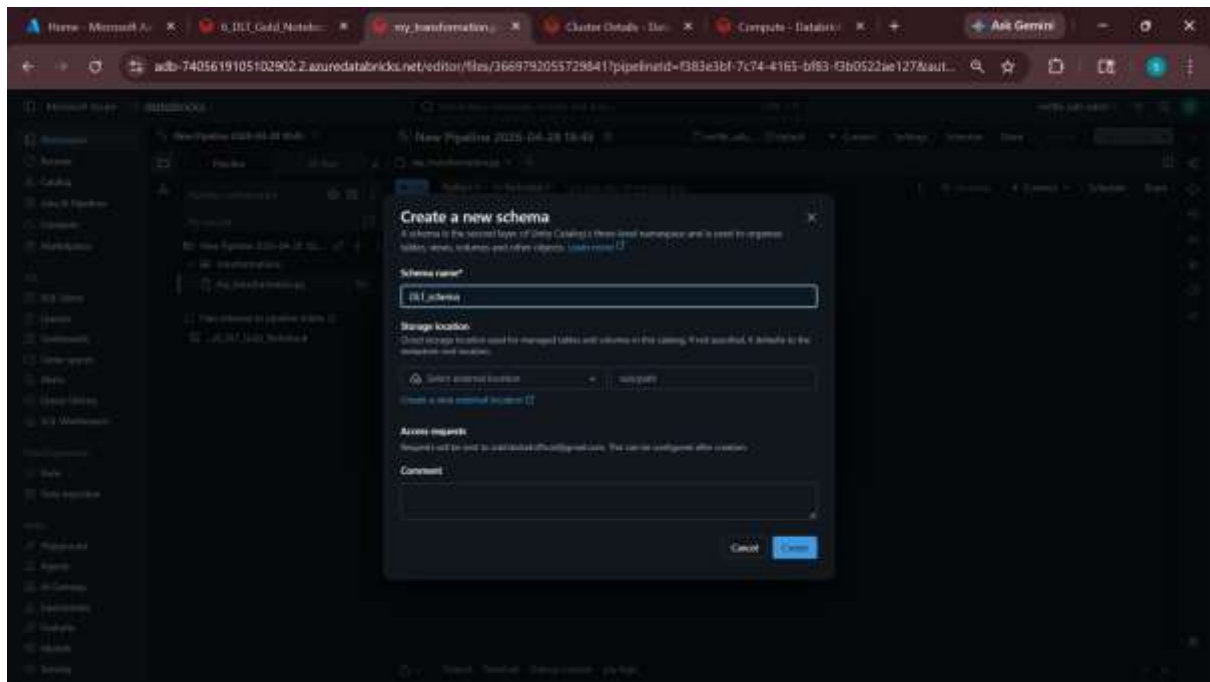

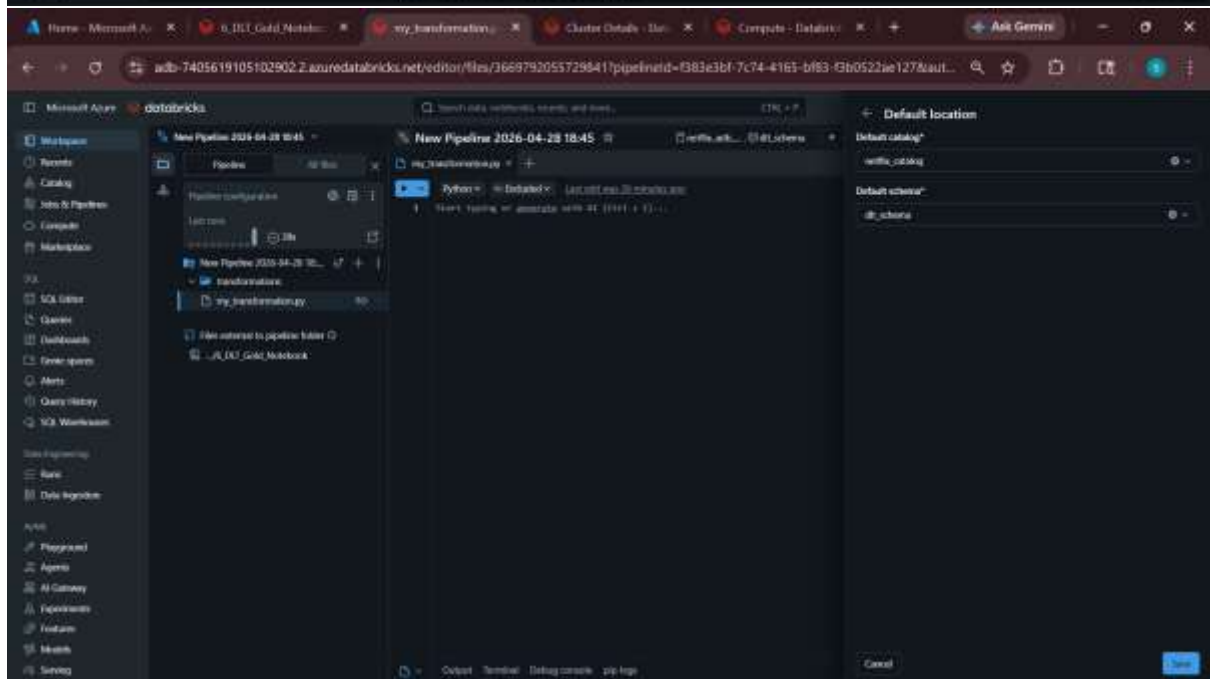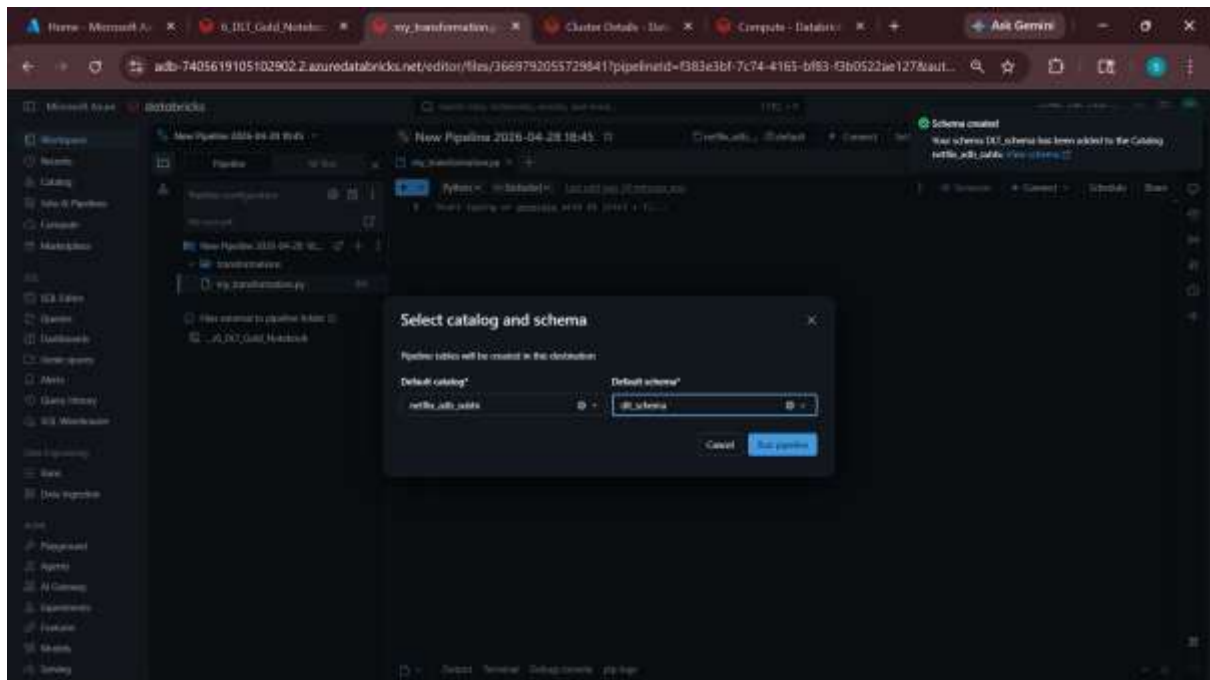

Home - Microsoft A... x o_BUT_Gold_Market... x my_transformations... x Cluster Details - Dat... x Compute - Databricks... x + Ask Gemini

adb-7405619105102902.2.azuredatabricks.net/editor/files/3669792055729841/pipelineid=0383e3bf-7c74-4161-bf83-0b0522ae127&aut...

Microsoft Azure databricks

Search data, workflows, clusters, and more...

CTN + P

Workspace

- Recent
- Cloning
- Jobs & Pipelines
- Compute
- Marketplace
- SQL
- SQL Editor
- Queries
- Dashboards
- Cluster queries
- Alerts
- Query history
- SQL Workflows

Data Engineering

- Home
- Data Explorer

Tools

- Playground
- Agents
- AI Gateway
- Experiments
- Features
- Models
- Services

New Pipeline 2026-04-28 18:45

Pipeline

my_transformations

Python

my_transformations.py

1. Work: Reading an asset table with AC (H11 + 1)...

Pipeline settings

Pipeline ID: 0383e3bf-7c74-4161-bf83-0b0522ae127

Pipeline type: ETL pipeline

Pipeline name: New Pipeline 2026-04-28 18:45

Pipeline owner: togepet

Cluster: databricks-ctn

Owner: databricks-ctn

Code assets

Root folder ID: 0b0522ae127

Source code ID: 0b0522ae127

Default location for data assets

Default catalog ID: my_catalog

Default schema ID: my_schema

Compute

Estimated cost: \$18.00

Product edition: Advanced

Cluster policy: New

Cluster mode: Headless

Modules: 0

Use previous configuration: No

Home - Microsoft A... x o_BUT_Gold_Market... x my_transformations... x Cluster Details - Dat... x Compute - Databricks... x + Ask Gemini

adb-7405619105102902.2.azuredatabricks.net/editor/files/3669792055729841/pipelineid=0383e3bf-7c74-4161-bf83-0b0522ae127&aut...

Microsoft Azure databricks

Search data, workflows, clusters, and more...

CTN + P

Workspace

- Recent
- Cloning
- Jobs & Pipelines
- Compute
- Marketplace
- SQL
- SQL Editor
- Queries
- Dashboards
- Cluster queries
- Alerts
- Query history
- SQL Workflows

Data Engineering

- Home
- Data Explorer

Tools

- Playground
- Agents
- AI Gateway
- Experiments
- Features
- Models
- Services

New Pipeline 2026-04-28 18:45

Pipeline

my_transformations

Python

my_transformations.py

1. Work: Reading an asset table with AC (H11 + 1)...

Pipeline settings

Pipeline ID: 0383e3bf-7c74-4161-bf83-0b0522ae127

Pipeline type: ETL pipeline

Pipeline name: New Pipeline 2026-04-28 18:45

Pipeline owner: togepet

Cluster: databricks-ctn

Owner: databricks-ctn

Code assets

Root folder ID: 0b0522ae127

Source code ID: 0b0522ae127

Default location for data assets

Default catalog ID: my_catalog

Default schema ID: my_schema

Compute

Estimated cost: \$18.00

Product edition: Advanced

Cluster policy: New

Cluster mode: Headless

Modules: 0

Use previous configuration: No

Waiting for resources...

Update type: Refresh all

Creation time: 2026-04-28 18:15:48

View configuration page

<https://adb-7405619105102902.2.azuredatabricks.net/pipelineid=0383e3bf-7c74-4161-bf83-0b0522ae127/pipelineid=0383e3bf-7c74-4161-bf83-0b0522ae127&aut...>

