

Thresholding Bandits with Augmented UCB

Author names withheld

Abstract

GitHub test by naveen.

1 Introduction

In this paper, we study a specific combinatorial pure exploration problem called thresholding bandit problem (TBP) in the stochastic multi-armed bandit (MAB) setting. MAB problems are classic sequential decision making problems where the learner is provided with a set of actions (or arms) whose rewards are i.i.d samples from the distribution specific to the arm $i \in A$ and whose expected mean is denoted by $r_i, \forall i \in A$. The learner's job is to identify the best arm whose expected mean is denoted by r^* . So, at very timestep the learner selects an arm i and hence faces the *exploration-exploitation dilemma* whereby it could pull the arm which has the highest observed mean reward (or \hat{r}_i) till now (exploitation) or to explore other arms, with the prospect of finding superior performance which was previously unobserved (exploration).

In the pure exploration thresholding bandit setup the goal is different than minimizing the cumulative regret, that is the total loss suffered by the learner for not selecting the optimal arm throughout the time horizon T . Here the learning algorithm is provided with a threshold τ and it has to output all such arms i whose r_i is above τ after T rounds. This is a specific instance of combinatorial pure exploration where the learning algorithm can explore as much as possible given a fixed horizon T and not be concerned with the usual exploration-exploitation dilemma. Formally we can define a set $S_\tau = \{i \in A : r_i \geq \tau\}$ and the complementary set $S_\tau^C = \{i \in A : r_i < \tau\}$. Also we define $\hat{S}_\tau = \hat{S}_\tau(T) \subset A$ and its complementary set \hat{S}_τ^C as the recommendation of the learning algorithm after T rounds. Given such sets exists, the performance of the learning agent is measured by how much accuracy it can discriminate between S_τ and S_τ^C after time horizon T . The loss \mathcal{L} is defined as:-

$$\mathcal{L}(T) = I(\{S_\tau \cap \hat{S}_\tau^C \neq \emptyset\} \cup \{\hat{S}_\tau \cap S_\tau^C \neq \emptyset\})$$

The goal of the learning agent is to minimize $\mathcal{L}(T)$. So, the expected loss after T rounds is,

$$\mathbb{E}[\mathcal{L}(T)] = \mathbb{P}(\{S_\tau \cap \hat{S}_\tau^C \neq \emptyset\} \cup \{\hat{S}_\tau \cap S_\tau^C \neq \emptyset\})$$

which we can say is the probability of making mistake, that is whether the learning agent at the end of round T rejects arms from S_τ or accepts arms from S_τ^C in its final recommendation.

2 Motivation

The TBP has several relevant industrial applications. In some cases the TBP problem is more relevant than the variants of TopM problem (identifying the best M arms from K given arms). From areas ranging from Anomaly Detection and Classification ([?]) to industrial application where the learner has to keep all those workers active whose productivity is above a particular threshold τ , or allocating channels whose quality is above a threshold for Mobile Communications ([?]) or in crowd-sourcing while hiring workers the TBP problem can be employed.

3 Related Works and Previous Results

A significant amount of work has been done on the stochastic MAB setting regarding minimizing cumulative regret with a single optimal arm. For a survey of such works we refer the reader to [?]. Starting from the early work of [?], [?] to [?] which gives us an asymptotic lower bound on the cumulative regret we come to the UCB1 algorithm in [?]. Subsequent works such as [?] and [?] have shown better upper bounds on the cumulative regret. In [?] they propose the UCB-Improved algorithm which is round-based algorithm¹. Of special mention is the [?] where they introduce variance-aware algorithm UCB-V and show that algorithms that take into account variance estimation along with mean estimation tends to perform better than algorithms that solely focuses on mean estimation such as UCB1.

In the pure exploration setup, a significant amount of research has been done on finding the best arm(s) from a set of arms. The pure exploration setup has been explored in mainly two settings:-

1. *Fixed Budget setting*: In this setting the learning algorithm has to suggest the best arm(s) within a fixed number of attempts that is given as an input. The objective here is to maximize the probability of returning the best arm(s). We

¹An algorithm is *round-based* if it pulls all the arms equal number of times in each round and then proceeds to eliminate one or more arms that it identifies to be sub-optimal.

study this setting in our paper. In [?] the authors come up with the algorithm UCBE and Successive Reject(SR) with simple regret guarantees to find the single best arm. The relationship between cumulative regret and simple regret is proved in [?] where the authors prove that minimizing the simple regret necessarily results in maximizing the cumulative regret. In the combinatorial fixed budget setup [?] come up with Gap-E and Gap-EV algorithm which suggests the best m (given as input) arms at the end of the budget with high probability. Similarly, [?] comes up with the algorithm Successive Accept Reject(SAR) which is an extension of the SR algorithm. SAR is a round based algorithm whereby at the end of a round an arm is either accepted or rejected based on certain conditions till the required top m arms are suggested at the end of the budget with high probability. A similar combinatorial setup was also explored in [?] where the authors come up with an algorithm, called Combinatorial Successive Accept Reject (CSAR) which is similar to SAR but with a more general setup.

2 Fixed Confidence setting: In this setting the the learning algorithm has to suggest the best arm(s) with a fixed (given as input) confidence with as less number of attempts as possible. The single best arm identification has been handled in [?] while in the combinatorial setup [?] have suggested the LUCB algorithm which on termination returns m arms which are atleast ϵ close to the true top m arms with $1-\delta$ probability. For a survey of this setup we refer the reader to [?].

Apart from these two settings some unified approach has also been suggested in [?] which proposes the algorithms UGapEb and UGapEc which can work in both the above two settings. The thresholding bandit problem is a specific instance of the pure exploration setup of [?]. In the latest work in [?] the algorithm Anytime Parameter-Free Thresholding (APT) algorithm comes up with a better anytime guarantee than CSAR for the thresholding bandit problem.

4 Contribution

In this paper we propose the Algorithm AugUCB which is an anytime action elimination algorithm suited for the TBP problem. It combines the approach of UCB-Improved, CCB ([?]) and APT algorithm. Our algorithm is also a variance-aware algorithm which takes into account the empirical variance of the arms. We also address an open problem raised in [?] of coming up with an algorithm that can eliminate arms based on variance. Both CSAR and APT are not variance-aware algorithms. Theoretically our result is more closer to CSAR and is weaker than APT. But empirically we show that for a large action set when the variance of the arms lying above τ are high, our algorithm performs better than all other algorithms, except the algorithm UCBEV which has access to the underlying problem complexity and also is a variance aware algorithm. Irrespective of this case AugUCB also employs elimination of arms based on mean estimation only and is the first such algorithm which uses elimination by both mean and variance estimation simultaneously. AugUCB requires three input parameters and the exact choices for these parameters are derived in Theorem ?? . Also, unlike SAR or CSAR, AugUCB does not have explicit accept or reject set

Table 1: Expected Loss for different bandit algorithms

Algorithm	Upper Bound on Expected Loss
APT	$\exp(-\frac{T}{64H_1}) + 2 \log((\log(T) + 1)K)$
CSAR	$K^2 \exp(-\frac{T-K}{72 \log(K)H_2})$
AugUCB	$\exp(-\frac{T \log(2K \sqrt{\log K})}{H_2 K (\log K)^2} + \log(K(\log_2 \frac{T}{e} + 1))) + \exp(-\frac{33T \log(K \sqrt{\log K})}{H_2^2 K (\log K)^2} + \log(K(\log_2 \frac{T}{e} + 1)))$

rather the arm elimination conditions simply removes arm(s) if it is sufficiently sure that the mean of the arms are very high or very low about the threshold based on mean and variance estimation thereby re-allocating the remaining budget among the surviving arms. This although is a tactic similar to SAR or CSAR, but here at any round, an arbitrary number of arms can be accepted or rejected thereby improving upon SAR and CSAR which accepts/rejects one arm in every round. At the end of the budget T the algorithm outputs all the arms whose \hat{r}_i is above the threshold τ thereby making this an anytime algorithm whereby we need not finish every round.

5 Notation Used and Assumptions

In this paper A is the set of all arms and $|A| = K$ denotes the number of arms in the set. Any arm is denoted by i . The average estimated payoff for any arm is denoted by \hat{r}_i whereas the true mean of the distribution from which the rewards are sampled is denoted by r_i . The optimal arm is denoted by $*$. The $*$ superscript is used to denote anything related to optimal arm. $\Delta_i = |\tau - r_i|$ and $\hat{\Delta}_i = |\tau - \hat{r}_i|$. n_i denotes the number of times the arm i has been pulled. ψ denotes the exploration regulatory factor and ρ, ρ_v as arm elimination parameters. $\hat{V}_i = \frac{1}{t} \sum_{t=1}^{n_i} (x_{i,t} - r_i)^2$ denotes the empirical variance and $x_{i,t}$ is the reward obtained at timestep t for arm i . Also σ_i^2 denotes the true variance of the arm i .

It is assumed that the distribution from which rewards are sampled are identical and independent 1-sub-Gaussian distributions. Throughout the paper, we assume that the distributions v_i are 1-sub-Gaussian including Gaussian distributions with variance less than 1 and distributions supported on an interval of length less than 2. We will also assume that all rewards are bounded in $[0, 1]$.

6 Augmented UCB

In algorithm ??, hence referred to as AugUCB, we have three exploration parameters, ρ, ρ_v which are the arm elimination parameters and ψ which is the exploration regulatory factor. The main approach is based on UCB-Improved with modifications suited for the thresholding bandit problem. The active set B_0 is initialized with all the arms from A . We divide the entire budget T into rounds/phases as like UCB-Improved, CCB, SAR and CSAR. After the end of each such round m we eliminate arm(s) from active set

Algorithm 1 AugmentedUCB

Input: Time horizon T , exploration parameters ρ, ρ_v and ψ , threshold τ .

Initialization: Set $B_0 := A$, $M = \left\lceil \frac{1}{2} \log_2 \frac{T}{\epsilon} \right\rceil$, $m := 0$,

$\epsilon_0 := 1$, $\ell_0 = \left\lceil \frac{2 \log(\psi T \epsilon_0^2)}{\epsilon_0} \right\rceil$ and $N_0 = K * \ell_0$.

Pull each arm once

for $t = K + 1, \dots, T$ **do**

Pull arm i in B_m such that $\min_{i \in B_m} \left\{ |\hat{r}_i - \tau| - 2s_i \right\}$

$t := t + 1$

Arm Elimination by Mean Estimation

For each arm $i \in B_m$, remove arm i from B_m if

$$\hat{r}_i + c_i < \tau - c_i$$

For each arm $i \in B_m$, remove arm i from B_m if

$$\hat{r}_i - c_i > \tau + c_i$$

where $c_i = \sqrt{\frac{\rho \log(\psi T \epsilon_m^2)}{2n_i}}$

Arm Elimination by Mean and Variance Estimation

For each arm $i \in B_m$, remove arm i from B_m if

$$\hat{r}_i + s_i < \tau - s_i$$

For each arm $i \in B_m$, remove arm i from B_m if

$$\hat{r}_i - s_i > \tau + s_i$$

where $s_i = \sqrt{\frac{\rho_v \hat{V}_i \log(\psi T \epsilon_m^2)}{4n_i} + \frac{\rho_v \log(\psi T \epsilon_m^2)}{4n_i}}$

if $t \geq N_m$ and $m \leq M$ **then**

Reset Parameters

$$\epsilon_{m+1} := \frac{\epsilon_m}{2}$$

$$B_{m+1} := B_m$$

$$\ell_{m+1} = \left\lceil \frac{2 \log(\psi T \epsilon_{m+1}^2)}{\epsilon_{m+1}} \right\rceil$$

$$N_{m+1} := t + |B_{m+1}| \ell_{m+1}$$

$$m := m + 1$$

end if

end for

Output $\hat{S}_\tau = \{i : \hat{r}_i \geq \tau\}$.

B_m and update parameters. As suggested by [?] to make AugUCB an anytime algorithm and to overcome too much early exploration, we no longer pull all the arms equal number of times in each round but pull the arm that minimizes, $\min_{i \in B_m} \left\{ |\hat{r}_i - \tau| - 2\sqrt{\frac{\rho_v \hat{V}_i \log(\psi T \epsilon_m^2)}{4n_i} + \frac{\rho_v \log(\psi T \epsilon_m^2)}{4n_i}} \right\}$ in the active set B_m . This condition makes it possible to pull the arms closer to the threshold τ and with suitable choice of ρ, ρ_v and ψ we can fine tune the exploration.

7 Main Results

7.1 Problem Complexity

We define problem complexity as,

$$H_1 = \sum_{i=1}^K \frac{1}{\Delta_i^2}, H_2 = \max_{i \in A} \frac{i}{\Delta_i^2}, \text{ where } \Delta_i = |r_i - \tau|$$

This is same as the problem complexity defined in [?] for the thresholding bandit problem and is similar to the problem complexity defined in [?] for single best arm identification. Also we know that,

$$H_2 \leq H_1 \leq \log(2K)H_2$$

Also, we define H_1^σ ([?]) and H_2^σ as,

$$H_1^\sigma = \sum_{i=1}^K \frac{\sigma_i + \sqrt{\sigma_i^2 + (16/3)\Delta_i}}{\Delta_i^2}$$

$$H_2^\sigma = \max_{i \in A} i \frac{3\sigma_i^2 + \Delta_i}{\Delta_i^2}$$

which also gives us that $H_2^\sigma < H_1^\sigma$.

7.2 Theorem 1

Theorem 7.1. The expected loss of the AugUCB algorithm is given by,

$$\mathbb{E}[\mathcal{L}(T)] \leq \exp\left(-\frac{T \log(2K\sqrt{\log K})}{H_2 K (\log K)^2} + \log\left(K\left(\log_2 \frac{T}{\epsilon} + 1\right)\right)\right) \\ + \exp\left(-\frac{33T \log(K\sqrt{\log K})}{H_2^\sigma K (\log K)^2} + \log\left(K\left(\log_2 \frac{T}{\epsilon} + 1\right)\right)\right)$$

for $\psi = \frac{T}{\log K}$, $\rho = \frac{1}{8}$ and $\rho_v = \frac{1}{3}$.

Proof. According to the algorithm, the number of rounds is $m = \{0, 1, 2, \dots, M\}$ where $M = \left\lceil \frac{1}{2} \log_2 \frac{T}{\epsilon} \right\rceil$. So, $\epsilon_m \geq 2^{-M} \geq \sqrt{\frac{\epsilon}{T}}$. Also each round m consists of $|B_m| \ell_m$ timesteps where $\ell_m = \frac{\log(\psi T \epsilon_m^2)}{\epsilon_m}$ and B_m is the set of all surviving arms.

Let $c_i = \sqrt{\frac{\rho \log(\psi T \epsilon_m^2)}{2n_i}}$ denote the confidence interval, where n_i is the number of times an arm i is pulled. Let $A' = \{i \in A | \Delta_i \geq b\}$, for $b \geq \sqrt{\frac{\epsilon}{T}}$. Let m_i be the minimum round that an arm i gets eliminated such that $m_i = \min\{m | \sqrt{\rho \epsilon_m} < \frac{\Delta_i}{2}\}$.

Let $s_i = \sqrt{\frac{\rho_v \hat{V}_i \log(\psi T \epsilon_g^2)}{4n_i} + \frac{\rho_v \log(\psi T \epsilon_g^2)}{4n_i}}$. Let g_i be the minimum round that an arm i gets eliminated such that $g_i = \min\{g | \sqrt{\rho_v \epsilon_g} < \frac{\Delta_i}{2}\}$.

Let ξ_1 and ξ_2 be the event such that,

$$\xi_1 = \left\{ \forall i \in A, \forall m = 0, 1, 2, \dots, M : |\hat{r}_i - r_i| \leq 2c_i \right\}$$

$$\xi_2 = \left\{ \forall i \in A, \forall m = 0, 1, 2, \dots, M : |\hat{r}_i - r_i| \leq 2s_i \right\}$$

So, ξ_1 and ξ_2 signifies the event till when any arm i will not get eliminated from B_m .

Some arm i is not eliminated on or before round

$\max\{m_i, g_i\}$

For any arm i , if it is eliminated from active set B_{m_i} then the below two events have to come true,

$$\hat{r}_i + c_i < \tau - c_i, \quad (1)$$

$$\hat{r}_i - c_i > \tau + c_i, \quad (2)$$

For ?? we can see that it eliminates arms that have performed poorly and removes them from B_{m_i} . Similarly, ?? eliminates arms from B_m that have performed very well compared to threshold τ .

Each round consist of $|B_{m_i}| \ell_{m_i}$ timesteps. In the m_i -th round an arm i can be pulled no more than ℓ_{m_i} times. So when $n_i = \ell_{m_i}$, putting the value of $\ell_{m_i} = \frac{2 \log(\psi T \epsilon_{m_i}^2)}{\epsilon_{m_i}}$ in c_i we get,

$$\begin{aligned} c_i &= \sqrt{\frac{\rho \epsilon_{m_i} \log(\psi T \epsilon_{m_i}^2)}{2 n_i}} = \sqrt{\frac{\rho \epsilon_{m_i} \log(\psi T \epsilon_{m_i}^2)}{2 * 2 \log(\psi T \epsilon_{m_i}^2)}} \\ &= \frac{\sqrt{\rho \epsilon_{m_i}}}{2} \leq \sqrt{\rho \epsilon_{m_i+1}} < \frac{\Delta_i}{4}, \text{ as } \rho \in (0, 1]. \end{aligned}$$

Again, for $i \in A'$ for ?? elimination condition,

$$\begin{aligned} \hat{r}_i + c_i &\leq r_i + 2c_i = r_i + 4c_i - 2c_i \\ &< r_i + \Delta_i - 2c_i = \tau - 2c_i \leq \tau - c_i \end{aligned}$$

Also, for $i \in A'$ for ?? elimination condition,

$$\begin{aligned} \hat{r}_i - c_i &\geq r_i - 2c_i = r_i - 4c_i + 2c_i \\ &> r_i - \Delta_i + 2c_i \geq \tau + 2c_i \geq \tau + c_i \end{aligned}$$

Now, arm elimination condition is being checked at every timestep, in the m_i -th round as soon as $n_i = \ell_{m_i}$, arm i gets eliminated. Applying Chernoff-Hoeffding bound and considering independence of complementary of the event in ??,

$$\begin{aligned} \mathbb{P}\{\hat{r}_i \geq r_i + 2c_i\} &\leq \exp(-4c_i^2 n_i) \\ &\leq \exp(-8 * \frac{\rho \log(\psi T \epsilon_{m_i}^2)}{2 n_i} * n_i) \\ &\leq \exp(-4\rho \log(\psi T \epsilon_{m_i}^2)) \end{aligned}$$

Similarly, $\mathbb{P}\{\hat{r}_i \leq r_i - 2c_i\} \leq \exp(-4\rho \log(\psi T \epsilon_{m_i}^2))$

Summing, the two up, the probability that an arm i is not eliminated on or before m_i -th round based on the ?? and ?? elimination condition is $(2 \exp(-4\rho \log(\psi T \epsilon_{m_i}^2)))$.

Again for any arm i , if it is eliminated from active set B_{g_i} then the below two events have to come true,

$$\hat{r}_i + s_i < \tau - s_i, \quad (3)$$

$$\hat{r}_i - s_i > \tau + s_i, \quad (4)$$

For ?? we can see that it eliminates arms that have performed poorly and removes them from B_{g_i} . Similarly, ?? eliminates arms from B_{g_i} that have performed very well compared to threshold τ .

In the g_i -th round an arm i can be pulled no more than ℓ_{g_i} times. So when $n_i = \ell_{g_i}$, putting the value of $\ell_{g_i} = \frac{2 \log(\psi T \epsilon_{g_i}^2)}{\epsilon_{g_i}}$ in s_i we get,

$$\begin{aligned} s_i &= \sqrt{\frac{\rho_v \hat{V}_i \epsilon_{g_i} \log(\psi T \epsilon_{g_i}^2)}{4 n_i}} + \frac{\rho_v \log(\psi T \epsilon_{g_i}^2)}{4 n_i} \\ &\leq \sqrt{\frac{\rho_v \epsilon_{g_i} \log(\psi T \epsilon_{g_i}^2)}{4 * 2 \log(\psi T \epsilon_{g_i}^2)}} + \frac{\rho_v \epsilon_{g_i} \log(\psi T \epsilon_{g_i}^2)}{4 * 2 \log(\psi T \epsilon_{g_i}^2)}, \text{ as } \hat{V}_i \in [0, 1]. \\ &\leq \sqrt{\frac{\rho_v \epsilon_{g_i}}{8}} + \frac{\rho_v \epsilon_{g_i}}{8} \leq \frac{\sqrt{\rho_v \epsilon_{g_i}}}{2} \\ &\leq \sqrt{\rho_v \epsilon_{g_i+1}} < \frac{\Delta_i}{4}, \text{ as } \rho_v \in (0, 1]. \end{aligned}$$

Again, for $i \in A'$ for ?? elimination condition,

$$\begin{aligned} \hat{r}_i + s_i &\leq r_i + 2s_i = r_i + 4s_i - 2s_i \\ &< r_i + \Delta_i - 2s_i = \tau - 2s_i \leq \tau - s_i \end{aligned}$$

Also, for $i \in A'$ for ?? elimination condition,

$$\begin{aligned} \hat{r}_i - s_i &\geq r_i - 2s_i = r_i - 4s_i + 2s_i \\ &> r_i - \Delta_i + 2s_i \geq \tau + 2s_i \geq \tau + s_i \end{aligned}$$

Since, arm elimination condition is being checked at every timestep, in the g_i -th round as soon as $n_i = \ell_{g_i}$, arm i gets eliminated. Applying Bernstein inequality and considering independence of complementary of the event in ??,

$$\mathbb{P}\{\hat{r}_i \geq r_i + 2s_i\} \quad (5)$$

$$\leq \mathbb{P}\left\{\hat{r}_i \geq r_i + \left(2\sqrt{\frac{\rho_v \hat{V}_i \log(\psi T \epsilon_{g_i}^2)}{4 n_i}} + \frac{\rho_v \log(\psi T \epsilon_{g_i}^2)}{4 n_i}\right)\right\} \quad (6)$$

$$\leq \mathbb{P}\left\{\hat{r}_i \geq r_i + \left(2\sqrt{\frac{\rho_v [\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}} + 1] \log(\psi T \epsilon_{g_i}^2)}{4 n_i}}\right)\right\} \quad (7)$$

$$+ \mathbb{P}\left\{\hat{V}_i \geq \sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}}\right\} \quad (8)$$

Now, we know that in the g_i -th round,

$$\begin{aligned} &2\sqrt{\frac{\rho_v [\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}}] \log(\psi T \epsilon_{g_i}^2)}{4 n_i}} + \frac{\rho_v \log(\psi T \epsilon_{g_i}^2)}{4 n_i} \\ &\leq 2\sqrt{\frac{\frac{\rho_v [\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}}] \log(\psi T \epsilon_{g_i}^2)}{8 \log(\psi T \epsilon_{g_i}^2)}}{\frac{\epsilon_{g_i}}{\epsilon_{g_i}}}} + \frac{\frac{\rho_v \log(\psi T \epsilon_{g_i}^2)}{8 \log(\psi T \epsilon_{g_i}^2)}}{\frac{\epsilon_{g_i}}{\epsilon_{g_i}}} \\ &\leq \frac{\sqrt{\rho_v \epsilon_{g_i} [\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}} + 1]}}{2} \leq \sqrt{\rho_v \epsilon_{g_i}} \end{aligned}$$

For the term in ??, by applying Bernstein inequality, we can write as,

$$\begin{aligned} &\mathbb{P}\left\{\hat{r}_i \geq r_i + \left(2\sqrt{\frac{\rho_v [\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}} + 1] \log(\psi T \epsilon_{g_i}^2)}{4 n_i}}\right)\right\} \\ &\leq \exp\left(-\frac{\left(2\sqrt{\frac{\rho_v [\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}}] \log(\psi T \epsilon_{g_i}^2)}{4 n_i}} + \frac{\rho_v \log(\psi T \epsilon_{g_i}^2)}{4 n_i}\right)^2 n_i}{2\sigma_i^2 + \frac{4}{3}\sqrt{\frac{\rho_v [\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}}] \log(\psi T \epsilon_{g_i}^2)}{4 n_i}} + \frac{\rho_v \log(\psi T \epsilon_{g_i}^2)}{4 n_i}}\right) \end{aligned}$$

$$\leq \exp \left(- \frac{\left(\rho_v [\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}} + 1] \log(\psi T \epsilon_{g_i}^2) \right)}{2\sigma_i^2 + \frac{2}{3}\sqrt{\rho_v \epsilon_{g_i}}} \right)$$

$$\leq \exp \left(- \frac{3\rho_v}{2} \left(\frac{\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}} + 1}{3\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}}} \right) \log(\psi T \epsilon_{g_i}^2) \right)$$

For the term in ??, by applying Bernstein inequality, we can write as,

$$\mathbb{P} \left\{ \hat{V}_i \geq \sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}} \right\}$$

$$\leq \mathbb{P} \left\{ \frac{1}{n_i} \sum_{t=1}^{n_i} (x_{i,t} - r_i)^2 - (\hat{r}_i - r_i)^2 \geq \sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}} \right\}$$

$$\leq \mathbb{P} \left\{ \frac{\sum_{t=1}^{n_i} (x_{i,t} - r_i)^2}{n_i} \geq \sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}} \right\}$$

$$\leq \mathbb{P} \left\{ \frac{\sum_{t=1}^{n_i} (x_{i,t} - r_i)^2}{n_i} \geq \sigma_i^2 + \right.$$

$$\left. \left(2\sqrt{\frac{\rho_v [\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}}] \log(\psi T \epsilon_{g_i}^2)}{4n_i}} + \frac{\rho_v \log(\psi T \epsilon_{g_i}^2)}{4n_i} \right) \right\}$$

$$\leq \exp \left(- \frac{3\rho_v}{2} \left(\frac{\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}} + 1}{3\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}}} \right) \log(\psi T \epsilon_{g_i}^2) \right)$$

Similarly, the condition for the complementary event for the elimination case ?? holds such that $\mathbb{P}\{\hat{r}_i \leq r_i - 2s_i\} \leq 2 \exp \left(- \frac{3\rho_v}{2} \left(\frac{\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}} + 1}{3\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}}} \right) \log(\psi T \epsilon_{g_i}^2) \right)$.

Summing everything up, the probability that an arm i is not eliminated on or before g_i -th round based on the ?? and ?? elimination condition is $4 \exp \left(- \frac{3\rho_v}{2} \left(\frac{\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}} + 1}{3\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}}} \right) \log(\psi T \epsilon_{g_i}^2) \right)$.

We start with an upper bound on the number of plays $\delta_{\max\{m_i, g_i\}}$ in the $\max\{m_i, g_i\}$ -th round. We know that the total number of arms surviving in the $\max\{m_i, g_i\}$ -th arm is,

$$|B_{\max\{m_i, g_i\}}| = 2K \exp \left(- 4\rho \log(\psi T \epsilon_{m_i}^2) \right)$$

$$+ 4K \exp \left(- \frac{3\rho_v}{2} \left(\frac{\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}} + 1}{3\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}}} \right) \log(\psi T \epsilon_{g_i}^2) \right)$$

Again for AugUCB, we know that the number of pulls allocated for each surviving arm i in the m_i -th round is $\ell_{m_i} = \frac{2 \log(\psi T \epsilon_{m_i}^2)}{\epsilon_{m_i}}$ or for the g_i -th round is $\ell_{g_i} = \frac{2 \log(\psi T \epsilon_{g_i}^2)}{\epsilon_{g_i}}$. Therefore, the proportion of plays $\delta_{\max\{m_i, g_i\}}$ in the $\max\{m_i, g_i\}$ -th round can be written as,

$$\delta_{\max\{m_i, g_i\}} = (|B_{m_i}| \cdot \ell_{m_i}) + (|B_{g_i}| \cdot \ell_{g_i})$$

$$\leq 2K \exp \left(- 4\rho \log(\psi T \epsilon_{m_i}^2) \right) \cdot \frac{2 \log(\psi T \epsilon_{m_i}^2)}{\epsilon_{m_i}}$$

$$+ 4K \exp \left(- \frac{3\rho_v}{2} \left(\frac{\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}} + 1}{3\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}}} \right) \log(\psi T \epsilon_{g_i}^2) \right) \cdot \frac{2 \log(\psi T \epsilon_{g_i}^2)}{\epsilon_{g_i}}$$

$$\leq \frac{4K \log(\psi T \epsilon_{m_i}^2)}{\epsilon_{m_i}} \exp \left(- 4\rho \log(\psi T \epsilon_{m_i}^2) \right)$$

$$+ \frac{8K \log(\psi T \epsilon_{g_i}^2)}{\epsilon_{g_i}} \exp \left(- \frac{3\rho_v}{2} \left(\frac{\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}} + 1}{3\sigma_i^2 + \sqrt{\rho_v \epsilon_{g_i}}} \right) \log(\psi T \epsilon_{g_i}^2) \right)$$

Now, in the $\max\{m_i, g_i\}$ -th round $\sqrt{\rho \epsilon_{m_i}} \leq \frac{\Delta_i}{2}$ or $\sqrt{\rho_v \epsilon_{g_i}} \leq \frac{\Delta_i}{2}$. Hence,

$$\delta_{\max\{m_i, g_i\}} \leq \frac{4K \log(\psi T \frac{\Delta_i^4}{16\rho^2})}{\frac{\Delta_i^2}{4\rho}} \exp \left(- 4\rho \log(\psi T \frac{\Delta_i^4}{16\rho^2}) \right)$$

$$+ \frac{8K \log(\psi T \frac{\Delta_i^4}{16\rho_v^2})}{\frac{\Delta_i^2}{4\rho_v}} \exp \left(- \frac{3\rho_v}{2} \left(\frac{\sigma_i^2 + \frac{\Delta_i}{2} + 1}{3\sigma_i^2 + \frac{\Delta_i}{2}} \right) \log(\psi T \frac{\Delta_i^4}{16\rho_v^2}) \right)$$

$$\leq 16C_1 \exp \left(- 4\rho \log(\psi T \frac{\Delta_i^4}{16\rho^2}) \right)$$

$$+ 32C_2 \exp \left(- \frac{3\rho_v}{2} \left(\frac{2\sigma_i^2 + \Delta_i + 2}{6\sigma_i^2 + \Delta_i} \right) \log(\psi T \frac{\Delta_i^4}{16\rho_v^2}) \right)$$

where $C_1 = \frac{K\rho \log(\psi T \frac{\Delta_i^4}{16\rho^2})}{\Delta_i^2}$ and $C_2 = \frac{K\rho_v \log(\psi T \frac{\Delta_i^4}{16\rho_v^2})}{\Delta_i^2}$

$$\leq 16C_1 \exp \left(- 4\rho \log(\psi T \frac{\Delta_i^4}{16\rho^2}) \right) + 32C_2 \exp \left(- \frac{3\rho_v}{2} \log(\psi T \frac{\Delta_i^4}{16\rho_v^2}) \right)$$

Now, putting the values of ψ , ρ , ρ_v and taking $\Delta_i \geq \min_{i \in A} \Delta = \sqrt{\frac{K \log K}{T}} \geq \sqrt{\frac{\epsilon}{T}}, \forall i \in A$ (see [?]),

$$\delta_{\max\{m_i, g_i\}} = \left\{ 16C_1 \exp \left(- 4\rho \log(\psi T \frac{\Delta_i^4}{16\rho^2}) \right) \right.$$

$$\left. + 32C_2 \exp \left(- \frac{3\rho_v}{2} \log(\psi T \frac{\Delta_i^4}{16\rho_v^2}) \right) \right\}$$

$$\leq \left\{ \frac{2K \log(T^2 \frac{4\Delta_i^4}{\log K})}{\Delta_i^2} \exp \left(- \frac{1}{2} \log(T^2 \frac{4\Delta_i^4}{\log K}) \right) \right.$$

$$\left. + \frac{32K \log(T^2 \frac{9\Delta_i^4}{\log K})}{3\Delta_i^2} \exp \left(- \frac{1}{2} \log(T^2 \frac{9\Delta_i^4}{\log K}) \right) \right\}$$

$$\leq \left\{ \frac{4K \log(T \frac{2\Delta_i^2}{\sqrt{\log K}})}{\Delta_i^2} \exp \left(- \log(T \frac{2\Delta_i^2}{\sqrt{\log K}}) \right) \right.$$

$$\left. + \frac{64K \log(T \frac{3\Delta_i^2}{\sqrt{\log K}})}{3\Delta_i^2} \exp \left(- \log(T \frac{3\Delta_i^2}{\sqrt{\log K}}) \right) \right\}$$

$$\leq \left\{ \frac{4KT \log(\frac{2K \log K}{\sqrt{\log K}})}{K \log K} \exp \left(- \log(\frac{2K \log K}{\sqrt{\log K}}) \right) \right.$$

$$\left. + \frac{64TK \log(\frac{3K \log K}{\sqrt{\log K}})}{3K \log K} \exp \left(- \log(\frac{3K \log K}{\sqrt{\log K}}) \right) \right\}$$

$$\leq \left\{ \frac{2T \log(2K \sqrt{\log K})}{K (\log K)^2} + \frac{22TK \log(K \sqrt{\log K})}{K (\log K)^2} \right\}$$

Now, for the i -th arm we can bound it probability of error for any round m by applying Chernoff-Hoeffding and Bernstein inequality ,

$$\mathbb{P}\{\xi_1\} + \mathbb{P}\{\xi_2\} \leq \mathbb{P}\{|\hat{r}_i - r_i| \leq 2c_i\} + \mathbb{P}\{|\hat{r}_i - r_i| \leq 2s_i\}$$

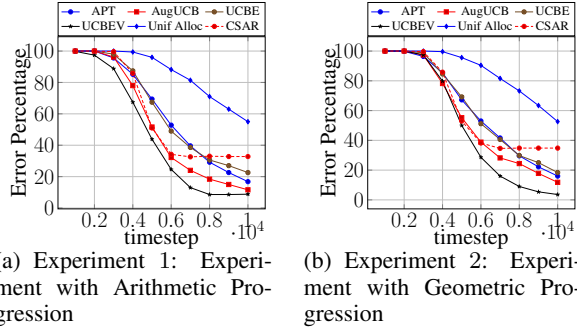


Figure 1: Experiments with thresholding bandit

$$\begin{aligned} &\leq \mathbb{P}\{|\hat{r}_i - r_i| \leq \frac{\Delta_i}{2}\} + \mathbb{P}\{|\hat{r}_i - r_i| \leq \frac{\Delta_i}{2}\} \\ &\leq 2 \exp\left(-\frac{\Delta_i^2}{2} \delta_{m_i}\right) + 2 \exp\left(-\frac{\Delta_i^2}{2\sigma_i^2 + \frac{2}{3}\Delta_i} \delta_{g_i}\right) \end{aligned}$$

Now, summing over all arms K and over all rounds $m = 0, 1, 2, \dots, M$,

$$\begin{aligned} \mathbb{E}[\mathcal{L}(T)] &\leq \sum_{i=1}^K \sum_{m=0}^M \left\{ 2 \exp\left(-\frac{\Delta_i^2}{2} \cdot \frac{2T \log(2K\sqrt{\log K})}{K(\log K)^2}\right) \right. \\ &\quad \left. + 2 \exp\left(-\frac{\Delta_i^2}{2\sigma_i^2 + \frac{2}{3}\Delta_i} \cdot \frac{22T \log(K\sqrt{\log K})}{K(\log K)^2}\right) \right\} \\ \mathbb{E}[\mathcal{L}(T)] &\leq K \log_2 \frac{T}{e} \left\{ \exp\left(-\frac{1}{i \max_i \Delta_i} \cdot \frac{T \log(2K\sqrt{\log K})}{K(\log K)^2}\right) \right. \\ &\quad \left. + \exp\left(-\frac{3}{i \max_i (3\sigma_i^2 + \Delta_i) \Delta_i^{-2}} \cdot \frac{11T \log(K\sqrt{\log K})}{K(\log K)^2}\right) \right\} \\ \mathbb{E}[\mathcal{L}(T)] &\leq K \log_2 \frac{T}{e} \left\{ \exp\left(-\frac{T \log(2K\sqrt{\log K})}{H_2^{\sigma} K(\log K)^2}\right) \right. \\ &\quad \left. + \exp\left(-\frac{33T \log(K\sqrt{\log K})}{H_2^{\sigma} K(\log K)^2}\right) \right\} \end{aligned}$$

□

8 Experimental Run:

In this section we compare the empirical performance of AugUCB against APT, Uniform Allocation, CSAR, UCBE and UCBEV algorithm. The threshold τ is set at 0.5 for all experiments. Each algorithm is run independently 500 times for 10000 timesteps and the output set of arms suggested by the algorithms at every timestep is recorded. The output is considered erroneous if the correct set of arms is not $i = \{6, 7, 8, 9, 10\}$ (true for all the experiments). The error percentage over 500 runs is plotted against 10000 timesteps. For the uniform allocation algorithm, for each $t = 1, 2, \dots, T$ the arms are sampled uniformly. For UCBE algorithm ([?]) which was built for single best arm identification, we modify it according to [?] to suit the goal of finding arms above the threshold τ . So the exploration parameter a in UCBE is set

to $a = \frac{T-K}{H_1}$. Again, for UCBEV, following [?], we modify it such that the exploration parameter $a = \frac{T-2K}{H_1^{\sigma}}$ where $H_1^{\sigma} = \sum_{i=1}^K \frac{\sigma_i + \sqrt{\sigma_i^2 + (16/3)\Delta_i}}{\Delta_i^2}$. Then for each timestep $t = 1, 2, \dots, T$ we pull the arm that minimizes $\{|\hat{r}_i - \tau| - \sqrt{\frac{a}{n_i}}\}$, where n_i is the number of times the arm i is pulled till $t-1$ timestep and a is set as mentioned above for UCBE and UCBEV respectively. Also, APT is run with $\epsilon = 0.05$, which denotes the precision with which the algorithm suggests the best set of arms and we modify CSAR as per [?] such that it behaves as a Successive Reject algorithm whereby it rejects the arm farthest from τ after each phase. For AugUCB we take $\psi = \frac{T}{\log K}$, $\rho = \frac{1}{8}$ and $\rho_v = \frac{1}{3}$ as in Theorem ??.

The first experiment is conducted on a testbed of 100 arms involving Gaussian reward distribution with expected rewards of the arms $r_{1:4} = 0.2 + (0 : 3) * 0.05$, $r_5 = 0.45$, $r_6 = 0.55$, $r_{7:10} = 0.65 + (0 : 3) * 0.05$ and $r_{11:100} = 0.4$. The means of first 10 arms are set as arithmetic progression. Variance is set as $\sigma_{i=1:5}^2 = 0.5$ and $\sigma_{i=6:10}^2 = 0.6$. Then $\sigma_{i=11:100}^2$ is chosen uniform randomly between 0.38 – 0.42. The means in the testbed are chosen in such a way that any algorithm has to spend a significant amount of budget to explore all the arms and variance is chosen in such a way that the arms above τ have high variance whereas arms below τ have lower variance. The result is shown in Figure ?? . In this experiment we see that UCBEV which has access to the problem complexity and is a variance-aware algorithm beats all other algorithm including UCBE which has access to the problem complexity but does not take into account the variance of the arms. AugUCB with the said parameters beats UCBE, APT and all the non variance-aware algorithms.

The second experiment is conducted on a testbed of 100 arms with the means of first 10 arms set as Geometric Progression. The testbed involves Gaussian reward distribution with expected rewards of the arms as $r_{1:4} = 0.4 - (0.2)^{1:4}$, $r_5 = 0.45$, $r_6 = 0.55$ and $r_{7:10} = 0.6 + (0.2)^{5-(1:4)}$. The variances of the arms 11 – 100 are set in the same way as in Experiment 1. AugUCB, APT, CSAR, Uniform Allocation, UCBE and UCBEV with the same settings as experiment 1 are run on this testbed. The result is shown in Figure ?? . Here, again we see that AugUCB beats APT, UCBE and all the non-variance aware algorithms with only UCBEV beating AugUCB.

9 Conclusion and Future work

To be written.