

```

#Employee Salary Analyzer

import tkinter as tk
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
from tkinter import messagebox

data=[]
def add_employee():
    name=name_entry.get()
    salary=float(salary_entry.get())
    data.append([name,salary])
    messagebox.showinfo("Success","Employee added")
def analyze():
    df=pd.DataFrame(data,columns=["Name","Salary"])
    salaries=df["Salary"].values

    avg=np.mean(salaries)
    highest=np.max(salaries)
    lowest=np.min(salaries)

    result.config(text=f"Average: {avg}\nHighest: {highest}\nLowest: {lowest}")

    df.set_index("Name").plot(kind="bar")
    plt.title("Employee Salaries")
    plt.show()

root=tk.Tk()
root.title("Salary Analyzer")

tk.Label(root,text="Employee Name").pack()
name_entry=tk.Entry(root)
name_entry.pack()

tk.Label(root,text="Salary").pack()
salary_entry=tk.Entry(root)
salary_entry.pack()

tk.Button(root,text="Add",command=add_employee).pack()
tk.Button(root,text="Analyze",command=analyze).pack()

result=tk.Label(root,text="")
result.pack()

root.mainloop()

```

Employee Name

Aneesh


Salary

25000

Add

Analyze

Average: 45940.0
Highest: 65000.0
Lowest: 25000.0

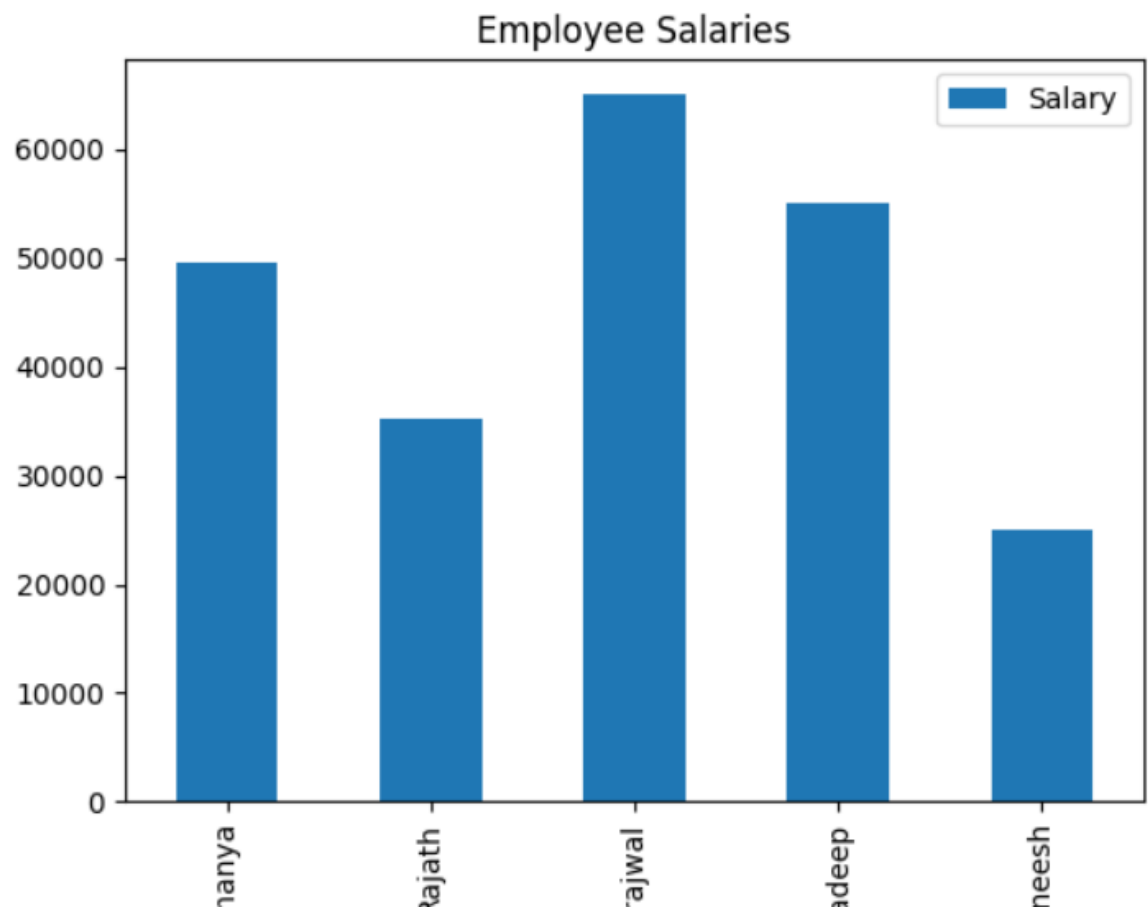

```
#Electricity Bill Analyzer

import tkinter as tk
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt

data=[]

def add_units():
    month=month_entry.get()
    units=float(units_entry.get())
    data.append([month,units])

def analyze():
    df=pd.DataFrame(data,columns=["Month","Units"])
    units=df["Units"].values

    total=np.sum(units)
    avg=np.mean(units)

    result.config(text=f"Total Units: {total}\nAverage: {avg}")

    df.set_index("Month").plot(kind="line",marker="o")
    plt.title("Electricity Usage")
    plt.show()

root=tk.Tk()

tk.Label(root,text="Month").pack()
month_entry=tk.Entry(root)
month_entry.pack()

tk.Label(root,text="Units").pack()
units_entry=tk.Entry(root)
units_entry.pack()

tk.Button(root,text="Add",command=add_units).pack()
tk.Button(root,text="Analyze",command=analyze).pack()

result=tk.Label(root,text="")
result.pack()

root.mainloop()
```

Month

April


Units

290

Add

Analyze

Total Units: 1120.0
Average: 280.0

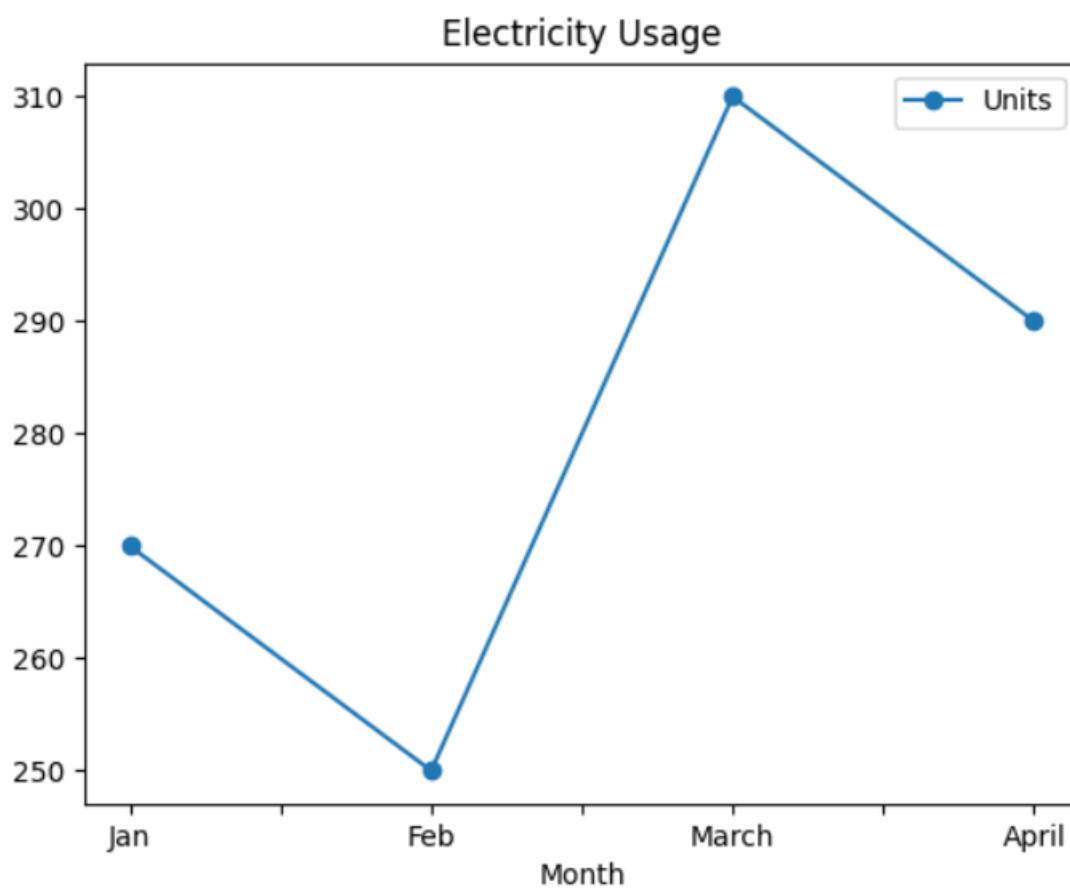

```

#Fitness Activity Tracker

import tkinter as tk
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt

data=[]

def add_steps():
    day=day_entry.get()
    steps=int(steps_entry.get())
    data.append([day,steps])

def analyze():
    df=pd.DataFrame(data,columns=["Day","Steps"])

    avg=np.mean(df["Steps"].values)

    result.config(text=f"Average Steps: {avg}")

    df.set_index("Day").plot(kind="bar")
    plt.title("Daily Steps")
    plt.show()

root=tk.Tk()

tk.Label(root,text="Day").pack()
day_entry=tk.Entry(root)
day_entry.pack()

tk.Label(root,text="Steps").pack()
steps_entry=tk.Entry(root)
steps_entry.pack()

tk.Button(root,text="Add",command=add_steps).pack()
tk.Button(root,text="Analyze",command=analyze).pack()

result=tk.Label(root,text="")
result.pack()

root.mainloop()

```

Day

Thu


Steps

4600

Add

Analyze

Average Steps: 4000.0

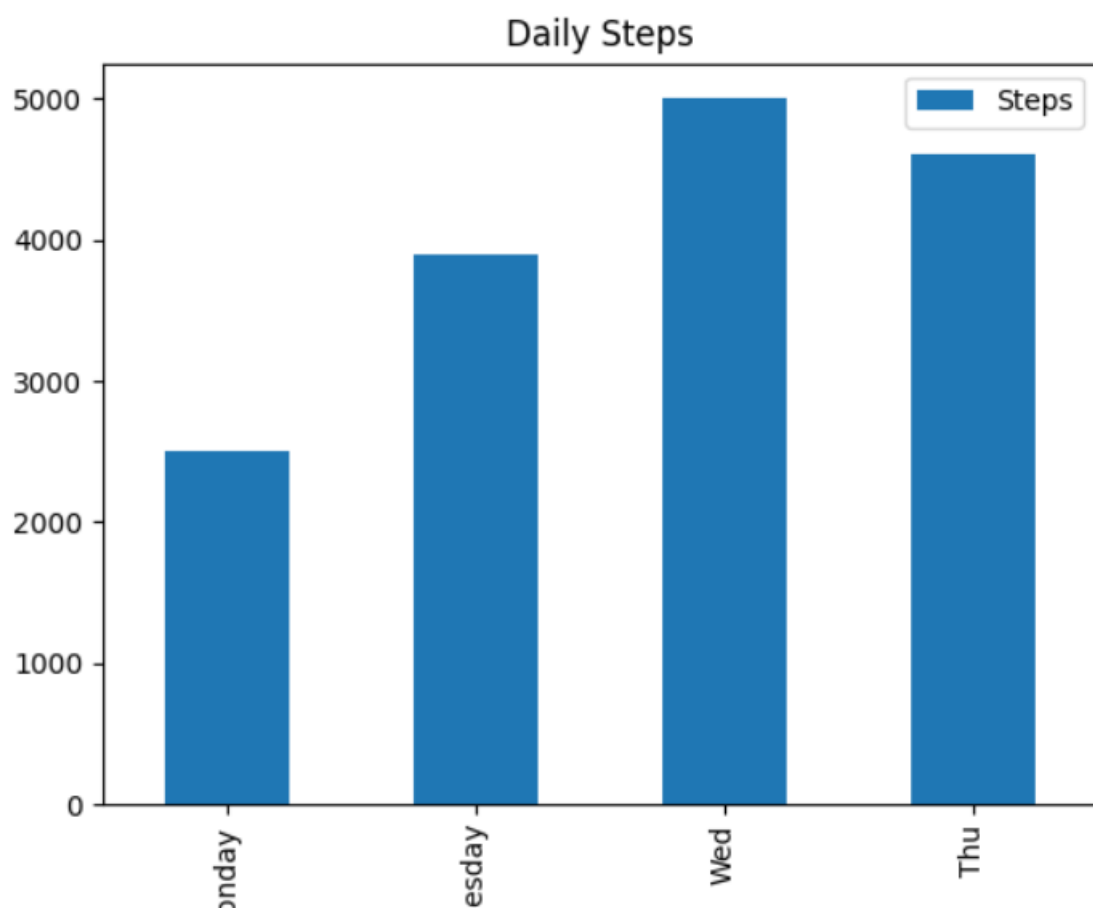

```

#Attendance Analyzer
import tkinter as tk
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
data=[]
def add_student():
    name=name_entry.get()
    total=int(total_entry.get())
    attended=int(attend_entry.get())

    percent=(attended/total)*100

    data.append([name,percent])

def analyze():
    df=pd.DataFrame(data,columns=["Name", "Attendance"])

    avg=np.mean(df["Attendance"])

    result.config(text=f"Average Attendance: {avg:.2f}%")

    df.set_index("Name").plot(kind="bar")
    plt.title("Attendance Percentage")
    plt.show()

root=tk.Tk()

tk.Label(root,text="Student Name").pack()
name_entry=tk.Entry(root)
name_entry.pack()

tk.Label(root,text="Total Classes").pack()
total_entry=tk.Entry(root)
total_entry.pack()

tk.Label(root,text="Attended Classes").pack()
attend_entry=tk.Entry(root)
attend_entry.pack()

tk.Button(root,text="Add",command=add_student).pack()
tk.Button(root,text="Analyze",command=analyze).pack()

result=tk.Label(root,text="")
result.pack()


```

Student Name

Total Classes

Attended Classes

Average Attendance: 65.00%

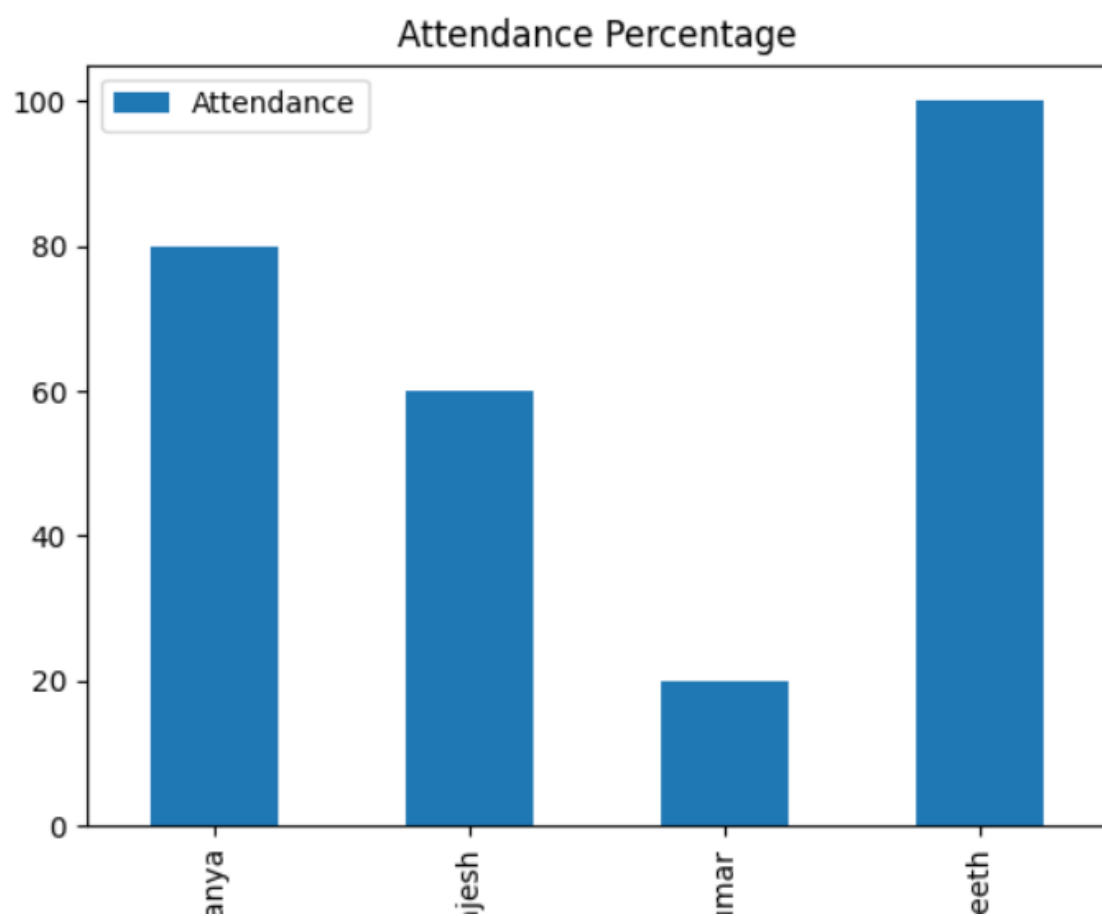

```

#Cricket Score Analyzer
import tkinter as tk
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt

data=[]

def add_score():
    player=player_entry.get()
    score=int(score_entry.get())
    data.append([player,score])

def analyze():
    df=pd.DataFrame(data,columns=["Player","Score"])

    avg=np.mean(df["Score"])

    result.config(text=f"Average Score: {avg}")

    df.set_index("Player").plot(kind="bar")
    plt.title("Cricket Scores")
    plt.show()

root=tk.Tk()

tk.Label(root,text="Player Name").pack()
player_entry=tk.Entry(root)
player_entry.pack()

tk.Label(root,text="Score").pack()
score_entry=tk.Entry(root)
score_entry.pack()

tk.Button(root,text="Add",command=add_score).pack()
tk.Button(root,text="Analyze",command=analyze).pack()

result=tk.Label(root,text="")
result.pack()

root.mainloop()

```

Player Name

Rahul


Score

92

Add

Analyze

Average Score: 65.0

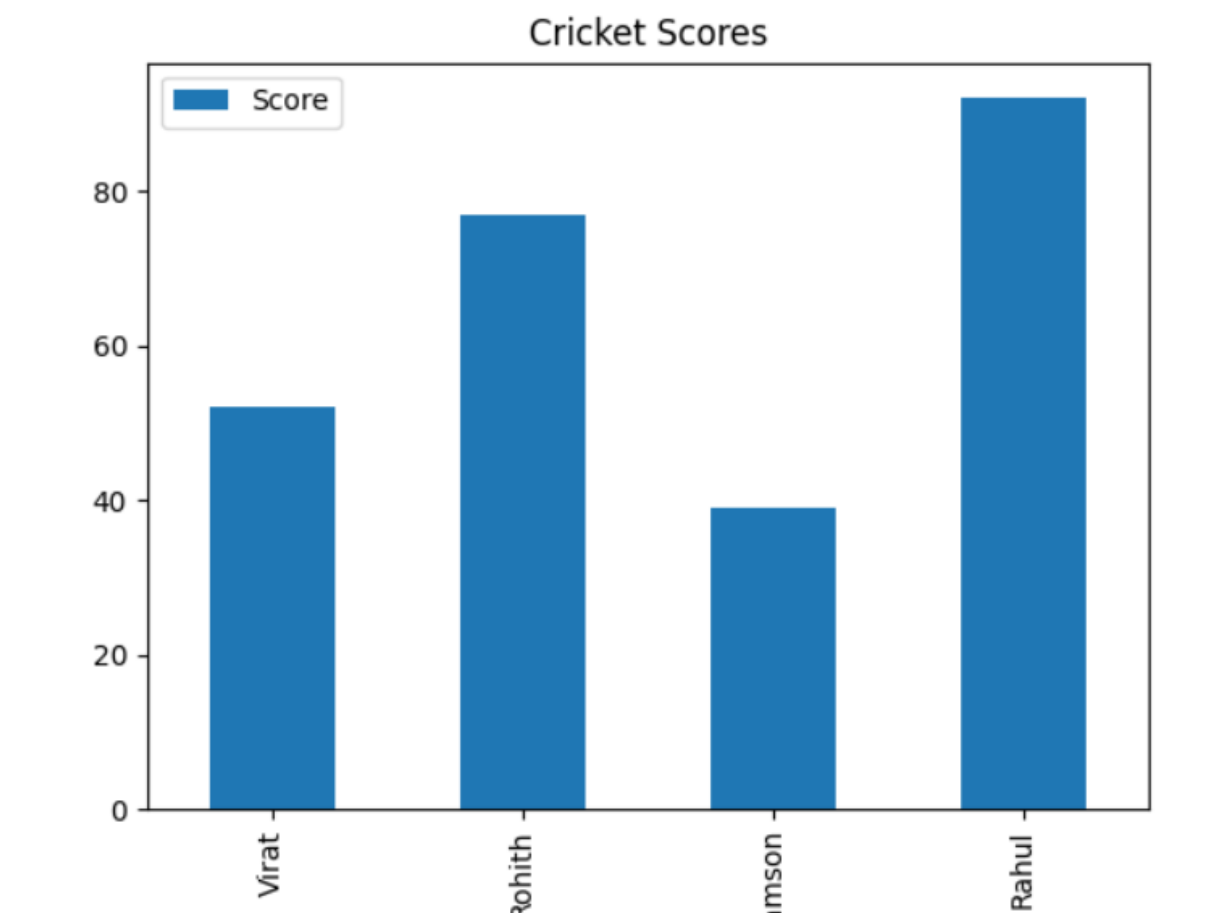

```

#Daily Water Intake Tracker

import tkinter as tk
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt

data=[]

def add_water():
    day=day_entry.get()
    water=float(water_entry.get())
    data.append([day,water])

def analyze():
    df=pd.DataFrame(data,columns=["Day", "Water"])

    avg=np.mean(df["Water"])

    result.config(text=f"Average Water Intake: {avg} L")

    df.set_index("Day").plot(kind="line",marker="o")
    plt.title("Water Intake")
    plt.show()

root=tk.Tk()

tk.Label(root,text="Day").pack()
day_entry=tk.Entry(root)
day_entry.pack()

tk.Label(root,text="Water Intake (Liters)").pack()
water_entry=tk.Entry(root)
water_entry.pack()

tk.Button(root,text="Add",command=add_water).pack()
tk.Button(root,text="Analyze",command=analyze).pack()

result=tk.Label(root,text="")
result.pack()

root.mainloop()

```

Day

thu

Water Intake (Liters)

4.2

Add

Analyze

Average Water Intake: 3.625 L

