
Configuration of NAT Network and Connectivity Between Two Virtual Machines Using Oracle VirtualBox


Step 01 – Create Two Virtual Machines.




Step 02 – Check the Network Configuration.

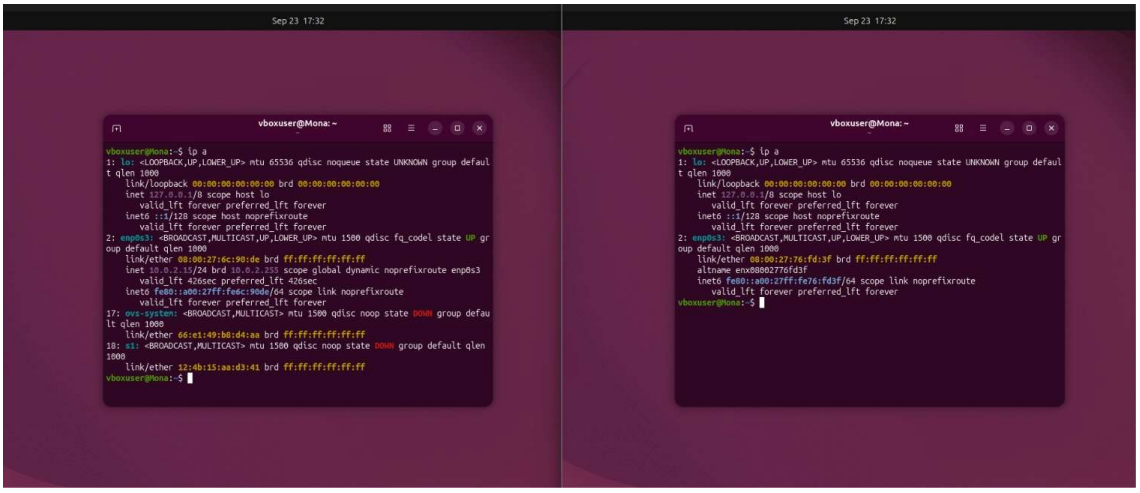


Step 03 – Create a Customized NAT Network.

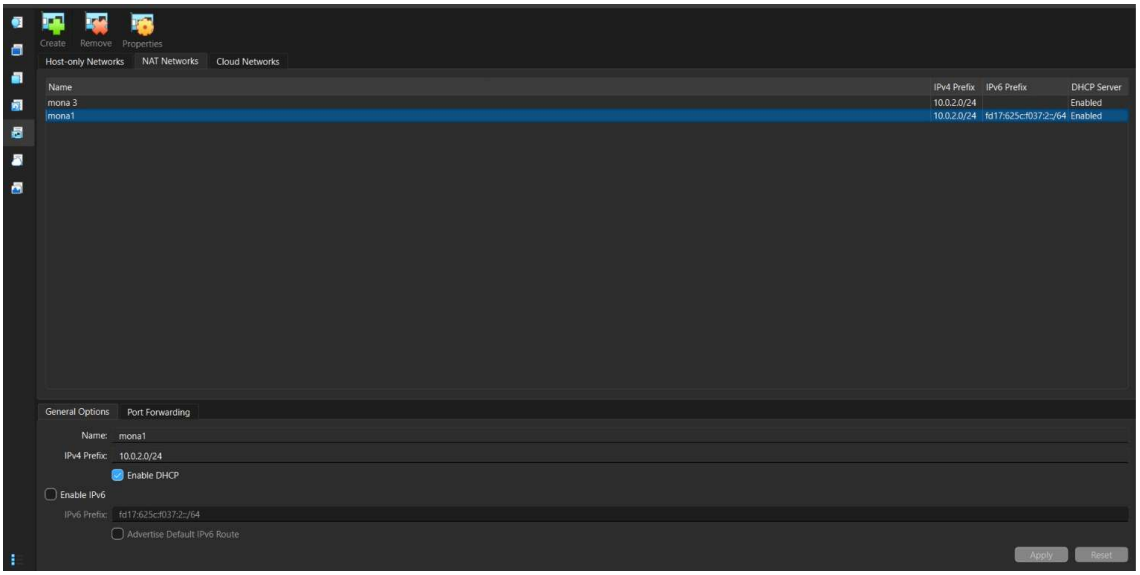


Step 04 – Connect the First & Second Virtual Machine to the NAT Network.

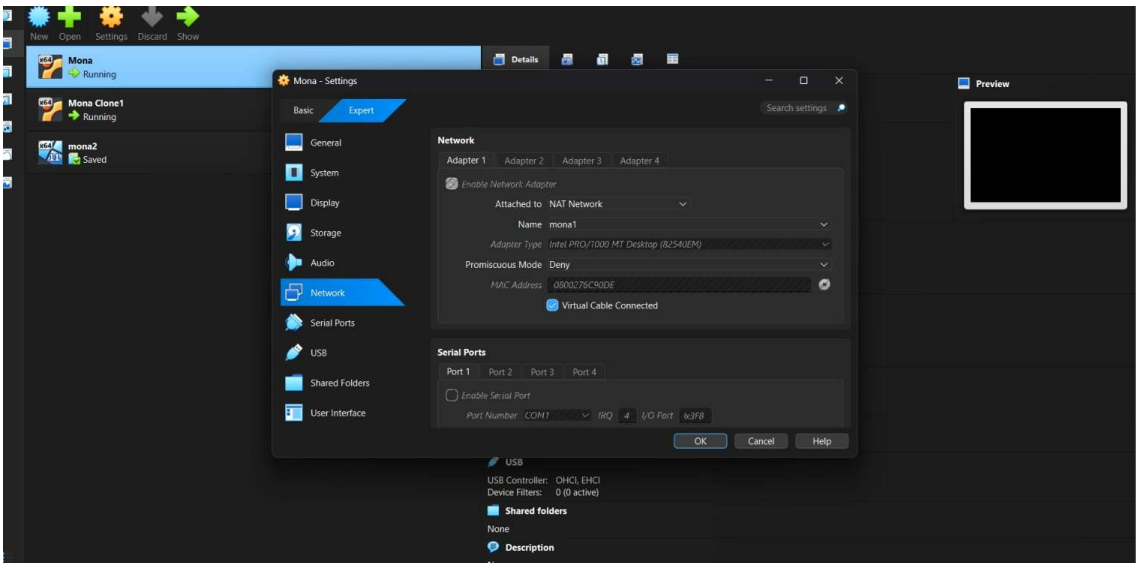


Step 05 – Restart Both Virtual Machines.

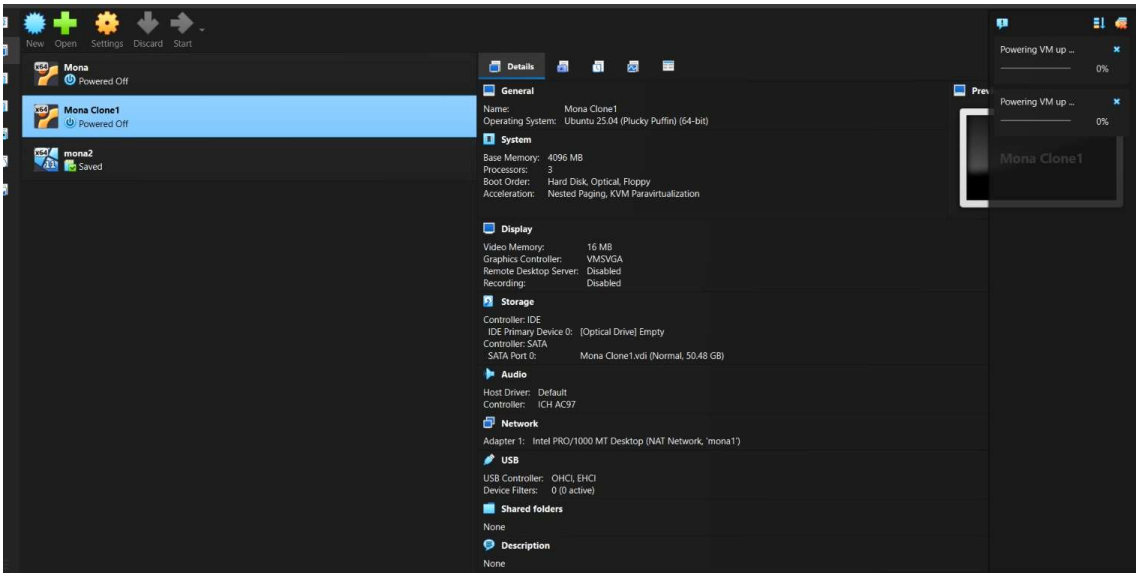

Step 06 – Check the IP Address of VM 1 & VM 2.

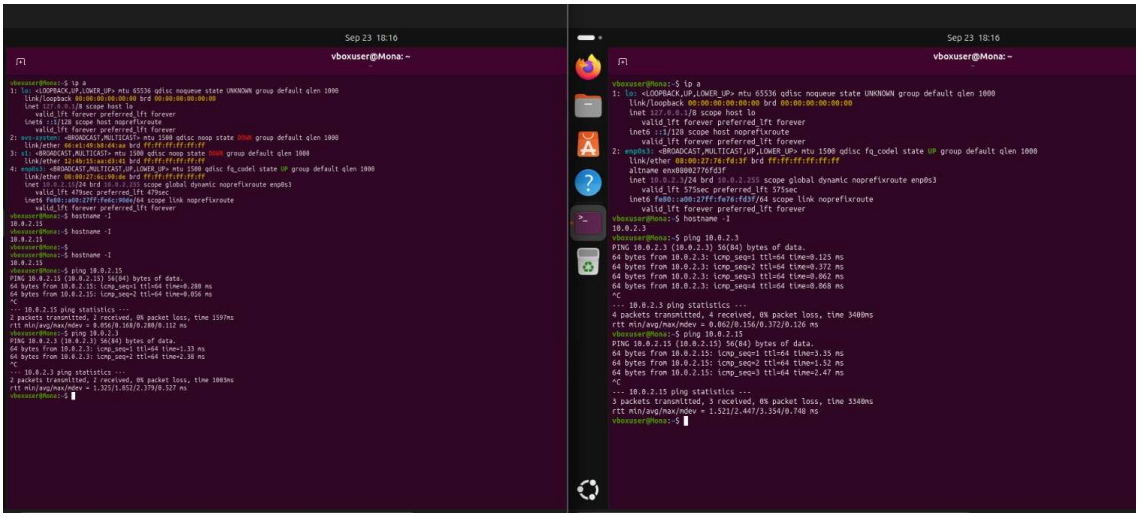

Step 7– Ping VM 2 from VM 1 & Ping VM 1 from VM 2.

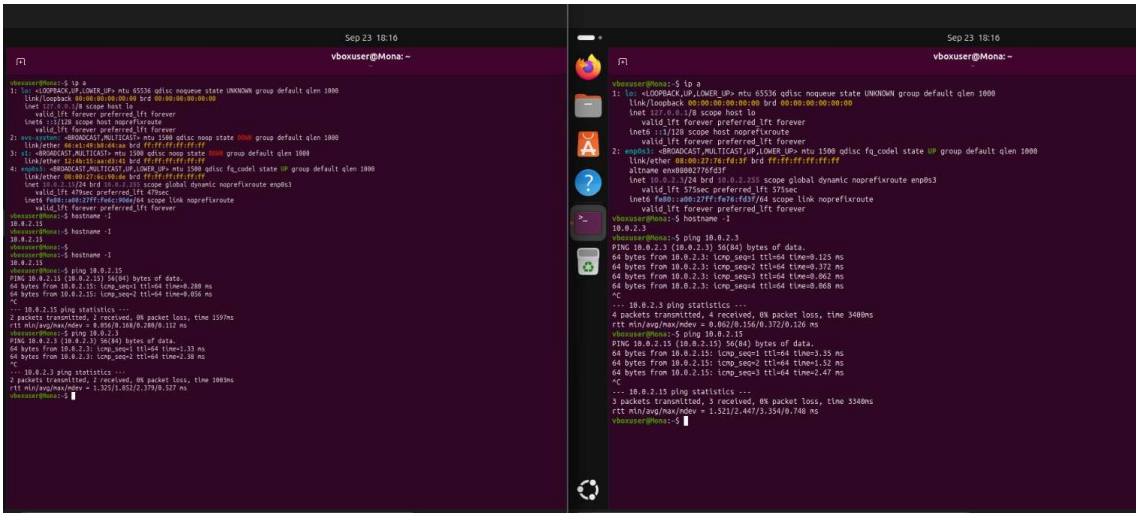

CONCLUSION:

Both Ubuntu Virtual Machines were successfully connected to the same customized NAT Network in Oracle VirtualBox. The IP addresses of both Virtual Machines were identified using the ip a command, and connectivity between the two VMs was successfully tested using the ping command.