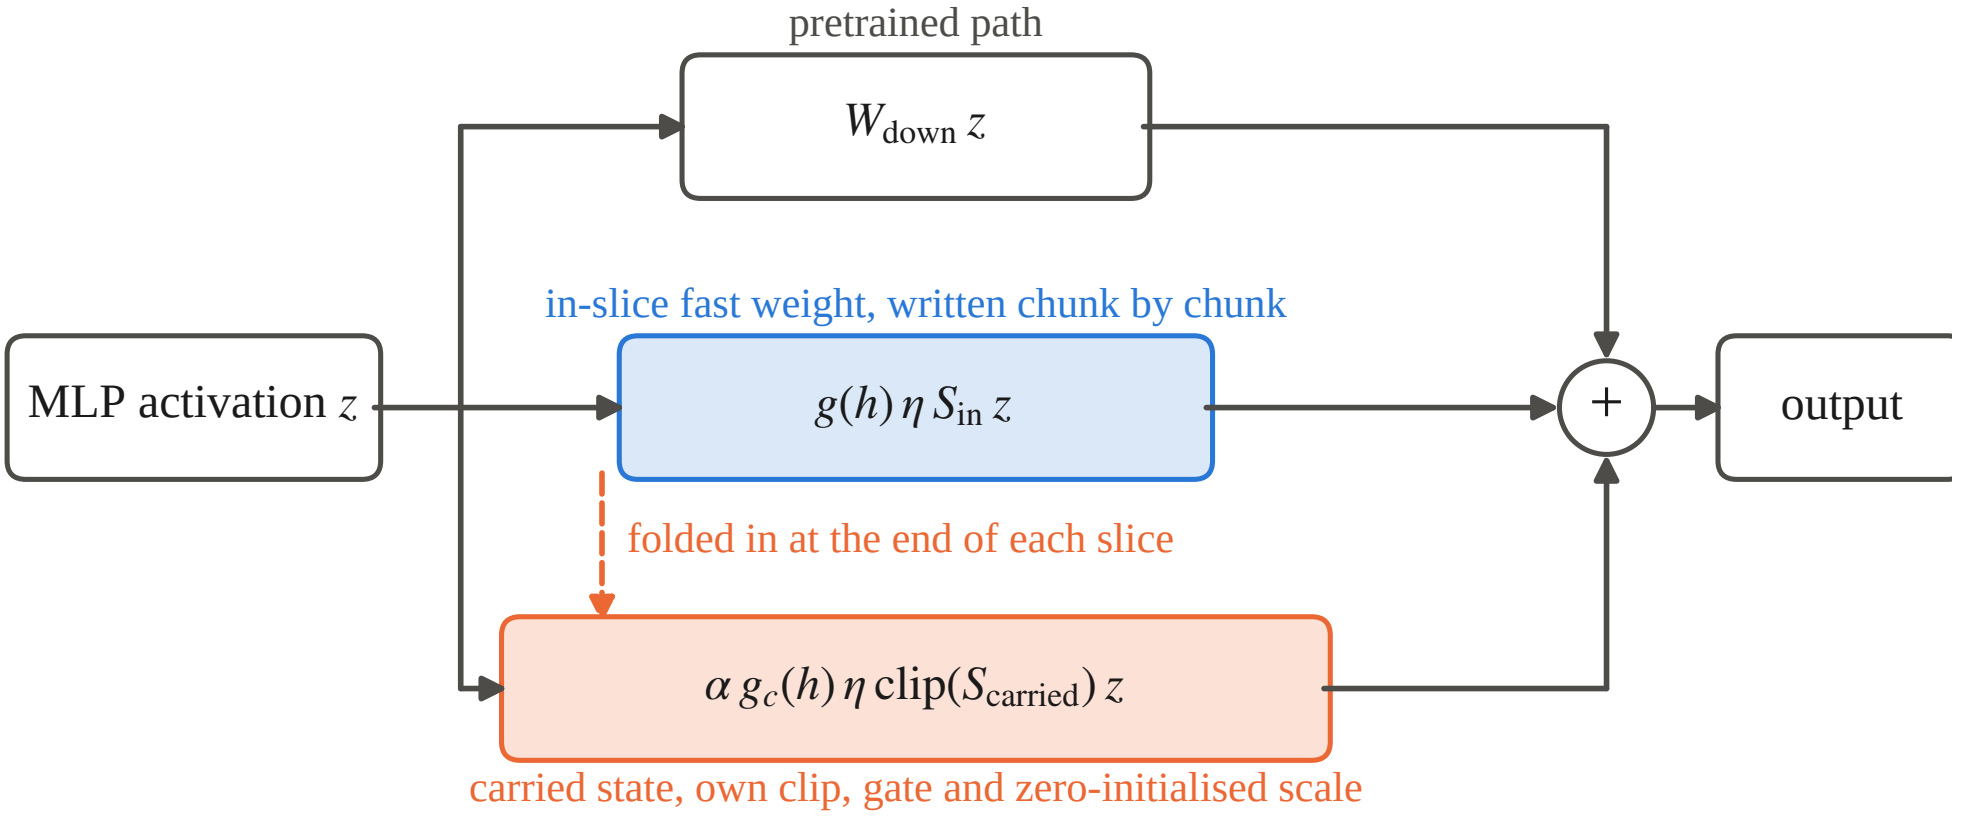
pretrained path
$W_{\text{down}}\, z$
in-slice fast weight, written chunk by chunk
MLP activation $z$
$g(h)\, \eta\, S_{\text{in}}\, z$
+
output
folded in at the end of each slice
$\alpha\, g_c(h)\, \eta\, \text{clip}(S_{\text{carried}})\, z$
carried state, own clip, gate and zero-initialised scale