

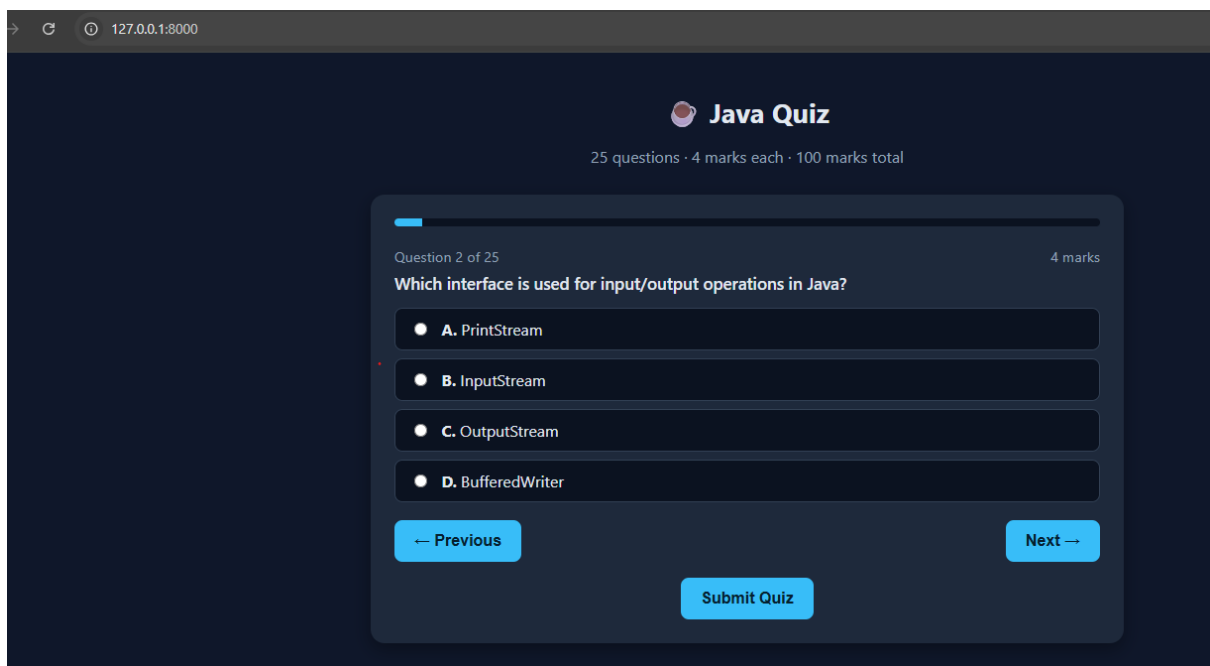
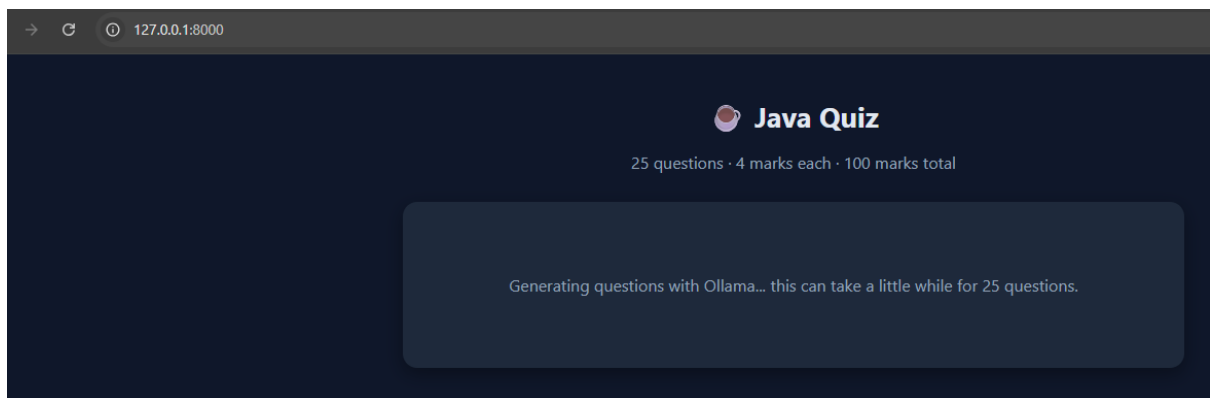


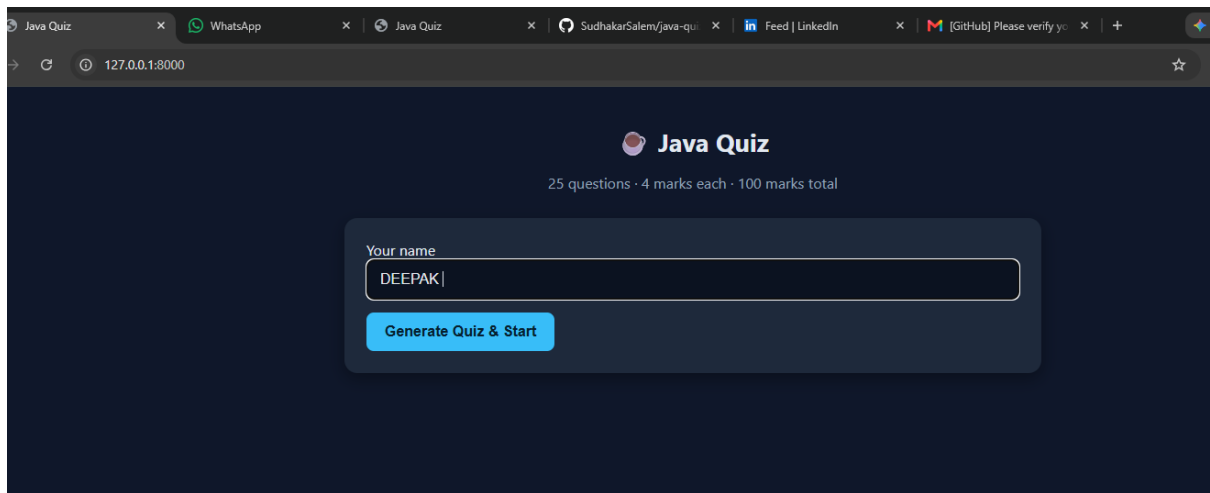

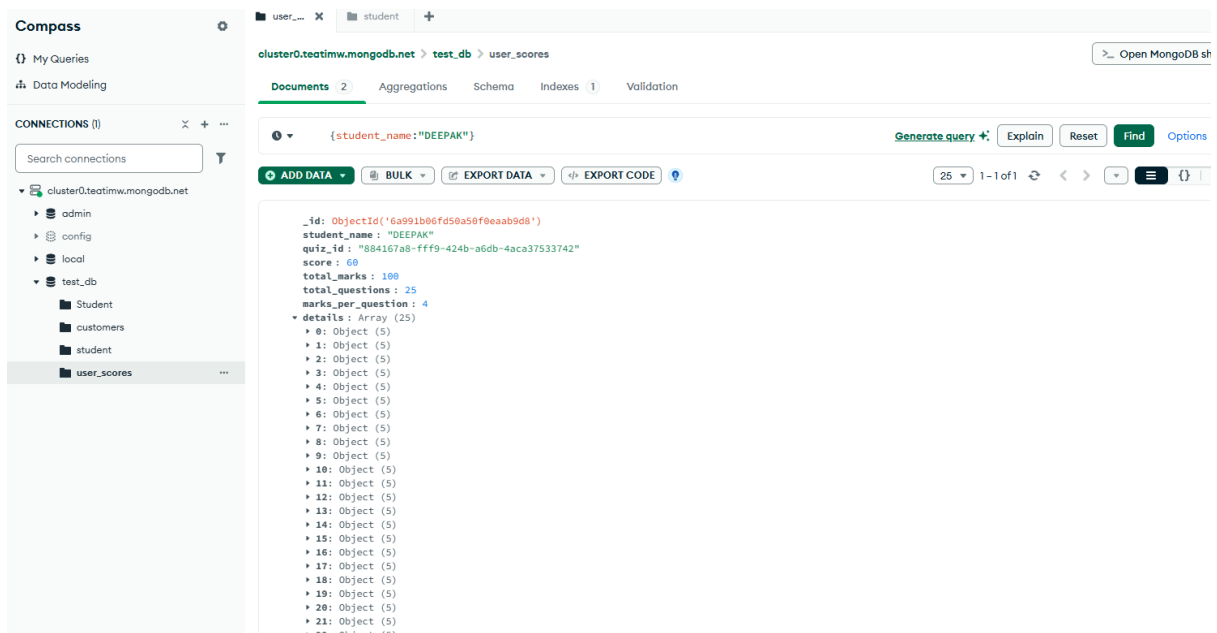

```
{
  _id: ObjectId('6a991b06fd50a50f0eaab9d8'),
```

```
student_name: 'DEEPAK',
quiz_id: '884167a8-fff9-424b-a6db-4aca37533742',
score: NumberInt('60'),
total_marks: NumberInt('100'),
total_questions: NumberInt('25'),
marks_per_question: NumberInt('4'),
details: [
  {
    question: 'What is the purpose of the "new" keyword in Java?',
    options: {
      A: 'To create a new array',
      B: 'To create a new object',
      C: 'To create a new class',
      D: 'To create a new variable'
    },
    given_answer: 'B',
    correct_answer: 'B',
    is_correct: true
  },
  {
    question: 'Which interface is used for input/output operations in Java?',
    options: {
      A: 'PrintStream',
      B: 'InputStream',
      C: 'OutputStream',
      D: 'BufferedWriter'
    },
    given_answer: 'A',
    correct_answer: 'C',
    is_correct: false
  },
]
```

```
{
  question: 'What is the purpose of the "final" keyword in Java?',
  options: {
    A: 'To declare a variable',
    B: 'To declare a method',
    C: 'To declare a class',
    D: 'To make a variable immutable'
  },
  given_answer: 'D',
  correct_answer: 'D',
  is_correct: true
},
{
  question: 'Which class is used for input/output operations in Java?',
  options: {
    A: 'BufferedReader',
    B: 'PrintWriter',
    C: 'InputStream',
    D: 'OutputStream'
  },
  given_answer: 'B',
  correct_answer: 'B',
  is_correct: true
},
{
  question: 'What is the purpose of the "@Override" annotation in Java?',
  options: {
    A: 'To override a method',
    B: 'To implement an interface',
    C: 'To extend a class',
    D: 'To declare a variable'
```

```
    },
    given_answer: 'B',
    correct_answer: 'A',
    is_correct: false
  },
  {
    question: 'Which interface is used for networking operations in Java?',
    options: {
      A: 'Socket',
      B: 'ServerSocket',
      C: 'InputStream',
      D: 'OutputStream'
    },
    given_answer: 'C',
    correct_answer: 'A',
    is_correct: false
  },
  {
    question: 'What is the purpose of the "try-catch-finally" block in Java?',
    options: {
      A: 'To handle exceptions',
      B: 'To declare variables',
      C: 'To create loops',
      D: 'To declare methods'
    },
    given_answer: 'A',
    correct_answer: 'A',
    is_correct: true
  },
  {
    question: 'Which class is used for parsing XML in Java?',
```

```
options: {
  A: 'SAXParser',
  B: 'DOMParser',
  C: 'XPath',
  D: 'XSLT'
},
given_answer: 'B',
correct_answer: 'A',
is_correct: false
},
{
  question: 'What is the purpose of the "enum" keyword in Java?',
  options: {
    A: 'To declare an enum',
    B: 'To declare a class',
    C: 'To declare an interface',
    D: 'To declare a variable'
  },
  given_answer: 'A',
  correct_answer: 'A',
  is_correct: true
},
{
  question: 'Which class is used for parsing JSON in Java?',
  options: {
    A: 'Jackson',
    B: 'JSONParser',
    C: 'JSONWriter',
    D: 'JSONReader'
  },
  given_answer: 'D',
```

```
correct_answer: 'A',
is_correct: false
},
{
  question: 'What is the purpose of the "lambda" expression in Java?',
  options: {
    A: 'To declare a method',
    B: 'To declare a variable',
    C: 'To declare an interface',
    D: 'To create a new class'
  },
  given_answer: 'B',
  correct_answer: 'A',
  is_correct: false
},
{
  question: 'Which interface is used for database operations in Java?',
  options: {
    A: 'JDBC',
    B: 'JPA',
    C: 'JAXP',
    D: 'JMS'
  },
  given_answer: 'B',
  correct_answer: 'A',
  is_correct: false
},
{
  question: 'What is the purpose of the "Thread" class in Java?',
  options: {
    A: 'To create a new thread',
```

```
B: 'To create a new process',
C: 'To create a new thread group',
D: 'To create a new thread pool'
},
given_answer: 'A',
correct_answer: 'A',
is_correct: true
},
{
question: 'Which class is used for synchronization in Java?',
options: {
A: 'Synchronized',
B: 'ReentrantLock',
C: 'Semaphore',
D: 'CyclicBarrier'
},
given_answer: 'B',
correct_answer: 'B',
is_correct: true
},
{
question: 'What is the purpose of the "volatile" keyword in Java?',
options: {
A: 'To declare a variable',
B: 'To declare a method',
C: 'To declare a class',
D: 'To make a variable volatile'
},
given_answer: 'D',
correct_answer: 'D',
is_correct: true
}
```



```
},  
{  
  question: 'Which interface is used for multithreading in Java?',  
  options: {  
    A: 'Runnable',  
    B: 'Callable',  
    C: 'FutureTask',  
    D: 'ScheduledExecutorService'  
  },  
  given_answer: 'A',  
  correct_answer: 'A',  
  is_correct: true  
},  
{  
  question: 'What is the purpose of the "wait()" method in Java?',  
  options: {  
    A: 'To wait for a condition',  
    B: 'To wait for a thread',  
    C: 'To wait for an event',  
    D: 'To wait for a timeout'  
  },  
  given_answer: 'C',  
  correct_answer: 'A',  
  is_correct: false  
},  
{  
  question: 'Which class is used for creating a new thread in Java?',  
  options: {  
    A: 'Thread',  
    B: 'Runnable',  
    C: 'Callable',
```

```
D: 'FutureTask'
},
given_answer: 'A',
correct_answer: 'A',
is_correct: true
},
{
question: 'What is the purpose of the "Runnable" interface in Java?',
options: {
A: 'To create a new thread',
B: 'To create a new process',
C: 'To create a new thread group',
D: 'To create a new thread pool'
},
given_answer: 'A',
correct_answer: 'A',
is_correct: true
},
{
question: 'Which class is used for creating a new thread pool in Java?',
options: {
A: 'ScheduledExecutorService',
B: 'ExecutorService',
C: 'ScheduledThreadPoolExecutor',
D: 'ThreadPoolExecutor'
},
given_answer: 'D',
correct_answer: 'B',
is_correct: false
},
{
```

```
question: 'What is the purpose of the "Generics" feature in Java?',
options: {
  A: 'To create generic classes',
  B: 'To create generic methods',
  C: 'To create generic interfaces',
  D: 'To create generic arrays'
},
given_answer: 'A',
correct_answer: 'A',
is_correct: true
},
{
  question: 'Which class is used for creating a new generic class in Java?',
  options: {
    A: 'GenericClass',
    B: 'TypeParameter',
    C: 'Wildcard',
    D: 'TypeVariable'
  },
  given_answer: 'D',
  correct_answer: 'B',
  is_correct: false
},
{
  question: 'What is the purpose of the "wildcard" in Java?',
  options: {
    A: 'To create a new type',
    B: 'To create a new class',
    C: 'To create a new interface',
    D: 'To create a new wildcard'
  },
  },
```

```
    given_answer: 'D',
    correct_answer: 'D',
    is_correct: true
  },
  {
    question: 'Which class is used for creating a new wildcard in Java?',
    options: {
      A: 'Wildcard',
      B: 'TypeVariable',
      C: 'TypeParameter',
      D: 'GenericClass'
    },
    given_answer: 'A',
    correct_answer: 'A',
    is_correct: true
  },
  {
    question: 'What is the purpose of the "HashMap" class in Java?',
    options: {
      A: 'To create a new map',
      B: 'To create a new list',
      C: 'To create a new set',
      D: 'To create a new array'
    },
    given_answer: 'A',
    correct_answer: 'A',
    is_correct: true
  }
],
timestamp: ISODate('2026-09-03T07:00:22.138Z')
}
```