


```

1. #include <stdio.h>
   #include <stdlib.h>
   struct Node {
       int data;
       struct Node *next;
   };

   int main() {
       struct Node *head, *first, *second;
       head = (struct Node *) malloc (size of (struct Node));
       first = (struct Node *) malloc (size of (struct Node));
       second = (struct Node *) malloc (size of (struct Node));
       head -> next = NULL;
       head -> next = first;
       first -> next = NULL;
       first -> next = second;
       second -> data = 600;
       second -> next = NULL;
       struct Node *temp = head;
       printf ("Linked List");
       while (temp != NULL) {
           printf ("%d -> ", temp -> data);
           temp = temp -> next;
       }
       printf ("Null");
       return 0;
   }

```

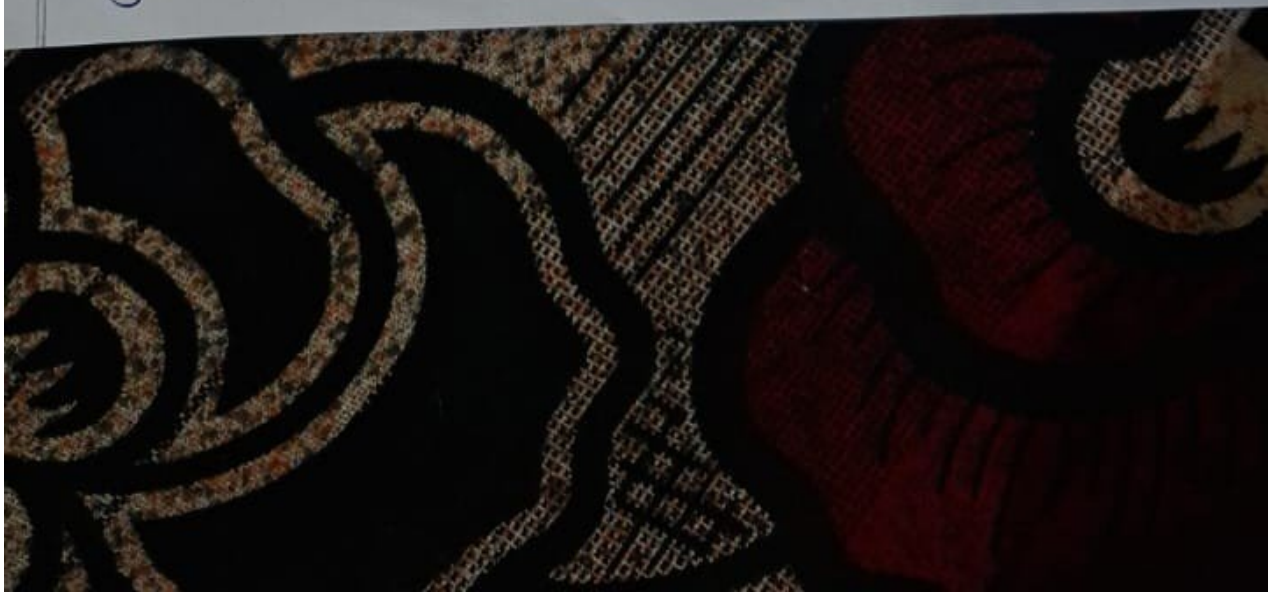

main.c



Run

Output

Clear

```
1 #include <stdio.h>
2 #include <stdlib.h>
3
4 struct Node{
5     int data;
6     struct Node *next;
7 };
8
9 int main() {
10     struct Node *head, *first, *second;
11     head=(struct Node*)malloc(sizeof(struct Node));
12     first=(struct Node*)malloc(sizeof(struct Node));
13     second=(struct Node*)malloc(sizeof(struct Node));
14
15     head->data=400;
16     head->next=first;
17
18     first->data=500;
19     first->next=second;
20
21     second->data=600;
22     second->next=NULL;
23
24     struct Node* temp=head;
25     printf("Linked list:");
26     while(temp!=NULL){
27         printf("%d->", temp->data);
28         temp = temp->next;
29     }
30
31     printf("NULL");
32
33     return 0;
34 }
35
```

Linked list:400->500->600->NULL

=== Code Execution Successful ===