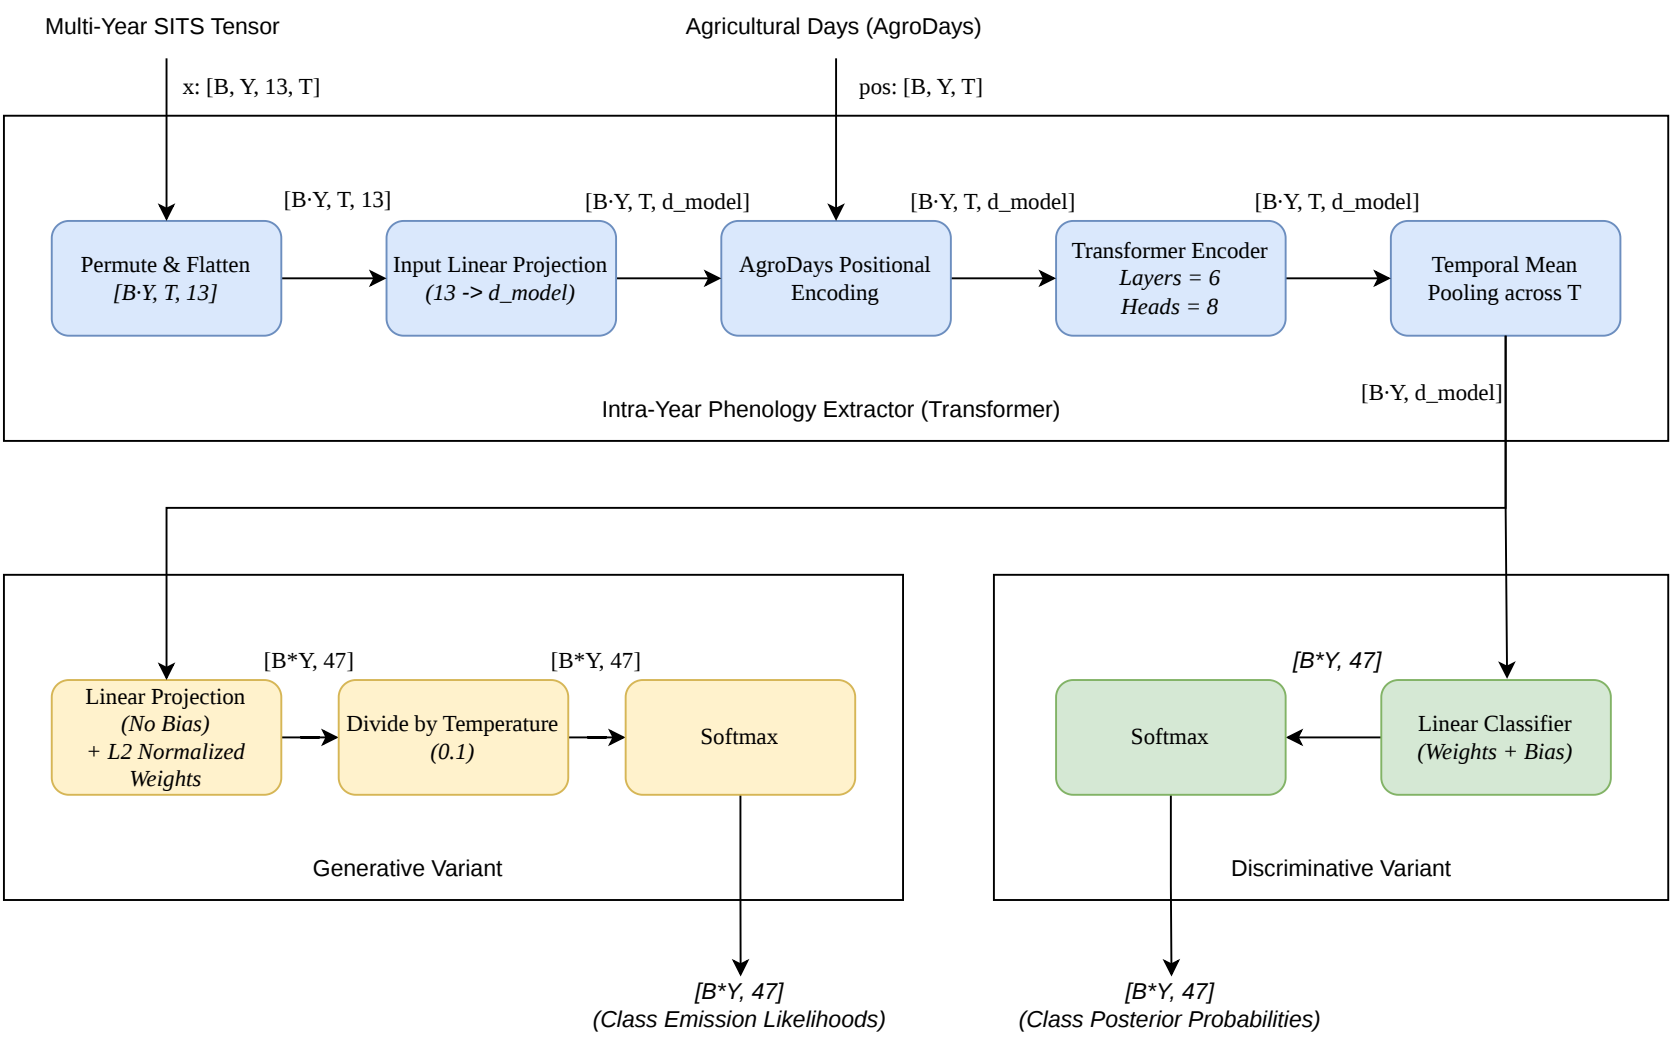

Multi-Year SITS Tensor
x: [B, Y, 13, T]
Agricultural Days (AgroDays)
pos: [B, Y, T]
Permute & Flatten
[B·Y, T, 13]
[B·Y, T, 13]
Input Linear Projection
(13 -> d_model)
[B·Y, T, d_model]
AgroDays Positional Encoding
[B·Y, T, d_model]
Transformer Encoder
Layers = 6
Heads = 8
[B·Y, T, d_model]
Temporal Mean Pooling across T
[B·Y, d_model]
Intra-Year Phenology Extractor (Transformer)
Linear Projection
(No Bias)
+ L2 Normalized Weights
[B*Y, 47]
Divide by Temperature
(0.1)
[B*Y, 47]
Softmax
Generative Variant
[B*Y, 47]
(Class Emission Likelihoods)
[B*Y, 47]
Softmax
Linear Classifier
(Weights + Bias)
Discriminative Variant
[B*Y, 47]
(Class Posterior Probabilities)