Neo4j Installation Using Docker

2. Pull Neo4j Image

docker pull neo4j

```
ubuntu@Suhel-PC:~$ docker pull neo4j
Using default tag: latest
latest: Pulling from library/neo4j
5435b2dcdf5c: Pull complete
bc1081ea499e: Pull complete
7c41fdec3372: Pull complete
02cb9cfbf07c: Pull complete
4f4fb700ef54: Pull complete
Digest: sha256:a5feb81d916c82d09186807ee8f8a523eb430d578fa6015f37ae72a07
f976537
Status: Downloaded newer image for neo4j:latest
docker.io/library/neo4j:latest
ubuntu@Suhel-PC:~$
```

3. Run Neo4j Container

Basic command:

```
docker run \
  --name neo4j-container \
  -p 7474:7474 -p 7687:7687 \
  -d \
  -e NEO4J_AUTH=neo4j/password \
  neo4j
```

```
ubuntu@Suhel-PC:~$ docker run \
  --name neo4j-container \
  -p 7474:7474 -p 7687:7687 \
  -d \
  -e NEO4J_AUTH=neo4j/password \
  neo4j
276f3a478209fa9ceacf46657614775d28f2a547e291f720272cbe23d784553c
ubuntu@Suhel-PC:~$
```

What this does:

- 7474 → Neo4j Browser (web UI)
- 7687 → Bolt protocol (used by apps)
- NEO4J_AUTH → sets username/password

4. Access Neo4j

Open your browser:

http://localhost:7474

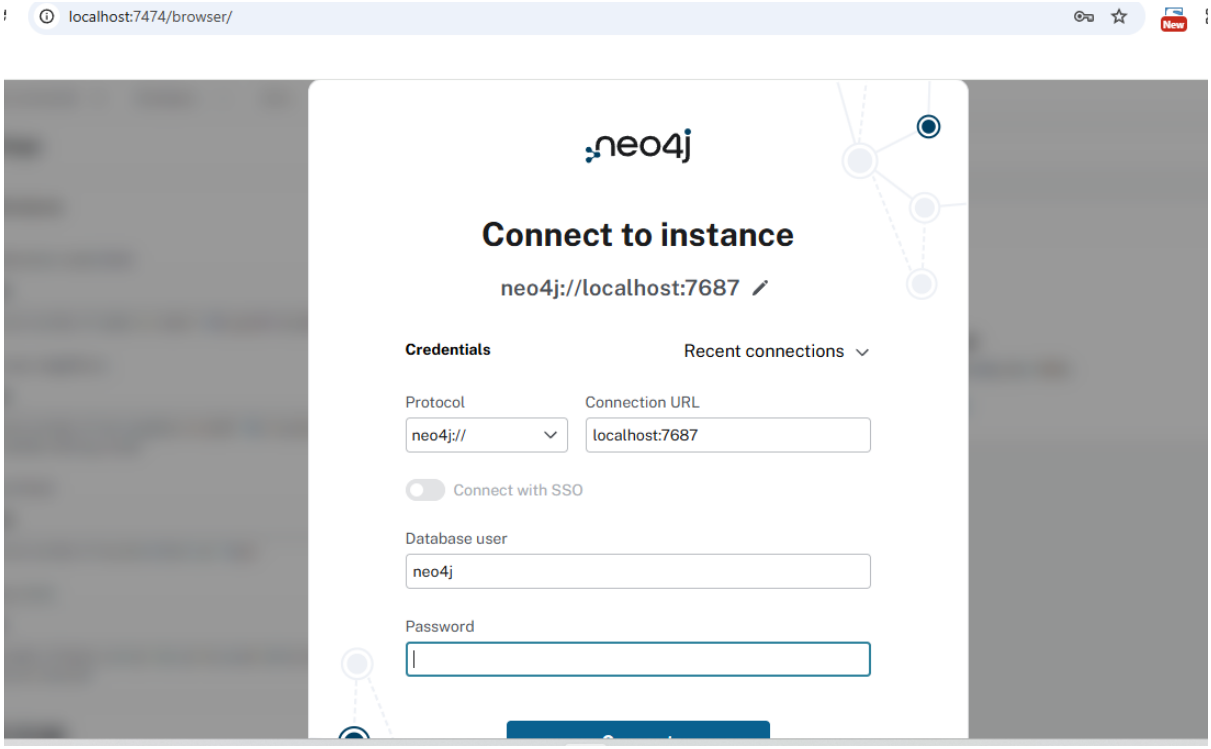

Login:

- Username: neo4j
- Password: password (or whatever you set)

5. Persist Data (Important)

Without volumes, data is lost when container stops.

Use volumes:

```
docker run \
  --name neo4j-container \
  -p 7474:7474 -p 7687:7687 \
  -d \
  -v $HOME/neo4j/data:/data \
  -v $HOME/neo4j/logs:/logs \
  -e NEO4J_AUTH=neo4j/password \
  neo4j
```

```
ubuntu@Suhel-PC:~$ docker run \
  --name neo4j-container \
  -p 7474:7474 -p 7687:7687 \
  -d \
  -v $HOME/neo4j/data:/data \
  -v $HOME/neo4j/logs:/logs \
  -e NEO4J_AUTH=neo4j/password \
  neo4j
8df2d638c20013f11e9d9c91bc26060910ea07af74b6d13ba438922e3bc91bb4
```

6. (Optional) Use Neo4j Desktop UI Image

If you want browser-based UI only:

docker run -p 7474:7474 -p 7687:7687 neo4j:latest

```
neo4j-container
ubuntu@Suhel-PC:~$ docker run -p 7474:7474 -p 7687:7687 neo4j:latest
2026-04-09 07:18:02.471+0000 INFO  Logging config in use: File '/var/lib
/neo4j/conf/user-logs.xml'
2026-04-09 07:18:02.522+0000 INFO  Starting...
2026-04-09 07:18:04.392+0000 INFO  This instance is ServerId{9255201b} (
9255201b-64f2-4934-8d77-5198a65f231c)
2026-04-09 07:18:07.856+0000 INFO  ======== Neo4j 2026.03.1 ========
2026-04-09 07:18:08.782+0000 INFO  X-Forward header processing enabled w
ith security controls
2026-04-09 07:18:08.783+0000 WARN  SECURITY WARNING: X-Forward headers a
ccepted from any source - configure allow_proxies
2026-04-09 07:18:08.786+0000 WARN  SECURITY WARNING: X-Forward headers a
ccept any hostname - configure allow_hosts
2026-04-09 07:18:10.837+0000 INFO  Anonymous Usage Data is being sent to
 Neo4j, see https://neo4j.com/docs/usage-data/
2026-04-09 07:18:11.846+0000 INFO  This server has built-in support for
online monitoring through Fleet Manager. Visit https://console.neo4j.io
to get started!
```

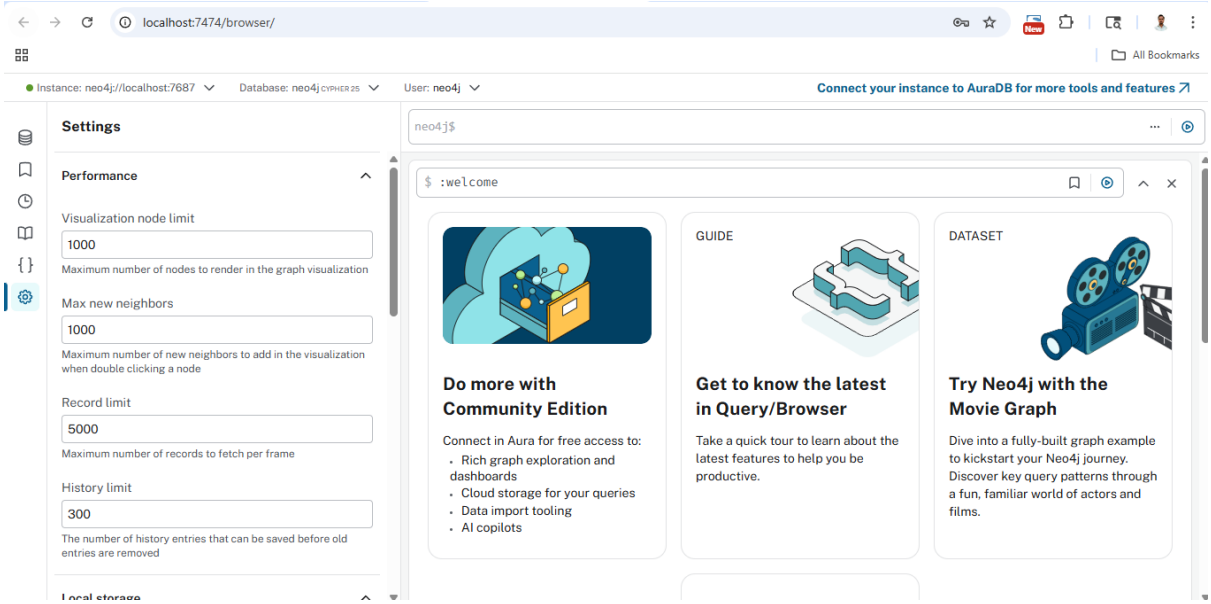

7. Stop / Start Container

docker stop neo4j-container
docker start neo4j-container

8. Check Logs

docker logs neo4j-container