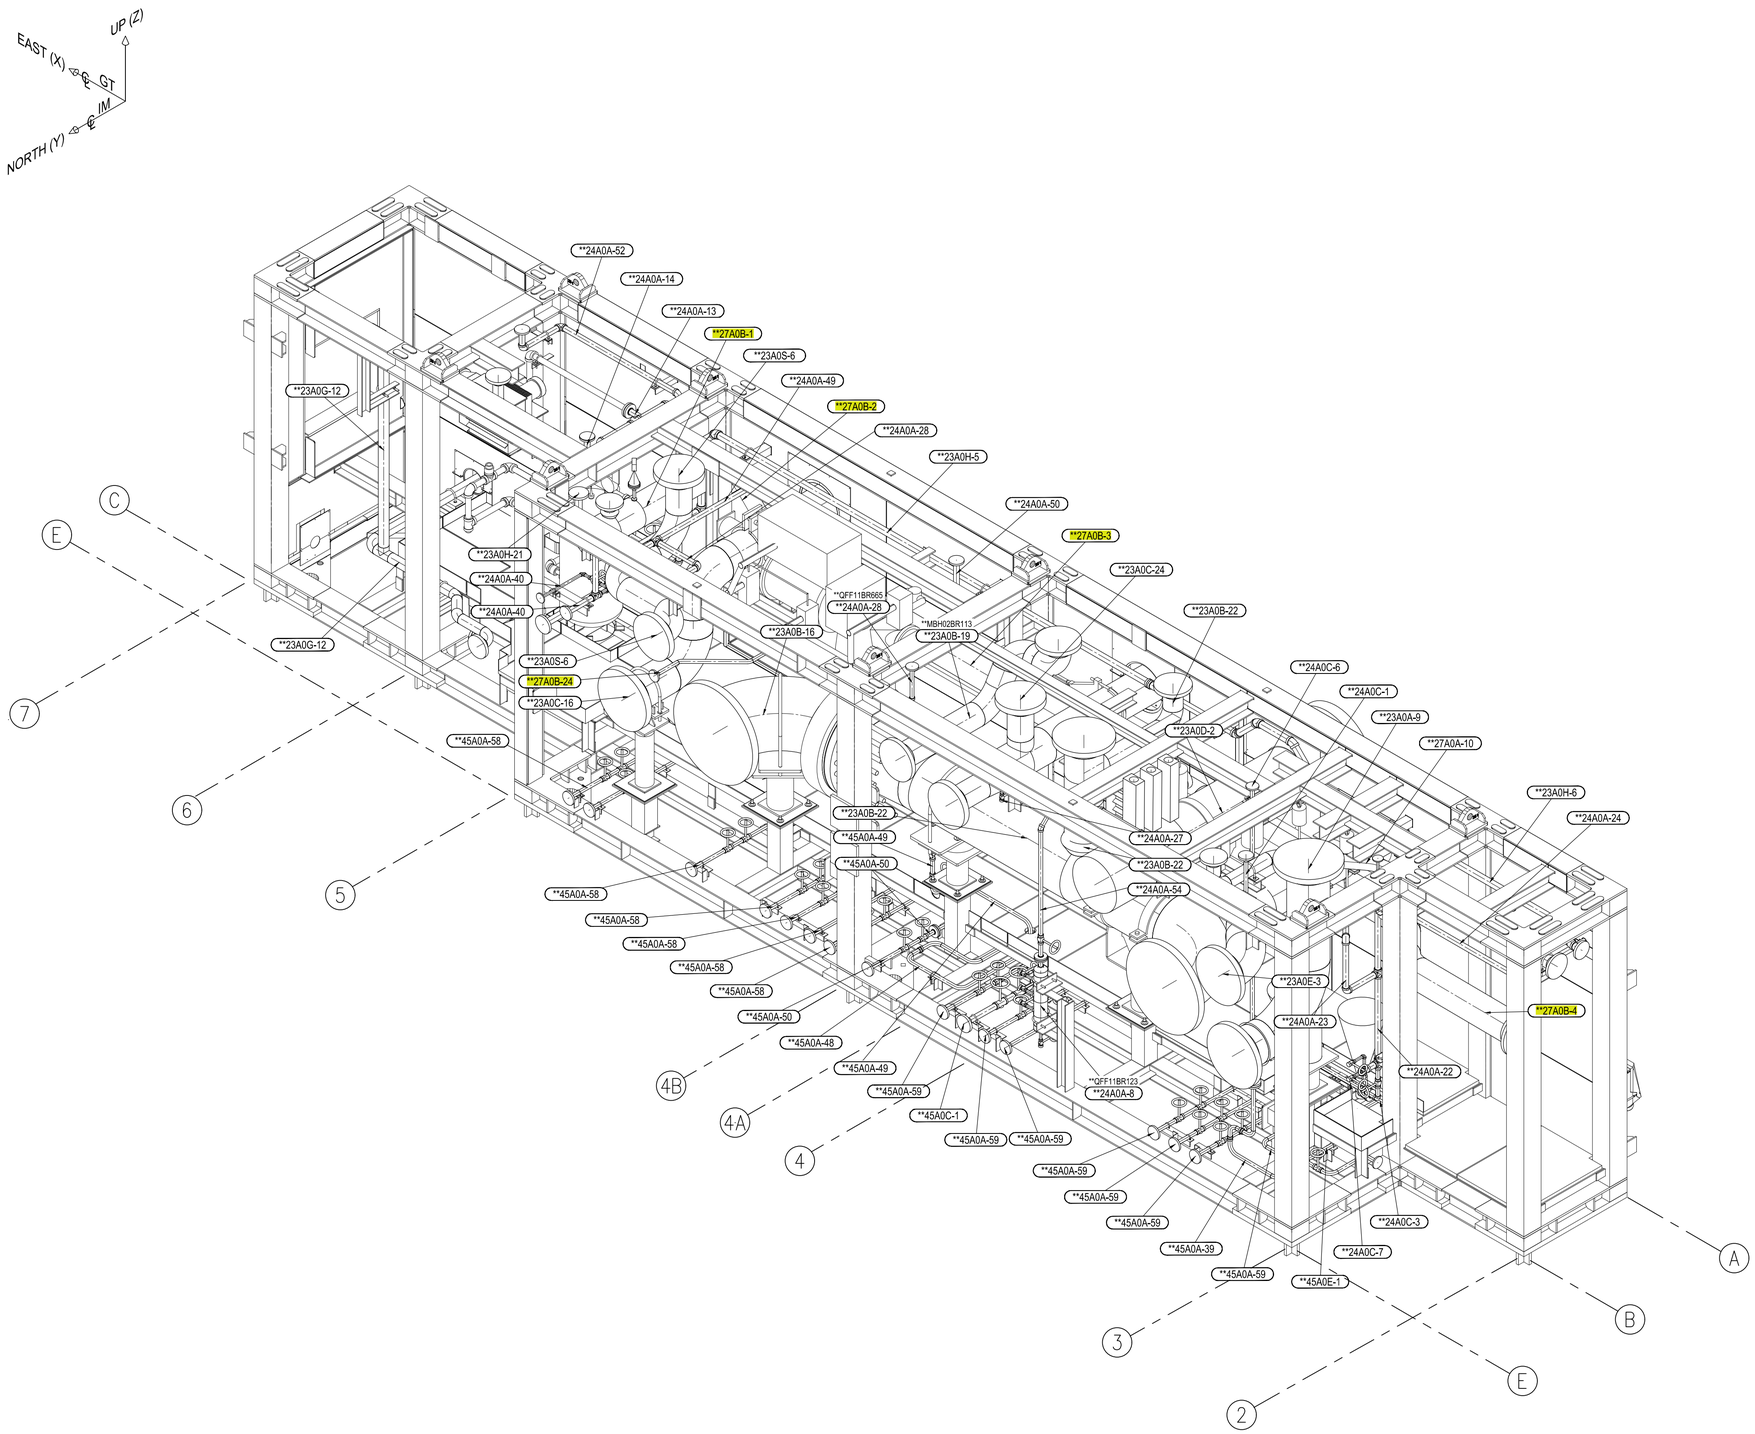


MD-1.1 ISOMETRIC VIEW
LOOKING SOUTH EAST

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX ——PIPE LINE
   - (××XXX-X) ——SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO
–

ITEM NO
MDL–150

DWG NAME
MD–1.1 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)


REF.DWG.NO.
–

PREPARED BY
cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO
2E00140–PI–094–001–MD–1.1

REV.
0

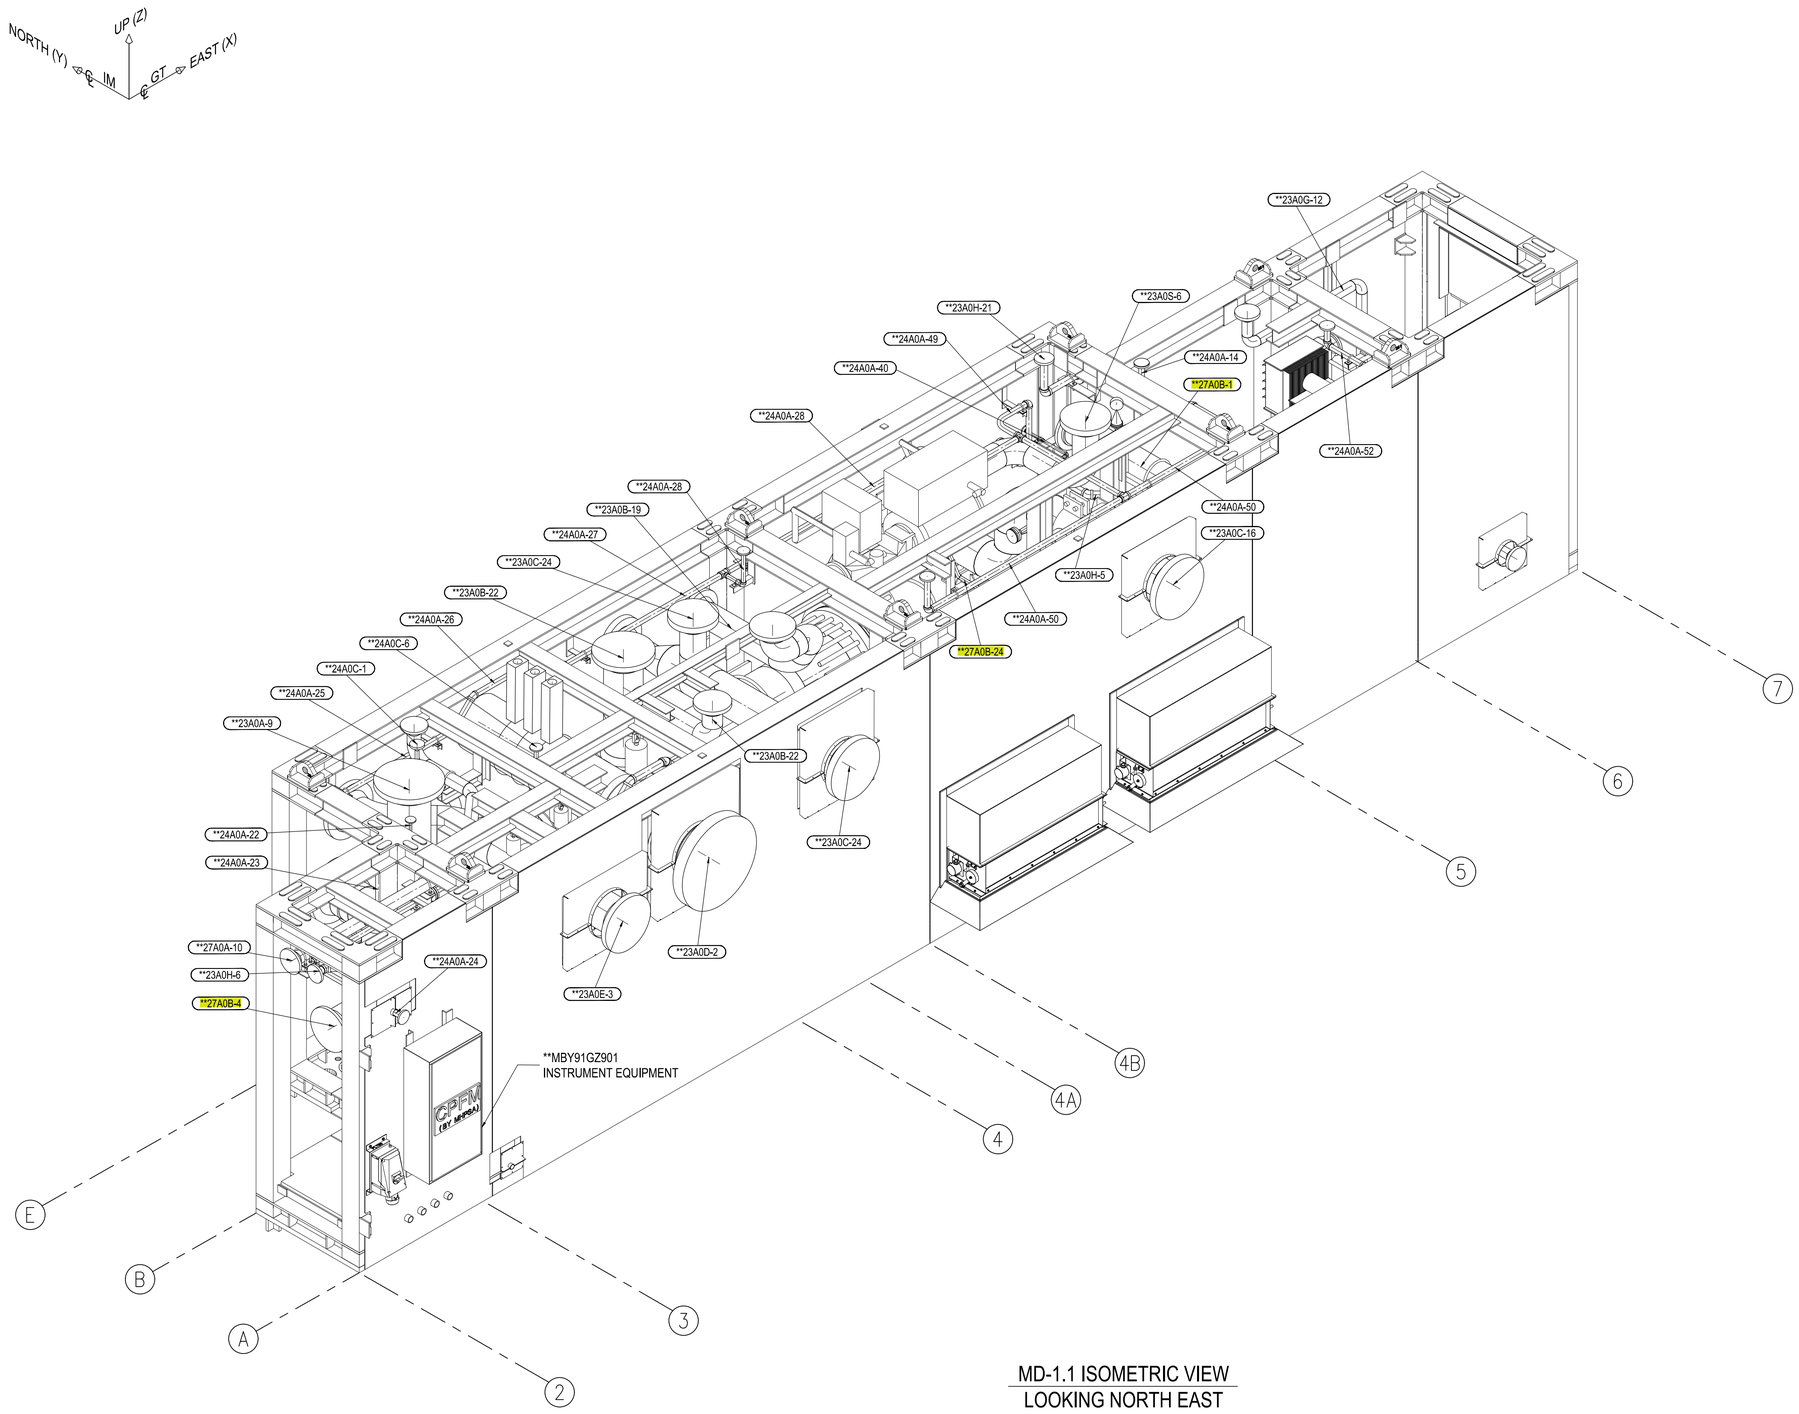

MD-1.1 ISOMETRIC VIEW
LOOKING NORTH EAST

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - **XXXXXX —— PIPE LINE
   - (**XXX-X) —— SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL-150

DWG NAME: MD-1.1 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS **(GA FOR SPOOLS)**


REF.DWG.NO.: –

PREPARED BY: cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140-PI-094-001-MD-1.1

REV.: 0

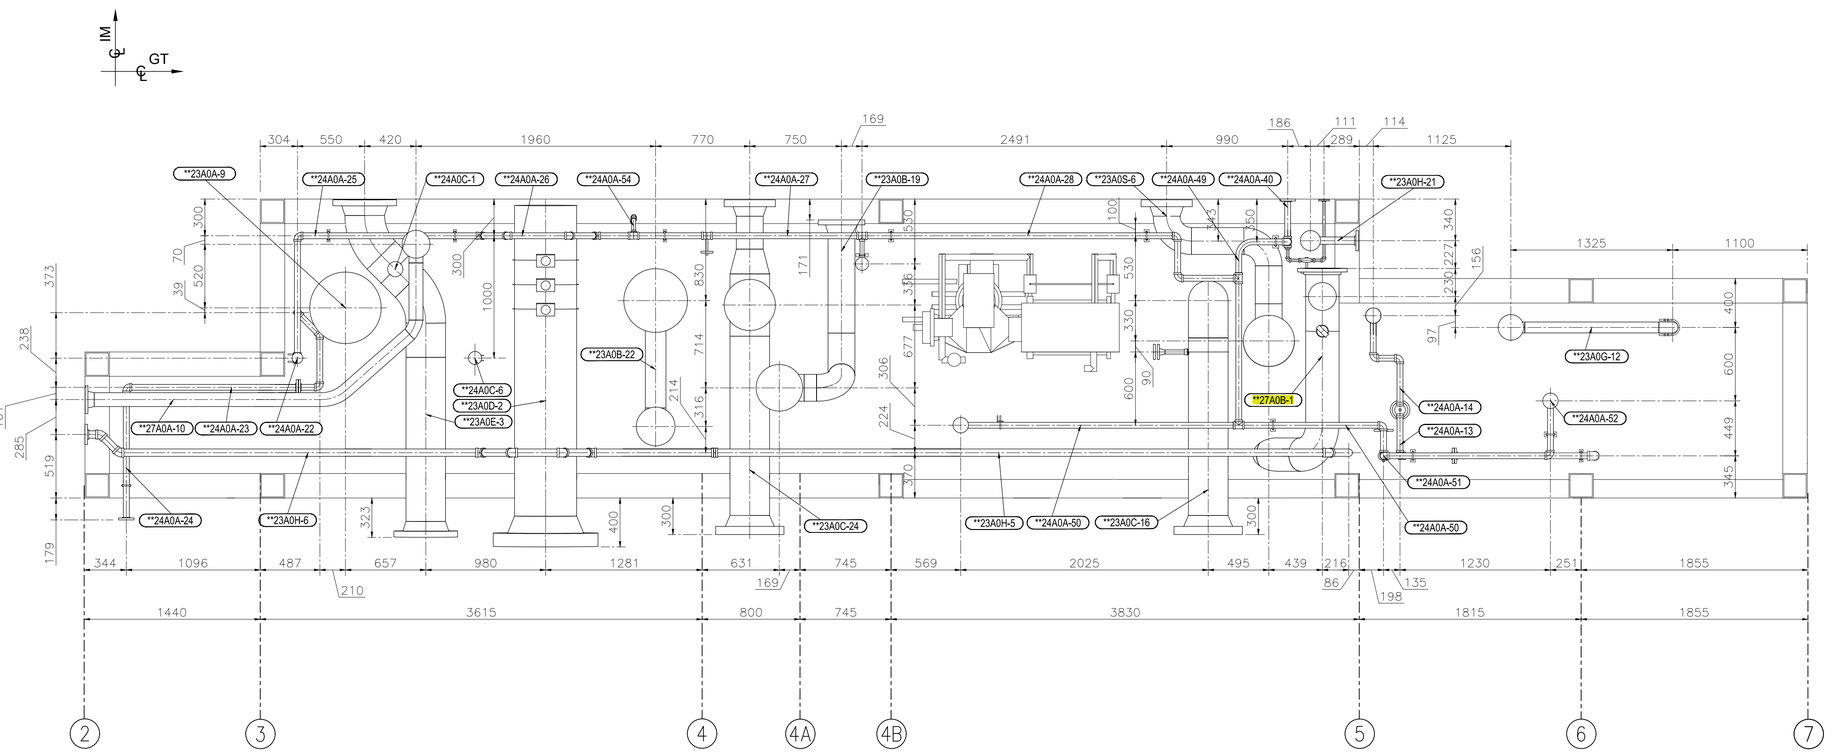

MD-1.1 PLAN VIEW
SECTION 'A-A'

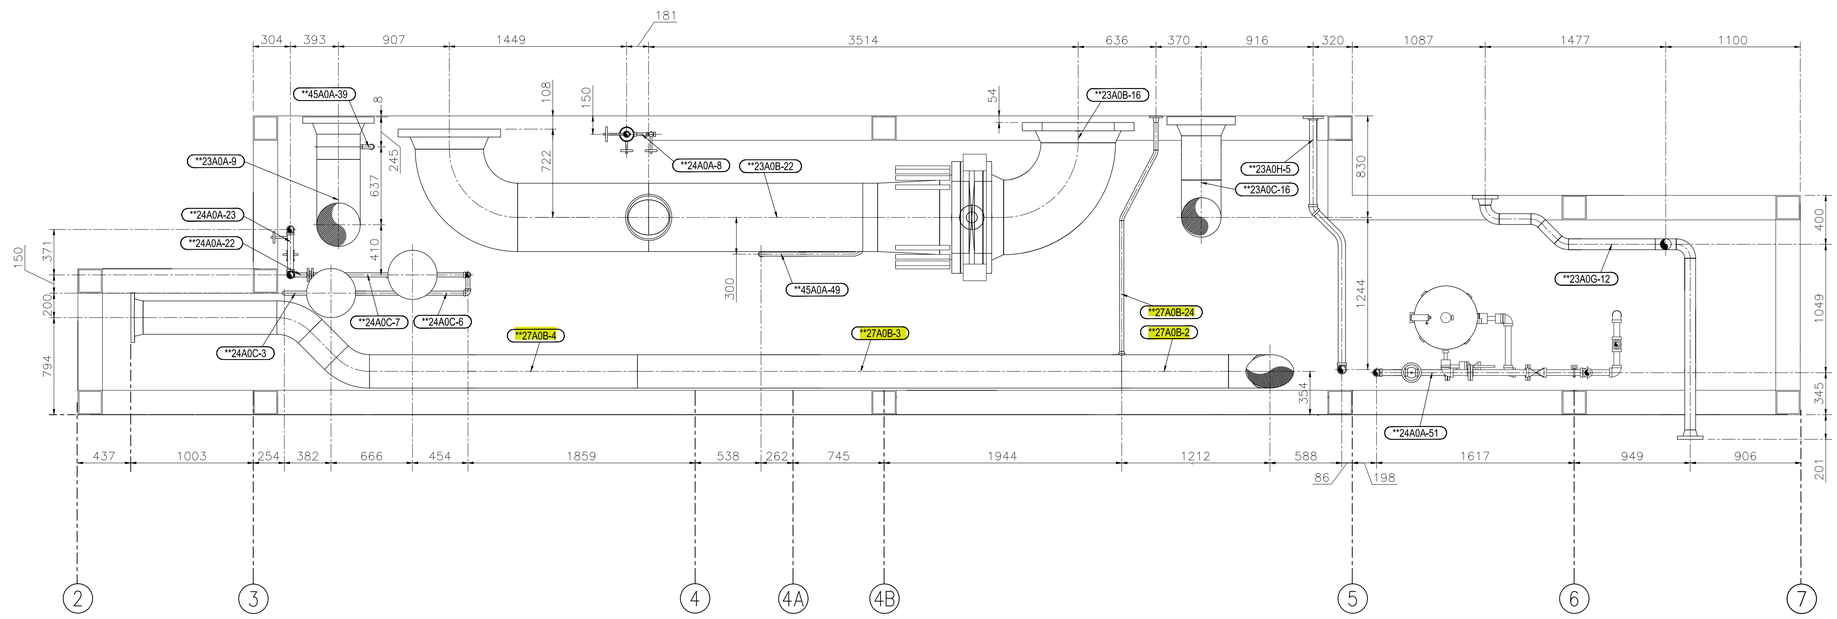

MD-1.1 PLAN VIEW
SECTION 'B-B'

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX ——PIPE LINE
   - (××XXX-X) ——SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL–150

DWG NAME: MD–1.1 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)


REF.DWG.NO.: –

PREPARED BY: cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140–PI–094–001–MD–1.1

REV.: 0

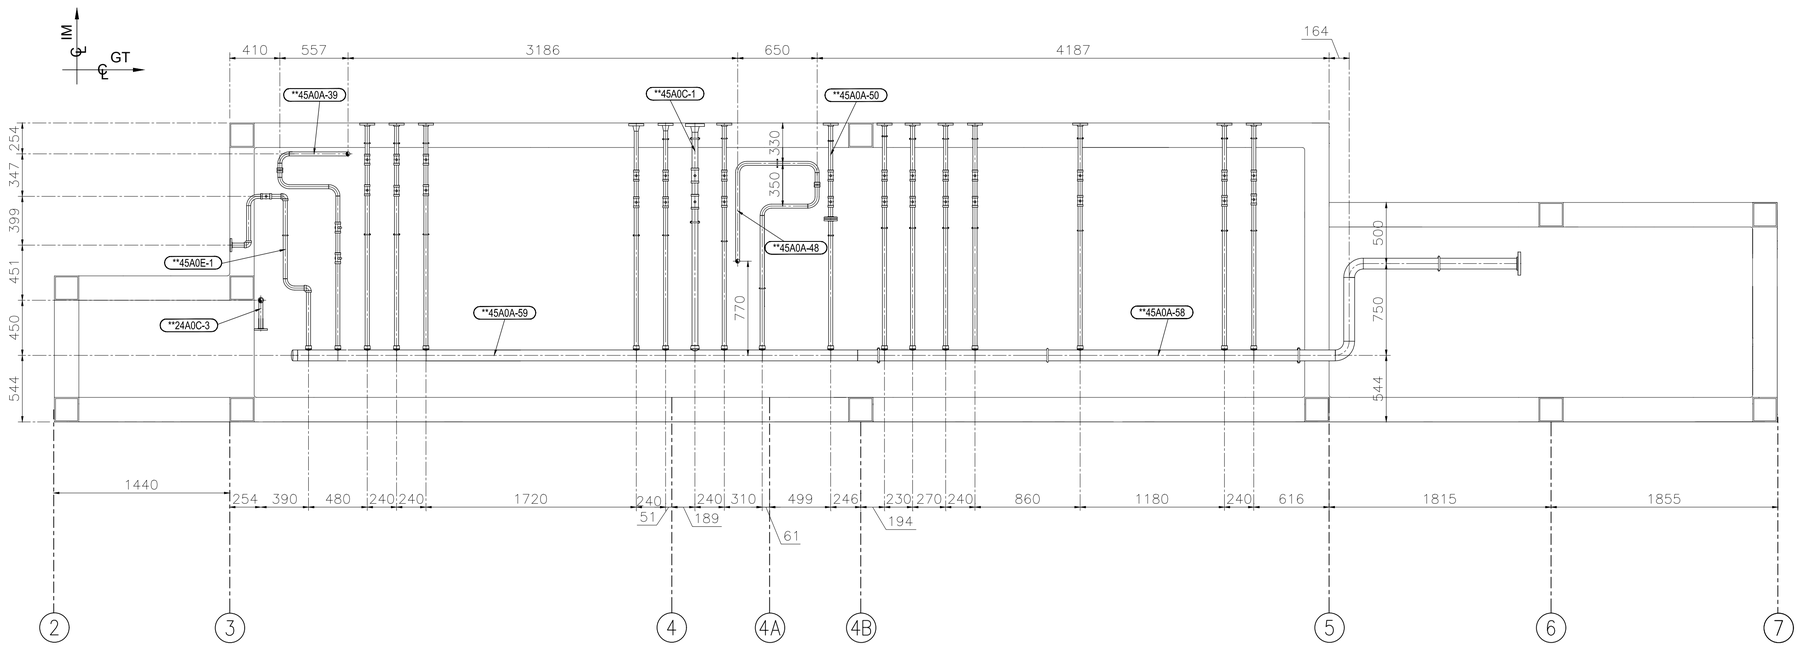

MD-1.1 PLAN VIEW
SECTION 'C-C'

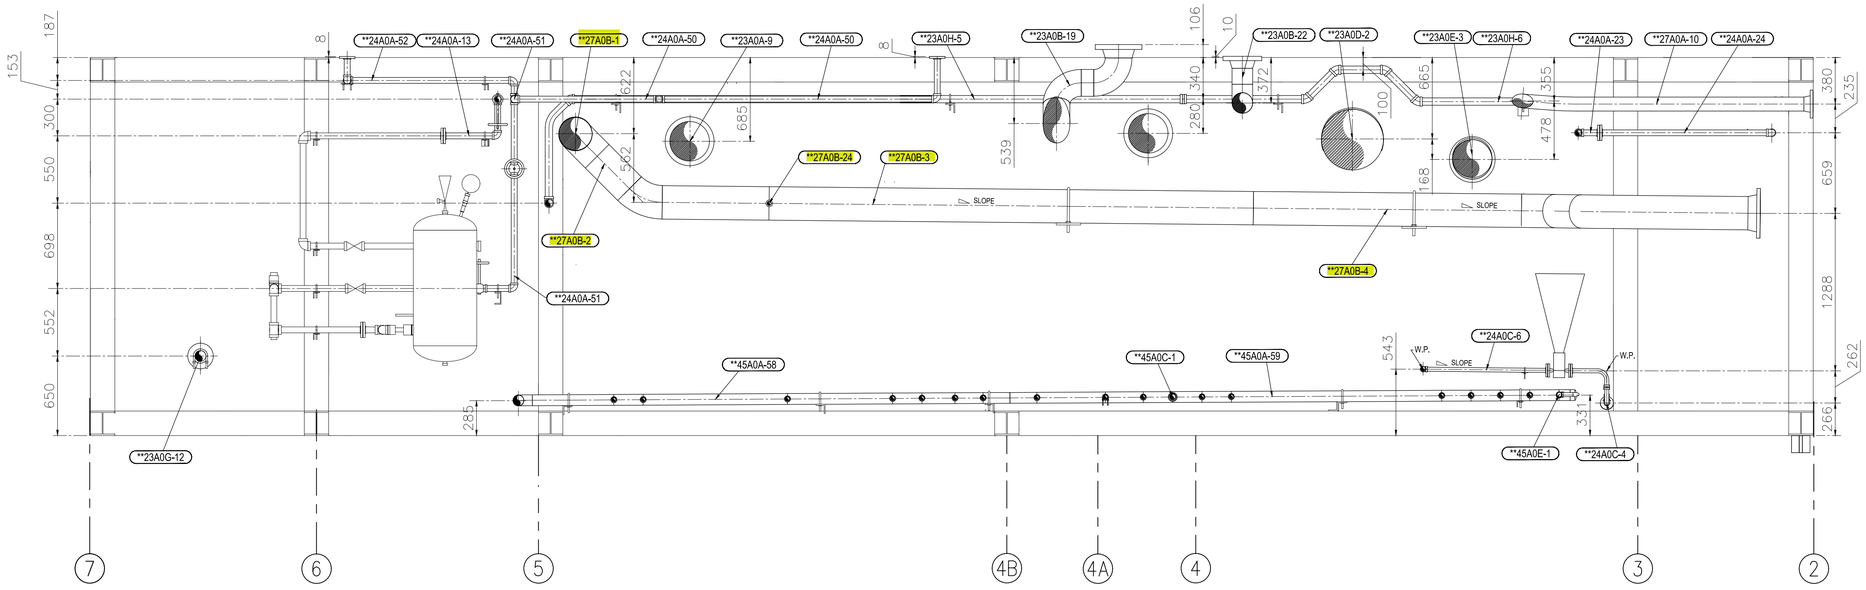

MD-1.1 ELEVATION VIEW
SECTION 'E-E'

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX —— PIPE LINE
   - (××XXX-X) —— SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO
–

ITEM NO
MDL-150

DWG NAME
MD-1.1 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)


REF.DWG.NO.
–

PREPARED BY
cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO
2E00140-PI-094-001-MD-1.1


REV.
0

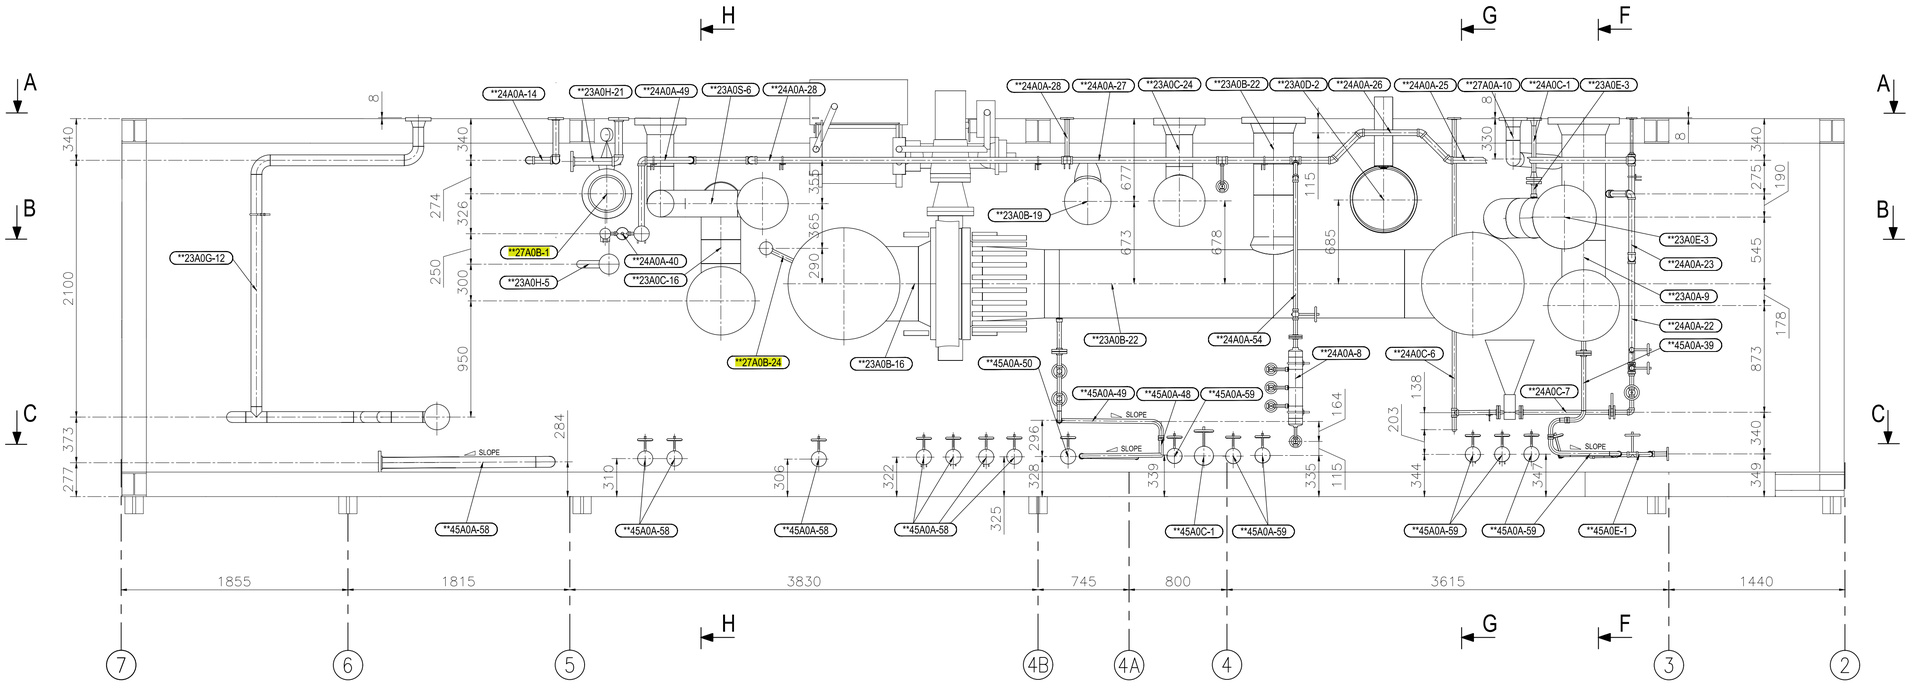


MD-1.1 ELEVATION VIEW
SECTION 'D-D'

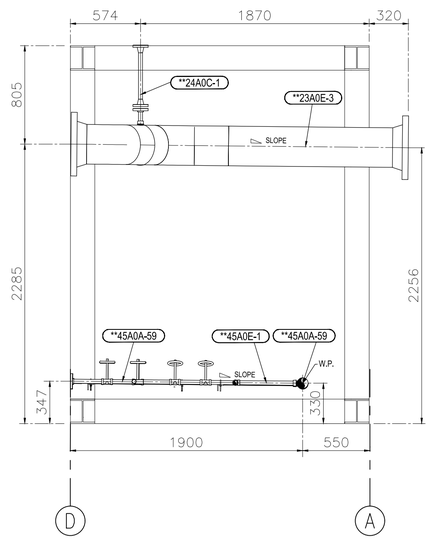

MD-1.1 SECTION 'F-F'
(LOOKING WEST)

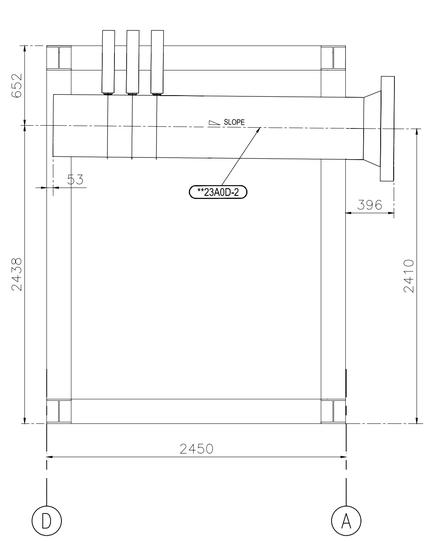

MD-1.1 SECTION 'G-G'
(LOOKING WEST)

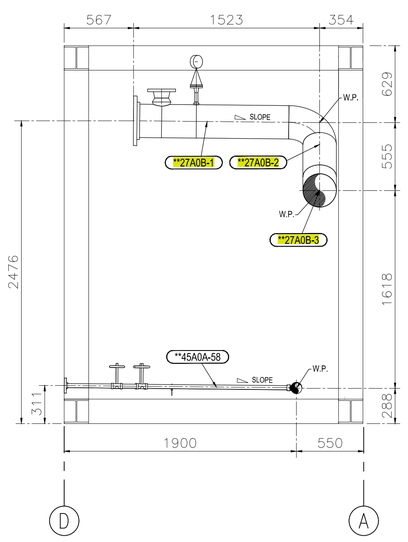

MD-1.1 SECTION 'H-H'
(LOOKING WEST)

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX ——PIPE LINE
   - (××XXX-X) ——SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	15.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO
–

ITEM NO
MDL–150

DWG NAME
MD–1.1 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS (GA FOR SPOOLS)

REF.DWG.NO.
–

PREPARED BY


cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO
2E00140–PI–094–001–MD–1.1

REV.
0

REVISION RECORD



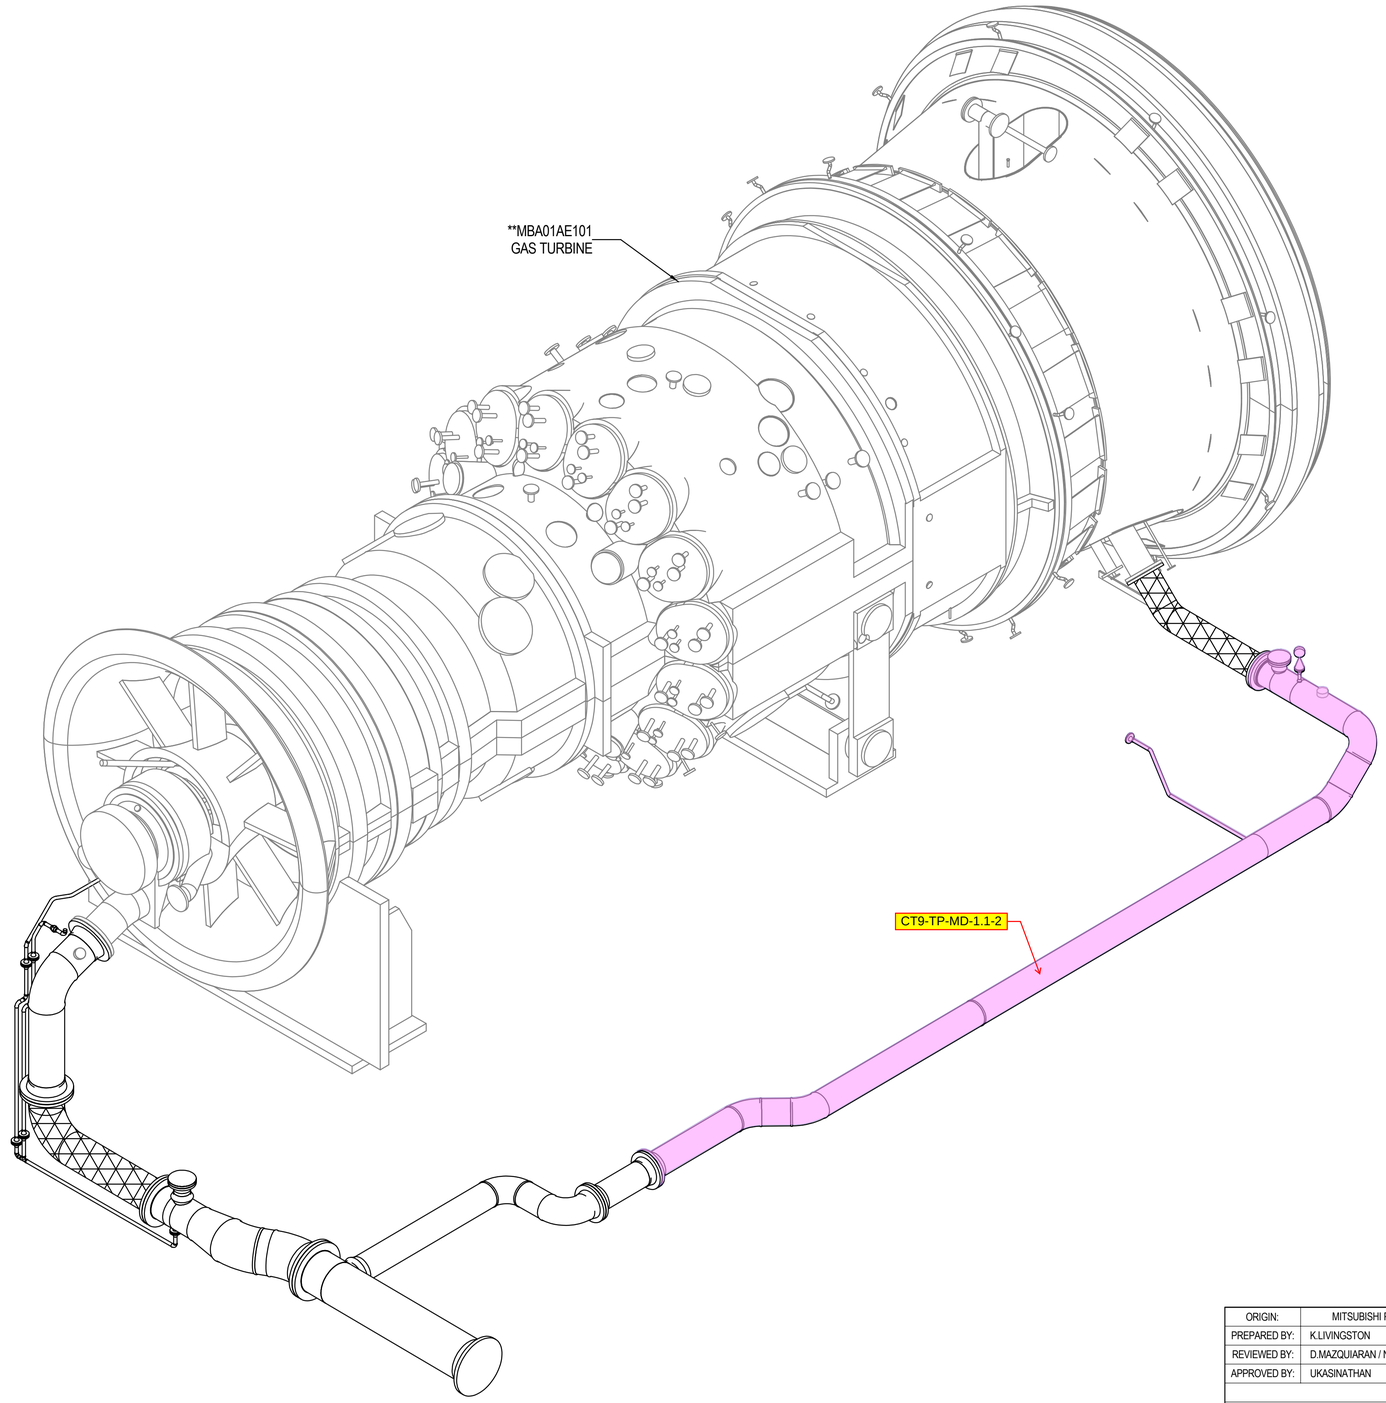

LEGEND:

PIPELINE / SPOOL	INDICATES PIPELINE ON THE TOP AND SPOOL ON THE BOTTOM.
SUPPORT	INDICATES SUPPORT.
TERMINAL POINT	INDICATES TERMINAL POINT.
– – – – – – –	INDICATES TRACING.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	K.LIVINGSTON	10/22/2025	**N05-003570**	**0**	**27A0B**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**LUBE OIL RETURN PIPING**		
APPROVED BY:	UKASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBV-BR-AB		
			P&ID DRAWING NUMBER: N01-PID-MBV-00-02		
			M501JAC GAS TURBINE		
PROJECT CODE:	-		P&ID:	-	
PIPELINE:	-		PAGE NUMBER:	1 OF 5	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd


SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

REVISION RECORD

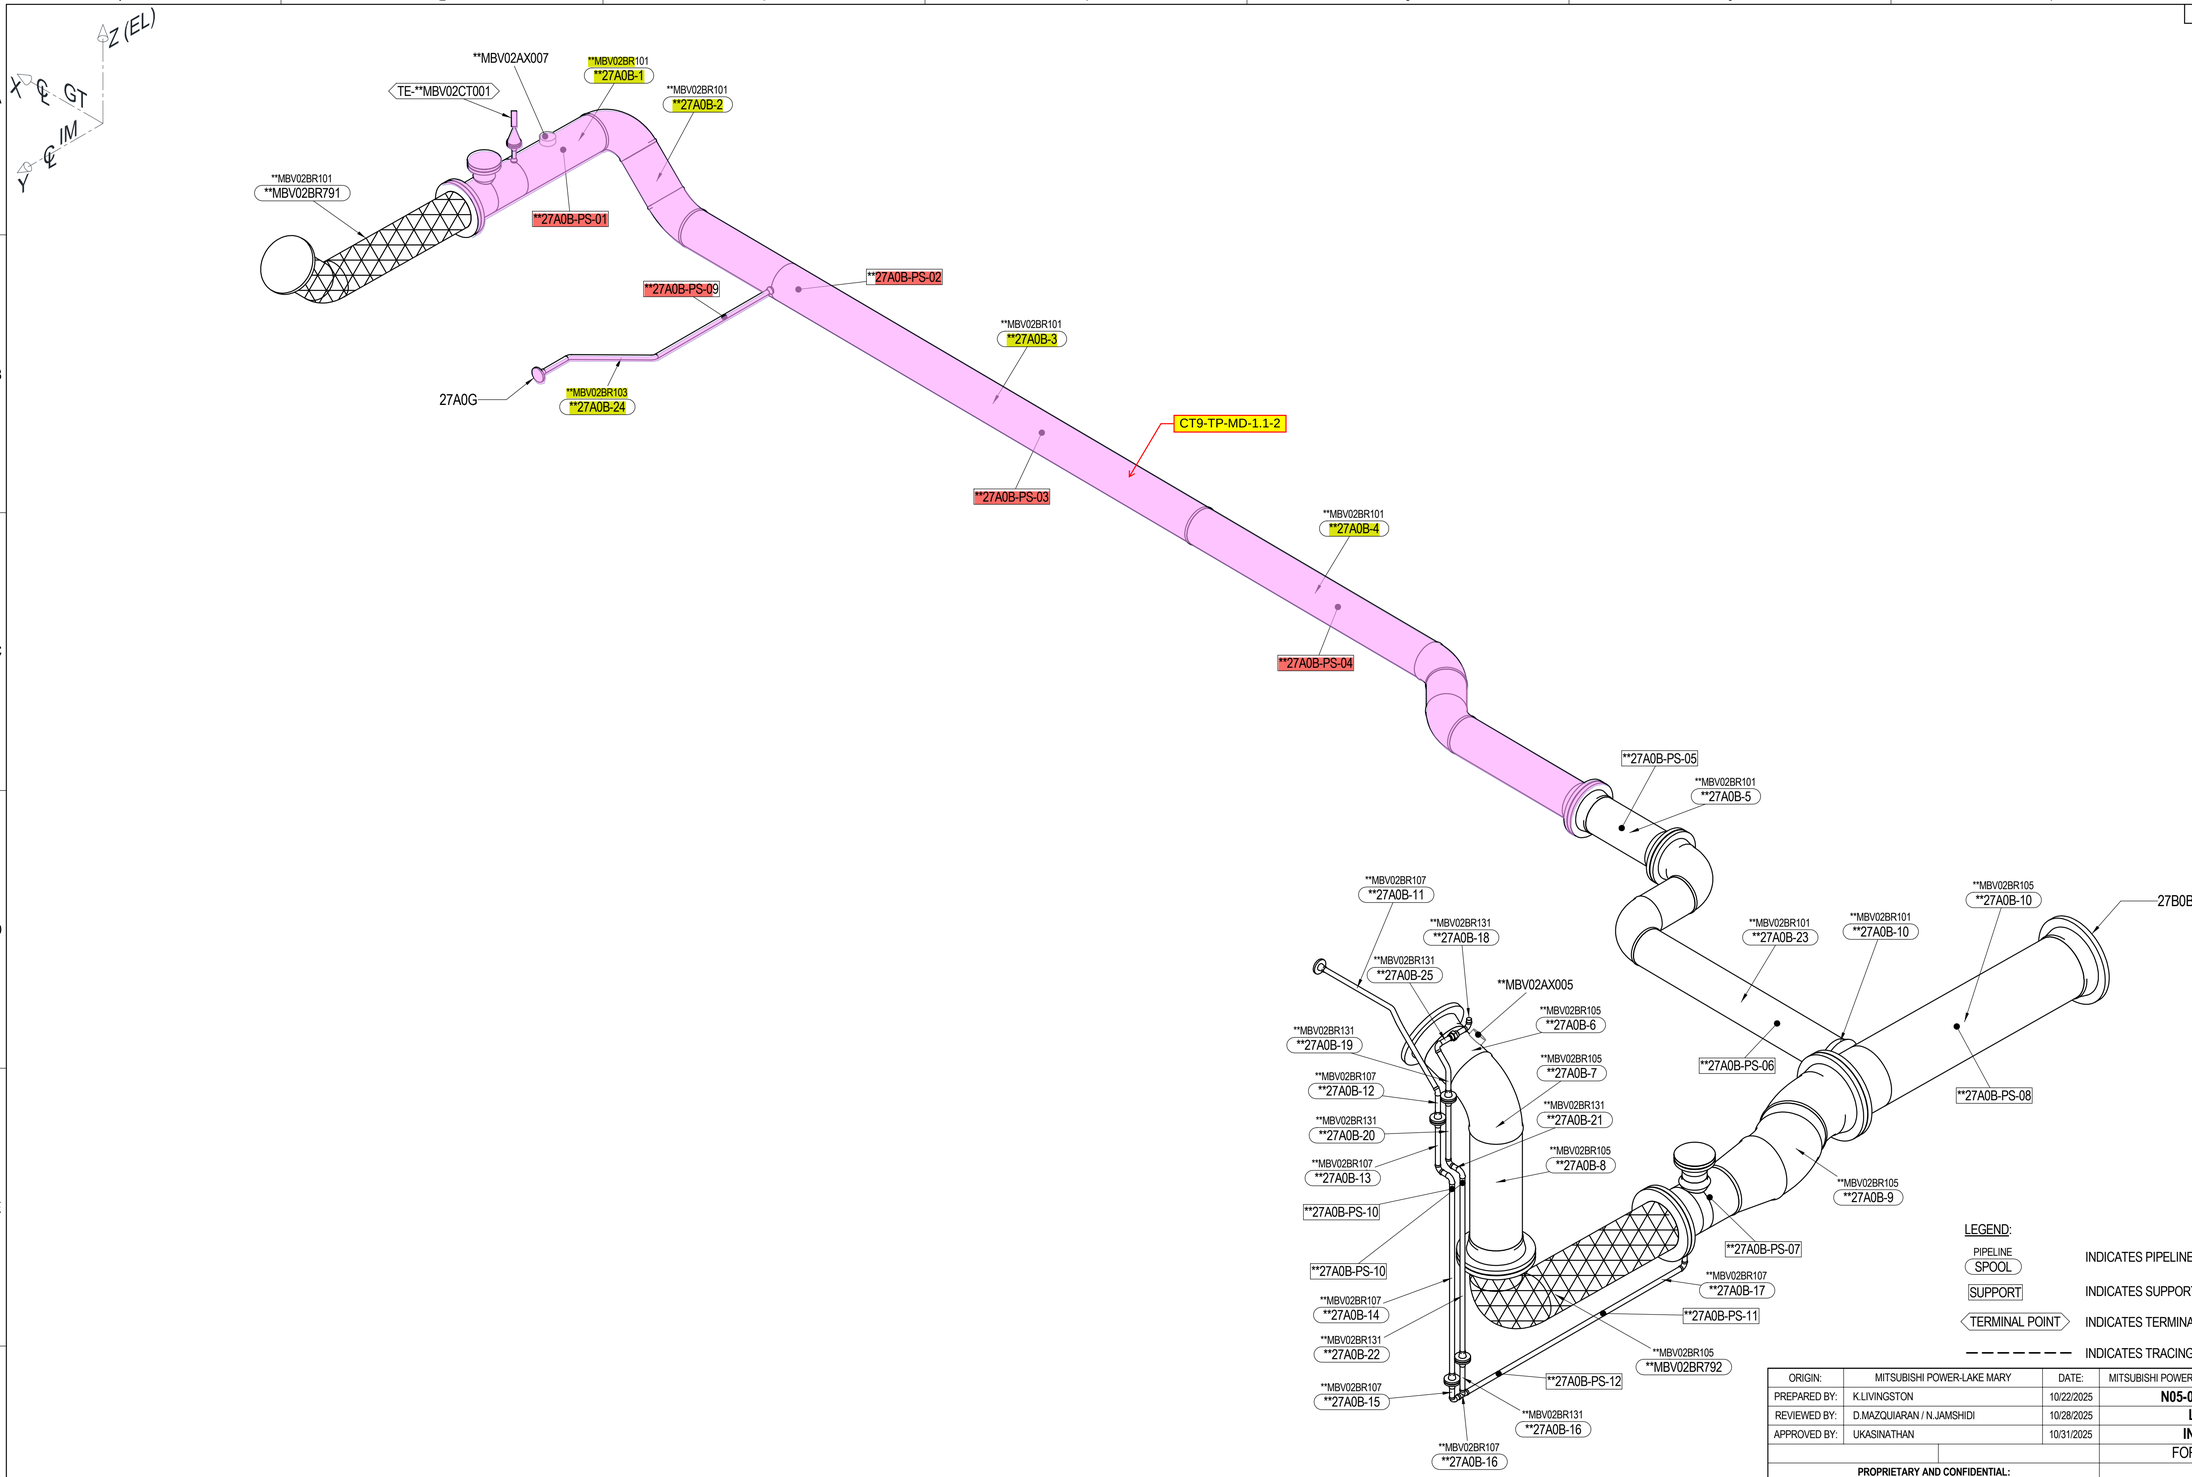

LEGEND:

PIPELINE SPOOL	INDICATES PIPELINE ON THE TOP AND SPOOL ON THE BOTTOM.
SUPPORT	INDICATES SUPPORT.
TERMINAL POINT	INDICATES TERMINAL POINT.
– – – – – – –	INDICATES TRACING.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	K.LIVINGSTON	10/22/2025	**N05-003570**	**0**	**27A0B**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**LUBE OIL RETURN PIPING**		
APPROVED BY:	UKASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBV-BR-AB		
			P&ID DRAWING NUMBER: N01-PID-MBV-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: -	PAGE NUMBER: 3 OF 5	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

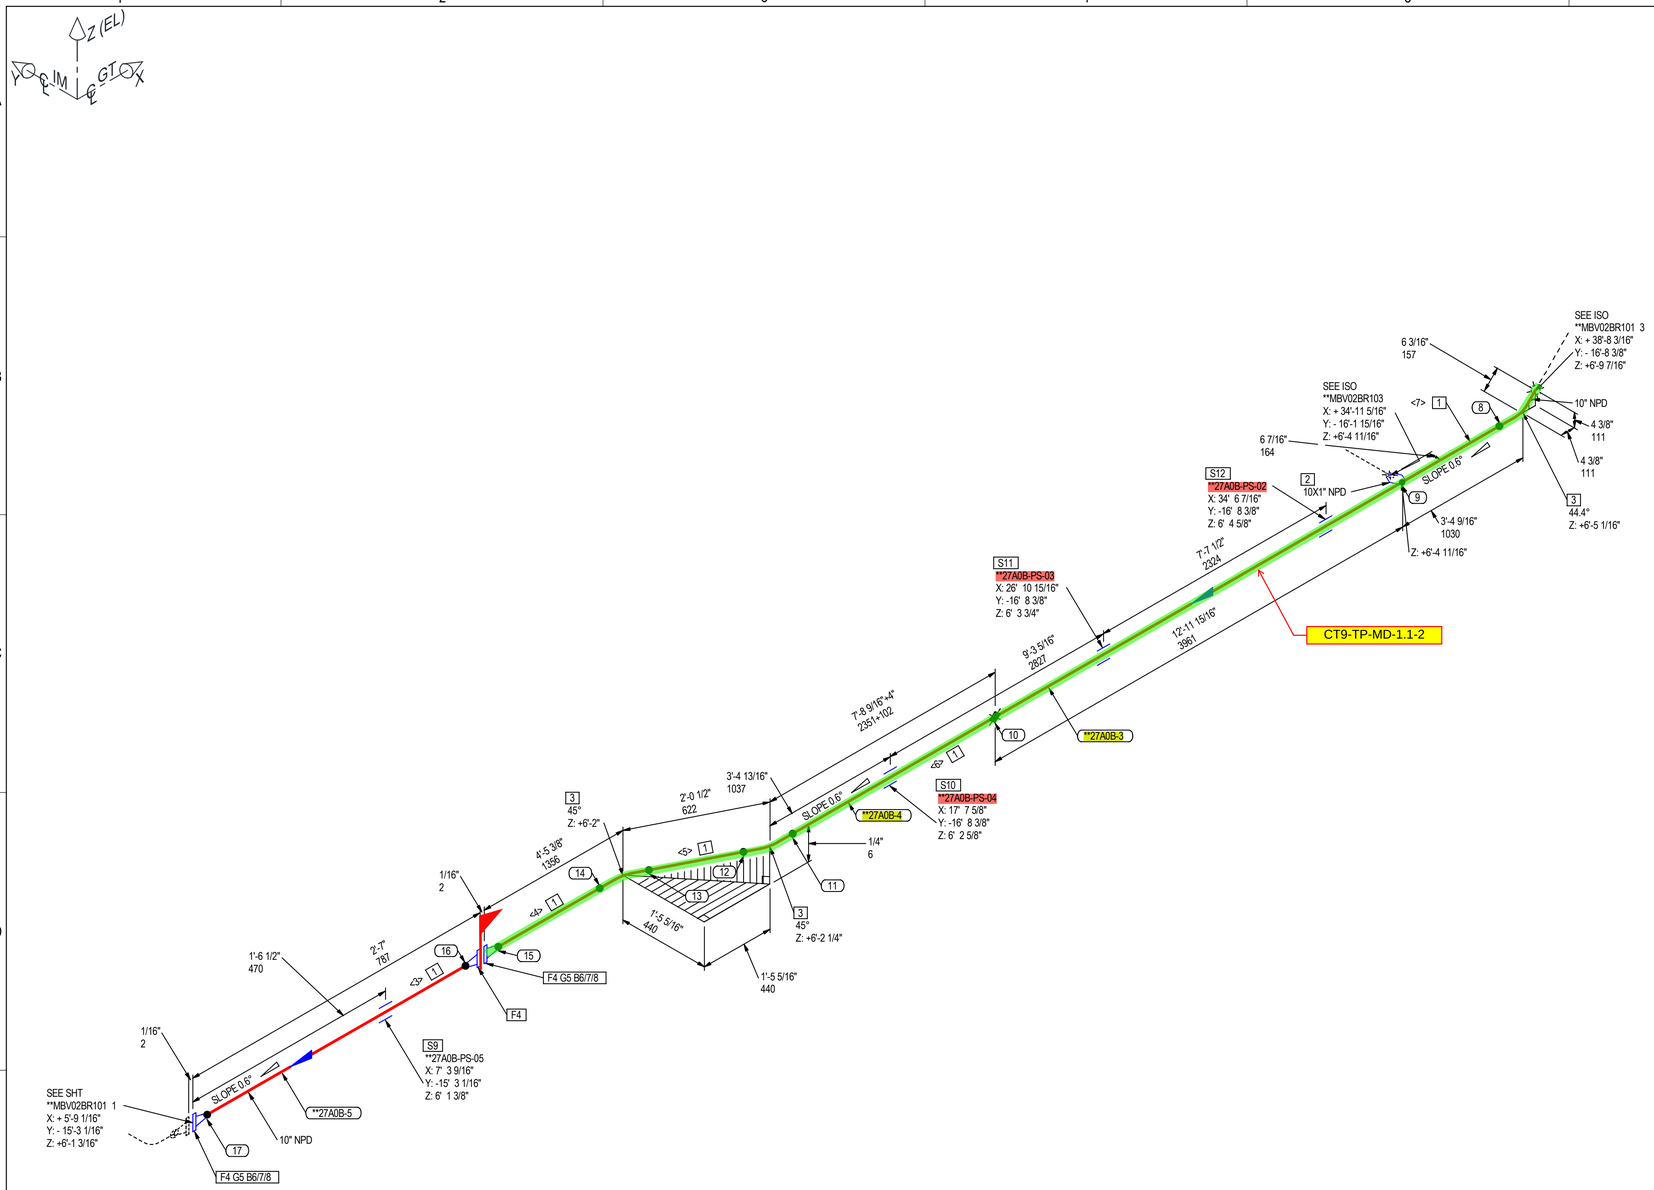

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	10	MPAAZZBOZZABBANI	29.9'
2	WELDOLET, S-STD x S-40S, BE, MSS-SP-97, ASTM A182-F304	10X1	MMEKZZBOZZGKGALO	1
3	45 DEG ELBOW LR, S-40S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	10	MMBXZZBOZZAAEAPI	3
4	FLANGE WN, CL150, RFFE x BE, ASME B16.5, ASTM A182-F304, S-40S bore	10	MFAAAHDCZZAADALO	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
5	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	10	MITAHAAAALBMNUS	2
6	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 9-UNC - 5.5 in. Length	7/8	MBAZZAFZZIAGBLJZ	24
7	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 9-UNC	7/8	MNOZZAFAAZPCJABU	48
8	WASHER, SPECIAL SHAPED LOCK, 10in NPD, 1.2mm THK, MHPSA G1-90942, ASTM A240-304	7/8	MWQZZZZBXIBBAMDP	48
	PIPE SUPPORTS			
9	PIPE SUPPORT	10	**27A0B-PS-05	1
10	PIPE SUPPORT	10	**27A0B-PS-04	1
11	PIPE SUPPORT	10	**27A0B-PS-03	1
12	PIPE SUPPORT	10	**27A0B-PS-02	1
	SPOOLS			
	**27A0B-3, **27A0B-4, **27A0B-5			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<3>	1'11"	10		BEVEL	BEVEL	MPAAZZBOZZABBANI
<4>	3'7 1/8"	10		BEVEL	BEVEL	MPAAZZBOZZABBANI
<5>	1'0"	10		BEVEL	BEVEL	MPAAZZBOZZABBANI
<6>	7'6 5/16"	10		BEVEL	BEVEL	MPAAZZBOZZABBANI
<7>	15'10 5/16"	10		BEVEL	BEVEL	MPAAZZBOZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
17	BW	S	10"	1
16	BW	S	10"	1
15	BW	S	10"	1
14	BW	S	10"	1
13	BW	S	10"	1
12	BW	S	10"	1
11	BW	S	10"	1
10	BW	S	10"	1
9	LET	S	1"	1
8	BW	S	10"	1

PIPING SPEC:	SAA	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	LO, LUBRICATING OIL	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	14.50 psig / 0.10 MPag							
TEST PRESS.:	21.75 psig / 0.15 MPag							
MAX. TEMP:	194 F / 90 C							
INSULATION SPEC:	NOT INSULATED							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER


SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER: / REV. NO.: / SYSTEM CODE:
PREPARED BY:	K.LIVINGSTON	10/22/2025	N05-003570 / 0 / 27A0B
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	LUBE OIL RETURN PIPING
APPROVED BY:	U.KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE
			FOR FABRICATION & ERECTION
			N05-ISO-MBV-BR-AB
			P&ID DRAWING NUMBER: N01-PID-MBV-00-02
			M501JAC GAS TURBINE
			PROJECT CODE: - / P&ID: -
			PIPELINE: **MBV02BR101 / PAGE NUMBER: 2 OF 4

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


MITSUBISHI POWER
ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

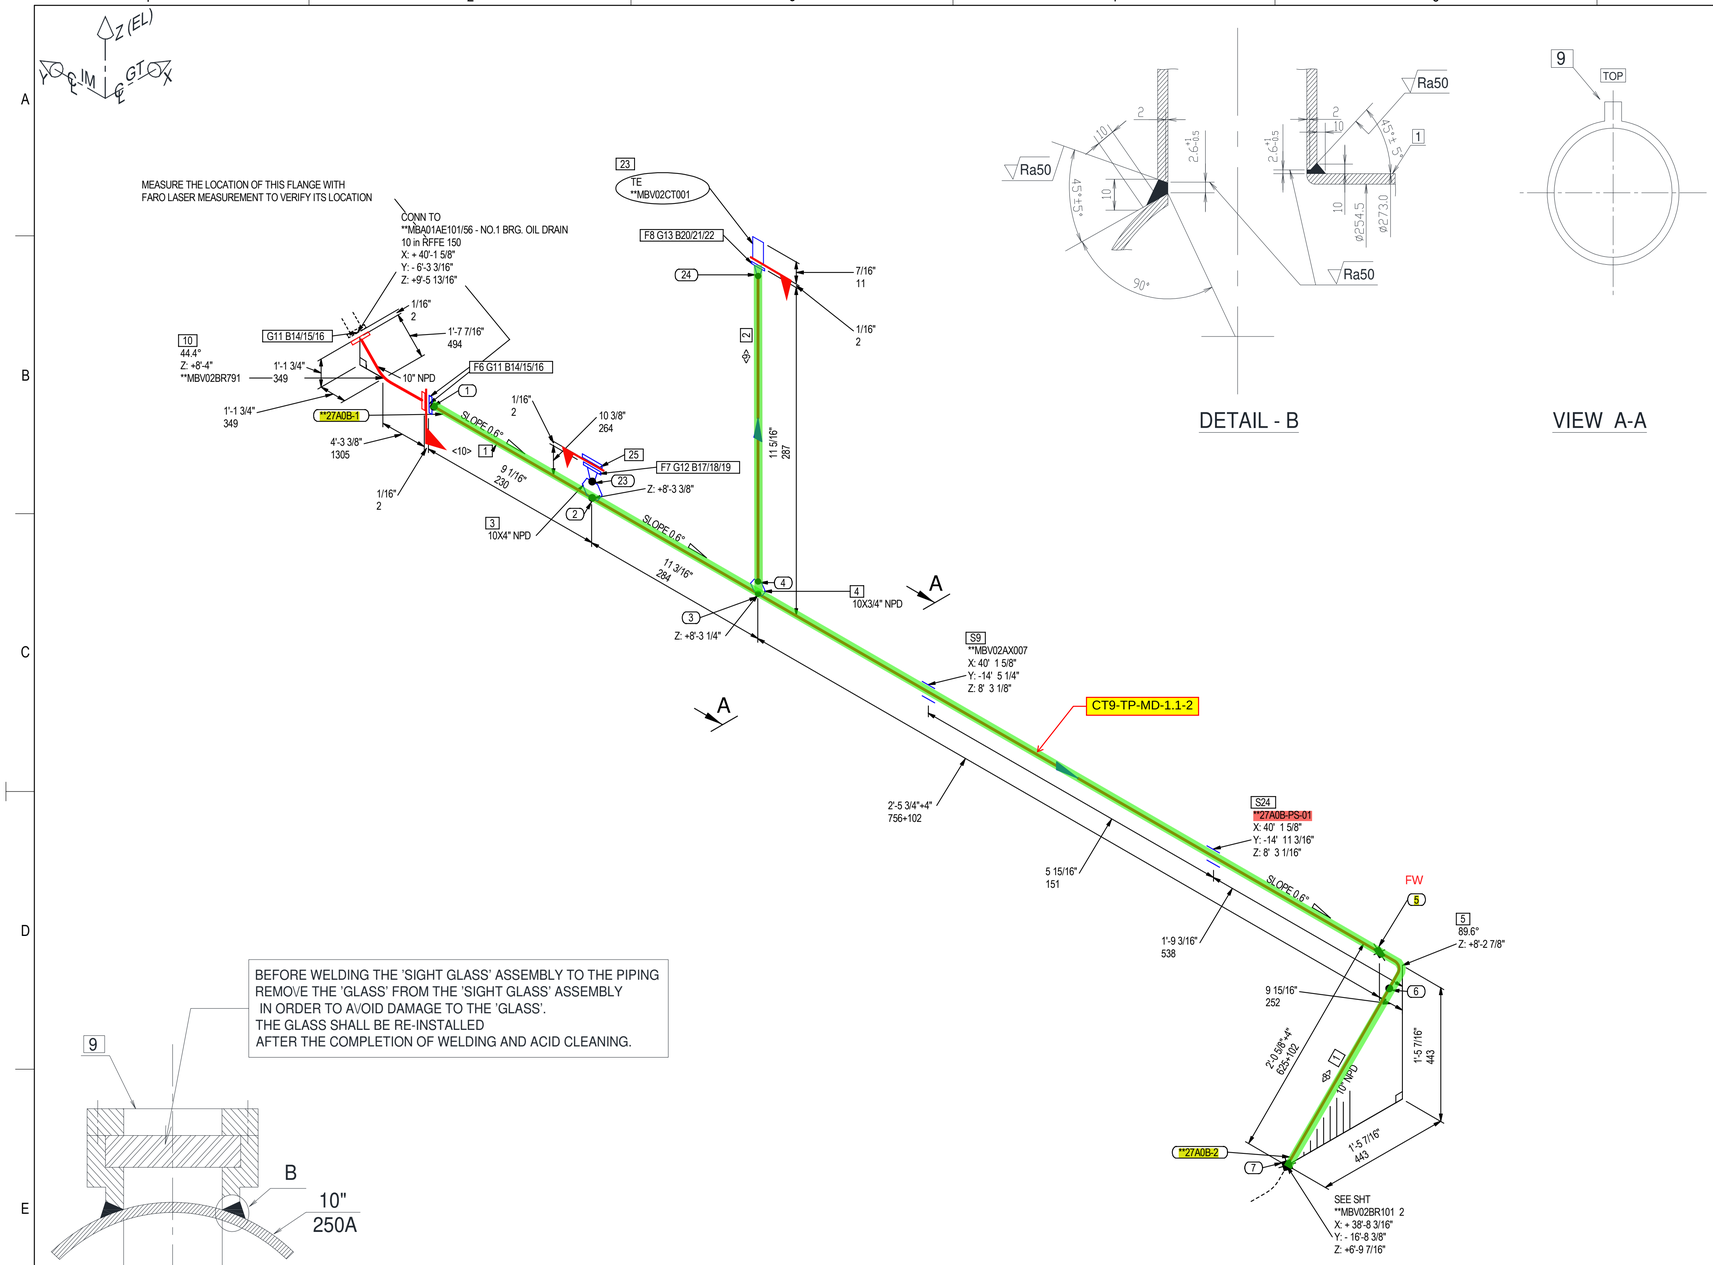

DETAIL - B

VIEW A-A

BEFORE WELDING THE 'SIGHT GLASS' ASSEMBLY TO THE PIPING
REMOVE THE 'GLASS' FROM THE 'SIGHT GLASS' ASSEMBLY
IN ORDER TO AVOID DAMAGE TO THE 'GLASS'.
THE GLASS SHALL BE RE-INSTALLED
AFTER THE COMPLETION OF WELDING AND ACID CLEANING.



DETAIL - SIGHT GLASS

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
7	BW	S	10"	1
6	BW	S	10"	1
5	BW	S	10"	1
3	LET	S	3/4"	1
4	BW	S	3/4"	1
24	BW	S	3/4"	1
2	LET	S	4"	1
23	BW	S	4"	1
1	SOF	S	10"	2

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	10	MPAAZZBOZZABBANI	6.1'
2	PIPE, S-40S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	3/4	MPAAZZBOZZABBANI	0.3'
3	WELDOLET, S-STD x S-40S, BE, MSS-SP-97, ASTM A182-F304	10X4	MMEKZZBOZZGKGALO	1
4	WELDOLET, S-STD x S-40S, BE, MSS-SP-97, ASTM A182-F304	10X3/4	MMEKZZBOZZGKGALO	1
5	90 DEG ELBOW SR, S-40S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	10	MMCNZZBOZZAAEAPI	1
6	FLANGE SLIP-ON, CL150, RFFE, ASME B16.5, ASTM A182-F304	10	MFAIAHABZZAADALO	1
7	FLANGE WN, CL150, RFFE x BE, ASME B16.5, ASTM A182-F304, S-40S bore	4	MFAAAHDCZZAADALO	1
8	FLANGE WN, CL150, RFFE x BE, ASME B16.5, ASTM A182-F304, S-40S bore	3/4	MFAAAHDCZZAADALO	1
9	SIGHT GLASS, G1-73514-09	10	**MBV02AX007	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
10	FLEXIBLE HOSE, CL150, ASTM A240-304, G2-66728-01	10	**MBV02BR791	1
11	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	10	MITAHAAAALBMNUS	2
12	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	4	MITAHAAAALBMNUS	1
13	GASKET, FLAT RING, CL150, 0.0625" THK, ASME B16.21, COMPRESSED NON ASBESTOS FIBER	3/4	MITAHAAAALBMNUS	1
14	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 9-UNC - 5.5 in. Length	7/8	MBAZZAFZZIAGBLJZ	24
15	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 9-UNC	7/8	MNOZZAFAAZPCJABU	48
16	WASHER, SPECIAL SHAPED LOCK, 10in NPD, 1.2mm THK, MHPSA G1-90942, ASTM A240-304	7/8	MWQZZZZBXIBBAMDP	48
17	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 11-UNC - 4.5 in. Length	5/8	MBAZZADZZIAGBLJZ	8
18	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 11-UNC	5/8	MNOZZADAAZPCJADU	16
19	WASHER, SPECIAL SHAPED LOCK, 4in NPD, 1.2mm THK, MHPSA G1-90942, ASTM A240-304	5/8	MWQZZZZBXIBBAMDP	16
20	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 3 in. Length	1/2	MBAZZACZZIAGBLJZ	4
21	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
22	WASHER, SPECIAL SHAPED LOCK, 0.75in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8

SEE SHT 4

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.: / SYSTEM CODE:
PREPARED BY:	K.LIVINGSTON	10/22/2025	N05-003570	0 / 27A0B
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	LUBE OIL RETURN PIPING	
APPROVED BY:	U.KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE	
			FOR FABRICATION & ERECTION	
			N05-ISO-MBV-BR-AB	
			P&ID DRAWING NUMBER: N01-PID-MBV-00-02	
			M501JAC GAS TURBINE	
			PROJECT CODE: -	P&ID: -
			PIPELINE:	PAGE NUMBER:
			**MBV02BR101	3 OF 4

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PIPING SPEC:	SAA	PAINTING SPEC: PER PROJECT SPECIFICATION	
FLUID CODE:	LO, LUBRICATING OIL	INTERIOR SURFACE TREATMENT SPEC: LU-00129	
MAX. PRESS.:	14.50 psig / 0.10 MPag		
TEST PRESS.:	21.75 psig / 0.15 MPag		
MAX. TEMP:	194 F / 90 C		
INSULATION SPEC:	NOT INSULATED		

REVISION RECORD					
REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST



SEE SHT 3

INSTRUMENTS

23	GT NO:1 BEARING DRAIN OIL TEMPERATURE, TE**MBV02CT001	3/4		1

PIPE SUPPORTS

24	PIPE SUPPORT	10	**27A0B-PS-01	1

SHOP LOOSE SHIPPED MATERIALS - ERECTION AND FABRICATION

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
25	BLIND FLANGE, CL150, RFFE, ASME B16.5, ASTM A182-F304	4	MMAAAHABZZAADALO	1

SPOOLS

**27A0B-1, **27A0B-2

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<8>	1'6 3/4"	10		BEVEL	BEVEL	MPAAZZBOZZABBANI
<9>	3"	3/4		BEVEL	BEVEL	MPAAZZBOZZABBANI
<10>	4'5 1/2"	10		BEVEL	SQ.CUT	MPAAZZBOZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	K.LIVINGSTON	10/22/2025	**N05-003570**	**0**	**27A0B**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	**LUBE OIL RETURN PIPING**		
APPROVED BY:	U.KASINATHAN	10/31/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBV-BR-AB		
			P&ID DRAWING NUMBER: N01-PID-MBV-00-02		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBV02BR101	4 OF 4	

PIPING SPEC:	SAA
FLUID CODE:	LO, LUBRICATING OIL
MAX. PRESS.:	14.50 psig / 0.10 MPag
TEST PRESS.:	21.75 psig / 0.15 MPag
MAX. TEMP:	194 F / 90 C
INSULATION SPEC:	NOT INSULATED

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REV. #	DESCRIPTION	BY	CHK	APP	DATE
	REVISION RECORD				

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER


SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

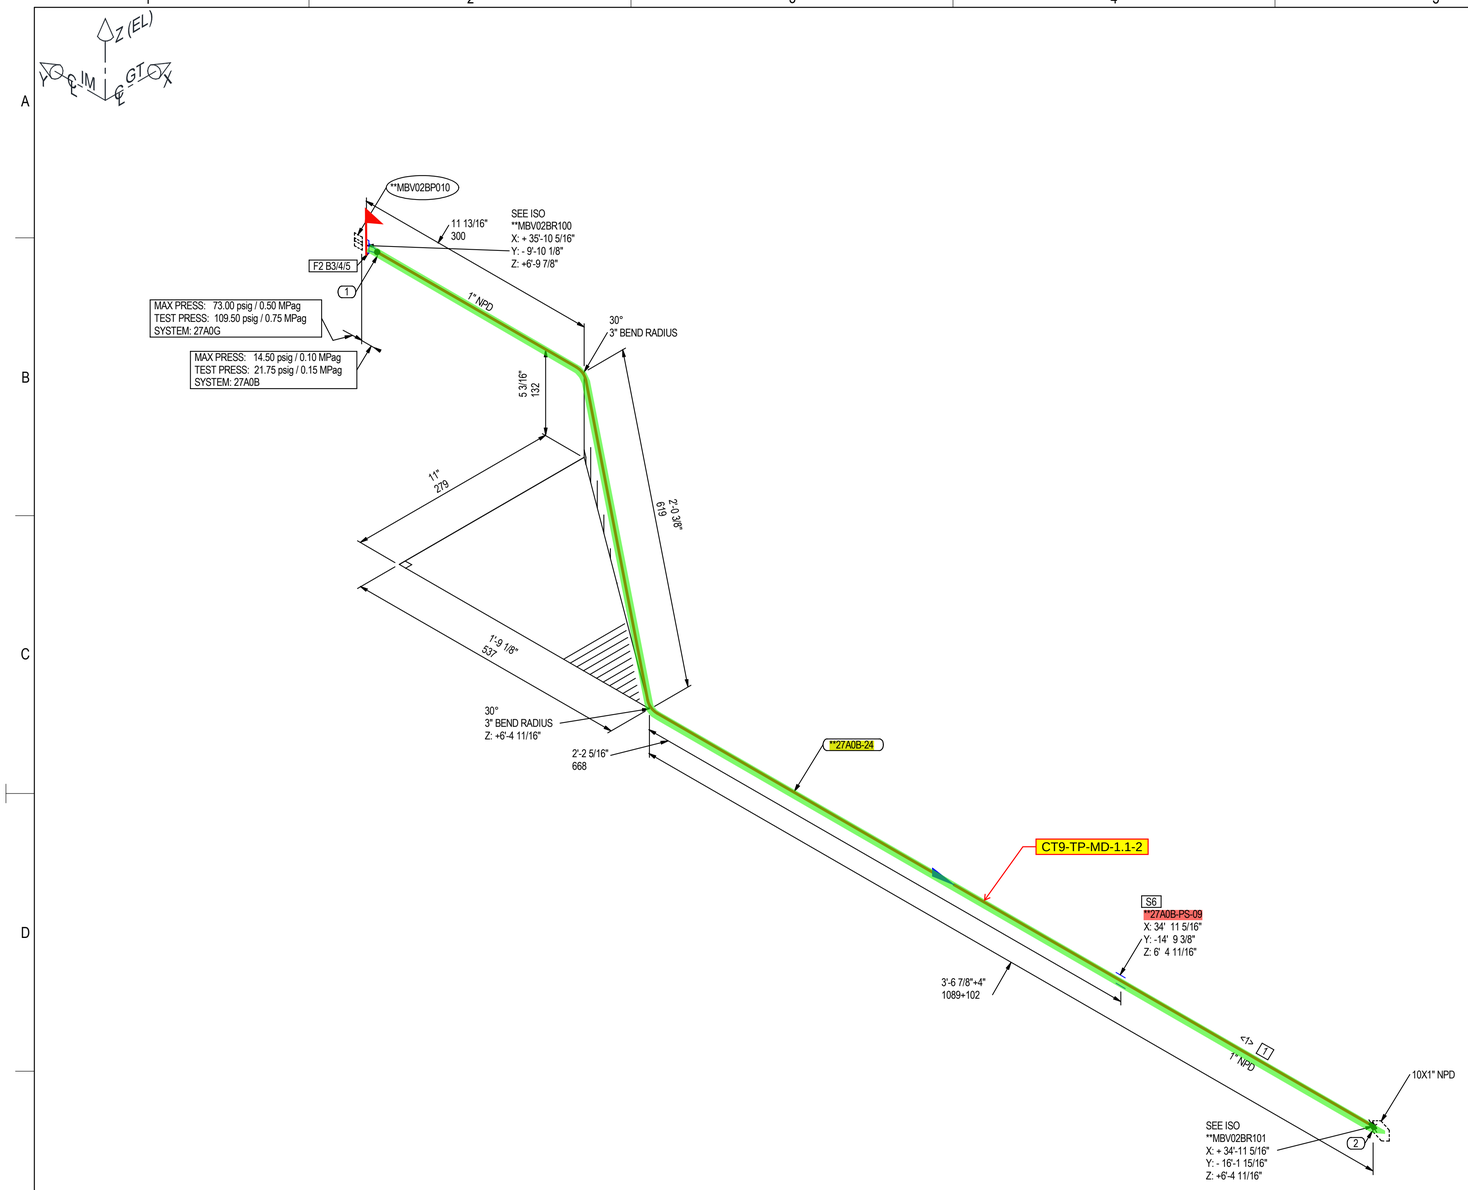

ADDITIONAL NOTES:
WELDING AT PIPES MARKED WITH ✱ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY.
THE MARK ✱ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	BW	S	1"	1
2	BW	S	1"	1

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1	MPAAZZBOZZABBANI	6.8'
2	FLANGE WN, CL150, RFFE x BE, ASME B16.5, ASTM A182-F304, S-40S bore	1	MFAAAHDCZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
3	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B8 CL1, 13-UNC - 4 in. Length	1/2	MBAZZACZZIAGBLJZ	4
4	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-8, 13-UNC	1/2	MNOZZACAAZPCJAFU	8
5	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 0.8mm THK, MHPSA G1-90942, ASTM A240-304	1/2	MWQZZZZBUIBBAMDP	8
	PIPE SUPPORTS			
6	PIPE SUPPORT	1	**27A0B-PS-09	1
	SPOOLS			
	**27A0B-24			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	6'8 13/16"	1	PLD BEND(2)	BEVEL	BEVEL	MPAAZZBOZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

PIPING SPEC:	SAA	PAINTING SPEC: PER PROJECT SPECIFICATION
FLUID CODE:	LO, LUBRICATING OIL	INTERIOR SURFACE TREATMENT SPEC: LU-00129
MAX. PRESS.:	14.50 psig / 0.10 MPag	
TEST PRESS.:	21.75 psig / 0.15 MPag	
MAX. TEMP:	194 F / 90 C	
INSULATION SPEC:	NOT INSULATED	

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	K.LIVINGSTON	10/22/2025	N05-003570	0	27A0B
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	10/28/2025	LUBE OIL RETURN PIPING		
APPROVED BY:	U.KASINATHAN	10/31/2025	INTERNAL TO GT PACKAGE		


FOR FABRICATION & ERECTION
N05-ISO-MBV-BR-AB
P&ID DRAWING NUMBER: N01-PID-MBV-00-02
M501JAC GAS TURBINE

PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**MBV02BR103		1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

NO	SUPPORT TAG	SPOOL NO	REMARK
1	**23A0A-PS-05	**23A0A-9	
2	**23A0B-PS-03	**23A0B-16	
3	**23A0B-PS-04	**23A0B-22	
4	**23A0B-PS-05	**23A0B-22	
5	**23A0B-PS-12	**23A0B-15	SEE NOTE 5
6	**23A0C-PS-10	**23A0C-16	
7	**23A0C-PS-11	**23A0C-16	
8	**23A0C-PS-17	**23A0C-24	
9	**23A0D-PS-01	**23A0D-2	
10	**23A0E-PS-01	**23A0E-3	
11	**23A0G-PS-01	**23A0G-12	
12	**23A0G-PS-02	**23A0G-12	
13	**23A0G-PS-03	**23A0G-12	
14	**23A0H-PS-07	**23A0H-6	
15	**23A0H-PS-08	**23A0H-6	
16	**23A0H-PS-09	**23A0H-5	
17	**23A0H-PS-10	**23A0H-5	
18	**23A0H-PS-25	**23A0H-21	
19	**23A0S-PS-07	**23A0S-24	SEE NOTE 5
20	**23A0U-PS-07	**23A0U-24	
21	**24A0A-PS-01	**24A0A-22	
22	**24A0A-PS-02	**24A0A-22	
23	**24A0A-PS-03	**24A0A-25	
24	**24A0A-PS-04	**24A0A-25	
25	**24A0A-PS-05	**24A0A-27	
26	**24A0A-PS-06	**24A0A-28	
27	**24A0A-PS-100	**24A0A-13	
28	**24A0A-PS-108	**24A0A-24	
29	**24A0A-PS-109	**24A0A-24	
30	**24A0A-PS-122	AIR CHAMBER	
31	**24A0A-PS-123	AIR CHAMBER	
32	**24A0A-PS-124	AIR CHAMBER	
33	**24A0A-PS-125	AIR CHAMBER	
34	**24A0A-PS-13	**24A0A-40	
35	**24A0A-PS-14	**24A0A-8	
36	**24A0A-PS-21	**24A0A-49	
37	**24A0A-PS-22	**24A0A-50	
38	**24A0A-PS-23	**24A0A-52	
39	**24A0A-PS-24	**24A0A-52	
40	**24A0A-PS-30	**24A0A-28	
41	**24A0A-PS-31	**24A0A-28	
42	**24A0A-PS-73	**24A0A-50	
43	**24A0A-PS-77	**24A0A-51	
44	**24A0A-PS-99	**24A0A-14	
45	**24A0C-PS-01	**24A0C-4	
46	**24A0C-PS-02	**24A0C-3	
47	**24A0C-PS-03	**24A0C-6	
48	**24A0C-PS-04	**24A0C-6	
49	**24A0C-PS-05	**24A0C-6	
50	**27A0A-PS-01	**27A0A-6	
51	**27A0A-PS-07	**27A0A-10	
52	**27A0A-PS-08	**27A0A-10	
53	**27A0A-PS-09	**27A0A-10	
54	**27A0B-PS-01	**27A0B-1	
55	**27A0B-PS-02	**27A0B-3	
56	**27A0B-PS-03	**27A0B-3	
57	**27A0B-PS-04	**27A0B-4	
58	**27A0B-PS-05	**27A0B-5	
59	**27A0B-PS-09	**27A0B-24	
60	**27A0F-PS-01	**27A0F-6	SEE NOTE 5
61	**45A0A-PS-01	**45A0A-59	
62	**45A0A-PS-02	**45A0A-47	SEE NOTE 5
63	**45A0A-PS-03	**45A0A-59	
64	**45A0A-PS-04	**45A0A-59	
65	**45A0A-PS-09	**45A0A-59	
66	**45A0A-PS-13	**45A0A-48	
67	**45A0A-PS-18	**45A0A-59	
68	**45A0A-PS-19	**45A0A-59	
69	**45A0A-PS-21	**45A0A-59	
70	**45A0A-PS-25	**45A0A-59	
71	**45A0A-PS-28	**45A0A-59	
72	**45A0A-PS-29	**45A0A-50	
73	**45A0A-PS-30	**45A0A-58	
74	**45A0A-PS-31	**45A0A-58	
75	**45A0A-PS-36	**45A0A-58	
76	**45A0A-PS-40	**45A0A-58	
77	**45A0A-PS-46	**45A0A-58	
78	**45A0A-PS-51	**45A0A-59	
79	**45A0A-PS-53	**45A0A-58	
80	**45A0A-PS-54	**45A0A-58	
81	**45A0A-PS-57	**45A0A-58	
82	**45A0A-PS-58	**45A0A-58	
83	**45A0A-PS-63	**45A0A-58	
84	**45A0A-PS-66	**45A0A-59	
85	**45A0A-PS-67	**45A0A-58	
86	**45A0A-PS-68	**45A0A-58	
87	**45A0A-PS-69	**45A0A-58	
88	**45A0A-PS-70	**45A0A-58	
89	**45A0A-PS-71	**45A0A-57	
90	**45A0C-PS-01	**45A0A-59 **45A0C-1	
91	**45A0C-PS-02	**45A0C-1	
92	**45A0E-PS-01	**45A0E-1	
93	**64A0A-PS-01	FFS	
94	**64A0A-PS-02	FFS	

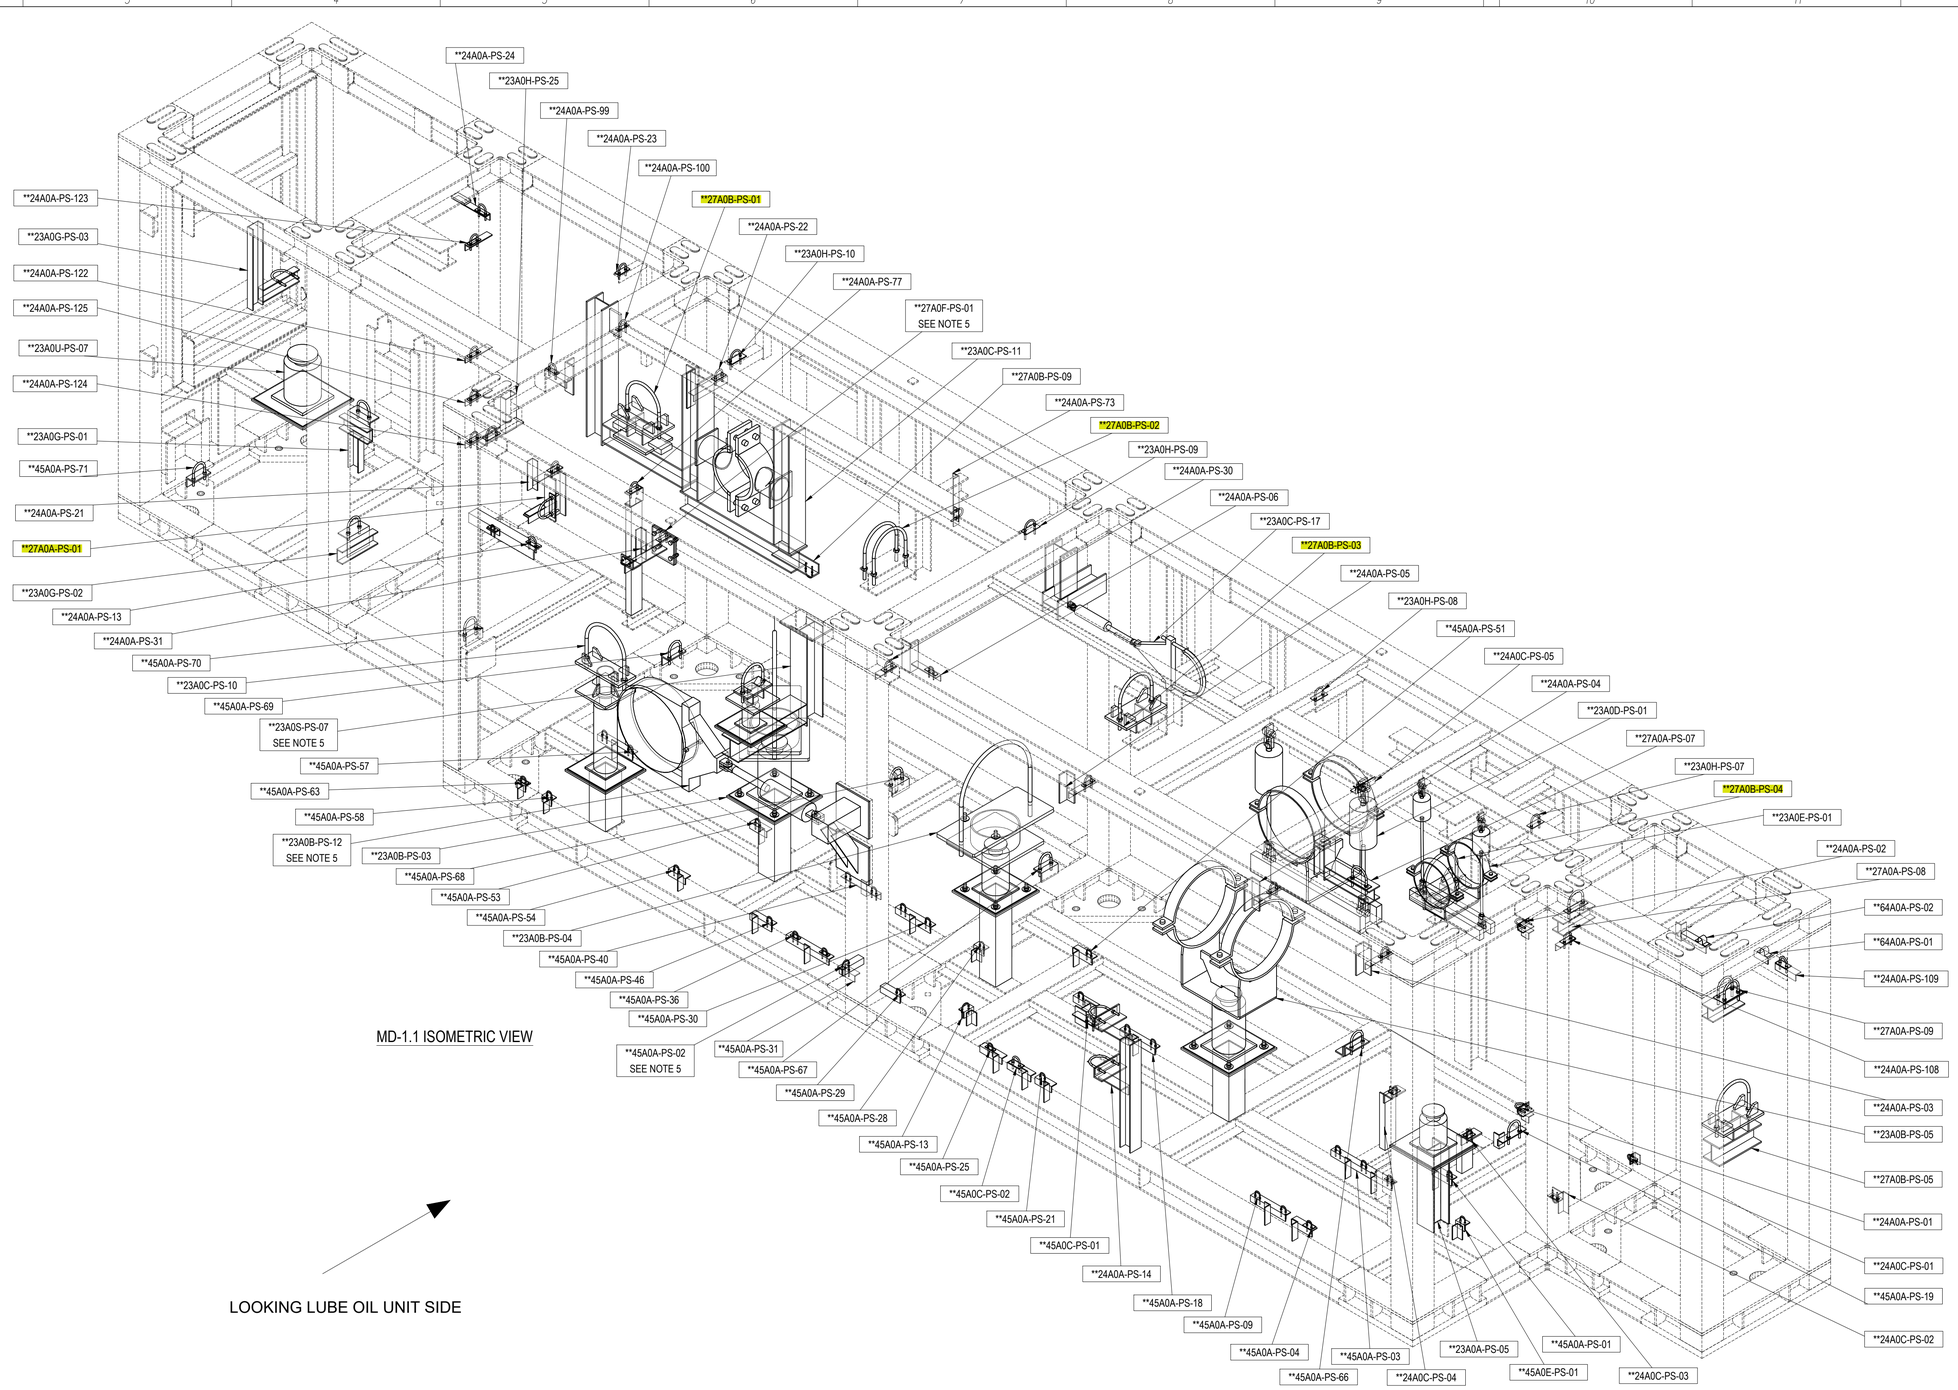

MD-1.1 ISOMETRIC VIEW

LOOKING LUBE OIL UNIT SIDE

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-150

DWG NAME: MD-1.1 SUPPORTS GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.: -


PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/6	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

NO	SUPPORT TAG	SPOOL NO	REMARK
1	**23A0A-PS-05	**23A0A-9	
2	**23A0B-PS-03	**23A0B-16	
3	**23A0B-PS-04	**23A0B-22	
4	**23A0B-PS-05	**23A0B-22	
5	**23A0B-PS-12	**23A0B-15	SEE NOTE 5
6	**23A0C-PS-10	**23A0C-16	
7	**23A0C-PS-11	**23A0C-16	
8	**23A0C-PS-17	**23A0C-24	
9	**23A0D-PS-01	**23A0D-2	
10	**23A0E-PS-01	**23A0E-3	
11	**23A0G-PS-01	**23A0G-12	
12	**23A0G-PS-02	**23A0G-12	
13	**23A0G-PS-03	**23A0G-12	
14	**23A0H-PS-07	**23A0H-6	
15	**23A0H-PS-08	**23A0H-6	
16	**23A0H-PS-09	**23A0H-5	
17	**23A0H-PS-10	**23A0H-5	
18	**23A0H-PS-25	**23A0H-21	
19	**23A0S-PS-07	**23A0S-24	SEE NOTE 5
20	**23A0U-PS-07	**23A0U-24	
21	**24A0A-PS-01	**24A0A-22	
22	**24A0A-PS-02	**24A0A-22	
23	**24A0A-PS-03	**24A0A-25	
24	**24A0A-PS-04	**24A0A-25	
25	**24A0A-PS-05	**24A0A-27	
26	**24A0A-PS-06	**24A0A-28	
27	**24A0A-PS-100	**24A0A-13	
28	**24A0A-PS-108	**24A0A-24	
29	**24A0A-PS-109	**24A0A-24	
30	**24A0A-PS-122	AIR CHAMBER	
31	**24A0A-PS-123	AIR CHAMBER	
32	**24A0A-PS-124	AIR CHAMBER	
33	**24A0A-PS-125	AIR CHAMBER	
34	**24A0A-PS-13	**24A0A-40	
35	**24A0A-PS-14	**24A0A-8	
36	**24A0A-PS-21	**24A0A-49	
37	**24A0A-PS-22	**24A0A-50	
38	**24A0A-PS-23	**24A0A-52	
39	**24A0A-PS-24	**24A0A-52	
40	**24A0A-PS-30	**24A0A-28	
41	**24A0A-PS-31	**24A0A-28	
42	**24A0A-PS-73	**24A0A-50	
43	**24A0A-PS-77	**24A0A-51	
44	**24A0A-PS-99	**24A0A-14	
45	**24A0C-PS-01	**24A0C-4	
46	**24A0C-PS-02	**24A0C-3	
47	**24A0C-PS-03	**24A0C-6	
48	**24A0C-PS-04	**24A0C-6	
49	**24A0C-PS-05	**24A0C-6	
50	**27A0A-PS-01	**27A0A-6	
51	**27A0A-PS-07	**27A0A-10	
52	**27A0A-PS-08	**27A0A-10	
53	**27A0A-PS-09	**27A0A-10	
54	**27A0B-PS-01	**27A0B-1	
55	**27A0B-PS-02	**27A0B-3	
56	**27A0B-PS-03	**27A0B-3	
57	**27A0B-PS-04	**27A0B-4	
58	**27A0B-PS-05	**27A0B-5	
59	**27A0B-PS-09	**27A0B-24	
60	**27A0F-PS-01	**27A0F-6	SEE NOTE 5
61	**45A0A-PS-01	**45A0A-59	
62	**45A0A-PS-02	**45A0A-47	SEE NOTE 5
63	**45A0A-PS-03	**45A0A-59	
64	**45A0A-PS-04	**45A0A-59	
65	**45A0A-PS-09	**45A0A-59	
66	**45A0A-PS-13	**45A0A-48	
67	**45A0A-PS-18	**45A0A-59	
68	**45A0A-PS-19	**45A0A-59	
69	**45A0A-PS-21	**45A0A-59	
70	**45A0A-PS-25	**45A0A-59	
71	**45A0A-PS-28	**45A0A-59	
72	**45A0A-PS-29	**45A0A-50	
73	**45A0A-PS-30	**45A0A-58	
74	**45A0A-PS-31	**45A0A-58	
75	**45A0A-PS-36	**45A0A-58	
76	**45A0A-PS-40	**45A0A-58	
77	**45A0A-PS-46	**45A0A-58	
78	**45A0A-PS-51	**45A0A-59	
79	**45A0A-PS-53	**45A0A-58	
80	**45A0A-PS-54	**45A0A-58	
81	**45A0A-PS-57	**45A0A-58	
82	**45A0A-PS-58	**45A0A-58	
83	**45A0A-PS-63	**45A0A-58	
84	**45A0A-PS-66	**45A0A-59	
85	**45A0A-PS-67	**45A0A-58	
86	**45A0A-PS-68	**45A0A-58	
87	**45A0A-PS-69	**45A0A-58	
88	**45A0A-PS-70	**45A0A-58	
89	**45A0A-PS-71	**45A0A-57	
90	**45A0C-PS-01	**45A0A-59 **45A0C-1	
91	**45A0C-PS-02	**45A0C-1	
92	**45A0E-PS-01	**45A0E-1	
93	**64A0A-PS-01	FFS	
94	**64A0A-PS-02	FFS	

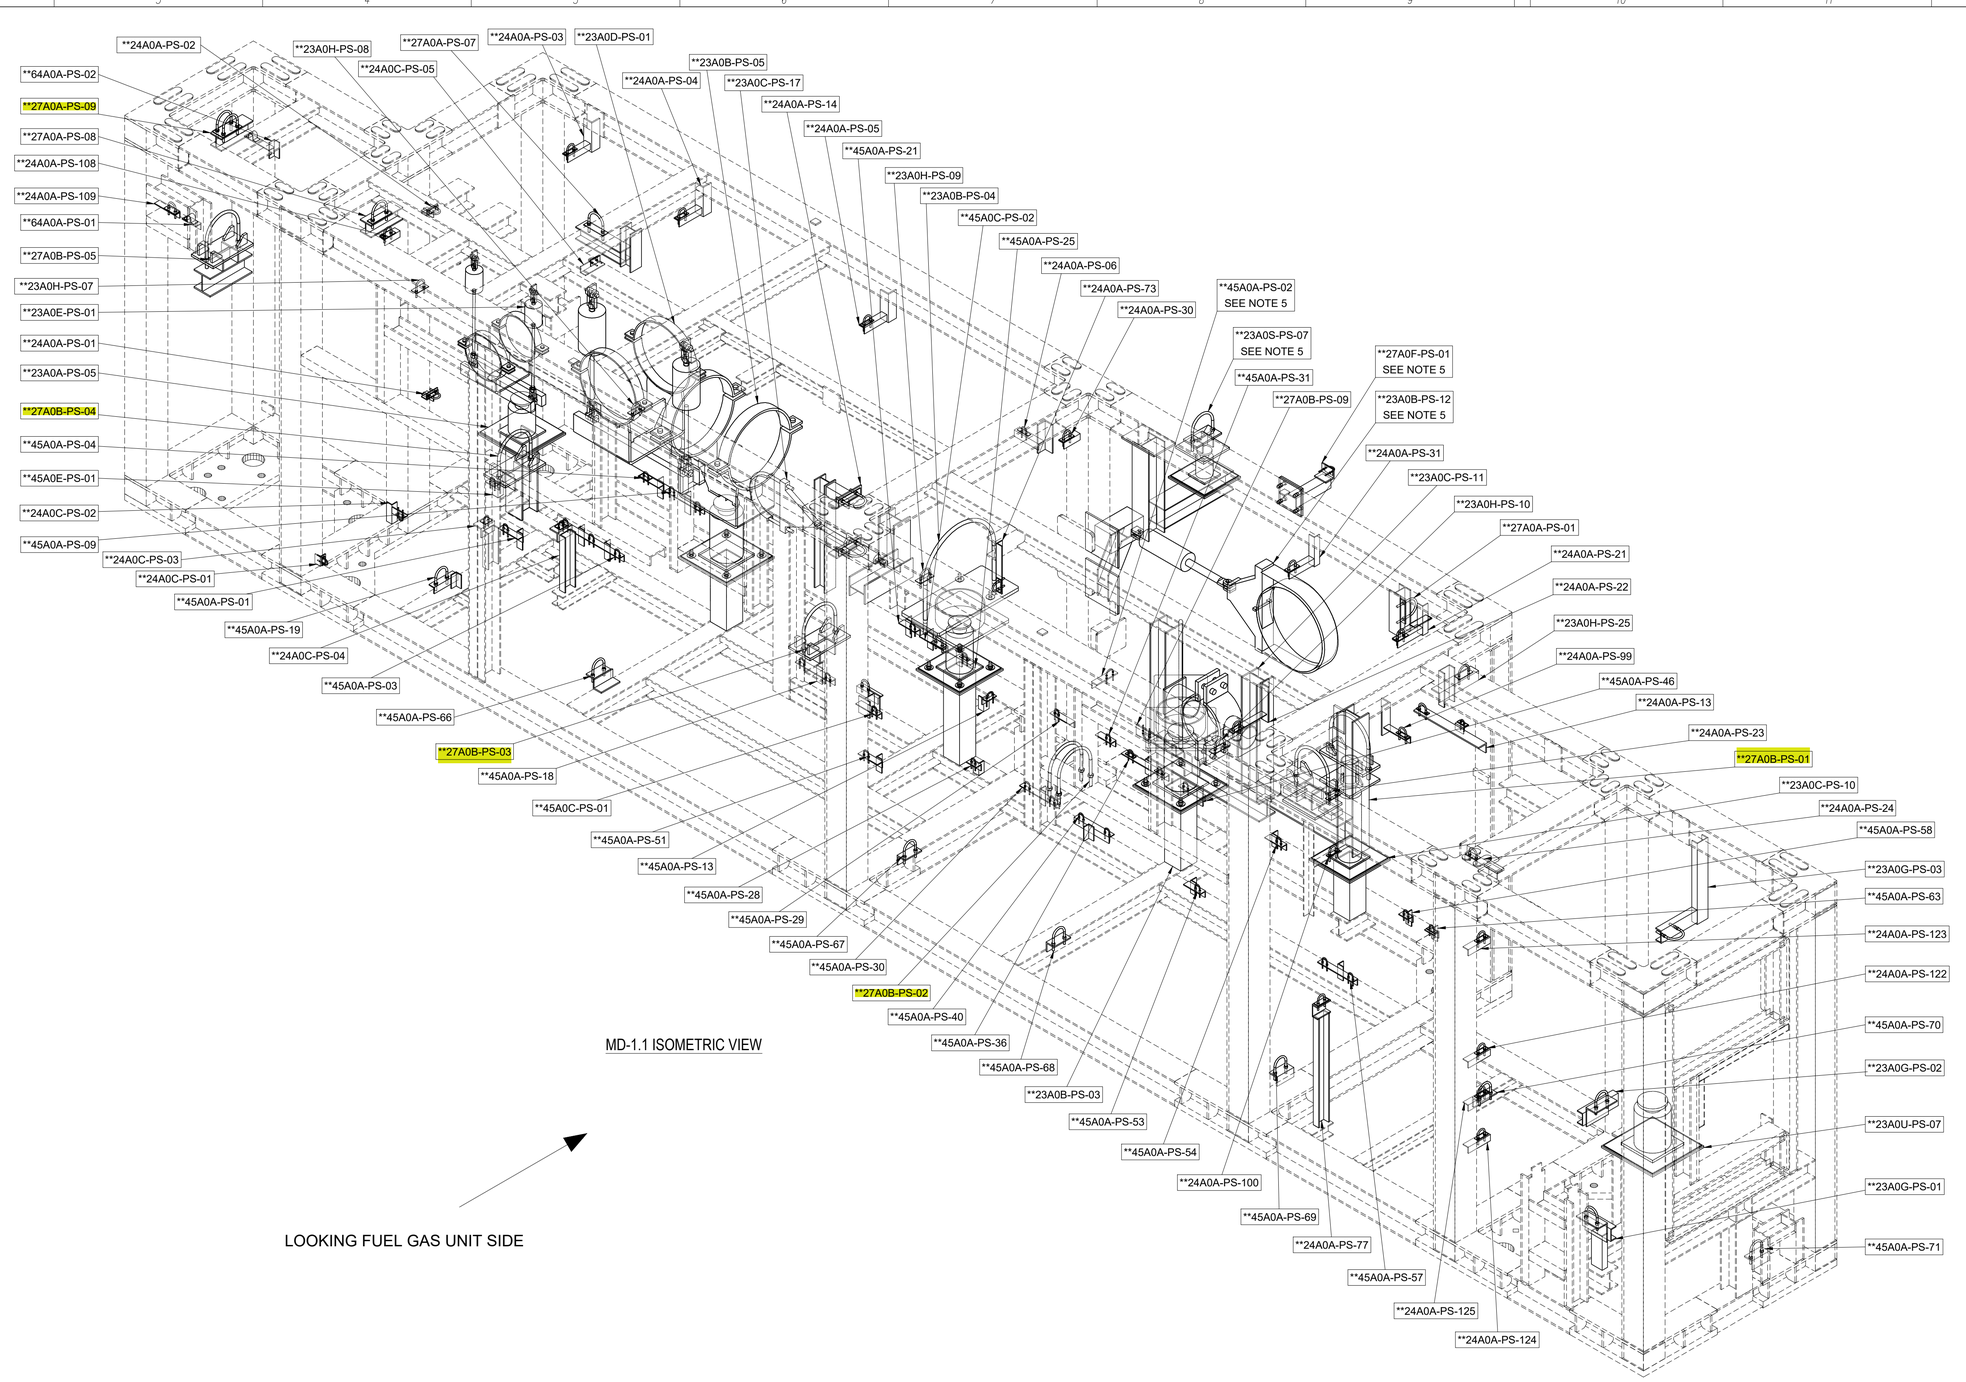

MD-1.1 ISOMETRIC VIEW

LOOKING FUEL GAS UNIT SIDE

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-150

DWG NAME: MD-1.1 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	2/6	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

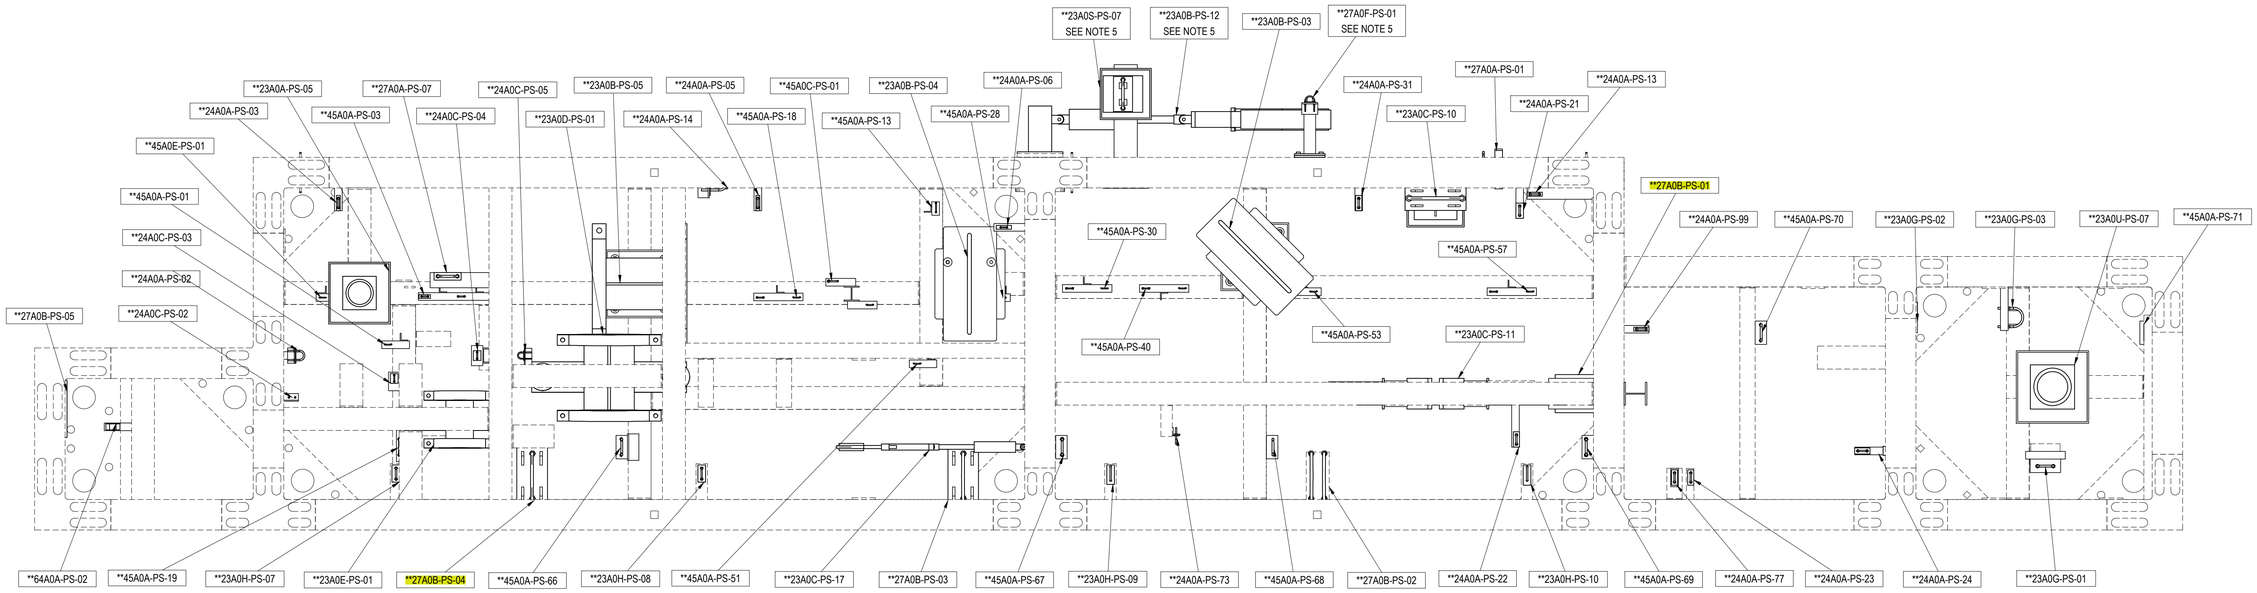

MD-1.1 PLAN VIEW

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-150

DWG NAME: MD-1.1 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	3/6	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

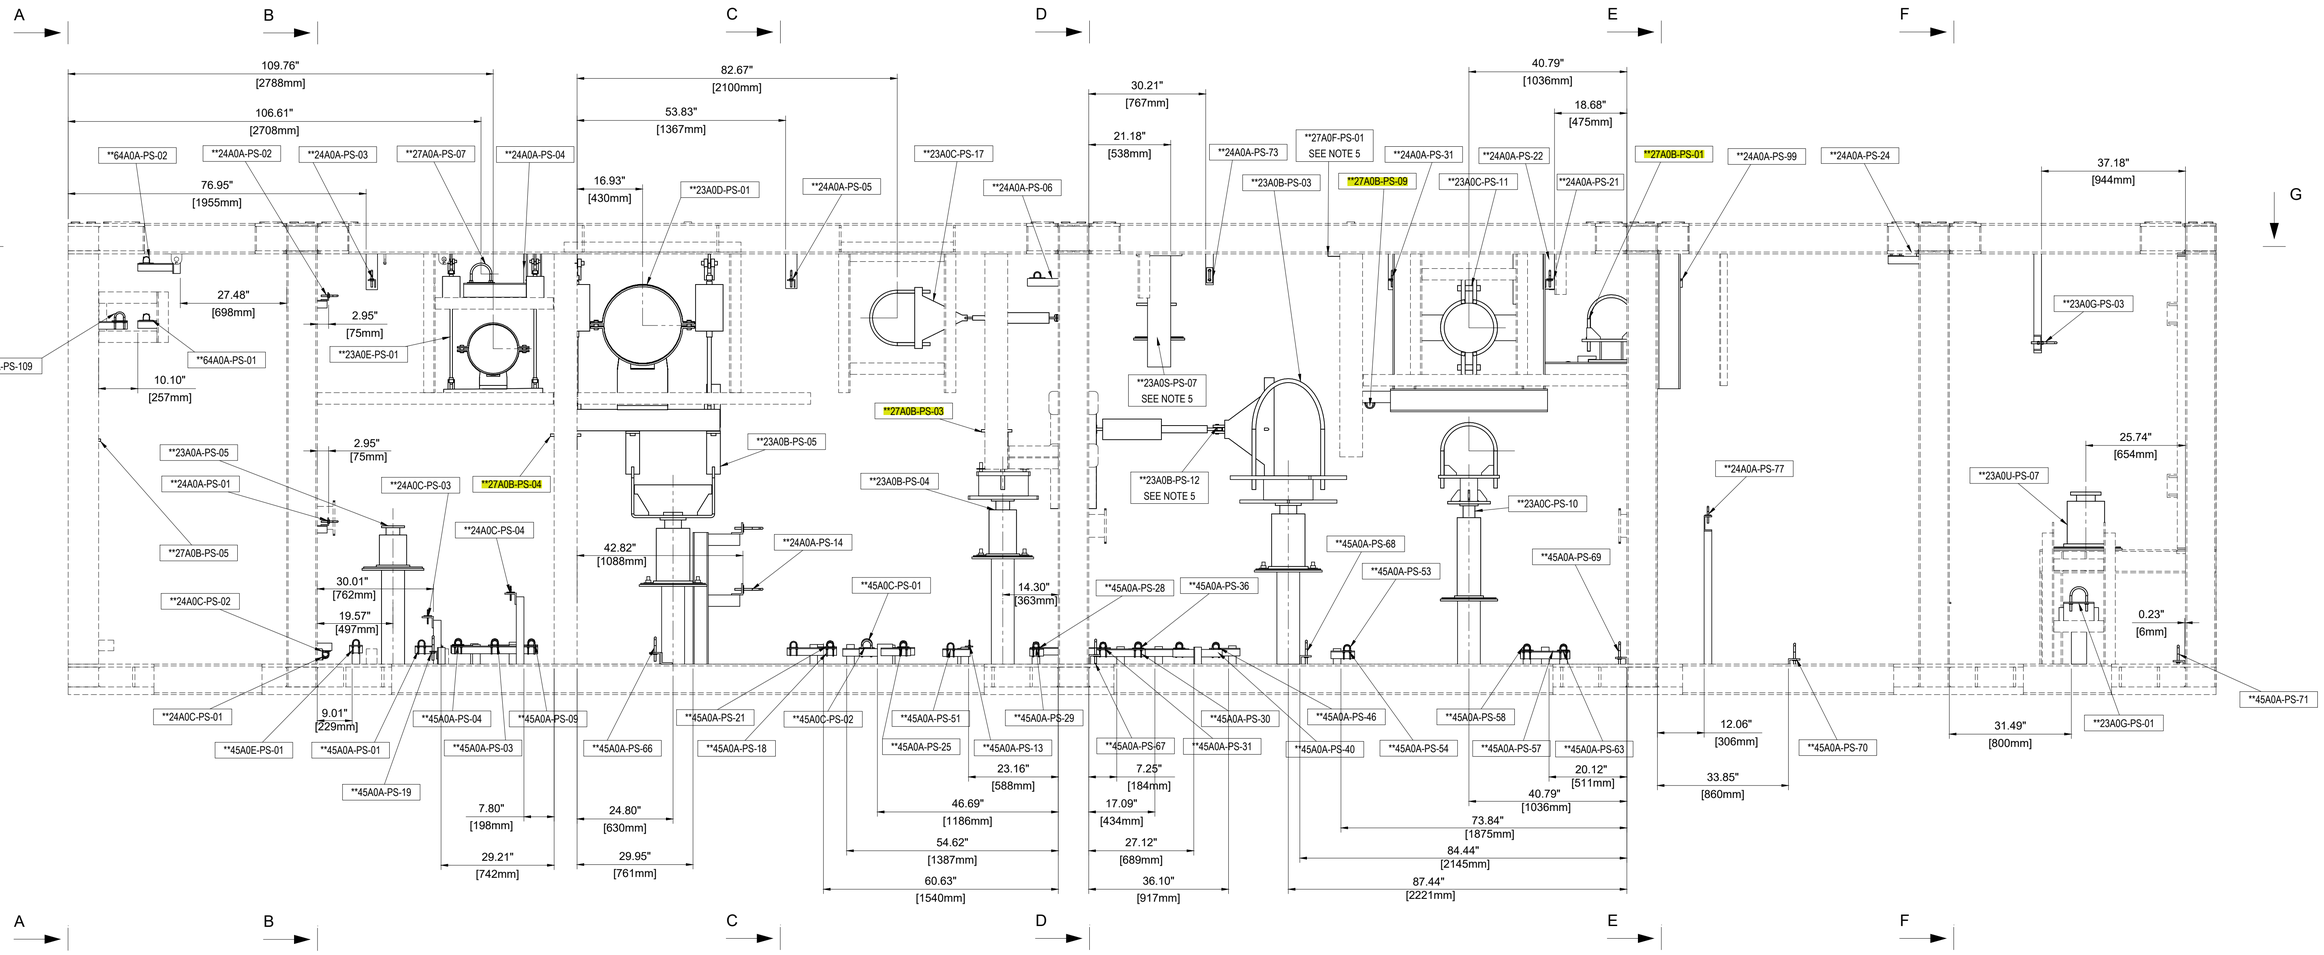

MD-1.1 LOOKING FUEL GAS UNIT SIDE

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 Mitsubishi Power Americas, Inc.
MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-150

DWG NAME: MD-1.1 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	4/6	1/20	A1

DRAWING NO: 2E00140-CI-026-150


REV.: 0

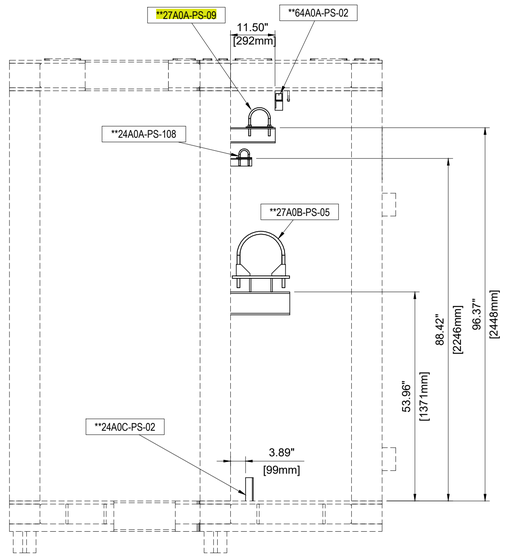


MD-1.1 SECTION A-A

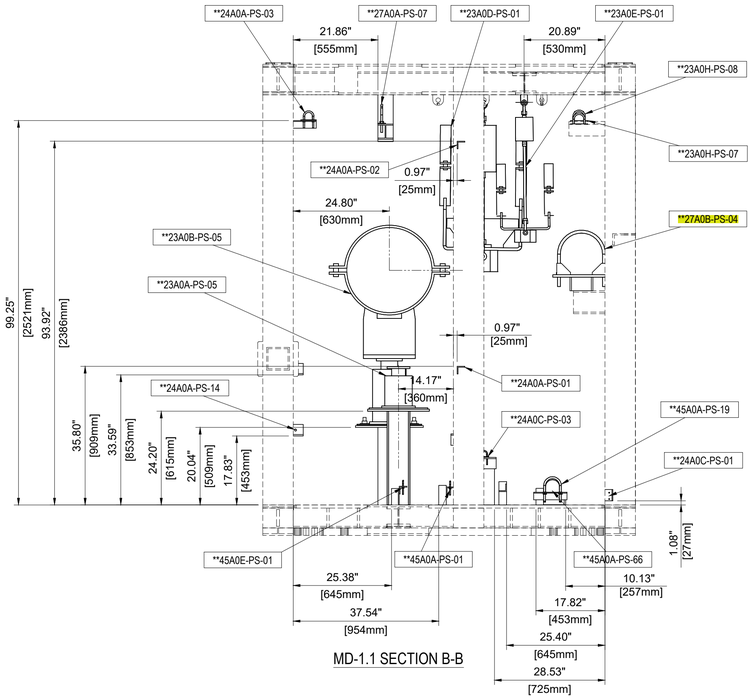


MD-1.1 SECTION B-B

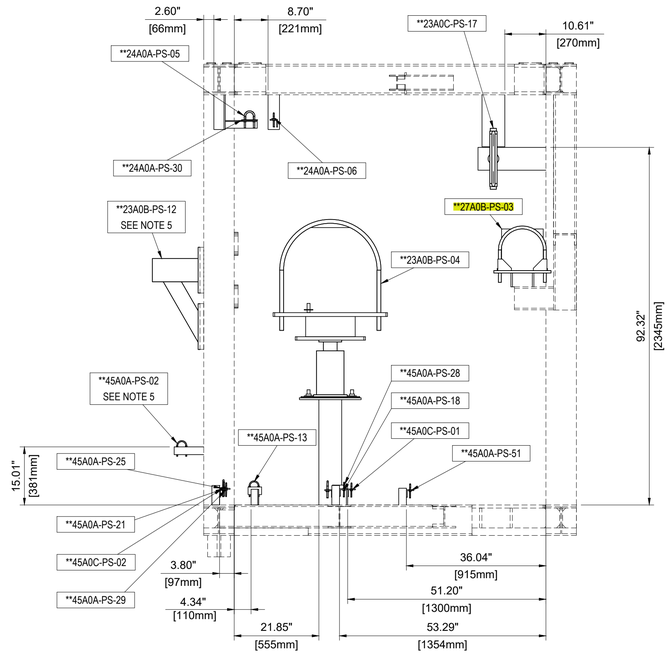


MD-1.1 SECTION C-C

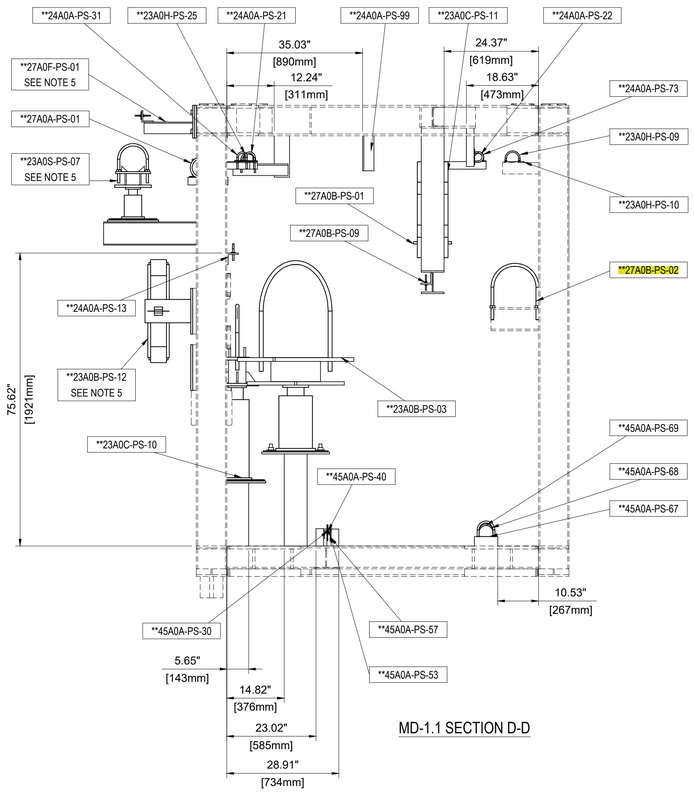

MD-1.1 SECTION D-D

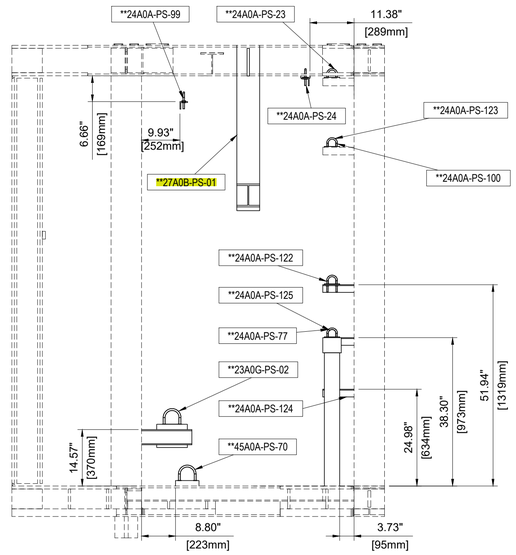

MD-1.1 SECTION E-E

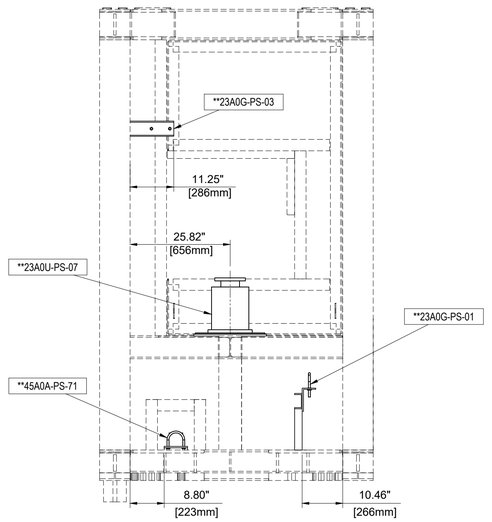

MD-1.1 SECTION F-F

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-150

DWG NAME: MD-1.1 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	5/6	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

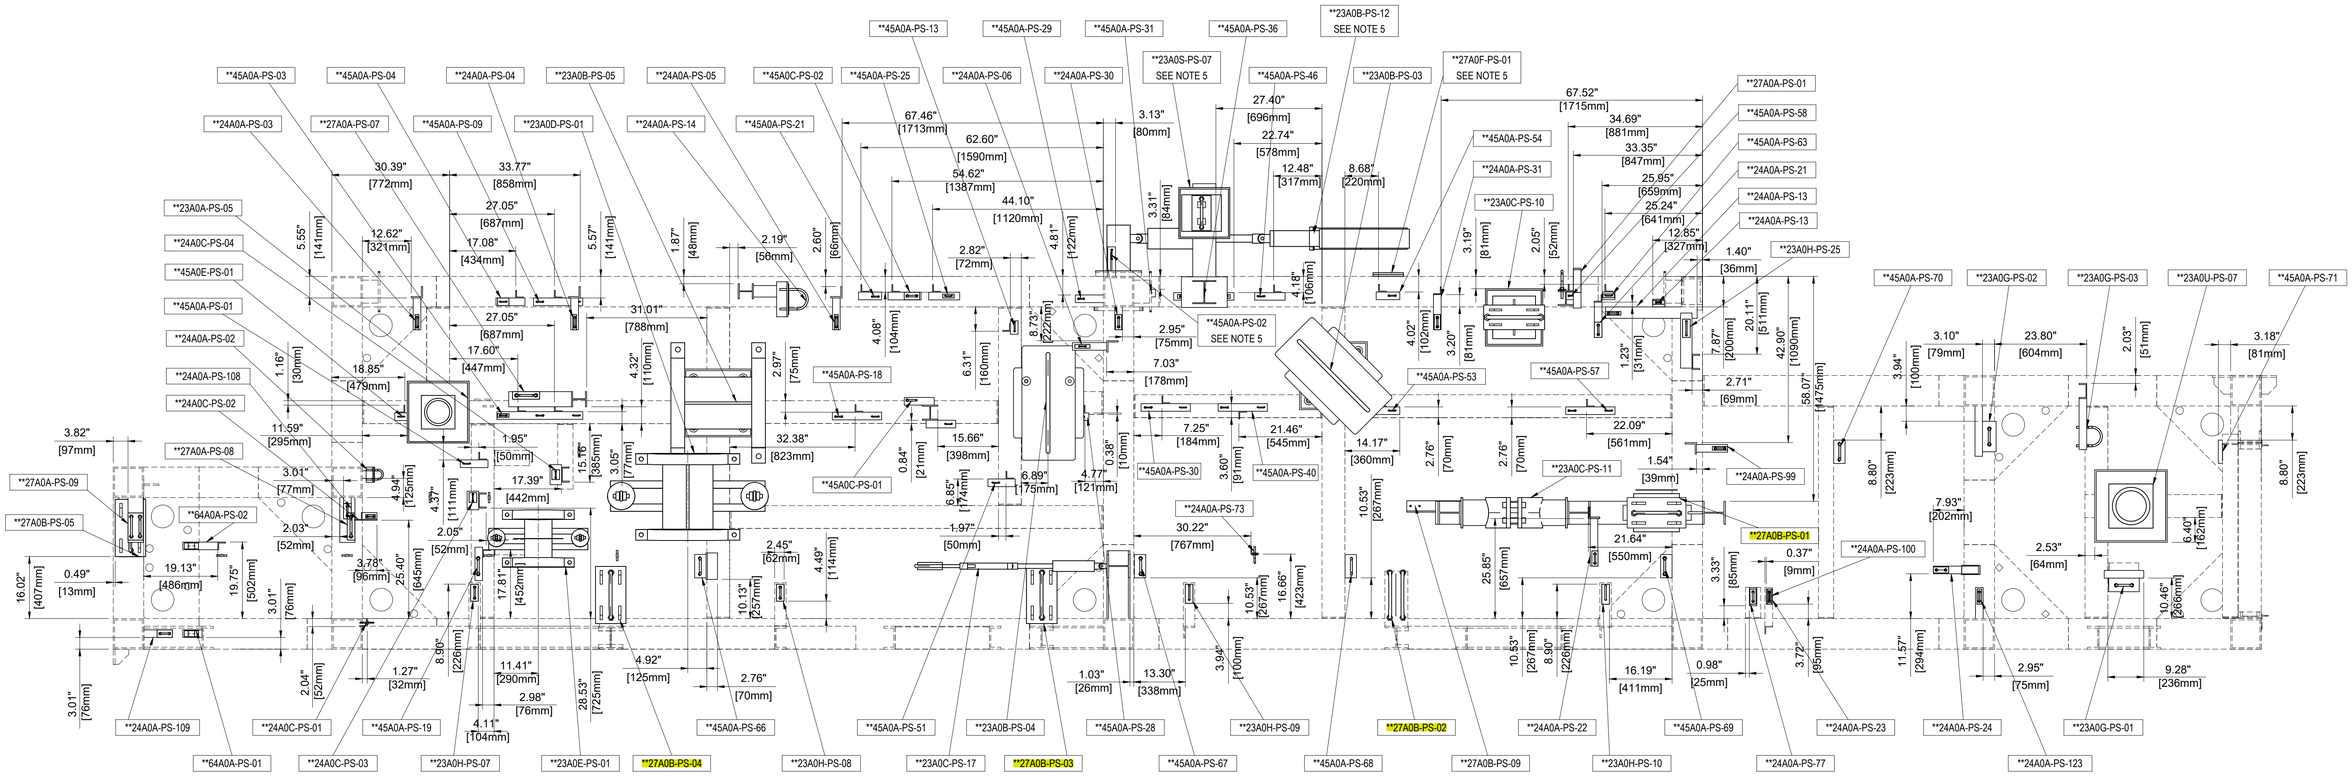

MD-1.1 SECTION G-G

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	PIPE SUPPORT DRAWINGS
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	TURBINE COOLING AIR SUPPLY PIPING (23A0D)	"
N/A	TURBINE COOLING AIR RETURN PIPING (23A0E)	"
N/A	TCA FILTER BLEED AIR PIPING (23A0G)	"
N/A	SEAL AIR PIPING (23A0H)	"
N/A	ENHANCED COOLING AIR SUPPLY PIPING (23A0S)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	GT COOLING AIR LINE PURGE AIR PIPING (24A0C)	"
N/A	LUBE OIL SUPPLY PIPING (27A0A)	"
N/A	LUBE OIL RETURN PIPING (27A0B)	"
N/A	LUBE OIL TURBINE SUPPORT COOLING SUPPLY PIPING (27A0F)	"
N/A	BLADE WASHING DRAIN PIPING (45A0A)	"
N/A	COMBUSTOR CYLINDER DRAIN PIPING (45A0C)	"
N/A	INLET MANIFOLD DRAIN PIPING (45A0E)	"
34	GT ENCLOSURE MODULE 1-1 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	04.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-150

DWG NAME: MD-1.1 SUPPORTS GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	6/6	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: 1765
LINE NO: **MBV02BR101


F(X) =	991	lbs
F(Y) =	0	lbs
F(Z) =	-916	lbs
(X)=	0.394	inch
(Y)=	0.081	inch
(Z)=	0	inch
Pipe OD =	10.75	inch
Pipe DesignTemp.=	194	°F
Insul=	0	inch

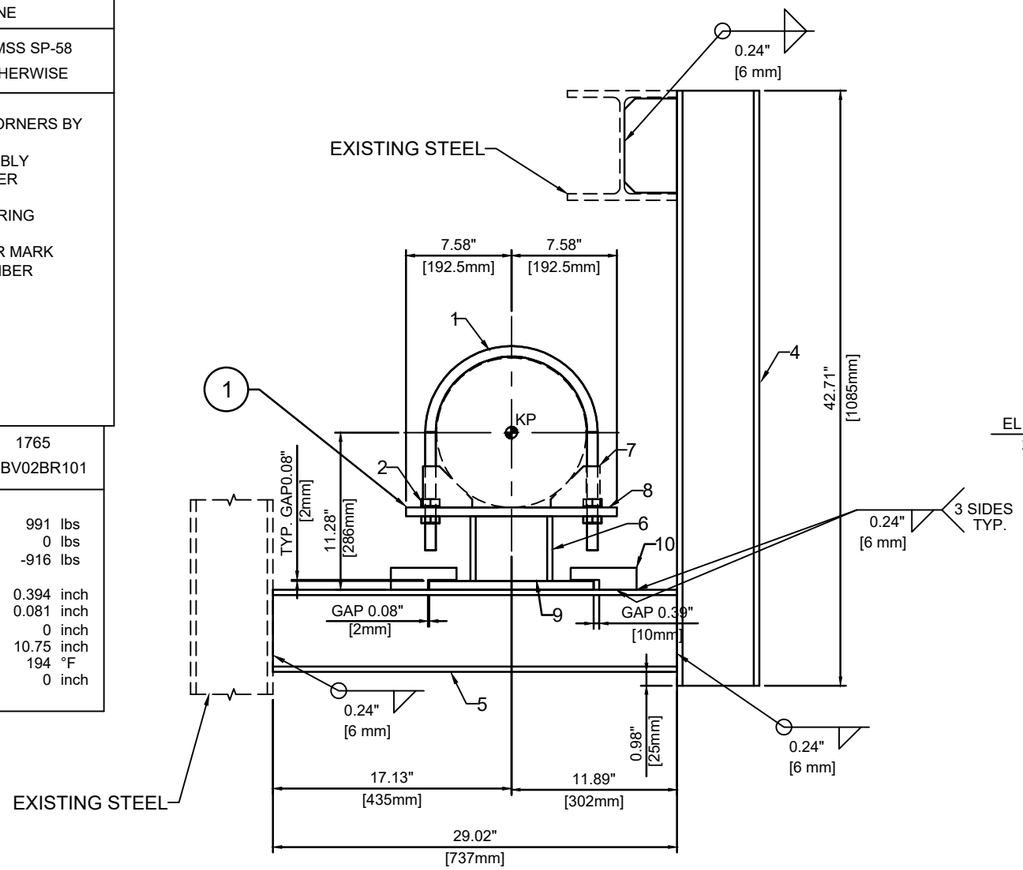

LOOKING FUEL GAS UNIT SIDE
1:10

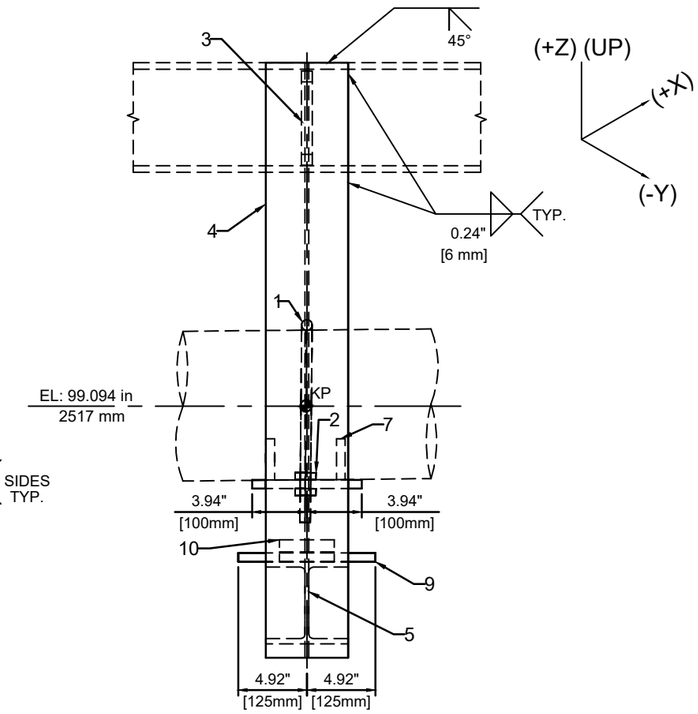

LOOKING INLET MANIFOLD SIDE
1:10

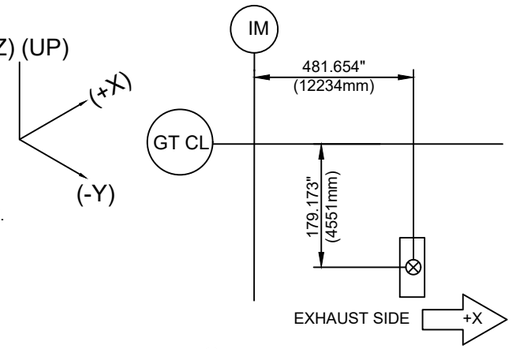

Item	Description	Lisega Size /Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 10.75"	402748					1	4.43	2.01	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/4"						4	0.79	0.36	STAINLESS STEEL
3	PL20		3.78	96	6.77	172	1	5.72	2.59	ASTM A36
4	H150x150x7x10	JIS G 3192			42.72	1085	1	75.35	34.18	SM520
5	H150x150x7x10	JIS G 3192			29.02	737	1	51.18	23.22	SM520
6	H150x150x7x10	JIS G 3192			4.65	118	1	8.19	3.72	SM520
7	PL16		2.95	75	3.54	90	4	7.62	3.46	ASTM A240-304
8	PL16		7.87	200	15.16	385	1	21.73	9.86	ASTM A240-304
9	PL16		9.84	250	11.81	300	1	20.77	9.42	ASTM A36
10	PL40		3.94	100	4.72	120	2	16.61	7.54	ASTM A36
						GRAND TOTAL		212.39	96.34	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY
SUPPORT NUMBER: **27A0B-PS-01


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

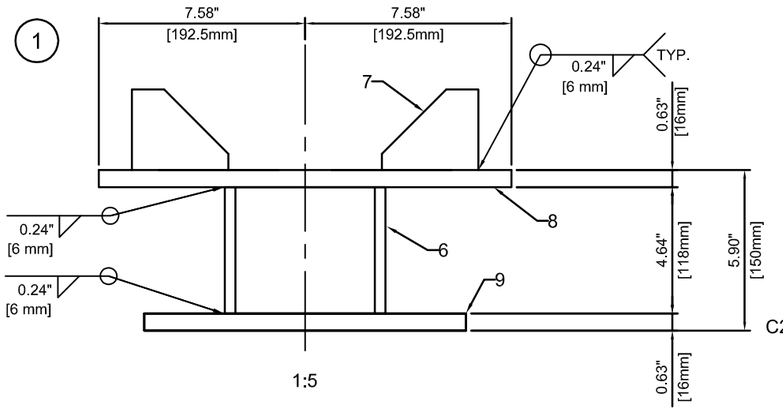


1:5




1:5

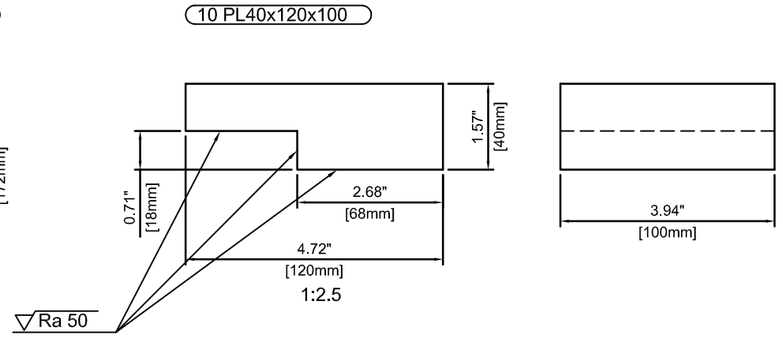


1:2.5

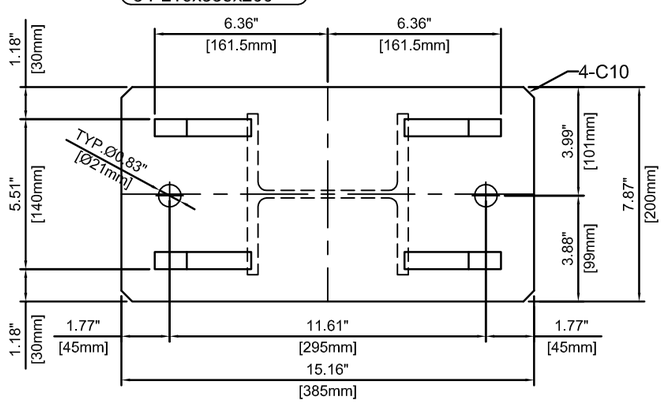

1:5

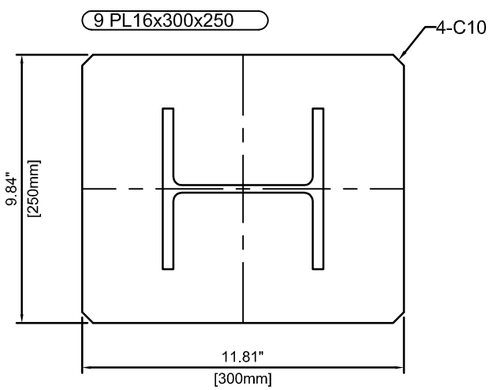

1:5



1:5

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations. diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY
SUPPORT NUMBER: **27A0B-PS-01

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	1820
LINE NO:	**MBV02BR101


F(X) =	0	lbs
F(Y) =	402	lbs
F(Z) =	-421	lbs
(X)=	0.375	inch
(Y)=	0	inch
(Z)=	0	inch
Pipe OD =	10.75	inch
Pipe DesignTemp.=	194	°F
Insul=	0	inch

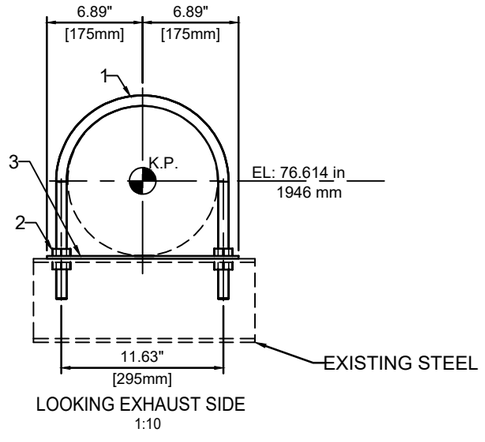

LOOKING EXHAUST SIDE
1:10

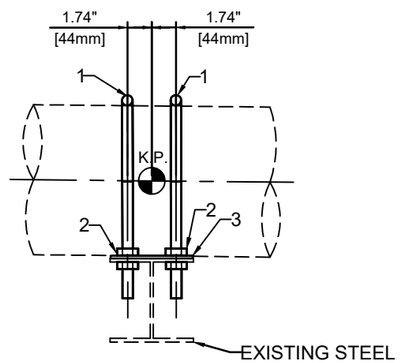


LOOKING LUBE OIL UNIT SIDE
1:10

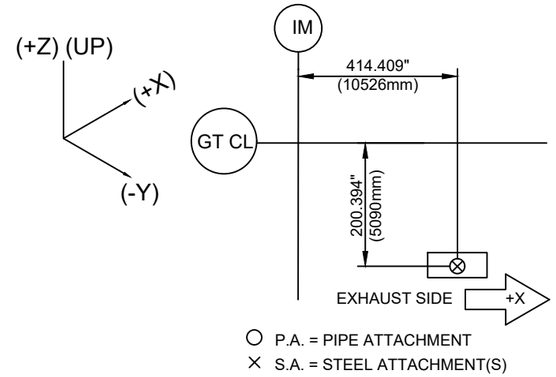


○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

DRILL ON EXISTING BEAM

3 PL3x350x150

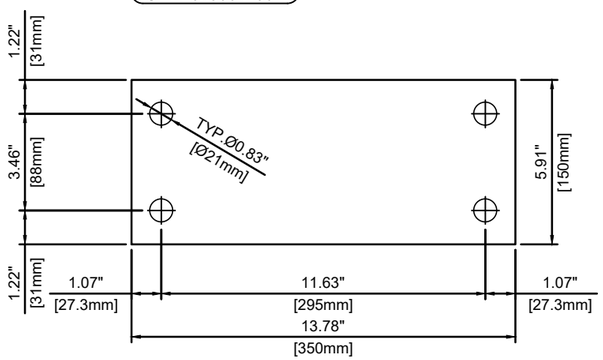

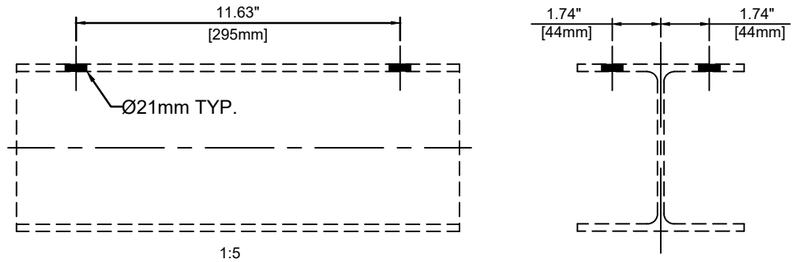

1:5

MODULE NO:
MD-1.1

Item	Description	Lisega Size/ Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 10.75"	402748	0.00		0.00		2	8.86	4.02	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/4"		0.00		0.00		8	1.59	0.72	STAINLESS STEEL
3	PL3		13.78	350	5.91	150	1	23.15	10.50	ASTM A240-304

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **27A0B-PS-02

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	1835
LINE NO:	**MBV02BR101


F(X) =	0	lbs
F(Y) =	-314	lbs
F(Z) =	-852	lbs
(X)=	0.299	inch
(Y)=	0	inch
(Z)=	0	inch
Pipe OD =	10.75	inch
Pipe DesignTemp.=	194	°F
Insul=	0	inch

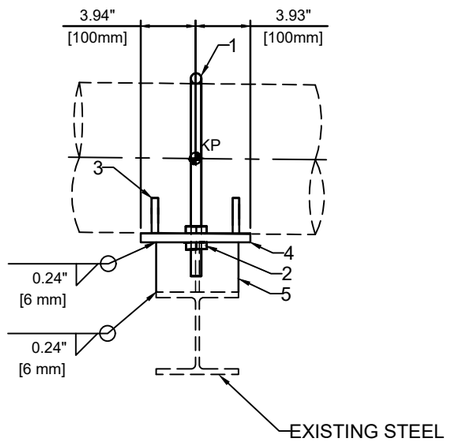


LOOKING LUBE OIL UNIT SIDE
1:10

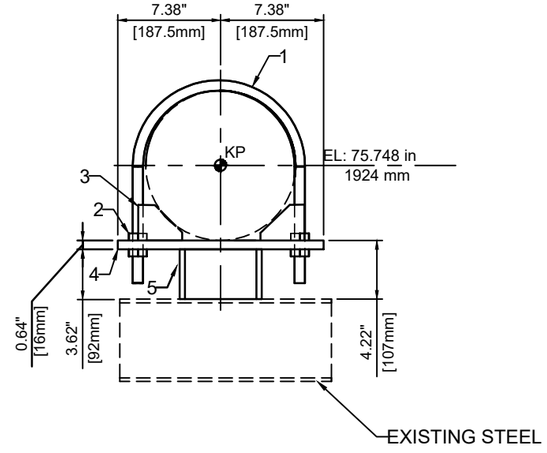

LOOKING EXHAUST SIDE
1:10

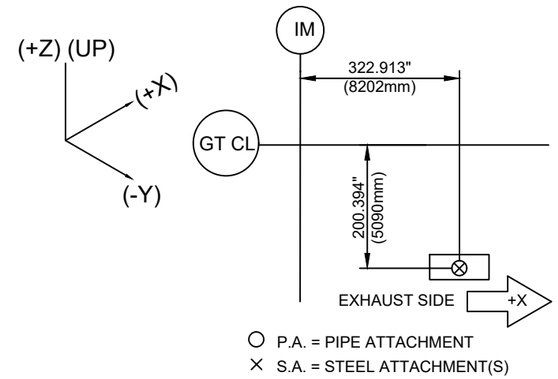


4 PL16*375*200

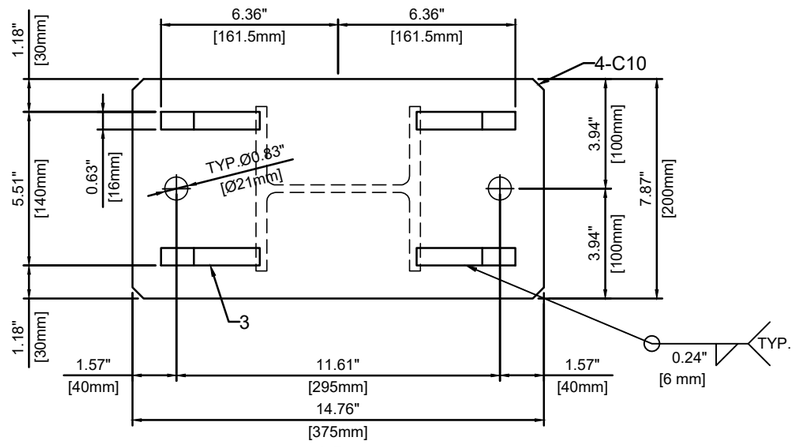

1:5

3 PL16x90x75



1:5

Item	Description	Lisega Size /Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	Standard U-Bolt, 10.75"	402748					1	4.43	2.01	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/4"						4	0.79	0.36	STAINLESS STEEL
3	PL16		2.95	75	3.54	90	4	7.62	3.46	ASTM A240-304
4	PL16		7.87	200	14.76	375	1	21.16	9.60	ASTM A240-304
5	H150x150x7x10	JIS G 3192			3.61	92	1	6.37	2.89	SM520
							GRAND TOTAL	40.38	18.32	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY
SUPPORT NUMBER: **27A0B-PS-03

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	1845
LINE NO:	**MBV02BR101


F(X) =	0	lbs
F(Y) =	-138	lbs
F(Z) =	-724	lbs
(X)=	0.207	inch
(Y)=	0	inch
(Z)=	0	inch
Pipe OD =	10.75	inch
Pipe DesignTemp.=	194	°F
Insul=	0	inch

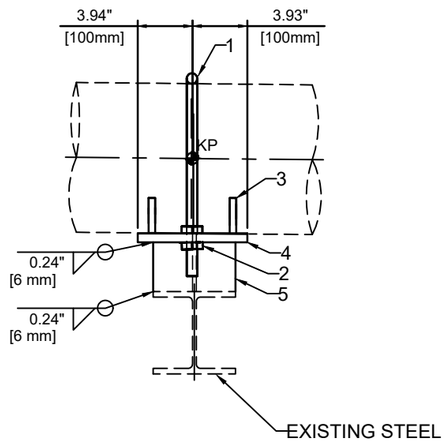


LOOKING LUBE OIL UNIT SIDE
1:10

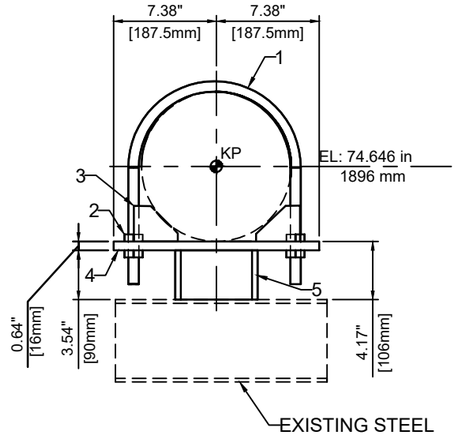

LOOKING EXHAUST SIDE
1:10

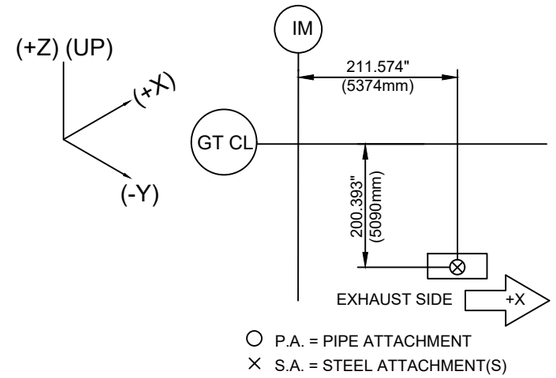


4 PL16*375*200

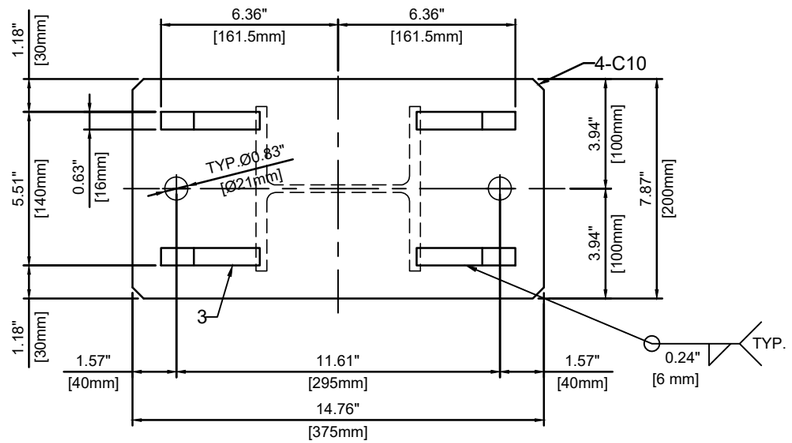

1:5

3 PL16x90x75



1:5

Item	Description	Lisega Size /Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 10.75"	402748					1	4.43	2.01	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/4"						4	0.79	0.36	STAINLESS STEEL
3	PL16		2.95	75	3.54	90	4	7.48	3.39	ASTM A240-304
4	PL16		7.87	200	14.76	375	1	20.77	9.42	ASTM A240-304
5	H150x150x7x10	JIS G 3192			3.54	90	1	6.25	2.84	SM520
							GRAND TOTAL	39.72	18.02	

MODULE NO:
MD-1.1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY
SUPPORT NUMBER: **27A0B-PS-04

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE:	2075
LINE NO:	**MBV02BR103


F(X) =	0	lbs
F(Y) =	0	lbs
F(Z) =	-67	lbs
(X)=	0.376	inch
(Y)=	0.020	inch
(Z)=	0	inch
Pipe OD =	1.315	inch
Pipe DesignTemp.=	194	°F
Insul=	0	inch

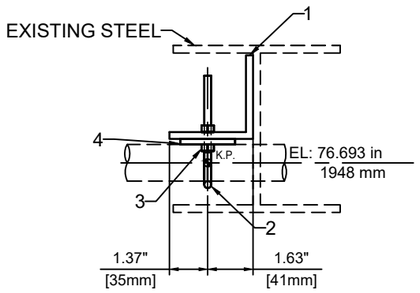


LOOKING EXHAUST SIDE
1:5

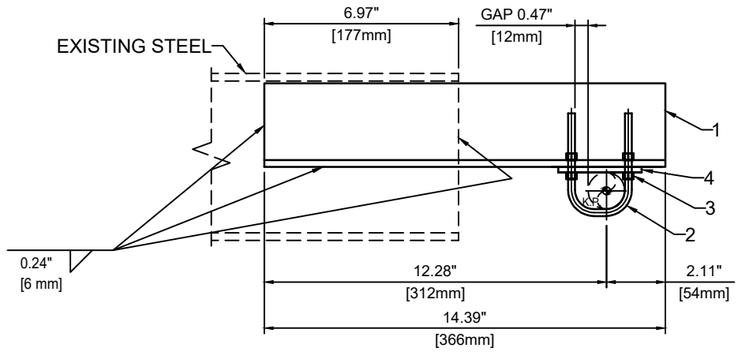

LOOKING LUBE OIL UNIT SIDE
1:5

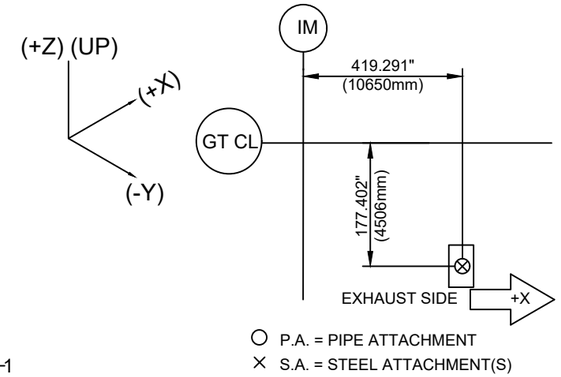


1 L75x75x9

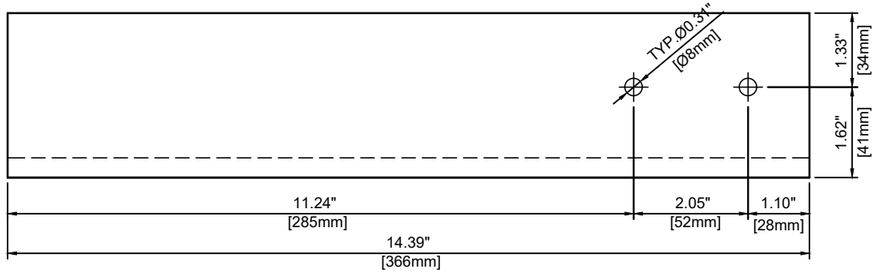


1:2.5

4 PL3*100*50

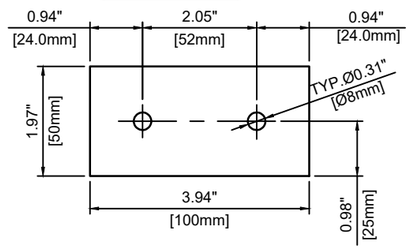

1:2.5

2 U BOLT 1"



Item	Description	Lisega Size/ Standard	Width		Length		Qty.	Total Weight		Material
			in	mm	in	mm		lbf	kg	
1	L75x75x9	JIS G 3192			14.41	366	1	8.04	3.65	SS400
2	Special U-Bolt, 1"	400348S					1	0.13	0.06	A193GrB8Cl1
3	Heavy Hex Nut for U-Bolt 1/4"						4	0.04	0.02	STAINLESS STEEL
4	PL3		1.97	50	3.94	100	1	0.43	0.20	ASTM A240-304

MODULE NO:
MD-1.1

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**27A0B-PS-09

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations; diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST