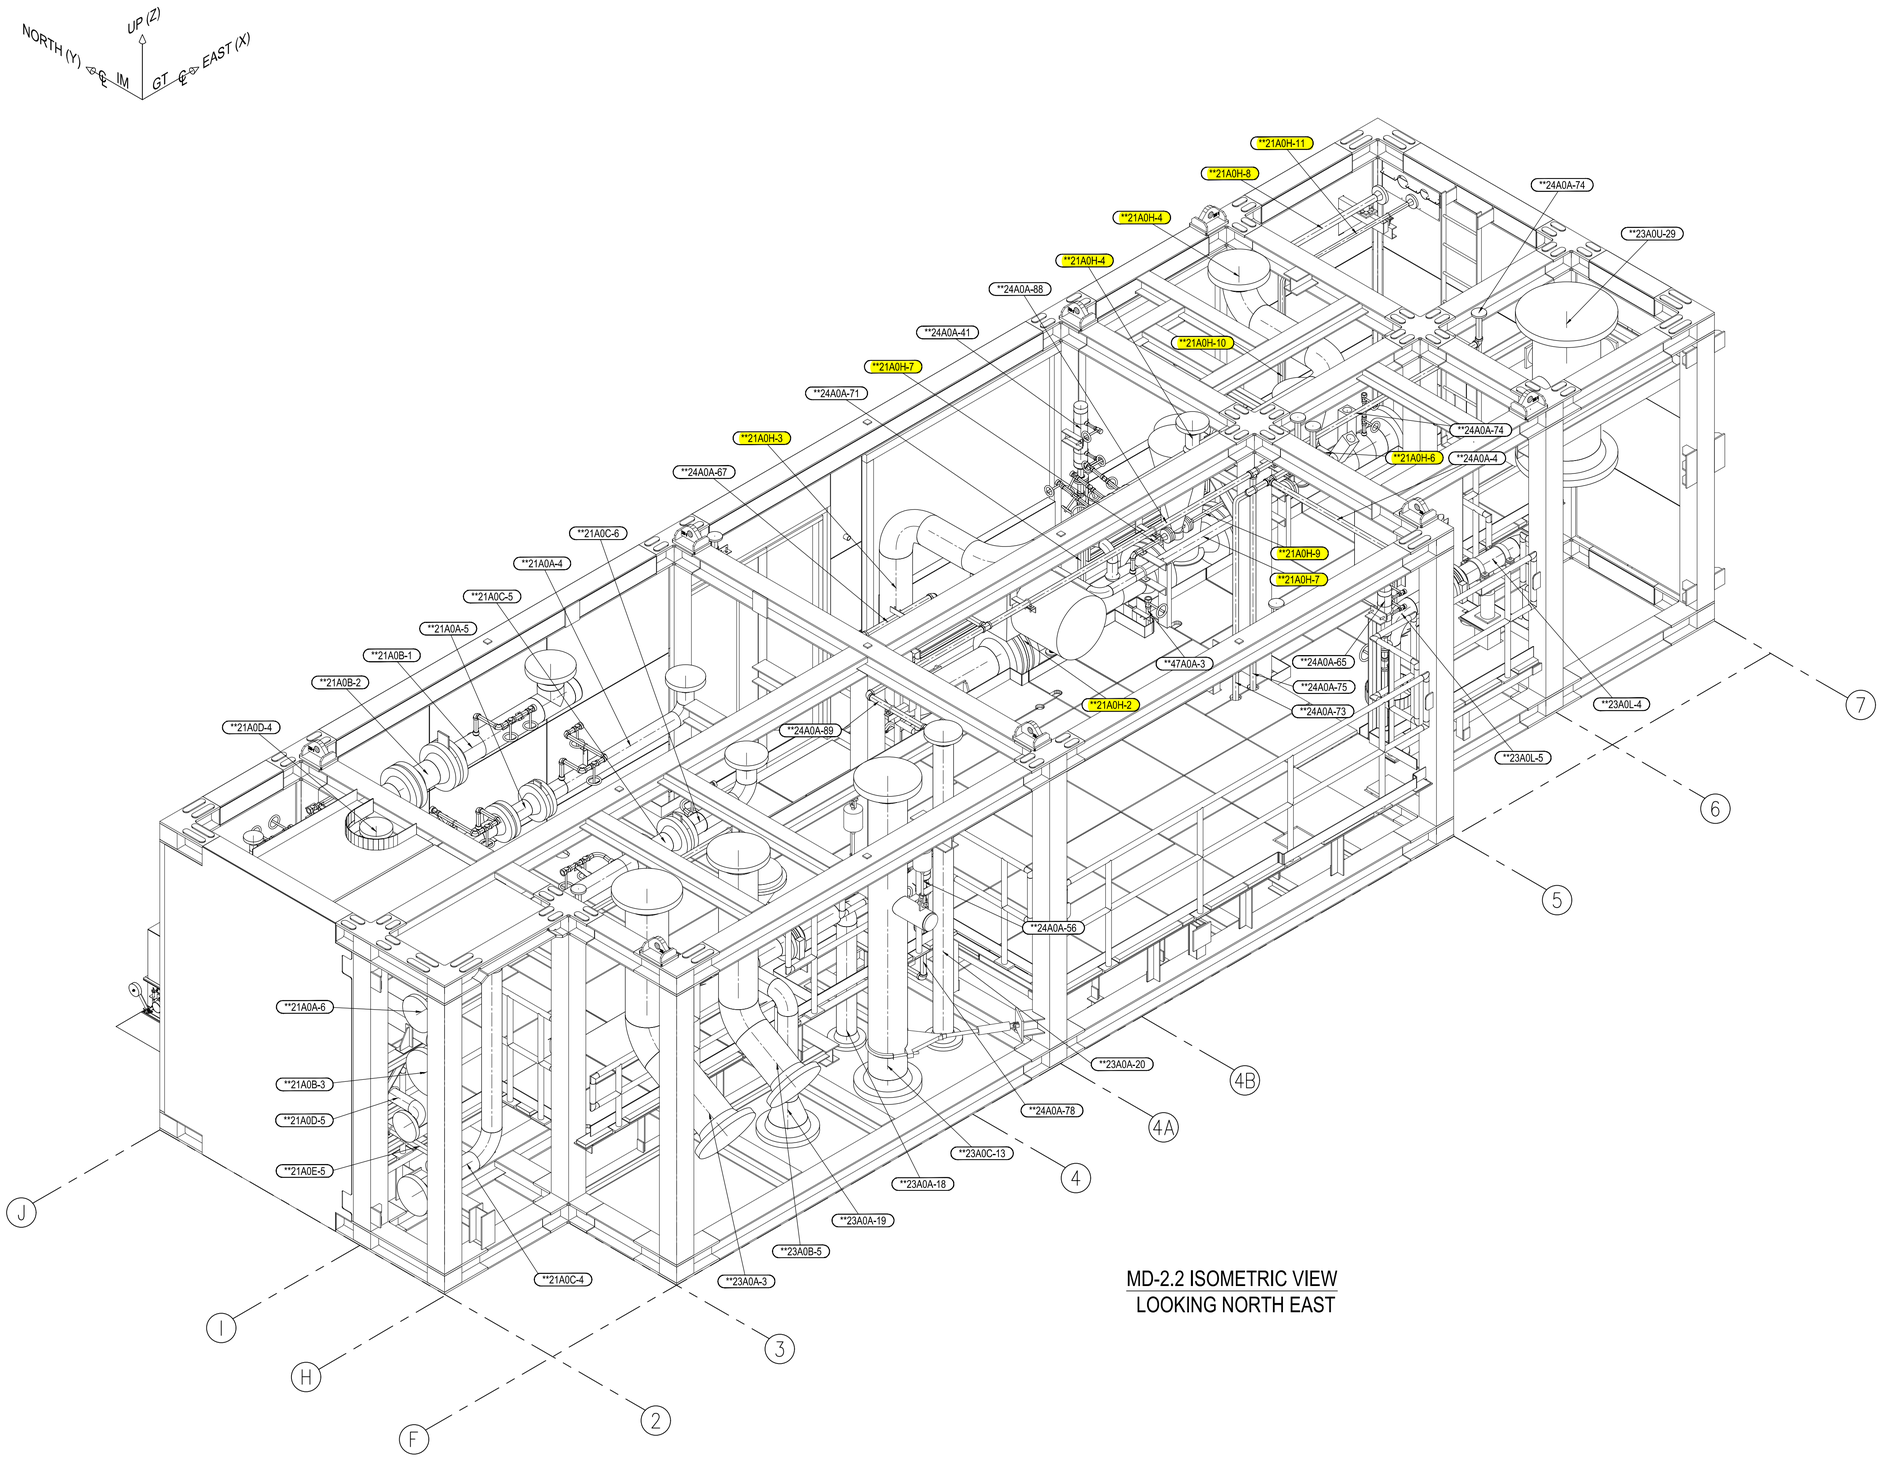


MD-2.2 ISOMETRIC VIEW
LOOKING NORTH EAST

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX ——PIPE LINE
   - (××XXX-X) ——SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	01.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL-150

DWG NAME: MD-2.2 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS **(GA FOR SPOOLS)**


REF.DWG.NO.: –

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140-PI-094-001-MD-2.2

REV. 0

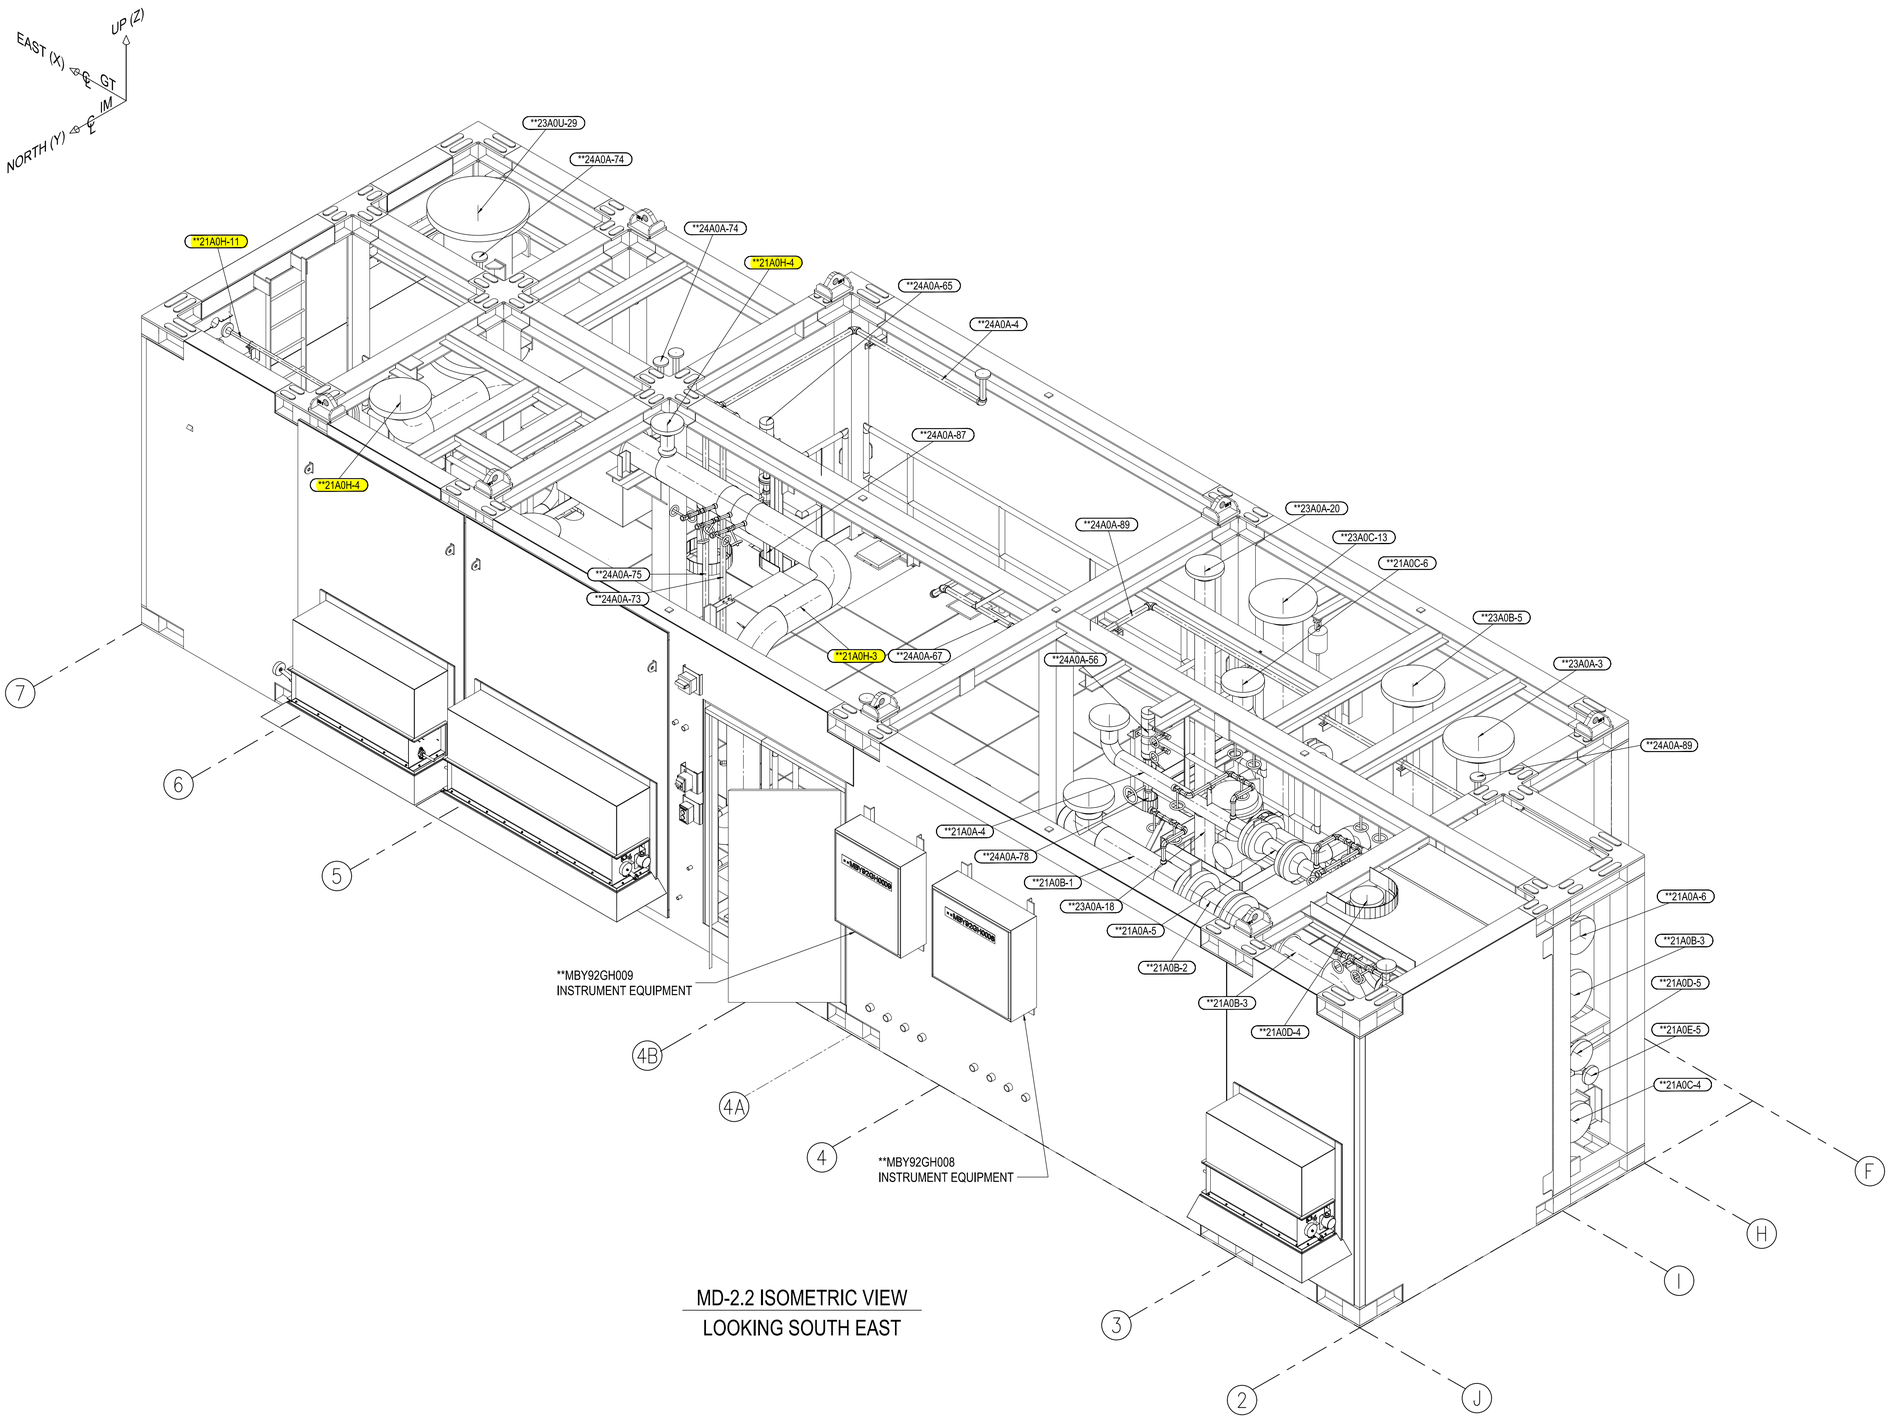

MD-2.2 ISOMETRIC VIEW
LOOKING SOUTH EAST

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX ——PIPE LINE
   - (××XXX-X) ——SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	01.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL-150

DWG NAME: MD-2.2 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS **(GA FOR SPOOLS)**


REF.DWG.NO.: –

PREPARED BY: cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140-PI-094-001-MD-2.2

REV.: 0

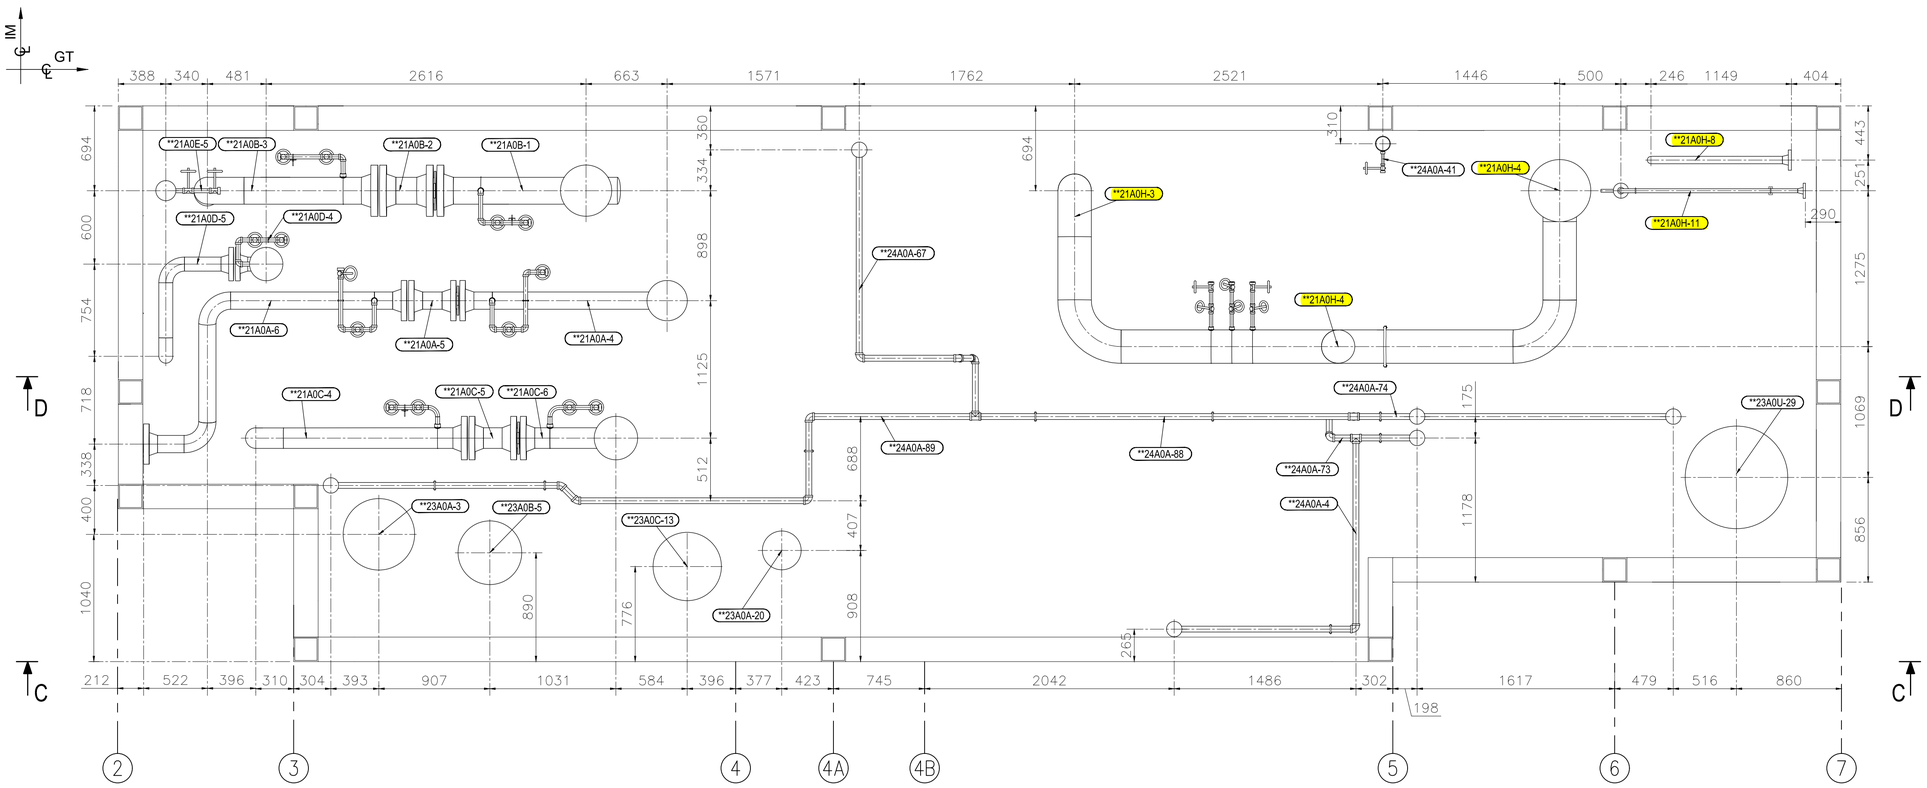

MD-2.2 PLAN VIEW
SECTION 'A-A'

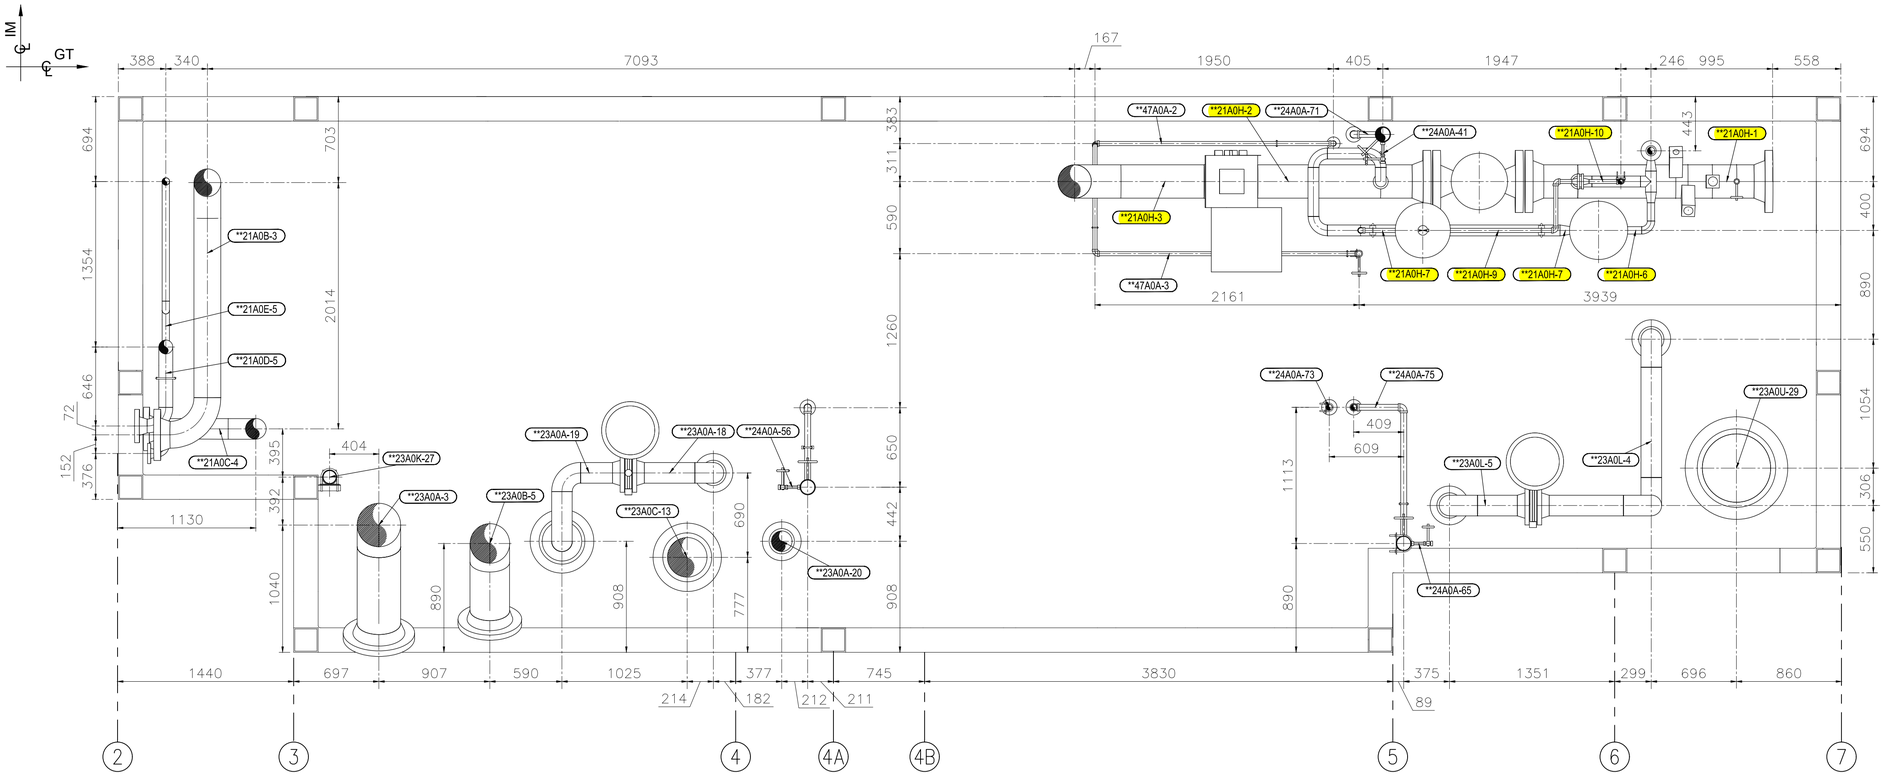

MD-2.2 PLAN VIEW
SECTION 'B-B'

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX —— PIPE LINE
   - (××XXX-X) —— SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	01.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:

This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO
–

ITEM NO
MDL–150

DWG NAME
MD–2.2 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS **(GA FOR SPOOLS)**


REF.DWG.NO.
–

PREPARED BY
cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO
2E00140–PI–094–001–MD–2.2


REV.
0

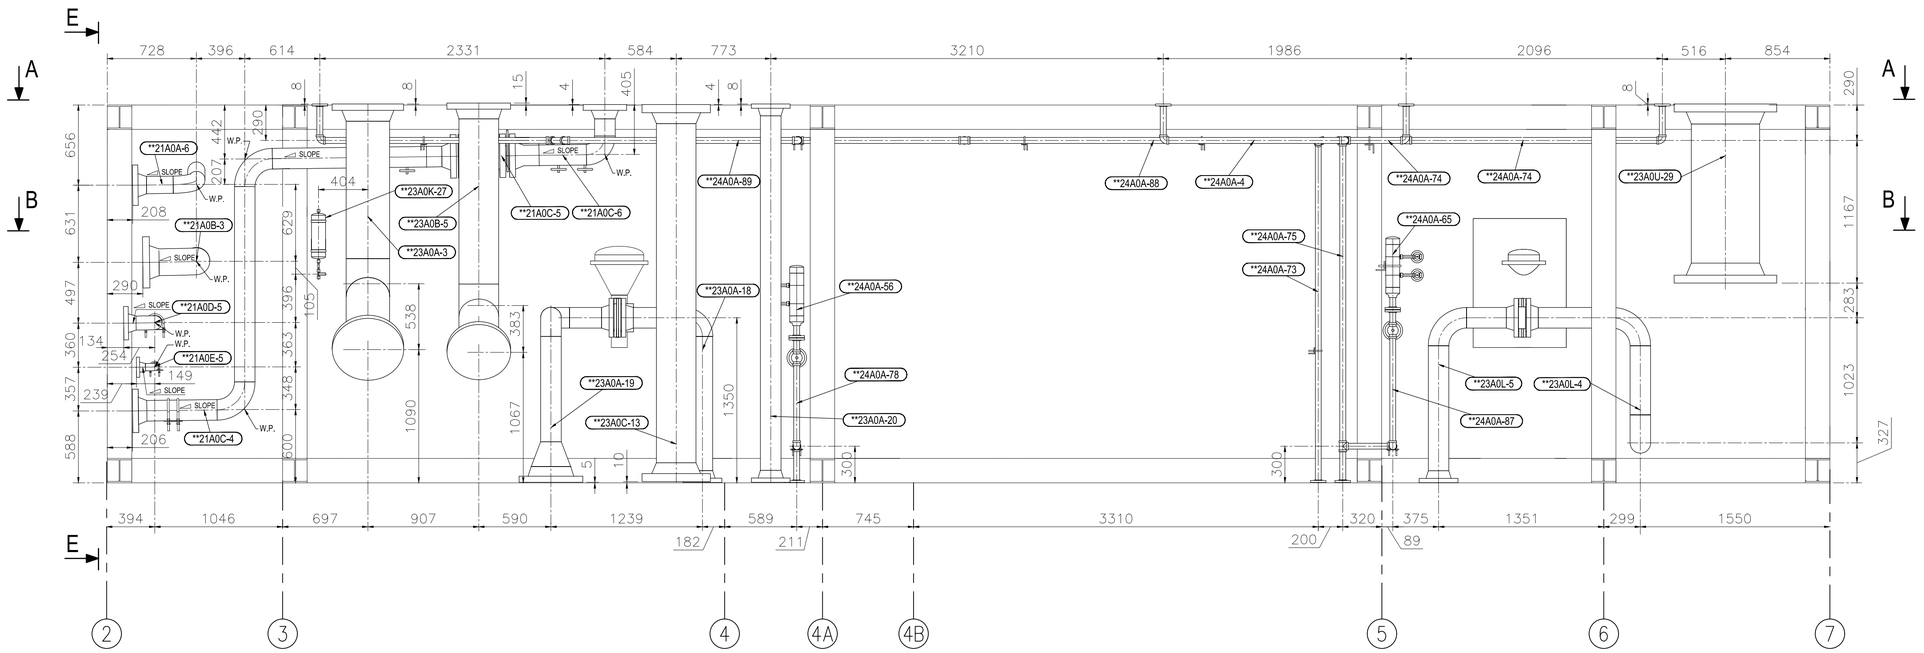

MD-2.2 ELEVATION VIEW
SECTION 'C-C'

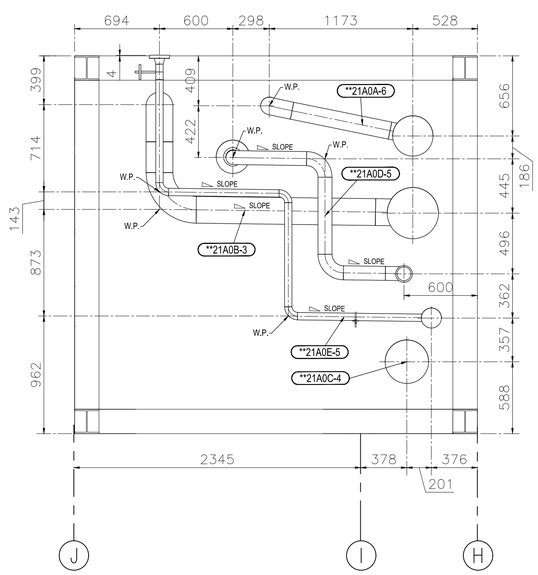

MD-2.2 SECTION 'E-E'
(LOOKING EAST)

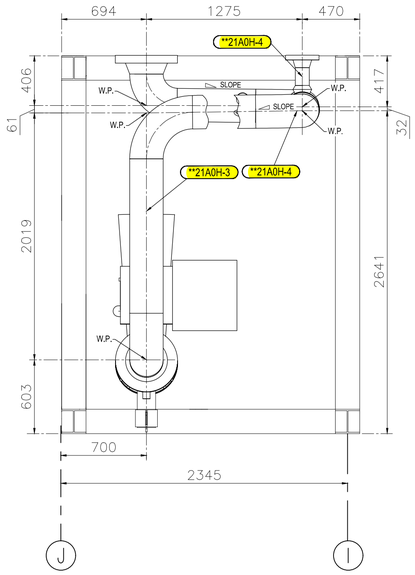

MD-2.2 SECTION 'F-F'
(LOOKING EAST)

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX —— PIPE LINE
   - (××XXX-X) —— SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	01.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: –

ITEM NO: MDL-150

DWG NAME: MD-2.2 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS **(GA FOR SPOOLS)**


REF.DWG.NO.: –

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO: 2E00140-PI-094-001-MD-2.2

REV.: 0

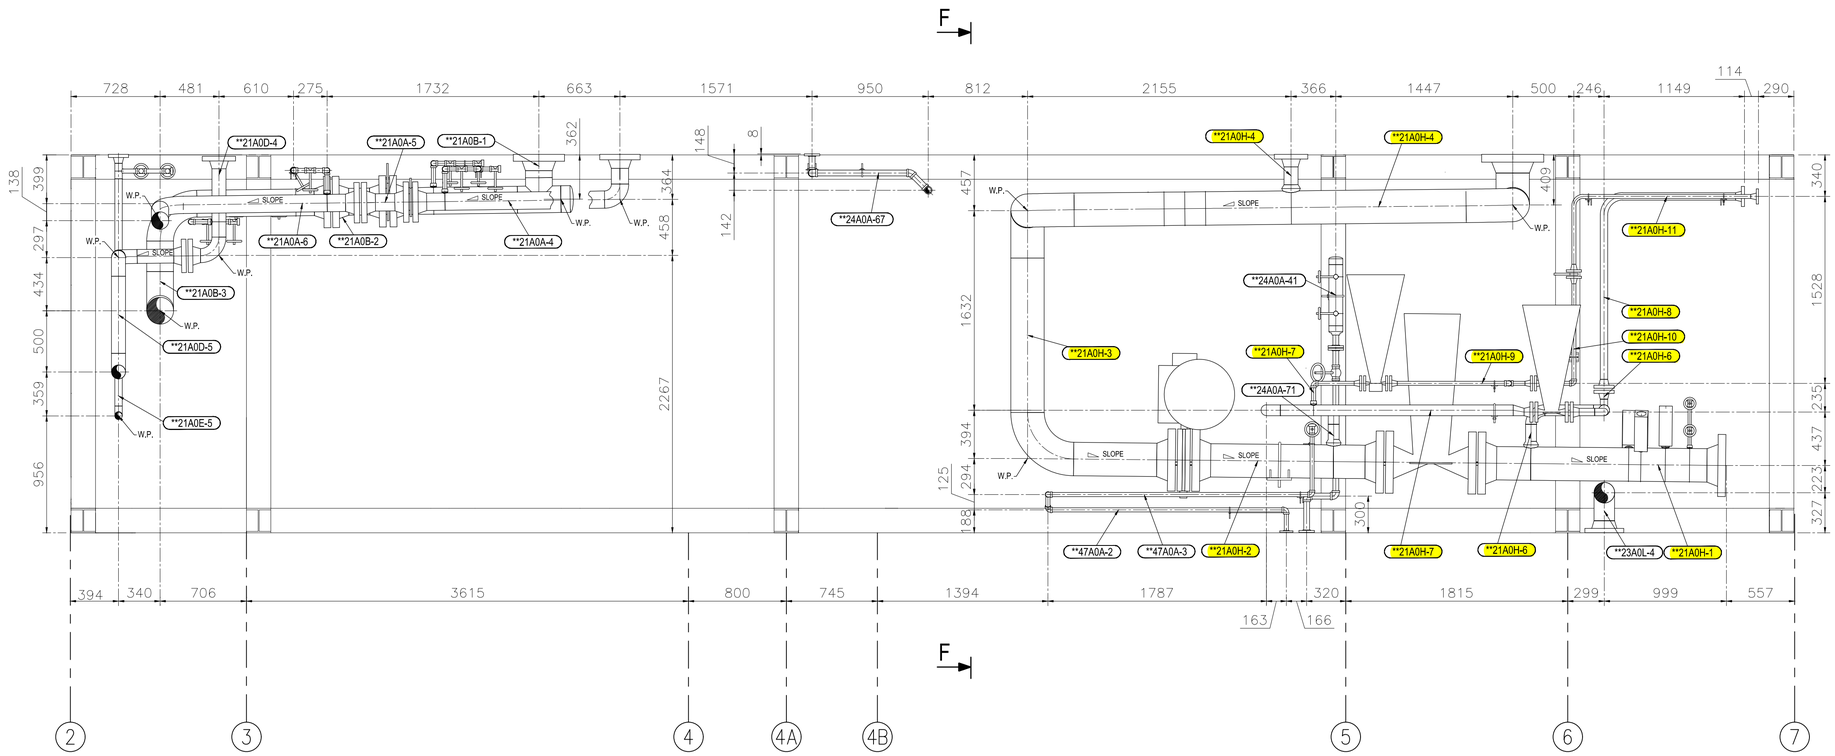

MD-2.2 ELEVATION VIEW
SECTION 'D-D'

REFERENCES

MDL ITEM #	MPWA MDL DESCRIPTION	DETAILS FOR
1	FOUNDATION PLAN AND SUMMARY LOADING DATA FOR MODULE GT ENCLOSURE	GENERAL LOCATION
20	GA DRAWING FOR MODULARIZED JAC GT ENCLOSURE	GENERAL LOCATION

NOTES

1. DIMENSIONS : MM [INCHES]
2. LABELING
   - ××XXXXXX ——PIPE LINE
   - (××XXX-X) ——SPOOL NO
3. SOME STRUCTURAL MEMBERS AND GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. WP : WORKING POINT FOR SLOPE LINE

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	01.MAY.2024	S.H.	M.F.	N.K.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2024 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO
–

ITEM NO
MDL-150

DWG NAME
MD-2.2 PIPING SUPPORT & SPOOLS GENERAL ARRANGEMENTS DRAWINGS **(GA FOR SPOOLS)**

REF.DWG.NO.
–


PREPARED BY
cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	1/1	1/25	A1

DRAWING NO
2E00140-PI-094-001-MD-2.2

REV.
0

REVISION RECORD

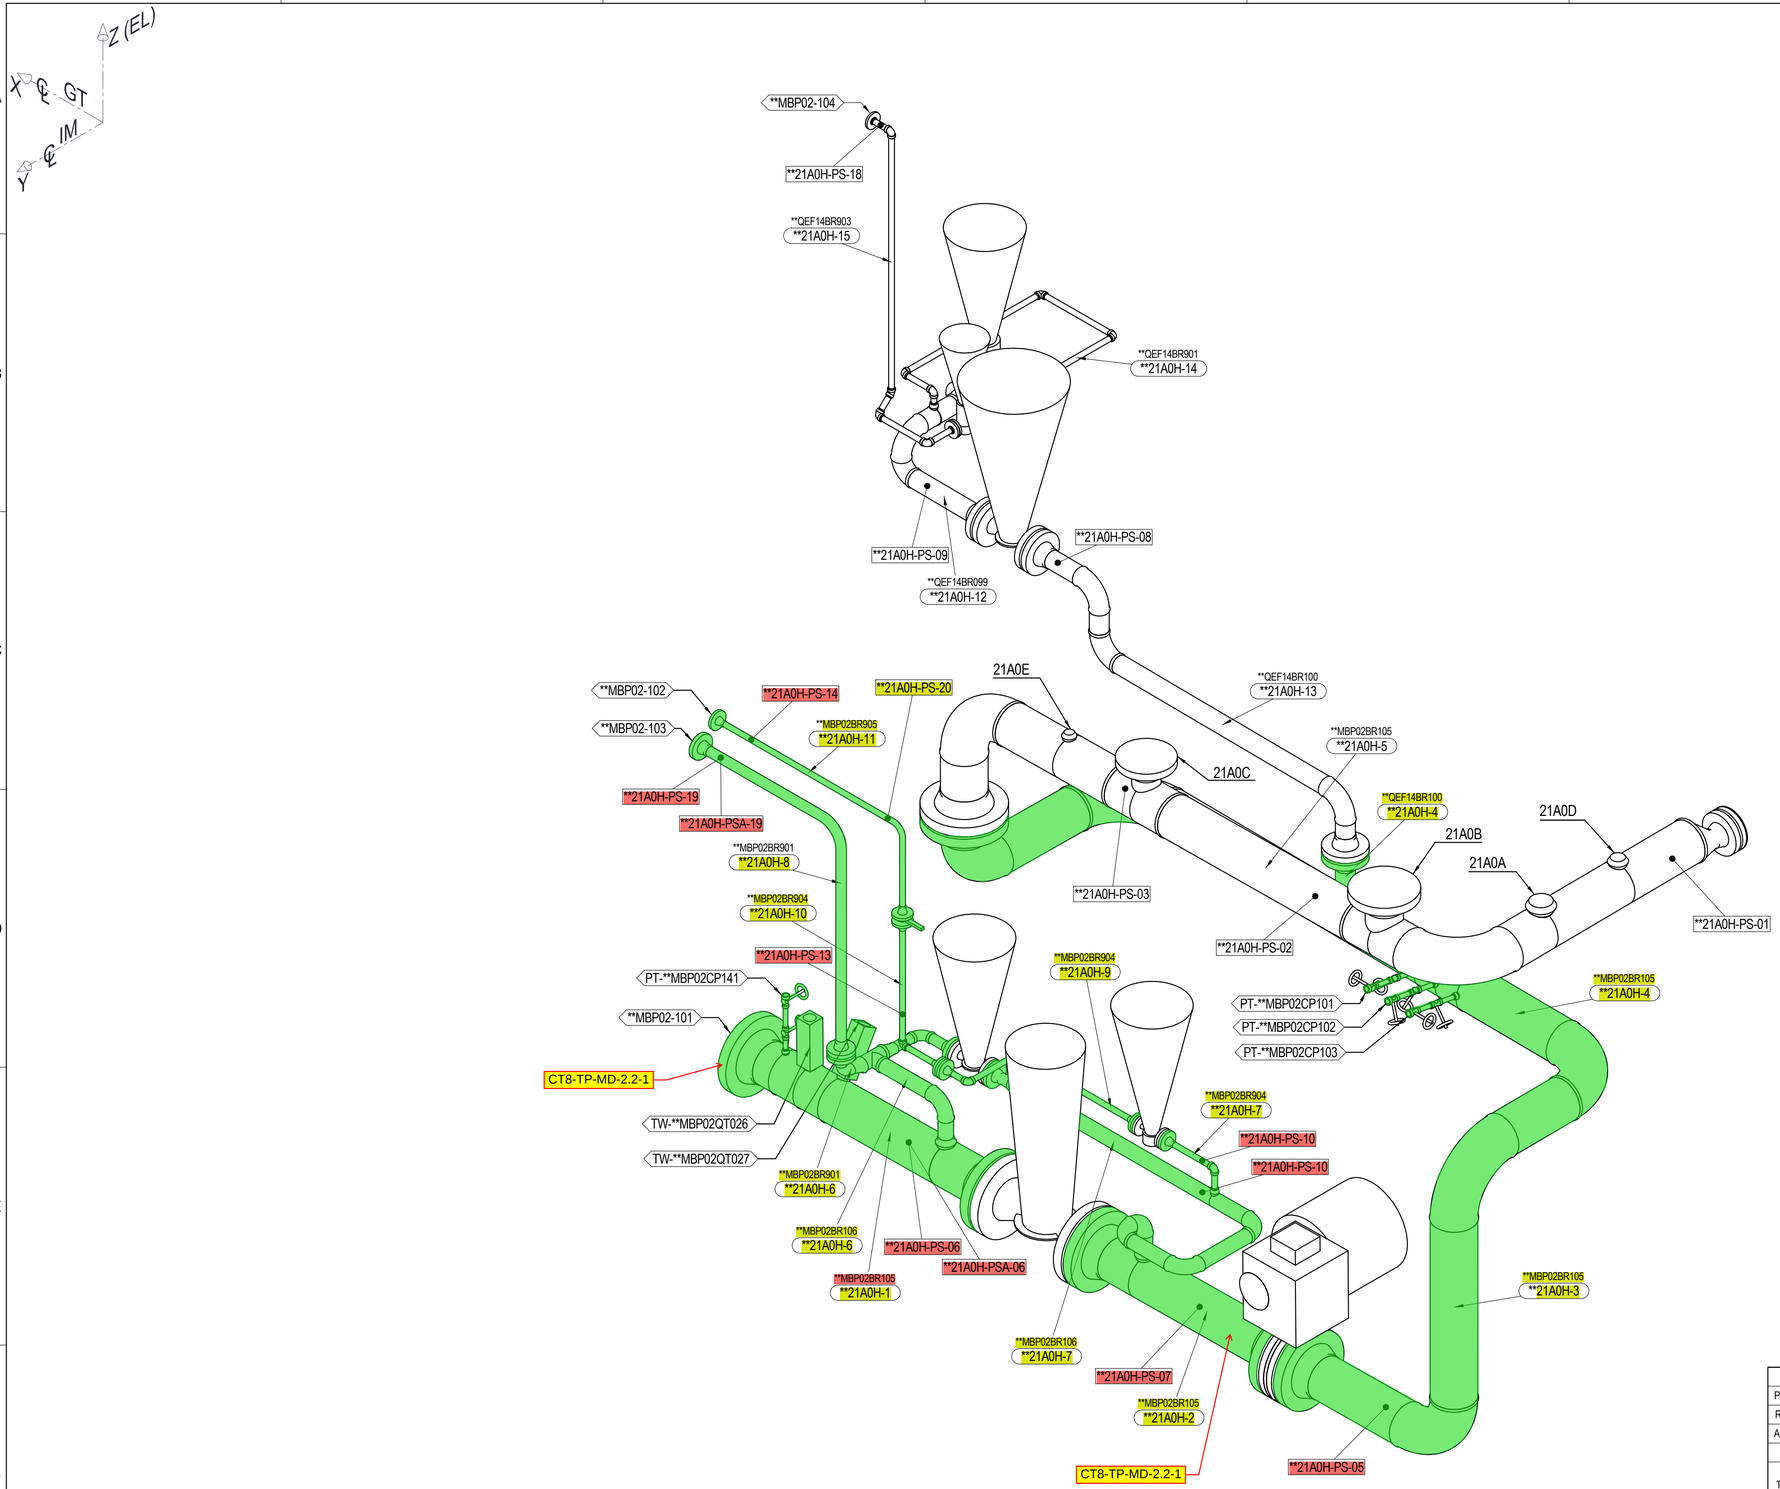

LEGEND:

PIPELINE / SPOOL	INDICATES PIPELINE ON THE TOP AND SPOOL ON THE BOTTOM.
SUPPORT	INDICATES SUPPORT.
TERMINAL POINT	INDICATES TERMINAL POINT.
– – – – – – –	INDICATES TRACING.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	12/03/2025	N05-003566	0	21A0H
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	12/08/2025	FUEL GAS PIPING		
APPROVED BY:	U. KASINATHAN	12/12/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBP-BR-AG		
			P&ID DRAWING NUMBER:N01-PID-MBP-00-05		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: -	PAGE NUMBER: 3 OF 4	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd


SL2


MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

REVISION RECORD



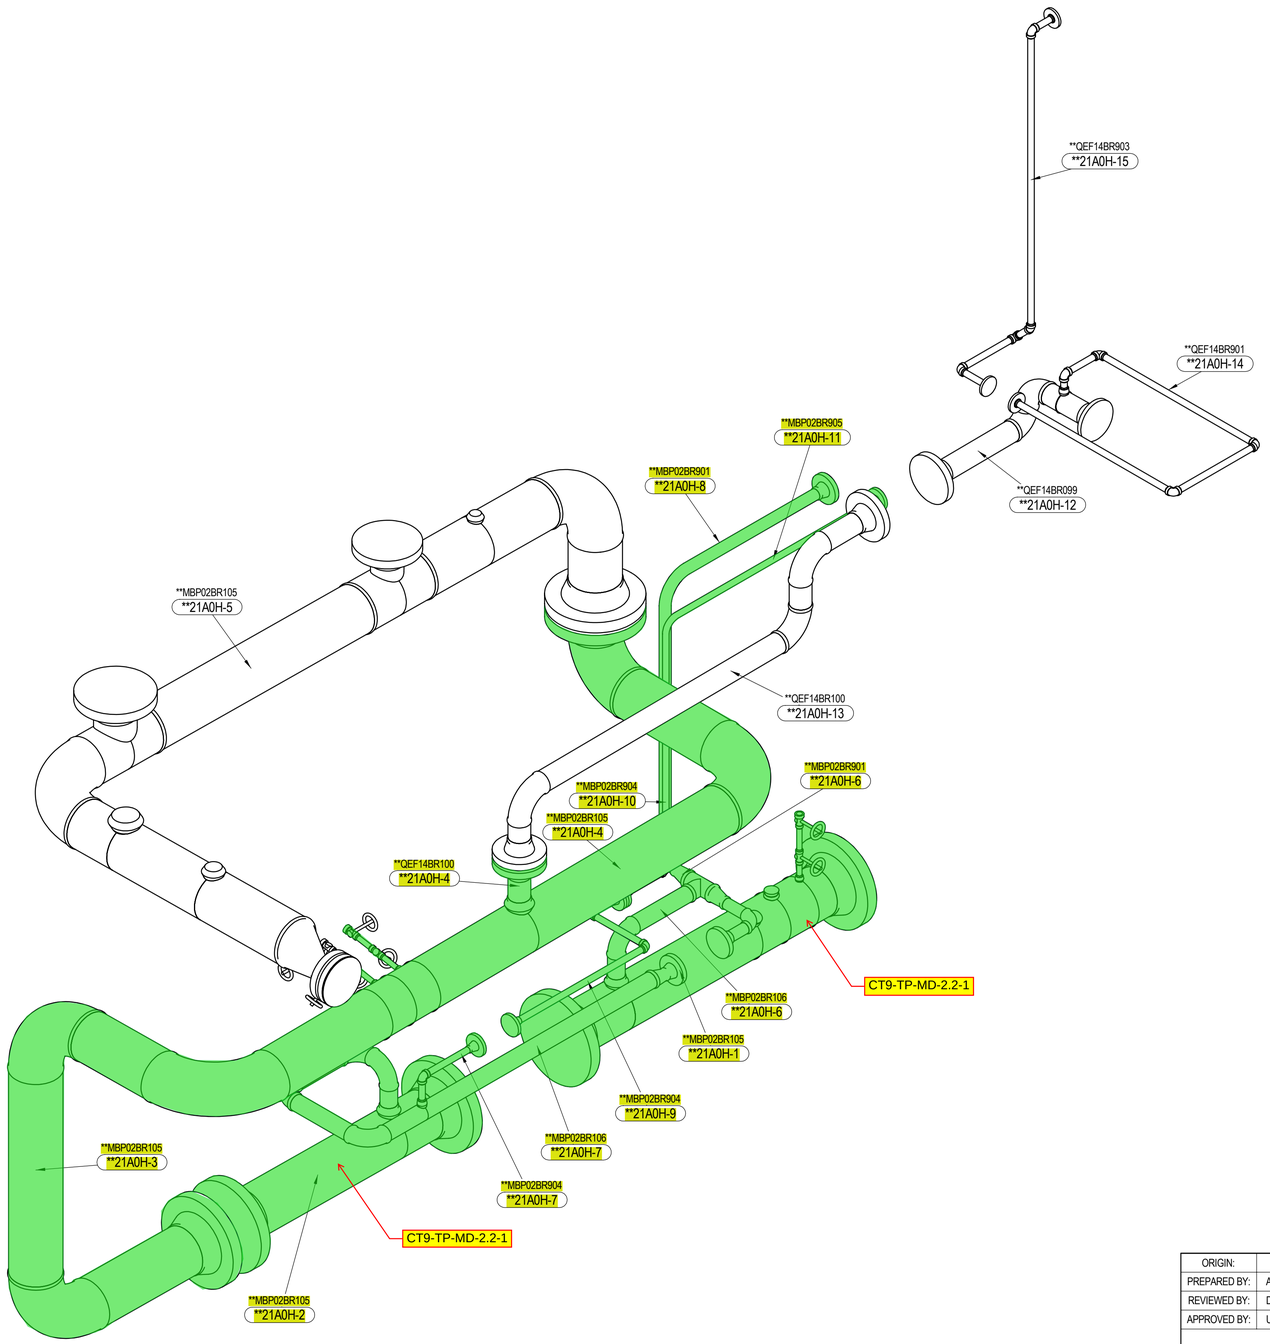

ON MODULE PIPING

LEGEND:

PIPELINE SPOOL	INDICATES PIPELINE ON THE TOP AND SPOOL ON THE BOTTOM.
SUPPORT	INDICATES SUPPORT.
TERMINAL POINT	INDICATES TERMINAL POINT.
– – – – – – –	INDICATES TRACING.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A. CLET	12/03/2025	N05-003566	0	21A0H
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	12/08/2025	FUEL GAS PIPING		
APPROVED BY:	U. KASINATHAN	12/12/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBP-BR-AG		
			P&ID DRAWING NUMBER:N01-PID-MBP-00-05		
			M501JAC GAS TURBINE		
PROJECT CODE:	-		P&ID:	-	
PIPELINE:	-		PAGE NUMBER:	4 OF 4	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd


SIL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:


DRAWING DISTRIBUTION LIST



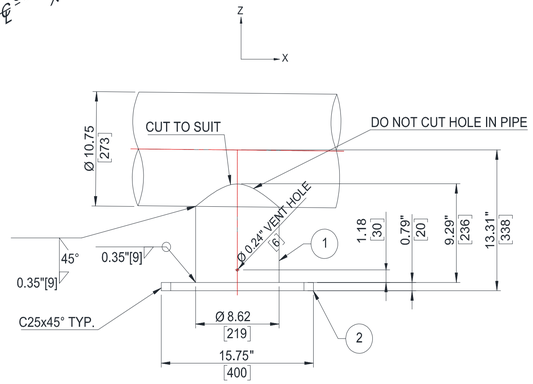

DETAIL-PIPE SUPPORT ATTACHMENT
[**21A0H-PSA-06]

1-PIPE 8", SCH 80S, ASTM A312-TP304, SEAMLESS L=9.29", 1 PIECE
2-PLATE, ASTM A36, 15.75"x13.78"x0.79", 1 PIECE

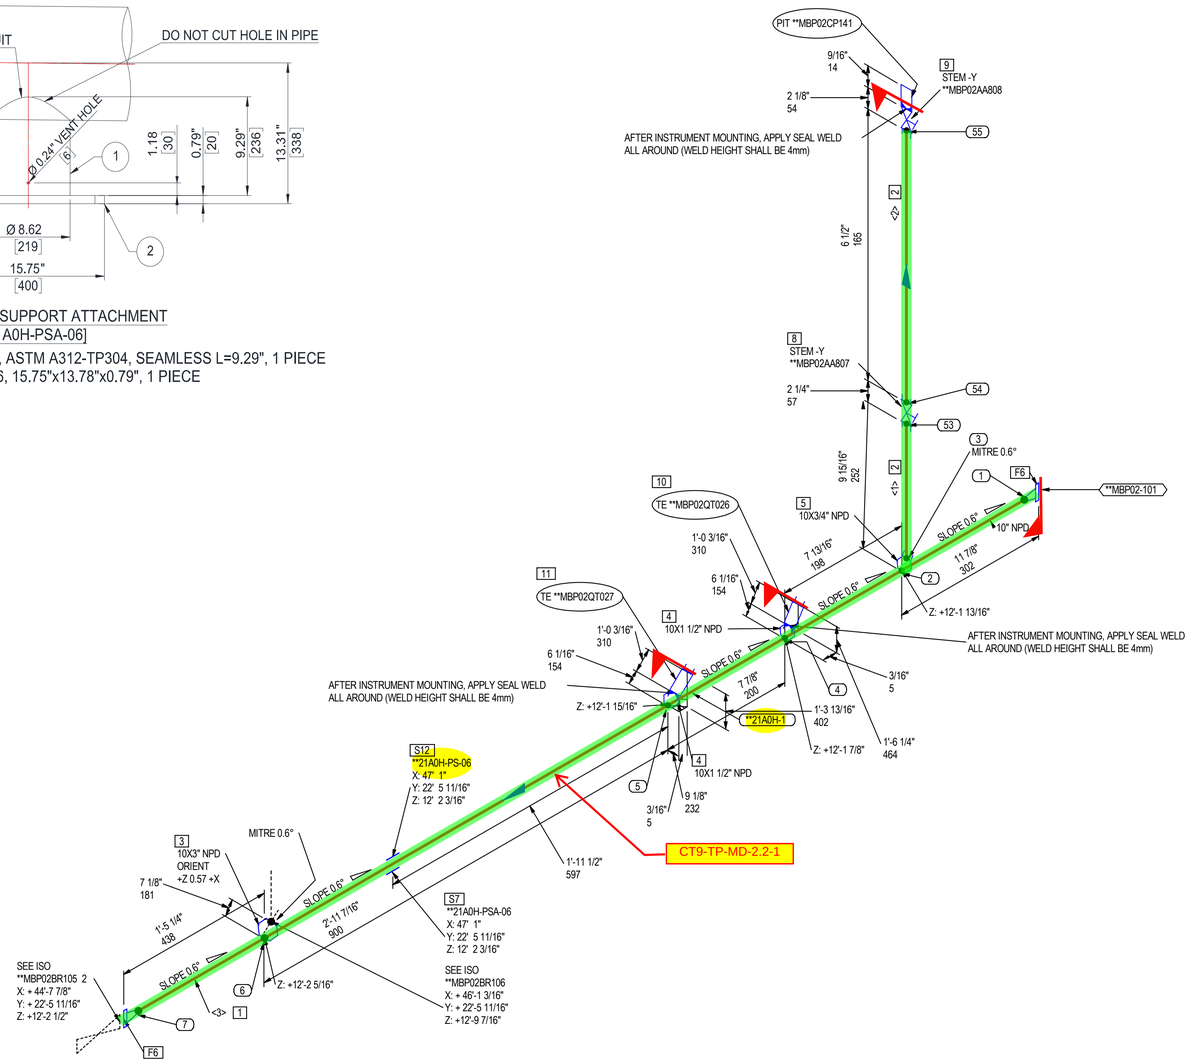

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	10	MPAAZZBOZZABBANI	5.7'
2	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	3/4	MPAAZZBPZZABBANI	0.9'
3	WELDOLET, S-XS x S-40S, BE, MSS-SP-97, ASTM A182-F304	10X3	MMEKZZBOZZGKGALO	1
4	THREDOLET, CL3000, FTE, MSS-SP-97, ASTM A182-F304	10X1 1/2	MMEMAWBUZZGKGALO	2
5	SOCKOLET, CL3000, SWE, MSS-SP-97, ASTM A182-F304	10X3/4	MMELAWBVZZGKGALO	1
6	FLANGE WN, CL600, RFFE x BE, ASME B16.5, ASTM A182-F304, S-80S bore	10	MFAAAPDCZZAADALO	2
	PIPE SUPPORTS			
7	PIPE SUPPORT ATTACHMENT (REFER TO DETAIL)	10	**21A0H-PSA-06	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	3/4	MVAAAQBVZZAATALS	1
9	GATE VALVE, CL800, SWE x FTE, ASME B16.34, ASTM A182-F316	3/4	MVAAAQDHZZAATALS	1
	INSTRUMENTS			
10	GT FUEL GAS SUPPLY TEMPERATURE-1, TE **MBP02QT026	1 1/2		1
11	GT FUEL GAS SUPPLY TEMPERATURE-2, TE **MBP02QT027	1 1/2		1
	PIPE SUPPORTS			
12	PIPE SUPPORT	10	**21A0H-PS-06	1
	SPOOLS			
	**21A0H-1			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	3 15/16"	3/4		MITRED	SQ.CUT	MPAAZZBPZZABBANI
<2>	6 1/2"	3/4		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<3>	5'7 3/4"	10		BEVEL	BEVEL	MPAAZZBOZZABBANI

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	BW	S	10"	1
2	LET	S	3/4"	1
3	MW	S	3/4"	1
53	SW	S	3/4"	1
54	SW	S	3/4"	1
55	SW	S	3/4"	1
4	LET	S	1 1/2"	1
5	LET	S	1 1/2"	1
6	LET	S	3"	1
7	BW	S	10"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

PIPING SPEC:	SCG	PAINTING SPEC: PER PROJECT SPECIFICATION			
FLUID CODE:	GF, FUEL GAS	INTERIOR SURFACE TREATMENT SPEC: LU-00129			
MAX. PRESS.:	884.00 psig / 6.09 MPag				
TEST PRESS.:	1326.00 psig / 9.14 MPag				
MAX. TEMP:	572 F / 300 C				
INSULATION SPEC:	LU-00332				

REVISION RECORD

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A.CLET	12/03/2025	N05-003566	0	21A0H
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	12/08/2025	FUEL GAS PIPING		
APPROVED BY:	U. KASINATHAN	12/12/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBP-BR-AG		
			P&ID DRAWING NUMBER:N01-PID-MBP-00-05		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBP02BR105	1 OF 6	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

DEPARTMENT: MITSUBISHI POWER ENGINEERING
SECTION: PLANT ENGINEERING

DRAWING DISTRIBUTION LIST

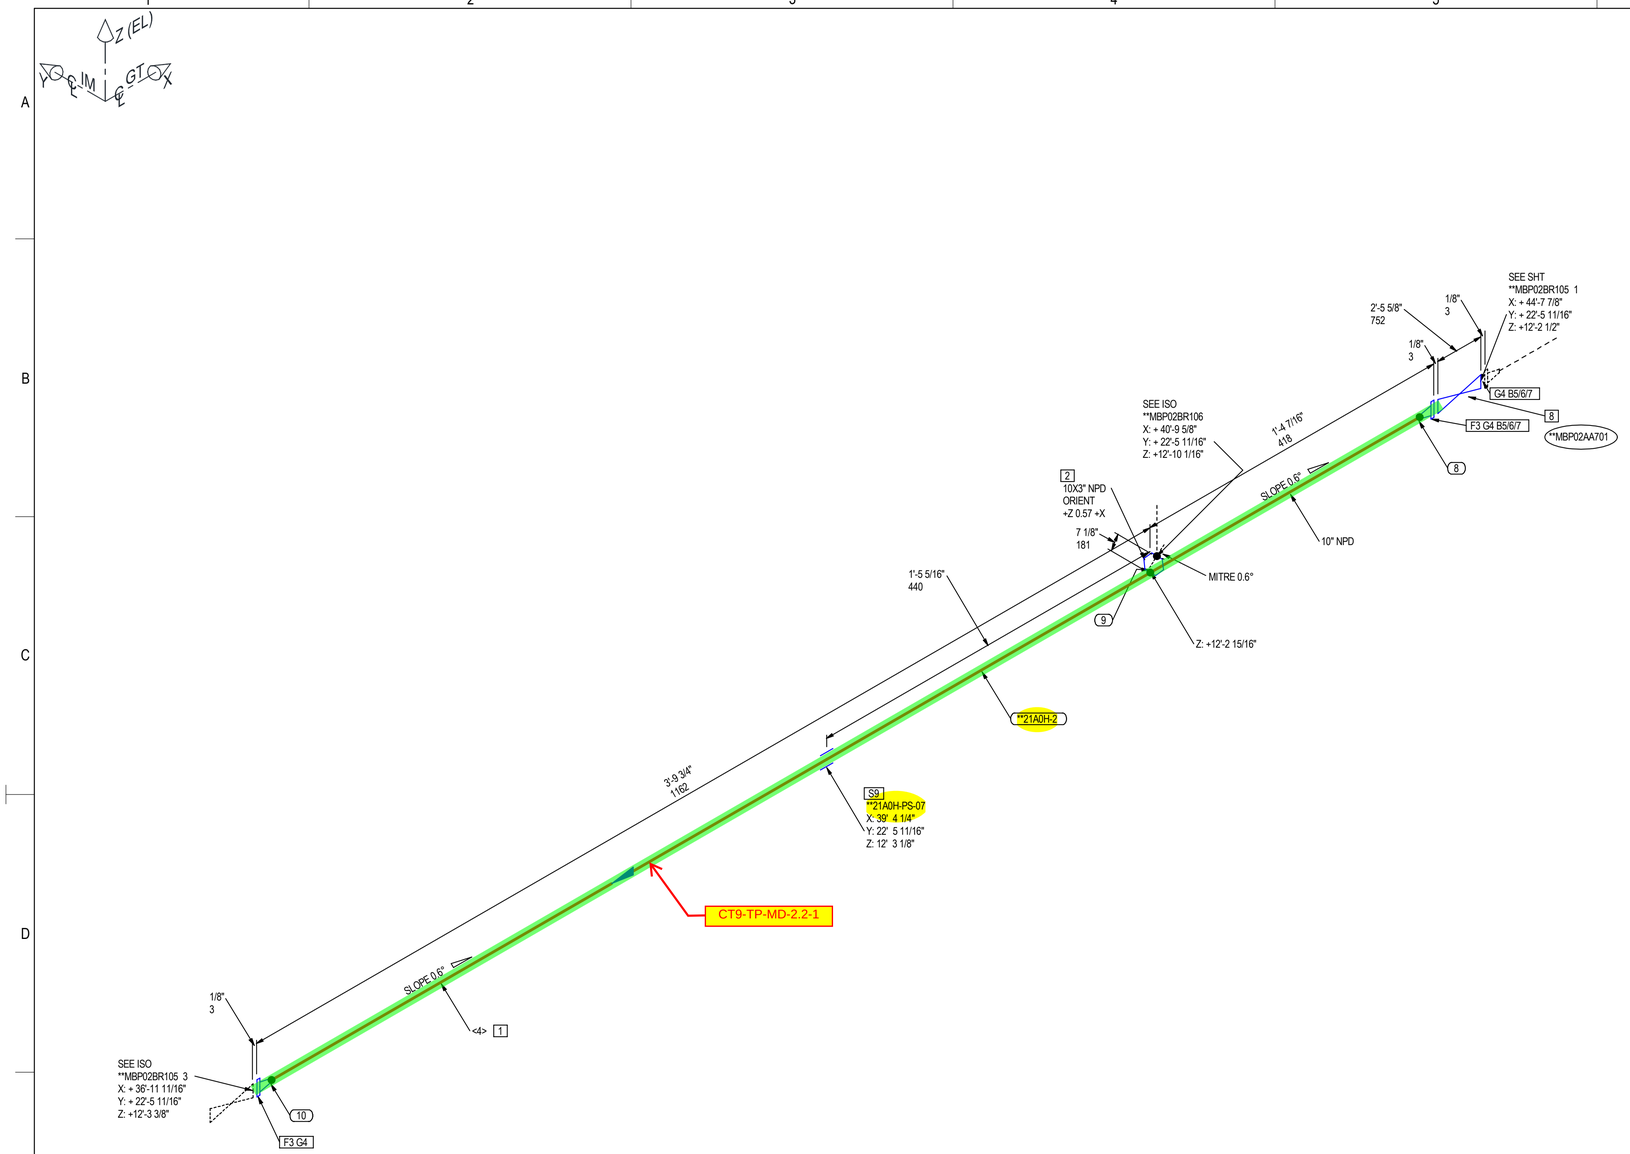

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	10	MPAAZZBOZZABBANI	4.2'
2	WELDOLET, S-XS x S-40S, BE, MSS-SP-97, ASTM A182-F304	10X3	MMEKZZBOZZGKGALO	1
3	FLANGE WN, CL600, RFFE x BE, ASME B16.5, ASTM A182-F304, S-80S bore	10	MFAAAPDCZZAADALO	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL600, 0.175" THK, ASME B16.20, WINDING 316L/FILLER FLEXIBLE GRAPHITE, INNER RING 316L/CENTERING RING 316	10	MDAPAXAAKXAJUS	3
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 8-UN - 9.5 in. Length	1 1/4	MBAZZAIZZIAGBEUZ	32
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 8-UN	1 1/4	MNOZZAIAAZBGAAKU	64
7	WASHER, SPECIAL SHAPED LOCK, 10in NPD, 1.5mm THK, MHPSA G1-90944, ASTM A240-304	1 1/4	MWQZZZZCAIBDAMDP	64
	INSTRUMENTS			
8	GT FUEL GAS SHUT OFF VALVE, CL600, RF, A351-CF8M, MODEL 51-16, GLOBE, **MBP02AA701	10		1
	PIPE SUPPORTS			
9	PIPE SUPPORT	10	**21A0H-PS-07	1
	SPOOLS			
	**21A0H-2			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<4>	4'1 11/16"	10		BEVEL	BEVEL	MPAAZZBOZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
8	BW	S	10"	1
9	LET	S	3"	1
10	BW	S	10"	1

PIPING SPEC:	SCG
FLUID CODE:	GF, FUEL GAS
MAX. PRESS.:	884.00 psig / 6.09 MPag
TEST PRESS.:	1326.00 psig / 9.14 MPag
MAX. TEMP:	572 F / 300 C
INSULATION SPEC:	LU-00332

PAINTING SPEC: PER PROJECT SPECIFICATION

INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD					
REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A.CLET	12/03/2025	N05-003566	0	21A0H
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	12/08/2025	FUEL GAS PIPING		
APPROVED BY:	U. KASINATHAN	12/12/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBP-BR-AG		
			P&ID DRAWING NUMBER:N01-PID-MBP-00-05		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBP02BR105	2 OF 6	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd


SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING


DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST



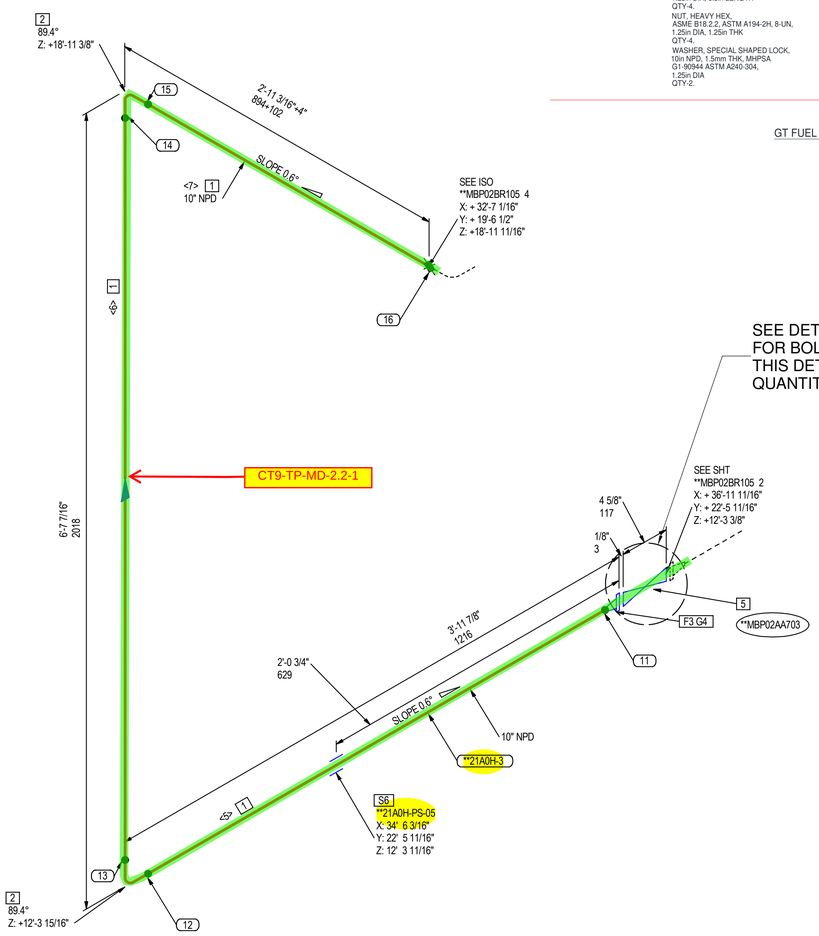

SEE DETAIL - A
FOR BOLTING INFORMATION
THIS DETAIL SHOWS THE ACTUAL
QUANTITY OF WASHERS REQUIRED

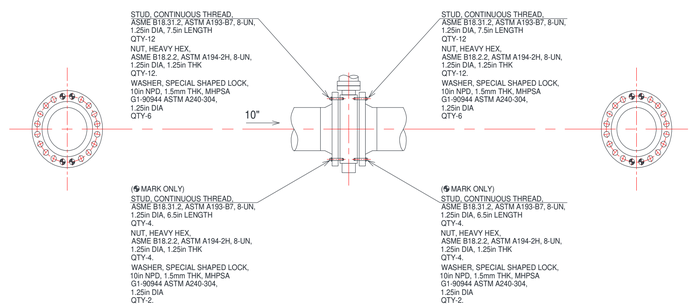

DETAIL - A
GT FUEL GAS NOZZLE PURGE AIR STOP VALVE
(**MBP02AA703)

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	10	MPAAZZBOZZABBANI	8.4'
2	90 DEG ELBOW LR, S-80S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	10	MMCMZZBOZZAAEAPI	2
3	FLANGE WN, CL600, RFFE x BE, ASME B16.5, ASTM A182-F304, S-80S bore	10	MFAAAPDCZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL600, 0.175" THK, ASME B16.20, WINDING 316L/FILLER FLEXIBLE GRAPHITE, INNER RING 316L/CENTERING RING 316	10	MDAPAXAAKXAJUS	1
	INSTRUMENTS			
5	GT FUEL GAS NOZZLE PURGE AIR STOP VALVE, CL600, RF, LUGGED, 8590 BUTTERFLY **MBP02AA703	10		1
	PIPE SUPPORTS			
6	PIPE SUPPORT	10	**21A0H-PS-05	1
	SPOOLS			
	**21A0H-3			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<5>	2'2 3/4"	10		BEVEL	BEVEL	MPAAZZBOZZABBANI
<6>	4'1 11/16"	10		BEVEL	BEVEL	MPAAZZBOZZABBANI
<7>	2'0 5/16"	10		BEVEL	BEVEL	MPAAZZBOZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX##-###⟩ INDICATES PIPING TERMINAL POINT.

ADITIONAL NOTES:
1. WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY. THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
11	BW	S	10"	1
12	BW	S	10"	1
13	BW	S	10"	1
14	BW	S	10"	1
15	BW	S	10"	1
16	BW	S	10"	1

PIPING SPEC:	SCG	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	GF, FUEL GAS	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	884.00 psig / 6.09 MPag							
TEST PRESS.:	1326.00 psig / 9.14 MPag							
MAX. TEMP:	572 F / 300 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
⬭ WELD NUMBER
▭ PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A.CLET	12/03/2025	N05-003566	0	21A0H
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	12/08/2025	FUEL GAS PIPING		
APPROVED BY:	U. KASINATHAN	12/12/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBP-BR-AG		
			P&ID DRAWING NUMBER:N01-PID-MBP-00-05		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBP02BR105	3 OF 6	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

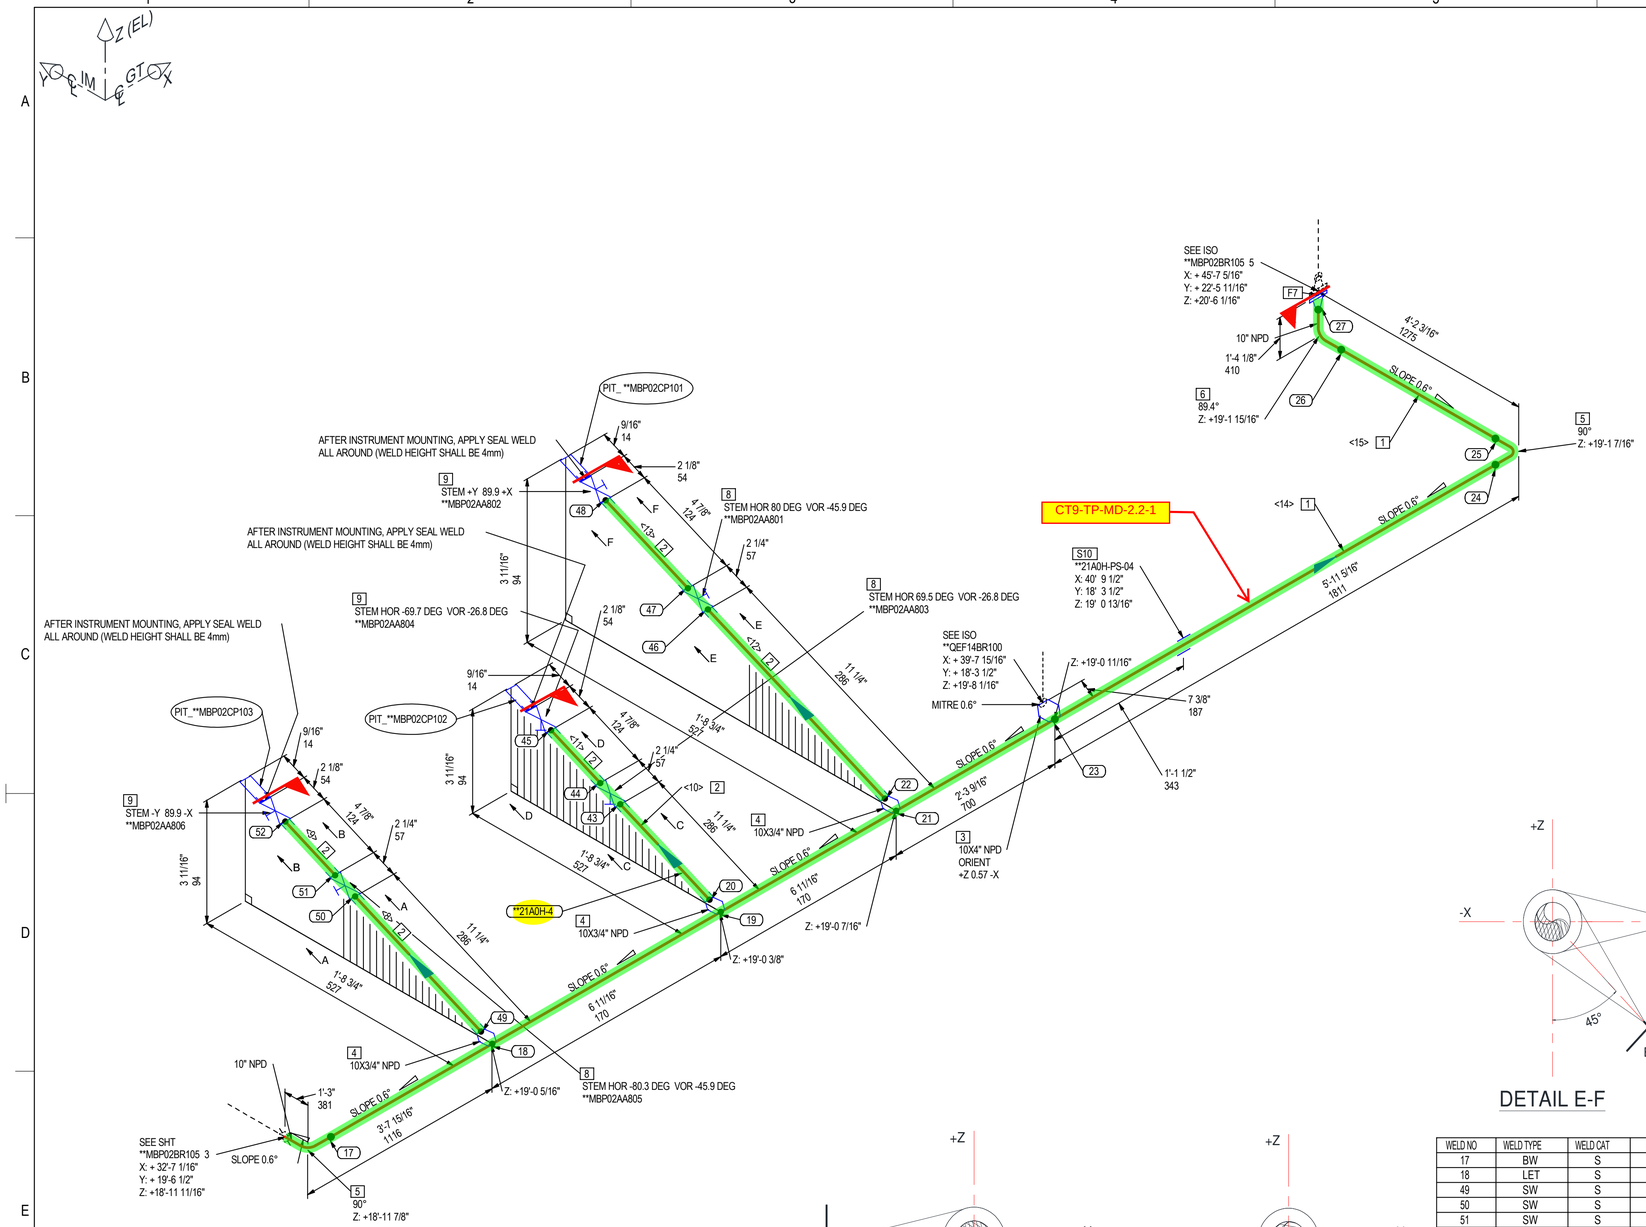

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-80S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	10	MPAAZZBOZZABBANI	12.7'
2	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	3/4	MPAAZZBPZZABBANI	2.6'
3	WELDOLET, S-XS x S-40S, BE, MSS-SP-97, ASTM A182-F304	10X4	MMEKZZBOZZGKGALO	1
4	SOCKOLET, CL3000, SWE, MSS-SP-97, ASTM A182-F304	10X3/4	MMELAWBVZZGKGALO	3
5	90 DEG ELBOW LR, S-80S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	10	MMCMZZBOZZAAEAPI	2
6	90 DEG ELBOW SR, S-80S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	10	MMCNZZBOZZAAEAPI	1
7	FLANGE WN, CL600, RFFE x BE, ASME B16.5, ASTM A182-F304, S-80S bore	10	MFAAAPDCZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
8	GATE VALVE, CL800, SWE, ASME B16.34, ASTM A182-F316	3/4	MVAAAQBVZZAATALS	3
9	GATE VALVE, CL800, SWE x FTE, ASME B16.34, ASTM A182-F316	3/4	MVAAAQDHZZAATALS	3
	PIPE SUPPORTS			
10	PIPE SUPPORT	10	**21A0H-PS-04	1
	SPOOLS			
	**21A0H-4			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<8>	5 1/4"	3/4		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<9>	4 7/8"	3/4		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<10>	5 1/4"	3/4		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<11>	4 7/8"	3/4		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<12>	5 1/4"	3/4		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<13>	4 7/8"	3/4		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<14>	10'6 3/16"	10		BEVEL	BEVEL	MPAAZZBOZZABBANI
<15>	2'1 1/4"	10		BEVEL	BEVEL	MPAAZZBOZZABBANI

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
17	BW	S	10"	1
18	LET	S	3/4"	1
49	SW	S	3/4"	1
50	SW	S	3/4"	1
51	SW	S	3/4"	1
52	SW	S	3/4"	1
19	LET	S	3/4"	1
20	SW	S	3/4"	1
43	SW	S	3/4"	1
44	SW	S	3/4"	1
45	SW	S	3/4"	1
21	LET	S	3/4"	1
22	SW	S	3/4"	1
46	SW	S	3/4"	1
47	SW	S	3/4"	1
48	SW	S	3/4"	1
23	LET	S	4"	1
24	BW	S	10"	1
25	BW	S	10"	1
26	BW	S	10"	1
27	BW	S	10"	1

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800 mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX## ###> INDICATES PIPING TERMINAL POINT.

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A.CLET	12/03/2025	N05-003566	0	21A0H
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	12/08/2025	FUEL GAS PIPING		
APPROVED BY:	U. KASINATHAN	12/12/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBP-BR-AG		
			P&ID DRAWING NUMBER:N01-PID-MBP-00-05		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBP02BR105	4 OF 6	

PIPING SPEC:	SCG
FLUID CODE:	GF, FUEL GAS
MAX. PRESS.:	884.00 psig / 6.09 MPag
TEST PRESS.:	1326.00 psig / 9.14 MPag
MAX. TEMP:	572 F / 300 C
INSULATION SPEC:	LU-00332

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REVISION RECORD					
REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST

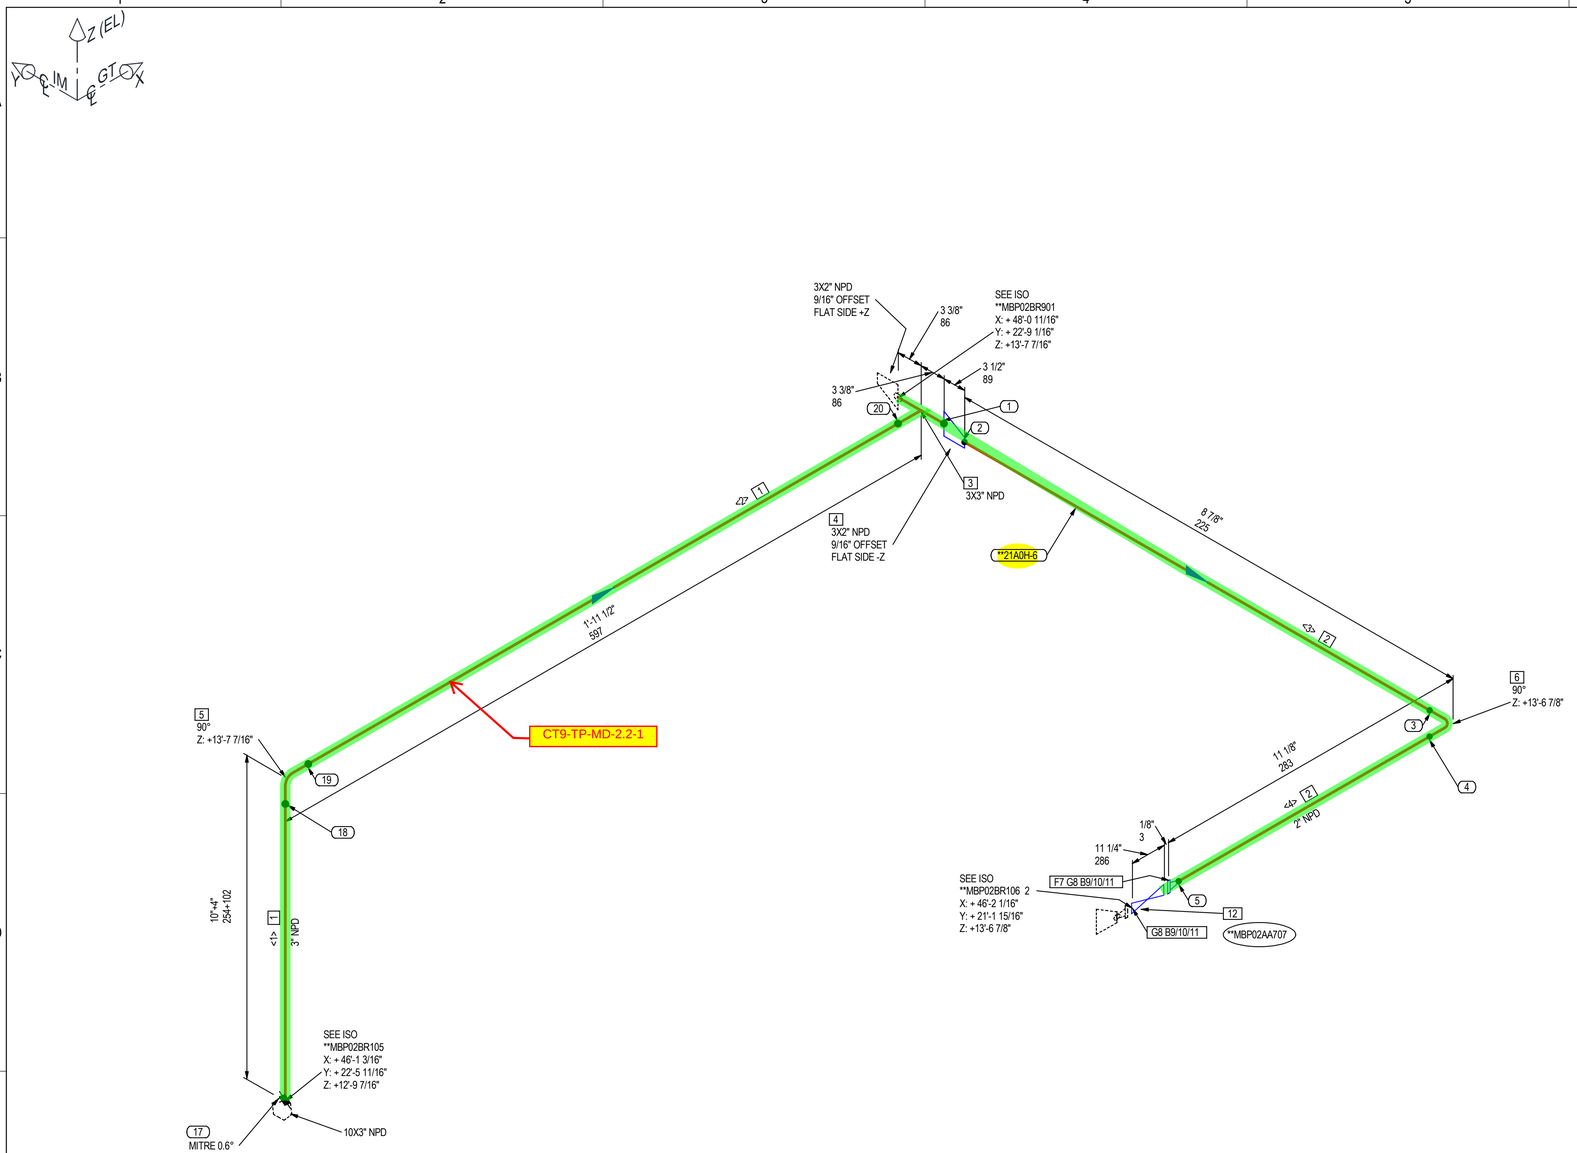

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	3	MPAAZZBOZZABBANI	2.1'
2	PIPE, S-40S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	2	MPAAZZBOZZABBANI	1.0'
3	TEE, S-40S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	3X3	MMDJZZBOZZAAEAPI	1
4	ECCENTRIC REDUCER, S-40S x S-40S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	3X2	MMBJZZBOZZAAEAPI	1
5	90 DEG ELBOW LR, S-40S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	3	MMCMZZBOZZAAEAPI	1
6	90 DEG ELBOW LR, S-40S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	2	MMCMZZBOZZAAEAPI	1
7	FLANGE WN, CL600, RFFE x BE, ASME B16.5, ASTM A182-F304, S-40S bore	2	MFAAAPDCZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
8	GASKET, SPIRAL WOUND, CL600, 0.175" THK, ASME B16.20, WINDING 316L/FILLER FLEXIBLE GRAPHITE, INNER RING 316L/CENTERING RING 316	2	MDAPAXAAKXAJUS	2
9	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 11-UNC - 5 in. Length	5/8	MBAZZADZZIAGBEUZ	16
10	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 11-UNC	5/8	MNOZZADAAZBGAADU	32
11	WASHER, SPECIAL SHAPED LOCK, 2in NPD, 1.2mm THK, MHPSA G1-90944, ASTM A240-304	5/8	MWQZZZZBXIBDAMDP	32
	INSTRUMENTS			
12	GT FUEL GAS SHUT OFF BYPASS VALVE, CL600, RF, A351-CF8M, MODEL 88-16, GLOBE, **MBP02AA707	2		1
	SPOOLS			
	**21A0H-6			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	9 1/2"	3		MITRED	BEVEL	MPAAZZBOZZABBANI
<2>	1'3 5/8"	3		BEVEL	BEVEL	MPAAZZBOZZABBANI
<3>	5 7/8"	2		BEVEL	BEVEL	MPAAZZBOZZABBANI
<4>	5"	2		BEVEL	BEVEL	MPAAZZBOZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. ⟨XXX## ###⟩ INDICATES PIPING TERMINAL POINT.

ADITIONAL NOTES:
1. WELDING AT PIPES MARKED WITH ✎ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY. THE MARK ✎ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
17	MW	S	3"	1
18	BW	S	3"	1
19	BW	S	3"	1
20	BW	S	3"	1
1	BW	S	3"	1
2	BW	S	2"	1
3	BW	S	2"	1
4	BW	S	2"	1
5	BW	S	2"	1

PIPING SPEC:	SCG
FLUID CODE:	GF, FUEL GAS
MAX. PRESS.:	884.00 psig / 6.09 MPag
TEST PRESS.:	1326.00 psig / 9.14 MPag
MAX. TEMP:	572 F / 300 C
INSULATION SPEC:	LU-00332

PAINTING SPEC: PER PROJECT SPECIFICATION
INTERIOR SURFACE TREATMENT SPEC: LU-00129

REV. #	DESCRIPTION	BY	CHK	APP	DATE

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
● S - SHOP
⊗ FW - FIELD WELD
⊗ FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A.CLET	12/03/2025	N05-003566	0	21A0H
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	12/08/2025	FUEL GAS PIPING		
APPROVED BY:	U. KASINATHAN	12/12/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBP-BR-AG		
			P&ID DRAWING NUMBER:N01-PID-MBP-00-05		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBP02BR106	1 OF 2	

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING | PLANT ENGINEERING

DEPARTMENT: | SECTION:

DRAWING DISTRIBUTION LIST

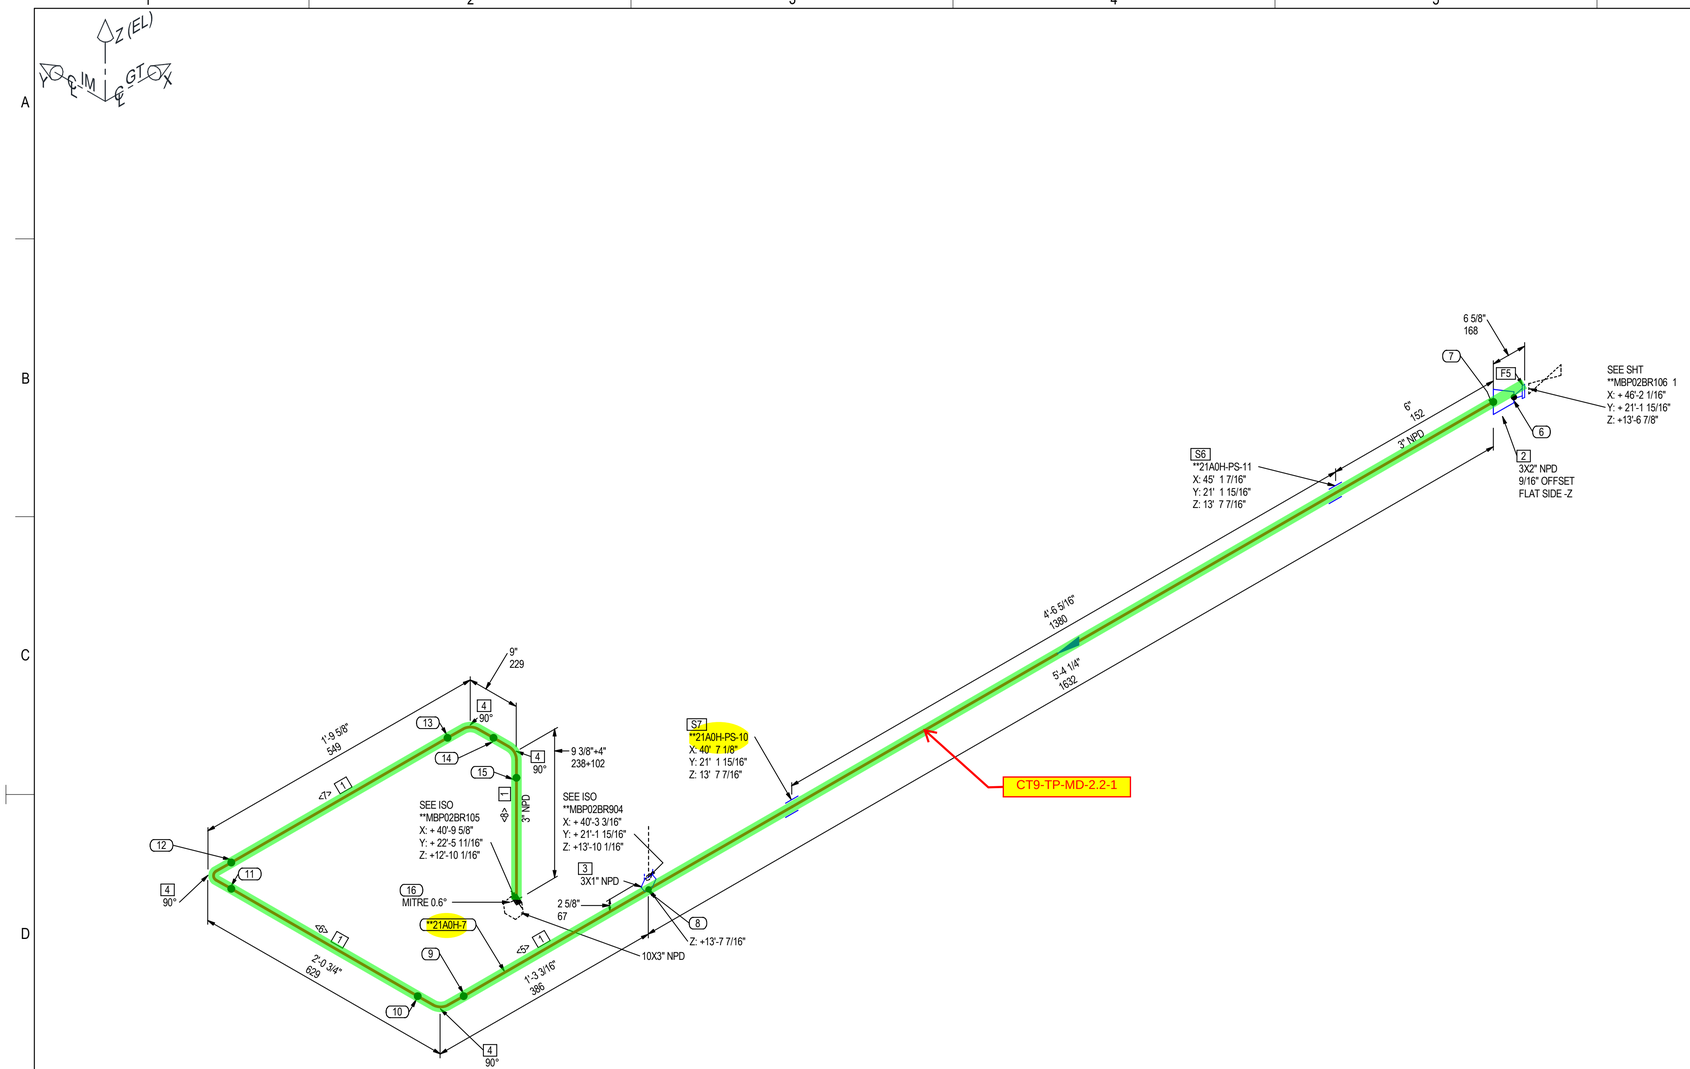

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	3	MPAAZZBOZZABBANI	9.4'
2	ECCENTRIC REDUCER, S-40S x S-40S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	3X2	MMBJZZBOZZAAEAPI	1
3	SOCKOLET, CL3000, SWE, MSS-SP-97, ASTM A182-F304	3X1	MMELAWBVZZGKGALO	1
4	90 DEG ELBOW LR, S-40S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	3	MMCMZZBOZZAAEAPI	4
5	FLANGE WN, CL600, RFFE x BE, ASME B16.5, ASTM A182-F304, S-40S bore	2	MFAAAPDCZZAADALO	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
6	PIPE SUPPORT	3	**21A0H-PS-11	1
7	PIPE SUPPORT	3	**21A0H-PS-10	1
	SPOOLS			
	**21A0H-7			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<5>	6'2 15/16"	3		BEVEL	BEVEL	MPAAZZBOZZABBANI
<6>	1'3 3/4"	3		BEVEL	BEVEL	MPAAZZBOZZABBANI
<7>	1'0 5/8"	3		BEVEL	BEVEL	MPAAZZBOZZABBANI
<8>	8 7/8"	3		BEVEL	MITRED	MPAAZZBOZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. 〈XXX## ###〉 INDICATES PIPING TERMINAL POINT.

ADITIONAL NOTES:
1. WELDING AT PIPES MARKED WITH ↯ SHALL BE ADJUSTED AT SHOP TO FIT DURING ASSEMBLY. THE MARK ↯ ON THE DRAWING INDICATES AN EXCESS LENGTH OF 4" (100mm) ADDED TO THE PIPE FOR ADJUSTED DURING ASSEMBLY.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
6	BW	S	2"	1
7	BW	S	3"	1
8	LET	S	1"	1
9	BW	S	3"	1
10	BW	S	3"	1
11	BW	S	3"	1
12	BW	S	3"	1
13	BW	S	3"	1
14	BW	S	3"	1
15	BW	S	3"	1
16	MW	S	3"	1

PIPING SPEC:	SCG	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	GF, FUEL GAS	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	884.00 psig / 6.09 MPag							
TEST PRESS.:	1326.00 psig / 9.14 MPag							
MAX. TEMP:	572 F / 300 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A.CLET	12/03/2025	N05-003566	0	21A0H
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	12/08/2025	FUEL GAS PIPING		
APPROVED BY:	U. KASINATHAN	12/12/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBP-BR-AG		
			P&ID DRAWING NUMBER:N01-PID-MBP-00-05		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**MBP02BR106	2 OF 2	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd


SL2


MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST



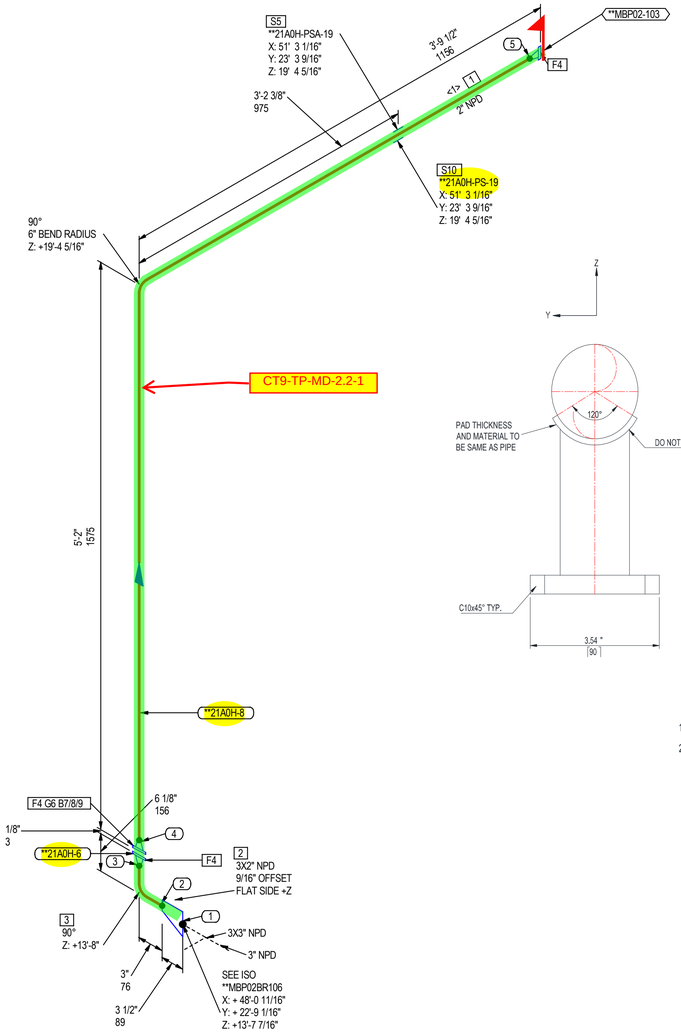

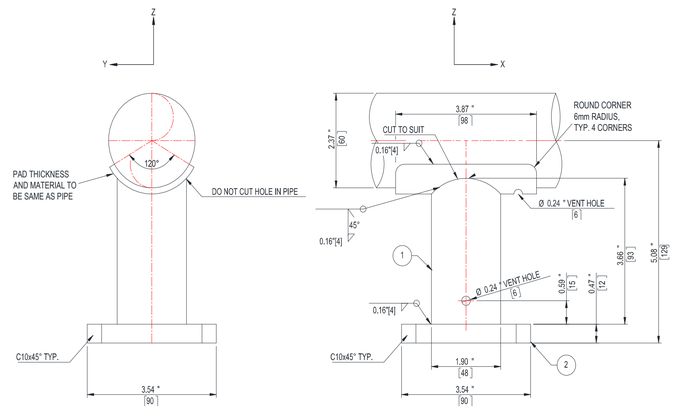

DETAIL-PIPE SUPPORT ATTACHMENT
[**21A0H-PSA-19]

1-PIPE 1 1/2", SCH 40S, ASTM A312-TP304, SEAMLESS L=3.66", 1 PIECE

2-PLATE, ASTM A36, 3.54"x3.54"x0.47", 1 PIECE

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	2	MPAAZZBOZZABBANI	8.3'
2	ECCENTRIC REDUCER, S-40S x S-40S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	3X2	MMBJZZBOZZAAEAPI	1
3	90 DEG ELBOW LR, S-40S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	2	MMCMZZBOZZAAEAPI	1
4	FLANGE WN, CL600, RFFE x BE, ASME B16.5, ASTM A182-F304, S-40S bore	2	MFAAAPDCZZAADALO	3
	PIPE SUPPORTS			
5	PIPE SUPPORT ATTACHMENT (REFER TO DETAIL)	2	**21A0H-PSA-19	1

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
6	GASKET, SPIRAL WOUND, CL600, 0.175" THK, ASME B16.20, WINDING 316L/FILLER FLEXIBLE GRAPHITE, INNER RING 316L/CENTERING RING 316	2	MDAPAXAAKXAJUS	1
7	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 11-UNC - 5 in. Length	5/8	MBAZZADZZIAGBEUZ	8
8	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 11-UNC	5/8	MNOZZADAAZBGAADU	16
9	WASHER, SPECIAL SHAPED LOCK, 2in NPD, 1.2mm THK, MHPSA G1-90944, ASTM A240-304	5/8	MWQZZZZBXIBDAMDP	16
	PIPE SUPPORTS			
10	PIPE SUPPORT	2	**21A0H-PS-19	1

SPOOLS

**21A0H-6, **21A0H-8

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	8'2 11/16"	2	PLD BEND(1)	BEVEL	BEVEL	MPAAZZBOZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX##-### INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	BW	S	3"	1
2	BW	S	2"	1
3	BW	S	2"	1
4	BW	S	2"	1
5	BW	S	2"	1

PIPING SPEC:	SCG	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	GF, FUEL GAS	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	884.00 psig / 6.09 MPag							
TEST PRESS.:	1326.00 psig / 9.14 MPag							
MAX. TEMP:	572 F / 300 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

ORIGIN:	MITSUBISHI POWER-LAKE MARY		DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A.CLET		12/03/2025	N05-003566	0	21A0H
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI		12/08/2025	FUEL GAS PIPING		
APPROVED BY:	U. KASINATHAN		12/12/2025	INTERNAL TO GT PACKAGE		
				FOR FABRICATION & ERECTION		


PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.


MITSUBISHI POWER

N05-ISO-MBP-BR-AG
P&ID DRAWING NUMBER:N01-PID-MBP-00-05
M501JAC GAS TURBINE
PROJECT CODE: - P&ID: -
PIPELINE: **MBP02BR901
PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST



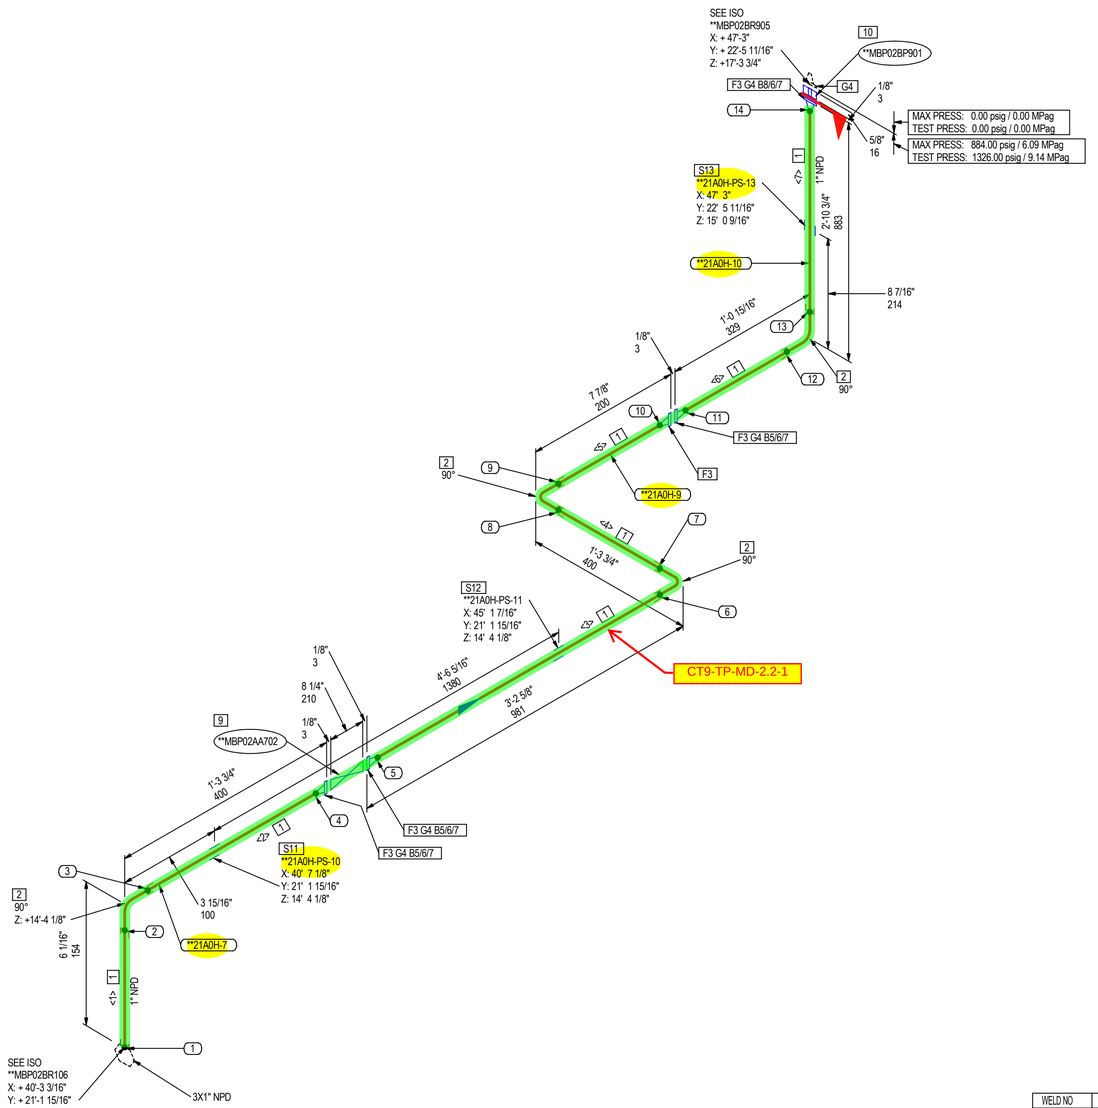

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1	MPAAZZBPZZABBANI	9.3'
2	90 DEG ELBOW, CL3000, SWE, ASME B16.11, ASTM A182-F304	1	MMCKAWBVZZAAGALO	4
3	FLANGE WN, CL600, RFFE x BE, ASME B16.5, ASTM A182-F304, S-40S bore	1	MFAAAPDCZZAADALO	5

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL600, 0.175" THK, ASME B16.20, WINDING 316L/FILLER FLEXIBLE GRAPHITE, INNER RING 316L/CENTERING RING 316	1	MDAPAXAAKXAJUS	5
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 11-UNC - 4.5 in. Length	5/8	MBAZZADZZIAGBEUZ	12
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 11-UNC	5/8	MNOZZADAAZBGAADU	32
7	WASHER, SPECIAL SHAPED LOCK, 1in NPD, 1.2mm THK, MHPSA G1-90944, ASTM A240-304	5/8	MWQZZZZBXIBDAMDP	32
8	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 11-UNC - 5.5 in. Length	5/8	MBAZZADZZIAGBEUZ	4
	INSTRUMENTS			
9	GT FUEL GAS VENT VALVE, CL600, RF, ASTM A351-CF8M **MBP02AA702	1		1
10	QUADRANT ORIFICE, CL600, A240 GR.316 **MBP02BP901	1		1
	PIPE SUPPORTS			
11	PIPE SUPPORT	1	**21A0H-PS-10	1
12	PIPE SUPPORT	1	**21A0H-PS-11	1
13	PIPE SUPPORT	1	**21A0H-PS-13	1

SPOOLS

**21A0H-7, **21A0H-9, **21A0H-10

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	5 1/8"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<2>	1'0 1/8"	1		SQ.CUT	BEVEL	MPAAZZBPZZABBANI
<3>	2'11"	1		BEVEL	SQ.CUT	MPAAZZBPZZABBANI
<4>	1'1 7/8"	1		SQ.CUT	SQ.CUT	MPAAZZBPZZABBANI
<5>	4 1/4"	1		SQ.CUT	BEVEL	MPAAZZBPZZABBANI
<6>	9 5/16"	1		BEVEL	SQ.CUT	MPAAZZBPZZABBANI
<7>	2'7 1/8"	1		SQ.CUT	BEVEL	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:

1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX## ###> INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	SW	S	1"	1
2	SW	S	1"	1
3	SW	S	1"	1
4	BW	S	1"	1
5	BW	S	1"	1
6	SW	S	1"	1
7	SW	S	1"	1
8	SW	S	1"	1
9	SW	S	1"	1
10	BW	S	1"	1
11	BW	S	1"	1
12	SW	S	1"	1
13	SW	S	1"	1
14	BW	S	1"	1

PIPING SPEC:	SCG	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD					
FLUID CODE:	GF, FUEL GAS	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	884.00 psig / 6.09 MPag							
TEST PRESS.:	1326.00 psig / 9.14 MPag							
MAX. TEMP:	572 F / 300 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A.CLET	12/03/2025	N05-003566	0	21A0H
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	12/08/2025	FUEL GAS PIPING		
APPROVED BY:	U. KASINATHAN	12/12/2025	INTERNAL TO GT PACKAGE		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBP-BR-AG		
			P&ID DRAWING NUMBER:N01-PID-MBP-00-05		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE: **MBP02BR904	PAGE NUMBER: 1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations. diversion contrary to U.S. law is prohibited.


ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT: SECTION:

DRAWING DISTRIBUTION LIST

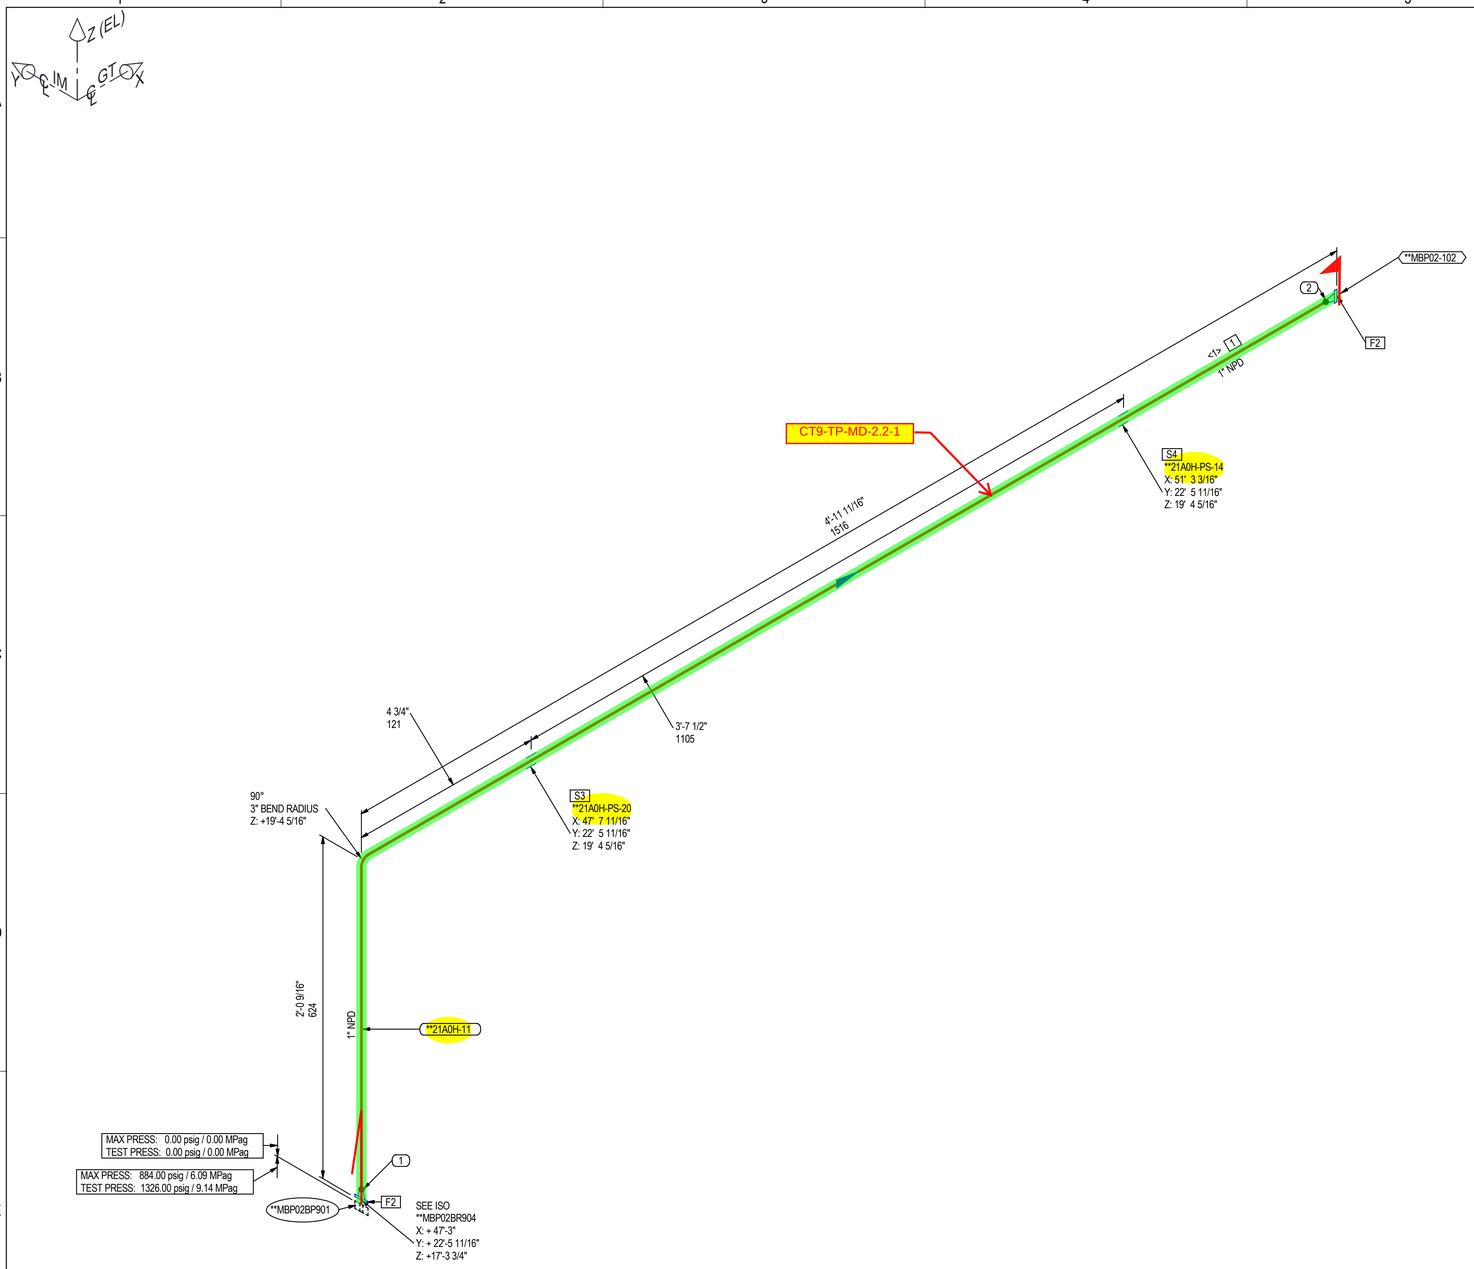

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, PE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	1	MPAAZZBPZZABBANI	6.5'
2	FLANGE WN, CL600, RFFE x BE, ASME B16.5, ASTM A182-F304, S-40S bore	1	MFAAAPDCZZAADALO	2

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
	PIPE SUPPORTS			
3	PIPE SUPPORT	1	**21A0H-PS-20	1
4	PIPE SUPPORT	1	**21A0H-PS-14	1
	SPOOLS			
	**21A0H-11			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	6'5 9/16"	1	PLD BEND(1)	BEVEL	BEVEL	MPAAZZBPZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. XXX## ### INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	BW	S	1"	1
2	BW	S	1"	1

PIPING SPEC:	SCG	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	GF, FUEL GAS	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	0.00 psig / 0.00 MPag							
TEST PRESS.:	0.00 psig / 0.00 MPag							
MAX. TEMP:	572 F / 300 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.


MITSUBISHI POWER

ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:
PREPARED BY:	A.CLET	12/03/2025	N05-003566
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	12/08/2025	FUEL GAS PIPING
APPROVED BY:	U. KASINATHAN	12/12/2025	INTERNAL TO GT PACKAGE
			FOR FABRICATION & ERECTION
			N05-ISO-MBP-BR-AG
			P&ID DRAWING NUMBER:N01-PID-MBP-00-05
			M501JAC GAS TURBINE
PROJECT CODE:	-	P&ID:	-
PIPELINE:		PAGE NUMBER:	
**MBP02BR905		1 OF 1	

REV. NO.: 0
SYSTEM CODE: 21A0H

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

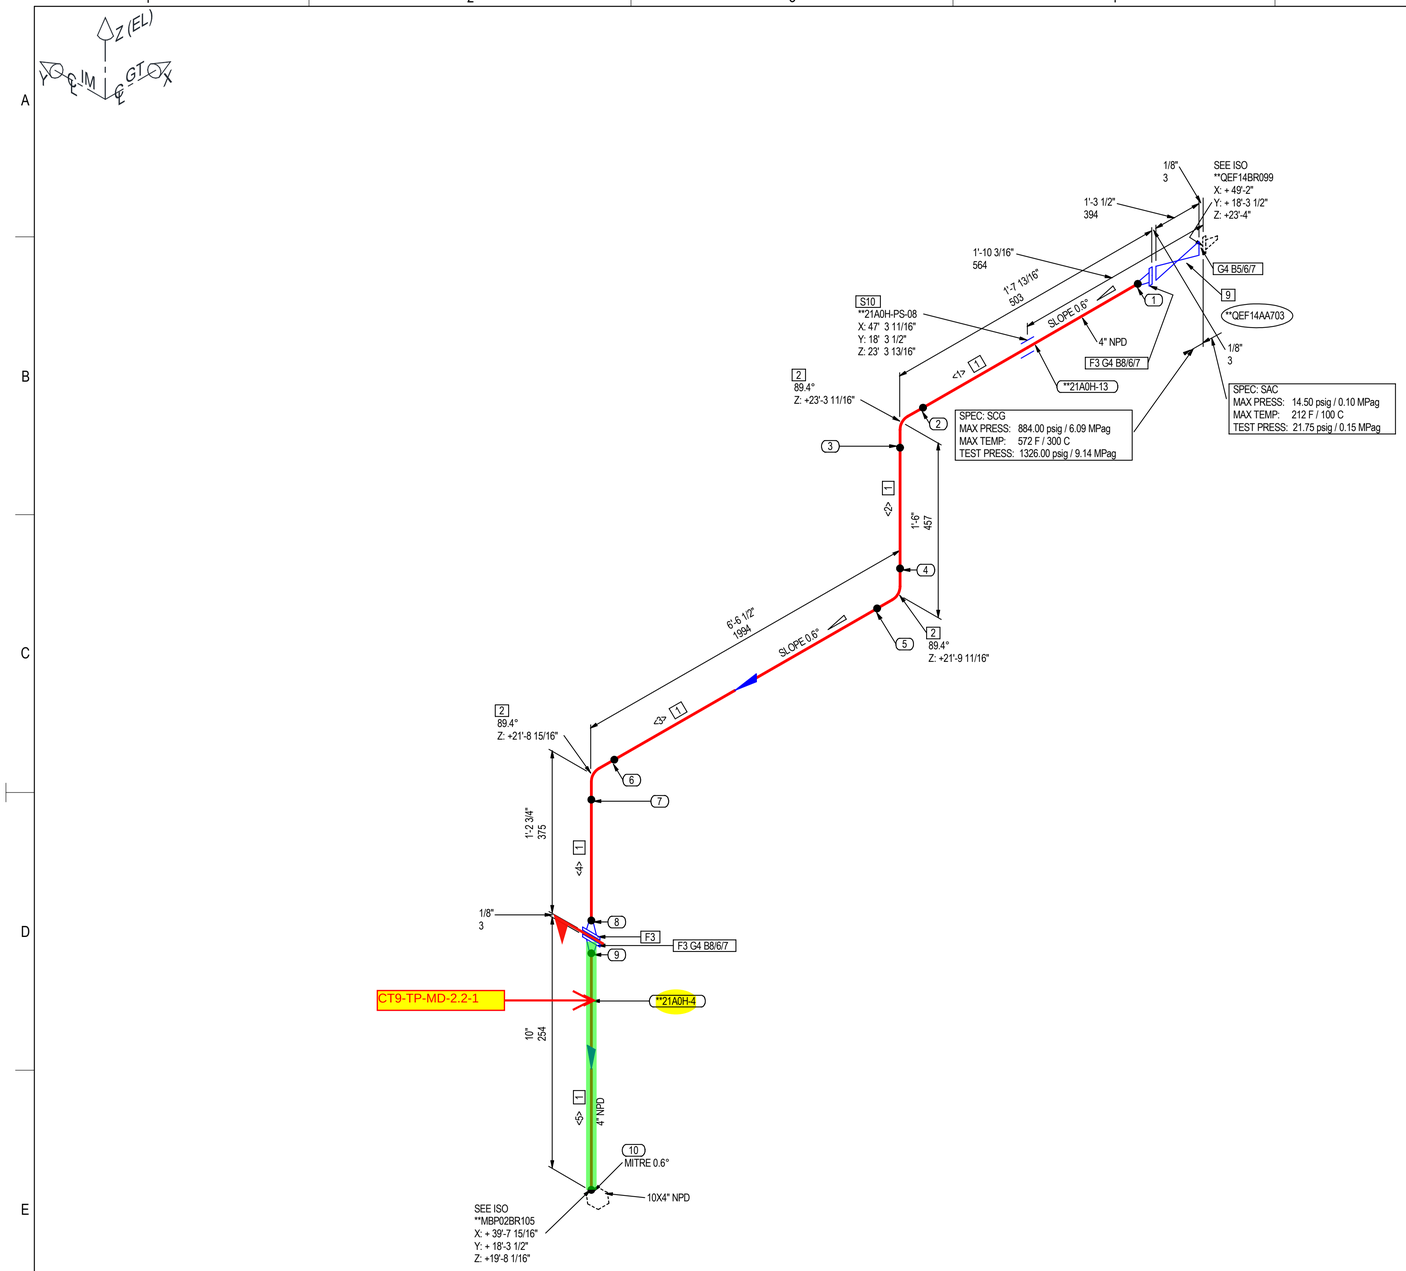

SHOP MATERIALS - FABRICATION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	PIPE, S-40S, BE, ASME B36.19M, ASTM A312-TP304, SEAMLESS	4	MPAAZZBOZZABBANI	7.8'
2	90 DEG ELBOW LR, S-40S, BE, ASME B16.9, ASTM A403-WP304, SEAMLESS	4	MMCMZZBOZZAAEAPI	3
3	FLANGE WN, CL600, RFFE x BE, ASME B16.5, ASTM A182-F304, S-40S bore	4	MFAAAPDCZZAADALO	3

OTHER THAN SHOP MATERIALS - ERECTION ONLY

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
4	GASKET, SPIRAL WOUND, CL600, 0.175" THK, ASME B16.20, WINDING 316L/FILLER FLEXIBLE GRAPHITE, INNER RING 316L/CENTERING RING 316	4	MDAPAXAAKXAJUS	3
5	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 10-UNC - 6.5 in. Length	7/8	MBAZZAEZZIAGBEUZ	8
6	NUT, HEAVY HEX, ASME B18.2.2, ASTM A194-2H, 9-UNC	7/8	MNOZZAFAAZBGAABU	48
7	WASHER, SPECIAL SHAPED LOCK, 4in NPD, 1.2mm THK, MHPSA G1-90944, ASTM A240-304	7/8	MWQZZZZBXIBDAMDP	48
8	STUD, CONTINUOUS THREAD, ASME B18.31.2, ASTM A193-B7, 9-UNC - 7 in. Length	7/8	MBAZZAFZZIAGBEUZ	16
	INSTRUMENTS			
9	GT FUEL GAS NOZZLE PURGE AIR SUPPLY VALVE, CL600, RF, ASTM A351-CF8M **QEF14AA703	4		1
	PIPE SUPPORTS			
10	PIPE SUPPORT	4	**21A0H-PS-08	1
	SPOOLS			
	**21A0H-4, **21A0H-13			

CUT PIPE LENGTH

PIECE NO	LENGTH (FT-INS)	NPD (IN)	REMARKS	END ONE	END TWO	ITEM CODE
<1>	9 5/8"	4		BEVEL	BEVEL	MPAAZZBOZZABBANI
<2>	6 1/16"	4		BEVEL	BEVEL	MPAAZZBOZZABBANI
<3>	5'6 5/8"	4		BEVEL	BEVEL	MPAAZZBOZZABBANI
<4>	4 1/2"	4		BEVEL	BEVEL	MPAAZZBOZZABBANI
<5>	5 3/4"	4		BEVEL	MITRED	MPAAZZBOZZABBANI

ACTUAL QUANTITY OF WASHERS SHALL BE CONSIDERED AS HALF OF THE QUANTITY SHOWN ON ISOMETRICS

NOTES:
1. THE X AND Y COORDINATES ARE WITH RESPECT TO THE INTERSECTION OF THE CENTERLINE OF THE GAS TURBINE (GT) AND THE INLET MANIFOLD (IM). THE Z (EL) COORDINATE IS WITH RESPECT TO THE TOP OF CONCRETE, WHICH IS 15'-9" [4800mm] BELOW THE CENTERLINE OF THE GT AND IS 0'-0".
2. ALL PIPE SUPPORT COORDINATES ARE WITH RESPECT TO THE CENTERLINE OF THE INSTALLED SUPPORTED PIPE.
3. THE MARK 'FFW' (FIELD FIT WELD) IN THE DRAWING INDICATES EXCESS LENGTH OF APPROX. 4 INCHES IDENTIFIED AS LOOSE IN THE DRAWING TO BE CUT AND ADJUSTED AT THE FIELD.
4. ALL WELDING TO BE DONE AND INSPECTED PER LATEST APPLICABLE EDITION OF ASME B31.1 AND SECTION IX AVAILABLE ON THE PROJECT AWARD DATE.
5. PIPING SHALL BE INSTALLED PER THE INDICATED SLOPE.
6. FOR ANY FURTHER INFORMATION REQUIRED DURING INSTALLATION, CONSULT MITSUBISHI POWER TFA (TECHNICAL FIELD ADVISOR) AT SITE.
7. <XXX## ###> INDICATES PIPING TERMINAL POINT.

WELD NO	WELD TYPE	WELD CAT	NPD	QTY
1	BW	S	4"	1
2	BW	S	4"	1
3	BW	S	4"	1
4	BW	S	4"	1
5	BW	S	4"	1
6	BW	S	4"	1
7	BW	S	4"	1
8	BW	S	4"	1
9	BW	S	4"	1
10	MW	S	4"	1

PIPING SPEC:	SCG	PAINTING SPEC: PER PROJECT SPECIFICATION	REVISION RECORD				
FLUID CODE:	AP, PURGE AIR	INTERIOR SURFACE TREATMENT SPEC: LU-00129	REV. #	DESCRIPTION	BY	CHK	APP	DATE
MAX. PRESS.:	884.00 psig / 6.09 MPag							
TEST PRESS.:	1326.00 psig / 9.14 MPag							
MAX. TEMP:	572 F / 300 C							
INSULATION SPEC:	LU-00332							

WELD TYPE IDENTIFIER:
BW - BUTT WELD
SW - SOCKET WELD
SOF - SLIP-ON FLANGE
SOB - SET-ON BRANCH
LET - OLET, LATROLET OR HALF COUPLING
TW - TACK WELD
MW - MITER WELD

WELD CATEGORY IDENTIFICATION:
S - SHOP
FW - FIELD WELD
FFW - FIELD FIT WELD

SYMBOLOGY:
WELD NUMBER
PART NUMBER (PT NO)
< > CUT LIST PIECE NUMBER

SYMBOL IDENTIFIER:
F - FLANGE
G - GASKET
B - BOLT
N - NUT
W - WASHER
O - O-RING
L - LOCK WIRE

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2025 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


ORIGIN:	MITSUBISHI POWER-LAKE MARY	DATE:	MITSUBISHI POWER DRAWING NUMBER:	REV. NO.:	SYSTEM CODE:
PREPARED BY:	A.CLET	12/03/2025	**N05-003566**	**0**	**21A0H**
REVIEWED BY:	D.MAZQUIARAN / N.JAMSHIDI	12/08/2025	**FUEL GAS PIPING**		
APPROVED BY:	U. KASINATHAN	12/12/2025	**INTERNAL TO GT PACKAGE**		
			FOR FABRICATION & ERECTION		
			N05-ISO-MBP-BR-AG		
			P&ID DRAWING NUMBER:N01-PID-MBP-00-05		
			M501JAC GAS TURBINE		
			PROJECT CODE: -	P&ID: -	
			PIPELINE:	PAGE NUMBER:	
			**QEF14BR100	1 OF 1	

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	FUEL GAS MAIN A PIPING (21A0A)	PIPE SUPPORT DRAWINGS
N/A	FUEL GAS MAIN B PIPING (21A0B)	"
N/A	FUEL GAS TOPHAT PIPING (21A0C)	"
N/A	FUEL GAS PILOT A PIPING (21A0D)	"
N/A	FUEL GAS PILOT B PIPING (21A0E)	"
N/A	FUEL GAS PIPING (21A0H)	"
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	"
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	AIR INLET PRESSURE INSTRUMENT PIPING (23A0K)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
38	GT ENCLOSURE MODULE 2-2 DETAIL DRAWINGS	STRUCTURE

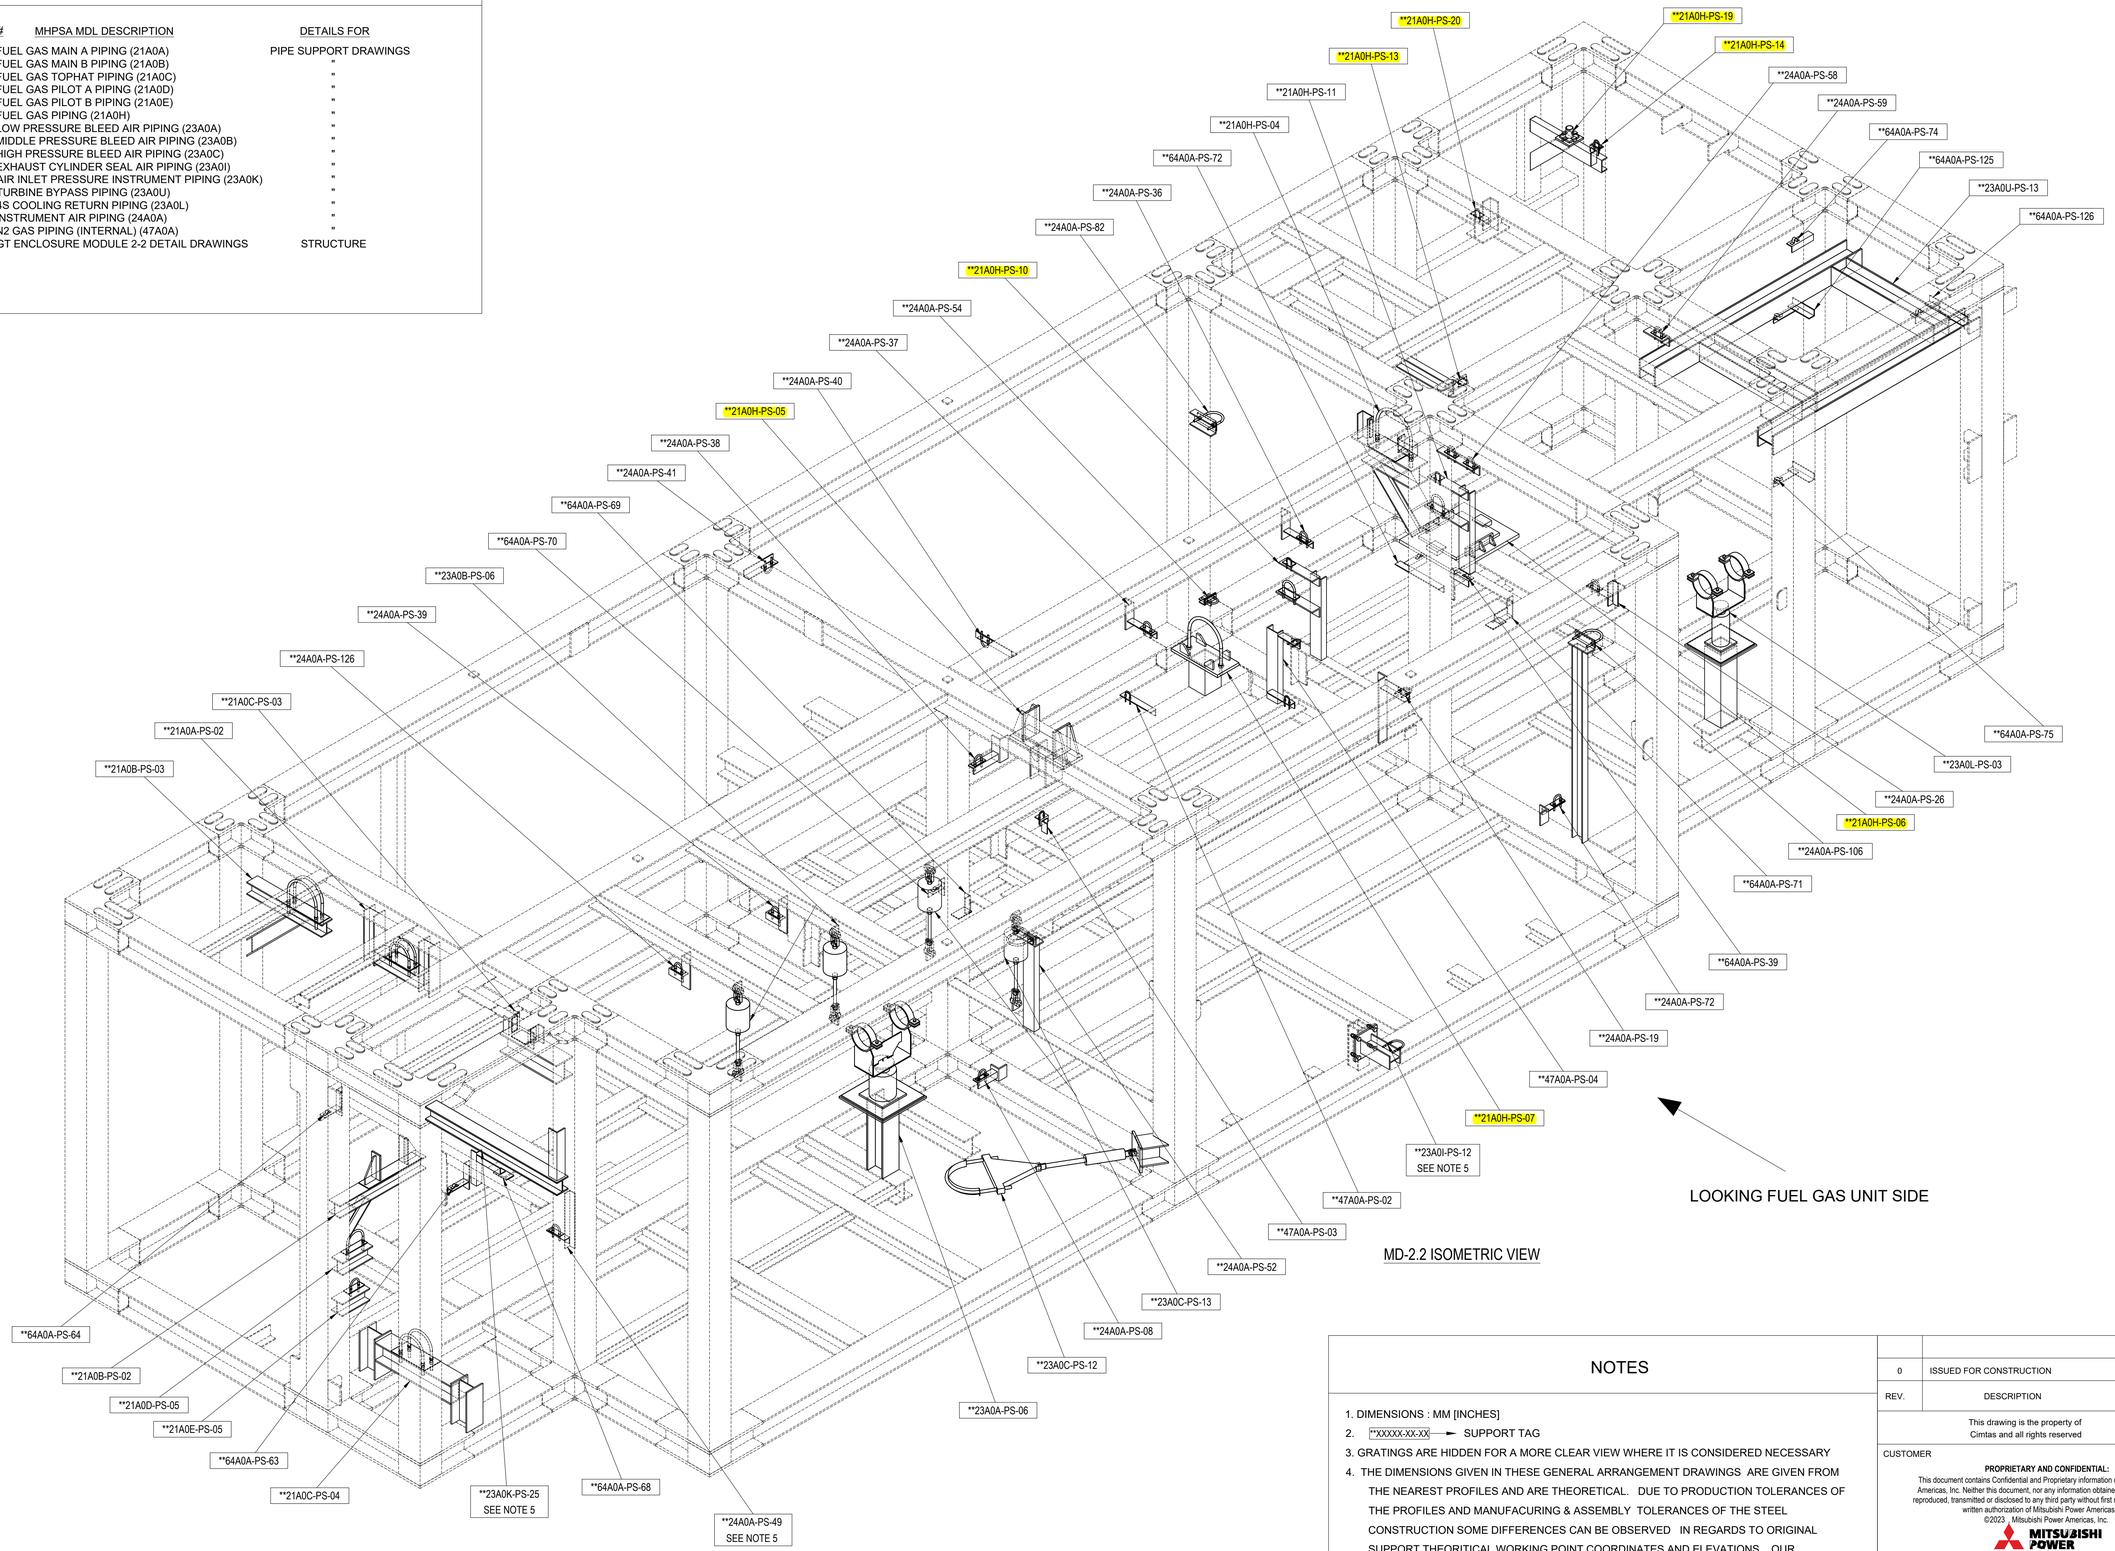

LOOKING FUEL GAS UNIT SIDE

MD-2.2 ISOMETRIC VIEW

NO	SUPPORT TAG	SPOOL NO	REMARK
1	**21A0A-PS-02	**21A0A-6	
2	**21A0B-PS-02	**21A0B-3	
3	**21A0B-PS-03	**21A0B-3	
4	**21A0C-PS-03	**21A0C-4	
5	**21A0C-PS-04	**21A0C-4	
6	**21A0D-PS-05	**21A0D-5	
7	**21A0E-PS-05	**21A0E-5	
8	**21A0H-PS-04	**21A0H-4	
9	**21A0H-PS-05	**21A0H-3	
10	**21A0H-PS-06	**21A0H-1	
11	**21A0H-PS-07	**21A0H-2	
12	**21A0H-PS-10	**21A0H-7	
		**21A0H-7	
13	**21A0H-PS-11	**21A0H-7	
		**21A0H-9	
14	**21A0H-PS-13	**21A0H-10	
15	**21A0H-PS-14	**21A0H-11	
16	**21A0H-PS-19	**21A0H-8	
17	**21A0H-PS-20	**21A0H-11	
18	**23A0A-PS-06	**23A0A-18	
19	**23A0B-PS-06	**23A0B-5	
20	**23A0C-PS-12	**23A0C-13	
21	**23A0C-PS-13	**23A0C-13	
22	**23A0I-PS-12	**23A0I-21	SEE NOTE 5
23	**23A0K-PS-25	**23A0K-20	SEE NOTE 5
		**23A0K-3	
24	**23A0L-PS-03	**23A0L-4	
25	**23A0U-PS-13	**23A0U-29	
26	**24A0A-PS-08	**24A0A-78	
27	**24A0A-PS-106	**24A0A-65	
28	**24A0A-PS-126	**24A0A-89	
29	**24A0A-PS-19	**24A0A-73	
30	**24A0A-PS-26	**24A0A-4	
31	**24A0A-PS-36	**24A0A-88	
32	**24A0A-PS-37	**24A0A-88	
33	**24A0A-PS-38	**24A0A-89	
34	**24A0A-PS-39	**24A0A-89	
35	**24A0A-PS-40	**24A0A-67	
36	**24A0A-PS-41	**24A0A-67	
37	**24A0A-PS-49	**24A0A-42	SEE NOTE 5
38	**24A0A-PS-52	**24A0A-56	
39	**24A0A-PS-54	**24A0A-71	
40	**24A0A-PS-58	**24A0A-73	
		**24A0A-74	
41	**24A0A-PS-59	**24A0A-74	
42	**24A0A-PS-72	**24A0A-87	
43	**24A0A-PS-82	**24A0A-41	
44	**47A0A-PS-02	**47A0A-2	
45	**47A0A-PS-03	**47A0A-2	
46	**47A0A-PS-04	**47A0A-3	
47	**64A0A-PS-125	FFS	
48	**64A0A-PS-126	FFS	
49	**64A0A-PS-39	FFS	
50	**64A0A-PS-63	FFS	
51	**64A0A-PS-64	FFS	
52	**64A0A-PS-68	FFS	
53	**64A0A-PS-69	FFS	
54	**64A0A-PS-70	FFS	
55	**64A0A-PS-71	FFS	
56	**64A0A-PS-72	FFS	
57	**64A0A-PS-74	FFS	
58	**64A0A-PS-75	FFS	

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	26.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-153

DWG NAME: MD-2.2 SUPPORTS GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.: -

PREPARED BY: cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	1/7	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	FUEL GAS MAIN A PIPING (21A0A)	PIPE SUPPORT DRAWINGS
N/A	FUEL GAS MAIN B PIPING (21A0B)	"
N/A	FUEL GAS TOPHAT PIPING (21A0C)	"
N/A	FUEL GAS PILOT A PIPING (21A0D)	"
N/A	FUEL GAS PILOT B PIPING (21A0E)	"
N/A	FUEL GAS PIPING (21A0H)	"
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	"
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	AIR INLET PRESSURE INSTRUMENT PIPING (23A0K)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
38	GT ENCLOSURE MODULE 2-2 DETAIL DRAWINGS	STRUCTURE

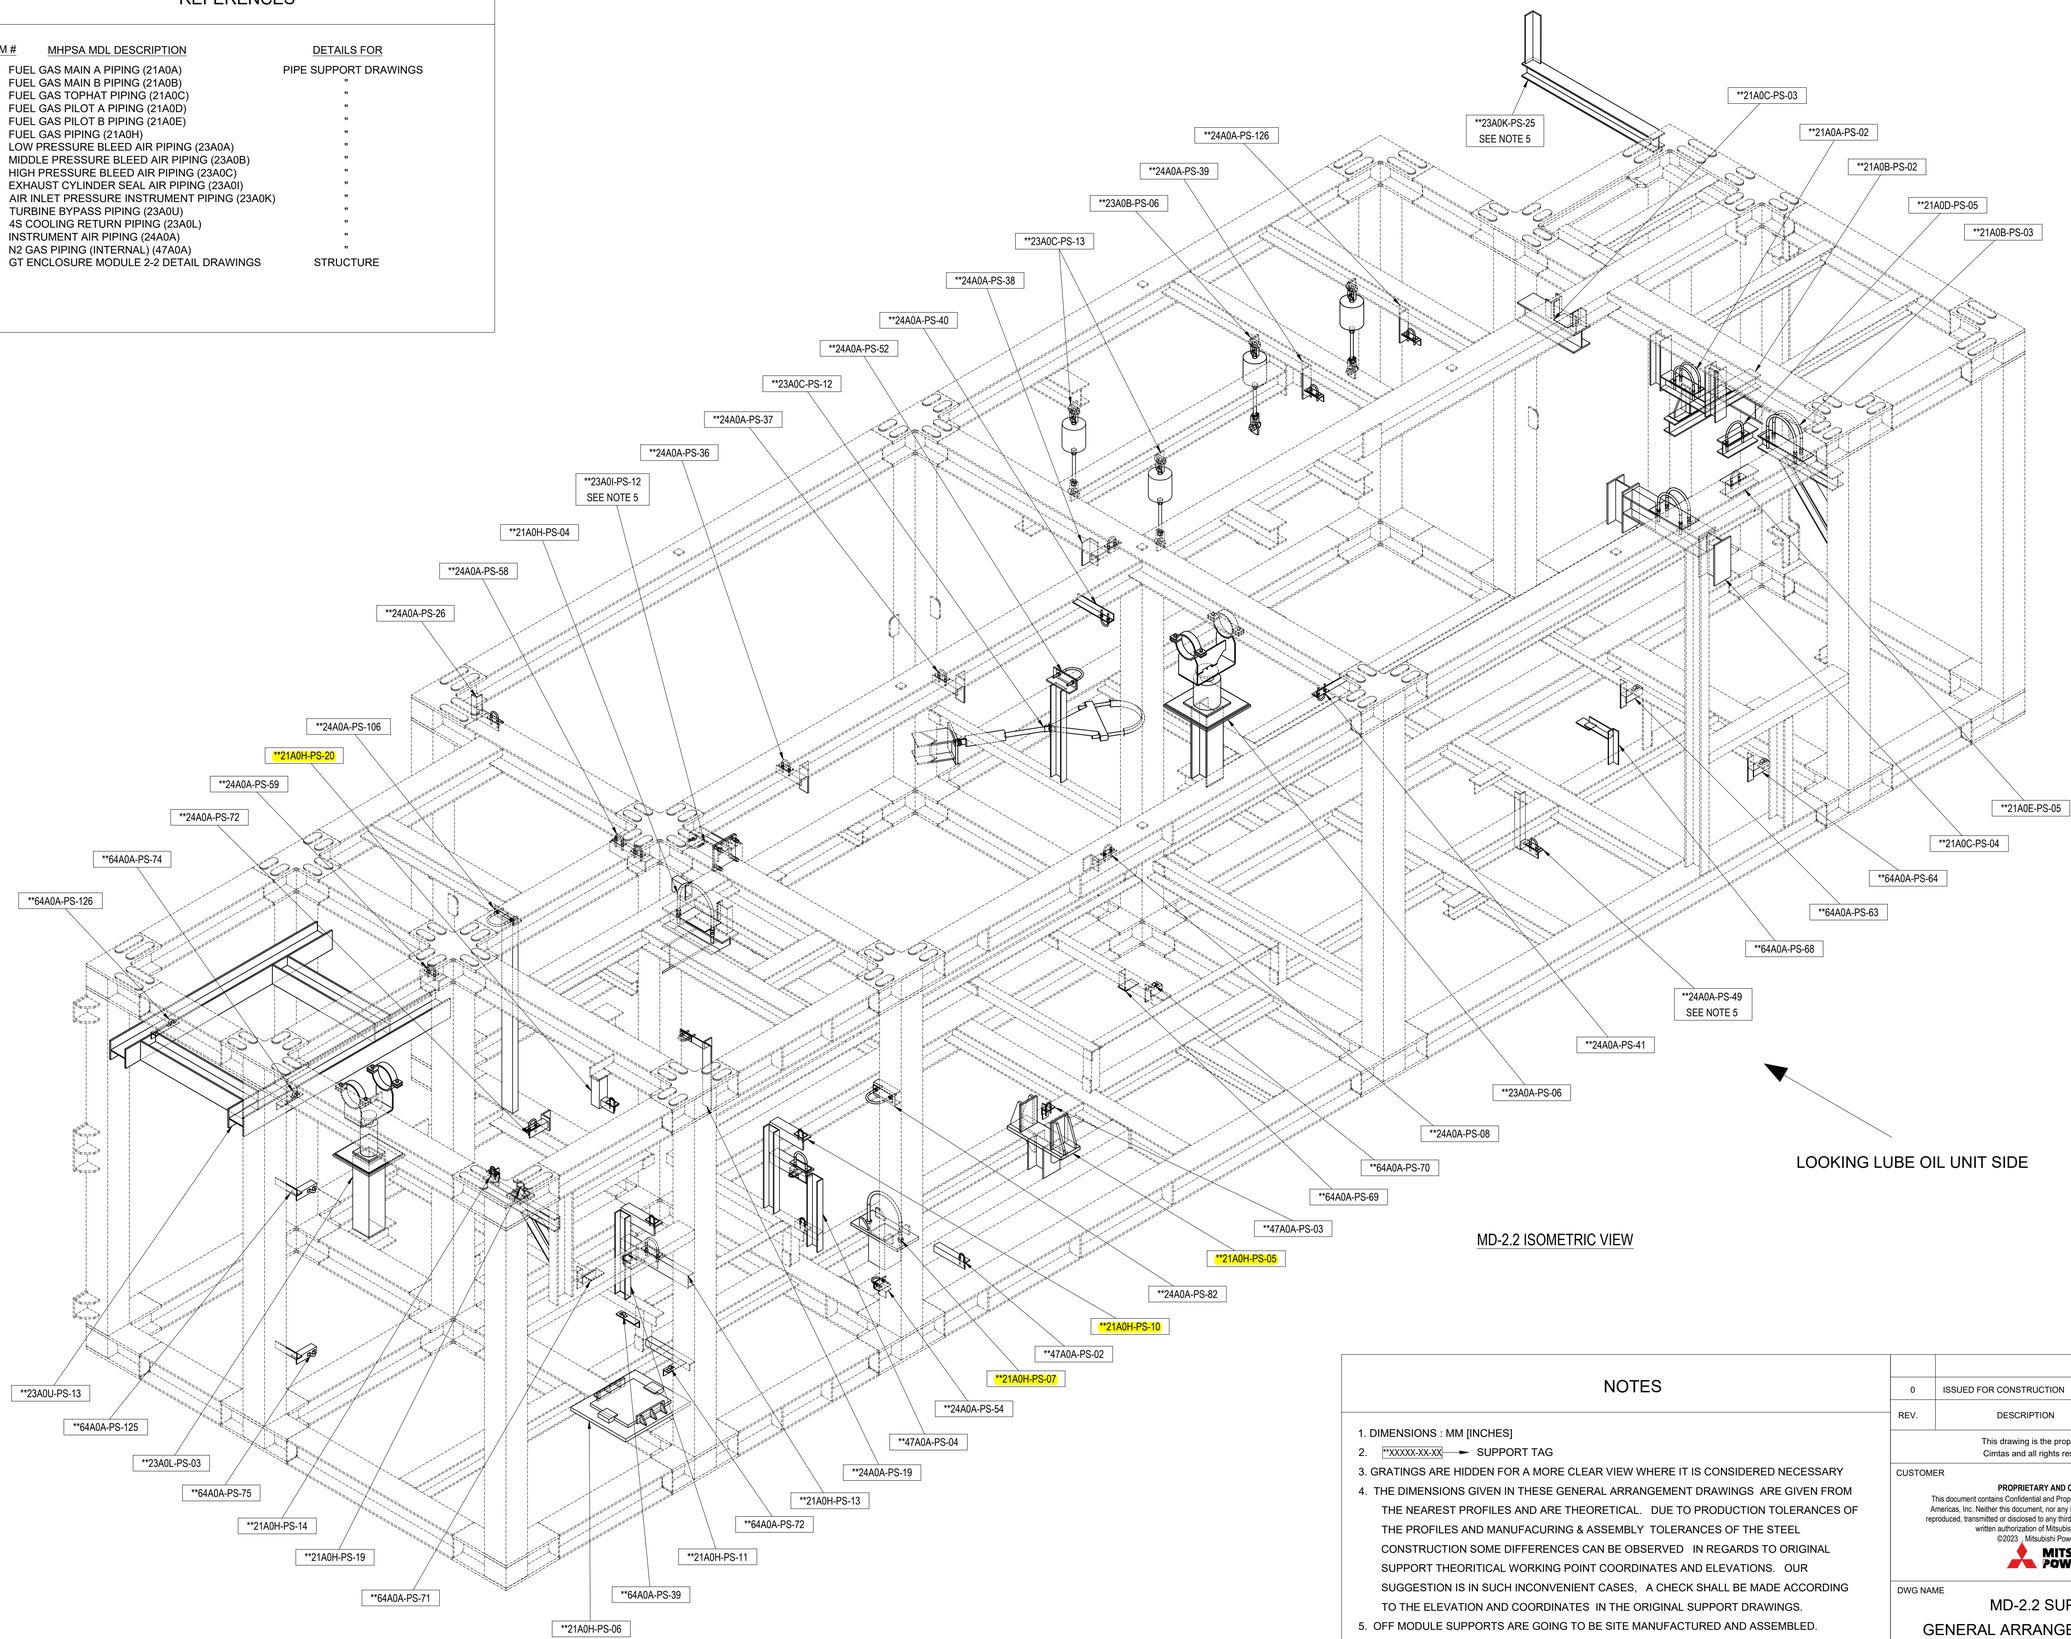

LOOKING LUBE OIL UNIT SIDE

MD-2.2 ISOMETRIC VIEW

NO	SUPPORT TAG	SPOOL NO	REMARK
1	**21A0A-PS-02	**21A0A-6	
2	**21A0B-PS-02	**21A0B-3	
3	**21A0B-PS-03	**21A0B-3	
4	**21A0C-PS-03	**21A0C-4	
5	**21A0C-PS-04	**21A0C-4	
6	**21A0D-PS-05	**21A0D-5	
7	**21A0E-PS-05	**21A0E-5	
8	**21A0H-PS-04	**21A0H-4	
9	**21A0H-PS-05	**21A0H-3	
10	**21A0H-PS-06	**21A0H-1	
11	**21A0H-PS-07	**21A0H-2	
12	**21A0H-PS-10	**21A0H-7	
		**21A0H-7	
13	**21A0H-PS-11	**21A0H-7	
		**21A0H-9	
14	**21A0H-PS-13	**21A0H-10	
15	**21A0H-PS-14	**21A0H-11	
16	**21A0H-PS-19	**21A0H-8	
17	**21A0H-PS-20	**21A0H-11	
18	**23A0A-PS-06	**23A0A-18	
19	**23A0B-PS-06	**23A0B-5	
20	**23A0C-PS-12	**23A0C-13	
21	**23A0C-PS-13	**23A0C-13	
22	**23A0I-PS-12	**23A0I-21	SEE NOTE 5
23	**23A0K-PS-25	**23A0K-20	SEE NOTE 5
		**23A0K-3	
24	**23A0L-PS-03	**23A0L-4	
25	**23A0U-PS-13	**23A0U-29	
26	**24A0A-PS-08	**24A0A-78	
27	**24A0A-PS-106	**24A0A-65	
28	**24A0A-PS-126	**24A0A-89	
29	**24A0A-PS-19	**24A0A-73	
30	**24A0A-PS-26	**24A0A-4	
31	**24A0A-PS-36	**24A0A-88	
32	**24A0A-PS-37	**24A0A-88	
33	**24A0A-PS-38	**24A0A-89	
34	**24A0A-PS-39	**24A0A-89	
35	**24A0A-PS-40	**24A0A-67	
36	**24A0A-PS-41	**24A0A-67	
37	**24A0A-PS-49	**24A0A-42	SEE NOTE 5
38	**24A0A-PS-52	**24A0A-56	
39	**24A0A-PS-54	**24A0A-71	
40	**24A0A-PS-58	**24A0A-73	
		**24A0A-74	
41	**24A0A-PS-59	**24A0A-74	
42	**24A0A-PS-72	**24A0A-87	
43	**24A0A-PS-82	**24A0A-41	
44	**47A0A-PS-02	**47A0A-2	
45	**47A0A-PS-03	**47A0A-2	
46	**47A0A-PS-04	**47A0A-3	
47	**64A0A-PS-125	FFS	
48	**64A0A-PS-126	FFS	
49	**64A0A-PS-39	FFS	
50	**64A0A-PS-63	FFS	
51	**64A0A-PS-64	FFS	
52	**64A0A-PS-68	FFS	
53	**64A0A-PS-69	FFS	
54	**64A0A-PS-70	FFS	
55	**64A0A-PS-71	FFS	
56	**64A0A-PS-72	FFS	
57	**64A0A-PS-74	FFS	
58	**64A0A-PS-75	FFS	

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	26.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-153

DWG NAME: MD-2.2 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	2/7	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

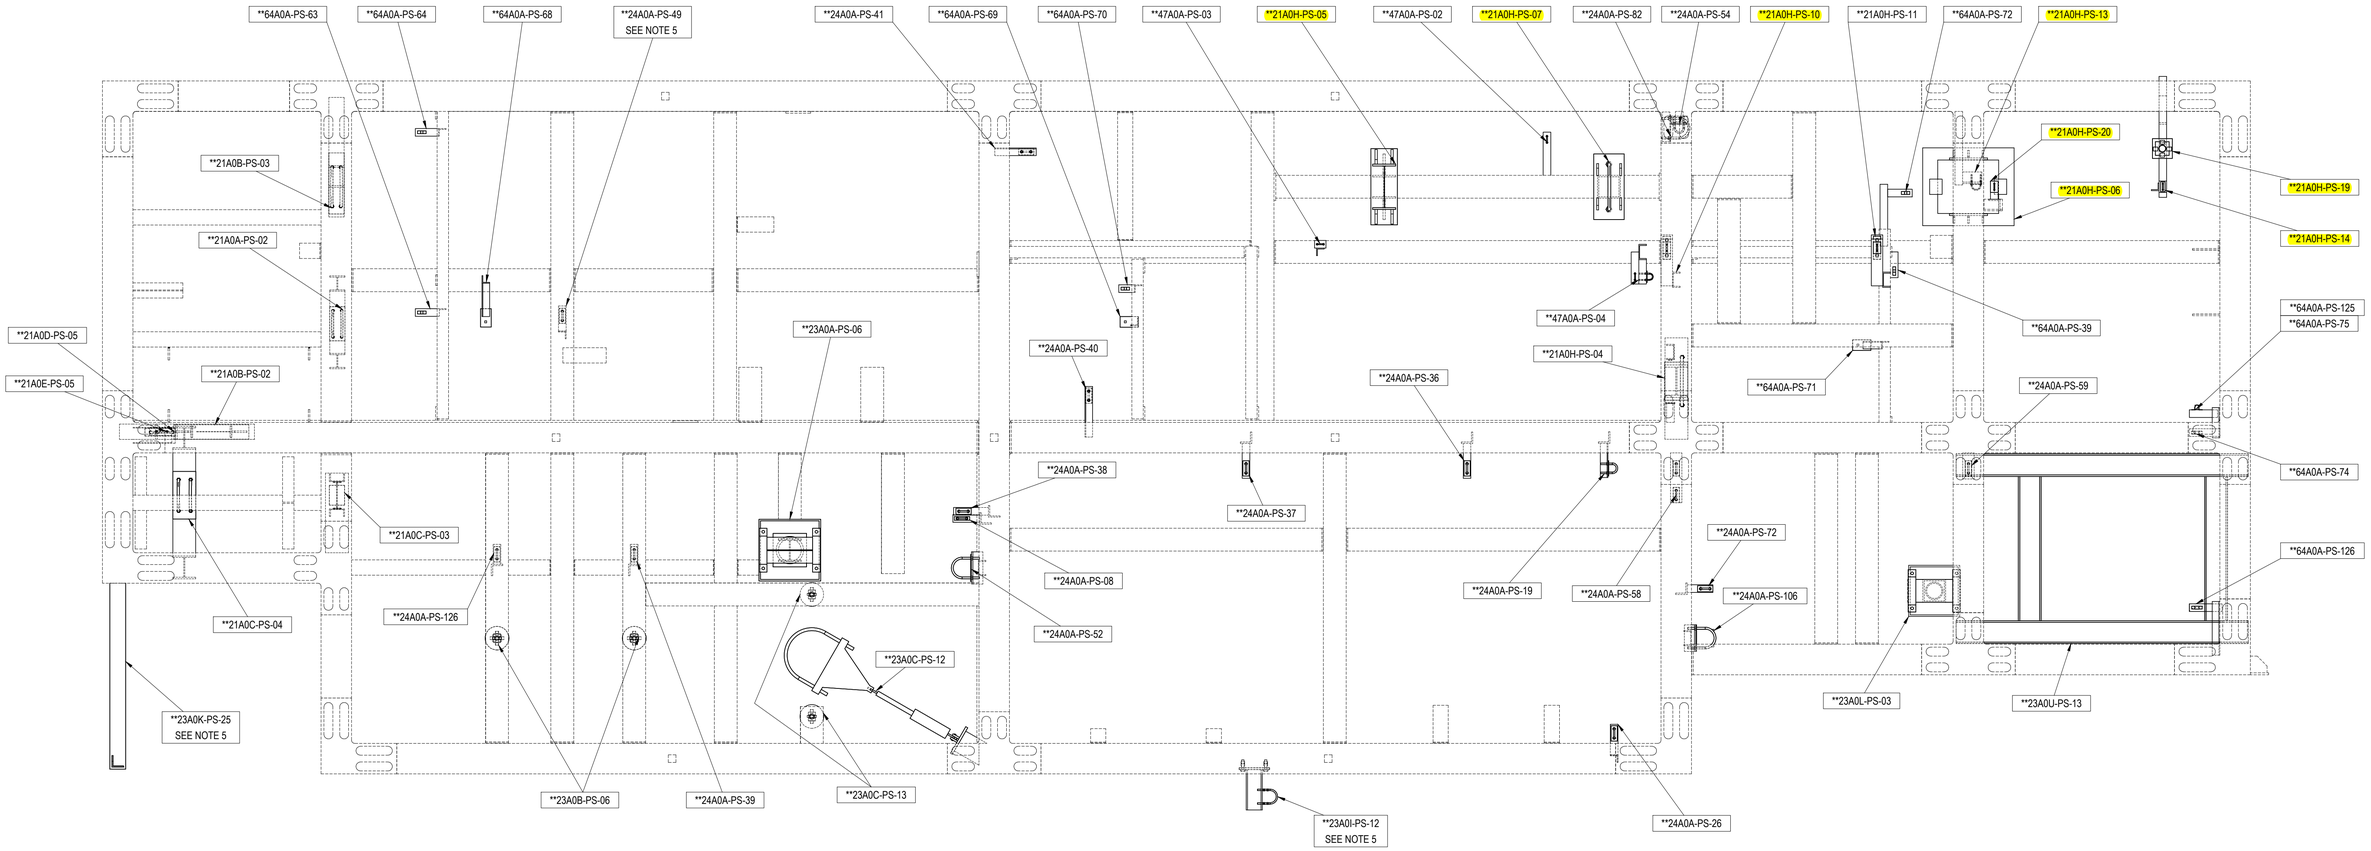

MD-2.2 PLAN VIEW

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	FUEL GAS MAIN A PIPING (21A0A)	PIPE SUPPORT DRAWINGS
N/A	FUEL GAS MAIN B PIPING (21A0B)	"
N/A	FUEL GAS TOPHAT PIPING (21A0C)	"
N/A	FUEL GAS PILOT A PIPING (21A0D)	"
N/A	FUEL GAS PILOT B PIPING (21A0E)	"
N/A	FUEL GAS PIPING (21A0H)	"
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	"
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	AIR INLET PRESSURE INSTRUMENT PIPING (23A0K)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
38	GT ENCLOSURE MODULE 2-2 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	26.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-153

DWG NAME: MD-2.2 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	3/7	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

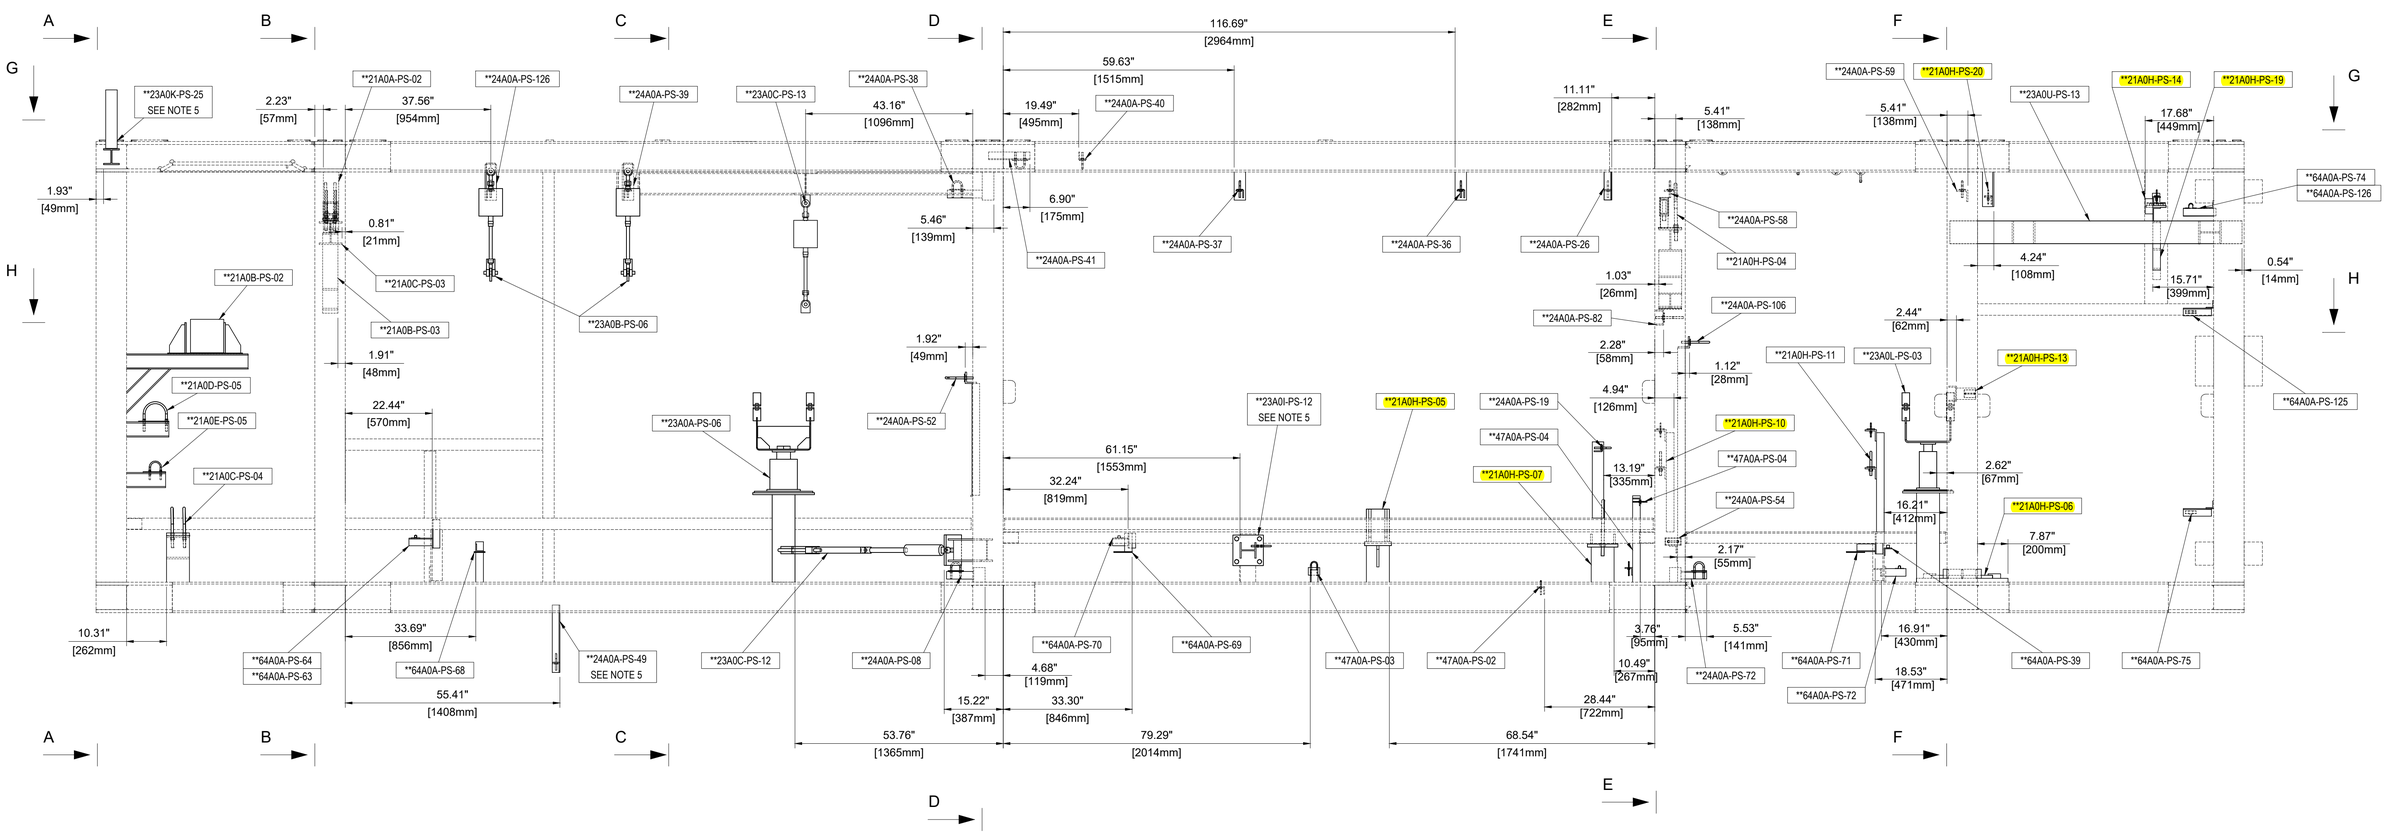

MD-2.2 LOOKING FUEL GAS UNIT SIDE

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	FUEL GAS MAIN A PIPING (21A0A)	PIPE SUPPORT DRAWINGS
N/A	FUEL GAS MAIN B PIPING (21A0B)	"
N/A	FUEL GAS TOPHAT PIPING (21A0C)	"
N/A	FUEL GAS PILOT A PIPING (21A0D)	"
N/A	FUEL GAS PILOT B PIPING (21A0E)	"
N/A	FUEL GAS PIPING (21A0H)	"
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	"
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	AIR INLET PRESSURE INSTRUMENT PIPING (23A0K)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
38	GT ENCLOSURE MODULE 2-2 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	26.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 , Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-153

DWG NAME

MD-2.2 SUPPORTS
GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.: -


PREPARED BY

cimtas


JOB NO	SHEET	SCALE	SIZE
2E00140	4/7	1/20	A1

DRAWING NO: 2E00140-CI-026-150


REV.: 0

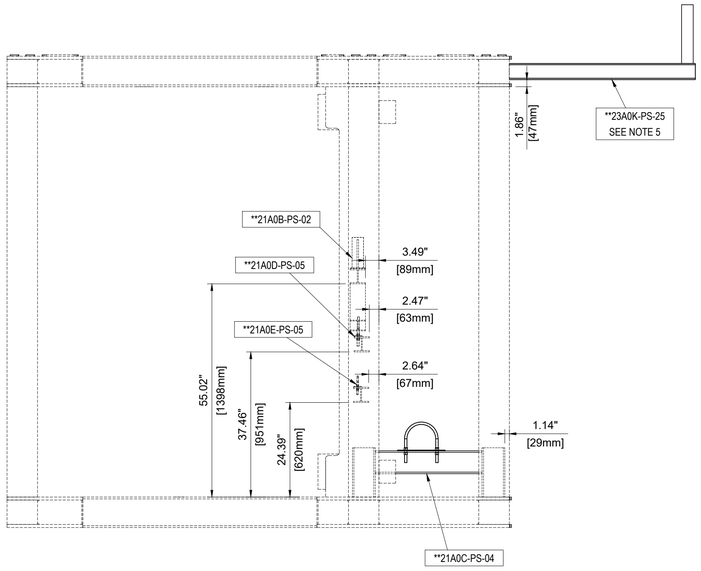


MD-2.2 SECTION A-A

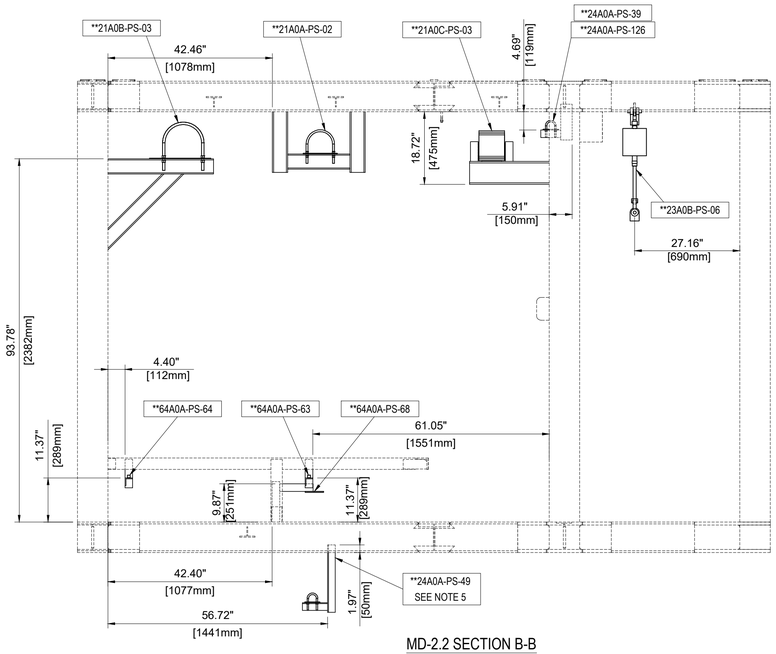


MD-2.2 SECTION B-B

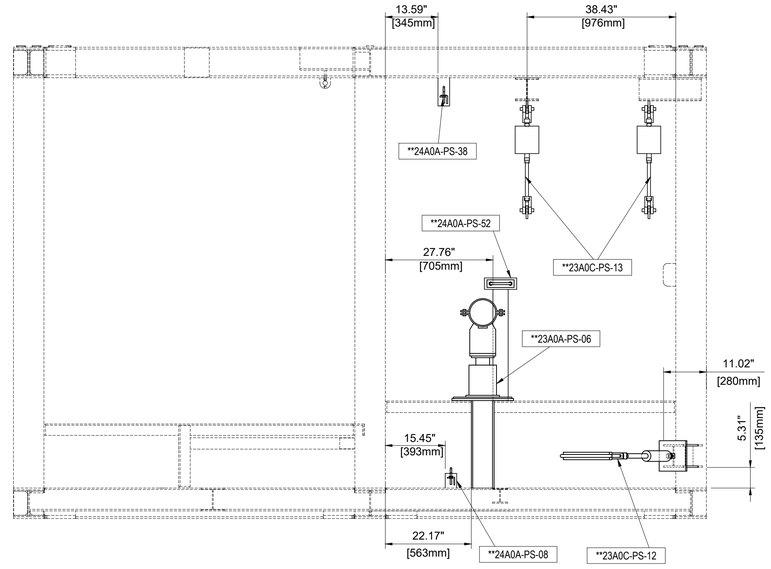


MD-2.2 SECTION C-C

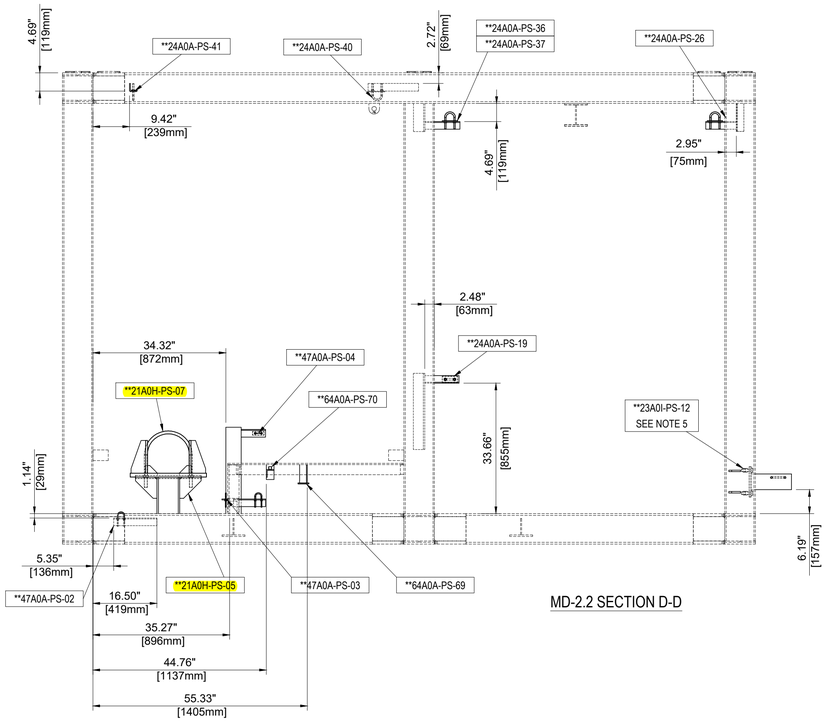

MD-2.2 SECTION D-D

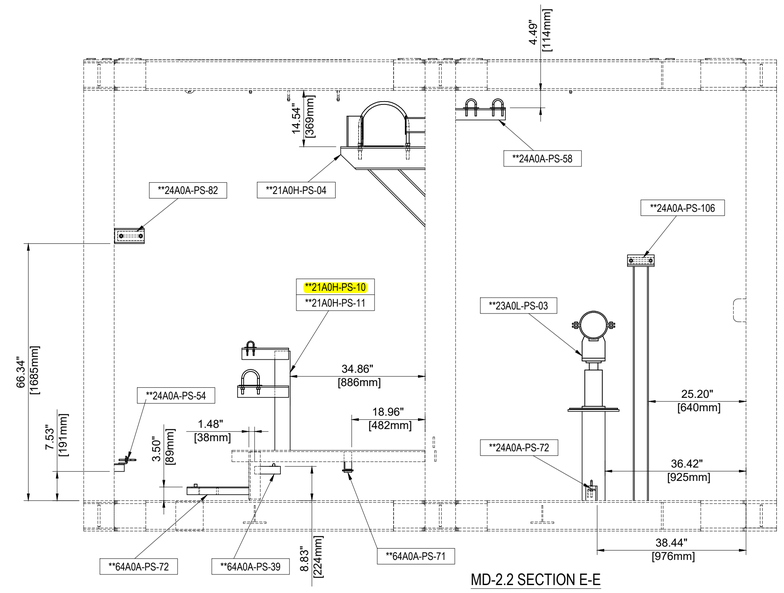

MD-2.2 SECTION E-E

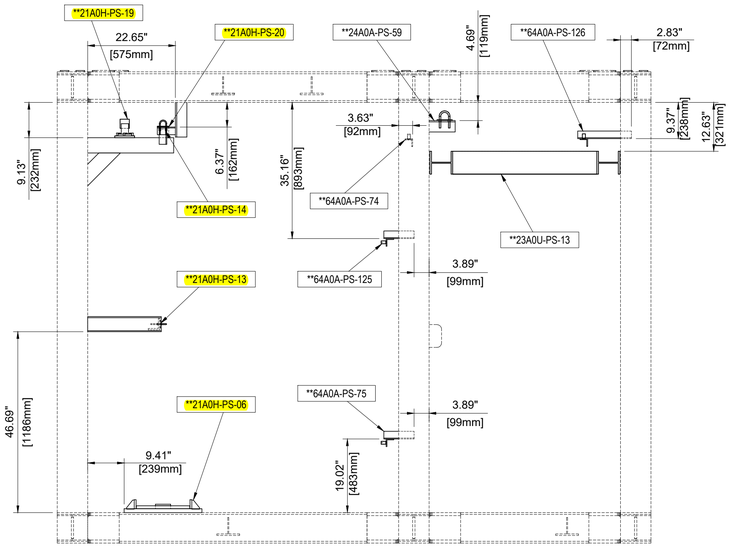

MD-2.2 SECTION F-F

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	FUEL GAS MAIN A PIPING (21A0A)	PIPE SUPPORT DRAWINGS
N/A	FUEL GAS MAIN B PIPING (21A0B)	"
N/A	FUEL GAS TOPHAT PIPING (21A0C)	"
N/A	FUEL GAS PILOT A PIPING (21A0D)	"
N/A	FUEL GAS PILOT B PIPING (21A0E)	"
N/A	FUEL GAS PIPING (21A0H)	"
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	"
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	AIR INLET PRESSURE INSTRUMENT PIPING (23A0K)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
38	GT ENCLOSURE MODULE 2-2 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	26.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 . Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-153

DWG NAME

MD-2.2 SUPPORTS
GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.: -


PREPARED BY

cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	5/7	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

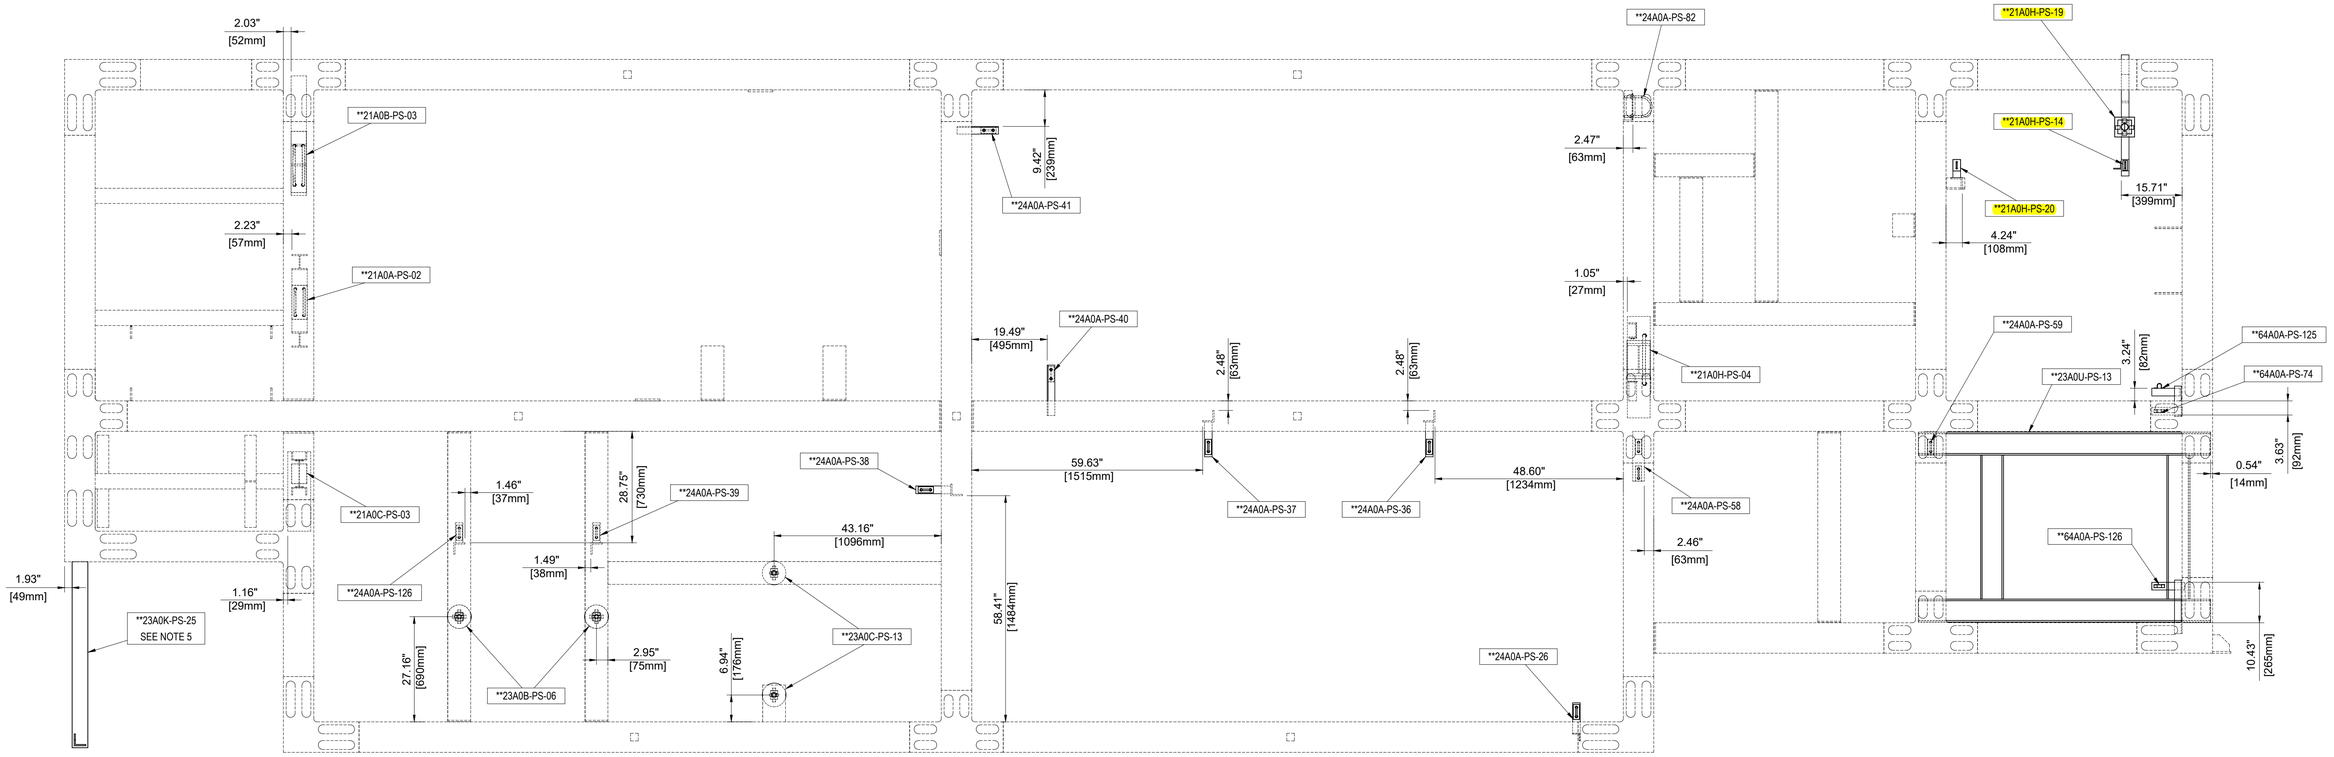

MD-2.2 SECTION G-G

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	FUEL GAS MAIN A PIPING (21A0A)	PIPE SUPPORT DRAWINGS
N/A	FUEL GAS MAIN B PIPING (21A0B)	"
N/A	FUEL GAS TOPHAT PIPING (21A0C)	"
N/A	FUEL GAS PILOT A PIPING (21A0D)	"
N/A	FUEL GAS PILOT B PIPING (21A0E)	"
N/A	FUEL GAS PIPING (21A0H)	"
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	"
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	AIR INLET PRESSURE INSTRUMENT PIPING (23A0K)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
38	GT ENCLOSURE MODULE 2-2 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	26.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 . Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-153

DWG NAME: MD-2.2 SUPPORTS GENERAL ARRANGEMENT DRAWING


REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	6/7	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0

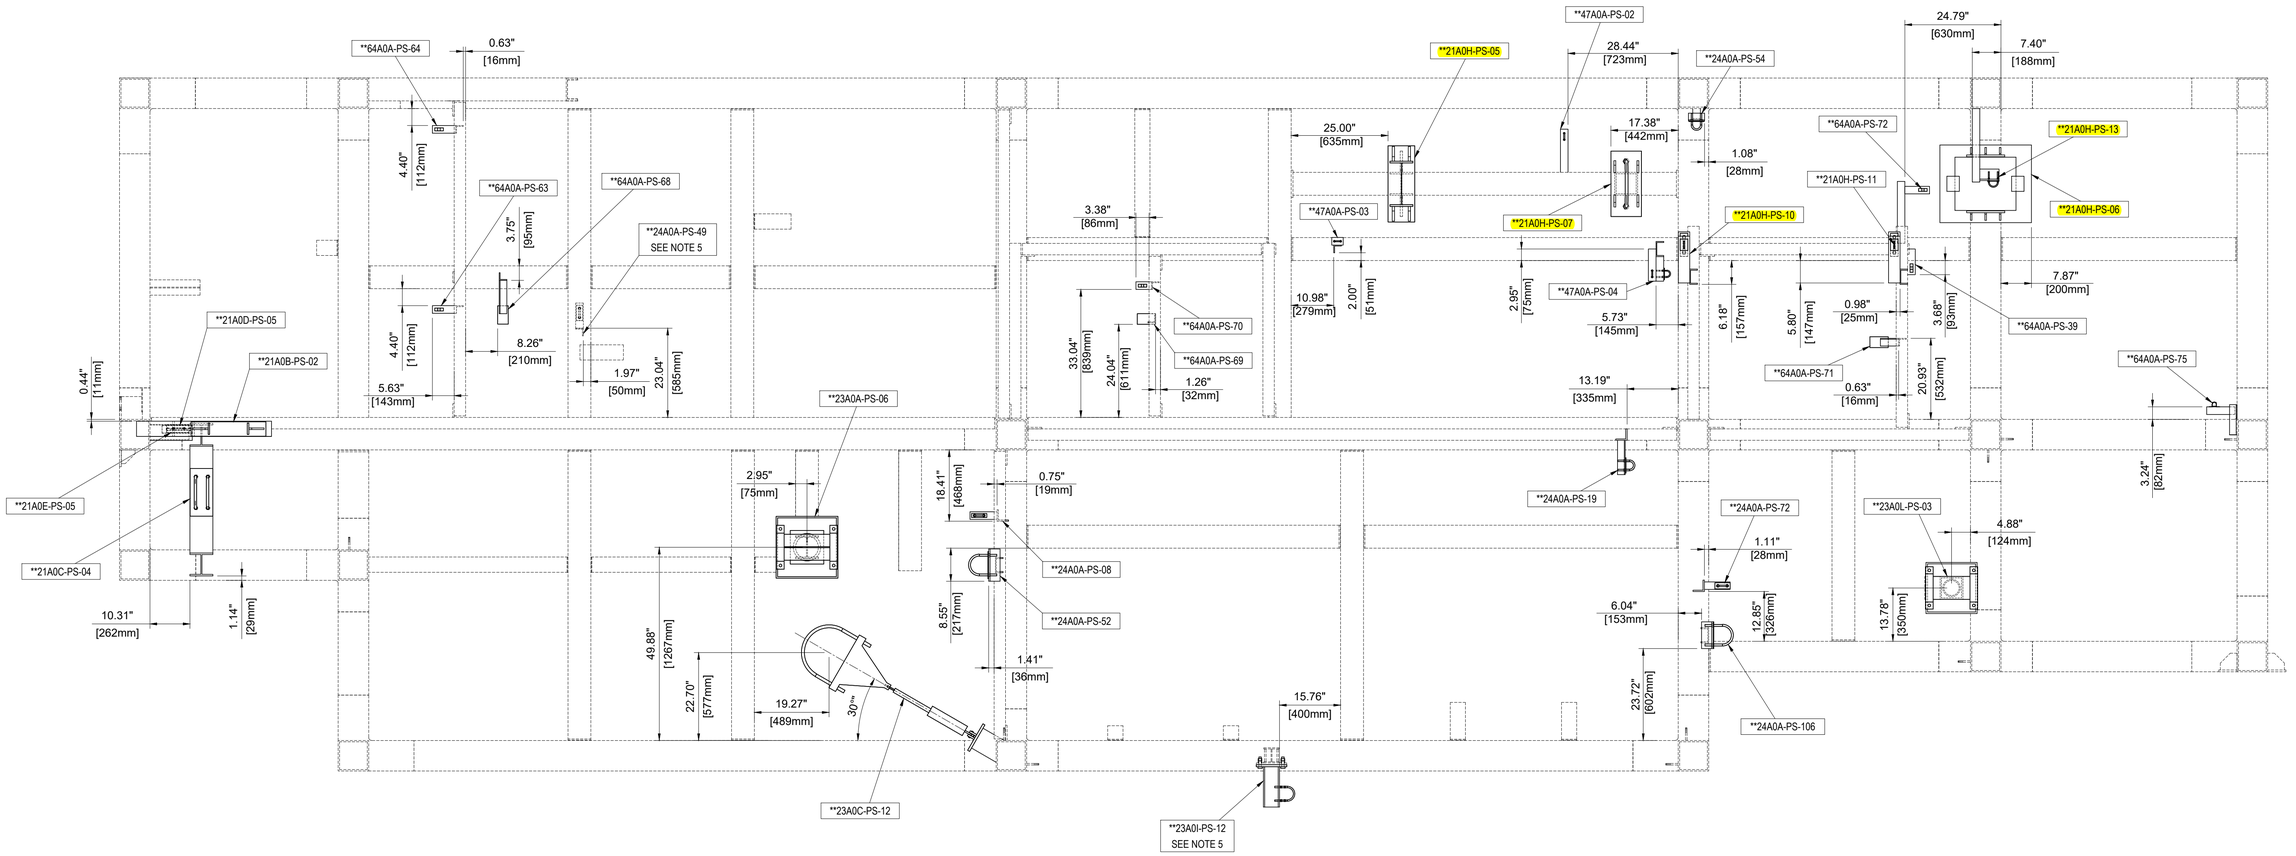

MD-2.2 SECTION H-H

REFERENCES

MDL ITEM #	MHPSA MDL DESCRIPTION	DETAILS FOR
N/A	FUEL GAS MAIN A PIPING (21A0A)	PIPE SUPPORT DRAWINGS
N/A	FUEL GAS MAIN B PIPING (21A0B)	"
N/A	FUEL GAS TOPHAT PIPING (21A0C)	"
N/A	FUEL GAS PILOT A PIPING (21A0D)	"
N/A	FUEL GAS PILOT B PIPING (21A0E)	"
N/A	FUEL GAS PIPING (21A0H)	"
N/A	LOW PRESSURE BLEED AIR PIPING (23A0A)	"
N/A	MIDDLE PRESSURE BLEED AIR PIPING (23A0B)	"
N/A	HIGH PRESSURE BLEED AIR PIPING (23A0C)	"
N/A	EXHAUST CYLINDER SEAL AIR PIPING (23A0I)	"
N/A	AIR INLET PRESSURE INSTRUMENT PIPING (23A0K)	"
N/A	TURBINE BYPASS PIPING (23A0U)	"
N/A	4S COOLING RETURN PIPING (23A0L)	"
N/A	INSTRUMENT AIR PIPING (24A0A)	"
N/A	N2 GAS PIPING (INTERNAL) (47A0A)	"
38	GT ENCLOSURE MODULE 2-2 DETAIL DRAWINGS	STRUCTURE

NOTES

1. DIMENSIONS : MM [INCHES]
2. **XXXX-XX-XX → SUPPORT TAG
3. GRATINGS ARE HIDDEN FOR A MORE CLEAR VIEW WHERE IT IS CONSIDERED NECESSARY
4. THE DIMENSIONS GIVEN IN THESE GENERAL ARRANGEMENT DRAWINGS ARE GIVEN FROM THE NEAREST PROFILES AND ARE THEORETICAL. DUE TO PRODUCTION TOLERANCES OF THE PROFILES AND MANUFACURING & ASSEMBLY TOLERANCES OF THE STEEL CONSTRUCTION SOME DIFFERENCES CAN BE OBSERVED IN REGARDS TO ORIGINAL SUPPORT THEORITICAL WORKING POINT COORDINATES AND ELEVATIONS. OUR SUGGESTION IS IN SUCH INCONVENIENT CASES, A CHECK SHALL BE MADE ACCORDING TO THE ELEVATION AND COORDINATES IN THE ORIGINAL SUPPORT DRAWINGS.
5. OFF MODULE SUPPORTS ARE GOING TO BE SITE MANUFACTURED AND ASSEMBLED.

REV.	DESCRIPTION	DATE	BY	CHECK	APPROVAL
0	ISSUED FOR CONSTRUCTION	26.07.2024	S.C.K.	S.S.	S.O.

This drawing is the property of Cimtas and all rights reserved

REVISIONS

CUSTOMER

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023 Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

CUSTOMER JOB NO: -

ITEM NO: MDL-153

DWG NAME: MD-2.2 SUPPORTS GENERAL ARRANGEMENT DRAWING

REF.DWG.NO.: -

PREPARED BY: cimtas

JOB NO	SHEET	SCALE	SIZE
2E00140	7/7	1/20	A1

DRAWING NO: 2E00140-CI-026-150

REV.: 0


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: 180
LINE NO: **MBP02BR105


F(X) =	-65	lbs
F(Y) =	-2190	lbs
F(Z) =	-1540	lbs
(X)=	-0.756	inch
(Y)=	0	inch
(Z)=	0.041	inch
Pipe OD =	10.75	inch
Pipe DesignTemp.=	572	°F
Insul=	1	inch

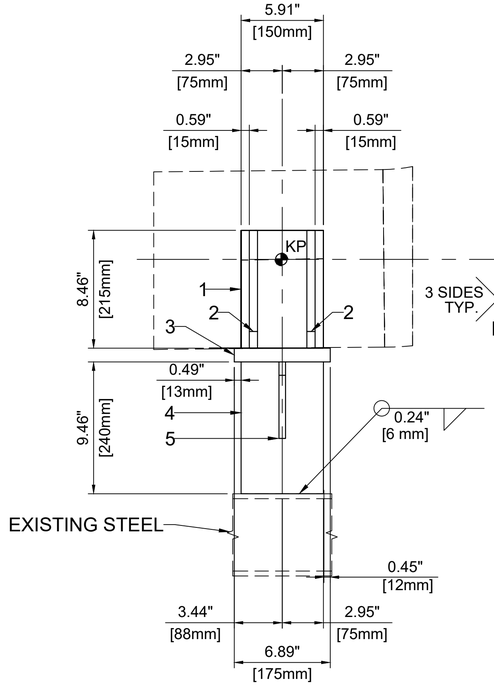


LOOKING LUBE OIL UNIT SIDE
1:10

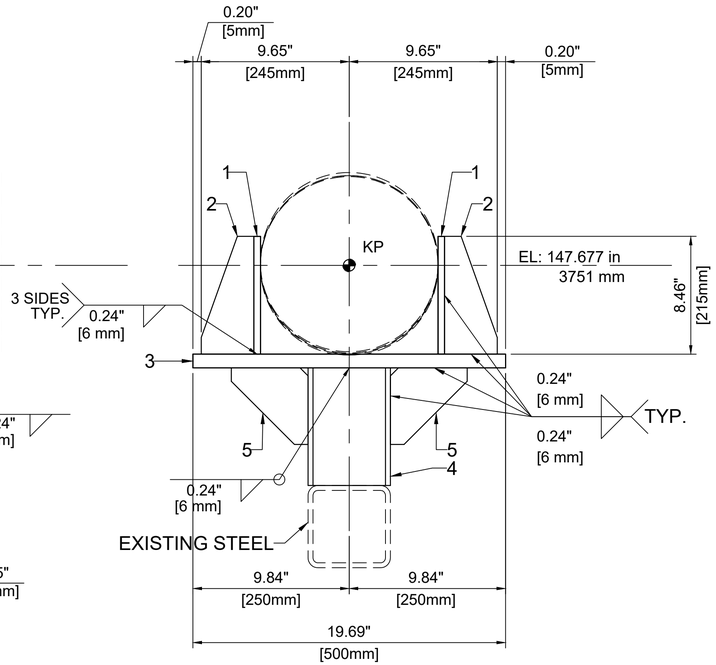

LOOKING EXHAUST SIDE
1:10

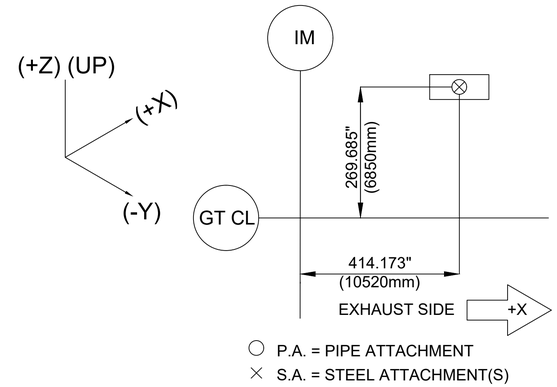


2 PL15*215*96

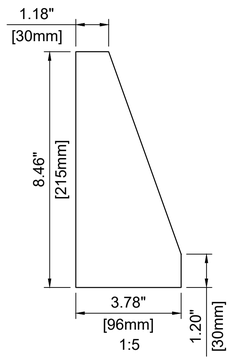

1:5

5 PL12*140*140



1:5

Item	Description	Lisega Size /Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	PL12		5.91	150	8.46	215	2	13.40	6.08	ASTM A240-304
2	PL15		3.78	96	8.46	215	4	21.43	9.72	ASTM A36
3	PL25		6.89	175	19.69	500	1	37.86	17.17	ASTM A240-304
4	H150x150x7x10	JIS G 3192			9.45	240	1	16.67	7.56	SM520
5	PL12		5.51	140	5.51	140	2	8.14	3.69	ASTM A36
						GRAND TOTAL		97.49	44.22	

MODULE NO:
MD-2.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY
SUPPORT NUMBER: **21A0H-PS-05

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: 135
LINE NO: **MBP02BR105


F(X) =	4174	lbs
F(Y) =	-1269	lbs
F(Z) =	-6101	lbs
(X)=	0	inch
(Y)=	0	inch
(Z)=	0	inch
Pipe OD =	10.75	inch
Pipe DesignTemp.=	572	°F
Insul=	1	inch

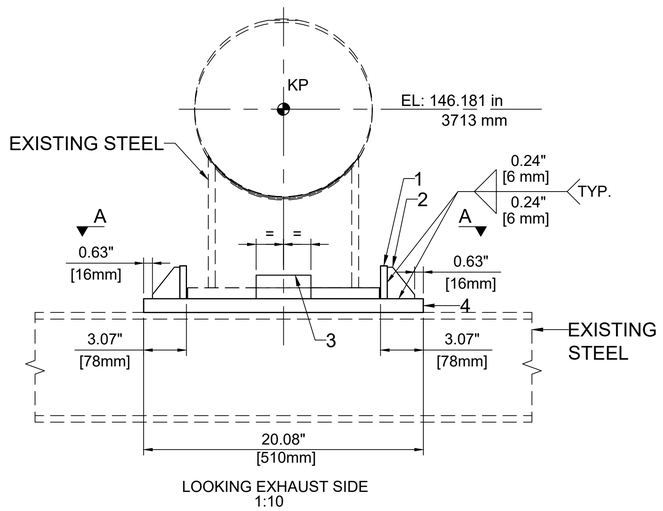



LOOKING EXHAUST SIDE
1:10

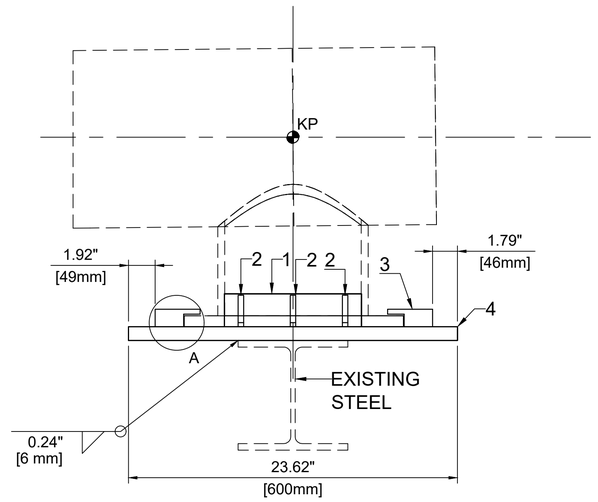


LOOKING FUEL GAS UNIT SIDE
1:10

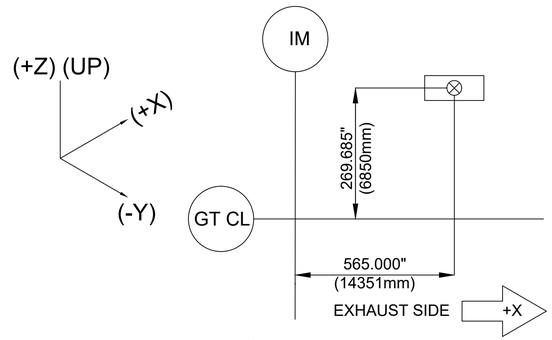



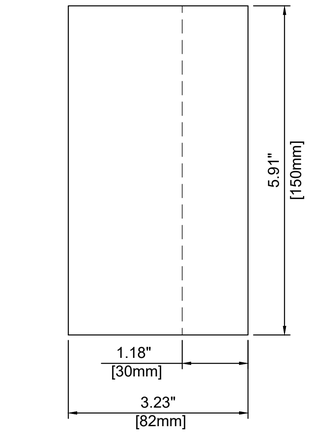


1:2.5

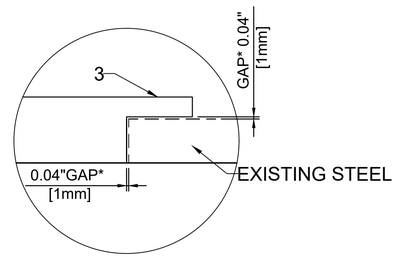


DETAIL A
1:2.5

*Gaps are given only for manufacturing tolerances



1:2.5

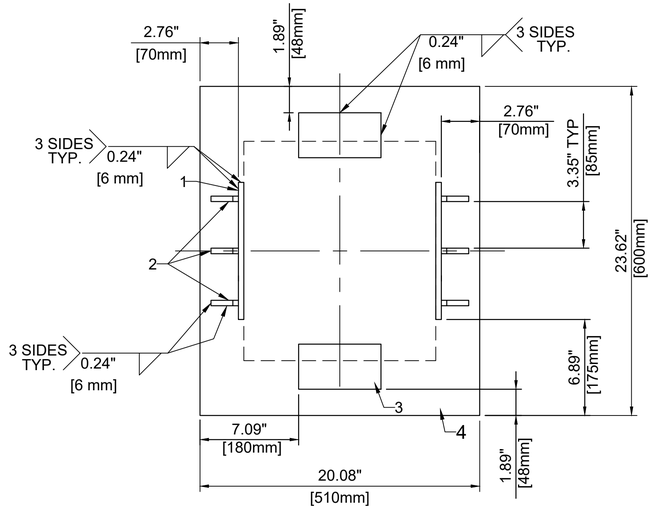

VIEW A-A
1:10

Item	Description	Lisega Size /Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	PL10		2.36	60	9.84	250	2	6.23	2.83	ASTM A36
2	PL10		1.97	50	2.36	60	6	3.12	1.41	ASTM A36
3	PL30		3.23	82	5.91	150	2	14.90	6.76	ASTM A36
4	PL25		20.08	510	23.62	600	1	132.39	60.05	ASTM A36
						GRAND TOTAL		156.64	71.05	

MODULE NO:
MD-2.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:

DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **21A0H-PS-06

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: 130
LINE NO: **MBP02BR105


F(X) =	-363	lbs
F(Y) =	3890	lbs
F(Z) =	-2806	lbs
(X)=	-0.467	inch
(Y)=	0	inch
(Z)=	0	inch
Pipe OD =	10.75	inch
Pipe DesignTemp.=	572	°F
Insul=	1	inch

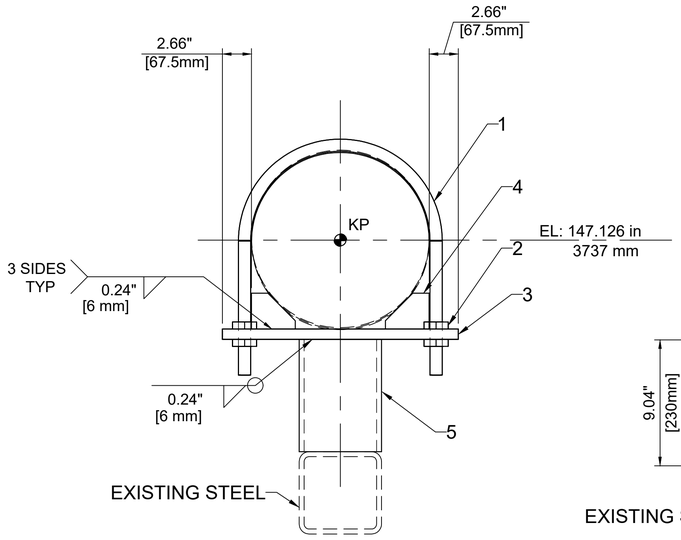


LOOKING EXHAUST SIDE
1:10

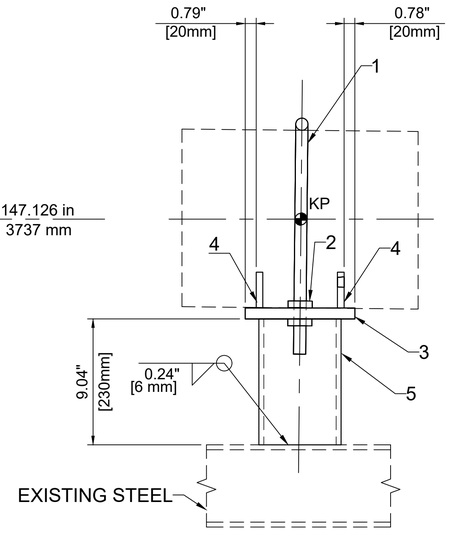


LOOKING FUEL GAS UNIT SIDE
1:10



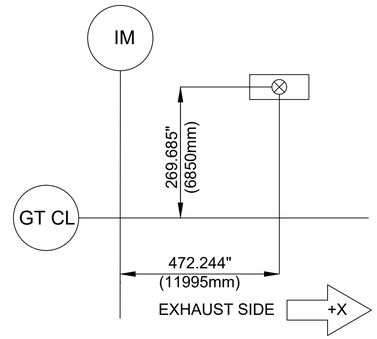


○ P.A. = PIPE ATTACHMENT
× S.A. = STEEL ATTACHMENT(S)

4 PL12*80*65



1:2.5

3 PL20*430*200

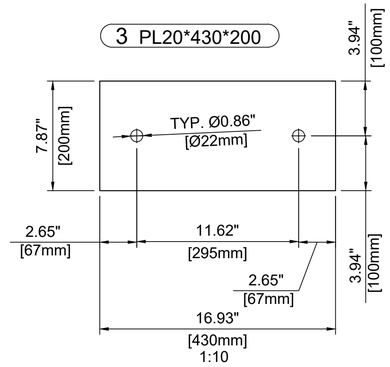

1:10

Item	Description	Lisega Size /Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 10.75''	402748					1	5.05	2.29	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 3/4''						4	1.15	0.52	STAINLESS STEEL
3	PL20		7.87	200	16.93	430	1	29.77	13.50	ASTM A240-304
4	PL12		2.56	65	3.15	80	4	4.32	1.96	ASTM A240-304
5	HSS150x150x9	JIS G 3466			9.06	230	1	19.37	8.79	SS400
						GRAND TOTAL		59.65	27.06	

MODULE NO:
MD-2.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY
SUPPORT NUMBER: **21A0H-PS-07

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER

DESIGN LOADS/MVMT		
NODE: 9834		
(X)=	−0.14	in
(Y)=	0.00	in
(Z)=	0.00	in
(fX)=	64	lb
(fY)=	127	lb
(fZ)=	688	lb
NODE: 9834		
O.D.=	3.50	in
Temp.=	70	°F
Insul.=	2.50	in


DESIGN LOADS/MVMT		
NODE: 570		
(X)=	−0.13	in
(Y)=	0.00	in
(Z)=	0.00	in
(fX)=	−230	lb
(fY)=	−136	lb
(fZ)=	−702	lb
NODE: 570		
O.D.=	1.315	in
Temp.=	70	°F
Insul.=	1.00	in

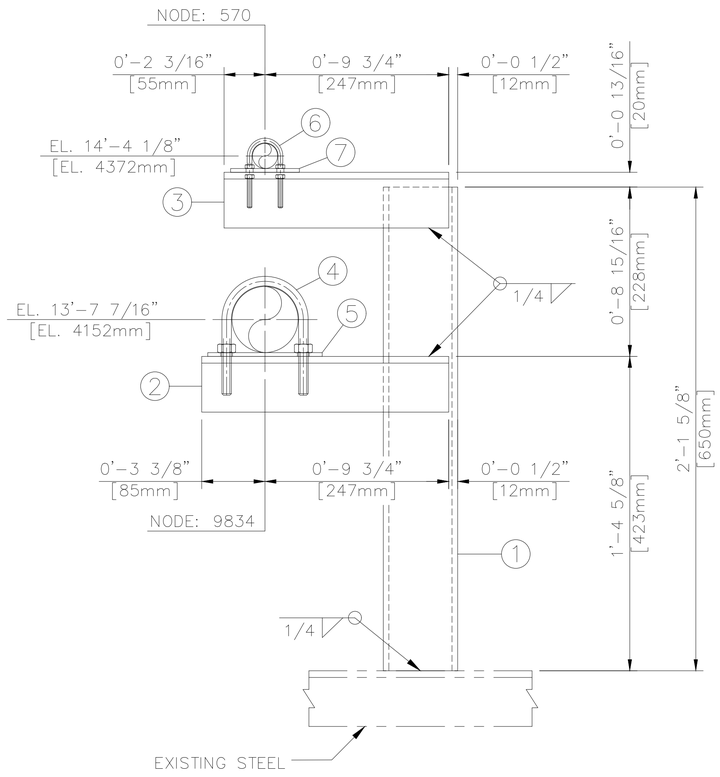


LOOKING EXHAUST SIDE

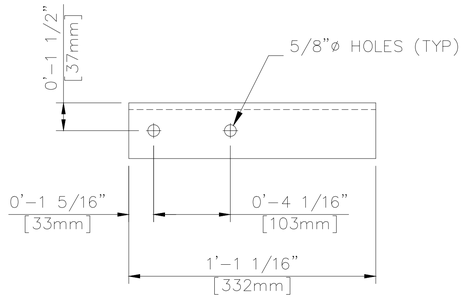


DETAIL ITEM 2

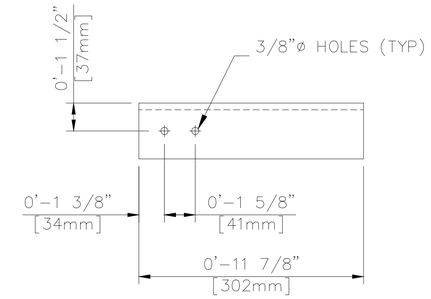


DETAIL ITEM 3




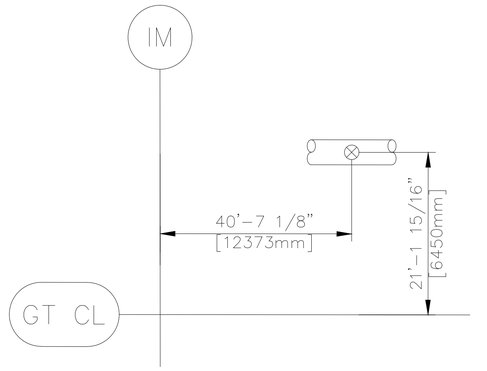

EXHAUST SIDE +X

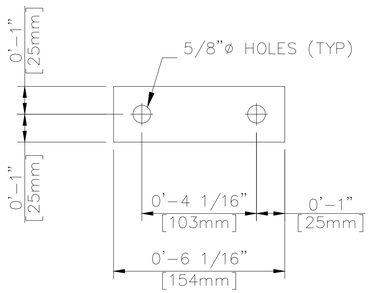

DETAIL ITEM 5

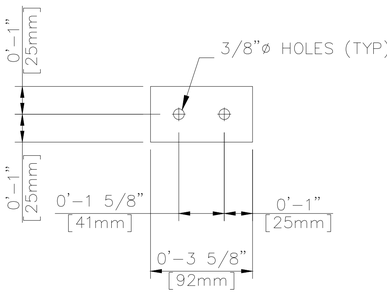

DETAIL ITEM 7

Item	Description	Type	Width Inches	Length Inches	Qty	Weight lb	Material
7	PL5		2.00	3.62	1		A240TP304
6	STANDARD U-BOLT 1"	400348			1		A193GrB8Cl1
5	PL5		2.00	6.06	1		A240TP304
4	STANDARD U-BOLT 3"	400948			1		A193GrB8Cl1
3	L75x75x9			11.89	1		SS400
2	L75x75x9			13.07	1		SS400
1	C100x50x5			25.59	1		SS400

MODULE NO:
MD-2.2

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER:	**21A0H-PS-10

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2021, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd

SL2

MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING

DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

SCALE = NONE


TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE

NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "**" IN HANGER MARK INDICATES GT UNIT NUMBER


NODE: 720
LINE NO: **MBP02BR905

F(X) =	7	lbs
F(Y) =	2	lbs
F(Z) =	-19	lbs
(X)=	0	inch
(Y)=	0	inch
(Z)=	0	inch
Pipe OD =	1.33	inch
Pipe DesignTemp.=	70	°F
Insul=	0.8	inch


VIEW A-A
1:5

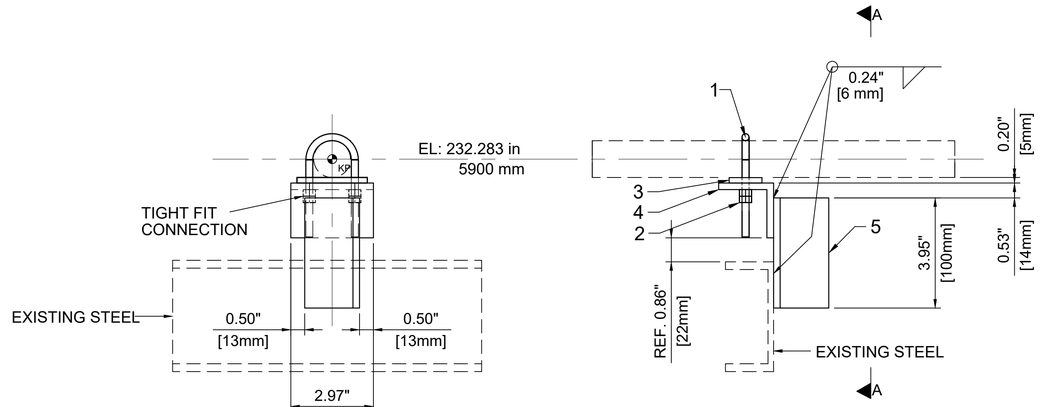

LOOKING LUBE OIL UNIT SIDE
1:5

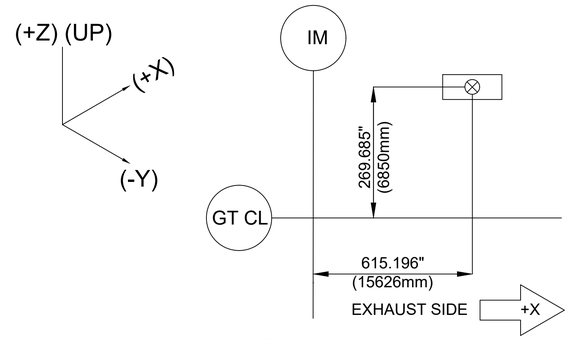


3 PL5*64*30

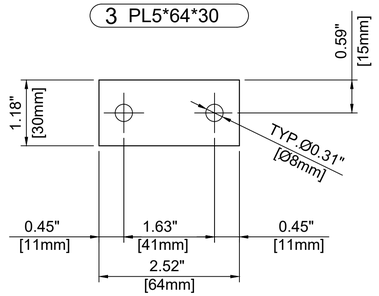

1:2.5

4 L50x50x6

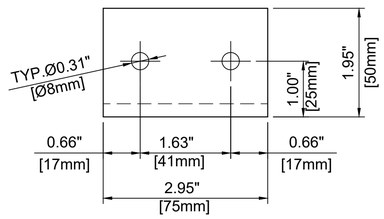

1:2.5

Item	Description	Lisega Size /Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	Standard U-Bolt, 1"	400348					1	0.13	0.06	A193GrB8Cl1
2	Heavy Hex Nut for U-Bolt 1/4"						4	0.04	0.02	STAINLESS STEEL
3	PL5		1.18	30	2.52	64	1	0.17	0.08	ASTM A240-304
4	L50x50x6	JIS G 3192			2.95	75	1	0.73	0.33	SS400
5	L50x50x6	JIS G 3192			3.94	100	1	0.98	0.44	SS400
						GRAND TOTAL		2.05	0.93	

MODULE NO:
MD-2.2

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SIL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST

MITSUBISHI POWER HQ-LAKE MARY
SUPPORT NUMBER: **21A0H-PS-14

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER


SCALE = NONE

TOLERANCES PER MSS SP-58
UNLESS NOTED OTHERWISE


NOTES:
1. SMOOTHEN SHARP CORNERS BY GRINDING
2. WELD TO SUIT ASSEMBLY
3. ** PREFIX SHALL BE PER DOCUMENT "PLANT IDENTIFICATION NUMBERING SYSTEM"
4. PREFIX "***" IN HANGER MARK INDICATES GT UNIT NUMBER

NODE: 522
LINE NO: **MBP02BR901


F(X) =	14	lbs
F(Y) =	16	lbs
F(Z) =	-30	lbs
(X)=	0	inch
(Y)=	0	inch
(Z)=	0	inch
Pipe OD =	2.375	inch
Pipe DesignTemp.=	70	°F
Insul=	0.8	inch

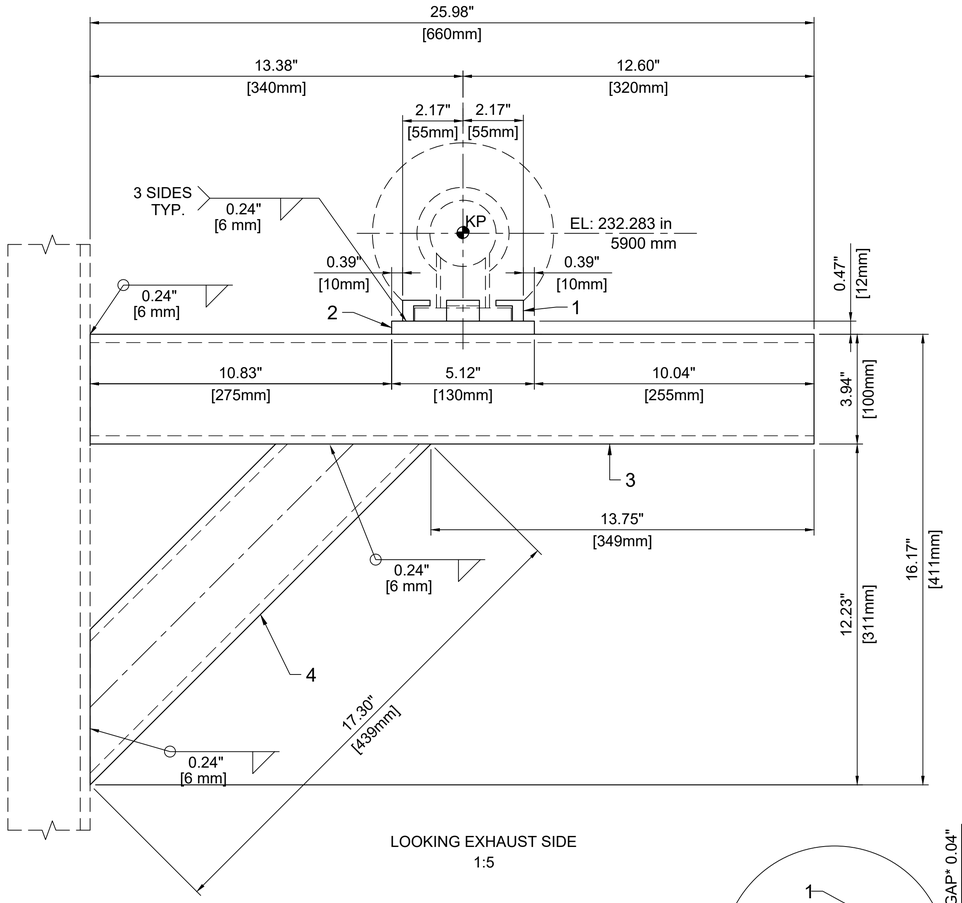


LOOKING EXHAUST SIDE
1:5

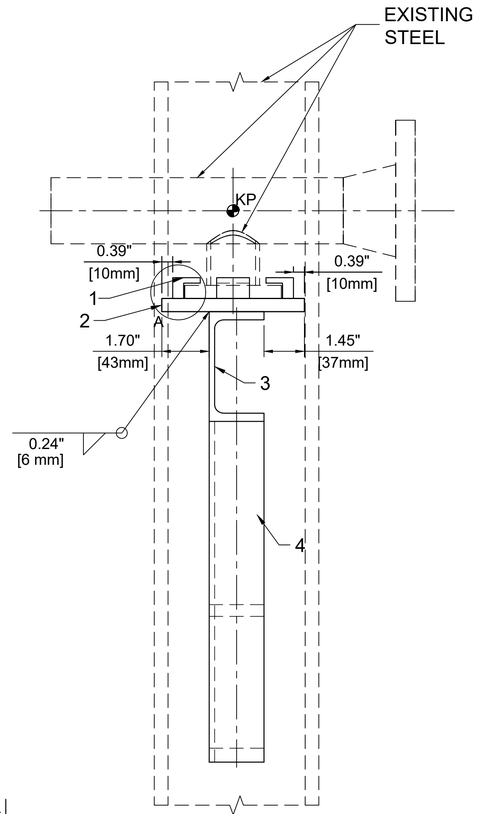


LOOKING FUEL GAS UNIT SIDE
1:5

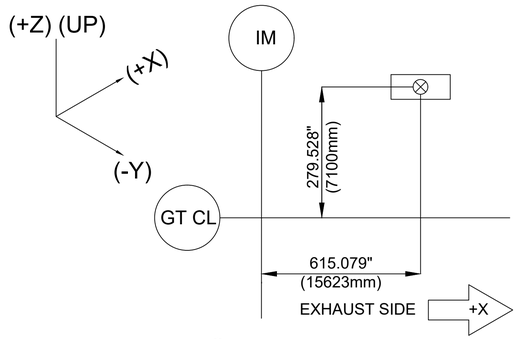

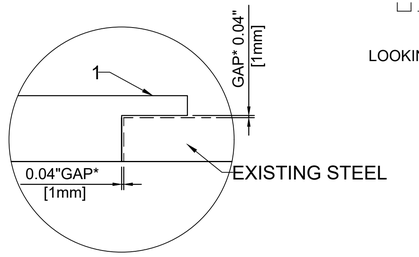


DETAIL A
1:2.5

*Gaps are given only for manufacturing tolerances



1:1

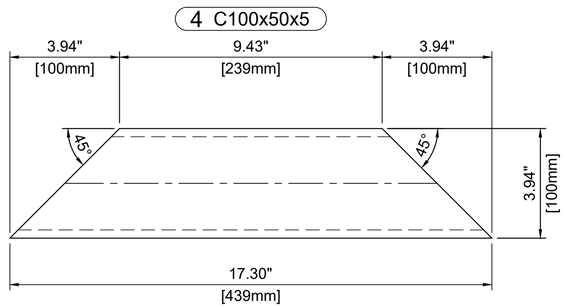

1:5

Item	Description	Lisega Size /Standard	Width in	Width mm	Length in	Length mm	Qty.	Total Weight lbf	Total Weight kg	Material
1	PL30		0.79	20	0.98	25	4	1.04	0.47	ASTM A36
2	PL12		5.12	130	5.12	130	1	3.51	1.59	ASTM A36
3	C100x50x5	JIS G 3192			25.98	660	1	13.62	6.18	SS400
4	C100x50x5	JIS G 3192			17.28	439	1	9.06	4.11	SS400
						GRAND TOTAL		27.23	12.35	

MODULE NO:
MD-2.2

MITSUBISHI POWER HQ-LAKE MARY

SUPPORT NUMBER: **21A0H-PS-19

PROPRIETARY AND CONFIDENTIAL:
This document contains Confidential and Proprietary information of Mitsubishi Power Americas, Inc. Neither this document, nor any information obtained therefrom is to be reproduced, transmitted or disclosed to any third party without first receiving the express written authorization of Mitsubishi Power Americas, Inc.
©2023, Mitsubishi Power Americas, Inc.

MITSUBISHI POWER

PAGE NUMBER: 1 OF 1

EXPORT CONTROL DIVERSION WARNING
This document contains data which if exported from the United States must be exported in accordance with the export administration regulations, diversion contrary to U.S. law is prohibited.

ECCN: EAR99 No License Req'd
SL2
MITSUBISHI POWER ENGINEERING
PLANT ENGINEERING
DEPARTMENT:
SECTION:
DRAWING DISTRIBUTION LIST