

SQL PROJECT

Name:Sujal Shetty

ROLL.NO:31

Subject:PI/SQL

Topic:Hotel database

Database name-Vihangs_inn

Entities:

1.Employee:

Attributes:

- E_id*
- E_name
- E_dob
- Date_of_joining
- Gender
- Mobile_no
- Shifts
- Salary
- room_id#
- d_id#

2.Bill

Attributes:

- Bill_id*
- Amount
- Date
- Mode

3.Customers

Attributes:

- Cust_id*
- Cust_name
- dob
- Gender
- Address

- Date_of_checkin
- Date_of_checkout
- room_id#
- Bill_id#

4.Department

Attributes:


- d_id*
- d_name
- Phone_no
- Floor
- Open_hrs
- Close_hrs

5.Room

Attributes:

- room_id*
- Floor
- Type
- Charges
- Availability
- d_id#

ERD DIAGRAM:

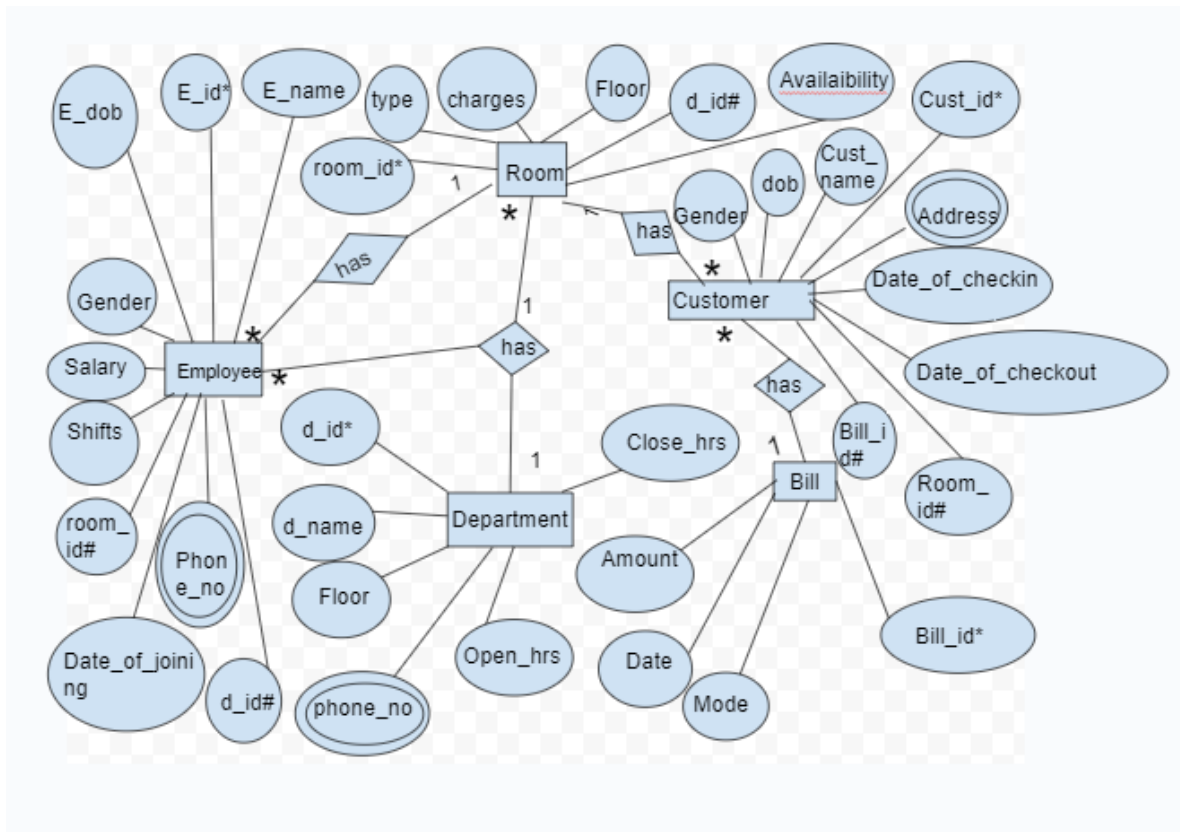

1.

Create database Vihangs_inn;

```
mysql> create database Vihangs_Inn;
Query OK, 1 row affected (0.02 sec)
```

2.

Use Vihangs_inn;

```
mysql> use Vihangs_Inn;
Database changed
```

3.

Create table Department(

d_id int not null,

d_name varchar(30) not null,

Phone_no bigint not null,

Floor varchar(20) not null,
Open_hrs varchar(30) not null,
Close_hrs varchar(30) not null,
check(Phone_no<=9999999999 and Phone_no>=1000000000),
Primary key(d_id)
);

```
mysql> use Vihangs_inn;  
Database changed  
mysql> Create table Department(  
-> d_id int not null,  
-> d_name varchar(30) not null,  
-> Phone_no bigint not null,  
-> Floor varchar(20) not null,  
-> Open_hrs varchar(30) not null,  
-> Close_hrs varchar(30) not null,  
-> check(Phone_no<=9999999999 and Phone_no>=1000000000),  
-> Primary key(d_id)  
-> );  
Query OK, 0 rows affected (0.05 sec)
```

4.

Create table Room(
room_id int not null,
Floor varchar(20) not null,
Type varchar(40) not null,
Charges int not null,
Availability varchar(30) not null,
d_id int not null,
Primary key (room_id),
Foreign key(d_id) references Department(d_id)
);

```
mysql> Create table Room(  
-> room_id int not null,  
-> Floor varchar(20) not null,  
-> Type varchar(40) not null,  
-> Charges int not null,  
-> Availability varchar(30) not null,  
-> d_id int not null,  
-> Primary key (room_id),  
-> Foreign key(d_id) references Department(d_id)  
-> );  
Query OK, 0 rows affected (0.07 sec)
```

5.

Create table Bill(

Bill_id int not null,

Amount int not null,

Date date,

Mode varchar(30) not null,

Primary key(Bill_id)

);

```
mysql> Create table Bill(  
-> Bill_id int not null,  
-> Amount int not null,  
-> Date date,  
-> Mode varchar(30) not null,  
-> Primary key(Bill_id)  
-> );  
Query OK, 0 rows affected (0.05 sec)
```

6.

Create table Customers(

Cust_id int not null,

Cust_name varchar(50),

dob date,

Gender varchar(8) not null,

Address varchar(50) not null,

Date_of_checkin date,

Date_of_checkout date,

```
room_id int not null,  
Bill_id int not null,  
Primary key(Cust_id),  
Foreign key(room_id) references Room(room_id),  
Foreign key(Bill_id) references Bill(Bill_id)  
);
```

```
mysql> Create table Customers(  
-> Cust_id int not null,  
-> Cust_name varchar(50),  
-> dob date,  
-> Gender varchar(8) not null,  
-> Address varchar(50) not null,  
-> Date_of_checkin date,  
-> Date_of_checkout date,  
-> room_id int not null,  
-> Bill_id int not null,  
-> Primary key(Cust_id),  
-> Foreign key(room_id) references Room(room_id),  
-> Foreign key(Bill_id) references Bill(Bill_id)  
-> );  
Query OK, 0 rows affected (0.10 sec)
```

7.

```
create table Employee(  
E_id int not null,  
E_name varchar(50) not null,  
E_dob date,  
Date_of_joining date,  
Gender varchar(8) not null,  
Mobile_no bigint not null,  
Shifts varchar(30) not null,  
Salary int not null,  
room_id int ,  
d_id int not null,  
check(Mobile_no<=9999999999 and Mobile_no>=1000000000),  
Primary key(E_id),
```

Foreign key(room_id) references Room(room_id),

Foreign Key(d_id) references Department(d_id)

);

```
mysql> create table Employee(  
-> E_id int not null,  
-> E_name varchar(50) not null,  
-> E_dob date,  
-> Date_of_joining date,  
-> Gender varchar(8) not null,  
-> Mobile_no bigint not null,  
-> Shifts varchar(30) not null,  
-> Salary int not null,  
-> room_id int ,  
-> d_id int not null,  
-> check(Mobile_no<=9999999999 and Mobile_no>=1000000000),  
-> Primary key(E_id),  
-> Foreign key(room_id) references Room(room_id),  
-> Foreign Key(d_id) references Department(d_id)  
-> );  
Query OK, 0 rows affected (0.10 sec)
```

8.

INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES

(1, 'Reception', 9876543210, 'Ground floor', '6am', '11pm');

INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES

(2, 'Housekeeping', 9876543211, '1st floor', '8am', '8pm');

INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES

(3, 'Catering', 9876543212, '2nd floor', '7am', '10pm');

INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES

(4, 'Maintenance', 9876543213, '3rd floor', '9am', '5pm');

```
INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES  
(5, 'Security', 9876543214, 'Ground floor', '24hrs', '24hrs');
```

```
INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES  
(6, 'Laundry', 9876543215, 'Basement', '10am', '7pm');
```

```
INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES  
(7, 'Spa', 9876543216, '2nd floor', '10am', '8pm');
```

```
INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES  
(8, 'Gym', 9876543217, '3rd floor', '6am', '10pm');
```

```
INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES  
(9, 'Pool', 9876543218, 'Ground floor', '7am', '9pm');
```

```
INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES  
(10, 'Parking', 9876543219, 'Basement', '24hrs', '24hrs');
```

```

mysql> INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES
-> (1, 'Reception', 9876543210, 'Ground floor', '6am', '11pm');
Query OK, 1 row affected (0.01 sec)

mysql>
mysql> INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES
-> (2, 'Housekeeping', 9876543211, '1st floor', '8am', '8pm');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES
-> (3, 'Catering', 9876543212, '2nd floor', '7am', '10pm');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES
-> (4, 'Maintenance', 9876543213, '3rd floor', '9am', '5pm');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES
-> (5, 'Security', 9876543214, 'Ground floor', '24hrs', '24hrs');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES
-> (6, 'Laundry', 9876543215, 'Basement', '10am', '7pm');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES
-> (7, 'Spa', 9876543216, '2nd floor', '10am', '8pm');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES
-> (8, 'Gym', 9876543217, '3rd floor', '6am', '10pm');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Department(d_id, d_name, Phone_no, Floor, Open_hrs, Close_hrs) VALUES
-> (9, 'Pool', 9876543218, 'Ground floor', '7am', '9pm');
Query OK, 1 row affected (0.00 sec)

```

9.

```
INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES
```

```
(1, '1st floor', 'Studio', 100, 'Vacant', 1);
```

```
INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES
```

```
(2, '2nd floor', 'Family room', 200, 'Reserved', 2);
```

```
INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES
```

```
(3, '3rd floor', 'Executive suite', 300, 'Booked', 3);
```

```
INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES
```

```
(4, '1st floor', 'Presidential suite', 400, 'Vacant', 4);
```

```
INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES  
(5, '2nd floor', 'Studio', 150, 'Reserved', 5);
```

```
INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES  
(6, 'Ground floor', 'Executive suite', 250, 'Booked', 6);
```

```
INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES  
(7, '3rd floor', 'Presidential suite', 350, 'Vacant', 7);
```

```
INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES  
(8, '1st floor', 'Studio', 120, 'Reserved', 8);
```

```
INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES  
(9, '2nd floor', 'Family room', 220, 'Booked', 9);
```

```
INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES  
(10, '3rd floor', 'Executive suite', 320, 'Vacant', 10);
```

```

mysql> INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES
-> (1, '1st floor', 'Studio', 100, 'Vacant', 1);
Query OK, 1 row affected (0.02 sec)

mysql>
mysql> INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES
-> (2, '2nd floor', 'Family room', 200, 'Reserved', 2);
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES
-> (3, '3rd floor', 'Executive suite', 300, 'Booked', 3);
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES
-> (4, '1st floor', 'Presidential suite', 400, 'Vacant', 4);
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES
-> (5, '2nd floor', 'Studio', 150, 'Reserved', 5);
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES
-> (6, 'Ground floor', 'Executive suite', 250, 'Booked', 6);
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES
-> (7, '3rd floor', 'Presidential suite', 350, 'Vacant', 7);
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES
-> (8, '1st floor', 'Studio', 120, 'Reserved', 8);
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES
-> (9, '2nd floor', 'Family room', 220, 'Booked', 9);
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Room(room_id, Floor, Type, Charges, Availability, d_id) VALUES
-> (10, '3rd floor', 'Executive suite', 320, 'Vacant', 10);
Query OK, 1 row affected (0.00 sec)

```

10.

```
INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES
```

```
(1, 150, '2023-10-01', 'Cash');
```

```
INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES
```

```
(2, 250, '2023-10-02', 'Online payment');
```

```
INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES
```

```
(3, 350, '2023-10-03', 'Credit Card');
```

```
INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES  
(4, 450, '2023-10-04', 'Debit Card');
```

```
INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES  
(5, 550, '2023-10-05', 'Cheque');
```

```
INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES  
(6, 150, '2023-10-06', 'Cash');
```

```
INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES  
(7, 250, '2023-10-07', 'Online payment');
```

```
INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES  
(8, 350, '2023-10-08', 'Credit Card');
```

```
INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES  
(9, 450, '2023-10-09', 'Debit Card');
```

```
INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES  
(10, 550, '2023-10-10', 'Cheque');
```

```

mysql>
mysql> INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES
-> (1, 150, '2023-10-01', 'Cash');
Query OK, 1 row affected (0.01 sec)

mysql>
mysql> INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES
-> (2, 250, '2023-10-02', 'Online payment');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES
-> (3, 350, '2023-10-03', 'Credit Card');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES
-> (4, 450, '2023-10-04', 'Debit Card');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES
-> (5, 550, '2023-10-05', 'Cheque');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES
-> (6, 150, '2023-10-06', 'Cash');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES
-> (7, 250, '2023-10-07', 'Online payment');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES
-> (8, 350, '2023-10-08', 'Credit Card');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES
-> (9, 450, '2023-10-09', 'Debit Card');
Query OK, 1 row affected (0.00 sec)

mysql>
mysql> INSERT INTO Bill(Bill_id, Amount, Date, Mode) VALUES
-> (10, 550, '2023-10-10', 'Cheque');
Query OK, 1 row affected (0.00 sec)

```

11.

```

INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin,
Date_of_checkout, room_id, Bill_id) VALUES

```

```

(1, 'John Doe', '1990-01-01', 'Male', '123 Main St', '2023-10-01', '2023-10-05', 1, 1);

```

```

INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin,
Date_of_checkout, room_id, Bill_id) VALUES

```

```

(2, 'Jane Smith', '1992-05-05', 'Female', '456 Elm St', '2023-10-02', '2023-10-06', 2, 2);

```

```

INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin,
Date_of_checkout, room_id, Bill_id) VALUES

```

```

(3, 'Alice Brown', '1993-02-02', 'Female', '789 Maple St', '2023-10-03', '2023-10-07', 3, 3);

```

INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES

(4, 'Bob White', '1989-12-12', 'Male', '101 Pine St', '2023-10-04', '2023-10-08', 4, 4);

INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES

(5, 'Charlie Green', '1995-03-03', 'Male', '202 Oak St', '2023-10-05', '2023-10-09', 5, 5);

INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES

(6, 'Daisy Black', '1988-04-04', 'Female', '303 Birch St', '2023-10-06', '2023-10-10', 6, 6);

INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES

(7, 'Ella Grey', '1994-06-06', 'Female', '404 Cedar St', '2023-10-07', '2023-10-11', 7, 7);

INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES

(8, 'Frank Red', '1987-07-07', 'Male', '505 Dogwood St', '2023-10-08', '2023-10-12', 8, 8);

INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES

(9, 'Grace Blue', '1996-08-08', 'Female', '606 Fir St', '2023-10-09', '2023-10-13', 9, 9);

INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES

(10, 'Henry Yellow', '1986-09-09', 'Male', '707 Spruce St', '2023-10-10', '2023-10-14', 10, 10);

```
mysql>
mysql> INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES
-> (1, 'John Doe', '1990-01-01', 'Male', '123 Main St', '2023-10-01', '2023-10-05', 1, 1);
Query OK, 1 row affected (0.01 sec)

mysql> INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES
-> (2, 'Jane Smith', '1992-05-05', 'Female', '456 Elm St', '2023-10-02', '2023-10-06', 2, 2);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES
-> (3, 'Alice Brown', '1993-02-02', 'Female', '789 Maple St', '2023-10-03', '2023-10-07', 3, 3);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES
-> (4, 'Bob White', '1989-12-12', 'Male', '101 Pine St', '2023-10-04', '2023-10-08', 4, 4);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES
-> (5, 'Charlie Green', '1995-03-03', 'Male', '202 Oak St', '2023-10-05', '2023-10-09', 5, 5);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES
-> (6, 'Daisy Black', '1988-04-04', 'Female', '303 Birch St', '2023-10-06', '2023-10-10', 6, 6);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES
-> (7, 'Ella Grey', '1994-06-06', 'Female', '404 Cedar St', '2023-10-07', '2023-10-11', 7, 7);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES
-> (8, 'Frank Red', '1987-07-07', 'Male', '505 Dogwood St', '2023-10-08', '2023-10-12', 8, 8);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES
-> (9, 'Grace Blue', '1996-08-08', 'Female', '606 Fir St', '2023-10-09', '2023-10-13', 9, 9);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Customers(Cust_id, Cust_name, dob, Gender, Address, Date_of_checkin, Date_of_checkout, room_id, Bill_id) VALUES
-> (10, 'Henry Yellow', '1986-09-09', 'Male', '707 Spruce St', '2023-10-10', '2023-10-14', 10, 10);
Query OK, 1 row affected (0.00 sec)
```

12.

```
INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
```

```
(1, 'Mike', '1985-01-15', '2019-01-01', 'Male', 9123456780, '8am-5pm', 1000, 1, 1);
```

```
INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
```

```
(2, 'Linda', '1987-02-20', '2020-02-02', 'Female', 9123456781, '9am-6pm', 1100, 2, 2);
```

```
INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
```

```
(3, 'Oscar', '1980-03-25', '2018-03-03', 'Male', 9123456782, '1pm-10pm', 1200, 3, 3);
```

```
INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
```

```
(4, 'Eva', '1982-04-30', '2017-04-04', 'Female', 9123456783, '7am-4pm', 1300, 4, 4);
```

```
INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
```

```
(5, 'Tom', '1983-05-05', '2016-05-05', 'Male', 9123456784, '10am-7pm', 1400, 5, 5);
```

```
INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
```

```
(6, 'Sophia', '1986-06-10', '2015-06-06', 'Female', 9123456785, '2pm-11pm', 1500, 6, 6);
```

```
INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
```

```
(7, 'Charlie', '1988-07-15', '2014-07-07', 'Male', 9123456786, '6am-3pm', 1600, 7, 7);
```

```
INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
```

```
(8, 'Olivia', '1981-08-20', '2013-08-08', 'Female', 9123456787, '3pm-12am', 1700, 8, 8);
```

```
INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
```

```
(9, 'David', '1984-09-25', '2012-09-09', 'Male', 9123456788, '9pm-6am', 1800, 9, 9);
```

```
INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
```

```
(10, 'Emma', '1989-10-30', '2011-10-10', 'Female', 9123456789, '11pm-8am', 1900, 10, 10);
```

```

mysql> INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
-> (1, 'Mike', '1985-01-15', '2019-01-01', 'Male', 9123456780, '8am-5pm', 1000, 1, 1);
Query OK, 1 row affected (0.01 sec)

mysql> INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
-> (2, 'Linda', '1987-02-20', '2020-02-02', 'Female', 9123456781, '9am-6pm', 1100, 2, 2);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
-> (3, 'Oscar', '1980-03-25', '2018-03-03', 'Male', 9123456782, '1pm-10pm', 1200, 3, 3);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
-> (4, 'Eva', '1982-04-30', '2017-04-04', 'Female', 9123456783, '7am-4pm', 1300, 4, 4);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
-> (5, 'Tom', '1983-05-05', '2016-05-05', 'Male', 9123456784, '10am-7pm', 1400, 5, 5);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
-> (6, 'Sophia', '1986-06-10', '2015-06-06', 'Female', 9123456785, '2pm-11pm', 1500, 6, 6);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
-> (7, 'Charlie', '1988-07-15', '2014-07-07', 'Male', 9123456786, '6am-3pm', 1600, 7, 7);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
-> (8, 'Olivia', '1981-08-20', '2013-08-08', 'Female', 9123456787, '3pm-12am', 1700, 8, 8);
Query OK, 1 row affected (0.01 sec)

mysql> INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
-> (9, 'David', '1984-09-25', '2012-09-09', 'Male', 9123456788, '9pm-6am', 1800, 9, 9);
Query OK, 1 row affected (0.00 sec)

mysql> INSERT INTO Employee(E_id, E_name, E_dob, Date_of_joining, Gender, Mobile_no, Shifts, Salary, room_id, d_id) VALUES
-> (10, 'Emma', '1989-10-30', '2011-10-10', 'Female', 9123456789, '11pm-8am', 1900, 10, 10);
Query OK, 1 row affected (0.00 sec)

```

13.

Select* from Department;

```

mysql> select * from Department;
+-----+-----+-----+-----+-----+-----+
| d_id | d_name      | Phone_no | Floor      | Open_hrs | Close_hrs |
+-----+-----+-----+-----+-----+-----+
| 1    | Reception   | 9876543210 | Ground floor | 6am      | 11pm      |
| 2    | Housekeeping | 9876543211 | 1st floor    | 8am      | 8pm       |
| 3    | Catering    | 9876543212 | 2nd floor    | 7am      | 10pm      |
| 4    | Maintenance | 9876543213 | 3rd floor    | 9am      | 5pm       |
| 5    | Security    | 9876543214 | Ground floor | 24hrs    | 24hrs     |
| 6    | Laundry     | 9876543215 | Basement     | 10am     | 7pm       |
| 7    | Spa         | 9876543216 | 2nd floor    | 10am     | 8pm       |
| 8    | Gym         | 9876543217 | 3rd floor    | 6am      | 10pm      |
| 9    | Pool        | 9876543218 | Ground floor | 7am      | 9pm       |
| 10   | Parking     | 9876543219 | Basement     | 24hrs    | 24hrs     |
+-----+-----+-----+-----+-----+-----+
10 rows in set (0.00 sec)

```

14.

Select * from Room;

```
mysql> Select * from Room;
```

room_id	Floor	Type	Charges	Availability	d_id
1	1st floor	Studio	100	Vacant	1
2	2nd floor	Family room	200	Reserved	2
3	3rd floor	Executive suite	300	Booked	3
4	1st floor	Presidential suite	400	Vacant	4
5	2nd floor	Studio	150	Reserved	5
6	Ground floor	Executive suite	250	Booked	6
7	3rd floor	Presidential suite	350	Vacant	7
8	1st floor	Studio	120	Reserved	8
9	2nd floor	Family room	220	Booked	9
10	3rd floor	Executive suite	320	Vacant	10

```
10 rows in set (0.00 sec)
```

15.

Select * from Bill;

```
mysql> Select * from Bill;
```

Bill_id	Amount	Date	Mode
1	150	2023-10-01	Cash
2	250	2023-10-02	Online payment
3	350	2023-10-03	Credit Card
4	450	2023-10-04	Debit Card
5	550	2023-10-05	Cheque
6	150	2023-10-06	Cash
7	250	2023-10-07	Online payment
8	350	2023-10-08	Credit Card
9	450	2023-10-09	Debit Card
10	550	2023-10-10	Cheque

```
10 rows in set (0.00 sec)
```

16.

Select * from Customers;

```
mysql> Select * from Customers;
```

Cust_id	Cust_name	dob	Gender	Address	Date_of_checkin	Date_of_checkout	room_id	Bill_id
1	John Doe	1990-01-01	Male	123 Main St	2023-10-01	2023-10-05	1	1
2	Jane Smith	1992-05-05	Female	456 Elm St	2023-10-02	2023-10-06	2	2
3	Alice Brown	1993-02-02	Female	789 Maple St	2023-10-03	2023-10-07	3	3
4	Bob White	1989-12-12	Male	101 Pine St	2023-10-04	2023-10-08	4	4
5	Charlie Green	1995-03-03	Male	202 Oak St	2023-10-05	2023-10-09	5	5
6	Daisy Black	1988-04-04	Female	303 Birch St	2023-10-06	2023-10-10	6	6
7	Ella Grey	1994-06-06	Female	404 Cedar St	2023-10-07	2023-10-11	7	7
8	Frank Red	1987-07-07	Male	505 Dogwood St	2023-10-08	2023-10-12	8	8
9	Grace Blue	1996-08-08	Female	606 Fir St	2023-10-09	2023-10-13	9	9
10	Henry Yellow	1986-09-09	Male	707 Spruce St	2023-10-10	2023-10-14	10	10

```
10 rows in set (0.00 sec)
```

17.

Select * from Employee;

```
mysql> Select * from Employee;
```

E_id	E_name	E_dob	Date_of_joining	Gender	Mobile_no	Shifts	Salary	room_id	d_id
1	Mike	1985-01-15	2019-01-01	Male	9123456780	8am-5pm	1000	1	1
2	Linda	1987-02-20	2020-02-02	Female	9123456781	9am-6pm	1100	2	2
3	Oscar	1980-03-25	2018-03-03	Male	9123456782	1pm-10pm	1200	3	3
4	Eva	1982-04-30	2017-04-04	Female	9123456783	7am-4pm	1300	4	4
5	Tom	1983-05-05	2016-05-05	Male	9123456784	10am-7pm	1400	5	5
6	Sophia	1986-06-10	2015-06-06	Female	9123456785	2pm-11pm	1500	6	6
7	Charlie	1988-07-15	2014-07-07	Male	9123456786	6am-3pm	1600	7	7
8	Olivia	1981-08-20	2013-08-08	Female	9123456787	3pm-12am	1700	8	8
9	David	1984-09-25	2012-09-09	Male	9123456788	9pm-6am	1800	9	9
10	Emma	1989-10-30	2011-10-10	Female	9123456789	11pm-8am	1900	10	10

```
10 rows in set (0.00 sec)
```

18.

select Avg(Salary) as "Average Salary of Employees" from Employee;

```
mysql> select Avg(Salary) as "Average Salary of Employees" from Employee;
```

Average Salary of Employees
1450.0000

```
1 row in set (0.01 sec)
```

19.

select floor(DATEDIFF(CURDATE(),E_dob)/365) as "AGE" from Employee;

```
mysql> select floor(DATEDIFF(CURDATE(),E_dob)/365) as "AGE" from Employee;
```

AGE
38
36
43
41
40
37
35
42
39
33

```
10 rows in set (0.01 sec)
```

20.

select sum(Salary) from Employee;

```
mysql> select sum(Salary) from Employee;
```

sum(Salary)
14500

```
1 row in set (0.00 sec)
```

21.

select floor(DATEDIFF(CURDATE(),dob)/365) as "AGE" from Customers;

```
mysql> select floor(DATEDIFF(CURDATE(),dob)/365) as "AGE" from Customers;
```

AGE
33
31
30
33
28
35
29
36
27
37

```
10 rows in set (0.00 sec)
```