



```
In [88]: 1 import warnings
2 warnings.filterwarnings("ignore")
3 import pandas as pd
4 import sqlite3
5 import csv
6 import matplotlib.pyplot as plt
7 import seaborn as sns
8 import numpy as np
9 from wordcloud import WordCloud
10 import re
11 import os
12 from sqlalchemy import create_engine # database connection
13 import datetime as dt
14 from nltk.corpus import stopwords
15 from nltk.tokenize import word_tokenize
16 from nltk.stem.snowball import SnowballStemmer
17 from sklearn.feature_extraction.text import CountVectorizer
18 from sklearn.feature_extraction.text import TfidfVectorizer
19 from sklearn.multiclass import OneVsRestClassifier
20 from sklearn.linear_model import SGDClassifier
21 from sklearn import metrics
22 from sklearn.metrics import f1_score, precision_score, recall_score
23 from sklearn import svm
24 from sklearn.linear_model import LogisticRegression
25 from sklearnlearn.adapt import mlknn
26 from sklearnlearn.problem_transform import ClassifierChain
27 from sklearnlearn.problem_transform import BinaryRelevance
28 from sklearnlearn.problem_transform import LabelPowerset
29 from sklearn.naive_bayes import GaussianNB
30 from datetime import datetime
```

Stack Overflow: Tag Prediction

1. Business Problem

1.1 Description

Description

Stack Overflow is the largest, most trusted online community for developers to learn, share their programming knowledge, and build their careers.

Stack Overflow is something which every programmer use one way or another. Each month, over 50 million developers come to Stack Overflow to learn, share their knowledge, and build their careers. It features questions and answers on a wide range of topics in computer programming. The website serves as a platform for users to ask and answer questions, and, through membership and

active participation, to vote questions and answers up or down and edit questions and answers in a fashion similar to a wiki or Digg. As of April 2014 Stack Overflow has over 4,000,000 registered users, and it exceeded 10,000,000 questions in late August 2015. Based on the type of tags assigned to questions, the top eight most discussed topics on the site are: Java, JavaScript, C#, PHP, Android, jQuery, Python and HTML.

Problem Statement

Suggest the tags based on the content that was there in the question posted on Stackoverflow.

Source: <https://www.kaggle.com/c/facebook-recruiting-iii-keyword-extraction/>
(<https://www.kaggle.com/c/facebook-recruiting-iii-keyword-extraction/>)

1.2 Source / useful links

Data Source : <https://www.kaggle.com/c/facebook-recruiting-iii-keyword-extraction/data>
(<https://www.kaggle.com/c/facebook-recruiting-iii-keyword-extraction/data>)

Youtube : <https://youtu.be/nNDqbUhtIRg> (<https://youtu.be/nNDqbUhtIRg>)

Research paper : <https://www.microsoft.com/en-us/research/wp-content/uploads/2016/02/tagging-1.pdf> (<https://www.microsoft.com/en-us/research/wp-content/uploads/2016/02/tagging-1.pdf>)

Research paper : <https://dl.acm.org/citation.cfm?id=2660970&dl=ACM&coll=DL>
(<https://dl.acm.org/citation.cfm?id=2660970&dl=ACM&coll=DL>)

1.3 Real World / Business Objectives and Constraints

1. Predict as many tags as possible with high precision and recall.
2. Incorrect tags could impact customer experience on StackOverflow.
3. No strict latency constraints.

2. Machine Learning problem

2.1 Data

2.1.1 Data Overview

Refer: <https://www.kaggle.com/c/facebook-recruiting-iii-keyword-extraction/data>
(<https://www.kaggle.com/c/facebook-recruiting-iii-keyword-extraction/data>)

All of the data is in 2 files: Train and Test.

Train.csv contains 4 columns: Id,Title,Body,Tags.

Test.csv contains the same columns but without the Tags, which you are to predict.

Size of Train.csv - 6.75GB

Size of Test.csv - 2GB

Number of rows in Train.csv = 6034195

The questions are randomized and contains a mix of verbose text sites as well as sites related to math and programming. The number of questions from each site may vary, and no filtering has been performed on the questions (such as closed questions).

Data Field Explanation

Dataset contains 6,034,195 rows. The columns in the table are:

Id - Unique identifier for each question

Title - The question's title

Body - The body of the question

Tags - The tags associated with the question in a space-separated format (all lowercase, should not contain tabs '\t' or ampersands '&')

2.1.2 Example Data point

Title: Implementing Boundary Value Analysis of Software Testing in a C++ program?

Body :

```

#include<
iostream>\n
#include<
stdlib.h>\n\n
using namespace std;\n\n
int main()\n
{\n
    int n,a[n],x,c,u[n],m[n],e[n][4];\n
    cout<<"Enter the number of variables";\n
cin>>n;\n\n
    cout<<"Enter the Lower, and Upper Limits of the
variables";\n
    for(int y=1; y<n+1; y++)\n
    {\n
        cin>>m[y];\n
        cin>>u[y];\n
    }\n
    for(x=1; x<n+1; x++)\n
    {\n
        a[x] = (m[x] + u[x])/2;\n
    }\n
    c=(n*4)-4;\n
    for(int a1=1; a1<n+1; a1++)\n
    {\n\n
        e[a1][0] = m[a1];\n
        e[a1][1] = m[a1]+1;\n
        e[a1][2] = u[a1]-1;\n
        e[a1][3] = u[a1];\n
    }\n
    for(int i=1; i<n+1; i++)\n
    {\n
        for(int l=1; l<=i; l++)\n
        {\n
            if(l!=1)\n
            {\n
                cout<<a[l]<<"\\t";\n
            }\n
        }\n
        for(int j=0; j<4; j++)\n
        {\n
            cout<<e[i][j];\n
            for(int k=0; k<n-(i+1); k++)\n
            {\n
                cout<<a[k]<<"\\t";\n
            }\n
            cout<<"\\n";\n
        }\n
    }\n
}

```

```

        system("PAUSE");\n
        return 0;    \n
    }\n

```



\n\n

The answer should come in the form of a table like

\n\n

1	50	50\n
2	50	50\n
99	50	50\n
100	50	50\n
50	1	50\n
50	2	50\n
50	99	50\n
50	100	50\n
50	50	1\n
50	50	2\n
50	50	99\n
50	50	100\n

\n\n

if the no of inputs is 3 and their ranges are\n

1,100\n

1,100\n

1,100\n

(could be varied too)

\n\n

The output is not coming,can anyone correct the code or tell me what's wrong?

\n'

Tags : 'c++ c'

2.2 Mapping the real-world problem to a Machine Learning Problem

2.2.1 Type of Machine Learning Problem

It is a multi-label classification problem

Multi-label Classification: Multilabel classification assigns to each sample a set of target labels. This can be thought as predicting properties of a data-point that are not mutually exclusive, such as topics that are relevant for a document. A question on Stackoverflow might be about any of C, Pointers, FileIO and/or memory-management at the same time or none of these.

Credit: <http://scikit-learn.org/stable/modules/multiclass.html> (<http://scikit-learn.org/stable/modules/multiclass.html>)

2.2.2 Performance metric

Micro-Averaged F1-Score (Mean F Score) : The F1 score can be interpreted as a weighted average of the precision and recall, where an F1 score reaches its best value at 1 and worst score at 0. The relative contribution of precision and recall to the F1 score are equal. The formula for the F1 score is:

$$F1 = 2 (precision \ recall) / (precision + recall)$$

In the multi-class and multi-label case, this is the weighted average of the F1 score of each class.

'Micro f1 score':

Calculate metrics globally by counting the total true positives, false negatives and false positives. This is a better metric when we have class imbalance.

'Macro f1 score':

Calculate metrics for each label, and find their unweighted mean. This does not take label imbalance into account.

<https://www.kaggle.com/wiki/MeanFScore> (<https://www.kaggle.com/wiki/MeanFScore>)
http://scikit-learn.org/stable/modules/generated/sklearn.metrics.f1_score.html (http://scikit-learn.org/stable/modules/generated/sklearn.metrics.f1_score.html)

Hamming loss : The Hamming loss is the fraction of labels that are incorrectly predicted.
<https://www.kaggle.com/wiki/HammingLoss> (<https://www.kaggle.com/wiki/HammingLoss>)

3. Exploratory Data Analysis

3.1 Data Loading and Cleaning

3.1.1 Using Pandas with SQLite to Load the data

```
In [0]: 1 #Creating db file from csv
2 #Learn SQL: https://www.w3schools.com/sql/default.asp
3 if not os.path.isfile('train.db'):
4     start = datetime.now()
5     disk_engine = create_engine('sqlite:///train.db')
6     start = dt.datetime.now()
7     chunksize = 180000
8     j = 0
9     index_start = 1
10    for df in pd.read_csv('Train.csv', names=['Id', 'Title', 'Body', 'Tags'],
11        df.index += index_start
12        j+=1
13        print('{} rows'.format(j*chunksize))
14        df.to_sql('data', disk_engine, if_exists='append')
15        index_start = df.index[-1] + 1
16    print("Time taken to run this cell :", datetime.now() - start)
```

3.1.2 Counting the number of rows

```
In [0]: 1 if os.path.isfile('train.db'):
2     start = datetime.now()
3     con = sqlite3.connect('train.db')
4     num_rows = pd.read_sql_query("""SELECT count(*) FROM data""", con)
5     #Always remember to close the database
6     print("Number of rows in the database :", "\n", num_rows['count(*)'].values)
7     con.close()
8     print("Time taken to count the number of rows :", datetime.now() - start)
9 else:
10    print("Please download the train.db file from drive or run the above cell")
```

Number of rows in the database :

6034196

Time taken to count the number of rows : 0:01:15.750352

3.1.3 Checking for duplicates

```
In [0]: 1 #Learn SQL: https://www.w3schools.com/sql/default.asp
2 if os.path.isfile('train.db'):
3     start = datetime.now()
4     con = sqlite3.connect('train.db')
5     df_no_dup = pd.read_sql_query('SELECT Title, Body, Tags, COUNT(*) as cnt_
6     con.close()
7     print("Time taken to run this cell :", datetime.now() - start)
8 else:
9     print("Please download the train.db file from drive or run the first to g")
```

Time taken to run this cell : 0:04:33.560122


```
In [0]: 1 start = datetime.now()
2 df_no_dup["tag_count"] = df_no_dup["Tags"].apply(lambda text: len(text.split(
3 # adding a new feature number of tags per question
4 print("Time taken to run this cell :", datetime.now() - start)
5 df_no_dup.head()
```

Time taken to run this cell : 0:00:03.169523

	Title	Body	Tags	cnt_dup	tag_
0	Implementing Boundary Value Analysis of S...	<pre> <code>#include<iosstream>\n#include<...>	c++ c	1	
1	Dynamic Datagrid Binding in Silverlight?	<p>I should do binding for datagrid dynamicall...	c# silverlight data-binding	1	
2	Dynamic Datagrid Binding in Silverlight?	<p>I should do binding for datagrid dynamicall...	c# silverlight data-binding columns	1	
3	java.lang.NoClassDefFoundError: javax.serv...	<p>I followed the guide in <a href="http://sta...	jsp jstl	1	
4	java.sql.SQLException:[Microsoft] [ODBC Dri...	<p>I use the following code</p>\n\n<pre> <code>...	java jdbc	2	

```
In [0]: 1 # distribution of number of tags per question
        2 df_no_dup.tag_count.value_counts()
```

```
Out[10]: 3      1206157
          2      1111706
          4       814996
          1       568298
          5       505158
          Name: tag_count, dtype: int64
```

```
In [0]: 1 #Creating a new database with no duplicates
2 if not os.path.isfile('train_no_dup.db'):
3     disk_dup = create_engine("sqlite:///train_no_dup.db")
4     no_dup = pd.DataFrame(df_no_dup, columns=['Title', 'Body', 'Tags'])
5     no_dup.to_sql('no_dup_train', disk_dup)
```

```
In [0]: 1 #This method seems more appropriate to work with this much data.
2 #creating the connection with database file.
3 if os.path.isfile('train_no_dup.db'):
4     start = datetime.now()
5     con = sqlite3.connect('train_no_dup.db')
6     tag_data = pd.read_sql_query("""SELECT Tags FROM no_dup_train""", con)
7     #Always remember to close the database
8     con.close()
9
10     # Let's now drop unwanted column.
11     tag_data.drop(tag_data.index[0], inplace=True)
12     #Printing first 5 columns from our data frame
13     tag_data.head()
14     print("Time taken to run this cell :", datetime.now() - start)
15 else:
16     print("Please download the train.db file from drive or run the above cell")
```

Time taken to run this cell : 0:00:52.992676

3.2 Analysis of Tags

3.2.1 Total number of unique tags

```
In [0]: 1 # Importing & Initializing the "CountVectorizer" object, which
2 #is scikit-learn's bag of words tool.
3
4 #by default 'split()' will tokenize each tag using space.
5 vectorizer = CountVectorizer(tokenizer = lambda x: x.split())
6 # fit_transform() does two functions: First, it fits the model
7 # and learns the vocabulary; second, it transforms our training data
8 # into feature vectors. The input to fit_transform should be a list of string
9 tag_dtm = vectorizer.fit_transform(tag_data['Tags'])
```

```
In [0]: 1 print("Number of data points :", tag_dtm.shape[0])
2 print("Number of unique tags :", tag_dtm.shape[1])
```

Number of data points : 4206314

Number of unique tags : 42048

```
In [0]: 1 #'get_feature_name()' gives us the vocabulary.
2 tags = vectorizer.get_feature_names()
3 #Lets Look at the tags we have.
4 print("Some of the tags we have :", tags[:10])
```

Some of the tages we have : ['.a', '.app', '.asp.net-mvc', '.aspxauth', '.bash-profile', '.class-file', '.cs-file', '.doc', '.drv', '.ds-store']

3.2.3 Number of times a tag appeared

```
In [0]: 1 # https://stackoverflow.com/questions/15115765/how-to-access-sparse-matrix-el
2 # Lets now store the document term matrix in a dictionary.
3 freqs = tag_dtm.sum(axis=0).A1
4 result = dict(zip(tags, freqs))
```


```
In [0]: 1 #Saving this dictionary to csv files.
2 if not os.path.isfile('tag_counts_dict_dtm.csv'):
3     with open('tag_counts_dict_dtm.csv', 'w') as csv_file:
4         writer = csv.writer(csv_file)
5         for key, value in result.items():
6             writer.writerow([key, value])
7 tag_df = pd.read_csv("tag_counts_dict_dtm.csv", names=['Tags', 'Counts'])
8 tag_df.head()
```

```
Out[17]:
```


	Tags	Counts
0	.a	18
1	.app	37
2	.asp.net-mvc	1
3	.aspxauth	21
4	.bash-profile	138

```
In [0]: 1 tag_df_sorted = tag_df.sort_values(['Counts'], ascending=False)
2 tag_counts = tag_df_sorted['Counts'].values
```

```
In [0]: 1 plt.plot(tag_counts)
2 plt.title("Distribution of number of times tag appeared questions")
3 plt.grid()
4 plt.xlabel("Tag number")
5 plt.ylabel("Number of times tag appeared")
6 plt.show()
```

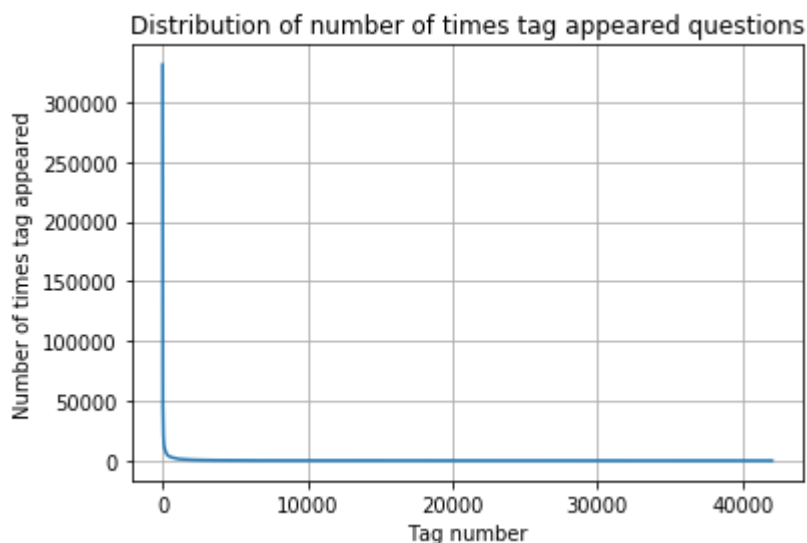


```
In [0]: 1 plt.plot(tag_counts[0:10000])
2 plt.title('first 10k tags: Distribution of number of times tag appeared quest
3 plt.grid()
4 plt.xlabel("Tag number")
5 plt.ylabel("Number of times tag appeared")
6 plt.show()
7 print(len(tag_counts[0:10000:25]), tag_counts[0:10000:25])
```

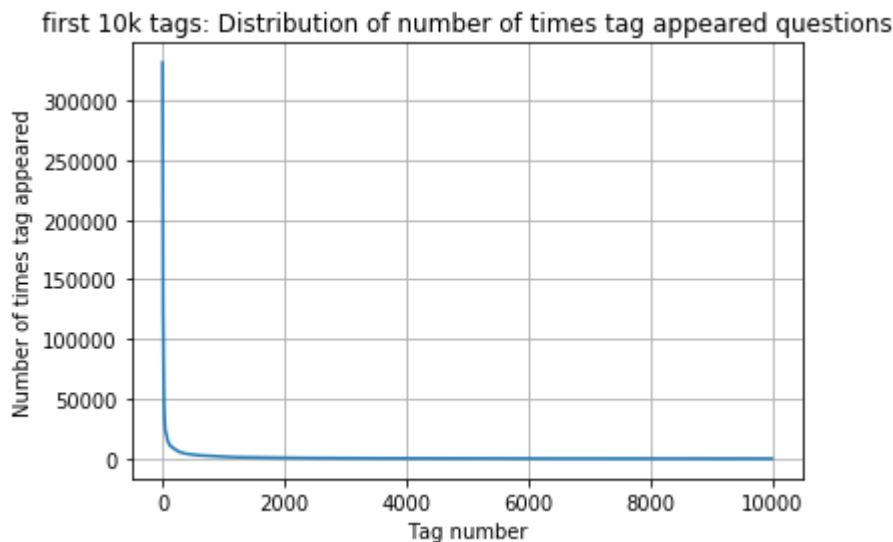

400	[331505	44829	22429	17728	13364	11162	10029	9148	8054	7151
6466	5865	5370	4983	4526	4281	4144	3929	3750	3593	
3453	3299	3123	2989	2891	2738	2647	2527	2431	2331	
2259	2186	2097	2020	1959	1900	1828	1770	1723	1673	
1631	1574	1532	1479	1448	1406	1365	1328	1300	1266	
1245	1222	1197	1181	1158	1139	1121	1101	1076	1056	
1038	1023	1006	983	966	952	938	926	911	891	
882	869	856	841	830	816	804	789	779	770	
752	743	733	725	712	702	688	678	671	658	
650	643	634	627	616	607	598	589	583	577	
568	559	552	545	540	533	526	518	512	506	
500	495	490	485	480	477	469	465	457	450	
447	442	437	432	426	422	418	413	408	403	
398	393	388	385	381	378	374	370	367	365	
361	357	354	350	347	344	342	339	336	332	
330	326	323	319	315	312	309	307	304	301	
299	296	293	291	289	286	284	281	278	276	
275	272	270	268	265	262	260	258	256	254	
252	250	249	247	245	243	241	239	238	236	
234	233	232	230	228	226	224	222	220	219	
217	215	214	212	210	209	207	205	204	203	
201	200	199	198	196	194	193	192	191	189	
188	186	185	183	182	181	180	179	178	177	
175	174	172	171	170	169	168	167	166	165	
164	162	161	160	159	158	157	156	156	155	
154	153	152	151	150	149	149	148	147	146	
145	144	143	142	142	141	140	139	138	137	
137	136	135	134	134	133	132	131	130	130	
129	128	128	127	126	126	125	124	124	123	
123	122	122	121	120	120	119	118	118	117	
117	116	116	115	115	114	113	113	112	111	
111	110	109	109	108	108	107	106	106	106	


105	105	104	104	103	103	102	102	101	101
100	100	99	99	98	98	97	97	96	96
95	95	94	94	93	93	93	92	92	91
91	90	90	89	89	88	88	87	87	86
86	86	85	85	84	84	83	83	83	82
82	82	81	81	80	80	80	79	79	78
78	78	78	77	77	76	76	76	75	75
75	74	74	74	73	73	73	73	72	72]

```
In [0]: 1 plt.plot(tag_counts[0:1000])
2 plt.title('first 1k tags: Distribution of number of times tag appeared questi
3 plt.grid()
4 plt.xlabel("Tag number")
5 plt.ylabel("Number of times tag appeared")
6 plt.show()
7 print(len(tag_counts[0:1000:5]), tag_counts[0:1000:5])
```

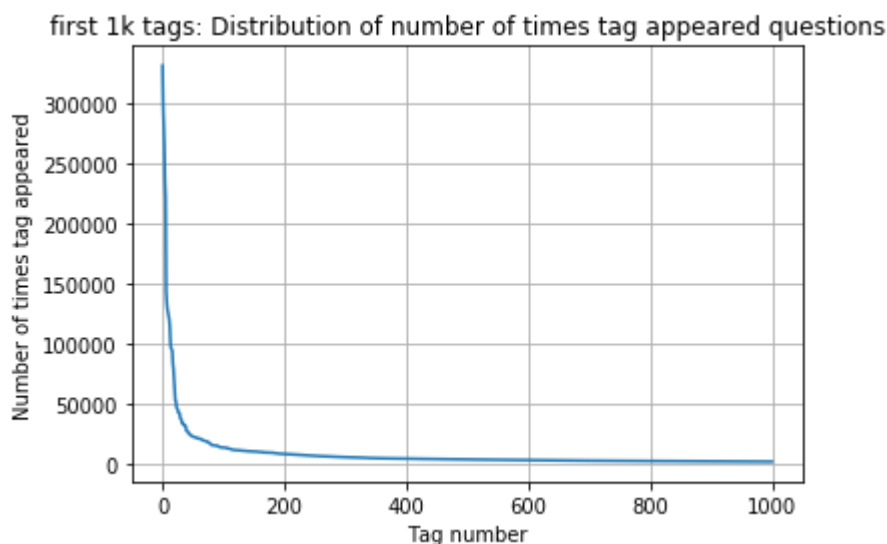


200	[331505	221533	122769	95160	62023	44829	37170	31897	26925	24537
22429	21820	20957	19758	18905	17728	15533	15097	14884	13703	
13364	13157	12407	11658	11228	11162	10863	10600	10350	10224	
10029	9884	9719	9411	9252	9148	9040	8617	8361	8163	
8054	7867	7702	7564	7274	7151	7052	6847	6656	6553	
6466	6291	6183	6093	5971	5865	5760	5577	5490	5411	
5370	5283	5207	5107	5066	4983	4891	4785	4658	4549	
4526	4487	4429	4335	4310	4281	4239	4228	4195	4159	
4144	4088	4050	4002	3957	3929	3874	3849	3818	3797	
3750	3703	3685	3658	3615	3593	3564	3521	3505	3483	
3453	3427	3396	3363	3326	3299	3272	3232	3196	3168	
3123	3094	3073	3050	3012	2989	2984	2953	2934	2903	
2891	2844	2819	2784	2754	2738	2726	2708	2681	2669	
2647	2621	2604	2594	2556	2527	2510	2482	2460	2444	
2431	2409	2395	2380	2363	2331	2312	2297	2290	2281	
2259	2246	2222	2211	2198	2186	2162	2142	2132	2107	
2097	2078	2057	2045	2036	2020	2011	1994	1971	1965	
1959	1952	1940	1932	1912	1900	1879	1865	1855	1841	
1828	1821	1813	1801	1782	1770	1760	1747	1741	1734	
1723	1707	1697	1688	1683	1673	1665	1656	1646	1639]	

```
In [0]: 1 plt.plot(tag_counts[0:500])
2 plt.title('first 500 tags: Distribution of number of times tag appeared quest
3 plt.grid()
4 plt.xlabel("Tag number")
5 plt.ylabel("Number of times tag appeared")
6 plt.show()
7 print(len(tag_counts[0:500:5]), tag_counts[0:500:5])
```

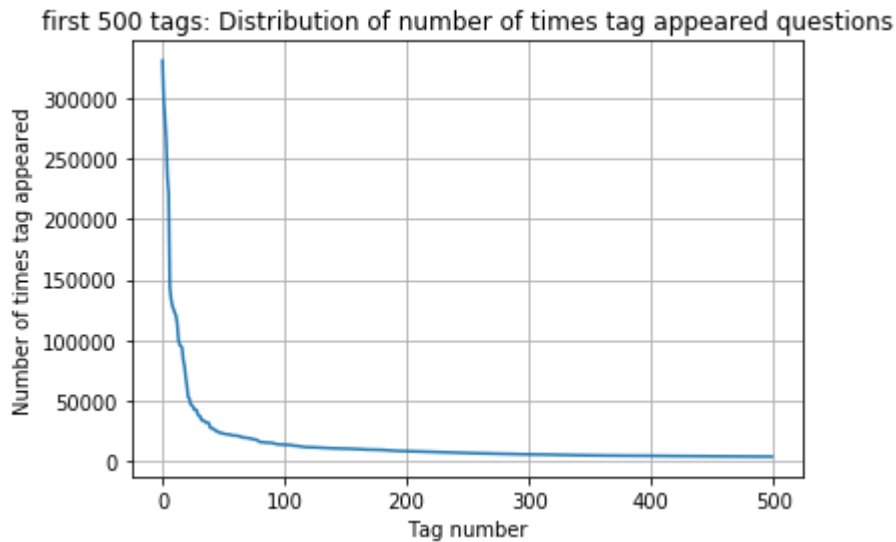

```
100 [331505 221533 122769 95160 62023 44829 37170 31897 26925 24537
22429 21820 20957 19758 18905 17728 15533 15097 14884 13703
13364 13157 12407 11658 11228 11162 10863 10600 10350 10224
10029 9884 9719 9411 9252 9148 9040 8617 8361 8163
8054 7867 7702 7564 7274 7151 7052 6847 6656 6553
6466 6291 6183 6093 5971 5865 5760 5577 5490 5411
5370 5283 5207 5107 5066 4983 4891 4785 4658 4549
4526 4487 4429 4335 4310 4281 4239 4228 4195 4159
4144 4088 4050 4002 3957 3929 3874 3849 3818 3797
3750 3703 3685 3658 3615 3593 3564 3521 3505 3483]
```

```
In [0]: 1 plt.plot(tag_counts[0:100], c='b')
2 plt.scatter(x=list(range(0,100,5)), y=tag_counts[0:100:5], c='orange', label=
3 # quantiles with 0.25 difference
4 plt.scatter(x=list(range(0,100,25)), y=tag_counts[0:100:25], c='m', label = "
5
6 for x,y in zip(list(range(0,100,25)), tag_counts[0:100:25]):
7     plt.annotate(s="({} , {})".format(x,y), xy=(x,y), xytext=(x-0.05, y+500))
8
9 plt.title('first 100 tags: Distribution of number of times tag appeared quest
10 plt.grid()
11 plt.xlabel("Tag number")
12 plt.ylabel("Number of times tag appeared")
13 plt.legend()
14 plt.show()
15 print(len(tag_counts[0:100:5]), tag_counts[0:100:5])
```

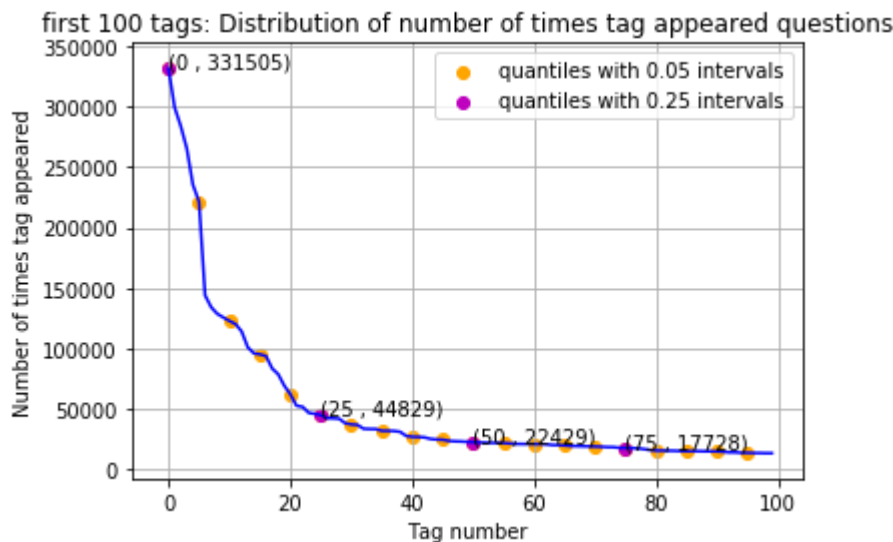

```
20 [331505 221533 122769 95160 62023 44829 37170 31897 26925 24537
    22429 21820 20957 19758 18905 17728 15533 15097 14884 13703]
```

```
In [0]: 1 # Store tags greater than 10K in one list
2 lst_tags_gt_10k = tag_df[tag_df.Counts>10000].Tags
3 #Print the length of the List
4 print ('{} Tags are used more than 10000 times'.format(len(lst_tags_gt_10k)))
5 # Store tags greater than 100K in one list
6 lst_tags_gt_100k = tag_df[tag_df.Counts>100000].Tags
7 #Print the length of the List.
8 print ('{} Tags are used more than 100000 times'.format(len(lst_tags_gt_100k)))
```

```
153 Tags are used more than 10000 times
14 Tags are used more than 100000 times
```

Observations:

1. There are total 153 tags which are used more than 10000 times.
2. 14 tags are used more than 100000 times.
3. Most frequent tag (i.e. c#) is used 331505 times.
4. Since some tags occur much more frequently than others, Micro-averaged F1-score is the appropriate metric for this problem.

3.2.4 Tags Per Question


```
In [0]: 1 #Storing the count of tag in each question in list 'tag_count'
2 tag_quest_count = tag_dtm.sum(axis=1).tolist()
3 #Converting list of lists into single list, we will get [[3], [4], [2], [2],
4 tag_quest_count=[int(j) for i in tag_quest_count for j in i]
5 print ('We have total {} datapoints.'.format(len(tag_quest_count)))
6
7 print(tag_quest_count[:5])
```

We have total 4206314 datapoints.
[3, 4, 2, 2, 3]

```
In [0]: 1 print( "Maximum number of tags per question: %d"%max(tag_quest_count))
2 print( "Minimum number of tags per question: %d"%min(tag_quest_count))
3 print( "Avg. number of tags per question: %f"% ((sum(tag_quest_count)*1.0)/len(tag_quest_count)))
```

Maximum number of tags per question: 5
Minimum number of tags per question: 1
Avg. number of tags per question: 2.899440


```
In [0]: 1 sns.countplot(tag_quest_count, palette='gist_rainbow')
2 plt.title("Number of tags in the questions ")
3 plt.xlabel("Number of Tags")
4 plt.ylabel("Number of questions")
5 plt.show()
```

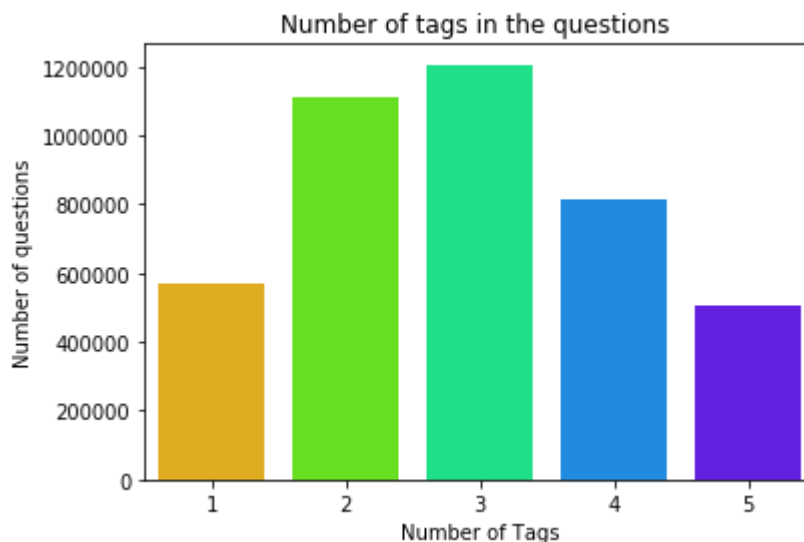

Observations:

1. Maximum number of tags per question: 5
2. Minimum number of tags per question: 1
3. Avg. number of tags per question: 2.899
4. Most of the questions are having 2 or 3 tags


```
In [0]: 1 i=np.arange(30)
2 tag_df_sorted.head(30).plot(kind='bar')
3 plt.title('Frequency of top 20 tags')
4 plt.xticks(i, tag_df_sorted['Tags'])
5 plt.xlabel('Tags')
6 plt.ylabel('Counts')
7 plt.show()
```

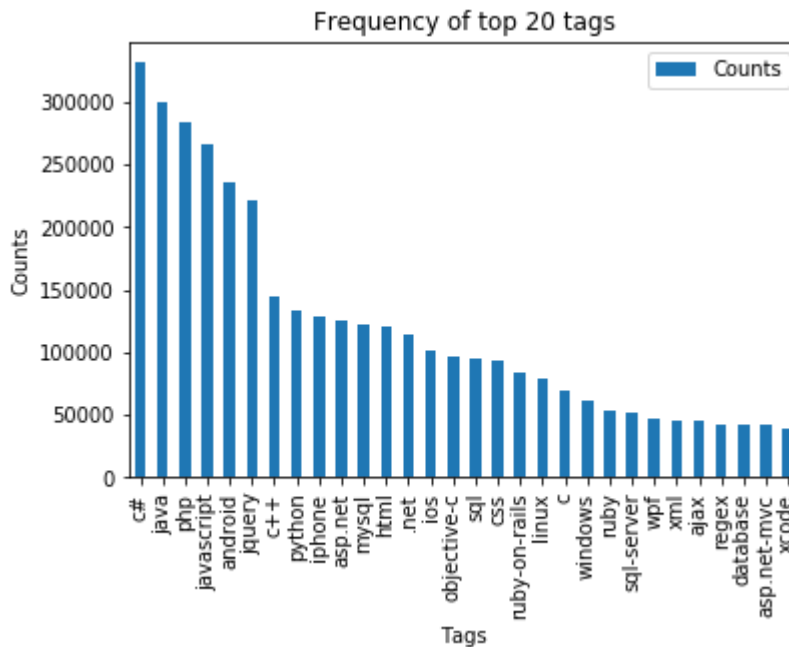

Observations:

1. Majority of the most frequent tags are programming language.
2. C# is the top most frequent programming language.
3. Android, IOS, Linux and windows are among the top most frequent operating systems.

3.3 Cleaning and preprocessing of Questions

3.3.1 Preprocessing

1. Sample 1M data points
2. Separate out code-snippets from Body
3. Remove Special characters from Question title and description (not in code)
4. Remove stop words (Except 'C')
5. Remove HTML Tags
6. Convert all the characters into small letters
7. Use SnowballStemmer to stem the words

```
In [89]: 1 def striphtml(data):  
2     cleanr = re.compile('<.*?>')  
3     cleantext = re.sub(cleanr, ' ', str(data))  
4     return cleantext  
5 stop_words = set(stopwords.words('english'))  
6 stemmer = SnowballStemmer("english")
```

In [90]:

```

1  #http://www.sqlitetutorial.net/sqlite-python/create-tables/
2  def create_connection(db_file):
3      """ create a database connection to the SQLite database
4          specified by db_file
5      :param db_file: database file
6      :return: Connection object or None
7      """
8      try:
9          conn = sqlite3.connect(db_file)
10         return conn
11     except Error as e:
12         print(e)
13
14     return None
15
16 def create_table(conn, create_table_sql):
17     """ create a table from the create_table_sql statement
18     :param conn: Connection object
19     :param create_table_sql: a CREATE TABLE statement
20     :return:
21     """
22     try:
23         c = conn.cursor()
24         c.execute(create_table_sql)
25     except Error as e:
26         print(e)
27
28 def checkTableExists(dbcon):
29     cursr = dbcon.cursor()
30     str = "select name from sqlite_master where type='table'"
31     table_names = cursr.execute(str)
32     print("Tables in the databse:")
33     tables = table_names.fetchall()
34     print(tables[0][0])
35     return(len(tables))
36
37 def create_database_table(database, query):
38     conn = create_connection(database)
39     if conn is not None:
40         create_table(conn, query)
41         checkTableExists(conn)
42     else:
43         print("Error! cannot create the database connection.")
44     conn.close()
45
46 sql_create_table = """CREATE TABLE IF NOT EXISTS QuestionsProcessed (question
47 create_database_table("Processed.db", sql_create_table)

```

Tables in the databse:
QuestionsProcessed

```
In [0]: 1 # http://www.sqlitetutorial.net/sqlite-delete/
2 # https://stackoverflow.com/questions/2279706/select-random-row-from-a-sqlite
3 start = datetime.now()
4 read_db = 'train_no_dup.db'
5 write_db = 'Processed.db'
6 if os.path.isfile(read_db):
7     conn_r = create_connection(read_db)
8     if conn_r is not None:
9         reader = conn_r.cursor()
10        reader.execute("SELECT Title, Body, Tags From no_dup_train ORDER BY R
11
12 if os.path.isfile(write_db):
13     conn_w = create_connection(write_db)
14     if conn_w is not None:
15         tables = checkTableExists(conn_w)
16         writer = conn_w.cursor()
17         if tables != 0:
18             writer.execute("DELETE FROM QuestionsProcessed WHERE 1")
19             print("Cleared All the rows")
20 print("Time taken to run this cell :", datetime.now() - start)
```

Tables in the databse:

QuestionsProcessed

Cleared All the rows

Time taken to run this cell : 0:06:32.806567

we create a new data base to store the sampled and preprocessed questions

```

In [0]: 1 #http://www.bernzilla.com/2008/05/13/selecting-a-random-row-from-an-sqlite-ta
2
3 start = datetime.now()
4 preprocessed_data_list=[]
5 reader.fetchone()
6 questions_with_code=0
7 len_pre=0
8 len_post=0
9 questions_proccesed = 0
10 for row in reader:
11
12     is_code = 0
13
14     title, question, tags = row[0], row[1], row[2]
15
16     if '<code>' in question:
17         questions_with_code+=1
18         is_code = 1
19     x = len(question)+len(title)
20     len_pre+=x
21
22     code = str(re.findall(r'<code>(.*?)</code>', question, flags=re.DOTALL))
23
24     question=re.sub('<code>(.*?)</code>', '', question, flags=re.MULTILINE|re
25     question=stripthtml(question.encode('utf-8'))
26
27     title=title.encode('utf-8')
28
29     question=str(title)+" "+str(question)
30     question=re.sub(r'^[A-Za-z]+', ' ', question)
31     words=word_tokenize(str(question.lower()))
32
33     #Removing all single letter and and stopwords from question exceptt for t
34     question=' '.join(str(stemmer.stem(j)) for j in words if j not in stop_wo
35
36     len_post+=len(question)
37     tup = (question,code,tags,x,len(question),is_code)
38     questions_proccesed += 1
39     writer.execute("insert into QuestionsProcessed(question,code,tags,words_p
40     if (questions_proccesed%100000==0):
41         print("number of questions completed=",questions_proccesed)
42
43     no_dup_avg_len_pre=(len_pre*1.0)/questions_proccesed
44     no_dup_avg_len_post=(len_post*1.0)/questions_proccesed
45
46     print( "Avg. length of questions(Title+Body) before processing: %d"%no_dup_av
47     print( "Avg. length of questions(Title+Body) after processing: %d"%no_dup_avg
48     print( "Percent of questions containing code: %d"%((questions_with_code*100.0
49
50     print("Time taken to run this cell :", datetime.now() - start)

```

```

number of questions completed= 100000
number of questions completed= 200000
number of questions completed= 300000
number of questions completed= 400000
number of questions completed= 500000

```

```
number of questions completed= 600000  
number of questions completed= 700000  
number of questions completed= 800000  
number of questions completed= 900000  
Avg. length of questions(Title+Body) before processing: 1169  
Avg. length of questions(Title+Body) after processing: 327  
Percent of questions containing code: 57  
Time taken to run this cell : 0:47:05.946582
```

```
In [0]: 1 # dont forget to close the connections, or else you will end up with locks  
        2 conn_r.commit()  
        3 conn_w.commit()  
        4 conn_r.close()  
        5 conn_w.close()
```

```
In [0]: 1 if os.path.isfile(write_db):
2         conn_r = create_connection(write_db)
3         if conn_r is not None:
4             reader = conn_r.cursor()
5             reader.execute("SELECT question From QuestionsProcessed LIMIT 10")
6             print("Questions after preprocessed")
7             print('='*100)
8             reader.fetchone()
9             for row in reader:
10                print(row)
11                print('-'*100)
12 conn_r.commit()
13 conn_r.close()
```

Questions after preprocessed

```
=====
=====
('ef code first defin one mani relationship differ key troubl defin one zero ma
ni relationship entiti ef object model look like use fluent api object composi
pk defin batch id batch detail id use fluent api object composi pk defin batch
detail id compani id map exist databas tpt basic idea submittedtransact zero ma
ni submittedsplittransact associ navig realli need one way submittedtransact su
bmittedsplittransact need dbcontext class onmodelcr overrid map class lazi load
occur submittedtransact submittedsplittransact help would much appreci edit tak
en advic made follow chang dbcontext class ad follow onmodelcr overrid must mis
s someth get follow except thrown submittedtransact key batch id batch detail i
d zero one mani submittedsplittransact key batch detail id compani id rather as
sum convent creat relationship two object configur requir sinc obvious wrong',)
-----
-----
('explan new statement review section c code came accross statement block come
accross new oper use way someon explain new call way',)
-----
-----
('error function notat function solv logic riddl iloczyni list structur list po
ssibl candid solut list possibl coordin matrix wan na choos one candid compar p
ossibl candid element equal wan na delet coordin call function skasuj look like
ni knowledg haskel cant see what wrong',)
-----
-----
('step plan move one isp anoth one work busi plan switch isp realli soon need c
hang lot inform dns wan wan wifi question guy help mayb peopl plan correct chan
g current isp new one first dns know receiv new ip isp major chang need take co
nsider exchang server owa vpn two site link wireless connect km away citrix ser
ver vmware exchang domain control link place import server crucial step inform
need know avoid downtim busi regard ndavid',)
-----
-----
('use ef migrat creat databas googl migrat tutori af first run applic creat dat
abas ef enabl migrat way creat databas migrat rune applic tri',)
-----
-----
('magento unit test problem magento site recent look way check integr magento s
ite given point unit test jump one method would assum would big job write whole
lot test check everyth site work anyon involv unit test magento advis follow po
ssibl test whole site custom modul nis exampl test would amaz given site heavil
i link databas would nbe possibl fulli test site without disturb databas better
```


way automaticlly check integr magento site say integr realli mean fault site sh
ip payment etc work correct',)

('find network devic without bonjour write mac applic need discov mac pcs iphon
ipad connect wifi network bonjour seem reason choic turn problem mani type rout
er mine exampl work block bonjour servic need find ip devic tri connect applic
specif port determin process run best approach accomplish task without violat a
pp store sandbox',)

('send multipl row mysql databas want send user mysql databas column user skill
time nnow want abl add one row user differ time etc would code send databas nth
en use help schema',)

('insert data mysql php powerpoint event powerpoint present run continu way upd
at slide present automat data mysql databas websit',)

```
In [0]: 1 #Taking 1 Million entries to a dataframe.
2 write_db = 'Processed.db'
3 if os.path.isfile(write_db):
4     conn_r = create_connection(write_db)
5     if conn_r is not None:
6         preprocessed_data = pd.read_sql_query("""SELECT question, Tags FROM Q
7 conn_r.commit()
8 conn_r.close()
```

```
In [0]: 1 preprocessed_data.head()
```

```
Out[47]:
```

	question	tags
0	resiz root window tkinter resized root window re...	python tkinter
1	ef code first defin one mani relationship diff...	entity-framework-4.1
2	explan new statement review section c code cam...	c++
3	error function notat function solv logic riddl...	haskell logic
4	step plan move one isp anoth one work busi pla...	dns isp

```
In [0]: 1 print("number of data points in sample :", preprocessed_data.shape[0])
2 print("number of dimensions :", preprocessed_data.shape[1])
```

number of data points in sample : 999999
number of dimensions : 2

4. Machine Learning Models

4.1 Converting tags for multilabel problems

	X	y1	y2	y3	y4
x1	0	1	1	0	
x1	1	0	0	0	
x1	0	1	0	0	


```
In [0]: 1 # binary='true' will give a binary vectorizer
2 vectorizer = CountVectorizer(tokenizer = lambda x: x.split(), binary='true')
3 multilabel_y = vectorizer.fit_transform(preprocessed_data['tags'])
```

We will sample the number of tags instead considering all of them (due to limitation of computing power)

```
In [0]: 1 def tags_to_choose(n):
2     t = multilabel_y.sum(axis=0).tolist()[0]
3     sorted_tags_i = sorted(range(len(t)), key=lambda i: t[i], reverse=True)
4     multilabel_yn=multilabel_y[:,sorted_tags_i[:n]]
5     return multilabel_yn
6
7 def questions_explained_fn(n):
8     multilabel_yn = tags_to_choose(n)
9     x= multilabel_yn.sum(axis=1)
10    return (np.count_nonzero(x==0))
```

```
In [0]: 1 questions_explained = []
2 total_tags=multilabel_y.shape[1]
3 total_qs=preprocessed_data.shape[0]
4 for i in range(500, total_tags, 100):
5     questions_explained.append(np.round(((total_qs-questions_explained_fn(i))
```

```
In [0]: 1 fig, ax = plt.subplots()
2 ax.plot(questions_explained)
3 xlabel = list(500+np.array(range(-50,450,50))*50)
4 ax.set_xticklabels(xlabel)
5 plt.xlabel("Number of tags")
6 plt.ylabel("Number Questions covered partially")
7 plt.grid()
8 plt.show()
9 # you can choose any number of tags based on your computing power, minimum is
10 print("with ",5500,"tags we are covering ",questions_explained[50],"% of ques
```

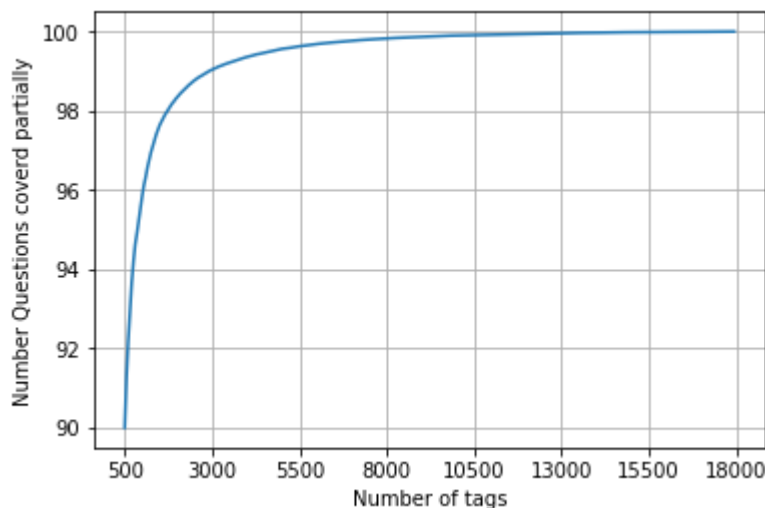

with 5500 tags we are covering 99.04 % of questions

```
In [0]: 1 multilabel_yx = tags_to_choose(5500)
2 print("number of questions that are not covered :", questions_explained_fn(5500))
```

number of questions that are not covered : 9599 out of 999999

```
In [0]: 1 print("Number of tags in sample :", multilabel_y.shape[1])
2 print("number of tags taken :", multilabel_yx.shape[1], "(", (multilabel_yx.shape[1] / multilabel_y.shape[1]) * 100, "%")
```

Number of tags in sample : 35422
number of tags taken : 5500 (15.527073570097679 %)

We consider top 15% tags which covers 99% of the questions

4.2 Split the data into test and train (80:20)

```
In [0]: 1 total_size=preprocessed_data.shape[0]
2 train_size=int(0.80*total_size)
3
4 x_train=preprocessed_data.head(train_size)
5 x_test=preprocessed_data.tail(total_size - train_size)
6
7 y_train = multilabel_yx[0:train_size,:]
8 y_test = multilabel_yx[train_size:total_size,:]
```

```
In [0]: 1 print("Number of data points in train data :", y_train.shape)
        2 print("Number of data points in test data :", y_test.shape)
```

Number of data points in train data : (799999, 5500)
Number of data points in test data : (200000, 5500)

4.3 Featurizing data

```
In [0]: 1 start = datetime.now()
        2 vectorizer = TfidfVectorizer(min_df=0.00009, max_features=200000, smooth_idf=
        3                                     tokenizer = lambda x: x.split(), sublinear_tf=Fa
        4 x_train_multilabel = vectorizer.fit_transform(x_train['question'])
        5 x_test_multilabel = vectorizer.transform(x_test['question'])
        6 print("Time taken to run this cell :", datetime.now() - start)
```

Time taken to run this cell : 0:09:50.460431

```
In [0]: 1 print("Dimensions of train data X:",x_train_multilabel.shape, "Y :",y_train.s
        2 print("Dimensions of test data X:",x_test_multilabel.shape,"Y:",y_test.shape)
```

Diamensions of train data X: (799999, 88244) Y : (799999, 5500)
Diamensions of test data X: (200000, 88244) Y: (200000, 5500)

```

In [0]: 1 # https://www.analyticsvidhya.com/blog/2017/08/introduction-to-multi-label-cl
2 #https://stats.stackexchange.com/questions/117796/scikit-multi-label-classifi
3 # classifier = LabelPowerset(GaussianNB())
4 """
5 from skmultilearn.adapt import MLkNN
6 classifier = MLkNN(k=21)
7
8 # train
9 classifier.fit(x_train_multilabel, y_train)
10
11 # predict
12 predictions = classifier.predict(x_test_multilabel)
13 print(accuracy_score(y_test,predictions))
14 print(metrics.f1_score(y_test, predictions, average = 'macro'))
15 print(metrics.f1_score(y_test, predictions, average = 'micro'))
16 print(metrics.hamming_loss(y_test,predictions))
17
18 """
19 # we are getting memory error because the multilearn package
20 # is trying to convert the data into dense matrix
21 # -----
22 #MemoryError                                Traceback (most recent call last)
23 #<ipython-input-170-f0e7c7f3e0be> in <module>()
24 #----> classifier.fit(x_train_multilabel, y_train)

```

```

Out[92]: "\nfrom skmultilearn.adapt import MLkNN\nnclassifier = MLkNN(k=21)\n\n# train\nclassifier.fit(x_train_multilabel, y_train)\n\n# predict\npredictions = classifier.predict(x_test_multilabel)\nprint(accuracy_score(y_test,predictions))\nprint(metrics.f1_score(y_test, predictions, average = 'macro'))\nprint(metrics.f1_score(y_test, predictions, average = 'micro'))\nprint(metrics.hamming_loss(y_test,predictions))\n\n"

```

4.4 Applying Logistic Regression with OneVsRest Classifier

```
In [0]: 1 # this will be taking so much time try not to run it, download the lr_with_eq
2 # This takes about 6-7 hours to run.
3 classifier = OneVsRestClassifier(SGDClassifier(loss='log', alpha=0.00001, pen
4 classifier.fit(x_train_multilabel, y_train)
5 predictions = classifier.predict(x_test_multilabel)
6
7 print("accuracy :",metrics.accuracy_score(y_test,predictions))
8 print("macro f1 score :",metrics.f1_score(y_test, predictions, average = 'mac
9 print("micro f1 scoore :",metrics.f1_score(y_test, predictions, average = 'mi
10 print("hamming loss :",metrics.hamming_loss(y_test,predictions))
11 print("Precision recall report :\n",metrics.classification_report(y_test, pre
12
```

10	0.86	0.62	0.72	5707
11	0.52	0.17	0.25	5723
12	0.55	0.10	0.16	5521
13	0.59	0.25	0.35	4722
14	0.61	0.22	0.32	4468
15	0.79	0.52	0.63	4536
16	0.58	0.27	0.37	4545
17	0.80	0.53	0.64	4069
18	0.61	0.24	0.35	3638
19	0.57	0.18	0.27	3218
20	0.33	0.06	0.10	3000
21	0.73	0.34	0.46	2585
22	0.59	0.29	0.38	2439
23	0.88	0.61	0.72	2199
24	0.64	0.39	0.48	2157
25	0.67	0.39	0.49	2123
26	0.86	0.65	0.74	1948
27	0.35	0.07	0.12	2027
28	0.59	0.29	0.39	2013
29	0.61	0.20	0.20	1801

```
In [0]: 1 from sklearn.externals import joblib
2 joblib.dump(classifier, 'lr_with_equal_weight.pkl')
```

4.5 Modeling with less data points (0.5M data points) and more weight to title and 500 tags only.

```
In [91]: 1 sql_create_table = """CREATE TABLE IF NOT EXISTS QuestionsProcessed (question
2 create_database_table("Titlemoreweight.db", sql_create_table)
```

Tables in the databse:
QuestionsProcessed

In [92]:

```

1  # http://www.sqlitetutorial.net/sqlite-delete/
2  # https://stackoverflow.com/questions/2279706/select-random-row-from-a-sqlite
3
4  read_db = 'train_no_dup.db'
5  write_db = 'Titlmoreweight.db'
6  train_datasize = 400000
7  if os.path.isfile(read_db):
8      conn_r = create_connection(read_db)
9      if conn_r is not None:
10         reader = conn_r.cursor()
11         # for selecting first 0.5M rows
12         reader.execute("SELECT Title, Body, Tags From no_dup_train LIMIT 5000")
13         # for selecting random points
14         #reader.execute("SELECT Title, Body, Tags From no_dup_train ORDER BY
15
16  if os.path.isfile(write_db):
17      conn_w = create_connection(write_db)
18      if conn_w is not None:
19         tables = checkTableExists(conn_w)
20         writer = conn_w.cursor()
21         if tables != 0:
22             writer.execute("DELETE FROM QuestionsProcessed WHERE 1")
23             print("Cleared All the rows")

```

Tables in the databse:

QuestionsProcessed

Cleared All the rows

4.5.1 Preprocessing of questions

1. Separate Code from Body
2. Remove Special characters from Question title and description (not in code)
3. **Give more weightage to title : Add title three times to the question**
4. Remove stop words (Except 'C')
5. Remove HTML Tags
6. Convert all the characters into small letters
7. Use SnowballStemmer to stem the words

In [93]:

```

1  #http://www.bernzilla.com/2008/05/13/selecting-a-random-row-from-an-sqlite-ta
2  start = datetime.now()
3  preprocessed_data_list=[]
4  reader.fetchone()
5  questions_with_code=0
6  len_pre=0
7  len_post=0
8  questions_proccesed = 0
9  for row in reader:
10
11      is_code = 0
12
13      title, question, tags = row[0], row[1], str(row[2])
14
15      if '<code>' in question:
16          questions_with_code+=1
17          is_code = 1
18      x = len(question)+len(title)
19      len_pre+=x
20
21      code = str(re.findall(r'<code>(.*?)</code>', question, flags=re.DOTALL))
22
23      question=re.sub('<code>(.*?)</code>', '', question, flags=re.MULTILINE|re
24      question=stripthtml(question.encode('utf-8'))
25
26      title=title.encode('utf-8')
27
28      # adding title three time to the data to increase its weight
29      # add tags string to the training data
30
31      question=str(title)+" "+str(title)+" "+str(title)+" "+question
32
33      # if questions_proccesed<=train_datasize:
34      #     question=str(title)+" "+str(title)+" "+str(title)+" "+question+" "+
35      # else:
36      #     question=str(title)+" "+str(title)+" "+str(title)+" "+question
37
38      question=re.sub(r'^A-Za-z0-9#+.\-]+', ' ', question)
39      words=word_tokenize(str(question.lower()))
40
41      #Removing all single letter and and stopwords from question exceptt for t
42      question=' '.join(str(stemmer.stem(j)) for j in words if j not in stop_wo
43
44      len_post+=len(question)
45      tup = (question,code,tags,x,len(question),is_code)
46      questions_proccesed += 1
47      writer.execute("insert into QuestionsProcessed(question,code,tags,words_p
48      if (questions_proccesed%100000==0):
49          print("number of questions completed=",questions_proccesed)
50
51      no_dup_avg_len_pre=(len_pre*1.0)/questions_proccesed
52      no_dup_avg_len_post=(len_post*1.0)/questions_proccesed
53
54      print( "Avg. length of questions(Title+Body) before processing: %d"%no_dup_av
55      print( "Avg. length of questions(Title+Body) after processing: %d"%no_dup_avg
56      print( "Percent of questions containing code: %d"%((questions_with_code*100.0

```



```
57  
58 print("Time taken to run this cell :", datetime.now() - start)
```

```
number of questions completed= 100000  
number of questions completed= 200000  
number of questions completed= 300000  
number of questions completed= 400000  
number of questions completed= 500000  
Avg. length of questions(Title+Body) before processing: 1239  
Avg. length of questions(Title+Body) after processing: 424  
Percent of questions containing code: 57  
Time taken to run this cell : 0:32:01.949976
```

In [94]:

```
1 # never forget to close the connections or else we will end up with database L  
2 conn_r.commit()  
3 conn_w.commit()  
4 conn_r.close()  
5 conn_w.close()
```

Sample quesitons after preprocessing of data

```
In [95]: 1 if os.path.isfile(write_db):
2         conn_r = create_connection(write_db)
3         if conn_r is not None:
4             reader = conn_r.cursor()
5             reader.execute("SELECT question From QuestionsProcessed LIMIT 10")
6             print("Questions after preprocessed")
7             print('='*100)
8             reader.fetchone()
9             for row in reader:
10                print(row)
11                print('-'*100)
12 conn_r.commit()
13 conn_r.close()
```

Questions after preprocessed

```
=====
=====
('dynam datagrid bind silverlight dynam datagrid bind silverlight dynam datagri
d bind silverlight bind datagrid dynam code wrote code debug code block seem bi
nd correct grid come column form come grid column although necessari bind nthan
k repli advance..',)
-----
-----
('java.lang.noclassdeffounderror javax servlet jsp tagext taglibraryvalid java.
lang.noclassdeffounderror javax servlet jsp tagext taglibraryvalid java.lang.no
classdeffounderror javax servlet jsp tagext taglibraryvalid follow guid link in
stal jstl got follow error tri launch jsp page java.lang.noclassdeffounderror j
avax servlet jsp tagext taglibraryvalid taglib declar instal jstl 1.1 tomcat we
bapp tri project work also tri version 1.2 jstl still messag caus solv',)
-----
-----
('java.sql.sqlexcept microsoft odbc driver manag invalid descriptor index java.
sql.sqlexcept microsoft odbc driver manag invalid descriptor index java.sql.sql
except microsoft odbc driver manag invalid descriptor index use follow code dis
play caus solv',)
-----
-----
('better way updat feed fb php sdk better way updat feed fb php sdk better way
updat feed fb php sdk novic facebook api read mani tutori still confused.i find
post feed api method like correct second way use curl someth like way better',)
-----
-----
('btnadd click event open two window record ad btnadd click event open two wind
ow record ad btnadd click event open two window record ad open window search.as
px use code hav add button search.aspx nwhen insert record btnadd click event o
pen anoth window nafter insert record close window',)
-----
-----
('sql inject issu prevent correct form submiss php sql inject issu prevent corr
ect form submiss php sql inject issu prevent correct form submiss php check eve
ryth think make sure input field safe type sql inject good news safe bad news o
ne tag mess form submiss place even touch life figur exact html use templat fil
e forgiv okay entir php script get execut see data post none forum field post p
roblem use someth titl field none data get post current use print post see subm
it noth work flawless statement though also mention script work flawless local
machin use host come across problem state list input test mess',)
-----
```

```
-----
('countabl subaddit lebesgu measur countabl subaddit lebesgu measur countabl su
baddit lebesgu measur let lbrace rbrace sequenc set sigma -algebra mathcal want
show left bigcup right leq sum left right countabl addit measur defin set sigma
algebra mathcal think use monoton properti somewhere proof start appreci littl h
elp nthank ad han answer make follow addit construct given han answer clear big
cup bigcup cap emptyset neq left bigcup right left bigcup right sum left right
also construct subset monoton left right leq left right final would sum leq sum
result follow',)
-----
```

```
-----
('hql equival sql queri hql equival sql queri hql equival sql queri hql queri r
eplac name class properti name error occur hql error',)
-----
```

```
-----
('undefin symbol architectur i386 objc class skpsmtpmessag referenc error undef
in symbol architectur i386 objc class skpsmtpmessag referenc error undefin symb
ol architectur i386 objc class skpsmtpmessag referenc error import framework se
nd email applic background import framework i.e skpsmtpmessag somebodi suggest
get error collect2 ld return exit status import framework correct sorc taken fr
amework follow mfmcomposeviewcontrol question lock field updat answer drag d
rop folder project click copi nthat',)
-----
```

Saving Preprocessed data to a Database

```
In [96]: 1 #Taking 0.5 Million entries to a dataframe.
2 write_db = 'Titlemoreweight.db'
3 if os.path.isfile(write_db):
4     conn_r = create_connection(write_db)
5     if conn_r is not None:
6         preprocessed_data = pd.read_sql_query("""SELECT question, Tags FROM Q
7 conn_r.commit()
8 conn_r.close()
```

```
In [97]: 1 preprocessed_data.head()
```

Out[97]:

	question	tags
0	dynam datagrid bind silverlight dynam datagrid...	c# silverlight data-binding
1	dynam datagrid bind silverlight dynam datagrid...	c# silverlight data-binding columns
2	java.lang.noclassdeffounderror javax servlet j...	jsp jstl
3	java.sql.sqlexcept microsoft odbc driver manag...	java jdbc
4	better way updat feed fb php sdk better way up...	facebook api facebook-php-sdk

```
In [98]: 1 print("number of data points in sample :", preprocessed_data.shape[0])
2 print("number of dimensions :", preprocessed_data.shape[1])
```

```
number of data points in sample : 500000
number of dimensions : 2
```


Converting string Tags to multilable output variables

```
In [99]: 1 vectorizer = CountVectorizer(tokenizer = lambda x: x.split(), binary='true')
2         multilabel_y = vectorizer.fit_transform(preprocessed_data['tags'])
```

Selecting 500 Tags

```
In [100]: 1 questions_explained = []
2         total_tags=multilabel_y.shape[1]
3         total_qs=preprocessed_data.shape[0]
4         for i in range(500, total_tags, 100):
5             questions_explained.append(np.round(((total_qs-questions_explained_fn(i))
```

```
In [101]: 1 fig, ax = plt.subplots()
2         ax.plot(questions_explained)
3         xlabel = list(500+np.array(range(-50,450,50))*50)
4         ax.set_xticklabels(xlabel)
5         plt.xlabel("Number of tags")
6         plt.ylabel("Number Questions covered partially")
7         plt.grid()
8         plt.show()
9         # you can choose any number of tags based on your computing power, minimum is
10        print("with ",5500,"tags we are covering ",questions_explained[50],"% of ques
11        print("with ",500,"tags we are covering ",questions_explained[0],"% of questi
```

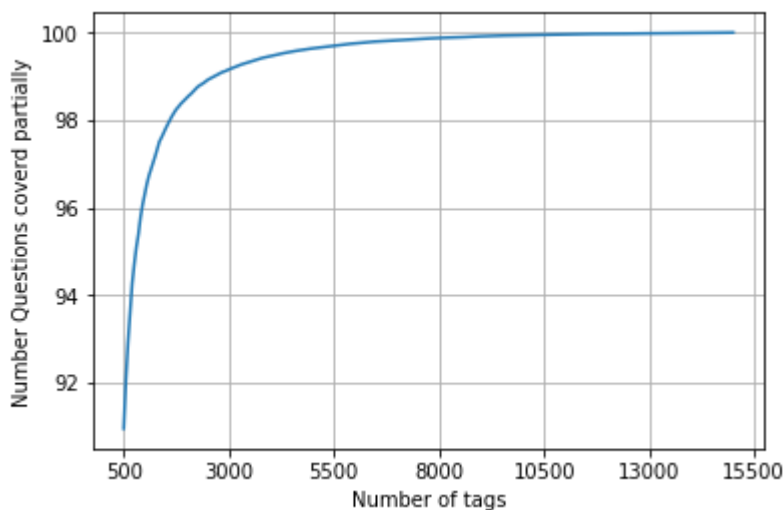

with 5500 tags we are covering 99.157 % of questions
 with 500 tags we are covering 90.956 % of questions

```
In [102]: 1 # we will be taking 500 tags
2         multilabel_yx = tags_to_choose(500)
3         print("number of questions that are not covered :", questions_explained_fn(500))

number of questions that are not covered : 45221 out of 500000
```

```
In [103]: 1 x_train=preprocessed_data.head(train_datasize)
          2 x_test=preprocessed_data.tail(preprocessed_data.shape[0] - 400000)
          3
          4 y_train = multilabel_yx[0:train_datasize,:]
          5 y_test = multilabel_yx[train_datasize:preprocessed_data.shape[0],:]
```

```
In [104]: 1 print("Number of data points in train data :", y_train.shape)
          2 print("Number of data points in test data :", y_test.shape)
```

Number of data points in train data : (400000, 500)

Number of data points in test data : (100000, 500)

4.5.2 Featurizing data with Tfidf vectorizer

```
In [0]: 1 start = datetime.now()
          2 vectorizer = TfidfVectorizer(min_df=0.00009, max_features=200000, smooth_idf=
          3                                     tokenizer = lambda x: x.split(), sublinear_tf=Fa
          4 x_train_multilabel = vectorizer.fit_transform(x_train['question'])
          5 x_test_multilabel = vectorizer.transform(x_test['question'])
          6 print("Time taken to run this cell :", datetime.now() - start)
```

Time taken to run this cell : 0:03:52.522389

```
In [0]: 1 print("Dimensions of train data X:",x_train_multilabel.shape, "Y :",y_train.s
          2 print("Dimensions of test data X:",x_test_multilabel.shape,"Y:",y_test.shape)
```

Diamensions of train data X: (400000, 94927) Y : (400000, 500)

Diamensions of test data X: (100000, 94927) Y: (100000, 500)

4.5.3 Applying Logistic Regression with OneVsRest Classifier

```

In [0]: 1 start = datetime.now()
2 classifier = OneVsRestClassifier(SGDClassifier(loss='log', alpha=0.00001, per
3 classifier.fit(x_train_multilabel, y_train)
4 predictions = classifier.predict(x_test_multilabel)
5
6
7 print("Accuracy :",metrics.accuracy_score(y_test, predictions))
8 print("Hamming loss ",metrics.hamming_loss(y_test,predictions))
9
10
11 precision = precision_score(y_test, predictions, average='micro')
12 recall = recall_score(y_test, predictions, average='micro')
13 f1 = f1_score(y_test, predictions, average='micro')
14
15 print("Micro-average quality numbers")
16 print("Precision: {:.4f}, Recall: {:.4f}, F1-measure: {:.4f}".format(precisio
17
18 precision = precision_score(y_test, predictions, average='macro')
19 recall = recall_score(y_test, predictions, average='macro')
20 f1 = f1_score(y_test, predictions, average='macro')
21
22 print("Macro-average quality numbers")
23 print("Precision: {:.4f}, Recall: {:.4f}, F1-measure: {:.4f}".format(precisio
24
25 print(metrics.classification_report(y_test, predictions))
26 print("Time taken to run this cell :", datetime.now() - start)

```

Accuracy : 0.23623

Hamming loss 0.00278088

Micro-average quality numbers

Precision: 0.7216, Recall: 0.3256, F1-measure: 0.4488

Macro-average quality numbers

Precision: 0.5473, Recall: 0.2572, F1-measure: 0.3339

	precision	recall	f1-score	support
--	-----------	--------	----------	---------

0	0.94	0.64	0.76	5519
---	------	------	------	------

1	0.69	0.26	0.38	8190
---	------	------	------	------

2	0.81	0.37	0.51	6529
---	------	------	------	------

3	0.81	0.43	0.56	3231
---	------	------	------	------

4	0.81	0.40	0.54	6430
---	------	------	------	------

5	0.82	0.33	0.47	2879
---	------	------	------	------

6	0.87	0.50	0.63	5086
---	------	------	------	------

7	0.87	0.54	0.67	4533
---	------	------	------	------

8	0.60	0.13	0.22	3000
---	------	------	------	------

9	0.81	0.53	0.64	2765
---	------	------	------	------

10	0.59	0.17	0.26	3051
----	------	------	------	------

11	0.70	0.22	0.45	3000
----	------	------	------	------

```

In [0]: 1 joblib.dump(classifier, 'lr_with_more_title_weight.pkl')

```

Out[113]: ['lr_with_more_title_weight.pkl']

```

In [0]: 1 start = datetime.now()
2 classifier_2 = OneVsRestClassifier(LogisticRegression(penalty='l1'), n_jobs=-1)
3 classifier_2.fit(x_train_multilabel, y_train)
4 predictions_2 = classifier_2.predict(x_test_multilabel)
5 print("Accuracy :", metrics.accuracy_score(y_test, predictions_2))
6 print("Hamming loss ", metrics.hamming_loss(y_test, predictions_2))
7
8
9 precision = precision_score(y_test, predictions_2, average='micro')
10 recall = recall_score(y_test, predictions_2, average='micro')
11 f1 = f1_score(y_test, predictions_2, average='micro')
12
13 print("Micro-average quality numbers")
14 print("Precision: {:.4f}, Recall: {:.4f}, F1-measure: {:.4f}".format(precision, recall, f1))
15
16 precision = precision_score(y_test, predictions_2, average='macro')
17 recall = recall_score(y_test, predictions_2, average='macro')
18 f1 = f1_score(y_test, predictions_2, average='macro')
19
20 print("Macro-average quality numbers")
21 print("Precision: {:.4f}, Recall: {:.4f}, F1-measure: {:.4f}".format(precision, recall, f1))
22
23 print(metrics.classification_report(y_test, predictions_2))
24 print("Time taken to run this cell :", datetime.now() - start)

```

```

Accuracy : 0.25108
Hamming loss 0.00270302
Micro-average quality numbers
Precision: 0.7172, Recall: 0.3672, F1-measure: 0.4858
Macro-average quality numbers
Precision: 0.5570, Recall: 0.2950, F1-measure: 0.3710

```

	precision	recall	f1-score	support
0	0.94	0.72	0.82	5519
1	0.70	0.34	0.45	8190
2	0.80	0.42	0.55	6529
3	0.82	0.49	0.61	3231
4	0.80	0.44	0.57	6430
5	0.82	0.38	0.52	2879
6	0.86	0.53	0.66	5086
7	0.87	0.58	0.70	4533
8	0.60	0.13	0.22	3000
9	0.82	0.57	0.67	2765
10	0.60	0.20	0.30	3051
11	0.60	0.20	0.30	3051

5. Assignments

1. Use bag of words upto 4 grams and compute the micro f1 score with Logistic regression(OvR)
2. Perform hyperparam tuning on alpha (or lambda) for Logistic regression to improve the performance using GridSearch
3. Try OneVsRestClassifier with Linear-SVM (SGDClassifier with loss-hinge)

```
In [108]: 1 start = datetime.now()
2 vectorizer = CountVectorizer(min_df=0.00009, max_features=200000, \
3                             tokenizer = lambda x: x.split(), ngram_range=(1
4
5 x_train_multilabel = vectorizer.fit_transform(x_train['question'])
6 x_test_multilabel = vectorizer.transform(x_test['question'])
7 print("Time taken to run this cell :", datetime.now() - start)
```

Time taken to run this cell : 0:02:05.494295

```
In [109]: 1 print("Dimensions of train data X:",x_train_multilabel.shape, "Y :",y_train.s
2 print("Dimensions of test data X:",x_test_multilabel.shape,"Y:",y_test.shape)
```

Dimensions of train data X: (400000, 86995) Y : (400000, 500)

Dimensions of test data X: (100000, 86995) Y: (100000, 500)

```
In [110]: 1 alphas = [10**-3,10**-2,10**-1,10**0,10**1,10**2,10**3]
```




```

In [114]: 1 import warnings
2 warnings.filterwarnings('ignore')
3 from sklearn.cross_validation import train_test_split
4 from sklearn.cross_validation import cross_val_score
5 from collections import Counter
6 from sklearn import cross_validation
7
8 # empty list that will hold cv scores
9 cv_scores = []
10
11 # perform 10-fold cross validation
12 for a in alphas: #alp = k
13     classifier = OneVsRestClassifier(SGDClassifier(loss='log', alpha=a, penal
14
15     scores = cross_val_score(classifier, x_train_multilabel, y_train, cv=2, s
16     cv_scores.append(scores.mean())
17
18 f_score = [x for x in cv_scores]
19
20 # determining best alpha
21 optimal_alpha = alphas[f_score.index(max(f_score))]
22 print('\nThe optimal value of alpha is %d.' % optimal_alpha)
23
24 # plot misclassification error vs k
25 plt.plot(alphas, f_score)
26
27 for xy in zip(alphas, np.round(f_score,3)):
28     plt.annotate('(%s, %s)' % xy, xy=xy, textcoords='data')
29
30 plt.xlabel('Value of Alpha')
31 plt.ylabel('F1_Score')
32 plt.show()
33
34 print("F1_score for each alpha value is : ", np.round(f_score,3))

```

The optimal value of alpha is 0.

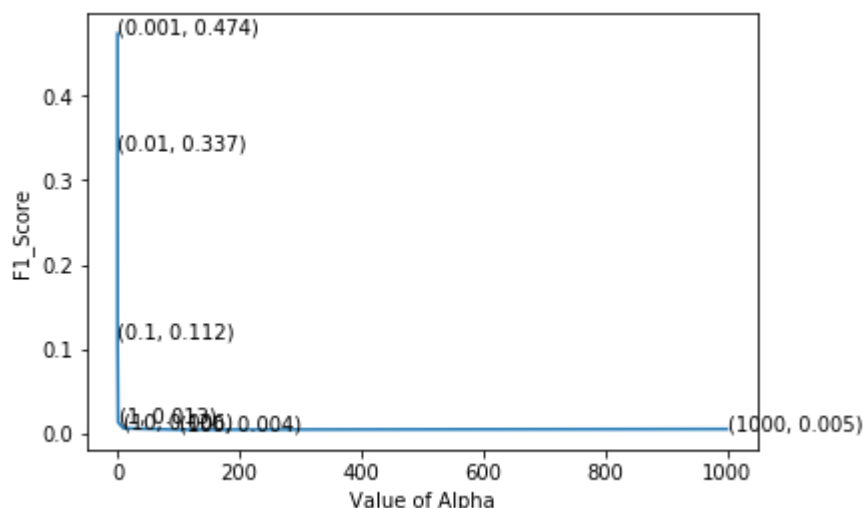

F1_score for each alpha value is : [0.474 0.337 0.112 0.013 0.006 0.004 0.005]

Observation: F1 score is highest for alpha = 0.001

```
In [116]: 1 start = datetime.now()
2 classifier = OneVsRestClassifier(SGDClassifier(loss='log', alpha=0.001, penal
3 classifier.fit(x_train_multilabel, y_train)
4 predictions = classifier.predict (x_test_multilabel)
5
6
7 print("Accuracy :",metrics.accuracy_score(y_test, predictions))
8 print("Hamming loss ",metrics.hamming_loss(y_test,predictions))
9
10
11 precision = precision_score(y_test, predictions, average='micro')
12 recall = recall_score(y_test, predictions, average='micro')
13 f1 = f1_score(y_test, predictions, average='micro')
14
15 print("Micro-average quality numbers")
16 print("Precision: {:.4f}, Recall: {:.4f}, F1-measure: {:.4f}".format(precisio
17 print("Time taken to run this cell :", datetime.now() - start)
```

Accuracy : 0.18409

Hamming loss 0.00326062

Micro-average quality numbers

Precision: 0.5524, Recall: 0.3267, F1-measure: 0.4106

Time taken to run this cell : 0:30:58.156043

```
In [117]: 1 start = datetime.now()
2 classifier = OneVsRestClassifier(SGDClassifier(loss='hinge', alpha=0.001, pen
3 classifier.fit(x_train_multilabel, y_train)
4 predictions = classifier.predict (x_test_multilabel)
5
6
7 print("Accuracy :",metrics.accuracy_score(y_test, predictions))
8 print("Hamming loss ",metrics.hamming_loss(y_test,predictions))
9
10
11 precision = precision_score(y_test, predictions, average='micro')
12 recall = recall_score(y_test, predictions, average='micro')
13 f1 = f1_score(y_test, predictions, average='micro')
14
15 print("Micro-average quality numbers")
16 print("Precision: {:.4f}, Recall: {:.4f}, F1-measure: {:.4f}".format(precisio
17 print("Time taken to run this cell :", datetime.now() - start)
```

Accuracy : 0.17974

Hamming loss 0.00327544

Micro-average quality numbers

Precision: 0.5503, Recall: 0.3160, F1-measure: 0.4015

Time taken to run this cell : 0:20:53.473447

Pretty table format for the results

```
In [121]: 1 from prettytable import PrettyTable
          2 x = PrettyTable()
          3 x.field_names = ["Model", "Featurization", "alpha", 'Loss', 'Micro F1 Score']
```

```
In [122]: 1 x.add_row(['OneVsRest+SGD Classifier', "Tf-idf", 0.00001, "log", 0.4488])
          2 x.add_row(['OneVsRest+logistic Classifier', "Tf-idf", "", "", 0.4858])
          3 x.add_row(['OneVsRest+SGD Classifier', "Bag-of-words", 0.001, "log", 0.4106])
          4 x.add_row(['OneVsRest+SGD Classifier', "Bag-of-words", 0.001, "Hinge", 0.4105])
```

```
In [123]: 1 print(x)
```

```
+-----+-----+-----+-----+-----+
--+
|          Model          | Featurization | alpha | Loss | Micro F1 Score |
+-----+-----+-----+-----+-----+
--+
| OneVsRest+SGD Classifier | Tf-idf       | 1e-05 | log  | 0.4488          |
| OneVsRest+logistic Classifier | Tf-idf       |      |      | 0.4858          |
| OneVsRest+SGD Classifier | Bag-of-words | 0.001 | log  | 0.4106          |
| OneVsRest+SGD Classifier | Bag-of-words | 0.001 | Hinge | 0.4105          |
+-----+-----+-----+-----+-----+
--+
```

```
In [ ]: 1
```