
Aim:

To discover live hosts using Nmap scan (ARP, ICMP, TCP/UDP) on myhackme platform.

Introduction:

When targetting a network we need an effective tool to handle repetitive tasks.

Subnetworks:

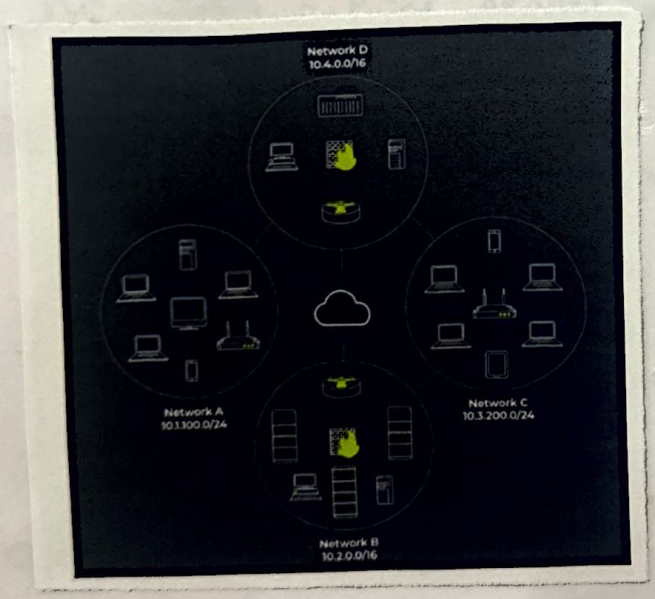

This figure displays two types subnet

/16 subnets


/24 subnets.


from computer 1


To computer 1

Packet type "ARP request"

Data Computer 6.

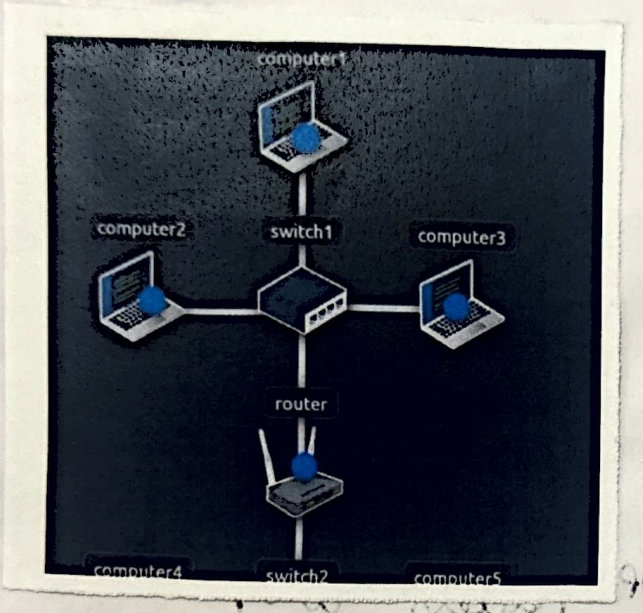

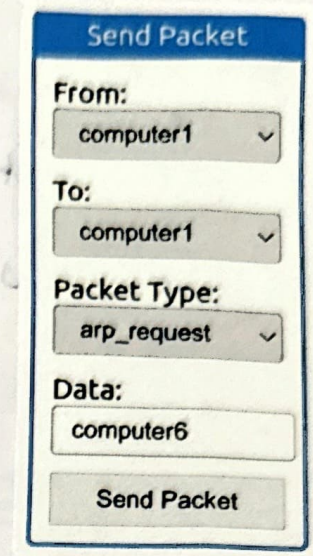

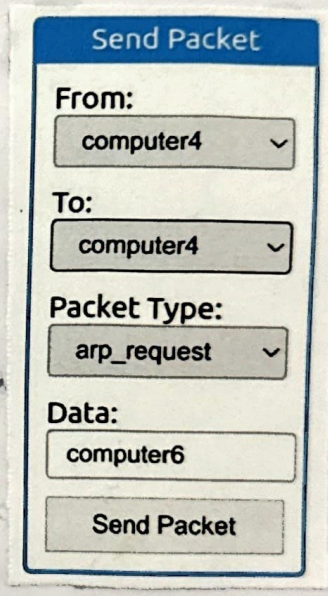


From computer 4

To computer 4


Packet Type : "ARP Request"

Data : Computer 6.

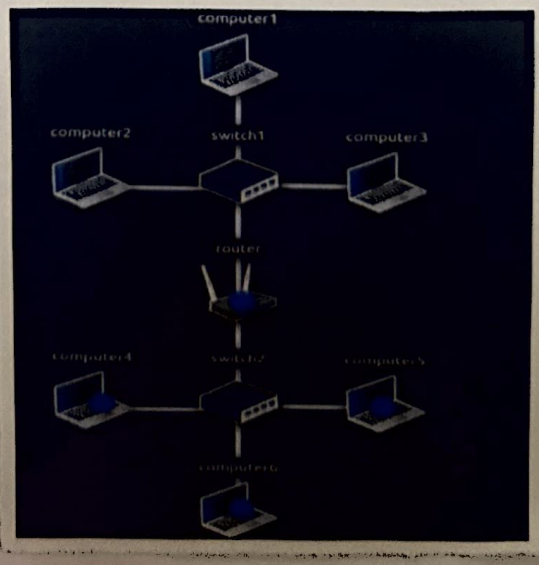


NMAP Host discovery using ARP:

When a privileged user tries to scan targets on local network, NMAP uses ARP request.

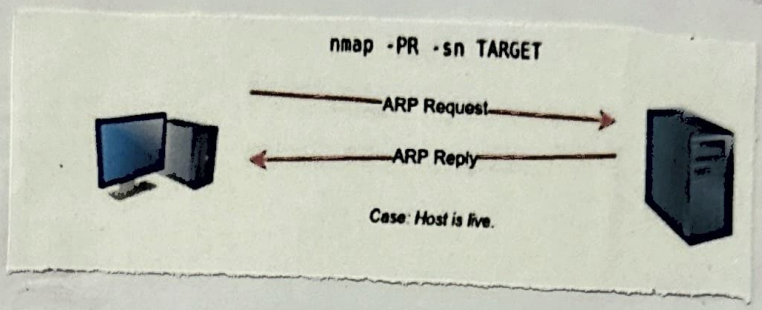

UDP ping:

While receiving UDP packets to open UDP ports may not trigger a response, sending them to closed UDP ports.

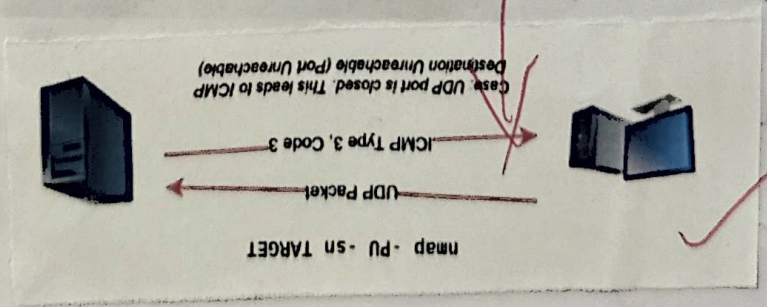

Result - Thus the requirement has been completed successfully using tryhackme.