



DBSE & DBD Skill Week-2

- **Name:** Vakkalanka Sai Bhaskara Sujit
- **Roll No:** 2520090085


1. CREATING TABLE

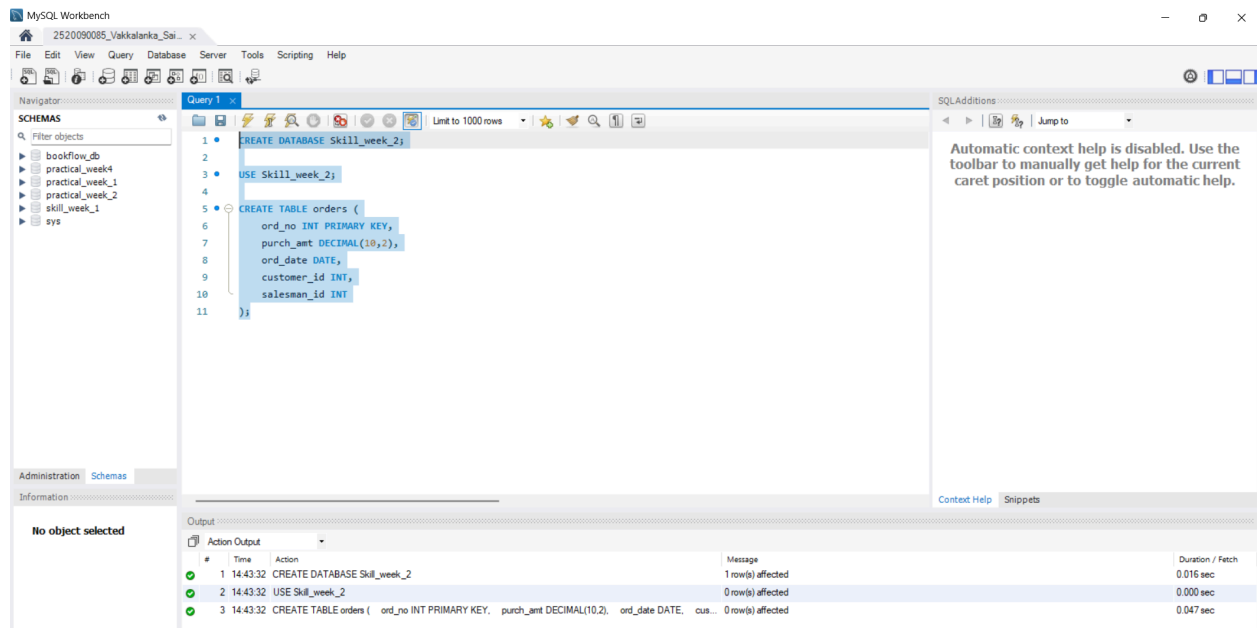

2. INSERTING DATA

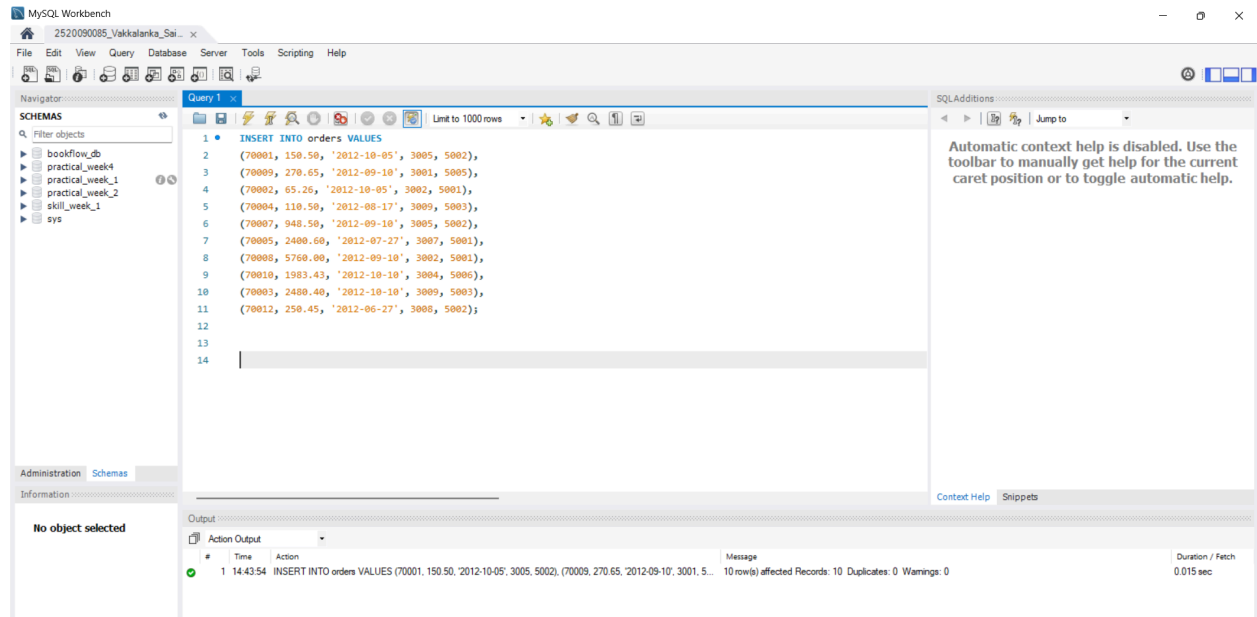

3. WHERE CLAUSE

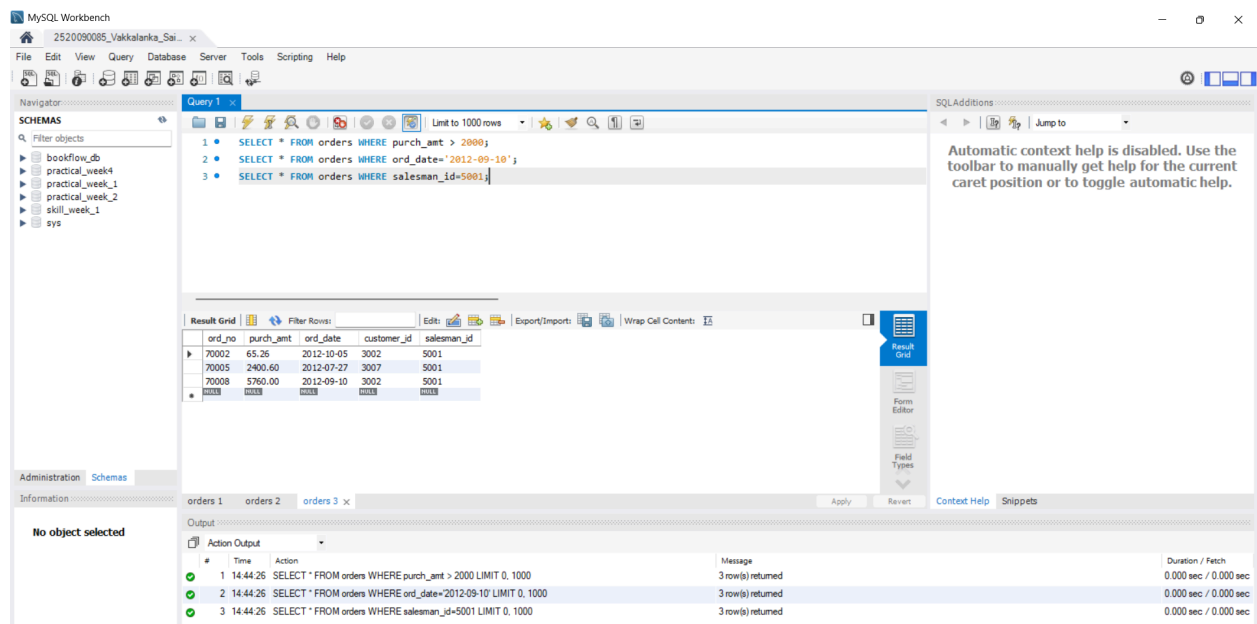

4. ORDER BY

MySQL Workbench

2520090085_Vakkalanka_Sai... x

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

- bookflow_db
- practical_week4
- practical_week_1
- practical_week_2
- skill_week_1
- sys

Query 1 x

Limit to 1000 rows

```

1 • SELECT * FROM orders ORDER BY purch_amt DESC;
2   SELECT * FROM orders ORDER BY ord_date;
3

```

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Result Grid

ord_no	purch_amt	ord_date	customer_id	salesman_id
70012	250.45	2012-06-27	3008	5002
70005	2400.60	2012-07-27	3007	5001
70004	110.50	2012-08-17	3009	5003
70007	948.50	2012-09-10	3005	5002
70008	5760.00	2012-09-10	3002	5001
70009	270.65	2012-09-10	3001	5005
70001	150.50	2012-10-05	3005	5002
70002	65.26	2012-10-05	3002	5001
70003	2480.40	2012-10-10	3009	5003
70010	1983.43	2012-10-10	3004	5006

orders 4 x

Output

#	Time	Action	Message	Duration / Fetch
1	14.44.48	SELECT * FROM orders ORDER BY purch_amt DESC LIMIT 0. 1000	10 row(s) returned	0.000 sec / 0.000 sec
2	14.44.48	SELECT * FROM orders ORDER BY ord_date LIMIT 0. 1000	10 row(s) returned	0.000 sec / 0.000 sec

5. SUM()

MySQL Workbench

2520090085_Vakkalanka_Sai... x

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

- bookflow_db
- practical_week4
- practical_week_1
- practical_week_2
- skill_week_1
- sys

Query 1 x

Limit to 1000 rows

```

1 • SELECT SUM(purch_amt) AS total_revenue FROM orders;

```

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Result Grid


total_revenue
14420.29

Result 6 x


Output

#	Time	Action	Message	Duration / Fetch
1	14.45.05	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0. 1000	1 row(s) returned	0.000 sec / 0.000 sec


6. AVG()

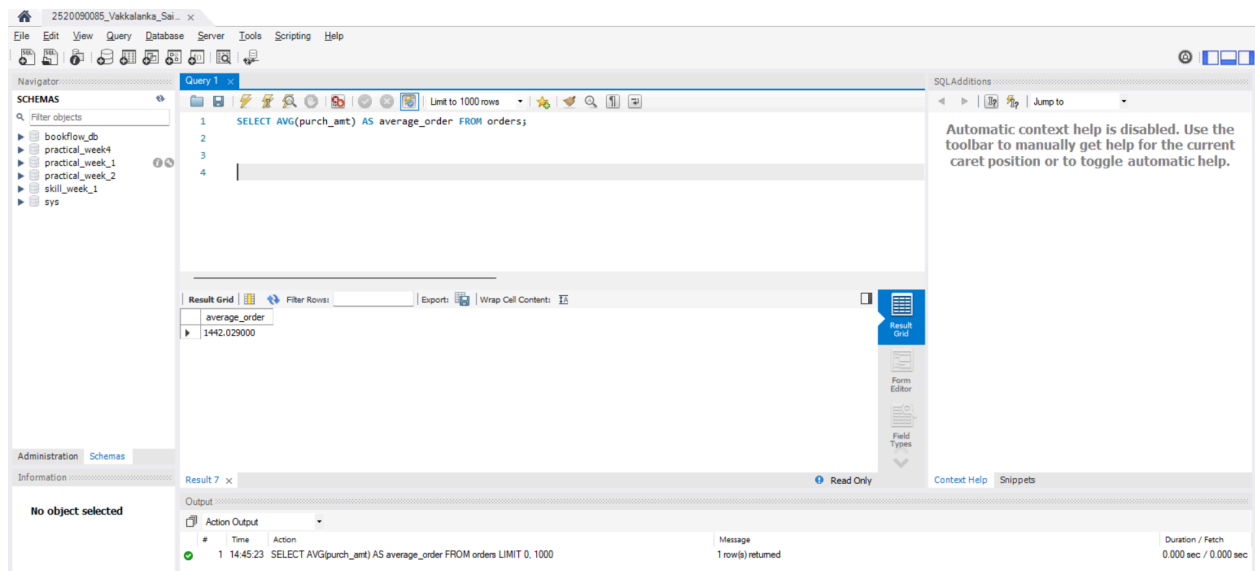


7. MAX()

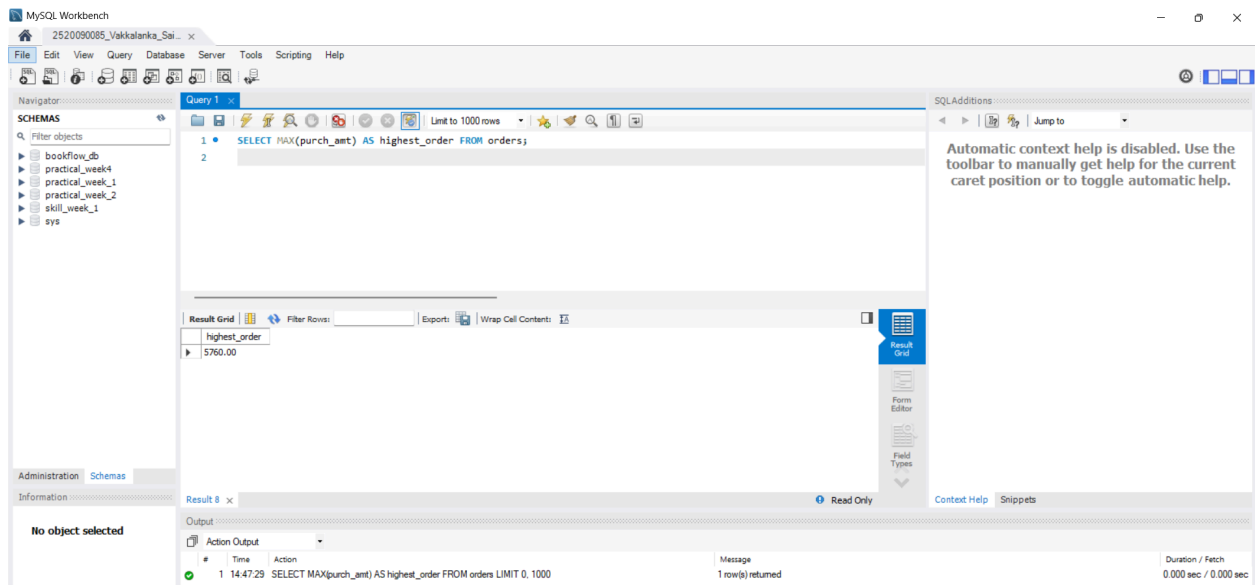

8. MIN()

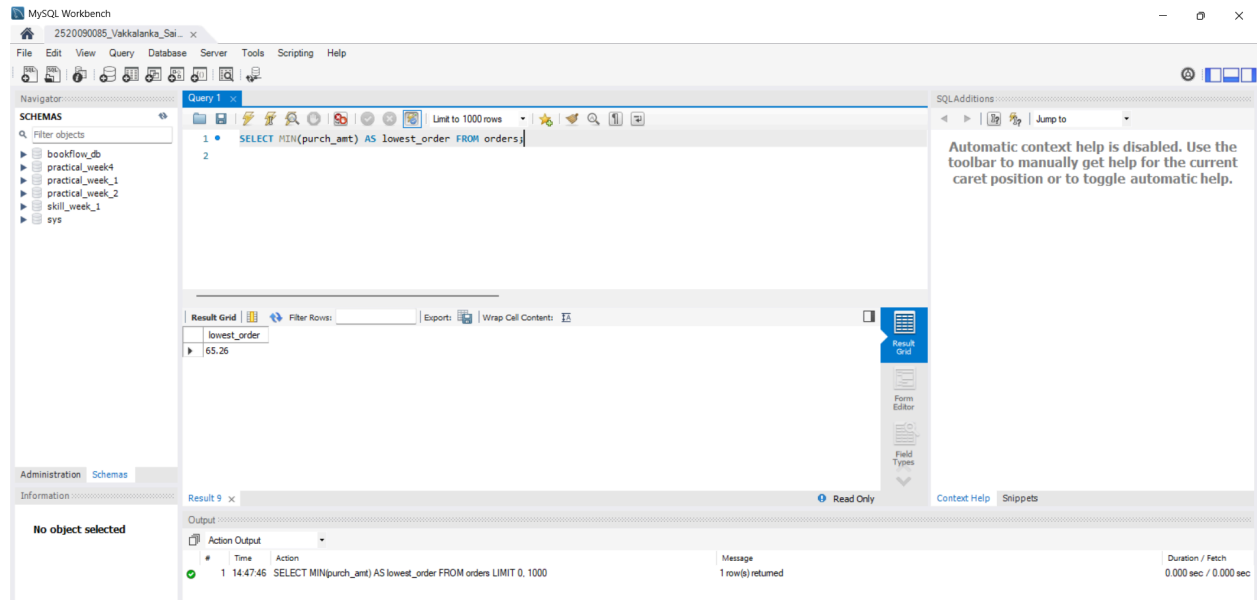

9. COUNT()

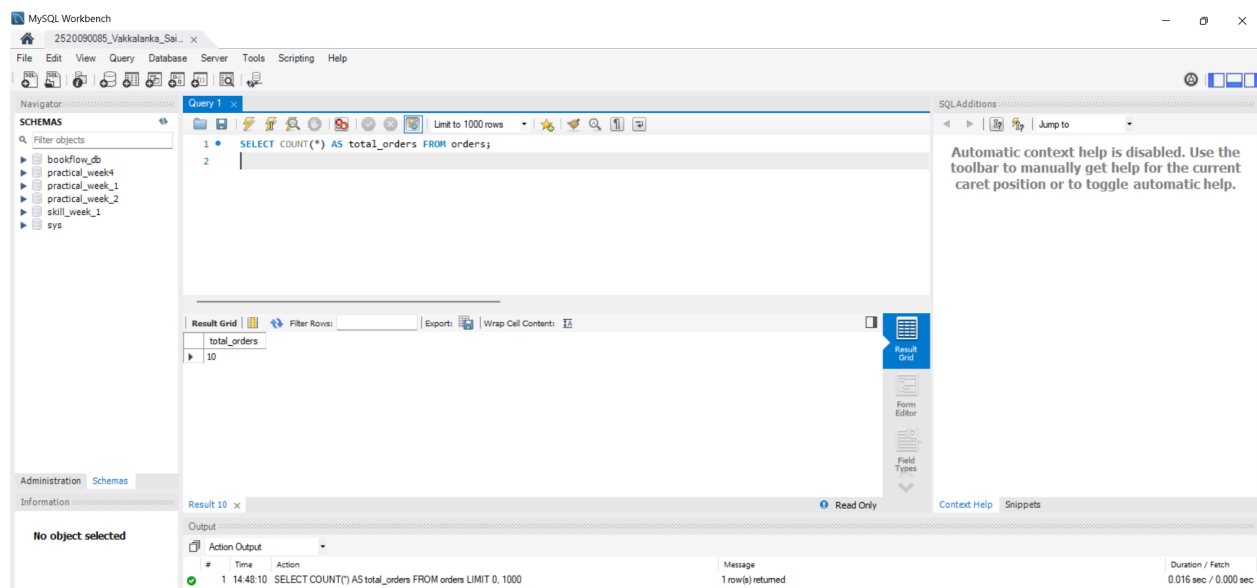

10. GROUP BY

Query 1

```

1 • SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id;
2 • SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id;
3

```

Result Grid

customer_id	total_purchase
3005	1099.00
3002	5825.26
3009	2590.90
3007	2400.60
3001	270.65
3004	1983.43
3008	250.45

Output

#	Time	Action	Message	Duration / Fetch
1	14:48:26	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id LIMIT 0, 1000	5 row(s) returned	0.031 sec / 0.000 sec
2	14:48:26	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id LIMIT 0, 1000	7 row(s) returned	0.000 sec / 0.000 sec

11. GROUP BY + MAX()

Query 1

```

1 • SELECT customer_id, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY customer_id;

```

Result Grid

customer_id	highest_purchase
3005	948.50
3002	5760.00
3009	2480.40
3007	2400.60
3001	270.65
3004	1983.43
3008	250.45

Output

#	Time	Action	Message	Duration / Fetch
1	14:48:44	SELECT customer_id, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY customer_id LIMIT 0, 1...	7 row(s) returned	0.000 sec / 0.000 sec

12. GROUP BY + HAVING

MySQL Workbench interface showing a query window with two SQL queries:

```

1 SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id HAVING SUM(purch_amt) > 3000;
2 SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVING SUM(purch_amt) > 2500;

```

The Result Grid displays the output for the second query:

customer_id	total_purchase
3002	5825.26
3009	2590.90

The Output window shows the execution results:

#	Time	Action	Message	Duration / Fetch
1	14:49:11	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id HAVING SUM(pu...	1 row(s) returned	0.000 sec / 0.000 sec
2	14:49:11	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVING SU...	2 row(s) returned	0.000 sec / 0.000 sec

13. GROUP BY + HAVING + ORDER BY

MySQL Workbench interface showing a query window with a single SQL query:

```

1 SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVING SUM(purch_amt) > 1000 ORDER BY total_purchase DESC;

```

The Result Grid displays the output for the query:

customer_id	total_purchase
3002	5825.26
3009	2590.90
3007	2400.60
3004	1983.43
3005	1099.00

The Output window shows the execution results:

#	Time	Action	Message	Duration / Fetch
1	14:49:11	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id HAVING SUM(pu...	1 row(s) returned	0.000 sec / 0.000 sec
2	14:49:11	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVING SU...	2 row(s) returned	0.000 sec / 0.000 sec
3	14:51:14	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVING SU...	5 row(s) returned	0.000 sec / 0.000 sec

14. BETWEEN + HAVING

MySQL Workbench

2520090085_Vakkalanka_Sai...

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

- bookflow_db
- practical_week4
- practical_week_1
- practical_week_2
- skill_week_1
- sys

Query 1

Limit to 1000 rows

1 • SELECT customer_id, MAX(purch_amt) AS max_purchase FROM orders GROUP BY customer_id HAVING MAX(purch_amt) BETWEEN 2000 AND 3000

2

Result Grid

customer_id	max_purchase
3002	5760.00
3009	2480.40
3007	2400.60

Output

Result 17

Read Only

Context Help Snippets

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Information

No object selected

Action Output

#	Time	Action	Message	Duration / Fetch
1	14:51:51	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id, MAX(purch_amt) AS max_purchase FROM orders GROUP BY customer_id HAVING MAX(purch_amt) BETWEEN 2000 AND 3000	Error Code: 1064. You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near 'HAVING MAX(purch_amt) BETWEEN 2000 AND 3000' at line 1	0.000 sec
2	14:52:04	SELECT customer_id, MAX(purch_amt) AS max_purchase FROM orders GROUP BY customer_id HAVING MAX(purch_amt) BETWEEN 2000 AND 3000	3 row(s) returned	0.000 sec / 0.000 sec

15. COUNT + HAVING

MySQL Workbench

2520090085_Vakkalanka_Sai...

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

- bookflow_db
- practical_week4
- practical_week_1
- practical_week_2
- skill_week_1
- sys

Query 1

Limit to 1000 rows

1 • SELECT salesman_id, COUNT(*) AS total_orders FROM orders GROUP BY salesman_id HAVING COUNT(*) >= 2

2

Result Grid

salesman_id	total_orders
5002	3
5001	3
5003	2

Output

Result 18

Read Only

Context Help Snippets

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Information

No object selected

Action Output

#	Time	Action	Message	Duration / Fetch
1	14:52:33	SELECT salesman_id, COUNT(*) AS total_orders FROM orders GROUP BY salesman_id HAVING COUNT(*) >= 2	3 row(s) returned	0.000 sec / 0.000 sec

16. MAX + GROUP BY + HAVING

MySQL Workbench

2520090085_Vakkalanka_Sai...

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

- bookflow_db
- practical_week4
- practical_week_1
- practical_week_2
- skill_week_1
- sys

Query 1

Limit to 1000 rows

1 SELECT ord_date, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY ord_date HAVING MAX(purch_amt) > 2000;

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Result Grid

ord_date	highest_purchase
2012-10-10	2400.40
2012-07-27	2400.60
2012-09-10	5760.00

Administration Schemas

Information

No object selected

Output

Read Only

Context Help Snippets

#	Time	Action	Message	Duration / Fetch
1	14:52:33	SELECT salesman_id, COUNT(*) AS total_orders FROM orders GROUP BY salesman_id HAVING COUNT(*) >= ...	3 row(s) returned	0.000 sec / 0.000 sec
2	14:52:48	SELECT ord_date, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY ord_date HAVING MAX(purch_amt) > 2000;	3 row(s) returned	0.016 sec / 0.000 sec