

Cucumber Report

14-Aug-2023, 7:03:46 pm

Start : Aug 14, 7:03:45.409 pm

End : Aug 14, 7:03:45.499 pm

Duration : 0.090 s

Features


Scenarios

Steps


PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 3
SKIPPED - 0


PASSED - 0
FAILED - 0
SKIPPED - 21

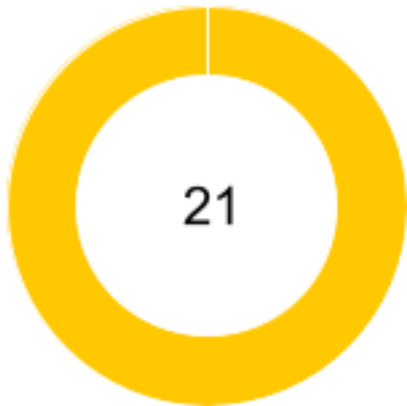

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>customer page</u>	0.090 s	3	0	3	0	21	0	0	21

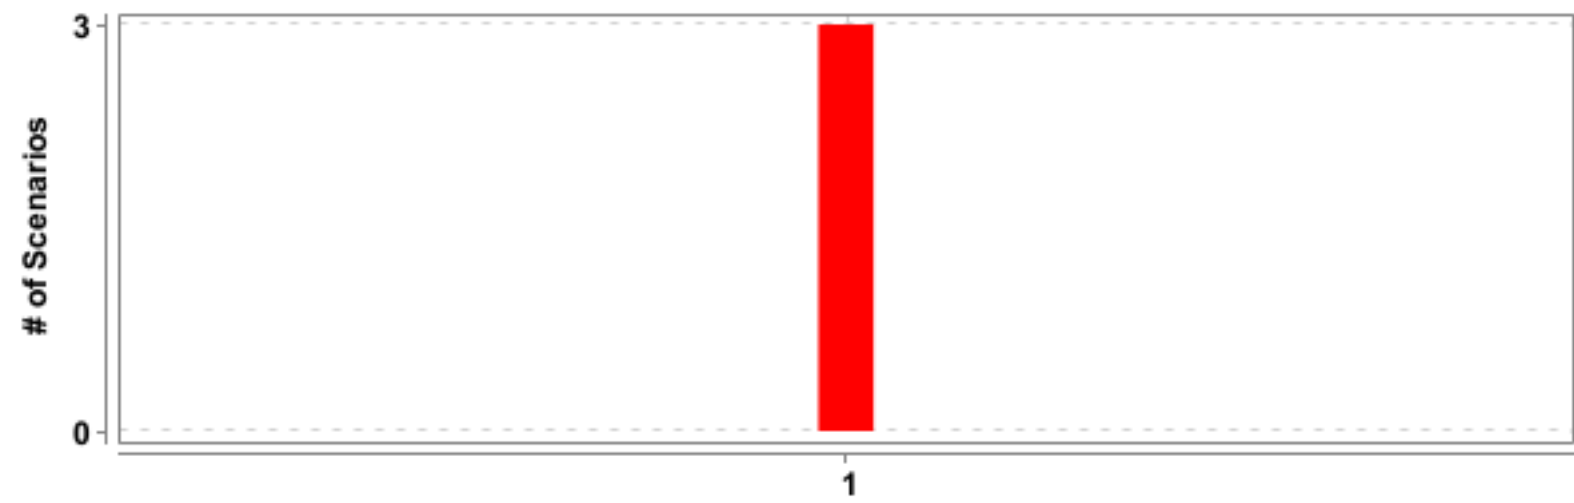



#	Feature Name	T	P	F	S	Duration
1	<u>customer page</u>	3	0	3	0	0.090 s

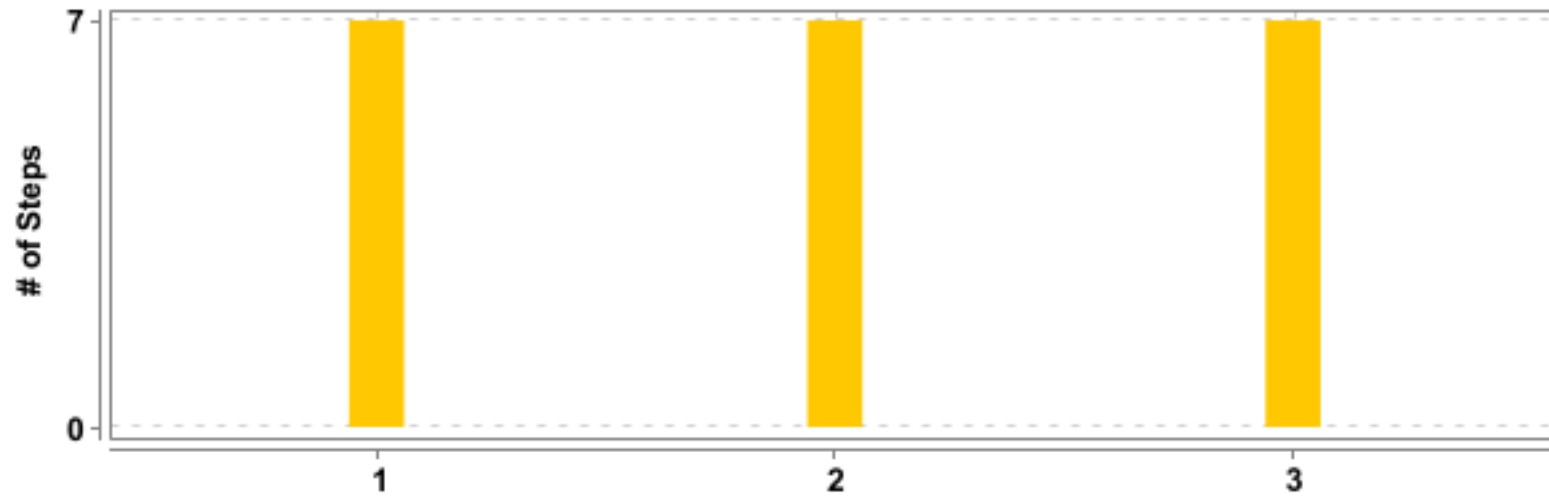



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>customer page</u>	<u>To enter the values in the fields of the customer page</u>	7	0	0	7	0.036 s
2	<u>customer page</u>	<u>To enter the values in the fields of the customer page</u>	7	0	0	7	0.007 s
3	<u>customer page</u>	<u>To enter the values in the fields of the customer page</u>	7	0	0	7	0.008 s

customer page

FAILED	DURATION - 0.090 s	Scenarios Total - 3 Pass - 0 Fail - 3 Skip - 0		Steps Total - 21 Pass - 0 Fail - 0 Skip - 21	
/ 7:03:45.409 pm // 7:03:45.499 pm /					

To enter the values in the fields of the customer page
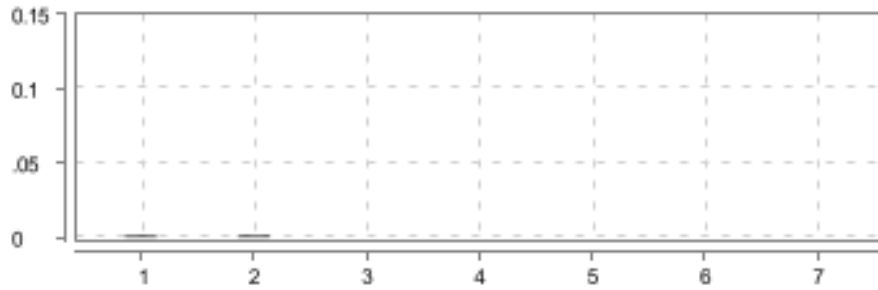
<div>FAILED</div> <div>DURATION - 0.036 s</div>		<div></div>	<div>Steps</div> <div>Total - 7</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 7</div>	<div></div>
/ 7:03:45.418 pm // 7:03:45.454 pm /				
customer page				



#	Step / Hook Details	Status	Duration
	<p>BEFORE - Steps.Hooks.Setup()</p> <p>org.picocontainer.injectors.AbstractInjector\$UnsatisfiableDependenciesException: Steps.Hooks has unsatisfied dependency 'interface org.openqa.selenium.WebDriver' for constructor 'public Steps.Hooks(org.orangehrm.details.Cucumber.Testcontext,org.openqa.selenium.WebDriver)' from org.picocontainer.DefaultPicoContainer@662f5666:4< </p> <p>at org.picocontainer.injectors.ConstructorInjector.getGreediestSatisfiableConstructor(ConstructorInjector.java:191)</p> <p>at org.picocontainer.injectors.ConstructorInjector.getGreediestSatisfiableConstructor(ConstructorInjector.java:110)</p> <p>at org.picocontainer.injectors.ConstructorInjector.access\$100(ConstructorInjector.java:51)</p> <p>at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:331)</p> <p>at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)</p> <p>at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)</p> <p>at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)</p> <p>at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)</p> <p>at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)</p> <p>at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)</p> <p>at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)</p> <p>at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678)</p> <p>at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p>	FAILED	0.010 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35)		

#	Step / Hook Details	Status	Duration
	at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55)		
1	Given Given Open the login page	SKIPPED	0.001 s
2	And enter 'Admin' and 'admin123'	SKIPPED	0.001 s
3	Then click login	SKIPPED	0.000 s
4	And move to PIM page	SKIPPED	0.000 s
5	Then enter 'David Morris' and '0066' in the fields	SKIPPED	0.000 s
6	And search with given data	SKIPPED	0.000 s
7	Then delete the data	SKIPPED	0.000 s
	AFTER - Steps.Hooks.Takescreenshot()	FAILED	0.001 s
	org.picocontainer.injectors.AbstractInjector\$UnsatisfiableDependenciesException: Steps.Hooks has unsatisfied dependency 'interface org.openqa.selenium.WebDriver' for constructor 'public Steps.Hooks(org.orangehrm.details.Cucumber.Testcontext,org.openqa.selenium.WebDriver)' from org.picocontainer.DefaultPicoContainer@662f5666:4< at org.picocontainer.injectors.ConstructorInjector.getGreediestSatisfiableConstructor(ConstructorInjector.java:191) at org.picocontainer.injectors.ConstructorInjector.getGreediestSatisfiableConstructor(ConstructorInjector.java:110) at org.picocontainer.injectors.ConstructorInjector.access\$100(ConstructorInjector.java:51) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:331) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55)		

To enter the values in the fields of the customer page
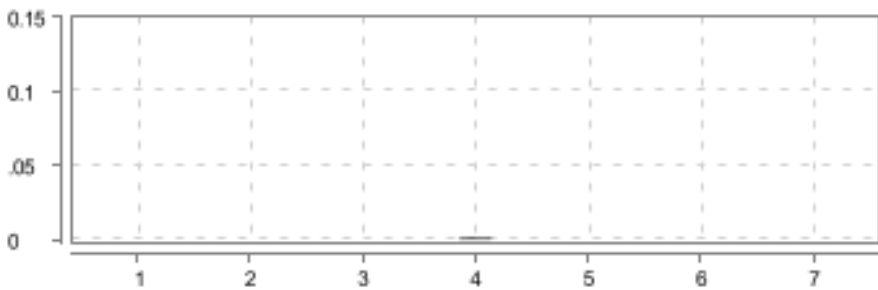
<div>FAILED</div> <div>DURATION - 0.007 s</div>		<div></div>	<div>Steps</div> <div>Total - 7</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 7</div>	<div></div>
/ 7:03:45.475 pm // 7:03:45.482 pm /				
customer page				

#	Step / Hook Details	Status	Duration
	BEFORE - Steps.Hooks.Setup() <pre> org.picocontainer.injectors.AbstractInjector\$UnsatisfiableDependenciesException: Steps.Hooks has unsatisfied dependency 'interface org. openqa.selenium.WebDriver' for constructor 'public Steps.Hooks(org.orangehm.details.Cucumber.Testcontext,org.openqa.selenium. WebDriver)' from org.picocontainer.DefaultPicoContainer@662f5666:4< at org.picocontainer.injectors.ConstructorInjector.getGreediestSatisfiableConstructor(ConstructorInjector.java:191) at org.picocontainer.injectors.ConstructorInjector.getGreediestSatisfiableConstructor(ConstructorInjector.java:110) at org.picocontainer.injectors.ConstructorInjector.access\$100(ConstructorInjector.java:51) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:331) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) </pre>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55)		
1	Given Given Open the login page	SKIPPED	0.000 s
2	And enter 'Admin' and 'admin123'	SKIPPED	0.000 s
3	Then click login	SKIPPED	0.000 s
4	And move to PIM page	SKIPPED	0.001 s
5	Then enter 'Jadine Jackie' and '0243' in the fields	SKIPPED	0.000 s
6	And search with given data	SKIPPED	0.000 s
7	Then delete the data	SKIPPED	0.000 s
	AFTER - Steps.Hooks.Takescreenshot()	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<p>org.picocontainer.injectors.AbstractInjector\$UnsatisfiableDependenciesException: Steps.Hooks has unsatisfied dependency 'interface org.openqa.selenium.WebDriver' for constructor 'public Steps.Hooks(org.orangehrm.details.Cucumber.Testcontext,org.openqa.selenium.WebDriver)' from org.picocontainer.DefaultPicoContainer@662f5666:4<</p> <p>at org.picocontainer.injectors.ConstructorInjector.getGreediestSatisfiableConstructor(ConstructorInjector.java:191) at org.picocontainer.injectors.ConstructorInjector.getGreediestSatisfiableConstructor(ConstructorInjector.java:110) at org.picocontainer.injectors.ConstructorInjector.access\$100(ConstructorInjector.java:51) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:331) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55) </pre>		

To enter the values in the fields of the customer page

<div> <div>FAILED</div> <div>DURATION - 0.008 s</div> </div> <div>/ 7:03:45.491 pm // 7:03:45.499 pm /</div> <div>customer page</div>		<div>Steps</div> <div>Total - 7</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 7</div>	
---	--	---	--

#	Step / Hook Details	Status	Duration
	<p>BEFORE - Steps.Hooks.Setup()</p> <pre> org.picocontainer.injectors.AbstractInjector\$UnsatisfiableDependenciesException: Steps.Hooks has unsatisfied dependency 'interface org.openqa.selenium.WebDriver' for constructor 'public Steps.Hooks(org.orangehrm.details.Cucumber.Testcontext,org.openqa.selenium.WebDriver)' from org.picocontainer.DefaultPicoContainer@662f5666:4< at org.picocontainer.injectors.ConstructorInjector.getGreediestSatisfiableConstructor(ConstructorInjector.java:191) at org.picocontainer.injectors.ConstructorInjector.getGreediestSatisfiableConstructor(ConstructorInjector.java:110) at org.picocontainer.injectors.ConstructorInjector.access\$100(ConstructorInjector.java:51) </pre>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:331) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55)		
1	Given Given Open the login page	SKIPPED	0.001 s
2	And enter 'Admin' and 'admin123'	SKIPPED	0.000 s
3	Then click login	SKIPPED	0.000 s
4	And move to PIM page	SKIPPED	0.000 s
5	Then enter 'Nina Patel' and '0074' in the fields	SKIPPED	0.000 s
6	And search with given data	SKIPPED	0.001 s
7	Then delete the data	SKIPPED	0.001 s
	AFTER - Steps.Hooks.Takescreenshot() org.picocontainer.injectors.AbstractInjector\$UnsatisfiableDependenciesException: Steps.Hooks has unsatisfied dependency 'interface org.openqa.selenium.WebDriver' for constructor 'public Steps.Hooks(org.orchestration.details.Cucumber.Testcontext,org.openqa.selenium.WebDriver)' from org.picocontainer.DefaultPicoContainer@662f5666:4< at org.picocontainer.injectors.ConstructorInjector.getGreedySatisfiableConstructor(ConstructorInjector.java:191) at org.picocontainer.injectors.ConstructorInjector.getGreedySatisfiableConstructor(ConstructorInjector.java:110) at org.picocontainer.injectors.ConstructorInjector.access\$100(ConstructorInjector.java:51) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:331) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35)		

#	Step / Hook Details	Status	Duration
	at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55)		