



INFO20003 Database Systems

Dr Renata Borovica-Gajic

Lecture 02
Database Development Process


Week 1




- How database applications are developed
 - The development lifecycle
 - Focus on database *design*
 - Conceptual design
 - Logical design
 - Physical design



Database Development Lifecycle

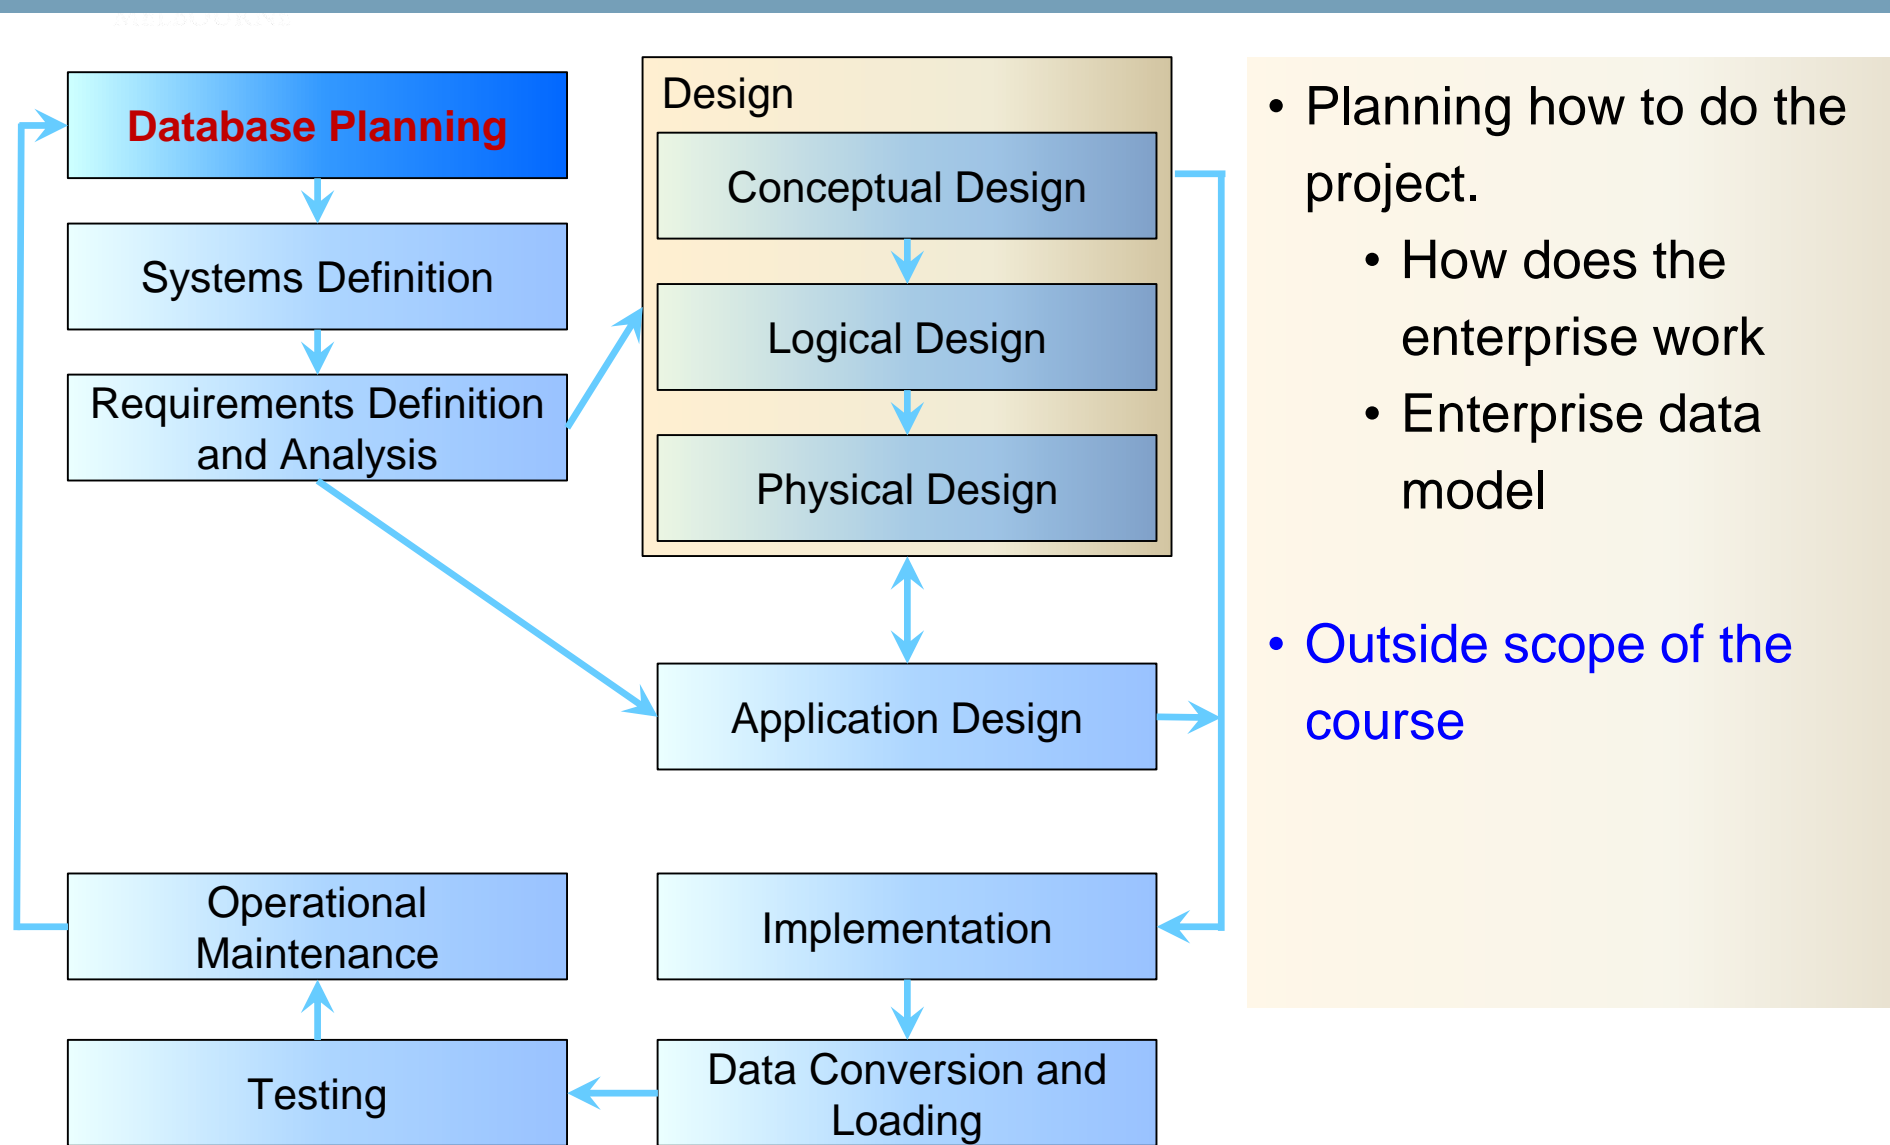

Example Enterprise Data Model – Investment Banking

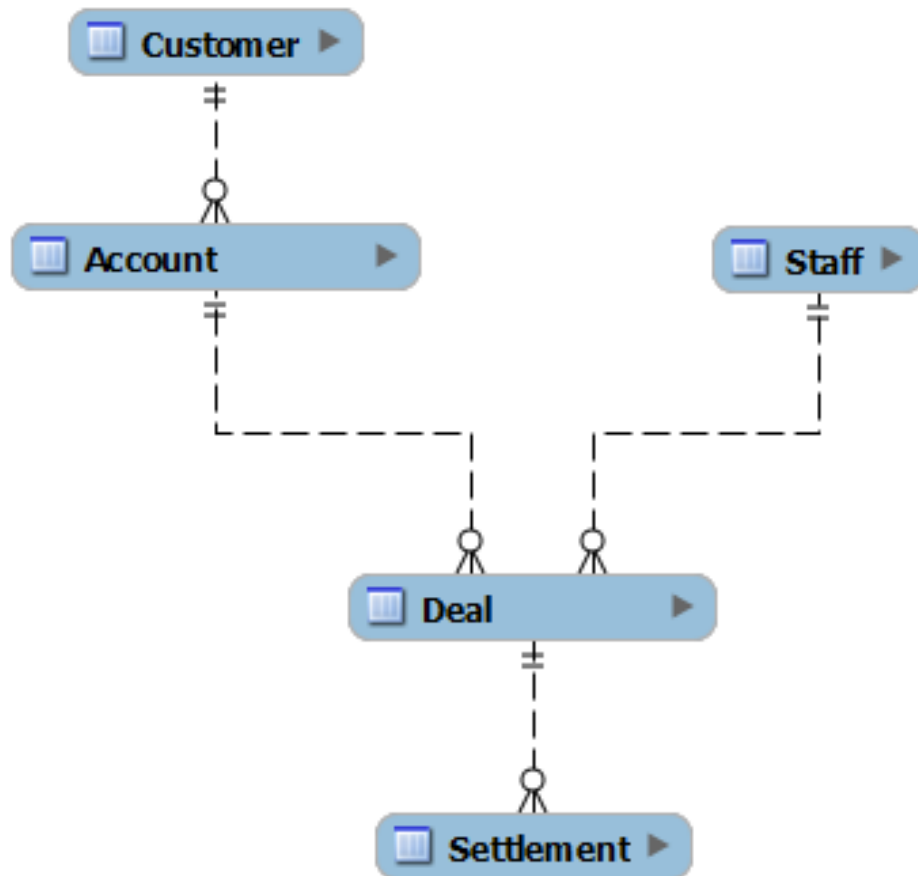


- A top level perspective on the data requirements
- Each box (subject area) would have a data model



Database Development Lifecycle


REEDUCATION

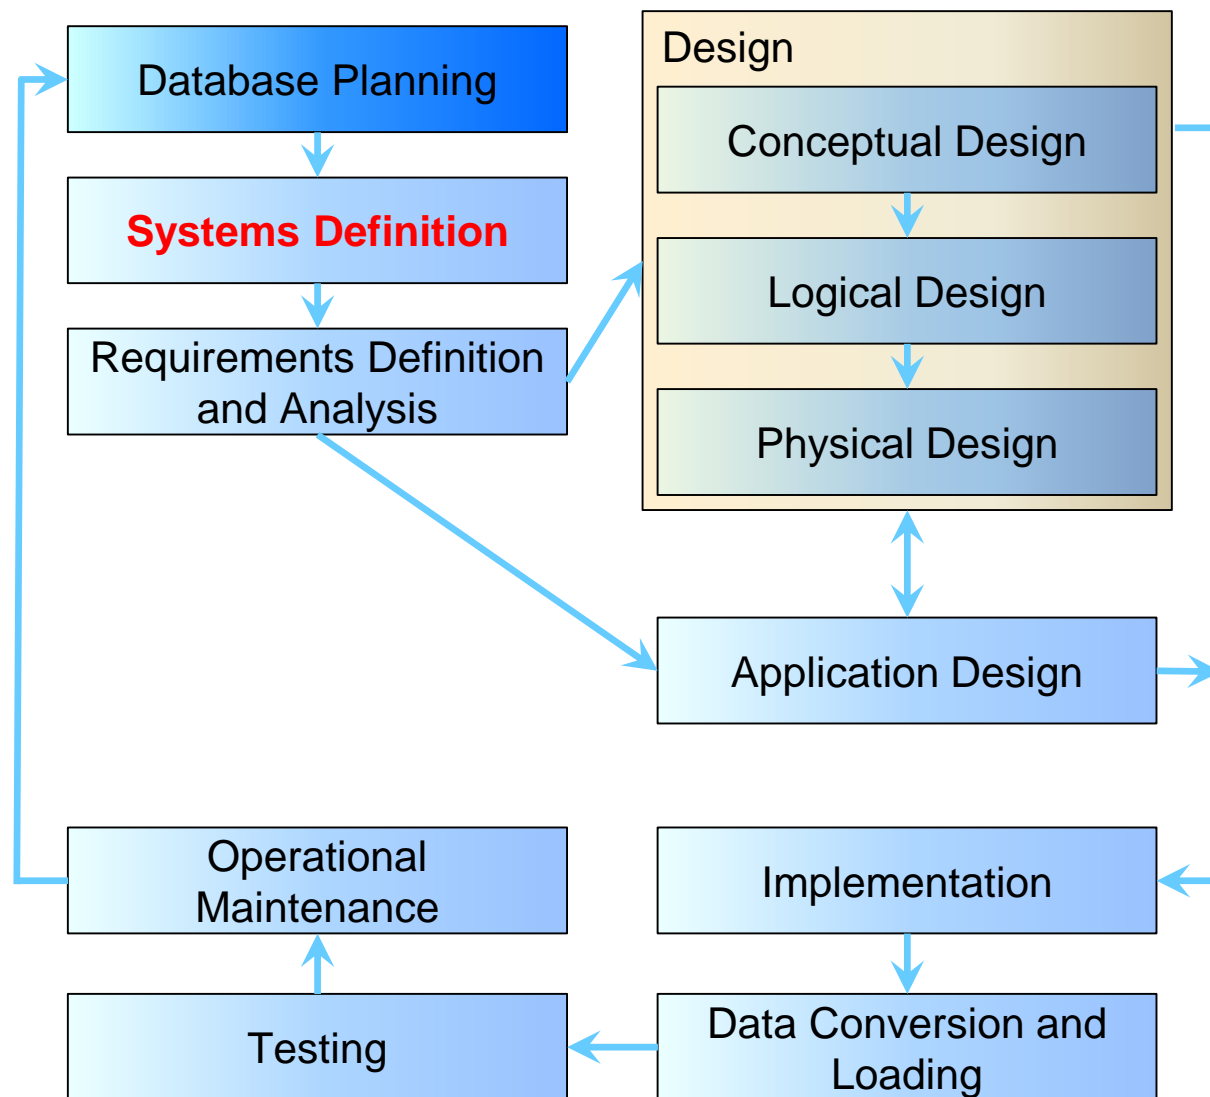

- Specifying scope and boundaries
 - Users
 - Application areas
- How does the system interfere with other organisational systems
- Outside scope of the course (slightly)




Database Development Lifecycle

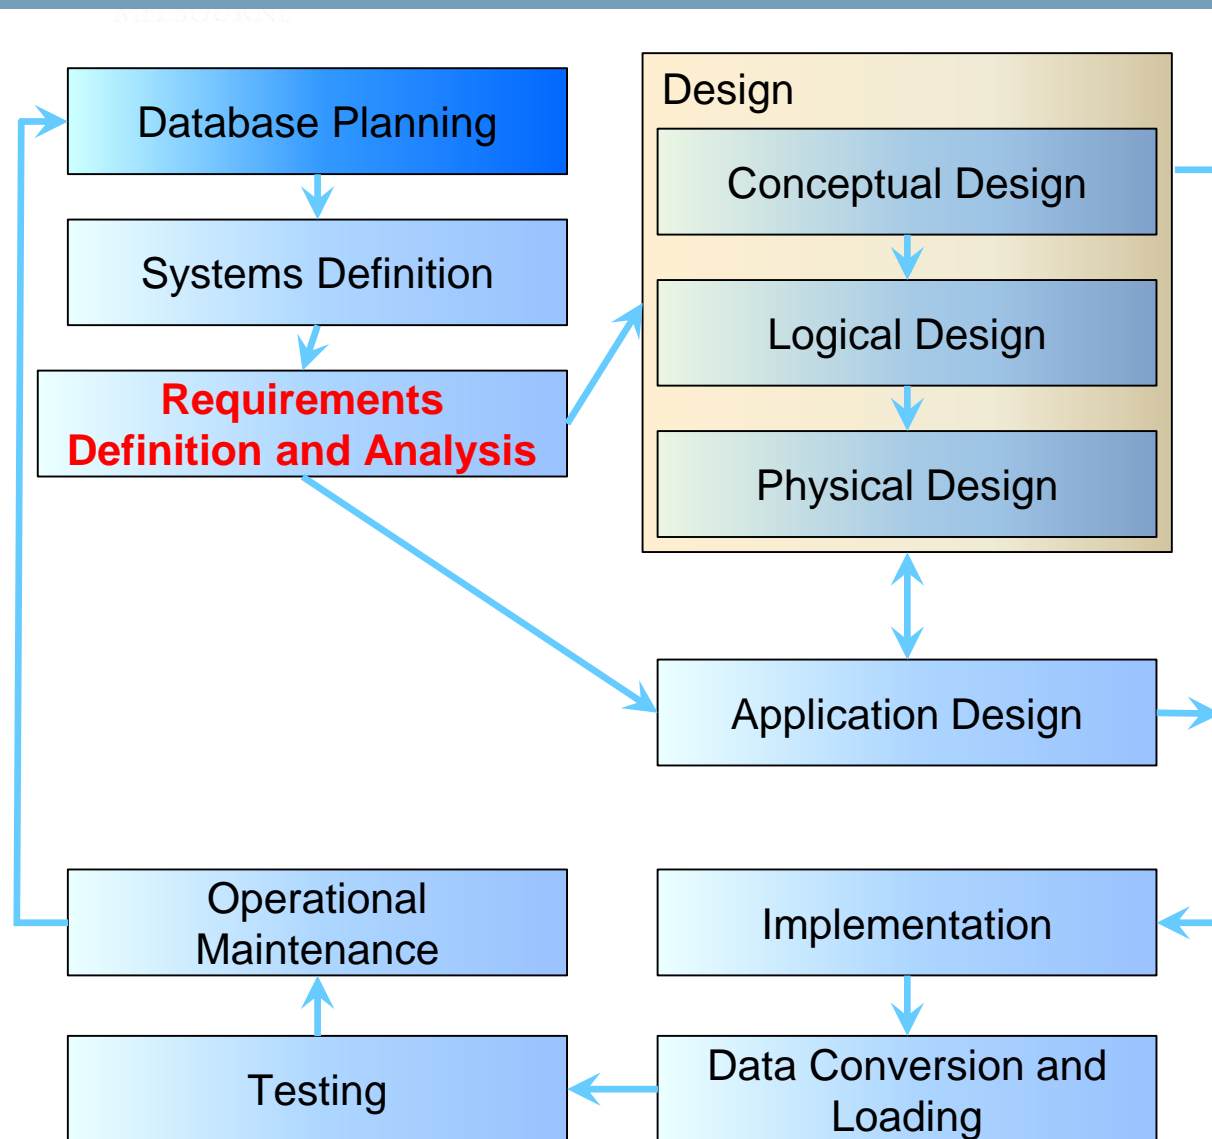

- Collection and analysis of requirements for the new system
- You will be given the requirements, but you will need to understand these!
- You may need to ask requirement questions about what you are given (for the assignment you state your assumptions)



Database Development Lifecycle

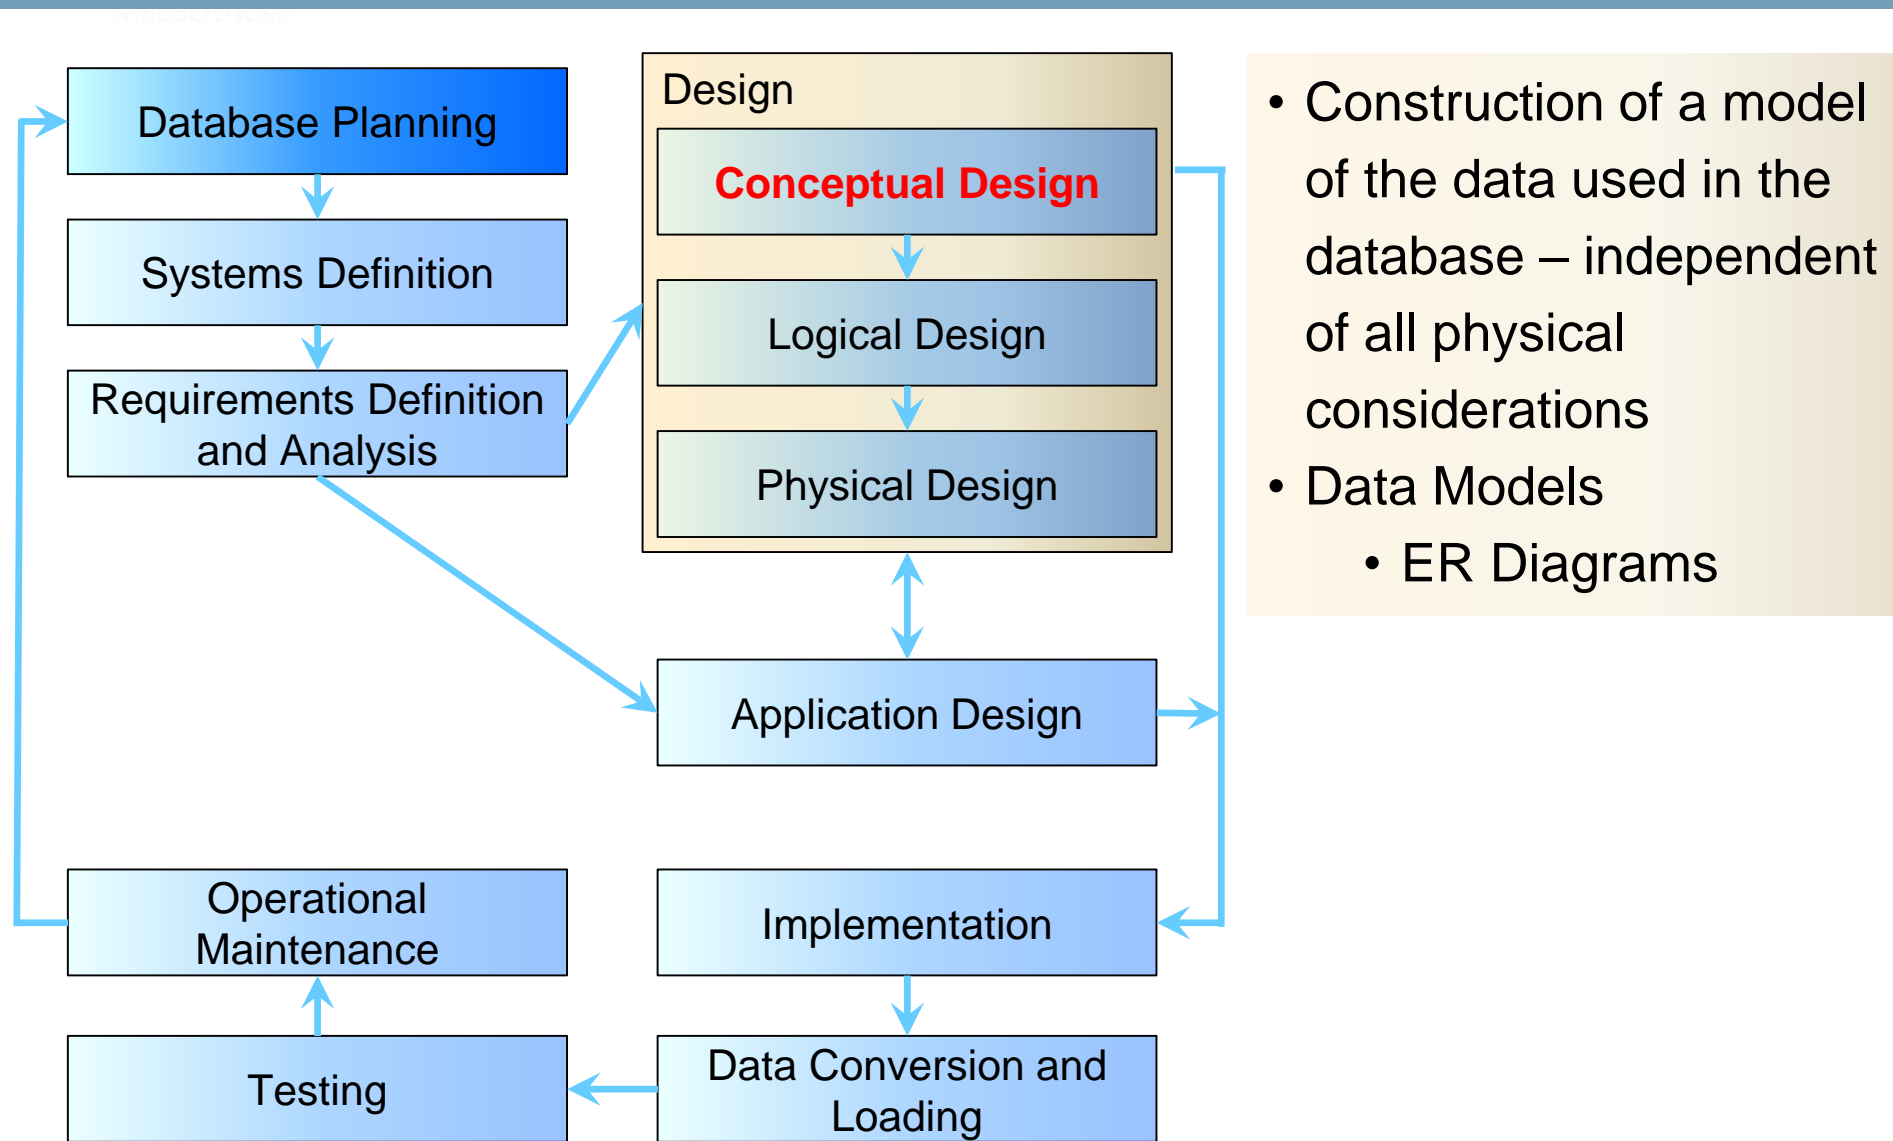


Business rule


- An investment bank has *a number of branches*. Within *each branch* ~~*a number of departments*~~ operate and are structured in a *hierarchical manner*. The bank employs around 3000 *staff* who are *assigned to work in the* various departments across the branches.
- We need a database to record staff details including which department and branch they are assigned...


Example Conceptual Data Model (ER)

– Investment Banking

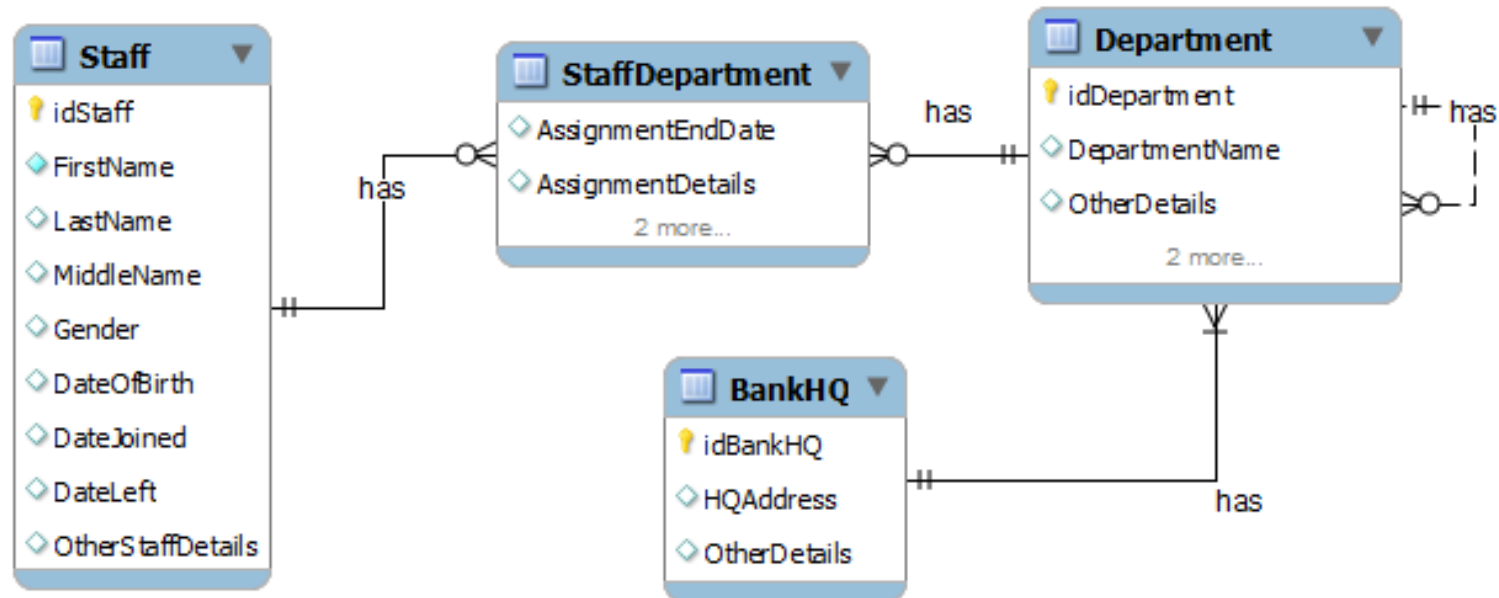


Database Development Lifecycle

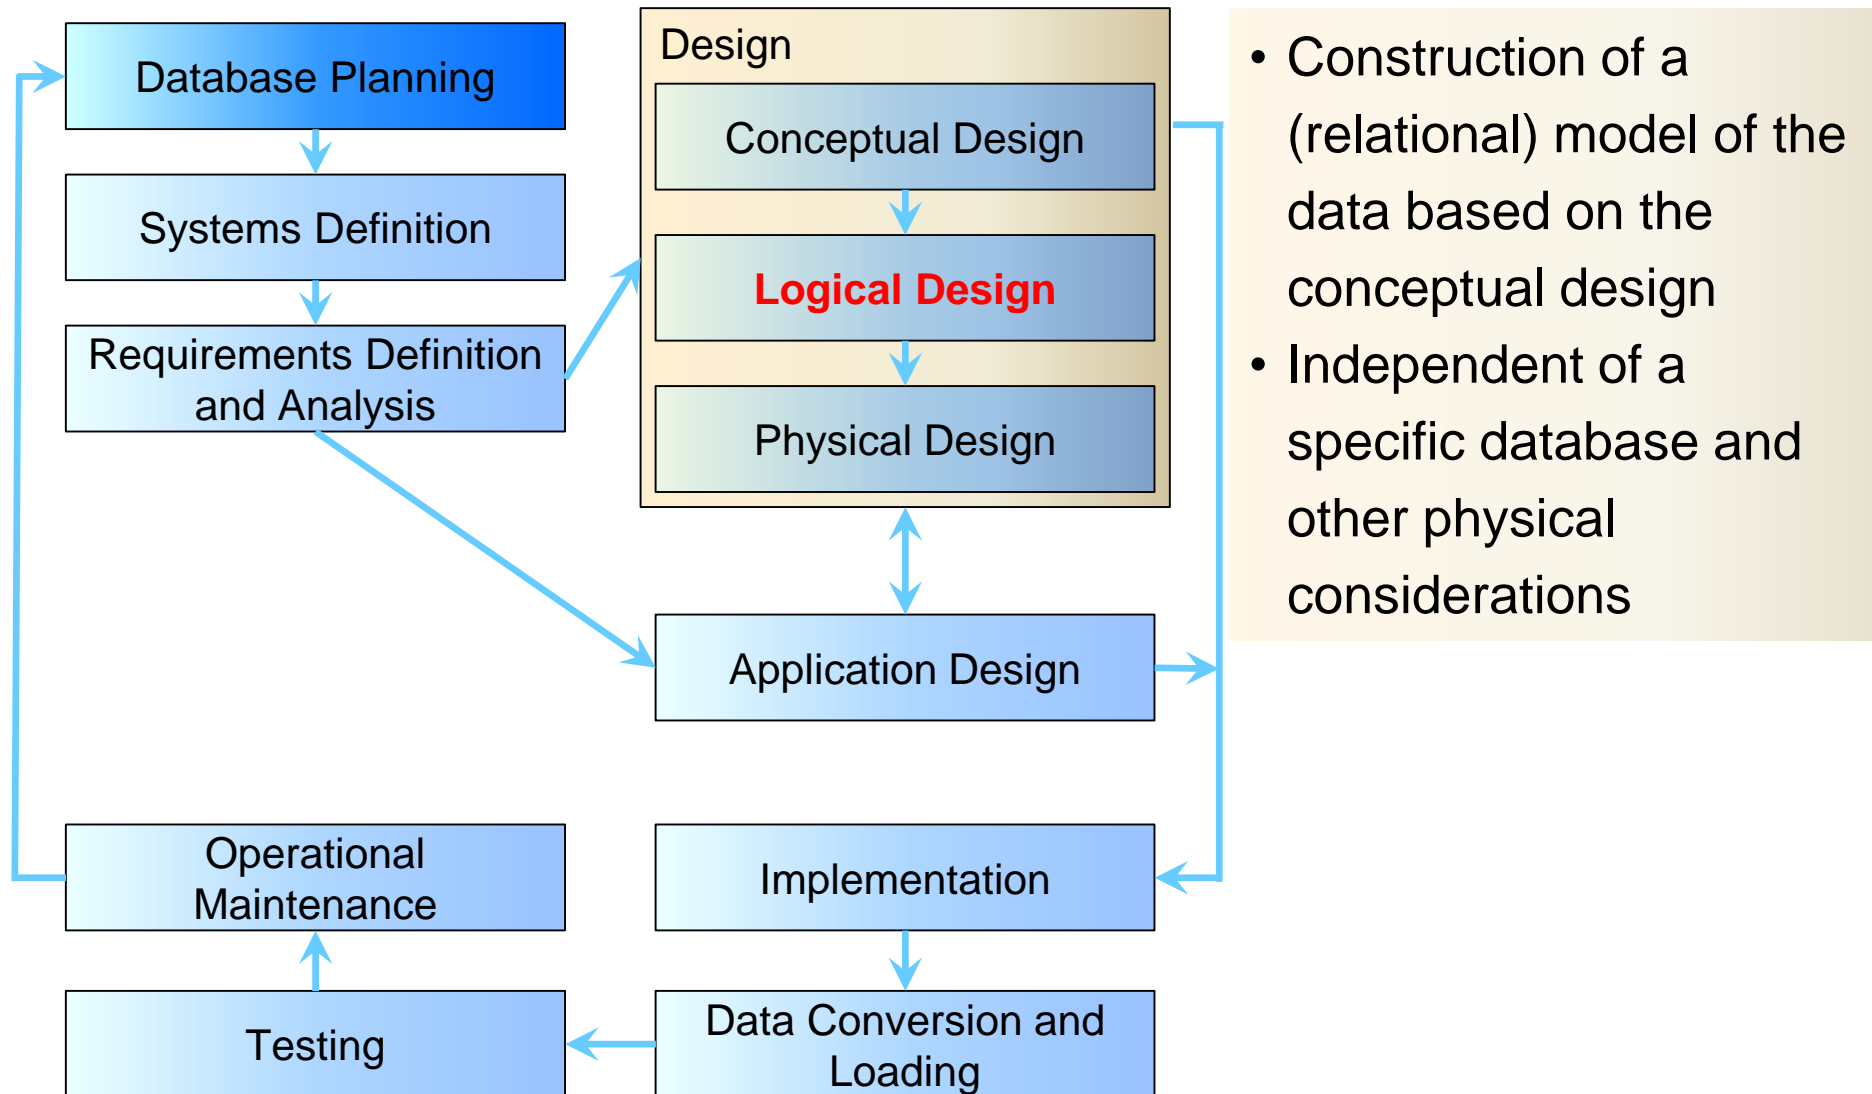

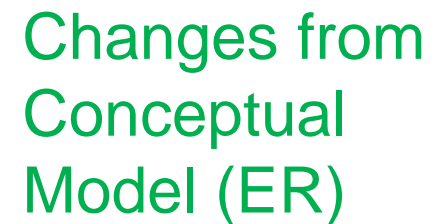




Example Logical Data Model – Investment Banking (Complete)

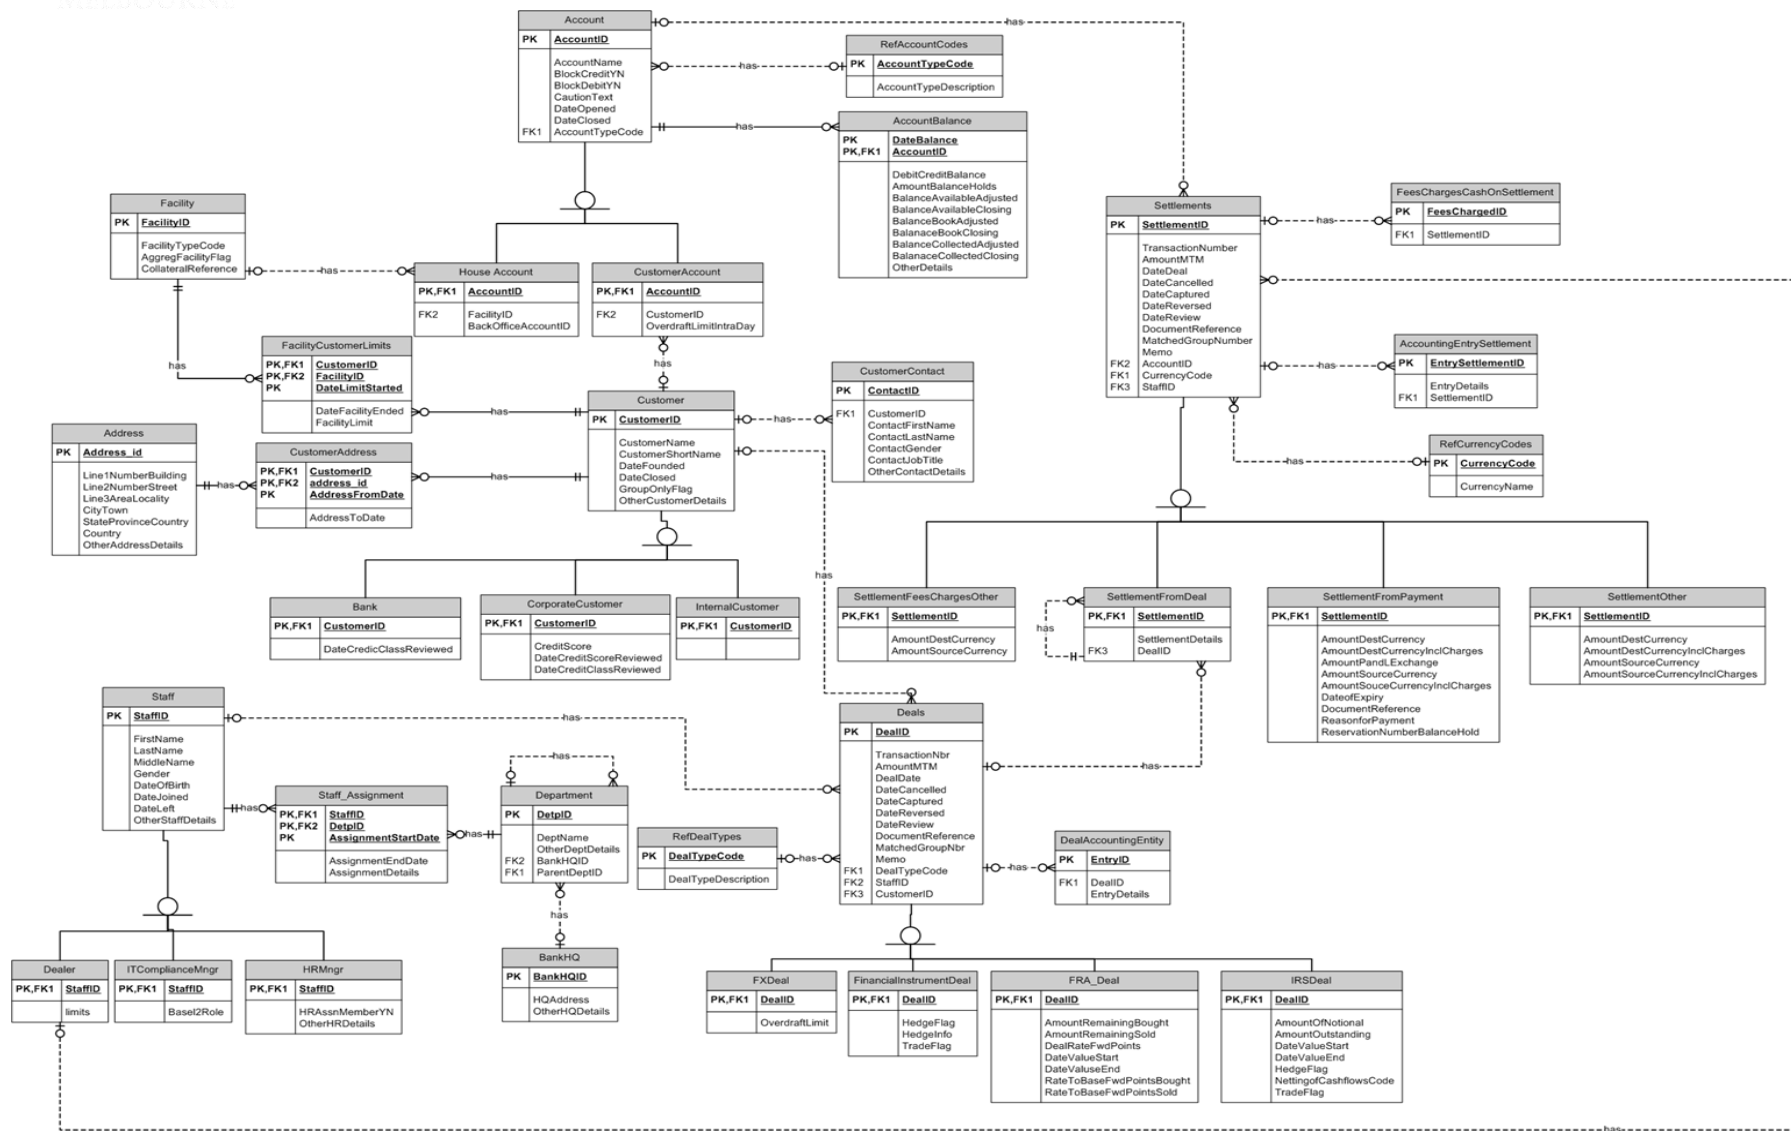




Database Development Lifecycle

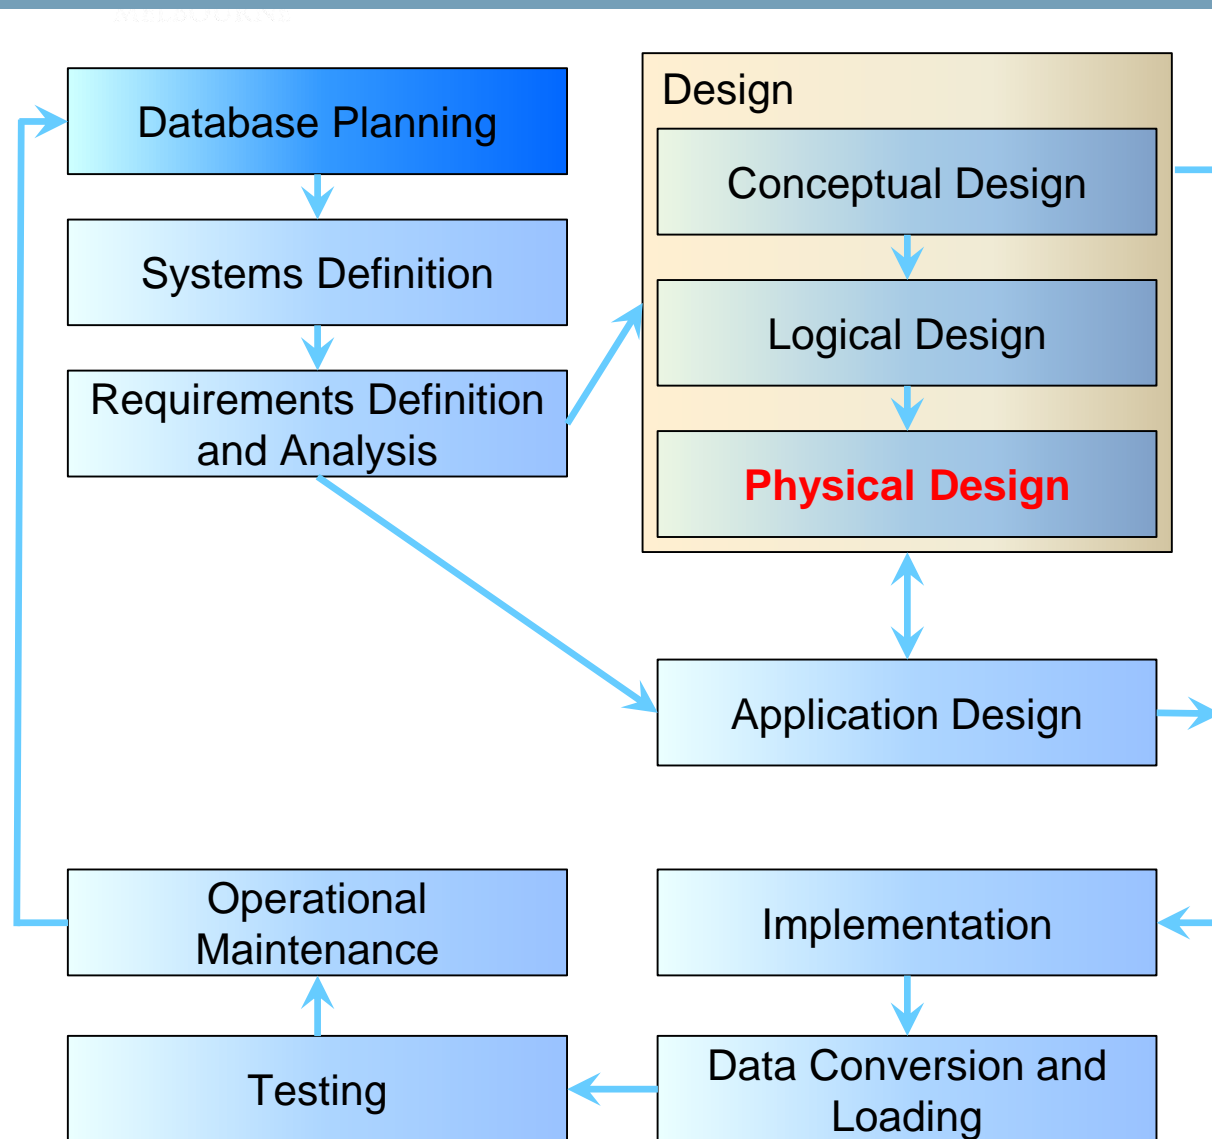

- A description of the implementation of the logical design – for a *specific* DBMS.
- Describes:
 - Basic relations (data types)
 - File organisation
 - Indexes
- Although we don't do full physical design, we discuss some of the issues (e.g. data types)

Example Physical Model – Investment Banking (Staff)

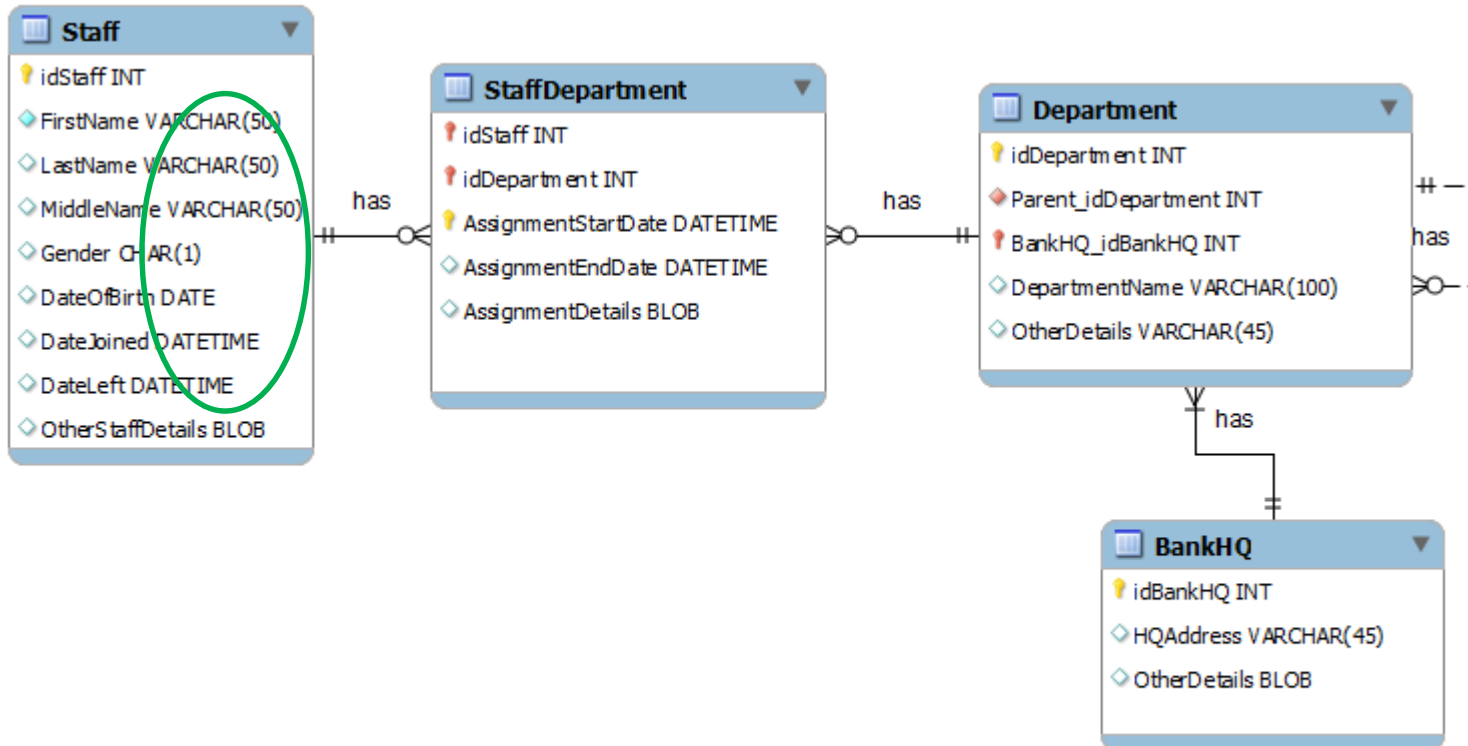



- Types help the DBMS store and use information efficiently
 - Can make assumptions in computation
 - Consistency is guaranteed
- Minimise storage space
- Need to consider
 - Can you store all possible values
 - Can the type you choose support the data manipulation required
- Selection of types may improve data integrity

Example of Data Dictionary

- We do the data dictionary as an ongoing process during analysis and design of the database
- Example of what is required

Key	Attribute	Data Type	Not Null	Unique	Description
Type of key Is it a primary key or a foreign key (leave blank if neither)	Name of Attribute	Data type of attribute	If the field is required or is optional	Must the value in the field be unique for that field	A description of the attribute giving any information that could be useful to the database designers or to the application developers. This would include things like attribute sizes, valid values for an attribute, information about coding for this attribute etc.




Key	Attribute	Data Type	Not Null	Unique	Description
PK	StaffID	Integer	Y	Y	ID number of the staff member, should be 5 in length. This is the primary identifier (key) of the table.
	FirstName	VarChar			The first given name of the staff member, up to 100 characters.
	LastName	VarChar	Y		The family name of the staff member, up to 100 characters. This must exist for every staff member
	Gender	ENUM	Y		The gender of the staff member, valid values are only "Male" or "Female" (???). An enumerated data type should be used if possible. This should be limited in applications using this field also.
	DateOfBirth	DateTime	Y		This is when the staff member was born. Needs dd/mm/yyyy format.
	■ ■ ■				

- Character Types
 - **CHAR(M)**: A fixed-length string, right-padded with spaces. The range of M is 0 to 255.
 - **VARCHAR(M)**: A variable-length string. The range of M is 1 to 65535. (its 255 max. in MySQL 4).
 - **BIT, BOOL, CHAR**: CHAR(1).
 - **BLOB, TEXT**: up to 65535 bytes (for blob) or characters (for text).
 - **ENUM** ('value1', 'value', ...) up to 65,535 members.
 - **SET** ('value1', 'value2', ...) up to 64 members.
- Integer Types
 - **TINYINT[(M)]**: Signed (-128 to 127) Unsigned(0 to 255)
 - **SMALLINT[(M)]**: Signed (-32768 to 32767) Unsigned (0 to 65535)
 - **MEDIUMINT[(M)]**: Signed (-8388608 to 8388607) Unsigned (0 to 16777215)
 - **INT[(M)] / INTEGER[(M)]**: Signed (-2147483648 to 2147483647) Unsigned (0 to 4294967295)
 - **BIGINT[(M)]**: Signed(-9223372036854775808 to 9223372036854775807) Unsigned(0 to 18,446,744,073,709,551,615)

- Real Types
 - **FLOAT[(M,D)]**: single-precision, allowable values: - 3.402823466E+38 to -1.175494351E-38, 0, and 1.175494351E-38 to 3.402823466E+38. M = display width, D = number of decimals.
 - **DOUBLE[(M,D)] / REAL[(M,D)]**: double-precision, allowable values: - 1.7976931348623157E+308 to -2.2250738585072014E-308, 0, and 2.2250738585072014E-308 to 1.7976931348623157E+308.
 - **DECIMAL[(M[,D])]**: fixed-point type. An unpacked floating-point number. Stored as string. Good for MONEY!
- Time and Date Types
 - **DATE** 1000-01-01 to 9999-12-31
 - **TIME** -838:59:59 to 838:59:59
 - **DATETIME** 1000-01-01 00:00:00 to 9999-12-31 23:59:59
 - **TIMESTAMP** 1970-01-01 00:00:00 - ~ 2037 Stored in UTC, converted to local
 - **YEAR[4]** 1901 to 2155 - A useful function in MySQL: NOW();

- How to store “Look Up”
 - Trade off between speed and space (and possibly integrity of data)

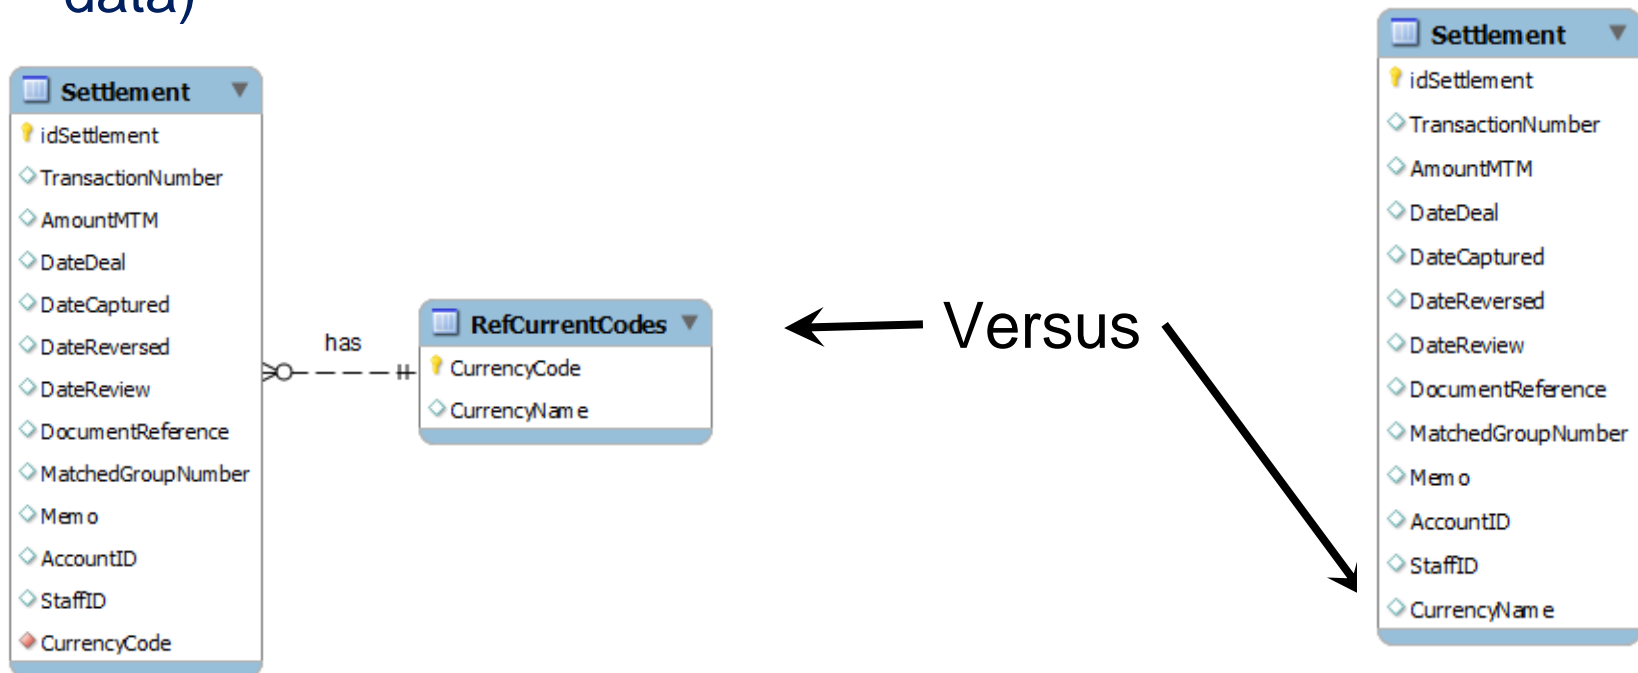


- Data field integrity (ensure fields only contain correct data)
- Handling missing data (concept of NULL data)

- To De-Normalise or Not (That is the Question)
 - Normalisation
 - A formal method used to validate and improve upon the logical design thus far (which attributes should be grouped together), before proceeding with the physical design.
 - Taught later in the semester
 - De-Normalisation
 - At physical design time need to decide how to implement the design – including removing some of the normalisation steps...
 - Benefits
 - Improved database performance
 - Costs
 - Wasted storage space
 - Data integrity / consistency threats




Database Development Lifecycle

REEDUCATION

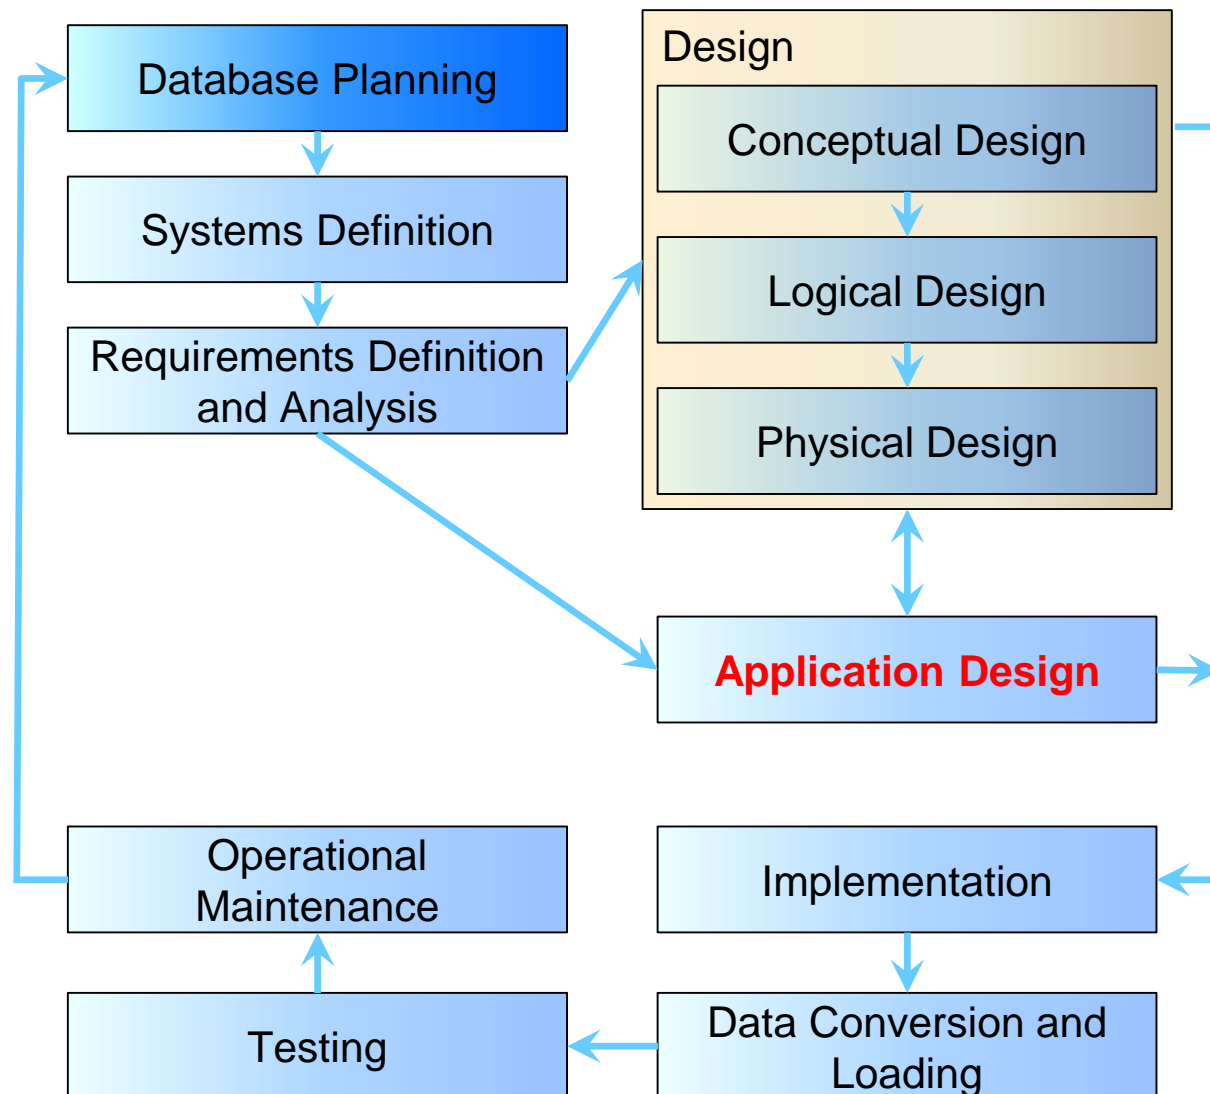


- Done in conjunction with design
- Design of the interface and application programs that use and process the database

Database Development Lifecycle

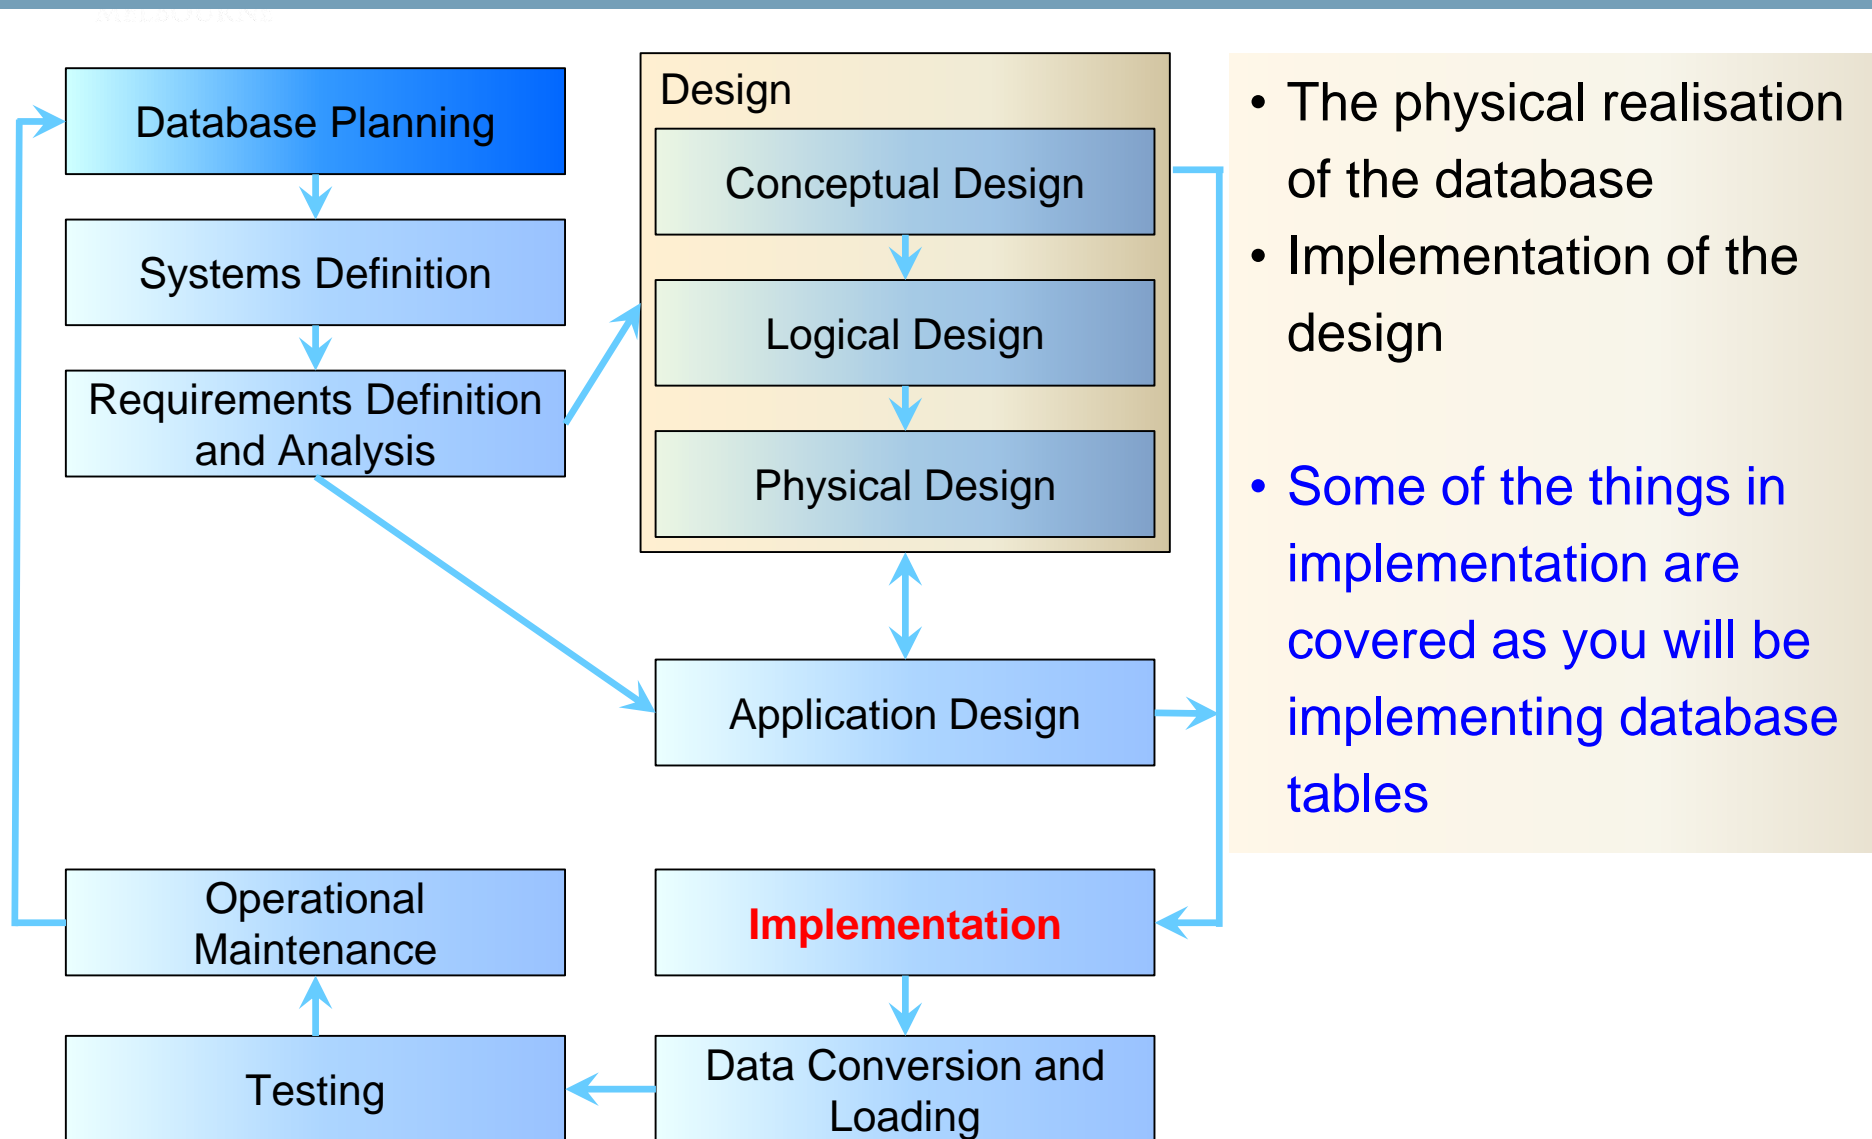





Database Development Lifecycle

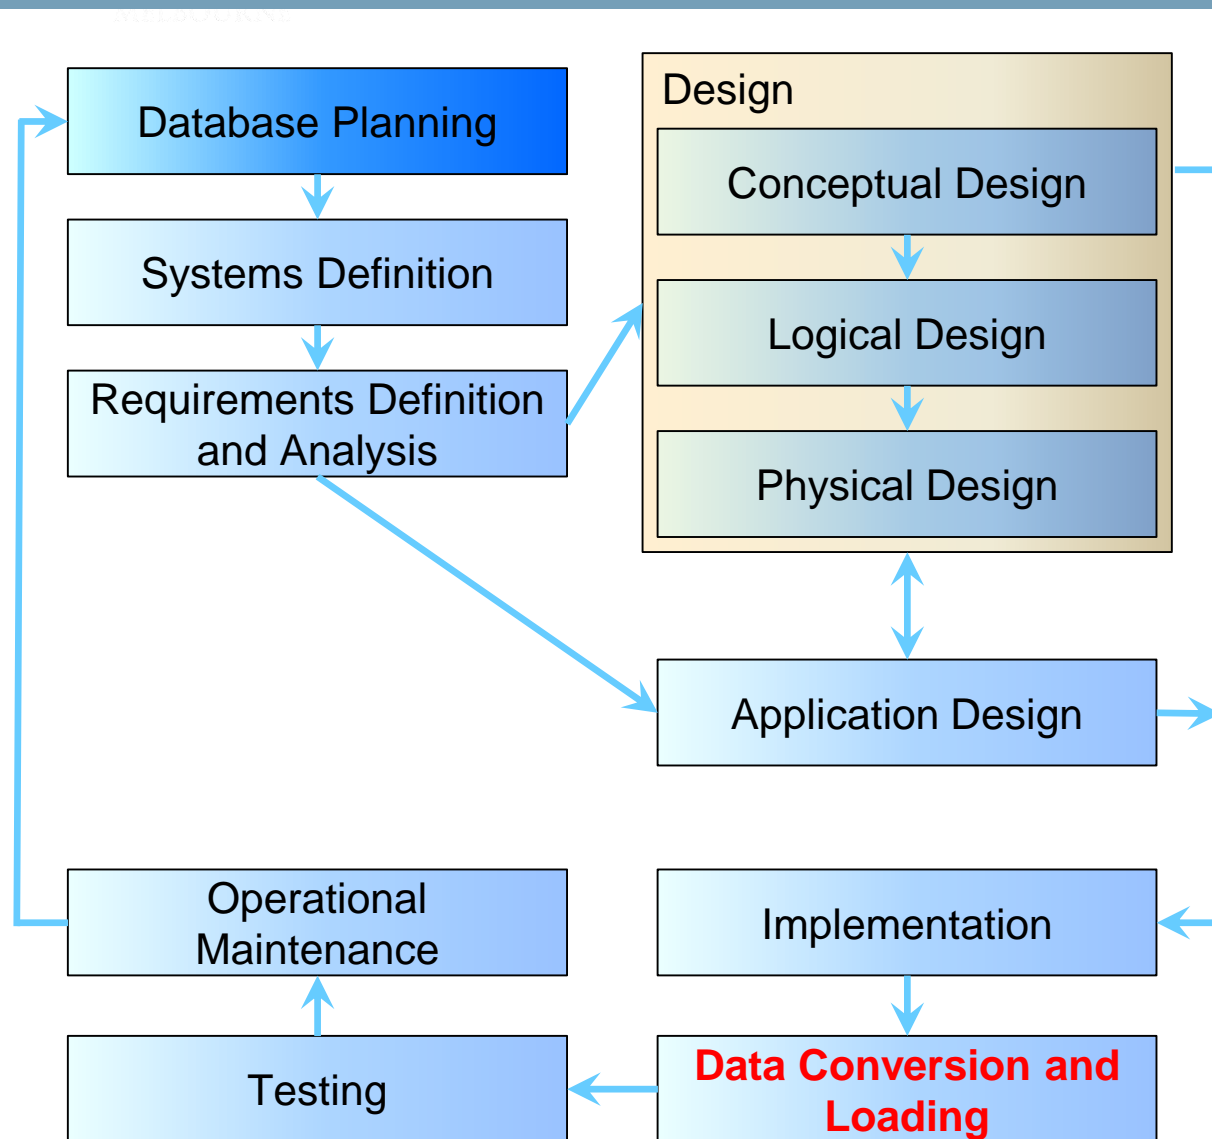


- Transfer existing data into the database
- Conversion from old systems
- Non trivial task
- We give you the data. In a real world situation you would have to do this step – very carefully, very time consuming... Lots of issues around this

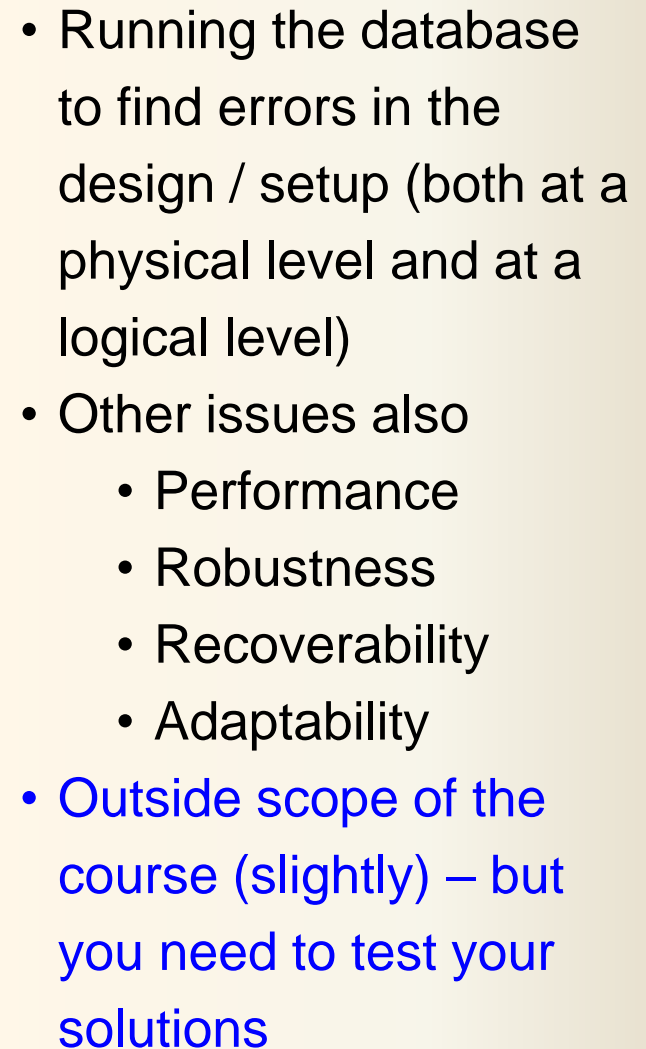

Database Development Lifecycle

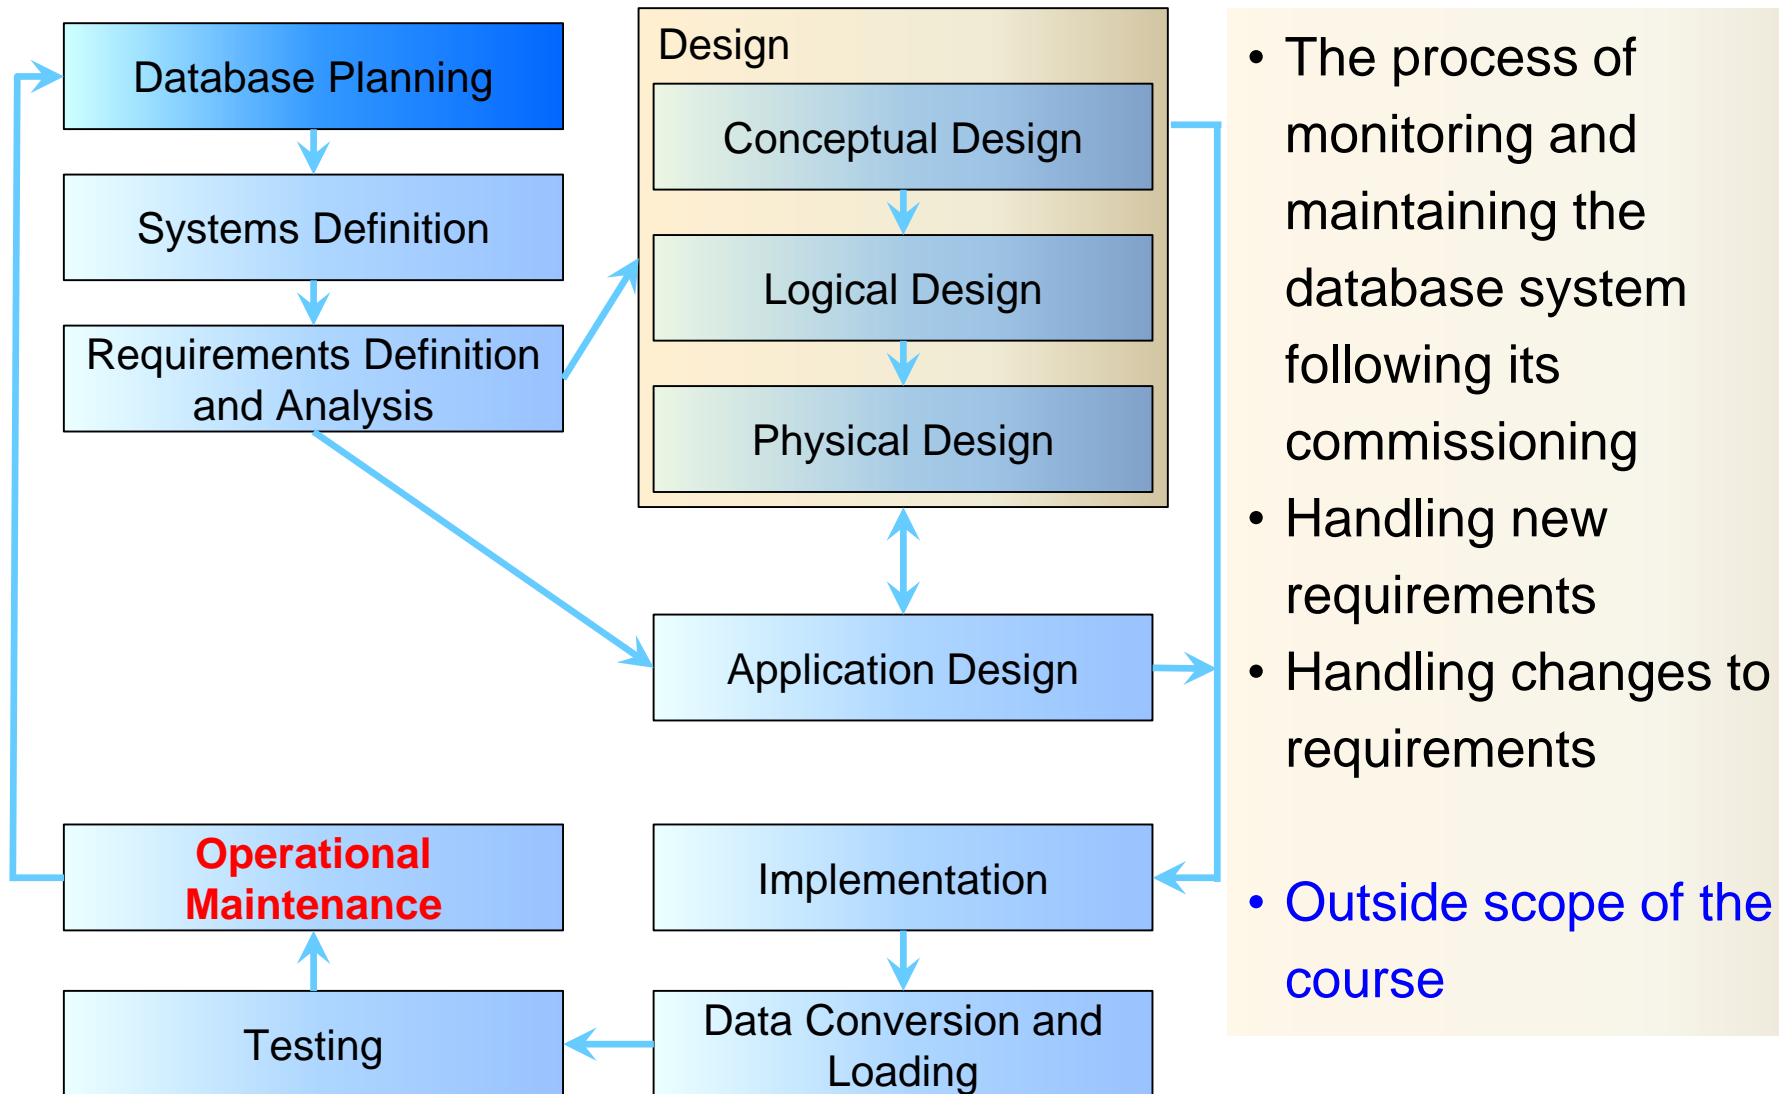

- Discussed the lifecycle of Database Development
- Showed detail of the Modelling stages

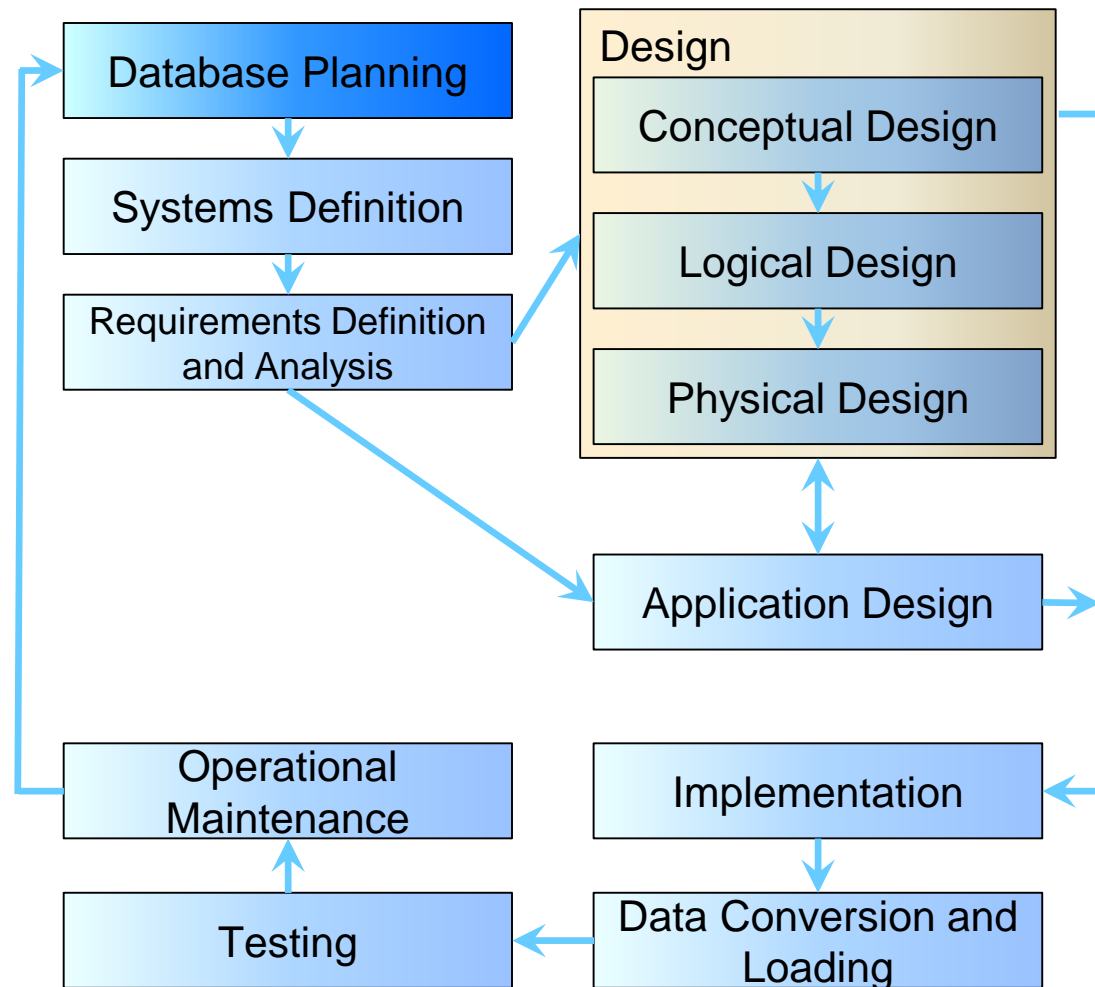



- Can you discuss the Database Development Lifecycle?
- What is done at each stage of Design?



- Introduction to Database Design
 - Conceptual design (ER diagrams)