Connection To Berlin

To establish the connection to Berlin from ***adetrmdb1/adetrmdb2***, please follow the below steps:

Below are the Instance details that was created in Berlin:

Informix instance : qlt4175_200tcp
Port : 1539
IP-Adress of Linus server : 46.108.91.142

Add the below entries in sqlhost file in both ***adetrmdb1/adetrmdb2*** servers:

cd $INFORMIXDIR/etc

vi sqlhosts
qlt4175_200tcp ontlitcp 46.108.91.142 1539

```
informix@adetrmdb2:/opt/informix/IDS/14.10.12/etc> cat sqlhosts
#**************************************************************************
#
#  Licensed Material - Property Of IBM
#
#  "Restricted Materials of IBM"
#
#  IBM Informix Dynamic Server
#  (c) Copyright IBM Corporation 1996, 2004 All rights reserved.
#
#   Title:      sqlhosts.demo
#   Description:
#              Default sqlhosts file for running demos.
#
#**************************************************************************
# IANA (www.iana.org) assigned port number/service names for Informix:
# sqlexec 9088/tcp
# sqlexec-ssl 9089/tcp

#if_rataktp1  onipcshm      adetrmas        shmcon

rataktp1_vm  ontlitcp    tramo-vm1    informix-tli
rataktp2_vm  ontlitcp    tramo-vm1    informix-tli2
rataktp4_vm  ontlitcp    tramo-vm1    informix-tli4
ratcalp2_vm  ontlitcp    tramo-vm1    informix-tli6

adevas6s  ontlitcp    adevas6s       informix-tli7
tramon   ontlitcp     adevas6s.dc-ratingen.de       informix-tli3

adetrtest_vm  ontlitcp    tramo-vm1    1542
prodtest_vm  ontlitcp    adetrmdb1.dc-ratingen.de       informix-tli7

qlt4175_200tcp ontlitcp 46.108.91.142 1539
```

Export the below parameter to set the environment:

export DBACCESS_COLUMNS=400

Establish the connection:

Do the dbaccess:

dbaccess connection qlt4175_200tcp enter select the database Connection established like below:


```
CONNECTION:  Connect  Disconnect  Exit
Connect to a database environment.

------------ subvent@qlt4175_200tcp ------------ Press CTRL-W for Help --------
```

To execute the commands in newly created instance in berlin, use below commands:

dbaccess connection qlt4175_200tcp enter sysadmin exit Query-Language New Fire below commands:

SELECT task("onstat"," -d") as cmd from sysmaster:sysdual

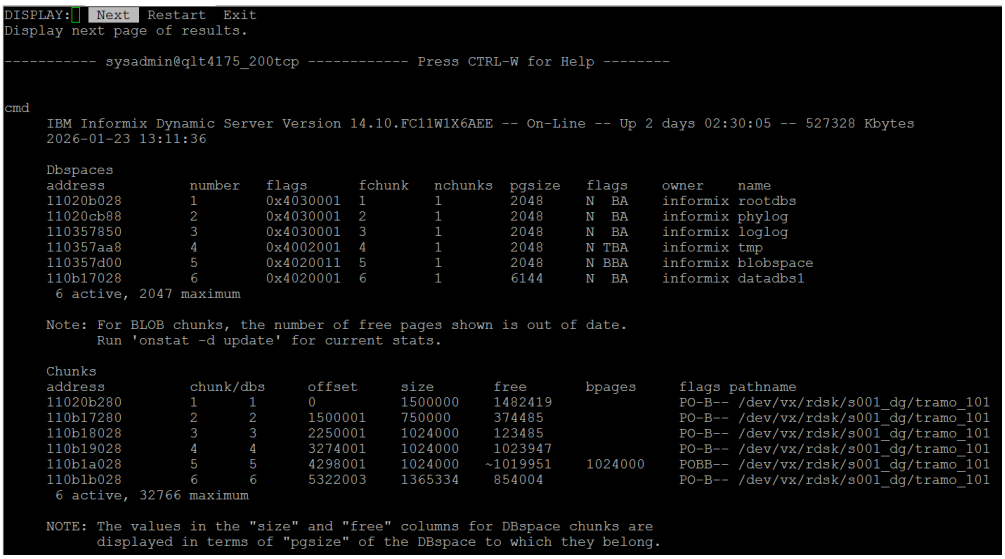

Here we are, the connection established successfully and we can see the information about Informix Instance that was created in Berlin.