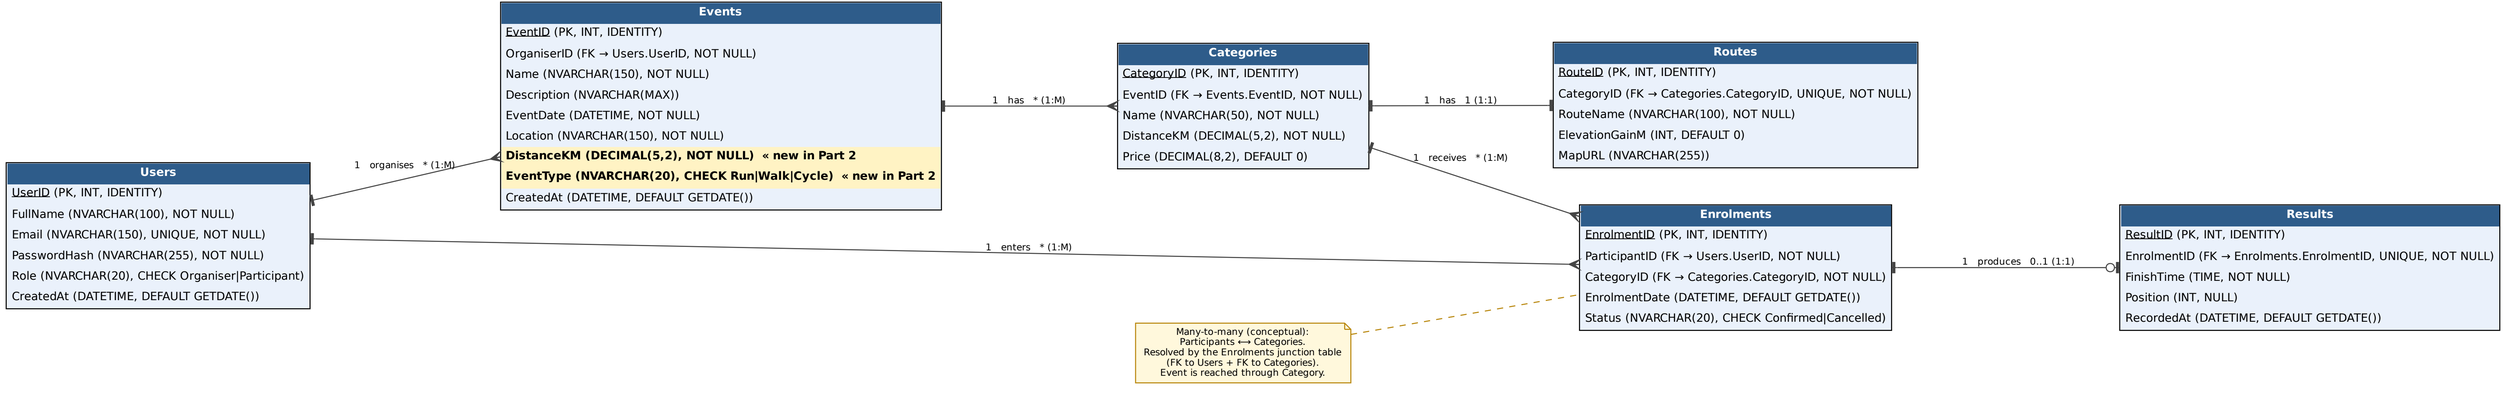
Users
UserID (PK, INT, IDENTITY)
FullName (NVARCHAR(100), NOT NULL)
Email (NVARCHAR(150), UNIQUE, NOT NULL)
PasswordHash (NVARCHAR(255), NOT NULL)
Role (NVARCHAR(20), CHECK Organiser|Participant)
CreatedAt (DATETIME, DEFAULT GETDATE())
Events
EventID (PK, INT, IDENTITY)
OrganiserID (FK → Users.UserID, NOT NULL)
Name (NVARCHAR(150), NOT NULL)
Description (NVARCHAR(MAX))
EventDate (DATETIME, NOT NULL)
Location (NVARCHAR(150), NOT NULL)
DistanceKM (DECIMAL(5,2), NOT NULL) « new in Part 2
EventType (NVARCHAR(20), CHECK Run|Walk|Cycle) « new in Part 2
CreatedAt (DATETIME, DEFAULT GETDATE())
Categories
CategoryID (PK, INT, IDENTITY)
EventID (FK → Events.EventID, NOT NULL)
Name (NVARCHAR(50), NOT NULL)
DistanceKM (DECIMAL(5,2), NOT NULL)
Price (DECIMAL(8,2), DEFAULT 0)
Routes
RouteID (PK, INT, IDENTITY)
CategoryID (FK → Categories.CategoryID, UNIQUE, NOT NULL)
RouteName (NVARCHAR(100), NOT NULL)
ElevationGainM (INT, DEFAULT 0)
MapURL (NVARCHAR(255))
Enrolments
EnrolmentID (PK, INT, IDENTITY)
ParticipantID (FK → Users.UserID, NOT NULL)
CategoryID (FK → Categories.CategoryID, NOT NULL)
EnrolmentDate (DATETIME, DEFAULT GETDATE())
Status (NVARCHAR(20), CHECK Confirmed|Cancelled)
Results
ResultID (PK, INT, IDENTITY)
EnrolmentID (FK → Enrolments.EnrolmentID, UNIQUE, NOT NULL)
FinishTime (TIME, NOT NULL)
Position (INT, NULL)
RecordedAt (DATETIME, DEFAULT GETDATE())
1 organises * (1:M)
1 has * (1:M)
1 has 1 (1:1)
1 receives * (1:M)
1 enters * (1:M)
1 produces 0..1 (1:1)
Many-to-many (conceptual):
Participants ⟷ Categories.
Resolved by the Enrolments junction table
(FK to Users + FK to Categories).
Event is reached through Category.