

**Practical 7**

**AIM : Naive Bayes' Classifier**

1. Implement the Naive Bayes' algorithm for classification.
2. Train a Naive Bayes' model using a given dataset and calculate class probabilities.
3. Evaluate the accuracy of the model on test data and analyze the results.

**CODE :**

```
import matplotlib.pyplot as plt
import seaborn as sns

from sklearn.model_selection import train_test_split
from sklearn.naive_bayes import GaussianNB
from sklearn.metrics import accuracy_score, classification_report, confusion_matrix

# Load Titanic dataset
data = sns.load_dataset("titanic")

# Select useful numerical features
data = data[
    ["survived", "pclass", "age", "sibsp", "parch", "fare"]
]

# Remove missing values
data = data.dropna()

# Features and target
X = data[
    ["pclass", "age", "sibsp", "parch", "fare"]
]

y = data["survived"]

print("Dataset Shape:", X.shape)
print("Classes:", ["Not Survived", "Survived"])

# Split dataset
X_train, X_test, y_train, y_test = train_test_split(
    X,
    y,
    test_size=0.20,
    random_state=42,
    stratify=y
)

# Create Naive Bayes model
```

```
nb_model = GaussianNB()

# Train model
nb_model.fit(X_train, y_train)

# Predict test data
y_pred = nb_model.predict(X_test)

# Calculate accuracy
accuracy = accuracy_score(y_test, y_pred)

# Calculate class probabilities
class_probabilities = nb_model.predict_proba(X_test)

# Display results
print("\nNaive Bayes Classifier")
print("-----")

print("\nTraining Samples:", len(X_train))
print("Testing Samples:", len(X_test))

print("\nAccuracy:", accuracy * 100, "%")

print("\nActual Values:")
print(y_test.values)

print("\nPredicted Values:")
print(y_pred)

print("\nClass Probabilities for First 10 Test Samples:")
print(class_probabilities[:10])

print("\nClassification Report:")
print(classification_report(
    y_test,
    y_pred,
    target_names=["Not Survived", "Survived"]
))

# Confusion Matrix
cm = confusion_matrix(y_test, y_pred)

plt.figure(figsize=(7, 5))
plt.imshow(cm)

plt.title("Naive Bayes Confusion Matrix")
plt.xlabel("Predicted Class")
plt.ylabel("Actual Class")

plt.colorbar()

plt.xticks(
```

```
        range(2),
        ["Not Survived", "Survived"]
    )

    plt.yticks(
        range(2),
        ["Not Survived", "Survived"]
    )

    for i in range(2):
        for j in range(2):
            plt.text(
                j,
                i,
                cm[i, j],
                ha="center",
                va="center"
            )

    plt.tight_layout()
    plt.show()

# Accuracy Graph
plt.figure(figsize=(6, 5))

plt.bar(
    ["Naive Bayes"],
    [accuracy * 100]
)

plt.ylabel("Accuracy (%)")
plt.title("Naive Bayes Classification Accuracy")
plt.ylim(0, 100)

plt.text(
    0,
    accuracy * 100 + 1,
    f"{accuracy * 100:.2f}%",
    ha="center"
)

plt.tight_layout()
plt.show()
```

# SHETH L.U.J. AND SIR M.V. COLLEGE OF ARTS, SCIENCE AND COMMERCE

## SUBJECT : ARTIFICIAL INTELLIGENCE

### OUTPUT :

```
PS C:\Users\DELL\OneDrive\Desktop\AI Practicals> python Practical7.py
Dataset Shape: (714, 5)
Classes: ['Not Survived', 'Survived']

Naive Bayes Classifier
-----
Training Samples: 571
Testing Samples: 143

Accuracy: 67.83216783216784 %

Actual Values:
[1 1 0 0 1 0 0 0 0 1 0 0 1 0 0 0 0 0 0 0 1 1 1 0 1 1 0 1 1 0 1 1 0 1 1
 1 0 0 0 0 0 1 0 0 1 0 1 1 1 0 1 0 0 1 0 0 0 0 1 1 0 0 0 0 1 1 0 1 1 0 0 0
 0 0 1 0 0 1 0 0 1 1 1 0 0 1 1 0 1 0 0 0 0 0 0 0 0 1 1 0 1 0 0 0 0 0 1 1 1 0
 0 0 0 1 1 1 1 1 0 1 1 1 0 0 0 0 1 0 0 1 0 0 0 0 1 1 0 0 0 1 0 0 0]

Predicted Values:
[0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 1 0 1 0 0 0 0 1 1 0 0 0 1 0 1 0 0 1 1
 0 0 0 0 0 0 1 0 0 1 1 0 1 0 0 0 0 1 0 0 0 0 0 1 1 0 0 0 1 0 1 1 0 1 0 1 0
 1 1 1 0 0 0 0 0 1 0 1 0 0 1 0 0 1 0 0 1 0 0 0 0 0 1 0 0 0 0 0 0 0 1 0 0 0
 0 0 0 1 0 0 0 0 0 0 1 0 0 0 1 0 0 0 0 0 1 0 0 1 1 0 0 0 0 0 0 1 0]

Class Probabilities for First 10 Test Samples:
[[0.85459333 0.14540667]
 [0.89337445 0.10662555]
 [0.86782057 0.13217943]
 [0.72579437 0.27420563]
 [0.87265531 0.12734469]
 [0.85454804 0.14545196]
 [0.85924986 0.14075014]
 [0.94818808 0.05181192]
 [0.7271622  0.2728378 ]
 [0.18652608 0.81347392]]
```

```
PS C:\Users\DELL\OneDrive\Desktop\AI Practicals> python Practical7.py
Predicted Values:
[0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 1 0 1 0 0 0 0 1 1 0 0 0 1 0 1 0 0 1 1
 0 0 0 0 0 0 1 0 0 1 1 0 1 0 0 0 0 1 0 0 0 0 0 1 1 0 0 0 1 0 1 1 0 1 0 1 0
 1 1 1 0 0 0 0 0 1 0 1 0 0 1 0 0 1 0 0 1 0 0 0 0 0 1 0 0 0 0 0 0 0 1 0 0 0
 0 0 0 1 0 0 0 0 0 0 1 0 0 0 1 0 0 0 0 0 1 0 0 1 1 0 0 0 0 0 0 0 1 0]

Class Probabilities for First 10 Test Samples:
[[0.85459333 0.14540667]
 [0.89337445 0.10662555]
 [0.86782057 0.13217943]
 [0.72579437 0.27420563]
 [0.87265531 0.12734469]
 [0.85454804 0.14545196]
 [0.85924986 0.14075014]
 [0.94818808 0.05181192]
 [0.7271622  0.2728378 ]
 [0.18652608 0.81347392]]

Classification Report:
precision    recall  f1-score   support

Not Survived    0.69    0.85    0.76         85
Survived        0.66    0.43    0.52         58


accuracy          0.67          0.64          0.68        143
macro avg         0.67          0.64          0.64        143
weighted avg      0.67          0.68          0.66        143
```

SUMEET YADAV

T125

SHETH L.U.J. AND SIR M.V. COLLEGE OF ARTS, SCIENCE AND COMMERCE  
SUBJECT : ARTIFICIAL INTELLIGECE

## Naive Bayes Confusion Matrix

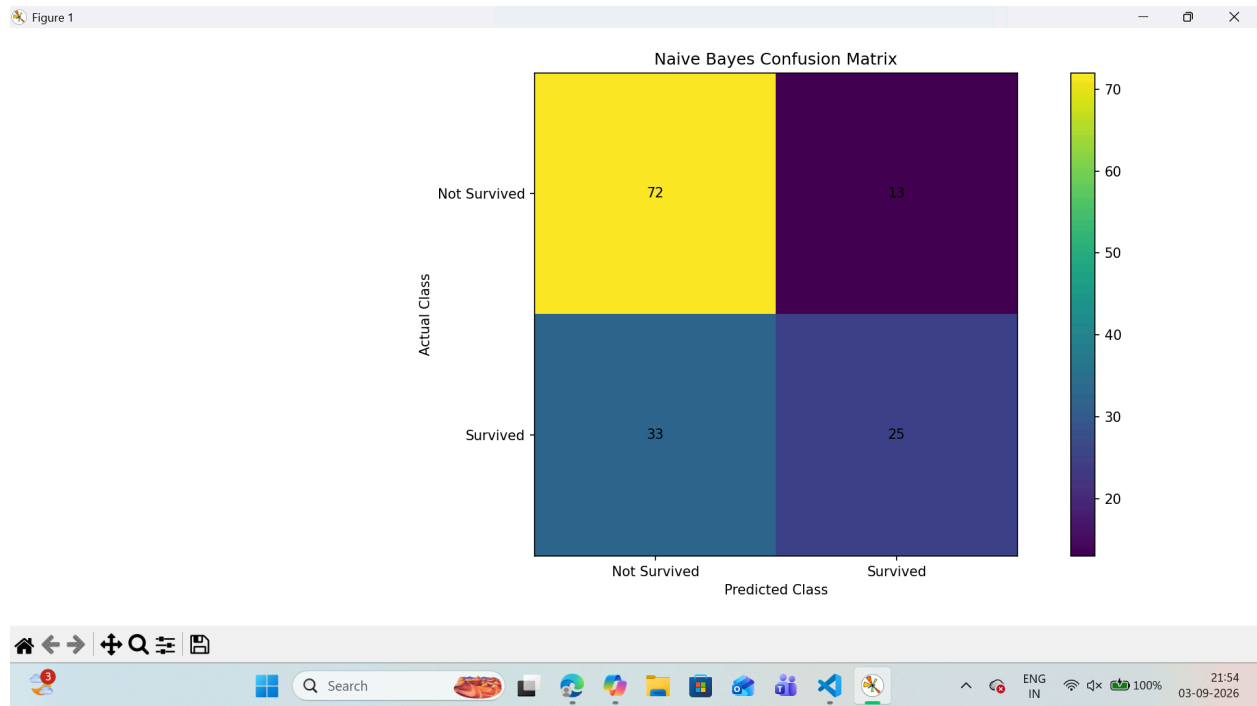

## Naive Bayes Classification Accuracy:

