


24. Nmap Timing & Performance

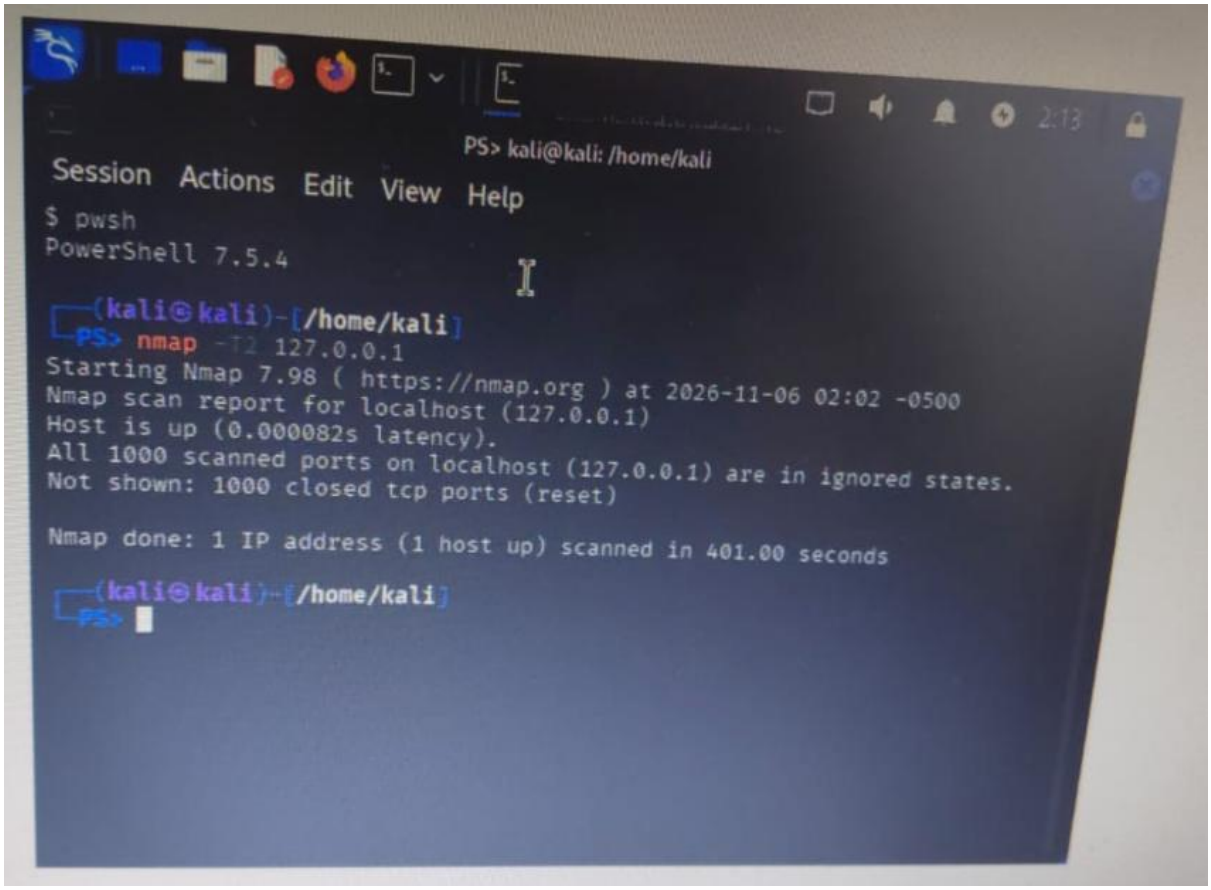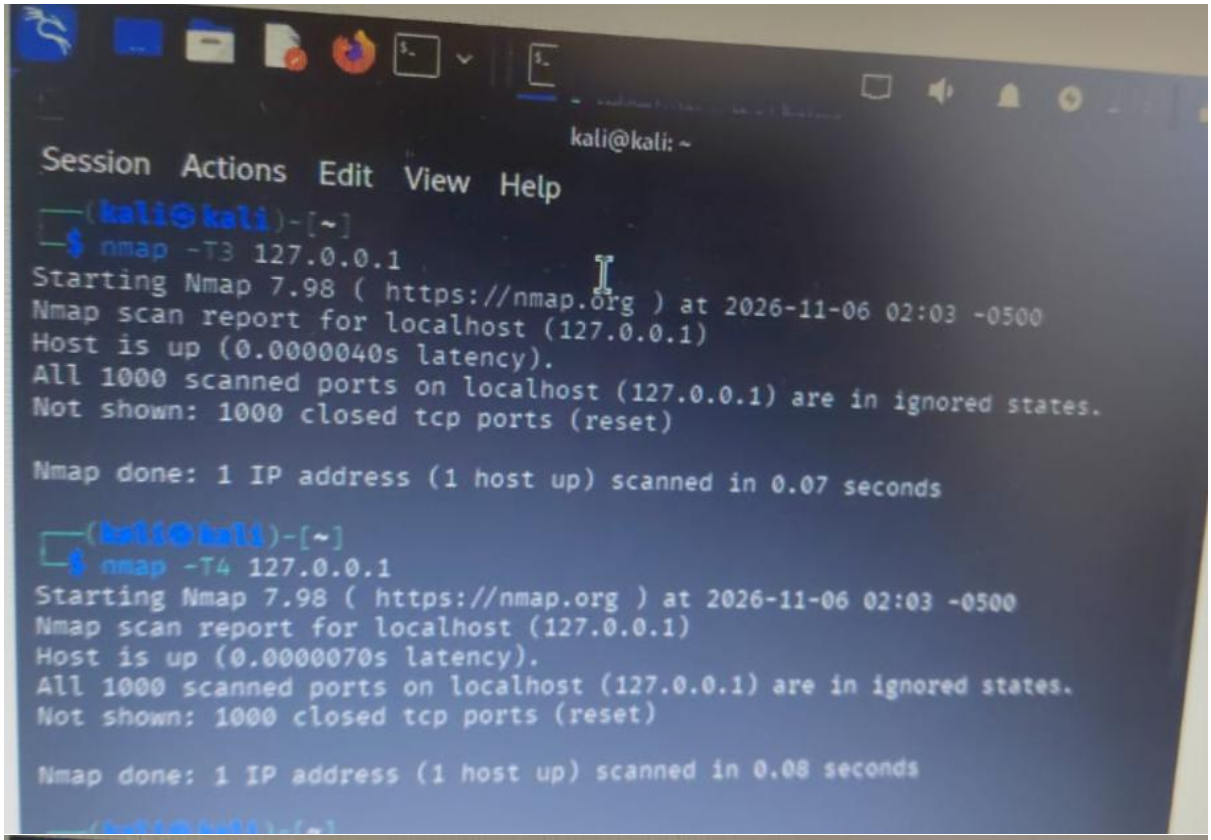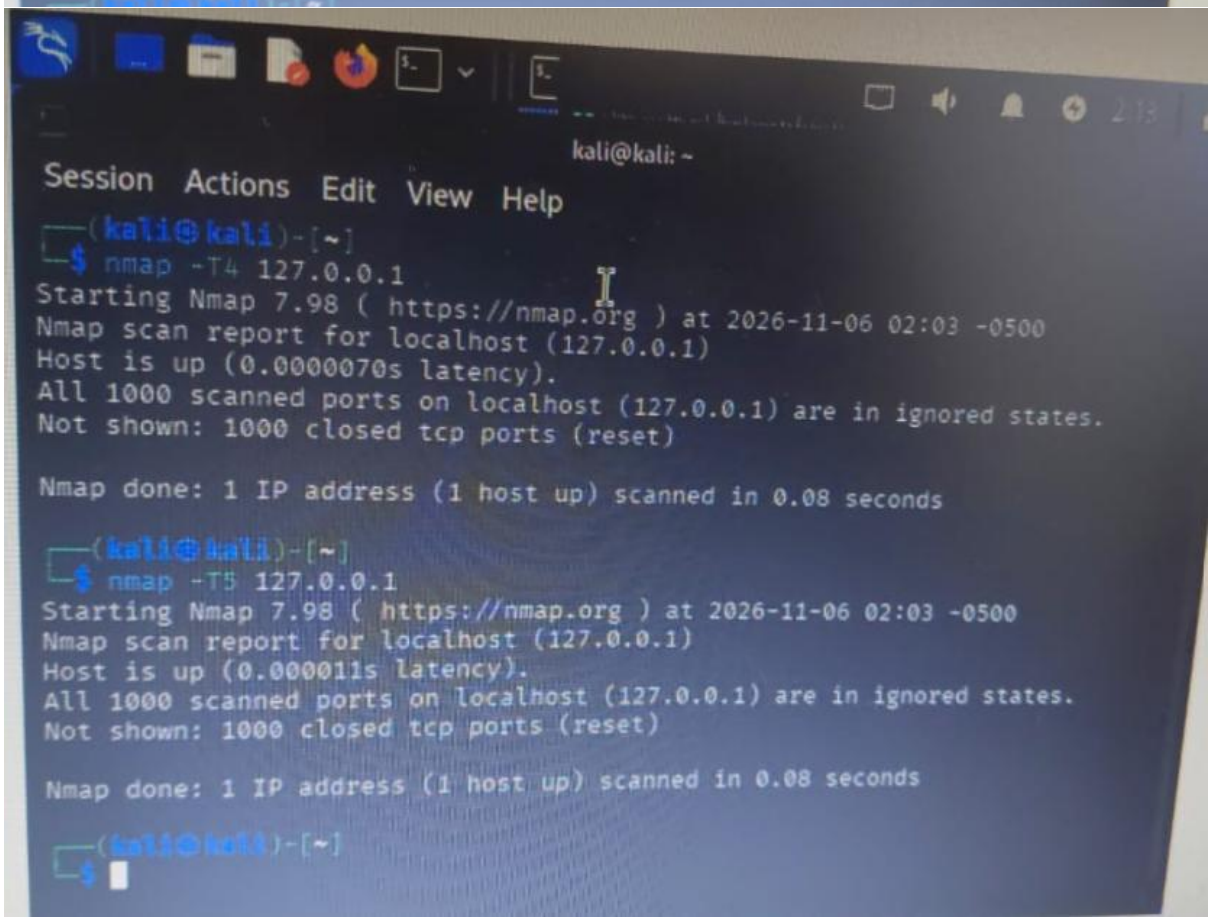


kali@kali: ~
Session Actions Edit View Help
(kali㉿kali)-[~]
$ nmap -T3 127.0.0.1
Starting Nmap 7.98 (https://nmap.org) at 2026-11-06 02:03 -0500
Nmap scan report for localhost (127.0.0.1)
Host is up (0.0000040s latency).
All 1000 scanned ports on localhost (127.0.0.1) are in ignored states.
Not shown: 1000 closed tcp ports (reset)
Nmap done: 1 IP address (1 host up) scanned in 0.07 seconds
(kali㉿kali)-[~]
$ nmap -T4 127.0.0.1
Starting Nmap 7.98 (https://nmap.org) at 2026-11-06 02:03 -0500
Nmap scan report for localhost (127.0.0.1)
Host is up (0.0000070s latency).
All 1000 scanned ports on localhost (127.0.0.1) are in ignored states.
Not shown: 1000 closed tcp ports (reset)
Nmap done: 1 IP address (1 host up) scanned in 0.08 seconds


kali@kali: ~
Session Actions Edit View Help
(kali㉿kali)-[~]
$ nmap -T4 127.0.0.1
Starting Nmap 7.98 (https://nmap.org) at 2026-11-06 02:03 -0500
Nmap scan report for localhost (127.0.0.1)
Host is up (0.0000070s latency).
All 1000 scanned ports on localhost (127.0.0.1) are in ignored states.
Not shown: 1000 closed tcp ports (reset)
Nmap done: 1 IP address (1 host up) scanned in 0.08 seconds
(kali㉿kali)-[~]
$ nmap -T5 127.0.0.1
Starting Nmap 7.98 (https://nmap.org) at 2026-11-06 02:03 -0500
Nmap scan report for localhost (127.0.0.1)
Host is up (0.000011s latency).
All 1000 scanned ports on localhost (127.0.0.1) are in ignored states.
Not shown: 1000 closed tcp ports (reset)
Nmap done: 1 IP address (1 host up) scanned in 0.08 seconds
(kali㉿kali)-[~]
$