

# Module Guide for Software Engineering

Team 21, Alkalytics  
Sumanya Gulati  
Kate Min  
Jennifer Ye  
Jason Tran

January 17, 2025

# 1 Revision History

Date	Version	Notes
11 January 2025	1.0	Added initial content for Rev 0.

**Note:** Please note that our team has adapted and extended this Module Guide document to include the contents of an MIS or other such document. For this reason, only one design document has been submitted.

## 2 Reference Material

This section records information for easy reference.

### 2.1 Abbreviations and Acronyms

symbol	description
AC	Anticipated Change
API	Application Programming Interface
CSV	Comma Separated Values
DAG	Directed Acyclic Graph
JSON	JavaScript Object Notation
KPI	Key Performance Indicator
M	Module
MG	Module Guide
MIS	Module Interface Specification
OS	Operating System
R	Requirement
SC	Scientific Computing
SRS	Software Requirements Specification
Software Engineering	Explanation of program name
UC	Unlikely Change
UI	User Interface
XML	Extensible Markup Language

### 2.2 Notation

# Contents

<b>1 Revision History</b>	i
<b>2 Reference Material</b>	ii
2.1 Abbreviations and Acronyms . . . . .	ii
2.2 Notation . . . . .	ii
<b>3 Introduction</b>	1
3.1 Summary . . . . .	1
3.2 Purpose . . . . .	1
<b>4 Anticipated and Unlikely Changes</b>	1
4.1 Anticipated Changes . . . . .	1
4.2 Unlikely Changes . . . . .	2
<b>5 Module Hierarchy</b>	3
<b>6 Module Decomposition</b>	5
6.1 Data Storage Module (M6) . . . . .	5
6.1.1 Uses . . . . .	6
6.1.2 Syntax . . . . .	6
6.1.3 Semantics . . . . .	6
6.2 Data Ingestion Module (M15) . . . . .	8
6.2.1 Uses . . . . .	8
6.2.2 Syntax . . . . .	8
6.2.3 Semantics . . . . .	8
6.3 Data Validation Module (M16) . . . . .	9
6.3.1 Uses . . . . .	9
6.3.2 Syntax . . . . .	9
6.3.3 Semantics . . . . .	9
6.4 Data Transformation Module (M17) . . . . .	9
6.4.1 Uses . . . . .	9
6.4.2 Syntax . . . . .	9
6.4.3 Semantics . . . . .	10
6.5 Machine Learning Module (M18) . . . . .	10
6.5.1 Uses . . . . .	10
6.5.2 Syntax . . . . .	10
6.5.3 Semantics . . . . .	10
6.6 Reporting Module (M19) . . . . .	11
6.6.1 Uses . . . . .	11
6.6.2 Syntax . . . . .	11
6.6.3 Semantics . . . . .	11
6.7 Notifications Module (M20) . . . . .	11
6.7.1 Uses . . . . .	11
6.7.2 Syntax . . . . .	11

6.7.3	Semantics . . . . .	12
6.8	UI Design Module (M11) . . . . .	12
6.8.1	Uses . . . . .	12
6.8.2	Syntax . . . . .	12
6.8.3	Semantics . . . . .	13
6.9	Visualization Module (M12) . . . . .	13
6.9.1	Uses . . . . .	13
6.9.2	Syntax . . . . .	13
6.9.3	Semantics . . . . .	14
6.10	User Management Module (M13) . . . . .	14
6.10.1	Uses . . . . .	14
6.10.2	Syntax . . . . .	14
6.10.3	Semantics . . . . .	14
<b>7</b>	<b>Traceability Matrix</b>	<b>16</b>
<b>8</b>	<b>Use Hierarchy Between Modules</b>	<b>17</b>
<b>9</b>	<b>User Interfaces</b>	<b>17</b>
<b>10</b>	<b>Timeline</b>	<b>20</b>

## List of Tables

1	Module Hierarchy . . . . .	4
2	Exported Access Programs for the Data Storage Module . . . . .	6
3	Exported Access Programs for the UI Design Module . . . . .	12
4	Exported Access Programs for the User Management Module . . . . .	15
5	Trace Between Requirements and Modules . . . . .	16
6	Trace Between Anticipated Changes and Modules . . . . .	17

## List of Figures

1	A DAG representing the implemented module hierarchy of Alkalytics. . . . .	5
2	Use hierarchy among modules . . . . .	17
3	The dashboard, or main home page of the application upon successful login.	18
4	The upload page for users to upload new experiment data files. . . . .	18
5	The main view page for querying and modifying data. . . . .	19
6	The main view page for generating and viewing visualizations of queried data.	19

## 3 Introduction

### 3.1 Summary

Alkalytics is a project designed to provide a scalable data management and analysis solution for ocean alkalinity research, in particular by streamlining the data organization, querying, and visualization processes. Through its various modules, the primary goal of the system is to offer a comprehensive solution for data ingestion, processing and reporting while maintaining adaptability to future changes.

Each functional component is developed as an independent module to encapsulate specific responsibilities, minimize dependencies, and promote information hiding. This modular approach, advocated for widely in the software sector, not only simplifies development and testing but also allows the system to accommodate evolving user requirements and technology upgrades.

### 3.2 Purpose

This Module Guide (MG) has been written to serve as a roadmap for the Alkalytics system, detailing its structure, functionality, and the relationships between its components. It provides clarity on how the system meets the requirements outlined in the [Software Requirements Specification \(SRS\)](#) and supports the following stakeholders:

- **New Developers:** To understand the modular architecture and ensure consistent implementation.
- **Maintainers:** To efficiently identify, update, or rewrite modules as needed.
- **Designers:** To validate the system's feasibility, flexibility, and alignment with project goals.

## 4 Anticipated and Unlikely Changes

This section identifies potential changes to the system and classifies them into two categories: anticipated changes (AC) as listed in section [4.1](#) and unlikely changes (UC) as listed in section [4.2](#). AC represent decisions that have been encapsulated within specific modules to minimize the impact of modifications while UC are those that, while possible, are fixed at the system architecture stage to reduce complexity.

### 4.1 Anticipated Changes

Anticipated changes are the source of the information that is to be hidden inside the modules. Ideally, changing one of the anticipated changes will only require changing the one module that hides the associated decision. These changes are encapsulated within specific modules to ensure the system's adaptability.

- AC1: Hardware Configuration** - The software may need to run on a different hardware platform like a server or on a cloud solution. Changes in hardware specifications will primarily affect the Hardware-Hiding Module, isolating their impact.
- AC2: Data Processing Algorithms** - Changes in analytical techniques along with advances in the machine learning space would introduce the need for new statistical models. These changes would be encapsulated in the Data Processing Module.
- AC3: User Interface (UI) Design** - Changes in analytical techniques along with advances in the machine learning space would introduce the need for new statistical models. These changes would be encapsulated in the Data Processing Module.
- AC4: Input Data Formats** - Currently, the system is expected to process data from Comma Separated Values (CSV) files only. In the future, however, modifications may have to be made to accommodate different file formats (such as JavaScript Object Notation (JSON), Extensible Markup Language (XML) etc) which will be handled by the Data Ingestion Module without impacting other parts of the system.
- AC5: Data Source Integration** - New data sources such as third-party application programming interfaces (APIs), Internet of Things (IoT) devices may have to be added in the future. The Data Ingestion Module will have to be redesigned to handle the integration of these new sources.
- AC6: Scaling Data Volume** - As the number of experiments increases, the system may need to handle increasing data volumes as usage grows. This is addressed by the Data Storage Module which has been designed to support database scalability strategies.
- AC7: User Roles and Permissions** - Future requirements may demand the addition of new user roles or changes to existing permissions. The Administration Module is designed to encapsulate these changes.
- AC8: Input Schema** - With an increase in the number of diverse experiments, the schema for the data inputs may have to be changed to support the addition or removal of new parameters. This is handled by the Data Ingestion Module.
- AC9: Notification Rules** - The conditions of triggering alerts or notifications may evolve, including but not limited to additional thresholds or new types of anomalies. These are handled by the Notifications Module without affecting other parts of the system.
- AC10: Analytical Metrics** - New metrics or Key Performance Indicators (KPIs) might be requested by stakeholders. This would involve adapting requirements by introducing new calculations or processing pipelines by modifying the Data Processing Module.

## 4.2 Unlikely Changes

Unlikely changes are those that are fixed early in the design to simplify the system and reduce complexity. These changes, if necessary, would have a significant impact on multiple modules.

**UC1: Input/Output Devices** - The system is designed to support file-based inputs. Changes can include additional input and/or output methods such as direct hardware interaction, would require substantial redesign across multiple modules.

**UC2: Core System Architecture** - The underlying architectural decisions, such as the use of modular decomposition and separation of concerns, are not expected to change. Altering these decisions would necessitate a complete overhaul of the system.

**UC3: Communication Protocols** - The communication methods between modules such as function calls, API interactions etc are fixed. Switching to a different communication protocol would impact the interfaces of all interacting modules.

**UC4: Programming Language** - The choice of programming languages is assumed to be fixed for the project. A change would require rewriting most of the system.

**UC5: Database Type** - The choice of storage solution (relational versus NoSQL databases, for example) is assumed to remain fixed. Switching to a different type of database would require reworking the Data Storage Module and parts of the Data Processing Module.

## 5 Module Hierarchy

This section provides an overview of the module design for the Alkalytics system. The modules are summarized in a hierarchy that follows the principle of information hiding. Each module encapsulates specific secrets, ensuring changes are localized and do not affect unrelated parts of the system. These modules are summarized in a hierarchy decomposed by secrets in table 1. This hierarchy represented as a directed acyclic graph, shown in ??, shows relationships between higher-level and lower-level modules, with the leaf modules representing those that will actually be implemented.

**M1:** Hardware-Hiding Module

**M2:** Behaviour-Hiding Module

**M3:** Interface Module

**M4:** Administration Module

**M5:** Data Acquisition Module

**M6:** Data Storage Module

**M7:** Data Retrieval Module

**M8:** Input Module

**M9:** Processing Module

**M10:** Output Module

- M11:** UI Design Module
- M12:** Visualization Module
- M13:** User Management Module
- M14:** Configuration Management Module
- M15:** Data Ingestion Module
- M16:** Data Validation Module
- M17:** Data Transformation Module
- M18:** Machine Learning Module
- M19:** Reporting Module
- M20:** Notification Module

Level 1	Level 2	Level 3
Hardware-Hiding Module	Data Acquisition Module Data Storage Module Data Retrieval Module	
Behaviour-Hiding Module	Input Module  Processing Module  Output Module	Data Ingestion Module Data Validation Module Data Transformation Module Machine Learning Module Reporting Module Notifications Module
Interface Module	UI Design Module Visualization Module	
Administration Module	User Management Module Configuration Management Module	

Table 1: Module Hierarchy

It must be noted that the blue nodes shown in figure 1 represent ‘container’ modules that are non-leaf modules and encompass other leaf nodes. The orange nodes represent leaf modules that will not be implemented for Revision 0 of Alkalytics and the green nodes represent leaf modules that will be implemented.

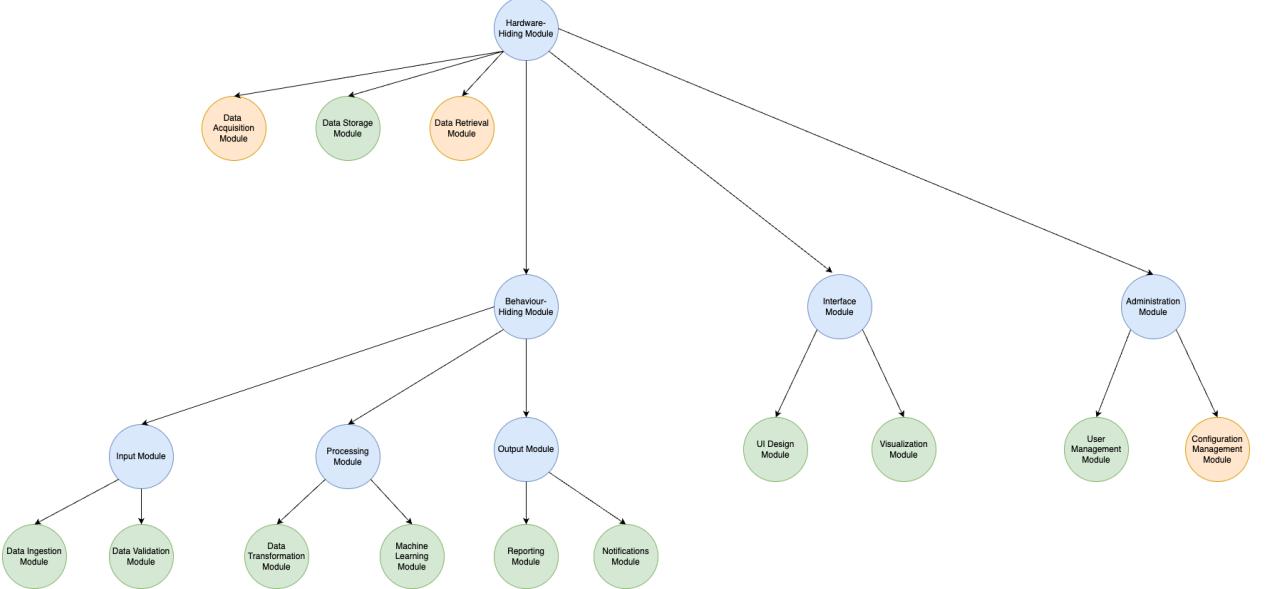


Figure 1: A DAG representing the implemented module hierarchy of Alkalytics.

## 6 Module Decomposition

Modules are decomposed according to the principle of “information hiding” proposed by Parnas et al. (1984). In this section, the *Secrets* field acts as a brief statement of the design decision hidden by the module. The *Services* field specifies *what* the module will do without documenting *how* to do it.

For each module, a suggestion for the implementing software is given under the *Implemented By* title. If the entry is *OS*, this means that the module is provided by the operating system or by standard programming language libraries. *Software Engineering* means the module will contain custom code and thus, will be implemented by the software engineering team.

Descriptions for non-leaf modules or the modules that will not be implemented for Revision 0 of Alkalytics have been provided below.

### 6.1 Data Storage Module (M6)

**Secrets:** The data structure and algorithm used to transform and store the received CSV files into the NoSQL database.

**Services:** This module handles the storage of system data by interacting with a NoSQL database. It transforms the data received as CSV files into a format suitable for storage in the database using a custom algorithm. This module also provides interfaces to query, retrieve, and update stored data.

**Implemented By:** Software Engineering

**Rationale:** This module abstracts the complexities of the NoSQL database structure, ensuring flexibility in storage design. It allows the system to accept data in the CSV format and transforms it for efficient storage in a schema-less NoSQL database. This ensures scalability and adaptability to handle large datasets with varying structures.

### 6.1.1 Uses

This module is used by the Behavior-Hiding and Interface Module to interact with the stored data. It provides mechanisms to transform the CSV data, and perform CRUD (Create, Read, Update, Delete) operations on the NoSQL database.

### 6.1.2 Syntax

#### Exported Constants and Access Programs:

`DB_CONNECTION_STRING`: The connection string for accessing the NoSQL database.

`MAX_BATCH_SIZE`: The maximum number of rows to process and upload in a single batch.

Name	In	Out	Exceptions
<code>initializeDB</code>	-	Boolean	Throws <code>DatabaseInitializationError</code> if the database connection fails.
<code>uploadData</code>	<code>filePath(string)</code>	Boolean	Throws <code>FileNotFoundException</code> if the file does not exist, or <code>DataTransformationError</code> if the Transformation fails.
<code>queryData</code>	<code>query(string)</code>	Data (JSON)	Throws <code>QueryExecutionError</code> if the query is invalid.
<code>updateData</code>	<code>query(string), updates</code>	Boolean	Throws <code>UpdateError</code> if the update fails.

Table 2: Exported Access Programs for the Data Storage Module

### 6.1.3 Semantics

#### State Variables:

`database`: Represents the connection to the NoSQL database.

`transformationRules`: Defines the set of rules for transforming CSV data to JSON format.

#### Environment Variables:

- Interacts with the local file system to access CSV files.

- Connects to an external NoSQL database, MongoDB to be specific.

### **Assumptions:**

- Assumes the NoSQL database is accessible and the credentials are correct.
- Assumes the received CSV files are well-formed and follow the expected schema.
- Assumes sufficient storage space is available in the database.

### **Access Routine Semantics:**

`initializeDB():`

- **Transition:** Establishes a connection to the NoSQL database and validates the connection.
- **Output:** Returns `True` if the database is successfully initialized. Throws a `DatabaseInitializationError` otherwise.

`uploadData(filePath: string):`

- **Transition:** Reads the specified CSV file, transforms the contents into JSON format using `transformationRules`, and uploads the transformed data to the database in batches.
- **Output:** Returns `True` if successful. Throws `FileNotFoundException` if the file does not exist or `DataTransformationError` if the transformation fails.

`queryData(query: string):`

- **Transition:** Executes the specified query on the database and retrieves the corresponding data.
- **Output:** Returns the retrieved data in JSON format. Throws `QueryExecutionError` if the query is invalid or fails.

`updateData(query: string, updates):`

- **Transition:** Applies the specified updates to the records matching the query in the database.
- **Output:** Returns `True` if successful. Throws `UpdateError` if the operation fails.

### **Local Function:**

```
transformCSVToJson(filePath: string):
```

- **Description:** Reads a CSV file and converts its rows into JSON objects based on `transformationRules`.
- **Output:** Returns a list of JSON objects or throws `DataTransformationError` if the transformation fails.

```
validateConnection():
```

- **Description:** Checks the connection to the NoSQL database and returns `True` if valid.

## 6.2 Data Ingestion Module (M15)

**Secrets:** The data structure and algorithm used to implement the virtual hardware.

**Services:** Serves as a virtual hardware used by the rest of the system. This module provides the interface between the hardware and the software. So, the system can use it to display outputs or to accept inputs.

**Implemented By:** OS

**Rationale:**

**6.2.1 Uses**

**6.2.2 Syntax**

**Exported Constants:**

**Exported Access Programs:**

**6.2.3 Semantics**

**State Variables:**

**Environment Variables:**

**Assumptions:**

**Access Routine Semantics:**

**Local Function:**

### **6.3 Data Validation Module (M16)**

**Secrets:** The data structure and algorithm used to implement the virtual hardware.

**Services:** Serves as a virtual hardware used by the rest of the system. This module provides the interface between the hardware and the software. So, the system can use it to display outputs or to accept inputs.

**Implemented By:** OS

**Rationale:**

**6.3.1 Uses**

**6.3.2 Syntax**

**Exported Constants:**

**Exported Access Programs:**

**6.3.3 Semantics**

**State Variables:**

**Environment Variables:**

**Assumptions:**

**Access Routine Semantics:**

**Local Function:**

### **6.4 Data Transformation Module (M17)**

**Secrets:** The data structure and algorithm used to implement the virtual hardware.

**Services:** Serves as a virtual hardware used by the rest of the system. This module provides the interface between the hardware and the software. So, the system can use it to display outputs or to accept inputs.

**Implemented By:** OS

**Rationale:**

**6.4.1 Uses**

**6.4.2 Syntax**

**Exported Constants:**

**Exported Access Programs:**

### **6.4.3 Semantics**

**State Variables:**

**Environment Variables:**

**Assumptions:**

**Access Routine Semantics:**

**Local Function:**

## **6.5 Machine Learning Module (M18)**

**Secrets:** The data structure and algorithm used to implement the virtual hardware.

**Services:** Serves as a virtual hardware used by the rest of the system. This module provides the interface between the hardware and the software. So, the system can use it to display outputs or to accept inputs.

**Implemented By:** OS

**Rationale:**

### **6.5.1 Uses**

### **6.5.2 Syntax**

**Exported Constants:**

**Exported Access Programs:**

### **6.5.3 Semantics**

**State Variables:**

**Environment Variables:**

**Assumptions:**

**Access Routine Semantics:**

**Local Function:**

## 6.6 Reporting Module (M19)

**Secrets:** The data structure and algorithm used to implement the virtual hardware.

**Services:** Serves as a virtual hardware used by the rest of the system. This module provides the interface between the hardware and the software. So, the system can use it to display outputs or to accept inputs.

**Implemented By:** OS

**Rationale:**

**6.6.1 Uses**

**6.6.2 Syntax**

**Exported Constants:**

**Exported Access Programs:**

**6.6.3 Semantics**

**State Variables:**

**Environment Variables:**

**Assumptions:**

**Access Routine Semantics:**

**Local Function:**

## 6.7 Notifications Module (M20)

**Secrets:** The data structure and algorithm used to implement the virtual hardware.

**Services:** Serves as a virtual hardware used by the rest of the system. This module provides the interface between the hardware and the software. So, the system can use it to display outputs or to accept inputs.

**Implemented By:** OS

**Rationale:**

**6.7.1 Uses**

**6.7.2 Syntax**

**Exported Constants:**

**Exported Access Programs:**

### 6.7.3 Semantics

**State Variables:**

**Environment Variables:**

**Assumptions:**

**Access Routine Semantics:**

**Local Function:**

## 6.8 UI Design Module (M11)

**Secrets:** The design specifications and UI components that make up the overall appearance and user experience of the system.

**Services:** This module is responsible for the design and layout of the user interface.

**Implemented By:** Software Engineering

**Rationale:** The UI Design Module abstracts the presentation of data and interactions with the user.

### 6.8.1 Uses

This module is used by the Interface Module to manage the display of data and user-related actions, ensuring that the design is consistent and offers a positive user experience.

### 6.8.2 Syntax

**Exported Constants and Access Programs:**

Name	In	Out	Exceptions
renderUI	[components]	-	Throws <code>RenderError</code> if UI rendering fails.
updateUI	component	-	Throws <code>UpdateError</code> if UI components cannot be updated.

Table 3: Exported Access Programs for the UI Design Module

### 6.8.3 Semantics

**State Variables:** N/A

**Environment Variables:**

- Interacts with the frontend framework (i.e., React) for rendering UI components.

**Assumptions:**

- Assumes the frontend framework is correctly set up for rendering UI components.

**Access Routine Semantics:**

`renderUI():`

- **Transition:** Renders the components to display on the user interface.
- **Output:** The rendered interface. Throws `RenderError` if the UI rendering fails.

`updateUI():`

- **Transition:** Updates specific components of the UI based on route changes or user interactions.
- **Output:** The updated UI. Throws `UpdateError` if updates fail.

**Local Function:** N/A

## 6.9 Visualization Module (M12)

**Secrets:** The data structure and algorithm used to implement the virtual hardware.

**Services:** Serves as a virtual hardware used by the rest of the system. This module provides the interface between the hardware and the software. So, the system can use it to display outputs or to accept inputs.

**Implemented By:** OS

**Rationale:**

### 6.9.1 Uses

### 6.9.2 Syntax

**Exported Constants:**

**Exported Access Programs:**

### 6.9.3 Semantics

**State Variables:**

**Environment Variables:**

**Assumptions:**

**Access Routine Semantics:**

**Local Function:**

## 6.10 User Management Module (M13)

**Secrets:** The data structure and algorithm used to store and manage user credentials.

**Services:** This module manages the creation, retrieval, and validation of user accounts. It interacts with the database to store user information and also provides interfaces for user authentication and Role-Based Access Control (RBAC).

**Implemented By:** Software Engineering

**Rationale:** This module abstracts the management of user data, ensuring that sensitive information, such as passwords, is hashed and not stored in plain-text. It also enables the management of user access levels within the application.

### 6.10.1 Uses

This module interacts with the Hardware-Hiding Module for user credential storage and verification.

### 6.10.2 Syntax

**Exported Constants and Access Programs:**

`SESSION_COOKIE`: The id of the session cookie used to maintain user sessions.

### 6.10.3 Semantics

**State Variables:**

`usersCollection`: Represents the MongoDB collection storing user data.

**Environment Variables:**

N/A

**Assumptions:**

- Assumes passwords are securely hashed before being stored.

Name	In	Out	Exceptions
createUser	email(string), pass- word(string), role(string)	dict	Throws <code>UserAlreadyExistsError</code> if the user already exists.
validateUser	email(string), pass- word(string)	dict	Throws <code>UserNotFoundError</code> if the user does not exist or <code>IncorrectPasswordError</code> if the password is incorrect.
getUserAndRole	email(string)	dict	Throws <code>UserNotFoundError</code> if the user does not exist.

Table 4: Exported Access Programs for the User Management Module

- Assumes emails are unique across the system.

#### Access Routine Semantics:

`createUser(email: string, password: string, role: string):`

- **Transition:** Checks if a user with the given email already exists. If not, hashes the password, creates a new user, and stores the new user in the database.
- **Output:** Returns a dictionary with user email and role if successful. Throws `UserAlreadyExistsError` if the user already exists.

`validateUser(email: string, password: string):`

- **Transition:** Attempts to find user by email and compares hashed input password with the stored hash.
- **Output:** Returns a dictionary with user email and role if the password is valid. Throws `UserNotFoundError` if the user doesn't exist or `IncorrectPasswordError` if the password is incorrect.

`getUserAndRole(email: string):`

- **Transition:** Retrieves user with the specified email and corresponding role.
- **Output:** Returns a dictionary with user email and role if the user exists. Throws `UserNotFoundError` if the user does not exist.

#### Local Function:

`hashPassword(password: string):`

- **Description:** Hashes the given password using `bcrypt` and a randomly-generated salt for secure storage.
- **Output:** Returns the hashed password string.

## 7 Traceability Matrix

This section shows two traceability matrices: between the modules and the requirements and between the modules and the anticipated changes.

Req.	Modules
R1	M1, M??, M??, M??
R2	M??, M??
R3	M??
R4	M??, M??
R5	M??, M??, M??, M??, M??, M??
R6	M??, M??, M??, M??, M??, M??
R7	M??, M??, M??, M??, M??
R8	M??, M??, M??, M??, M??
R9	M??
R10	M??, M??, M??
R11	M??, M??, M??, M??

Table 5: Trace Between Requirements and Modules

<b>AC</b>	<b>Modules</b>
AC1	M1
AC2	M9
AC4	M9
AC3	M3
AC4	M3
AC5	M3
AC6	M6
AC7	M4
AC8	M3
AC9	M20
AC10	M9

Table 6: Trace Between Anticipated Changes and Modules

## 8 Use Hierarchy Between Modules

In this section, the uses hierarchy between modules is provided. Parnas (1978) said of two programs A and B that A *uses* B if correct execution of B may be necessary for A to complete the task described in its specification. That is, A *uses* B if there exist situations in which the correct functioning of A depends upon the availability of a correct implementation of B. Figure 2 illustrates the use relation between the modules. It can be seen that the graph is a directed acyclic graph (DAG). Each level of the hierarchy offers a testable and usable subset of the system, and modules in the higher level of the hierarchy are essentially simpler because they use modules from the lower levels.

[The uses relation is not a data flow diagram. In the code there will often be an import statement in module A when it directly uses module B. Module B provides the services that module A needs. The code for module A needs to be able to see these services (hence the import statement). Since the uses relation is transitive, there is a use relation without an import, but the arrows in the diagram typically correspond to the presence of import statement. —SS]

[If module A uses module B, the arrow is directed from A to B. —SS]

Figure 2: Use hierarchy among modules

## 9 User Interfaces

The following figures encompass key design mock-ups of the application interface, created using Figma. These mock-ups are merely wireframes and do not represent the final interface design of the application.

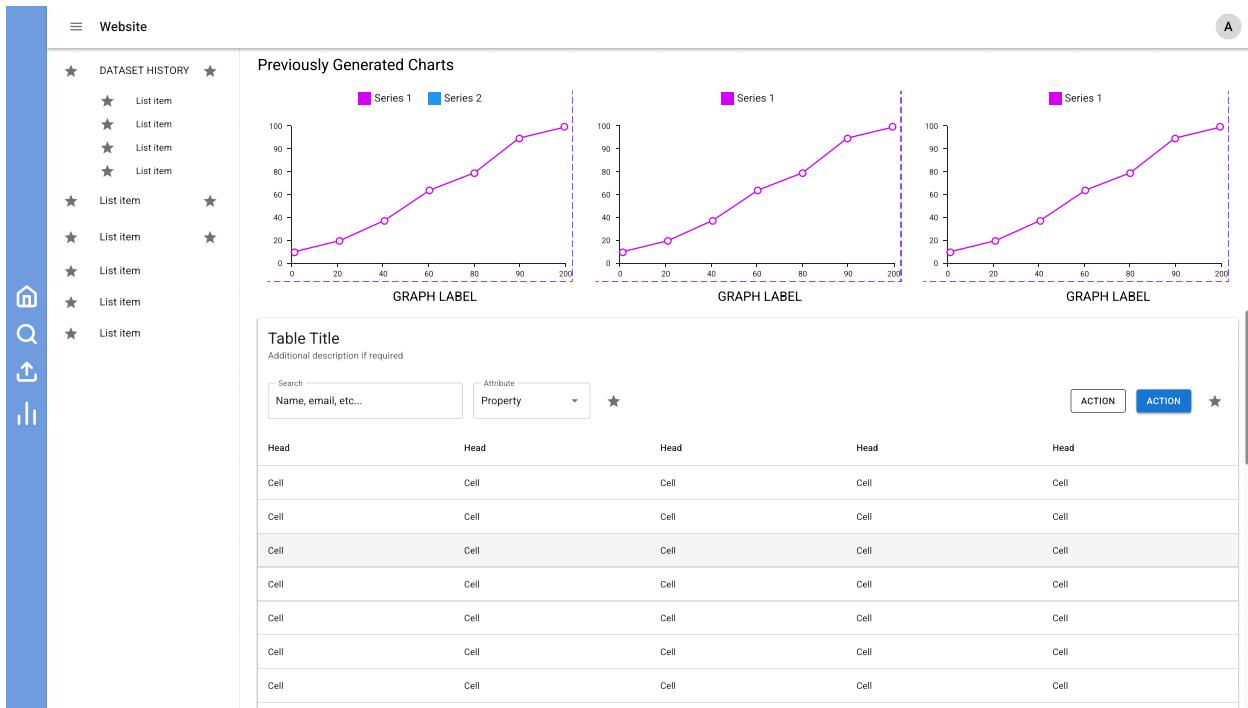


Figure 3: The dashboard, or main home page of the application upon successful login.

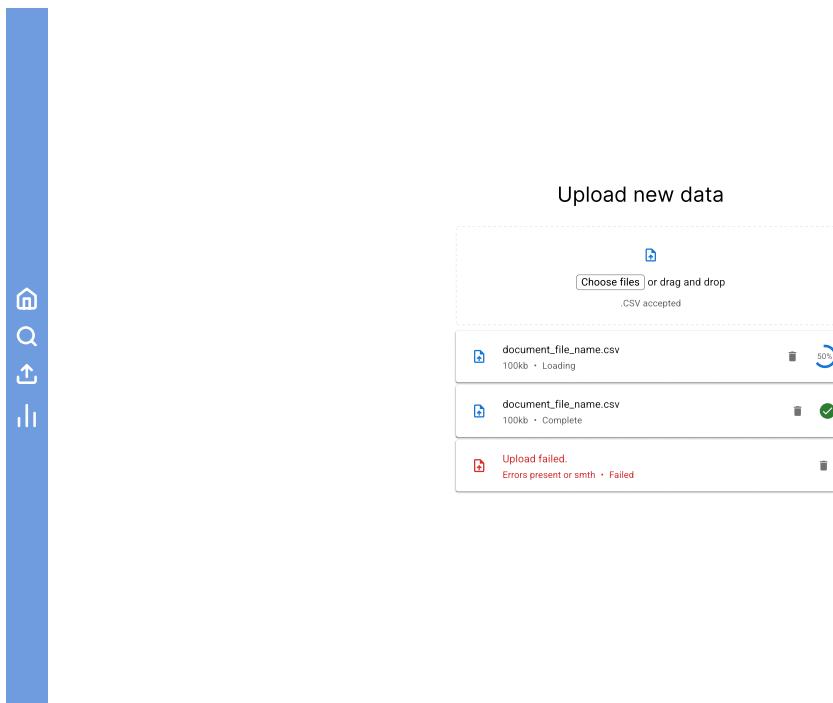


Figure 4: The upload page for users to upload new experiment data files.

Figure 5: The main view page for querying and modifying data.

★ GRAPH HISTORY? ★

★ List item  
★ List item  
★ List item  
★ List item

★ List item ★  
★ List item ★  
★ List item  
★ List item  
★ List item

SELECT:  
PARAMETERS TO COMPARE  
RANGE OF EXPERIMENTS  
TYPE OF GRAPH

■ Series 1 ■ Series 2

ZOOM/PIN Description

100  
90  
80  
70  
60  
50  
40  
30  
20  
10  
0

0 20 40 60 80 100 120 140 160 180 200

CUSTOMIZATION BAR OR SMTH  
AXES | LABELS/RANGE | LEGEND | COLOURS

DOWNLOAD SVG?

Figure 6: The main view page for generating and viewing visualizations of queried data.

## 10 Timeline

[Schedule of tasks and who is responsible —SS]

[You can point to GitHub if this information is included there —SS]

## References

David L. Parnas. Designing software for ease of extension and contraction. In *ICSE '78: Proceedings of the 3rd international conference on Software engineering*, pages 264–277, Piscataway, NJ, USA, 1978. IEEE Press. ISBN none.

D.L. Parnas, P.C. Clement, and D. M. Weiss. The modular structure of complex systems. In *International Conference on Software Engineering*, pages 408–419, 1984.