Practical 5:

Array 1


```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
</head>
<body>
    <script>
        let numbers = [3,4,6,8,10];

        document.write("Original Array: " +numbers);
    </script>
</body>
</html>
```



Array 2


```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
</head>
<body>
    <script>
        let name = ["Anushka","Renuka","Sumira","Sneha"];
        document.write("Names: "+name);
    </script>
</body>
</html>
```

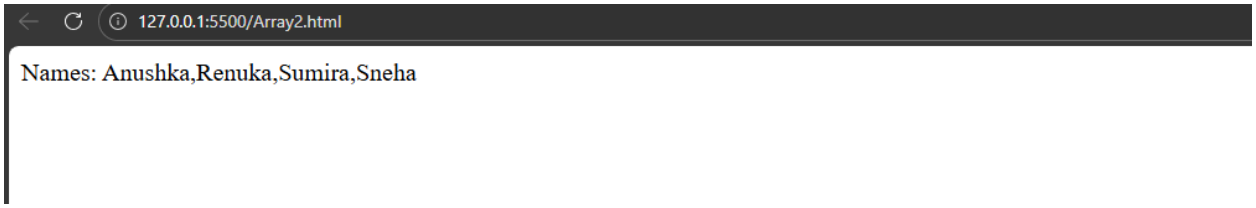

Array 3

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
</head>
<body>
    <script>
        let fruits = ["Apple", "Banana", "Mango", "Orange"];


        document.write("First fruit: " + fruits[0] + "<br>");
        document.write("Second fruit: " + fruits[1] + "<br>");
        document.write("Third fruit: " + fruits[2] + "<br>");
        document.write("Fourth fruit: " + fruits[3]);
    </script>
</body>
</html>
```

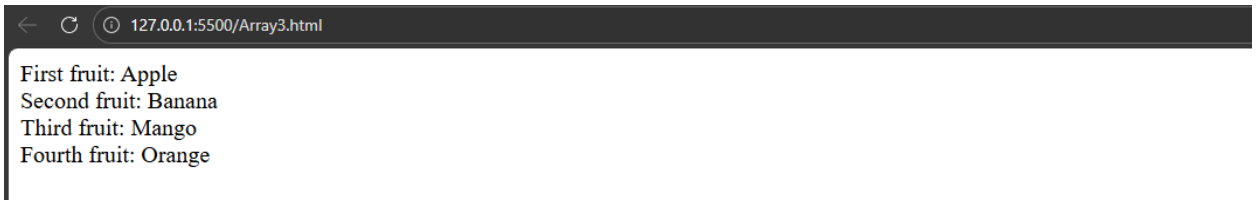

Array 4:


```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=] initial-scale=1.0">
    <title>Document</title>
```

```
</head>
<body>
    <script>
        let fruits =["apple","mango","banana"];
        fruits.push("Orange");
        document.write("fruits:" +fruits);
    </script>
</body>
</html>
```

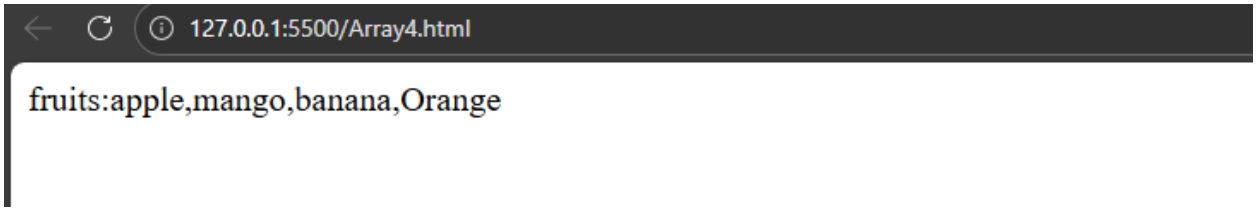

Array 5:

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
</head>
<body>
    <script>
        let colors = ["red","green","black"];
        document.write("Colours "+colors+"<br>");
        document.write("Number of colors: "+colors.length);
    </script>
</body>
</html>
```

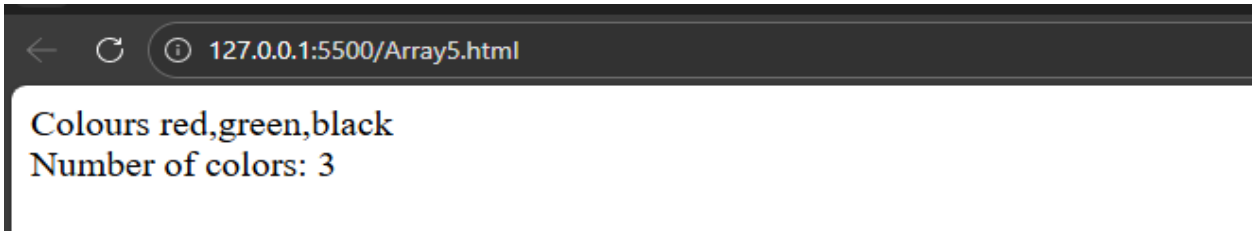

Array 6:

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
</head>
<body>
    <h2>Using map() Method</h2>
    <script>
        let marks =[10,20,30,40];
        let newMarks = marks.map(function(mark){
            return mark*2;
        });
        document.write("Original Marks: "+marks+"<br>");
        document.write("New Marks:"+newMarks);
    </script>
</body>
</html>
```



Using map() Method

Original Marks: 10,20,30,40
New Marks:20,40,60,80


Array 7:

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
</head>
<body>
    <h2>Using reduce() Method</h2>
    <script>
```

```
        let marks = [90, 80, 70, 60, 50];

        let total = marks.reduce(function(sum, mark){
            return sum + mark;
        }, 0);

        document.write("Marks: " + marks + "<br>");
        document.write("Total Marks: " + total);
    </script>
</body>
</html>
```

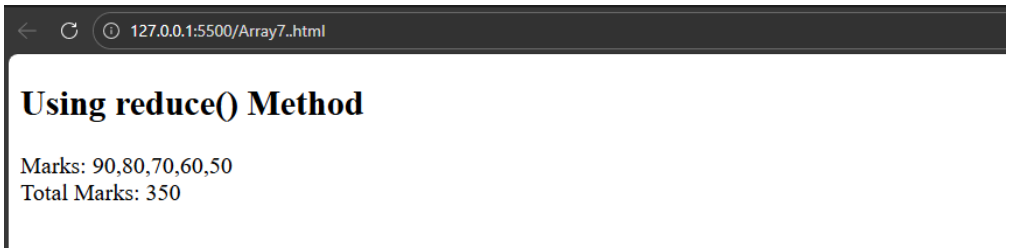

Array 8:


```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
</head>
<body>
    <H2>Movies Playlist</H2>
    <script>
        let movies = ["Avengers","Inception"];
        document.write("Original Movies: "+movies+"<br><br>");

        movies.push("Titanic");
        document.write("After adding movie: "+movies+"<br>");

        movies.pop();
        document.write("After removing movie: "+movies+"<br>")

        document.write("Total movies: "+movies.length);
```

```
    </script>
</body>
</html>
```

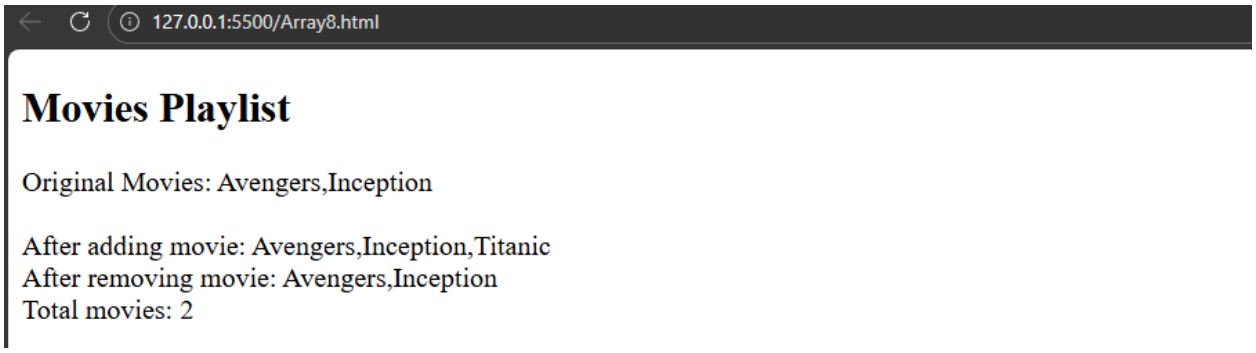

Sample Program:

```
<!DOCTYPE html>
<html>
<head>
    <title>Student Details</title>
</head>
<body>

    <h2>Student Information</h2>

    <label>Name:</label>
    <input type="text" id="name"><br><br>

    <label>Roll No:</label>
    <input type="number" id="roll"><br><br>

    <label>Section:</label>
    <input type="text" id="section"><br><br>

    <button onclick="display()">Submit</button>

    <h3 id="result"></h3>

    <script>
        function display() {
            let studentName = document.getElementById("name").value;
```

```
            let studentRoll = document.getElementById("roll").value;
            let studentSection = document.getElementById("section").value;

            document.getElementById("result").innerHTML =
                "Submitted Details:<br>" +
                "Name: " + studentName + "<br>" +
                "Roll No: " + studentRoll + "<br>" +
                "Section: " + studentSection;
        }
    </script>
</body>
</html>
```

