



Swagger Task which I created API to perform different tasks

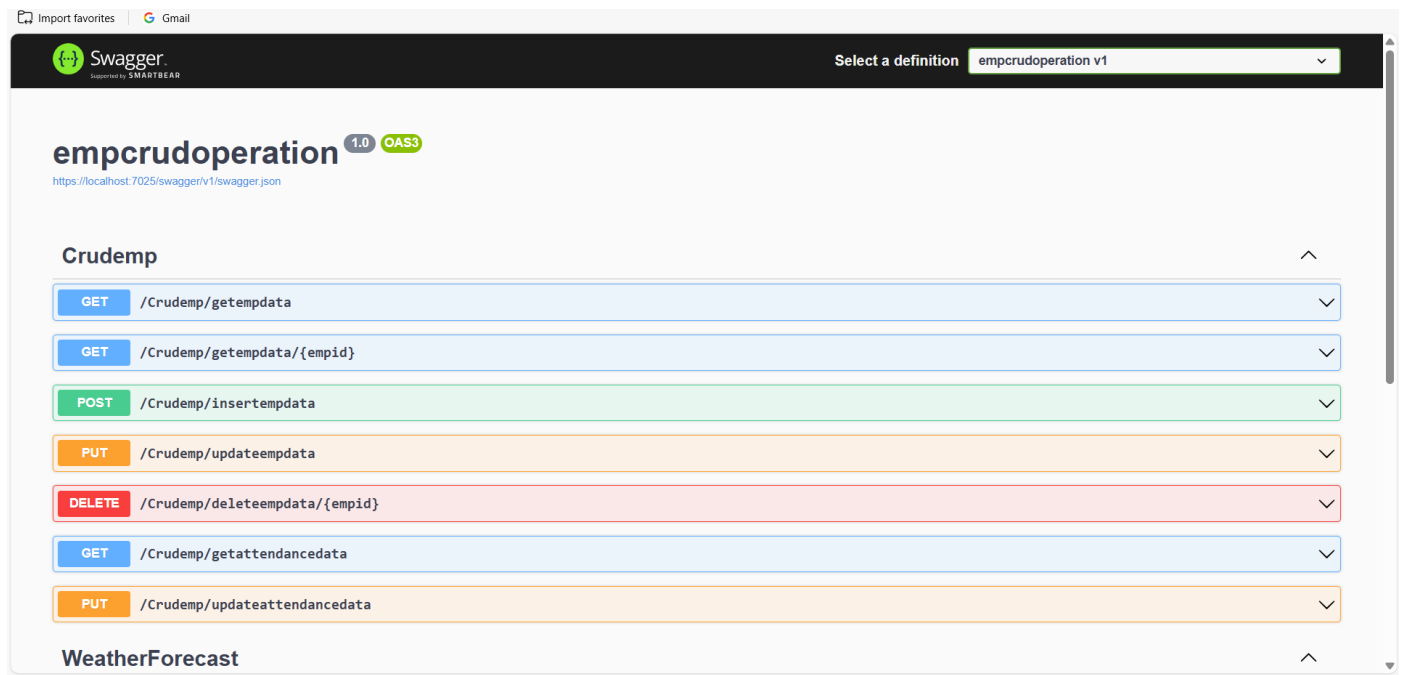

I Performed the crude operation by connecting to dotnet API on

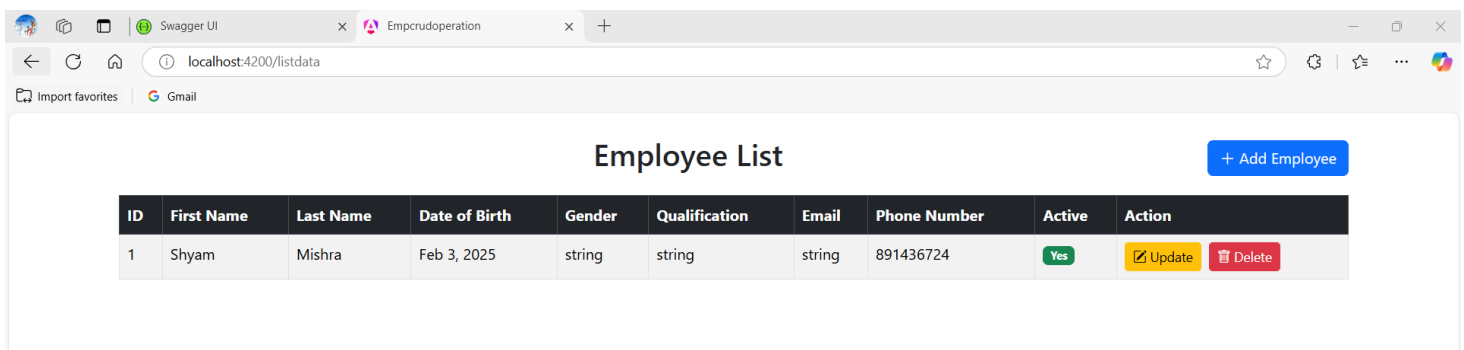

When I clicked on the add button, the panel for adding employee details opened in which I added the employee data

Insert Employee

First Name	Last Name
Date of Birth	Gender
mm/dd/yyyy 	v
Qualification	Email
Phone Number	☒ Active

And when I clicked on update, the update panel opened where I updated the employee data

Update Employee

First Name:	Last Name:
Shyam	Mishra
Date of Birth:	Gender:
02/02/2025 	string
Qualification:	Email:
string	string
Phone Number:	Is Active: ☒
891436724	

I applied the concept of primary and foreign key to the attendance data and showed the employee's firstname, lastname, timein, timeout, total and status data by creating a separate table

Employee Attendance Data

Emp ID	First Name	Last Name	Active	Time In	Time Out	Total Hours	Status	Action
1	Shyam	Mishra	Yes	2025-02-05T09:43:55	2025-02-05T03:43:55	-6	Half Day	✎ Edit

Database Screenshot

Attendance database table

The screenshot shows a database management tool interface. At the top, there are two tabs: 'md_employee' and 'mp_attendance'. The 'mp_attendance' tab is active, displaying a SQL query in a text area:

```
1 • SELECT * FROM empcrudoperation.mp_attendance;
```

Below the query, there is a 'Result Grid' section. It includes a 'Filter Rows' input field, an 'Edit' button, and an 'Export/Import' button. The 'Wrap Cell Content' option is also visible. The result grid displays the following data:

	attendance_id	empid	timein	timeout	total	status
▶	1	1	2025-02-05 09:43:55	2025-02-05 03:43:55	-6	Half Day
•	NULL	NULL	NULL	NULL	NULL	NULL

Employee database table

[illegible]