

Practical 9**1. Write a java code to develop a SignIn form.****Code:**

```
import javax.swing.*;
import java.awt.event.*;

public class SignInForm {
    public static void main(String[] args) {
        JFrame frame = new JFrame("Sign In");
        frame.setSize(300, 150);
        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
        frame.setLayout(null);
        JLabel userLabel = new JLabel("Username:");
        userLabel.setBounds(20, 20, 80, 25);
        frame.add(userLabel);
        JTextField userField = new JTextField();
        userField.setBounds(100, 20, 160, 25);
        frame.add(userField);
        JLabel passLabel = new JLabel("Password:");
        passLabel.setBounds(20, 50, 80, 25);
        frame.add(passLabel);

        JPasswordField passField = new JPasswordField();
        passField.setBounds(100, 50, 160, 25);
        frame.add(passField);
        JButton signInButton = new JButton("Sign In");
        signInButton.setBounds(100, 80, 80, 25);
        frame.add(signInButton);
        signInButton.addActionListener(new ActionListener() {
            public void actionPerformed(ActionEvent e) {
                JOptionPane.showMessageDialog(frame, "Sign In Clicked");
            }
        });
        frame.setVisible(true);
    }
}
```

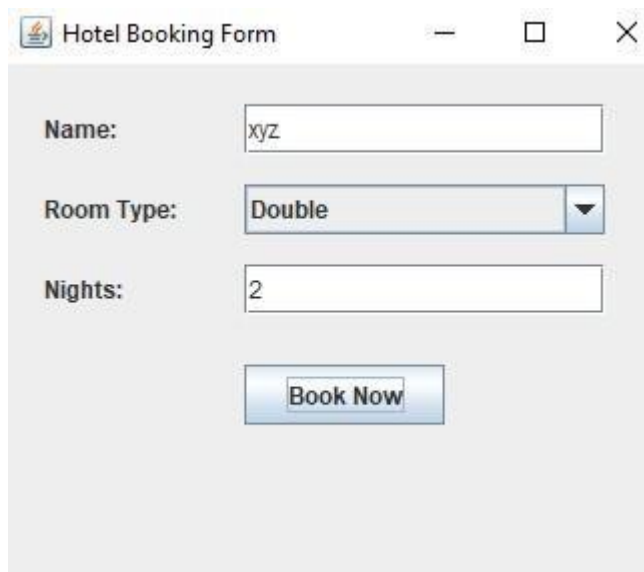
```
}  
}
```

Output:**2. Write a java code to develop a hotel form.****Code:**

```
import javax.swing.*;  
import java.awt.event.*;  
public class HotelForm {  
    public static void main(String[] args) {  
        JFrame frame = new JFrame("Hotel Booking Form");  
        frame.setSize(350, 300);  
        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);  
        frame.setLayout(null);  
        JLabel nameLabel = new JLabel("Name:");  
        nameLabel.setBounds(20, 20, 100, 25);  
        frame.add(nameLabel);  
        JTextField nameField = new JTextField();  
        nameField.setBounds(120, 20, 180, 25);  
        frame.add(nameField);  
        JLabel roomLabel = new JLabel("Room Type:");  
        roomLabel.setBounds(20, 60, 100, 25);  
        frame.add(roomLabel);  
        String[] roomTypes = {"Single", "Double", "Suite"};  
        JComboBox<String> roomBox = new JComboBox<>(roomTypes);  
        roomBox.setBounds(120, 60, 180, 25);  
        frame.add(roomBox);  
        JLabel nightsLabel = new JLabel("Nights:");  
        nightsLabel.setBounds(20, 100, 100, 25);
```

```
frame.add(nightsLabel);
JTextField nightsField = new JTextField();
nightsField.setBounds(120, 100, 180, 25);
frame.add(nightsField);
JButton submitButton = new JButton("Book Now");
submitButton.setBounds(120, 150, 100, 30);
frame.add(submitButton);

submitButton.addActionListener(new ActionListener() {
    public void actionPerformed(ActionEvent e) {
        JOptionPane.showMessageDialog(frame, "Booking Confirmed!\nName: "
+
        nameField.getText() + "\nRoom: " + roomBox.getSelectedItem() + "\nNights: "
+
        nightsField.getText());
    }
});
frame.setVisible(true);
}
```

Output:

The screenshot shows a Java Swing window titled "Hotel Booking Form". Inside the window, there are three input fields arranged vertically. The first field is labeled "Name:" and contains the text "xyz". The second field is labeled "Room Type:" and is a dropdown menu currently showing "Double". The third field is labeled "Nights:" and contains the text "2". Below these fields is a button labeled "Book Now". The window has standard Windows-style title bar controls (minimize, maximize, close).

