
Asymptotic Notations advises and one	
Asymptotic notations give us an idea about he good a given algorithm is compared to so other algorithm Let us see the mathematical definition of "order or now.	ow me of
Primarily there are three types of widely used asymptotic notations.	
1, Big Oh notation (0) 2, Big omega notation (2) 3, Big theta notation (0) Widely used one!	
Big oh notation is used to describe asymptotic	
	un si live
$0 \le f(n) \le cg(n) \text{ for all } n \ge n_0$	whoer
if a function is $O(n)$, it is bound on a function tically $O(n^2)$ as well!	unchin.
represents the upper bound of an algorithm's time complexity	



	Graphic es	cample for Big omega (D)	
		f(n)	
	^	(N) 1 4 1 7 1 7 1 7 1 7 1 7 1 7 1 7 1 7 1 7	
_	time	C9(n)	
	(10) 6	A	
			K
		—	- 1
_		n_0 $n \rightarrow$	
	Big the ta	rotation s we of seeds to ear hide	
. 1	1 1 1		
	let for a	efine running time of an algorithm	
[Y][]	May sat 10	12A(1) (10A1) (10A(1)	
1	(m) 18 80	id to be O(gn) iff fon) is O(gn) and	
	'f(n) is	(12(g(n)) & with while state in	
5	1		
	Mathematica	ly n+ n tost grove in + next saint	
NV:	Using Yester	in A has (r) ()	
	0 4	$f(n) \leq C_1 g(n) + n > n_0 - Sufficiently large value$	y
_		= $(-9(n)) \leq (f(n)) + n \geq n_0 > 0 \leq n$	
_	0 =	$\leq C_2 g(n) \leq f(n) + n \geq n_0 > n_0$	
-	Managar ba	the the equations, we get:	
	morgany 100		
7.		$0 \leq C_2 g(n) \leq f(n) \leq C_1 g(n) + n \geq n_0$	—

The equation simply means there exist positive constants and C2 Such that f(n) is sandwiched between C2 g(n) and C, g(n)

Theta notation represents both the upper and lower bounds, providing a tight bound on an algorithm's time complexity

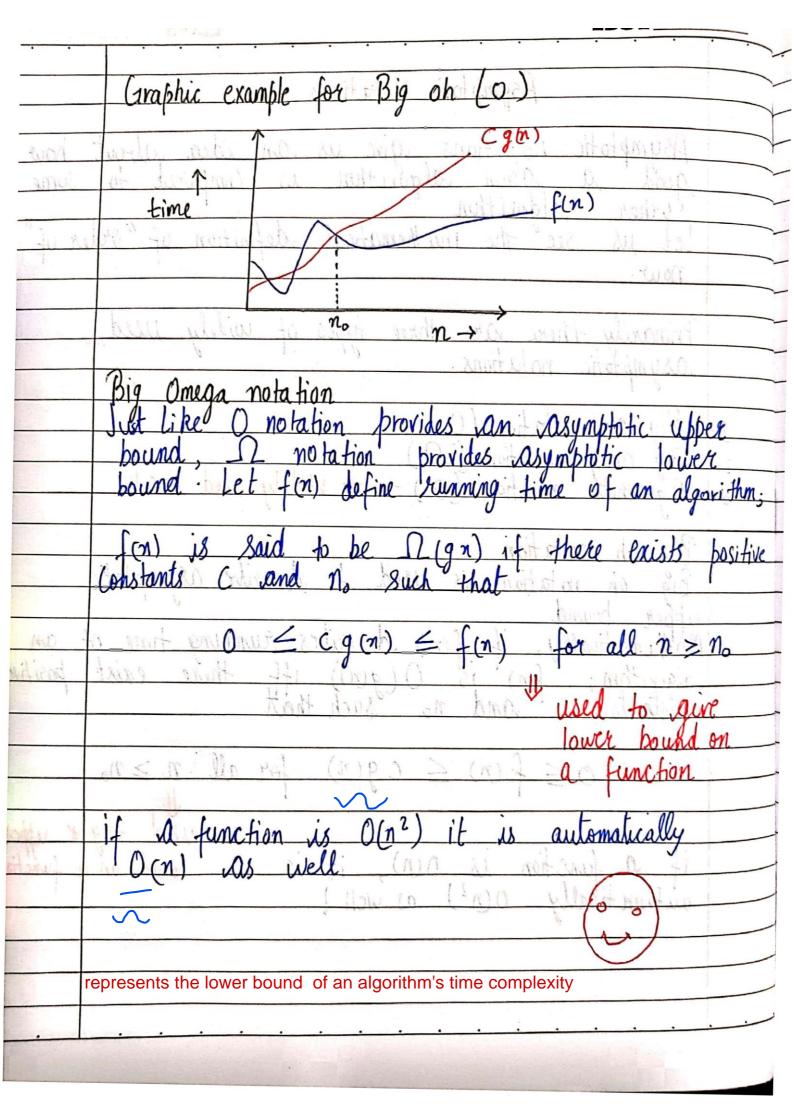