

【JEEWX开源】本地启动项目环境搭建

2016年12月17日
12:50

项目说明:


项目分三个工程，以maven方式构建：

jeewx	平台项目（微信管家功能）	采用Springmvc + Hibernate + Easyui
jeecg-p3-biz-alipay-single	插件项目(支付窗平台)	采用微服务框架 jeecg-p3
jeecg-p3-biz-qywx	插件项目(微信企业号平台)	采用微服务框架 jeecg-p3

项目启动环境搭建步骤:

第一步：创建mysql数据库（只支持mysql数据库）

采用UTF-8编码，创建数据库jeewx-os，执行SQL脚本{db/jeewx-3.0.0-20161219-mysql.sql}初始化数据

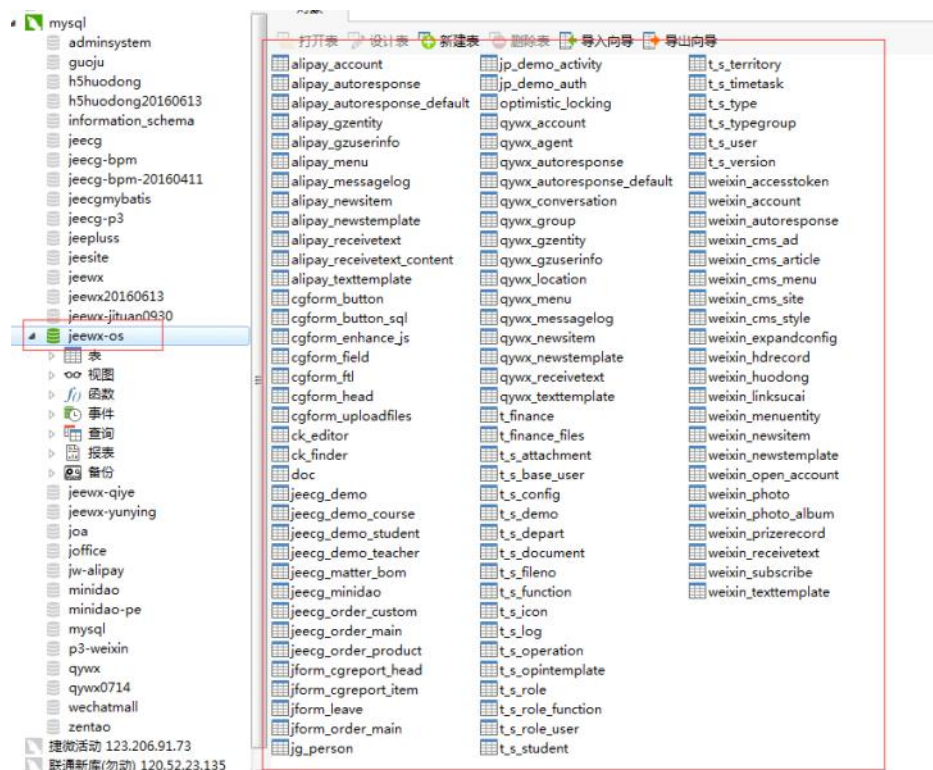

第二步：本地启动，访问系统

【一】必须依赖软件环境：

1. 安装Maven

安装参考：

<http://jingyan.baidu.com/article/1709ad808ad49f4634c4f00d.html>

2. 安装jdk1.7（不支持jdk8）

技巧：为了提高maven依赖下载效率，参考如下配置

配置文件：{本地maven路径}/conf/settings.xml

说明：这是配置阿里镜像，需要排除jeecg的仓库

```

<mirrors>
  <mirror>
    <id>nexus-aliyun</id>
    <mirrorOf>*,!jeecg,!jeecg-snapshots</mirrorOf>
    <name>Nexus aliyun</name>
    <url>
      http://maven.aliyun.com/nexus/content/groups/public</url>
    </mirror>
  </mirrors>

```

【二】双击start.bat，启动项目

访问地址：<http://localhost/jeewx>。

默认账号密码：admin/123456

说明：第一次启动会比较慢，需要下载依赖，请耐心等待。

（如果网速不好会出现失败情况，请关闭start.bat，多重复几次）

启动成功：

```

C:\Windows\system32\cmd.exe

this_.typegroupid as typegrou5_43_0_,
this_.typecode as typecode2_43_0_,
this_.typename as typename3_43_0_
from
  t_s_type this_
where
  this_.typegroupid=?
Hibernate:
select
  this_.ID as ID1_43_0_,
  this_.typepid as typepid4_43_0_,
  this_.typegroupid as typegrou5_43_0_,
  this_.typecode as typecode2_43_0_,
  this_.typename as typename3_43_0_
from
  t_s_type this_
where
  this_.typegroupid=?
十二月 17, 2016 12:53:29 下午 org.apache.catalina.core.ApplicationContext log
INFO: Initializing Spring FrameworkServlet 'springMvc'
十二月 17, 2016 12:53:29 下午 org.apache.coyote.http11.Http11Protocol init
INFO: Initializing Coyote HTTP/1.1 on http-80
十二月 17, 2016 12:53:30 下午 org.apache.coyote.http11.Http11Protocol start
INFO: Starting Coyote HTTP/1.1 on http-80

```

进入系统：

