

Combination -1

Playwright +Typescript .jsonl file



fine-tuning-test-data-
builder.html

Fine tuning HTML tool provided attached above

← → ↻ ⓘ File C:/Users/s2kda/OneDrive/Desktop/Gen%20AI%20notes/Jur

JSONL Training Data Converter for Fine tuning LLM

LLM Fine-tuning Dataset Builder · 7 Frameworks

↑ INPUT

Configure framework, prompts & training entries

1 SELECT FRAMEWORK & LANGUAGE ▲

SELENIUM

Java

SELENIUM

C#

SELENIUM

Python

PLAYWRIGHT

Java

PLAYWRIGHT

TypeScript

PLAYWRIGHT

C#

PLAYWRIGHT

Python

2 PROMPT CONFIGURATION

DEFAULT ▼



JSONL Training Data Converter for Fine tuning LLM

LLM Fine-tuning Dataset Builder · 7 Frameworks

UPLOAD A .ZIP OF .TXT FILES



Click or drag a .zip file

All .txt files inside will be extracted and parsed

EditLeadPage.txt

AUTO

FindLeadsPage.txt

AUTO

FindLeadsUpdated.txt

AUTO

HomePage.txt

AUTO

Login.txt

AUTO

Process Batch

Clear

v1.0 · Browser-based



OUTPUT

Review your dataset & export files

4 Output

5 Downloads 10

i Format Ref

Playwright · TypeScript

2

Playwright · TypeScript

3

Playwright · TypeScript

4

DOWNLOAD FULL DATASET

Filename: `training_data_playwright_typescript.jsonl`


Download All as JSONL

name	state	view
↑	↓	↺
This PC > Local Disk (C:) > Users > s2kda > Downloads		
		Search Downloads
access	Name	Date modified
op	Today (6)	
loads	☒ training_data_playwright_typescript.jsonl	27-06-2026 11:16
		JSONL File



training_data_playwright_typescript.jsonl

Open this in <https://jsonl.co/jsonl-formatter>

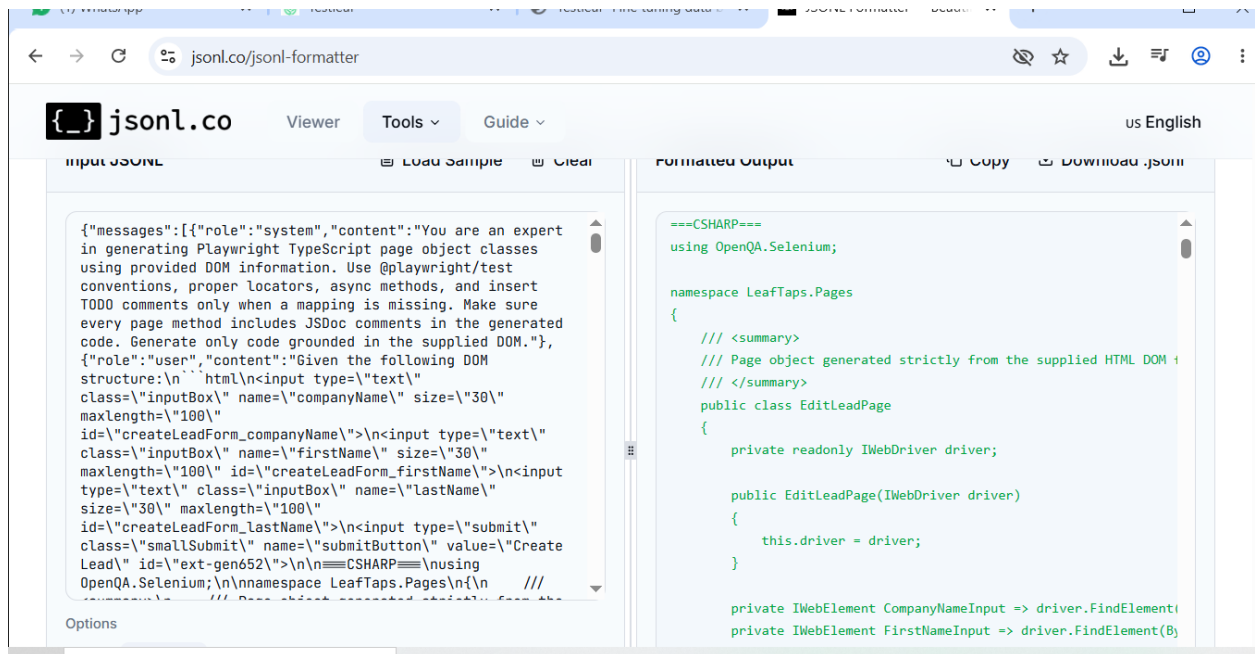

The screenshot shows the jsonl.co/jsonl-formatter website. The interface has a top navigation bar with "jsonl.co", "Viewer", "Tools", and "Guide" tabs. The main area is split into two panels: "Input JSONL" and "Formatted Output".

Input JSONL:

```
{
  "messages": [
    {
      "role": "system",
      "content": "You are an expert in generating Playwright TypeScript page object classes using provided DOM information. Use @playwright/test conventions, proper locators, async methods, and insert TODO comments only when a mapping is missing. Make sure every page method includes JSDoc comments in the generated code. Generate only code grounded in the supplied DOM."
    },
    {
      "role": "user",
      "content": "Given the following DOM structure:\n`html\n<input type='text' class='inputBox' name='companyName' size='30' maxLength='100'\nid='createLeadForm_companyName'\n>\n<input type='text' class='inputBox' name='firstName' size='30' maxLength='100'\nid='createLeadForm_firstName'\n>\n<input type='text' class='inputBox' name='lastName' size='30' maxLength='100'\nid='createLeadForm_lastName'\n>\n<input type='submit' class='smallSubmit' name='submitButton' value='Create Lead'\nid='ext-gen652'\n>\n\n====CSHARP====\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n  /// <summary>\n  /// Page object generated strictly from the supplied HTML DOM\n  /// </summary>\n  public class EditLeadPage\n  {\n    private readonly IWebDriver driver;\n\n    public EditLeadPage(IWebDriver driver)\n    {\n      this.driver = driver;\n    }\n\n    private IWebElement CompanyNameInput => driver.FindElement(By\n  "
    }
  ]
}
```


Formatted Output:

```
====CSHARP====
using OpenQA.Selenium;

namespace LeafTaps.Pages
{
  /// <summary>
  /// Page object generated strictly from the supplied HTML DOM
  /// </summary>
  public class EditLeadPage
  {
    private readonly IWebDriver driver;

    public EditLeadPage(IWebDriver driver)
    {
      this.driver = driver;
    }

    private IWebElement CompanyNameInput => driver.FindElement(By
    private IWebElement FirstNameInput => driver.FindElement(By
```

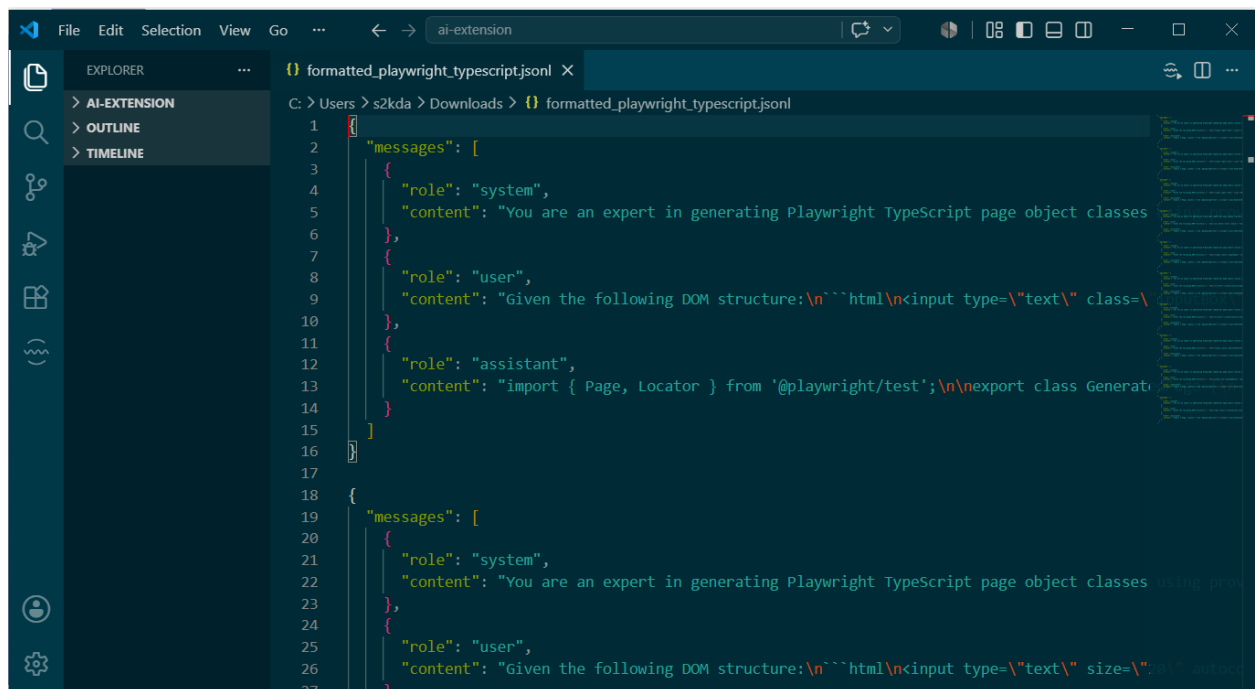

The screenshot shows a Visual Studio Code editor with a file named `formatted_playwright_typescript.jsonl` open. The file content is as follows:

```
1 {
2   "messages": [
3     {
4       "role": "system",
5       "content": "You are an expert in generating Playwright TypeScript page object classes using provided DOM information. Use @playwright/test conventions, proper locators, async methods, and insert TODO comments only when a mapping is missing. Make sure every page method includes JSDoc comments in the generated code. Generate only code grounded in the supplied DOM."
6     },
7     {
8       "role": "user",
9       "content": "Given the following DOM structure:\n`html\n<input type='text' class='inputBox' name='companyName' size='30' maxLength='100'\nid='createLeadForm_companyName'\n>\n<input type='text' class='inputBox' name='firstName' size='30' maxLength='100'\nid='createLeadForm_firstName'\n>\n<input type='text' class='inputBox' name='lastName' size='30' maxLength='100'\nid='createLeadForm_lastName'\n>\n<input type='submit' class='smallSubmit' name='submitButton' value='Create Lead'\nid='ext-gen652'\n>\n\n====CSHARP====\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n  /// <summary>\n  /// Page object generated strictly from the supplied HTML DOM\n  /// </summary>\n  public class EditLeadPage\n  {\n    private readonly IWebDriver driver;\n\n    public EditLeadPage(IWebDriver driver)\n    {\n      this.driver = driver;\n    }\n\n    private IWebElement CompanyNameInput => driver.FindElement(By\n  "
10    }
11  ]
12 }
13
14 {
15   "messages": [
16     {
17       "role": "system",
18       "content": "You are an expert in generating Playwright TypeScript page object classes using provided DOM information. Use @playwright/test conventions, proper locators, async methods, and insert TODO comments only when a mapping is missing. Make sure every page method includes JSDoc comments in the generated code. Generate only code grounded in the supplied DOM."
19     },
20     {
21       "role": "user",
22       "content": "Given the following DOM structure:\n`html\n<input type='text' size='30' maxLength='100'\nid='createLeadForm_companyName'\n>\n<input type='text' size='30' maxLength='100'\nid='createLeadForm_firstName'\n>\n<input type='text' size='30' maxLength='100'\nid='createLeadForm_lastName'\n>\n<input type='submit' value='Create Lead'\nid='ext-gen652'\n>\n\n====CSHARP====\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n  /// <summary>\n  /// Page object generated strictly from the supplied HTML DOM\n  /// </summary>\n  public class EditLeadPage\n  {\n    private readonly IWebDriver driver;\n\n    public EditLeadPage(IWebDriver driver)\n    {\n      this.driver = driver;\n    }\n\n    private IWebElement CompanyNameInput => driver.FindElement(By\n  "
23    }
24  ]
25 }
26
27 {
28   "messages": [
29     {
30       "role": "system",
31       "content": "You are an expert in generating Playwright TypeScript page object classes using provided DOM information. Use @playwright/test conventions, proper locators, async methods, and insert TODO comments only when a mapping is missing. Make sure every page method includes JSDoc comments in the generated code. Generate only code grounded in the supplied DOM."
32     },
33     {
34       "role": "user",
35       "content": "Given the following DOM structure:\n`html\n<input type='text' size='30' maxLength='100'\nid='createLeadForm_companyName'\n>\n<input type='text' size='30' maxLength='100'\nid='createLeadForm_firstName'\n>\n<input type='text' size='30' maxLength='100'\nid='createLeadForm_lastName'\n>\n<input type='submit' value='Create Lead'\nid='ext-gen652'\n>\n\n====CSHARP====\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n  /// <summary>\n  /// Page object generated strictly from the supplied HTML DOM\n  /// </summary>\n  public class EditLeadPage\n  {\n    private readonly IWebDriver driver;\n\n    public EditLeadPage(IWebDriver driver)\n    {\n      this.driver = driver;\n    }\n\n    private IWebElement CompanyNameInput => driver.FindElement(By\n  "
36    }
37  ]
38 }
39 }
```


formatted_playwright
_typescript.jsonl

Combination -2

Selenium +Java


The screenshot displays the 'JSONL Training Data Converter for Fine tuning LLM' web application. The interface is divided into two main sections: 'INPUT' and 'OUTPUT'.

INPUT Section:

- 1 SELECT FRAMEWORK & LANGUAGE:** A grid of buttons for selecting frameworks and languages. The 'SELENIUM Java' button is highlighted.
- UPLOAD A .ZIP OF .TXT FILES:** A dashed box with a file icon and the text 'Click or drag a .zip file'. Below it, a list of files is shown: 'HomePage.txt', 'Login.txt', 'MyHomePage.txt', and 'MyLeadsPage.txt', each with an 'AUTO' button.
- Process Batch:** A green button to start the conversion process.


OUTPUT Section:

- Output:** A tab showing the selected configuration: 'Selected: Selenium + Java · Marker: ===JAVA==='. Below it, a 'Live Preview (last 3 entries)' section shows '// No entries yet...'.
- Downloads:** A tab showing a list of files for download. The first three entries are 'Selenium · Java', each with a 'Download' button.
- Format Ref:** A tab for format reference.
- DOWNLOAD FULL DATASET:** A green box containing the filename 'training_data_selenium_java.jsonl' and a 'Download All as JSONL' button.

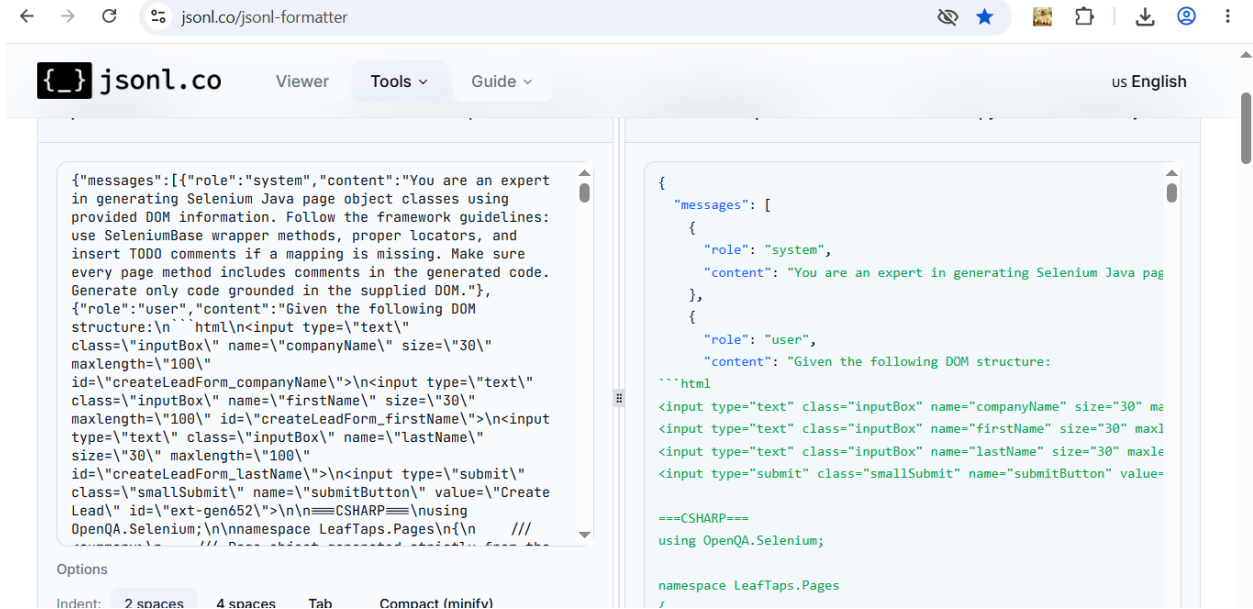

Attaching the formatted output .Jsonl file


training_data_selenium
m_java.jsonl

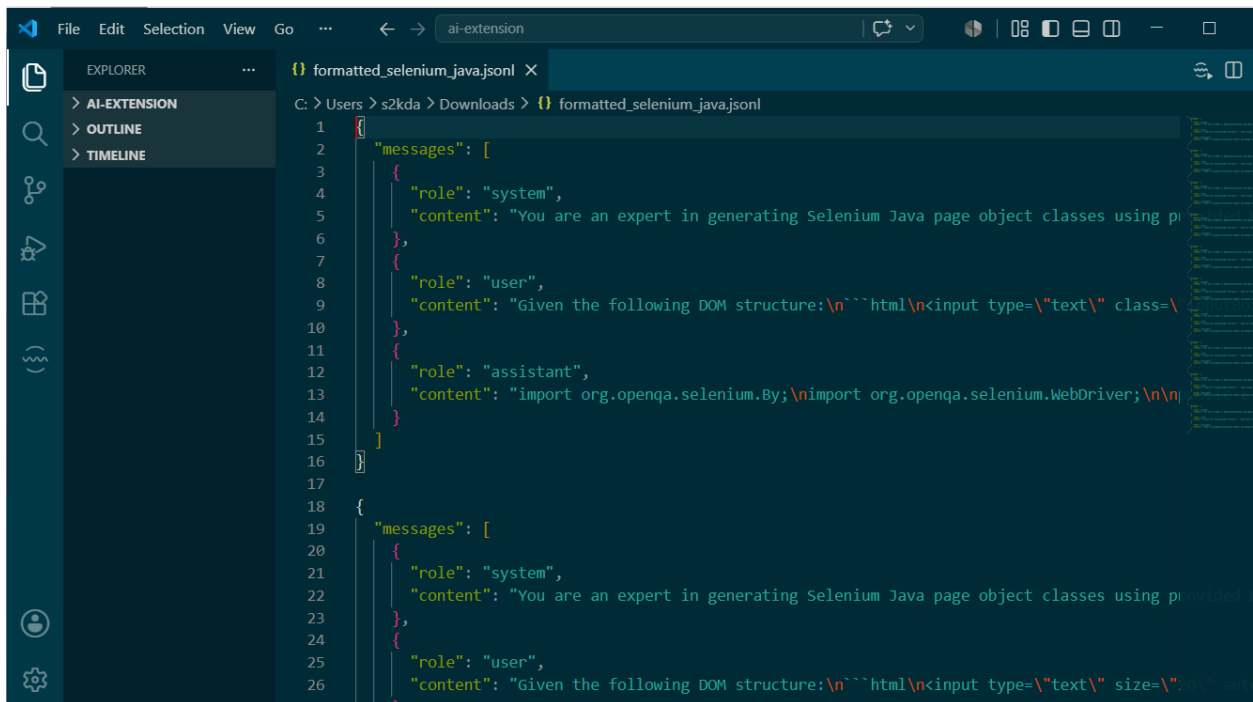

Combination 3:

Selenium +C#

← → ↻ File C:/Users/s2kda/OneDrive/Desktop/Gen%20AI%20notes/June%2027th%202026/fine-tuning-test-data-builder-enhance... ☆ ⬇ ⌚ ⋮

JSONL Training Data Converter for Fine tuning LLM
LLM Fine-tuning Dataset Builder · 10 Frameworks

v1.0 · Browser-based ⚙ 🌙

INPUT
Configure framework, prompts & training entries

1 SELECT FRAMEWORK & LANGUAGE

SELENIUM
Java

SELENIUM
C#

SELENIUM
Python

PLAYWRIGHT
Java

PLAYWRIGHT
TypeScript

PLAYWRIGHT
C#

PLAYWRIGHT
Python

CYPRESS
TypeScript

ROBOT
FRAMEWORK
Python

OUTPUT
Review your dataset & export files

4 Output 5 Downloads i Format Ref

0
entries in dataset
0/10 -- add more
for fine-tuning

Selenium
FRAMEWORK

C#
LANGUAGE

Selected: Selenium + C# · Marker: ===C#SHARP===

← → ↻ File C:/Users/s2kda/OneDrive/Desktop/Gen%20AI%20notes/June%2027th%202026/fine-tuning-test-data-builder-enhance... ☆ ⬇ ⌚ ⋮

JSONL Training Data Converter for Fine tuning LLM
LLM Fine-tuning Dataset Builder · 10 Frameworks

v1.0 · Browser-based ⚙ 🌙

UPLOAD A .ZIP OF .TXT FILES


Click or drag a .zip file
All .txt files inside will be extracted and parsed

HomePage.txt OK

Login.txt OK

MyHomePage.txt OK

MyLeadsPage.txt OK

Process Batch Clear

OUTPUT
Review your dataset & export files

4 Output 5 Downloads 10 i Format Ref

Selenium · C#
2

Selenium · C#
3

Selenium · C#
4

DOWNLOAD FULL DATASET
Filename: training_data_selenium_csharp.jsonl
Download All as JSONL

← → ↺ jsonl.co/jsonl-formatter 🔒 ★ ⬇️ ⌚ ⋮

{ } jsonl.co Viewer Tools ▾ Guide ▾ us English

side, your data never leaves your browser.

Input JSONL Load Sample Clear

```
{
  "messages": [
    {
      "role": "system",
      "content": "You are an expert in generating Selenium C# page object classes using provided DOM information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."
    },
    {
      "role": "user",
      "content": "Given the following DOM structure:\n<<<html\n<input type='text'\n  class='inputBox'\n  name='companyName'\n  size='30'\n  maxLength='100'\n  id='createLeadForm_companyName'\n>\n<input type='text'\n  class='inputBox'\n  name='firstName'\n  size='30'\n  maxLength='100'\n  id='createLeadForm_firstName'\n>\n<input type='text'\n  class='inputBox'\n  name='lastName'\n  size='30'\n  maxLength='100'\n  id='createLeadForm_lastName'\n>\n<input type='submit'\n  class='smallSubmit'\n  name='submitButton'\n  value='Create"
    }
  ]
}
```

Formatted Output Copy Download .jsonl

```
{
  "messages": [
    {
      "role": "system",
      "content": "You are an expert in generating Selenium C# page"
    },
    {
      "role": "user",
      "content": "Given the following DOM structure:\n<<<html\n<input type='text' class='inputBox' name='companyName' size='30' ma\n<input type='text' class='inputBox' name='firstName' size='30' maxl\n<input type='text' class='inputBox' name='lastName' size='30' maxle\n<input type='submit' class='smallSubmit' name='submitButton' value="
    }
  ]
}
```

Attaching the formatted file



File Edit Selection View Go ... ai-extension

EXPLORER

- AI-EXTENSION
- OUTLINE
- TIMELINE

formatted_selenium_java.jsonl formatted_selenium_csharp.jsonl X

C:\Users\s2kda\Downloads> formatted_selenium_csharp.jsonl

```
1 {
2   "messages": [
3     {
4       "role": "system",
5       "content": "You are an expert in generating Selenium C# page object classes using provided DOM information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."
6     },
7     {
8       "role": "user",
9       "content": "Given the following DOM structure:\n<<<html\n<input type='text'\n  class='inputBox'\n  name='companyName'\n  size='30'\n  maxLength='100'\n  id='createLeadForm_companyName'\n>\n<input type='text'\n  class='inputBox'\n  name='firstName'\n  size='30'\n  maxLength='100'\n  id='createLeadForm_firstName'\n>\n<input type='text'\n  class='inputBox'\n  name='lastName'\n  size='30'\n  maxLength='100'\n  id='createLeadForm_lastName'\n>\n<input type='submit'\n  class='smallSubmit'\n  name='submitButton'\n  value='Create"
10    }
11  ]
12 }
13
14 {
15   "messages": [
16     {
17       "role": "system",
18       "content": "You are an expert in generating Selenium C# page object classes using provided DOM information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."
19     },
20     {
21       "role": "user",
22       "content": "Given the following DOM structure:\n<<<html\n<input type='text'\n  class='inputBox'\n  name='companyName'\n  size='30'\n  maxLength='100'\n  id='createLeadForm_companyName'\n>\n<input type='text'\n  class='inputBox'\n  name='firstName'\n  size='30'\n  maxLength='100'\n  id='createLeadForm_firstName'\n>\n<input type='text'\n  class='inputBox'\n  name='lastName'\n  size='30'\n  maxLength='100'\n  id='createLeadForm_lastName'\n>\n<input type='submit'\n  class='smallSubmit'\n  name='submitButton'\n  value='Create"
23    }
24  ]
25 }
26 }
```


Combination 4:

Playwright + Python

← → ↻ 📁 File C:/Users/s2kda/OneDrive/Desktop/Gen%20AI%20notes/June%2027th%202026/fine-tuning-test-data-builder-enhance... ☆ ⬇️ ⌚ ⋮

**JSONL Training Data Converter for Fine tuning LLM**
LLM Fine-tuning Dataset Builder · 10 Frameworks

v1.0 · Browser-based ⚙️ 🌙

INPUT
↑
Configure framework, prompts & training entries

1 SELECT FRAMEWORK & LANGUAGE ▲

SELENIUM
Java

SELENIUM
C#

SELENIUM
Python

PLAYWRIGHT
Java

PLAYWRIGHT
TypeScript

PLAYWRIGHT
C#

PLAYWRIGHT
Python

CYPRESS
JavaScript

CYPRESS
TypeScript

ROBOT
FRAMEWORK
Python

OUTPUT
↓
Review your dataset & export files

4 Output

5 Downloads

i Format Ref

Selected: Playwright + Python · Marker: ===PYTHON===

Live Preview (last 3 entries)

// No entries yet...

← → ↻ 📁 File C:/Users/s2kda/OneDrive/Desktop/Gen%20AI%20notes/June%2027th%202026/fine-tuning-test-data-builder-enhance... ☆ ⬇️ ⌚ ⋮

**JSONL Training Data Converter for Fine tuning LLM**
LLM Fine-tuning Dataset Builder · 10 Frameworks

v1.0 · Browser-based ⚙️ 🌙

UPLOAD A .ZIP OF .TXT FILES


Click or drag a .zip file
All .txt files inside will be extracted and parsed

EditLeadPage.txt

FindLeadsPage.txt

FindLeadsUpdated.txt

HomePage.txt

Login.txt

Process Batch

Clear

OUTPUT
↓
Review your dataset & export files

4 Output

5 Downloads 10

i Format Ref

8 Playwright · Python
Download

9 Playwright · Python
Download

10 Playwright · Python
Download

DOWNLOAD FULL DATASET

Filename: training_data_playwright_python.jsonl

Download All as JSONL

← → ↻ jsonl.co/jsonl-formatter

{ } jsonl.co Viewer Tools Guide us English

side, your data never leaves your browser.

Input JSONL

Load Sample Clear

```
{
  "messages": [
    {
      "role": "system",
      "content": "You are an expert in generating Playwright Python page object classes using provided DOM information. Use playwright.sync_api or playwright.async_api conventions, proper Locator usage, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."
    },
    {
      "role": "user",
      "content": "Given the following DOM structure:\n`html\n<input type='text' class='inputBox' name='companyName' size='30' maxlength='100'\nid='createLeadForm_companyName'\n>\n<input type='text' class='inputBox' name='firstName' size='30' maxlength='100'\nid='createLeadForm_firstName'\n>\n<input type='text' class='inputBox' name='lastName' size='30' maxlength='100'\nid='createLeadForm_lastName'\n>\n<input type='submit'"
    }
  ]
}
```

Formatted Output

Copy Download .jsonl

```
{
  "messages": [
    {
      "role": "system",
      "content": "You are an expert in generating Playwright Python"
    },
    {
      "role": "user",
      "content": "Given the following DOM structure:
      \n`html
      <input type='text' class='inputBox' name='companyName' size='30' ma
      <input type='text' class='inputBox' name='firstName' size='30' maxl
      <input type='text' class='inputBox' name='lastName' size='30' maxle
      <input type='submit' class='smallSubmit' name='submitButton' value=
```

Attaching the formatted file



File Edit Selection View Go ... ai-extension

EXPLORER

- AI-EXTENSION
- OUTLINE
- TIMELINE

formatted_selenium_csharp.jsonl formatted_playwright_python.jsonl

C: > Users > s2kda > Downloads > formatted_playwright_python.jsonl

```
1 {
2   "messages": [
3     {
4       "role": "system",
5       "content": "You are an expert in generating Playwright Python page object classes using provided DOM information. Use playwright.sync_api or playwright.async_api conventions, proper Locator usage, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."
6     },
7     {
8       "role": "user",
9       "content": "Given the following DOM structure:\n`html\n<input type='text' class='inputBox' name='companyName' size='30' maxlength='100'\nid='createLeadForm_companyName'\n>\n<input type='text' class='inputBox' name='firstName' size='30' maxlength='100'\nid='createLeadForm_firstName'\n>\n<input type='text' class='inputBox' name='lastName' size='30' maxlength='100'\nid='createLeadForm_lastName'\n>\n<input type='submit'"
10    }
11  ]
12 }
13
14 {
15   "messages": [
16     {
17       "role": "system",
18       "content": "You are an expert in generating Playwright Python page object classes using provided DOM information. Use playwright.sync_api or playwright.async_api conventions, proper Locator usage, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."
19     },
20     {
21       "role": "assistant",
22       "content": "from playwright.sync_api import Page, Locator\n\nclass GeneratedPage:\n"
23     }
24   ]
25 }
26
```