


Objective :Enhance the Chunking application such that when LLM –Based Intelligent strategy is chosen and any LLM model is chosen from the drop down with simulate LLM key not checked then chunking and mongo db ingestion should be happening correctly.

Evidence Snapshots:

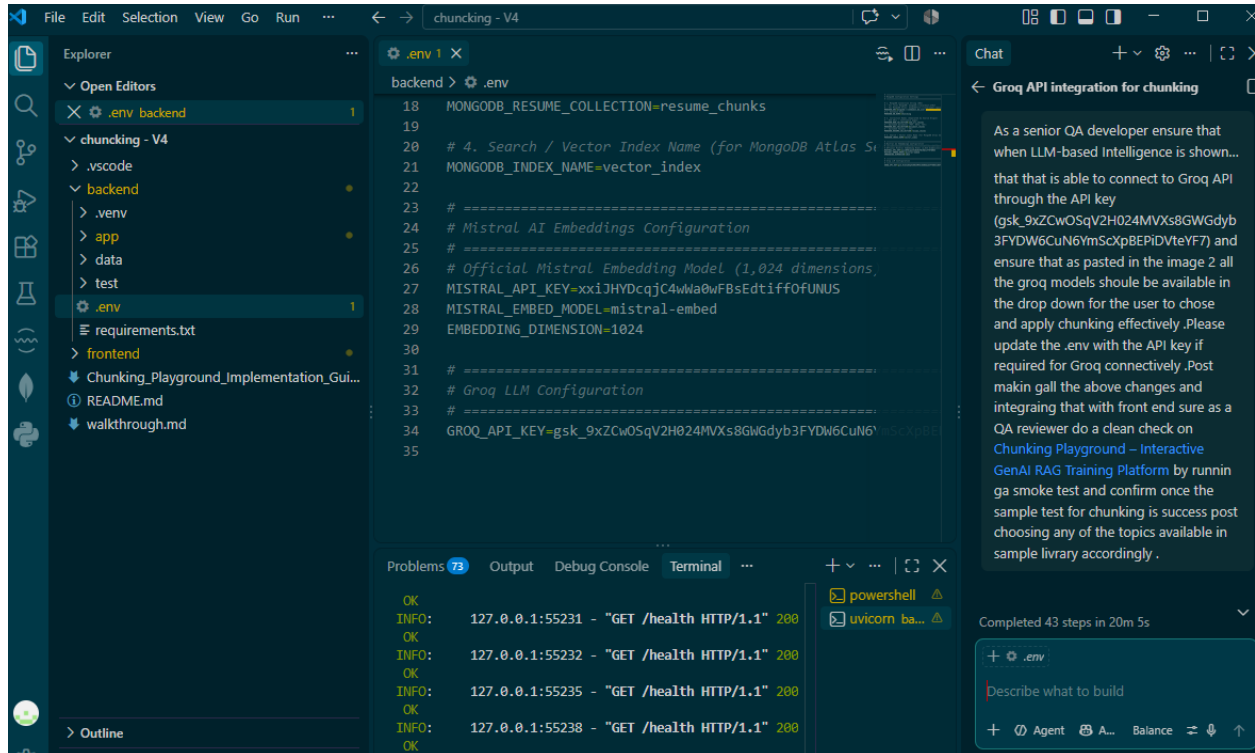


The screenshot shows the VS Code editor with the `chunking - V4` project open. The `.env` file is selected, displaying the following configuration:

```
18 MONGODB_RESUME_COLLECTION=resume_chunks
19
20 # 4. Search / Vector Index Name (for MongoDB Atlas S
21 MONGODB_INDEX_NAME=vector_index
22
23 # =====
24 # Mistral AI Embeddings Configuration
25 # =====
26 # Official Mistral Embedding Model (1,024 dimensions
27 MISTRAL_API_KEY=xxiJHYDcqjC4wMa0wFBsEdtiffOFUNUS
28 MISTRAL_EMBED_MODEL=mistral-embed
29 EMBEDDING_DIMENSION=1024
30
31 # =====
32 # Groq LLM Configuration
33 # =====
34 GROQ_API_KEY=gsk_9xZCwOSqV2H024MVxs8GWGdyb3FYDW6CuN6VnScXp8B
35
```

The terminal output shows the following logs:

```
OK
INFO: 127.0.0.1:55231 - "GET /health HTTP/1.1" 200
OK
INFO: 127.0.0.1:55232 - "GET /health HTTP/1.1" 200
OK
INFO: 127.0.0.1:55235 - "GET /health HTTP/1.1" 200
OK
INFO: 127.0.0.1:55238 - "GET /health HTTP/1.1" 200
OK
```

The Chat panel on the right shows a conversation with the Groq API integration for chunking, with a message from a senior QA developer ensuring that the LLM-based intelligence is shown correctly.

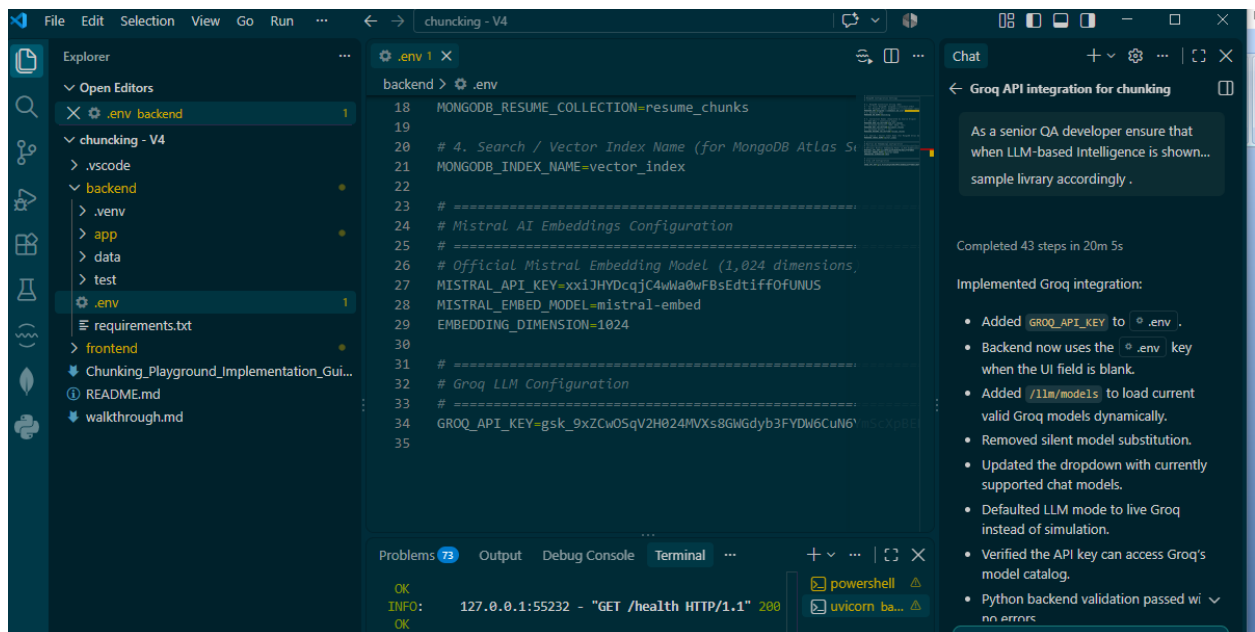

The screenshot shows the VS Code editor with the `chunking - V4` project open. The `.env` file is selected, displaying the following configuration:

```
18 MONGODB_RESUME_COLLECTION=resume_chunks
19
20 # 4. Search / Vector Index Name (for MongoDB Atlas S
21 MONGODB_INDEX_NAME=vector_index
22
23 # =====
24 # Mistral AI Embeddings Configuration
25 # =====
26 # Official Mistral Embedding Model (1,024 dimensions
27 MISTRAL_API_KEY=xxiJHYDcqjC4wMa0wFBsEdtiffOFUNUS
28 MISTRAL_EMBED_MODEL=mistral-embed
29 EMBEDDING_DIMENSION=1024
30
31 # =====
32 # Groq LLM Configuration
33 # =====
34 GROQ_API_KEY=gsk_9xZCwOSqV2H024MVxs8GWGdyb3FYDW6CuN6VnScXp8B
35
```

The terminal output shows the following logs:



```
OK
INFO: 127.0.0.1:55232 - "GET /health HTTP/1.1" 200
OK
```

The Chat panel on the right shows a conversation with the Groq API integration for chunking, with a message from a senior QA developer ensuring that the LLM-based intelligence is shown correctly.

Completed 43 steps in 20m 5s


Implemented Groq integration:

- Added `GROQ_API_KEY` to `.env`.
- Backend now uses the `.env` key when the UI field is blank.
- Added `/llm/models` to load current valid Groq models dynamically.
- Removed silent model substitution.
- Updated the dropdown with currently supported chat models.
- Defaulted LLM mode to live Groq instead of simulation.
- Verified the API key can access Groq's model catalog.
- Python backend validation passed with no errors.

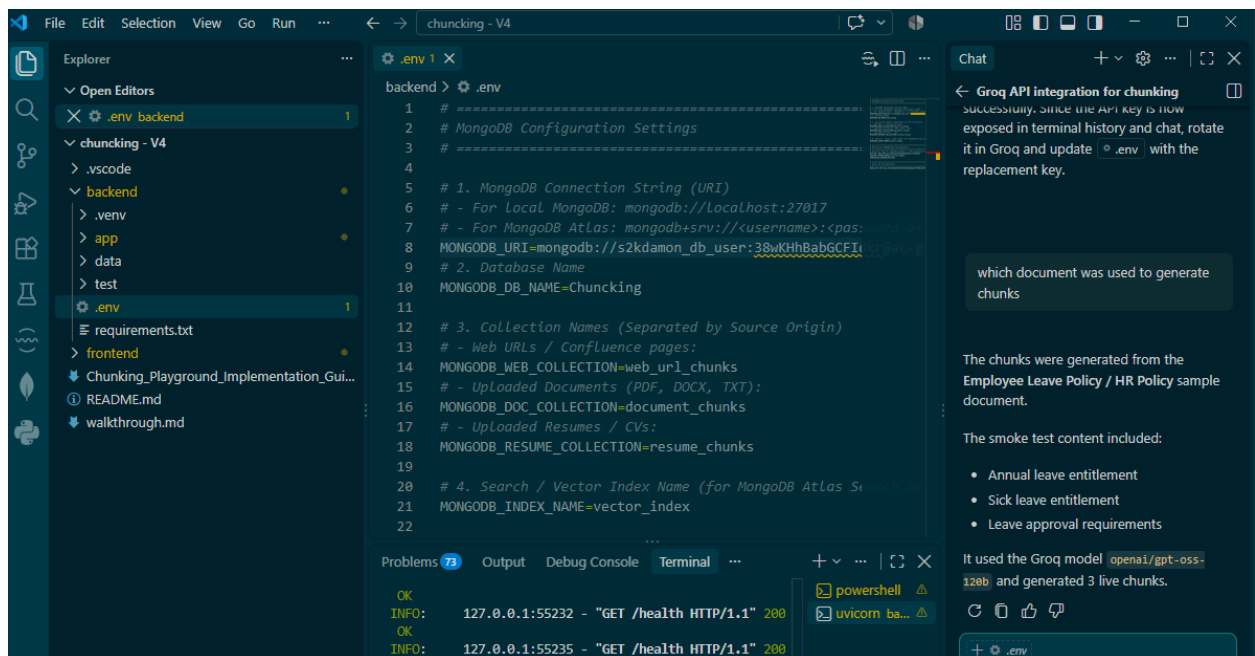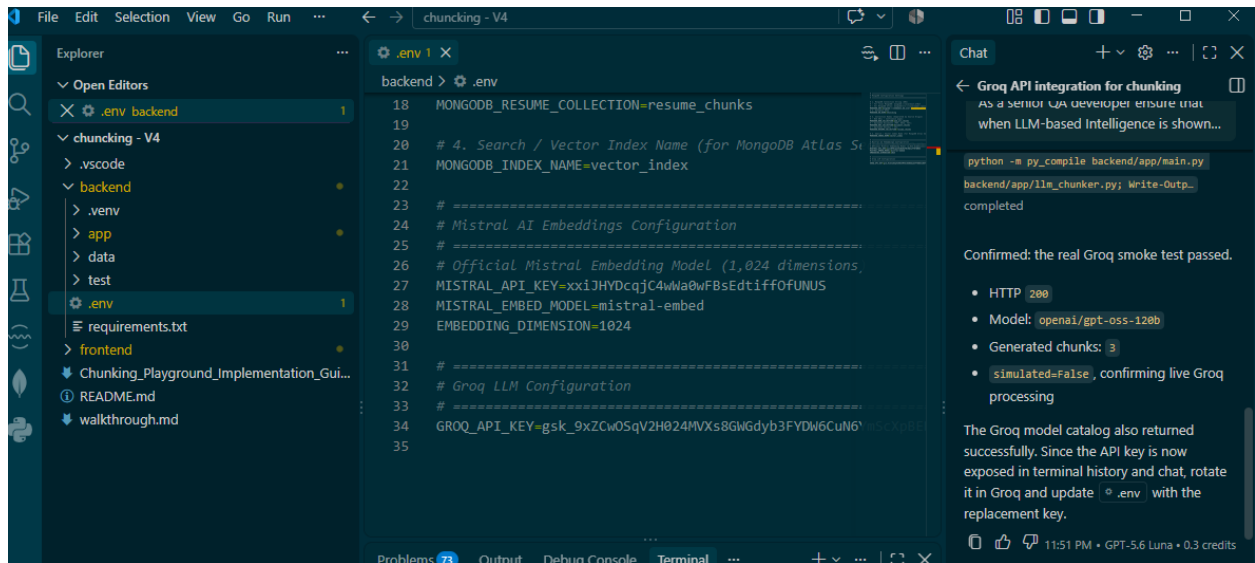


Now since smoke test passed trying the checks with few different samples through real time runs

Test 1: Choosing Company FAQ from the list for chunking

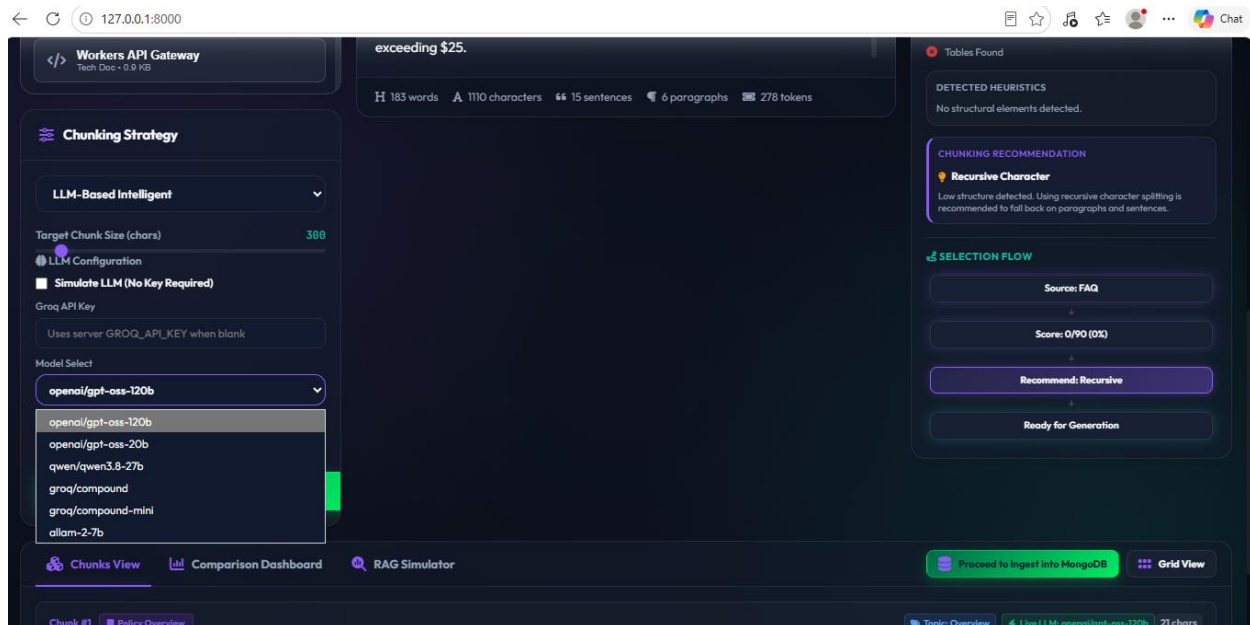

Choosing qwen 3.8 model as shown above and applied chunking

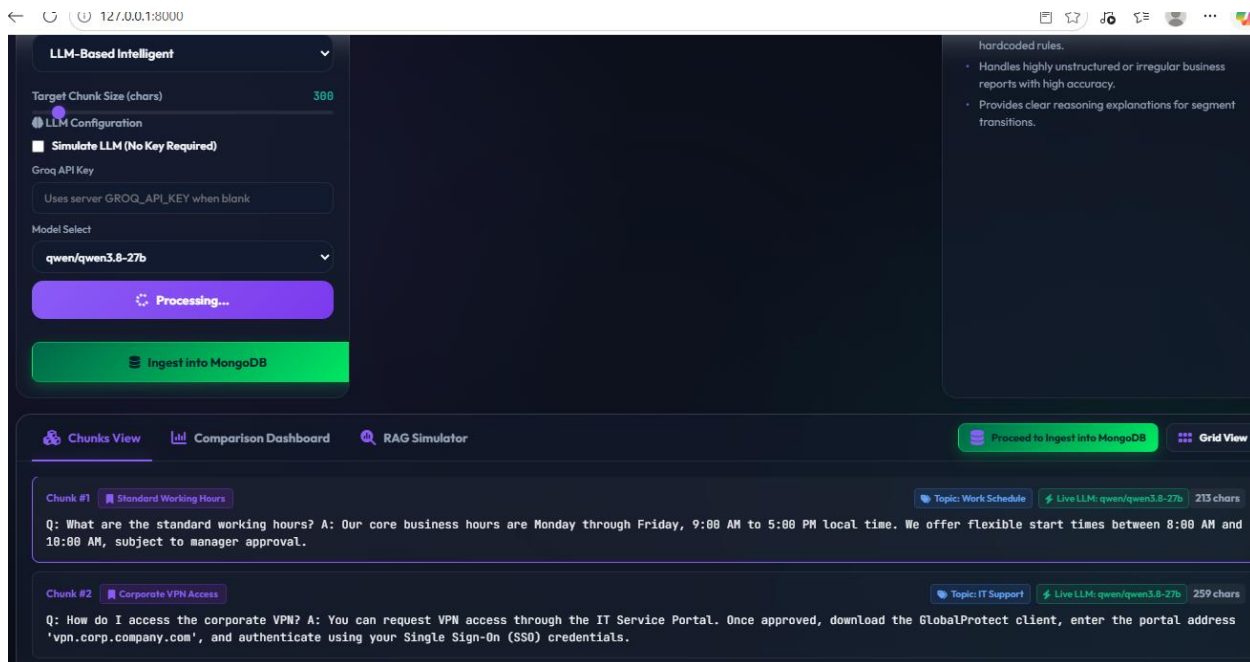

Now ingesting into Mongo DB

Patient Medical Chart

Medical - 1.2 KB

Workers API Gateway

Tech Doc - 0.9 KB

Chunking Strategy

LLM-Based Intelligent

Target Chunk Size (chars)

300

LLM Configuration

Simulate LLM (No Key Required)

Groq API Key

Uses server GROQ_API_KEY when blank

Model Select

qwen/qwen3.8-27b

Apply Chunking

Ingesting...

A: All business expenses must be submitted through the Concur platform by the last day of each month. Receipts are required for any individual expense item exceeding \$25.

H 183 wordsA 1110 charactersS 15 sentencesP 6 paragraphsT 278 tokens

Disadvantages

- Can output a reason and title for each chunk boundary.

Why Companies Use It

- Intelligently extracts logical sub-topics without hardcoded rules.
- Handles highly unstructured or irregular business reports with high accuracy.
- Provides clear reasoning explanations for segment transitions.

Chunks View

Comparison Dashboard

RAG Simulator

Ingesting...

Grid View



MongoDB Ingestion
 Partitioned Document & Chunk Storage

✕



Ingestion & Embedding Complete

Each chunk has been stored as an individual MongoDB document with a 1,024-dimensional Mistral embedding.

TARGET COLLECTION

document_chunks

STORAGE ARCHITECTURE

Individual Chunk Documents

EMBEDDING MODEL

Mistral (1,024 Dimensions)

VECTOR SEARCH STATUS

Ready (vector_index)

DOCUMENT NAME

Company FAQ

DOCUMENTS INGESTED

5 Documents

FIRST INSERTED ID

6ab0299c3caac8b12acc02d0


Verify Vector Search
1,024-d Cosine Similarity

▶ Search

Close

Cross checking the Mongo DB to check these 5 documents ingested and could see them as expected below

890	ObjectId('6ab0299c3caac8...	"da3dad44-2478-4850-97d1...	"Company FAQ"	"document"	null	"llm"	  
891	ObjectId('6ab0299c3caac8...	"da3dad44-2478-4850-97d1...	"Company FAQ"	"document"	null	"llm"	  
892	ObjectId('6ab0299c3caac8...	"da3dad44-2478-4850-97d1...	"Company FAQ"	"document"	null	"llm"	  
893	ObjectId('6ab0299c3caac8...	"da3dad44-2478-4850-97d1...	"Company FAQ"	"document"	null	"llm"	  
894	ObjectId('6ab0299c3caac8...	"da3dad44-2478-4850-97d1...	"Company FAQ"	"document"	null	"llm"	  

The screenshot shows the MongoDB Cloud interface for a cluster named 'Sunil8'. The 'document_chunks' collection is selected, showing 894 documents. A query is applied: `{document_name:{$regex:'Company FAQ',$options:'i'}}`. The results are sorted by `{document_name:1,chunk_index:1}`. The table below shows the first five chunks of the document.

#	document_chunks_id ObjectId	document_id String	document_name String	source_url Null	chunk_id Int32	chunk_index Int32
1	ObjectId('6ab0299c3caac8...')	*da3dad44-2478-4858-97d1...	*Company FAQ*	null	1	1
2	ObjectId('6ab0299c3caac8...')	*da3dad44-2478-4858-97d1...	*Company FAQ*	null	2	2
3	ObjectId('6ab0299c3caac8...')	*da3dad44-2478-4858-97d1...	*Company FAQ*	null	3	3
4	ObjectId('6ab0299c3caac8...')	*da3dad44-2478-4858-97d1...	*Company FAQ*	null	4	4
5	ObjectId('6ab0299c3caac8...')	*da3dad44-2478-4858-97d1...	*Company FAQ*	null	5	5

Test 2: Choosing RAG Research Abstract FAQ from the list for chunking

The screenshot shows a web interface for visualizing RAG document segmentation. The document 'HR Policy Manual 2023.pdf' (382.4 KB) has been successfully parsed. The document is categorized as a 'Research Paper'. The interface displays various metrics and analysis results.

Document Preview:

Retrieval-Augmented Generation (RAG) in Large Language Models: A Survey

Abstract:

Large Language Models (LLMs) have demonstrated remarkable capabilities in natural language understanding and generation. However, they continue to suffer from inherent limitations such as hallucinations, outdated knowledge, and lack of domain-specific context. Retrieval-Augmented Generation (RAG) has emerged as a promising paradigm to address these challenges by retrieving relevant documents from an external corpus to aid the LLM in generating more accurate, contextually grounded, and verifiable responses.

This paper provides a comprehensive survey of modern RAG architectures. We categorize RAG techniques into three developmental stages: Naive RAG, Advanced RAG, and Agentic RAG. Naive RAG follows a simple retrieve-then-read pipeline. Advanced RAG refines this by incorporating pre-retrieval optimization (e.g., query rewriting, routing) and post-retrieval strategies (e.g., reranking, compression). Agentic RAG introduces autonomous agents to iteratively verify information, fetch multi-hop documents, and evaluate reasoning paths. We examine the critical role of document chunking strategies, vector database selection, embedding models, and evaluation frameworks (such as RAGAS and DeepEval) in dictating overall system performance.

Analysis & Segmentation:

DOCUMENT TYPE: Research Paper

READABILITY METRICS:

- AVG. SENTENCE LENGTH: 18.8 words
- LONGEST PARAGRAPH: 93 words

TOKEN & CONTEXT USAGE:

- Llama 3 Context (8K): 3.1%

STRUCTURE & INGESTION ANALYSIS:

SOURCE TYPE: RESEARCH PAPER

Structure Confidence: 0%

No Structure Detected

Structure Found:

- Title Found
- Main Sections Found
- Subsections Found
- Lists Found
- Tables Found

Using Open ai model gpt-oss-20b MODEL now

127.0.0.1:8000

169 words1329 characters5 sentences3 paragraphs332 tokens

Chat

Chunking Strategy

LLM-Based Intelligent

Target Chunk Size (chars)300

LLM Configuration

Simulate LLM (No Key Required)

Groq API Key

Uses server GROQ_API_KEY when blank

Model Select

openai/gpt-oss-20b

Processing...

Ingest into MongoDB

No structural elements detected.

CHUNKING RECOMMENDATION

Recursive Character

Low structure detected. Using recursive character spitting is recommended to fall back on paragraphs and sentences.

SELECTION FLOW

Source: Research Paper

Score: 0/90 (0%)

Recommend: Recursive

Ready for Generation

Chunks ViewComparison DashboardRAG Simulator

Proceed to ingest into MongoDBGrid View

Chunk #1Standard Working Hours

Topic: Work ScheduleLive LLM: qwen/qwen3.8-72b213 chars

Q: What are the standard working hours? A: Our core business hours are Monday through Friday, 9:00 AM to 5:00 PM local time. We offer flexible start times between 8:00 AM and 10:00 AM, subject to manager approval.

127.0.0.1:8000Chat

Chunking Playground

VISUALIZING RAG DOCUMENT SEGMENTATION

Download Study GuideReset WorkspaceBackend Online

Upload FileWeb URLSample Web

Upload Document

HR Policy Manual 2023.pdf

Parsed successfully (382.4 KB)

Sample Library

Insurance Health Policy

Employee Handbook

Document Preview

Run AnalysisRESEARCH PAPER

Retrieval-Augmented Generation (RAG) in Large Language Models: A Survey

Abstract:

Large Language Models (LLMs) have demonstrated remarkable capabilities in natural language understanding and generation. However, they continue to suffer from inherent limitations such as hallucinations, outdated knowledge, and lack of domain-specific context. Retrieval-Augmented Generation (RAG) has emerged as a promising paradigm to address these challenges by retrieving relevant documents from an external corpus to aid the LLM in generating more accurate, contextually grounded, and verifiable responses.

This paper provides a comprehensive survey of modern RAG architectures. We categorize RAG techniques into three developmental stages: Naive RAG, Advanced RAG, and Agentic RAG. Naive RAG follows a simple retrieve-then-read pipeline. Advanced RAG refines this by incorporating pre-retrieval optimization (e.g., query rewriting, routing) and post-retrieval strategies (e.g., reranking, compression). Agentic RAG introduces autonomous agents to iteratively verify information, fetch multi-hop documents, and evaluate

AnalysisSegmentation

TOTAL CHUNKS6

AVG. CHUNK SIZE220.2 chars

EST. TOKENS330

TIME ELAPSED3287.467 ms

Teaching Mode

LLM-Based Intelligent Chunking

Leverages an LLM (e.g., Llama or Gemma via Groq) to read the document, detect semantic transitions, and split the text into ideal, topic-labeled segments.

OverviewApplicationsPracticesQ&A Prep

Advantages

Excellent understanding of complex formatting, lists,

Chunks View

Comparison Dashboard

RAG Simulator

Proceed to Ingest into MongoDB

Grid View

Chunk #1

Title

Topic: Document Title

Live LLM: openai/gpt-oss-20b

71 chars

Retrieval-Augmented Generation (RAG) in Large Language Models: A Survey

Chunk #2

Abstract Introduction

Topic: Abstract

Live LLM: openai/gpt-oss-20b

270 chars

Abstract: Large Language Models (LLMs) have demonstrated remarkable capabilities in natural language understanding and generation. However, they continue to suffer from inherent limitations such as hallucinations, outdated knowledge, and lack of domain-specific context.

Chunk #3

RAG Overview

Topic: Abstract

Live LLM: openai/gpt-oss-20b

250 chars

Retrieval-Augmented Generation (RAG) has emerged as a promising paradigm to address these challenges by retrieving relevant documents from an external corpus to aid the LLM in generating more accurate, contextually grounded, and verifiable responses.

Chunk #4

Survey Scope

Topic: Abstract

Live LLM: openai/gpt-oss-20b

175 chars

This paper provides a comprehensive survey of modern RAG architectures. We categorize RAG techniques into three developmental stages: Naive RAG, Advanced RAG, and Agentic RAG.

Chunk #5

RAG Stages Details

Topic: Abstract

Live LLM: openai/gpt-oss-20b

353 chars

Naive RAG follows a simple retrieve-then-read pipeline. Advanced RAG refines this by incorporating pre-retrieval optimization (e.g., query rewriting, routing) and post-retrieval strategies (e.g., reranking, compression). Agentic RAG introduces autonomous agents to iteratively verify information, fetch multi-hop documents, and evaluate reasoning paths.

Chunk #6

Key Components

Topic: Abstract

Live LLM: openai/gpt-oss-20b

202 chars

We examine the critical role of document chunking strategies, vector database selection, embedding models, and evaluation frameworks (such as RAGAS and DeepEval) in dictating overall system performance.

Ingesting into Mongo DB

← ↻ 127.0.0.1:8000

📄 ⭐ 🎵 ⚙️ 👤 ... 🗨 Chat

MongoDB Ingestion

Partitioned Document & Chunk Storage

✕

🟢

Ingestion & Embedding Complete

Each chunk has been stored as an individual MongoDB document with a 1,024-dimensional Mistral embedding.

TARGET COLLECTION

document_chunks

STORAGE ARCHITECTURE

Individual Chunk Documents

EMBEDDING MODEL

Mistral (1,024 Dimensions)

VECTOR SEARCH STATUS

Ready (vector_index)

DOCUMENT NAME

RAG Research Abstract

DOCUMENTS INGESTED

6 Documents

FIRST INSERTED ID

6ab82f7f3caac8b12acc82d5

🔍 Verify Vector Search


1,024-d Cosine Similarity

e.g. Automation QA with Selenium...

▶ Search


Close

Cross checking into Mongo DB FOR 6 documents inserted

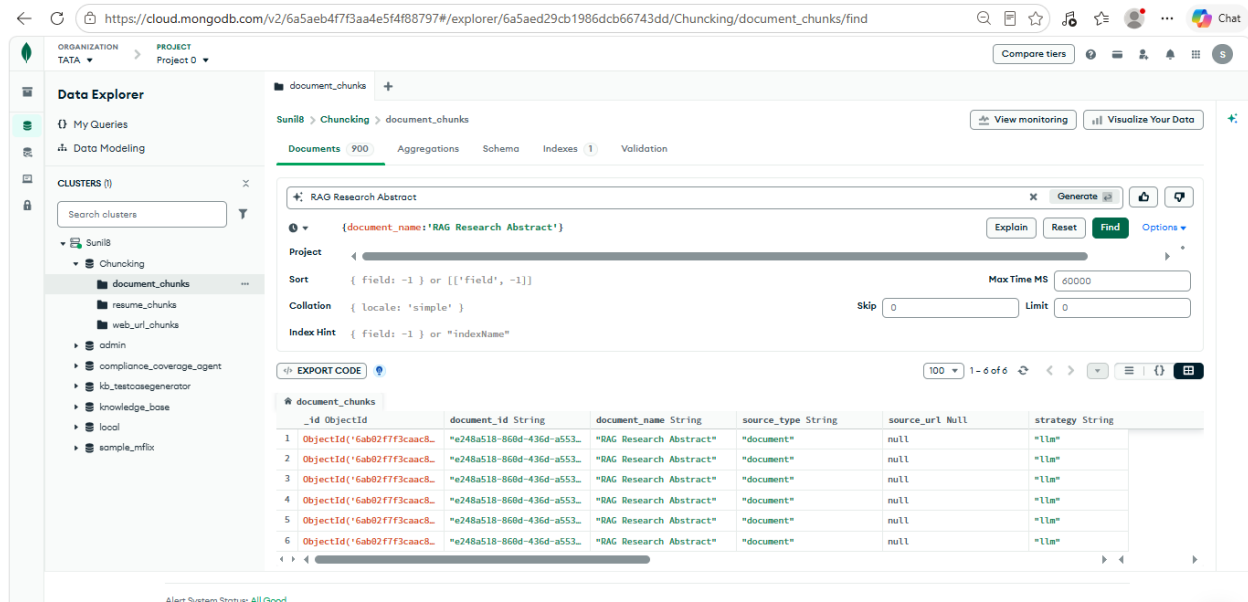

Working and ingested as expected

Test 3: Doing a regression without choosing Groq key by enabling Simulate LLM (No key) required

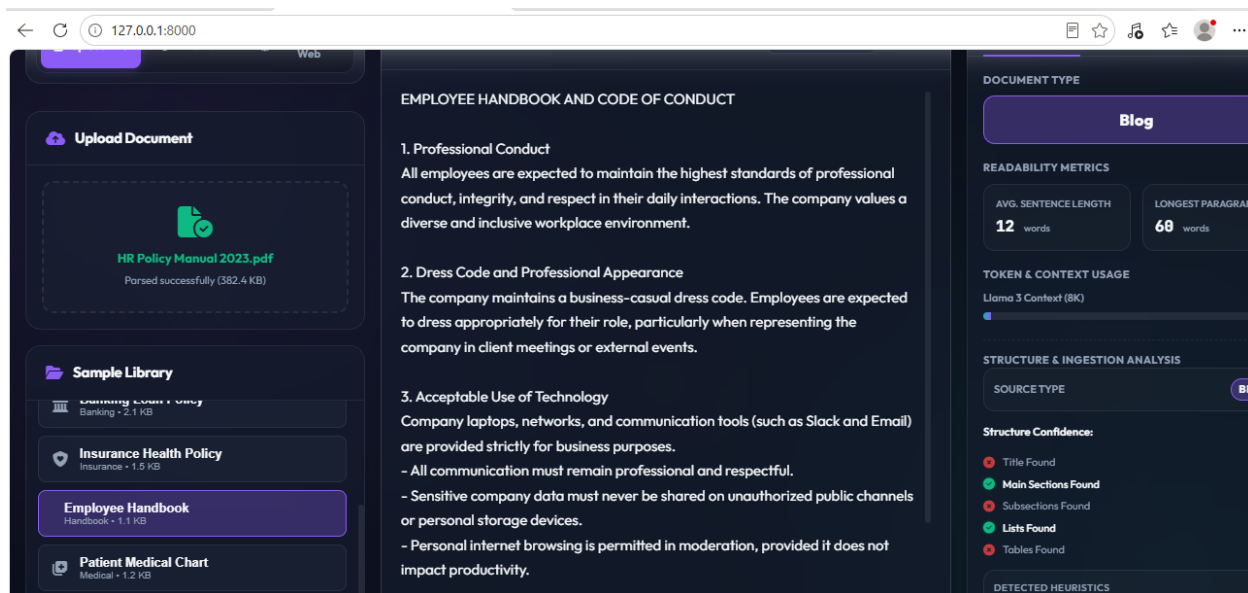

Banking - 2.1 KB

Insurance Health Policy
Insurance - 1.5 KB

Employee Handbook
Handbook - 1.1 KB

Patient Medical Chart
Medical - 1.2 KB

Workers API Gateway
Tech Doc - 0.9 KB

Chunking Strategy

LLM-Based Intelligent

Target Chunk Size (chars) 388

LLM Configuration

☒ Simulate LLM (No Key Required)

Apply Chunking

Ingest into MongoDB

- Sensitive company data must never be shared on unauthorized public channels or personal storage devices.

- Personal internet browsing is permitted in moderation, provided it does not impact productivity.

4. Core Hours and Workplace Attendance

Our standard work week is 40 hours. Core collaborative hours are between 10:00 AM and 4:00 PM, during which all employees are expected to be available for team meetings and client requests.

H 168 words A 1157 characters S 14 sentences P 5 paragraphs T 289 tokens

Structure Confidences: 55%

Title Found

Main Sections Found

Subsections Found

Lists Found

Tables Found

DETECTED HEURISTICS

- 4 sections detected

- 1 list detected

CHUNKING RECOMMENDATION

Document-Structure Aware

High structure detected. Splitting by logical document structures (headings, tables, lists) is recommended to keep topics whole.

SELECTION FLOW

Source: Blog

Score: 50/90 (55%)

Recommend: Doc Structure

Ready for Generation

Chunking Playground
VISUALIZING RAG DOCUMENT SEGMENTATION

Download Study Guide

Reset Workspace

Backend Online

Upload File

Web URL

Sample Web

Upload Document

HR Policy Manual 2023.pdf
Parsed successfully (382.4 KB)

Sample Library

Banking - 2.1 KB

Insurance Health Policy
Insurance - 1.5 KB

Employee Handbook
Handbook - 1.1 KB

Document Preview

Run Analysis

BLOG

EMPLOYEE HANDBOOK AND CODE OF CONDUCT

1. Professional Conduct

All employees are expected to maintain the highest standards of professional conduct, integrity, and respect in their daily interactions. The company values a diverse and inclusive workplace environment.

2. Dress Code and Professional Appearance

The company maintains a business-casual dress code. Employees are expected to dress appropriately for their role, particularly when representing the company in client meetings or external events.

3. Acceptable Use of Technology

Company laptops, networks, and communication tools (such as Slack and Email) are provided strictly for business purposes.

- All communication must remain professional and respectful.

- Sensitive company data must never be shared on unauthorized public channels or personal storage devices.

Analysis

Segmentation

TOTAL CHUNKS 5

AVG. CHUNK SIZE 229.8 chars

EST. TOKENS 287

TIME ELAPSED 22.669 ms

Teaching Mode

LLM-Based Intelligent Chunking

Leverages an LLM (e.g., Llama or Gemma via Groq) to read the document, detect semantic transitions, and split the text into ideal, topic-labeled segments.

Overview

Applications

Practices

Q&A Prep

Advantages

- Excellent understanding of complex formatting, lists,

Chunks View

Comparison Dashboard

RAG Simulator

Proceed to Ingest into MongoDB

Grid View

Chunk #1

Logical Section: EMPLOYEE HANDBOOK AND CO

Topic: Document / Conduct / Code

Simulated LLM

37 chars

EMPLOYEE HANDBOOK AND CODE OF CONDUCT

Chunk #2

Logical Section: 1. Professional Conduct

Topic: Document / Professional / Conduct

Simulated LLM

227 chars

1. Professional Conduct All employees are expected to maintain the highest standards of professional conduct, integrity, and respect in their daily interactions. The company values a diverse and inclusive workplace environment.

Chunk #3

Logical Section: 2. Dress Code and Professional Ap

Topic: Document / Dress / Code

Simulated LLM

237 chars

2. Dress Code and Professional Appearance The company maintains a business-casual dress code. Employees are expected to dress appropriately for their role, particularly when representing the company in client meetings or external events.

Chunk #4

Logical Section: 3. Acceptable Use of Technology

Topic: Document / Provided / Personal

Simulated LLM

420 chars

3. Acceptable Use of Technology Company laptops, networks, and communication tools (such as Slack and Email) are provided strictly for business purposes. - All communication must remain professional and respectful. - Sensitive company data must never be shared on unauthorized public channels or personal storage devices. - Personal internet browsing is permitted in moderation, provided it does not impact productivity.

Chunk #5

Logical Section: 4. Core Hours and Workplace Att

Topic: Document / Hours / Core

Simulated LLM

228 chars

4. Core Hours and Workplace Attendance Our standard work week is 40 hours. Core collaborative hours are between 10:00 AM and 4:00 PM, during which all employees are expected to be available for team meetings and client requests.

127.0.0.1:8000

Chat

Insurance Health Policy
Insurance - 1.5 KB

Employee Handbook
Handbook - 1.1 KB

Patient Medical Chart
Medical - 1.2 KB

Workers API Gateway
Tech Doc - 0.9 KB

Chunking Strategy

LLM-Based Intelligent

Target Chunk Size (chars) 300

LLM Configuration

☒ Simulate LLM (No Key Required)

Apply Chunking

Ingesting...

Company laptops, networks, and communication tools (such as Slack and Email) are provided strictly for business purposes.

- All communication must remain professional and respectful.

- Sensitive company data must never be shared on unauthorized public channels or personal storage devices.

- Personal internet browsing is permitted in moderation, provided it does not impact productivity.

H 168 words A 1157 characters S 14 sentences P 5 paragraphs T 289 tokens

Overview

Applications

Practices

Q&A Prep

Advantages

- Excellent understanding of complex formatting, lists, and tables.
- Can output a reason and title for each chunk boundary.

Disadvantages

- Very high API cost and latency.
- Requires handling potential LLM JSON formatting errors.

Why Companies Use It

- Intelligently extracts logical sub-topics without hardcoded rules.
- Handles highly unstructured or irregular business reports with high accuracy.
- Provides clear reasoning explanations for segment transitions.

Chunks View

Comparison Dashboard

RAG Simulator

Ingesting...

Grid View



MongoDB Ingestion

Partitioned Document & Chunk Storage

×



Ingestion & Embedding Complete

Each chunk has been stored as an individual MongoDB document with a 1,024-dimensional Mistral embedding.

TARGET COLLECTION	 document_chunks
STORAGE ARCHITECTURE	 Individual Chunk Documents
EMBEDDING MODEL	 Mistral (1,024 Dimensions)
VECTOR SEARCH STATUS	 Ready (vector_index)
DOCUMENT NAME	Employee Handbook
DOCUMENTS INGESTED	5 Documents
FIRST INSERTED ID	6ab031a83caac8b12acc02db


 **Verify Vector Search**

1,024-d Cosine Similarity

 **Search**


Close

Cross checking in Mongo DB

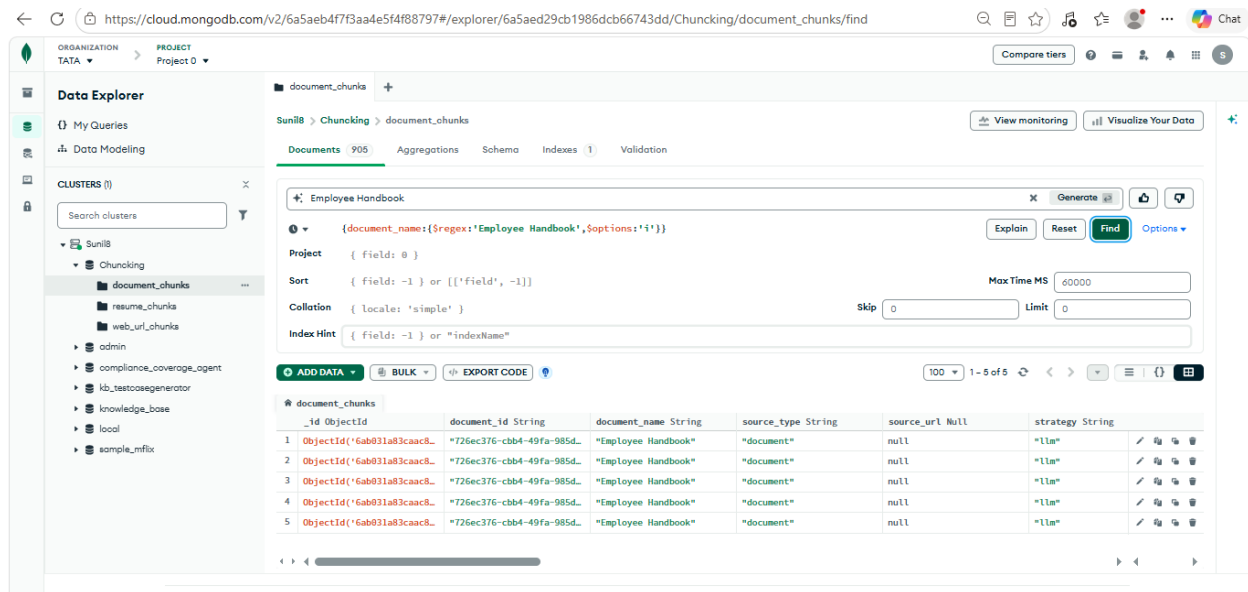

Regression checks passed and chunking application for LLM-Based-Intelligent is working with LLM model from Groq from the drop down **when Simulate LLM (No Key Required) is not chosen** and also **when Simulate LLM is chosen** then chunking is done without Groq model being chosen

Test 4: Checking Mongo db ingestion with one more model **groq/compound mini** and could see 4 chunks generated and ingested into Mongo DB successfully

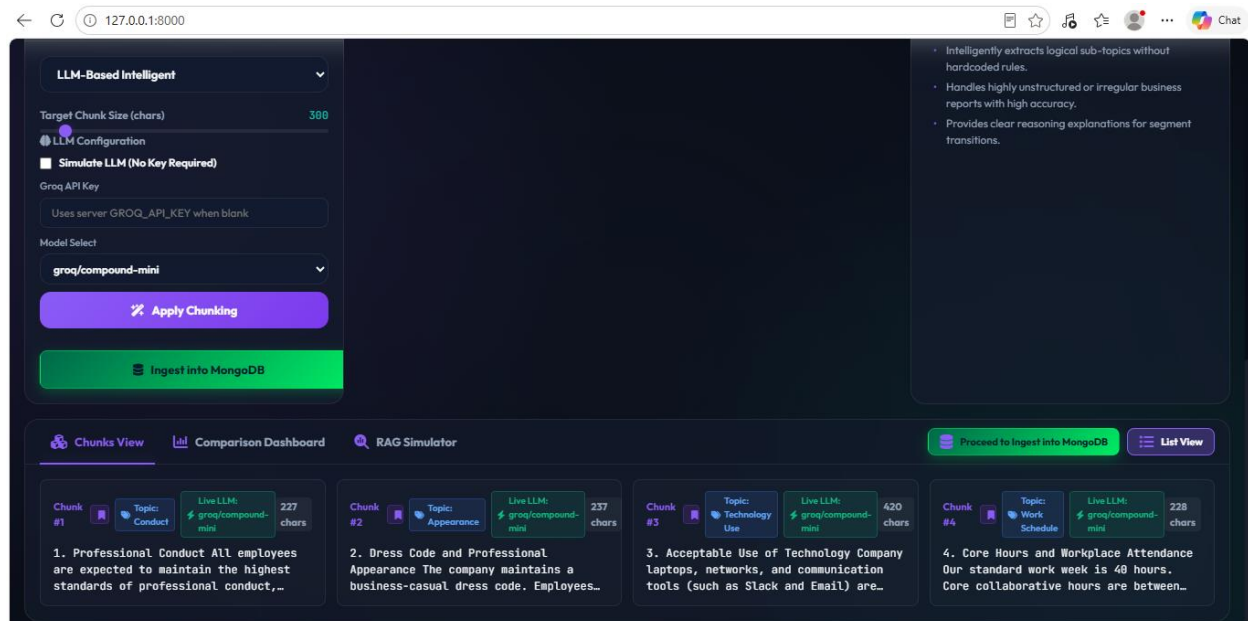

127.0.0.1:8000

Chat

 **Chunking Playground**
VISUALIZING RAG DOCUMENT SEGMENTATION

[Download Study Guide](#) [Reset Workspace](#) [Backend Online](#) 

[Upload File](#) [Web URL](#) [Sample Web](#)

 **Upload Document**

**HR Policy Manual 2023.pdf**
Parsed successfully (382.4 KB)

Sample Library

 **Banking** • 2.1 KB

 **Insurance Health Policy**
Insurance • 1.5 KB

 **Employee Handbook**
Handbook • 1.1 KB

 **Document Preview**

[Run Analysis](#) [BLOG](#)

conduct, integrity, and respect in their daily interactions. The company values a diverse and inclusive workplace environment.

2. Dress Code and Professional Appearance
The company maintains a business-casual dress code. Employees are expected to dress appropriately for their role, particularly when representing the company in client meetings or external events.

3. Acceptable Use of Technology
Company laptops, networks, and communication tools (such as Slack and Email) are provided strictly for business purposes.

- All communication must remain professional and respectful.
- Sensitive company data must never be shared on unauthorized public channels or personal storage devices.
- Personal internet browsing is permitted in moderation, provided it does not impact productivity.

4. Core Hours and Workplace Attendance

Analysis **Segmentation**

TOTAL CHUNKS
4

EST. TOKENS
278

AVG. CHUNK SIZE
278 chars

TIME ELAPSED
5123.551 ms

 **Teaching Mode**

LLM-Based Intelligent Chunking

Leverages an LLM (e.g., Llama or Gemma via Groq) to read the document, detect semantic transitions, and split the text into ideal, topic-labeled segments.

[Overview](#) [Applications](#) [Practices](#) [Q&A Prep](#)

Advantages

- Excellent understanding of complex formatting, lists,



MongoDB Ingestion
 Partitioned Document & Chunk Storage

✕



Ingestion & Embedding Complete

Each chunk has been stored as an individual MongoDB document with a 1,024-dimensional Mistral embedding.

TARGET COLLECTION	 document_chunks
STORAGE ARCHITECTURE	 Individual Chunk Documents
EMBEDDING MODEL	 Mistral (1,024 Dimensions)
VECTOR SEARCH STATUS	 Ready (vector_index)
DOCUMENT NAME	Employee Handbook
DOCUMENTS INGESTED	4 Documents
FIRST INSERTED ID	6ab0345b3caac8b12acc02e4


Verify Vector Search

1,024-d Cosine Similarity

▶ Search

Close

Appearing successfully in Mongo db as below

ObjectId('6ab0345b3caac8b12acc02e4')	"7e20c25f-670b-49c7-b00e...	"Employee Handbook"	1	4
ObjectId('6ab0345b3caac8b12acc02e5')	"7e20c25f-670b-49c7-b00e...	"Employee Handbook"	2	4
ObjectId('6ab0345b3caac8b12acc02e6')	"7e20c25f-670b-49c7-b00e...	"Employee Handbook"	3	4
ObjectId('6ab0345b3caac8b12acc02e7')	"7e20c25f-670b-49c7-b00e...	"Employee Handbook"	4	4