
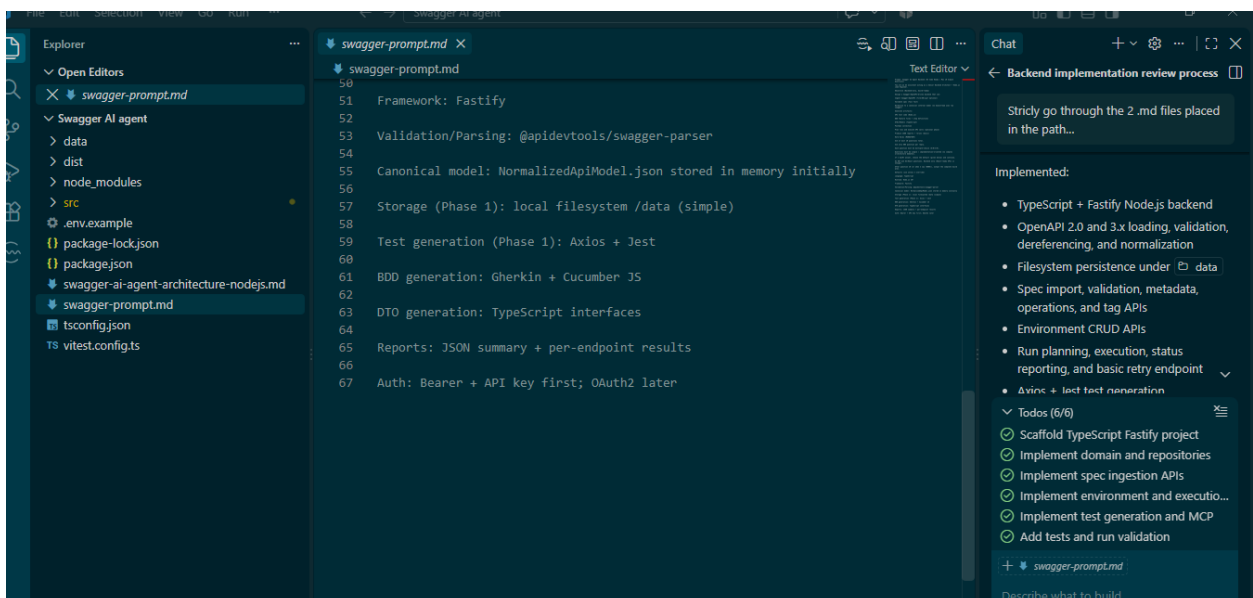
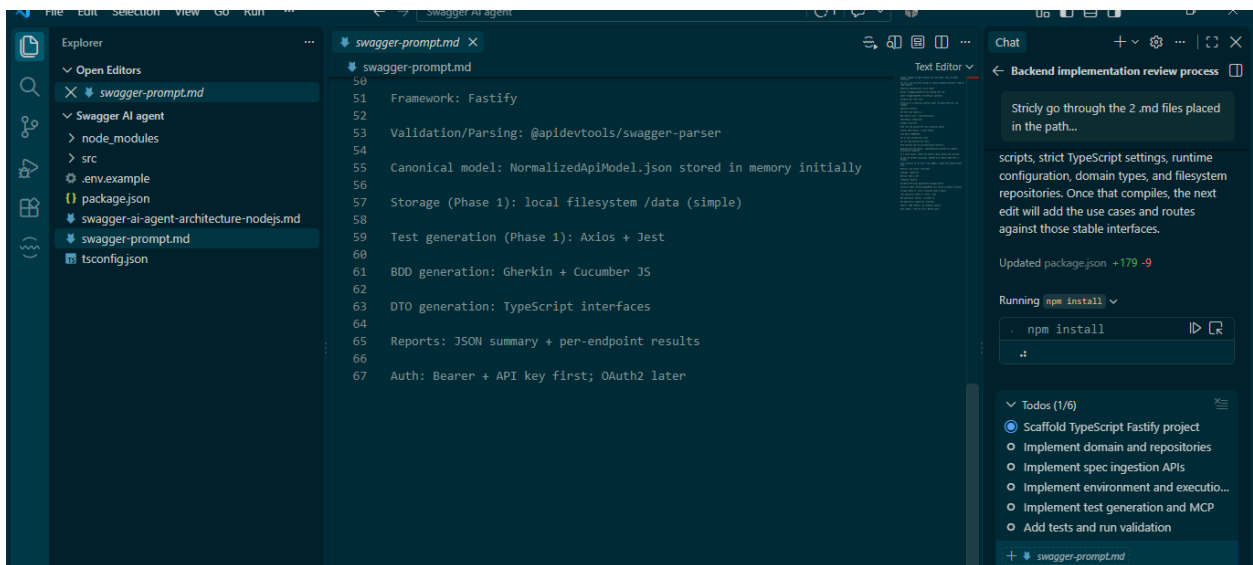


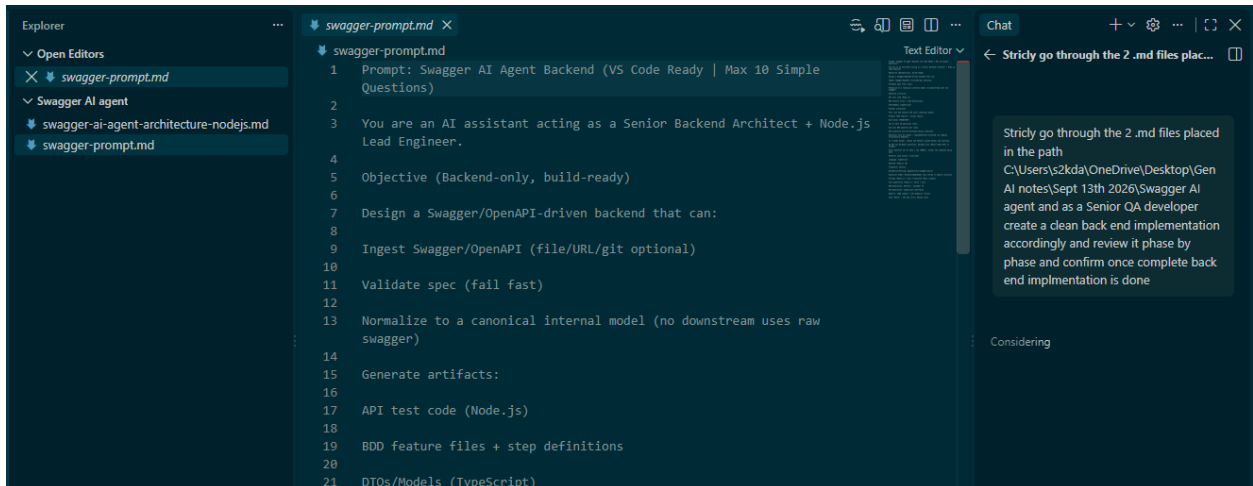

Completed 7 steps in 45s

Created and validated `postman.json`.

The collection contains 20 requests covering:

- Health check
- Spec import, validation, metadata, operations, and tags
- Environment
create/list/get/update/delete
- Run planning, execution, status, and retry endpoint
- Axios/Jest test generation
- MCP operation, planning, and generation APIs

It automatically stores `specId`, `envId`, `runId`, and `operationId` as collection variables.

Completed 7 steps in 45s

Created and validated `postman.json`.

The collection contains 20 requests covering:

- Health check
- Spec import, validation, metadata, operations, and tags
- Environment
create/list/get/update/delete
- Run planning, execution, status, and retry endpoint
- Axios/Jest test generation
- MCP operation, planning, and generation APIs

It automatically stores `specId`, `envId`, `runId`, and `operationId` as collection variables.

Completed 7 steps in 45s

Created and validated `postman.json`.

The collection contains 20 requests covering:

- Health check
- Spec import, validation, metadata, operations, and tags
- Environment
create/list/get/update/delete
- Run planning, execution, status, and retry endpoint
- Axios/Jest test generation
- MCP operation, planning, and generation APIs

It automatically stores `specId`, `envId`, `runId`, and `operationId` as collection variables.

-
- Completed 7 steps in 45s
- Created and validated `postman.json`.
- The collection contains 20 requests covering:
- Health check
 - Spec import, validation, metadata, operations, and tags
 - Environment
create/list/get/update/delete
 - Run planning, execution, status, and retry endpoint
 - Axios/Jest test generation
 - MCP operation, planning, and generation APIs
- It automatically stores `specId`, `envId`, `runId`, and `operationId` as collection variables.

Completed 7 steps in 45s

Created and validated `postman.json`.

The collection contains 20 requests covering:

- Health check
- Spec import, validation, metadata, operations, and tags
- Environment
create/list/get/update/delete
- Run planning, execution, status, and retry endpoint
- Axios/Jest test generation
- MCP operation, planning, and generation APIs

It automatically stores `specId`, `envId`, `runId`, and `operationId` as collection variables.

Backend implementation review process

Run the backend with...

I'll start the backend with `npm run dev`,
verify it is listening, and then check whether
a local Postman/Newman runner is available
to execute the collection automatically. If
only the GUI workflow is available, I'll leave
the server running and give you the exact
import/run step.

Running `npm run dev` ▾

npm run dev

```
{ "level": 30, "time": 1789278261230, "pid": 14892, "hostname": "DESKTOP-9G4AHT9", "msg": "Server listening at http://127.0.0.1:3000" }  
{ "level": 30, "time": 1789278261230, "pid": 14892, "hostname": "DESKTOP-9G4AHT9", "msg": "Server listening at http://10.204.142.209:3000" }
```

postman.json

postman.json > ...
1 {
2 "info": {
3 "name": "Swagger AI Agent Backend Verification",
4 "description": "Smoke and contract verification collection for the s
5 "schema": "https://schema.getpostman.com/json/collection/v2.1.0/col
6 },
7 "variable": [
8 { "key": "baseUrl", "value": "http://localhost:3000" },
9 { "key": "specUrl", "value": "https://petstore.swagger.io/v2/swagger
10 { "key": "environmentName", "value": "qa" },
11 { "key": "environmentBaseUrl", "value": "https://petstore.swagger.io
12 { "key": "specId", "value": "" },
13 { "key": "envId", "value": "" },
14 { "key": "runId", "value": "" },
15 { "key": "operationId", "value": "" }
16],
17 "item": [
 {
 "name": "01 - Health",
 "request": { "method": "GET", "header": [], "url": "{{baseUrl}}/he
 "event": [{ "listen": "test", "script": { "exec": ["pm.test('HTTP 200 OK', function()
 },
 {
 "name": "02 - Spec APIs",
 "item": [
 {
 "name": "Import OpenAPI specification",
 "request": { "method": "GET", "header": [], "url": "https://petstore.swagger.io/v2/swagger
 }
]
 }
]
}

Chat
Backend implementation review process
TypeScript compilation: passed
Full test suite: 5 test files p
Total tests: 6 passed
Integration workflow: passed
Execution result: 1 passed, 0 f.

Remaining qualification: the LLM endpoints currently use deterministic schema/template fallbacks. A real OpenAI, Azure OpenAI, or other provider still needs to be connected through the LLM client interface. The backend uses Fastify as specified by swagger-prompt.md ; the architecture document's Express choice was not used.

Todos (6/6)
✓ Harden request validation and config
✓ Implement parameterized authenticat...
✓ Implement real retry and aggregates
✓ Add LLM payload and artifact genera...
✓ Add MCP tool module structure
✓ Expand integration and phase validati...

Backend implementation review process

Validate that postman.json is all up to date



- Axios/Jest generation
- LLM payload and test suggestions
- BDD generation
- TypeScript DTO generation
- Postman collection generation
- All MCP endpoints, including operation execution

Validation passed:

```
JSON parsing: passed
Backend route coverage: 27/27
Postman/Newman requests: 27
Failed requests: 0
Assertions: 54 passed
Total duration: 6.5 seconds
```

<https://petstore.swagger.io/v2/swagger.json>

Validating the api's in postman

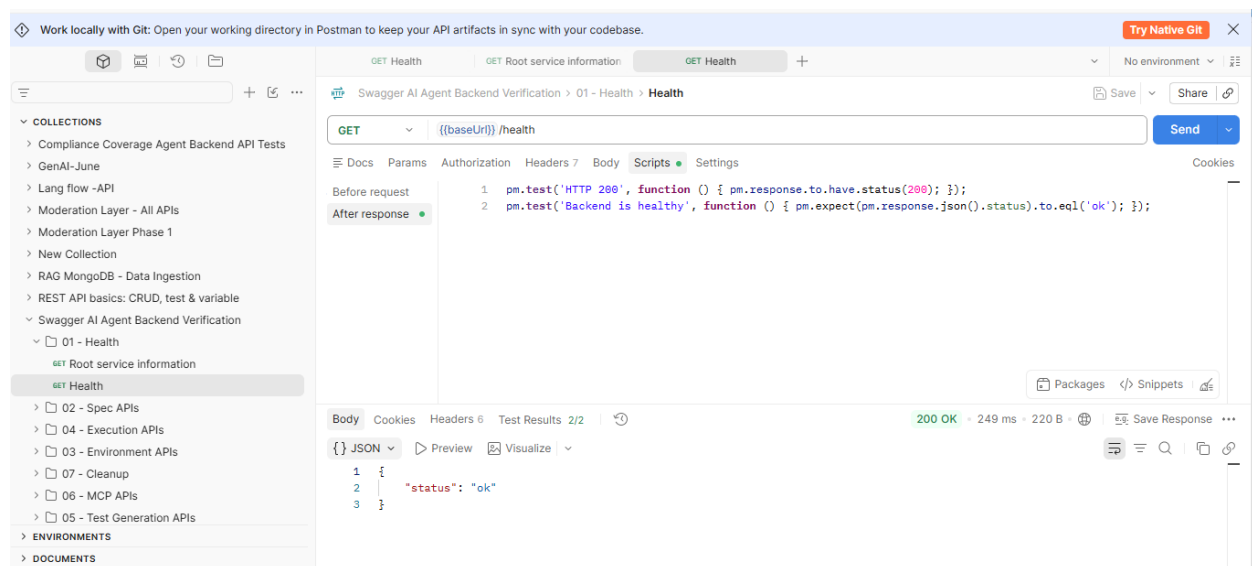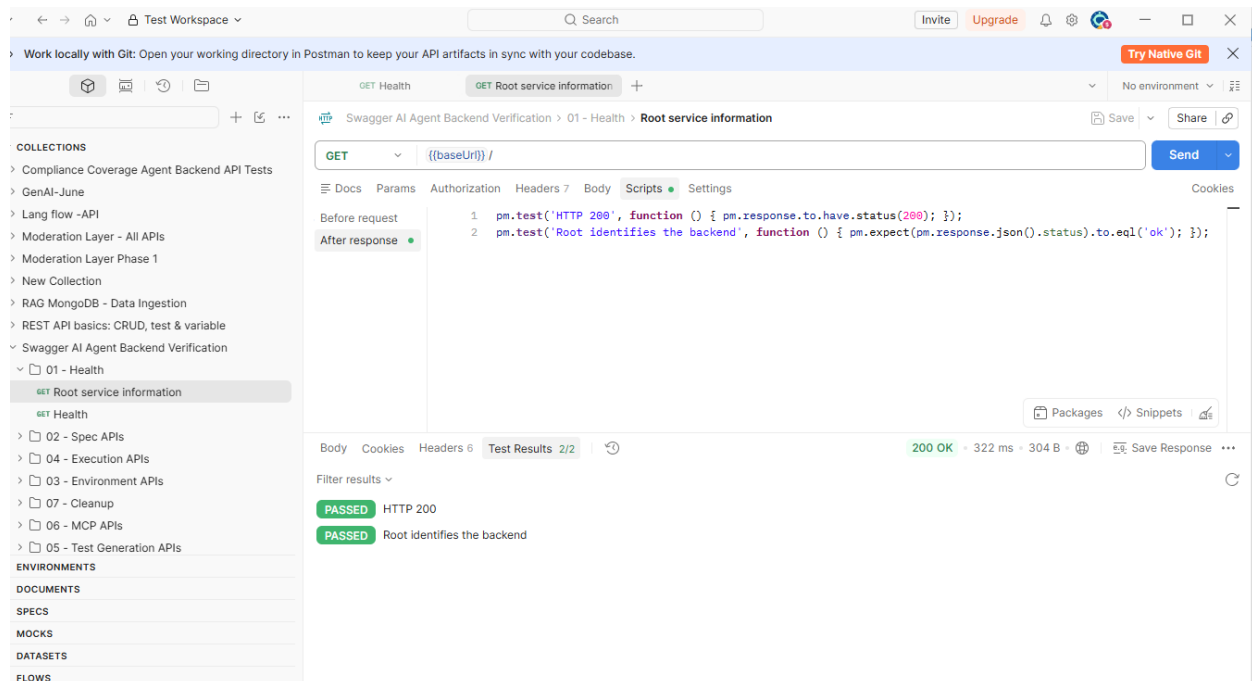

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase. Try Native Git

GET Health GET Root service information GET Health POST Import OpenAPI specification

Swagger AI Agent Backend Verification > 02 - Spec APIs > Import OpenAPI specification

POST {{baseUri}} /spec/import

Docs Params Authorization Headers 10 Body Scripts Settings Cookies

none form-data x-www-form-urlencoded raw binary GraphQL Text

```
1 {
2   "source": {
3     "type": "url",
4     "url": "{{specUrl}}"
5   }
6 }
```

Body Cookies Headers 6 Test Results 2/2 200 OK 5.82 s 400 B Save Response

```
1 {
2   "specId": "spec-5758f72b-6e34-4480-9156-d3495fead6ce",
3   "title": "Swagger Petstore",
4   "version": "1.8.7",
5   "servers": [
6     "https://petstore.swagger.io/v2"
7   ],
8   "tags": [
9     "pet",
10    "store",
11    "user"
12 ]
13 }
```

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase. Try Native Git

GET Health GET Root service information GET Health POST Import OpenAPI specification GET List tags

Swagger AI Agent Backend Verification > 02 - Spec APIs > List tags

GET {{baseUri}} /spec/ {{specId}} /tags

Docs Params Authorization Headers 7 Body Scripts Settings Cookies

Headers 7 hidden

Key	Value	Description	Bulk Edit	Presets
Key	Value	Description		

Body Cookies Headers 6 Test Results 2/2 200 OK 4 ms 309 B Save Response

```
3   "tag": "pet",
4   "operationCount": 8
5 },
6 {
7   "tag": "store",
8   "operationCount": 4
9 },
10 {
11   "tag": "user",
12   "operationCount": 8
13 }
```

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase. Try Native Git

GET Health GET Root service info GET Health POST Import OpenAPI GET List tags GET Get spec metadata + No environment

Swagger AI Agent Backend Verification > 02 - Spec APIs > Get spec metadata Save Share

GET {{(baseUri)} /spec/ {{(specId)}} Send

Docs Params Authorization Headers 7 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2 200 OK 3 ms 400 B Save Response

```
{
  "title": "Swagger Petstore",
  "version": "1.0.7",
  "servers": [
    {
      "url": "https://petstore.swagger.io/v2"
    }
  ],
  "tags": [
    {
      "name": "pet",
      "description": "pet",
      "externalDocs": {
        "url": "https://petstore.swagger.io/v2"
      }
    },
    {
      "name": "store",
      "description": "store",
      "externalDocs": {
        "url": "https://petstore.swagger.io/v2"
      }
    },
    {
      "name": "user",
      "description": "user",
      "externalDocs": {
        "url": "https://petstore.swagger.io/v2"
      }
    }
  ],
  "operationCount": 20
}
```

Open Folder Terminal Console All systems are go! Globals Vault Tools

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase. Try Native Git

GET Health GET Root service info GET Health POST Import OpenAPI GET List tags GET Get spec metadata POST Validate raw + No environment

Swagger AI Agent Backend Verification > 02 - Spec APIs > Validate raw specification Save Share

POST {{(baseUri)} /spec/validate Send

Docs Params Authorization Headers 10 Body Scripts Settings Cookies

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL Text

```
1 {
2   "spec": {
3     "openapi": "3.0.3",
4     "info": { "title": "Smoke API", "version": "1.0.0" },
5     "paths": {}
6   }
7 }
```

Body Cookies Headers 6 Test Results 2/2 200 OK 249 ms 231 B Save Response

```
{
  "valid": true,
  "issues": []
}
```

Open Folder Terminal Console All systems are go! Globals Vault Tools

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase. Try Native Git

GET Health GET Root service GET Health POST Import Op GET List tags GET Get spec m POST Validate r GET List operati + No environment

Swagger AI Agent Backend Verification > 02 - Spec APIs > List operations

GET {{baseUrl}} /spec/ {{specId}} /operations Send

Docs Params Authorization Headers 7 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2 Save Response

JSON Preview Visualize

```
1 [
2   {
3     "operationId": "uploadFile",
4     "method": "POST",
5     "path": "/pet/{{petId}}/uploadImage",
6     "tags": [
7       "pet"
8     ],
9     "summary": "uploads an image"
```

Test Workspace Search Invite Upgrade

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase. Try Native Git

GET Root se GET Health POST Plan fu POST Import GET Get spe POST Validat GET List ope GET List tag POST Create PUT Update + No environment

Swagger AI Agent Backend Verification > 03 - Environment APIs > Create environment

POST {{baseUrl}} /environment Send

Docs Params Authorization Headers 10 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2 Save Response

JSON Preview Visualize

```
1 {
2   "specId": "spec-bd8e6bdf-4087-4948-ad38-e0a6c303808f",
3   "name": "qa",
4   "baseUrl": "https://petstore.swagger.io/v2",
5   "defaultHeaders": {
6     "Accept": "application/json"
7   },
8   "authConfig": {},
9   "id": "env-5a270a9e-a3f7-405a-8177-445206289673"
10 }
```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 03 - Environment APIs > Update environment

PUT {{baseUrl}}/environment/{{envId}}

Params Authorization Headers 10 Body Scripts Settings

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2

200 OK - 4 ms - 451 B

```
{
  "specId": "spec-bd8e6bdf-4087-4948-ad38-e0a6c383888f",
  "name": "qa",
  "baseUrl": "https://petstore.swagger.io/v2",
  "defaultHeaders": {
    "Accept": "application/json",
    "X-Smoke-Test": "updated"
  },
  "authConfig": {},
  "id": "env-5a278a9e-a3f7-405a-8177-445286289673"
}
```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 03 - Environment APIs > List environments

GET {{baseUrl}}/spec/{{specId}}/environments

Params Authorization Headers 7 Body Scripts Settings

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2

200 OK - 69 ms - 453 B

```
{
  "specId": "spec-bd8e6bdf-4087-4948-ad38-e0a6c383888f",
  "name": "qa",
  "baseUrl": "https://petstore.swagger.io/v2",
  "defaultHeaders": {
    "Accept": "application/json",
    "X-Smoke-Test": "updated"
  },
  "authConfig": {},
  "id": "env-5a278a9e-a3f7-405a-8177-445286289673"
}
```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 03 - Environment APIs > Get environment

GET {{baseUrl}}/environment/{{envId}}

Params Authorization Headers 7 Body Scripts Settings

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2

200 OK - 2 ms - 451 B

```
{
  "specId": "spec-bd8e6bdf-4087-4948-ad38-e0a6c303088f",
  "name": "qa",
  "baseUrl": "https://petstore.swagger.io/v2",
  "defaultHeaders": {
    "Accept": "application/json",
    "X-Smoke-Test": "updated"
  },
  "authConfig": {},
  "id": "env-5a270a9e-a3f7-405a-8177-445206289673"
}
```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 04 - Execution APIs > Plan full run

POST {{baseUrl}}/execution/plan

Params Authorization Headers 10 Body Scripts Settings

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2

200 OK - 9 ms - 359 B

```
{
  "runId": "run-dbeeda10-c15b-42fb-a074-dc6e56e333a3",
  "specId": "spec-bd8e6bdf-4087-4948-ad38-e0a6c303088f",
  "envName": "qa",
  "operationCount": 1,
  "testCount": 1
}
```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 04 - Execution APIs > Execute run

POST {{baseUrl}}/execution/run

Params Authorization Headers 10 Body Scripts Settings

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2

200 OK • 1.09 s • 313 B

```
{
  "runId": "run-dbeeda18-c15b-42fb-a074-dc6e56e333a3",
  "summary": {
    "total": 1,
    "passed": 1,
    "failed": 0,
    "errors": 0
  }
}
```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 04 - Execution APIs > Get run status

GET {{baseUrl}}/execution/status/{{runId}}

Params Authorization Headers 7 Body Scripts Settings

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2

200 OK • 2 ms • 821 B

```
{
  "runId": "run-dbeeda18-c15b-42fb-a074-dc6e56e333a3",
  "status": "completed",
  "summary": {
    "total": 1,
    "passed": 1,
    "failed": 0,
    "errors": 0
  },
  "results": [
    {
      "testId": "test-8f6a9492-d965-42c2-bd17-2fdf5f5dcbd46",
    }
  ]
}
```

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase. Try Native Git

Swagger AI Agent Backend Verification > 04 - Execution APIs > **Retry failed tests endpoint** Save Share

POST `{{baseUrl}}/execution/retry-failed` Send

Docs Params Authorization Headers 10 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2 Save Response

200 OK · 3 ms · 836 B

```
{
  "runId": "run-dbeeda10-c15b-42fb-a074-dc6e56e333a3",
  "status": "completed",
  "summary": {
    "total": 1,
    "passed": 1,
    "failed": 0,
    "errors": 0
  },
  "results": [
    {

```

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase. Try Native Git

Swagger AI Agent Backend Verification > 05 - Test Generation APIs > **Generate Axios Jest tests** Save Share

POST `{{baseUrl}}/testgen/generate-axios-tests` Send

Docs Params Authorization Headers 10 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2 Save Response

200 OK · 6 ms · 712 B

```
{
  "code": "import axios from 'axios';\n\nconst baseUrl = process.env.BASE_URL ?? 'https://petstore.swagger.io/v2';\n\nconst describe = ('Swagger Petstore', () => {\n  it('GET /store/inventory', async () => {\n    const response = await axios.get(baseUrl + '/store/inventory');\n    expect(response.status).toBeGreaterThanOrEqual(200);\n    expect(response.status).toBeLessThan(300);\n  });\n});",
  "testCases": [
    {
      "operationId": "getInventory",
      "method": "GET",
      "path": "/store/inventory",
      "tests": [
        "happy-path",

```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 05 - Test Generation APIs > Preview generated tests

GET `{{baseUri}}/testgen/spec/{{specId}}/preview`

Docs Params Authorization Headers 7 Body Scripts Settings

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2

200 OK • 3 ms • 6.48 KB

```
{
  "tests": [
    {
      "happy-path": {
        "operationId": "updatePet",
        "method": "PUT",
        "path": "/pet",
        "tests": [
          {
            "happy-path": {

```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 05 - Test Generation APIs > Build payload from schema

POST `{{baseUri}}/llm/build-payload`

Docs Params Authorization Headers 10 Body Scripts Settings

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2

200 OK • 3 ms • 253 B

```
{
  "payloads": [
    null
  ],
  "provider": "schema-fallback"
}
```


Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 05 - Test Generation APIs > Generate TypeScript DTO

POST {{baseUri}}/testgen/generate-dto

Params Authorization Headers 10 Body Scripts Settings

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2

200 OK - 3 ms - 490 B

```
{
  "code": "export interface SwaggerPetstoreOperation {\n  operationId: string;\n  method: 'POST' | 'POST' | 'PUT' | 'GET' | 'GET' | 'GET' | 'POST' | 'DELETE' | 'GET' | 'POST' | 'GET' | 'DELETE' | 'POST' | 'GET' | 'PUT' | 'DELETE' | 'GET' | 'GET' | 'POST' | 'POST';\n  path: string;\n}"
```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 05 - Test Generation APIs > Generate Postman collection

POST {{baseUri}}/testgen/generate-postman

Params Authorization Headers 10 Body Scripts Settings

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2

200 OK - 3 ms - 2.39 KB

```
{
  "url": "{{baseUri}}/pet/1petId",
  "name": "GET /store/inventory",
  "request": {
    "method": "GET",
    "header": [],
    "url": "{{baseUri}}/store/inventory"
  }
}
```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 06 - MCP APIs > MCP list operations

POST {{baseUri}}/mcp/swagger/list-operations

Params Authorization Headers 10 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2

200 OK · 3 ms · 14.96 KB

```
{
  "operationId": "uploadFile",
  "method": "POST",
  "path": "/pet/{petId}/uploadImage",
  "tags": [
    "pet"
  ],
  "summary": "uploads an image",
  "parameters": [
    {
      "name": "petId",
```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 06 - MCP APIs > MCP generate Axios tests

POST {{baseUri}}/mcp/swagger/generate-axios-tests

Params Authorization Headers 10 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2

200 OK · 3 ms · 692 B

```
{
  "code": "import axios from 'axios';\n\nconst baseUrl = process.env.BASE_URL ?? 'https://petstore.swagger.io/v2';\n\nconst describe =\n  ('Swagger Petstore', () => {\n    it('GET /store/inventory', async () => {\n      const response = await axios.get(baseUrl +\n        '/store/inventory');\n      expect(response.status).toBeGreaterThanOrEqual(200);\n      expect(response.status).toBeLessThan(300);\n    });\n  });\n\nconst testCases = [\n  {\n    operationId: "getInventory",\n    method: "GET",\n    path: "/store/inventory",\n    tests: [\n      "happy-path"
```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 06 - MCP APIs > MCP plan run

POST `{{baseUri}}/mcp/swagger/plan-run` Send

Params Authorization Headers 10 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2 200 OK 6 ms 302 B Save Response

```
1 {
2   "runId": "run-d53f8dca-28c1-46cd-b8fa-d9ea6d41d171",
3   "summary": {
4     "operationCount": 1,
5     "testCount": 1
6   }
7 }
```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 06 - MCP APIs > MCP execute operation

POST `{{baseUri}}/mcp/swagger/execute-operation` Send

Params Authorization Headers 10 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2 200 OK 1.42 s 821 B Save Response

```
1 {
2   "runId": "run-eaf5cfdd-6696-4e83-a2ec-96fd88979e98",
3   "status": "completed",
4   "summary": {
5     "total": 1,
6     "passed": 1,
7     "failed": 0,
8     "errors": 0
9   },
10  "results": [
11    {
12      "testId": "test-8f84ae36-3d74-4623-afe4-d547da8a9abe",
```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 07 - Cleanup > Get environment

GET `{{baseUrl}}/environment/{{envId}}` Send

Params Authorization Headers 7 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2 Save Response

200 OK · 4 ms · 451 B

```
{
  "specId": "spec-bd8e6bdf-4887-4948-ad38-e0a6c383888f",
  "name": "qa",
  "baseUrl": "https://petstore.swagger.io/v2",
  "defaultHeaders": {
    "Accept": "application/json",
    "X-Smoke-Test": "updated"
  },
  "authConfig": {},
  "id": "env-5a270a9e-a3f7-405a-8177-445286289673"
}
```

Test Workspace

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

Swagger AI Agent Backend Verification > 07 - Cleanup > Delete environment

DELETE `{{baseUrl}}/environment/{{envId}}` Send

Docs Params Authorization Headers 7 Body Scripts Settings Cookies

Before request

After response

```
1 pm.test('HTTP 200', function () { pm.response.to.have.status(200); });
2 pm.test('Environment deleted', function () { pm.expect(pm.response.json().deleted).to.eql(true); });
```

View more actions

200 OK · 4 ms · 221 B

```
{
  "deleted": true
}
```

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase. Try Native Git

Swagger AI Agent Backend Verification > 07 - Cleanup > **Get environment** Save Share

GET `{{baseUri}}/environment/{{envId}}` Send

Docs Params Authorization Headers 7 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 0/2 404 Not Found • 2 ms • 292 B Save Response

JSON Preview Debug with AI

```

1 {
2   "error": "Environment 'env-5a278a9e-a3f7-4d65a-8177-445286289673' was not found"
3 }

```

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase. Try Native Git

Swagger AI Agent Backend Verification > 07 - Cleanup > **Verify qa environment remains available** Save Share

GET `{{baseUri}}/environment/{{envId}}` Send

Docs Params Authorization Headers 7 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 6 Test Results 2/2 200 OK • 5 ms • 451 B Save Response



JSON Preview Visualize



```




1 {
2   "specId": "spec-b2545674-27da-4164-b555-497f86688a24",
3   "name": "qa",
4   "baseUrl": "https://petstore.swagger.io/v2",
5   "baseUri": "https://petstore.swagger.io/v2",
6   "accept": "application/json",
7   "x-smoke-test": "updated",
8   "authConfig": {},
9   "id": "env-9581ac85-62d5-48d7-8356-22678194a32a"
10 }



```

Now using prompting implement the front end from the web-instructions.md file shared and then check the integration

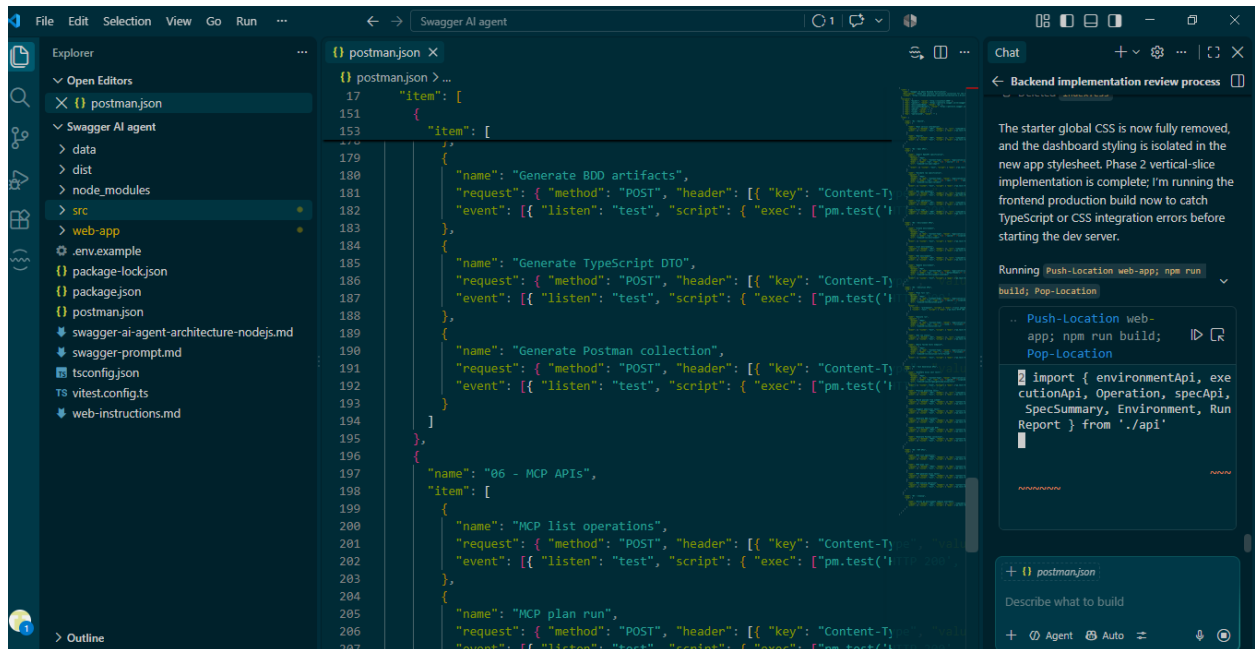
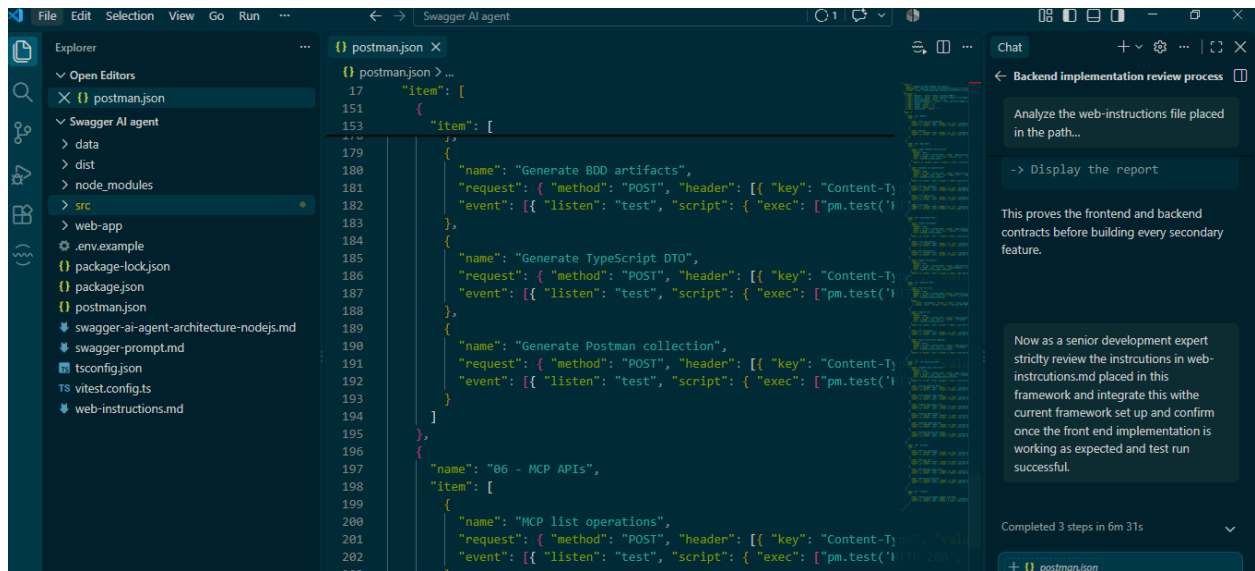


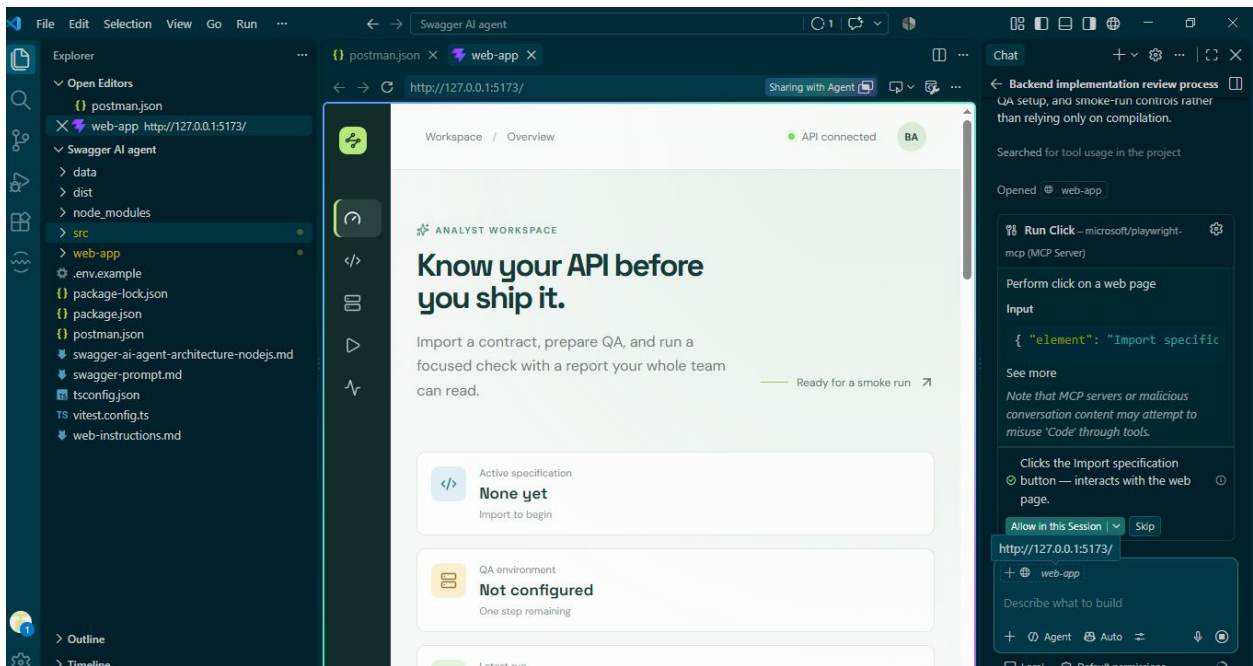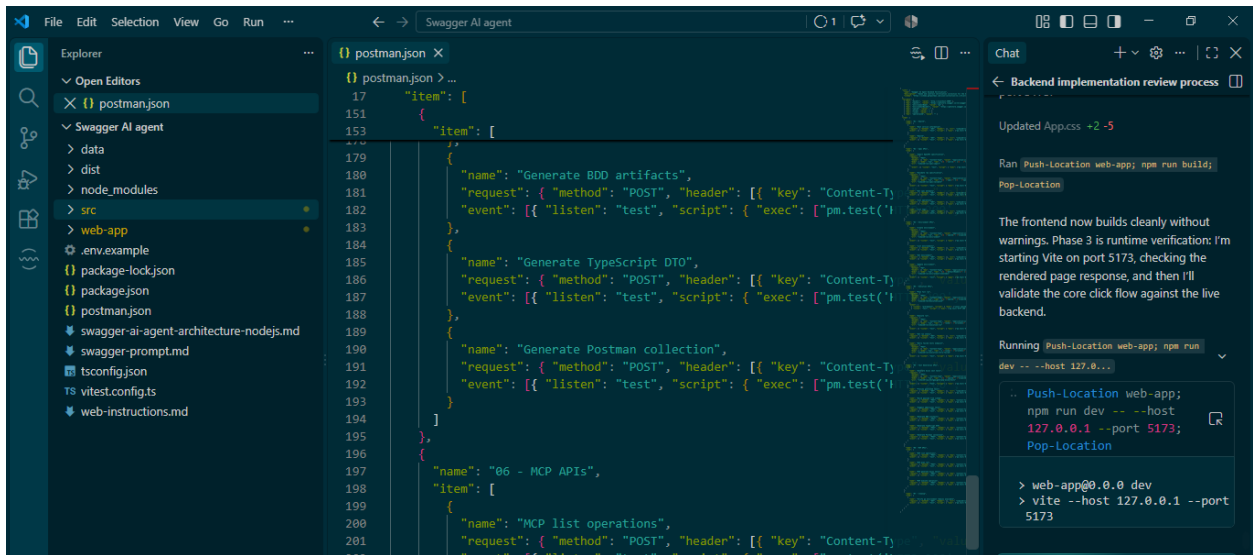

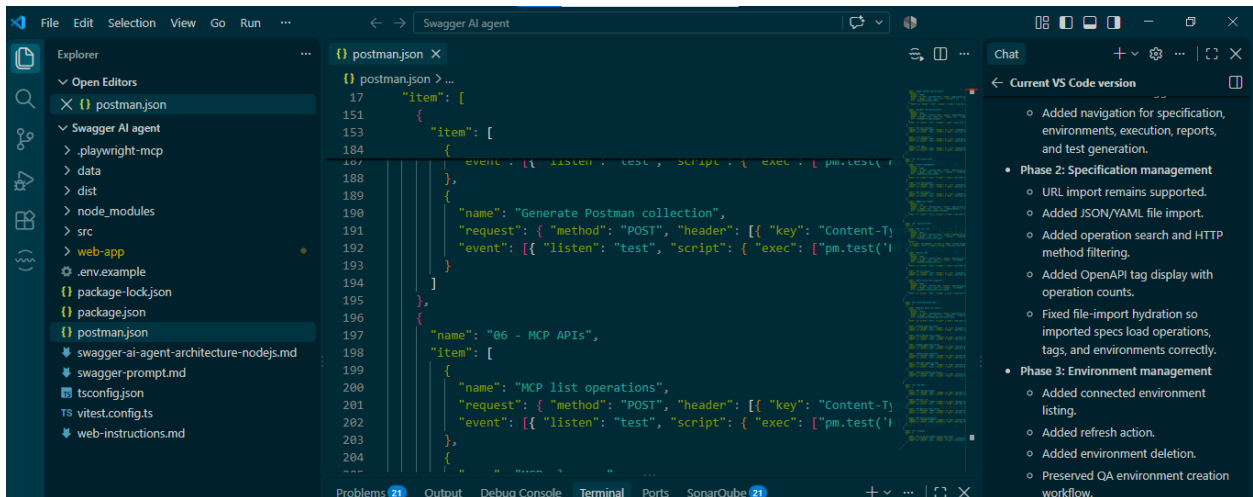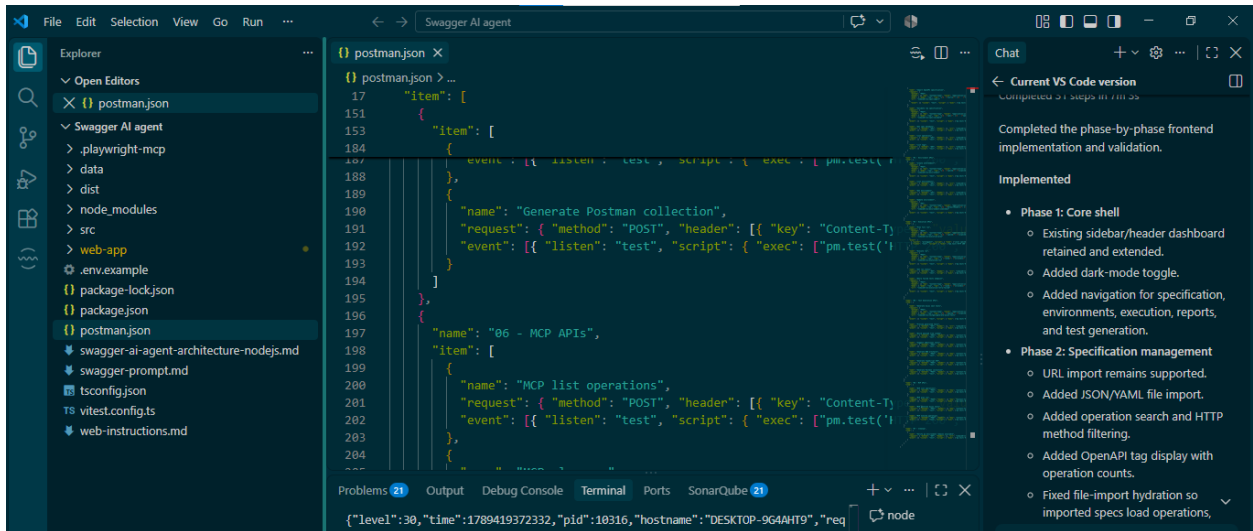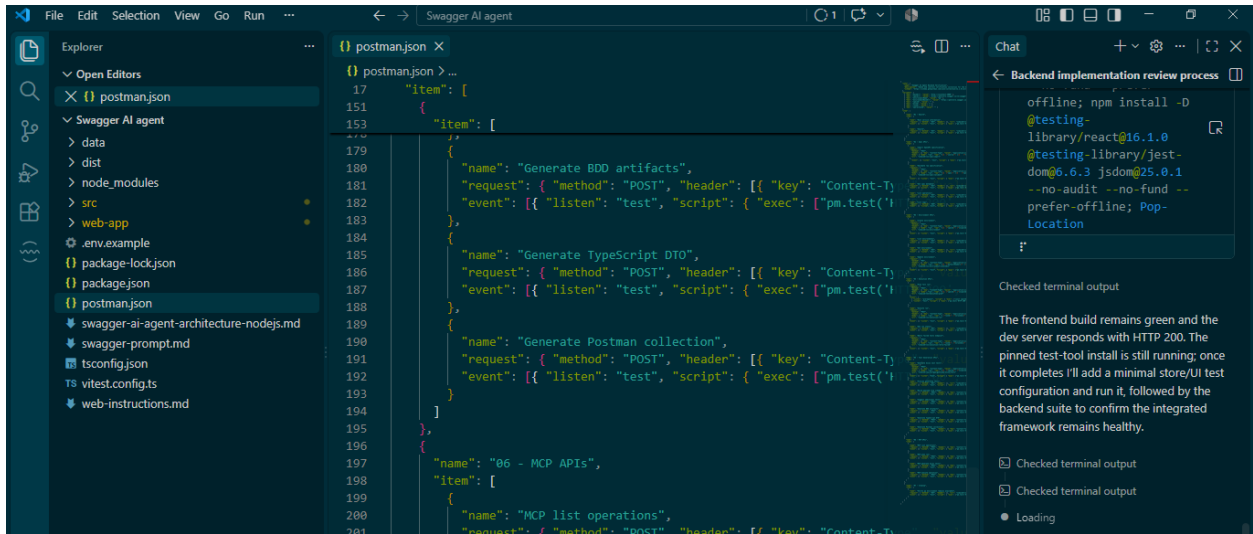

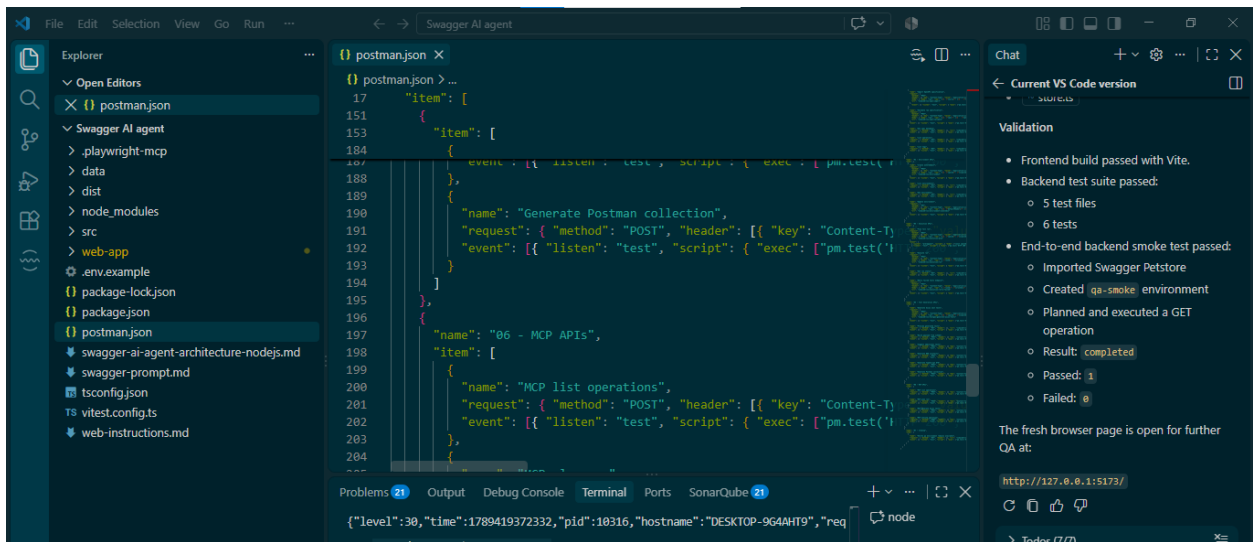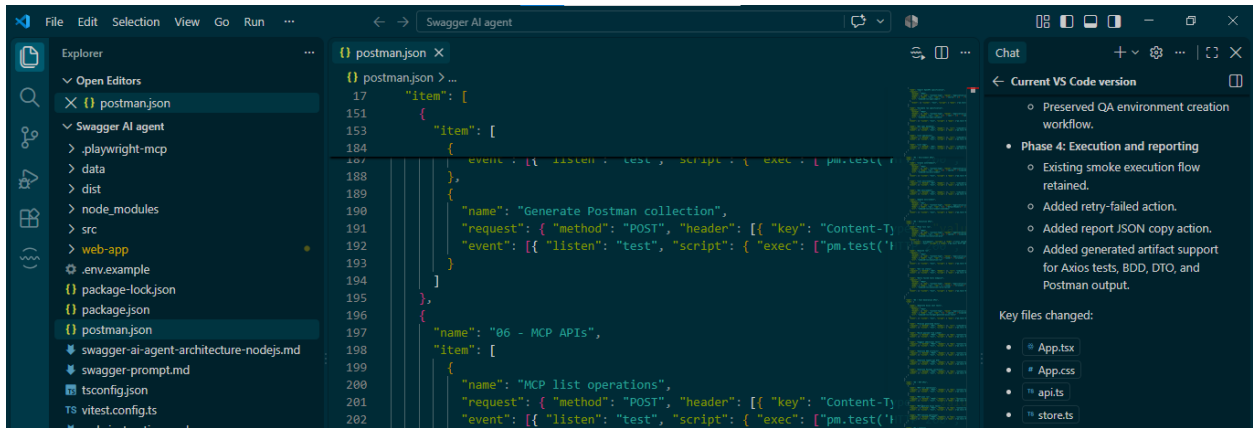

Front end implementation complete and below is the snapshot

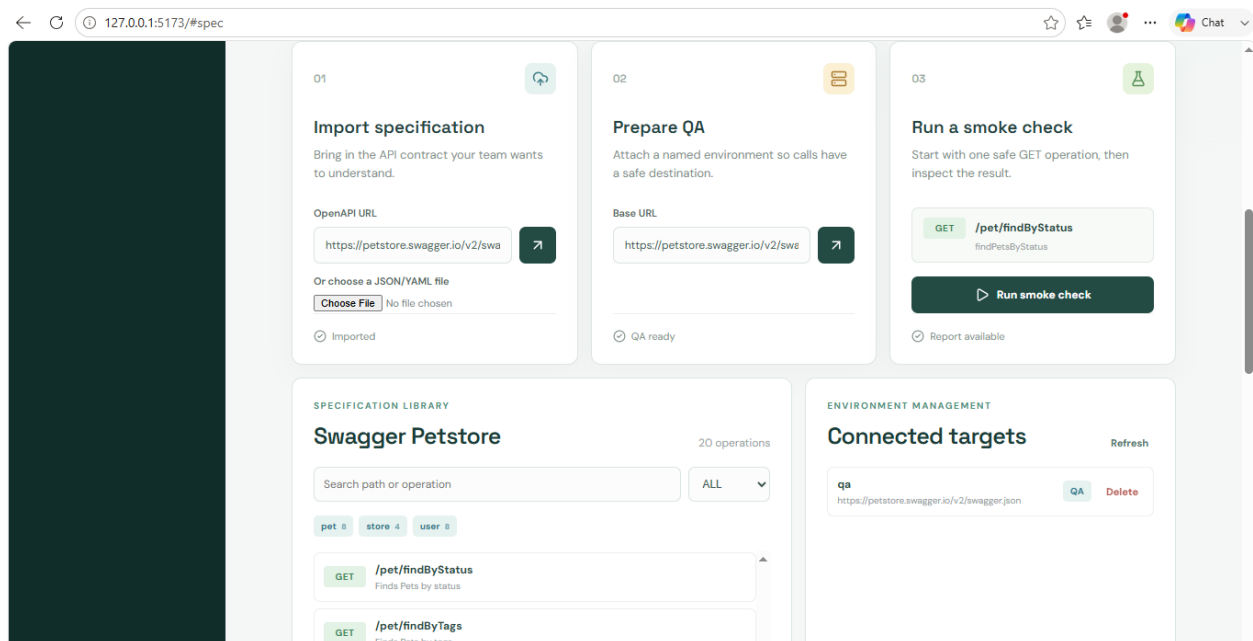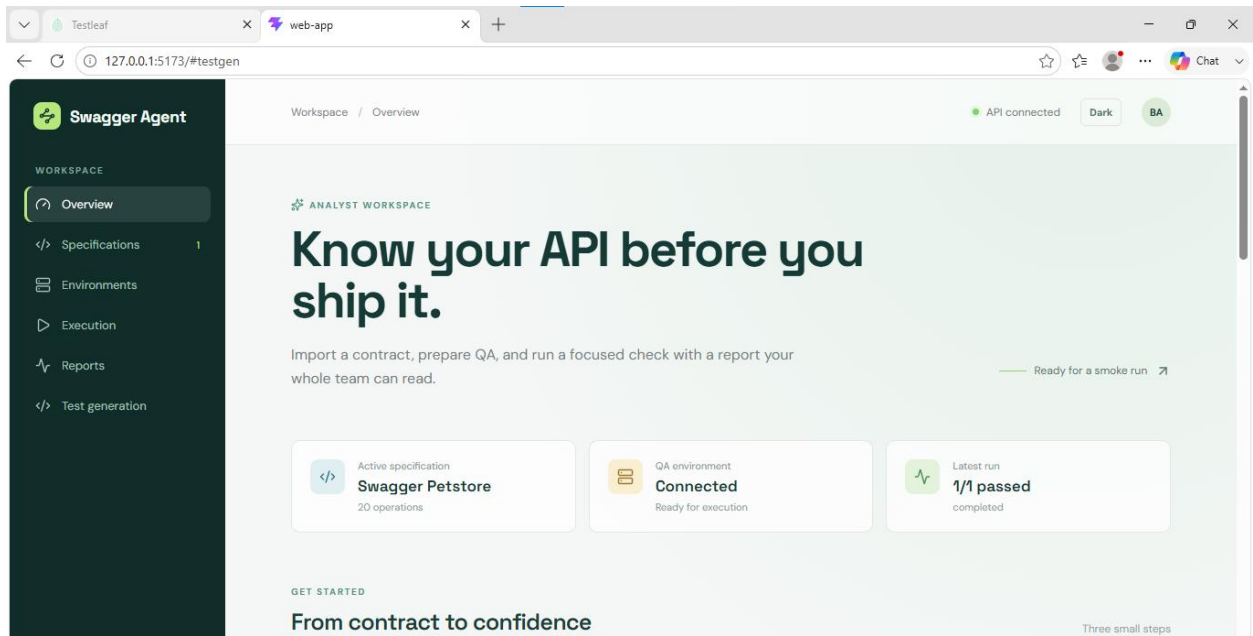

Swagger Petstore 20 operations

Search path or operation

pet 3 store 4 user 3

GET /pet/findByStatus
Finds Pets by status

GET /pet/findByTags
Finds Pets by tags

GET /pet/{petId}
Find pet by ID

POST /pet/{petId}
Updates a pet in the store with form data

DELETE /pet/{petId}
Deletes a pet

Connected targets

Refresh

qa
https://petstore.swagger.io/v2/swagger.json QA Delete

DELIVERY ARTIFACTS

Generate for your team

Code, BDD, DTQ, or Postman

Axios tests

</> Generate artifact

Axios tests

BDD feature

TypeScript DTO

Postman collection

```
const BASE_URL ?? 'https://petstore.swagger.io/v2';

describe('Swagger Petstore', () => {
  test('POST /pet/{petId}/uploadImage', async () => {
    const response = await axios.post(BASE_URL + '/pet/{petId}/uploadImage');
    expect(response.status).toBeGreaterThanOrEqual(200);
    expect(response.status).toBeLessThan(300);
  });

  test('POST /pet', async () => {
    const response = await axios.post(BASE_URL + '/pet');
    expect(response.status).toBeGreaterThanOrEqual(200);
    expect(response.status).toBeLessThan(300);
  });

  test('PUT /pet', async () => {
    const response = await axios.put(BASE_URL + '/pet');
```

127.0.0.1:5173/#spec

```
expect(response.status).toBeGreaterThanOrEqual(200);
expect(response.status).toBeLessThan(300);
});

test('GET /pet/findByTags', async () => {
  const response = await axios.get(baseUrl + '/pet/findByTags');
  expect(response.status).toBeGreaterThanOrEqual(200);
  expect(response.status).toBeLessThan(300);
});

test('GET /pet/{petId}', async () => {
  const response = await axios.get(baseUrl + '/pet/{petId}');
  expect(response.status).toBeGreaterThanOrEqual(200);
  expect(response.status).toBeLessThan(300);
});
});
```

LATEST SIGNAL

Execution report

Retry failed Copy JSON
Completed

Run ID run-a3774b2b-6f07-...	1 Passed	0 Failed	863 ms Duration
---------------------------------	-------------	-------------	--------------------

PASSED findPetsByStatus Response 200

Local workspace

Changing mode

127.0.0.1:5173/#testgen

Swagger Agent

Workspace / Overview

API connected Light BA

WORKSPACE

- Overview
- Specifications 1
- Environments
- Execution
- Reports
- Test generation

ANALYST WORKSPACE

Know your API before you ship it.

Import a contract, prepare QA, and run a focused check with a report your whole team can read.

Ready for a smoke run

Active specification

Swagger Petstore

20 operations

QA environment

Connected

Ready for execution

Latest run

1/1 passed

completed

GET STARTED

From contract to confidence

127.0.0.1:5173/#testgen

Chat

```
expect(response.status).toBeLessThan(300);
expect(response.status).toBeLessThan(300);
});

test('POST /user/createWithArray', async () => {
  const response = await axios.post(baseUrl + '/user/createWithArray');
  expect(response.status).toBeGreaterThanOrEqual(200);
  expect(response.status).toBeLessThan(300);
});

test('POST /user', async () => {
  const response = await axios.post(baseUrl + '/user');
  expect(response.status).toBeGreaterThanOrEqual(200);
  expect(response.status).toBeLessThan(300);
});
});
```

LATEST SIGNAL

Execution report

Retry failed Copy JSON

Completed

Run ID

run-a3774b2b-6f07-....

1

Passed

0

Failed

863ms

Duration

PASSED

findPetsByStatus

Response 200

✓

Local workspace

●