

Task On EC2

1. Launch one EC2 using Amazon Linux 2 image and add a script in user data to install Apache.

Login to aws console

navigate to ec2- launch instance

name – ami – instance type – security groups -


In Advance settings – scroll down – user data – write script

```
#!/bin/bash
```

```
sudo yum -y install httpd
```

```
echo "message" >> /var/www/html/index.html
```

```
sudo systemctl start httpd
```

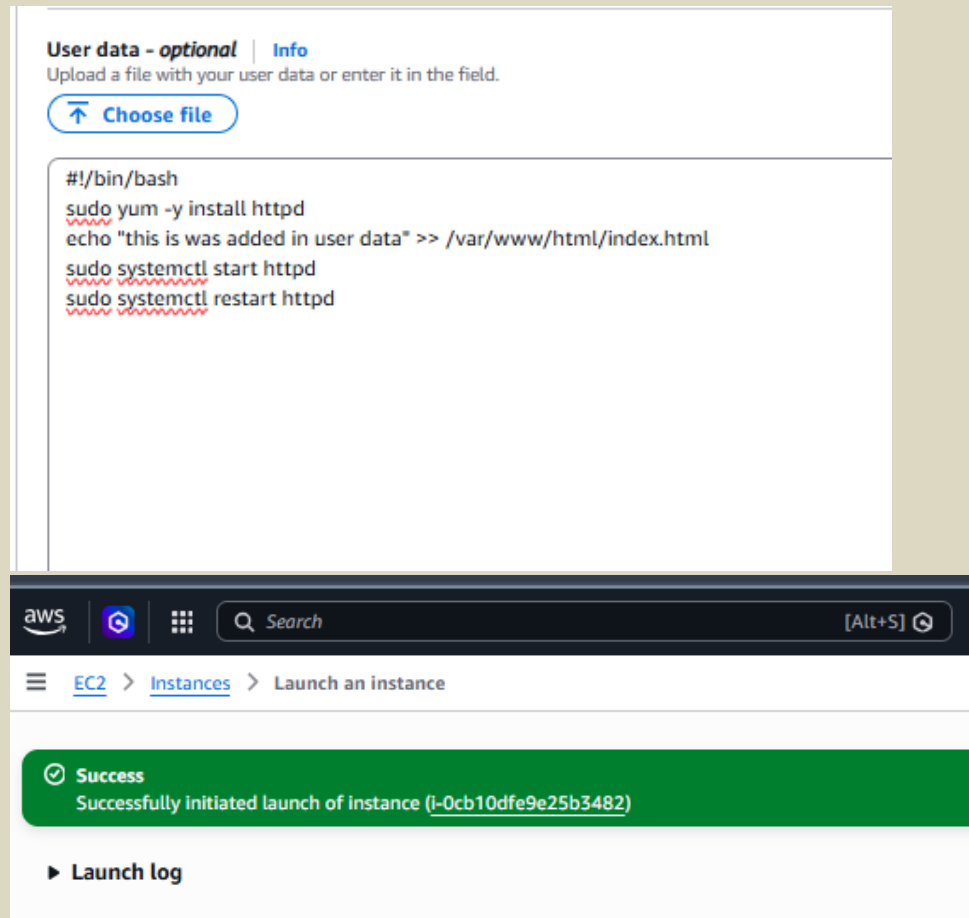


Task On EC2

```

[ec2-user@ip-172-31-36-114 ~]$ sudo su
[root@ip-172-31-36-114 ec2-user]# systemctl status httpd
● httpd.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; disabled; preset: disabled)
   Active: active (running) since Wed 2026-08-26 11:25:33 UTC; 2min 6s ago
     Docs: man:httpd.service(8)
  Main PID: 6422 (httpd)
    Status: "Total requests: 0; Idle/Busy workers 100/0; Requests/sec: 0; Bytes served/sec: 0 B/sec"
     Tasks: 177 (limit: 1059)
  Memory: 13.9M
    CPU: 184ms
  CGroup: /system.slice/httpd.service
          └─6422 /usr/sbin/httpd -DFOREGROUND
            └─6519 /usr/sbin/httpd -DFOREGROUND
              └─6522 /usr/sbin/httpd -DFOREGROUND
                └─6525 /usr/sbin/httpd -DFOREGROUND
                  └─6601 /usr/sbin/httpd -DFOREGROUND

Aug 26 11:25:33 ip-172-31-36-114.ec2.internal systemd[1]: Starting httpd.service - The Apache HTTP Server...
Aug 26 11:25:33 ip-172-31-36-114.ec2.internal systemd[1]: Started httpd.service - The Apache HTTP Server.
Aug 26 11:25:33 ip-172-31-36-114.ec2.internal httpd[6422]: Server configured, listening on: port 80
[root@ip-172-31-36-114 ec2-user]# cat /var/www/html/index.html
this is added in user data
[root@ip-172-31-36-114 ec2-user]#

```

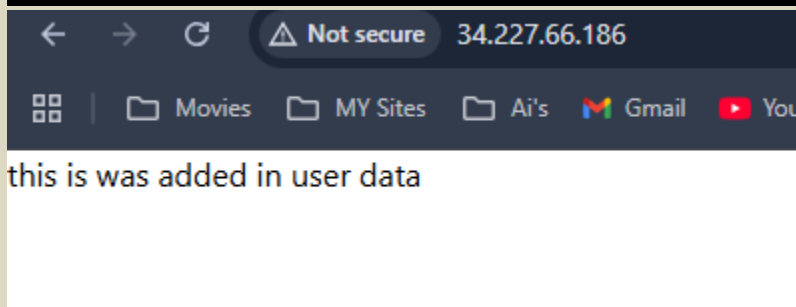

2. Launch one EC2 using Ubuntu image and add a script in user data to install Nginx.

Login to aws console

navigate to ec2- launch instance

name – ami – instance type(Ubuntu) – security groups -

In Advance settings – scroll down – user data – write script


```
#!/bin/bash
```

```
sudo apt update
```

```
sudo apt upgrade -y
```

```
sudo yum -y install nginx
```

```
sudo systemctl start nginx
```

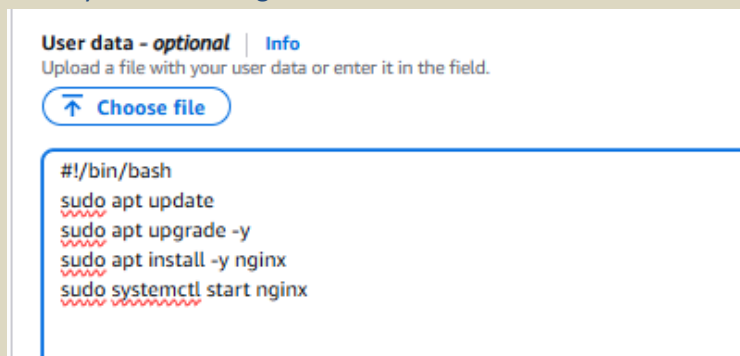

Task On EC2

```
HP@Ashish MINGW64 ~/Downloads (master)
$ ssh -i "Devops.pem" ubuntu@23.20.90.77
The authenticity of host '23.20.90.77 (23.20.90.77)' can't be established.
ED25519 key fingerprint is SHA256:5OUxDFMzH5ovjnw5QoUNDu5HXZ/voAX0BiJJwH7n9cs.
This key is not known by any other names
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '23.20.90.77' (ED25519) to the list of known hosts.
Welcome to Ubuntu 26.04 LTS (GNU/Linux 7.0.0-1006-aws x86_64)

 * Documentation:  https://docs.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

System information as of Wed Aug 26 11:39:14 UTC 2026

System load:  0.06           Temperature:   -273.1 C
Usage of /:   30.7% of 6.61GB Processes:      122
Memory usage: 25%           Users logged in: 0
Swap usage:   0%            IPv4 address for ens5: 172.31.33.74

Expanded Security Maintenance for Applications is not enabled.

0 updates can be applied immediately.


Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

The list of available updates is more than a week old.
To check for new updates run: sudo apt update

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

ubuntu@ip-172-31-33-74:~$ |
```

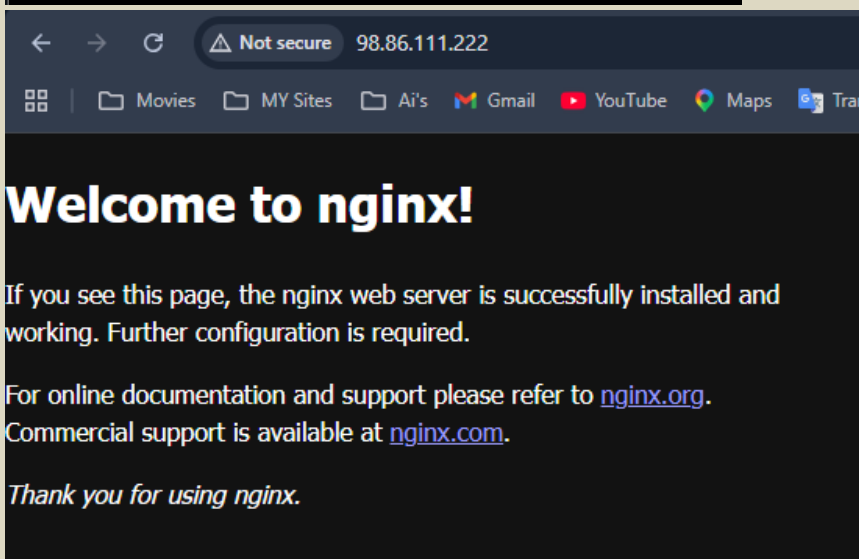

3. Launch one Windows server and install Tomcat on Windows.

Login to aws console

navigate to ec2- launch instance

name – ami – instance type (windows) – security groups -

connect with RDC(Remote desktop connection)

- username – Administration

- password – Decrypt from the .Pem file

login to Server

Downloaded Git bash in windows server

Task On EC2

Downloaded wget <https://d1cdn.apache.org/tomcat/tomcat-9/v9.0.121/bin/apache-tomcat-9.0.121.tar.gz>

```
tar -xvf apache-tomcat-9.0.121.tar.gz
```


```
sudo dnf install -y java-17-openjdk-devel
```

```
cd apache-tomcat-9.0.121
```


```
cd bin/
```

```
./startup.bat
```

```
https://localhost:8080
```

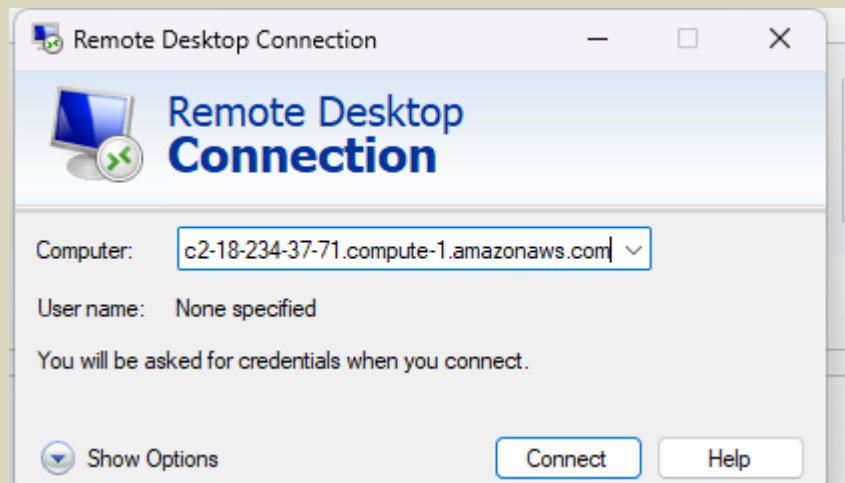

Task On EC2

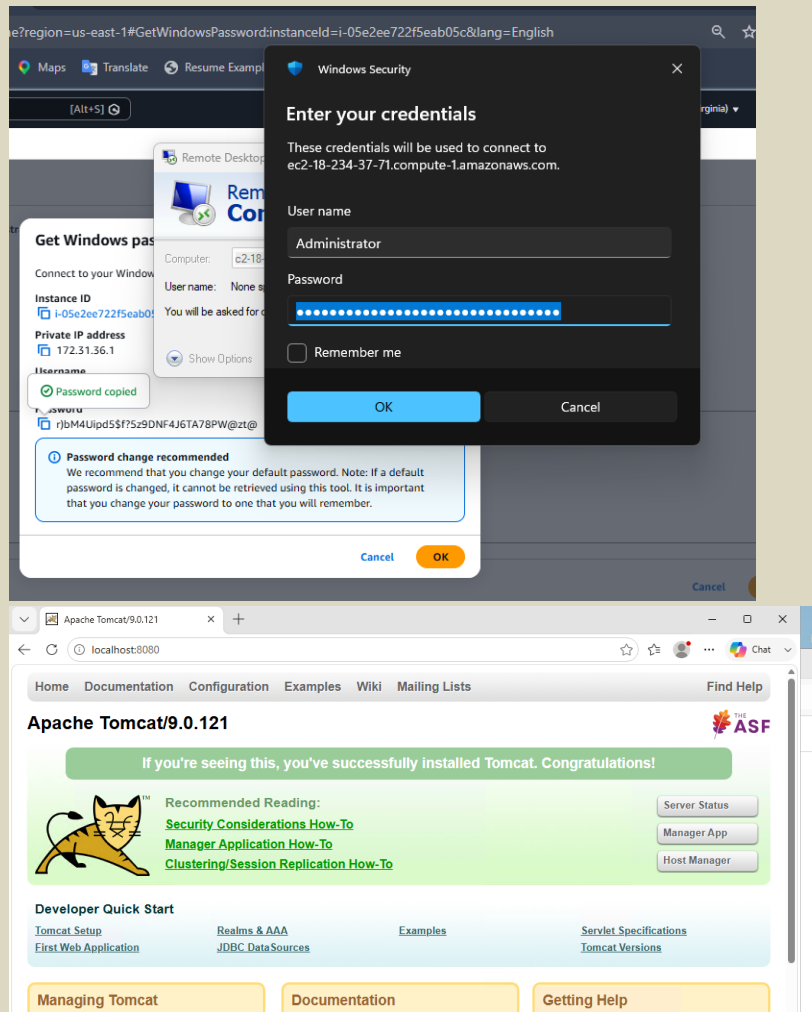

4. Take a snapshot of the instance created in Task 1.
Go to **EC2 → Instances**.
Select the instance you created in **Task 1**.
Go to the **Storage** tab.
Click the attached **EBS volume**.
Choose **Actions → Create snapshot**.
Give it a description, for example:
Task-1-EC2-Snapshot
Click **Create snapshot**.
Go to **EC2 → Snapshots** and verify that the snapshot was created.

Task On EC2

Instances (1/2) Info

Last updated less than a minute ago

Connect |
 Instance state ▾ |
 Actions ⌵ |
 Launch instances ⌵

Find Instance by attribute or tag (case-sensitive)

☒	Name	Instance ID	Instance state	Instance type	Status check	Availability Zone	Public IPv4 D
☒	ec2 task	i-0cb10dfe9e25b3482	Running	t3.micro	3/3 checks passed	us-east-1d	ec2-3-87-168-
☐	ubuntu	i-0942d7749ebb92feb	Stopped	t3.micro	-		

Create image
 Create template from instance
 Launch more like this

Filter actions
 Instance diagnostics
 Instance settings
 Networking
 Security
Image and templates
 Storage
 Monitor and troubleshoot

i-0cb10dfe9e25b3482 (ec2 task)

Details | Status and alarms | Monitoring | Security | Networking | Storage | Tags

▼ Instance summary Info

Instance ID <i>i-0cb10dfe9e25b3482</i>	Public IPv4 address 3.87.168.249 open address ↗	Private IPv4 addresses 172.31.36.114
IPv6 address	Instance state	Public DNS

Instance volumes

Storage type	Device	Snapshot	Size	Volume type	IOPS	Throughput	Delete on termination	Encrypted
EBS	/dev/x...	Create new snapshot from v...	8	EBS General Purpose SSD - ...	3000		☒ Enable	☐ Enable

During the image creation process, Amazon EC2 creates a snapshot of each of the above volumes.

Tags - optional

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

☒ Tag image and snapshots together
Tag the image and the snapshots with the same tag.

☐ Tag image and snapshots separately
Tag the image and the snapshots with different tags.

No tags associated with the resource.

Add new tag

You can add up to 50 more tags.

Cancel Create image

Amazon Machine Images (AMIs) (1/1) Info

Owined by me ▾

Find AMI by attribute or tag

☒	Name	AMI name	AMI ID	Source
☒	My Image		ami-0df5d102dc41cdf96	567487919764/My Imag

Search for an AMI by entering a search term e.g. "Windows"

Quick Start AMIs (46)
Commonly used AMIs

My AMIs (1)
Created by me

AWS Marketplace AMIs (7011)
AWS & trusted third-party AMIs

Community AMIs (500)
Published by anyone

Refine results

Clear all filters

▼ Owner

☒ Owned by me
☐ Shared with me

▼ OS category

☐ All Linux/Unix
☐ All Windows

All products (1 filtered, 1 unfiltered)

My image
 ami-0df5d102dc41cdf96

OwnerAlias: – Platform: – Architecture: x86_64 Owner: 567487919764 Creation date: 2026-08-26 Root device type: ebs Virtualization: hvm ENA enabled: Yes

Free tier eligible

Task On EC2

5. Assign passwordless authentication for the EC2 created in Task 2.

```
ssh-keygen
copy "C:\Users\HP\.ssh\id_rsa.pub" to .ssh/authorised.keys
ssh ec2-user@pb_ip
useradd kumar
passwd kumar
vi /etc/ssh/sshd_config = Password authentication "Yes"
kumar ec2-user@pub_ip
```

```
HP@Ashish MINGW64 ~/Downloads (master)
$ cat /c/users/HP/.ssh/id_rsa.pub
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQgCqrxEu0SKo3z76Km7H4xwFUCFMj3mCs01aG02CAiGNQzb6/qbKuDxu6ciI
qvwk0jJAJRRO5Jug2SMWRVUudYfM8X0Hfhw17nwupu94t51uzAIT5H1ZtMwcZQerUUI0jJ4cxkqBSSvtV1AGmBeTbtOdQGS8
cfQGu1mWpZ8FPqvs2nQSPzL/Ini9MnAqhDPkOYI8E7Dt1jvv5hu1stI7ho13r004zg6yK4kgdeQw1Dw8iFsguf/1Eyonr8T
```

```
HP@Ashish MINGW64 ~/Downloads (master)
$ ssh ec2-user@3.87.168.249

      #_
    ~\   #####                Amazon Linux 2023
    ~\   #####\
    ~\   \###|
    ~\   \#/____ https://aws.amazon.com/linux/amazon-linux-2023
    ~\   V~' '->
        ~~~~~
            ~._.~
              / \
             /   \
            /m/' -
```

Last login: Wed Aug 26 23:27:08 2026 from 103.160.27.55
[ec2-user@ip-172-31-36-114 ~]\$ |

```
# For this to work you will also need host keys in /etc/ssh/ssh_known_hosts
#HostbasedAuthentication no
# Change to yes if you don't trust ~/.ssh/known_hosts for
# HostbasedAuthentication
#IgnoreUserKnownHosts no
# Don't read the user's ~/.rhosts and ~/.shosts files
#IgnoreRhosts yes

# Explicitly disable PasswordAuthentication. By presetting it, we
# avoid the cloud-init set_passwords module modifying sshd_config and
# restarting sshd in the default instance launch configuration.
PasswordAuthentication yes
PermitEmptyPasswords no
```

Task On EC2

```
HP@Ashish MINGW64 ~/Downloads (master)
$ ssh kumar@3.87.168.249
kumar@3.87.168.249's password:

      #_
    ~\  #####_           Amazon Linux 2023
   ~~ \  #####\
   ~~  \###|
   ~~   \|#/
   ~~~ V~' '->
       ~~~
       ~~-.-.
         _/_/
        _/m/' -/
```

<https://aws.amazon.com/linux/amazon-linux-2023>

```
[kumar@ip-172-31-36-114 ~]$ |
```

6. Launch any EC2 using the spot purchasing option.

Open the **AWS Management Console**.

Go to **EC2** → **Instances**.

Click **Launch instances**.

Enter a name, for example:

Spot-EC2-Server

Select an AMI, such as **Amazon Linux 2023** or **Windows Server**, depending on your assignment.

Select an instance type, such as t3.micro.

Under **Advanced details**, find **Purchasing option**.

Select **Request Spot Instances / Spot.**

Configure the key pair, network, security group, and storage as required.

Click **Launch instance**.

Go back to **EC2 → Instances** and verify that the instance shows **Spot** as its purchasing option.

Purchasing option | [Info](#)

- ☐ None
- ☐ Capacity Blocks
Launch instances for your active capacity blocks
- ☐ Interruptible Capacity Reservations
Launch instances for your interruptible Capacity Reservations
- ☒ Spot instances
Request Spot Instances at the Spot price, capped at the On-Demand price

[Customize Spot instance options](#)

Task On EC2

Lifecycle
spot

Key pair assigned at launch
Devops

Kernel ID
—

RAM disk ID
—

Instances (1/4) Info

Last updated 7 minutes ago

Connect

Instance state

Actions

Launch instances

Saved filter sets

Choose filter set

Find Instance by attribute or tag (case-sensitive)

	Name	Instance ID	Instance state	Instance type	Status check	Availability Zone	Public IPv4 DNS	Public IPv4 ...
☐	ec2 task	i-0cb10dfe9e25b3482	Stopped	t3.micro	—	us-east-1d	—	—
☐	ubuntu	i-0942d7749ebb92feb	Stopped	t3.micro	—	us-east-1d	—	—

i-0417f3cd73a86e52f (spot instances)

Stop protection
Disabled

Instance reboot migration
Default (On)

Stop-hibernate behavior
Disabled

State transition reason
—

State transition message
—

Launch time
Wed Aug 26 2026 22:29:14 GMT+0530 (India Standard Time) (6 minutes)

Instance auto-recovery
Default

AMI Launch index
0

Credit specification
unlimited

Usage operation
RunInstances

AMI location
amazon/al2023-ami-2023.12.20260817.0-kernel-6.18-x86_64

Lifecycle
spot

Key pair assigned at launch
Devops

Kernel ID
—

RAM disk ID
—

7. Enable termination policy on the EC2 created in Task 2.

Go to **EC2** → **Instances**.

Select the EC2 instance from **Task 2**.

Click **Actions**.




Look for **Instance settings**.

Select **Change termination protection**.

Enable **termination protection**.

Confirm the change.

Task On EC2

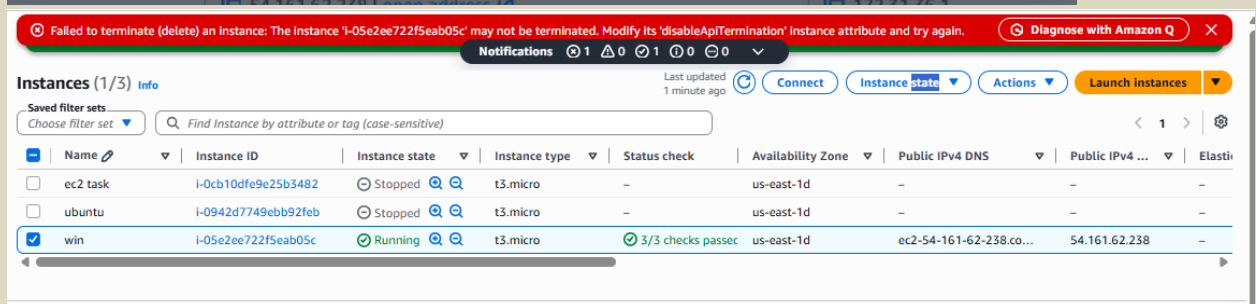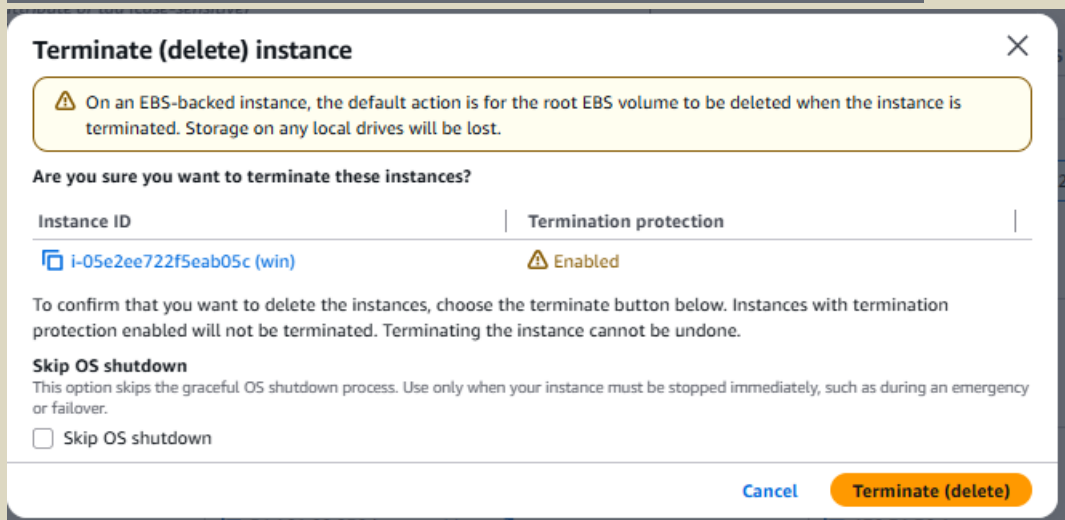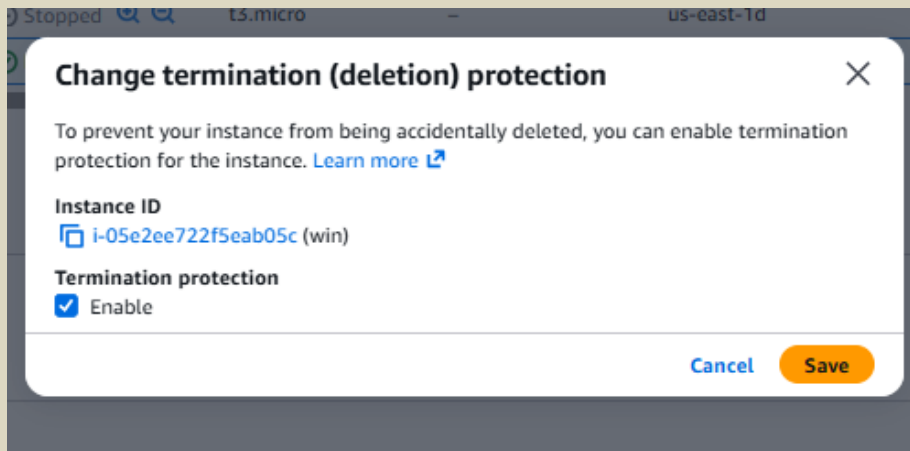

8. Launch one EC2 using AWS CLI

1. Aws Configure

AWS Access Key ID [*****7KWH]: AKIAYIIHKO2KGNIW7KWH

AWS Secret Access Key [*****9ZA4]: *****

Default region name [None]:

2. create key pair pem

```
aws ec2 create-key-pair --key-name practice-key --query 'KeyMaterial' --output text > practice-key.pem
```

```
ls -l practice-key.pem
```

```
chmod 400 practice-key.pem
```

3. Vpc

Task On EC2

```
aws ec2 describe-vpcs --filters Name=is-default,Values=true --query 'Vpcs[0].VpcId' --output text  
vpc-0fff3eb0730a112f0
```

4. Security Groups

```
aws ec2 create-security-group --group-name practice-sg --description "Security group for EC2 CLI  
practice" --vpc-id vpc-0fff3eb0730a112f0
```

```
5. SG_ID=$(aws ec2 describe-security-groups --filters Name=group-name,Values=practice-sg  
Name=vpc-id,Values=vpc-0fff3eb0730a112f0 --query 'SecurityGroups[0].GroupId' --output text)
```

6.Ami

```
aws ec2 describe-images --owners amazon --filters "Name=name,Values=al2023-ami-*"  
"Name=state,Values=available" "Name=architecture,Values=x86_64" --query  
"sort_by(Images,&CreationDate)[-1].[ImageId,Name,CreationDate]" --output table
```

7.Assign AMI ID to Variable

```
AMI_ID=ami-03774f39090702d17
```

8.check

```
echo $AMI_ID  
o/p: ami-03774f39090702d17
```

9.set vpc id to variable

```
$ aws ec2 describe-vpcs --filters "Name=is-default,Values=true" --query "Vpcs[0].VpcId" --output  
text
```

```
vpc-0fff3eb0730a112f0
```

10. VPC_ID=vpc-0fff3eb0730a112f0

11.to check security groups created or not

```
aws ec2 describe-security-groups --filters "Name=group-name,Values=practice-sg" "Name=vpc-  
id,Values=$VPC_ID" --query "SecurityGroups[0].[GroupId,GroupName,VpcId]" --output table
```

```
| DescribeSecurityGroups |  
+-----+  
| sg-0c2fe1d6ce1587a3c |  
| practice-sg          |  
| vpc-0fff3eb0730a112f0 |  
+-----+
```

12. Assign security group to variable

```
SG_ID=$(aws ec2 describe-security-groups --filters "Name=group-name,Values=practice-sg"  
"Name=vpc-id,Values=$VPC_ID" --query "SecurityGroups[0].GroupId" --output text)
```

13. to check assigned security group

```
echo $SG_ID
```

```
O/p: sg-0c2fe1d6ce1587a3c
```

Task On EC2

14.to check port number

aws ec2 describe-security-groups --group-ids \$SG_ID --query "SecurityGroups[0].IpPermissions" --output table

```
aws ec2 describe-security-groups --g
```

DescribeSecurityGroups		
FromPort	IpProtocol	ToPort
22	tcp	22
IpRanges		
CidrIp		
0.0.0.0/0		

15. To check which instance

aws ec2 describe-instance-type-offerings --location-type region --filters "Name=instance-type,Values=t3.micro" --query "InstanceTypeOfferings[0].InstanceType" --output text

O/p: t3.micro

16.To Run

aws ec2 run-instances --image-id \$AMI_ID --instance-type t3.micro --count 1 --key-name practice-key --security-group-ids \$SG_ID --tag-specifications 'ResourceType=instance,Tags=[{Key=Name,Value=CLI-Practice-EC2}]'

17.To confirm

INSTANCE_ID=\$(aws ec2 describe-instances --filters "Name=tag:Name,Values=CLI-Practice-EC2" "Name=instance-state-name,Values=pending,running" --query "Reservations[0].Instances[0].InstanceId" --output text)

18.Output

\$ echo \$INSTANCE_ID
i-0fbba3dec972519d7

Retrieve access key [Info](#)

Access key

If you lose or forget your secret access key, you cannot retrieve it. Instead, create a new access key and make the old key inactive.

Access key

 AKIAIIHKO2KGNIW7KWH

Secret access key

 ***** [Show](#)

Task On EC2

Tip: You can deliver temporary credentials to the AWS CLI using your AWS Console sess

AWS Access Key ID [None]: AKIAYIIHKO2KGNIW7KWH
AWS Secret Access Key [None]: F+sAE88VfIn9a3GcfHe4LhMt6vfnpKgEYdpb9ZA4|

```
HP@Ashish MINGW64 ~  
$ aws configure  
AWS Access Key ID [*****7KWH]: AKIAYIIHKO2KGNIW7KWH  
AWS Secret Access Key [*****9ZA4]: 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  
Default region name [None]: us-east-1  
Default output format [None]: json
```

```
HP@Ashish MINGW64 ~  
$ aws ec2 create-key-pair --key-name practice-key --query 'KeyMaterial' --output text > practice-key.pem
```

```
HP@Ashish MINGW64 ~  
$ aws ec2 describe-vpcs --filters Name=is-default,Values=true --query 'Vpcs[0].VpcId' --output text  
vpc-0fff3eb0730a112f0
```

```
HP@Ashish MINGW64 ~  
$ aws ec2 create-security-group --group-name practice-sg --description "Security group for EC2 CLI practice" --vpc-id vpc-0fff3eb0730a112f0  
{  
  "GroupId": "sg-0c2feld6ce1587a3c",  
  "SecurityGroupArn": "arn:aws:ec2:us-east-1:567487919764:security-group/sg-0c2feld6ce1587a3c"  
}
```

```
HP@Ashish MINGW64 ~  
$ SG_ID=$(aws ec2 describe-security-groups --filters Name=group-name,Values=practice-sg Name=vpc-id,Values=vpc-0fff3eb0730a112f0 --query 'SecurityGroups[0].GroupId' --output text)
```

```
HP@Ashish MINGW64 ~  
$ aws ec2 authorize-security-group-ingress --group-id $SG_ID --protocol tcp --port 22 --cidr 0.0.0.0/0  
{  
  "Return": true,  
  "SecurityGroupRules": [  
    {  
      "SecurityGroupRuleId": "sgr-014f9fb26c33546db",  
      "GroupId": "sg-0c2feld6ce1587a3c",  
      "GroupOwnerId": "567487919764",  
      "IsEgress": false,  
      "IpProtocol": "tcp",  
      "FromPort": 22,  
      "ToPort": 22,  
      "CidrIpv4": "0.0.0.0/0",  
      "SecurityGroupRuleArn": "arn:aws:ec2:us-east-1:567487919764:security-group-rule/sgr-014f9fb26c33546db"  
    }  
  ]  
}
```

```
HP@Ashish MINGW64 ~  
$ aws ec2 describe-images --owners amazon --filters "Name=name,Values=al2023-ami-*" "Name=state,Values=available" "Name=ImageId,Name,CreationDate]" --output table
```

DescribeImages	
ami-03774f39090702d17	
al2023-ami-ecs-gpu-hvm-2023.0.20260820-kernel-6.1-x86_64-ebs	
2026-08-21T19:35:21.000Z	

Task On EC2

```
HP@Ashish MINGW64 ~
$ echo $AMI_ID

HP@Ashish MINGW64 ~
$ aws configure get region
us-east-1

HP@Ashish MINGW64 ~
$ AC

HP@Ashish MINGW64 ~
$ aws ec2 describe-key-pairs --key-names practice-key --query "KeyPairs[0].KeyName" --output text
practice-key

HP@Ashish MINGW64 ~
$ aws ec2 describe-images --image-ids ami-03774f39090702d17 --query "Images[0].[ImageId,Name,Architecture,State,OwnerId]"
-----
|                                     |
|               DescribeImages       |
|-----+-----|
| ami-03774f39090702d17              |
| al2023-ami-ecs-gpu-hvm-2023.0.20260820-kernel-6.1-x86_64-ebs |
| x86_64                             |
| available                          |
| 591542846629                       |
|-----+-----|
|                                     |
+-----+-----+

HP@Ashish MINGW64 ~
$ AMI_ID=ami-03774f39090702d17

HP@Ashish MINGW64 ~
$ echo $AMI_ID
ami-03774f39090702d17

HP@Ashish MINGW64 ~
$ aws ec2 describe-vpcs --filters "Name=is-default,Values=true" --query "Vpcs[0].VpcId" --output text
vpc-0fff3eb0730a112f0

HP@Ashish MINGW64 ~
$ echo $VPC_ID

HP@Ashish MINGW64 ~
$ VPC_ID=vpc-0fff3eb0730a112f0

HP@Ashish MINGW64 ~
$ echo $VPC_ID
vpc-0fff3eb0730a112f0

HP@Ashish MINGW64 ~
$ SG_ID=$(aws ec2 describe-security-groups --filters "Name=group-name,Values=practice-sg" "Name=vpc-id,Values=$VPC_ID" --query "SecurityGroups[0].GroupId" --output text)

HP@Ashish MINGW64 ~
$ echo $SG_ID
sg-0c2f6d6ce1587a3c

HP@Ashish MINGW64 ~
$ aws ec2 describe-security-groups --group-ids $SG_ID --query "SecurityGroups[0].IpPermissions" --output table
-----
|               DescribeSecurityGroups               |
|-----+-----+-----+-----|
| FromPort | IpProtocol | ToPort |
|-----+-----+-----+-----|
| 22       | tcp       | 22     |
|-----+-----+-----+-----|
|               IpRanges               |
|-----+-----+-----+-----|
|               CidrIp                 |
|-----+-----+-----+-----|
| 0.0.0.0/0 |
|-----+-----+-----+-----|
+-----+-----+-----+-----+
```

Task On EC2

```
HP@bash:~$ aws ec2 run-instances --image-id $AMI_ID --instance-type t3.micro --count 1 --key-name practice-key --security-group-ids $SG_ID --tag-specifications "ResourceType=instance,Tags=[{Key=Name,Value=CLI-Practice-EC2}]"
{
  "ReservationId": "r-0891aa32c344df35f",
  "OwnerId": "567487919764",
  "Groups": [],
  "Instances": [
    {
      "Architecture": "x86_64",
      "BlockDeviceMappings": [],
      "ClientToken": "2223db7e-f0b1-48ef-80b9-e28e1c5c3799",
      "EbsOptimized": false,
      "EnaSupport": true,
      "Hypervisor": "xen",
      "NetworkInterfaces": [
        {
          "Attachment": {
            "AttachTime": "2026-08-27T00:59:17+00:00",
            "AttachmentId": "eni-attach-03492f0ce47d8083e",
            "DeleteOnTermination": true,
            "DeviceIndex": 0,
            "Status": "attaching",
            "NetworkCardIndex": 0
          },
          "Description": "",
          "Groups": [
            {
              "GroupId": "sg-0c2fed6ce1587a3c",
              "GroupName": "practice-sg"
            }
          ],
          "Ipv6Addresses": [],
          "MacAddress": "0e:b7:99:d3:f7:71",
          "NetworkInterfaceId": "eni-071cc0f27cf8dae59",
          "OwnerId": "567487919764",
          "PrivateOnName": "ip-172-31-34-240.ec2.internal",
          "PrivateIpAddress": "172.31.34.240",
          "PrivateIpAddresses": [
            {
              "Primary": true,
              "PrivateOnName": "ip-172-31-34-240.ec2.internal",
              "PrivateIpAddress": "172.31.34.240"
            }
          ],
          "SourceDestCheck": true,
          "Status": "in-use",
          "SubnetId": "subnet-02b94c642a96a159a",
          "VpcId": "vpc-0fff3eb0730a112f0",
          "InterfaceType": "interface",
          "Operator": {
            "Managed": false
          }
        }
      ]
    }
  ]
}
```

AC

```
HP@bash:~$ aws ec2 describe-instances --filters "Name=tag:Name,Values=CLI-Practice-EC2" "Name=instance-state-name,Values=pending,running" --query "Reservations[0].Instances[0].InstanceId"
--output text
i-0fbba3dec972519d7

HP@bash:~$ echo $INSTANCE_ID
i-0fbba3dec972519d7
```

Saved filter sets						
Choose filter set ▾						
🔍 Find Instance by attribute or tag (case-sensitive)						
☑	Name	Instance ID	Instance state	Instance type	Status check	
☑	ec2 task	i-0cb10dfe9e25b3482	🟢 Running 🔍 🔍	t3.micro	🟢 3/3 checks passed	
☐	ubuntu	i-0942d7749ebb92feb	⚪ Stopped 🔍 🔍	t3.micro	–	
☐	CLI-Practice-EC2	i-0fbba3dec972519d7	🟢 Running 🔍 🔍	t3.micro	🕒 Initializing	