

1. Basic Shell Scripts:

Output to screen

```
#!/bin/bash
# Simple output script
```

```
echo "Hello World"
```

```
#!/bin/bash
#This id for my pracise
echo "Hello this is sunith"
```

```
~
~
~
```

```
[ec2-user@ip-172-31-0-30 ~]$ vi bash.sh
[ec2-user@ip-172-31-0-30 ~]$ ls
bash.sh
[ec2-user@ip-172-31-0-30 ~]$ cat bash.sh
#!/bin/bash
#This id for my pracise
echo "Hello this is sunith"
[ec2-user@ip-172-31-0-30 ~]$ chmod 755 bash.sh
[ec2-user@ip-172-31-0-30 ~]$ ls
bash.sh
[ec2-user@ip-172-31-0-30 ~]$ ./bash.sh
Hello this is sunith
[ec2-user@ip-172-31-0-30 ~]$ !
```

2. Defining Tasks

```
#!/bin/bash
# Define small tasks
```

```
whoami
echo
pwd
echo
hostname
echo
ls -ltr
echo
```

```
#!/bin/bash
# Define small task

uname
whoami
pwd
echo
hostname
echo
ls -ltr
echo

[ec2-user@ip-172-31-0-30 ~]$ vi Defining.sh
[ec2-user@ip-172-31-0-30 ~]$ chmod 755 Defining.sh
[ec2-user@ip-172-31-0-30 ~]$ ./Defining.sh
Linux
ec2-user
/home/ec2-user

ip-172-31-0-30.ec2.internal

total 8
-rwxr-xr-x. 1 ec2-user ec2-user 64 Aug 20 05:13 bash.sh
-rwxr-xr-x. 1 ec2-user ec2-user 82 Aug 20 05:19 Defining.sh

[ec2-user@ip-172-31-0-30 ~]$ hostname
ip-172-31-0-30.ec2.internal
```

3. Defining variables

```
#!/bin/bash
# Example of defining variables

a=Imran
b=Afzal
c='Linux class'

echo "My first name is $a"
echo "My surname is $b"
echo 'My surname is $c'
```

```
#!/bin/bash
# Defining Variables
```

```
a=Malem
b=sunith
c="kumar"
```

```
echo "my surname name is $a"
echo "my first nameis $b"
echo "My Last name is $c"
```

```
~
```

```
[ec2-user@ip-172-31-0-30 ~]$ vi Variables.sh
[ec2-user@ip-172-31-0-30 ~]$ chmod 755 Variables.sh
[ec2-user@ip-172-31-0-30 ~]$ cat Variables.sh
```

```
#!/bin/bash
# Defining Variables
```

```
a=Malem
b=sunith
c=kumar
```

```
echo 'my surname name is $a'
echo "my first nameis $b"
echo "My last name is $c"
```

```
[ec2-user@ip-172-31-0-30 ~]$ ./Variables.sh
```

```
my surname name is $a
my first nameis sunith
My last name is kumar
```

```
[ec2-user@ip-172-31-0-30 ~]$ vi Variables.sh
```

```
[ec2-user@ip-172-31-0-30 ~]$ ./Variables.sh
```

```
my surname name is Malem
my first nameis sunith
My last name is kumar
```

```
[ec2-user@ip-172-31-0-30 ~]$ |
```

```
#!/bin/bash
# Defining Variables
```

```
a=Malem
b=sunith
c=kumar
```

```
echo "my surname name is $a"
echo "my first nameis $b"
echo "My last name is $c"
```

```
~
```

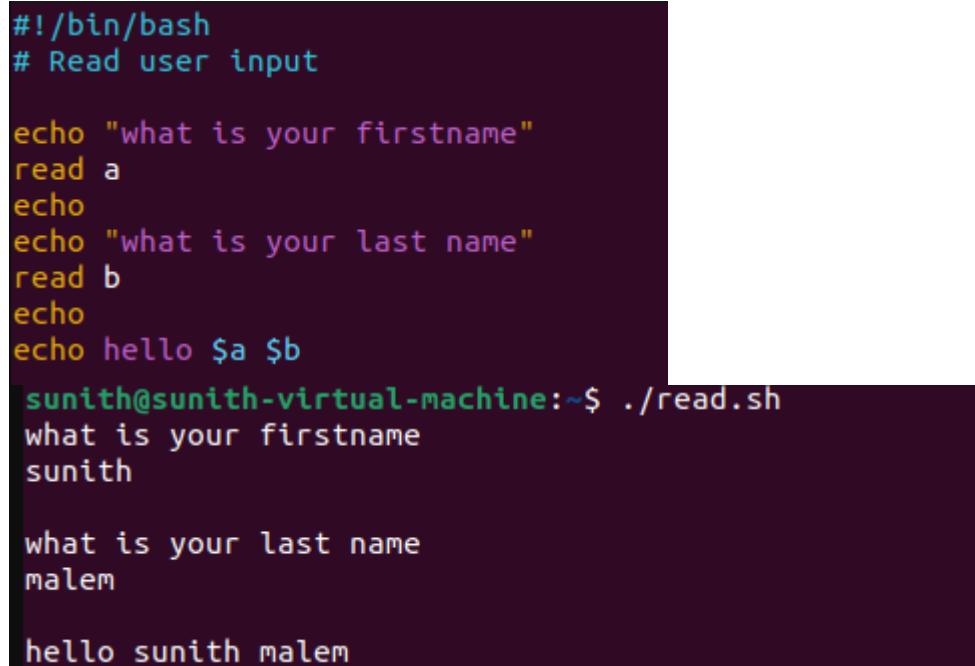
4. Read Input

```
#!/bin/bash
# Read user input

echo "What is your first name?"
read a
echo

echo "What is your last name?"
read b
echo

echo Hello $a $b
```

A terminal window with a dark purple background. The script content from the previous block is shown in a light blue font. Below it, the terminal shows the execution of the script. The prompt is 'sunith@sunith-virtual-machine:~\$./read.sh'. The first prompt is 'what is your firstname', followed by the input 'sunith'. The second prompt is 'what is your last name', followed by the input 'malem'. The final output is 'hello sunith malem'.

```
#!/bin/bash
# Read user input

echo "what is your firstname"
read a
echo
echo "what is your last name"
read b
echo
echo hello $a $b

sunith@sunith-virtual-machine:~$ ./read.sh
what is your firstname
sunith

what is your last name
malem

hello sunith malem
```

5. Scripts to run commands within

```
#!/bin/bash
# Script to run commands within

clear
echo "Hello `whoami`"
echo
echo "Today is `date`"
echo
echo "Number of user login: `who | wc -l`"
echo
```

```
#!/bin/bash
# Run commands wihtin

clear
echo "Hello `whoami`"
echo
echo "today is `date`"
echo
echo "number of users login: `who | wc -l`"
echo
~
Hello ec2-user

today is Thu Aug 20 06:39:04 UTC 2026

number of users login: 3

[ec2-user@ip-172-31-0-30 ~]$ who
ec2-user pts/0      2026-08-20 05:00 (103.160.27.206)
ec2-user pts/1      2026-08-20 05:49 (103.160.27.206)
ec2-user pts/2      2026-08-20 06:09 (103.160.27.206)
[ec2-user@ip-172-31-0-30 ~]$ wc -l

^C
[ec2-user@ip-172-31-0-30 ~]$ who | wc -l
3
[ec2-user@ip-172-31-0-30 ~]$ |
```

6. Read input and perform a task

```
#!/bin/bash
# This script will rename a file

echo Enter the file name to be renamed
read oldfilename

echo Enter the new file name
read newfilename

mv $oldfilename $newfilename
echo The file has been renamed as $newfilename
```

```

[ec2-user@ip-172-31-0-30 ~]$ sudo mkdir sunith
[ec2-user@ip-172-31-0-30 ~]$ cat input_perform.sh
#!/bin/bash
# This script will Rename a file

echo "enter the file name to be renamed"
read oldfilename
echo "enter the new file name"
read newfilename
mv $oldfilename $newfilename
echo The file has been reanamed as $newfilename
[ec2-user@ip-172-31-0-30 ~]$ ./input_perform.sh
enter the file name to be renamed
sunith
enter the new file name
Devops
The file has been reanamed as Devops
[ec2-user@ip-172-31-0-30 ~]$ ls
Defining.sh  Devops  Read.sh  Variables.sh  bash.sh  commands.sh  input_perform.sh
[ec2-user@ip-172-31-0-30 ~]$ |
#!/bin/bash
# This script will Rename a file

echo "enter the file name to be renamed"
read oldfilename
echo "enter the new file name"
read newfilename
mv $oldfilename $newfilename
echo The file has been reanamed as $newfilename
~

```

7. Input case

```

#!/bin/bash
a=`hostname`
echo "My name is $a"
echo
echo "what is your name"
read b
echo "hello $b"

```

```
#!/bin/bash
a=`hostname`
echo "My name is $a"
echo
echo "what is your name"
read b
echo "hello $b"
```

~

```
sunith@sunith-virtual-machine:~$ vi input.bash
```

```
sunith@sunith-virtual-machine:~$ chmod 755 input.bash
```

```
sunith@sunith-virtual-machine:~$ ./input.bash
```

My name is hostname

what is your name

sunith

hello sunith

```
sunith@sunith-virtual-machine:~$ vi input.bash
```

```
sunith@sunith-virtual-machine:~$ ./input.bash
```

My name is sunith-virtual-machine

what is your name

techie

hello techie

```
sunith@sunith-virtual-machine:~$ cat vi input.bash
```