EXPERIMENT 15: ANALYZE DIFFERENT TYPES OF SERVER LOGS USING WEBALIZER

AIM:

To analyze web server access logs using Webalizer and summarize website activity.

PROCEDURE:

1. Install Webalizer using the package manager supported by the lab operating system.

2. Locate a web server access log, such as the Apache access.log file, or use a permitted sample log.

3. Run Webalizer with the log file path and the desired output directory.

4. Open the generated index.html report in a web browser.

5. Review statistics such as total hits, files, pages, visits, sites and referrers when available.

6. Confirm that the selected log file exists and that the current user has permission to read it.
7. Check the Webalizer configuration if the log format or output directory differs from the default.
8. Refresh the report after processing the log and compare the summary statistics with the selected log period.
9. Do not publish reports containing sensitive client details unless they have been appropriately reviewed.

CODE:

```
# Debian/Ubuntu example:
sudo apt update
sudo apt install webalizer


# Analyze a sample Apache access log:
```

```
sudo webalizer /var/log/apache2/access.log -o
~/webalizer-report

# Open the generated report:
xdg-open ~/webalizer-report/index.html

# If your server uses a different log path, replace the
path accordingly.
```

OUTPUT:

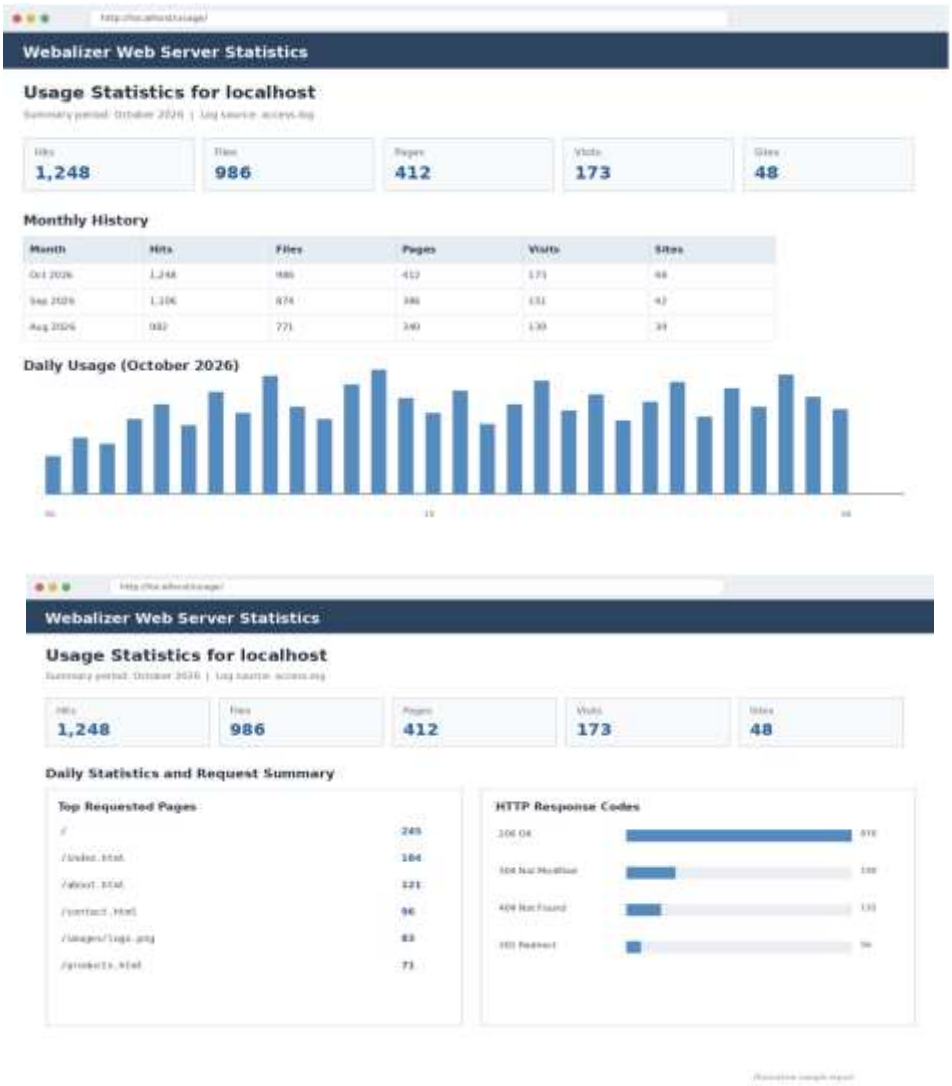

RESULT:

Thus, Webalizer was used to generate and examine a statistical report from web server access logs.