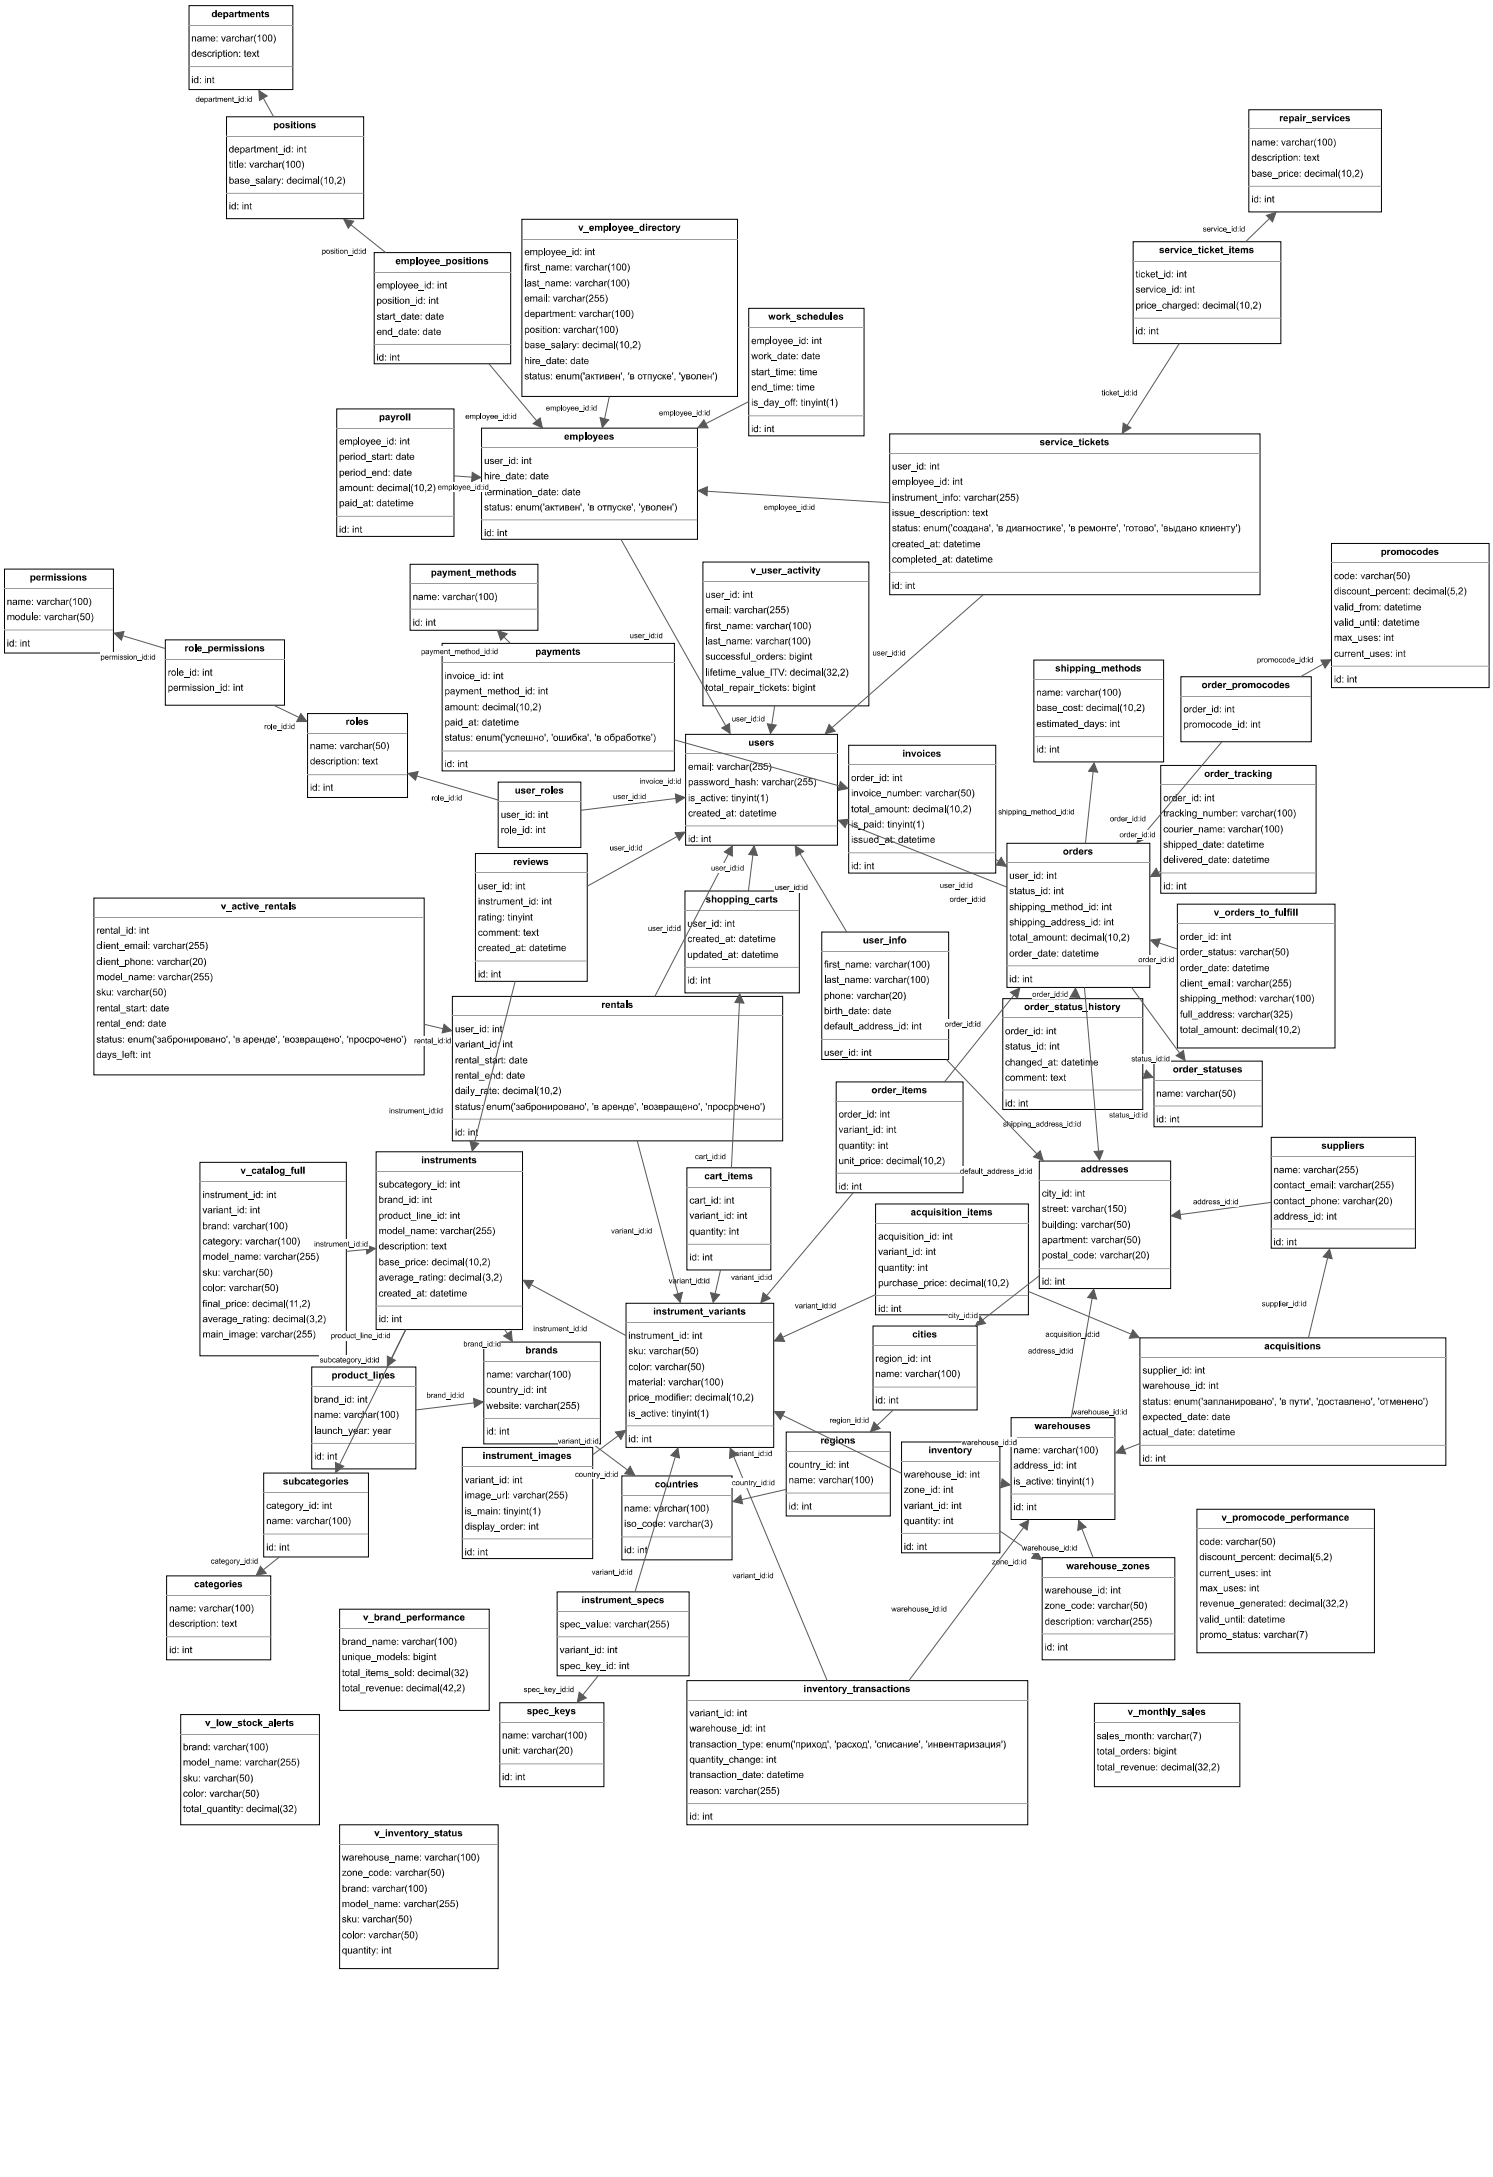

departments
name: varchar(100)
description: text
id: int
department_id:id
positions
department_id: int
title: varchar(100)
base_salary: decimal(10,2)
id: int
position_id:id
employee_positions
employee_id: int
position_id: int
start_date: date
end_date: date
id: int
v_employee_directory
employee_id: int
first_name: varchar(100)
last_name: varchar(100)
email: varchar(255)
department: varchar(100)
position: varchar(100)
base_salary: decimal(10,2)
hire_date: date
status: enum('активен', 'в отпуске', 'уволен')
work_schedules
employee_id: int
work_date: date
start_time: time
end_time: time
is_day_off: tinyint(1)
id: int
repair_services
name: varchar(100)
description: text
base_price: decimal(10,2)
id: int
service_id:id
service_ticket_items
ticket_id: int
service_id: int
price_charged: decimal(10,2)
id: int
ticket_id:id
payroll
employee_id: int
period_start: date
period_end: date
amount: decimal(10,2)
paid_at: datetime
id: int
employee_id:id
employees
user_id: int
hire_date: date
termination_date: date
status: enum('активен', 'в отпуске', 'уволен')
id: int
service_tickets
user_id: int
employee_id: int
instrument_info: varchar(255)
issue_description: text
status: enum('создана', 'в диагностике', 'в ремонте', 'готово', 'выдано клиенту')
created_at: datetime
completed_at: datetime
id: int
promocodes
code: varchar(50)
discount_percent: decimal(5,2)
valid_from: datetime
valid_until: datetime
max_uses: int
current_uses: int
id: int
promocode_id:id
permissions
name: varchar(100)
module: varchar(50)
id: int
permission_id:id
role_permissions
role_id: int
permission_id: int
role_id:id
roles
name: varchar(50)
description: text
id: int
payment_methods
name: varchar(100)
id: int
payment_method_id:id
payments
invoice_id: int
payment_method_id: int
amount: decimal(10,2)
paid_at: datetime
status: enum('успешно', 'ошибка', 'в обработке')
id: int
user_id:id
v_user_activity
user_id: int
email: varchar(255)
first_name: varchar(100)
last_name: varchar(100)
successful_orders: bigint
lifetime_value_ITV: decimal(32,2)
total_repair_tickets: bigint
user_id:id
shipping_methods
name: varchar(100)
base_cost: decimal(10,2)
estimated_days: int
id: int
shipping_method_id:id
order_promocodes
order_id: int
promocode_id: int
order_id:id
users
email: varchar(255)
password_hash: varchar(255)
is_active: tinyint(1)
created_at: datetime
id: int
user_roles
user_id: int
role_id: int
invoices
order_id: int
invoice_number: varchar(50)
total_amount: decimal(10,2)
is_paid: tinyint(1)
issued_at: datetime
id: int
invoice_id:id
order_tracking
order_id: int
tracking_number: varchar(100)
courier_name: varchar(100)
shipped_date: datetime
delivered_date: datetime
id: int
orders
user_id: int
status_id: int
shipping_method_id: int
shipping_address_id: int
total_amount: decimal(10,2)
order_date: datetime
id: int
reviews
user_id: int
instrument_id: int
rating: tinyint
comment: text
created_at: datetime
id: int
shopping_carts
user_id: int
created_at: datetime
updated_at: datetime
id: int
v_orders_to_fulfill
order_id: int
order_status: varchar(50)
order_date: datetime
client_email: varchar(255)
shipping_method: varchar(100)
full_address: varchar(325)
total_amount: decimal(10,2)
v_active_rentals
rental_id: int
client_email: varchar(255)
client_phone: varchar(20)
model_name: varchar(255)
sku: varchar(50)
rental_start: date
rental_end: date
status: enum('забронировано', 'в аренде', 'возвращено', 'просрочено')
days_left: int
rental_id:id
rentals
user_id: int
variant_id: int
rental_start: date
rental_end: date
daily_rate: decimal(10,2)
status: enum('забронировано', 'в аренде', 'возвращено', 'просрочено')
id: int
instrument_id:id
user_info
first_name: varchar(100)
last_name: varchar(100)
phone: varchar(20)
birth_date: date
default_address_id: int
user_id: int
order_status_history
order_id: int
status_id: int
changed_at: datetime
comment: text
id: int
order_statuses
name: varchar(50)
id: int
status_id:id
order_items
order_id: int
variant_id: int
quantity: int
unit_price: decimal(10,2)
id: int
suppliers
name: varchar(255)
contact_email: varchar(255)
contact_phone: varchar(20)
address_id: int
id: int
v_catalog_full
instrument_id: int
variant_id: int
brand: varchar(100)
category: varchar(100)
model_name: varchar(255)
sku: varchar(50)
color: varchar(50)
final_price: decimal(11,2)
average_rating: decimal(3,2)
main_image: varchar(255)
instruments
subcategory_id: int
brand_id: int
product_line_id: int
model_name: varchar(255)
description: text
base_price: decimal(10,2)
average_rating: decimal(3,2)
created_at: datetime
id: int
cart_items
cart_id: int
variant_id: int
quantity: int
id: int
addresses
city_id: int
street: varchar(150)
building: varchar(50)
apartment: varchar(50)
postal_code: varchar(20)
id: int
address_id:id
acquisition_items
acquisition_id: int
variant_id: int
quantity: int
purchase_price: decimal(10,2)
id: int
instrument_variants
instrument_id: int
sku: varchar(50)
color: varchar(50)
material: varchar(100)
price_modifier: decimal(10,2)
is_active: tinyint(1)
id: int
cities
region_id: int
name: varchar(100)
id: int
city_id:id
acquisitions
supplier_id: int
warehouse_id: int
status: enum('запланировано', 'в пути', 'доставлено', 'отменено')
expected_date: date
actual_date: datetime
id: int
supplier_id:id
product_lines
brand_id: int
name: varchar(100)
launch_year: year
id: int
brands
name: varchar(100)
country_id: int
website: varchar(255)
id: int
regions
country_id: int
name: varchar(100)
id: int
region_id:id
warehouses
name: varchar(100)
address_id: int
is_active: tinyint(1)
id: int
warehouse_id:id
inventory
warehouse_id: int
zone_id: int
variant_id: int
quantity: int
id: int
subcategories
category_id: int
name: varchar(100)
id: int
instrument_images
variant_id: int
image_url: varchar(255)
is_main: tinyint(1)
display_order: int
id: int
countries
name: varchar(100)
iso_code: varchar(3)
id: int
v_promocode_performance
code: varchar(50)
discount_percent: decimal(5,2)
current_uses: int
max_uses: int
revenue_generated: decimal(32,2)
valid_until: datetime
promo_status: varchar(7)
categories
name: varchar(100)
description: text
id: int
warehouse_zones
warehouse_id: int
zone_code: varchar(50)
description: varchar(255)
id: int
v_brand_performance
brand_name: varchar(100)
unique_models: bigint
total_items_sold: decimal(32)
total_revenue: decimal(42,2)
instrument_specs
spec_value: varchar(255)
variant_id: int
spec_key_id: int
spec_keys
name: varchar(100)
unit: varchar(20)
id: int
inventory_transactions
variant_id: int
warehouse_id: int
transaction_type: enum('приход', 'расход', 'списание', 'инвентаризация')
quantity_change: int
transaction_date: datetime
reason: varchar(255)
id: int
v_monthly_sales
sales_month: varchar(7)
total_orders: bigint
total_revenue: decimal(32,2)
v_low_stock_alerts
brand: varchar(100)
model_name: varchar(255)
sku: varchar(50)
color: varchar(50)
total_quantity: decimal(32)
v_inventory_status
warehouse_name: varchar(100)
zone_code: varchar(50)
brand: varchar(100)
model_name: varchar(255)
sku: varchar(50)
color: varchar(50)
quantity: int