

HoloQ-VLA: Uniform W4A4 Quantization of Vision-Language-Action Models

Xinyu Wang^{1,6*}, Mingze Li^{2*}, Sicheng Lyu^{1,5,6*}, Dongxiu Liu³, Kaicheng Yang⁴, Ziyu Zhao¹,
Yufei Cui^{1,5}, Xiao-Wen Chang¹, Peng Lu^{2†}

¹McGill University ²Université de Montréal ³Beijing University of Posts and Telecommunications

⁴Shanghai Jiao Tong University ⁵Mila – Quebec AI Institute ⁶SimpleWay.ai

{xinyu.wang5,sicheng.lyu}@mail.mcgill.ca, mingzeli996@gmail.com, peng.lu@umontreal.ca

Abstract

Vision-Language-Action (VLA) models unify perception, reasoning, and control in a single policy, but their multi-billion-parameter backbones and diffusion-based action heads make on-device deployment prohibitively expensive. Low-bit post-training quantization (PTQ) is the natural remedy, yet the diffusion action head that emits continuous control signals is highly sensitive to it: a few weight and activation outliers are enough to destabilize the head, so prior work leaves it at full precision or falls back to mixed-precision schemes, and uniformly quantizing the whole model to low bit-width remains an open challenge. We present HoloQ-VLA, the first training-free PTQ framework that compresses both the language backbone and the entire diffusion action head to a uniform W4A4 precision, without any mixed-precision allocation. Instead of trading weight quality against activation quality, HoloQ-VLA targets the two outlier sources with complementary transforms—a weight-adapted rotation composed with an activation-dispersing Hadamard—and further absorbs the dynamic-range drift that the action head exhibits across denoising steps. On LIBERO, HoloQ-VLA compresses Pi-0.5 and GR00T-N1.5 to W4A4 with **98.0%** and **87.8%** task success rates—matching or exceeding their FP16 references (97.1%, 87.0%)—while reducing the static memory footprint by **74.2%**. Real-world manipulation experiments further demonstrate that HoloQ-VLA maintains smooth, accurate control robustly across diverse real-world scenarios.

Introduction

Vision-Language-Action (VLA) models (Kim et al. 2024; Intelligence et al. 2025; Bjorck et al. 2025) unify visual perception, language reasoning, and action generation within a single policy, offering a promising path toward generalist robot control. By inheriting pretrained backbones from large language models (LLMs) (Touvron et al. 2023; Yang et al. 2025; OpenAI 2024) and vision-language models (VLMs) (Li et al. 2022), VLA systems can parse natural-language instructions, reason over visual observations, and output executable actions in one forward pass. However, this unification comes at a steep cost: deploying a VLA policy on real robot hardware requires running a multi-billion-parameter language backbone alongside a diffusion-based action head (Chi et al. 2025) under tight latency and memory budgets. Making these

models efficient enough for on-device deployment is therefore an urgent and open problem.

Post-training quantization (PTQ) (Xiao et al. 2023; Lin et al. 2024a; Lin* et al. 2024; Wang et al. 2025; Chen et al. 2026; Wang et al. 2026) has become the standard recipe for compressing LLMs and VLMs without retraining. Yet a striking gap emerges when we survey existing work on VLA efficiency: *no prior method stably quantizes the full DiT action head of a VLA model at a uniform low-bit precision*. This gap is a direct consequence of what the action head is. Unlike a language backbone, which predicts discrete tokens, the diffusion action head emits continuous control signals through an iterative denoising process and drives physical actuators in a closed loop. A rounding error that is harmless on a language benchmark turns into a control error that compounds across denoising steps and around the closed loop, amplified by contact forces and physical dynamics.

The action head is therefore intrinsically far more sensitive to quantization than the discrete language model it is attached to. Crucially, this sensitivity does not doom low-bit quantization: the failure that appears under uniform W4A4 stems from a specific, addressable cause. Suppressing weight outliers and suppressing activation outliers pull in opposite directions, and a single low-bit quantization mechanism cannot serve both at once. Earlier VLA quantizers sidestep this by operating in relaxed regimes—weight-only (W4A16) or 8-bit activations (W4A8)—that leave enough headroom for one-sided outlier handling; uniform W4A4 removes that headroom and forces the conflict into the open. We address it by pairing two complementary transforms—a weight-adapted rotation and an activation-dispersing Hadamard—so that weight and activation outliers are handled by different factors rather than traded against each other. We present HoloQ-VLA, the first training-free PTQ framework to compress both the language backbone and the entire DiT action head of a VLA model to a uniform W4A4 precision—eliminating the need for mixed-precision allocation altogether. Our contributions are threefold:

1. We identify a previously-overlooked *conflict between weight- and activation-outlier suppression* that surfaces specifically in the uniform W4A4 regime, and show that this—rather than any inherent sensitivity of the action head—is why quantizing the full language-and-action stack has been considered intractable.
2. We address this conflict with a composite SVD-Hadamard

*These authors contributed equally.

†Corresponding author.

rotation whose two factors target the weight and the residual activation outliers respectively, and add a per-step activation scaling that absorbs the action head’s dynamic-range drift across denoising steps.

3. On the LIBERO benchmark (Liu et al. 2023), HoloQ-VLA compresses Pi-0.5 and GR00T-N1.5 to W4A4 with average task success rates of **98.0%** and **87.8%**, matching or exceeding their FP16 references (97.1% and 87.0%) while reducing the static memory footprint by **74.2%**, and real-world bimanual manipulation confirms smooth, accurate control where prior W4A4 methods fail.

Related Work

LLM quantization

The core challenge in LLM quantization is activation outliers: a small number of channels carry disproportionately large values that dominate the quantization error. SmoothQuant (Xiao et al. 2023) handles this by rescaling activations against their corresponding weights, pushing the quantization difficulty from activations to weights, which are easier to compress. Rotation-based methods—QuaRot (Ashkboos et al. 2024), FlatQuant (Sun et al. 2024), DuQuant (Lin et al. 2024a), OSTQuant (Hu et al. 2025)—take a different approach: they apply orthogonal transformations to spread outliers evenly across channels before quantization, so no single dimension suffers excessive error. Weight-only schemes like AWQ (Lin et al. 2024b) and GPTQ (Frantar et al. 2022) sidestep activation quantization entirely by compressing only the weights, which works well for memory-bound deployment but leaves compute-bound scenarios unaddressed.

DiT quantization

Unlike standard autoregressive language models, diffusion transformers (DiTs) (Peebles and Xie 2023) exhibit highly dynamic activation statistics that fluctuate continuously across the multi-step denoising process. Recognizing this severe limitation, recent research has pivoted toward developing bespoke, DiT-specific compression strategies. For example, Li et al. (2024) addresses this temporal variance by absorbing prominent activation outliers through the addition of full-precision, low-rank branches. Similarly, Zhao et al. (2024) introduces a granular, per-group dynamic quantization method that adaptively captures and adjusts to the shifting activation ranges at each specific timestep. The fundamental inadequacy of directly transferring text-based techniques is systematically formalized by the PTQ4DiT benchmark (Wu et al. 2024). Their extensive evaluations definitively show that off-the-shelf LLM quantization recipes degrade both the spatial and temporal consistencies of diffusion models.

VLA quantization

Progress in one component of a VLA system does not automatically transfer to others. For example, improvements in quantization techniques for LLMs do not guarantee similar gains in multimodal or action-generation modules, and methods designed for one modality often fail to ensure efficient or stable behavior when applied to the full VLA pipeline. QuantVLA (Zhang et al.), QVLA (Xu et al. 2026), and

Method	Quantized Components		Precision	
	LLM Backbone	Diffusion Action Head	Weight	Act.
QuantVLA	✓	✓ [†]	4-bit	8-bit
QVLA	✓	N/A	4-bit	16-bit
ActQuant	✓	×	4-bit	16-bit
HoloQ-VLA	✓	✓	4-bit	4-bit

Table 1: Quantization coverage and precision of representative VLA PTQ methods. Under *Quantized Components*, ✓ marks a component quantized to low bits, × marks a component that is present but kept at FP16, and N/A marks a component absent in the target model (QVLA targets a discrete-action VLA that has no diffusion action head). [†]QuantVLA quantizes only the action-head MLP and leaves its attention layers at FP16. HoloQ-VLA is the only method to quantize the entire diffusion action head, including its attention, and the only one to reach a uniform W4A4 precision.

similar recent efforts address this gap by developing compression strategies explicitly tailored for the unique architectural and operational demands of embodied control. Specifically, Zhang et al. introduce a scale-calibrated post-training quantization framework that selectively quantizes both the language backbone and the diffusion transformer (DiT) action head to preserve operator schedules and control fidelity. Taking a complementary approach, Xu et al. (2026) highlight the compounding execution errors caused by naive, uniform-bit LLM quantization, proposing instead an action-centric, channel-wise bit allocation method that explicitly measures and minimizes action-space sensitivity. Collectively, these works demonstrate that effectively compressing VLA systems requires holistic, action-aware optimization rather than the direct transfer of language-centric techniques.

As summarized in Table 1, *each prior method leaves the hardest part untouched*: QVLA targets a VLA with no diffusion action head, while ActQuant (Akbari et al. 2026) keeps the diffusion action head at full precision; both are weight-only (W4A16, activations in FP16). QuantVLA reaches only the action-head MLP at W4A8, leaving the attention layers at FP16. Additionally, *mismatched bit widths force lower-precision tensors to be upcast to the higher precision, negating the performance benefits of quantization*. HoloQ-VLA is the only method to quantize both the language backbone and the *entire* diffusion action head—including its attention layers—at a uniform W4A4.

Preliminaries

Vision Language Action (VLA) Model

VLA models form a class of embodied systems that jointly process visual observations, interpret textual instructions, and generate action representations executable on physical robotic platforms operating in dynamic environments. Similar to models that map sensory inputs and prompts to action sequences, VLAs integrate vision encoders (e.g., ViTs (Dosovitskiy et al. 2021)), language models (e.g., LLMs), and action-

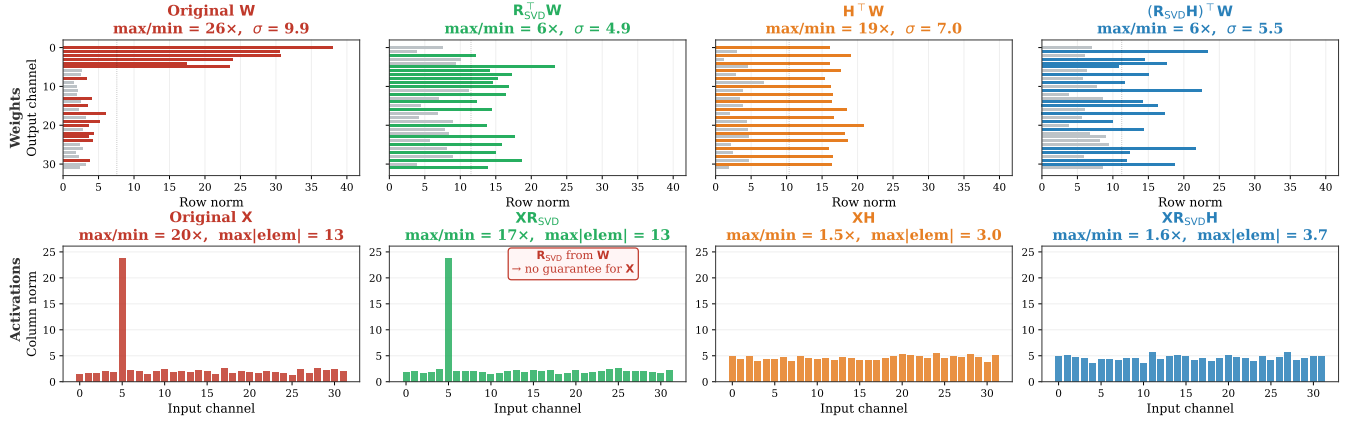


Figure 1: Per-channel distribution of weights (top) and activations (bottom) under four rotation settings. $\mathbf{R}_{\text{SVD}}$, adapted to $\mathbf{W}$, reduces the weight-row-norm spread substantially ($26\times \rightarrow 6\times$, $\sigma: 9.9 \rightarrow 4.9$), whereas the data-independent $\mathbf{H}$ provides limited improvement ($19\times$, $\sigma=7.0$). Conversely, $\mathbf{H}$ smooths activations ($20\times \rightarrow 1.5\times$) via incoherence ($|(z\mathbf{H})_k| \approx \|z\|_2/\sqrt{n}$), while $\mathbf{R}_{\text{SVD}}$, derived entirely from $\mathbf{W}$, leaves activation outliers intact ($20\times \rightarrow 17\times$). The composite $\mathbf{R}_{\text{SVD}}\mathbf{H}$ inherits both strengths (weights: $6\times$, $\sigma=5.5$; activations: $1.6\times$). These panels visualize the deterministic Hadamard $\mathbf{H}_C$; the random signs $\mathbf{D}$ in the full transform $\mathbf{D}\mathbf{H}_C$ act as a worst-case incoherence safeguard against adversarially aligned inputs and are omitted here.

generation modules or planners to produce task-conditioned behaviors (e.g., DiTs). Their architectures typically extend multimodal fusion techniques established in vision–language models—such as cross-attention, concatenated embeddings, or token-level unification—to align sensory inputs, linguistic directives, and action representations within a unified control framework.

Model Quantization

Quantization maps full-precision parameters $\mathbf{W}$ to a low-precision representation $\hat{\mathbf{W}} = Q(\mathbf{W})$ through a discrete transformation. The objective is to design a quantizer that preserves model behavior under reduced precision. Consider a weight matrix $\mathbf{W}$ from a linear layer $\mathbf{Y} = \mathbf{X}\mathbf{W} + \mathbf{b}$, where $\mathbf{X}$ denotes the activations. Uniform quantization computes a single scaling factor α_W for the entire tensor and maps all full-precision values to k_w -bit integers $\mathbf{W}_q$. The de-quantized weights are then recovered as $\hat{\mathbf{W}} = \alpha_W \mathbf{W}_q$, yielding an approximation of the original computation, i.e., $\mathbf{Y} \approx \hat{\mathbf{X}}\hat{\mathbf{W}} + \mathbf{b}$, where $\hat{\mathbf{X}}$ denotes the quantized activations. To accelerate computation, modern commercial GPUs require both weights and activations to be quantized to the same bit width. Otherwise, if the bit widths differ, the lower-precision values must be upcast to match the higher-precision ones (or vice versa), which negates the performance benefits of quantization.

Methodology

We posit that VLA quantization is highly sensitive to outliers in both weights and activations. We first show that a single rotation is insufficient to suppress both types of outliers effectively. We then propose a *composite rotation*, described in the subsection *Decoupling Weight and Activation Outliers via Operator Composition*, that pairs a weight-adapted basis with an activation-dispersing Hadamard to target weight-

and activation-outliers with separate factors, and a *per-step activation scaling*, described in the subsection *Per-step DiT Activation Scaling Quantization*, that absorbs the DiT-induced, timestep-dependent activation dynamic range.

Decoupling Weight and Activation Outliers via Operator Composition

Rotation-based quantization exploits computational invariance: for a linear layer $\mathbf{Y} = \mathbf{X}\mathbf{W}$ and any orthogonal $\mathbf{R}$ ($\mathbf{R}\mathbf{R}^\top = \mathbf{I}$), we may write $\mathbf{Y} = (\mathbf{X}\mathbf{R})(\mathbf{R}^\top\mathbf{W})$ and quantize the rotated weights and activations without changing the output. Per-channel low-bit quantization is accurate on an *incoherent* tensor—one in which no channel dominates, i.e. $\max_k |z_k| \lesssim \|z\|_2/\sqrt{C_{\text{in}}}$ —and loses precision when outlier channels inflate the quantization step. A good $\mathbf{R}$ therefore makes both weights and activations incoherent; under W4A4 a *single* shared $\mathbf{R}$ must do so for both.

But the rotations preferred by the two sides are generally different: weight structure is exposed in its singular-vector basis, whereas activation outliers are best dispersed by a flat basis. A single shared rotation therefore cannot, in general, attain both objectives.

Proposition 1 (Basis conflict under a single rotation). *Let $\mathbf{W} \in \mathbb{R}^{d \times m}$, where $d \leq m$, be full row rank and have singular value decomposition $\mathbf{W} = \mathbf{U}\Sigma\mathbf{V}^\top$ with distinct singular values $\sigma_1 > \dots > \sigma_d > 0$. Let $\mathbf{R} \in \mathbb{R}^{d \times d}$ be orthogonal, and define $\mathbf{X}' = \mathbf{X}\mathbf{R}$ and $\mathbf{W}' = \mathbf{R}^\top\mathbf{W}$. Then:*

1. (**Weight diagonalization**) *The rows of $\mathbf{W}'$ are mutually orthogonal if and only if $\mathbf{R} = \mathbf{U}\mathbf{\Pi}$ for some signed permutation $\mathbf{\Pi}$.*
2. (**Activation flattening**) *For a single-channel outlier $z = e_j$,*

$$\|z\mathbf{R}\|_\infty = \max_k |R_{jk}| \geq \frac{1}{\sqrt{d}},$$

with equality if and only if row j of $\mathbf{R}$ is flat, i.e., $|\mathbf{R}_{jk}| = 1/\sqrt{d}$ for all k .

Consequently, a single rotation attains both objectives only when the corresponding rows of $\mathbf{U}$ are flat. In general, the singular-vector basis preferred by the weights differs from the flat basis preferred for dispersing activation outliers, motivating separate rotations for the two sides.

A proof is provided in the appendix.

Motivated by this observation, we propose a composite rotation strategy that targets weight and activation outliers respectively.

SVD rotation. For the weight side we compute the SVD $\mathbf{W} = \mathbf{U}\mathbf{\Sigma}\mathbf{V}^\top$ and set $\mathbf{R}_{\text{SVD}} = \mathbf{U}$. The rotated weight $\mathbf{R}_{\text{SVD}}^\top \mathbf{W} = \mathbf{\Sigma}\mathbf{V}^\top$ then has row norms exactly $\{\sigma_i\}$, so per-channel weight energy is governed by the singular spectrum rather than by coordinate-dependent mixing—condition (1) of Proposition 1. Being fit to $\mathbf{W}$ alone, however, $\mathbf{U}$ gives no control over the activations.

Hadamard rotation. For the activation side we compose $\mathbf{R}_{\text{SVD}}$ with a randomized Hadamard transform $\mathbf{H} = \frac{1}{\sqrt{C_{\text{in}}}} \mathbf{D}\mathbf{H}_{C_{\text{in}}}$ ($\mathbf{D} = \text{diag}(\pm 1)$ random signs applied *before* the Hadamard mixing, so that under the row-vector convention $\mathbf{z}\mathbf{H}$ the signs randomize the input coordinates):

$$\mathbf{R} = \mathbf{R}_{\text{SVD}} \mathbf{H} = \mathbf{U}\mathbf{H}. \quad (1)$$

$\mathbf{H}$ makes the activation channels *incoherent* (Ashkboos et al. 2024): each rotated coordinate is sub-Gaussian with variance $\|\mathbf{z}\|_2^2/C_{\text{in}}$, so $\max_k |(\mathbf{z}\mathbf{H})_k| \lesssim \|\mathbf{z}\|_2 \sqrt{\log C_{\text{in}}/C_{\text{in}}}$ with high probability—condition (2). Thus $\mathbf{U}$ reshapes the weight rows toward the singular spectrum while $\mathbf{H}$ diffuses the residual activation outliers it leaves behind; Figure 1 confirms the composite inherits both ($6\times$ on weights, $1.6\times$ on activations), whereas either operator alone fixes only its own side ($\mathbf{R}_{\text{SVD}}$: activations $17\times$; $\mathbf{H}$: weights $19\times$). We stress that the composite is a heuristic rather than a simultaneous optimum: because $\mathbf{H}$ remixes the singular-vector rows, $\mathbf{R} = \mathbf{U}\mathbf{H}$ no longer exactly satisfies the weight-orthogonality condition of Proposition 1. It instead trades a small amount of weight-side structure for activation incoherence, and empirically improves *both* sides relative to using either factor alone.

Block-wise Implementation. Nevertheless, directly instantiating $\mathbf{R} = \mathbf{R}_{\text{SVD}} \cdot \mathbf{H}$ as a dense $C_{\text{in}} \times C_{\text{in}}$ matrix is computationally prohibitive and incurs substantial memory overhead. We instead approximate $\mathbf{R}$ in a block-wise manner:

$$\hat{\mathbf{R}} = \text{BlockDiag}(\mathbf{R}_1, \dots, \mathbf{R}_K), \quad (2)$$

$$\mathbf{R}_b = \mathbf{U}_{\text{SVD}}(\mathbf{W}_b) \cdot \mathbf{H}_c, \quad (3)$$

where each $\mathbf{W}_b$ is a contiguous row partition of $\mathbf{W}$, c is the corresponding row dimension of $\mathbf{W}_b$, $\mathbf{U}_{\text{SVD}}$ is the matrix of left singular vectors. However, since each block rotation operates independently within its partition, outlier channels clustered within the same block remain jointly suppressed under a single group scale, thus the magnitude of different blocks could have large difference. To avoid outliers concentrate on some blocks, we utilize an orthogonal permutation

matrix $\mathbf{P}$ satisfying $\mathbf{P}\mathbf{P}^\top = \mathbf{I}$ that reorders channels prior to block partitioning. We sort channels by descending weight row norm $\|\mathbf{W}_{j,:}\|_2^2$ (the j -th input channel) and distribute them across the K blocks in a zigzag order, such that each block receives channels of alternating high and low norms rather than a homogeneous range. This balances the energy distribution across blocks, preventing high-norm channels from concentrating within any single partition. The complete transformation is then:

$$\mathbf{X}' = \mathbf{X}\mathbf{P}\hat{\mathbf{R}}, \quad (4)$$

$$\mathbf{W}' = \hat{\mathbf{R}}^\top \mathbf{P}^\top \mathbf{W}, \quad (5)$$

where $\mathbf{P}$ is determined solely by weight column norms, without requiring activation statistics, to avoid overfitting to the calibration distribution.

Per-step DiT Activation Scaling Quantization

Quantization is applied after the composite rotation, yielding the rotated weight $\mathbf{W}'$ and activation $\mathbf{X}'$. Both are quantized using symmetric uniform quantization. For a generic tensor $\mathbf{Z}$ at bit-width k , let $q_{\text{max}} = 2^{k-1} - 1$ and define the scale and quantized representation as:

$$\Delta_{\mathbf{Z}} = \frac{\max(|\mathbf{Z}|)}{q_{\text{max}}}, \quad (6)$$

$$\mathbf{Q}_{\mathbf{Z}} = \text{clamp}\left(\left\lfloor \frac{\mathbf{Z}}{\Delta_{\mathbf{Z}}} \right\rfloor, -q_{\text{max}}, q_{\text{max}}\right). \quad (7)$$

The dequantized value is reconstructed as $Q(\mathbf{Z}) = \Delta_{\mathbf{Z}} \mathbf{Q}_{\mathbf{Z}}$. For weights, $\Delta_{\mathbf{W}'}$ is computed per output channel at bit-width k_w ; for LLM backbone activations, $\Delta_{\mathbf{X}'}$ is computed per token at bit-width k_a .

However, a single static scale is suboptimal for the DiT action head, whose activation magnitudes vary substantially across denoising steps. We therefore introduce *per-step activation calibration*: a per-step, per-layer, per-channel scale table precomputed offline from calibration trajectories. For layer ℓ , step t , and channel j :

$$\Delta_{\ell,t,j} = \frac{\hat{\sigma}(\mathbf{X}'_{t,:,j})}{q_{\text{max}}}, \quad (8)$$

where $\hat{\sigma}(\cdot)$ is a robust peak estimator. At inference, the scale for the current step is retrieved and the activation is quantized via Eq. 7 with $\Delta_{\ell,t,\cdot}$ in place of $\Delta_{\mathbf{Z}}$. The low-bit linear operation is then:

$$\mathbf{X}'\mathbf{W}' \approx \Delta_{\mathbf{X}'}\Delta_{\mathbf{W}'}\mathbf{Q}_{\mathbf{X}'}\mathbf{Q}_{\mathbf{W}'}. \quad (9)$$

Experiments and Results

In this section, we describe our experimental setup and report results on both simulation benchmarks and real-world manipulation tasks, evaluated across two VLA model families.

Experimental Settings

Simulation Benchmark. We evaluate HoloQ-VLA on two state-of-the-art VLA policies, OpenPI Pi-0.5 (Intelligence

Method	Precision	Quantization Setting	GR00T-N1.5					Pi-0.5				
			Goal	Spatial	Object	Long	Average	Goal	Spatial	Object	Long	Average
Full Precision	FP16	No quantization	86.0	92.0	92.0	76.0	86.5	98.5	99.0	97.5	93.5	97.1
GPTQ	W4A16	w/o DiT attention	81.0	91.0	81.0	68.0	80.3	76.0	85.0	91.0	75.0	81.8
AWQ	W4A16	w/o DiT attention	51.0	92.0	95.0	75.0	78.3	67.0	85.0	92.0	82.0	81.5
OmniQuant	W4A16	w/o DiT attention	86.0	90.0	68.0	76.0	80.0	74.0	85.0	94.0	78.0	82.8
GPTQ	W4A16	Full quantization	49.0	43.0	73.0	60.0	56.3	10.0	15.0	39.0	0.0	16.0
AWQ	W4A16	Full quantization	51.0	38.0	74.0	64.0	56.8	11.0	4.0	29.0	2.0	11.5
OmniQuant	W4A16	Full quantization	43.0	39.0	65.0	53.0	50.0	10.0	8.0	23.0	0.0	10.3
SmoothQuant	W4A8	Full quantization	89.0	82.0	94.0	80.0	86.3	96.0	99.0	98.0	94.0	96.8
DuQuant	W4A8	Full quantization	83.0	75.0	86.0	77.0	80.3	93.0	96.0	99.0	92.0	95.0
QuantVLA	W4A8	Full quantization	53.0	44.0	50.0	77.0	56.0	90.0	92.0	98.0	56.0	84.0
QuantVLA	W4A8	w/o DiT attention	90.0	96.0	92.0	74.0	88.0	98.0	98.5	98.0	96.0	97.6
SmoothQuant	W4A4	Full quantization	83.0	87.0	84.0	82.0	84.0	40.0	83.0	88.0	26.0	59.3
DuQuant	W4A4	Full quantization	62.0	66.0	74.0	78.0	70.0	94.0	96.0	99.0	88.0	94.3
QuantVLA	W4A4	Full quantization	63.0	71.0	71.0	74.0	69.8	80.0	94.0	98.0	56.0	82.0
QuantVLA	W4A4	w/o DiT attention	60.0	62.0	74.0	70.0	66.5	98.0	96.0	100.0	86.0	95.0
HoloQ-VLA	W4A4	Full quantization	91.0	86.0	92.0	82.0	87.8	100.0	99.0	97.0	96.0	98.0

Table 2: Quantization performance comparison on LIBERO with calibration sample size $n = 10$. All numbers are success rates (%). “Full quantization” quantizes the language backbone and the entire DiT action head, while “w/o DiT attention” additionally excludes the DiT attention layers.

et al. 2025) and GR00T-N1.5 (Bjorck et al. 2025), both employing a DiT-based action head that maps fused visual–language features to action sequences. Using two widely-adopted VLA policies with different vision–language backbones lets us assess the generality of HoloQ-VLA across models rather than specializing to a single architecture. Evaluation uses the LIBERO (Liu et al. 2023) simulator with four task suites that target distinct capabilities: *Spatial* tests relational reasoning and precise placement, *Object* focuses on object-centric grasping and manipulation, *Goal* measures instruction-to-goal alignment, and *Long* examines temporal decomposition and control of accumulated error. We follow the standard LIBERO protocol and report success rates on each suite as well as the four-suite average.

Real-World Experiments. To verify the effectiveness of HoloQ-VLA on physical hardware, we evaluate on five bimanual manipulation tasks of increasing difficulty: the relatively simple *Pick Cup*, the intermediate *Put Blocks* and *Put Fruit*, and the more challenging long-horizon *Put Flowers* and *Fold Towel*. The experimental setup and task illustrations are shown in Fig. 4. All experiments are conducted on a dual-arm ARX R5 platform equipped with two 6-DoF arms with parallel-jaw grippers and three RGB camera views. We use Pi-0.5 as the full-precision base model and compare two W4A4 quantization approaches: QuantVLA as the baseline and the proposed HoloQ-VLA. Since each task consists of multiple sequential stages, we adopt a stage-wise progress score for fine-grained evaluation; detailed scoring criteria are provided in the appendix subsection *Real-World Manipulation Tasks*.

We report the progress score averaged over 10 rollouts per task.

Implementation Details. Unless otherwise stated, HoloQ-VLA is applied with a uniform W4A4 precision on all linear layers across language backbone and DiT action head. Following the composite-rotation design described above, we use block-wise SVD-Hadamard rotation with block size 64 and a zigzag weight-norm channel permutation. The LLM side uses GPTQ-style weight quantization (block size 128, damping ratio 0.01); the DiT side uses RTN with the per-step activation scale table calibrated over $T = 8$ Euler denoising steps. All scales are estimated from a small unlabeled calibration buffer of $n = 10$ trajectories and folded into dequantization at inference time. All experiments are run on NVIDIA H100 GPUs. Hyperparameters for HoloQ-VLA and all baselines are detailed in the appendix subsection *Key Hyperparameters*.

Main Results

Table 2 reports the simulation results on LIBERO under calibration sample size $n = 10$. We evaluate two representative VLA backbones, GR00T-N1.5 and Pi-0.5, and compare HoloQ-VLA with both weight-only and weight-activation PTQ baselines. The results show that full-stack quantization is substantially harder than selectively excluding DiT attention. Under W4A16, excluding DiT attention keeps the average success rate around 78–80% on GR00T-N1.5 and 81–83% on Pi-0.5, whereas quantizing the full stack causes a sharp drop, especially on Pi-0.5 where GPTQ, AWQ, and OmniQuant fall to 16.0%, 11.5%, and 10.3%, respectively. This confirms that

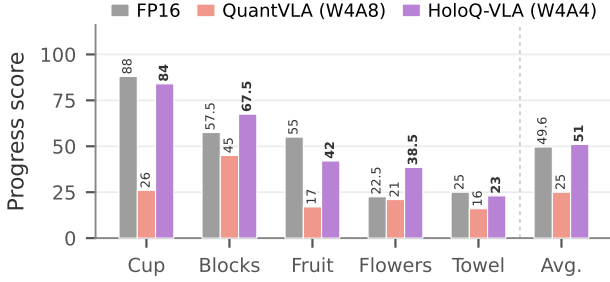


Figure 2: Real-world bimanual manipulation on the *same* Pi-0.5 policy under different quantizers (progress score, %). HoloQ-VLA at W4A4 matches the FP16 reference (average 51.0 vs. 49.6) and far surpasses QuantVLA, even though QuantVLA runs at the more lenient W4A8 budget. Per-task scores are listed in Table 6 in the appendix subsection *Real-World Manipulation Tasks*.

DiT attention is a major source of quantization sensitivity in VLA models.

Despite this difficulty, HoloQ-VLA remains effective under the aggressive W4A4 full-quantization setting. On GR00T-N1.5, HoloQ-VLA achieves 87.8% average success rate, matching the FP16 reference performance of 87.0% and outperforming W4A4 full-quantization baselines such as SmoothQuant, DuQuant, and QuantVLA. On Pi-0.5, HoloQ-VLA achieves 98.0% average success rate, slightly exceeding the FP16 reference of 97.1%. Compared with QuantVLA under W4A4 full quantization, HoloQ-VLA improves the average success rate from 82.0% to 98.0%, with particularly large gains on the long-horizon suite (56.0% $\rightarrow$ 96.0%). These results indicate that HoloQ-VLA can quantize the full VLA stack, including the DiT attention layers, without sacrificing task performance.

Overall, the simulation results demonstrate two key points. First, naively applying standard PTQ methods to the complete VLA model is unstable, especially when the action head attention layers are included. Second, the proposed rotation and per-step calibration design substantially mitigates this failure mode, allowing W4A4 full-stack quantization to reach or even surpass full-precision performance on both evaluated backbones.

Real-world experiment results

Figure 2 summarizes results on five real-world manipulation tasks (per-task scores in Table 6; task descriptions and scoring criteria in the appendix subsection *Real-World Manipulation Tasks*). All three bars quantize the *same* Pi-0.5 policy. At W4A4, HoloQ-VLA reaches an average progress score of 51.0, slightly surpassing the FP16 reference (49.6), while QuantVLA—despite its more lenient W4A8 budget—collapses to 25.0 with unreliable execution across multiple tasks. The two policies also differ qualitatively: QuantVLA produces jerky end-effector trajectories that accumulate over long horizons into task failures, whereas HoloQ-VLA yields substantially smoother actions. This behavioral gap is corrobo-

Method	Q-Layers	Footprint	Saving
FP16 baseline	0	5.41 GB	—
W4A16 GPTQ (Frantar et al. 2022)	252	2.00 GB	62.9%
QuantVLA (W4A8) (Zhang et al.)	108	2.38 GB	55.9%
QVLA	288	1.82 GB	66.3%
ActQuant (4 bpw)	288	1.81 GB	66.5%
HoloQ-VLA (ours)	414	1.39 GB	74.2%

Table 3: Static memory footprint and memory savings on Pi-0.5. “Q-Layers” denotes the number of layers stored or executed in quantized format.

rated by the *Open-Loop Action Analysis* appendix subsection, where HoloQ-VLA tracks the reference trajectories closely while QuantVLA produces frequent spikes across action dimensions.

Discussion and Analysis

In this section, we present a comprehensive analysis comprising efficiency benchmarks, ablation studies of individual components, and an evaluation of the rotation method’s effect on quantization quality.

Memory Efficiency and Metadata Overhead

Table 3 reports the static model footprint on Pi-0.5. Since all methods store 4-bit weights, the footprint is governed by how many layers are quantized (“Q-Layers”): the saving grows monotonically with that count. QuantVLA quantizes only the 108 MLP layers and keeps attention in FP16 (55.9%), GPTQ quantizes 252 (62.9%), and QVLA and ActQuant quantize 288 (66.3% and 66.5%). HoloQ-VLA quantizes all 414 linear layers—including the DiT attention that the others leave in FP16—yielding the smallest footprint, **1.39 GB**, and the largest saving, **74.2%** over the 5.41 GB FP16 model. The metadata HoloQ-VLA adds—block-wise SVD rotation matrices, zigzag permutation indices, and per-step activation scale tables—is small and already counted in this footprint.

Concretely, this metadata is asymptotically negligible relative to the weights it accompanies. The block-wise rotation stores K orthogonal 64×64 blocks per layer, i.e. $\mathcal{O}(C_{\text{in}} \cdot 64)$ values, rather than the $\mathcal{O}(C_{\text{in}}^2)$ of a dense rotation; the zigzag permutation is a single length- C_{in} integer index vector; and the per-step scale table holds one scalar per (step, layer, channel), amortized over the entire denoising trajectory. Summed across the model these structures stay well under a few percent of the quantized weight bytes, which is why the HoloQ-VLA footprint in Table 3 already subsumes them without eroding the 74.2% saving.

Ablation Study

Table 4 ablates the two components under W4A4. First, a single rotation is not enough: SVD alone drops the four-suite average to 79.25, *below* the 83.00 of no rotation, because it balances the weight rows while leaving—and on *Object* even concentrating (90 $\rightarrow$ 73)—the activation outliers. Composing it with the Hadamard transform reverses this, raising the average to 87.75 (+8.5 over SVD-only, +4.75 over no rotation) and recovering *Object* to 92. Second, per-step scaling adds a

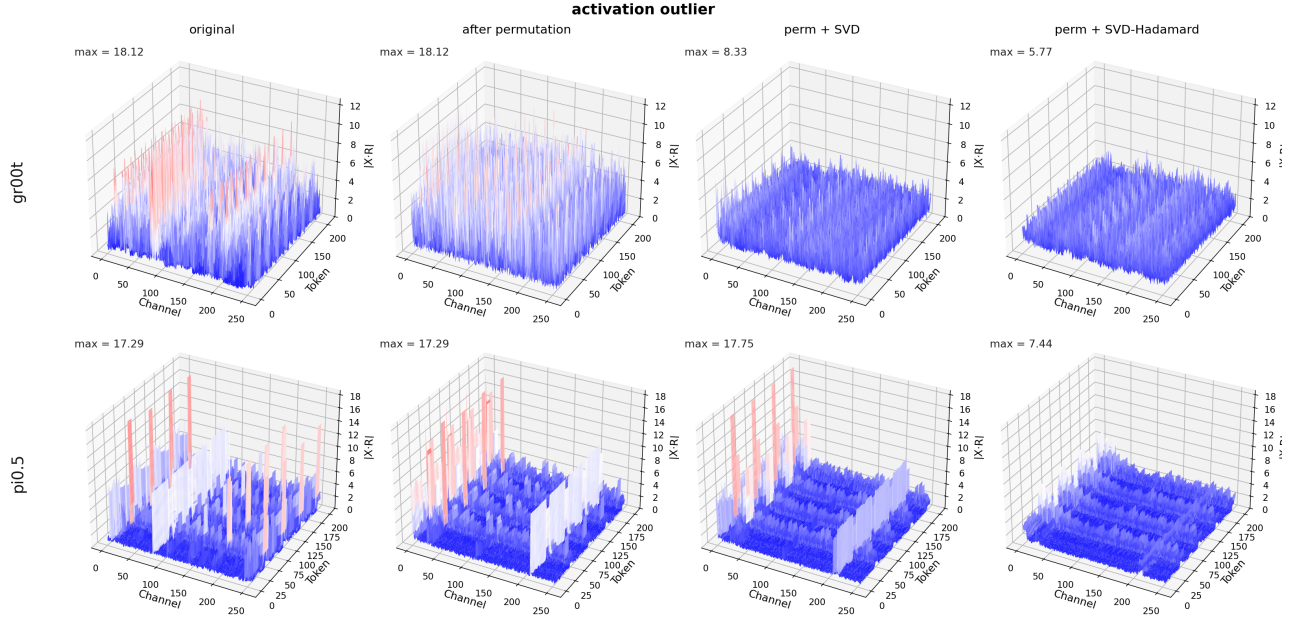


Figure 3: Outlier suppression with QuantVLA (Zhang et al.) and our SVD-Hadamard. We visualize per-token, per-channel magnitudes $|\mathbf{X} \cdot \mathbf{R}|$ for representative layers of GR00T-N1.5 (top) and Pi-0.5 (bottom). The four columns correspond to identity, channel permutation, single rotation, and SVD-Hadamard (left to right). The steady decline in annotated peak magnitudes shows that the Hadamard transform effectively diffuses residual outliers, allowing a narrower dynamic range for 4-bit activation quantization.

further +2.0 on top of the composite rotation (85.75→87.75), concentrated on the long-horizon suite (+7 on *Long*), where inter-step activation drift accumulates most.

Two aspects of this decomposition are worth highlighting. The composite rotation *alone* (85.75) already exceeds every W4A4 baseline in Table 2, so the rotation—not the per-step scaling—is the primary driver of HoloQ-VLA’s accuracy, with per-step scaling acting as a targeted refinement rather than the main mechanism.

The trend holds at the layer level: on 10 sampled W4A4 layers the Hadamard step lowers the output nMSE on 9/10 (e.g., `LLM.L02.q_proj`: 0.139 → 0.028) by diffusing the single-channel concentration that an SVD basis fitted on weights alone cannot remove. Notably, the one layer where the Hadamard step does not help is an extreme-outlier `down_proj` whose channel skew exceeds the within-block mixing capacity—evidence that the composite addresses the common case while a small number of pathological layers still benefit from the calibrated GPTQ pass we retain on the LLM side; full breakdowns are provided in the appendix subsections *Effectiveness of the SVD-Hadamard Rotation* and *Necessity of Per-Step Activation Scaling for DiT*.

Smoothing Effect of Composite Rotation

Figure 3 illustrates outlier suppression via a single rotation (Zhang et al.) compared to the proposed SVD-Hadamard method. The figure presents per-channel and per-token magnitude surfaces $|\mathbf{X} \cdot \mathbf{R}|$ for a representative layer in the GR00T-N1.5 (top row) and Pi-0.5 (bottom row) models. The surfaces are shown after the application of progressively more

Rotation Matrix	PS	Goal	Spatial	Object	Long	4-avg
None	×	84	82	90	76	83.00
None	✓	87	86	86	73	83.00
SVD	✓	87	82	73	75	79.25
SVD-Hadamard	×	93	83	92	75	85.75
SVD-Hadamard	✓	91	86	92	82	87.75

Table 4: Ablation study on the rotation matrix and per-step scaling strategy under the W4A4 setting. “PS” means applying per-step scaling on DiT steps.

expressive rotations: identity, channel permutation, a single rotation, and the proposed SVD-Hadamard transform. The peak magnitude, annotated in each panel, decreases monotonically across the sequence of transformations for both architectures. This consistent reduction demonstrates that the composite rotation effectively diffuses residual outliers that persist after the single rotation, thereby providing the dynamic-range headroom necessary for 4-bit activation quantization.

Since the peak per-channel magnitude sets the per-token A4 scale, this reduction translates directly into a smaller quantization step and lower reconstruction error. The intermediate columns show why the composite is needed: channel permutation only relocates the outliers and a single rotation merely attenuates them, whereas the Hadamard tail redistributes the energy the SVD basis leaves behind and removes the last concentrated spike.

Conclusion

We present HoloQ-VLA, the first training-free PTQ framework to uniformly quantize VLA models to W4A4, covering both the language backbone and the DiT action head. The framework combines SVD-Hadamard rotation with per-step activation calibration, matching or exceeding FP16 performance on LIBERO while reducing the static memory footprint by 74.2%. Real-world bimanual experiments further validate that fully W4A4-quantized VLAs can maintain smooth and reliable control.

References

- Akbari, A.; Akbari, A.; Eskandar, M.; Tan, Q.; Chen, Y.; Luo, J.; Pangaribuan, B.; Zhang, L.; Dy, J.; Yuan, G.; et al. 2026. ActQuant: Sub-4-bit Action-Guided Quantization for Vision-Language-Action Models. *arXiv preprint arXiv:2605.24011*.
- Ashkboos, S.; Mohtashami, A.; Croci, M. L.; Li, B.; Jaggi, M.; Alistarh, D.; Hoefler, T.; and Hensman, J. 2024. QuaRot: Outlier-Free 4-Bit Inference in Rotated LLMs. *arXiv preprint arXiv:2404.00456*.
- Bjorck, J.; Castañeda, F.; Cherniadev, N.; Da, X.; Ding, R.; Fan, L.; Fang, Y.; Fox, D.; Hu, F.; Huang, S.; et al. 2025. Gr00t n1: An open foundation model for generalist humanoid robots. *arXiv preprint arXiv:2503.14734*.
- Chen, J.; Shabanzadeh, Y.; Crnčević, E.; Hoefler, T.; and Alistarh, D. 2026. The Geometry of LLM Quantization: GPTQ as Babai’s Nearest Plane Algorithm. In *The Fourteenth International Conference on Learning Representations*.
- Chi, C.; Xu, Z.; Feng, S.; Cousineau, E.; Du, Y.; Burchfiel, B.; Tedrake, R.; and Song, S. 2025. Diffusion policy: Visuomotor policy learning via action diffusion. *The International Journal of Robotics Research*, 44(10-11): 1684–1704.
- Dosovitskiy, A.; Beyer, L.; Kolesnikov, A.; Weissenborn, D.; Zhai, X.; Unterthiner, T.; Dehghani, M.; Minderer, M.; Heigold, G.; Gelly, S.; Uszkoreit, J.; and Houlsby, N. 2021. An Image is Worth 16x16 Words: Transformers for Image Recognition at Scale. In *International Conference on Learning Representations*.
- Frantar, E.; Ashkboos, S.; Hoefler, T.; and Alistarh, D. 2022. Gptq: Accurate post-training quantization for generative pre-trained transformers. *arXiv preprint arXiv:2210.17323*.
- Hu, X.; Cheng, Y.; Yang, D.; Xu, Z.; Yuan, Z.; Yu, J.; Xu, C.; Jiang, Z.; and Zhou, S. 2025. Ostquant: Refining large language model quantization with orthogonal and scaling transformations for better distribution fitting. *arXiv preprint arXiv:2501.13987*.
- Intelligence, P.; Black, K.; Brown, N.; Darpinian, J.; Dhabalia, K.; Driess, D.; Esmail, A.; Equi, M.; Finn, C.; Fusai, N.; et al. 2025. $\pi 0.5$: a Vision–Language–Action Model with Open-World Generalization. *arXiv preprint arXiv:2504.16054*.
- Kim, M. J.; Pertsch, K.; Karamcheti, S.; Xiao, T.; Balakrishna, A.; Nair, S.; Rafailov, R.; Foster, E.; Lam, G.; Sanketi, P.; et al. 2024. Openvla: An open-source vision-language-action model. *arXiv preprint arXiv:2406.09246*.
- Li, J.; Li, D.; Xiong, C.; and Hoi, S. 2022. Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation. In *International conference on machine learning*, 12888–12900. PMLR.
- Li, M.; Lin, Y.; Zhang, Z.; Cai, T.; Li, X.; Guo, J.; Xie, E.; Meng, C.; Zhu, J.-Y.; and Han, S. 2024. Svdquant: Absorbing outliers by low-rank components for 4-bit diffusion models. *arXiv preprint arXiv:2411.05007*.
- Lin, H.; Xu, H.; Wu, Y.; Cui, J.; Zhang, Y.; Mou, L.; Song, L.; Sun, Z.; and Wei, Y. 2024a. Duquant: Distributing outliers via dual transformation makes stronger quantized llms. *Advances in Neural Information Processing Systems*, 37: 87766–87800.
- Lin, J.; Tang, J.; Tang, H.; Yang, S.; Chen, W.-M.; Wang, W.-C.; Xiao, G.; Dang, X.; Gan, C.; and Han, S. 2024b. Awq: Activation-aware weight quantization for on-device llm compression and acceleration. *Proceedings of machine learning and systems*, 6: 87–100.
- Lin*, Y.; Tang*, H.; Yang*, S.; Zhang, Z.; Xiao, G.; Gan, C.; and Han, S. 2024. QServe: W4A8KV4 Quantization and System Co-design for Efficient LLM Serving. *arXiv preprint arXiv:2405.04532*.
- Liu, B.; Zhu, Y.; Gao, C.; Feng, Y.; Liu, Q.; Zhu, Y.; and Stone, P. 2023. Libero: Benchmarking knowledge transfer for lifelong robot learning. *Advances in Neural Information Processing Systems*, 36: 44776–44791.
- OpenAI. 2024. GPT-4 Technical Report. *arXiv:2303.08774*.
- Peebles, W.; and Xie, S. 2023. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF international conference on computer vision*, 4195–4205.
- Shao, W.; Chen, M.; Zhang, Z.; Xu, P.; Zhao, L.; Li, Z.; Zhang, K.; Gao, P.; Qiao, Y.; and Luo, P. 2023. OmniQuant: Omnidirectionally Calibrated Quantization for Large Language Models. In *The Twelfth International Conference on Learning Representations*.
- Sun, Y.; Liu, R.; Bai, H.; Bao, H.; Zhao, K.; Li, Y.; Hu, J.; Yu, X.; Hou, L.; Yuan, C.; et al. 2024. Flatquant: Flatness matters for llm quantization. *arXiv preprint arXiv:2410.09426*.
- Touvron, H.; Martin, L.; Stone, K.; Albert, P.; Almahairi, A.; Babaei, Y.; Bashlykov, N.; Batra, S.; Bhargava, P.; Bhosale, S.; et al. 2023. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*.
- Wang, X.; Nia, V. P.; Lu, P.; Huang, J.; Chang, X.-W.; Chen, B.; and Cui, Y. 2025. PoTPTQ: A Two-step Power-of-Two Post-training for LLMs. *arXiv preprint arXiv:2507.11959*.
- Wang, X.; Zhao, Z.; Lu, P.; Gu, Y.; and Chang, X.-W. 2026. OJBKQ: Objective-Joint Babai-Klein Quantization. *arXiv preprint arXiv:2602.08376*.
- Wu, J.; Wang, H.; Shang, Y.; Shah, M.; and Yan, Y. 2024. Ptq4dit: Post-training quantization for diffusion transformers. *Advances in neural information processing systems*, 37: 62732–62755.
- Xiao, G.; Lin, J.; Seznec, M.; Wu, H.; Demouth, J.; and Han, S. 2023. Smoothquant: Accurate and efficient post-training quantization for large language models. In *International conference on machine learning*, 38087–38099. PMLR.
- Xu, Y.; Yang, Y.; Fan, Z.; Liu, Y.; Li, Y.; Li, B.; and Zhang, Z. 2026. QVLA: Not All Channels Are Equal in Vision-Language-Action Model’s Quantization. In *The Fourteenth International Conference on Learning Representations*.

Yang, A.; Li, A.; Yang, B.; Zhang, B.; Hui, B.; Zheng, B.; and et al, B. Y. 2025. Qwen3 Technical Report. arXiv:2505.09388.

Zhang, J.; Hsieh, Y.; Wan, Z.; Lin, H.; Wang, X.; Wang, Z.; Lei, Y.; and Zhang, M. ??? QuantVLA: Scale-Calibrated Post-Training Quantization for Vision-Language-Action Models.

Zhao, T.; Fang, T.; Huang, H.; Liu, E.; Wan, R.; Soedar-madji, W.; Li, S.; Lin, Z.; Dai, G.; Yan, S.; et al. 2024. Vedit-q: Efficient and accurate quantization of diffusion transformers for image and video generation. *arXiv preprint arXiv:2406.02540*.

Appendix

Proof of Proposition 1

Proof. For the weight side, we have

$$\mathbf{W}'\mathbf{W}'^\top = \mathbf{R}^\top \mathbf{W}\mathbf{W}^\top \mathbf{R} = \mathbf{R}^\top \mathbf{U}\Sigma^2 \mathbf{U}^\top \mathbf{R}. \quad (10)$$

The rows of $\mathbf{W}'$ are mutually orthogonal if and only if $\mathbf{W}'\mathbf{W}'^\top$ is diagonal. Because the eigenvalues $\sigma_1^2, \dots, \sigma_d^2$ are distinct, its orthonormal eigenbasis is unique up to sign and permutation. Therefore, $\mathbf{W}'\mathbf{W}'^\top$ is diagonal if and only if $\mathbf{R}^\top \mathbf{U}$ is a signed permutation matrix, or equivalently,

$$\mathbf{R} = \mathbf{U}\mathbf{\Pi}. \quad (11)$$

for some signed permutation matrix $\mathbf{\Pi}$. Under such a rotation, the row norms of $\mathbf{W}'$ are $\{\sigma_1, \dots, \sigma_d\}$ up to permutation.

For the activation side, let $\mathbf{z} = \mathbf{e}_j$. Then

$$\mathbf{z}\mathbf{R} = \mathbf{e}_j \mathbf{R} = \mathbf{R}_{j,:}. \quad (12)$$

Since $\mathbf{R}$ is orthogonal, $\mathbf{R}_{j,:}$ has unit ℓ_2 norm. Hence,

$$1 = \|\mathbf{R}_{j,:}\|_2^2 \leq d \|\mathbf{R}_{j,:}\|_\infty^2, \quad (13)$$

which gives

$$\|\mathbf{z}\mathbf{R}\|_\infty \geq \frac{1}{\sqrt{d}}. \quad (14)$$

Equality holds if and only if every entry of row j has magnitude $1/\sqrt{d}$.

Combining the two parts, a weight-diagonalizing rotation is, by part (1), of the form $\mathbf{R} = \mathbf{U}\mathbf{\Pi}$. Fix a single-channel outlier $\mathbf{e}_j$. By part (2), this rotation attains the activation lower bound $1/\sqrt{d}$ if and only if row j of $\mathbf{R} = \mathbf{U}\mathbf{\Pi}$ is flat. Because $\mathbf{\Pi}$ is a signed permutation, right-multiplication by $\mathbf{\Pi}$ only permutes the columns of $\mathbf{U}$ and flips their signs; consequently the row- j magnitudes are preserved as a multiset,

$$\{ |(U\mathbf{\Pi})_{jk}| \}_{k=1}^d = \{ |U_{jk}| \}_{k=1}^d, \quad (15)$$

so row j of $\mathbf{U}\mathbf{\Pi}$ is flat if and only if row j of $\mathbf{U}$ is flat. Hence a weight-diagonalizing rotation attains the activation bound for $\mathbf{e}_j$ if and only if row j of $\mathbf{U}$ is flat, and attains it for *every* single-channel outlier if and only if *every* row of $\mathbf{U}$ is flat, i.e., $|U_{jk}| = 1/\sqrt{d}$ for all j, k .

This all-flat condition is non-generic: it forces every orthonormal row of $\mathbf{U}$ to spread its unit energy equally over all d coordinates, and fails as soon as some row has $\max_k |U_{jk}| > 1/\sqrt{d}$. In particular, when the weights concentrate energy in a few channels, the corresponding left singular vectors align with those coordinate axes, so $\mathbf{U}$ is close to a signed permutation, its rows are spiky ($\max_k |U_{jk}| \rightarrow 1 \gg 1/\sqrt{d}$), and the weight-diagonalizing rotation leaves the activation outlier essentially unmoved. Thus the singular-vector basis preferred by the weights and the flat basis that disperses activation outliers coincide only in the degenerate all-flat case, so in general the two sides require different rotations. $\square$

Description of Baselines and Benchmarks

Benchmark. We evaluate all methods on LIBERO (Liu et al. 2023), a standard benchmark for VLA policy evaluation in robotic manipulation. LIBERO consists of four task suites:

- **Goal:** goal-conditioned manipulation tasks that require following language instructions.
- **Spatial:** tasks emphasizing spatial relations and precise object placement.
- **Object:** object-centric manipulation tasks involving object recognition and interaction.
- **Long:** long-horizon tasks requiring multiple sequential manipulation steps.

We report the success rate on each suite and the four-suite average.

Baselines. We compare HoloQ-VLA against representative post-training quantization baselines:

- **GPTQ** (Frantar et al. 2022): a second-order, layer-wise weight quantization method that minimizes reconstruction error using calibration activations.
- **AWQ** (Lin et al. 2024b): an activation-aware weight quantization method that protects salient channels based on activation statistics.
- **OmniQuant** (Shao et al. 2023): a PTQ method that optimizes clipping ranges and scaling factors through layer-wise reconstruction.
- **SmoothQuant** (Xiao et al. 2023): a weight-activation quantization method that migrates activation outliers into weights before quantization.
- **DuQuant** (Lin et al. 2024a): a rotation-based PTQ method that improves low-bit weight-activation quantization through distribution-aware transformations.
- **QuantVLA** (Zhang et al.): a VLA-specific quantization baseline that combines low-bit quantization with VLA-oriented calibration components.

Calibration and evaluation protocol. For all quantization methods that require calibration data (including HoloQ-VLA and all baselines), we use the *same* unlabeled calibration buffer for fairness. The buffer consists of 10 trajectories per task suite—one trajectory from each of the 10 tasks within the suite, sampled from a single fixed initial state—collected by rolling out the FP16 base model in simulation. We then evaluate on 10 trials per task with initial states held out from calibration, ensuring no overlap between calibration and evaluation conditions. The success rates reported in Table 2 are averaged across all tasks within each suite.

Key Hyperparameters

Table 5 summarizes the configurations of all methods reported in the main LIBERO comparison (Table 2).

Real-World Manipulation Tasks

To evaluate HoloQ-VLA in real-world scenarios, we construct five manipulation tasks with varying levels of difficulty, ranging from simple object placement to long-horizon bimanual

manipulation. As summarized in Table 7, each task is decomposed into multiple sequential stages and evaluated using a progress score, enabling a fine-grained assessment of task completion. Detailed scoring criteria are provided in Table 7. Table 6 lists the per-task progress scores plotted in Figure 2.

Open-Loop Action Analysis

Figure 8 presents an open-loop comparison of the predicted action trajectories on real-world tasks. The blue dashed curves denote the proposed HoloQ-VLA, while the red curves correspond to the baseline quantization method, QuantVLA. Specifically, we feed observations from the dataset into the model and visualize the predicted actions across all 14 action dimensions. Although both quantized models introduce prediction deviations relative to the ground truth, HoloQ-VLA consistently generates action trajectories that more closely match the reference actions. As shown in the figure, the baseline method occasionally produces noticeable spikes and abrupt deviations in several action dimensions, indicating that quantization errors may be amplified into extreme action outputs. In contrast, HoloQ-VLA yields smoother and more consistent trajectories, suggesting that the proposed quantization strategy better preserves the original action distribution. Similar trends can also be observed in the gripper action dimensions, where HoloQ-VLA exhibits smaller fluctuations and more stable predictions. Such improvements are particularly important for closed-loop manipulation, as unstable action outputs may accumulate over time and result in jerky motions or inaccurate object interactions. We believe this observation partially explains why HoloQ-VLA achieves superior real-world manipulation performance under the same W4A4 quantization setting.

Selection of Weight Quantization Solvers

Figure 5 measures the layer-wise W4 weight-only output error after the SVD-Hadamard rotation, with and without an additional GPTQ pass on the residual. Two observations stand out.

First, GPTQ unambiguously reduces the numerical per-layer quantization error on both sides of both models. Across all 16 module-kind combinations on gr00t and Pi-0.5, SVD-Hadamard + GPTQ has a strictly lower bar than SVD-Hadamard + RTN — roughly a 40-50% reduction in relative output error on average, consistent with what GPTQ-style inter-column error compensation is supposed to deliver after activation outliers have been spread by rotation.

Second, the absolute quantization difficulty after rotation is asymmetric between the two sides. On the LLM side (gr00t eagle, Pi-0.5 paligemma), even after SVD-Hadamard the relative error remains in the 0.07-0.13 range, with the LLM down_proj layers consistently the hardest — gr00t LLM.L02/L05/L09.down_proj all sit above 0.10, reflecting the residual outlier structure that survives Hadamard mixing. On the DiT/expert side (gr00t action head, Pi-0.5 expert), SVD-Hadamard alone already brings most layers to 0.04-0.07; GPTQ pushes them further down, but the absolute headroom GPTQ can claim is much smaller than on the LLM side.

Table 5: Key configurations of all methods reported in the main LIBERO comparison.

Method	Setting	Key hyperparameters / runtime configuration
FP16	FP16	Original full-precision model without quantization; used as the reference upper bound.
GPTQ (Frantar et al. 2022)	W4A16	Weight-only quantization with FP16 activations. Block size 128, damping ratio 0.01, Hessian-aware layer-wise reconstruction. The input Hessian is estimated from the calibration activations.
AWQ (Lin et al. 2024b)	W4A16	Weight-only activation-aware quantization. Activation-based channel saliency, grid-based scale search with 20 candidates, maximum shrink ratio 0.5, and 512 sampled calibration tokens for clipping and scale search.
OmniQuant (Shao et al. 2023)	W4A16	Weight-only PTQ with optimized clipping and scaling parameters. Layer-wise reconstruction with learnable quantization parameters, optimized with Adam at learning rate 5×10^{-3} for 200 iterations.
SmoothQuant (Xiao et al. 2023)	W4A8 / W4A4	Weight-activation quantization with smoothing coefficient $\alpha = 0.5$ and clipping threshold 10^3 . The per-channel smoothing scale is estimated from calibration activations and absorbed into the weight matrix before quantization. Activations are quantized to 8 or 4 bits according to the setting.
DuQuant (Lin et al. 2024a)	W4A8 / W4A4	Rotation-based weight-activation quantization. Block-wise rotation with block size 64, SVD-based rotation, weight-energy channel permutation, and row-rotation restore. Activation calibration uses percentile $p = 99.9$ over calibration steps.
QuantVLA (Zhang et al.)	W4A4	VLA-specific quantization baseline built on DuQuant-style low-bit quantization, with DuQuant defaults, ATM calibration, and Output-Head Boosting as proposed in the original paper. Following the released setting, DiT attention layers are kept in FP16 unless otherwise noted.
HoloQ-VLA	W4A4	Uniform W4A4 quantization across the LLM backbone and DiT action head. <i>Rotation</i> : block-wise SVD-Hadamard rotation with block size 64, preceded by a zigzag weight-norm channel permutation as described in <i>Methodology</i> . <i>Solver</i> : GPTQ-style weight quantization on the LLM side (block size 128, damping ratio 0.01); plain RTN on the DiT side, motivated by the appendix subsection <i>Selection of Weight Quantization Solvers</i> . <i>Activation calibration</i> : per-step, per-channel scale table calibrated over $T = 8$ Euler denoising steps on $n = 10$ unlabeled calibration trajectories. All scales are folded into dequantization at inference.

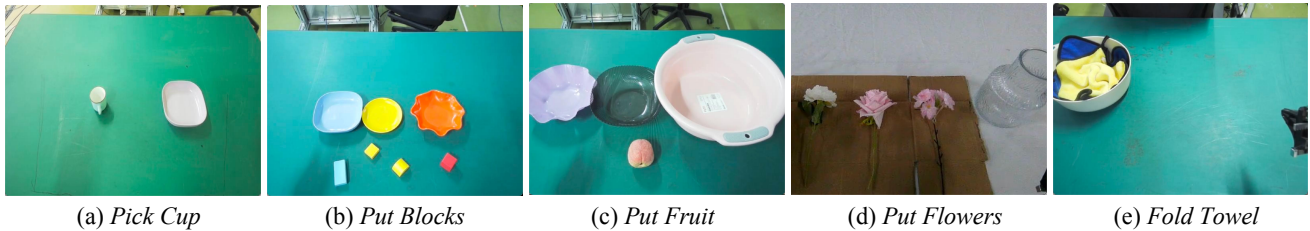


Figure 4: Experimental setup of the real-world manipulation tasks. (a) *Pick Cup*: move the plate to the center and place the cup onto it. (b) *Put Blocks*: place colored blocks into their matching plates. (c) *Put Fruit*: place the fruit into the designated container according to the language instruction. (d) *Put Flowers*: insert three flowers into a vase. (e) *Fold Towel*: pick up, flatten, fold, and place the towel back.

This per-side asymmetry maps directly onto what we observe end-to-end: adding GPTQ on the LLM side yields a measurable LIBERO success gain, because rotation alone does not eliminate the LLM down_proj difficulty and GPTQ’s column-wise compensation buys real precision back. On the DiT side, however, the same numerical improvement does not translate into a downstream score gain; We attribute this to the fact that, with the SVD-Hadamard rotation already producing near-uniform per-row column magnitudes on the DiT weights, GPTQ’s inter-column error propagation has little structure left to exploit and instead introduces a calibration-dependent

bias that interacts poorly with the per-step diffusion dynamics. The figure therefore makes concrete the asymmetric design choice underlying HoloQ-VLA: GPTQ is applied only on the LLM side, while the DiT side retains plain RTN.

Effectiveness of the SVD-Hadamard Rotation

Figure 6 quantifies the gain from adding the Hadamard tail to the per-block SVD rotation, measured on 10 sampled GR00T layers (5 LLM + 5 DiT) under a true W4A4 quantization sweep. Two complementary metrics are reported: the left panel

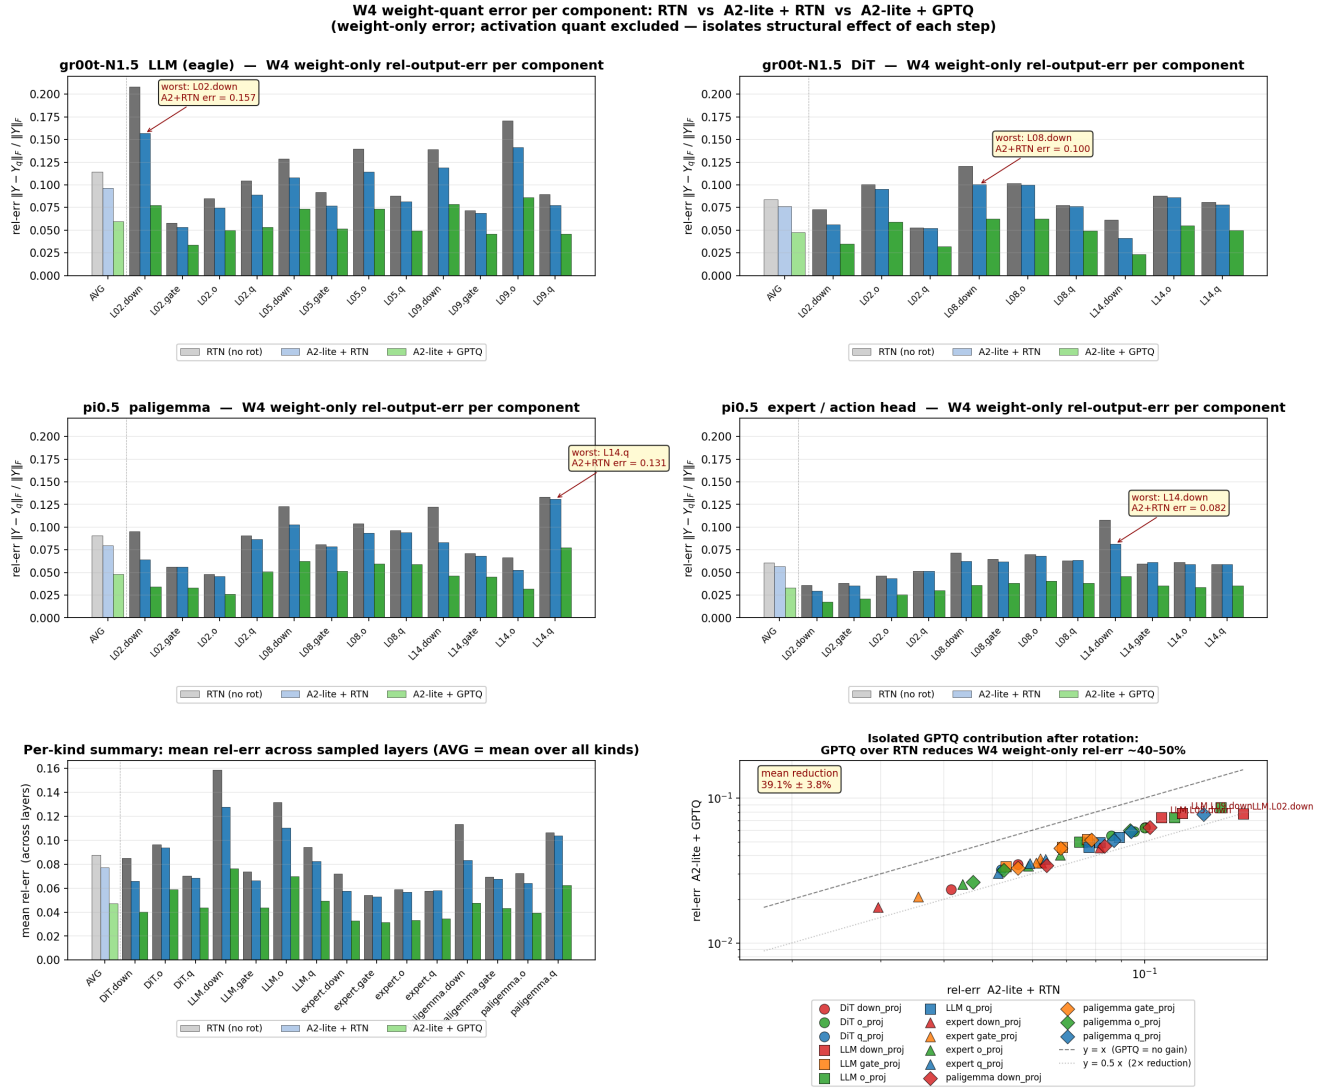


Figure 5: Per-component W4 weight quantization error across gr00t-N1.5 and Pi-0.5. Relative output error $|XW^T - XR, Q(WR)^T|_F / |XW^T|_F$ measured layer-by-layer for three weight pipelines: RTN with no rotation, SVD-Hadamard rotation + RTN, and SVD-Hadamard rotation + GPTQ. Activation quantization is excluded so the bars isolate the structural contribution of each weight-quant step.

Pi-0.5 Base	Cup	Blocks	Fruit	Flowers	Towel	Avg.
FP16	88.0	57.5	55.0	22.5	25.0	49.6
QuantVLA	26.0	45.0	17.0	21.0	16.0	25.0
HoloQ-VLA	84.0	67.5	42.0	38.5	23.0	51.0

Table 6: Per-task real-world progress scores (%) for Figure 2: the same Pi-0.5 policy under FP16, QuantVLA (W4A8), and HoloQ-VLA (W4A4).

shows the end-to-end normalized MSE between the FP16 and the W4A4 layer output (what the downstream forward pass actually consumes), while the right panel shows the 99th-percentile per-row maximum of the rotated activation

$X \cdot R$, which sets the A4 scale on the heaviest rows and therefore upper-bounds how much dynamic range A4 must accommodate. The two metrics agree closely.

For 9 of the 10 sampled layers, SVD-Hadamard yields both the lowest layer-output nMSE and the lowest A4 scale ceiling, with the gain over SVD-only often exceeding $2\text{-}5\times$ — for example, LLM.L02.q_proj drops from 0.139 (SVD-only) to 0.028 (SVD-Hadamard), and DiT.L02.q_proj from 0.051 to 0.019. This confirms the geometric intuition that an SVD basis fitted block-by-block on the weight matrix does not, by itself, address activation-side outliers; the Hadamard mixing applied on top spreads any residual single-channel concentration across the 64 channels of the block, simultaneously lowering both the per-row dynamic range and the resulting W4A4

Task ID	Task Name	Task Description	Scoring Criteria
1	Pick Cup	Place a cup onto a plate using bimanual coordination.	40 points are awarded for grasping the cup with the right arm, 30 points for moving the plate to the center with the left arm, 20 points for placing the cup onto the plate, and 10 points for returning both arms to the home position.
2	Put Blocks	Place four colored blocks into the plates with matching colors.	25 points are awarded for each correctly matched block, resulting in a maximum score of 100 points.
3	Put Fruit	Place the target fruit into the corresponding container according to the language instruction.	40 points are awarded for grasping the target fruit, 50 points for placing it into the correct container, and 10 points for returning both arms to the home position.
4	Put Flowers	Insert three flowers into a vase.	For each flower, 15 points are awarded for grasping and 15 points for successful insertion. Completing all three flowers yields 90 points, while returning both arms to the home position yields an additional 10 points.
5	Fold Towel	Fold a towel and place it back to the designated area.	20 points are awarded for picking up the towel, 30 points for flattening it, 30 points for completing the folding operation, and 20 points for placing the folded towel back in the designated area.

Table 7: Descriptions and progress-score criteria for the five real-world manipulation tasks. Each task is decomposed into multiple stages, and the progress score is computed according to the completion of intermediate subtasks.

reconstruction error.

The one revealing exception is `LLM.L02.down_proj`, a layer with channel-skew on the order of 5×10^4 . Here pure SVD is actively harmful: its nMSE inflates from 0.001 on raw to 0.148 — roughly two orders of magnitude worse — because the dominant SVD direction aligns with the outlier channel and concentrates rather than disperses it. SVD-Hadamard restores partial sanity (0.056) but does not fully recover the raw baseline, indicating that for this extreme outlier the Hadamard $\sqrt{64} \approx 8\times$ attenuation is not enough on its own. The picture here is consistent with the per-(token,block) heatmap evidence (Figure 9) and explains why our final pipeline pairs the SVD-Hadamard rotation with calibrated W-side GPTQ on the LLM, while the DiT side — where rotation alone already pushes nMSE below the level at which inter-column compensation could help — uses plain RTN.

Real-Quantized W4A4 Inference

We further implement a real-quantized W4A4 inference backend for Pi-0.5 using the native INT4 Tensor-Core kernels from Nunchaku (Li et al. 2024). Our backend quantizes all target Transformer linear layers, including the `q`, `k`, `v`, `o`, `gate`, `up`, and `down` projections in both the 18-layer PaliGemma backbone and the 18-layer action expert. Weights are stored in packed INT4 format, activations are dynamically quantized to INT4, and the matrix multiplications are executed by native INT4 $\times$ INT4 kernels rather than fake quantization.

As shown in Table 8, fully quantizing the Transformer

Batch	FP16 (ms)	Our Method W4A4 (ms)	Normalized	Speedup
1	77.08	75.12	0.97 $\times$	1.03 $\times$
8	459.29	320.49	0.70 $\times$	1.43$\times$
16	909.77	669.90	0.74 $\times$	1.36 $\times$
24	1365.08	1016.38	0.74 $\times$	1.34 $\times$

Table 8: Real-quantized inference latency of Pi-0.5 on an NVIDIA RTX 4080 SUPER. All 252 target Transformer linear layers are executed using the W4A4 backend. Latency measures one complete `sample_actions` call, including the vision-language prefix and ten denoising steps.

linear layers provides consistent end-to-end acceleration. The improvement is modest at batch size 1, where small expert operations remain launch-bound, but increases to 1.43 $\times$ at batch size 8 and remains above 1.3 $\times$ at larger batches. These results demonstrate that our uniform W4A4 quantization can be executed using real low-bit kernels and provides practical acceleration without leaving selected Transformer layers in floating-point precision.

Necessity of Per-Step Activation Scaling for DiT

Figure 7 (left) plots the 99.9-percentile activation magnitude across the 8 Euler denoising steps for four sampled DiT layer kinds. We observe a sharp layer-type asymmetry: `attn1.to_q/k/v` (the QKV projections that follow `norm1`) exhibit a monotonic 15–20% drop in q999 from step $t = 0$ (pure noise input) to step $t = 7$ (near-converged action signal), while `ff.net[0]` (the MLP projection following

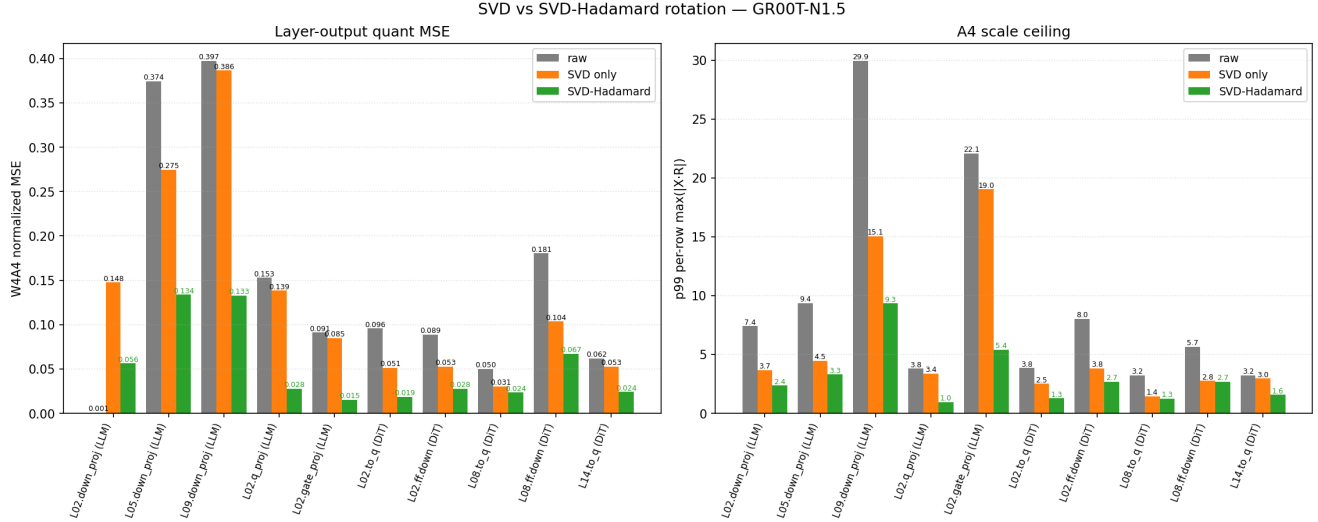


Figure 6: Per-layer W4A4 quantization quality on GR00T-N1.5. Left: normalized MSE between FP16 and W4A4 layer outputs. Right: 99th-percentile per-row max of rotated activations (sets the A4 scale ceiling). Bars compare raw, SVD-only, and SVD-Hadamard (A2-lite) rotation across 5 LLM + 5 DiT sampled layers. SVD-Hadamard yields the lowest nMSE and lowest scale ceiling on 9/10 layers. The single exception is LLM.L02.down_proj, whose extreme channel-skew ($\approx 50000\times$) aligns with the SVD basis and is only partially mitigated by the within-block Hadamard mixing.

norm3) is essentially flat (within 2%). The remaining attention output (attn1.to_out) and MLP output (ff.net[2], down_proj) sit in between with 5–10% drift. The source-code structure of the DiT block explains this asymmetry: norm1 is an AdaLayerNorm whose per-step scale and shift are functions of the timestep embedding t , so its output explicitly carries the time-conditioned magnitude into the QKV input; norm3 is a plain LayerNorm that strips time-dependent magnitude variation away before the MLP. The layers that benefit from per-step act_scale are exactly those that read a time-conditioned activation.

The right panel translates this distributional drift into a quantization cost. For each DiT layer $\times$ diffusion step, we measure the relative MSE of int4 symmetric quantization under (i) a step-specific per-channel scale (computed from that step’s own q999) and (ii) a single-bucket scale (the mean q999 over all 8 steps). Per-step MSE stays low and flat across the 8 steps; single-bucket MSE rises at the steps whose q999 deviates most from the across-step mean, with the shaded gap quantifying the wasted int4 budget. Aggregating across the 4 layer kinds $\times$ 3 depth samples $\times$ 8 steps gives a mean per-(layer, step) MSE gap of **2.5%**, dominated by q_proj-style layers (gap up to 11%) and essentially zero for ff.net[0]. Compounded over the ~ 16 DiT blocks and 8 Euler steps of a single action prediction, this per-step waste maps empirically to an end-to-end loss of -2.0 **pp 4-suite average** and -7.0 **pp on the long-horizon suite** (with vs. without per-step scaling; rows 2 and 3 of Table 4), confirming that per-step act_scale is necessary in the W4A4 regime—and confirming that the necessity is concentrated on the post-AdaLayerNorm attention inputs rather than uniformly across all DiT linears.

Quantization Error with Different Rotations

AI Tool Usage Statement

During the preparation of this manuscript, the authors only used AI tools for refining the language and presentation of the written text. All scientific content, experimental design, analysis, and conclusions were produced entirely by the authors. The authors reviewed and edited all AI-assisted output and take full responsibility for the final manuscript.

Per-step act_scale necessity — empirical motivation (gr00t-N1.5 DiT, libero_object cal)

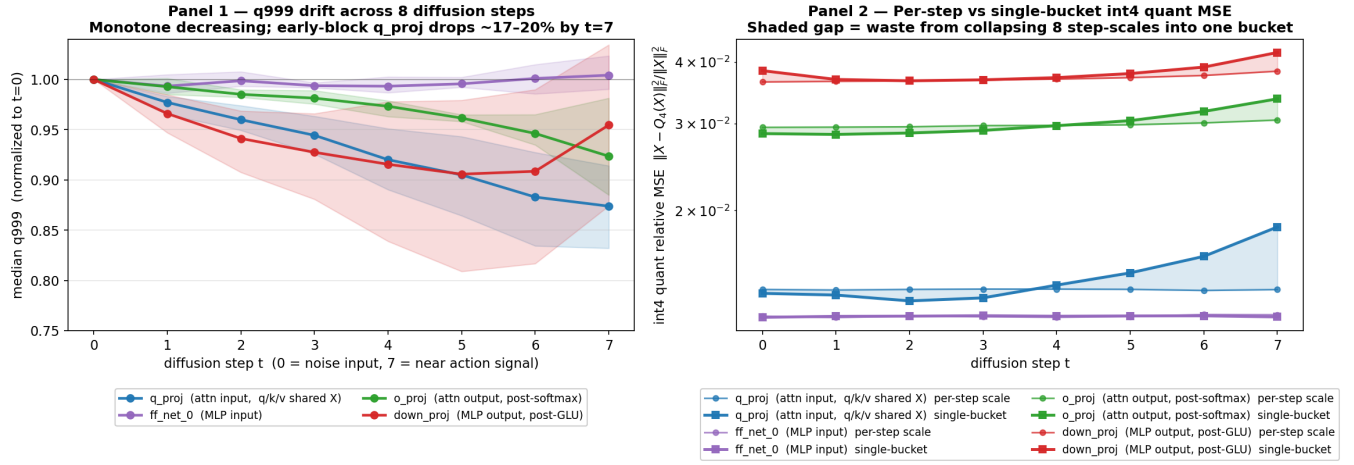


Figure 7: Necessity of per-step act_scale on the DiT side. Left: per-channel q999 across the 8 Euler denoising steps for four DiT layer kinds (normalized to $t = 0$). Right: int4 quantization MSE per step under a step-specific scale (circles) vs a single-bucket scale (squares); shaded area = waste from collapsing 8 step-scales into one. Time-conditioned magnitude drift only appears at layers reading the AdaLayerNorm output (attention QKV projections), and per-step scaling helps exactly those layers.

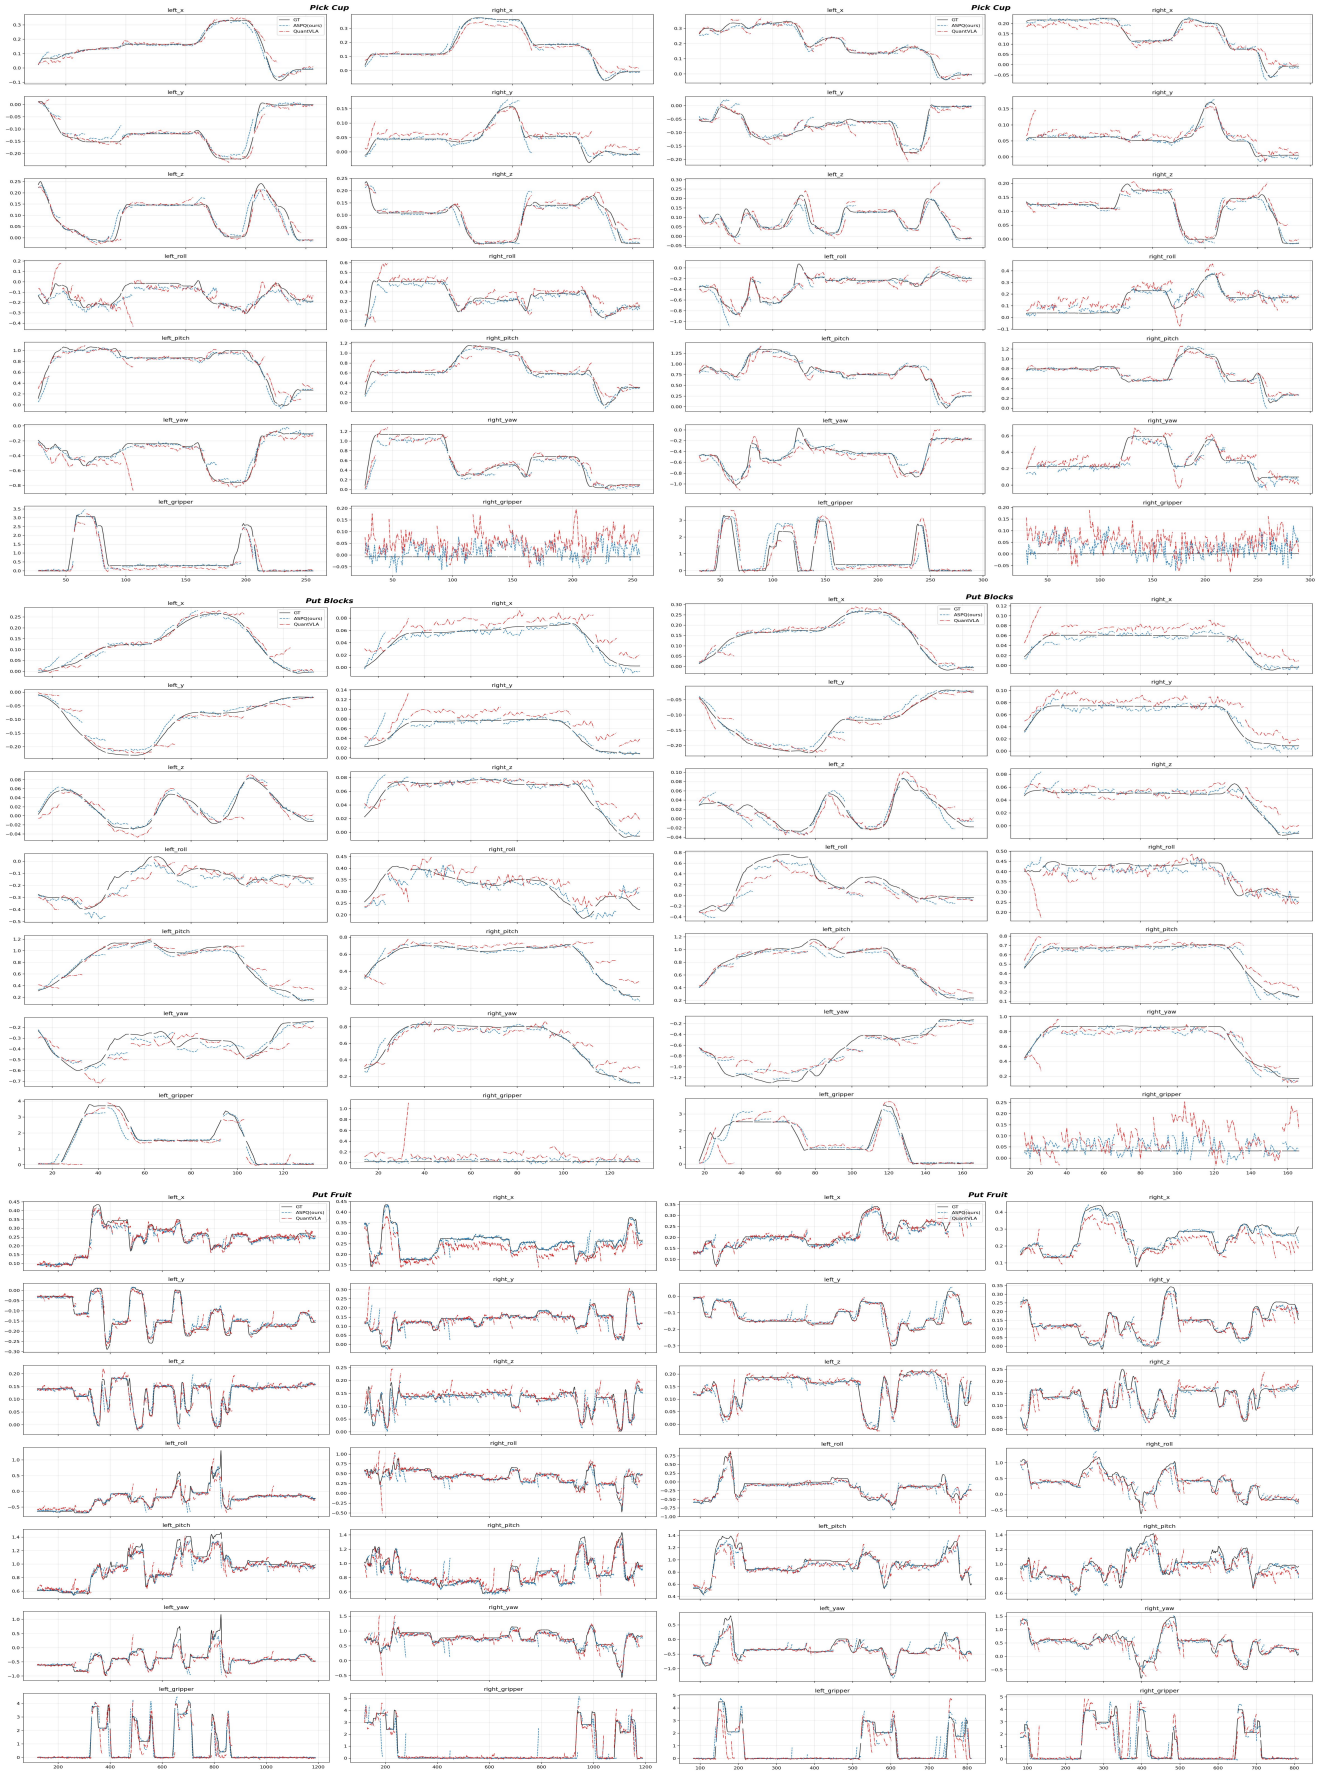


Figure 8: Open-loop action trajectory comparison across all 14 action dimensions. The blue dashed curves denote HoloQ-VLA and the red curves denote QuantVLA. HoloQ-VLA generates trajectories that more closely match the ground-truth trajectories and exhibits fewer spikes, abrupt deviations, and extreme outputs. Such improved action stability may reduce control jitter during closed-loop execution, providing a plausible explanation for the superior real-world manipulation performance achieved by HoloQ-VLA.

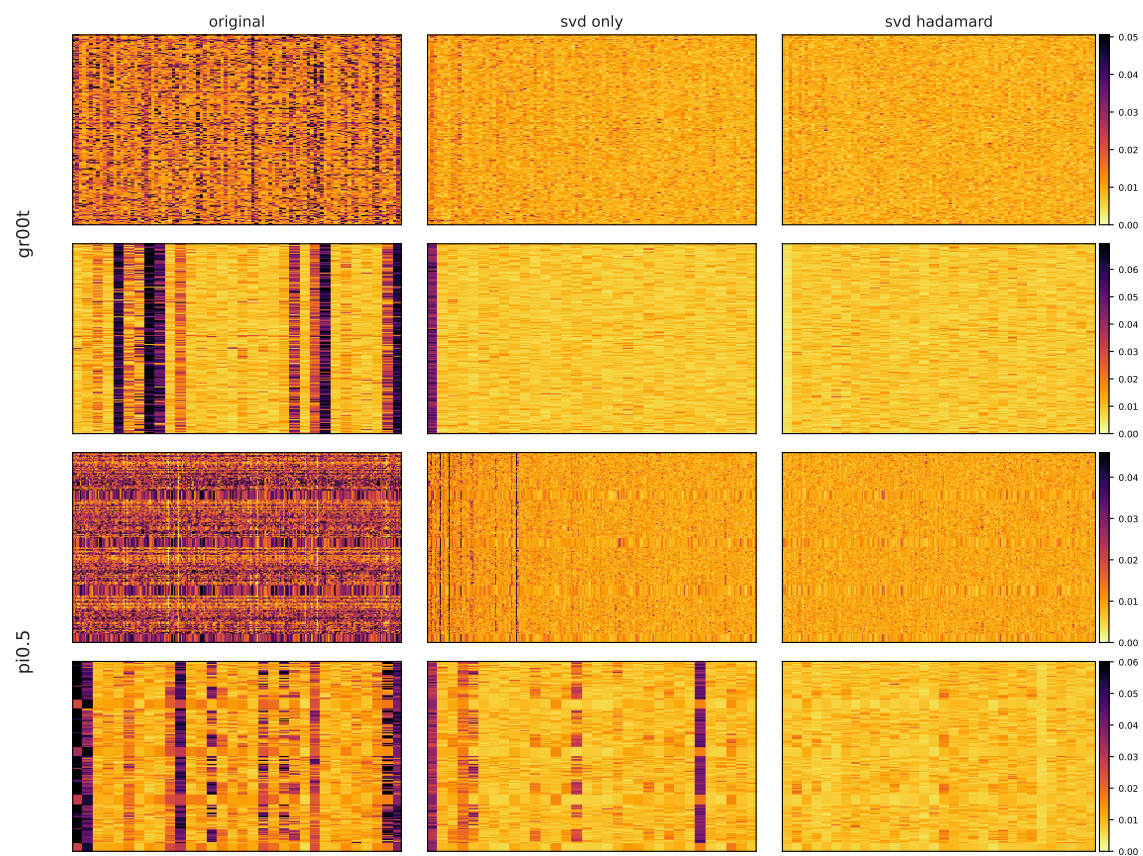


Figure 9: The quantization error with different rotation methods.