

STEERQUANT: STEERING QUANTIZATION ERROR WITH ACTION-GUIDED SCALING IN WORLD-ACTION MODELS

Yunhan Wang^{1,2,*,†} Haodong Wang^{2,*} Zhiming Liu³ Zicong Hong⁴ Qianli Liu²
 Xiaoyi Pang² Yangjia Hu² Quanxin Shou² Yikun Miao² Song Guo²

¹Tongji ²HKUST ³HIT ⁴EPFL

ABSTRACT

World-action models (WAMs) jointly generate future world states and actions through iterative denoising, using shared weights to process heterogeneous semantic streams of video, proprioceptive, and action tokens. Quantization reduces inference cost, but comparable numerical errors in different streams can have markedly different effects on final actions, making numerical accuracy alone insufficient for reliable control. We introduce **SteerQuant**, a 4-bit quantization framework for WAMs that steers errors toward computations with less influence on final actions. It maps how each stream’s quantization errors affect final actions and uses this map to guide shared channel scaling. Activation scaling is further calibrated for each stream and denoising step to accommodate changes in activation ranges and action impact. This adapts quantization to different stream requirements without duplicating weights or increasing bit-widths for selected streams. To reduce the extra kernel launches and memory traffic introduced by scaling, we develop **Rudder**, a 4-bit inference engine for WAMs that fuses scaling and output compensation into low-bit kernels. Under W4A8 and W4A4, SteerQuant maintains mean LIBERO success within 0.8 percentage points of full precision, while delivering up to $2.23\times$ denoising speedup over BF16 across three WAMs with reduced peak GPU memory usage. On a real dual-arm robot, W4A8 deployment achieves a $1.35\times$ end-to-end inference speedup while maintaining average task success relative to BF16.

1 INTRODUCTION

World-action models (WAMs) build on pretrained video models to jointly model future world states and actions, using spatiotemporal priors learned from large-scale video data (Kim et al., 2026; NVIDIA, 2026; Ye et al., 2026; Yuan et al., 2026). During inference, diffusion Transformers (Peebles & Xie, 2023) repeatedly process heterogeneous semantic streams, including visual representations, proprioceptive states, and actions, across denoising steps. This repeated computation and data movement make inference costly.

Post-training quantization (PTQ) reduces these costs (Frantar et al., 2023; Li et al., 2023; Shang et al., 2023; Hu et al., 2026) by lowering weight and activation precision, reducing memory traffic and enabling hardware-accelerated low-precision arithmetic (e.g., INT4 and NVFP4). To preserve accuracy, existing PTQ methods typically control outlier magnitudes to reduce numerical error (Xiao et al., 2023; Ashkboos et al., 2024; Li et al., 2025; Liu et al., 2025). However, WAMs use shared weights to process heterogeneous semantic streams, so a single weight quantization choice affects multiple streams at once. The resulting errors propagate through stream interactions and subsequent denoising steps, potentially producing different final-action deviations even at similar magnitudes. Effective WAM quantization must therefore balance errors across streams according to their impact on final actions.

*Equal contribution.

†Work done during Yunhan Wang’s internship at HKUST.

Achieving this balance requires identifying which streams’ errors most affect final actions. We observe that comparable numerical errors across semantic streams can lead to markedly different final-action deviations and task success rates (see Sec. 3). A naive method is to calibrate weight–activation scaling independently for each stream. However, independently chosen scales generally require different quantized weight matrices, sacrificing weight sharing. Moreover, a stream whose errors strongly affect final actions at one denoising step may have less influence at another, limiting the effectiveness of fixed per-stream choices. The core challenge is therefore to adapt error trade-offs across streams as their action impact changes, while retaining one static quantized weight matrix per layer and fixed bit-widths.

To address this challenge, we propose **SteerQuant**, a 4-bit quantization framework for WAMs that steers errors toward computations with less influence on final actions. It coordinates shared channel scaling and stream-specific activation scaling across denoising steps while retaining shared weights and fixed 4-bit. To reduce the extra kernel launches and memory traffic introduced by separate scaling operations, we fuse these transformations into low-bit kernels.

Our contributions are summarized as follows:

- We reveal that heterogeneous semantic streams differ in their tolerance to quantization: comparable numerical errors can produce markedly different action deviations and task success rates. This tolerance varies across layers and denoising steps, motivating calibration guided by downstream action impact.
- We propose **SteerQuant**, which uses an Action-Impact Stream Map to guide shared channel scaling and stream-specific activation calibration across denoising steps. These two stages prioritize computations with greater action impact while retaining one static quantized weight matrix per layer and fixed bit-widths.
- We develop **Rudder**, a 4-bit inference engine for WAMs that integrates calibrated scaling and output compensation into fused kernels. By reducing extra kernel launches and intermediate memory traffic, Rudder enables efficient execution of SteerQuant while preserving the computational and memory benefits of quantization.
- We evaluate three WAMs under W4A8 and W4A4 on LIBERO and RoboLab, preserving near-BF16 LIBERO success and outperforming evaluated same-precision RoboLab baselines. We achieve up to $2.23\times$ denoising speedup over BF16. Real dual-arm deployment delivers $1.35\times$ end-to-end inference speedup while maintaining average task success.

2 RELATED WORK

Post-Training Quantization. Existing PTQ methods broadly follow two directions. The first reduces numerical error through transformations (Lin et al., 2024; Shao et al., 2024; Sun et al., 2025; Wang et al., 2026), such as SmoothQuant’s equivalent channel scaling (Xiao et al., 2023). The second incorporates action-related criteria into quantization (Xu et al., 2026). For VLA models (Shou et al., 2026), ActQuant combines action-guided bit allocation with weight-scale optimization (Akbari et al., 2026). For WAMs, QuantWAMs allocates weight precision using sensitivity to the joint video–action loss (Zhou et al., 2026). However, these criteria do not directly characterize how weight and activation quantization errors in coupled WAM streams propagate to final actions across denoising steps. We explore this impact to guide calibration at fixed 4-bit.

Efficient WAM Inference. Complementary work improves action-conditioned world modeling through active online learning (Miao et al., 2026). Joint future-state and action prediction makes iterative WAM denoising costly. Existing acceleration methods reduce this cost by simplifying future prediction or reusing intermediate computations. For example, Fast-WAM retains video prediction during training but omits future video generation at inference (Yuan et al., 2026). DreamZero instead uses caching to reuse intermediate results and avoid repeated computation (Ye et al., 2026). These approaches reduce the amount of computation performed during inference. Our method addresses a complementary source of cost by lowering the precision of weights and activations in the retained operations. It therefore complements computation reduction and caching while preserving joint world–action denoising. At the system level, D2MoE optimizes routing and scheduling for on-device MoE-based LLM serving (Wang et al., 2025).

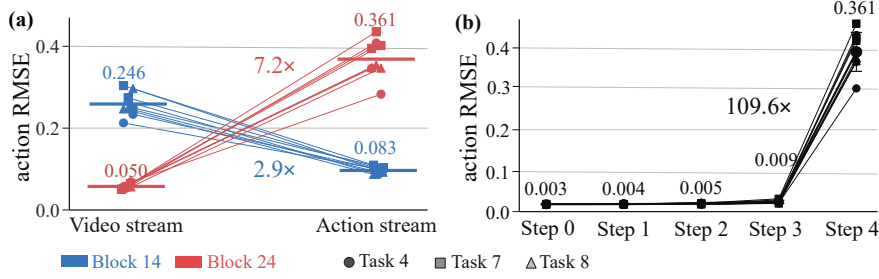


Figure 1: **Control effects of matched local errors.** (a) Video- and action-stream comparisons at Blocks 14 and 24 at the final denoising step, with local errors matched within each block. (b) Action-stream comparisons across Steps 0–4 at Block 24, with local errors matched across steps.

3 PRELIMINARY AND MOTIVATION

3.1 WAM QUANTIZATION

WAMs jointly generate future world states and robot actions through iterative denoising. At each denoising step, a shared Transformer jointly processes heterogeneous semantic streams, where each stream consists of tokens encoding a particular type of information, such as video frames, robot actions, value estimates, or proprioceptive states. Video streams provide visual context for action generation, while predicted actions drive the robot’s interaction with the environment. Reducing the precision of linear operations in this shared Transformer can lower the cost of joint denoising, but also introduces errors into these coupled streams.

To characterize these errors, consider a linear operation at a fixed layer ℓ , denoising step τ , and semantic stream s , with input $\mathbf{X}$, weight $\mathbf{W}$, and full-precision output $\mathbf{Y}$. Using per-tensor quantization as an example, symmetric k -bit quantization maps $\mathbf{X}$ to its integer representation as

$$\mathbf{Q}_\mathbf{X} = \text{clip} \left(\text{round} \left(\frac{\mathbf{X}}{\Delta_\mathbf{X}} \right), -q_{\max}, q_{\max} \right), \quad \Delta_\mathbf{X} = \frac{c_\mathbf{X}}{q_{\max}}, \quad (1)$$

where $c_\mathbf{X} > 0$ is the clipping threshold, $\Delta_\mathbf{X}$ is the quantization step size, and $q_{\max} = 2^{k-1} - 1$. Rounding and clipping are applied elementwise. The weight $\mathbf{W}$ is quantized in the same manner using its corresponding bit-width and step size, yielding

$$\mathbf{Y} = \mathbf{X}\mathbf{W} \approx \hat{\mathbf{Y}} = \mathcal{Q}(\mathbf{X}) \mathcal{Q}(\mathbf{W}) = \Delta_\mathbf{X} \Delta_\mathbf{W} \cdot \mathbf{Q}_\mathbf{X} \mathbf{Q}_\mathbf{W}, \quad (2)$$

where $\mathcal{Q}$ denotes quantization followed by dequantization. Thus, weight and activation quantization jointly determine the deviation of the layer output from the full-precision.

To compare these deviations across computational locations, we explicitly index the same outputs as $\mathbf{Y}_{\ell,\tau,s}$ and $\hat{\mathbf{Y}}_{\ell,\tau,s}$, and define the normalized local reconstruction error as

$$\epsilon_{\ell,\tau,s} = \frac{\|\hat{\mathbf{Y}}_{\ell,\tau,s} - \mathbf{Y}_{\ell,\tau,s}\|_F}{\|\mathbf{Y}_{\ell,\tau,s}\|_F}. \quad (3)$$

This quantity measures the relative magnitude of local errors. However, similar local errors may lead to different deviations in final actions as they propagate through the coupled computation.

3.2 OBSERVATIONS

In this part, We examine how well local reconstruction error reflects the effects of quantization on final actions and task success. We inject rescaled W4A8 quantization residuals into selected layer outputs of full-precision Cosmos-Policy (Kim et al., 2026). Within each comparison, we match the normalized local reconstruction error in Eq. 3, while keeping all remaining computation in full precision. We measure standardized action RMSE relative to full-precision predictions and closed-loop task success on three LIBERO tasks, each with three initial states, yielding nine paired rollouts per condition. Appendix A provides the intervention protocol and summary results.

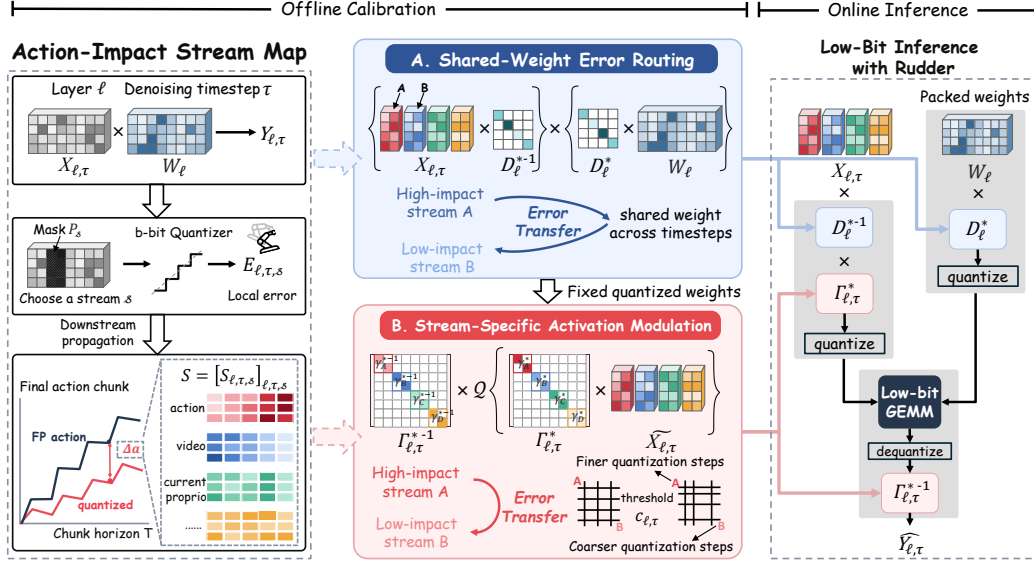


Figure 2: **Overview of SteerQuant.** $\Gamma_{\ell,\tau}$ is a diagonal matrix of token-wise stream gains. The upper-right gray box depicts offline weight preparation; the other gray boxes denote fused inference kernels.

The more influential stream varies across blocks. As shown in Fig. 1(a), matched local errors in the video and action streams have different effects on final actions. At the final denoising step, with local errors matched within each block, video-stream errors at Block 14 produce $2.9\times$ the action RMSE of action-stream errors. At Block 24, this ordering reverses: action-stream errors produce $7.2\times$ the RMSE of video-stream errors. The difference also appears in closed-loop execution: at Block 24, video-stream errors yield 9/9 successful rollouts, compared with 4/9 for action-stream errors. This observation shows that protection should be guided by how strongly errors in each semantic stream affect final actions.

Control impact changes across denoising steps. As shown in Fig. 1(b), control impact also varies when we hold the stream and block fixed and inject matched local errors into the action stream at Block 24 across Steps 0–4. Step 4 produces $109.6\times$ the action RMSE of Step 0. Task success is 4/9 at Step 4, compared with 7/9 or 8/9 at earlier steps. This observation shows that a stream’s action impact depends on when the error occurs, motivating its characterization across denoising steps as well as layers and streams.

These observations call for selective error reduction across semantic streams and denoising steps based on their impact on final actions. However, each layer shares its weights across these streams and steps, so quantization adjustments targeting one stream at one step may also affect others. The challenge is therefore to meet these differing protection needs under shared weights and fixed 4-bit.

4 METHODOLOGY

As illustrated in Figure 2, SteerQuant first constructs an *Action-Impact Stream Map* that estimates how local quantization errors affect final actions. Guided by this map, *Shared-Weight Error Routing* calibrates shared channel scaling, followed by *Stream-Specific Activation Modulation*, which refines activation quantization across streams and denoising steps while keeping the quantized weights fixed. The inference engine *Rudder* fuses scaling and output compensation into quantization and GEMM kernels for efficient execution.

4.1 ACTION-IMPACT STREAM MAP

To identify where quantization errors most affect final actions, we score each layer–step–stream region by its impact on the action output. Before calibrating the scaling factors, we compute the

local quantization error at the target bit-widths:

$$\mathbf{E}_{\ell,\tau,s} = \hat{\mathbf{Y}}_{\ell,\tau,s} - \mathbf{Y}_{\ell,\tau,s}. \quad (4)$$

Here, $\hat{\mathbf{Y}}_{\ell,\tau,s}$ is the output for stream s after quantizing the weights and input activations of linear layer ℓ at step τ . The input is taken from a full-precision forward pass to exclude upstream quantization errors.

Injecting each stream’s error and rerunning the remaining full-precision computation requires $\mathcal{O}(|\mathcal{D}|R)$ downstream forward evaluations for R regions and calibration set $\mathcal{D}$. Instead, we use derivatives of the full-precision model to estimate the resulting action changes. Let $\mathbf{a} \in \mathbb{R}^m$ denote the vectorized final action chunk, standardized using fixed, stabilized per-dimension standard deviations. Its Jacobian $\mathbf{J}_{\ell,\tau,s}$ with respect to $\text{vec}(\mathbf{Y}_{\ell,\tau,s})$ gives the first-order action change $\mathbf{J}_{\ell,\tau,s} \text{vec}(\mathbf{E}_{\ell,\tau,s})$. We define the action-impact score as

$$S_{\ell,\tau,s} = \left[\frac{1}{m} \mathbb{E}_{\mathcal{D}} \left[\|\mathbf{J}_{\ell,\tau,s} \text{vec}(\mathbf{E}_{\ell,\tau,s})\|_2^2 \right] \right]^{1/2}. \quad (5)$$

Here, $\mathbb{E}_{\mathcal{D}}$ averages over calibration samples. The score measures the RMS first-order action displacement; larger values indicate greater estimated impact on final actions.

Forming these Jacobians requires m coordinate vector–Jacobian products (VJPs) per sample and stores m entries for every local output element. We instead estimate the squared scores using P Rademacher projections (Hutchinson, 1989). Each projected reverse pass provides VJPs at all captured linear outputs, reusable across their stream error matrices. This yields scores for all R regions with $\mathcal{O}(|\mathcal{D}|P)$ reverse passes, without storing dense Jacobians. The map remains fixed during subsequent calibration. Appendix B.2 derives the unbiased squared-score estimator and analyzes its cost and approximation error; Appendices B.3 and B.4 examine the map’s structure and stability.

4.2 SHARED-WEIGHT ERROR ROUTING

Within each layer, semantic streams and denoising steps share the same weights but differ in how their errors affect final actions. A scaling that reduces reconstruction error in one region may increase it in another. We therefore use the Action-Impact Stream Map to choose a shared channel scaling that prioritizes regions with greater action impact.

For each linear layer, a positive diagonal matrix $\mathbf{D}_{\ell}$ scales the weights and inversely scales the input activations:

$$\hat{\mathbf{Y}}_{\ell,\tau,s}(\mathbf{D}_{\ell}) = \mathcal{Q}(\mathbf{X}_{\ell,\tau,s} \mathbf{D}_{\ell}^{-1}) \mathcal{Q}(\mathbf{D}_{\ell} \mathbf{W}_{\ell}). \quad (6)$$

The two scalings cancel in full precision but change the ranges of weights and activations seen by the quantizer, allowing us to reshape quantization error at fixed bit-widths. Using the same $\mathbf{D}_{\ell}$ across streams and denoising steps retains one quantized weight matrix per layer.

We select this shared scaling by minimizing reconstruction error weighted by the map-derived importance $\omega_{\ell,\tau,s}^D$ (Appendix C):

$$\mathbf{D}_{\ell}^* = \arg \min_{\mathbf{D}_{\ell}} \sum_{\tau,s} \frac{\pi_{\tau} \omega_{\ell,\tau,s}^D}{n_s} \mathbb{E}_{\mathcal{D}} \left[\left\| \hat{\mathbf{Y}}_{\ell,\tau,s}(\mathbf{D}_{\ell}) - \mathbf{Y}_{\ell,\tau,s} \right\|_F^2 \right]. \quad (7)$$

Here, π_{τ} is the normalized calibration frequency of step τ , and n_s is the number of tokens in stream s , so that $1/n_s$ averages the loss over stream tokens. The map weights penalize errors more strongly in high-impact regions, guiding the trade-off when regions favor different scalings.

After calibration, we fold $\mathbf{D}_{\ell}^*$ into the weights, yielding $\hat{\mathbf{W}}_{\ell} = \mathcal{Q}(\mathbf{D}_{\ell}^* \mathbf{W}_{\ell})$. These weights are stored as packed integers with corresponding quantization scales and remain fixed during subsequent activation calibration and inference.

4.3 STREAM-SPECIFIC ACTIVATION MODULATION

As discussed in Section 3.2, the relative action impact of semantic streams changes across denoising steps. A shared channel scaling provides one compromise across all steps, but cannot follow these changing priorities. We therefore adjust activation quantization while keeping the weights fixed.

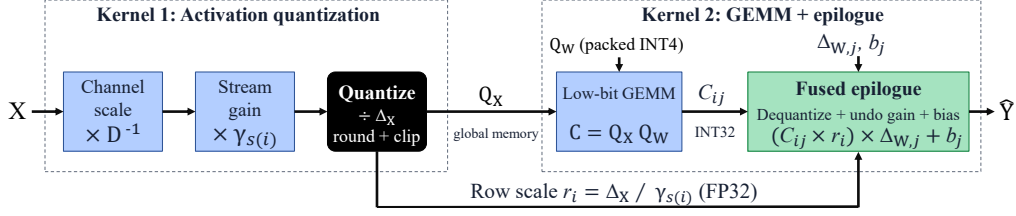


Figure 3: **Rudder’s fused execution.** The first kernel combines channel scaling, stream gains, and activation quantization. The second performs low-bit GEMM and applies dequantization, inverse-gain compensation, and bias before writing the output. Only integer activations and row scales pass between kernels. Dashed boxes indicate kernel boundaries.

At each layer and step, a shared clipping threshold establishes a common reference range and base quantization scale. Stream gains adjust each stream’s effective range relative to this reference, allowing different streams to receive greater protection at different steps. We bound both the threshold and gains to limit extreme range choices that can cause excessive clipping or coarse quantization.

For the transformed activation $\tilde{\mathbf{X}}_{\ell,\tau,s} = \mathbf{X}_{\ell,\tau,s}(\mathbf{D}_\ell^*)^{-1}$, the modulated output is

$$\hat{\mathbf{Y}}_{\ell,\tau,s}(\gamma_{\ell,\tau,s}, c_{\ell,\tau}) = \gamma_{\ell,\tau,s}^{-1} \mathcal{Q}(\gamma_{\ell,\tau,s} \tilde{\mathbf{X}}_{\ell,\tau,s}; c_{\ell,\tau}) \hat{\mathbf{W}}_\ell. \quad (8)$$

The inverse gain compensates for the input scaling at the output. Using map-derived weights $\omega_{\ell,\tau,s}^\gamma$, we jointly calibrate the gain vector and shared threshold:

$$\begin{aligned} (\gamma_{\ell,\tau}^*, c_{\ell,\tau}^*) &= \arg \min_{\gamma, c} \sum_s \frac{\omega_{\ell,\tau,s}^\gamma}{n_s} \mathbb{E}_D \left[\left\| \hat{\mathbf{Y}}_{\ell,\tau,s}(\gamma_s, c) - \tilde{\mathbf{X}}_{\ell,\tau,s} \hat{\mathbf{W}}_\ell \right\|_F^2 \right] \\ \text{s.t. } & c_{\min} \leq c \leq c_{\max}, \quad \gamma_{\min} \leq \gamma_s \leq \gamma_{\max} \quad \forall s, \\ & \sum_s n_s \log \gamma_s = 0. \end{aligned} \quad (9)$$

All streams share the same positive bounds. When these constraints require a trade-off across streams, the map weights favor lower reconstruction errors in those with greater impact on final actions. Appendix C details the weight construction and effective quantization ranges. The calibrated gains and thresholds are stored in a layer-step lookup table, preserving uniform bit-widths without online optimization.

4.4 RUDDER

Executing channel scaling, stream gains, and output compensation separately adds kernel launches and intermediate memory traffic at every denoising step. Rudder, our 4-bit inference engine for WAMs, reduces this overhead through two fused kernels while preserving stream-specific quantization (Figure 3). Below, layer and step indices are omitted, and all scaling parameters denote their calibrated values.

The first kernel applies channel scaling $\mathbf{D}^{-1}$ and stream gains during activation quantization. It writes only integer activations $\mathbf{Q}_\mathbf{X}$ and row scales $r_i = \Delta_\mathbf{X} / \gamma_{s(i)}$, where $s(i)$ identifies the stream of row i and $\Delta_\mathbf{X} = c/q_{\max}$. The row scale incorporates inverse-gain compensation, eliminating a separate compensation operation.

The second kernel reuses the packed INT4 weights $\mathbf{Q}_\mathbf{W}$ across streams and steps. Using CUTLASS (NVIDIA), it accumulates $\mathbf{C} = \mathbf{Q}_\mathbf{X} \mathbf{Q}_\mathbf{W}$ in INT32 and produces the output in its epilogue:

$$\hat{Y}_{ij} = \text{cast}_{\text{FP16/BF16}} \left[(\text{FP32}(C_{ij}) r_i) \Delta_{\mathbf{W},j} + b_j \right]. \quad (10)$$

Here, $\Delta_{\mathbf{W},j}$ is the weight scale for output channel j , and b_j is the optional bias. This fusion avoids writing scaled floating-point activations and INT32 accumulation results to global memory, retaining only $\mathbf{Q}_\mathbf{X}$ and $\mathbf{r}$ between kernels.

Table 1: **Closed-loop task success rates (%) on LIBERO and RoboLab.** For LIBERO, Avg. denotes the mean across the four suites.

Precision	Method	LIBERO										RoboLab
		Cosmos-Policy					FastWAMJoint					Cosmos-Edge
		Spatial ↑	Object ↑	Goal ↑	Long ↑	Avg. ↑	Spatial ↑	Object ↑	Goal ↑	Long ↑	Avg. ↑	SR ↑
FP	Original	98.3	100.0	97.9	98.0	98.5	99.2	99.4	98.6	98.4	98.9	21.83
W4A8	SmoothQuant	98.0	99.7	98.4	95.6	97.9	96.8	98.4	97.2	96.2	97.2	13.67
	PTQ4DiT	98.8	99.6	96.1	97.7	98.1	97.8	98.6	98.0	96.0	97.6	13.67
	Q-DiT	97.5	99.9	96.8	96.7	97.7	97.4	98.4	97.8	96.6	97.6	12.17
	SteerQuant	98.3	99.9	98.1	98.0	98.6	97.8	99.4	98.2	96.8	98.1	14.67
W4A4	QuaRot	98.2	99.2	96.1	98.1	97.9	99.0	99.6	98.2	97.8	98.7	12.25
	Atom	96.2	98.7	96.6	97.3	97.2	97.8	97.4	98.8	98.6	98.2	13.50
	SVDQuant	98.4	99.7	96.7	97.7	98.1	98.2	98.4	98.6	97.6	98.2	16.00
	SteerQuant	98.3	99.7	97.7	97.5	98.3	98.8	99.8	98.4	96.6	98.4	17.33

5 EXPERIMENTS

5.1 SETUP

Models and benchmarks. We evaluate Cosmos-Policy (Kim et al., 2026) and FastWAMJoint (Yuan et al., 2026) on LIBERO (Liu et al., 2023), and Cosmos-Edge (NVIDIA, 2026) on RoboLab (Yang et al., 2026).

Baselines and quantization settings. We evaluate W4A8 and W4A4 quantization, where W and A denote the bit-widths of weights and activations, respectively. For W4A8, we compare against SmoothQuant (Xiao et al., 2023), PTQ4DiT (Wu et al., 2024), and Q-DiT (Chen et al., 2025). For W4A4, we compare against QuaRot (Ashkboos et al., 2024), Atom (Zhao et al., 2024), and SVDQuant (Li et al., 2025). The original full-precision (FP) model serves as a reference. Within each model, all methods use the same checkpoint and inference settings.

Evaluation metrics. We assess control performance using closed-loop success rate (SR), supplemented by standardized action RMSE relative to FP in ablation studies. We assess efficiency using denoising latency and speedup relative to FP, peak allocated GPU memory, and packed weight storage. The shared quantization scope and additional details are provided in Appendix D.

5.2 TASK SUCCESS

Table 1 compares task success at FP, W4A8, and W4A4. We compare each quantized model with its own FP reference and with baselines at the same nominal precision.

Results on LIBERO. As shown in Table 1, SteerQuant largely preserves the FP performance of both models. Under W4A8, its average SRs reach 98.6% on Cosmos-Policy and 98.1% on FastWAMJoint, exceeding the strongest baseline by 0.5 percentage points (pp) on each model. Under W4A4, the average SR of 98.3% on Cosmos-Policy surpasses the strongest baseline by 0.2 pp, while the 98.4% result on FastWAMJoint falls 0.3 pp below QuaRot. Across both models and precision settings, the average SR decreases by at most 0.8 pp relative to FP, supporting the effectiveness of SteerQuant in maintaining closed-loop task performance under low-bit quantization.

Results on RoboLab. On Cosmos-Edge, SteerQuant outperforms all evaluated quantization baselines at both precision settings (Table 1). Under W4A8, it reaches 14.67%, surpassing SmoothQuant and PTQ4DiT by 1.00 pp. Under W4A4, it attains 17.33%, outperforming the strongest baseline, SVDQuant, by 1.33 pp. These results show that SteerQuant retains more task performance than the evaluated same-precision baselines on RoboLab, although a gap to FP remains.

5.3 INFERENCE EFFICIENCY AND MEMORY FOOTPRINT

Table 2 reports denoising latency, speedup relative to FP, peak GPU memory, and weight storage. All measurements use an NVIDIA RTX 4090 GPU, and all quantized configurations use low-bit kernels. Measurement details are provided in Appendix D.

Table 2: **Inference efficiency and memory footprint across models.** Lat.: denoising latency (ms); Spd.: speedup relative to FP; Peak: peak allocated GPU memory (GB); Storage: packed weight storage (GiB). PTQ4DiT and Q-DiT are omitted because their official implementations do not provide low-bit inference kernels for the evaluated settings.

Precision	Method	Cosmos-Policy				FastWAMJoint				Cosmos-Edge			
		Lat. ↓	Spd. ↑	Peak ↓	Storage ↓	Lat. ↓	Spd. ↑	Peak ↓	Storage ↓	Lat. ↓	Spd. ↑	Peak ↓	Storage ↓
FP	Original	261.460	1.000×	4.241	3.644	360.450	1.000×	12.116	11.230	881.637	1.000×	8.492	6.276
W4A8	SmoothQuant	134.967	1.937×	1.607	1.191	263.368	1.369×	3.363	2.983	570.893	1.544×	6.405	4.314
	SteerQuant	133.455	1.959×	1.642	1.191	260.977	1.381×	3.363	2.983	563.858	1.564×	6.397	4.312
W4A4	QuaRot	122.657	2.132×	1.604	1.189	221.647	1.626×	3.363	2.983	569.943	1.547×	6.396	4.312
	Atom	192.997	1.355×	1.679	1.258	309.021	1.166×	3.510	3.188	766.027	1.151×	6.463	4.361
	SVDQuant	131.093	1.994×	1.755	1.321	348.767	1.033×	3.756	3.371	581.278	1.517×	6.503	4.411
	SteerQuant	117.322	2.229×	1.645	1.194	193.916	1.859×	3.370	2.983	521.589	1.690×	6.398	4.314

Table 3: **Contribution of individual components and action guidance.** Standardized action RMSE is averaged over W4A8 and W4A4 on Cosmos-Policy, using 1,800 observations from 600 trajectories across 40 tasks. Paired, unadjusted 95% CIs are computed by resampling whole trajectories within each task–seed stratum and refer to $\Delta\text{RMSE} = \text{RMSE}_{\text{SteerQuant}} - \text{RMSE}_{\text{row}}$. Negative values favor SteerQuant.

Variant	Routing	Modulation	Weighting	RMSE ↓	95% CI of ΔRMSE
Base	×	×	Uniform	0.1581	[−0.0430, −0.0357]
Routing only	✓	×	Map-derived	0.1224	[−0.0044, −0.0026]
Modulation only	×	✓	Map-derived	0.1529	[−0.0368, −0.0312]
Both, uniform	✓	✓	Uniform	0.1416	[−0.0262, −0.0052]
SteerQuant	✓	✓	Map-derived	0.1189	—

Denoising latency and speedup. SteerQuant achieves the lowest denoising latency among the evaluated methods at both precision settings on all three models. Under W4A4, it delivers speedups of 2.229×, 1.859×, and 1.690× over FP on Cosmos-Policy, FastWAMJoint, and Cosmos-Edge, respectively. Compared with QuaRot, the fastest W4A4 baseline on each model, it further reduces latency by 4.3%, 12.5%, and 8.5%, respectively. Under W4A8, it also achieves lower latency than SmoothQuant on all three models.

Memory and storage footprint. Peak allocated GPU memory includes resident weights, activations, and temporary buffers, whereas packed weight storage covers stored model weights only. Table 2 reports these quantities in GB and GiB, respectively. Across models and precision settings, SteerQuant reduces peak GPU memory by 24.7–72.2% and packed weight storage by 31.3–73.4% relative to FP.

5.4 ABLATION STUDIES

Contribution of individual components and action guidance. Table 3 evaluates Shared-Weight Error Routing, Stream-Specific Activation Modulation, and weighting derived from the Action-Impact Stream Map. Shared-Weight Error Routing alone achieves lower action RMSE than Stream-Specific Activation Modulation alone, and combining both components further improves action fidelity. The full method reduces RMSE by 24.79% relative to the base quantizer. Replacing map-derived weighting with uniform weighting increases RMSE, supporting the contribution of guidance from the Action-Impact Stream Map.

Quantization error analysis. Figure 4 (left) compares local output errors under uniform weighting and weighting derived from the Action-Impact Stream Map. Within each layer–step unit, we rank streams by their reference action-impact scores estimated on the calibration set. The top and bottom three streams form the high- and low-impact groups, respectively, with group assignments fixed across variants. In 935 of the 1,120 units (83.48%), map-derived weighting reduces error in the high-impact group while increasing it in the low-impact group. This pattern supports preferential

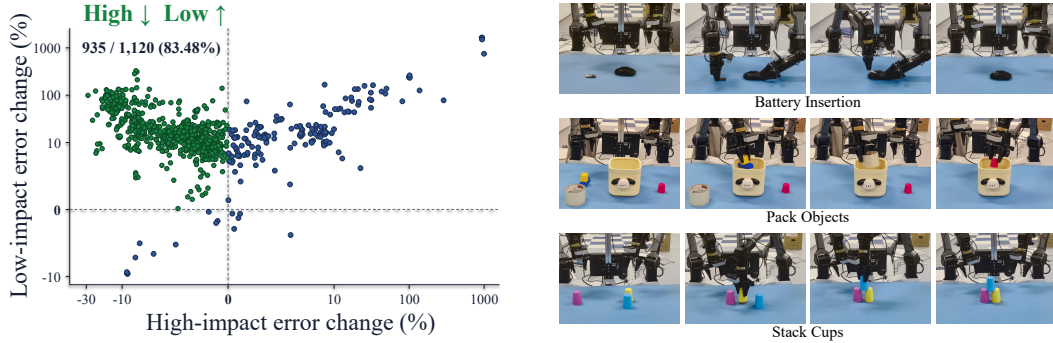


Figure 4: **Action-guided quantization error analysis and real-world execution.** **Left:** Cosmos-Policy W4A8 on 1,800 observations. Errors are token-normalized squared Frobenius differences from FP outputs under matched FP inputs, averaged over observations and streams within each group. Axes show percentage changes relative to uniform weighting on symmetric logarithmic scales. Green points indicate lower high-impact and higher low-impact error. **Right:** Representative SteerQuant executions on the AgileX Cobot Magic dual-arm platform. Rows show battery insertion, object packing, and cup stacking, with time progressing from left to right.

Table 4: **Real-world task performance and inference efficiency.** Task scores are reported in percent and averaged equally across tasks. Scoring details are provided in Appendix D. We report the median end-to-end inference latency and speedup, measured from sending a policy request to receiving the predicted actions. Robot motion execution time is excluded.

Method	Battery Insertion	Pack Objects	Stack Cups	Avg. score (%) ↑	Latency (ms) ↓	Speedup ↑
FP (BF16)	83.33	69.44	75.00	75.93	462.79	1.00×
SteerQuant (W4A8)	75.00	88.89	83.33	82.41	341.97	1.35×

error reduction in streams with greater estimated impact on final actions, while allowing larger errors in lower-impact streams.

5.5 PERFORMANCE ON REAL-WORLD TASKS

We evaluate FastWAMJoint fine-tuned on three real-world tasks using the AgileX Cobot Magic dual-arm platform and an NVIDIA RTX 4090 GPU (24 GB). Both methods use the same checkpoint and initial conditions, with 12 trials per task. Figure 4 (right) shows representative executions. As shown in Table 4, W4A8 SteerQuant achieves 82.41% average task score versus 75.93% for BF16, with a $1.35\times$ end-to-end inference speedup. Although battery insertion score decreases, the overall results show faster inference with higher average task success.

6 LIMITATIONS AND FUTURE WORK

Future work can broaden the evaluation and deployment of SteerQuant in several directions. First, our efficiency evaluation is conducted on an NVIDIA RTX 4090. Extending Rudder to other GPU architectures and resource-constrained edge devices would broaden its deployment opportunities. Second, our evaluation covers three WAMs. Future work could explore additional model architectures and scales to further assess the applicability of action-guided quantization. Third, our real-world experiments focus on three manipulation tasks using a dual-arm robot. Expanding evaluation to more tasks and robot platforms would provide a broader picture of SteerQuant’s practical benefits.

7 CONCLUSION

We presented SteerQuant, a post-training quantization framework that guides error allocation across heterogeneous semantic streams according to their influence on final actions. Its action-guided scal-

ing coordinates shared weights and stream-specific activation ranges across denoising steps, preserving one static quantized weight matrix per layer at fixed bit-widths. The Rudder inference engine integrates these transformations into fused low-bit kernels. Across three WAMs, SteerQuant preserves near-BF16 success on LIBERO, outperforms the evaluated same-precision baselines on RoboLab, and achieves up to 2.23 $\times$ denoising speedup with reduced GPU memory usage. Real-world W4A8 deployment delivers a 1.35 $\times$ end-to-end inference speedup while maintaining average task success. These findings support downstream action impact as a useful guide for efficient quantization of coupled world–action computation.

REFERENCES

- Arash Akbari, Arman Akbari, Masih Eskandar, Qitao Tan, Yixiao Chen, Jingwu Luo, Bertha Pangribuan, Liyun Zhang, Jennifer Dy, Geng Yuan, Xue Lin, Gaowen Liu, Stratis Ioannidis, and Yanzhi Wang. ActQuant: Sub-4-bit action-guided quantization for vision-language-action models. *arXiv preprint arXiv:2605.24011*, 2026.
- Saleh Ashkboos, Amirkeivan Mohtashami, Maximilian L. Croci, Bo Li, Pashmina Cameron, Martin Jaggi, Dan Alistarh, Torsten Hoefer, and James Hensman. QuaRot: Outlier-free 4-bit inference in rotated LLMs. In *Advances in Neural Information Processing Systems*, volume 37, pp. 100213–100240. Curran Associates, Inc., 2024.
- Lei Chen, Yuan Meng, Chen Tang, Xinzhu Ma, Jingyan Jiang, Xin Wang, Zhi Wang, and Wenwu Zhu. Q-DiT: Accurate post-training quantization for diffusion transformers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 28306–28315, 2025.
- Elias Frantar, Saleh Ashkboos, Torsten Hoefer, and Dan Alistarh. GPTQ: Accurate post-training quantization for generative pre-trained transformers. In *International Conference on Learning Representations*, 2023.
- Yangjia Hu, Haodong Wang, Zicong Hong, Qianli Liu, Quanxin Shou, Jian Lin, Song Guo, Xiaowei Shen, Xiangjun Huang, Dian Wang, et al. MosaicQuant: Inlier-outlier disaggregation for unified 4-bit LLM quantization. *arXiv preprint arXiv:2606.15652*, 2026.
- Michael F Hutchinson. A stochastic estimator of the trace of the influence matrix for laplacian smoothing splines. *Communications in Statistics-Simulation and Computation*, 18(3):1059–1076, 1989.
- Alexander Khazatsky, Karl Pertsch, Suraj Nair, Ashwin Balakrishna, Sudeep Dasari, Siddharth Karamcheti, Soroush Nasiriany, Mohan Kumar Srirama, Lawrence Yunliang Chen, Kirsty Ellis, et al. DROID: A large-scale in-the-wild robot manipulation dataset. In *Proceedings of Robotics: Science and Systems*, 2024.
- Moo Jin Kim, Yihuai Gao, Tsung-Yi Lin, Yen-Chen Lin, Yunhao Ge, Grace Lam, Percy Liang, Shuran Song, Ming-Yu Liu, Chelsea Finn, and Jinwei Gu. Cosmos policy: Fine-tuning video models for visuomotor control and planning. *arXiv preprint arXiv:2601.16163*, 2026.
- Muyang Li, Yujun Lin, Zhekai Zhang, Tianle Cai, Xiuyu Li, Junxian Guo, Enze Xie, Chenlin Meng, Jun-Yan Zhu, and Song Han. SVDQuant: Absorbing outliers by low-rank component for 4-bit diffusion models. In *International Conference on Learning Representations*, volume 2025, pp. 97831–97858, 2025.
- Xiuyu Li, Yijiang Liu, Long Lian, Huanrui Yang, Zhen Dong, Daniel Kang, Shanghang Zhang, and Kurt Keutzer. Q-diffusion: Quantizing diffusion models. In *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 17489–17499, 2023.
- Ji Lin, Jiaming Tang, Haotian Tang, Shang Yang, Wei-Ming Chen, Wei-Chen Wang, Guangxuan Xiao, Xingyu Dang, Chuang Gan, and Song Han. AWQ: Activation-aware weight quantization for on-device LLM compression and acceleration. In *Proceedings of Machine Learning and Systems*, volume 6, pp. 87–100, 2024.

- Bo Liu, Yifeng Zhu, Chongkai Gao, Yihao Feng, Qiang Liu, Yuke Zhu, and Peter Stone. LIBERO: Benchmarking knowledge transfer for lifelong robot learning. In *Advances in Neural Information Processing Systems*, volume 36, pp. 44776–44791. Curran Associates, Inc., 2023.
- Zechun Liu, Changsheng Zhao, Igor Fedorov, Bilge Soran, Dhruv Choudhary, Raghuraman Krishnamoorthi, Vikas Chandra, Yuandong Tian, and Tijmen Blankevoort. SpinQuant: LLM quantization with learned rotations. In *International Conference on Learning Representations*, volume 2025, pp. 92009–92032, 2025.
- Yikun Miao, Fangqi Zhu, Quanxin Shou, Xiaoyi Pang, Zhengyang Yan, Junhao Li, Haodong Wang, Zicong Hong, and Song Guo. OnlineWM: Causality-aware active online learning for effective world modeling. *arXiv preprint arXiv:2609.23753*, 2026.
- NVIDIA. CUTLASS: Cuda templates for linear algebra subroutines. <https://github.com/NVIDIA/cutlass>. Accessed September 2026.
- NVIDIA. Cosmos 3: Omnimodal world models for physical AI. *arXiv preprint arXiv:2606.02800*, 2026.
- William Peebles and Saining Xie. Scalable diffusion models with transformers. In *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 4172–4182, 2023.
- Yuzhang Shang, Zhihang Yuan, Bin Xie, Bingzhe Wu, and Yan Yan. Post-training quantization on diffusion models. In *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 1972–1981, 2023.
- Wenqi Shao, Mengzhao Chen, Zhaoyang Zhang, Peng Xu, Lirui Zhao, Zhiqian Li, Kaipeng Zhang, Gao Peng, Yu Qiao, and Ping Luo. Omniquant: Omnidirectionally calibrated quantization for large language models. In *International Conference on Learning Representations*, volume 2024, pp. 45472–45496, 2024.
- Quanxin Shou, Fangqi Zhu, Shawn Chen, Puxin Yan, Zhengyang Yan, Yikun Miao, Xiaoyi Pang, Zicong Hong, Ruikai Shi, Hao Huang, et al. HALO: A unified vision-language-action model for embodied multimodal chain-of-thought reasoning. *arXiv preprint arXiv:2602.21157*, 2026.
- Yuxuan Sun, Ruikang Liu, Haoli Bai, Han Bao, Kang Zhao, Yuening Li, Jiaxin Hu, Xianzhi Yu, Lu Hou, Chun Yuan, Xin Jiang, Wulong Liu, and Jun Yao. FlatQuant: Flatness matters for LLM quantization. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pp. 57587–57613. PMLR, 2025.
- Haodong Wang, Qihua Zhou, Zicong Hong, and Song Guo. D2MoE: Dual routing and dynamic scheduling for efficient on-device MoE-based LLM serving. In *Proceedings of the 31st Annual International Conference on Mobile Computing and Networking*, ACM MOBICOM ’25, pp. 574–588, 2025. doi: 10.1145/3680207.3723493.
- Haodong Wang, Junjie Liu, Zicong Hong, Qianli Liu, Jian Lin, Song Guo, and Xu Chen. TwinQuant: Learnable subspace decomposition for 4-bit LLM quantization. *arXiv preprint arXiv:2606.01556*, 2026.
- Zhiqing Wei, Yongji Zhang, Danna Ji, and Chenfei Li. Sensing and communication integrated fast neighbor discovery for UAV networks. *ZTE Communications*, 22(3):69–82, September 2024. doi: 10.12142/ZTECOM.202403009.
- Junyi Wu, Haoxuan Wang, Yuzhang Shang, Mubarak Shah, and Yan Yan. PTQ4DiT: Post-training quantization for diffusion transformers. In *Advances in Neural Information Processing Systems*, volume 37, pp. 62732–62755. Curran Associates, Inc., 2024.
- Guangxuan Xiao, Ji Lin, Mickael Seznec, Hao Wu, Julien Demouth, and Song Han. SmoothQuant: Accurate and efficient post-training quantization for large language models. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 38087–38099. PMLR, 2023.

- Yuhao Xu, Yantai Yang, Zhenyang Fan, Yufan Liu, Yuming Li, Bing Li, and Zhipeng Zhang. QVLA: Not all channels are equal in vision-language-action model’s quantization. In *International Conference on Learning Representations*, 2026.
- Xuning Yang, Rishit Dagli, Alex Zook, Hugo Hadfield, Ankit Goyal, Stan Birchfield, Fabio Ramos, and Jonathan Tremblay. RoboLab: A high-fidelity simulation benchmark for analysis of task generalist policies. In *Proceedings of Robotics: Science and Systems*, 2026.
- Seonghyeon Ye, Yunhao Ge, Kaiyuan Zheng, Shenyuan Gao, Sihyun Yu, George Kurian, Suneel Indupuru, You Liang Tan, Chuning Zhu, Jiannan Xiang, Ayaan Malik, Kyungmin Lee, William Liang, Nadun Ranawaka, Jiasheng Gu, Yinzen Xu, Guanzhi Wang, Fengyuan Hu, Avnish Narayan, Johan Bjorck, Jing Wang, Gwanghyun Kim, Dantong Niu, Ruijie Zheng, Yuqi Xie, Jimmy Wu, Qi Wang, Ryan Julian, Danfei Xu, Yilun Du, Yevgen Chebotar, Scott Reed, Jan Kautz, Yuke Zhu, Linxi ”Jim” Fan, and Joel Jang. World action models are zero-shot policies. *arXiv preprint arXiv:2602.15922*, 2026.
- Tianyuan Yuan, Zibin Dong, Yicheng Liu, and Hang Zhao. Fast-WAM: Do world action models need test-time future imagination? *arXiv preprint arXiv:2603.16666*, 2026.
- Yilong Zhao, Chien-Yu Lin, Kan Zhu, Zihao Ye, Lequn Chen, Size Zheng, Luis Ceze, Arvind Krishnamurthy, Tianqi Chen, and Baris Kasikci. Atom: Low-bit quantization for efficient and accurate LLM serving. In *Proceedings of Machine Learning and Systems*, volume 6, pp. 196–209, 2024.
- Jiacheng Zhou, Jinfan Lv, Ruixuan Li, Longtai Zhang, Yan Wang, Wenqiang Zhang, and Lizhe Qi. QuantWAMs: Calibrating at the right granularity for world action models. *arXiv preprint arXiv:2607.28405*, 2026.

A EXPERIMENTAL DETAILS FOR PRELIMINARY ANALYSIS

We evaluate Cosmos-Policy on LIBERO-10 Tasks 4, 7, and 8 with three default initial states each, giving nine paired rollouts per condition. We use policy seed 195, environment-reset seed 0, five denoising steps, and 16×7 action chunks. Each intervention targets one Linear output in the 28-block Transformer; block indices start at 1 and step indices at 0. Table 5 lists the stream-depth and step-wise conditions.

For each policy query, we compute the W4A8 round-to-nearest residual $\mathbf{r} = \mathbf{Y}^{\text{W4A8}} - \mathbf{Y}^{\text{FP}}$ using the same FP input. With layer and step indices omitted, we inject it only into stream s :

$$\tilde{\mathbf{Y}}_s = \mathbf{Y}_s^{\text{FP}} + \epsilon_s \frac{\|\mathbf{Y}_s^{\text{FP}}\|_F}{\|P_s(\mathbf{r})\|_F} P_s(\mathbf{r}). \quad (11)$$

Here P_s selects stream rows. Unselected streams at the injection site and all downstream computation remain in FP. We set $\epsilon_s = 0.25$ at Block 14 and 0.50 at Block 24, including all step-wise conditions; the reported realized local errors differ from these targets by at most 3.2×10^{-5} .

FP and intervened predictions use matched observations and sampler seeds; only the intervened actions are executed. For rollout r and query q , standardized action RMSE is

$$e_{r,q} = \left[\frac{1}{16 \times 7} \sum_{k=1}^{16} \sum_{d=1}^7 \left(\frac{\tilde{a}_{r,q,k,d} - a_{r,q,k,d}^{\text{FP}}}{\sigma_d + 10^{-6}} \right)^2 \right]^{1/2}, \quad (12)$$

where σ_d comes from LIBERO training statistics. We average over queries within each episode, then report the mean and sample standard deviation over the nine episodes.

B ACTION-IMPACT STREAM MAP: CONSTRUCTION AND ANALYSIS

B.1 CALIBRATION SETUP

We construct a separate map for each target bit-width configuration. The analyses below use Cosmos-Policy W4A8 with 320 LIBERO observations, symmetric per-output-channel W4 weights,

Table 5: **Controlled intervention summary.** RMSE is mean $\pm$ s.d.; success is the number of successful rollouts out of nine. The Block 24, Step 4 action condition is shared by both comparisons.

Comparison	Block	Step	Stream	Action RMSE	Success
FP	–	–	–	–	7/9
Stream–depth	14	4	Video	0.246 ± 0.0292	5/9
Stream–depth	14	4	Action	0.0833 ± 0.00788	9/9
Stream–depth	24	4	Video	0.0500 ± 0.00575	9/9
Stream–depth	24	4	Action	0.361 ± 0.0458	4/9
Step	24	0	Action	0.00330 ± 0.000331	7/9
Step	24	1	Action	0.00361 ± 0.000432	8/9
Step	24	2	Action	0.00467 ± 0.00177	7/9
Step	24	3	Action	0.00870 ± 0.00391	8/9
Step	24	4	Action	0.361 ± 0.0458	4/9

static per-tensor A8 activations, and 16×7 action chunks. We use 16 Rademacher projections, denoising seed 195, and projection seed 20260809, keeping conditioning and diffusion draws fixed across passes for each observation.

Each of 28 blocks contains ten Linear families. Eight act on nine temporal streams: blank control, current proprioception, current wrist and primary images, action, future proprioception, future wrist and primary images, and value. The cross-attention key and value projections each form one global-text region with $P_s = I$. Across five denoising steps, this gives $28 \times 5 \times (8 \times 9 + 2) = 10,360$ regions.

B.2 EFFICIENT MAP ESTIMATION

For observation x and region $i = (\ell, \tau, s)$, write $\mathbf{v} = \text{vec}(\mathbf{E}_i(x))$ and $\mathbf{J} = \mathbf{J}_i(x)$ as in Section 4.1. Let $N_{\text{cal}} = |\mathcal{D}|$. With m standardized action coordinates and independent Rademacher vectors $\mathbf{z}_p$, we estimate $e_{x,i} = \|\mathbf{J}\mathbf{v}\|_2^2/m$ by

$$\hat{e}_{x,i} = \frac{1}{Pm} \sum_{p=1}^P \langle \mathbf{J}^\top \mathbf{z}_p, \mathbf{v} \rangle^2, \quad \hat{S}_i = \left[\frac{1}{N_{\text{cal}}} \sum_{x \in \mathcal{D}} \hat{e}_{x,i} \right]^{1/2}. \quad (13)$$

Since $\mathbb{E}[\mathbf{z}_p \mathbf{z}_p^\top] = I$ and $\langle \mathbf{J}^\top \mathbf{z}_p, \mathbf{v} \rangle = \mathbf{z}_p^\top \mathbf{J}\mathbf{v}$, we have $\mathbb{E}[\hat{e}_{x,i}] = \|\mathbf{J}\mathbf{v}\|_2^2/m$. For a fixed calibration set, $\hat{S}_i$ is therefore unbiased for the squared first-order score; $\hat{S}_i$ is not generally unbiased.

One reverse pass per observation and projection provides VJPs at all captured Linear outputs. Contracting the stream-selected VJPs with their residuals yields all regional estimates, using $\mathcal{O}(N_{\text{cal}}P)$ reverse passes instead of $\mathcal{O}(N_{\text{cal}}R)$ downstream replays for R regions. Residual construction and contractions still scale with R , but no dense Jacobian is stored.

The estimate targets a first-order response. Let f map a selected stream’s local output $\mathbf{y}$ to standardized final actions, with other streams fixed at FP at the injection site and all downstream computation in FP, under fixed conditioning and randomness. If Df is L_J -Lipschitz in the induced Euclidean operator norm along the segment from $\mathbf{y}$ to $\mathbf{y} + \mathbf{v}$, then

$$\|f(\mathbf{y} + \mathbf{v}) - f(\mathbf{y}) - \mathbf{J}\mathbf{v}\|_2 \leq \frac{L_J}{2} \|\mathbf{v}\|_2^2, \quad \mathbf{J} = Df(\mathbf{y}). \quad (14)$$

B.3 MAP STRUCTURE

For region group $\mathcal{G}$, we report $\hat{S}_{\mathcal{G}} = [|\mathcal{G}|^{-1} \sum_{i \in \mathcal{G}} \hat{S}_i^2]^{1/2}$, which summarizes individual scores rather than simultaneous perturbations. Figure 5 shows changing stream priorities: the action stream dominates from Block 17 onward; across denoising steps, the largest score belongs to current proprioception at Steps 0–2, future wrist image at Step 3, and action at Step 4.

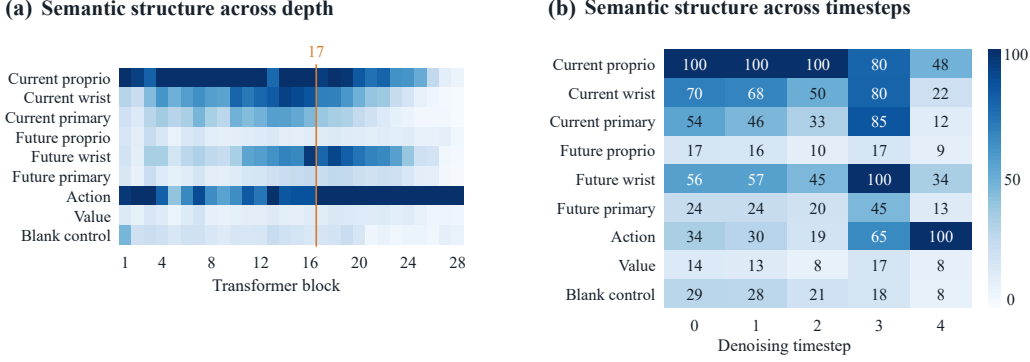


Figure 5: **Relative action impact of semantic streams.** Scores aggregate over 320 observations and eight stream-aligned Linear families, additionally averaging over steps in (a) and blocks in (b). Each column is normalized by its maximum and multiplied by 100; colors compare streams within a column. The marker indicates Block 17.

B.4 MAP STABILITY

With estimation settings fixed, 200 disjoint 160/160 splits of the 320 observations give median Spearman correlation 0.967 (2.5th–97.5th percentiles: 0.953–0.974) and top-10% overlap 0.979 (0.974–0.984) across the 10,360 regions. Overlap is the intersection of the top-ranked sets divided by 1,036. Table 6 reports convergence to the 320-observation map. Its subsets belong to the reference pool, so this comparison complements the disjoint split-half analysis.

Table 6: **Calibration-size convergence.** Median agreement with the 320-observation map, with 2.5th–97.5th percentile intervals over 200 subsets per size, sampled without replacement within each subset.

Observations	Spearman correlation	Top-10% overlap
5	0.898 [0.859, 0.958]	0.957 [0.914, 0.965]
10	0.927 [0.864, 0.969]	0.966 [0.929, 0.973]
20	0.947 [0.874, 0.981]	0.973 [0.954, 0.979]
40	0.960 [0.911, 0.987]	0.980 [0.972, 0.984]
80	0.977 [0.938, 0.993]	0.985 [0.981, 0.988]
160	0.993 [0.970, 0.999]	0.989 [0.986, 0.992]

C CALIBRATION WEIGHTS AND ACTIVATION CONSTRAINTS

We transform squared map scores into positive calibration weights:

$$u_{\ell,\tau,s} = (\hat{S}_{\ell,\tau,s}^2 + \eta)^\rho, \quad \eta > 0, \quad 0 < \rho \leq 1. \quad (15)$$

Here η ensures positivity and $\rho < 1$ tempers large scores. Shared-weight calibration normalizes across steps and streams, whereas activation calibration normalizes streams at each layer and step:

$$\omega_{\ell,\tau,s}^D = \frac{u_{\ell,\tau,s}}{\sum_{\tau',j} \pi_{\tau'} u_{\ell,\tau',j}}, \quad \omega_{\ell,\tau,s}^\gamma = \frac{u_{\ell,\tau,s}}{\sum_j u_{\ell,\tau,j}}. \quad (16)$$

The step frequencies satisfy $\sum_\tau \pi_\tau = 1$, giving $\sum_{\tau,s} \pi_\tau \omega_{\ell,\tau,s}^D = 1$ and $\sum_s \omega_{\ell,\tau,s}^\gamma = 1$. The map and weights remain fixed throughout calibration.

C.1 EFFECTIVE ACTIVATION RANGES

For fixed layer and step, stream s has effective clipping threshold c/γ_s and step size $c/(q_{\max}\gamma_s)$ after inverse-gain compensation. Increasing γ_s narrows the unclipped range and reduces rounding intervals. Shared gain bounds restrict the threshold to $[c/\gamma_{\max}, c/\gamma_{\min}]$; the normalization

$\sum_s n_s \log \gamma_s = 0$ makes c the token-weighted geometric mean of these thresholds. Together with the bounds on c , these constraints limit range choices, and map weights guide the trade-off when streams prefer incompatible settings. The target $\tilde{\mathbf{X}}_{\ell,\tau,s} \widehat{\mathbf{W}}_\ell$ uses unquantized activations and fixed quantized weights, isolating activation error; all streams share base step size $c/q_{\max}$ before compensation.

D ADDITIONAL EXPERIMENTAL DETAILS

Quantization. For Cosmos-Policy, FastWAMJoint, and Cosmos-Edge, we quantize all query, key, value, and output projections in self- and cross-attention, plus FFN up- and down-projections. Weights use 4 bits; input activations use 8 or 4 bits for W4A8 or W4A4. Normalization, RoPE, Softmax, GELU, the KV cache, and residual additions remain in BF16. SteerQuant uses symmetric per-output-channel weight quantization and symmetric activation quantization with an offline-calibrated base scale shared across streams at each layer and step. Stream gains and inverse-gain compensation yield stream-specific effective scales.

Calibration and evaluation. Calibration uses 320 LIBERO training observations for Cosmos-Policy, 100 for FastWAMJoint, and 512 DROID (Khazatsky et al., 2024) training observations for Cosmos-Edge. All methods share the same calibration set within each model, with no overlap with evaluation data. Cosmos-Policy uses 3,000 rollouts (40 tasks, 25 trials per task, three seeds); FastWAMJoint and Cosmos-Edge use 2,000 and 1,200, respectively. Initial states and seeds are matched across methods, and success rates are averaged across tasks. Ablation RMSE compares against FP with fixed training-set statistics, matched observations, and matched sampling randomness.

Efficiency. All models are benchmarked on an NVIDIA RTX 4090. DiT replay latency uses FP-captured inputs, CUDA Graphs, CUDA events, and warm-up runs. For Cosmos-Policy we use five warm-up and 20 timed sequences, reporting the median; speedup is relative to each model’s BF16 reference.

Real-world evaluation. BF16 and W4A8 SteerQuant use the same FastWAMJoint checkpoint fine-tuned on the real-world tasks, with 12 trials per task under matched initial conditions. Pack Objects scores $k/3$ for k successfully handled objects; other tasks use binary success. Each task’s mean score over 12 trials is reported as a percentage.