

Mind-VLA: Instruction-Aware Spatial Representation Alignment for Vision-Language-Action Models

Xingyu Ding^{1,2} Yuzhong Zhao³ Yang Wu^{2,3} Chunhai Zhao²
Chaoyang Zhao^{2,†} Yifan Zhang^{2,3,†} Jian Cheng^{2,3}

¹Nanjing University, Nanjing, China

²Institute of Automation, Chinese Academy of Sciences, Beijing, China

³University of Chinese Academy of Sciences, Beijing, China

[†]Corresponding authors

Abstract—Recent Vision-Language-Action (VLA) methods improve generalization by aligning their representations with 3D scene geometry. However, these methods are fundamentally instruction-agnostic: the representations align the entire scene uniformly, neglecting the 3D geometry of the specific target object designated by the language instruction. This causes failures on fine-grained manipulation and target occlusion tasks, where success depends on accurate 3D understanding of the target object rather than the entire scene. To address this, we present Mind-VLA, an instruction-aware spatial representation alignment method for VLA models. Specifically, Mind-VLA first obtains the target object specified by the language instruction, then prepares its canonical target views and extracts the corresponding VAE and VGGT features. Finally, the latent representation of the VLA model is aligned with these features to enable instruction-aware 3D understanding. Mind-VLA reaches 94.4% on LIBERO and 4.47 on CALVIN with a compact 345M-parameter backbone. On real-robot tasks with target occlusion, Mind-VLA reaches 54% average success, outperforming the matched scene-VGGT control by 26 percentage points.

I. INTRODUCTION

Vision-Language-Action (VLA) models have become an important approach for generalist robotic manipulation, mapping language instructions and visual observations directly to robot actions [1], [2], [3], [4]. However, many manipulation tasks require the VLA models to go beyond 2D visual recognition and reason about object shape, pose, spatial relations, and occlusion. To improve the 3D understanding of VLA models, recent methods use 3D scene information in two main ways. The first (Fig. 1(a)) [5], [6], [7] provides explicit 3D information as additional model input, such as point-cloud features, RGB-D observations, or rendered orthographic views. These methods can improve spatial reasoning, but they usually require depth sensors, depth estimation, or extra 3D processing during inference, increasing the deployment cost. The second (Fig. 1(b)) [8], [9] extracts 3D scene features with frozen 3D foundation models and aligns VLA representations to these features during training. This training-time alignment keeps the model input unchanged at inference, reduces deployment cost, and has therefore become a mainstream paradigm for building 3D-aware VLAs.

However, existing 3D-aware VLA methods are still instruction-agnostic. Their 3D input or supervision is usually

built from the whole scene, regardless of which object is specified by the language instruction. As a result, the target object, distractor objects, and background structures are encoded together. This weakens the connection between the instruction and the 3D representation. For manipulation tasks, the most important geometry is often not the whole scene, but the object that the robot is asked to manipulate. When the target object is visually similar to nearby objects, instruction-agnostic supervision may make target discrimination harder. When the target is partially occluded, it may also make the VLA model less reliable, because the model has not been explicitly trained to preserve the 3D structure of the instructed object. As illustrated on the left of Fig. 1, scene-level 3D information captures only partial target geometry under occlusion. This motivates using canonical target geometry for spatial supervision.

To address this problem, we propose Mind-VLA, an instruction-aware spatial representation alignment method for VLA models (Fig. 1(c)). Mind-VLA aligns the VLA representation with 3D features of the instruction-specified target object instead of only using scene-level 3D features. Specifically, Mind-VLA first obtains the target object referred to by the instruction. It then prepares the canonical target views and extracts the corresponding VAE and VGGT features. Finally, the latent representation of the VLA model is aligned with these features to enable instruction-aware 3D understanding. In practice, VAE latent prediction encourages the model to encode the target object’s geometry, while VGGT feature alignment guides intermediate VLA features toward target-object 3D structure. These auxiliary supervision modules are only used during training and are removed at inference time, so Mind-VLA adds negligible deployment overhead.

Our main contributions are as follows:

- We identify instruction-agnostic 3D modeling as a limitation of existing 3D-aware VLA methods. Since their 3D information is built from the whole scene, they do not explicitly emphasize the object specified by the language instruction, which can hurt fine-grained manipulation and target-occlusion tasks.
- We propose Mind-VLA, which aligns VLA representations with target-object 3D features. Mind-VLA uses

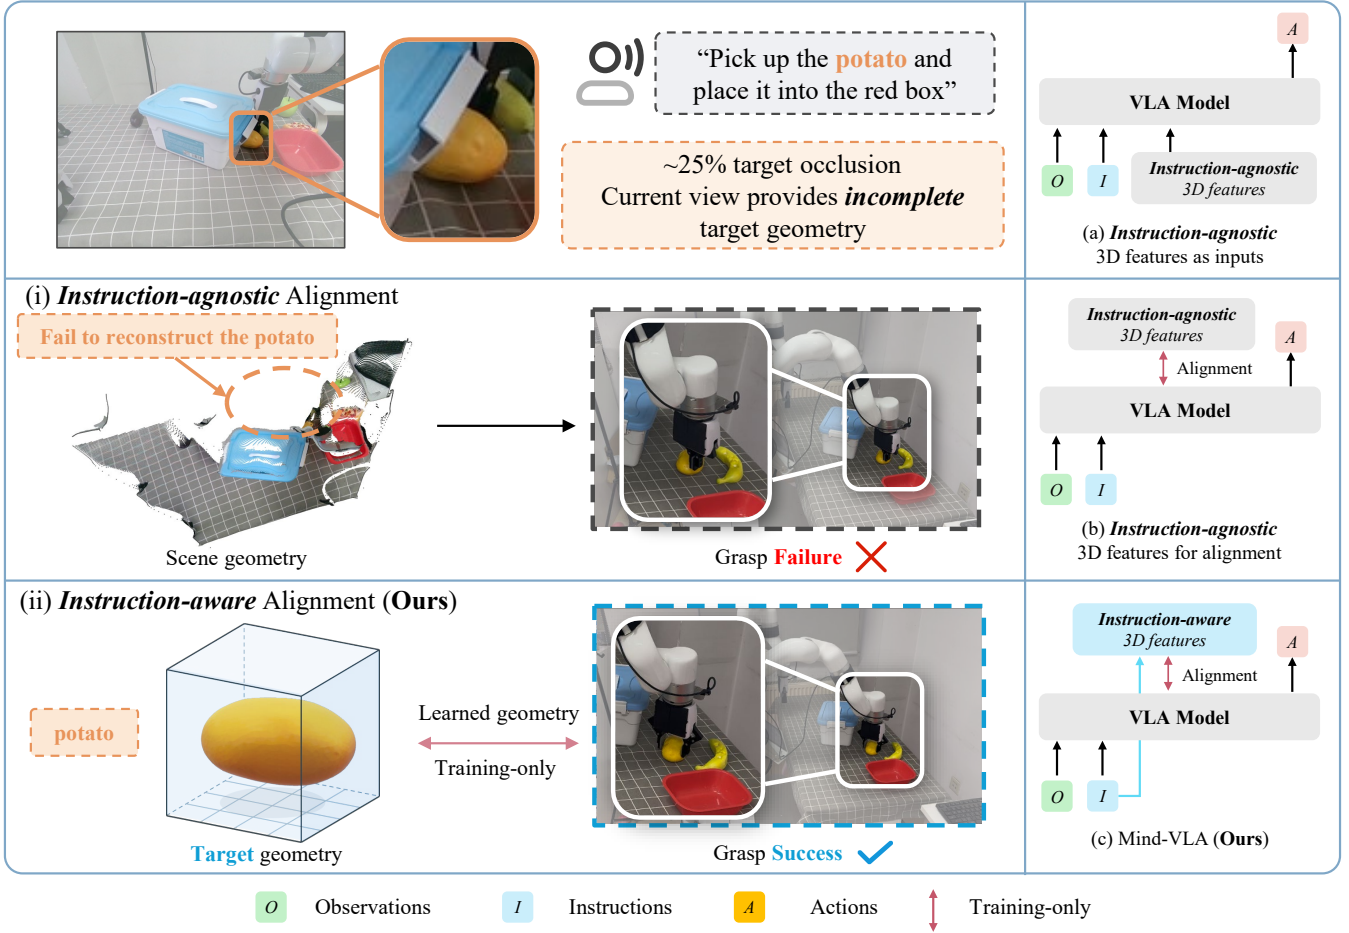


Fig. 1. **Comparison of 3D-aware VLA paradigms.** The left example shows that scene-level 3D information captures incomplete target geometry under occlusion. Mind-VLA instead uses canonical target geometry for instruction-aware spatial supervision. Existing 3D-aware VLA methods are fundamentally instruction-agnostic. They either provide instruction-agnostic 3D features as additional model inputs (a) [6], [5], [7] or align VLA representations with instruction-agnostic 3D features during training (b) [8], [9], neglecting the 3D geometry of the specific target object designated by the language instruction. (c) Mind-VLA (Ours) aligns VLA representations with instruction-aware 3D features during training, enabling instruction-aware 3D understanding.

canonical target-view VAE latent prediction and target-object VGGT feature alignment during training, enabling instruction-aware 3D understanding.

- Mind-VLA achieves 94.4% average success on LIBERO and 4.47 average completed length on CALVIN with a compact 345M-parameter backbone. On real-robot tasks with target occlusion, Mind-VLA reaches 54% average success, outperforming the matched scene-VGGT control by 26 percentage points in our real-robot comparison.

II. RELATED WORK

End-to-end visuomotor learning has moved from task-specific methods [10], [11] to generalist VLA models [12], [1], [3], [2], [4]. Recent variants add spatial encodings [13], visual traces [14], diffusion decoding [15], and hybrid generation [16]. These methods strengthen modeling from RGB and language, but offer little explicit pressure to encode the 3D geometry of the instruction-specified object. To supply this geometry, recent work follows two directions.

The first provides explicit 3D inputs. Before VLAs, 3D manipulation methods showed the value of explicit 3D representations through voxel [17], point [18], virtual-view [19], and diffusion [20] designs, typically with multi-view RGB-D sensing and narrower task scope. Recent 3D-aware VLAs carry this to inference by feeding point clouds [5], [6], stereo observations [21], or RGB-D orthographic views [7]; while effective, they add depth or 3D preprocessing and build full-scene rather than target-object-specific geometry. The second direction instead supplies 3D information only as training supervision: Spatial Forcing (SF) [8] aligns VLA features to VGGT [22] scene features, GLaD [9] distills them across layers, and QDepth-VLA [23] predicts quantized depth tokens. This avoids deployment-time 3D modules, but the supervision remains global: the same scene representation supervises the model regardless of the instructed object.

A related family uses predictive auxiliary objectives to enrich model representations: DreamVLA [24] predicts dynamic regions, depth, and semantic cues, PALM [25] uses progress-aware affordances, and Geometry Forcing [26]

transfers VGGT features through video generation. Mind-VLA is complementary: it keeps inference inputs unchanged while making the supervision instruction-aware, aligning VLA representations with the canonical target views and their VGGT features rather than scene-level geometry alone.

III. METHOD

The overall framework of Mind-VLA is illustrated in Fig. 2. We present the method in four parts. Sec. III-A reviews the basic VLA formulation and diffusion-based action generation. Sec. III-B presents **Instruction-Aware Target Acquisition**, which identifies instruction-specified target objects and their manipulation order. Sec. III-C introduces **Instruction-Aware Spatial Representation Alignment**, which constructs canonical target views for target representation prediction and geometric feature alignment. Finally, Sec. III-D describes the overall training objective and inference procedure.

A. Preliminaries

Vision-Language-Action (VLA) models aim to predict executable robot actions conditioned on visual observations and language instructions, optionally together with the robot proprioceptive state. Specifically, at timestep t , the model takes the visual observation $\mathbf{o}_t$, language instruction ℓ , and proprioceptive state $\mathbf{s}_t$ as inputs and jointly encodes these multimodal signals into an action-related latent representation $\mathbf{c}_t$. Based on this representation, the action head predicts a continuous action sequence $\mathbf{a}_{t:t+n-1}$ over the next n timesteps.

For diffusion-based action generation, the action head is conditioned on $\mathbf{c}_t$ and iteratively denoises a noisy action sequence. The action prediction objective is defined as

$$\mathcal{L}_{\text{act}} = \mathbb{E}_{\tau, \epsilon} \left[\left\| \epsilon - \epsilon_{\theta}(\sqrt{\bar{\alpha}_{\tau}} \mathbf{a}_{t:t+n-1} + \sqrt{1 - \bar{\alpha}_{\tau}} \epsilon, \tau, \mathbf{c}_t) \right\|_2^2 \right], \quad (1)$$

where ϵ_{θ} denotes the action denoising network, $\epsilon \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$ is Gaussian noise added to the action sequence, τ denotes the diffusion timestep, and $\bar{\alpha}_{\tau}$ is the cumulative coefficient of the corresponding noise schedule. However, the action prediction objective alone does not explicitly constrain the VLA representations to capture the 3D structure of the instruction-specified target object.

B. Instruction-Aware Target Acquisition

To construct an instruction-aware VLA method, we need to identify the target objects that are directly relevant to robot manipulation under the language instruction. Given a language instruction ℓ and its corresponding robot manipulation sequence, we define an *Instruction-Aware Target* as an object described by the instruction that needs to interact with the robot manipulator. However, a manipulation scene may contain multiple visually or semantically similar objects, while long-horizon tasks may involve multiple targets that need to be manipulated in a particular order. We therefore

need to identify the actual manipulated instances and determine their manipulation order. Specifically, given a language instruction ℓ , e.g., “put the potato and then the banana into the basket,” we first use Qwen3-VL [27] to parse the instruction and extract an ordered target phrase sequence $\mathcal{P}(\ell) = \{p_m\}_{m=1}^M$ according to the task execution order, e.g., $\mathcal{P}(\ell) = [\text{“potato”}, \text{“banana”}]$. For each target phrase p_m , we use a relatively low segmentation threshold and combine the target phrase with its generic category prompt to generate a candidate object set $\mathcal{C}_m$ from the robot video sequence using SAM 3 [28].

We then identify the manipulated target using a fixed candidate-ranking strategy that combines CLIP-based semantic similarity [29], SAM 3 segmentation confidence, and temporal motion cues from the demonstration. For each target phrase, the highest-ranked candidate is reconstructed into a 3D mesh using SAM 3D Objects [30] and used to construct the canonical target views in Sec. III-C. The entire process relies only on RGB observations, language instructions, and interaction cues from the demonstrations, without using simulator object IDs or ground-truth target meshes.

C. Instruction-Aware Spatial Representation Alignment

After obtaining the instruction-aware targets, we need to transform their 3D spatial information into suitable supervision for VLA training. Since 3D meshes are variable-length, unordered, and lack a unified parameterization, we center and scale-normalize each reconstructed object mesh and render a fixed set of three orthographic views along its principal axes. The resulting canonical target views provide a consistent object-centric representation of the target geometry, reducing variations caused by camera viewpoint, scene pose, and visibility. As shown in Fig. 2, these views are then used for latent prediction and geometric feature alignment.

a) *Canonical target-view latent prediction*: To reduce training overhead, we independently encode the three canonical views using a frozen Stable Diffusion VAE [31] and stack the resulting latent representations into the canonical target-view latent $\mathbf{Z}_m$. At each timestep, we additionally introduce a group of object-level queries. An attention mask restricts their information interaction, allowing them to access the language, proprioceptive-state, and visual tokens from the current and historical timesteps. These object-level queries are then jointly decoded to predict the latent representation $\hat{\mathbf{Z}}_t$ of the three canonical views. The training objective is defined as

$$\mathcal{L}_{\text{tri}} = \frac{1}{K} \sum_{t=1}^K \text{MSE}(\hat{\mathbf{Z}}_t, \mathbf{Z}_{m_t}), \quad (2)$$

where K denotes the number of observation timesteps, $m_t \in \{1, \dots, M\}$ is the active target index associated with timestep t , and $\mathbf{Z}_{m_t}$ denotes the canonical target-view latent of the corresponding target object. For single-target tasks, $m_t = 1$ for all timesteps.

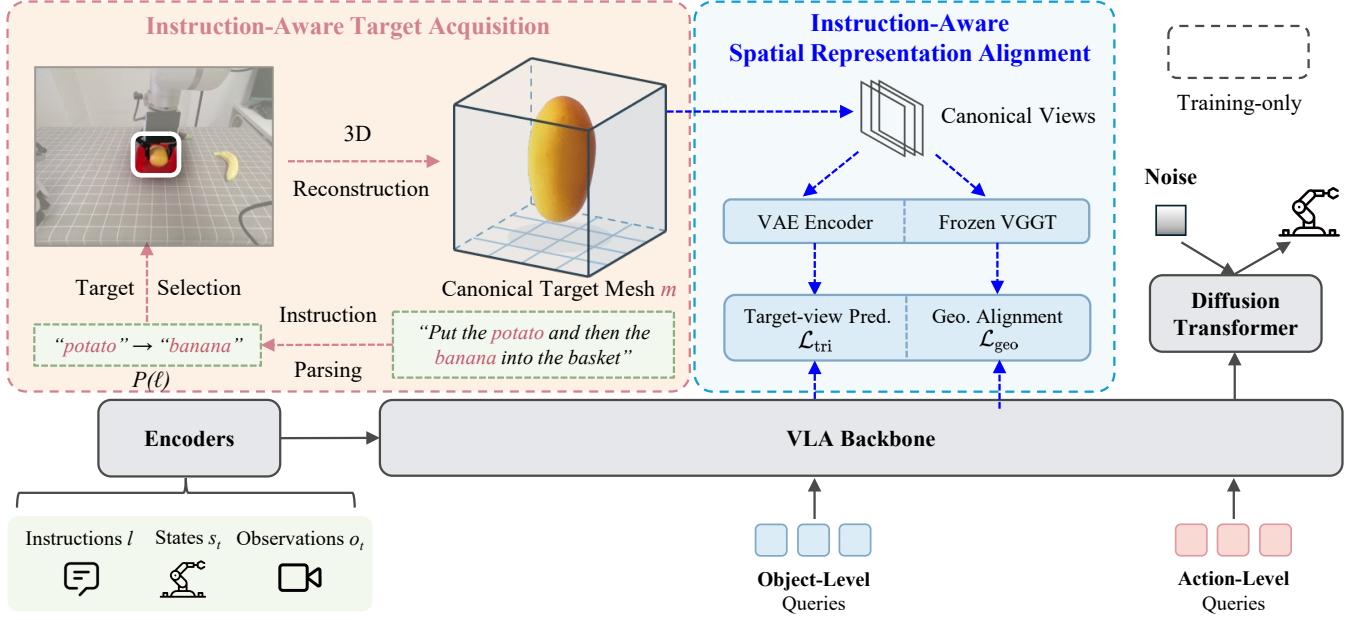


Fig. 2. **Mind-VLA overview.** Instructions, states, and observations are processed by the VLA backbone for action prediction. Mind-VLA parses the instruction into an ordered target sequence, identifies the corresponding targets from robot demonstrations, and constructs their canonical target views as training-only supervision. Object-level queries predict the corresponding canonical target-view latent, while intermediate VLA representations are aligned with target-object VGGT features.

b) Target-object VGGT feature alignment: Using solely canonical target-view latent prediction, Mind-VLA could miss explicit geometric supervision for intermediate VLA representations. Target-object VGGT feature alignment is thereby introduced to provide direct supervision of target-object 3D geometry and cross-view information. Specifically, the three canonical views are jointly fed into a frozen VGGT [22]. At each selected representation level j , the patch tokens of each view are mean-pooled and then averaged across the three views to obtain the target-object feature $\mathbf{g}_{m,j}$. At the corresponding VLA layer j , all visual tokens at timestep t are mean-pooled into an intermediate representation $\bar{\mathbf{h}}_{t,j}$, which is mapped into the VGGT feature space using a learnable projection ϕ_j . The geometric feature alignment objective is defined as

$$\mathcal{L}_{\text{geo}} = \frac{1}{JK} \sum_{t=1}^K \sum_{j=1}^J [1 - \cos(\phi_j(\bar{\mathbf{h}}_{t,j}), \mathbf{g}_{m_t,j})], \quad (3)$$

where J denotes the number of aligned representation levels. Unlike Eq. (2), which supervises the object-level query output, Eq. (3) directly constrains intermediate VLA representations to encode the 3D geometric structure and cross-view information associated with the target object specified by the language instruction.

c) Temporal target assignment: For tasks involving multiple sequential manipulation targets, we further assign each timestep to its corresponding active target to construct the correct target supervision. For grasping operations, target transitions are localized according to the opening and closing cycles of the gripper; for pushing operations, interaction

stages are identified from significant motion changes in CoTracker [32] point trajectories. For tasks with more complex interaction patterns, we jointly consider gripper states and object motion cues. We then temporally match the detected interaction stages with the ordered target sequence from Sec. III-B to determine m_t . Once the current manipulation ends, supervision switches to the next target from the following timestep, associating the approach motion with the upcoming target.

D. Overall Training and Inference

We instantiate Mind-VLA on DreamVLA [24] as the base VLA model. Following DreamVLA, we use the future-frame prediction objective $\mathcal{L}_{\text{pred}}$ and dynamic-region prediction objective $\mathcal{L}_{\text{dyn}}$ together with the action prediction objective $\mathcal{L}_{\text{act}}$. The resulting base objective is defined as

$$\mathcal{L}_{\text{base}} = \mathcal{L}_{\text{act}} + \lambda_{\text{pred}} \mathcal{L}_{\text{pred}} + \lambda_{\text{dyn}} \mathcal{L}_{\text{dyn}}. \quad (4)$$

We further introduce the proposed instruction-aware spatial objectives, and the overall training objective of Mind-VLA is defined as

$$\mathcal{L}_{\text{MindVLA}} = \mathcal{L}_{\text{base}} + \lambda_{\text{tri}} \mathcal{L}_{\text{tri}} + \lambda_{\text{geo}} \mathcal{L}_{\text{geo}}, \quad (5)$$

where λ_{tri} and λ_{geo} control the weights of canonical target-view latent prediction and target-object VGGT feature alignment, respectively.

During training, Mind-VLA uses Instruction-Aware Target Acquisition and Instruction-Aware Spatial Representation Alignment to provide instruction-aware 3D supervision. At inference, the learned object-level queries are retained, while instruction parsing, 3D reconstruction, VAE encoding, and

VGGT feature extraction are no longer required. Mind-VLA therefore requires no additional 3D inputs or 3D preprocessing at inference time.

IV. EXPERIMENTS

We evaluate Mind-VLA on LIBERO and CALVIN (Sec. IV-B), analyze the effects of instruction-aware spatial supervision and the learned representations (Secs. IV-C and IV-D), and further evaluate robustness to target occlusion in real-robot manipulation (Sec. IV-E).

A. Experimental Setup

a) Base VLA and implementation: We follow the model architecture and training settings of DreamVLA [24] unless otherwise specified. Mind-VLA additionally introduces a separate group of object-level queries, forming an independent query branch from the original Dream queries. During training, the original Dream queries and object-level queries are mutually masked, while the action queries can attend to both query branches, allowing the target-specific representations learned by the object-level queries to directly contribute to action prediction.

Mind-VLA uses nine object-level queries decoded by a two-layer MLP. For geometric alignment, we use $J = 4$ representation levels, pairing VLA layers $\{3, 6, 9, 11\}$ with VGGT layers $\{4, 11, 17, 23\}$ through two-layer projection heads (all 0-indexed). We set $\lambda_{\text{tri}} = 0.01$ and $\lambda_{\text{geo}} = 0.1$. A single set of interaction thresholds is used for all LIBERO-Long demonstrations. On an RTX 5090, the retained object-level queries increase end-to-end action-chunk latency from 70.5 to 73.4 ms.

b) Benchmarks and protocols: We evaluate Mind-VLA on LIBERO [33] and CALVIN ABC-D [34], following the corresponding experimental protocols of DreamVLA [24] on both benchmarks. LIBERO comprises Spatial, Object, Goal, and Long suites, each with ten tasks and 50 demonstrations per task. Models are pretrained on LIBERO-90 and finetuned separately for each suite, and we report 20 rollouts per task. For CALVIN, we use the video-prediction-pretrained initialization and language-annotated demonstrations from environments A–C, and evaluate on the standard 1000 five-instruction sequences in the unseen environment D. We report success over one to five consecutive tasks and the average completed length. The DreamVLA results in Table II are taken from the original paper [24].

B. Main Benchmark Results

Table I compares Mind-VLA with representative compact and large VLA models on LIBERO. Using the same GPT-2-M backbone as DreamVLA, Mind-VLA achieves 94.4% average success, improving over the 92.6% reported by DreamVLA [24]. The largest gain appears on LIBERO-Object, where success increases from 94.0% to 98.0%. With a compact 345M-parameter backbone, Mind-VLA remains competitive with substantially larger VLA models.

Table II reports CALVIN ABC-D results. Mind-VLA reaches 79.4% success on Task 5 and an average completed

TABLE I
LIBERO BENCHMARK RESULTS. SUCCESS RATE (%) ON FOUR TASK SUITES. [†]LARGE VLAS (3–7 B PARAMETERS) ARE SHOWN FOR REFERENCE; MIND-VLA USES A COMPACT BACKBONE (~345M). BEST COMPACT-BACKBONE RESULTS ARE **BOLD**; BEST OVERALL ARE UNDERLINED.

Method	Backbone	Spatial	Object	Goal	Long	Avg.
<i>Compact-backbone methods</i>						
Diff. Policy [10]	–	78.3	92.5	68.3	50.5	72.4
MDT [35]	<300M	78.5	87.5	73.5	64.8	76.1
Octo [3]	93M	78.9	85.7	84.6	51.1	75.1
SmolVLA [36]	0.45B	90.0	96.0	92.0	71.0	87.3
DreamVLA [24]	345M	97.5	94.0	89.5	89.5	92.6
Mind-VLA (Ours)	345M	98.0	98.0	92.0	<u>89.5</u>	<u>94.4</u>
<i>Large VLAs[†] (3–7 B parameters)</i>						
OpenVLA [2]	Llama-2-7B	84.7	88.4	79.2	53.7	76.5
TraceVLA [14]	Llama-2-7B	84.6	85.2	75.1	54.1	74.8
SpatialVLA [13]	PaliGemma-4B	88.2	89.9	78.6	55.5	78.1
CoT-VLA [37]	Llama-2-7B	87.5	91.6	87.6	69.0	83.9
CogACT [15]	Llama-2-7B	97.2	98.0	90.2	88.8	93.6
GLaD [9]	Llama-2-7B	95.0	97.4	94.4	89.4	94.1
π_0 [4]	PaliGemma-3B	96.8	<u>98.8</u>	<u>95.8</u>	85.2	94.2

TABLE II
CALVIN ABC-D RESULTS. SUCCESS RATE FOR COMPLETING 1–5 CONSECUTIVE TASKS AND AVERAGE COMPLETED LENGTH (AVG. LEN.) OVER 1000 ROLLOUTS. DREAMVLA RESULTS ARE TAKEN FROM THE ORIGINAL PAPER [24]. [†]LARGE VLAS ARE SHOWN FOR REFERENCE.

Method	Task 1	Task 2	Task 3	Task 4	Task 5	Avg. Len.
GR-1 [38]	85.4	71.2	59.6	49.7	40.1	3.06
OpenVLA [†] [2]	91.3	77.8	62.0	52.1	43.5	3.27
CLOVER [39]	96.0	83.5	70.8	57.5	45.4	3.53
$\pi_0^{\dagger}$ [4]	93.8	85.0	76.7	68.1	59.9	3.84
Seer [40]	96.3	91.6	86.1	80.3	74.0	4.28
VPP [41]	95.7	91.2	86.3	81.0	75.0	4.29
DreamVLA [24]	98.2	94.6	89.5	83.4	78.1	4.44
Mind-VLA (Ours)	98.0	95.2	89.9	84.6	79.4	4.47

length of 4.47, compared with 78.1% and 4.44 reported by DreamVLA [24], respectively.

C. Instruction-Aware Spatial Alignment Analysis

Table III provides controlled comparisons of scene-level and target-object spatial supervision under the same backbone, pretrained checkpoint, base training objective, and optimization settings.

a) Target-object alignment: We first isolate the effect of replacing scene-level geometric supervision with instruction-aware target-object supervision. Without $\mathcal{L}_{\text{tri}}$, replacing scene-level VGGT features with canonical target-view features improves the average success from 92.4% to 93.5% (A2→A3), including a gain from 92.5% to 97.5% on LIBERO-Object. The same trend holds with canonical target-view latent prediction: A4 and A5 differ only in the VGGT alignment target, and target-object alignment improves the average from 92.8% to 93.9%. These comparisons show that the improvement comes from making spatial supervision instruction-aware rather than merely introducing VGGT

TABLE III

CONTROLLED LIBERO ABLATION. ALL VARIANTS USE THE SAME BACKBONE, PRETRAINED CHECKPOINT, BASE TRAINING OBJECTIVE, AND OPTIMIZATION RECIPE. A4 AND A5 DIFFER ONLY IN THE VGGT ALIGNMENT TARGET, AND A6 ADDS TEMPORAL TARGET ASSIGNMENT TO A5.

ID	Configuration	$\mathcal{L}_{\text{tri}}$	VGGT target	Spatial	Object	Goal	Long	Avg.
A0	Base model	–	–	97.0	93.5	89.5	85.0	91.3
A1	$\mathcal{L}_{\text{tri}}$ only	✓	–	97.5	95.0	91.0	86.5	92.5
A2	Matched SF reimplementation	–	Scene RGB	98.0	92.5	90.0	89.0	92.4
A3	$\mathcal{L}_{\text{geo}}$ only	–	Canonical target views	98.0	97.5	91.5	87.0	93.5
A4	$\mathcal{L}_{\text{tri}}$ + scene-VGGT control	✓	Scene RGB	97.5	94.0	89.5	90.0	92.8
A5	Mind-VLA w/o target assignment	✓	Canonical target views	98.0	98.0	92.0	87.5	93.9
A6	Mind-VLA full	✓	Canonical target views	98.0	98.0	92.0	89.5	94.4

alignment.

b) Target selection and canonical geometry: We then separate the effects of instruction-aware target selection and canonical target geometry. On LIBERO-Object, scene-VGGT alignment achieves 94.0% success. In an additional target-crop control, replacing scene-VGGT features with features from the instruction-specified target object improves the success rate to 96.5%, showing the benefit of focusing spatial supervision on the instructed target. Using canonical target-view alignment further improves the success rate to 98.0%, suggesting that canonical target views provide more consistent target-object spatial supervision by reducing variations caused by camera viewpoint, scene pose, and visibility.

c) Supervision objectives and temporal assignment: We further examine how the proposed supervision objectives and temporal assignment contribute to performance. The two target-object objectives provide complementary supervision, with $\mathcal{L}_{\text{tri}}$ supervising object-level query predictions and $\mathcal{L}_{\text{geo}}$ constraining intermediate VLA representations. Their combination achieves 93.9% average success (A5). Temporal target assignment further improves LIBERO-Long from 87.5% to 89.5% (A5→A6), supporting its role in sequential multi-target manipulation.

d) Automatic supervision construction: We additionally evaluate the automatically constructed supervision on LIBERO from instruction parsing, target selection, and temporal consistency. The target sequences are correctly parsed and the automatic pipeline correctly selects the manipulated target for all 40 tasks. On LIBERO-Long, 494 of 500 demonstrations pass the phase-consistency check between the detected interaction events and parsed target phases. These results show that the automatic pipeline can reliably identify instruction-specified targets and construct temporally consistent supervision.

D. Representation Analysis

To examine whether Mind-VLA learns target-specific geometric representations, we freeze each model and train layer-wise linear probes under a ten-fold leave-one-object-out protocol. Target geometry decodability is measured by centered cosine similarity to the held-out target descriptor, while target association is evaluated using ten-way top-1 retrieval accuracy. DreamVLA, Mind-VLA without $\mathcal{L}_{\text{geo}}$, and a Vanilla VLA are included as controls.

TABLE IV

REAL-ROBOT SUCCESS RATE (%). THIRTY TRIALS PER TASK. THE SCENE-VGGT VARIANT IS THE MATCHED CONTROL, SHARING MIND-VLA’S ARCHITECTURE AND LOSSES AND DIFFERING ONLY IN THE VGGT ALIGNMENT TARGET; OPENVLA AND SEER ARE EXTERNAL REFERENCES.

Task	OpenVLA	Seer	Scene-VGGT	Mind-VLA
<i>Normal</i>				
Pick–Banana	33	43	63	70
Pick–Potato	10	30	37	57
Drawer	40	63	70	73
Place–Banana	27	67	70	80
Place–Potato	20	43	47	63
<i>Occluded (~25%)</i>				
Pick–Banana	3	23	27	57
Pick–Potato	7	13	20	43
Drawer	10	30	37	63

a) Target geometry: As shown in Fig. 3(a), Mind-VLA encodes substantially more target-geometry information than the baselines, reaching a centered cosine similarity of 0.75 at layer 11, while DreamVLA and Vanilla VLA remain around 0.3–0.4. Removing $\mathcal{L}_{\text{geo}}$ markedly reduces the decodability, validating the effect of target-object geometric alignment.

b) Target retrieval: We then examine whether the decoded geometry is associated with the instruction-specified target. As shown in Fig. 3(b), Mind-VLA achieves 29% top-1 target retrieval accuracy, substantially above the 10% chance level. Removing the target identity from the instruction reduces geometry decodability to 0.41–0.45 and retrieval accuracy to 2–4%, demonstrating that the learned geometric representation is instruction-aware.

E. Real-Robot Occlusion Robustness

Finally, we examine whether the learned instruction-aware geometry translates into robust manipulation under real-world target occlusion (Fig. 4). We use one arm of a dual xArm 6 setup with a static RealSense D455 and a wrist-mounted D435 (Fig. 4(a)). Following DreamVLA [24], we first pretrain the base VLA on DROID [42] without auxiliary objectives. Mind-VLA and the matched scene-VGGT control are initialized from this pretrained model. OpenVLA and Seer are initialized from their respective released pretrained checkpoints. All methods are then finetuned on the same 50

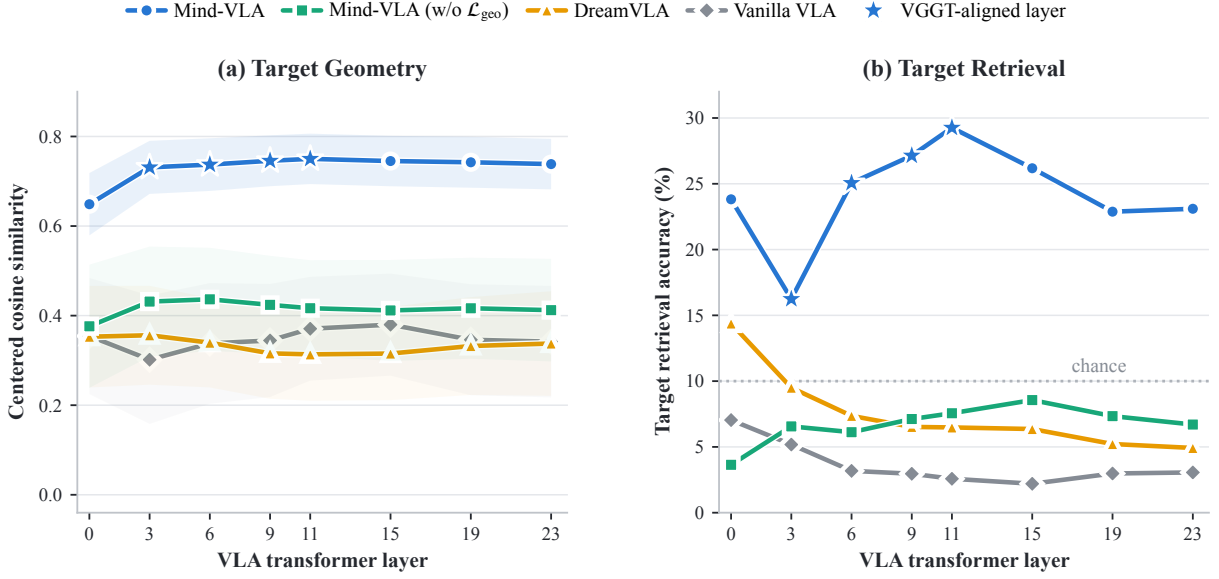


Fig. 3. **Layer-wise representation analysis of Mind-VLA.** Layer-wise linear probes are trained under a ten-fold leave-one-object-out protocol. (a) Target geometry is evaluated by centered cosine similarity to the held-out target descriptor; shaded bands show ± 1 s.e.m. (b) Target retrieval is evaluated by ten-way top-1 accuracy, with 10% chance accuracy. Star markers indicate the Mind-VLA layers directly aligned with VGGT features by $\mathcal{L}_{geo}$.

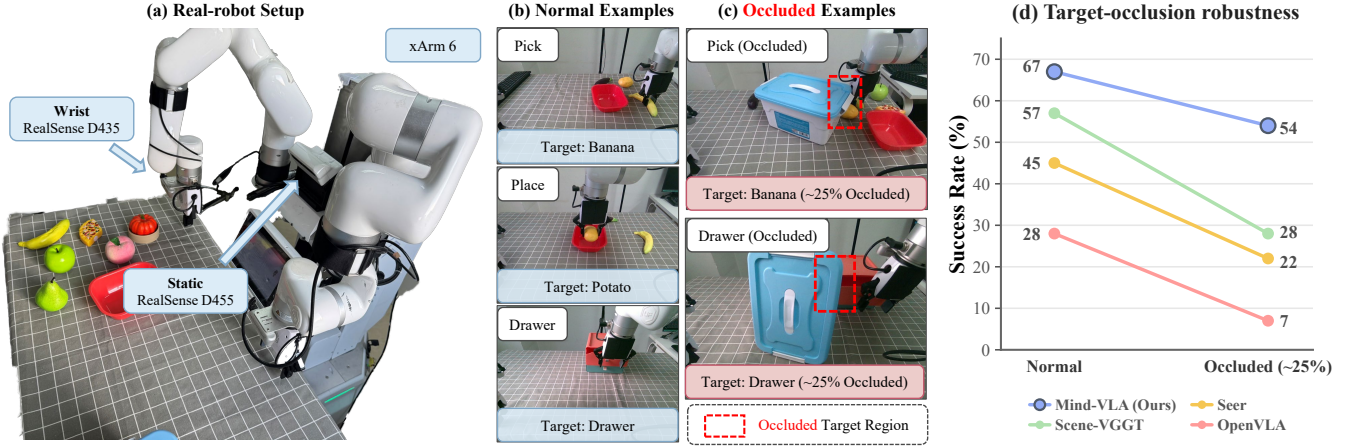


Fig. 4. **Real-robot evaluation.** (a) Robot setup. (b) Normal task examples. (c) Examples under approximately 25% target occlusion. (d) Robustness to target occlusion. The averages in (d) are computed over the three tasks evaluated under both normal and occluded settings.

demonstrations per task following their respective training recipes for fair comparison.

We evaluate Pick, Place, and Drawer, with 30 trials per reported cell. Before each trial, the robot is reset to the same preset initial arm pose, while the task objects are randomly repositioned within predefined task-specific workspace regions. Pick succeeds when the specified object is held stably for at least 10 s; Place when it reaches the designated region; and Drawer when it is fully closed. A wrong-object grasp counts as failure. Occluded Pick and Drawer use a physical occluder that blocks approximately 25% of the target, and any arm-occluder contact counts as failure.

As shown in Table IV and Fig. 4(d), Mind-VLA achieves 54% average success under approximately 25% target oc-

clusion, outperforming the matched scene-VGGT control by 26 percentage points (54% vs. 28%). From normal to occluded settings, Mind-VLA drops by only 13 points (67% to 54%), while the scene-VGGT control drops by 29 points (57% to 28%). Seer and OpenVLA also show larger degradation, decreasing from 45% to 22% and from 28% to 7%, respectively. These results demonstrate the advantage of instruction-aware target geometry for robust manipulation under target occlusion.

V. CONCLUSION

To address manipulation failures caused by instruction-agnostic 3D modeling, we propose Mind-VLA, which aligns VLA representations with the 3D geometry of instruction-specified targets rather than the entire scene. Mind-VLA

uses canonical target geometry to provide instruction-aware spatial supervision during training, without requiring additional 3D inputs or 3D preprocessing at inference. Experiments on LIBERO, CALVIN, and real robots demonstrate improved manipulation performance and stronger robustness to target occlusion. These results highlight the importance of instruction-aware spatial supervision for VLA learning.

REFERENCES

- [1] B. Zitkovich, T. Yu, S. Xu, P. Xu, T. Xiao, F. Xia, J. Wu, P. Wohlhart, S. Welker, A. Wahid, *et al.*, “Rt-2: Vision-language-action models transfer web knowledge to robotic control,” in *Conference on Robot Learning*. PMLR, 2023, pp. 2165–2183.
- [2] M. J. Kim, K. Pertsch, S. Karamcheti, T. Xiao, A. Balakrishna, S. Nair, R. Rafailov, E. Foster, G. Lam, P. Sanketi, *et al.*, “Openvla: An open-source vision-language-action model,” *arXiv preprint arXiv:2406.09246*, 2024.
- [3] O. M. Team, D. Ghosh, H. Walke, K. Pertsch, K. Black, O. Mees, S. Dasari, J. Hejna, T. Kreiman, C. Xu, *et al.*, “Octo: An open-source generalist robot policy,” *arXiv preprint arXiv:2405.12213*, 2024.
- [4] K. Black, N. Brown, D. Driess, A. Esmail, M. Equi, C. Finn, N. Fusai, L. Groom, K. Hausman, B. Ichter, *et al.*, “ π_0 : A vision-language-action flow model for general robot control,” *arXiv preprint arXiv:2410.24164*, 2024.
- [5] C. Li, J. Wen, Y. Peng, Y. Peng, and Y. Zhu, “Pointvla: Injecting the 3d world into vision-language-action models,” *IEEE Robotics and Automation Letters*, vol. 11, no. 3, pp. 2506–2513, 2026.
- [6] L. Sun, B. Xie, Y. Liu, H. Shi, T. Wang, and J. Cao, “Geovla: Empowering 3d representations in vision-language-action models,” *arXiv preprint arXiv:2508.09071*, 2025.
- [7] I. Singh, A. Goyal, S. Birchfield, D. Fox, A. Garg, and V. Blukis, “Og-vla: Orthographic image generation for 3d-aware vision-language action model,” *arXiv preprint arXiv:2506.01196*, 2025.
- [8] F. Li, W. Song, H. Zhao, J. Wang, P. Ding, D. Wang, L. Zeng, and H. Li, “Spatial forcing: Implicit spatial representation alignment for vision-language-action model,” *arXiv preprint arXiv:2510.12276*, 2025.
- [9] M. Guo, M. Cao, J. Tao, R. Xu, Y. Yan, X. Liang, I. Laptev, and X. Chang, “Glad: Geometric latent distillation for vision-language-action models,” *arXiv preprint arXiv:2512.09619*, 2025.
- [10] C. Chi, Z. Xu, S. Feng, E. Cousineau, Y. Du, B. Burchfiel, R. Tedrake, and S. Song, “Diffusion policy: Visuomotor policy learning via action diffusion,” *The International Journal of Robotics Research*, vol. 44, no. 10-11, pp. 1684–1704, 2025.
- [11] T. Z. Zhao, V. Kumar, S. Levine, and C. Finn, “Learning fine-grained bimanual manipulation with low-cost hardware,” *arXiv preprint arXiv:2304.13705*, 2023.
- [12] A. Broyan, N. Brown, J. Carbajal, Y. Chebotar, J. Dabis, C. Finn, K. Gopalakrishnan, K. Hausman, A. Herzog, J. Hsu, *et al.*, “Rt-1: Robotics transformer for real-world control at scale,” *arXiv preprint arXiv:2212.06817*, 2022.
- [13] D. Qu, H. Song, Q. Chen, Y. Yao, X. Ye, Y. Ding, Z. Wang, J. Gu, B. Zhao, D. Wang, *et al.*, “Spatialvla: Exploring spatial representations for visual-language-action model,” *arXiv preprint arXiv:2501.15830*, 2025.
- [14] R. Zheng, Y. Liang, S. Huang, J. Gao, H. Daumé III, A. Kolobov, F. Huang, and J. Yang, “Tracevla: Visual trace prompting enhances spatial-temporal awareness for generalist robotic policies,” *arXiv preprint arXiv:2412.10345*, 2024.
- [15] Q. Li, Y. Liang, Z. Wang, L. Luo, X. Chen, M. Liao, F. Wei, Y. Deng, S. Xu, Y. Zhang, *et al.*, “Cogact: A foundational vision-language-action model for synergizing cognition and action in robotic manipulation,” *arXiv preprint arXiv:2411.19650*, 2024.
- [16] J. Liu, H. Chen, P. An, Z. Liu, R. Zhang, C. Gu, X. Li, Z. Guo, S. Chen, M. Liu, *et al.*, “Hybridvla: Collaborative diffusion and autoregression in a unified vision-language-action model,” *arXiv preprint arXiv:2503.10631*, 2025.
- [17] M. Shridhar, L. Manuelli, and D. Fox, “Perceiver-actor: A multi-task transformer for robotic manipulation,” in *Conference on Robot Learning*. PMLR, 2023, pp. 785–799.
- [18] T. Gervet, Z. Xian, N. Gkanatsios, and K. Fragkiadaki, “Act3d: 3d feature field transformers for multi-task robotic manipulation,” *arXiv preprint arXiv:2306.17817*, 2023.
- [19] A. Goyal, J. Xu, Y. Guo, V. Blukis, Y.-W. Chao, and D. Fox, “Rvt: Robotic view transformer for 3d object manipulation,” in *Conference on Robot Learning*. PMLR, 2023, pp. 694–710.
- [20] T.-W. Ke, N. Gkanatsios, and K. Fragkiadaki, “3d diffuser actor: Policy diffusion with 3d scene representations,” *arXiv preprint arXiv:2402.10885*, 2024.
- [21] S. Deng, M. Yan, Y. Zheng, J. Su, W. Zhang, X. Zhao, H. Cui, Z. Zhang, and H. Wang, “Stereovla: Enhancing vision-language-action models with stereo vision,” *arXiv preprint arXiv:2512.21970*, 2025.
- [22] J. Wang, M. Chen, N. Karaev, A. Vedaldi, C. Rupprecht, and D. Novotny, “Vggt: Visual geometry grounded transformer,” in *Proceedings of the Computer Vision and Pattern Recognition Conference*, 2025, pp. 5294–5306.
- [23] Y. Li, Y. Chen, M. Zhou, H. Li, Z. Zhang, and D. Zhao, “Qdepthvla: quantized depth prediction as auxiliary supervision for vision-language-action models,” *arXiv preprint arXiv:2510.14836*, 2025.
- [24] W. Zhang, H. Liu, Z. Qi, Y. Wang, X. Yu, J. Zhang, R. Dong, J. He, F. Lu, H. Wang, *et al.*, “Dreamvla: a vision-language-action model dreamed with comprehensive world knowledge,” *arXiv preprint arXiv:2507.04447*, 2025.
- [25] Y. Liu, J. Zhu, Y. Mo, G. Li, X. Cao, J. Jin, Y. Shen, Z. Li, T. Yu, W. Yuan, *et al.*, “Palm: Progress-aware policy learning via affordance reasoning for long-horizon robotic manipulation,” *arXiv preprint arXiv:2601.07060*, 2026.
- [26] H. Wu, D. Wu, T. He, J. Guo, Y. Ye, Y. Duan, and J. Bian, “Geometry forcing: Marrying video diffusion and 3d representation for consistent world modeling,” *arXiv preprint arXiv:2507.07982*, 2025.
- [27] S. Bai, Y. Cai, R. Chen, K. Chen, X. Chen, Z. Cheng, L. Deng, W. Ding, C. Gao, C. Ge, *et al.*, “Qwen3-vl technical report,” *arXiv preprint arXiv:2511.21631*, 2025.
- [28] N. Carion, L. Gustafson, Y.-T. Hu, S. Debnath, R. Hu, D. Suris Coll-Vinent, C. Ryal, K. V. Alwala, H. Khedr, A. Huang, *et al.*, “Sam 3: Segment anything with concepts,” in *International Conference on Learning Representations*, vol. 2026, 2026, pp. 138 846–138 923.
- [29] A. Radford, J. W. Kim, C. Hallacy, A. Ramesh, G. Goh, S. Agarwal, G. Sastry, A. Askell, P. Mishkin, J. Clark, *et al.*, “Learning transferable visual models from natural language supervision,” in *International conference on machine learning*. PMLR, 2021, pp. 8748–8763.
- [30] X. Chen, F.-J. Chu, P. Gleize, K. J. Liang, A. Sax, H. Tang, W. Wang, M. Guo, T. Hardin, X. Li, *et al.*, “Sam 3d: 3dfy anything in images,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026, pp. 7220–7232.
- [31] R. Rombach, A. Blattmann, D. Lorenz, P. Esser, and B. Ommer, “High-resolution image synthesis with latent diffusion models,” in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2022, pp. 10 684–10 695.
- [32] N. Karaev, I. Rocco, B. Graham, N. Neverova, A. Vedaldi, and C. Rupprecht, “Cotracker: It is better to track together,” in *European conference on computer vision*. Springer, 2024, pp. 18–35.
- [33] B. Liu, Y. Zhu, C. Gao, Y. Feng, Q. Liu, Y. Zhu, and P. Stone, “Libero: Benchmarking knowledge transfer for lifelong robot learning,” *Advances in Neural Information Processing Systems*, vol. 36, pp. 44 776–44 791, 2023.
- [34] O. Mees, L. Hermann, E. Rosete-Beas, and W. Burgard, “Calvin: A benchmark for language-conditioned policy learning for long-horizon robot manipulation tasks,” *IEEE Robotics and Automation Letters*, vol. 7, no. 3, pp. 7327–7334, 2022.
- [35] M. Reuss, Ö. E. Yağmurlu, F. Wenzel, and R. Lioutikov, “Multimodal diffusion transformer: Learning versatile behavior from multimodal goals,” *arXiv preprint arXiv:2407.05996*, 2024.
- [36] M. Shukor, D. Aubakirova, F. Capuano, P. Kooijmans, S. Palma, A. Zouitine, M. Aractingi, C. Pascal, M. Russi, A. Marafioti, *et al.*, “Smolvla: A vision-language-action model for affordable and efficient robotics,” *arXiv preprint arXiv:2506.01844*, 2025.
- [37] Q. Zhao, Y. Lu, M. J. Kim, Z. Fu, Z. Zhang, Y. Wu, Z. Li, Q. Ma, S. Han, C. Finn, *et al.*, “Cot-vla: Visual chain-of-thought reasoning for vision-language-action models,” in *Proceedings of the Computer Vision and Pattern Recognition Conference*, 2025, pp. 1702–1713.
- [38] H. Wu, Y. Jing, C. Cheang, G. Chen, J. Xu, X. Li, M. Liu, H. Li, and T. Kong, “Unleashing large-scale video generative pre-training for visual robot manipulation,” *arXiv preprint arXiv:2312.13139*, 2023.
- [39] Q. Bu, J. Zeng, L. Chen, Y. Yang, G. Zhou, J. Yan, P. Luo, H. Cui, Y. Ma, and H. Li, “Closed-loop visuomotor control with generative expectation for robotic manipulation,” *Advances in Neural Information Processing Systems*, vol. 37, pp. 139 002–139 029, 2024.

- [40] Y. Tian, S. Yang, J. Zeng, P. Wang, D. Lin, H. Dong, and J. Pang, "Predictive inverse dynamics models are scalable learners for robotic manipulation," in *International Conference on Learning Representations*, vol. 2025, 2025, pp. 92 033–92 052.
- [41] Y. Hu, Y. Guo, P. Wang, X. Chen, Y.-J. Wang, J. Zhang, K. Sreenath, C. Lu, and J. Chen, "Video prediction policy: A generalist robot policy with predictive visual representations," *arXiv preprint arXiv:2412.14803*, 2024.
- [42] A. Khazatsky, K. Pertsch, S. Nair, A. Balakrishna, S. Dasari, S. Karamcheti, S. Nasiriany, M. K. Srirama, L. Y. Chen, K. Ellis, *et al.*, "Droid: A large-scale in-the-wild robot manipulation dataset," *arXiv preprint arXiv:2403.12945*, 2024.